


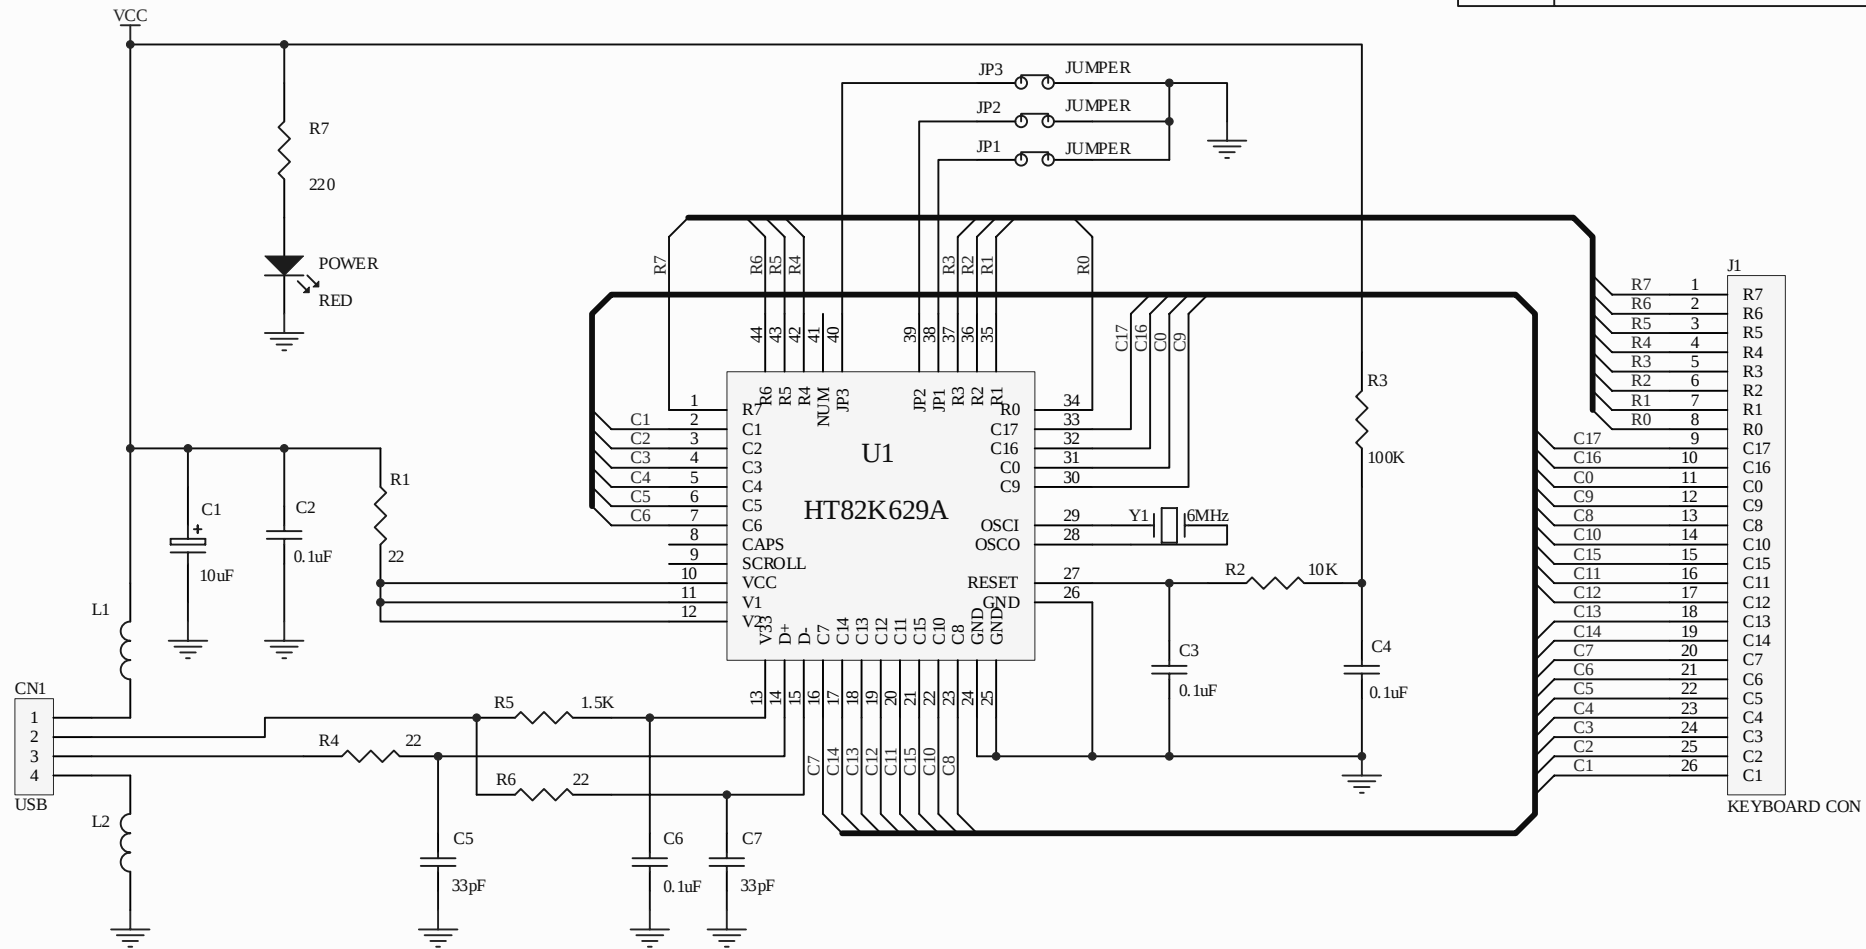


Note:

- 1.JP1 is used to define U+P or USB only
JP1 float define USB only
JP1 connected to GND define U+P
- 2.JP2,JP3 is used to define keyboard mode.

PART NO.	DESCRIPTION	Q`TY	MAT'L	TREATING	REMARK
SCALE:	TOLERANCE:				
---	UNSPECIFIED				
	.XXX ±0.05				
UNIT:	.XX ±0.1				
	.X ±0.15				
	. ±0.25				
	ANGLE ±0.5				
DRAWN:	DO NO SCALE	TITLE: DK2388U SCHEMATIC			
DESIGER:	DRAWING				
CHECKED:	SHEET				
	1 OF 1				
APPROVED:	DRAWING NO.:				
	D:\DK2388U\PCB\ht82k629a.Sch				
		A4		REV 0.1	


MARK	ISSUE	DATE	REVER
⚠	Finger location be moved	5/30/05	0.2
2			

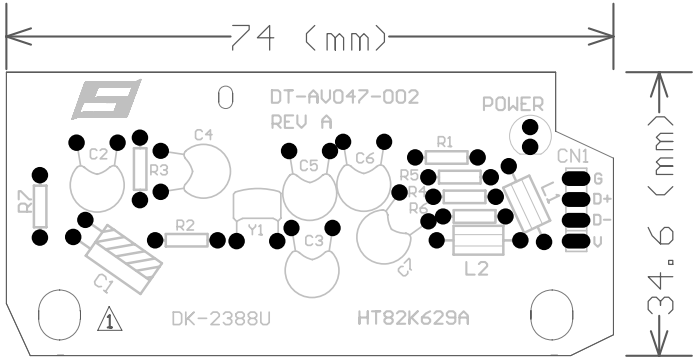

NOTE:
1) Mechanical:XPC T=1.6mm
2) Finish:Green Oil & White Words
3) Hole & Edge:The specificity order sign in Mechanical1

PART NO.	DT-AV047-002	QTY	MAT'L	TRETING	REMARK
SCALE: 1:1	TOLERANCE: UNSPECIFIED .XXX ±0.05 .XX ±0.1 .X ±0.15 ° ±0.25 ANGLE ±0.5				
UNIT: mm					
DRAWN:		Top Overlay	TITLE:		
DESIGER:		SHEET	DK-2388U<HT82K629A> PCB		
CHECKED:		1 OF 2			
APPROVED:		DRAWING NO:	DK-2388U<HT82K629A>_02.PCBD00		

MARK	ISSUE	DATE	REVER
⚠	Finger location be moved	5/30/05	0.2
2			

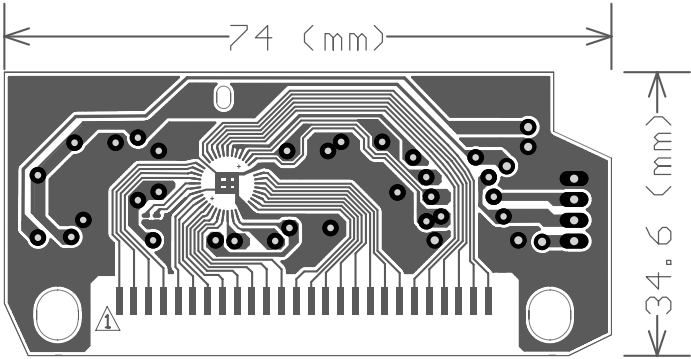

NOTE:
1) Mechanical:XPC T=1.6mm
2) Finish:Green Oil & White Words
3) Hole & Edge:The specificity order sign in Mechanical1

PART NO.	DT-AV047-002	QTY		MAT'L		TRETING		REMARK	
SCALE:	1:1	TOLERANCE:	UNSPECIFIED						
UNIT:	MM		.XXX ±0.05						
			.XX ±0.1						
			.X ±0.15						
			ANGLE ±0.25						
DRAWN:		Bottom Layer						TITLE:	
DESIGER:		SHEET						DK-2388U<HT82K629A> PCB	
CHECKED:		2 OF 2							
APPROVED:		DRAWING NO:						DK-2388U<HT82K629A>_02.PCBO00	