


# Global EMC Inc. Labs

## EMC & RF Test Report

As per  
**GLOBAL EMC INC.**  
RSS-247 Issue 1  
&  
FCC Part 15 Subpart C  
Unlicensed Intentional Radiators  
on the  
OTOCs

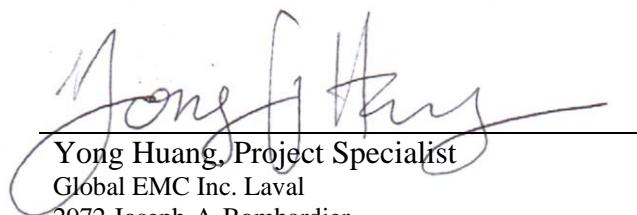

Yong Huang, Project Specialist  
Global EMC Inc. Laval  
2972 Joseph-A-Bombardier  
Laval, QC, H7P 6E3 CANADA  
Ph: (450) 687- 4976



See Appendix A for full customer & EUT details.



LAB REGISTRATION #6844A-2



Testing Laboratory  
Certificate #2555.01

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Table of Contents

Table of Contents.....	2
Report Scope.....	3
Summary .....	4
Test Results Summary .....	5
Justifications, Descriptions, or Deviations.....	6
Applicable Standards, Specifications and Methods.....	7
Sample calculation(s).....	8
Document Revision Status .....	8
Definitions and Acronyms .....	9
Testing Facility .....	10
Calibrations and Accreditations.....	10
Testing Environmental Conditions and Dates .....	11
Detailed Test Results Section .....	12
Radiated Emissions.....	13
Spurious Conducted Emissions.....	28
Maximum Peak Envelope Conducted Power .....	36
Channel Carrier Bandwidth of Frequency Hopping Systems .....	41
Number of Channels for Frequency Hopping Systems .....	46
Channel Carrier Separation for Frequency Hopping Systems .....	55
Frequency Occupancy for Frequency Hopping Systems.....	58
Appendix A – EUT Summary.....	62
Appendix B – EUT and Test Setup Photographs.....	65

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Report Scope

This report addresses the EMC verification testing and test results of the OTOCS, herein referred to as EUT (Equipment Under Test) performed at Global EMC Labs.

The EUT was tested for compliance against the following standards:

RSS-247 Issue 1/ FCC Part 15 Subpart C 15

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or Global EMC Inc.

Opinions/interpretations expressed in this report, if any, are outside the scope of Global EMC Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of Global EMC Inc, unless otherwise stated.

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Summary

The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	T9ROTOCS
EUT Industry Canada Certification #, IC:	6519A-OTOCS
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Yong Huang

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203 RSS-247	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-247	Restricted Bands for intentional operation	None within chart	Pass See description
FCC 15.207 RSS-247	Power line conducted emissions	QuasiPeak Average	Pass See Justification
FCC 15.209 RSS-247	Radiated emissions	QuasiPeak Average	Pass
FCC 15.247(a)(1) RSS-247	Channel Separation	> 25 kHz	Pass
FCC 15.247(a)(1)(i) RSS-247	Number of channels	> 50	Pass
FCC 15.247(a)(1)(i) RSS-247	Time of occupancy	< 400 mSec in 20 sec period	Pass
FCC 15.247(b) RSS-247	Max output power	< 1 Watt	Pass
FCC 15.247(b)(4) RSS-247	Antenna Gain	< 6 dBi	Pass See Justification
FCC 15.247(d) RSS-247	Antenna conducted spurious	> 20 dBc	Pass
FCC 15.247(h)	FHSS Intelligence	No coordination	Pass See Justification
FCC 15.247(i) IC Safety code 6	Maximum Permissible Exposure	> 20 cm separation.	Pass See justification and calculations
<b>Overall Result</b>			<b>PASS</b>

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



All tests were performed by Yong Huang.

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '\*'.

### ***Justifications, Descriptions, or Deviations***

The following justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS-247), this device is designed with an proprietary antenna connector (RP-SMA) which meets the requirements of FCC 15.203.

For the Restricted Bands of operation, the EUT is designed to only operate between 902 to 928 MHz.

For the scope of this test report, radiated testing of the EUT was pre-scanned in three orthogonal axis to maximize emissions. Maximum emissions were found in the vertical EUT polarization. This setup was used for all testing in this report.

For the power line conducted emissions requirements, the EUT is DC powered via battery (automotive application) with no provisions for direct or indirect connection to AC mains and this test does not apply.

For the Antenna gain, the radiated measurement of the fundamental compared to the conducted measurement of the fundamental show a gain of less than 6 dB.

For maximum permissible exposure, this device operates at less then 1 Watt at 902-928 MHz and is designed to operate greater then 20 cm from personnel during normal operation. No testing is required, however worst case calculated exposure compliance follows later in this report.

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## ***Applicable Standards, Specifications and Methods***

ANSI C63.4:2014 - Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10:2013 - American national standard for testing unlicensed wireless devices

CFR 47 FCC 15 - Code of Federal Regulations – Radio Frequency Devices

CISPR 22:2008 - Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement

ICES-003:2012 - Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

ISO 17025:2005 - General Requirements for the competence of testing and calibration laboratories

RSS 210:2010 - Issue 8: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power Licence-Exempt Radiocommunication Devices

RSS-247 :2015 - Issue 1: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Client	<b>Tag Tracking Inc.</b>	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

### ***Sample calculation(s)***

Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8.5 dB

### ***Document Revision Status***

Revision 1 - First revision issued on the 23<sup>rd</sup>, Apr.2015

Revision 2 - 2<sup>nd</sup> revision released on the Feb 9, 2016 , modified as per TCB's request.

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Definitions and Acronyms

The following definitions and acronyms are applicable in this report.  
See also ANSI C63.14.

**AE** – Auxillary Equipment.

**BW** – Bandwidth. Unless otherwise stated, this is refers to the 6 dB bandwidth.

**EMC** – Electro-Magnetic Compatibility

**EMI** – Electro-Magnetic Immunity

**EUT** – Equipment Under Test

**ITE** – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

**LISN** – Line impedance stabilization network

**NCR** – No Calibration Required

**RF** – Radio Frequency

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## **Testing Facility**

Testing for EMC on the EUT was carried out at Global EMC labs in Montréal, Québec, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

### ***Calibrations and Accreditations***

The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test. Global EMC's is accredited by A2LA with a scope of accreditation listed under certificate number 2555.01.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### ***Testing Environmental Conditions and Dates***

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
Nov. 18-24, 2014	All	YH	20-25°C	30-45%	100 -103kPa

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15

The logo for Global EMC Inc. features the word "GLOBAL" in blue capital letters at the top, a red globe graphic with a white star in the upper right, and the words "EMC INC" in large blue capital letters at the bottom.

## **Detailed Test Results Section**

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## *Radiated Emissions*

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

### **Limit(s) and Method**

The method is as defined in ANSI C63.4:2014 for tests below 1GHz, and ANSI C63.10:2013 for tests above 1GHz.

The limits, as defined in 15.247(d) for unintentional radiated emissions apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions (including band edge) must also meet the requirements of -20 dBc or greater

0.009 MHz – 0.490 MHz, 2400/F(kHz) uV/m at 300 m<sup>4</sup>

0.490 MHz – 1.705 MHz, 24000/F(kHz) uV/m at 30 m<sup>4</sup>

1.705 MHz – 30 MHz, 30 uV/m at 30 m<sup>4</sup>

30 MHz – 88 MHz, 100 uV/m (40.0 dBuV/m<sup>1</sup>) at 3 m

88 MHz – 216 MHz, 150 uV/m (43.5 dBuV/m<sup>1</sup>) at 3 m

216 MHz – 960 MHz, 200 uV/m (46.0 dBuV/m<sup>1</sup>) at 3 m

Above 960 MHz, 500 uV/m (54.0 dBuV/m<sup>1</sup>) at 3 m

Above 1000 MHz, 500 uV/m (54 dBuV/m<sup>2</sup>) at 3m

Above 1000 MHz, 5000 uV/m (74 dBuV/m<sup>3</sup>) at 3m

<sup>1</sup>Limit is with 120 kHz measurement bandwidth and a using a Quasi Peak detector.

<sup>2</sup>Limit is with 1 MHz measurement bandwidth and using an Average detector


<sup>3</sup>Limit is with 1 MHz measurement bandwidth and using an Peak detector

<sup>4</sup>Limit is with using a Quasi-peak detector with a bandwidth as defined in CISPR 16-1-1

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### Typical Radiated Emissions Setup

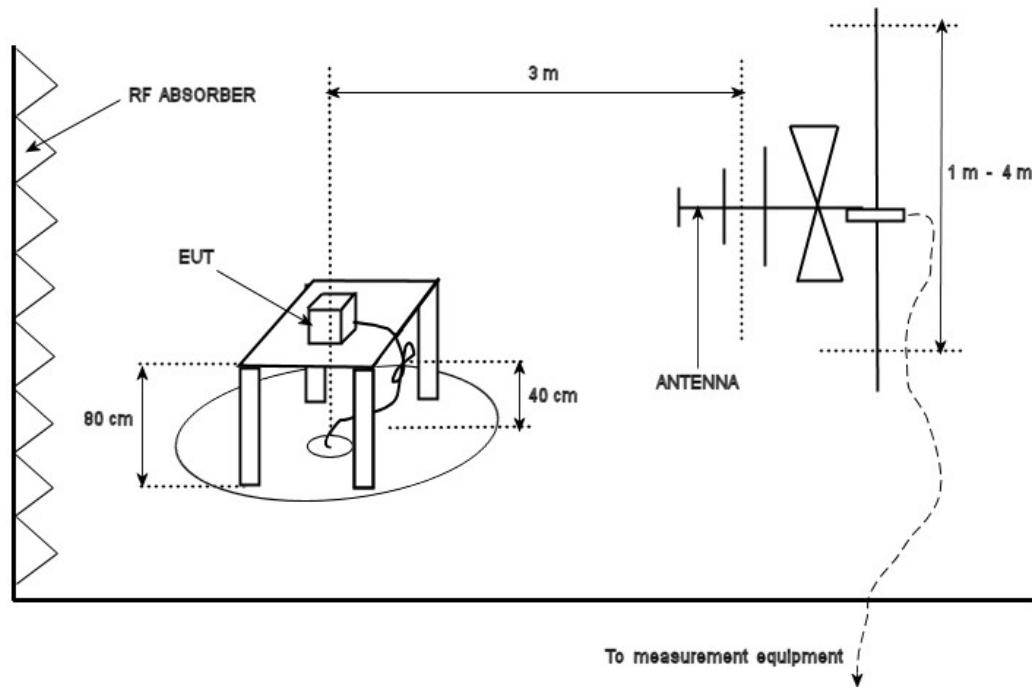

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

## Results

The EUT passed the limits. Low, middle and high band was measured. The worst case for each mode is presented as a graph for the spectrum.

## Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings. Final measurements are performed over a full 0-360 degrees rotation and 1 – 4 meter height of measurement antenna.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10<sup>th</sup> harmonic ( a minimum of a 1 GHz).


Devices scanned above 1GHz may be scanned at a closer test distance, and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz, and 40 dB/decade below 30 MHz.

Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### 9 kHz to 150 kHz – Loop @ 0 degree

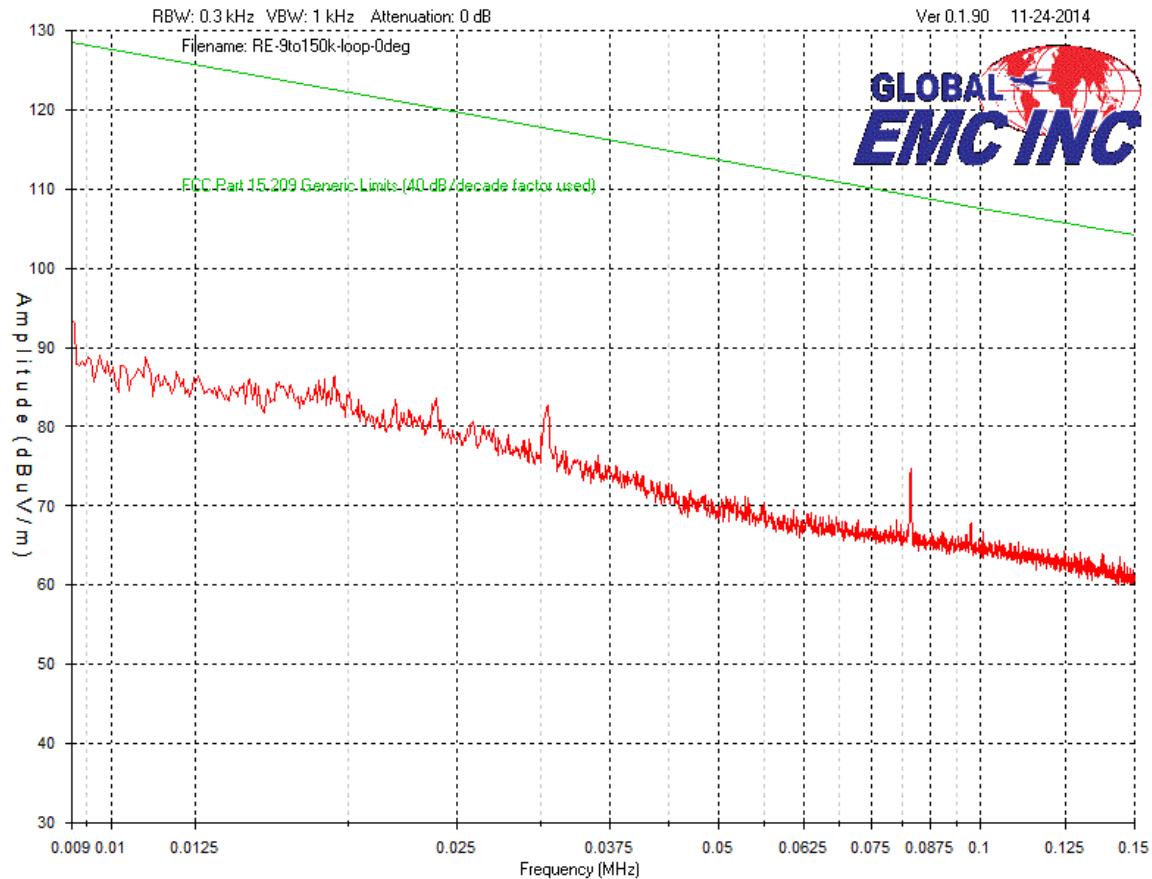


Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### 9 kHz to 150 kHz – Loop @ 90 degree

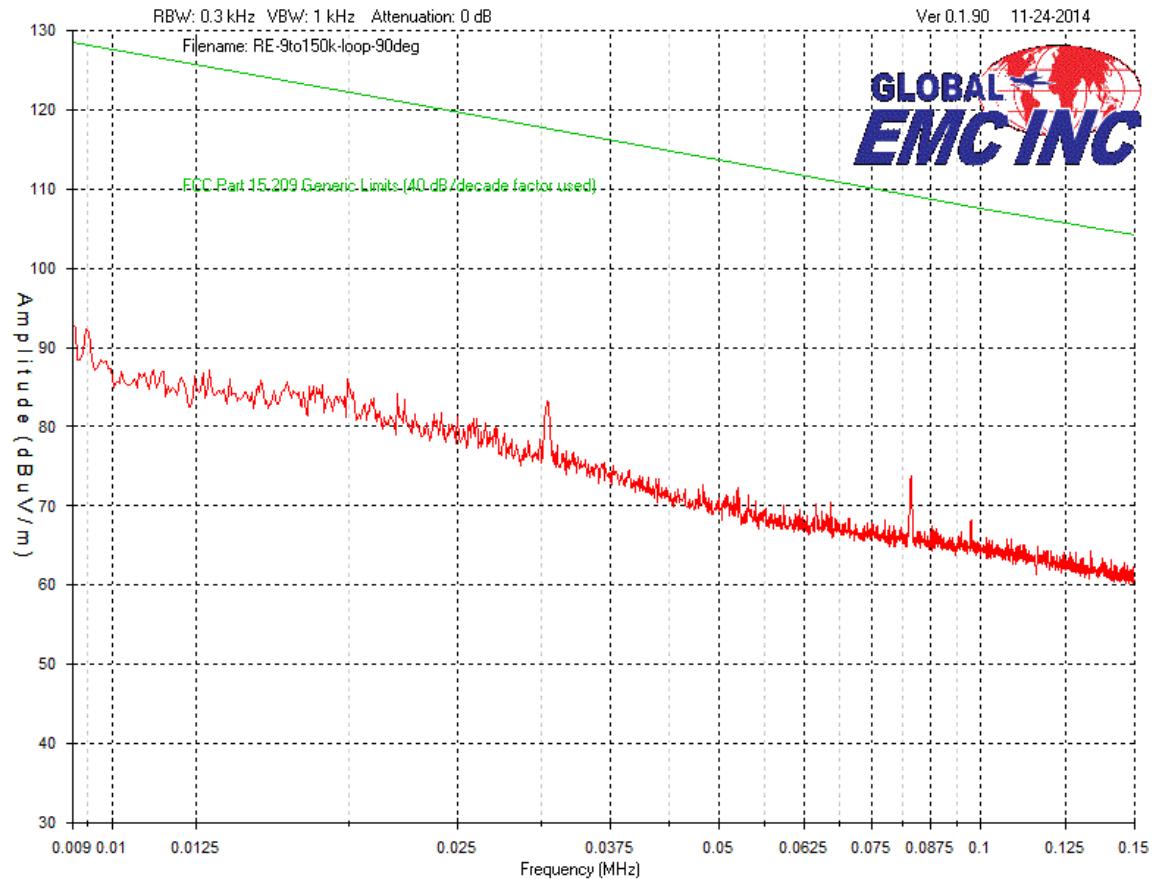


Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### 150 kHz to 30 MHz - Loop @ 0 degree

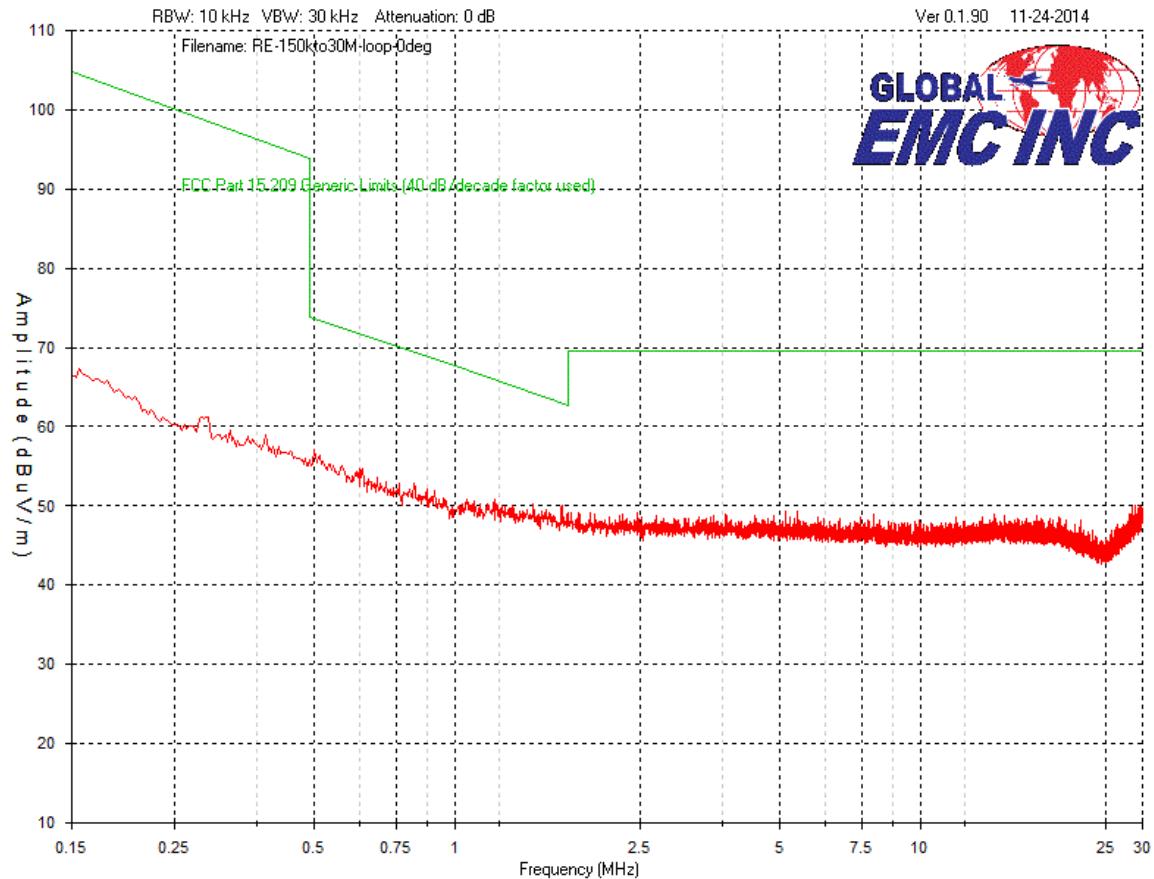


Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### 150 kHz to 30 MHz - Loop @ 90 degree

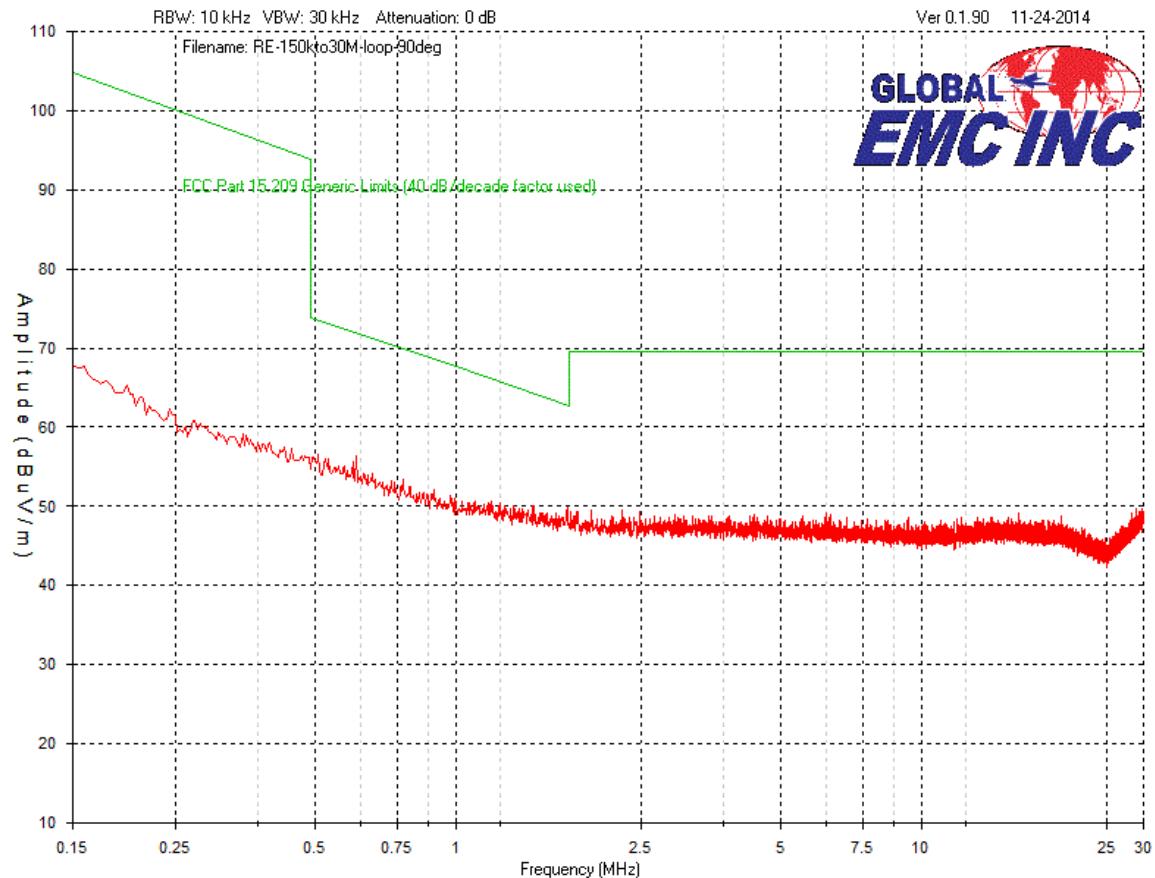


Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




Vertical – Peak Emissions Graph

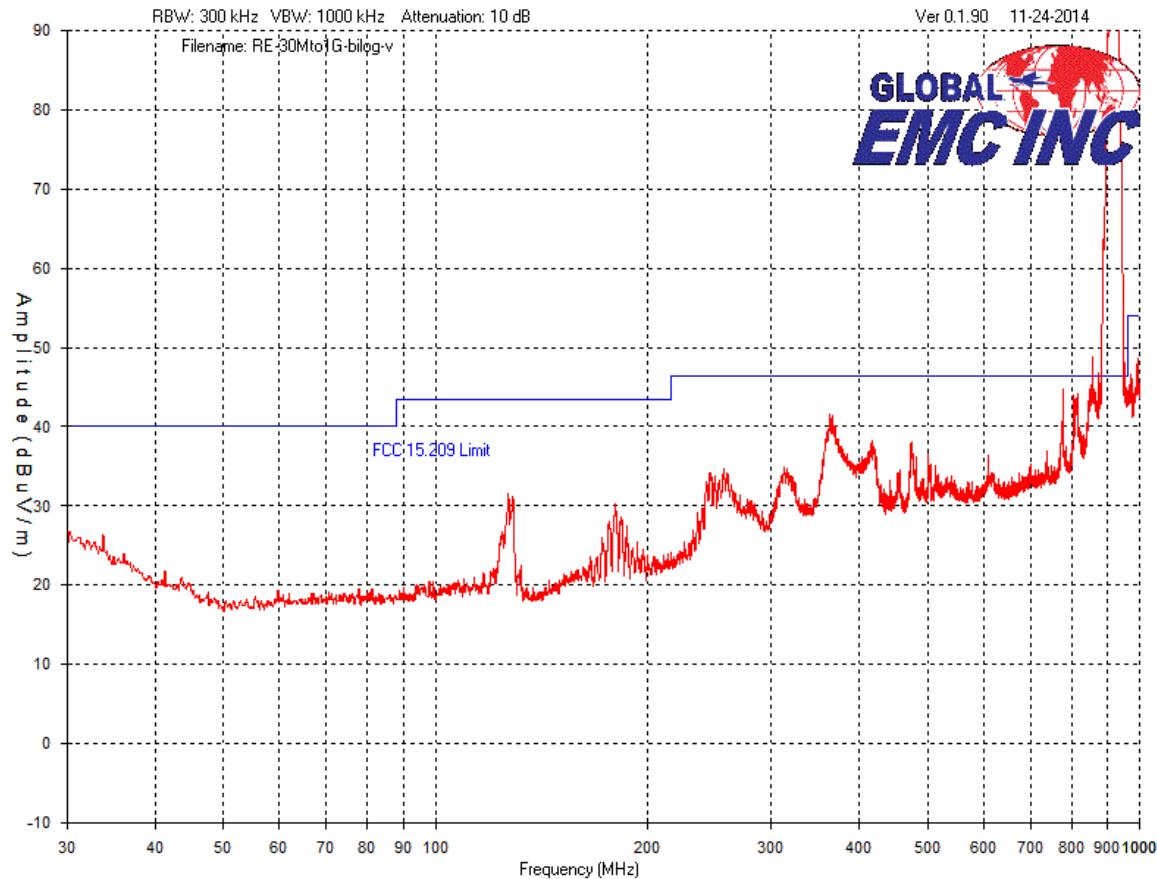

Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15

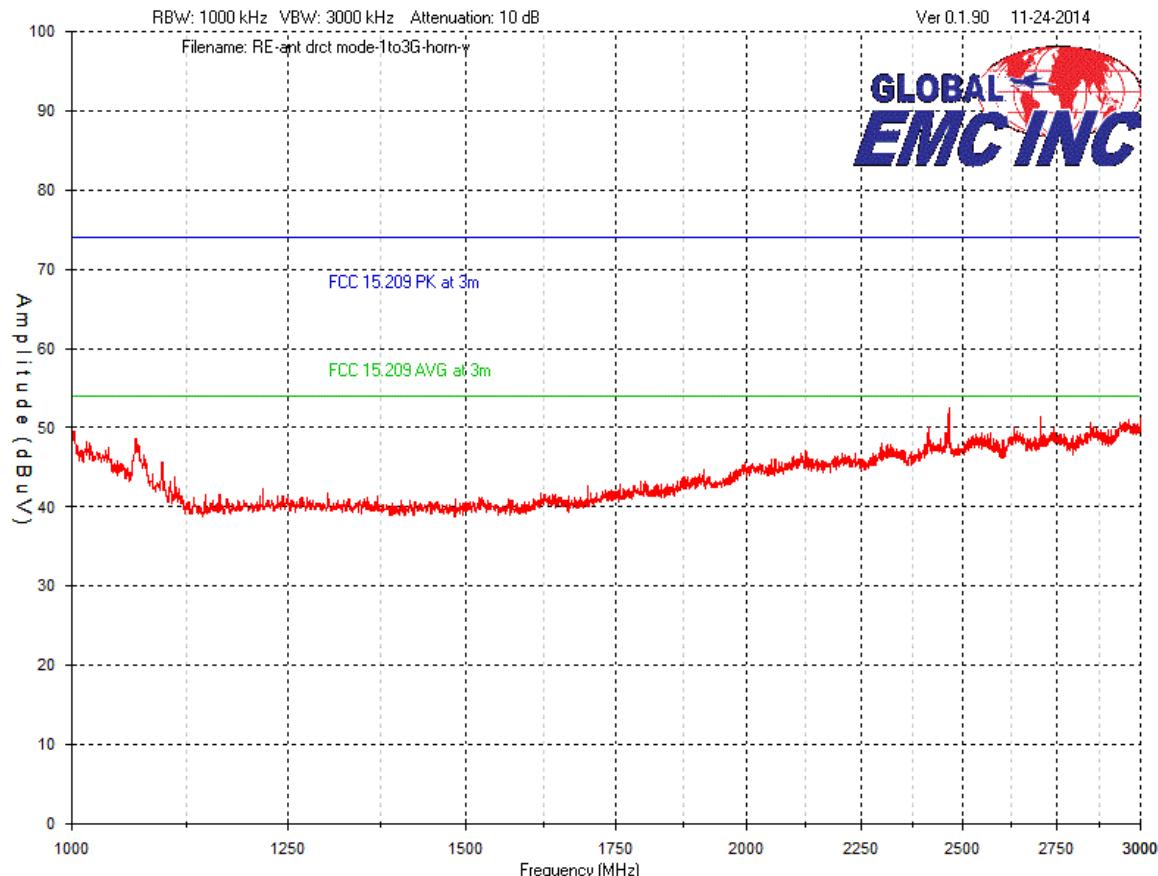


Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Plots show general spectrum, see table for worst case maximized readings.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




Horizontal – Peak Emissions Graph

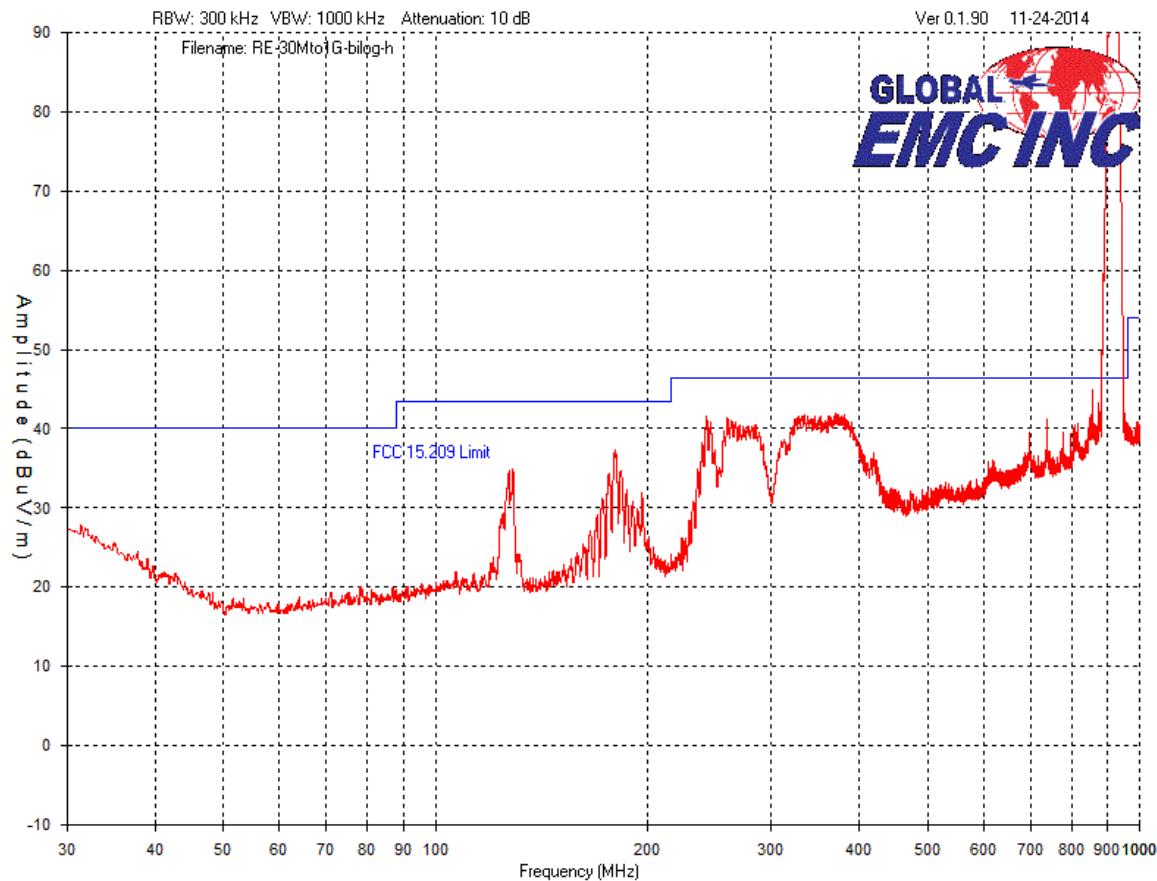

Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15

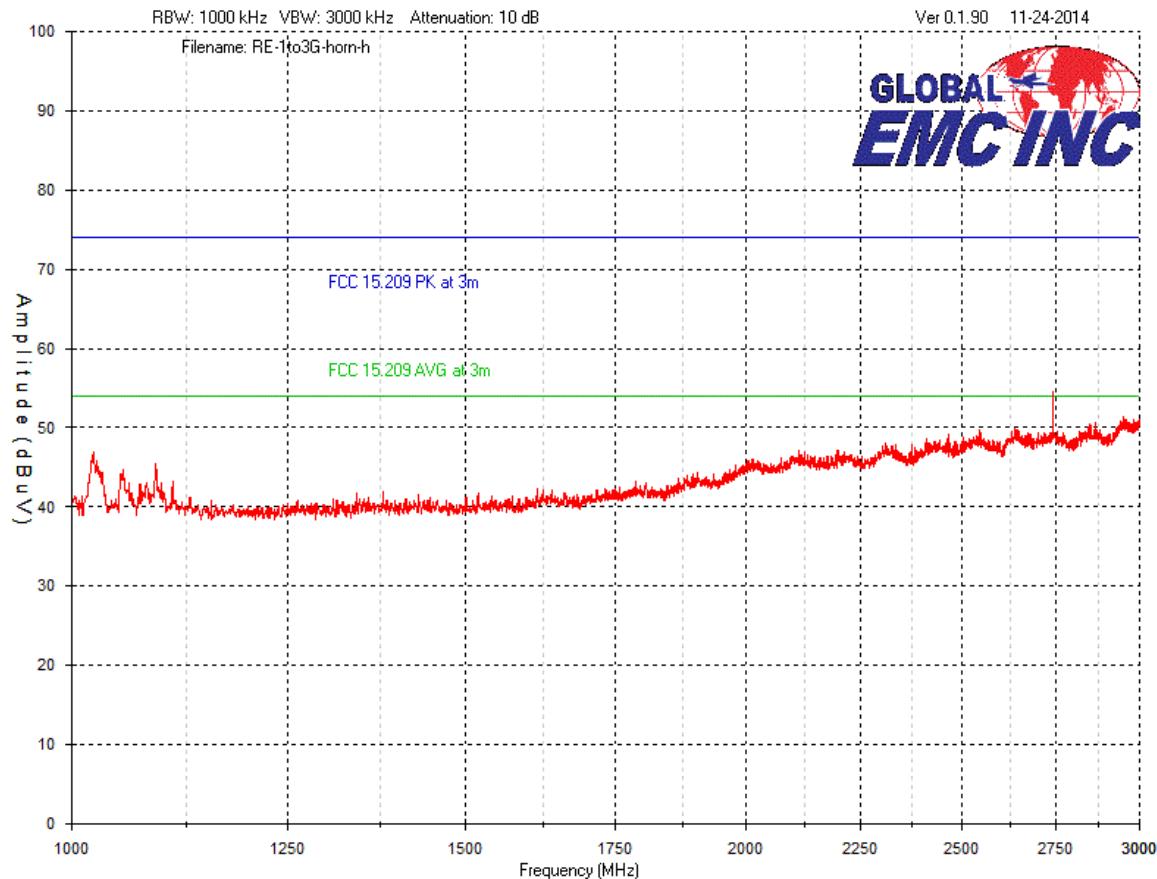

Note the device was scanned at low, middle and high channel, and the results shown above are worst case results.

Plots show general spectrum, see table for worst case maximized readings

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Final Measurements

The following measurements were made at the harmonics.

Test Freq. (MHz)	Det. mode	Ant. Pol. (H/V)	Raw signal dB(µV )	Ant. factor dB	Cable loss dB	Pre-Amp Gain dB	Pre-sel /atten. dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
Low Channel											
902.25	Peak	H	99.7	24.0	2.8	0	0	126.5	n/a	n/a	
902.25	Peak	V	105.3	24.0	2.8	0	0	132.1	n/a	n/a	
1804.5	Peak	H	53.1	25.2	4.1	-33.1	1.9	51.1	106.5	55.4	PASS
2706.8	Peak	H	52.8	28.9	5.3	-33.1	3.3	57.2	74.0	16.8	PASS
3609.0	Peak	H	45.6	30.2	6.6	-32.9	6.0	55.5	74.0	18.5	PASS
4511.3	Peak	H	43.3	32.1	6.9	-32.9	6.0	55.4	74.0	18.6	PASS
1804.5	Peak	V	49.5	25.2	4.1	-33.1	1.9	47.5	112.1	64.6	PASS
2706.8	Peak	V	52.3	28.9	5.3	-33.1	3.3	56.7	74.0	17.3	PASS
3609.0	Peak	V	45.7	30.2	6.6	-32.9	6.0	55.6	74.0	18.4	PASS
4511.3	Peak	V	42.9	32.1	6.9	-32.9	6.0	55.0	74.0	19.0	PASS
1804.5	Avg	H	38.3	25.2	4.1	-33.1	1.9	36.3	n/a	n/a	
2706.8	Avg	H	43.2	28.9	5.3	-33.1	3.3	47.6	54.0	6.4	PASS
3609.0	Avg	H	33.3	30.2	6.6	-32.9	6.0	43.2	54.0	10.8	PASS
4511.3	Avg	H	28.9	32.1	6.9	-32.9	6.0	41.0	54.0	13.0	PASS
1804.5	Avg	V	39.4	25.2	4.1	-33.1	1.9	37.4	n/a	n/a	
2706.8	Avg	V	48.1	28.9	5.3	-33.1	3.3	52.5	54.0	1.5	PASS
3609.0	Avg	V	36.2	30.2	6.6	-32.9	6.0	46.1	54.0	7.9	PASS
4511.3	Avg	V	28.9	32.1	6.9	-32.9	6.0	41.0	54.0	13.0	PASS
Mid channel											
915.0	Peak	H	98.7	24.0	2.8	0	0	125.5	n/a	n/a	
915.0	Peak	V	102.8	24.0	2.8	0	0	129.6	n/a	n/a	
1830.0	Peak	H	45.6	25.2	4.1	-33.1	1.9	43.6	105.5	61.9	PASS
2745.0	Peak	H	49.5	28.9	5.3	-33.1	3.3	53.9	74.0	20.1	PASS
3660.0	Peak	H	45.2	30.2	6.6	-32.9	6.0	55.1	74.0	18.9	PASS
4575.0	Peak	H	42.6	32.1	6.9	-32.9	6.0	54.7	74.0	19.3	PASS
1830.0	Peak	V	46.3	25.2	4.1	-33.1	1.9	44.3	109.6	65.3	PASS
2745.0	Peak	V	56.6	28.9	5.3	-33.1	3.3	61.0	74.0	13.0	PASS
3660.0	Peak	V	45.8	30.2	6.6	-32.9	6.0	55.7	74.0	18.3	PASS
4575.0	Peak	V	43.9	32.1	6.9	-32.9	6.0	56.0	74.0	18.0	PASS

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



1830.0	Avg	H	32.3	25.2	4.1	-33.1	1.9	30.3	n/a	n/a	
2745.0	Avg	H	42.5	28.9	5.3	-33.1	3.3	46.9	54.0	7.1	PASS
3660.0	Avg	H	33.8	30.2	6.6	-32.9	6.0	43.7	54.0	10.3	PASS
4575.0	Avg	H	30.5	32.1	6.9	-32.9	6.0	42.6	54.0	11.4	PASS
1830.0	Avg	V	32.5	25.2	4.1	-33.1	1.9	30.5	n/a	n/a	
2745.0	Avg	V	38.3	28.9	5.3	-33.1	3.3	42.7	54.0	11.3	PASS
3660.0	Avg	V	31.8	30.2	6.6	-32.9	6.0	41.7	54.0	12.3	PASS
4575.0	Avg	V	30.5	32.1	6.9	-32.9	6.0	42.6	54.0	11.4	PASS
927.75	Peak	H	98.4	24.0	2.8	0	0	125.2	n/a	n/a	
927.75	Peak	V	102.3	24.0	2.8	0	0	129.1	n/a	n/a	
1855.5	Peak	H	46.5	25.2	4.1	-33.1	1.9	44.5	105.2	60.7	PASS
2783.3	Peak	H	51.8	28.9	5.3	-33.1	3.3	56.2	74.0	17.8	PASS
3711.0	Peak	H	44.9	30.2	6.6	-32.9	6.0	54.8	74.0	19.2	PASS
4638.8	Peak	H	43.2	32.1	6.9	-32.9	6.0	55.3	74.0	18.7	PASS
1855.5	Peak	V	52.2	25.2	4.1	-33.1	1.9	50.2	109.1	58.9	PASS
2783.3	Peak	V	51.4	28.9	5.3	-33.1	3.3	55.8	74.0	18.2	PASS
3711.0	Peak	V	45.5	30.2	6.6	-32.9	6.0	55.4	74.0	18.6	PASS
4638.8	Peak	V	43.1	32.1	6.9	-32.9	6.0	55.2	74.0	18.8	PASS
1855.5	Avg	H	32.1	25.2	4.1	-33.1	1.9	30.1	n/a	n/a	
2783.3	Avg	H	38.4	28.9	5.3	-33.1	3.3	42.8	54.0	11.2	PASS
3711.0	Avg	H	34.8	30.2	6.6	-32.9	6.0	44.7	54.0	9.3	PASS
4638.8	Avg	H	29.9	32.1	6.9	-32.9	6.0	42.0	54.0	12.0	PASS
1855.5	Avg	V	33.5	25.2	4.1	-33.1	1.9	31.5	n/a	n/a	
2783.3	Avg	V	43.1	28.9	5.3	-33.1	3.3	47.5	54.0	6.5	PASS
3711.0	Avg	V	35.5	30.2	6.6	-32.9	6.0	45.4	54.0	8.6	PASS
4638.8	Avg	V	30.1	32.1	6.9	-32.9	6.0	42.2	54.0	11.8	PASS

Note: In accordance with 15.247(d), only radiated emissions exceeding the 15.209 limit that occur within the bands listed in 15.205, need to be verified with a quasi-peak detector or an average detector.

The frequency shown on the peak graph does not fall within a restricted band as listed in FCC 15.205 and does not need to be verified. In case the peak emissions exceeding the average limits, average detector emission measurements were made to ensure compliance.

Up to the 10<sup>th</sup> harmonics were measured on all three channels, no emissions were detected above the 5<sup>rd</sup> harmonic at 3 meter. The noise floor is lower than the limits.

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



The fundamental was measured for information purpose, and none of the unintentional radiated emissions that fall outside of the restricted bands exceeded the -20dBc requirement. See 'Spurious Conducted' measurements for further details.

Peak emissi

Note: During the tests, EUT was operating in a continuous transmit mode with the hopping stopped and fixed on a single channel and no on/off pulsing occurring for average measurements in which it is transmitting at a 100% duty cycle.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	1/22/13	1/22/15	4169
Quasi Peak Adapter	85650A	HP	1/23/13	1/23/15	4170
Loop Antenna	EM 6879	Electro-Metrics	10-11-13	10-11-15	4040
BiLog Antenna	3142-C	ETS	4/25/13	4/25/15	4002
Attenuator 3 dB	FP-50-3	Trilithic	Verified 2013-04-02	2015-04-02	4028
9kHz-1GHz, 28dB preamp	LNA 6901	Teseq	8-6-13	8-6-15	4036
Horn Antenna	ATH1G18G	AR	4/3/13	4/3/15	4003
1GHz-26.5GHz preamp	HP 8449B	HP	4/25/13	4/25/15	4006
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4026
RF Cable 1M	LMR-400-1M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4039
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4025
Hewlett Packard Preselector	8445B	HP	NCR	NCR	6364
Notch Filter	BRC50722	MICRO-TRONICS	Verified 2013-04-02	2015-04-02	186
Emission software	0.1.87	Global EMC	NCR	NCR	58

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions\_Rev5.doc"

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Spurious Conducted Emissions

### Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified.

### Limits

The limits are defined in 15.247(d).

In any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental.

### Results

The EUT passed. The peak power measured was 30 dBm (1W). The worst case instrument noise floor was below -60 dBc under this configuration (or -30 dBm) and no harmonics were observed.


Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Graph(s)

The graphs shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT. Note there was 26dB of external attenuation taken during this measurement. The -20 dBc requirement is shown for the lower band edge at 902MHz in the low channel. The -20 dBc requirement is also shown for the higher band edge at 928MHz in the high channel.


9kHz to 150kHz (26dB attenuation)

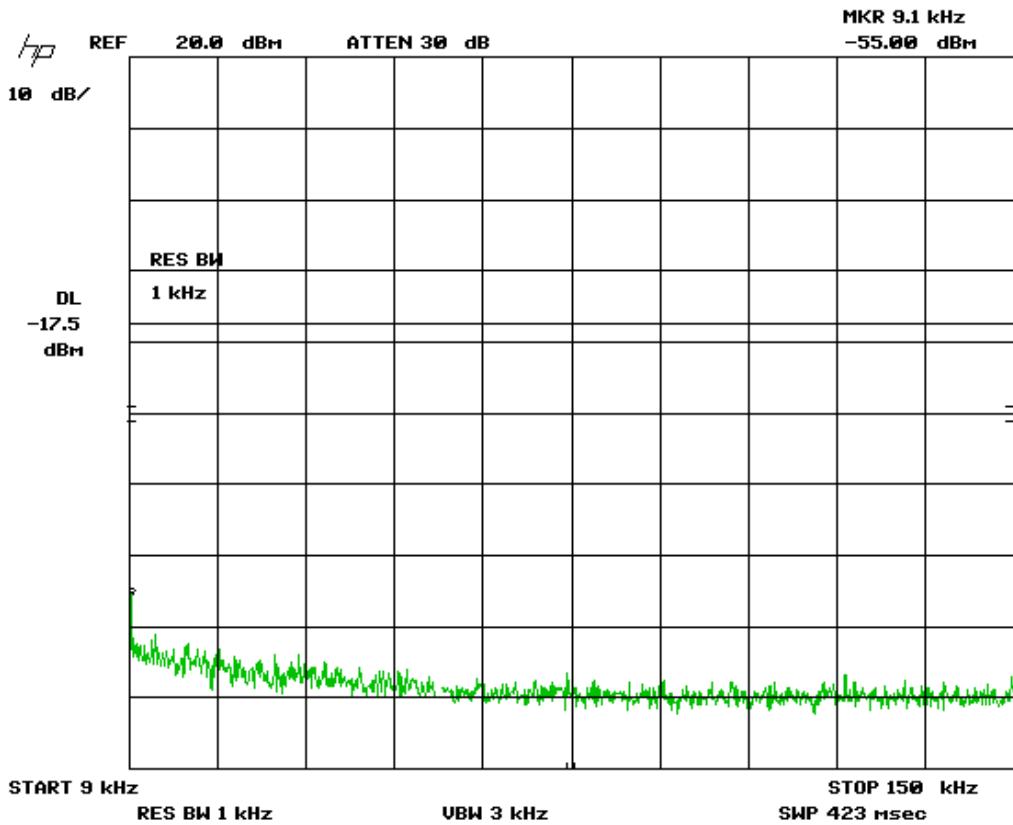

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




150kHz to 30MHz(26dB attenuation)

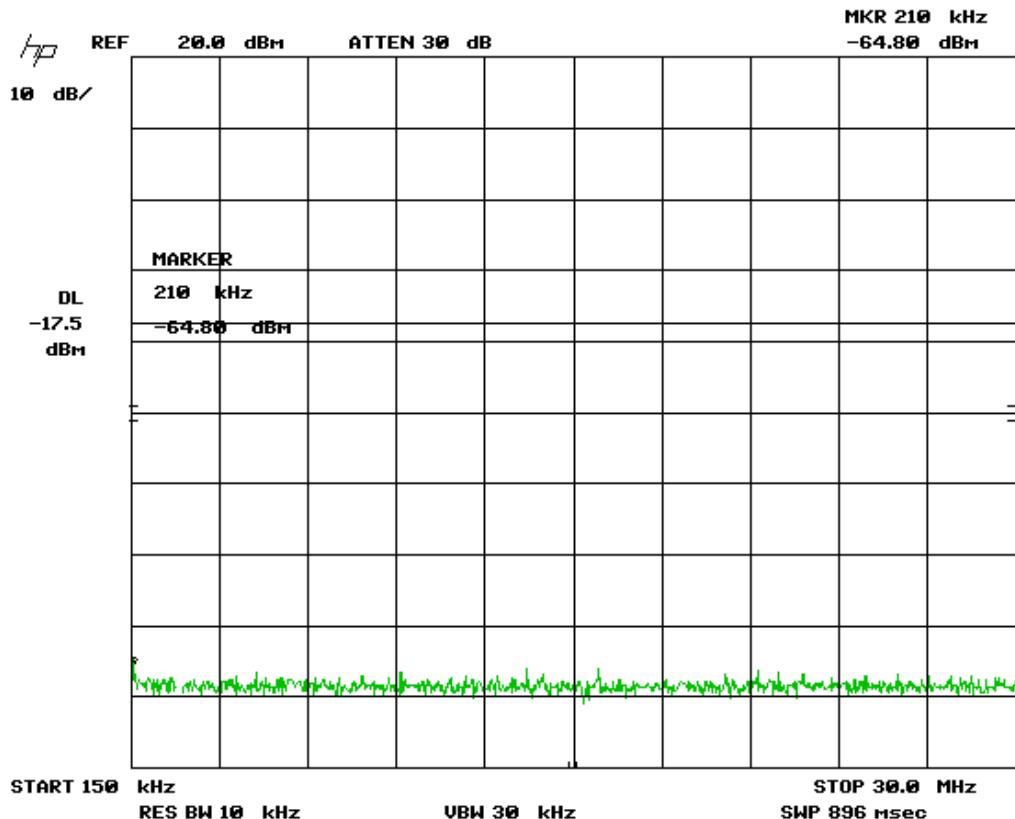

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




30MHz to 2.5GHz(26dB attenuation)

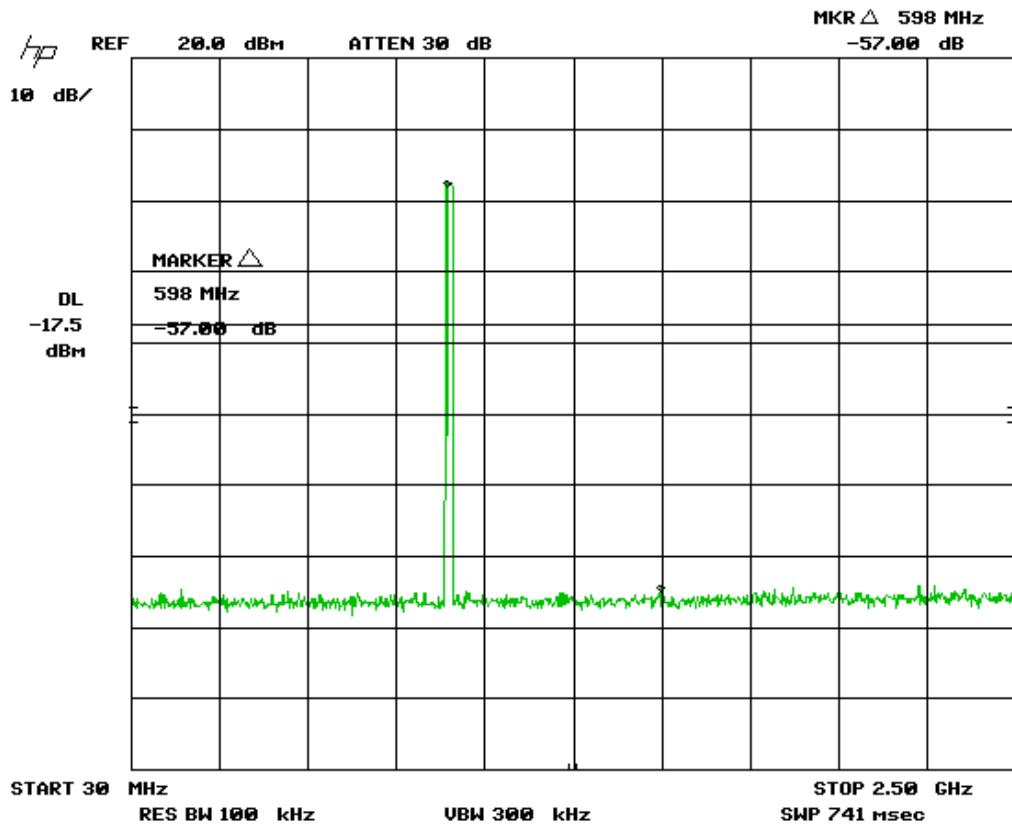

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




902MHz to 902.5MHz  
(Band edge, low channel with 26dB attenuation)

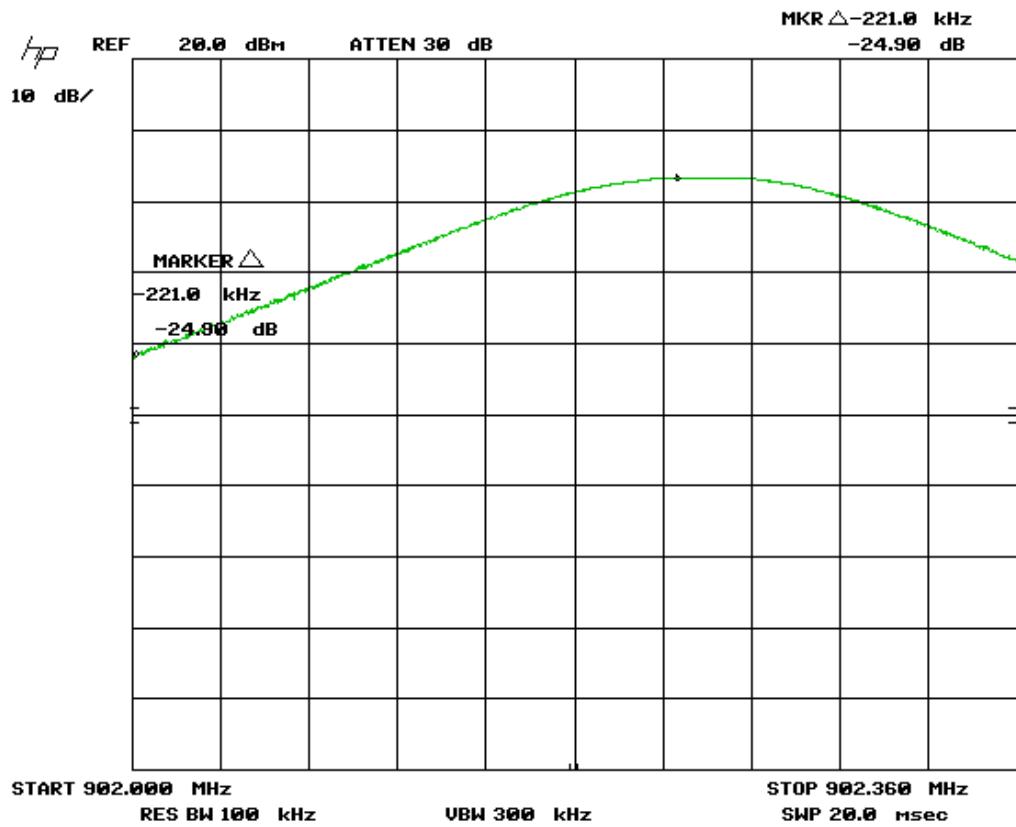

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




927.5MHz to 928MHz  
(Band edge, High Channel, with 26dB attenuation)

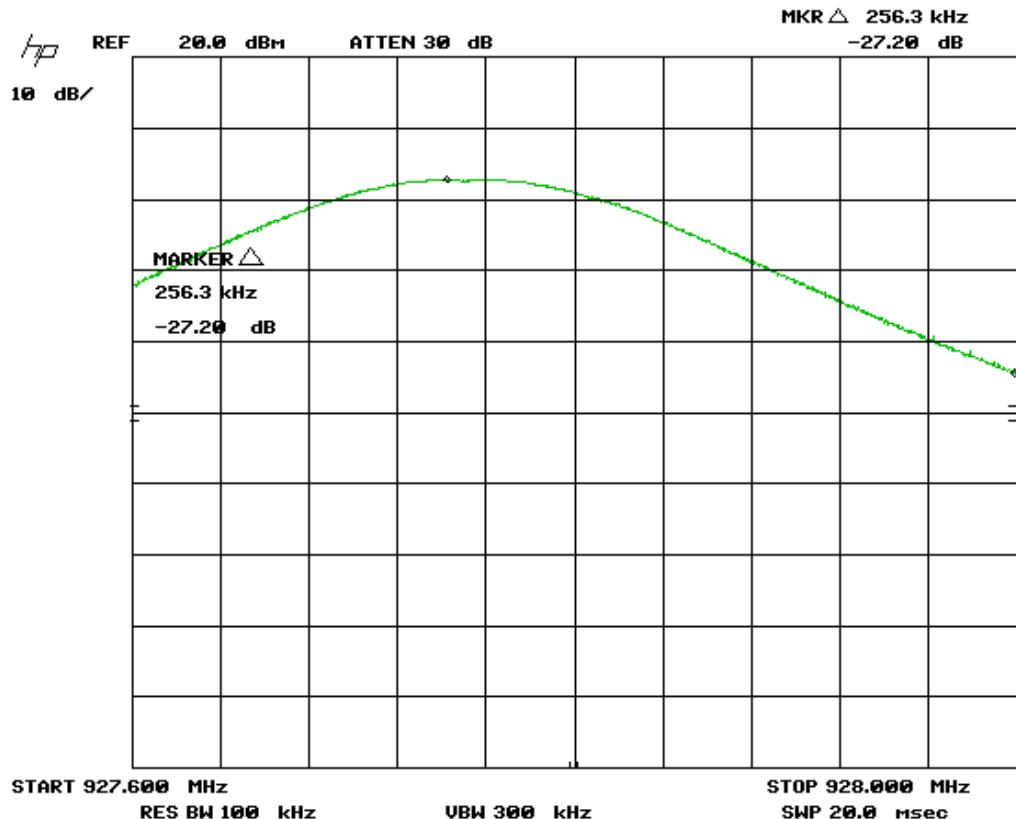

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

2.5GHz to 10GHz(20dB attenuation)

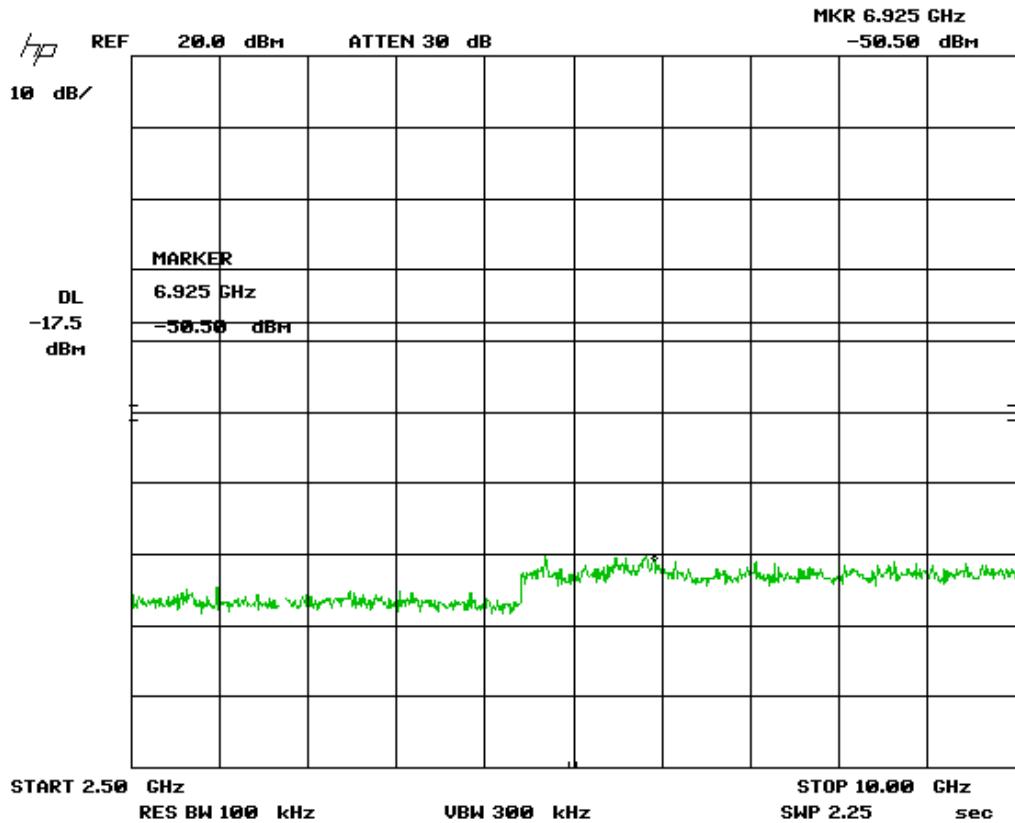

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	Verified 2013-04-02	2015-04-02	4038
Power Attenuator 6 dB	100-A-MFN-06	Bird	Verified 2013-04-02	2015-04-02	4010
Spectrum Analyzer Display	8566B	HP	2013-01-22	2015-01-22	4168
Spectrum Analyzer	8566B	HP	2013-01-22	2015-01-22	4169
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4029
Screen Capture software	Version 1.3.1	John Miles, KE5FX	NCR	NCR	59

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## **Maximum Peak Envelope Conducted Power**

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified.

### **Limits**

The limits are defined in 15.247(b).

For frequency hopping systems operating in the 902-928 MHz band employing more than 50 hopping channels, the peak limit is 1 watt.

### **Results**

The EUT passed. The peak power measured was 30 dBm (1W).


Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Graph(s)

The graphs shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT. Note there was 26dB of external attenuation taken during this measurement.


Low Channel

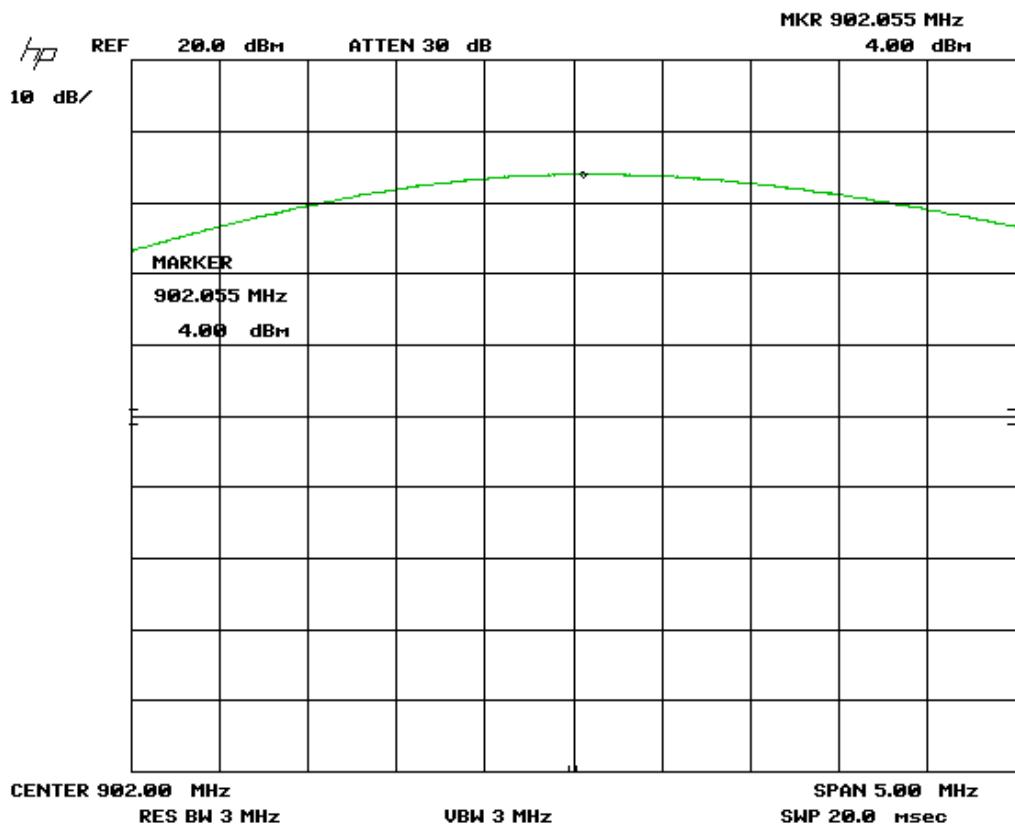

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




### Mid Channel

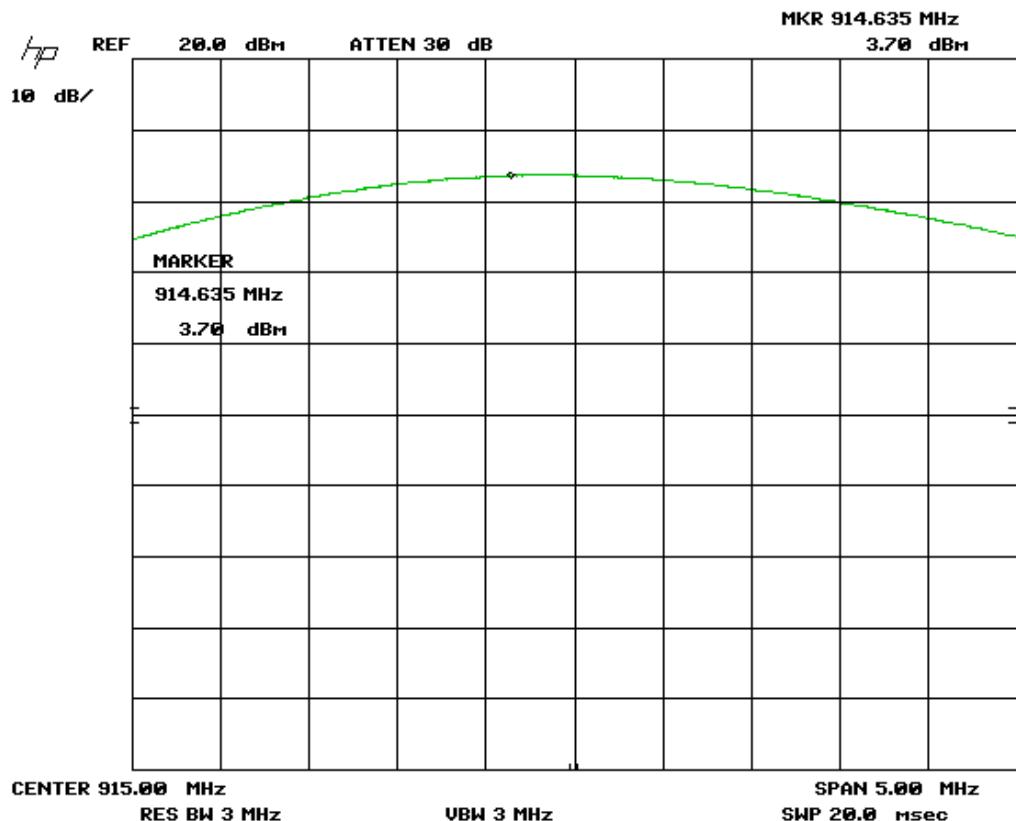

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### High Channel

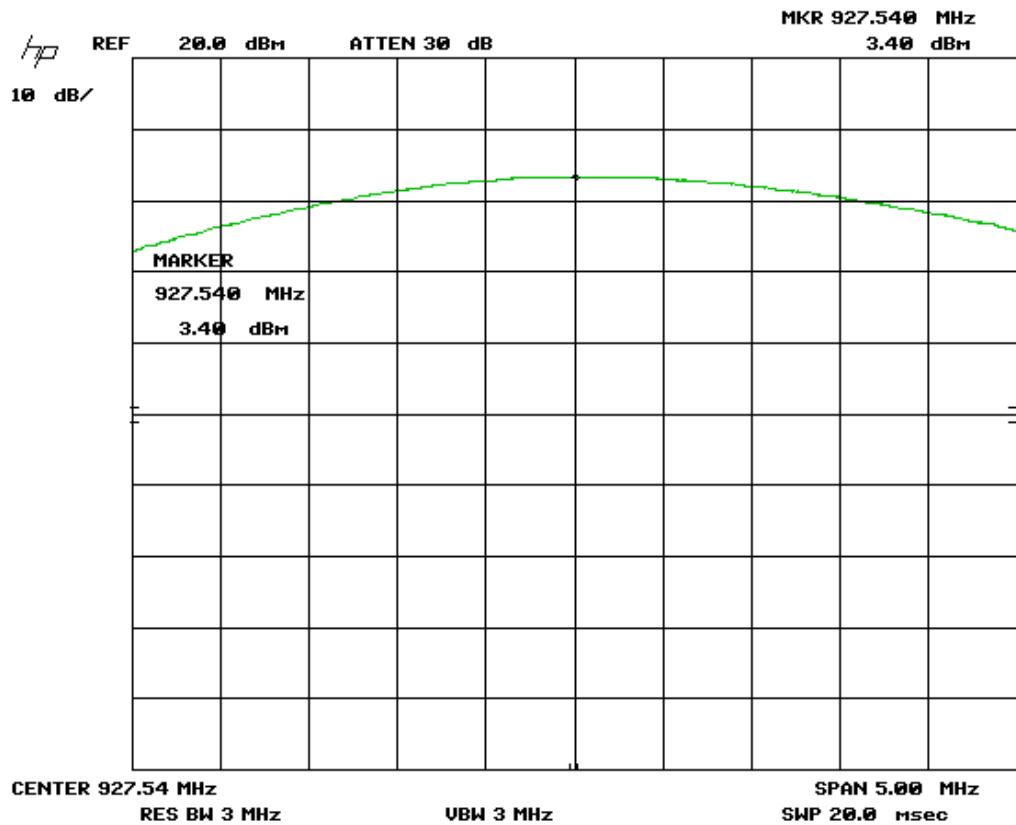

The calculated value is:  
 $4 \text{ dBm} + 26 \text{ dB} \text{ (attenuator)} = 30 \text{ dBm}$  or 1W.

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	Verified 2013-04-02	2015-04-02	4038
Power Attenuator 6 dB	100-A-MFN-06	Bird	Verified 2013-04-02	2015-04-02	4010
Spectrum Analyzer Display	8566B	HP	2013-01-22	2015-01-22	4168
Spectrum Analyzer	8566B	HP	2013-01-22	2015-01-22	4169
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4029
Screen Capture software	Version 1.3.1	John Miles, KE5FX	NCR	NCR	59

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Channel Carrier Bandwidth of Frequency Hopping Systems

### Purpose

The purpose of this test is to allow for results that is used to help establish other limits. Although there is not specific limit for this requirement, the derived limits dependant on this information helps allow for other spread spectrum devices to co-exist in the same frequency spectrum.. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

### Limits

There is no specified limit. However, an approximate calculated maximum limit can be obtained by dividing the maximum bandwidth of the frequency allocation by the minimum number of channels. Note that this is a maximum bandwidth, and the measurement is used to calculate other limits.

902 to 928 MHz <sup>1</sup>	902 to 928 MHz <sup>2</sup>	2.4 to 2.4835 GHz	5.725 GHz to 5.85 GHz
26 MHz / 50	26 MHz / 25	83.5 MHz / 15	125 MHz / 75
520 kHz	1.04 MHz	5.57 MHz	1.67 MHz

Note 1: When the 20 dB BW is less than 250 kHz

Note 2: When the 20 dB BW is greater than 250 kHz

### Results

The EUT passed. The 20 dB BW measured was 35 kHz.


Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Graph(s)

The graphs shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 20 dB bandwidth of a channel during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.


Low channel

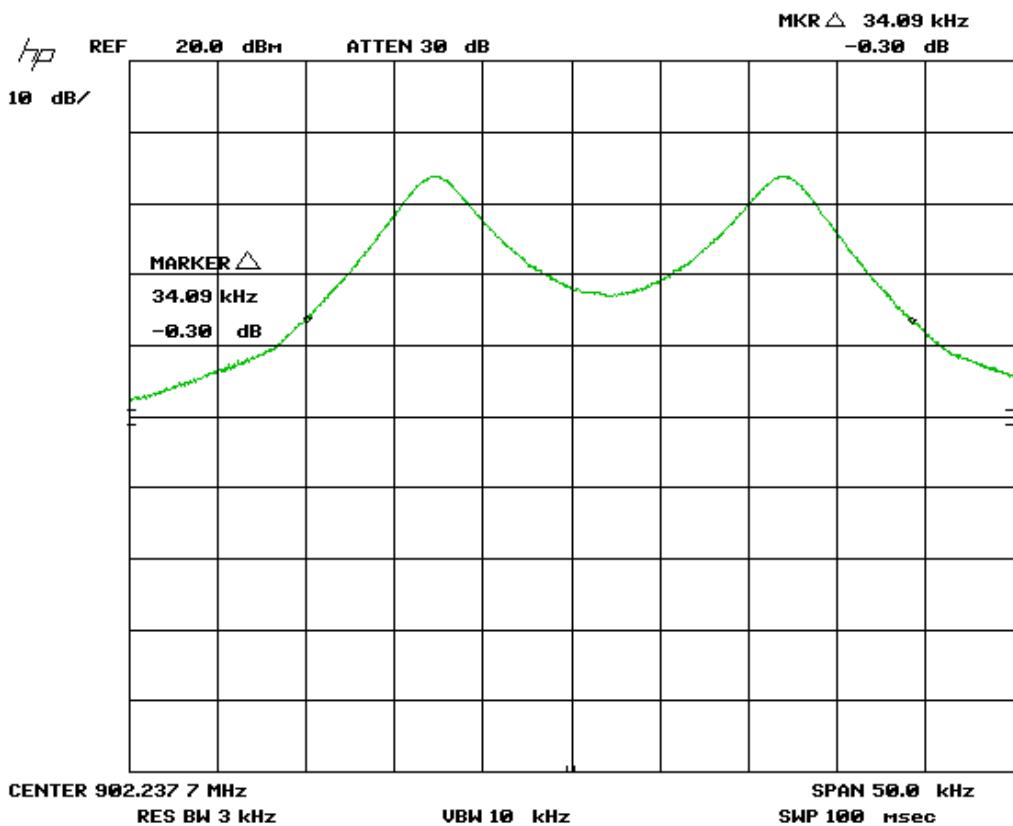

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




Mid channel

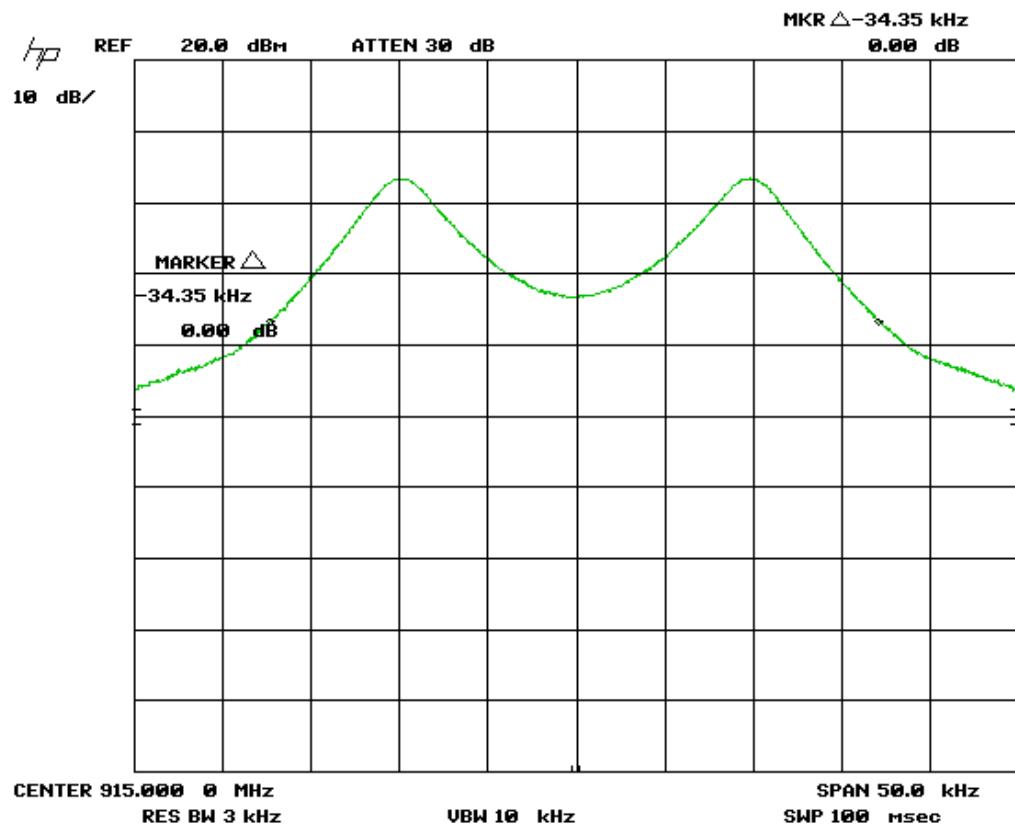

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### High channel

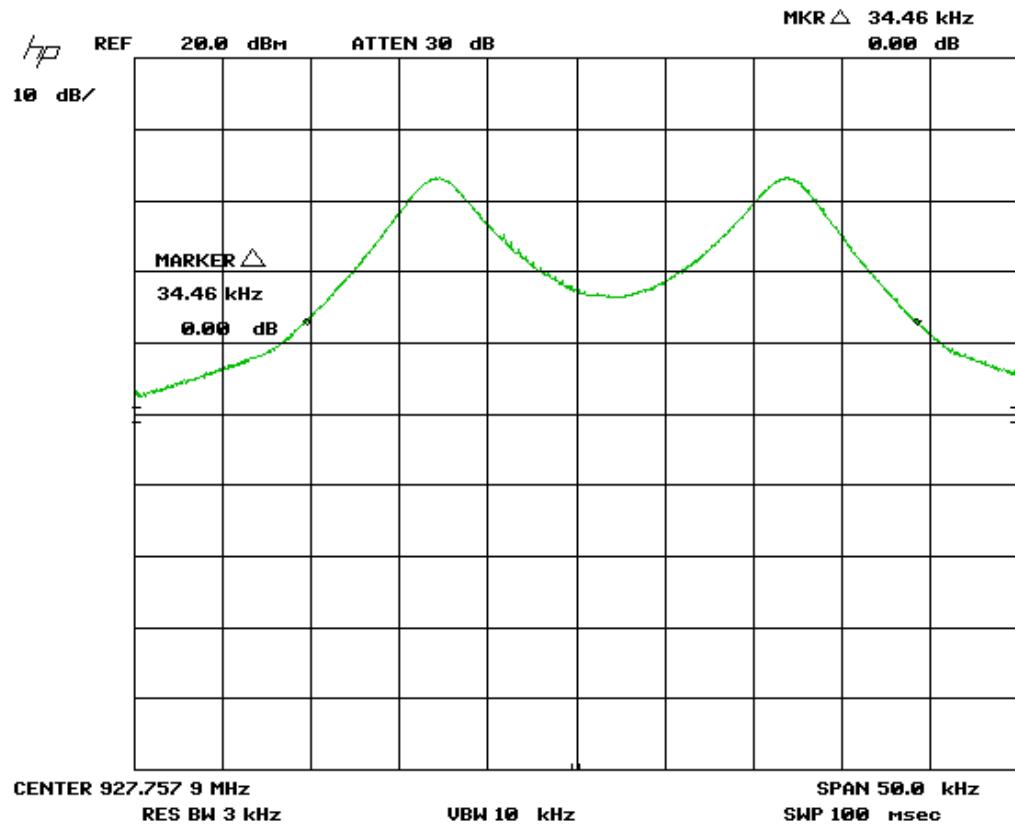

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	Verified 2013-04-02	2015-04-02	4038
Power Attenuator 6 dB	100-A-MFN-06	Bird	Verified 2013-04-02	2015-04-02	4010
Spectrum Analyzer Display	8566B	HP	2013-01-22	2015-01-22	4168
Spectrum Analyzer	8566B	HP	2013-01-22	2015-01-22	4169
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4029
Screen Capture software	Version 1.3.1	John Miles, KE5FX	NCR	NCR	59

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Number of Channels for Frequency Hopping Systems

### Purpose

The purpose of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

### Limits

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)

	902 to 928 MHz	2.4 to 2.4835 GHz	5.275 to 5.85 GHz
No conditions	>= 50 channels	>= 15 channels	>= 75 channels
20 dB BW	>= 25 channels	>= 15 channels	>= 75 channels
exceeds 250 kHz			

### Results


The EUT passed the requirements of the number of channels. The number of channels the device occupies is 53 channels in the allocation band of 902 to 928 MHz.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Graph(s)

The graphs shown below shows the number of occupied channels during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less then 10 minutes, or as sufficient to capture the channels occupied.


The number of channels from 925.75MHz to 926.25MHz: 7

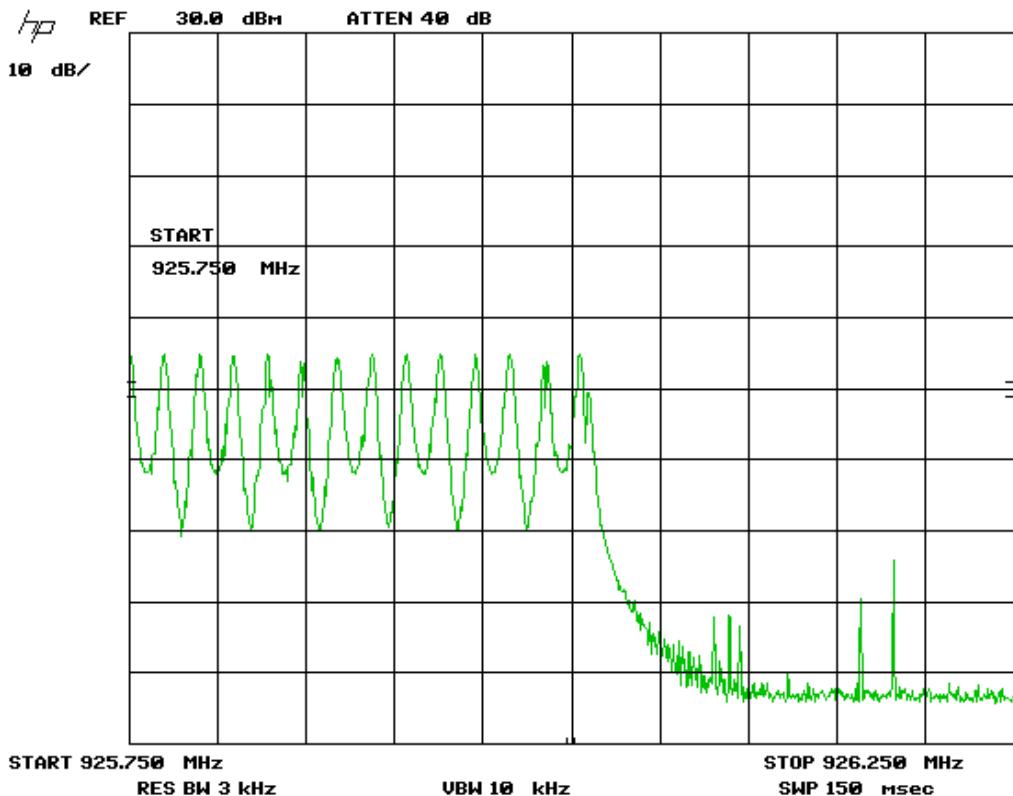

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




The number of channels from 925.25MHz to 925.75MHz: 12

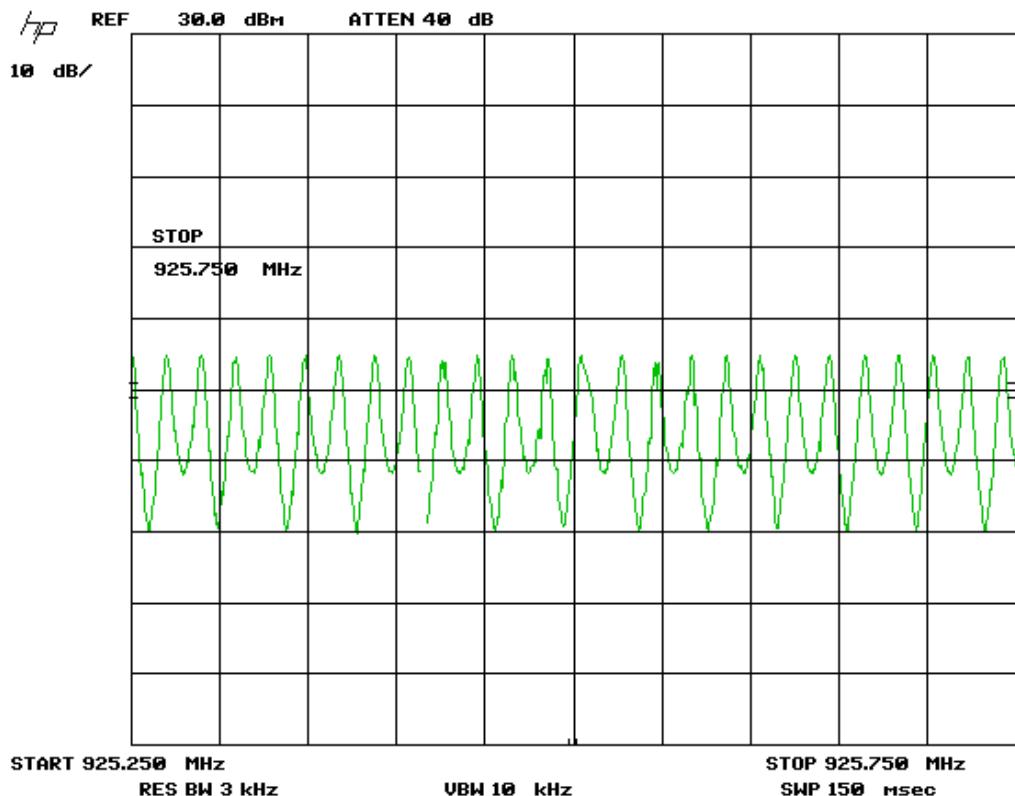

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	


The number of channels from 924.75MHz to 925.25MHz: 9

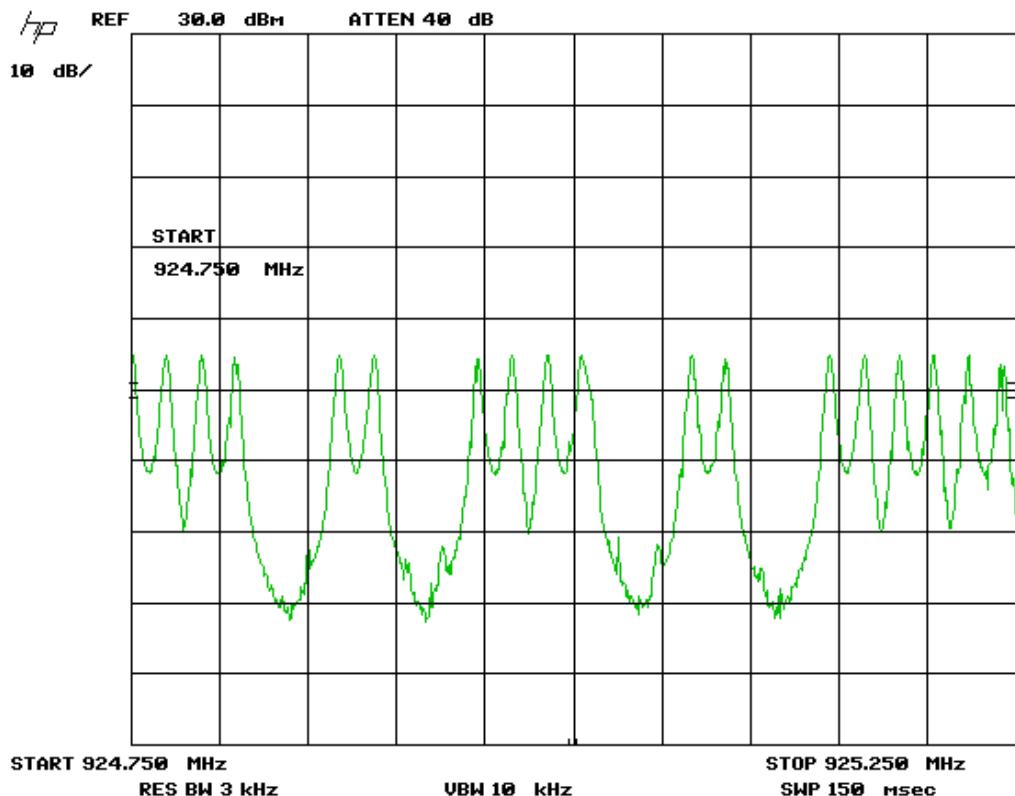

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




The number of channels from 924.25MHz to 924.75MHz: 6

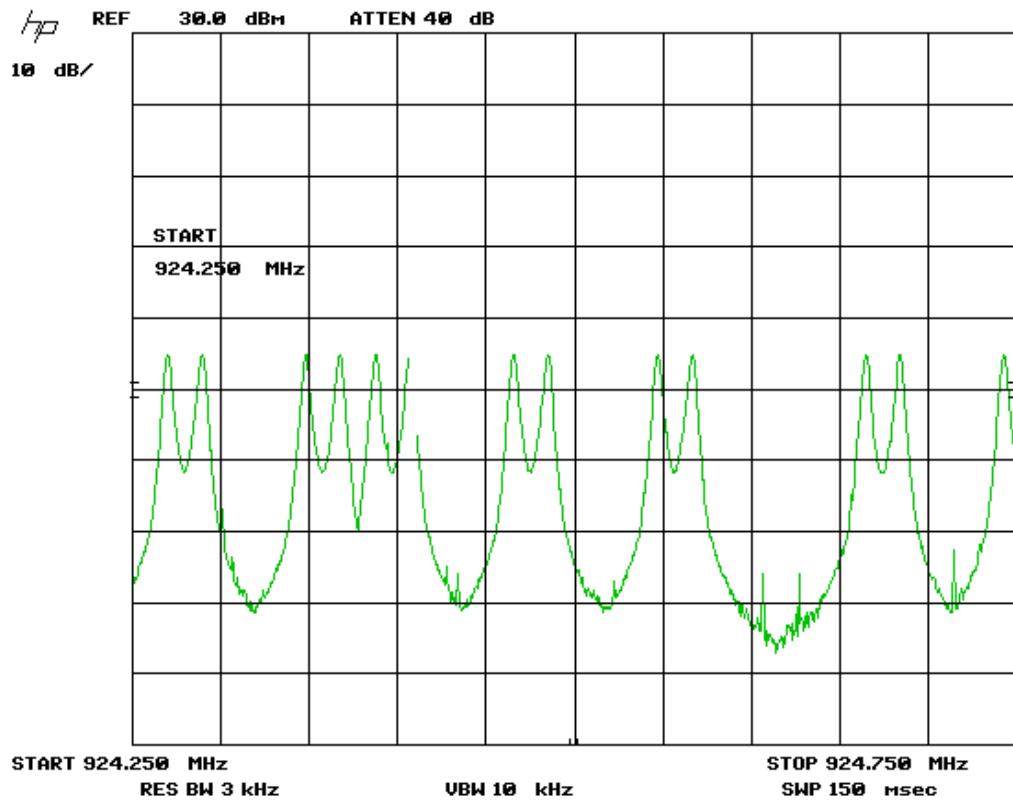

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




The number of channels from 923.75MHz to 924.25MHz: 8

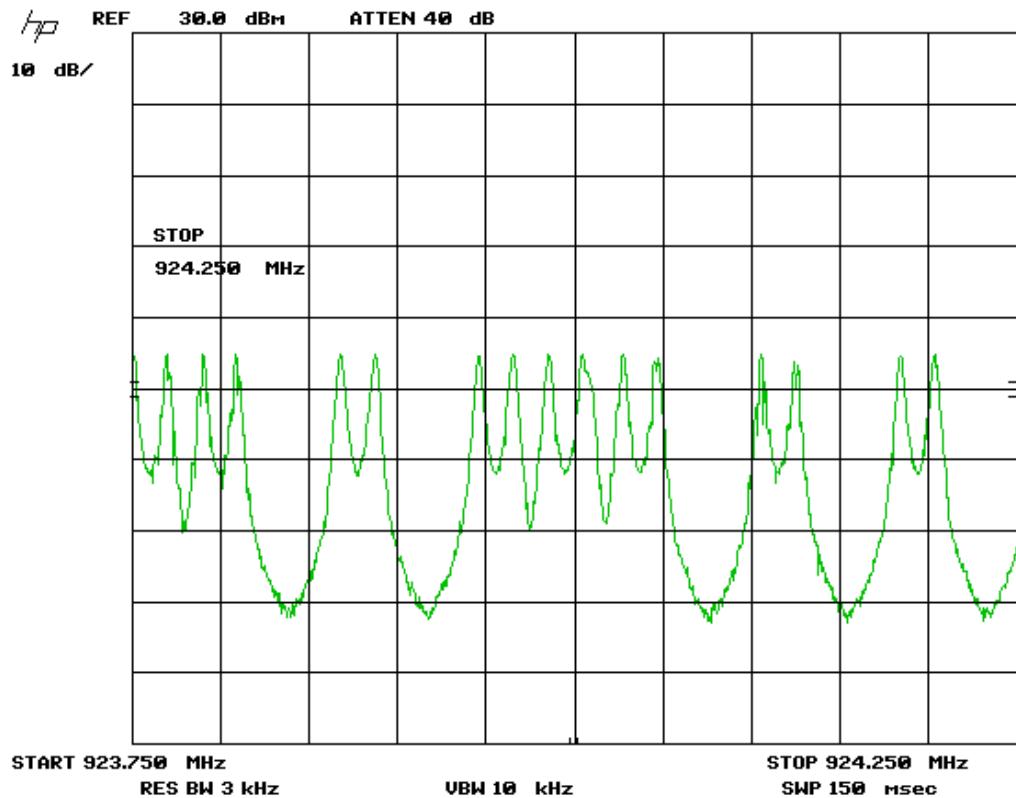

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




The number of channels from 923.25MHz to 923.75MHz: 6

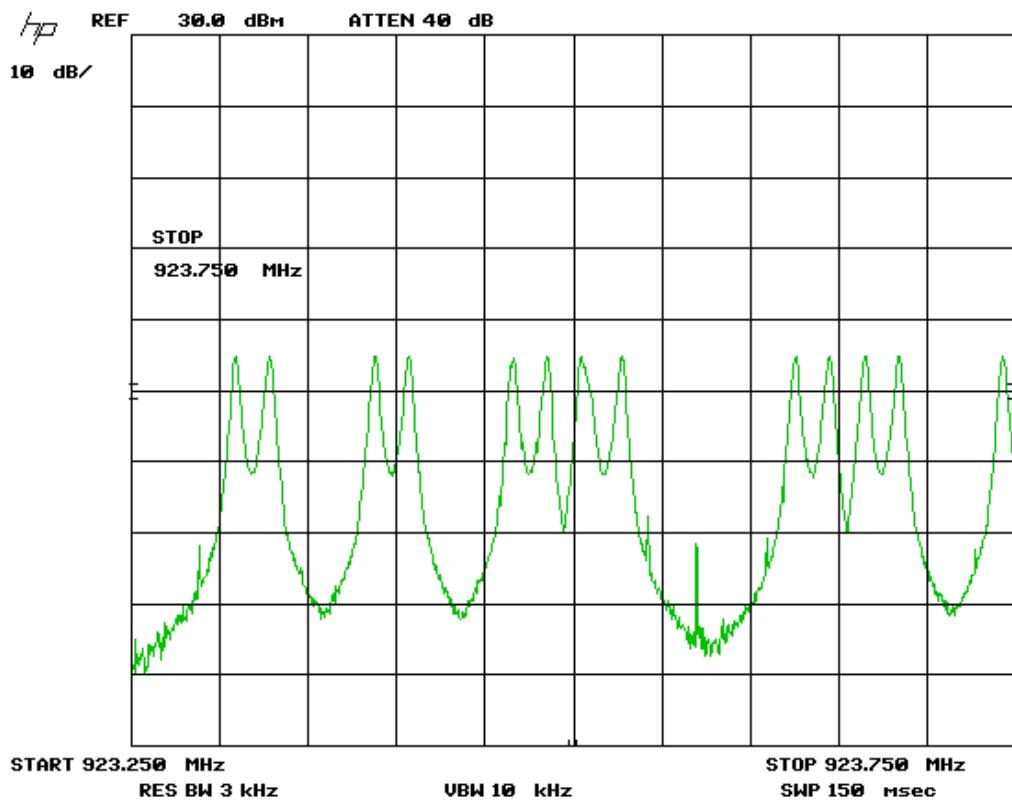

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



The number of channels from 922.75MHz to 923.25MHz: 5

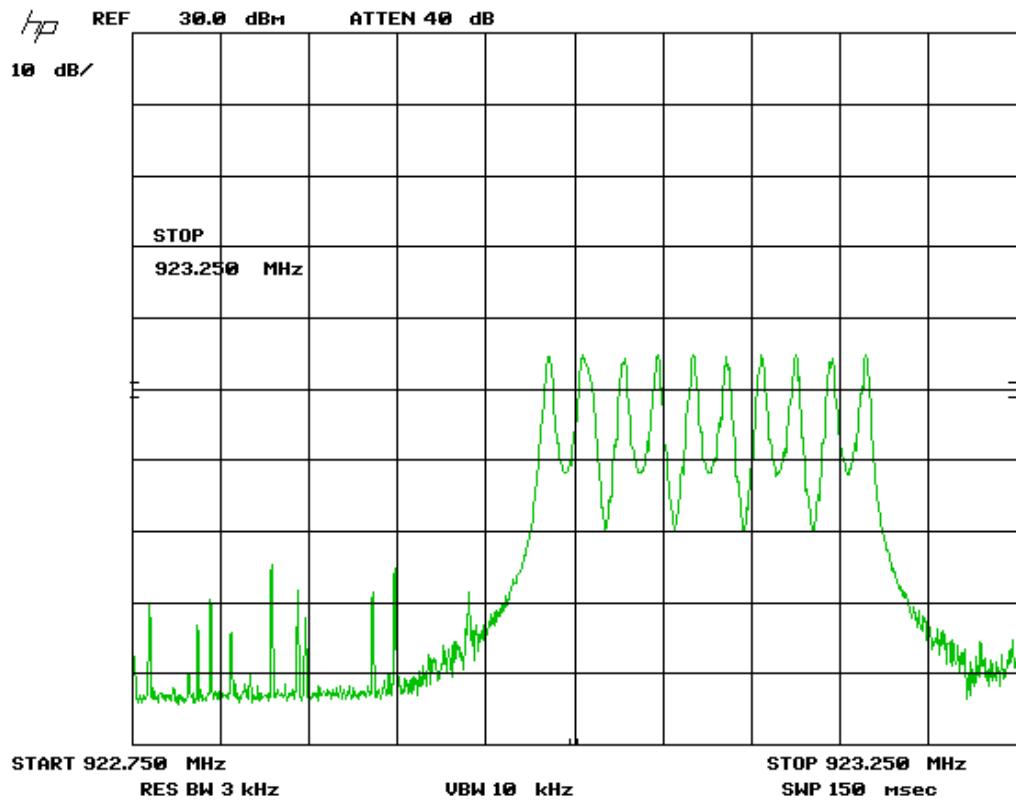

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	Verified 2013-04-02	2015-04-02	4038
Power Attenuator 6 dB	100-A-MFN-06	Bird	Verified 2013-04-02	2015-04-02	4010
Spectrum Analyzer Display	8566B	HP	2013-01-22	2015-01-22	4168
Spectrum Analyzer	8566B	HP	2013-01-22	2015-01-22	4169
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4029
Screen Capture software	Version 1.3.1	John Miles, KE5FX	NCR	NCR	59

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Channel Carrier Separation for Frequency Hopping Systems

### Purpose

The purpose of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

### Limits

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)

No conditions	902 to 928 MHz	2.4 to 2.4835 GHz	5.275 to 5.85 GHz
< 125 mW	25 kHz or 20 dB BW <sup>1</sup>	25 kHz or 20 dB BW <sup>1</sup>	25 kHz or 20 dB BW <sup>1</sup>

25 kHz or 20 dB BW<sup>1</sup>

Note 1: Whichever is greater. The 20 dB BW of the system was measured to be 35 kHz, so a limit of 35 kHz applies.

### Results


The EUT passed the requirements of channel carrier spacing exceeding the measured 20 dB BW of the EUT. The 20 dB BW previously measured was 35 kHz, and the device had a channel spacing of 40.4 kHz.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Graph(s)

The graphs shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.

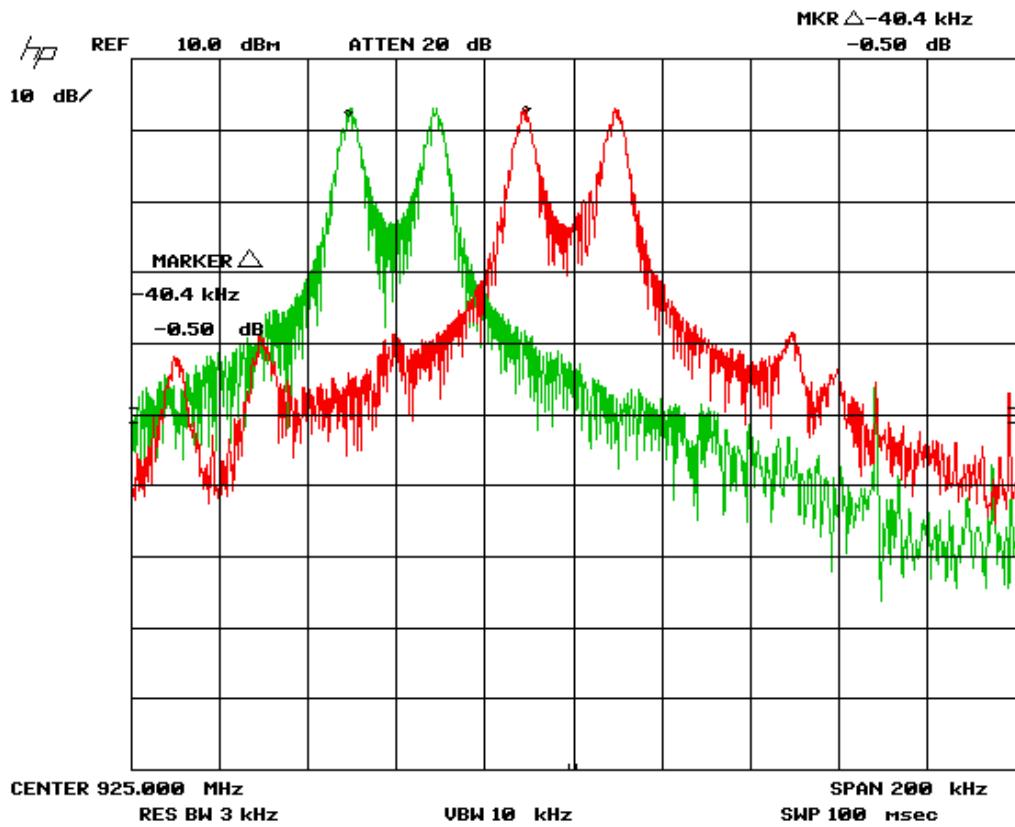

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	Verified 2013-04-02	2015-04-02	4038
Power Attenuator 6 dB	100-A-MFN-06	Bird	Verified 2013-04-02	2015-04-02	4010
Spectrum Analyzer Display	8566B	HP	2013-01-22	2015-01-22	4168
Spectrum Analyzer	8566B	HP	2013-01-22	2015-01-22	4169
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4029
Screen Capture software	Version 1.3.1	John Miles, KE5FX	NCR	NCR	59

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## Frequency Occupancy for Frequency Hopping Systems

### Purpose

The purpose of this test is to ensure that the RF energy of frequency hopping systems is hopping at a minimum defined rate. This helps ensure sufficient time off to enable other frequency hopping devices to co-operate within this allocated band.

### Limits

For 902 to 928 MHz systems, the limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)(i).

For systems with greater than a 20 dB BW of a hopping channel, and greater than 50 hopping channels, such as this EUT, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

### Results

The EUT passed the requirements. The EUT cycles through its list of hopping frequencies every 55.2 seconds. The on time duration of each hop is 394 msec.

Thus the EUT achieves an worst case occupancy of 394 msec within a 20 second period. This is under the 400 msec limit.


### Graph(s)

The first graph shown below shows the repeat time of the pseudorandom generated hopping list. This graph was taken over a period of 120 seconds. The second graph shows the on time over a 500 msec period. Note that in the first graph, the peak represents the 'on' of the frequency being measured. The lower signals are artifacts of nearby channels due to the wide resolution BW used.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




### Hopping List repeat rate

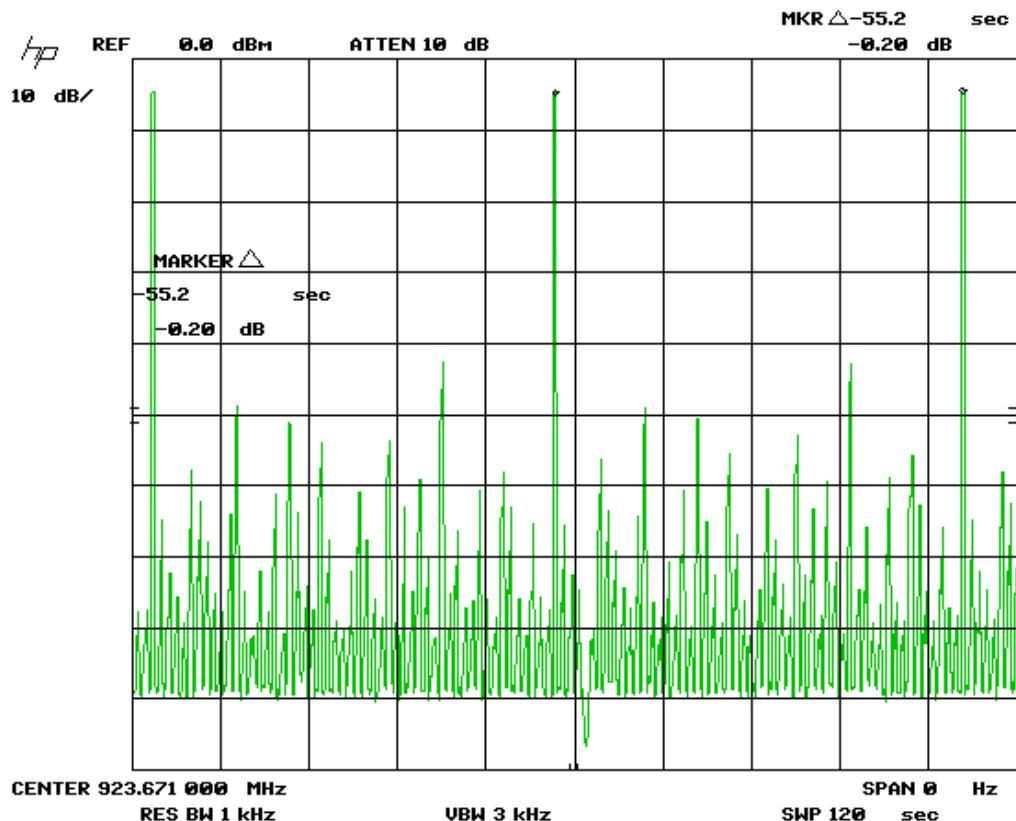

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



On time during each channel

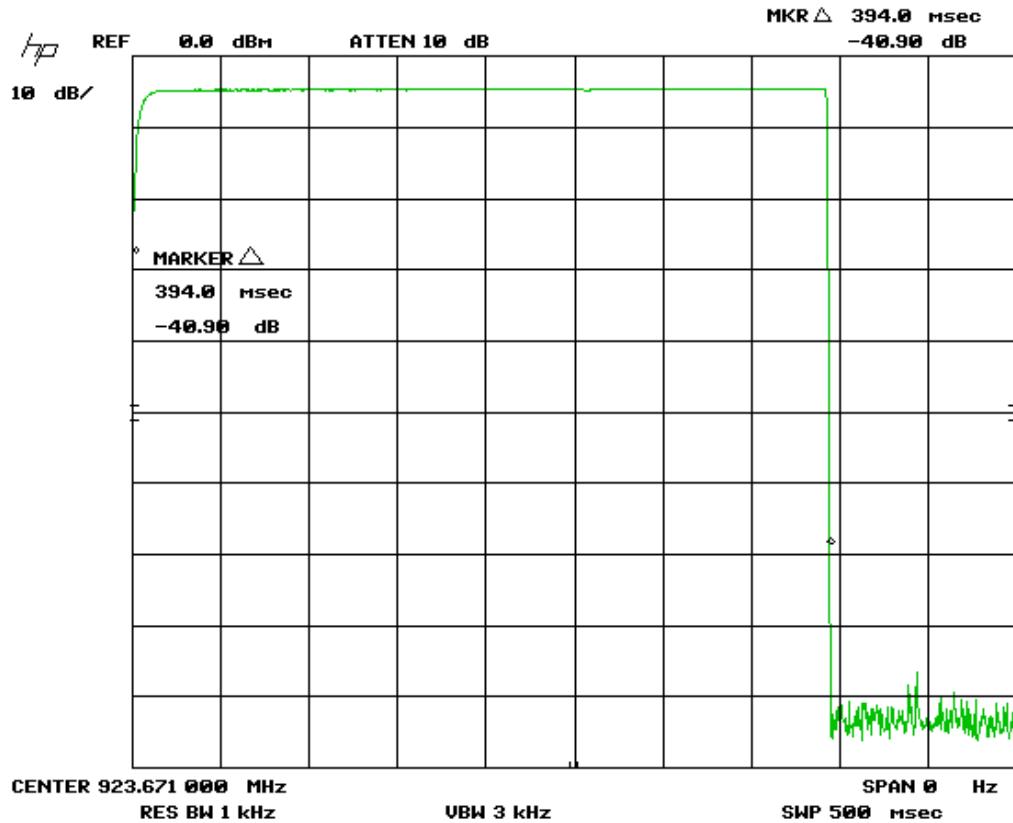

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Tag Tracking Inc.	
Product	OTOCS	
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	Verified 2013-04-02	2015-04-02	4038
Power Attenuator 6 dB	100-A-MFN-06	Bird	Verified 2013-04-02	2015-04-02	4010
Spectrum Analyzer Display	8566B	HP	2013-01-22	2015-01-22	4168
Spectrum Analyzer	8566B	HP	2013-01-22	2015-01-22	4169
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Verified 2013-04-02	2015-04-02	4029
Screen Capture software	Version 1.3.1	John Miles, KE5FX	NCR	NCR	59

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



**GLOBAL**  
**EMC INC**

## Appendix A – EUT Summary

For further details for filing purposes, refer to filing package.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



## General EUT Description

Client Details	
Organization / Address	Tag Tracking Inc. 9280 L'Acadie Boulevard, Montreal, QC. Canada H4N 3C5
Contact	Jason M Gallovich - President
Phone	P: 514-745-8241 F: 514-745-8630
Email	jmgallovich@tagtracking.ca
EUT (Equipment Under Test) Details	
EUT Name (for report title)	OTOCS
EUT Model / SN (if known)	TELEMATIC_1R3
EUT revision	1R3
Software version	0.1.74
Equipment category	Transceiver
EUT is powered using	Battery
Input voltage range(s) (V)	5v-16v
Frequency range(s) (Hz)	902-928 MHz ISM
Rated input current (A)	1 A Max
Nominal power consumption (W)	3 W
Number of power supplies in EUT	1 Battery
Transmits RF energy? (describe)	Click here... 30 dBm
Basic EUT functionality description	Automated asset management, telematic
High level block diagram of EUT (attachment)	OTOCS
Modes of operation	FHSS
Frequency of all clocks present in EUT	32.768KHz, 19.68MHz
Dimensions of product	L 130mm W 70mm H 25mm

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT & Test Setup Photographs'.

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




## **Appendix B – EUT and Test Setup Photographs**

Note: These photos are for information purposes only. Also refer to PDF files that are separate from this test report.

Client	Tag Tracking Inc.
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15




**EUT's Photo:**

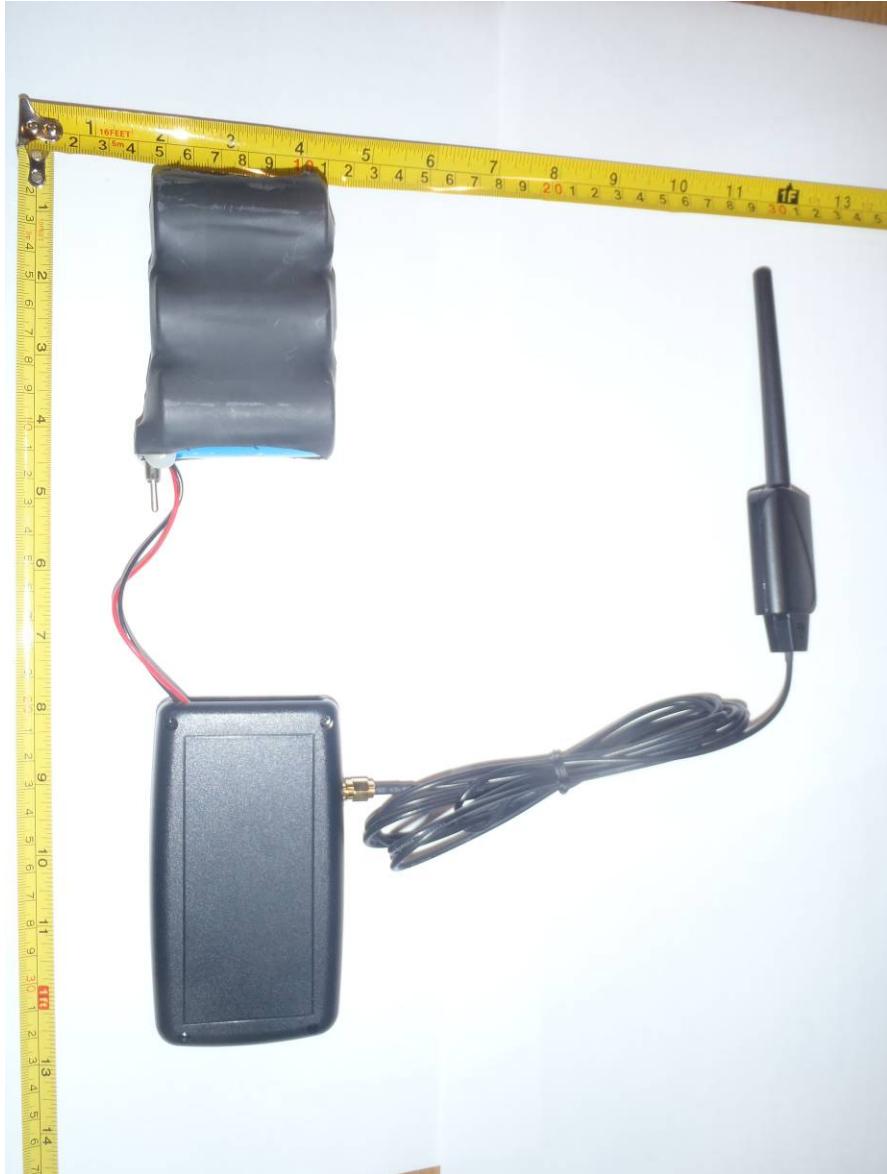

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



### Conducted Test Setup Photo:

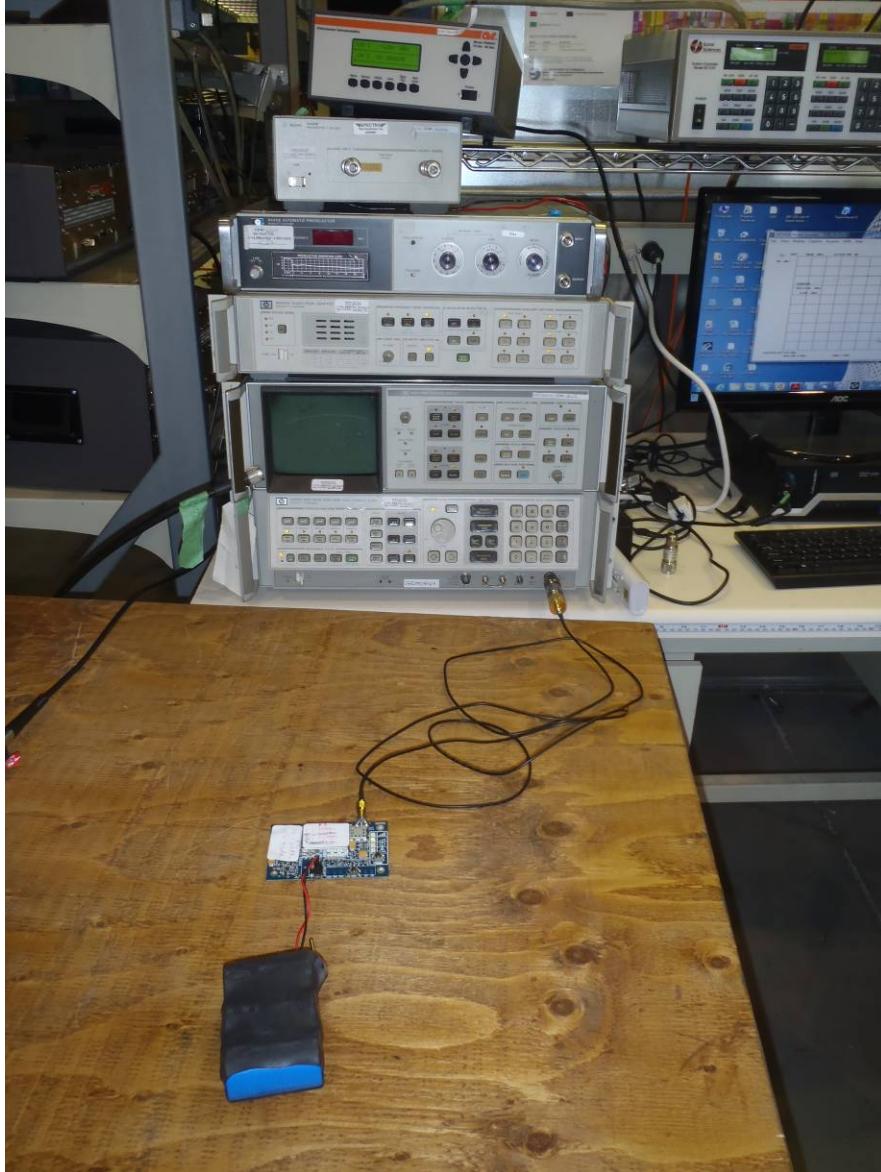

Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



**Radiated Emission Test Setup Photo#1:**



Client	<b>Tag Tracking Inc.</b>
Product	OTOCS
Standard(s)	RSS-247 Issue 1/ FCC Part 15 Subpart C 15



**Radiated Emission Test Setup Photo#2:**



Note: device was also scanned at 1.5 meters, worst case emissions presented in this report.