



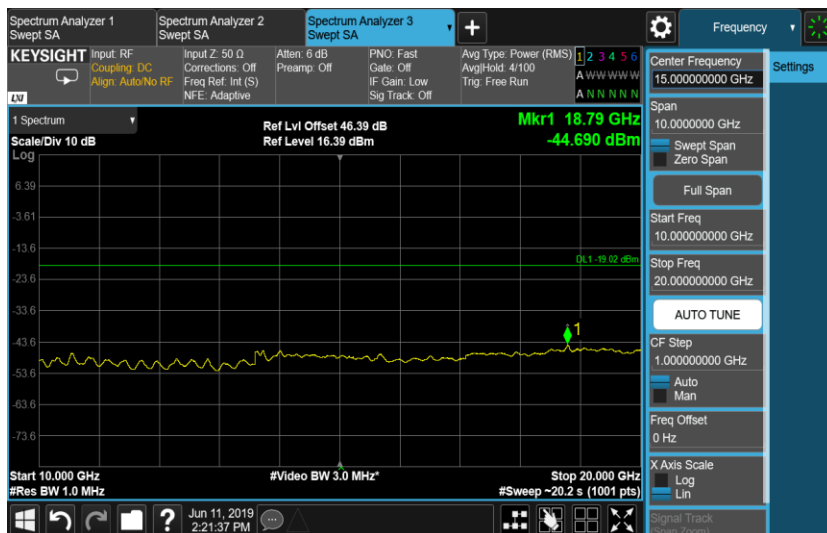


Configuration WCDMA+LTE+NB-IoT-MIMO-MC-1 (1WCDMA 64QAM+1LTE QPSK+1SA QPSK)

Channel Bandwidth	RBW (MHz)	Limit (dBm)
NB: 250 KHz W: 5.0 MHz L: 5.0 MHz	1.0	-19.02

Port B , Channel Position M, LTE 5.0 MHz


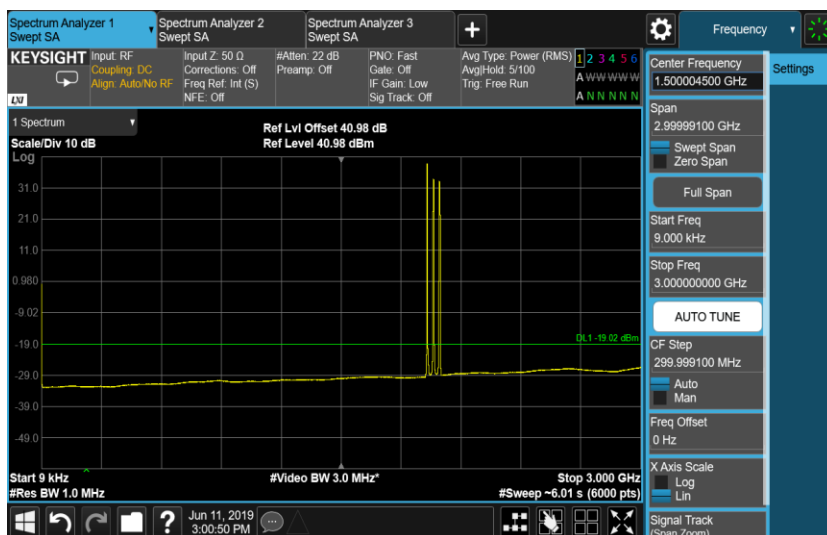


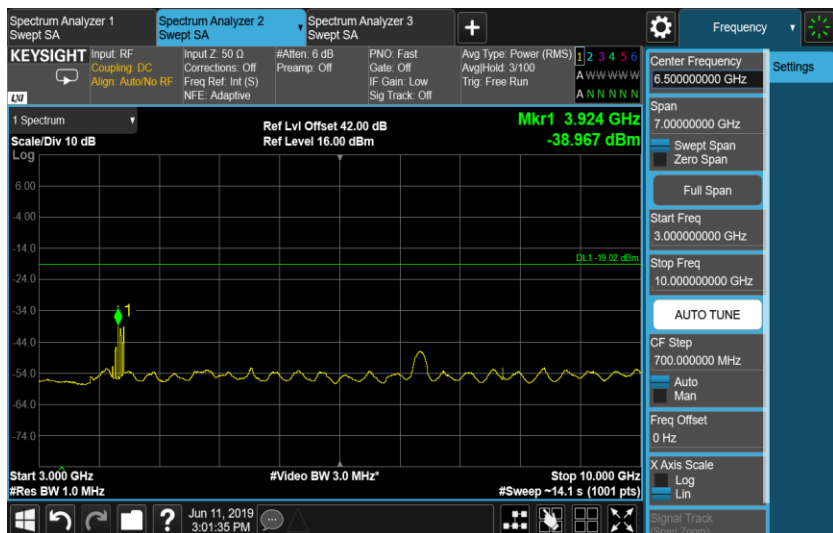

Configuration WCDMA+LTE+NB-IoT-MIMO-MC-2 (1WCDMA 64QAM+1LTE QPSK+2SA QPSK)

Channel Bandwidth	RBW (MHz)	Limit (dBm)
NB: 250 KHz W: 5.0 MHz L: 5.0 MHz	1.0	-19.02

Port B , Channel Position M, LTE 5.0 MHz

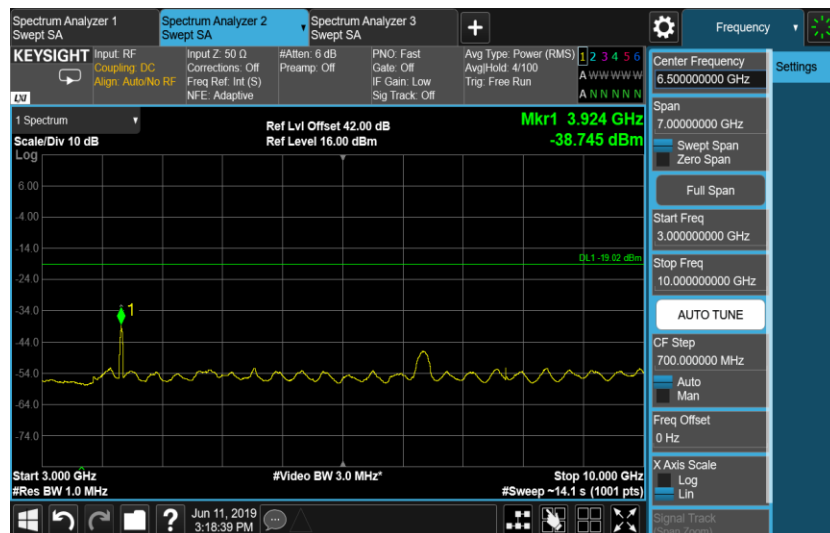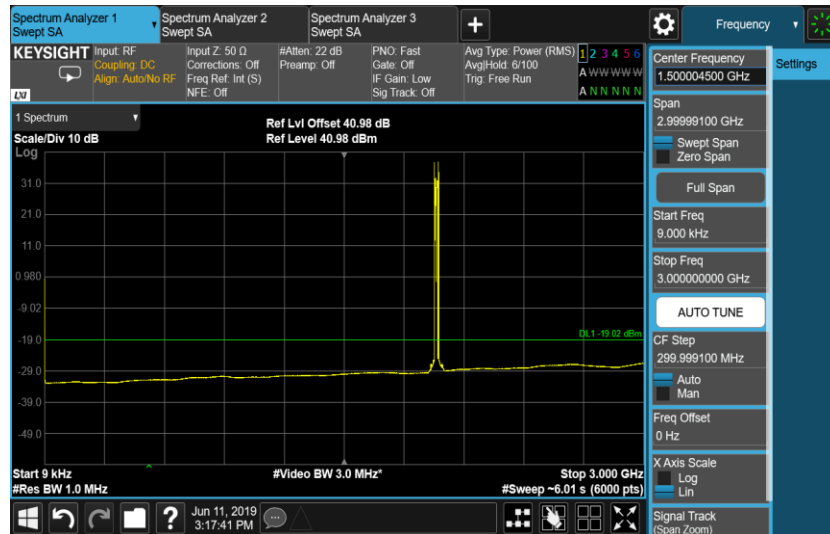

A.5 Radiated Spurious Emission

A.5.1 Reference

FCC CFR 47 Part 2, Clause 2.1046

FCC CFR 47 Part 24, Clause 24.232 (a) (d)

RSS-133, Clause 6.5

A.5.2 Method of measurement

The measurements procedures in TIA-603-E: 2016 are used. This measurement is carried out in semi-anechoic chamber.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the measurement antenna in both horizontal and vertical polarizations.

Emissions identified within the range 30MHz to 22GHz were then formally measured using a peak detector as the worst case.

The limits for outside a licensee's frequency band(s) of operation the power of the spurious emissions have been calculated, as shown below using the following formula:

$$\text{Field Strength of Carrier} - (43 + 10\log(P)) \text{ dB}$$

Where:

Field Strength is measured in dB μ V/m

P is measured Transmitter Power in Watts

The EUT was measured with the antenna height varied between 1 and 4 m with the turn table rotated between 0 and 360 degrees. The emission of any outside a licensee's frequencies within 20dB of the limit were measured with the substitution method used according to the standard. The measurements were performed at a 3m distance unless otherwise stated.

A.5.3 Measurement limit

The field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipoles as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where

G_i is the antenna gain of ideal half-wave dipoles,

P_o is the power out of the transceiver in W,

d is the measurement distance in meter.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 16.56)^{0.5} / 3 = 9.51 \text{ V/m} = 139.57 \text{ dB}\mu\text{V/m}$$

As per 24.238 (a) the spurious emission must be attenuated by $43 + 10\log(P_o)$ dB this gives:

$$43 + 10\log(16.56) = 55.19 \text{ dB}$$

Therefore the limit at 3m measurement distance is:

$$139.57 - 55.19 = 84.4 \text{ dB}\mu\text{V/m}$$

These limits have been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

A.5.4 Measurement results

Configuration GSM-1C :

Maximum Output Power 52.0dBm

Channel Position	Channel Frequencies
Channel Position B	1930.4MHz
Channel Position M	1960.0MHz
Channel Position T	1989.6MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+LTE-MIMO-MC-1:

Maximum Output Power 52.0dBm, 5MHz Bandwidth,

Channel Position	Channel Frequencies
Channel Position M	(G)1930.4MHz+(L)1987.5MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+LTE-MIMO-MC-1:

Maximum Output Power 52.0dBm, 10MHz Bandwidth,

Channel Position	Channel Frequencies
Channel Position M	(G)1930.4MHz+(L)1985.0MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+NB-IoT-MC-1:

Maximum Output Power 52.0dBm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz+(NB)1949.8MHz
Channel Position M	(G)1950.2MHz+(NB)1969.8MHz
Channel Position T	(G)1970.2MHz+(NB)1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+WCDMA+NB-IoT-MC-1 :

Maximum Output Power 52.0dBm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz+(W)1940.0MHz (NB)1949.8MHz
Channel Position M	(G)1950.2MHz+(W)19600.0MHz (NB)1969.8MHz
Channel Position T	(G)1970.2MHz+(W)1980.0MHz (NB)1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+WCDMA+NB-IoT-MC-3:

Maximum Output Power 52.0dBm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz+1931+(W)1937.4MHz +1942.4+(NB)1949.2MHz+1949.8MHz
Channel Position M	(G)1950.2MHz+1950.8+(W)1957.4MHz +1962.4+(NB)1969.2MHz+1969.8MHz
Channel Position T	(G)1970.2MHz+1970.8+(W)1977.4MHz +1982.4+(NB)1989.2MHz+1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+LTE+NB-IoT-MIMO-MC-1 :

Maximum Output Power 52.0Bm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz+(L)1940.0MHz +(NB)1949.8MHz
Channel Position M	(G)1950.2MHz+(L)1960.0MHz +(NB)1969.8MHz
Channel Position T	(G)1970.2MHz+(L)1980.0MHz +(NB)1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+LTE+NB-IoT-MIMO-MC-2:

Maximum Output Power 52.0Bm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz+(L)1937.5MHz +1942.5 MHz +(NB)1949.8MHz
Channel Position M	(G)1950.2MHz+(L)1957.5MHz +1962.5MHz +(NB)1969.8MHz
Channel Position T	(G)1970.2MHz+(L)1977.5MHz +1982.5MHz +(NB)1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+LTE+NB-IoT-MIMO-MC-3

Maximum Output Power 52.0m

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz+1931MHz+ (L)1940MHz +(NB)1949.2MHz+1949.8MHz
Channel Position M	(G)1950.2MHz+1950.8MHz+ (L)1960MHz +(NB)1969.2MHz+1969.8MHz
Channel Position T	(G)1970.2MHz+1970.8MHz+ (L)1980MHz +(NB)1989.2MHz+1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration GSM+NB-IoT-MC-4:

Maximum Output Power 52.0Bm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz +(NB)1949.2MHz+1949.8MHz
Channel Position M	(G)1950.2MHz+ (NB)1969.2MHz+1969.8MHz
Channel Position T	(G)1970.2MHz +(NB)1989.2MHz+1989.8MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA-1C :

Maximum Output Power 52.0dBm

Channel Position	Channel Frequencies
Channel Position B	1932.4MHz
Channel Position M	1962.4MHz
Channel Position T	1992.6MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA-2C:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	1932.4 MHz +1992.6MHz

No emissions were detected within 20dB of the limit.

Configuration LTE-MIMO-1C:

Maximum Output Power 52.0dBm, 10MHz Bandwidth,

Channel Position	Channel Frequencies
Channel Position B	1932.5MHz
Channel Position M	1962.5MHz
Channel Position T	1992.5MHz

No emissions were detected within 20dB of the limit.

Configuration NB-IoT-GuardBand-1C:

Maximum Output Power 52.0dBm ;

Channel Position	Channel Frequencies
Channel Position T	1990.0MHz

No emissions were detected within 20dB of the limit.

Configuration NB-IoT-Standalone-1C :

Maximum Output Power 52.0dBm ;

Channel Position	Channel Frequencies
Channel Position T	(NB)1994.8MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA+LTE-MIMO-MC-1:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	(W)1932.4MHz+(L)1992.5MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA+NB-IoT-MC-1 :

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	(NB)1930.3MHz+(W)1992.6MHz

No emissions were detected within 20dB of the limit.

Configuration LTE+NB-IoT-MC-2:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position B	(NB)1930.3MHz+(L)1940.0MHz+(NB)1949.8MHz
Channel Position M	(NB)1952.7MHz+(L)1962.5MHz+(NB)1972.3MHz
Channel Position T	(NB)1975.2MHz+(L)1985.0MHz+(NB)1994.8MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA+LTE+NB-IoT-MC-2

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position B	(NB)1930.3MHz+(W)1937.4MHz+(L)1942.5MHz +(NB)1949.8MHz
Channel Position M	(NB)1952.7MHz+(W)1960.0MHz+(L)1965MHz+(NB)1972.3MHz
Channel Position T	(NB)1975.2MHz+(W)1982.4MHz+(L)1987.5MHz +(NB)1994.8MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA-6C:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	1932.4 MHz +1937.4 MHz +1942.4 MHz +1982.6 MHz +1987.6 MHz +1992.6 MHz

No emissions were detected within 20dB of the limit.

Configuration LTE-MIMO-6C:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	1932.5 MHz +1937.5 MHz +1942.5 MHz +1982.5 MHz +1987.5 MHz +1992.5 MHz

No emissions were detected within 20dB of the limit.

Configuration WCDMA+LTE-MIMO-MC-3:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	(W)1932.4 MHz +(W)1937.4 MHz +(W)1942.4 MHz +(L)1982.5 MHz +(L)1987.5 MHz +(L)1992.5 MHz

No emissions were detected within 20dB of the limit.

Configuration LTE+NB-IoT-MC-3:

Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	(NB)1952.7MHz+(NB)1972.3MHz +(L)1957.5MHz+1962.5MHz+1967.5MHz

No emissions were detected within 20dB of the limit.

Configuration GSM-4C:


Maximum Output Power 52.0Bm

Channel Position	Channel Frequencies
Channel Position B	(G)1930.4MHz +1931MHz+1949.2MHz+1949.8MHz

No emissions were detected within 20dB of the limit.


Channel Position M-30MHz-1GHz

RSE_Erison_30M-1G_FCC

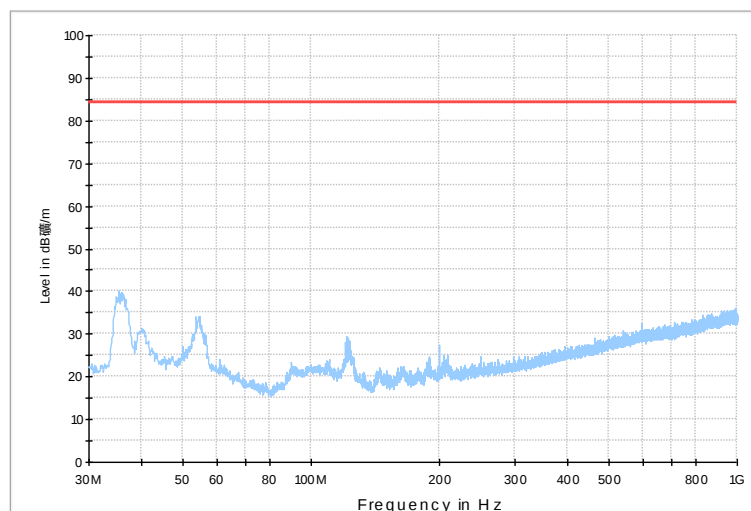


Channel Position M-1GHz-18GHz

RSE_Erison_1-18G_FCC

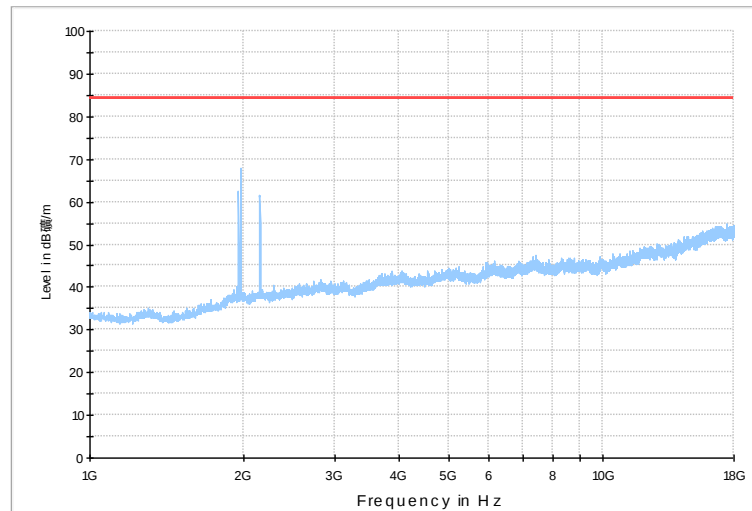

Channel Position M-18GHz-20GHz

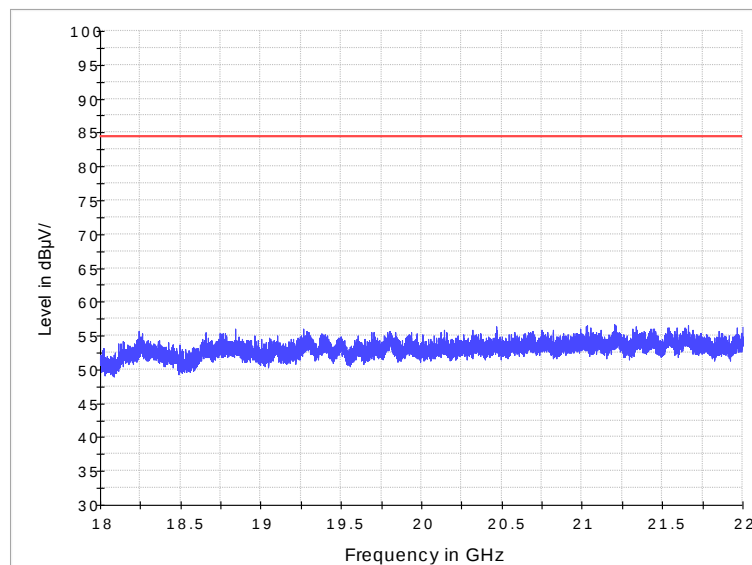

Configuration WCDMA+LTE+NB-IoT-MC-3:


Maximum Output Power 52.0 dBm ;

Channel Position	Channel Frequencies
Channel Position M	(NB)1930.3 MHz +1935.8 MHz +(W)1960.0 MHz +1965.0 MHz +(L)1987.5 MHz+1992.5 MHz

No emissions were detected within 20dB of the limit.


Channel Position M-30MHz-1GHz

RSE_Erison_30M-1G_FCC

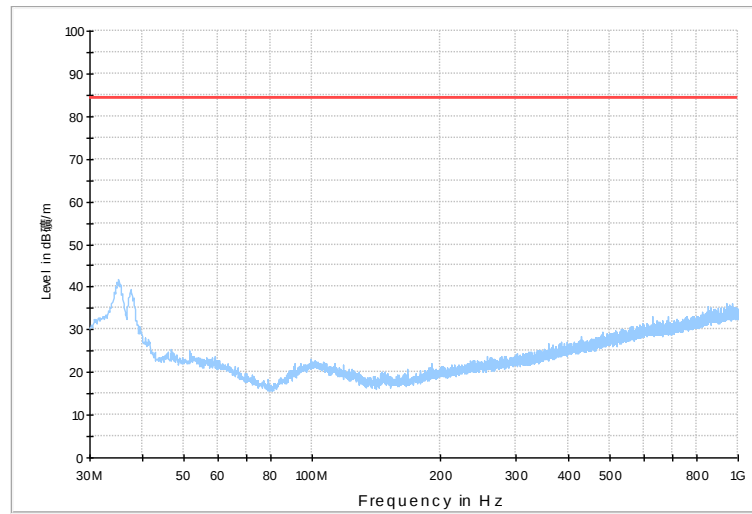


Channel Position M-1GHz-18GHz

RSE_Erison_1-18G_FCC

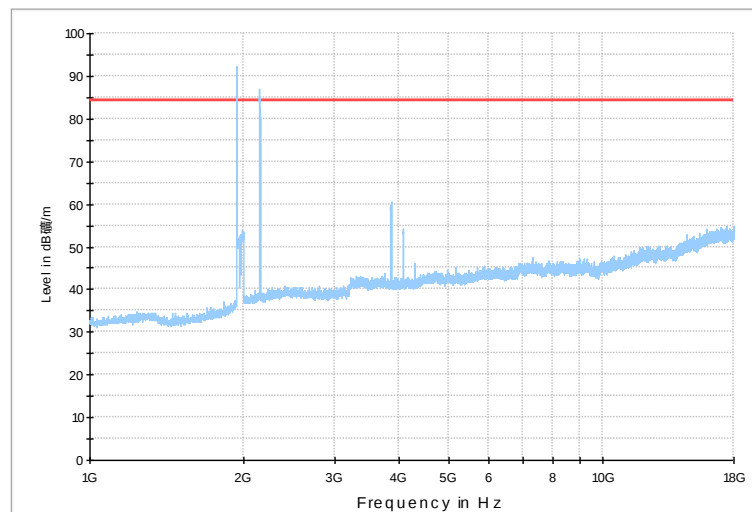

Channel Position M-18GHz-22GHz

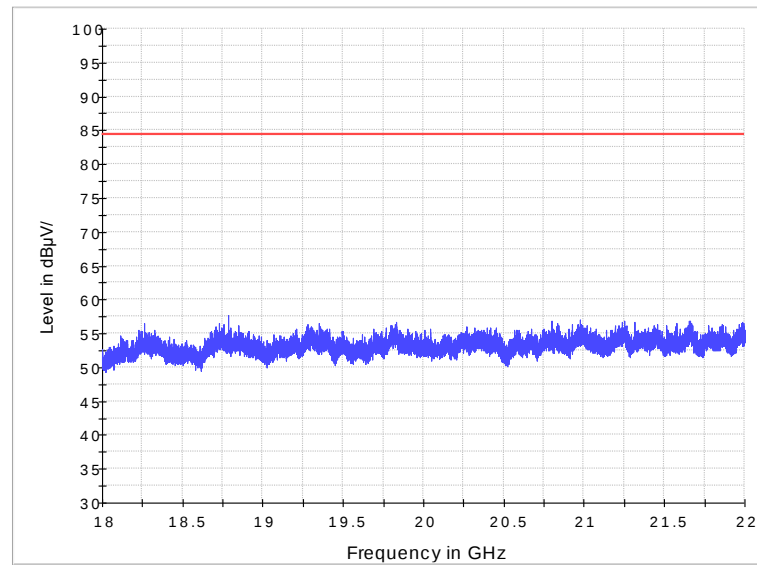

Remarks

The EUT does not exceed -13dBm / 84.4dBμV/m at the measured frequencies.

A.6 Frequency Stability

A.6.1 Reference

FCC CFR 47 Part 2, Clause 2.1055
FCC CFR 47 Part 24, Clause 24.235
RSS-133, Clause 6.3

A.6.2 Method of measurement

Temperature Variation

The EUT was tested over the temperature range -30°C to +50°C in 10°C steps with 120V AC Power Supply. At each temperature step, the Base Station was configured to transmit an [RAT]* at maximum power on the middle channel of the operating band. After achieving thermal balance, the averages of 200 transmission bursts were measured and the result recorded.

Voltage Variation

The EUT was tested at the supplied voltages varied from 85 to 115 percent of the nominal values of 120V AC. At +20°C, the Base Station was configured to transmit an [RAT]* at maximum power on the bottom, middle and top channel of the operating band. The average of 200 transmission bursts was measured and the result recorded.

[RAT]*:

GSM - GSM Single Carrier with all timeslots active with GMSK modulation

WCDMA - Single Carrier with 64QAM modulation

LTE (5.0 MHz) - Test Model E-TM1.1 Single Carrier with QPSK modulation

NB-IoT - QPSK modulation

A.6.3 Measurement limit

FCC: The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

ISED: ± 1.0 ppm

A.6.4 Measurement results

Frequency Error – Temperature Variation

Configuration GSM-1C,GMSK

Maximum Output Power 43.0dBm per port, Channel Bandwidth 200KHz

Supply Voltage AC(V)	Temperature	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
120	-30	-8.099	7.324	-8.041
	-20	8.033	8.351	8.042
	-10	7.882	7.684	8.206
	0	7.977	-8.129	-8.473
	10	8.325	7.243	7.281
	20	8.038	9.428	9.705
	30	-9.327	10.491	10.684
	40	8.405	-8.984	-9.741
	50	-9.829	9.576	9.886

Configuration WCDMA-1C,64QAM,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 5MHz

Supply Voltage AC(V)	Temperature	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
120	-30	0.55	0.67	0.57
	-20	0.49	0.51	-0.53
	-10	-0.47	0.47	-0.50
	0	-0.66	0.57	-0.63
	10	0.73	-0.75	-0.74
	20	0.80	0.86	-0.79
	30	-0.86	0.87	0.89
	40	-0.90	0.94	-0.96
	50	1.00	1.03	-1.02

Configuration LTE-1C,QPSK,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 5MHz

Supply Voltage AC(V)	Temperature	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
120	-30	-1.14	-1.15	1.10
	-20	1.10	-1.13	-1.05
	-10	1.03	1.01	-1.06
	0	1.22	1.31	-1.32
	10	-1.33	1.31	1.34
	20	1.02	1.11	1.08
	30	1.18	1.20	1.16
	40	-1.14	-1.24	1.24
	50	-1.10	1.12	-1.11

Configuration NB-IoT-Inband-1C,QPSK,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 5MHz

Supply Voltage AC(V)	Temperature	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
120	-30	-4.26	-4.25	-4.35
	-20	-4.45	-4.47	-4.50
	-10	-4.49	-4.48	-4.51
	0	-4.63	-4.62	-4.71
	10	-4.70	-4.73	-4.80
	20	-4.87	-4.90	-4.85
	30	-4.98	5.00	-4.96
	40	-5.00	-5.08	-5.02
	50	-5.08	-5.12	-5.08

Configuration NB-IoT-Guardband-1C,QPSK,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 10MHz

Supply Voltage AC(V)	Temperature	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
120	-30	-	1.42	-
	-20	-	-1.37	-
	-10	-	-1.23	-
	0	-	-1.21	-
	10	-	1.24	-
	20	-	-1.26	-
	30	-	-1.31	-
	40	-	-1.37	-
	50	-	-1.42	-

Configuration NB-IoT-Standalone-1C,QPSK,Port A

Maximum Output Power 43.0dBm per port, Channel Bandwidth 200KHz

Supply Voltage AC(V)	Temperature	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
120	-30(A)	-1.21	-1.16	-1.21
	-20	1.21	-1.31	-1.23
	-10	1.25	-1.35	-1.27
	0	-1.27	-1.20	-1.32
	10	-1.33	-1.47	-1.42
	20	-1.43	-1.52	-1.42
	30	-1.42	-1.56	-1.41
	40	-1.39	-1.51	1.38
	50	-1.38	-1.48	1.41

Configuration GSM-1C,GMSK

Maximum Output Power 43.0dBm per port, Channel Bandwidth 200KHz

Supply Voltage AC(V)	Temperature(°C)	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
102	20	9.899	9.812	8.614
120	20	8.038	9.428	9.705
138	20	9.917	-9.919	9.106

Configuration WCDMA-1C,64QAM,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 5MHz

Supply Voltage AC(V)	Temperature(°C)	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
102	20	-0.83	-0.85	-0.85
120	20	0.80	0.86	-0.79
138	20	-0.87	0.86	-0.86

Configuration LTE-1C,QPSK,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 5MHz

Supply Voltage AC(V)	Temperature(°C)	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
102	20	1.03	1.06	1.02
120	20	1.02	1.11	1.08
138	20	1.13	1.00	1.01

Configuration NB-IoT-Inand-1C,QPSK,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 5MHz

Supply Voltage AC(V)	Temperature(°C)	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
102	20	-4.87	-4.93	-4.85
120	20	-4.87	-4.90	-4.85
138	20	-4.92	-4.88	-4.84

Configuration NB-IoT-Guardband-1C,QPSK,Port A

Maximum Output Power 44.8dBm per port, Channel Bandwidth 10MHz

Supply Voltage AC(V)	Temperature(°C)	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
102	20	-	-1.27	-
120	20	-	-1.26	-
138	20	-	-1.24	-



Configuration NB-IoT-Standalone-1C,QPSK,Port A

Maximum Output Power 43.0dBm per port, Channel Bandwidth 200KHz

Supply Voltage AC(V)	Temperature(°C)	Frequency Stability (Hz)		
		Channel position B	Channel position M	Channel position T
102	20	-1.32	-1.44	-1.31
120	20	-1.43	-1.52	-1.42
138	20	1.36	-1.57	-1.38

ANNEX B: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP[®] Certificate of Accreditation to ISO/IEC 17025:2005 NVLAP LAB CODE: 600118-0 Telecommunication Technology Labs, CAICT Beijing China <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i> Electromagnetic Compatibility & Telecommunications <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i> <table><tr><td> 2018-09-28 through 2019-09-30 <i>Effective Dates</i> </td><td></td><td>  <i>For the National Voluntary Laboratory Accreditation Program</i> </td></tr></table>		2018-09-28 through 2019-09-30 <i>Effective Dates</i>		 <i>For the National Voluntary Laboratory Accreditation Program</i>
2018-09-28 through 2019-09-30 <i>Effective Dates</i>		 <i>For the National Voluntary Laboratory Accreditation Program</i>		

*****END OF REPORT*****