



REPORT

Issued by an FCC listed Laboratory Reg. no93866
The test site complies with RSS-Gen, IC file no. 3482A-1
Contact person

Tomas Lennhager
Electronics
+46 10 516 54 09
Tomas.Lennhager@sp.se

Date

2014-05-27

Reference

4P02595-02-F24

Page

1 (2)



1002
ISO/IEC 17025

Ericsson AB
Klaes Holm
PDU HW
164 80 Stockholm

Radio measurements on RUS 01 B2 1900 MHz radio equipment with FCC ID: TA8CKRC11866-1 and IC: 287AB-CS118661 (8 appendices)

Test object

Product name: RUS 01 B2
Product number: KRC 118 66/1, R2H

Summary

See appendix 1 for general information and appendix 8 for external photos.

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-133 Issue 6		
2.1046 / RSS-133 6.4 RF power output	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-133 6.5 Band edge	Yes	4
2.1051 / RSS-133 6.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-133 6.5 Field strength of spurious radiation	Yes	6
2.1055 / RSS-133 6.3 Frequency stability	Yes	7

Note: Above RSS-133 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Technical Research Institute of Sweden

Electronics – EMC

Performed by

Examined by

Jörgen Wassholm

Anders Nordlöf

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 BORÅS
Sweden

Office location

Västeråsen
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory. .

Table of contents

Description of the test object	Appendix 1
Operation modes during measurements	Appendix 1
Test frequencies and setups	Appendix 1
Purpose of test	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
External photos	Appendix 8

Appendix 1

Description of the test object

Equipment:	Radio equipment RUS 01 B2 Product number KRC 118 66/1 FCC ID: TA8CKRC11866-1 IC: 287AB-CS118661 IC MODEL NO: CS118661
Tested configuration:	WCDMA single RAT
Frequency range:	TX: 1930 – 1990 MHz RX: 1850 – 1910 MHz
Antenna ports:	1 TX/RX port 1 RX port
RF configuration:	Single carrier, multi carrier and MIMO 2x2
Nominal RF output power per antenna port:	Single carrier: 1x 47.8 dBm (1x 60W) Multi carrier: 2x 44.8 dBm (2x 30W) 4x 41.8 dBm (4x 15W)
Antenna:	No dedicated antenna, handled during licensing
Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidths:	4.2 to 5 MHz (configurable in steps of 100/200 kHz)
Channel spacing:	4.4 to 5 MHz (configurable in steps of 100/200 kHz)
Nominal supply voltage:	-48VDC

Appendix 1

Operation mode during measurements

Measurements were performed with the test object transmitting the Test model 1 which are defined in 3GPP TS 25.141. Test model 1 (TM1) represent QPSK modulation. Test model 5 (TM5) includes the 16QAM modulation and Test model 6 (TM6) includes the 64QAM modulation.

The settings below were deemed representative for all traffic scenarios when settings with different modulations, channel bandwidths, number of carriers and RF configurations has been tested to find the worst case setting. All measurements were performed with the test object configured for maximum transmit power. The settings below were used for all measurements if not otherwise noted.

MIMO mode, single carrier

TM5: 8 HS-PDSCH at 240 ksps + 30 DPCH:s at 30 ksps (SF=128)

MIMO mode, multi carrier (2 carriers)

TM5: 8 HS-PDSCH at 240 ksps +30 DPCH:s at 30 ksps (SF=128)

Channel bandwidth: 5 MHz

Conducted measurements

The test object was hosted in a RBS 6201 powered with -48 VDC. Additional connections are documented in the set-up drawings below.

All measurements were performed on test object 1 (described in the Test setup diagram), running in primary mode. All TX parameters were measured at port RF A

Radiated measurements

The test object was tested stand-alone. It was powered with -48 VDC. RF A port was terminated into 50 ohm.

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 and Industry Canada RSS-133 and RSS-Gen.

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2009

ANSI/TIA/EIA-603-C-2004

3GPP TS 25.141, version 11.4.0

CFR 47 part 2, October 1st, 2013

CFR 47 part 24 Subpart E, October 1st, 2013

RSS-Gen Issue 3

RSS-133 Issue 6

Appendix 1

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test objects was delivered 2013-09-27 and 2014-03-28.

Manufacturer's representative

Christer Gustavsson, Ericsson AB.

Test engineers

Andreas Johnson, Tomas Isbring, Maulo Rivera, Kexin Chen, Tomas Lennhager, Jörgen Wassholm and Rolf Kühn, SP.

Test participant

None.

Appendix 1

Measurement equipment

	Calibration Due	SP number
Test site Tesla	2017-01	503 881
R&S FSIQ 40	2014-07	503 738
R&S ESIB 26	2014-07	503 292
R&S FSQ 40	2014-07	504 143
Control computer with R&S software EMC32 version 8.52.0	-	503 899
High pass filter	2015-01	BX40074
High pass filter	2014-07	901 501
High pass filter	2014-07	901 502
High pass filter	2014-07	504 199
High pass filter	2014-09	901 373
High pass filter	2014-09	503 739
High pass filter	2014-07	503 740
RF attenuator	2014-07	504 159
RF attenuator	2014-07	900 233
RF attenuator	2014-07	900 691
RF attenuator	2014-07	901 384
RF attenuator	2014-11	901 508
Chase Bilog Antenna CBL 6111A	2014-10	503 182
EMCO Horn Antenna 3115	2015-09	502 175
Std.gain horn FLANN model 20240-20	2014-03	503 674
µComp Nordic, Low Noise Amplifier	2014-04	901 545
Schwarzbeck preamplifier BBV 9742	2015-01	504 085
Miteq Low Noise Amplifier	2014-09	503 285
Temperature and humidity meter, Testo 635	2015-03	504 203
Temperature and humidity meter, Testo 625	2014-06	504 188
Temperature Chamber	2015-03	503 360
Multimeter Fluke 87	2014-08	502 190

HP filter	BX40074
-----------	---------

Appendix 1


Test frequencies during conducted and radiated measurements

UARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
9662	1932.4	B	Single carrier TX bottom frequency
9662 9687	1932.4 1937.4	B2	2-carriers TX band bottom constellation
9662 9712	1932.4 1942.4	B3	2-carriers TX band bottom constellation
9662 9687 9712 9737	1932.4 1937.4 1942.4 1947.4	B4	4-carriers TX band bottom constellation
9800	1960.0	M	Single carrier TX band mid frequency
9800 9825	1960.0 1965.0	M2	2-carriers TX band mid constellation
9800 9850	1960.0 1970.0	M3	2-carriers TX band mid constellation
9775 9800 9825 9850	1955.0 1960.0 1965.0 1970.0	M4	4-carriers TX band mid constellation
9938	1987.6	T	Single carrier TX band top frequency
9938 9913	1987.6 1982.6	T2	2-carriers TX band top constellation
9938 9888	1987.6 1977.6	T3	2-carriers TX band top constellation
9938 9913 9888 9863	1987.6 1982.6 1977.6 1972.6	T4	4-carriers TX band top constellation

All RX frequencies were configured 80 MHz below the corresponding TX frequency according to the applicable duplex offset for the operating band.

Appendix 1

Test setup conducted measurements WCDMA

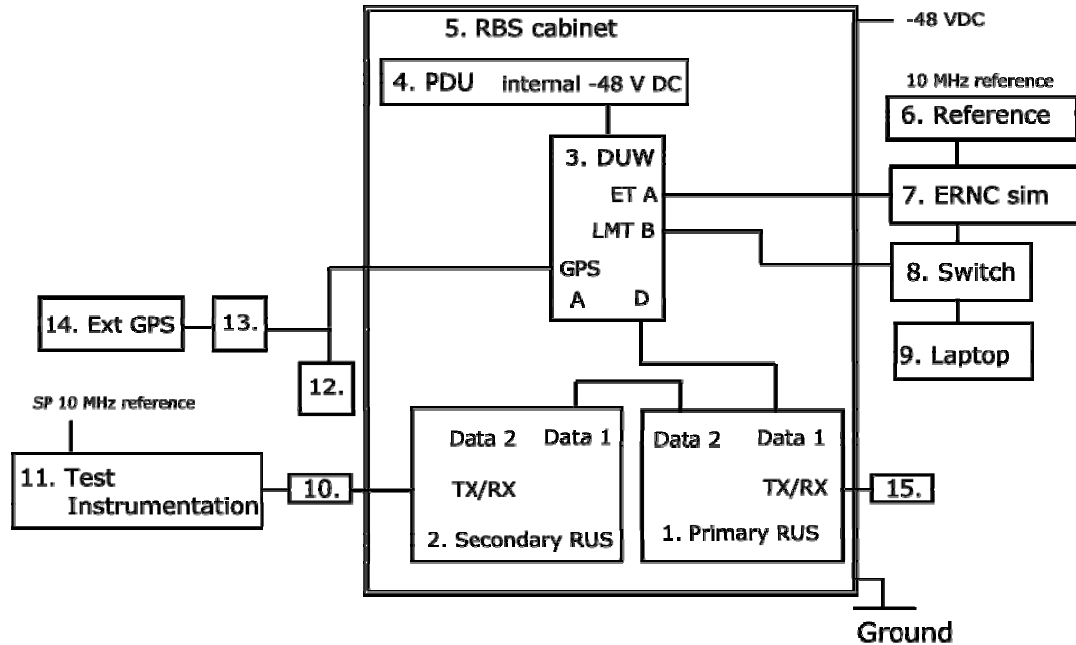

Test object:


1.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: CB4J994518, Test object: primary/ secondary
2.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: CB4J994533, Dummy (secondary/ primary) software CXP 901 3268/6, rev. R57CA with FCC ID: TA8CKRC11866-1 and IC: 287AB-CS118661

Functional test equipment:

3.	DUW 41 01, KDU 127 174/4, rev. R2C, s/n: A401998222
4.	PDU 02 02, BMG 980 336/5, rev. R1F, s/n: X051445683
5.	RBS 6201 cabinet, BAMS – 1000778792
6.	Symmetricon 8040 reference, BAMS – 1000714189
7.	ERNC Sim 130, BAMS – 100066091
8.	Fast Ethernet switch, Netgear FS726T
9.	Laptop, EliteBook 8560w, BAMS – 1001236856
10.	Attenuator, filter, according respective appendix
11.	SP test instrument according measurement equipment list
12.	Power supply, Mascot Type 719
13.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K474887
14.	GPS Active Antenna, KRE 101 2082/1
15.	Terminator

Appendix 1

Test setup radiated measurements WCDMA

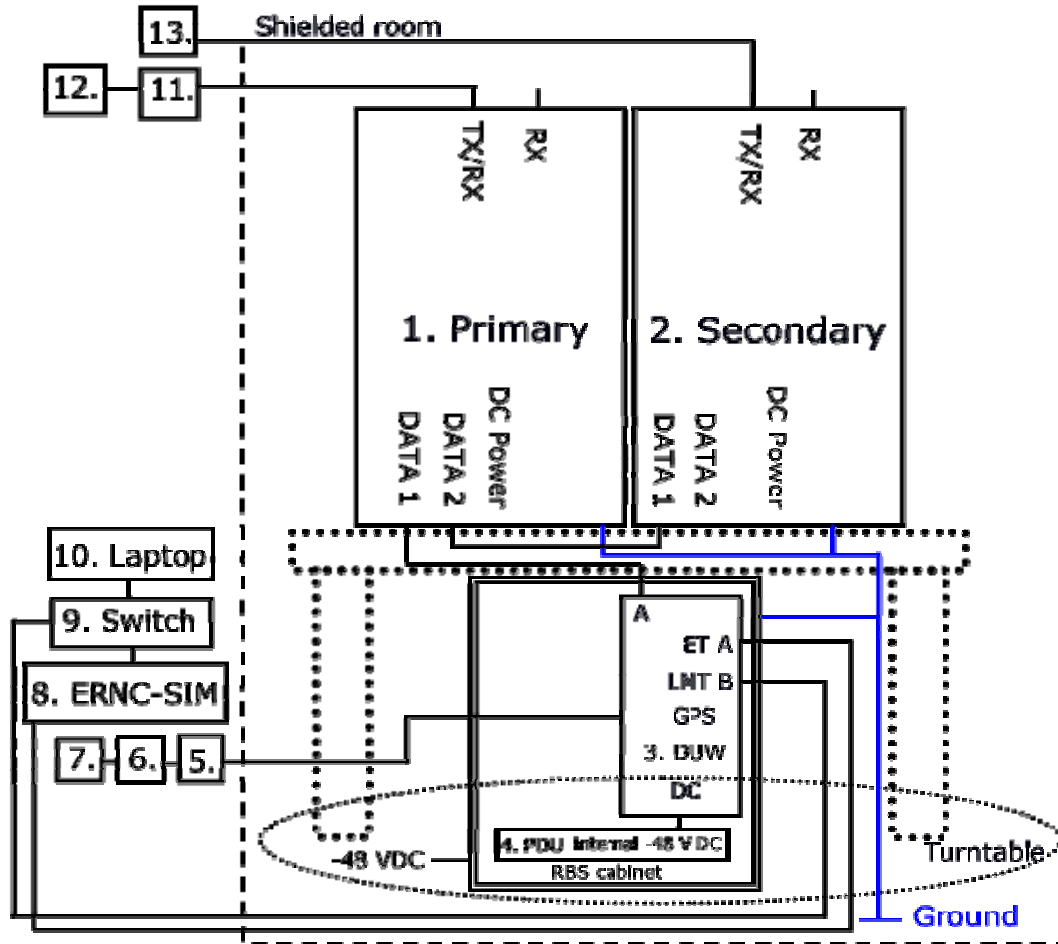

Test object:

1.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: CB4J994518, Test object: primary/ secondary
2.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: CB4J994533, Dummy (secondary/ primary) working software CXP 901 3268/6, rev. R57CA with FCC ID: TA8CKRC11866-1 and IC: 287AB-CS118661

Functional test equipment:

3.	DUW 41 01, KDU 127 174/4, rev. R2C, s/n: A401998222
4.	RBS 6202: PDU 02 02, BMG 980 336/5, rev. R1F, s/n: X051445683
5.	Power supply, Mascot Type 719
6.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K356428
7.	GPS Active Antenna, KRE 101 2082/1
8.	ERN-C-SIM 131, BAMS – 1000660992, Symetricom 8040, BAMS – 1000714186
9.	Switch Netgear FS726T
10.	Laptop, EliteBook 8560w, BAMS – 1001236856
11.	Attenuator
12.	FSIQ 40, SP number: 503 738, for supervision purpose only

Appendix 1

13.	Terminator
-----	------------

Interfaces:
Type of port:

Power: -48 VDC	DC Power
Antenna port (A), 7/16 connector, combined TX/RX	Antenna
Antenna port (B), 7/16 connector, only RX	Antenna
Data 1, electrical interface	Signal
Data 2, electrical interface	Signal
RX A Out, no cable attached	RF
RX A I/O, no cable attached	RF
RX B I/O, no cable attached	RF
Ground wire	Ground

RBS software:

Software	Revision
CXP 902 1719	R1DG07

Appendix 2

RF power output measurements according to CFR 47 §24.232 / IC RSS-133 6.4

Date	Temperature	Humidity
2013-11-13	22 °C ± 3 °C	28 % ± 5 %
2013-11-14	22 °C ± 3 °C	30 % ± 5 %
2013-11-15	23 °C ± 3 °C	28 % ± 5 %
2014-04-01	22 °C ± 3 °C	20 % ± 5 %
2014-04-14	23 °C ± 3 °C	17 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	902 282
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results

Single carrier

Rated output power 1 x 47.8 dBm at RF A.

Tested configuration	Transmitter power [RMS (dBm)/ PAR dB]
Modulation and symbolic name	Port RF A
B	48.17/ 7.16
M	48.17/ 7.16
T	48.17/ 7.16

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Appendix 2

MIMO mode, single carrier

Rated output power 1 x 47 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]		
	Port RF A primary	Port RF A secondary	Total power ¹⁾
B	46.54/ 7.88	47.02/ 7.88	49.80
M	46.86/ 7.88	46.87/ 7.88	49.88
T	46.98/ 7.88	46.98/ 7.88	49.99

¹⁾: summed output power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.

MIMO mode, 2-Carrier

Rated output power 2 x 44.8 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]		
	Port RF A primary	Port RF A secondary	Total power ¹⁾
B2	47.86/ 7.24	47.74/ 7.26	50.81
M2	47.88/ 7.19	47.89/ 7.19	50.90
T2	47.70/ 7.21	47.84/ 7.21	50.78

MIMO mode, 4-Carrier

Rated output power 4 x 41.8 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]		
	Port RF A primary	Port RF A secondary	Total power ¹⁾
B4	47.72/ 7.40	47.69/ 7.38	50.72
M4	47.90/ 7.14	47.85/ 7.14	50.89
T4	47.84/ 7.24	47.81/ 7.24	50.84

¹⁾: 2 outputs summed power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Appendix 2

Single carrier

Measured output power per 1 MHz.

Tested configuration	Transmitter power [RMS (dBm)]
Modulation and symbolic name	Port RF A
B	42.85
M	42.86
T	42.91

MIMO mode, single carrier

Measured output power per 1 MHz.

Symbolic name	[RMS dBm]		Total power ¹⁾ [RMS dBm]
	Port RF A primary	Port RF A secondary	
B	41.66	41.81	44.81
M	41.64	41.55	44.64
T	41.89	41.88	44.89

¹⁾: Measured according to FCC KDB662911 D01 Multiple Transmitter Output v02r01. Method E), 2), c). “Measure and add $10 \log(N_{\text{Ant}})$ ”.

Appendix 2

Remark

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limits

§24.232 The maximum output power may not exceed 3280 W/MHz (EIRP).
The Peak to Average Ratio (PAR) may not exceed 13 dB.

RSS-133 Base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts. When the transmitter power is measured in terms of average value, the peak-to-average ratio(PAR) of the power shall not exceed 13 dB

There is no EIRP limit specified for base station equipment in the RSS-133.

EIRP compliance is addressed at the time of licensing, as required by the responsible IC Bureau. Licensee's are required to take into account the antenna gain to get the maximum usable power settings to prevent the radiated output power to exceed the EIRP limits specified in SRSP-510

Complies?	Yes
-----------	-----

Appendix 3

Occupied bandwidth measurements according to 47 CFR 2.1049 /IC RSS-Gen 4.6.1

Date	Temperature	Humidity
2013-11-13	22 °C ± 3 °C	28 % ± 5 %
2013-11-14	22 °C ± 3 °C	30 % ± 5 %
2014-04-01	22 °C ± 3 °C	20 % ± 5 %
2014-04-14	23 °C ± 3 °C	17 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	902 282
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier


Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1	B	RF A	4.18
2	M	RF A	4.17
3	T	RF A	4.17

MIMO mode, single carrier,

Diagram	Symbolic name	Tested port	Occupied BW (99%) [MHz]
4	B	RF A	4.18
5	M	RF A	4.17
6	M	RF B	4.17
7	T	RF A	4.16


Appendix 3

Diagram 1:

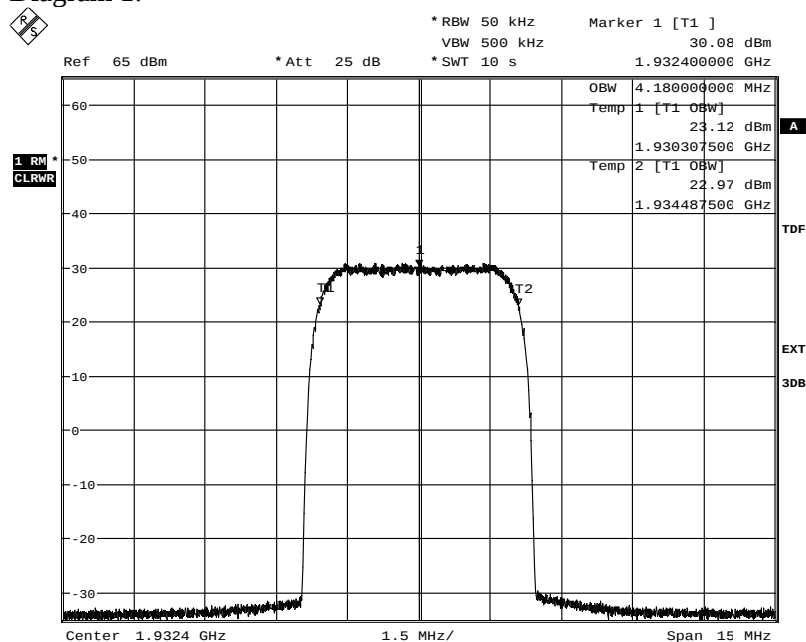

Date: 14.APR.2014 17:32:54


Diagram 2:

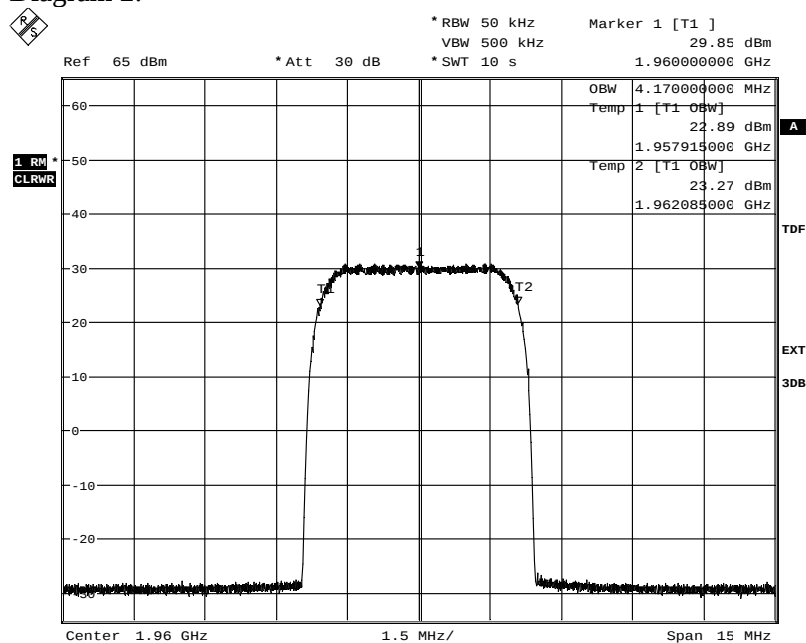

Date: 1.APR.2014 12:16:02

Appendix 3

Diagram 3:

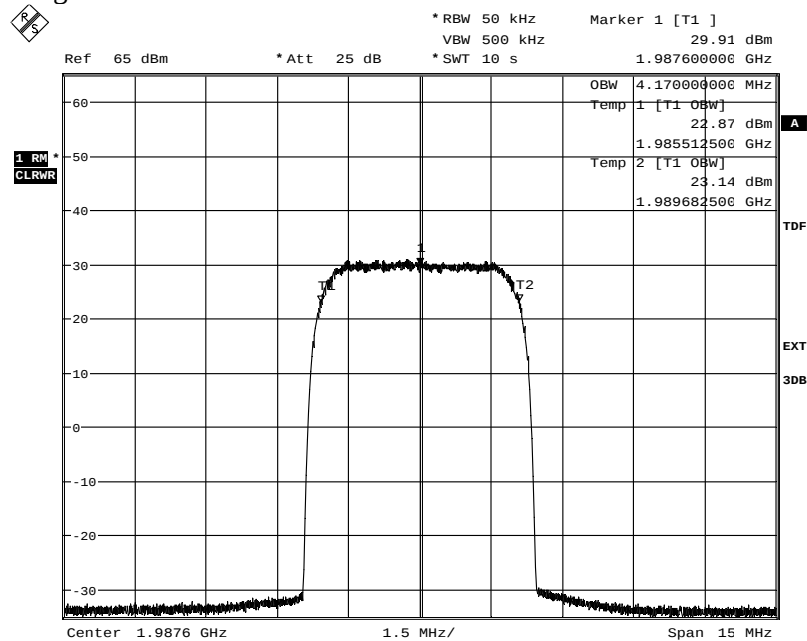


Date: 14.APR.2014 17:18:32




Appendix 3

Diagram 4:

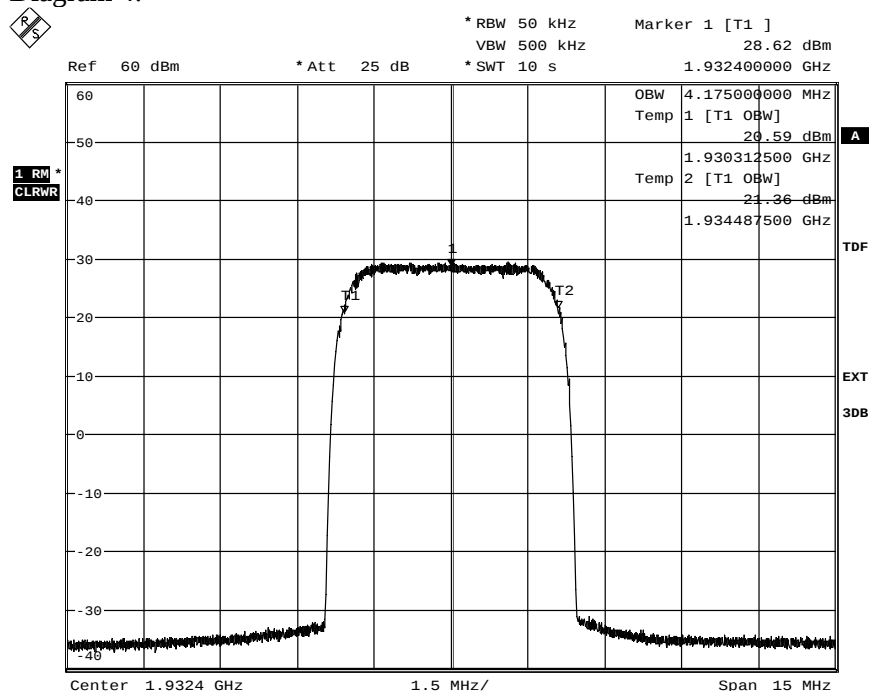

Date: 13.NOV.2013 19:01:37

Diagram 5:

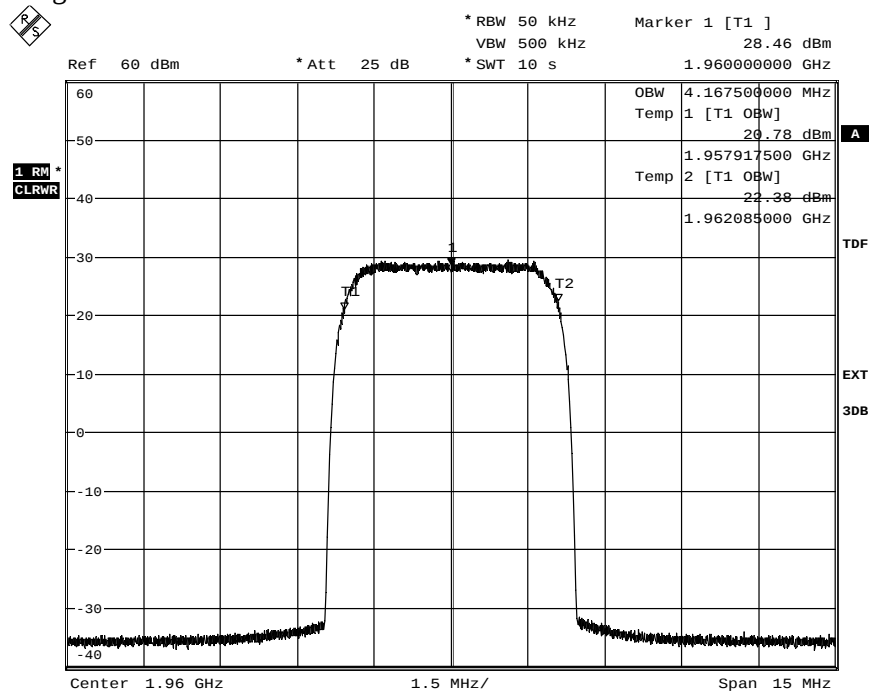


Date: 13.NOV.2013 18:20:53




Appendix 3

Diagram 6:

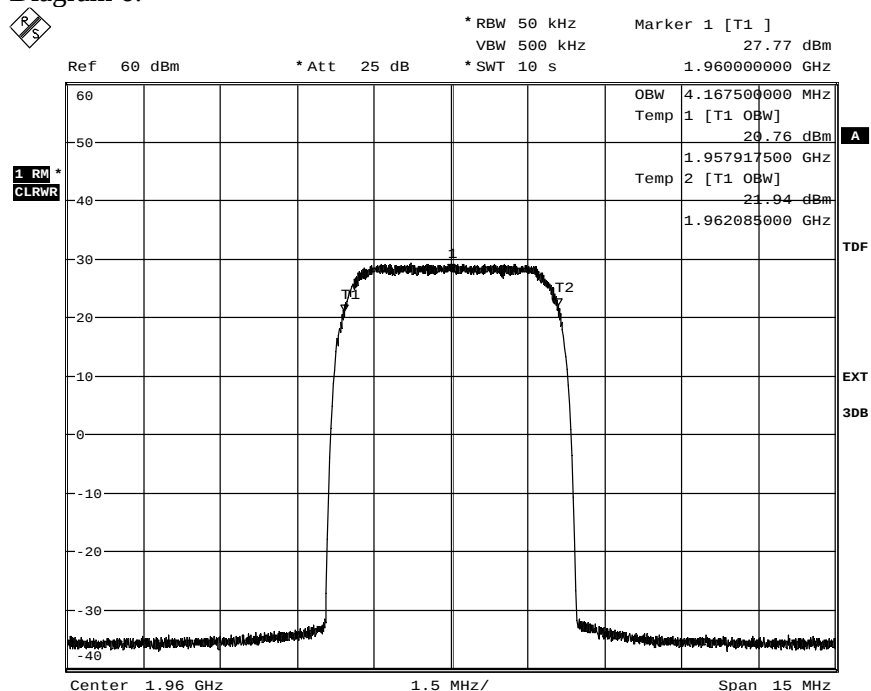

Date: 14.NOV.2013 15:16:35

Diagram 7:

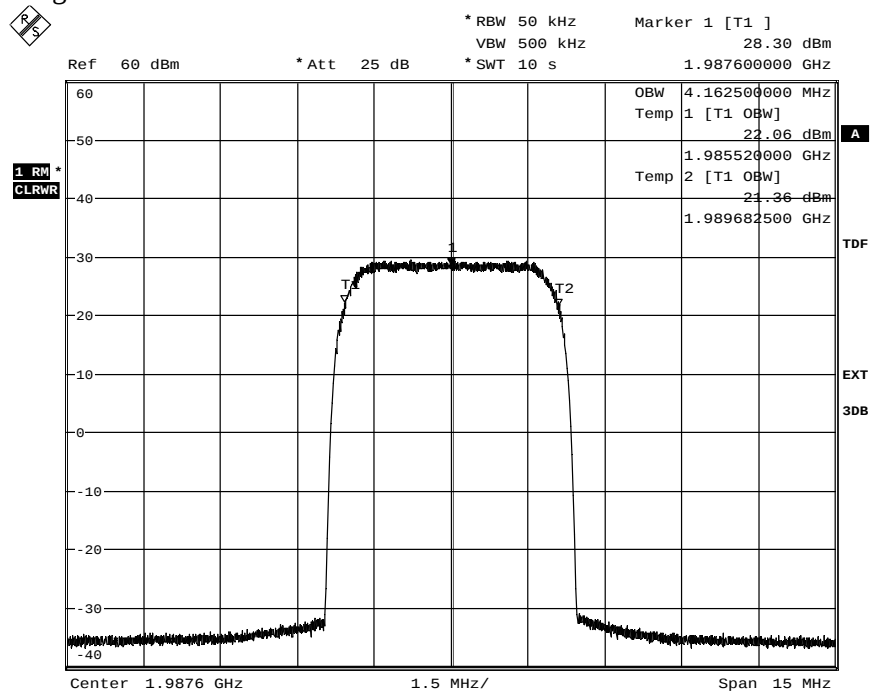

Date: 13.NOV.2013 20:43:14

Appendix 4

Band edge measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-13	22 °C ± 3 °C	28 % ± 5 %
2013-11-14	22 °C ± 3 °C	30 % ± 5 %
2014-04-14	23 °C ± 3 °C	17 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. A resolution bandwidth of 20 kHz and 30kHz was used up to 1 MHz away from the band edges. 20 kHz is <1% of the Emission BW (4.37 MHz between the 26 dB points for 5 MHz nominal BW setting). To compensate for the reduced resolution bandwidth, the limit was adjusted with 3.39 dB to -16.39 dBm and 1.63 dB to 14.63 dBm.

A resolution bandwidth of 100 kHz was used 1 MHz to 6 MHz away from the band edges, to compensate for the reduced resolution bandwidth the limit was adjusted by 10 dB to -23 dBm. A resolution bandwidth of 1 MHz was used from 6 to 15 MHz away from the band edges.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), a), (iii) Measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v02r01

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	902 282
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 4

Results

Singel carrier

Diagram	BW configuration	Symbolic name	Tested Port
1 a-c	5 MHz	B	Primary
2 a-c	5 MHz	T	Primary

MIMO mode, single carrier

Diagram	BW configuration	Symbolic name	Tested Port
3 a-c	5 MHz	B	Primary
4 a-c	5 MHz	B	Secondary
5 a-c	5 MHz	T	Primary
6 a-c	5 MHz	T	Secondary

MIMO mode, 2-carriers

Diagram	BW configuration	Symbolic name	Tested Port
7 a-c	5 MHz	B2	Primary
8 a-c	5 MHz	T2	Primary

Limits


CFR 47 §24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----


Appendix 4

Diagram 1 a:

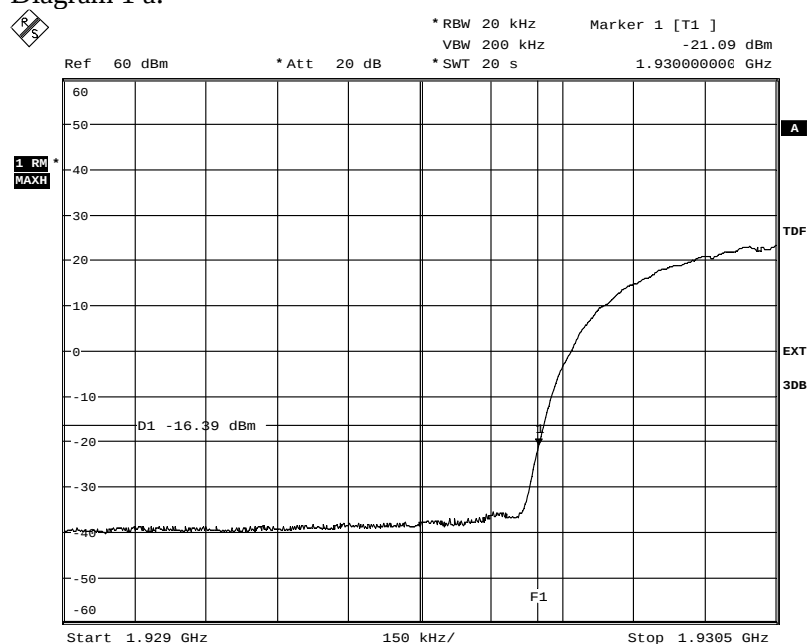

Date: 14.APR.2014 17:30:43


Diagram 1 b:

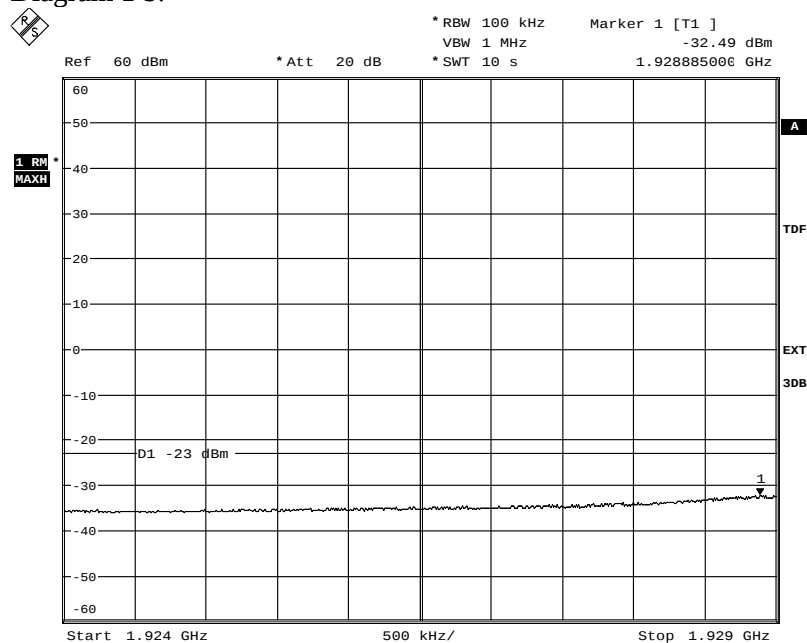

Date: 14.APR.2014 16:42:35

Appendix 4


Diagram 1 c:

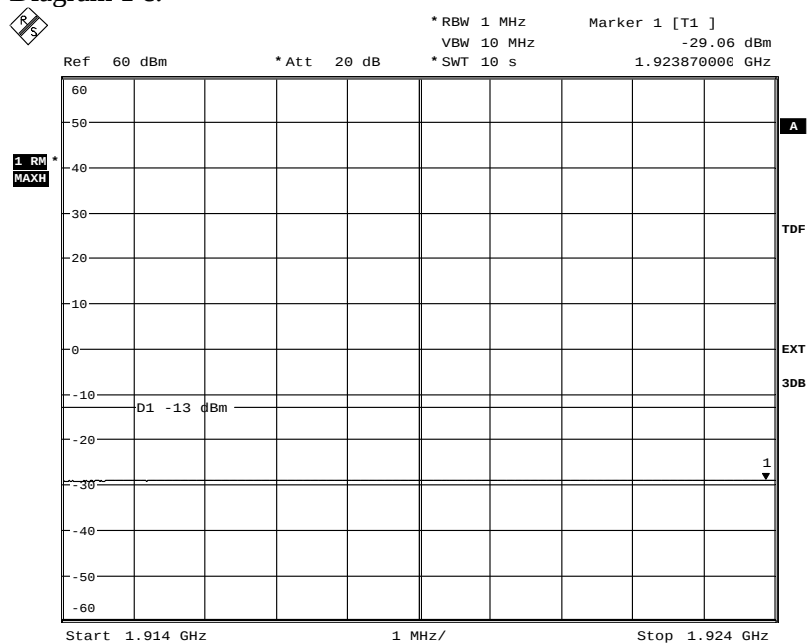

Date: 14.APR.2014 16:43:36


Appendix 4

Diagram 2 a:

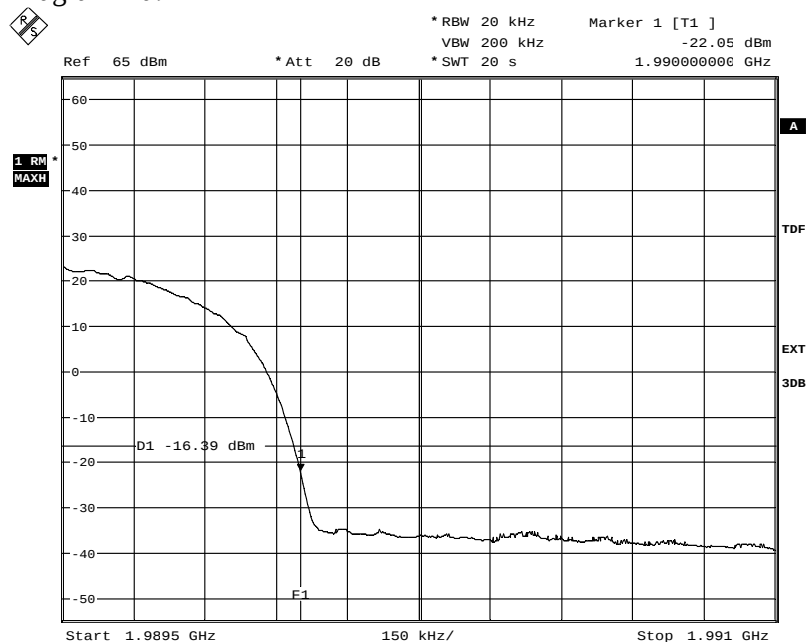

Date: 15.APR.2014 08:36:37

Diagram 2 b:

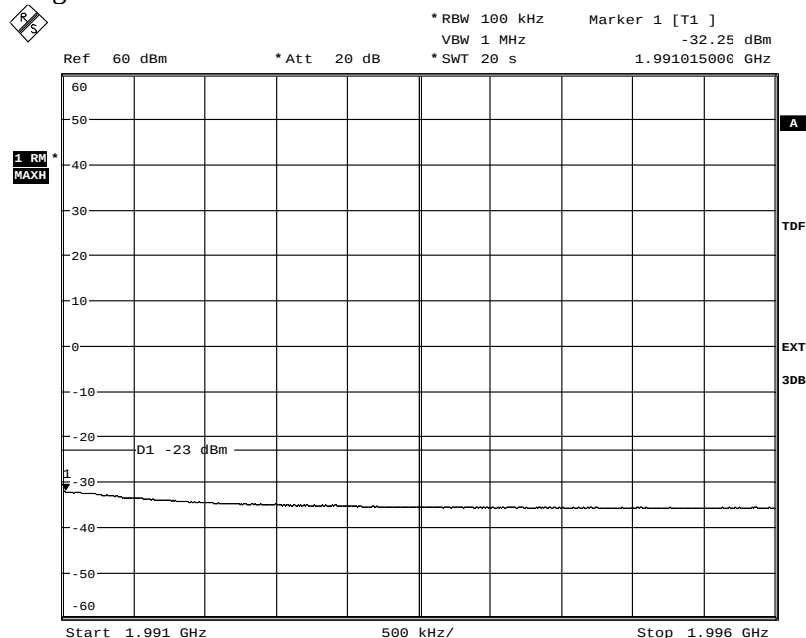


Date: 14.APR.2014 16:58:52



Appendix 4


Diagram 2 c:

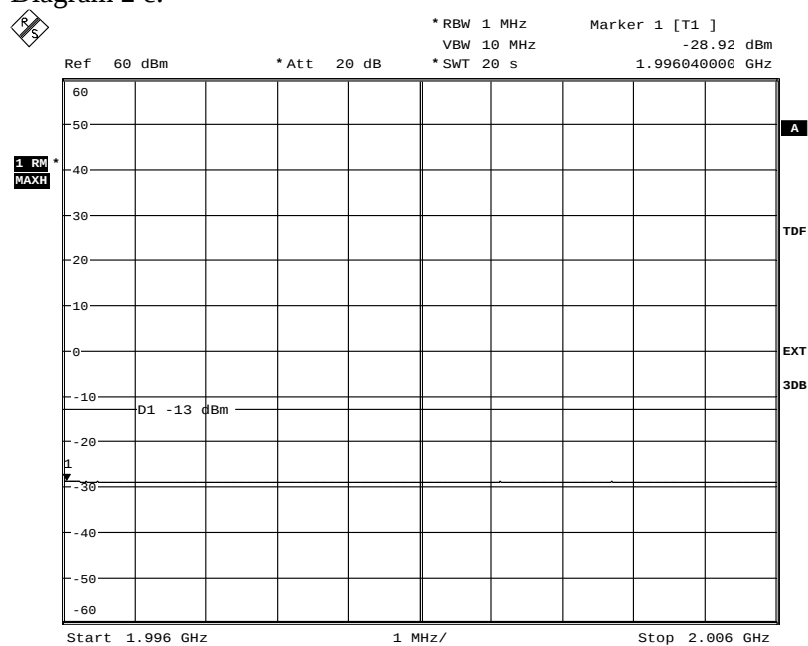

Date: 14.APR.2014 17:00:46


Appendix 4

Diagram 3 a:

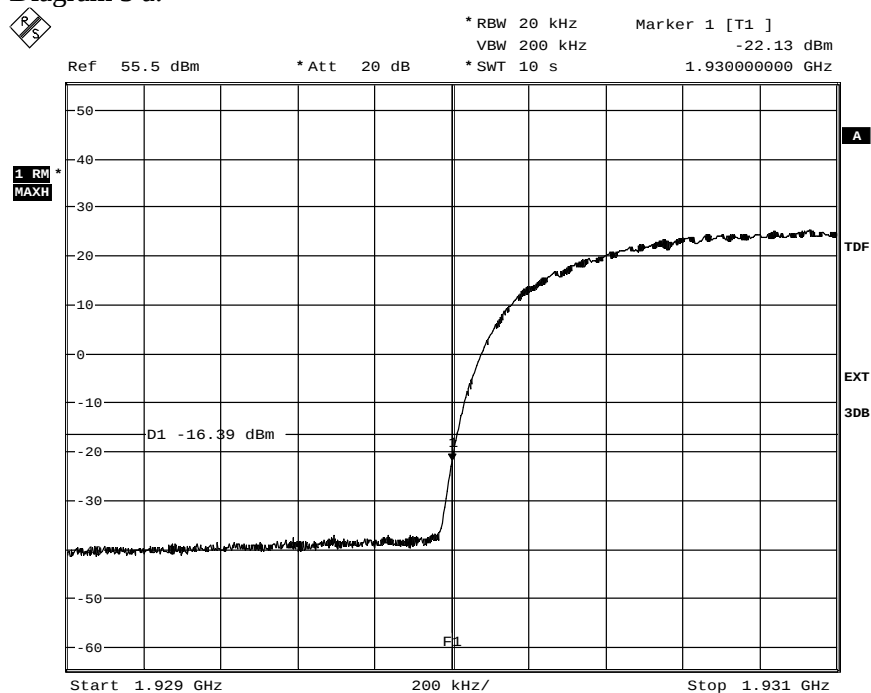

Date: 13.NOV.2013 19:05:54

Diagram 3 b:

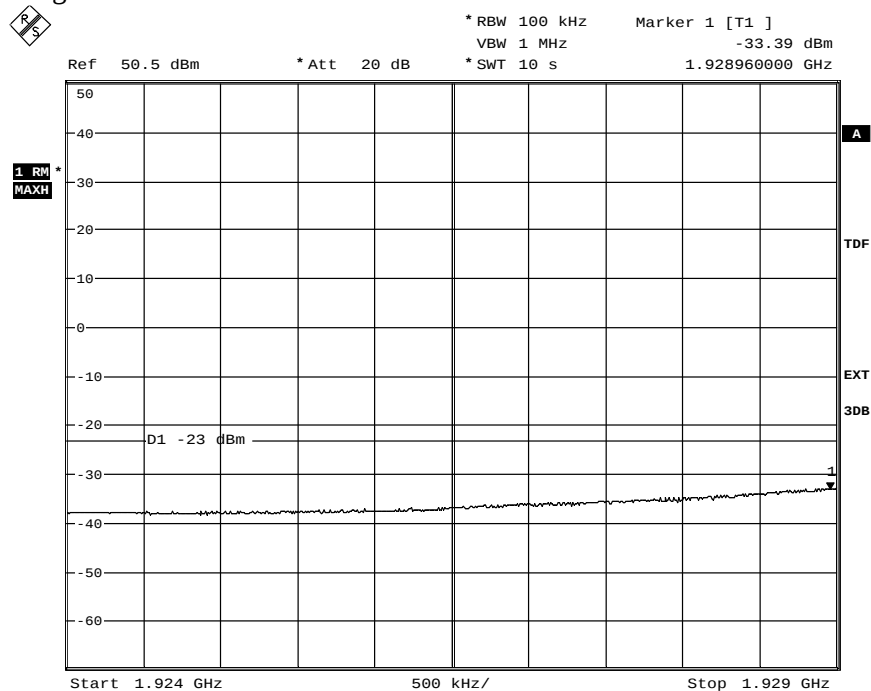


Date: 13.NOV.2013 19:07:20



Appendix 4


Diagram 3 c:

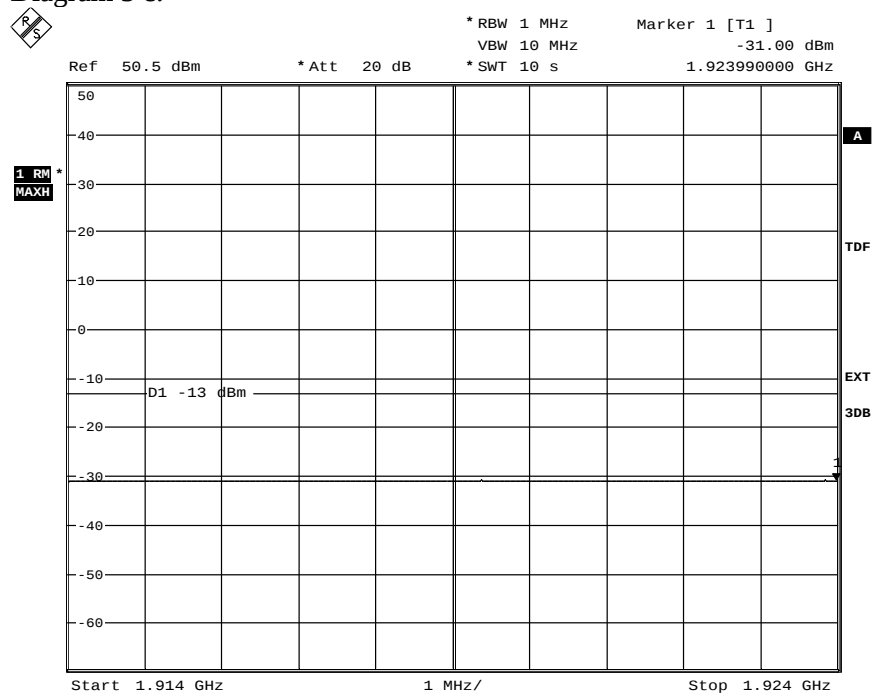

Date: 13.NOV.2013 19:08:27


Appendix 4

Diagram 4 a:

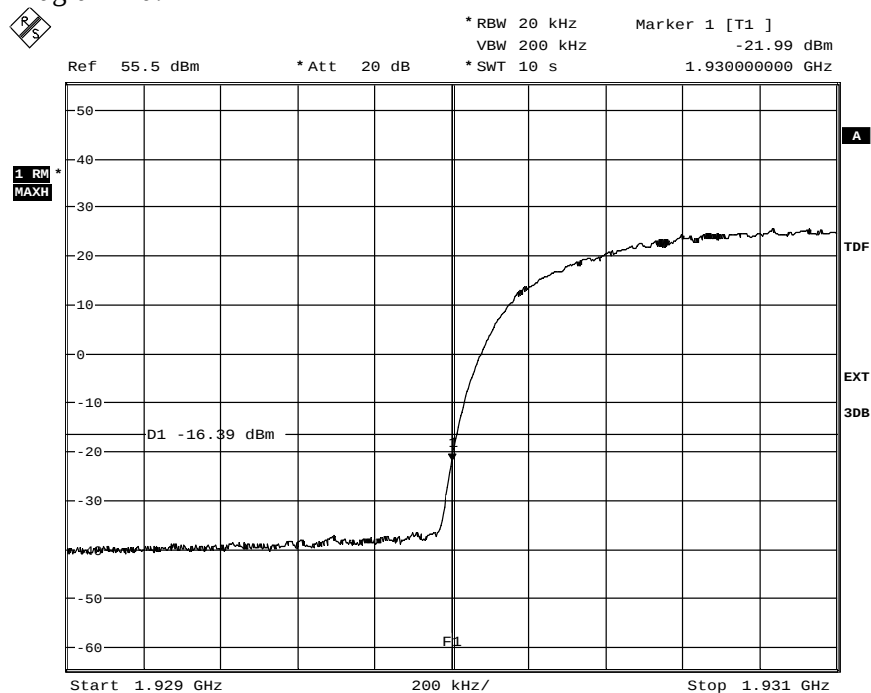

Date: 13.NOV.2013 21:05:48

Diagram 4 b:

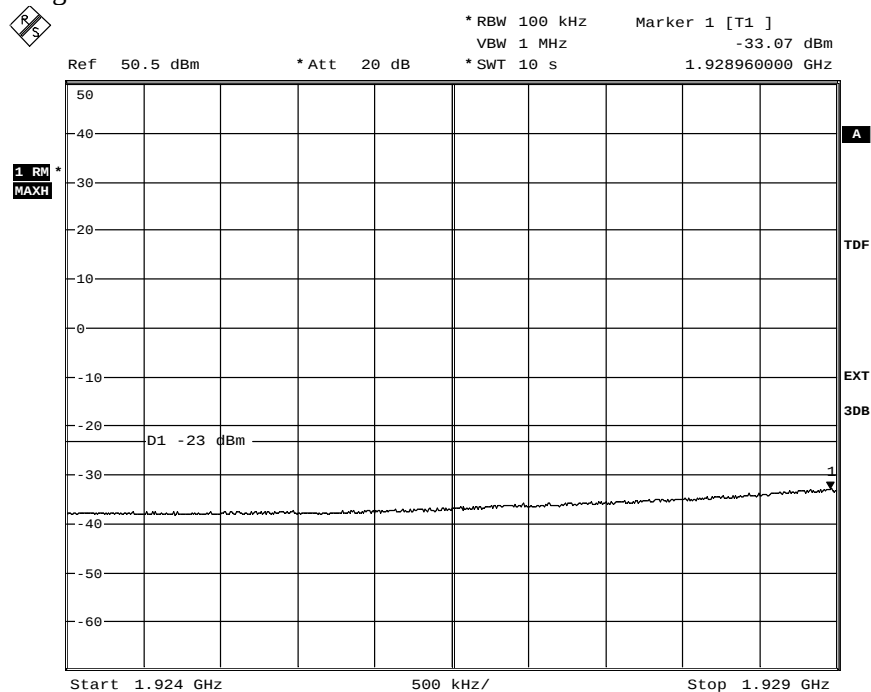


Date: 13.NOV.2013 21:06:44



Appendix 4


Diagram 4 c:

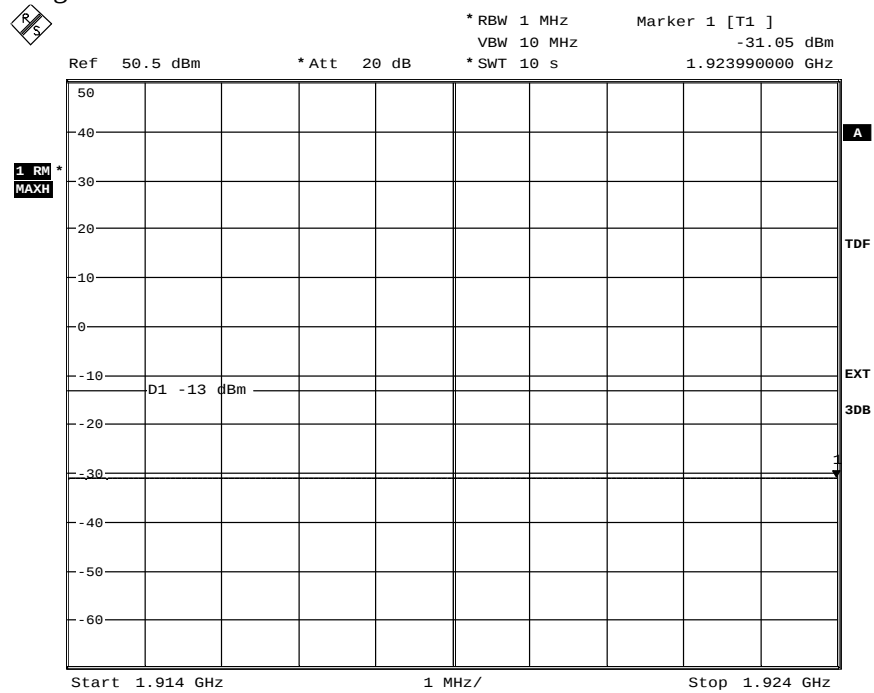

Date: 13.NOV.2013 21:07:33


Appendix 4

Diagram 5 a:

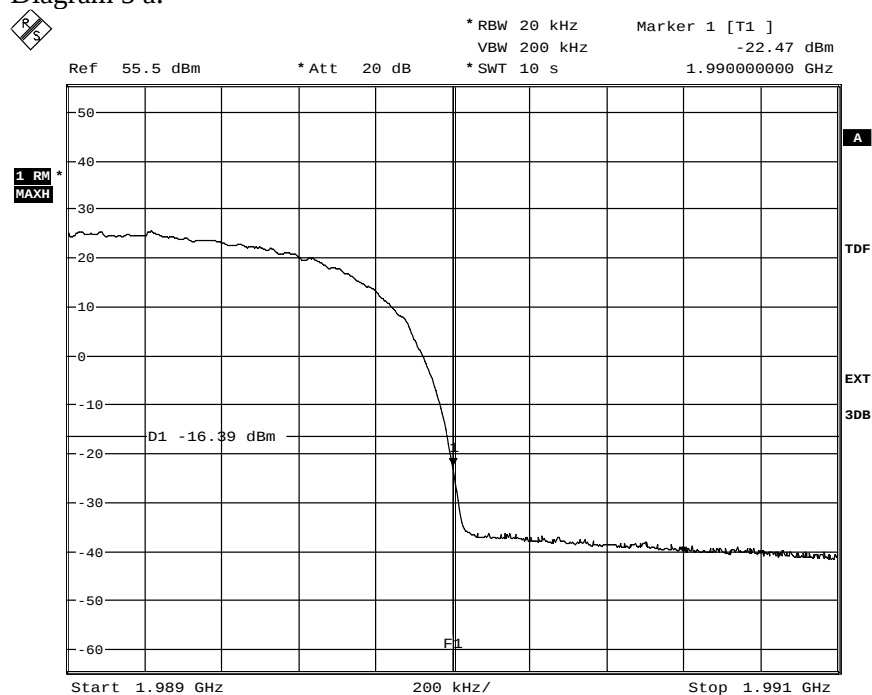

Date: 13.NOV.2013 20:39:05

Diagram 5 b:

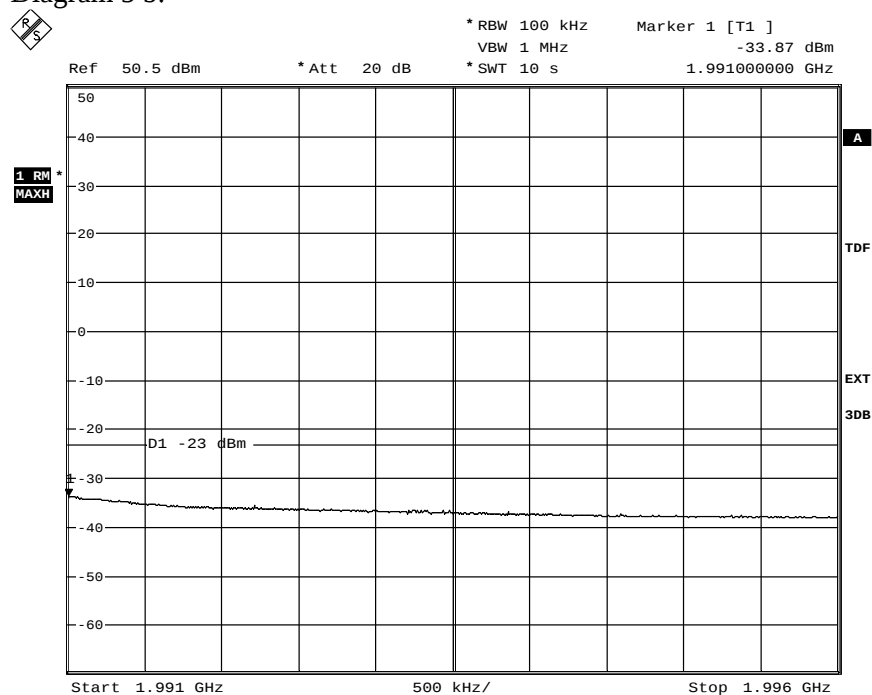


Date: 13.NOV.2013 20:40:21



Appendix 4


Diagram 5 c:

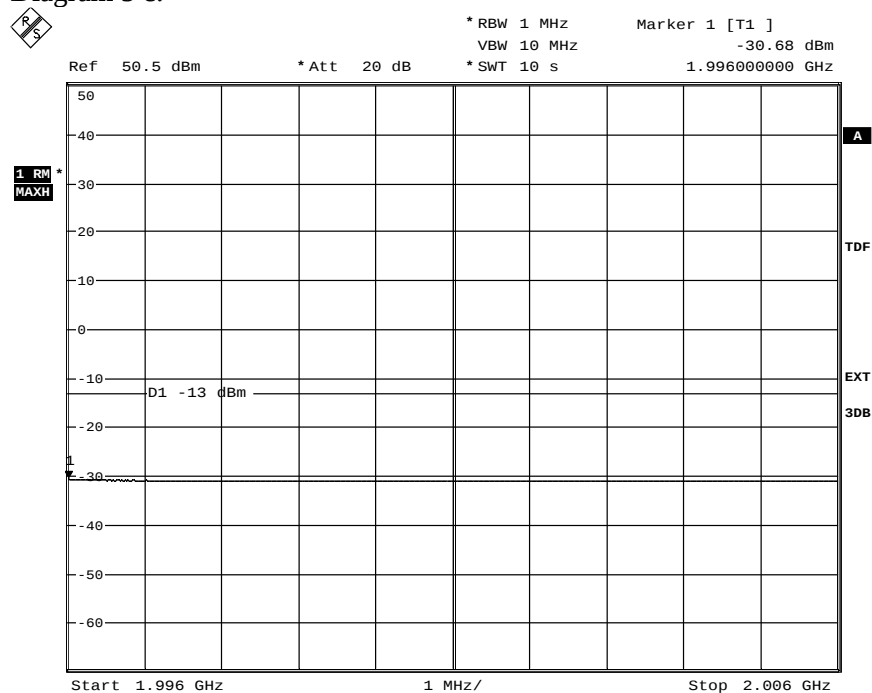

Date: 13.NOV.2013 20:41:16


Appendix 4

Diagram 6 a:

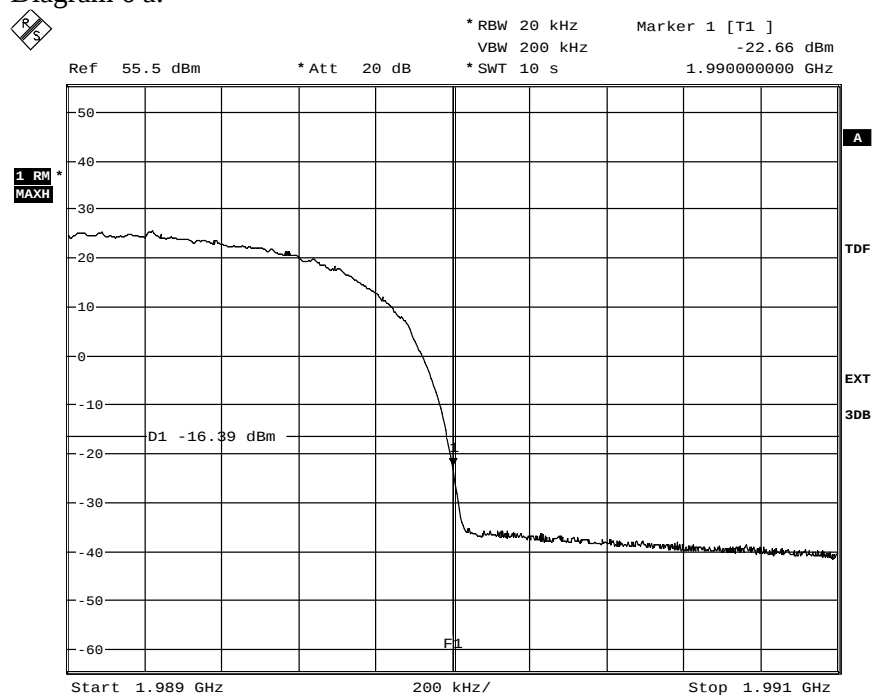

Date: 13.NOV.2013 20:57:39

Diagram 6 b:

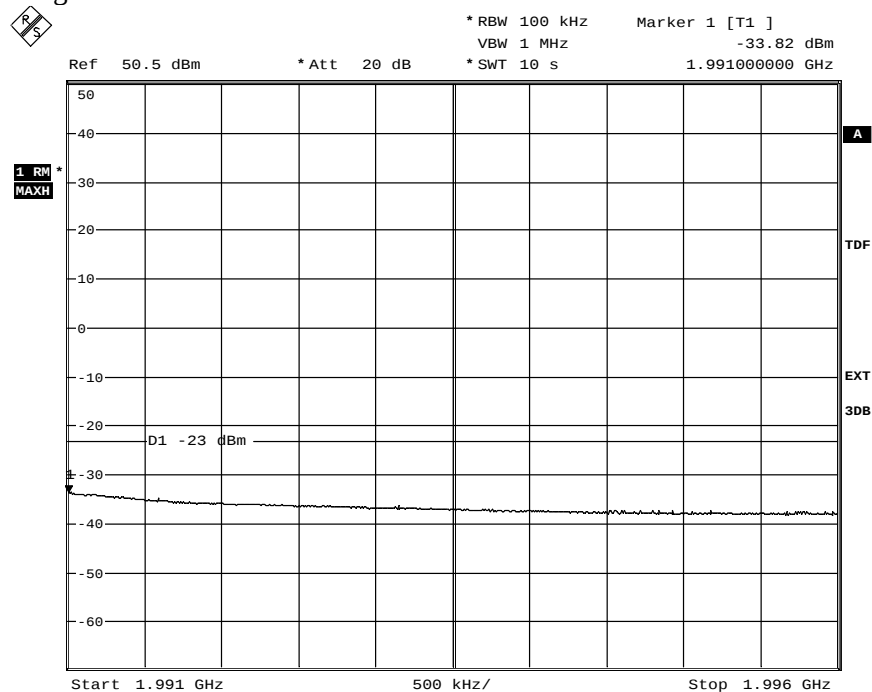


Date: 13.NOV.2013 20:58:46



Appendix 4


Diagram 6 c:

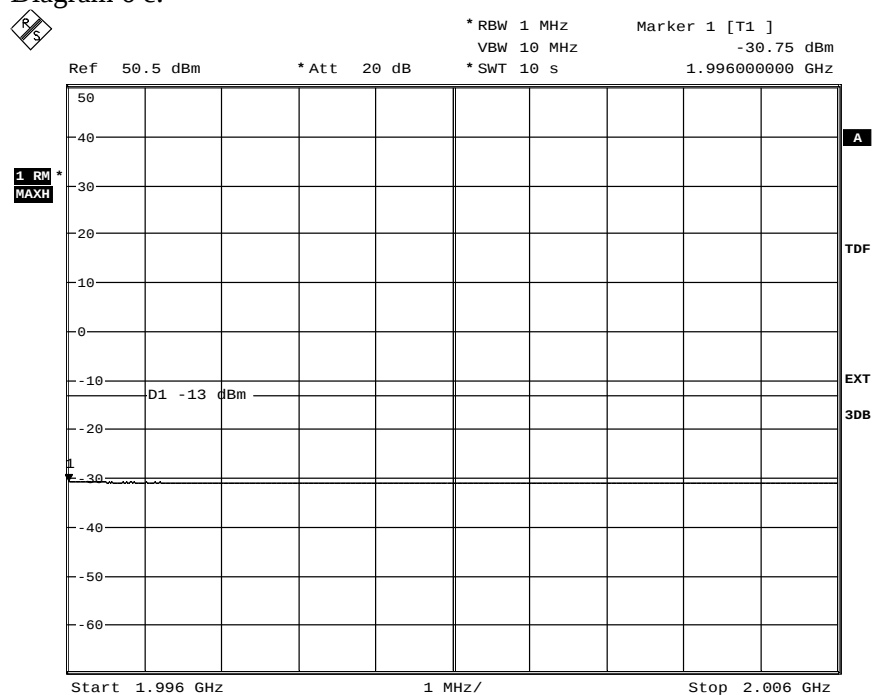

Date: 13.NOV.2013 20:59:49


Appendix 4

Diagram 7 a:

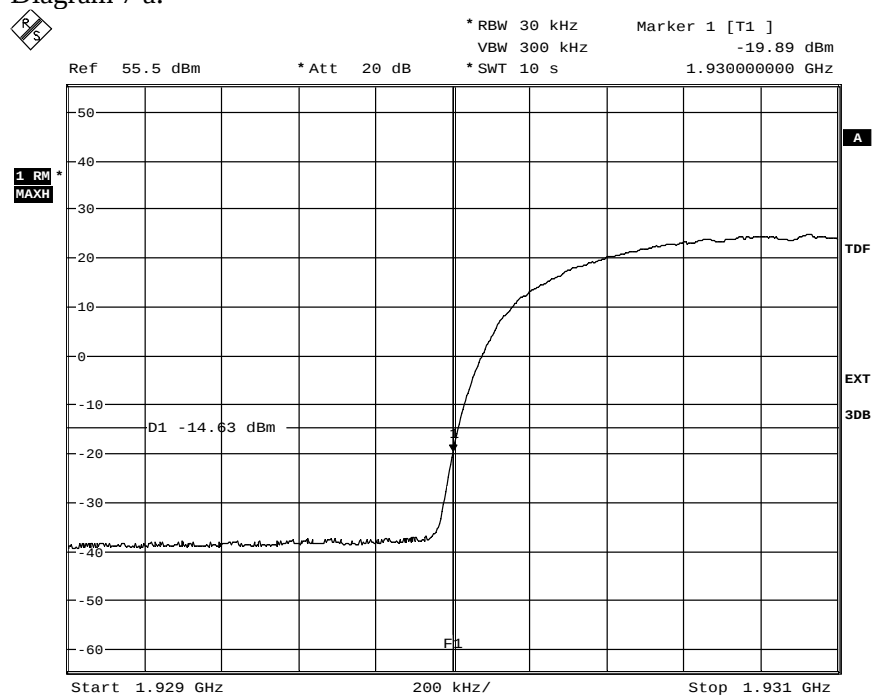

Date: 14.NOV.2013 21:43:45


Diagram 7 b:

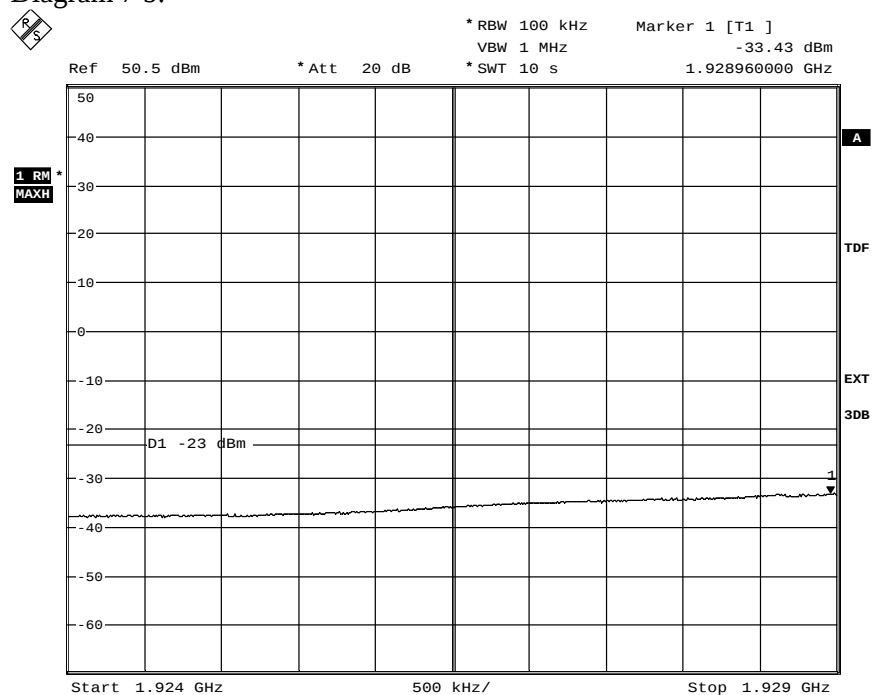

Date: 14.NOV.2013 21:46:52

Appendix 4


Diagram 7 c:

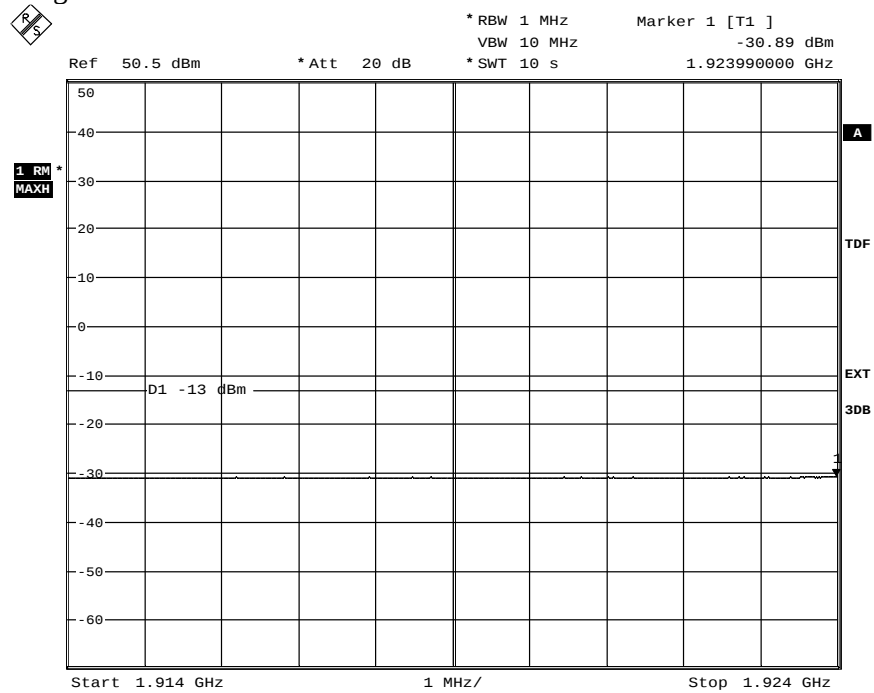

Date: 14.NOV.2013 21:48:11


Appendix 4

Diagram 8 a:

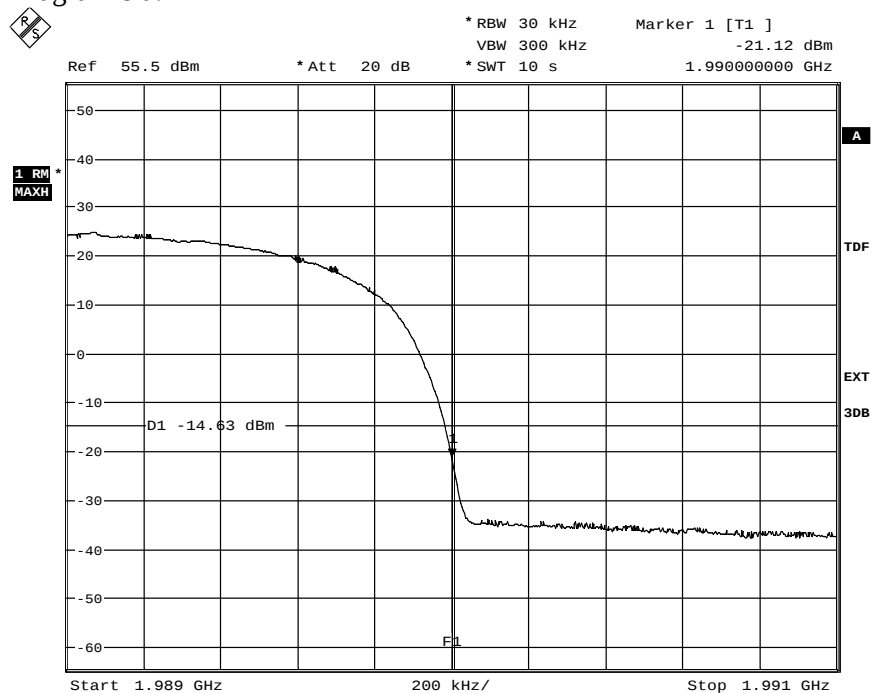

Date: 15.NOV.2013 14:16:38

Diagram 8 b:

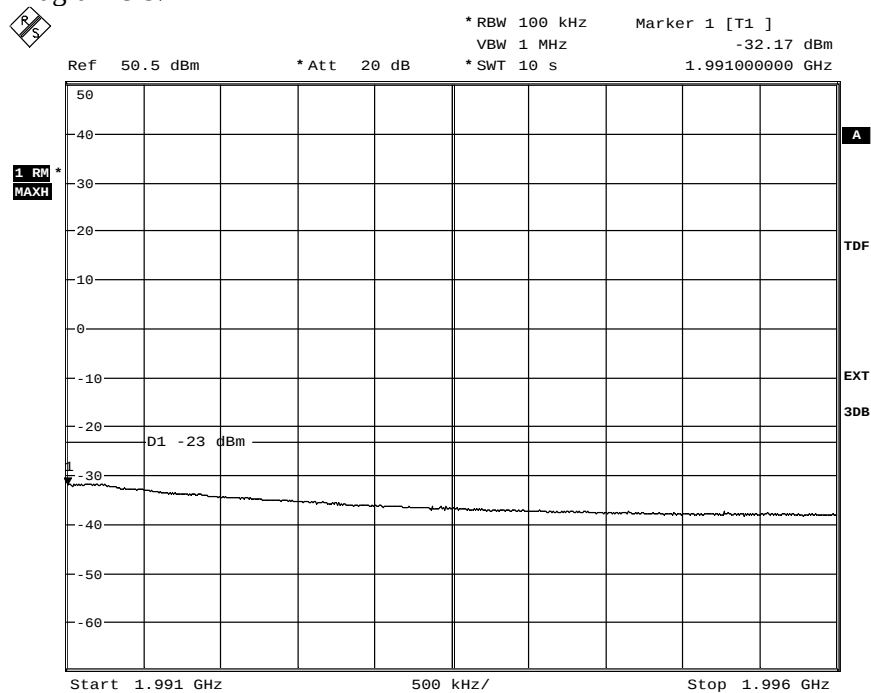


Date: 15.NOV.2013 14:18:32



Appendix 4

Diagram 8 c:

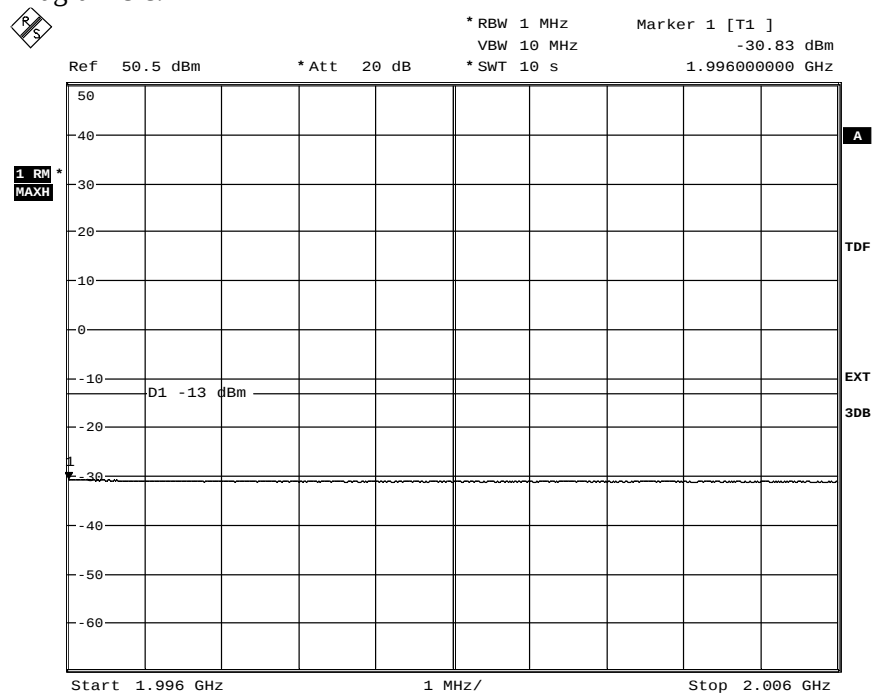

Date: 15.NOV.2013 14:21:11

Appendix 5

Conducted spurious emission measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-13	22 °C ± 3 °C	28 % ± 5 %
2013-11-14	22 °C ± 3 °C	30 % ± 5 %
2014-04-01	22 °C ± 3 °C	20 % ± 5 %
2014-04-14	23 °C ± 3 °C	17 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), a), (iii) Measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v02r01

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	902 282
HP filter	BX40074
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier

Diagram	Symbolic name	Tested Port
1 a+b+c+d	B	RF A
2 a+b+c+d	M	RF A
3 a+b+c+d	T	RF A

Appendix 5

MIMO mode, single carrier

Diagram	Symbolic name	Tested Port
4 a+b+c+d	B	RF A
5 a+b+c+d	M	RF A
6 a+b+c+d	M	RF B
7 a+b+c+d	T	RF A

MIMO mode, 2-carriers

Diagram	BW configuration	Symbolic name	Tested Port
8 a+b+c+d+e	5 MHz	B3	RF A
9 a+b+c+d	5 MHz	M3	RF A
10 a+b+c+d+e	5 MHz	T3	RF A

MIMO mode, 4-carriers

Diagram	BW configuration	Symbolic name	Tested Port
11 a+b+c+d+e	5 MHz	B4	RF A
12 a+b+c+d	5 MHz	M4	RF A
13 a+b+c+d+e	5 MHz	T4	RF A

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

Limits


§24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----


Appendix 5

Diagram 1 a:

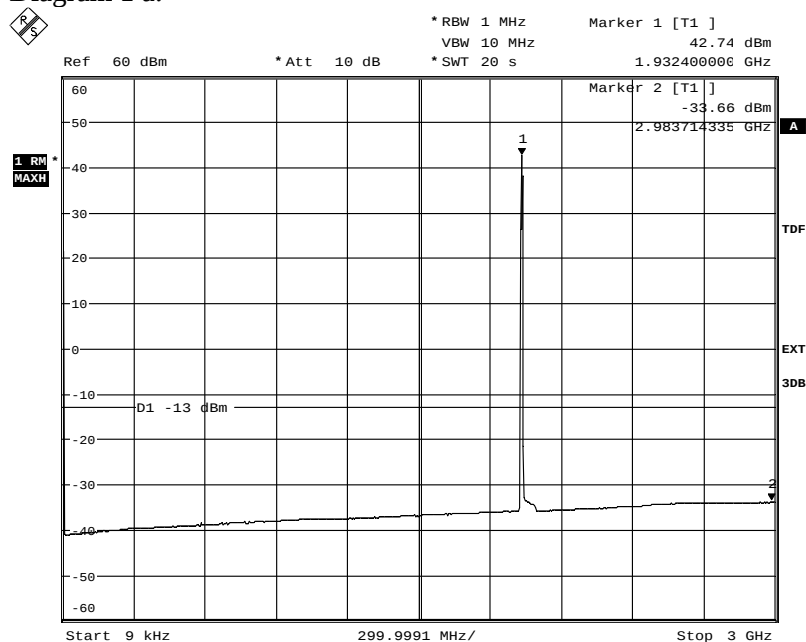

Date: 14.APR.2014 16:39:22


Diagram 1 b:

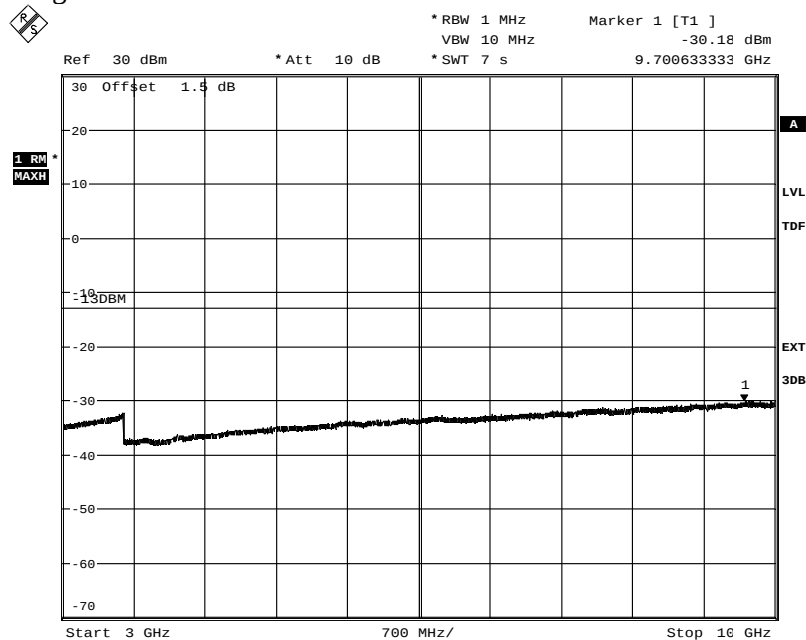

Date: 14.APR.2014 16:37:09


Appendix 5

Diagram 1 c:

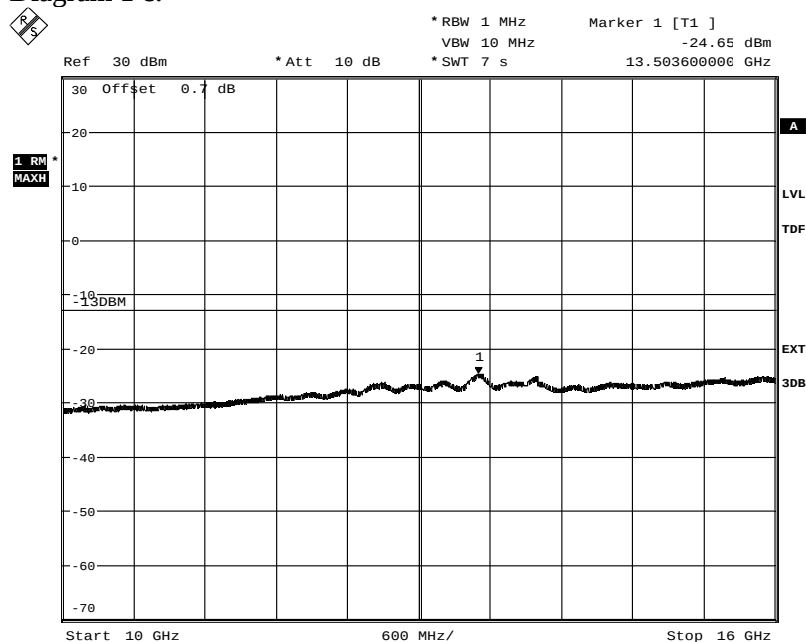

Date: 14.APR.2014 16:36:18


Diagram 1 d:

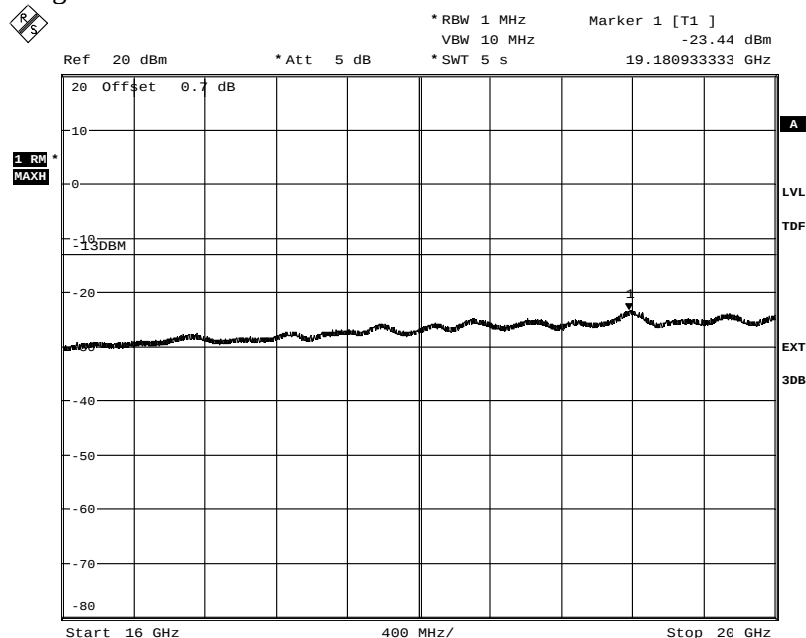

Date: 14.APR.2014 16:33:37


Appendix 5

Diagram 2 a:

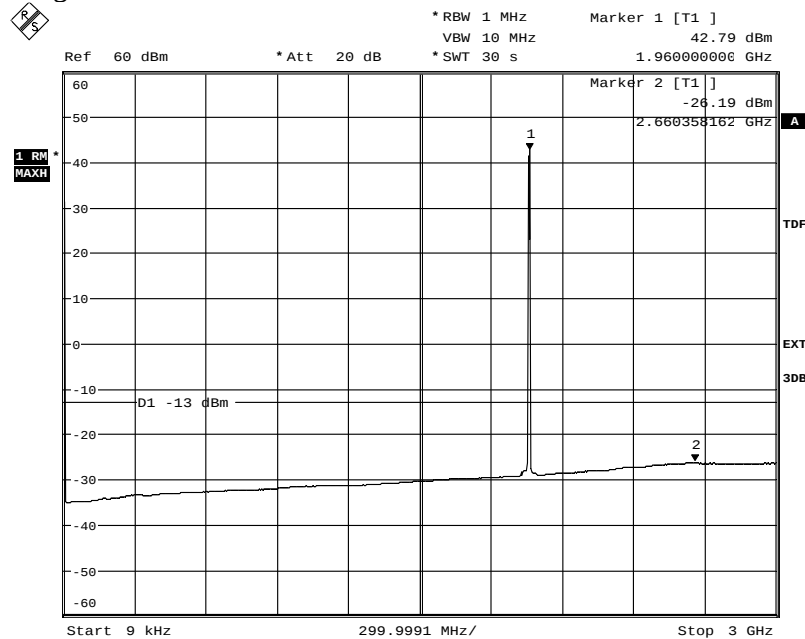

Date: 1.APR.2014 11:54:11


Diagram 2 b:

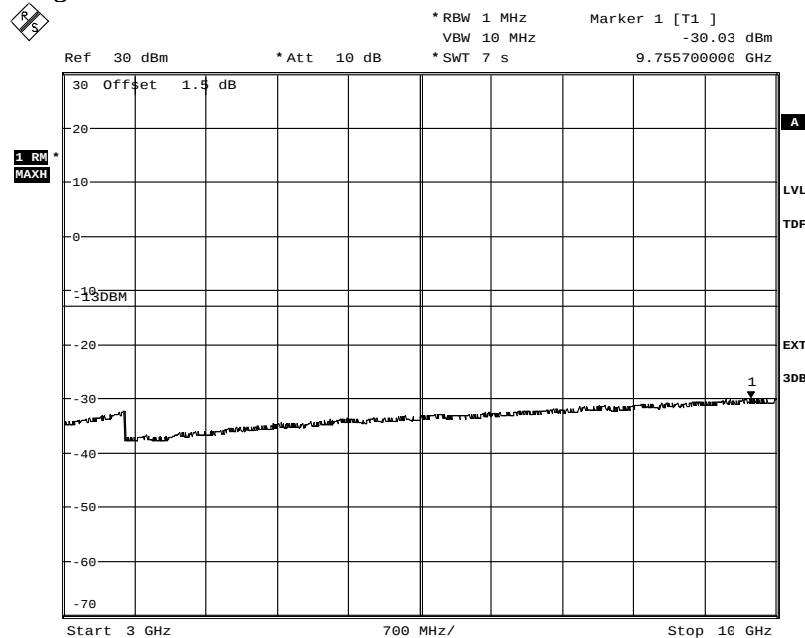

Date: 1.APR.2014 12:06:02


Appendix 5

Diagram 2 c:

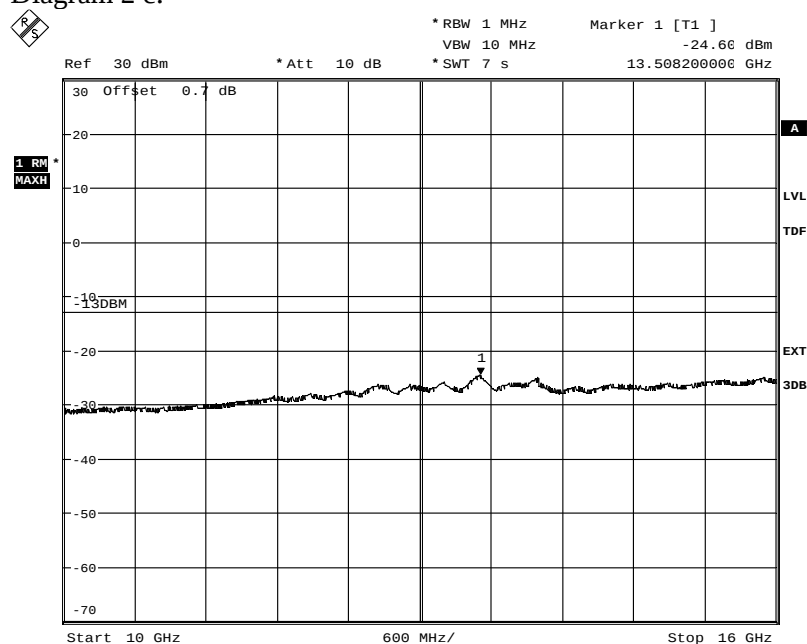

Date: 1.APR.2014 12:10:08


Diagram 2 d:

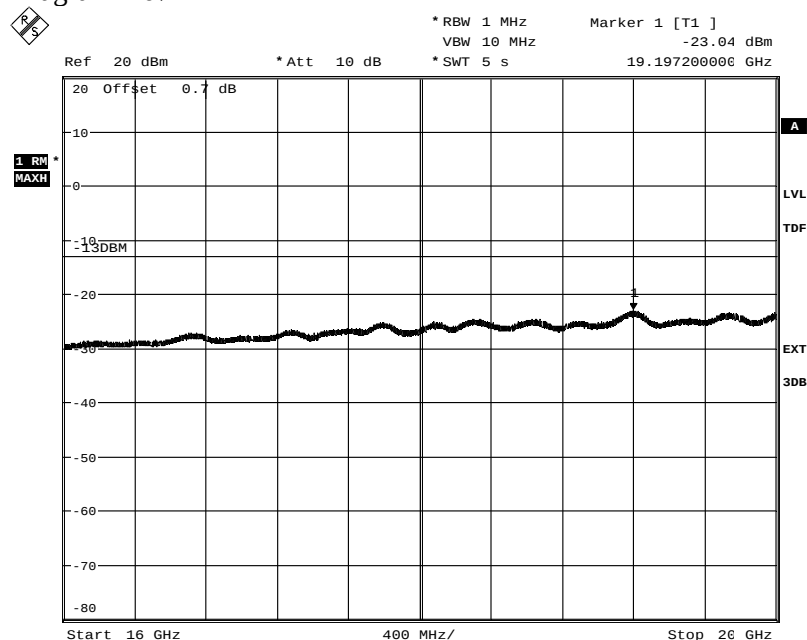

Date: 1.APR.2014 12:11:19


Appendix 5

Diagram 3 a:

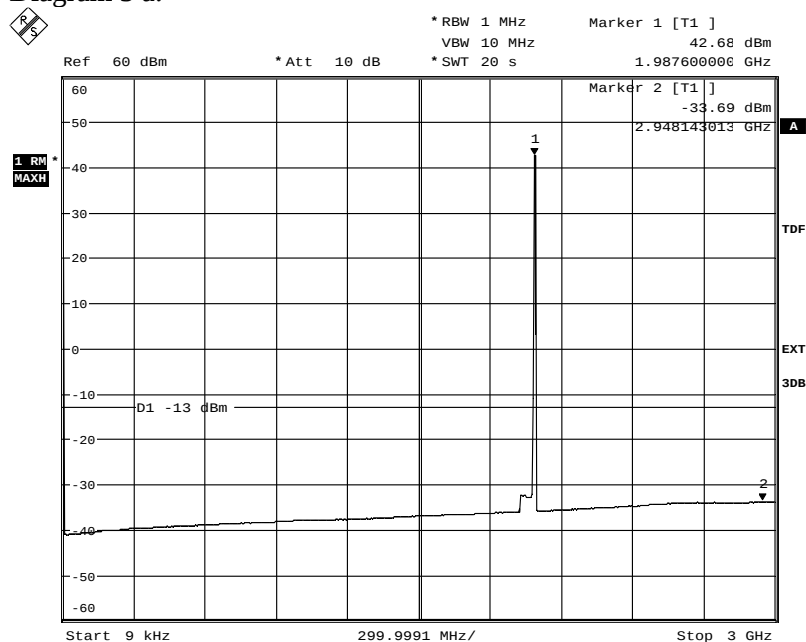

Date: 14.APR.2014 17:20:30


Diagram 3 b:

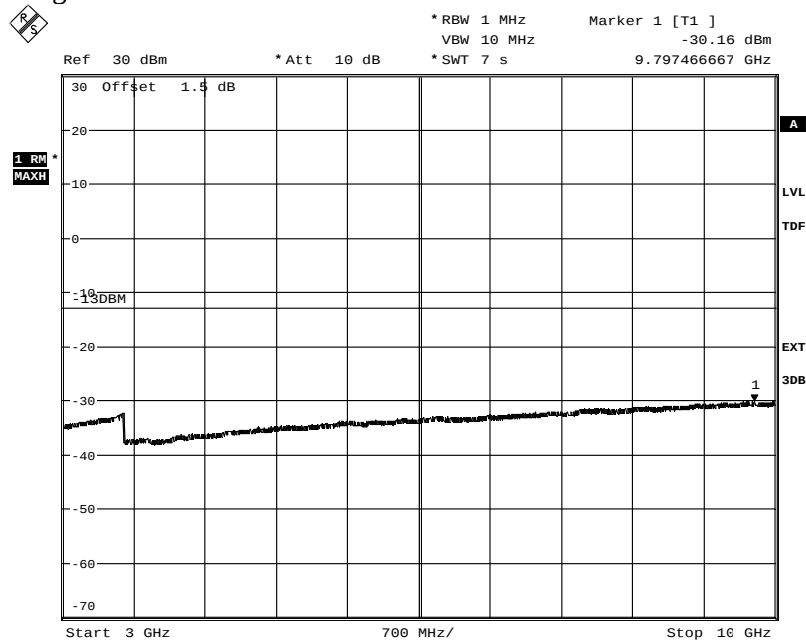

Date: 14.APR.2014 17:22:16


Appendix 5

Diagram 3 c:

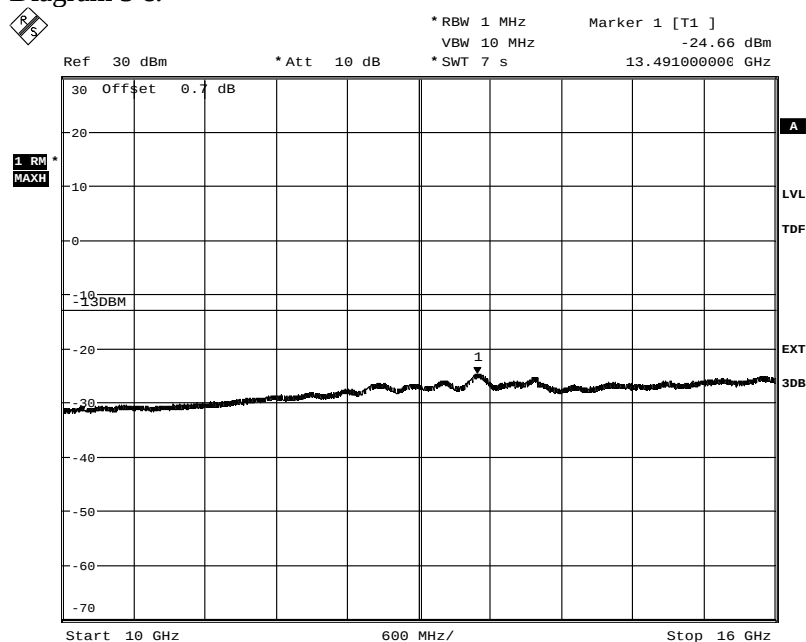

Date: 14.APR.2014 17:22:58


Diagram 3 d:

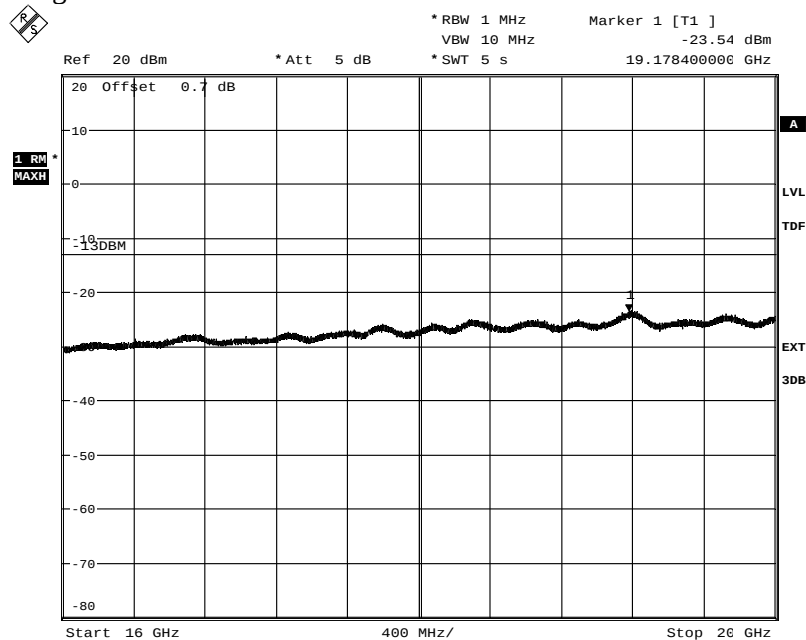

Date: 14.APR.2014 17:23:38


Appendix 5

Diagram 4 a:

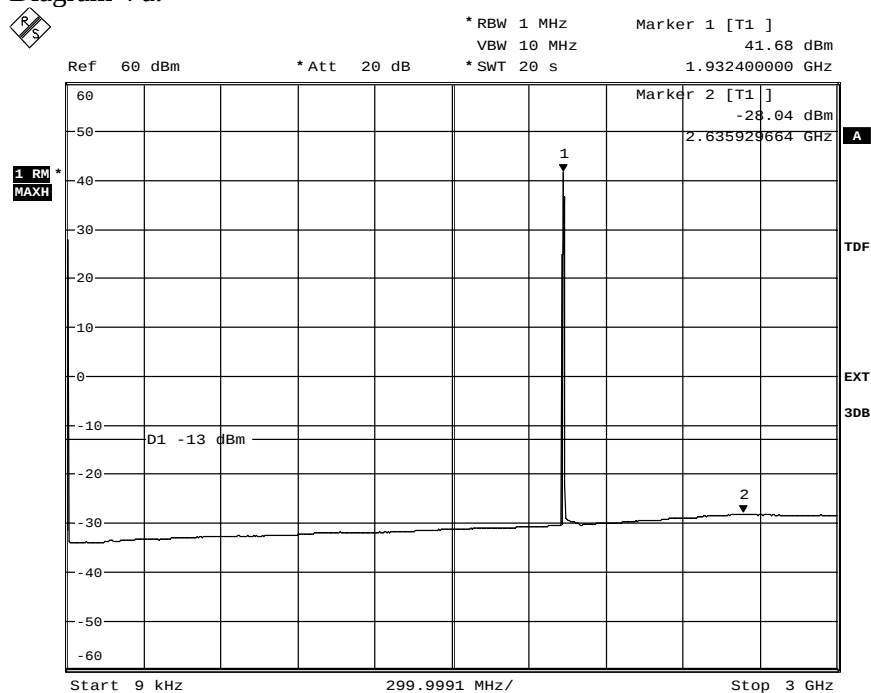

Date: 13.NOV.2013 19:11:03


Diagram 4 b:

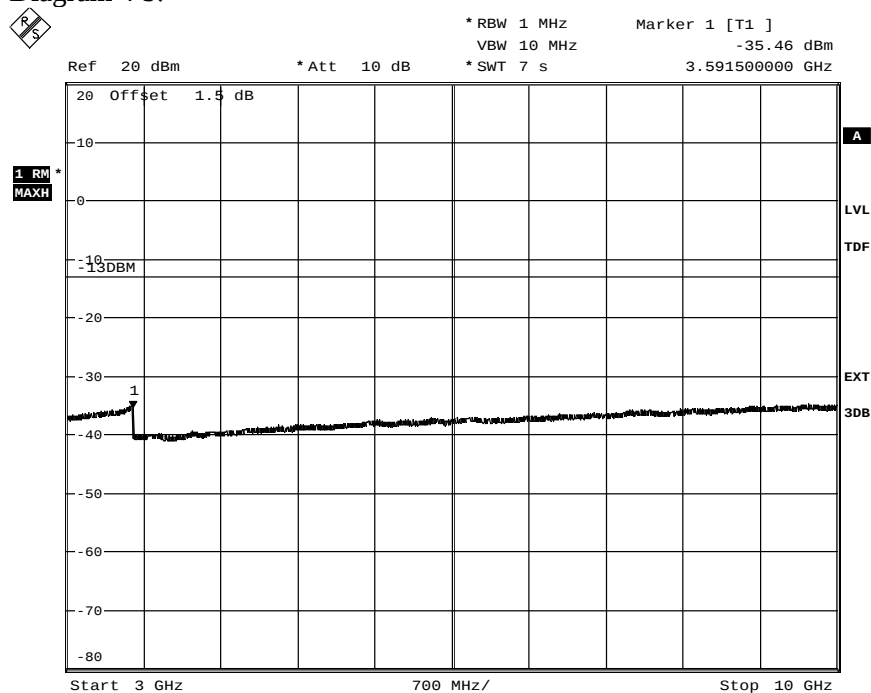

Date: 13.NOV.2013 19:13:31


Appendix 5

Diagram 4 c:

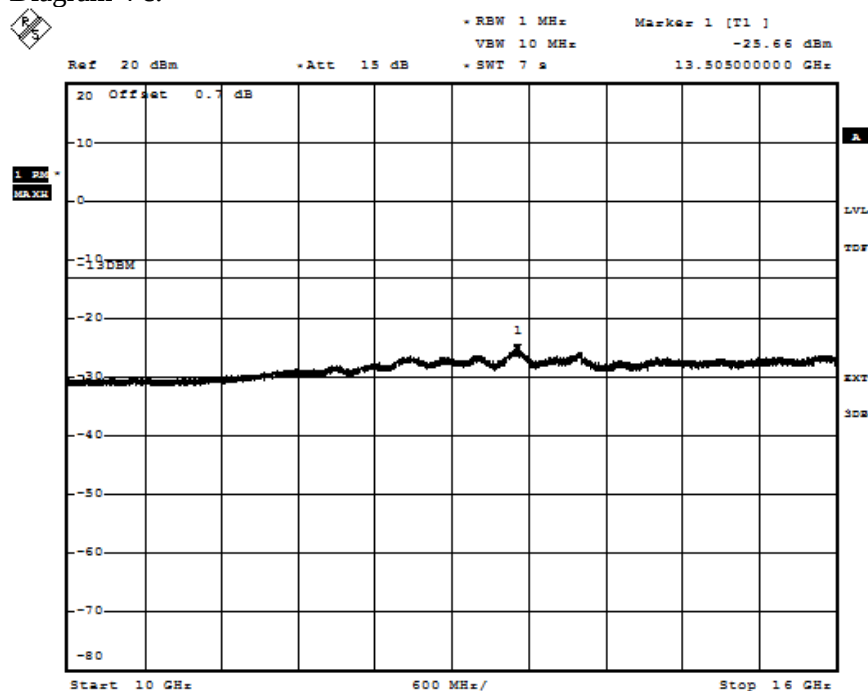

Date: 13.NOV.2013 19:14:19


Diagram 4 d:

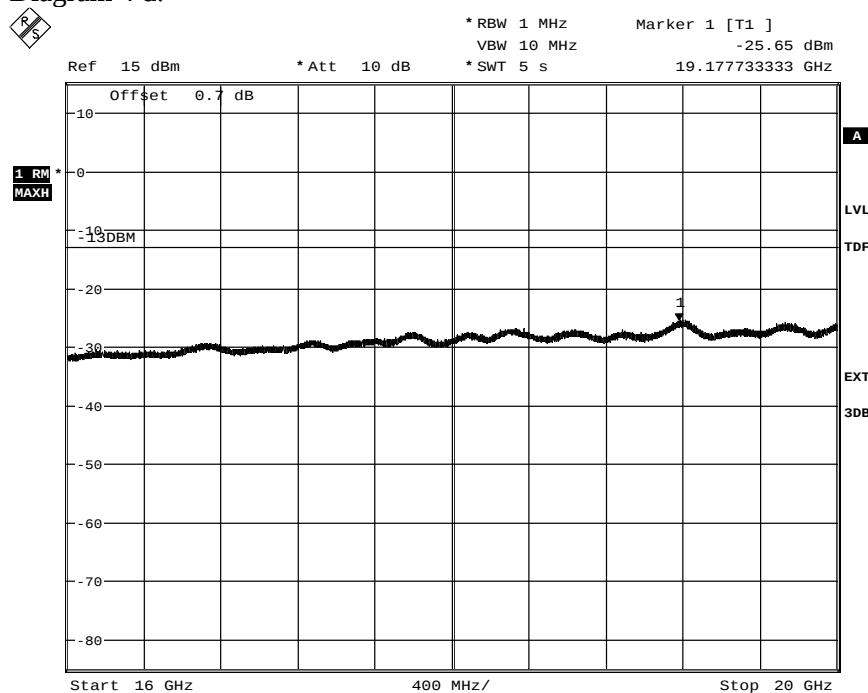

Date: 13.NOV.2013 19:15:14


Appendix 5

Diagram 5 a:

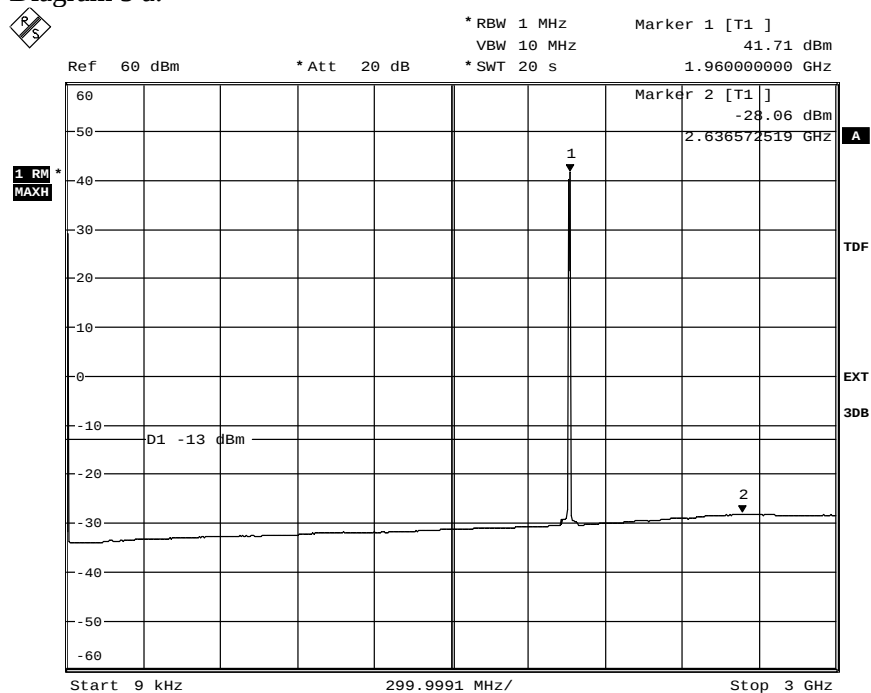

Date: 13.NOV.2013 18:26:03

Diagram 5 b:

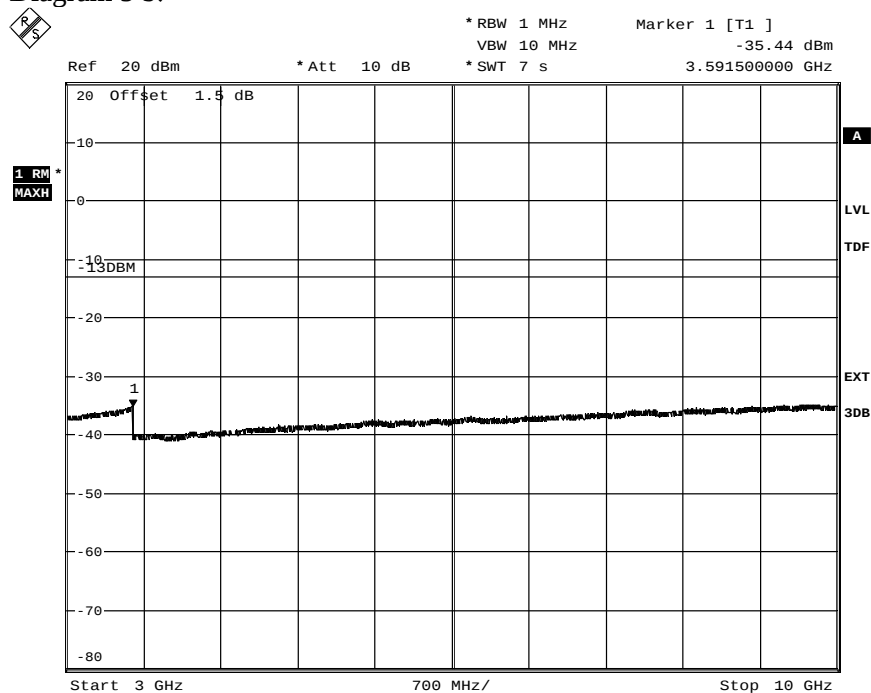


Date: 13.NOV.2013 18:30:23




Appendix 5

Diagram 5 c:

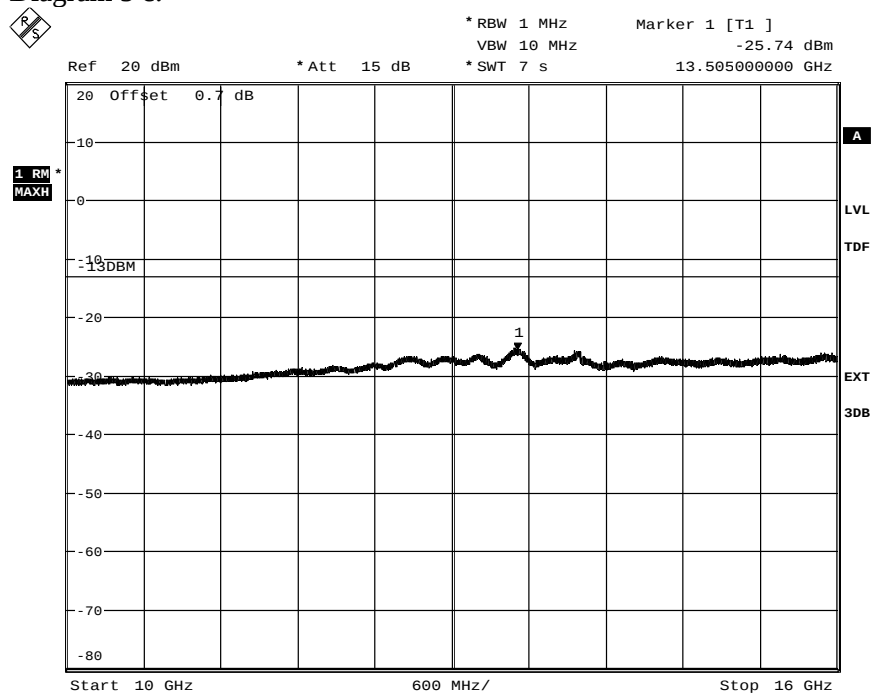

Date: 13.NOV.2013 18:31:05


Diagram 5 d:

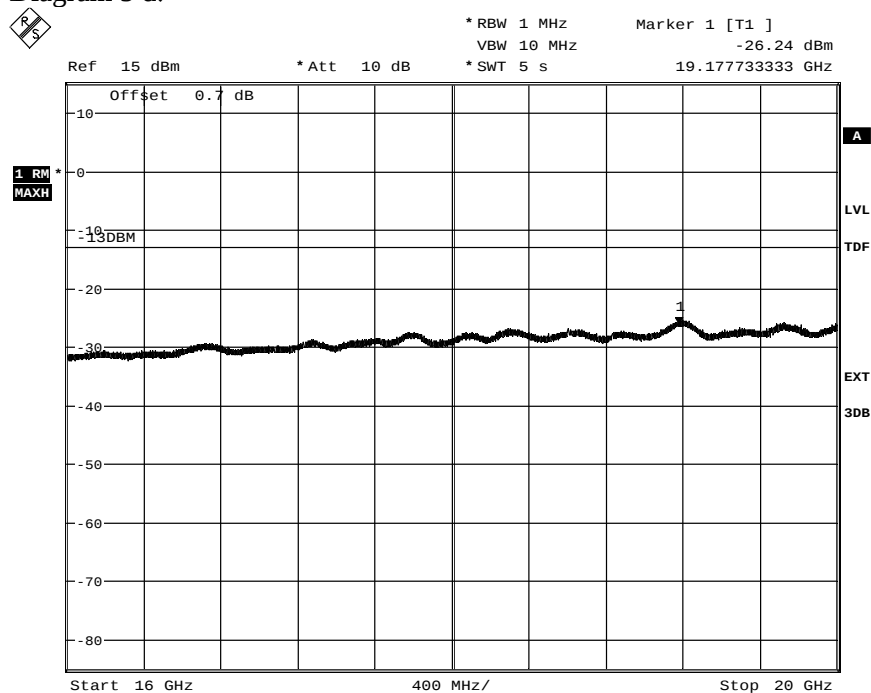

Date: 13.NOV.2013 18:31:56


Appendix 5

Diagram 6 a:

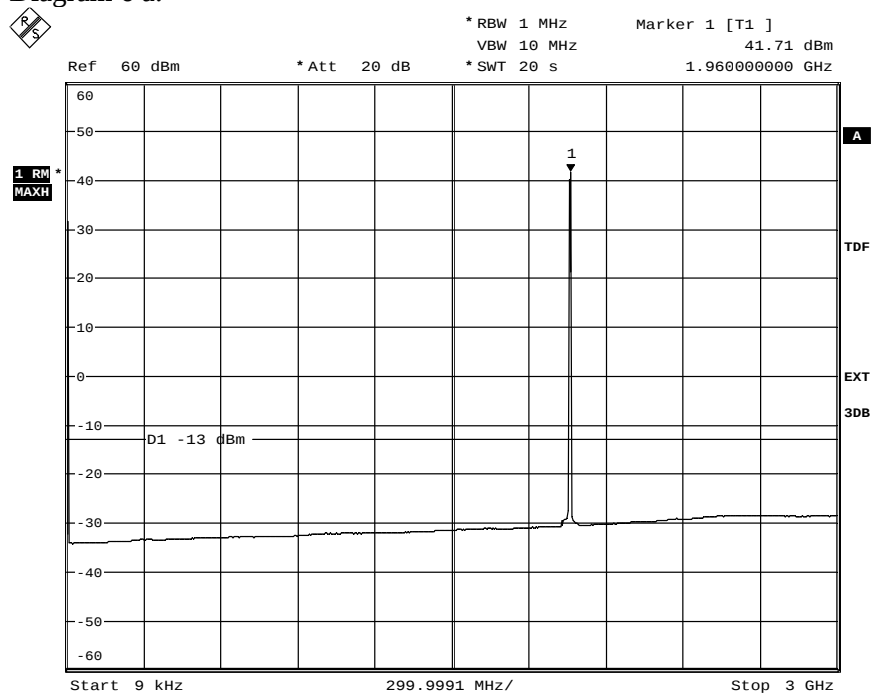

Date: 14.NOV.2013 15:18:29


Diagram 6 b:

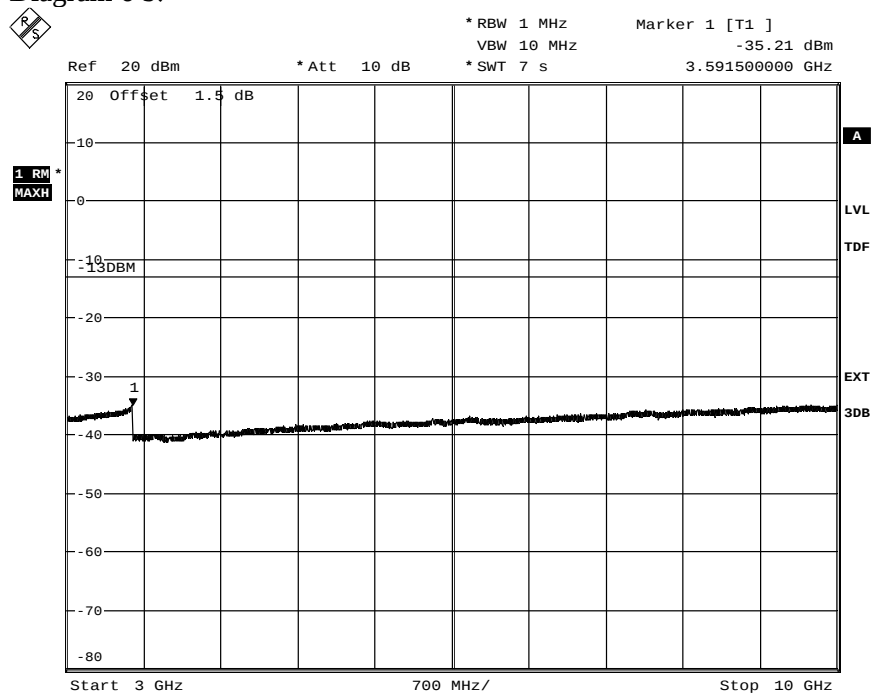

Date: 14.NOV.2013 15:20:04


Appendix 5

Diagram 6 c:

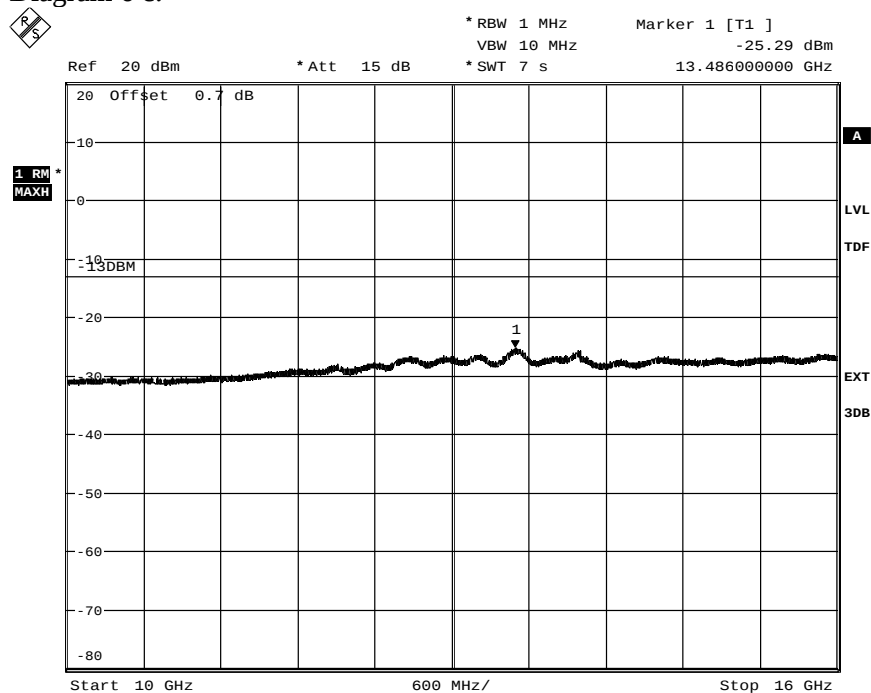

Date: 14.NOV.2013 15:20:53


Diagram 6 d:

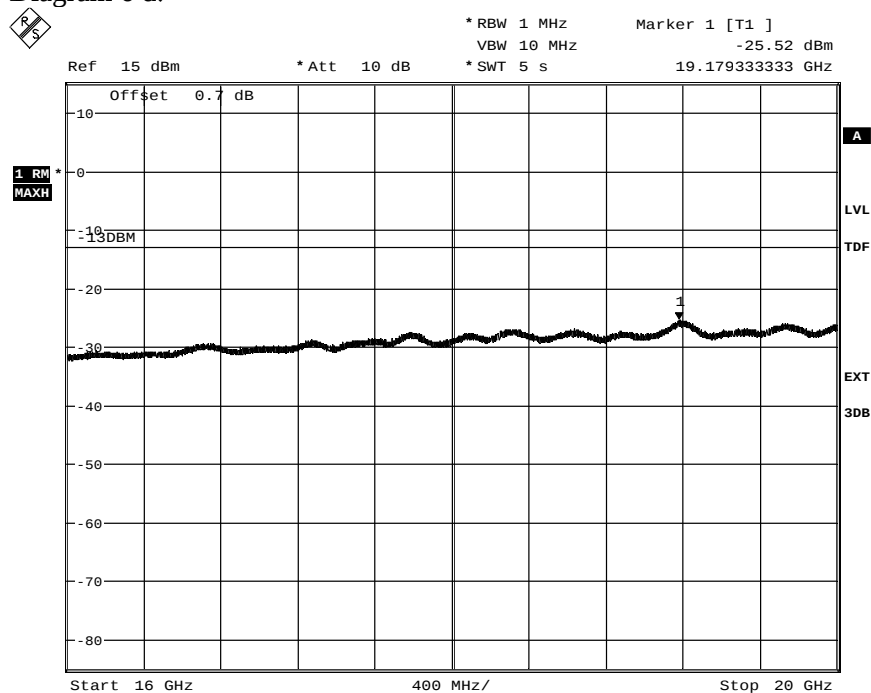

Date: 14.NOV.2013 15:21:38


Appendix 5

Diagram 7 a:

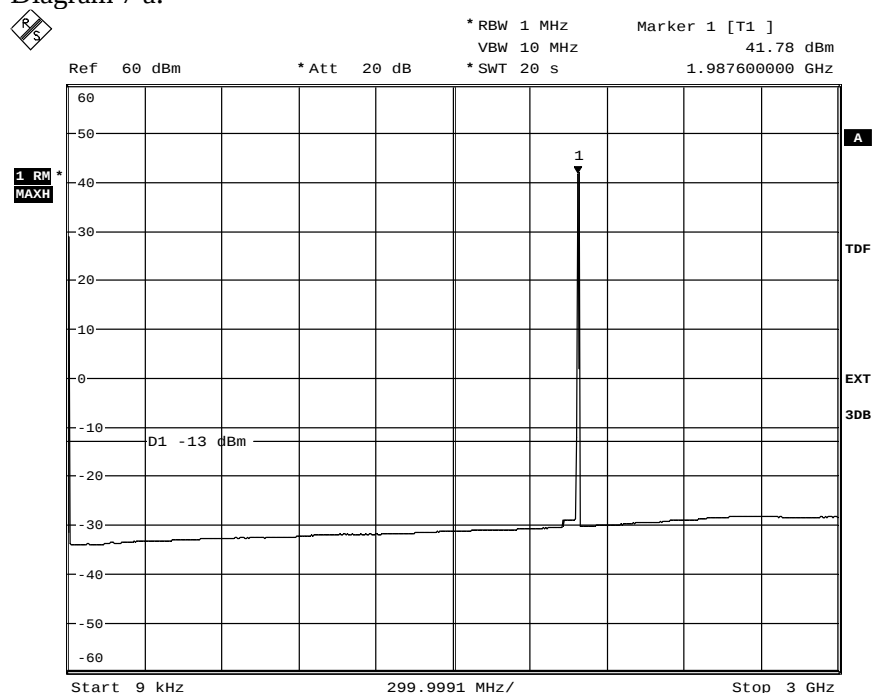

Date: 13.NOV.2013 19:43:00


Diagram 7 b:

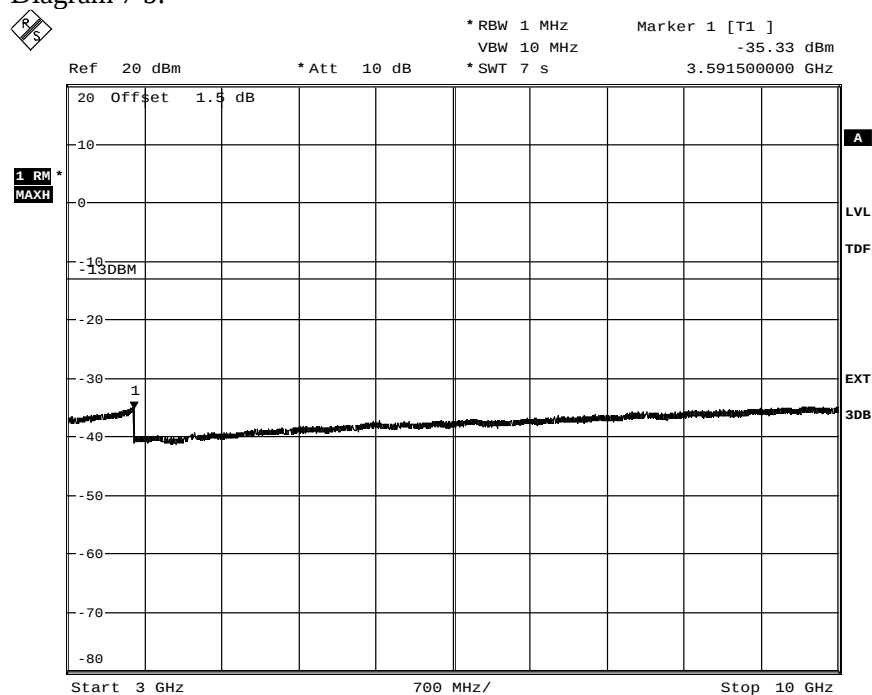

Date: 13.NOV.2013 19:40:40


Appendix 5

Diagram 7 c:

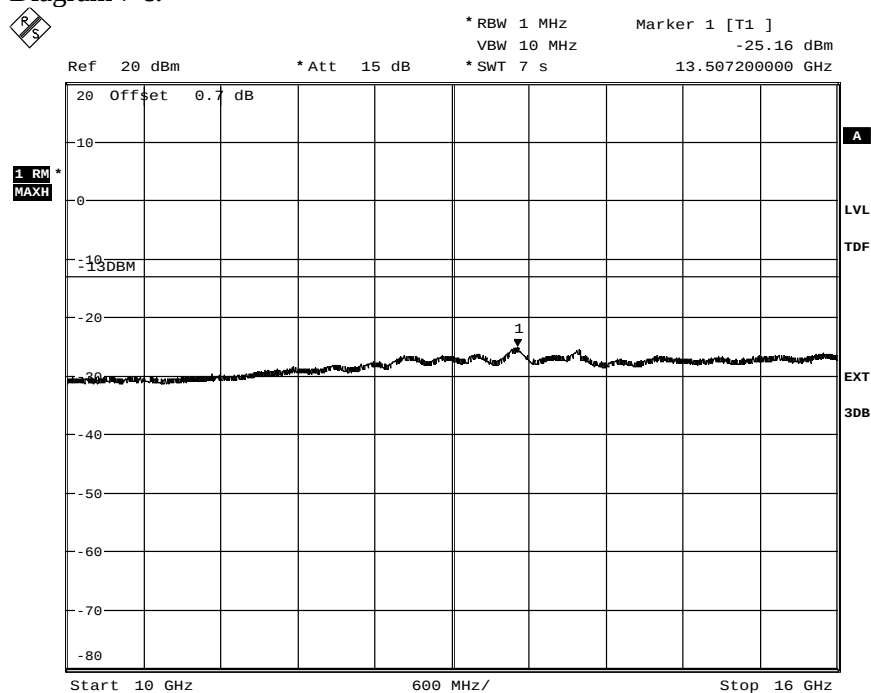

Date: 13.NOV.2013 19:39:40


Diagram 7 d:

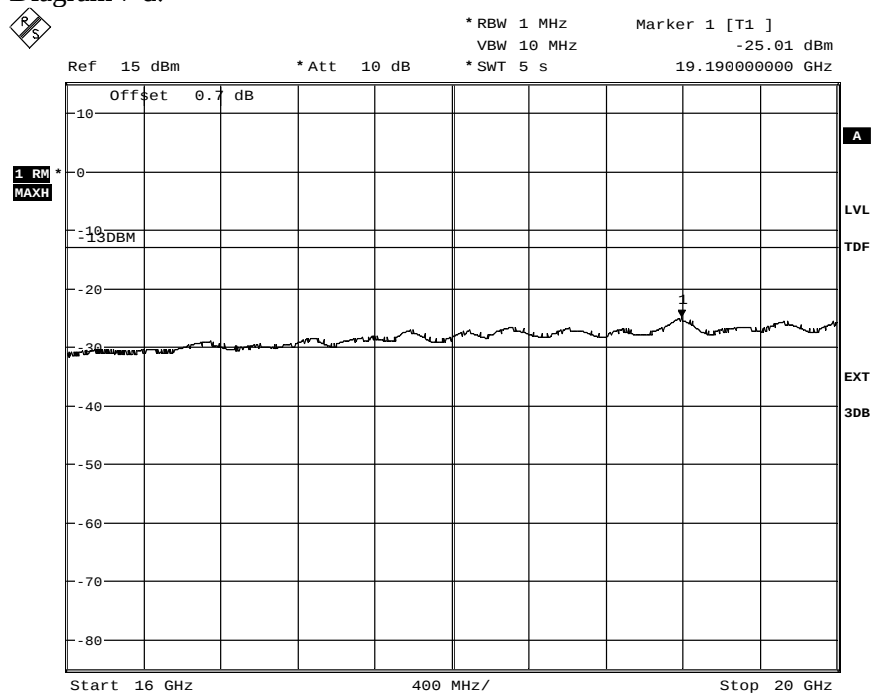

Date: 13.NOV.2013 19:38:12


Appendix 5

Diagram 8 a:

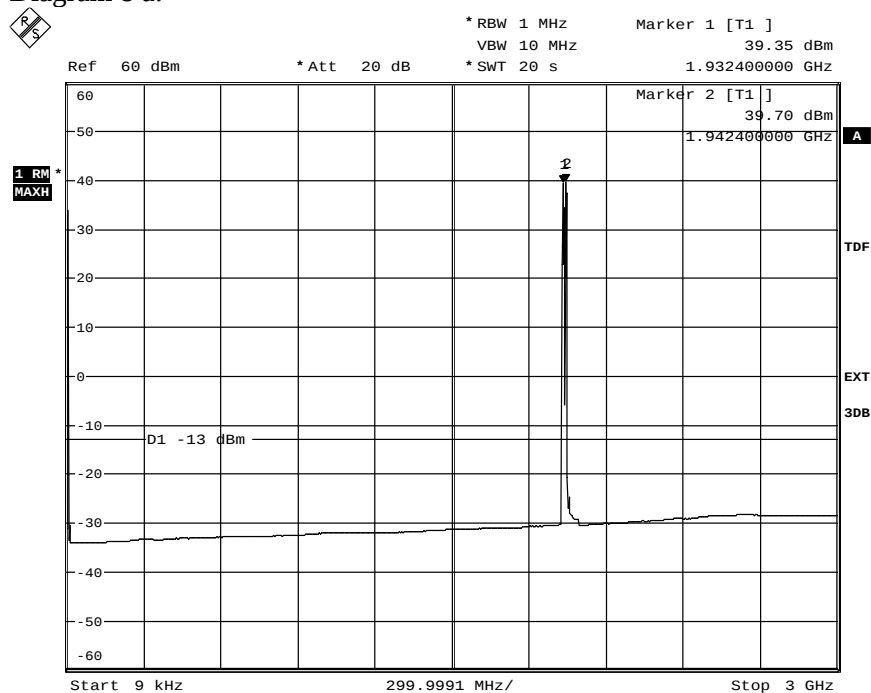

Date: 15.NOV.2013 13:42:51


Diagram 8 b:

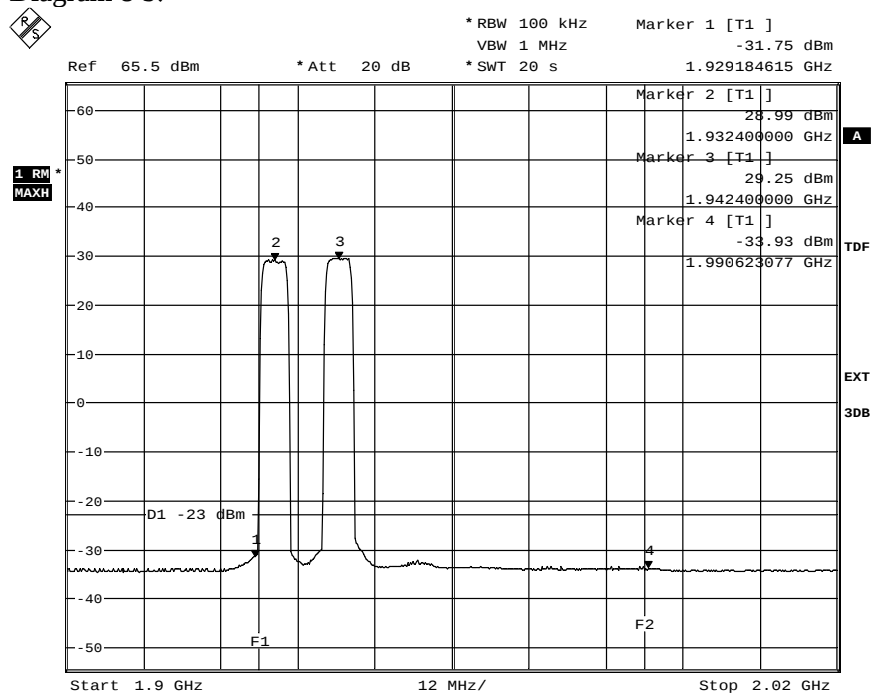

Date: 15.NOV.2013 13:44:37


Appendix 5

Diagram 8 c:

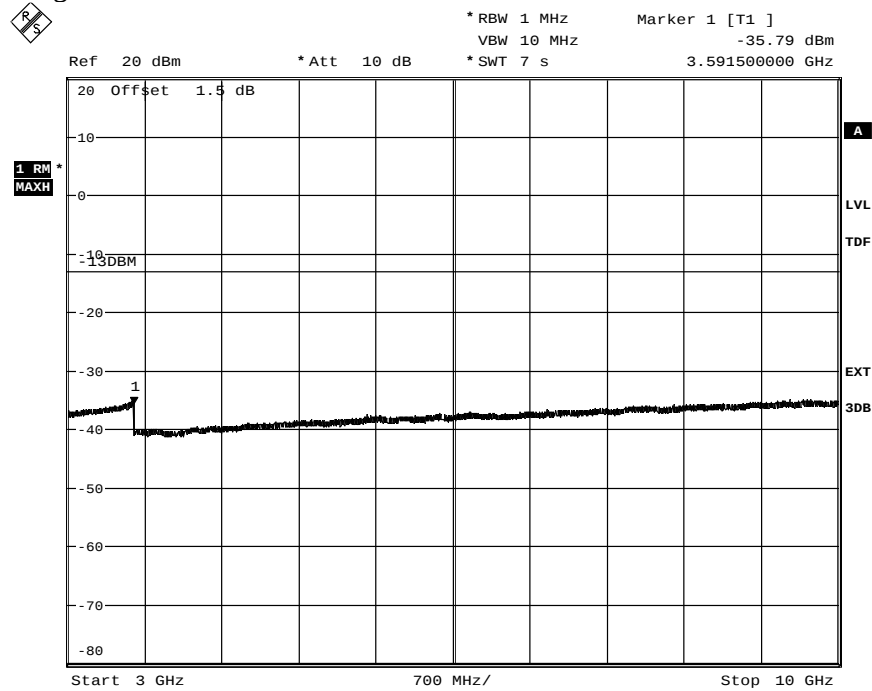

Date: 15.NOV.2013 13:46:11

Diagram 8 d:

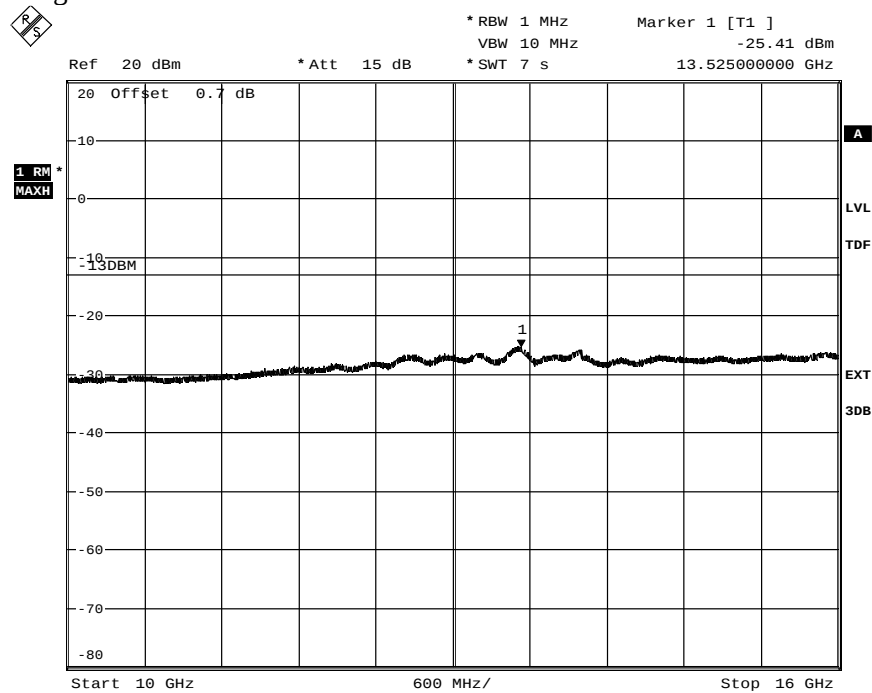


Date: 15.NOV.2013 13:47:01



Appendix 5


Diagram 8 e:

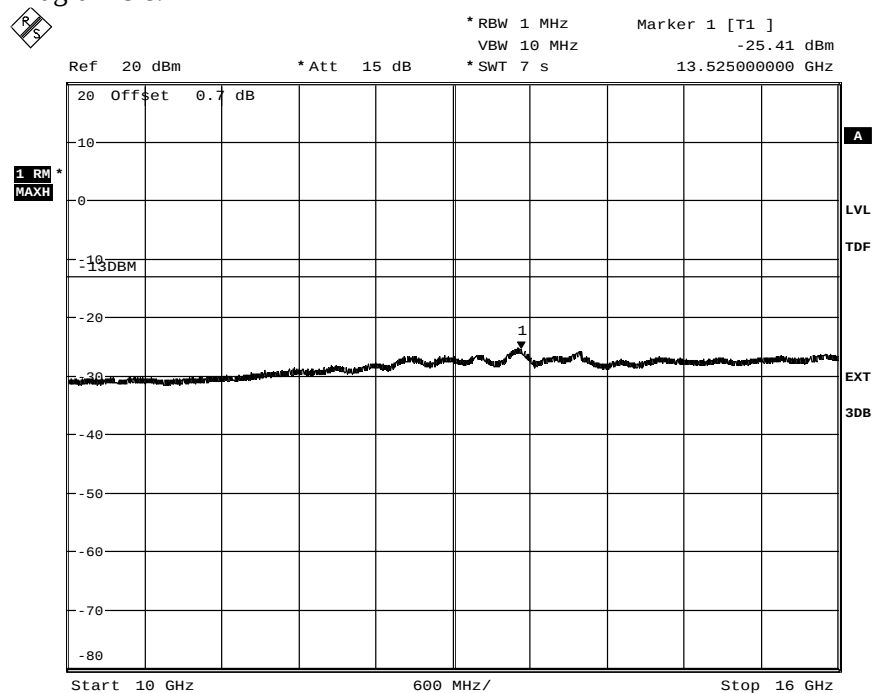

Date: 15.NOV.2013 13:47:01


Appendix 5

Diagram 9 a:

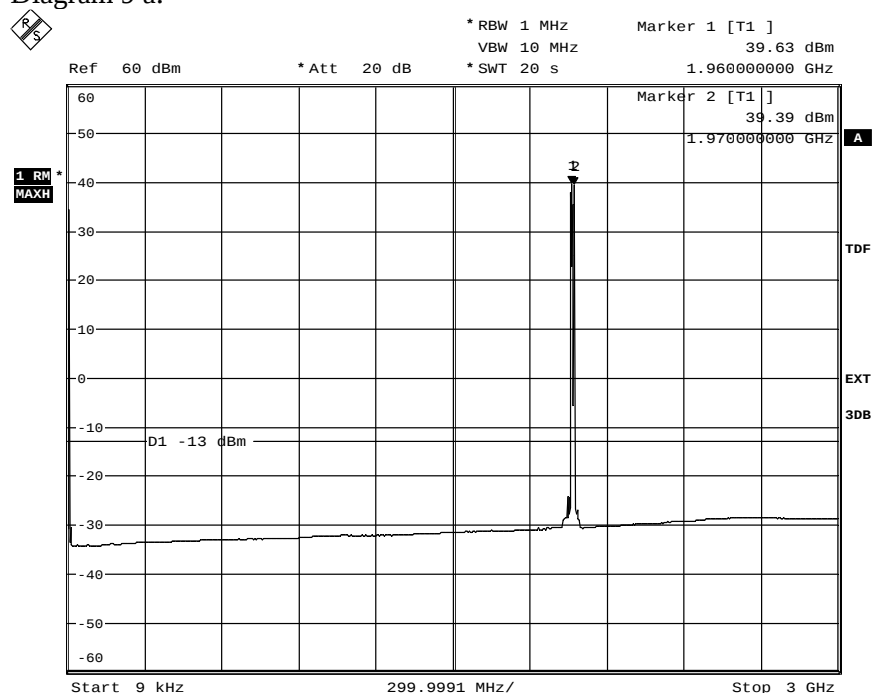

Date: 15.NOV.2013 13:56:17


Diagram 9 b:

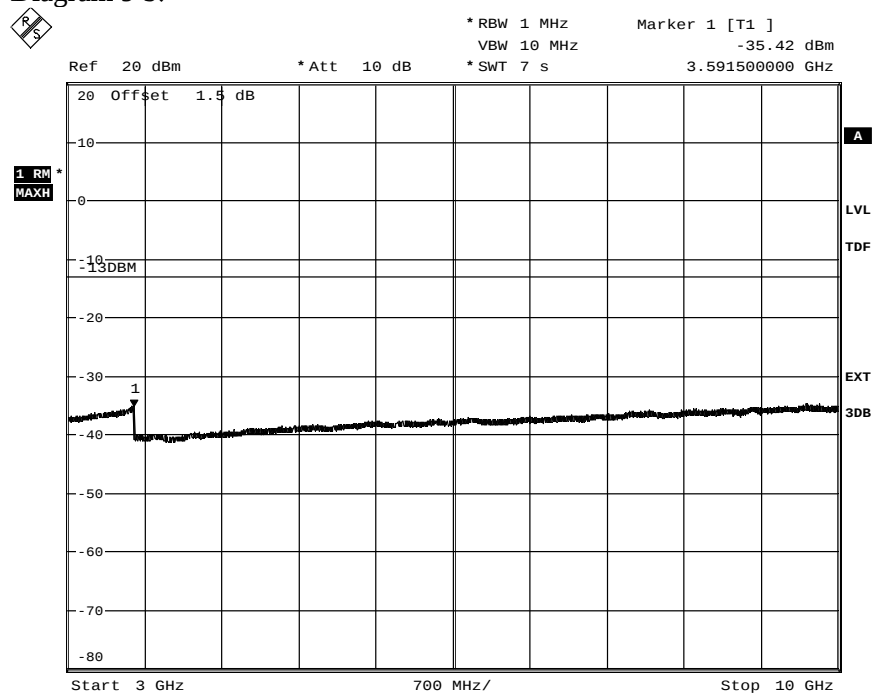

Date: 15.NOV.2013 13:54:26


Appendix 5

Diagram 9 c:

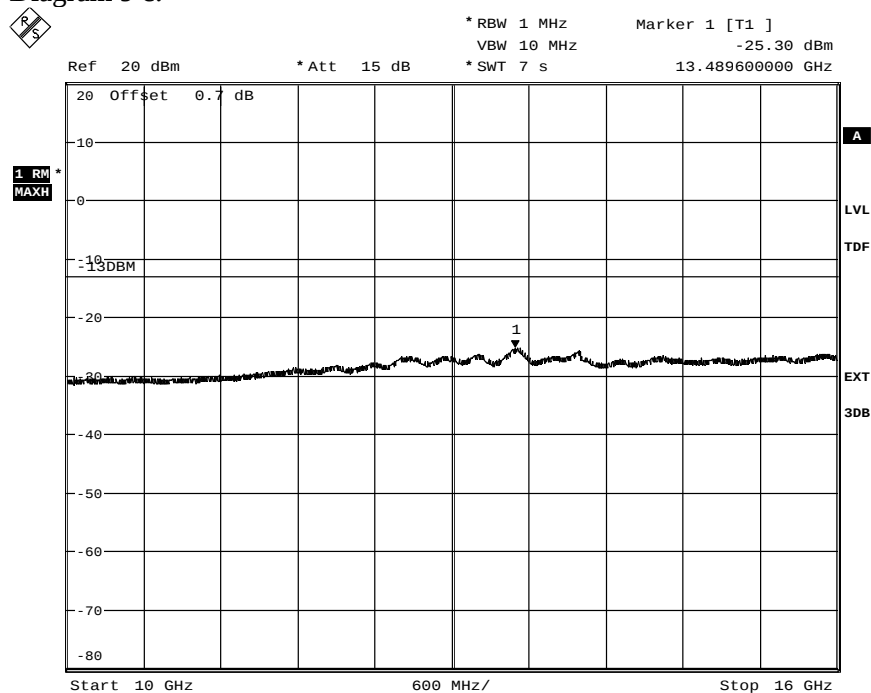

Date: 15.NOV.2013 13:53:33


Diagram 9 d:

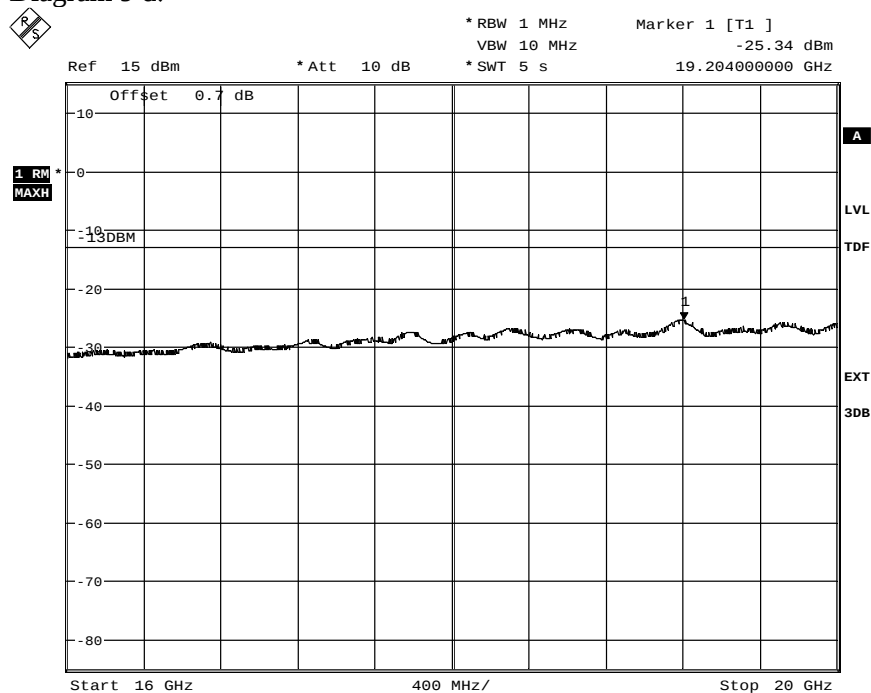

Date: 15.NOV.2013 13:52:33


Appendix 5

Diagram 10 a:

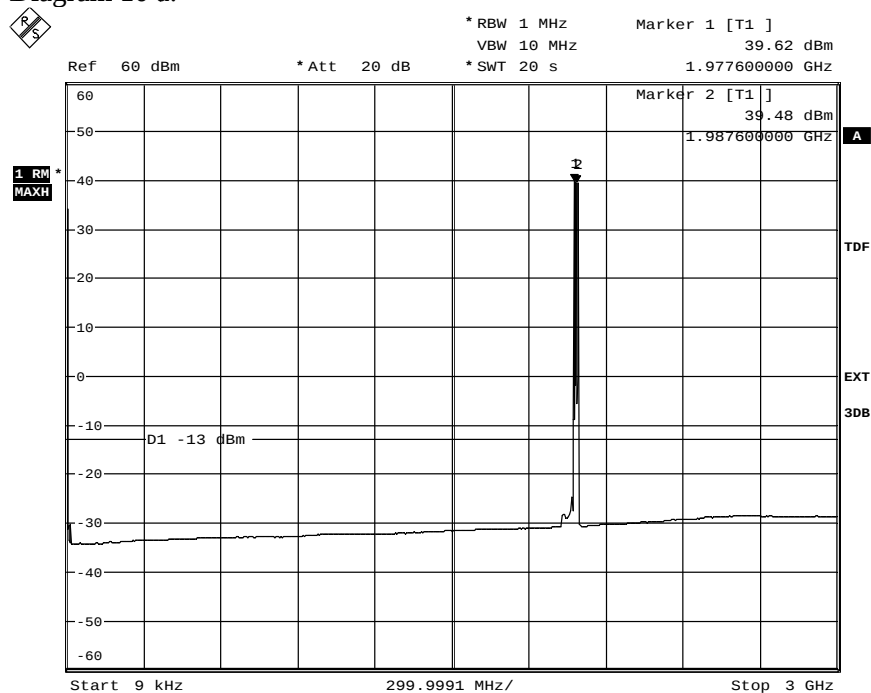

Date: 15.NOV.2013 14:03:05


Diagram 10 b:

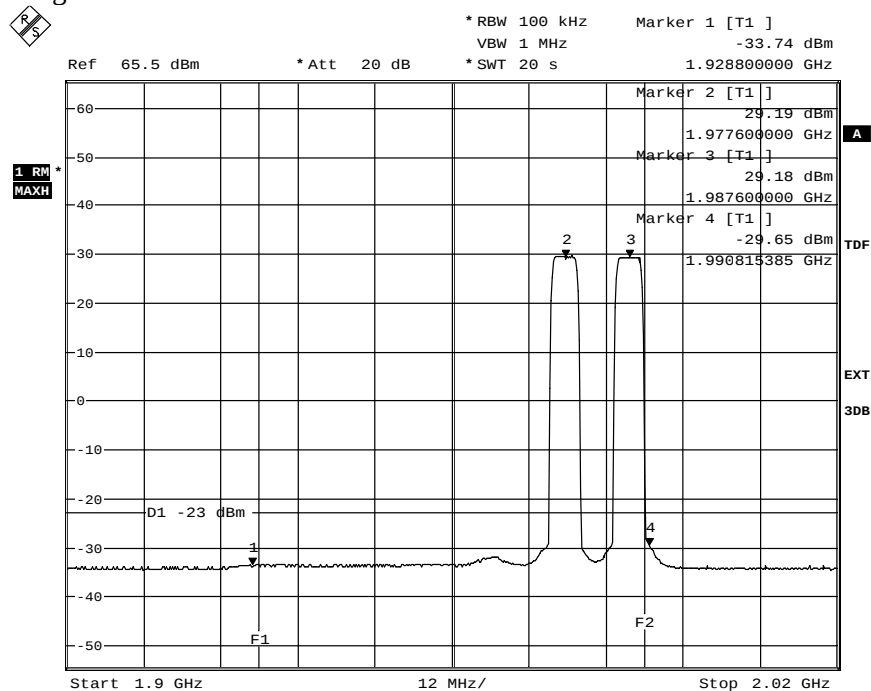

Date: 15.NOV.2013 14:04:55


Appendix 5

Diagram 10 c:

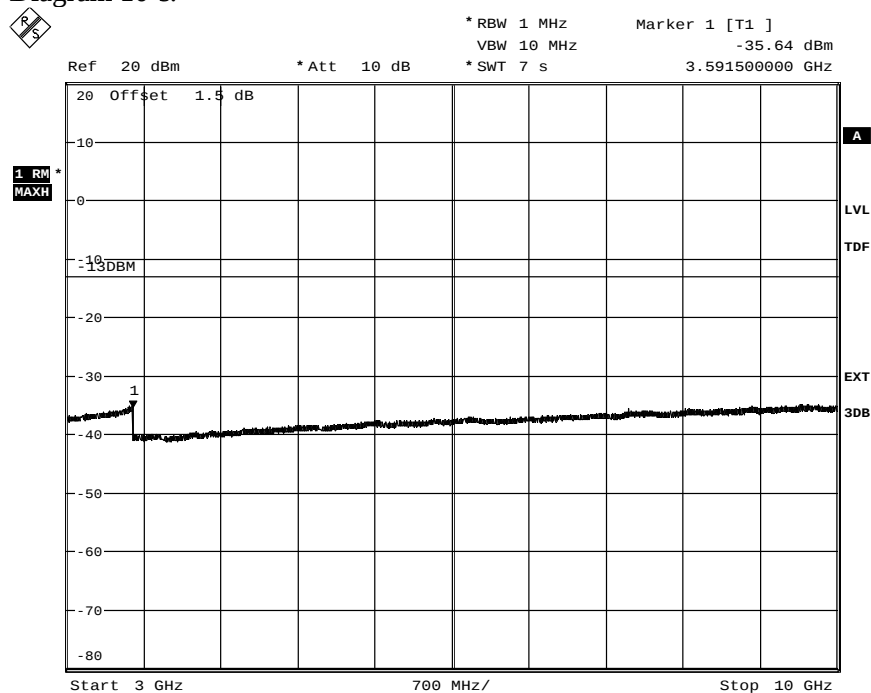

Date: 15.NOV.2013 14:06:58

Diagram 10 d:

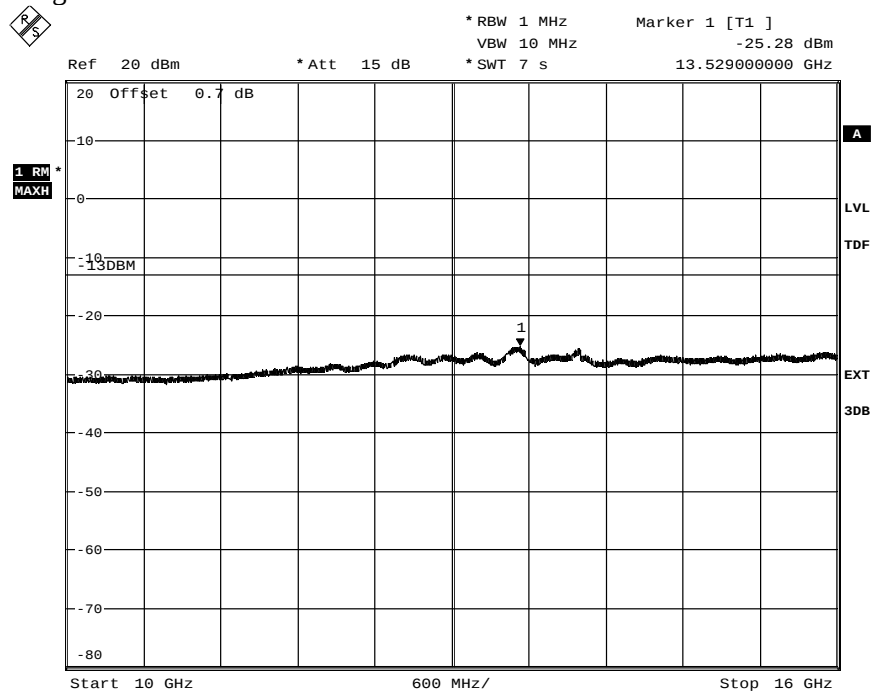


Date: 15.NOV.2013 14:08:06



Appendix 5


Diagram 10 e:

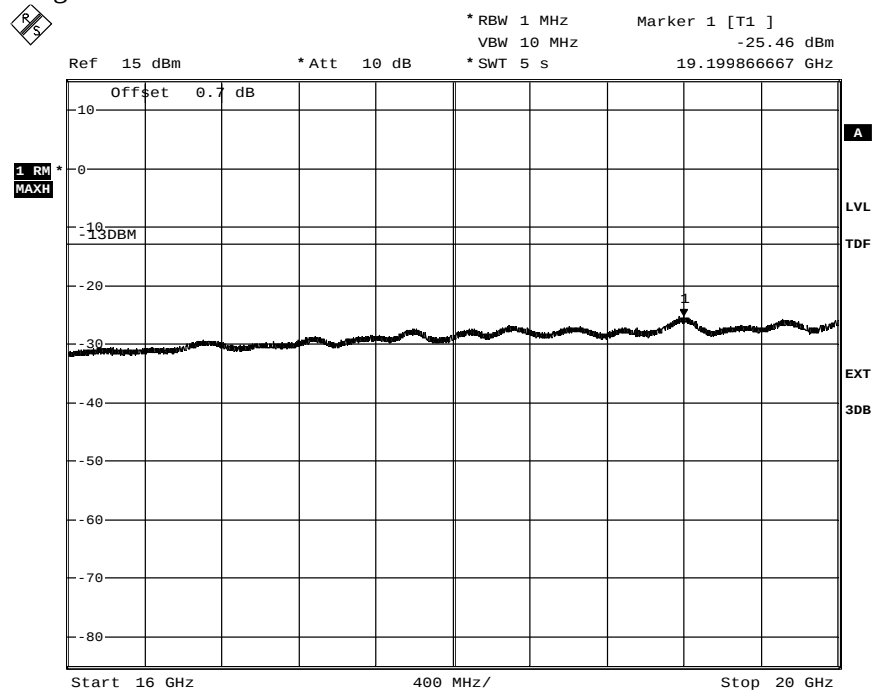

Date: 15.NOV.2013 14:09:20


Appendix 5

Diagram 11 a:

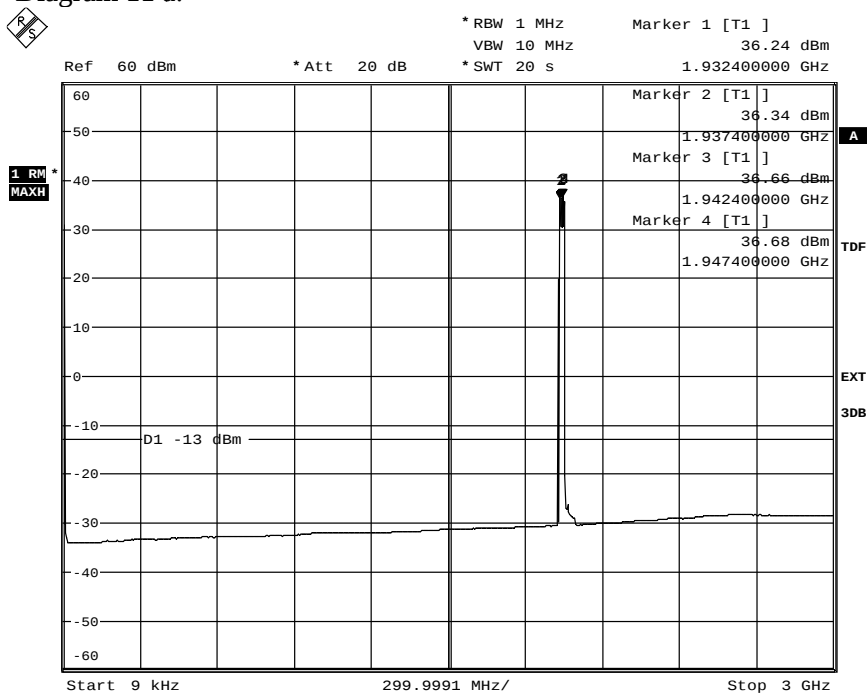

Date: 14.NOV.2013 17:48:41


Diagram 11 b:

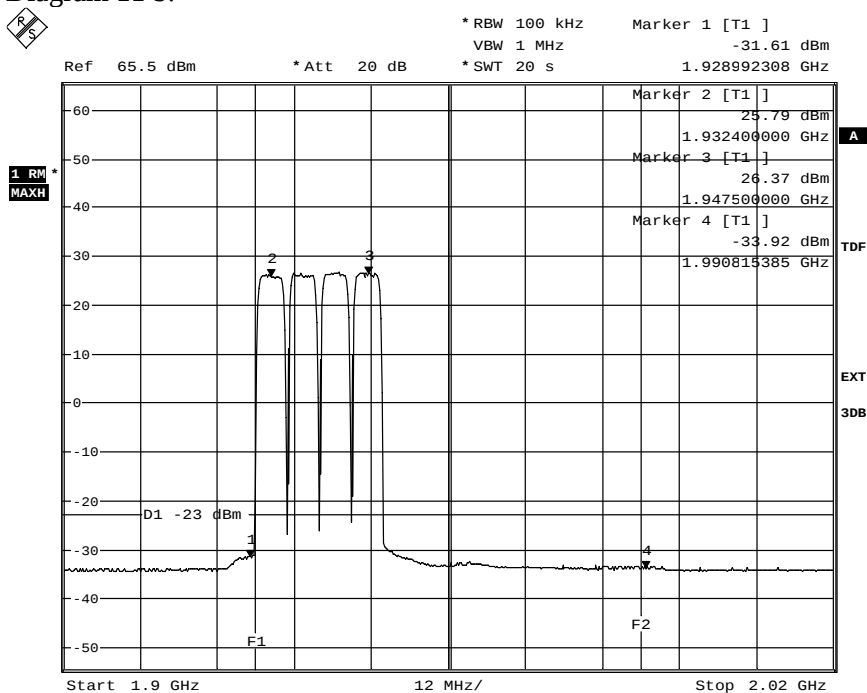

Date: 14.NOV.2013 17:51:16


Appendix 5

Diagram 11 c:

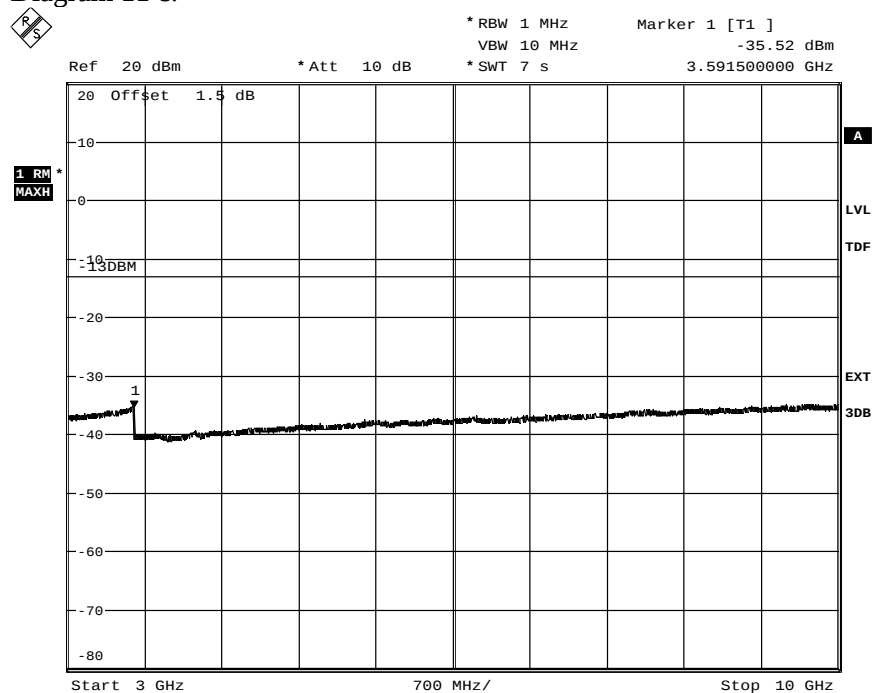

Date: 14.NOV.2013 17:53:07


Diagram 11 d:

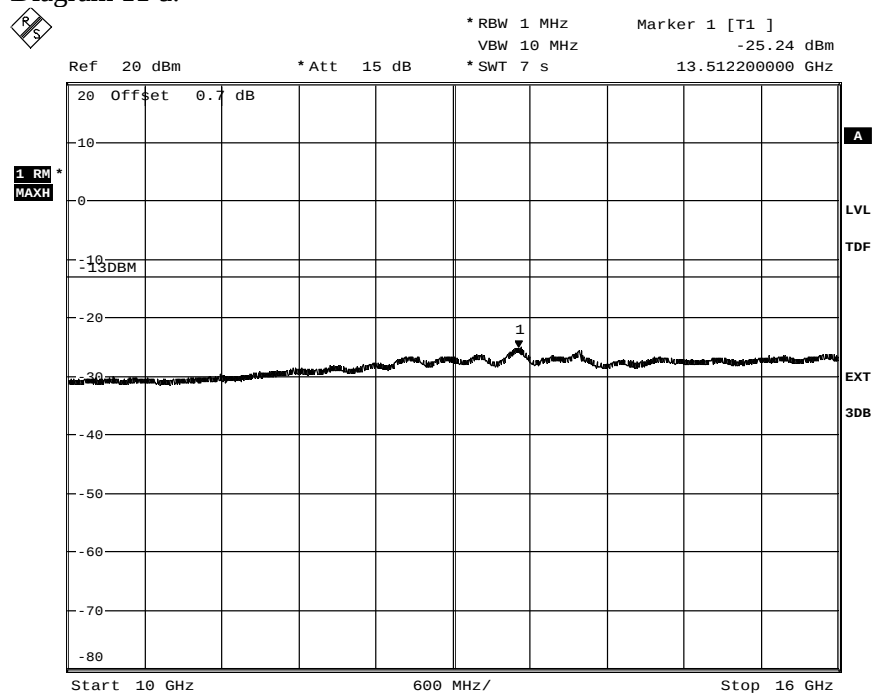

Date: 14.NOV.2013 17:54:09

Appendix 5


Diagram 11 e:

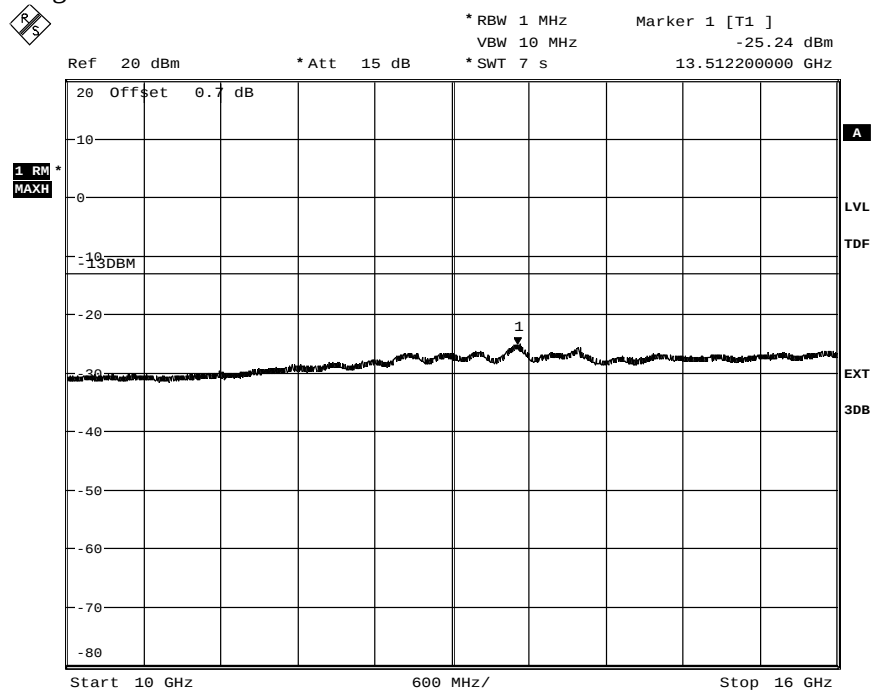

Date: 14.NOV.2013 17:54:09


Appendix 5

Diagram 12 a:

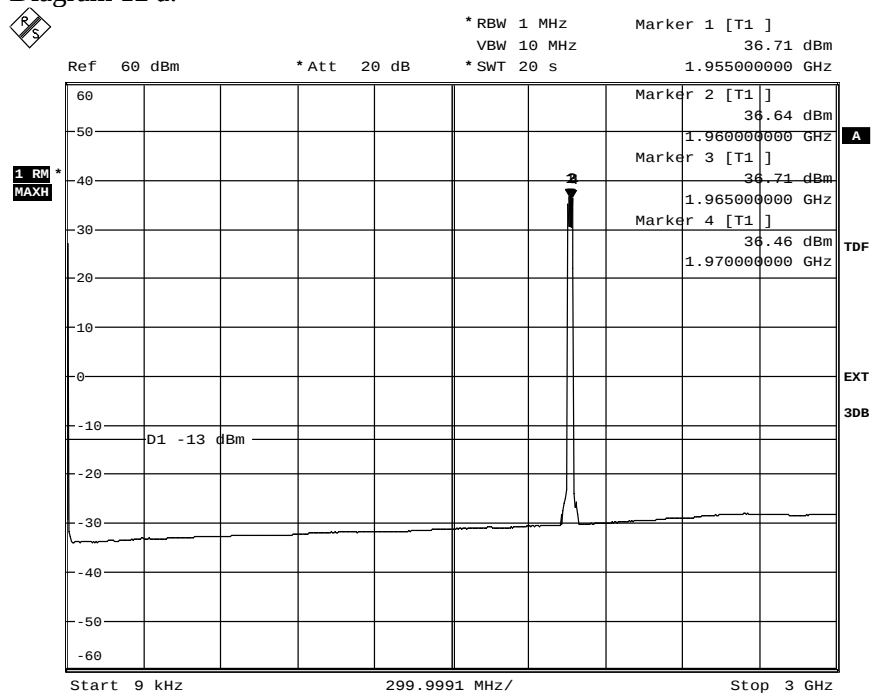

Date: 14.NOV.2013 19:58:15


Diagram 12 b:

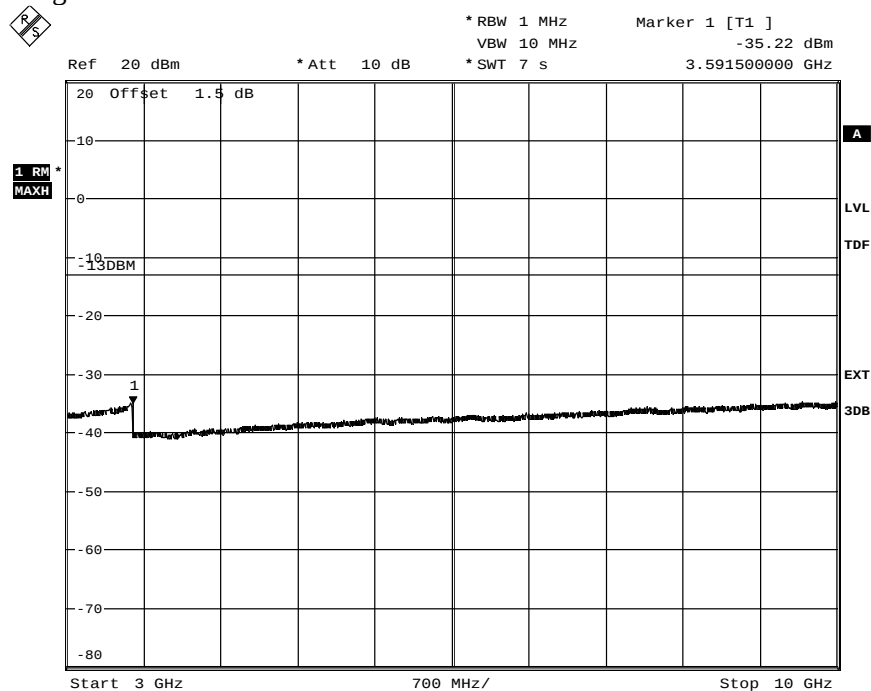

Date: 14.NOV.2013 20:02:29


Appendix 5

Diagram 12 c:

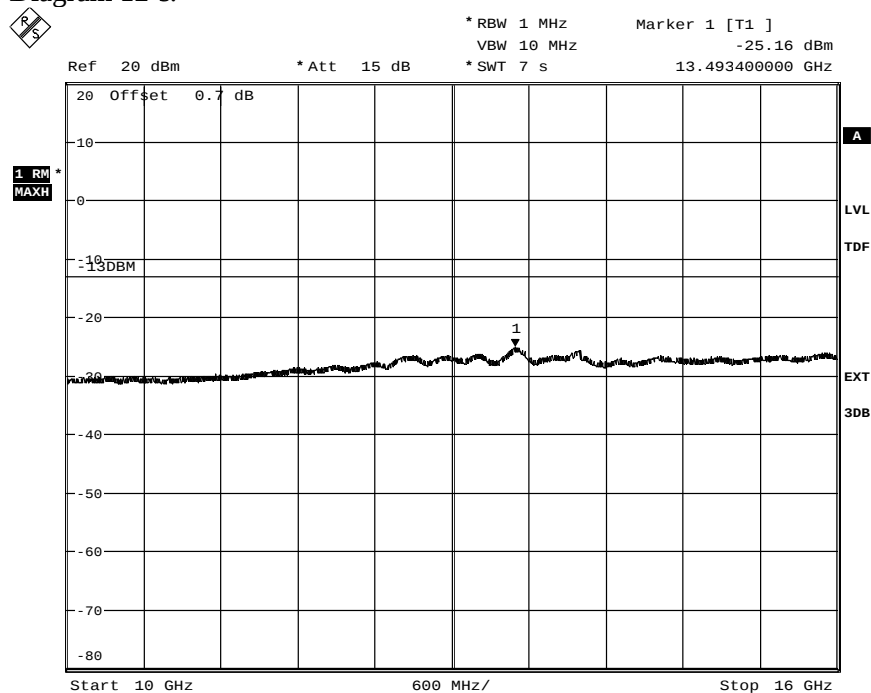

Date: 14.NOV.2013 20:05:10


Diagram 12 d:

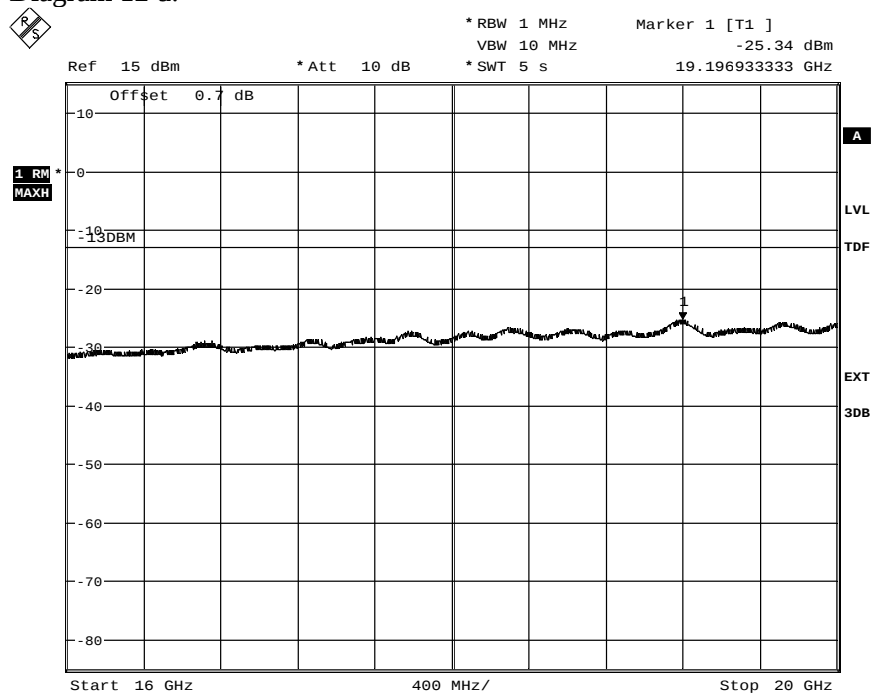

Date: 14.NOV.2013 20:07:49


Appendix 5

Diagram 13 a:

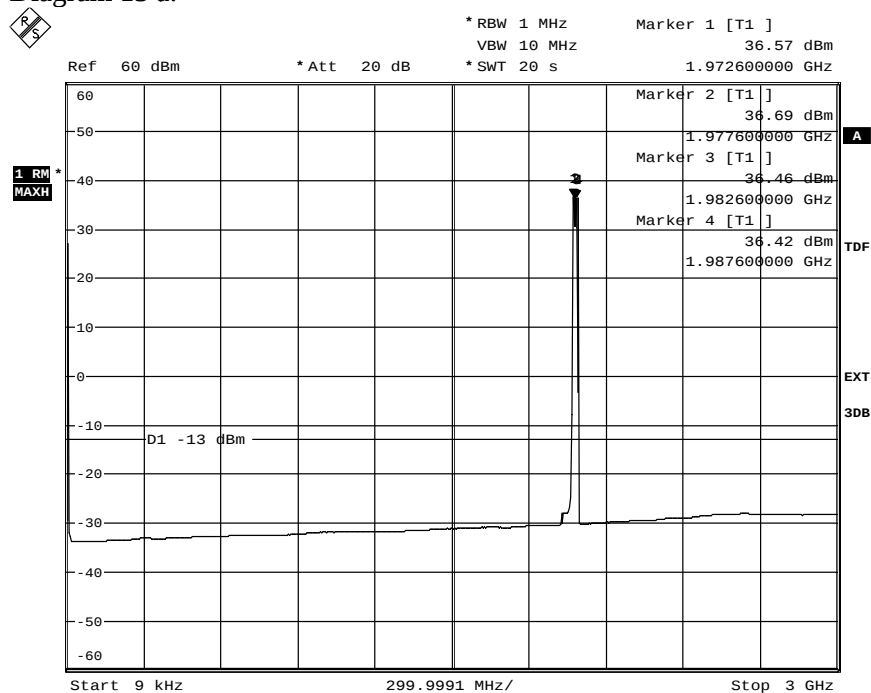

Date: 14.NOV.2013 21:04:13


Diagram 13 b:

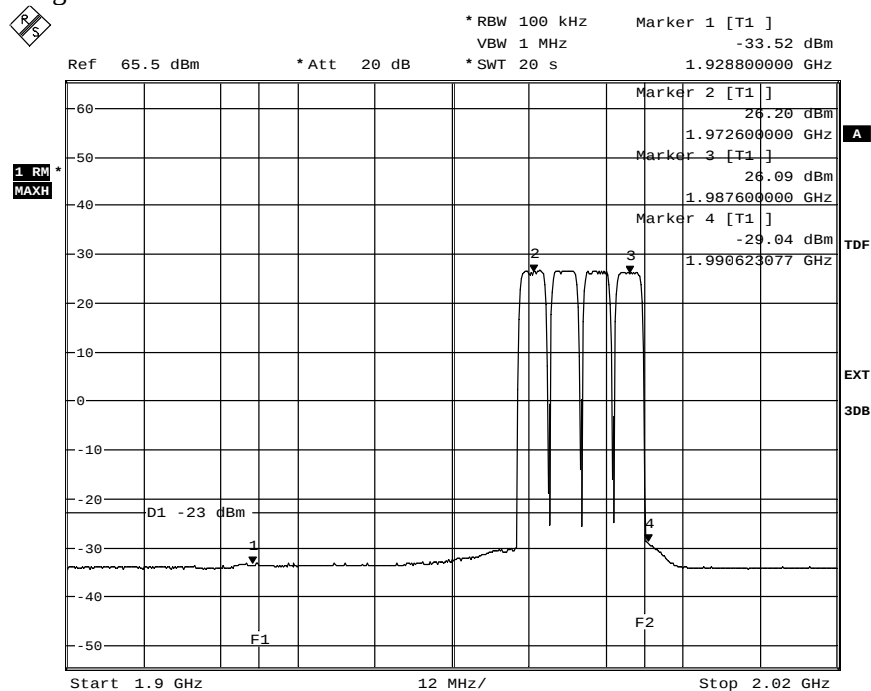

Date: 14.NOV.2013 21:06:51


Appendix 5

Diagram 13 c:

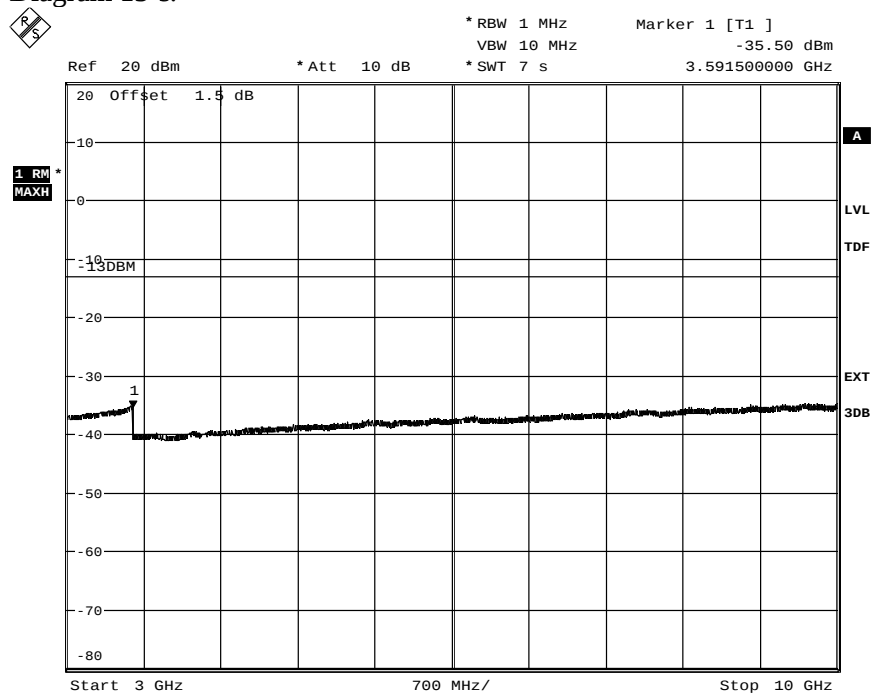

Date: 14.NOV.2013 21:12:24

Diagram 13 d:

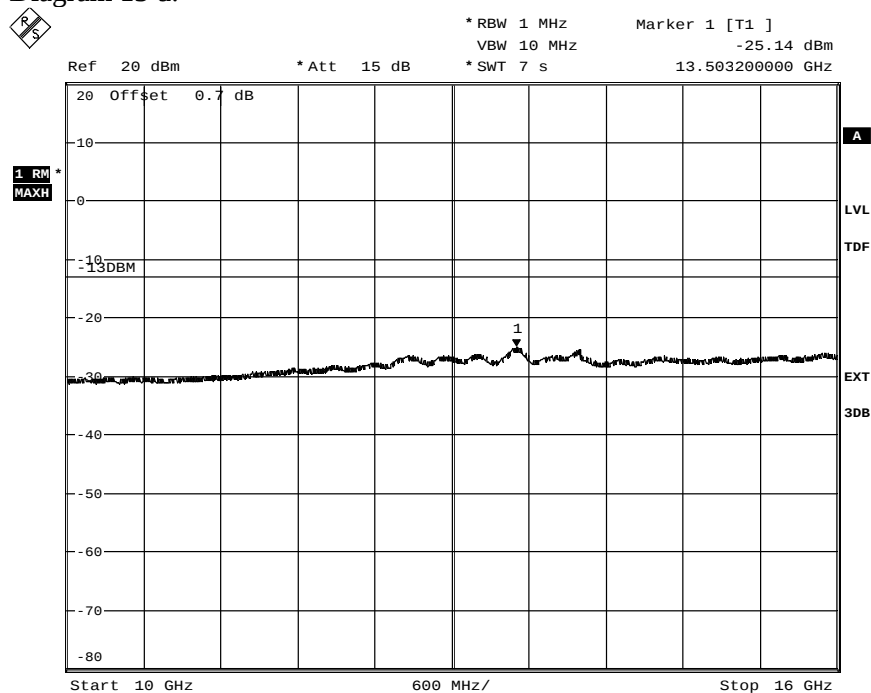


Date: 14.NOV.2013 21:13:50



Appendix 5

Diagram 13 e:

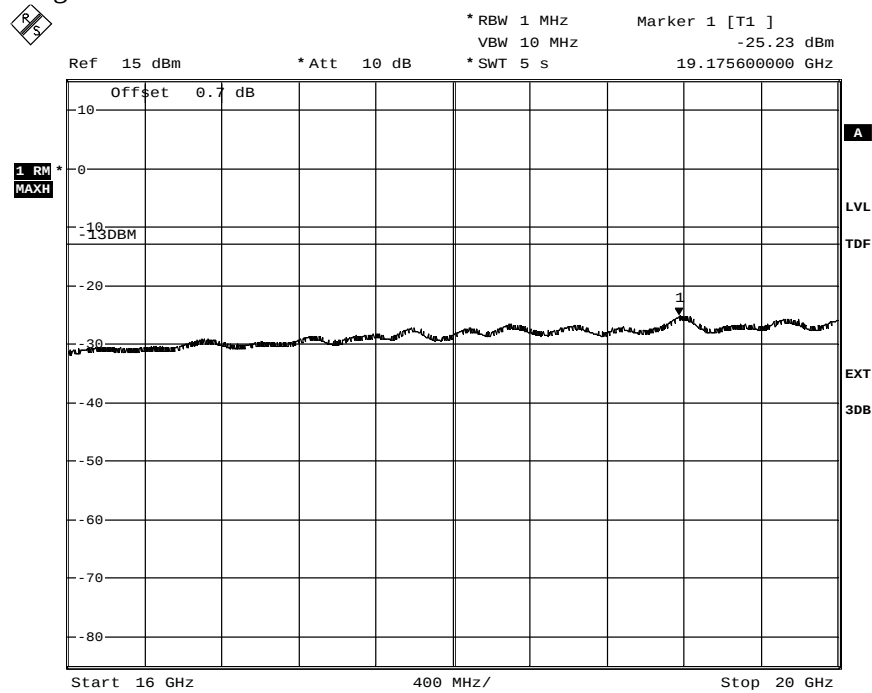

Date: 14.NOV.2013 21:16:35

Appendix 6

Field strength of spurious radiation measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-08	24 °C ± 3°C	31 % ± 5 %
2013-11-11	23 °C ± 3°C	29 % ± 5 %
2014-04-10	24 °C ± 3°C	30 % ± 5 %
2014-05-21	23 °C ± 3°C	42 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1 m in the frequency range 18 - 20 GHz.

In the frequency range 30 MHz - 20 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was


$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

Appendix 6

The test set-up during the spurious radiation measurements is shown in the picture below:

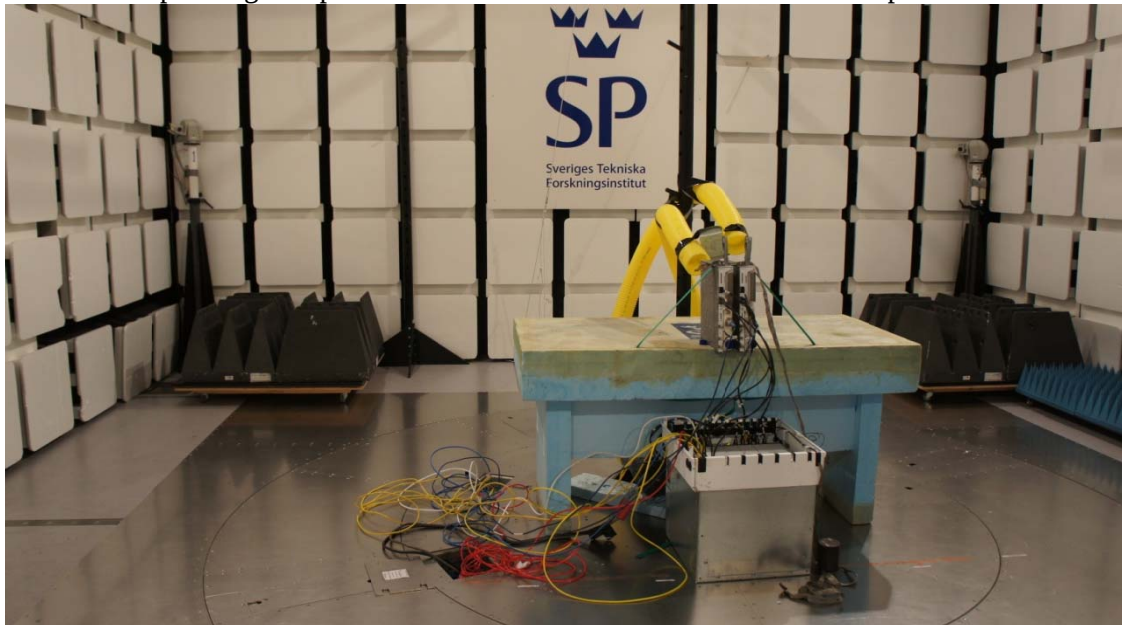

Measurement equipment

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU 26	901 553
R&S FSIQ 40	503 738
EMC 32 ver. 8.52.0	503 899
Chase Bilog Antenna CBL 6111A	503 182
EMCO Horn Antenna 3115	502 175
High pass filter, RLC Electronics	503 739
Miteq, Low Noise Amplifier	503 285
Schwarzbeck preamplifier BBV 9742	504 085
µComp Nordic, Low Noise Amplifier	901 545
Temperature and humidity meter, Testo 625	504 188

Tested configurations

Symbolic name Single mode and MIMO mode
B
B2
B4

Appendix 6

Results, representing worst case

Diagram	Symbolic name Single mode
1 a-d	B

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-20 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

CFR 47 §24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

Appendix 6

Diagram 1a:


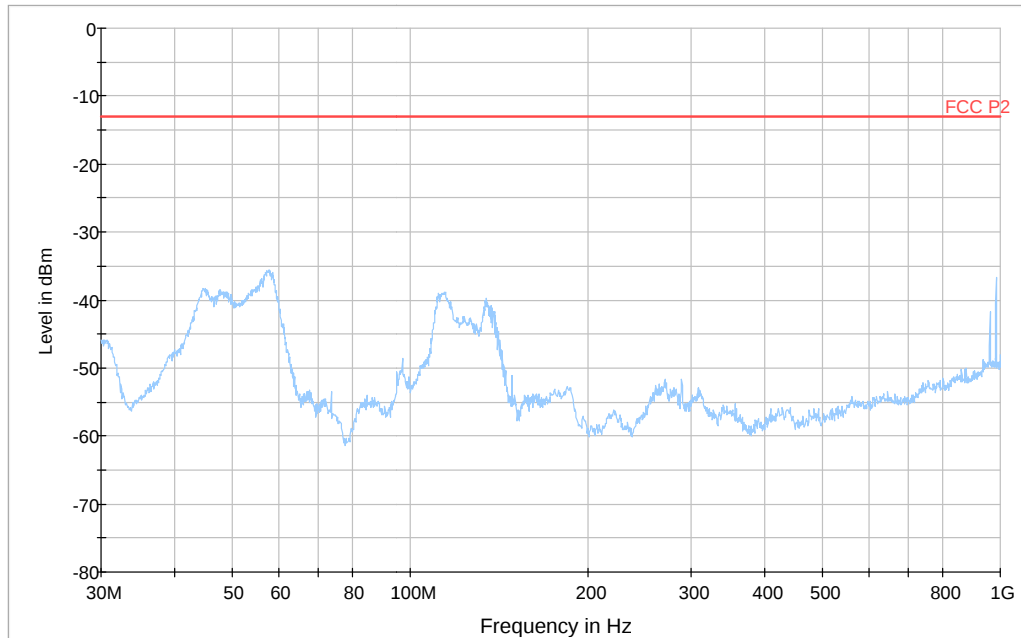



Diagram 1b:

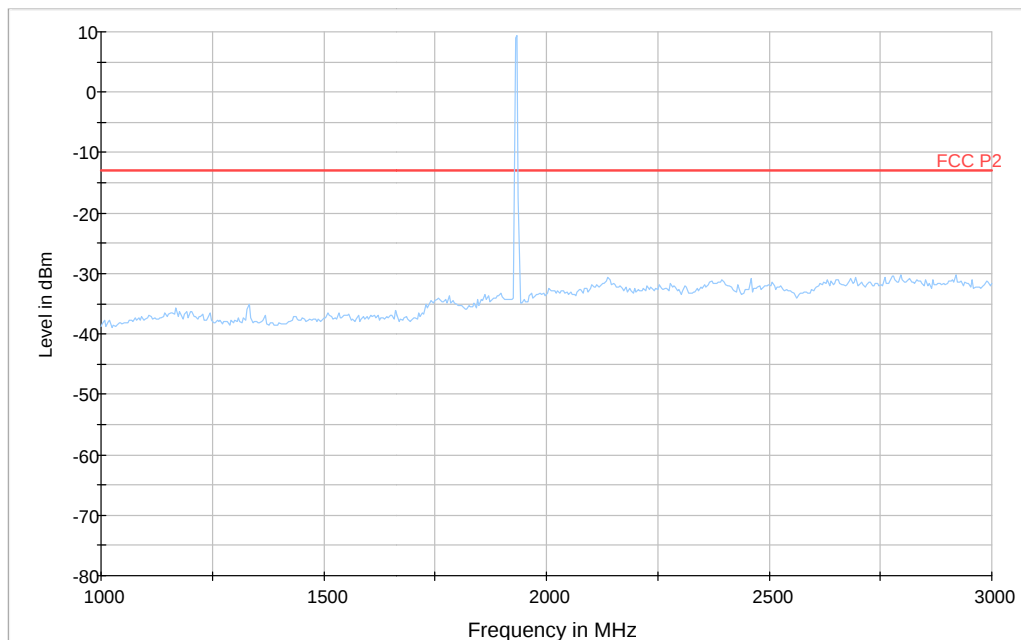

Note: The emission at 1932.4 MHz is the carrier frequency and shall be ignored in the context.

Appendix 6

Diagram 1c:

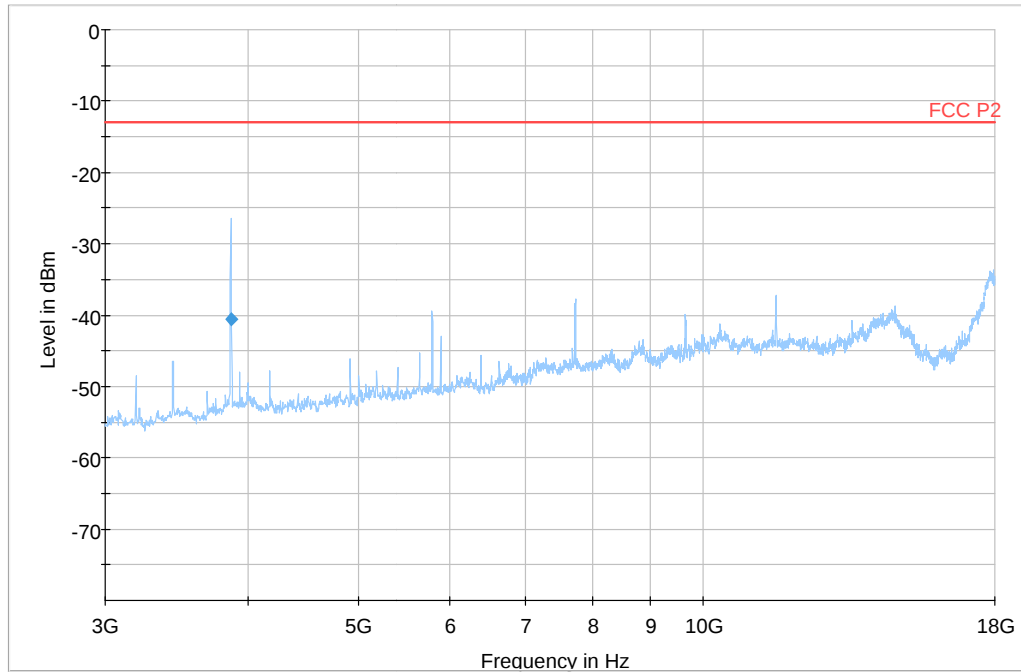


Final RMS Result

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
3863.131263	-40.6	5000.0	1000.000	100.0	V	89.0	-104.3	27.6	-13.0

Appendix 6

Diagram 1d:

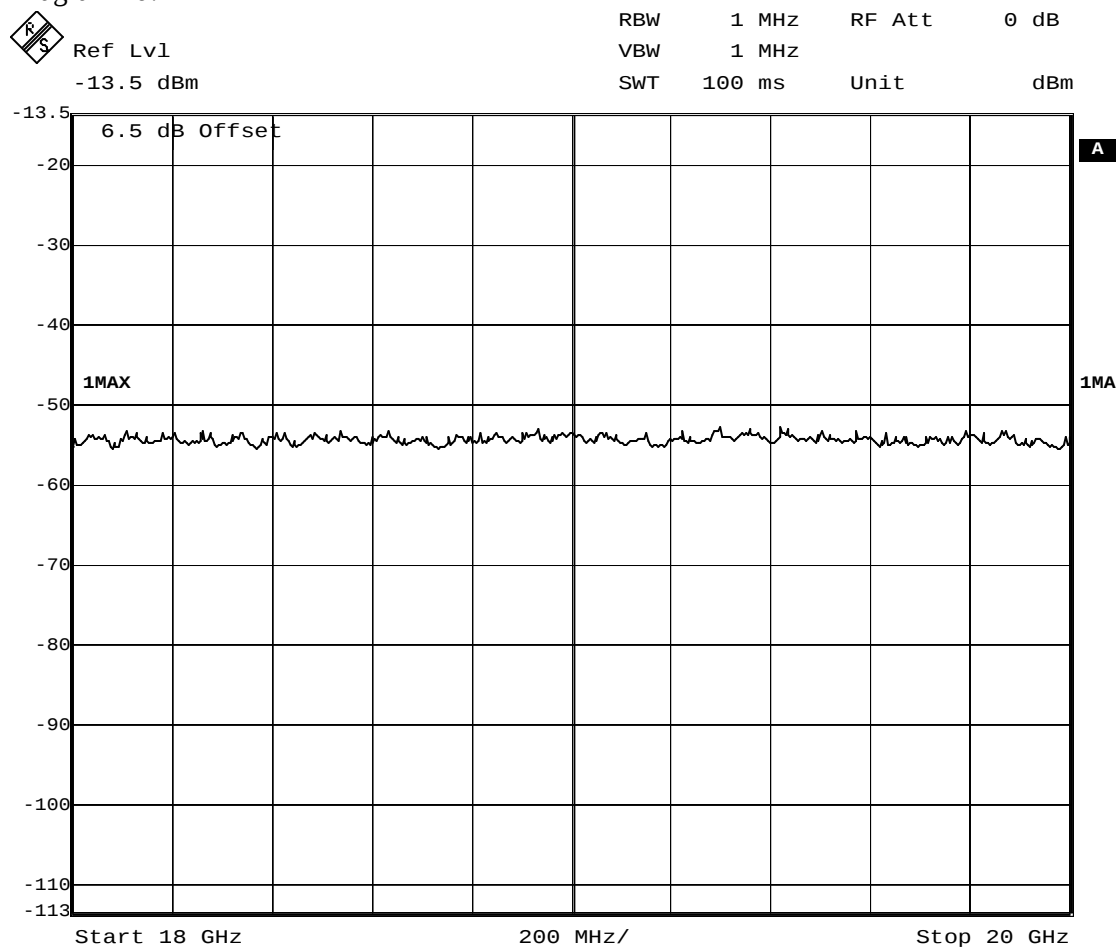

Date: 21.MAY.2014 10:09:23

Appendix 7

Frequency stability measurements according to CFR 47 §24.235 / IC RSS 133 6.3

Date 2014-04 -17 to 2014-04-24	Temperature (test equipment) 22-24 °C ± 3 °C	Humidity (test equipment) 24-27 % ± 5 %
-----------------------------------	---	--

Test set-up and procedure

The measurement was made per 3GPP TS 25.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	502 282
Testo 635, Temperature and humidity meter	504 203
Temperature cabinet	503 360

Results

Nominal Voltage -48 V DC

Maximum output power at mid channel (M). Rated output power level at connector RF A (maximum): 47.8 dBm (60 W)

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	Temp. (°C)	
-48.0	+20	-15
-55.2	+20	19
-40.8	+20	-20
-48.0	+30	14
-48.0	+40	15
-48.0	+50	17
-48.0	+10	14
-48.0	0	19
-48.0	-10	18
-48.0	-20	15
-48.0	-30	16
Maximum freq. error (Hz)		20
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Appendix 7

Remark

It was deemed sufficient to test one combination of TX frequency modulation, as all combinations share a common internal reference to derive the TX frequency from.

Limit according to:

§24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS-133 6.3 Frequency stability:

The carrier frequency shall not depart from the reference frequency in excess of ± 1.0 ppm (± 1960 Hz) for base stations when tested to the temperature and supply voltage variations specified in RSS-Gen.

Complies?	Yes
-----------	-----

Appendix 6

External photos


Front side:




Back side:




Product Label:

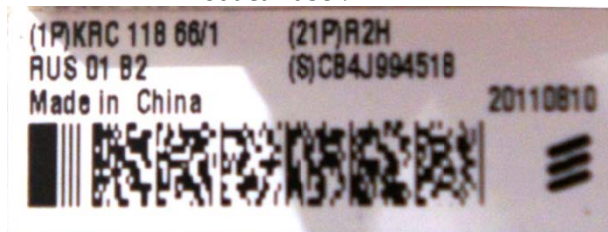

Left side:

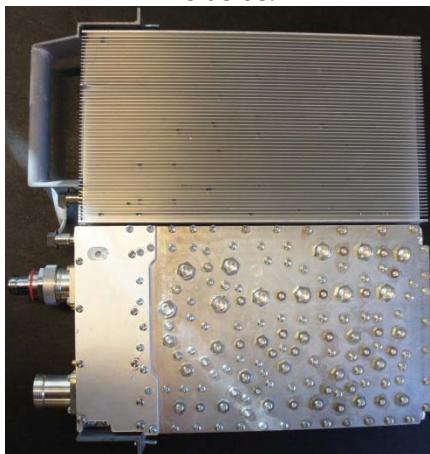

Right side:

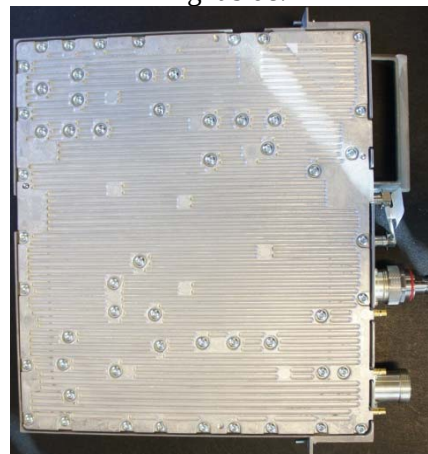

Appendix 6

Top side:



Bottom side:

