



REPORT

Issued by an FCC listed Laboratory Reg. no. 93866.
The test site complies with RSS-Gen, IC file no. 3482A-1

Contact person
Tomas Lennhager
Electronics
+46 10 516 54 09
Tomas.Lennhager@sp.se

Date
2014-05-26

Reference
4P02595-03-F24

Page
1 (2)



1002
ISO/IEC 17025

Ericsson AB
Klaes Holm
PDU HW
164 80 Stockholm

Radio measurements on RUS 01 B2 1900 MHz radio equipment with FCC ID: TA8CKRC11866-1 and IC: 287AB-CS118661

(8 appendices)

Test object

Product name: RUS 01 B2
Product number: KRC 118 66/1, R2H

Summary

See appendix 1 for general information and appendix 8 for external photos.

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-133 ISSUE 6		
2.1046 / RSS-133 6.4 RF power output	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-133 6.5 Band edge	Yes	4
2.1051 / RSS-136 6.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-136 6.5 Field strength of spurious radiation	Yes	6
2.1055 / RSS-133 6.3 Frequency stability	Yes	7

Note: Above RSS-133 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Technical Research Institute of Sweden

Electronics – EMC

Performed by

Examined by

Jörgen Wassholm

Anders Nordlöf

SP Technical Research Institute of Sweden

Postal address
SP
Box 857
SE-501 15 BORÅS
Sweden

Office location
Västeråsen
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail
+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory

Table of contents

Description of the test object	Appendix 1
Purpose of test	Appendix 1
Operation modes during measurements	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
External photos	Appendix 8

Appendix 1

Description of the test object

Equipment:	Radio equipment RUS 01 B2 Product number KRC 118 66/1 FCC ID: TA8CKRC11866-1 IC: 287AB-CS118661 IC MODEL NO: CS118661
Operating bands:	TX: 1930 – 1990 MHz RX: 1850 – 1910 MHz
Antenna ports:	1 TX/RX port 1 RX port
RF configurations:	Single carrier, multi carrier, TX diversity and MIMO 2x2
Nominal output power per antenna port:	Total power: 1x 47.8 dBm, (60 W), 2x 44.7 dBm (2x 30 W) Total number of carriers: 2
Antenna:	No dedicated antenna, handled during licensing
LTE Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidth:	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz and 20 MHz
Nominal supply voltage:	-48VDC

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 and Industry Canada RSS-133 and RSS-Gen.

Appendix 1

Operation modes during measurements**LTE Single RAT, MIMO mode**

LTE measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 represent QPSK modulation, test model E-TM3.2 represent 16QAM modulation and test model E-TM3.1 represent 64QAM modulation.

The settings below were deemed representative for all traffic scenarios when settings with different modulations, channel bandwidths, number of carriers and RF configurations has been tested to find the worst case setting. All measurements were performed with the test object configured for maximum transmit power. The settings below were used for all measurements if not otherwise noted.

LTE MIMO mode 1- carrier
E-TM1.1
Channel bandwidth 1.4 MHz.

LTE MIMO mode 2- carriers
E-TM1.1
Channel bandwidth 1.4 MHz.

Conducted measurements

The test object was hosted in a RBS 6201 powered with -48 VDC. Additional connections are documented in the set-up drawings below.

All measurements were performed on test object 1 (described in the Test setup diagram), running in primary mode.

Radiated measurements

The test object was tested stand-alone. It was powered with -48 VDC. RF A port was terminated into 50 ohm.

References

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2009

ANSI/TIA/EIA-603-C-2004

CFR 47 part 2, October 1st, 2013

CFR 47 part 24, October 1st, 2013

3GPP TS 36.141, version 11.4.0

RSS-Gen Issue 3

RSS-133 Issue 6

Appendix 1

Measurement equipment

	Calibration Due	SP number
Test site Tesla	2017-01	503 881
R&S FSIQ 40	2014-07	503 738
R&S ESIB 26	2014-07	503 292
R&S FSQ 40	2014-07	504 143
Control computer with R&S software EMC32 version 8.52.0	-	503 899
High pass filter	2015-01	BX40074
High pass filter	2014-07	901 501
High pass filter	2014-07	901 502
High pass filter	2014-07	504 199
High pass filter	2014-09	901 373
High pass filter	2014-09	503 739
High pass filter	2014-07	503 740
RF attenuator	2014-07	504 159
RF attenuator	2014-07	900 233
RF attenuator	2014-07	900 691
RF attenuator	2014-07	901 384
RF attenuator	2014-11	901 508
Chase Bilog Antenna CBL 6111A	2014-10	503 182
EMCO Horn Antenna 3115	2015-09	502 175
Std.gain horn FLANN model 20240-20	-	503 674
µComp Nordic, Low Noise Amplifier	2014-04	901 545
Miteq Low Noise Amplifier	2014-09	503 285
Schwartzbeck preamplifier BBV 9742	2014-04	504 085
Temperature and humidity meter, Testo 635	2015-03	504 203
Temperature and humidity meter, Testo 625	2014-06	504 188
Temperature Chamber	2015-03	503 360
Multimeter Fluke 87	2014-08	502 190

Appendix 1

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered 2013-09-27 and 2014-03-28..

Manufacturer's representative

Christer Gustavsson, Ericsson AB.

Test engineers

Andreas Johnson, Tomas Isbring, Maulo Rivera, Kexin Chen, Tomas Lennhager, Jörgen Wassholm and Rolf Kühn SP.

Test participant

None.

Appendix 1

Test frequencies used for conducted and radiated measurements

MIMO, single carrier TX test frequencies

EARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
607	1930.7	B	TX bottom frequency in 1.4 MHz BW configuration
615	1931.5	B	TX bottom frequency in 3 MHz BW configuration
625	1932.5	B	TX bottom frequency in 5 MHz BW configuration
650	1935.0	B	TX bottom frequency in 10 MHz BW configuration.
675	1937.5	B	TX bottom frequency in 15 MHz BW configuration.
700	1940.0	B	TX bottom frequency in 20 MHz BW configuration.
900	1960.0	M	TX band mid frequency all BW configurations
1100	1980.0	T	TX top frequency in 20 MHz BW configuration.
1125	1982.5	T	TX top frequency in 15 MHz BW configuration.
1150	1985.0	T	TX top frequency in 10 MHz BW configuration.
1175	1987.5	T	TX top frequency in 5 MHz BW configuration
1185	1988.5	T	TX top frequency in 3 MHz BW configuration
1193	1989.3	T	TX top frequency in 1.4 MHz BW configuration


MIMO, multi carrier TX test frequencies

EARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
607 657	1930.7 1935.7	B2	TX bottom frequency in 1.4 MHz BW configuration 2 carriers.
615 665	1931.5 1936.5	B3	TX bottom frequency in 3 MHz BW configuration 2 carriers.
607 621	1930.7 1932.1	B2im1	TX bottom frequency in 1.4 MHz BW configuration 2 carriers.
700 812	1940.0 1951.2	B2im2	TX bottom frequency in 1.4 MHz BW configuration 2 carriers.
850 950	1955.0 1965.0	M2	TX band mid frequency in 1.4 MHz BW configuration 2 carriers.
875 925	1957.5 1962.5	M3	TX band mid frequency in 1.4 MHz BW configuration 2 carriers.
1193 1143	1989.3 1984.3	T2	TX bottom frequency in 1.4 MHz BW configuration 2 carriers.
1185 1135	1988.5 1983.5	T3	TX bottom frequency in 3 MHz BW configuration 2 carriers.
1193 1179	1989.3 1987.9	T2im1	TX bottom frequency in 1.4 MHz BW configuration 2 carriers.
1100 988	1980.0 1968.8	T2im2	TX bottom frequency in 1.4 MHz BW configuration 2 carriers.

All RX frequencies were configured 80 MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

Appendix 1

Test setup conducted measurements

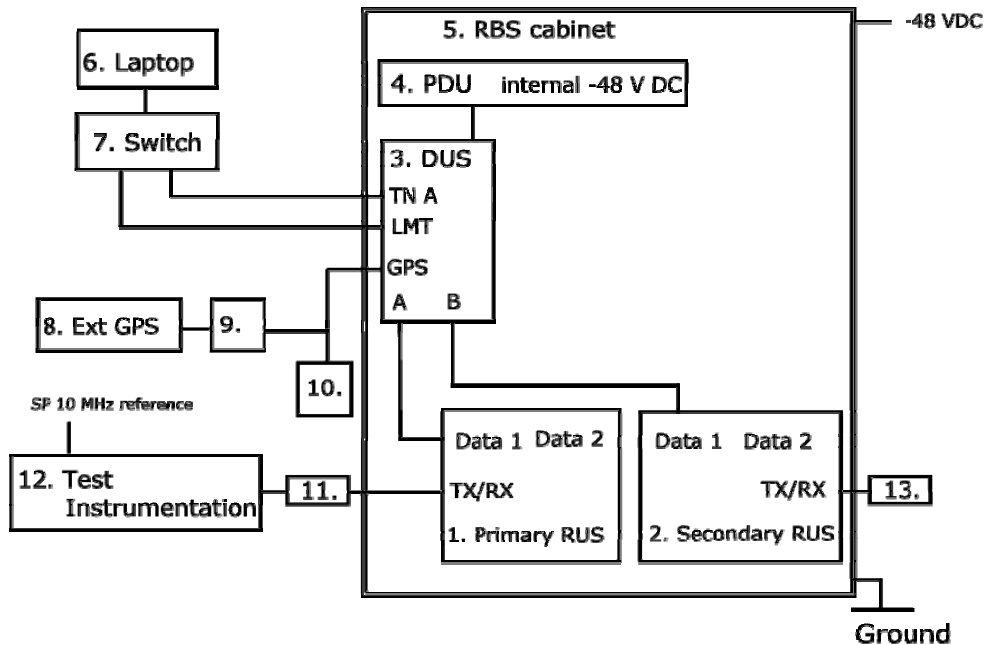

Note: Unconnected interfaces were omitted in the picture for simplicity, but are listed in the interface table on page 7.

Test object:


1.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: : CB4J994518, Test object: primary/ secondary
2.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: : CB4J994533, Dummy (secondary/ primary) software CXP 901 3268/6, rev. R54XD For Frequency stability RUS 01 B2, KRC 118 66/1, rev. R2H, s/n: : CB4J994533 was used FCC ID: TA8CKRC11866-1 and IC: 287AB-CS118661

Functional test equipment:

3.	DUS 41 01, KDU 137 624/1, rev. R5A, s/n: D165724695
4.	PDU 02 02, BMG 980 336/5, rev. R1F, s/n: X051445683
5.	RBS 6201 cabinet, BAMS – 1000778792
6.	Laptop, EliteBook 8560w, BAMS – 1001236856
7.	Fast Ethernet switch, Netgear FS726T
8.	GPS Active Antenna, KRE 101 2082/1
9.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K474887
10.	Power supply, Mascot Type 719
11.	Attenuator, filter, according respective appendix
12.	SP test instrument according measurement equipment list
13.	Terminator

Appendix 1

Test setup radiated measurements

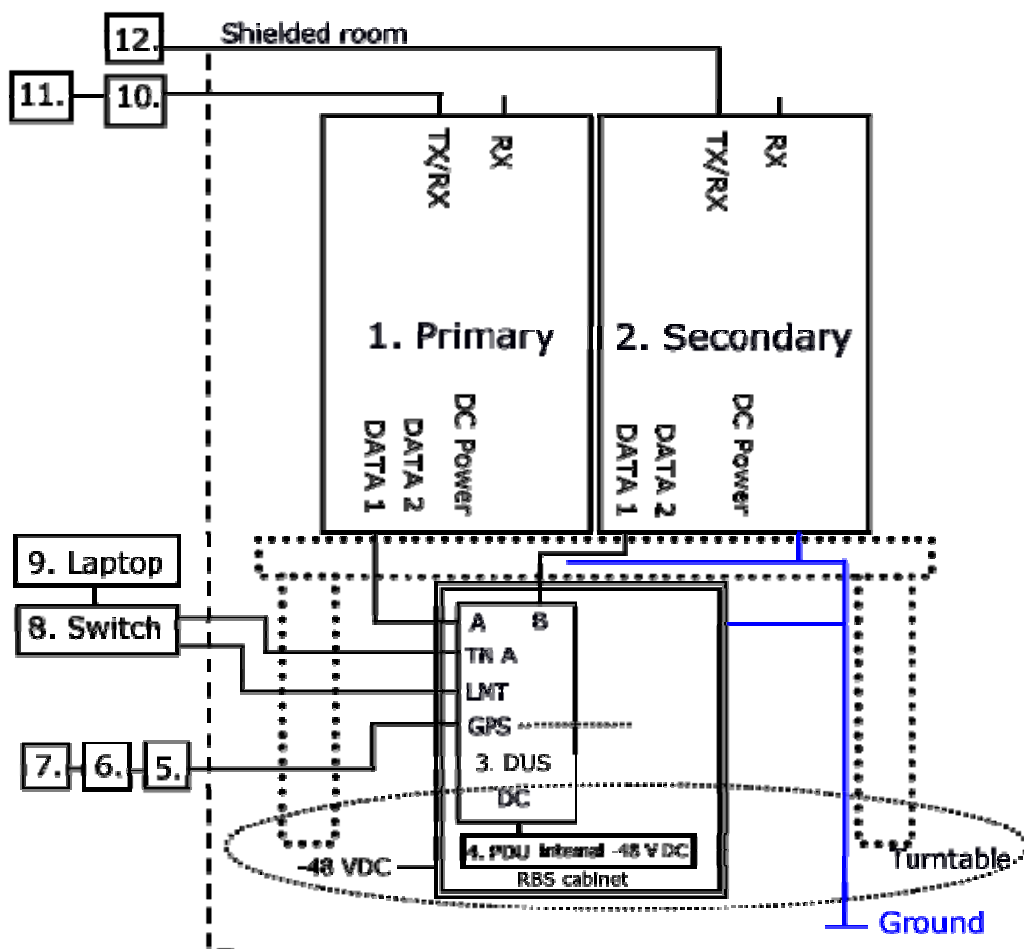

Test object:

1.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n : CB4J994518, Test object: primary/ secondary
2.	RUS 01 B2, KRC 118 66/1, rev. R2H, s/n : CB4J994533, Dummy (secondary/ primary) working software CXP 901 3268/6, rev. R54XDwith FCC ID: TA8CKRC11866-1 and IC: 287AB-CS118661

Functional test equipment:

3.	DUS 41 01, KDU 137 624/1, rev. R5A, s/n: D165724695
4.	RBS 6202: PDU 02 02, BMG 980 336/5, rev. R1F, s/n: X051445683
5.	Power supply, Mascot Type 719
6.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K356428
7.	GPS Active Antenna, KRE 101 2082/1
8.	Switch Netgear FS726T
9.	Laptop, EliteBook 8560w, BAMS – 1001236856
10.	Attenuator
11.	ESI 26, SP number: 503 292, for supervision purpose only
12.	Terminator

Appendix 1

Interfaces:
Type of port:

Power: -48 VDC	DC Power
Antenna port (A), 7/16 connector, combined TX/RX	Antenna
Antenna port (B), 7/16 connector, only RX	Antenna
Data 1, electrical interface	Signal
Data 2, electrical interface	Signal
RX A Out, no cable attached	RF
RX A I/O, no cable attached	RF
RX B I/O, no cable attached	RF
Ground wire	Ground

RBS software:

Software	Revision
CXP 102 051/18	R32AV

Appendix 2

RF power output measurements according to CFR 47 §2.1046 / IC RSS-133 6.4

Date	Temperature	Humidity
2013-11-07	22 °C ± 3 °C	31 % ± 5 %
2013-11-08	22 °C ± 3 °C	31 % ± 5 %
2013-11-11	21 °C ± 3 °C	35 % ± 5 %
2013-11-12	21 °C ± 3 °C	35 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results

Single carrier, MIMO

Rated output power level at RF connector 1x 47.8 dBm.

Carrier BW [MHz]	Symbolic name	[RMS dBm/ PAR dB]		
		Primary	Secondary	Total power ¹⁾
1.4	B	47.69/ 7.16	47.60/ 7.16	50.66
20	B	47.70/ 7.43	47.65/ 7.45	50.69
1.4	M	47.54/ 7.16	47.57/ 7.16	50.57
3	M	47.70/ 7.24	47.66/ 7.24	50.69
5	M	47.61/ 7.33	47.76/ 7.33	50.70
10	M	47.50/ 7.26	47.65/ 7.26	50.59
15	M	47.53/ 7.28	47.61/ 7.26	50.58
20	M	47.70/ 7.28	47.63/ 7.28	50.68
1.4	T	47.56/ 7.16	47.49/ 7.19	50.54
20	T	47.73/ 7.36	47.63/ 7.36	50.69

¹⁾: Summed output power according to FCC KDB662911 Multiple transmitter output v02r01.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Appendix 2

MIMO mode, multicarrier

Rated output power level at RF connector 2x 44.8 dBm.

Carrier BW [MHz]	Symbolic name	[RMS dBm/ PAR dB]		
		Primary	Secondary	Total power ¹⁾
1.4	B2	47.32/ 7.12	47.48/ 7.12	50.41
3	B3	47.56/ 6.88	47.57/ 6.90	50.58
1.4	M3	47.51/ 7.07	47.44/ 7.09	50.49
1.4	T2	47.44/ 7.07	47.41/ 7.12	50.44
3	T3	47.49/ 6.85	47.45/ 6.85	50.48

¹⁾: Summed output power according to FCC KDB662911 Multiple transmitter output v02r01.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Single carrier, MIMO

Measured output power per 1 MHz.

Carrier BW [MHz]	Symbolic name	[RMS dBm]		Total power ¹⁾ [RMS dBm]
		Primary	Secondary	
1.4	B	46.47	46.33	49.47
20	B	35.70	35.71	38.71
1.4	M	46.50	46.52	49.52
3.0	M	43.79	43.77	46.79
5.0	M	41.50	41.57	44.57
10.0	M	38.47	38.60	41.60
15.0	M	36.67	36.87	39.87
20.0	M	35.66	35.60	38.66
1.4	T	46.53	46.53	49.53
20	T	35.68	35.56	38.68

¹⁾: Measured according to FCC KDB662911 D01 Multiple Transmitter Output v02r01. Method E), 2), c). “Measure and add 10 log(N_{Ant})”.

Appendix 2

Remark

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limits

§24.232 The maximum output power may not exceed 3280 W/MHz (EIRP).
The Peak to Average Ratio (PAR) may not exceed 13 dB.

RSS-133 Base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts. When the transmitter power is measured in terms of average value, the peak-to-average ratio(PAR) of the power shall not exceed 13 dB

There is no EIRP limit specified for base station equipment in the RSS-133.

EIRP compliance is addressed at the time of licensing, as required by the responsible IC Bureau. Licensee's are required to take into account the antenna gain to get the maximum usable power settings to prevent the radiated output power to exceed the EIRP limits specified in SRSP-510

Complies?	Yes
-----------	-----

Appendix 3

Occupied bandwidth measurements according to 47 CFR 2.1049 / RSS-Gen 4.6.1

Date	Temperature	Humidity
2013-11-11	21 °C ± 3 °C	35 % ± 5 %
2013-11-12	21 °C ± 3 °C	35 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
Testo 635 temperature and humidity meter	504 203


Measurement uncertainty: 3.7 dB

Results

Diagram	BW configuration [MHz]	Symbolic name	Test mode	OBW (99%) [MHz]
1	1.4	B	Primary	1.09
2	20	B	Primary	17.86
3	1.4	M	Primary	1.09
4	1.4	M	Secondary	1.09
5	3	M	Primary	2.69
6	5	M	Primary	4.48
7	10	M	Primary	8.94
8	15	M	Primary	13.42
9	20	M	Primary	17.86
10	20	M	Secondary	17.86
11	1.4	T	Primary	1.09
12	20	T	Primary	17.86


Appendix 3

Diagram 1:

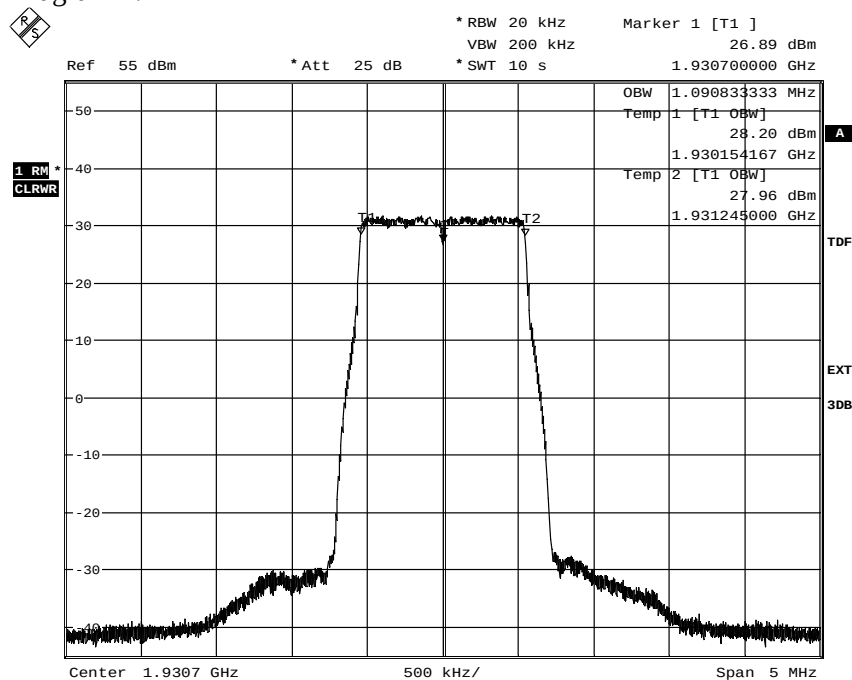

Date: 12.NOV.2013 15:52:13


Diagram 2:

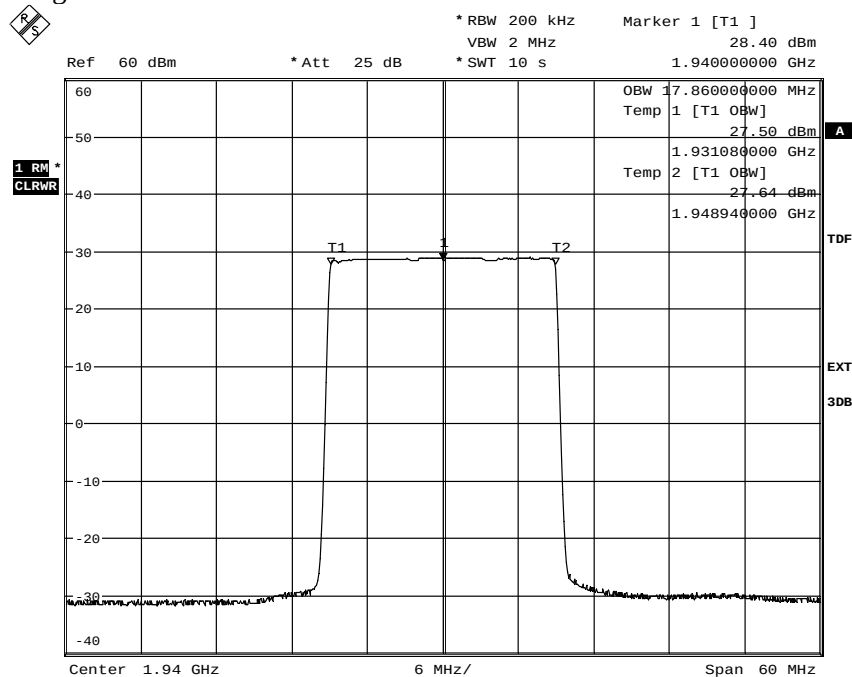

Date: 12.NOV.2013 08:40:17


Appendix 3

Diagram 3:

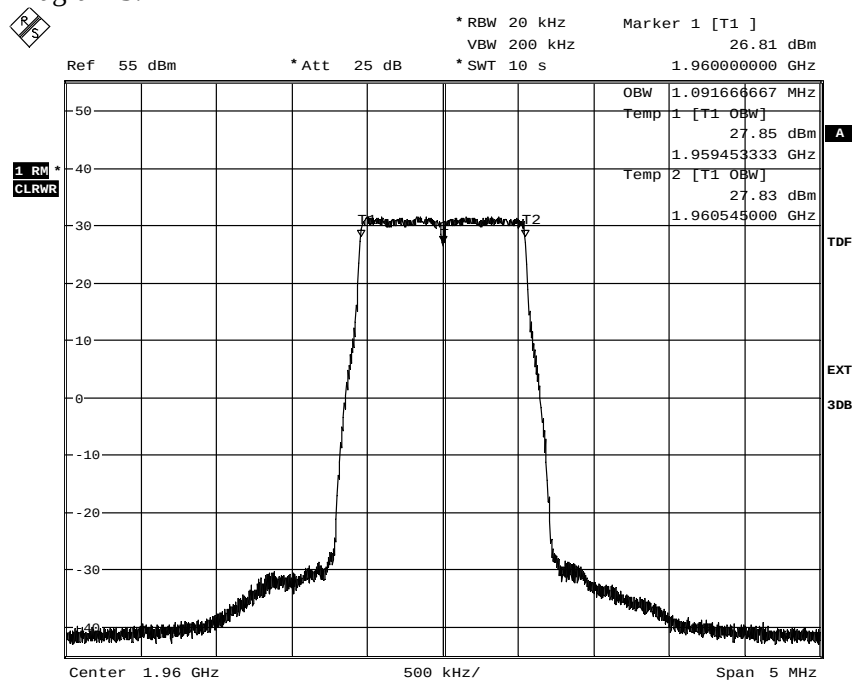

Date: 12.NOV.2013 10:24:36

Diagram 4:

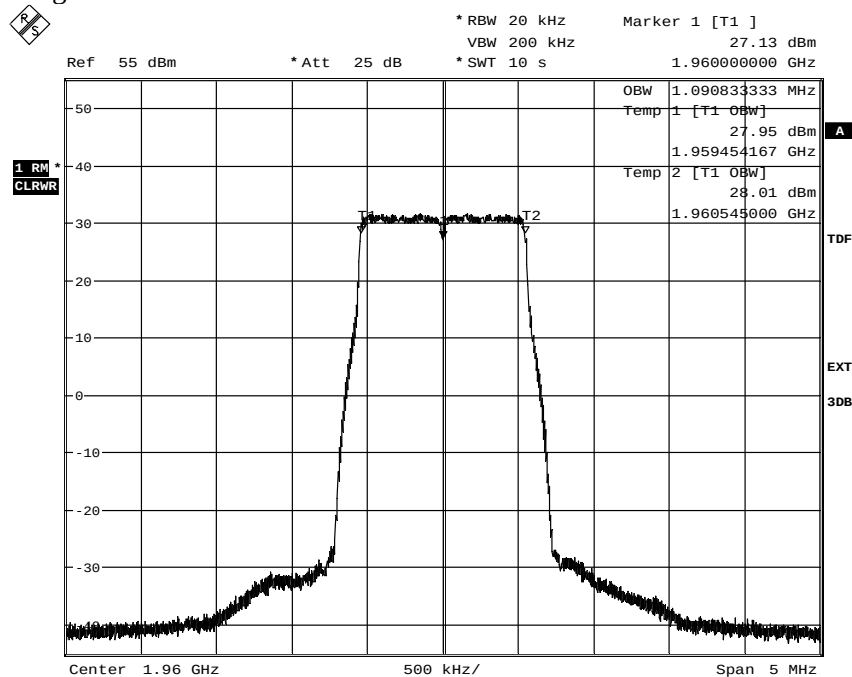


Date: 12.NOV.2013 15:55:13




Appendix 3

Diagram 5:

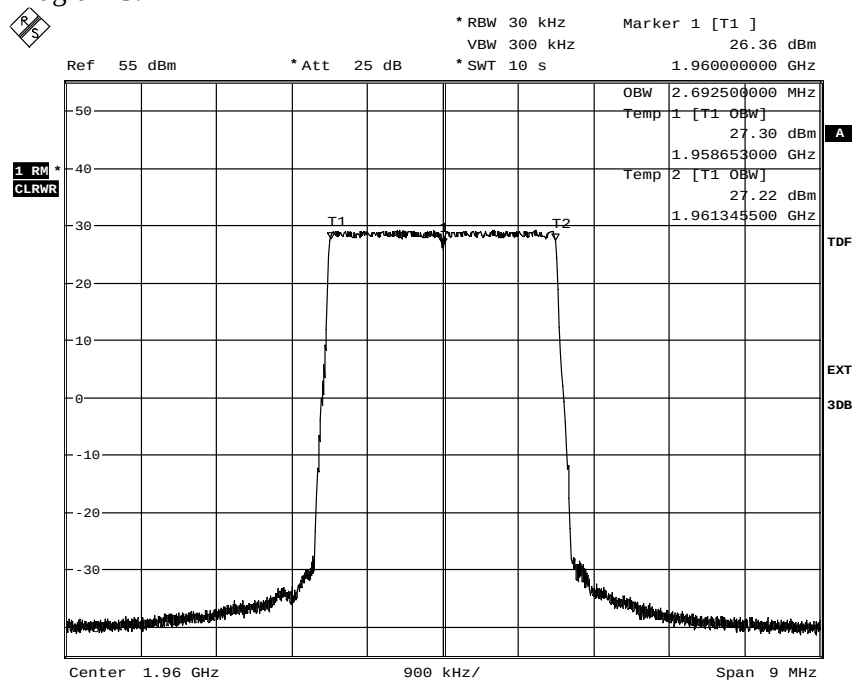

Date: 12.NOV.2013 09:53:08

Diagram 6:

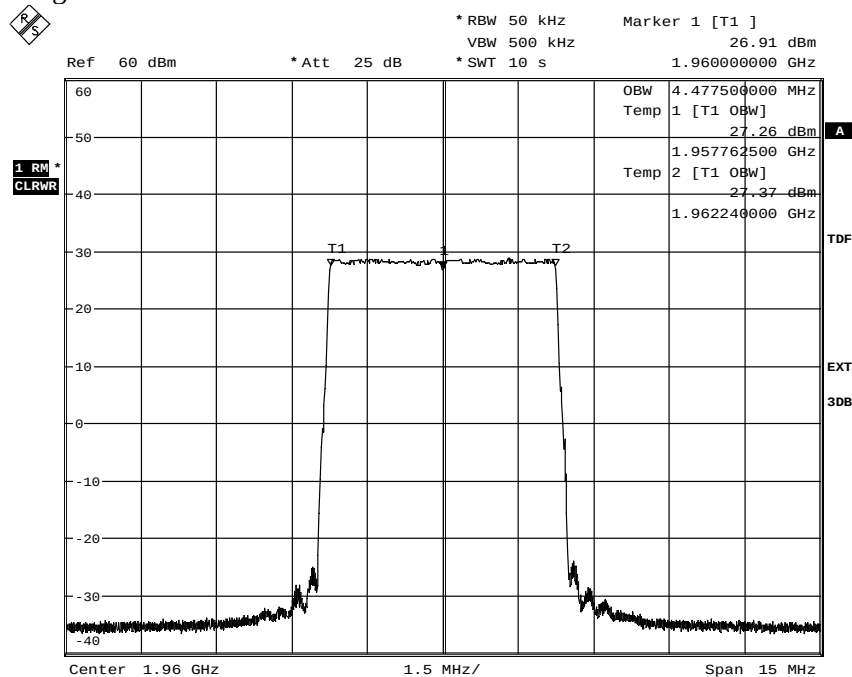


Date: 12.NOV.2013 10:35:34




Appendix 3

Diagram 7:

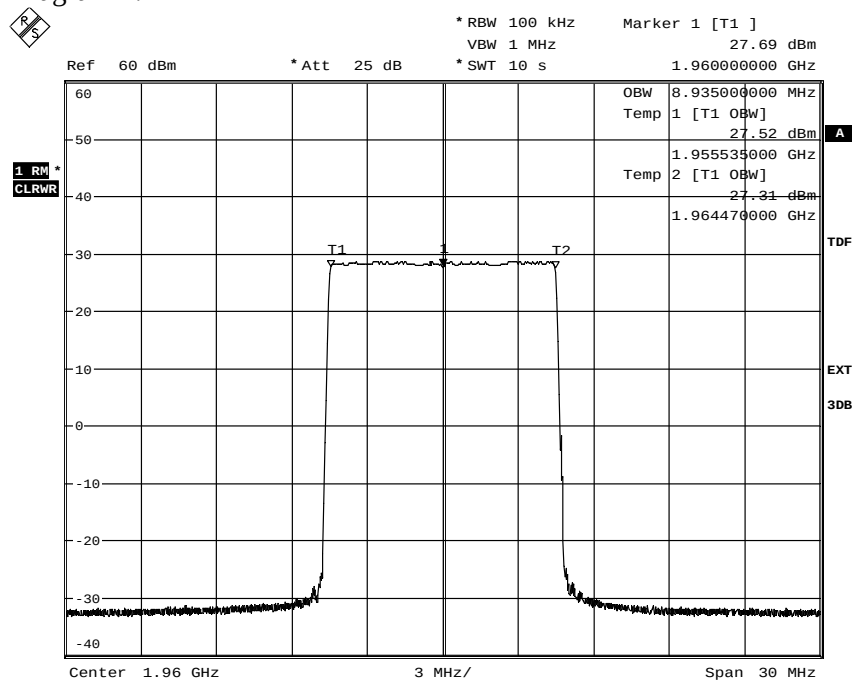

Date: 12.NOV.2013 10:49:44

Diagram 8:

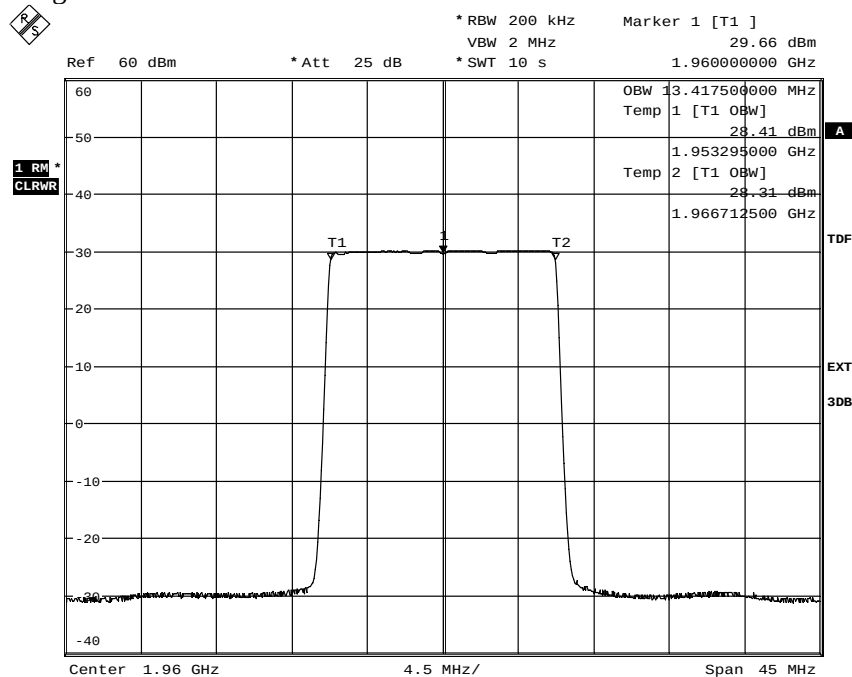


Date: 12.NOV.2013 11:02:46




Appendix 3

Diagram 9:

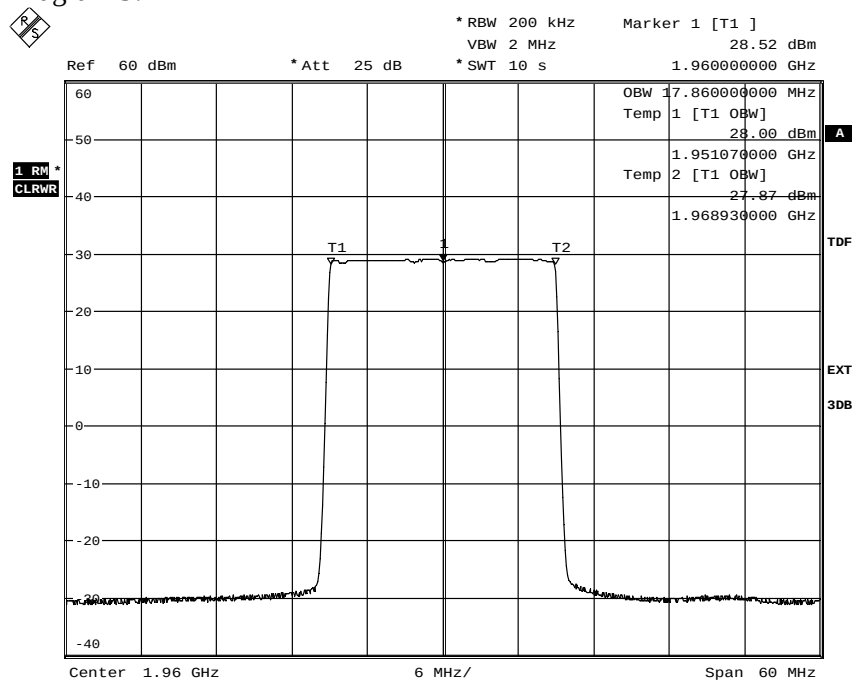

Date: 12.NOV.2013 11:40:36

Diagram 10:

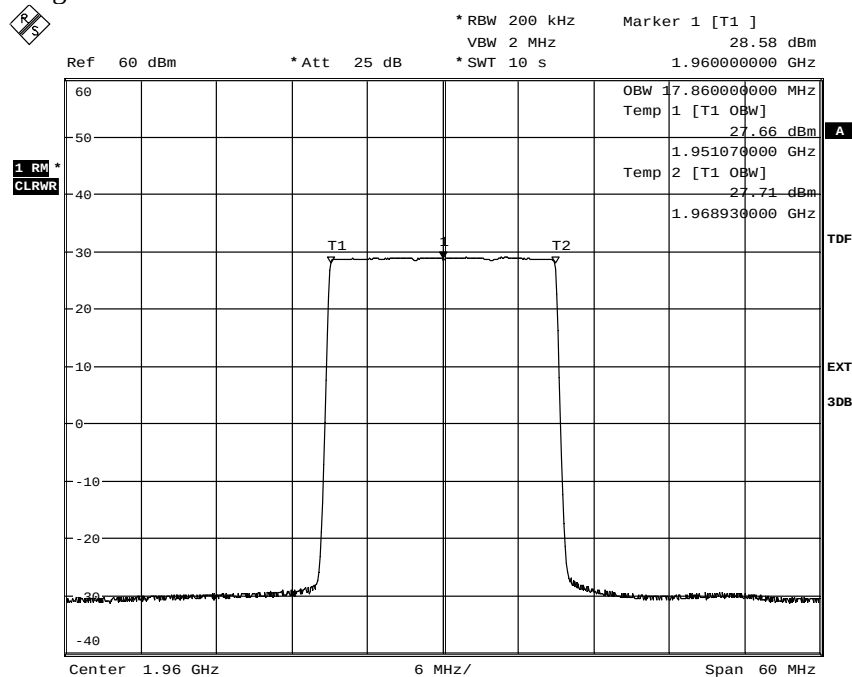


Date: 12.NOV.2013 08:53:33




Appendix 3

Diagram 11:

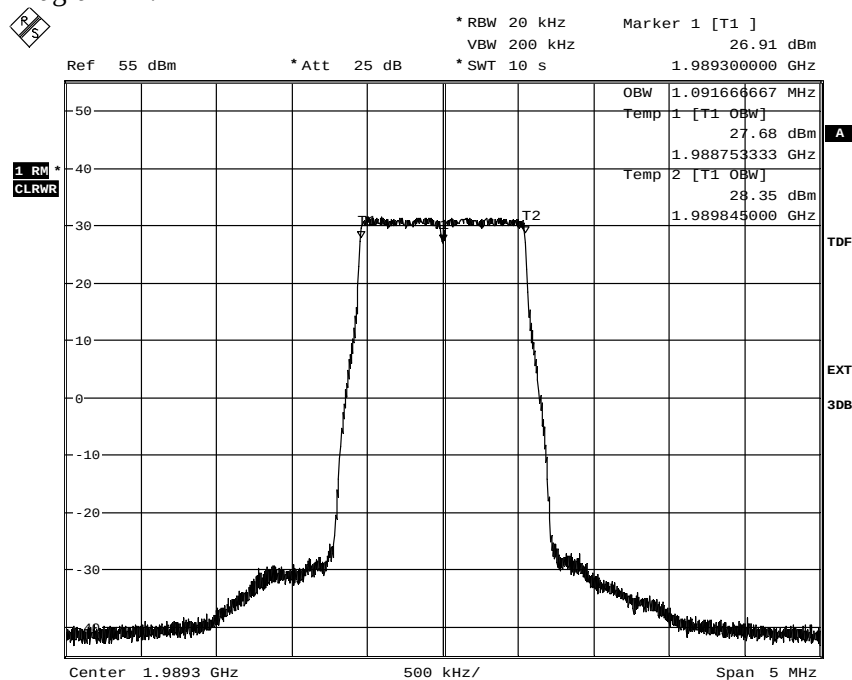

Date: 12.NOV.2013 12:44:42

Diagram 12:

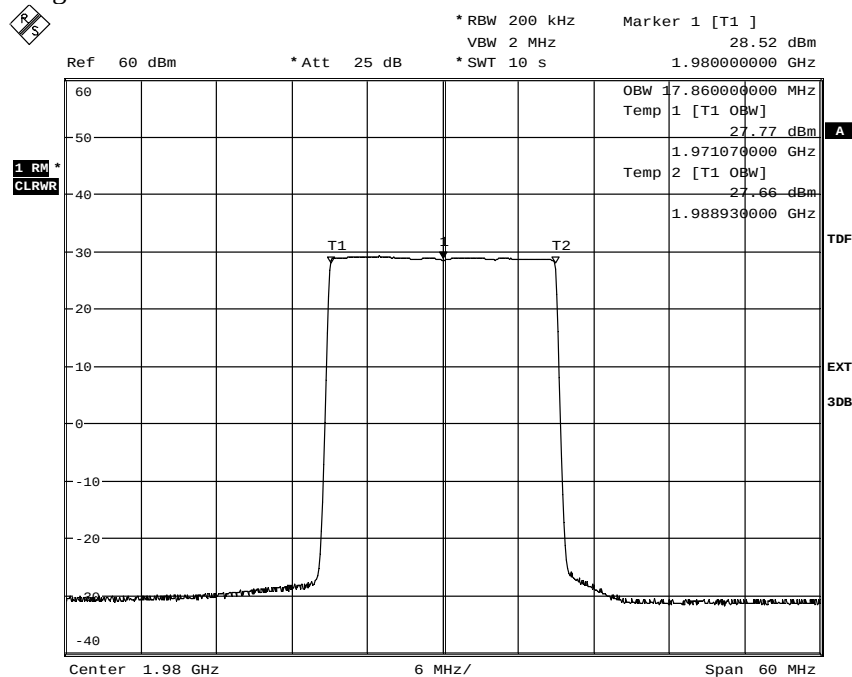

Date: 12.NOV.2013 11:48:52

Appendix 4

Band edge measurements according to CFR 47 §2.1051 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-07	22 °C ± 3 °C	31 % ± 5 %
2013-11-08	22 °C ± 3 °C	31 % ± 5 %
2013-11-11	21 °C ± 3 °C	35 % ± 5 %
2013-11-12	21 °C ± 3 °C	35 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Beyond the 1st MHz off the band edges the limit was adjusted to compensate for reduced measurement bandwidths pursuant to the FCC rules, specifying a RBW of at least 1% of the fundamental emission bandwidth up to 1 MHz away from the band edges and a RBW of 1 MHz for measurements of emissions more than 1 MHz away from the band edges.

Where a smaller RBW was used as compared to the rules, the limit in the plot is adjusted by $10 \log (\text{RBW}_{\text{used}} / \text{RBW}_{\text{specified}})$ [dB].

BW configuration [MHz]	Emission BW [MHz]	RBW _{used} [kHz]	Adjusted limit to [dBm]
1.4	1.12	10	-13.5
3	2.73	10	-17.4

Before comparing the results to the limit, 3 dB [$10 \log (2)$] should be added according to method E), 3, (iii) “measure and add $10 \log (N_{\text{ANT}})$ ” of FCC KDB662911 D01 Multiple Transmitter Output v02r01

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 4

Results

1-carrier, MIMO:

Diagram	BW configuration [MHz]	Symbolic name	Test mode
1 a+b+c	1.4	B	Primary
2 a+b+c	3	B	Primary
3 a+b+c	5	B	Primary
4 a+b+c	10	B	Primary
5 a+b+c	15	B	Primary
6 a+b+c	20	B	Primary
7 a+b+c	1.4	T	Primary
8 a+b+c	3	T	Primary
9 a+b+c	3	T	Secondary
10 a+b+c	5	T	Primary
11 a+b+c	10	T	Primary
12 a+b+c	15	T	Primary
13 a+b+c	20	T	Primary

2- carrier, MIMO:

Diagram	BW configuration	Symbolic name	Test mode
14 a+b+c	3 MHz	B3	Primary
15 a+b+c	3 MHz	T3	Primary

Appendix 4

The diagrams are shown on the following pages.

Remark

Where multiple requirements apply, the most stringent requirement is considered for compliance assessment.


Limits

CFR 47 §24.238 and RSS-133 6.5: Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----


Appendix 4

Diagram 1 a:

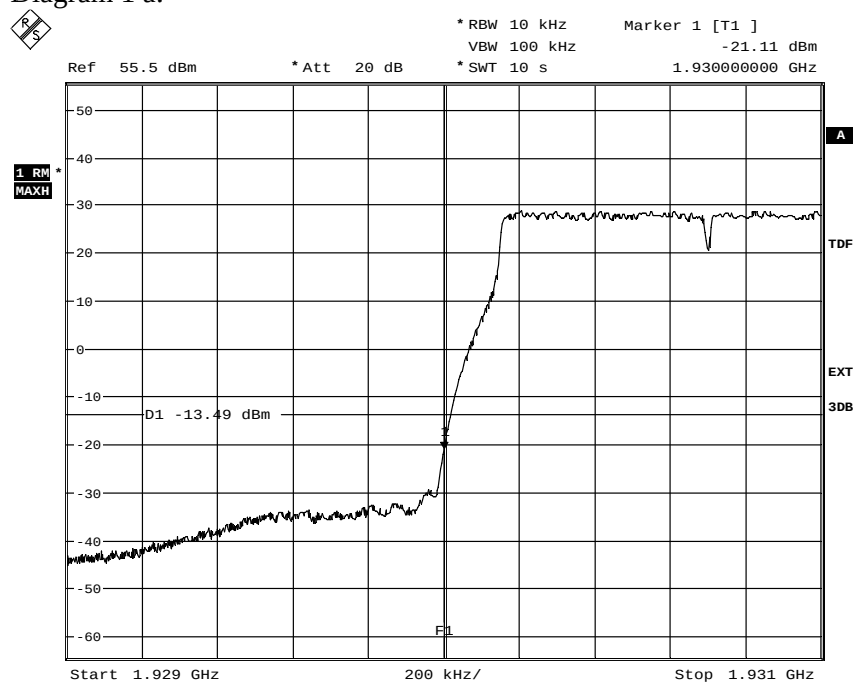

Date: 11.NOV.2013 20:29:06

Diagram 1 b:

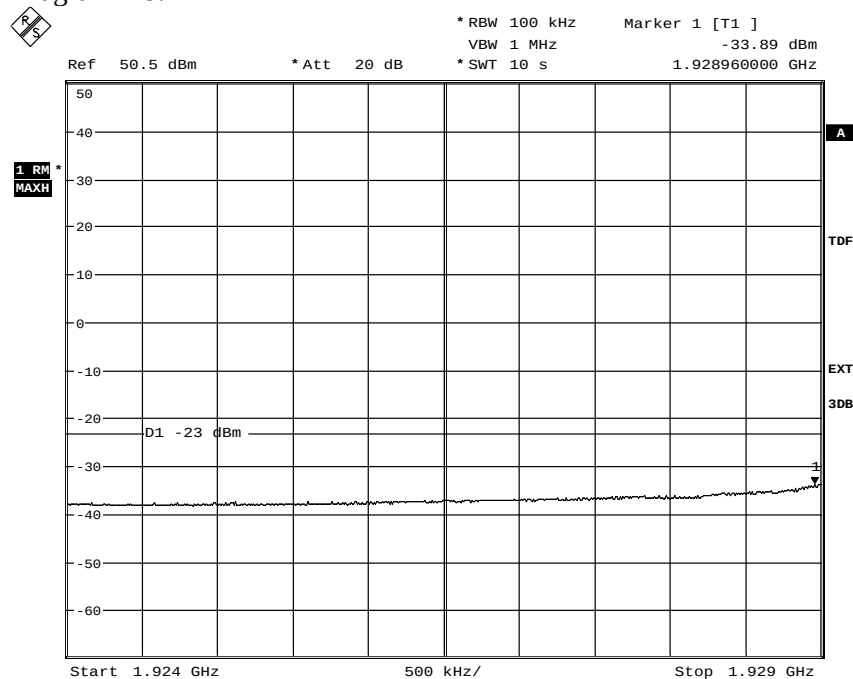


Date: 11.NOV.2013 20:27:28



Appendix 4


Diagram 1 c:

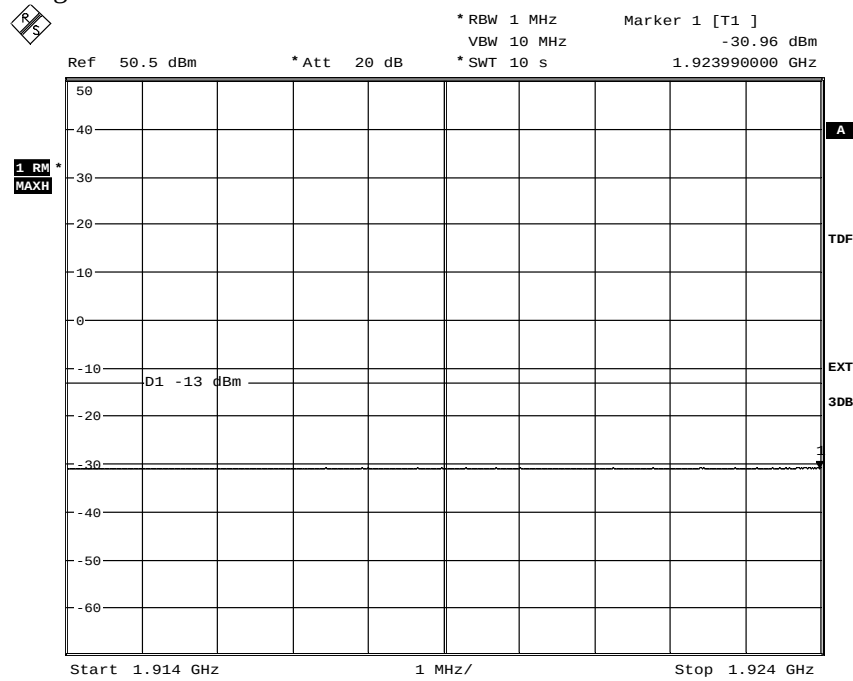

Date: 11.NOV.2013 20:30:58


Appendix 4

Diagram 2 a:

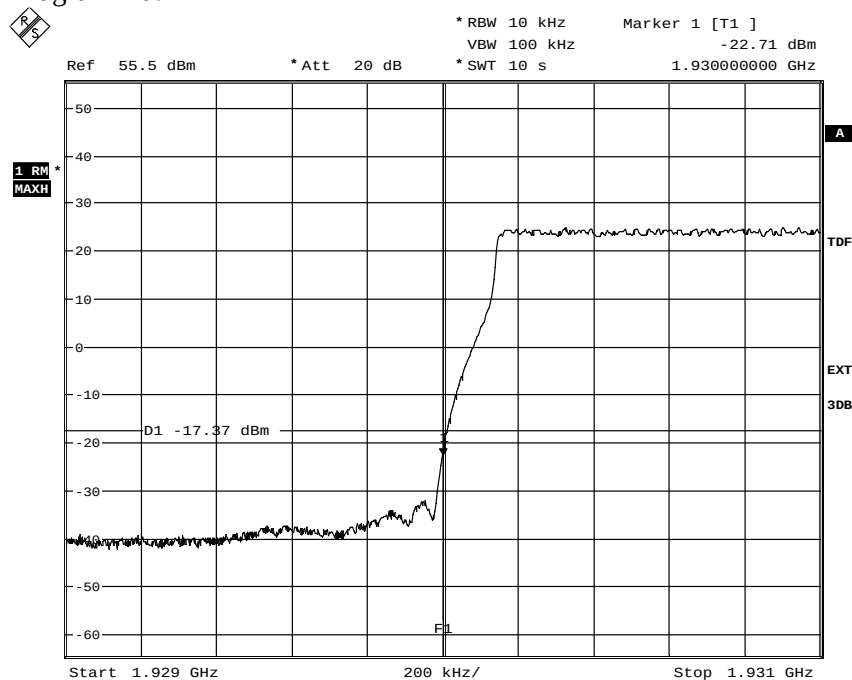

Date: 11.NOV.2013 21:01:13


Diagram 2 b:

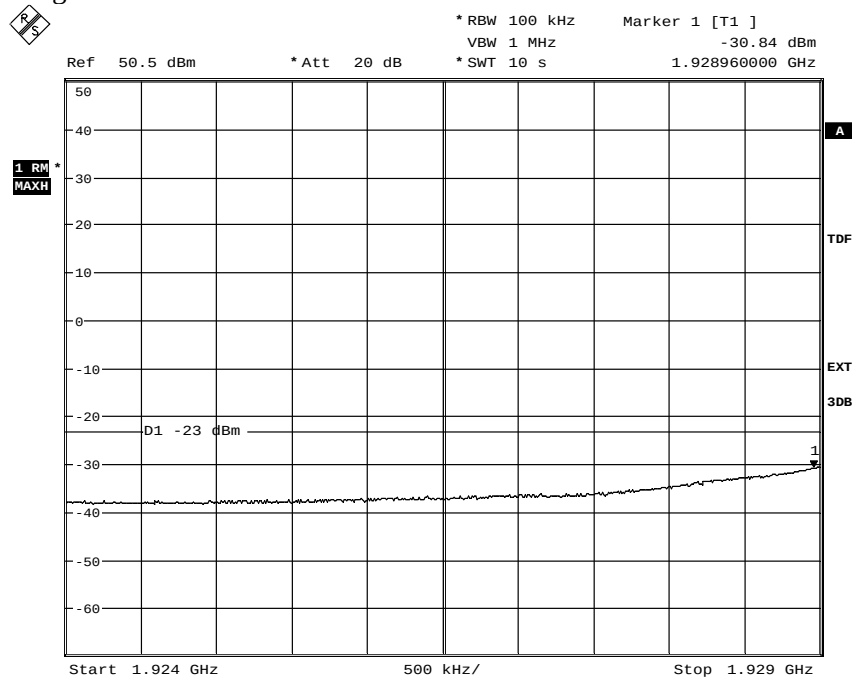

Date: 11.NOV.2013 20:59:45

Appendix 4


Diagram 2 c:

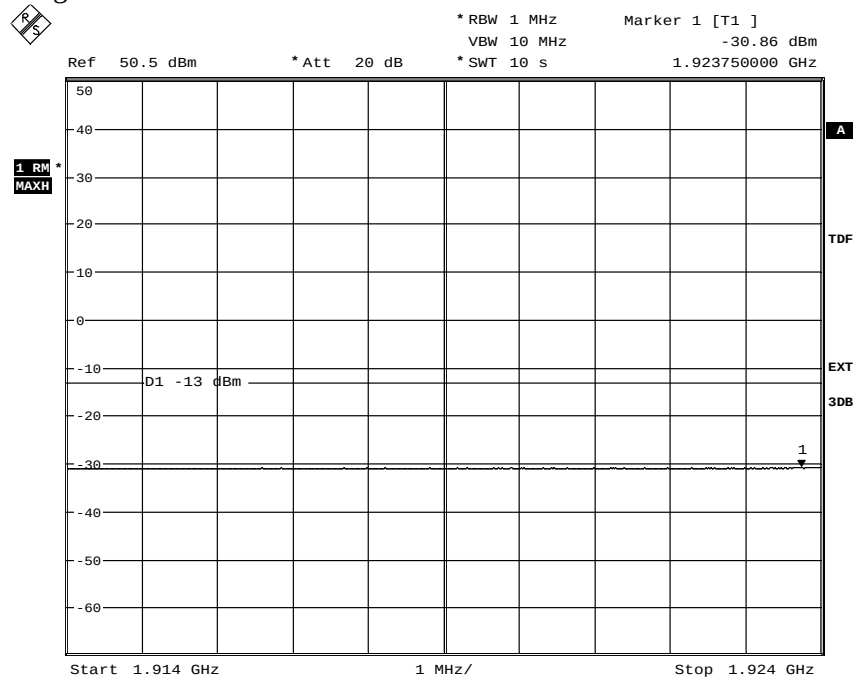

Date: 11.NOV.2013 20:58:43


Appendix 4

Diagram 3 a:

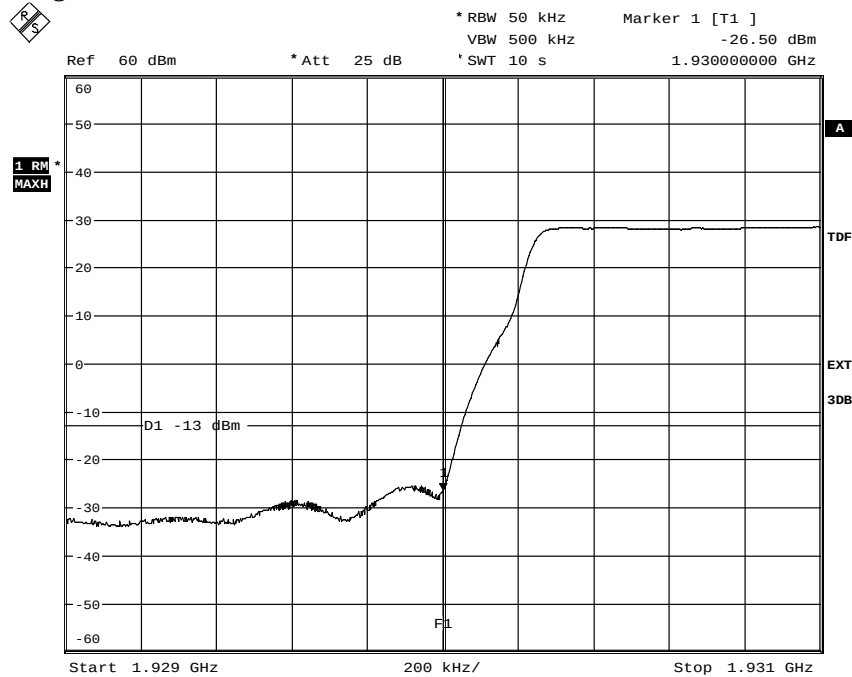

Date: 11.NOV.2013 21:31:34

Diagram 3 b:

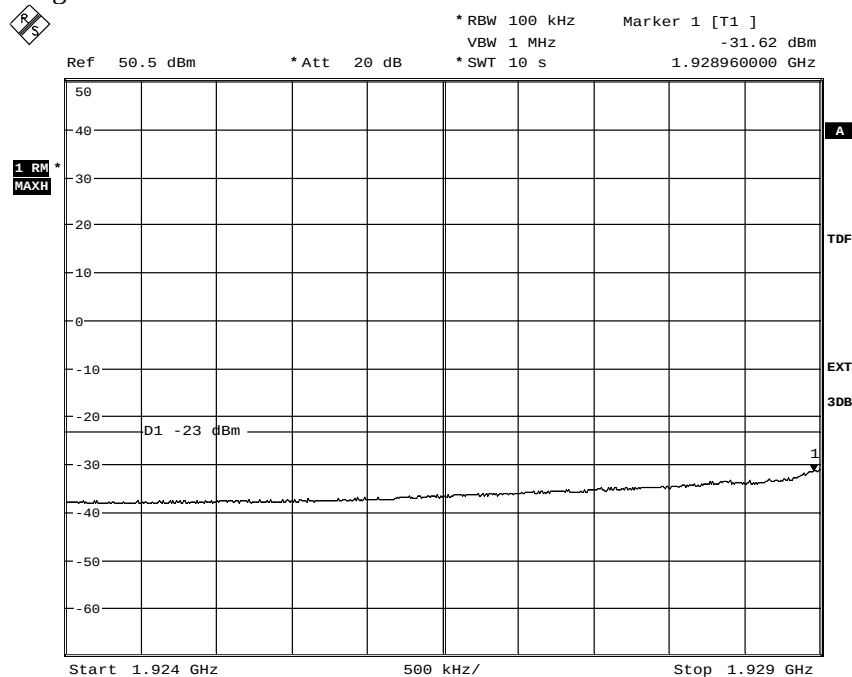


Date: 11.NOV.2013 21:32:36



Appendix 4


Diagram 3 c:

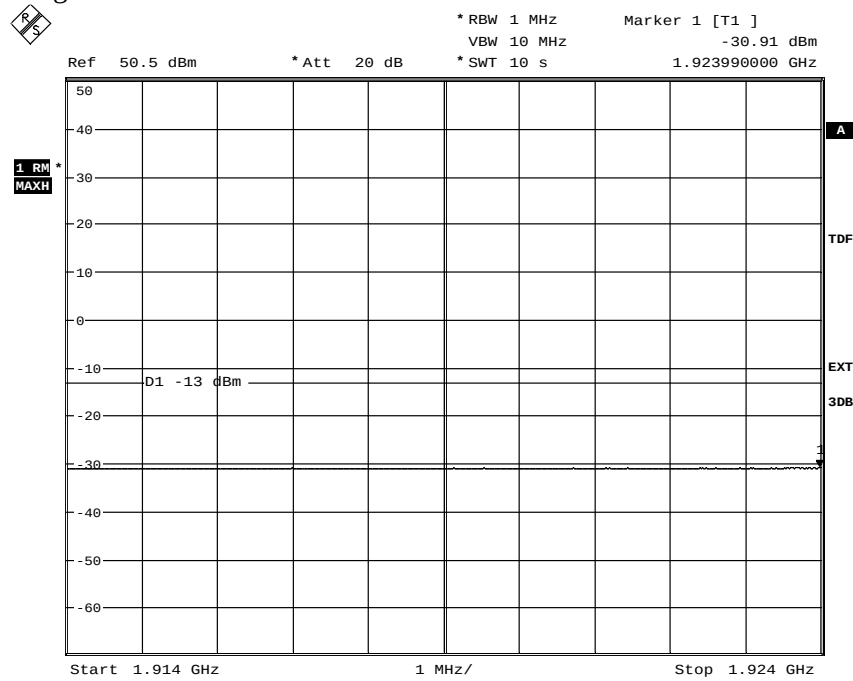

Date: 11.NOV.2013 21:33:29


Appendix 4

Diagram 4 a:

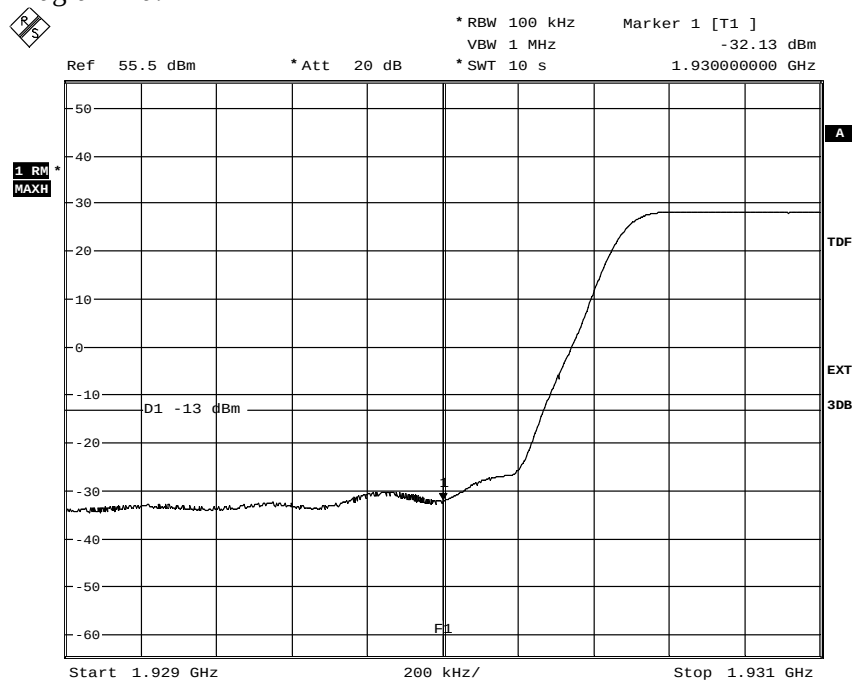

Date: 11.NOV.2013 21:38:34

Diagram 4 b:

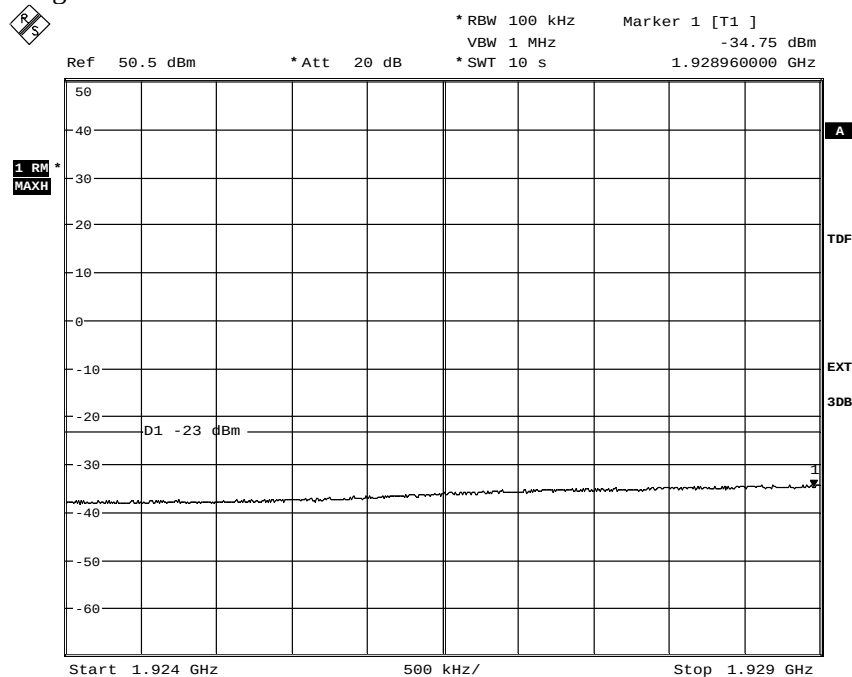


Date: 11.NOV.2013 21:37:25



Appendix 4


Diagram 4 c:

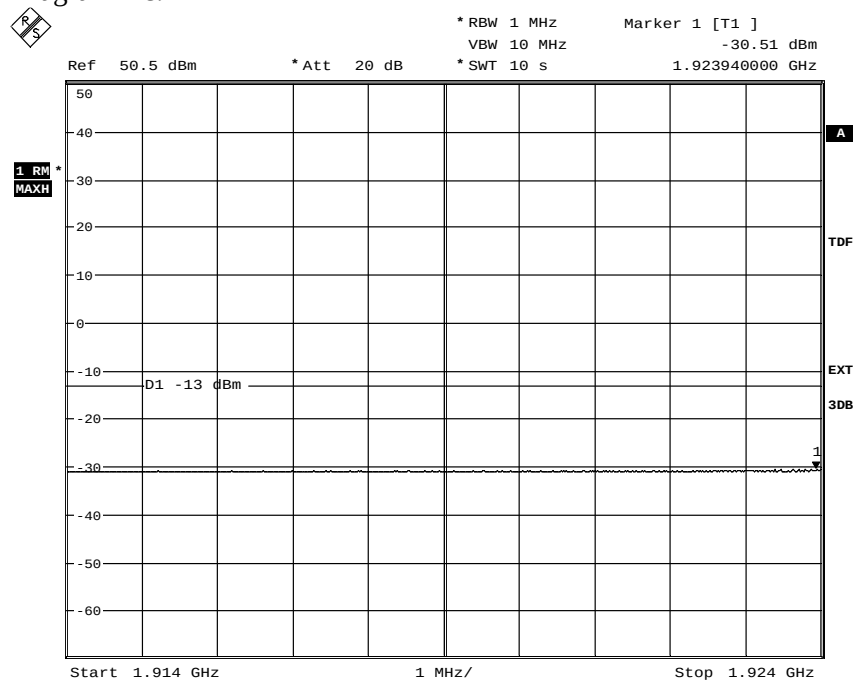

Date: 11.NOV.2013 21:36:14


Appendix 4

Diagram 5 a:

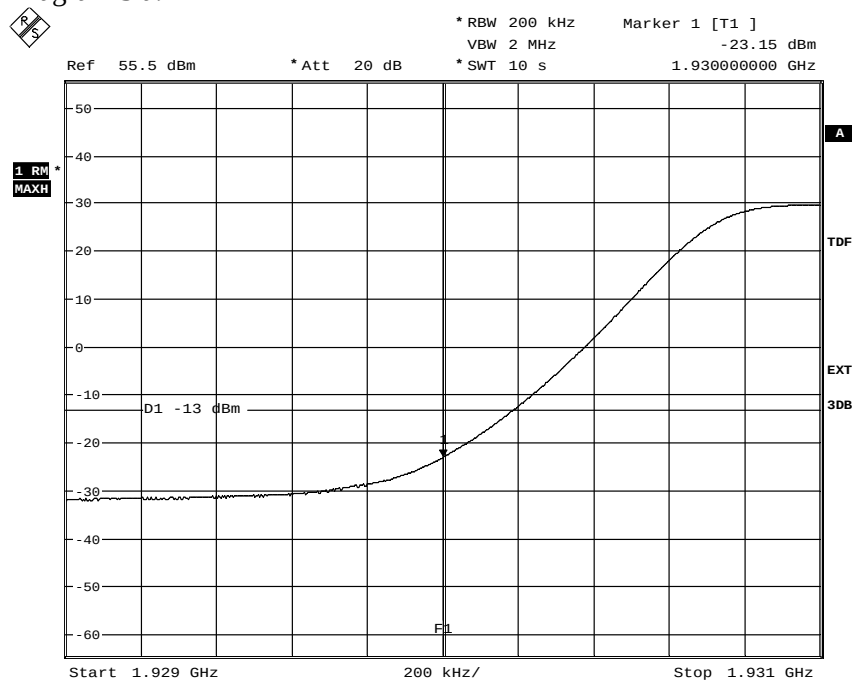

Date: 11.NOV.2013 21:40:56


Diagram 5 b:

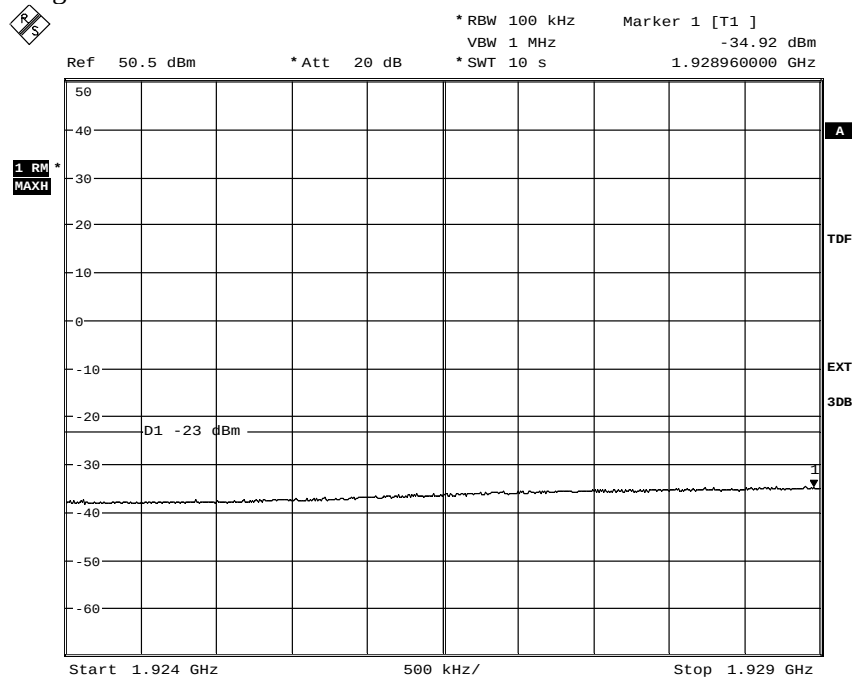

Date: 11.NOV.2013 21:42:17

Appendix 4


Diagram 5 c:

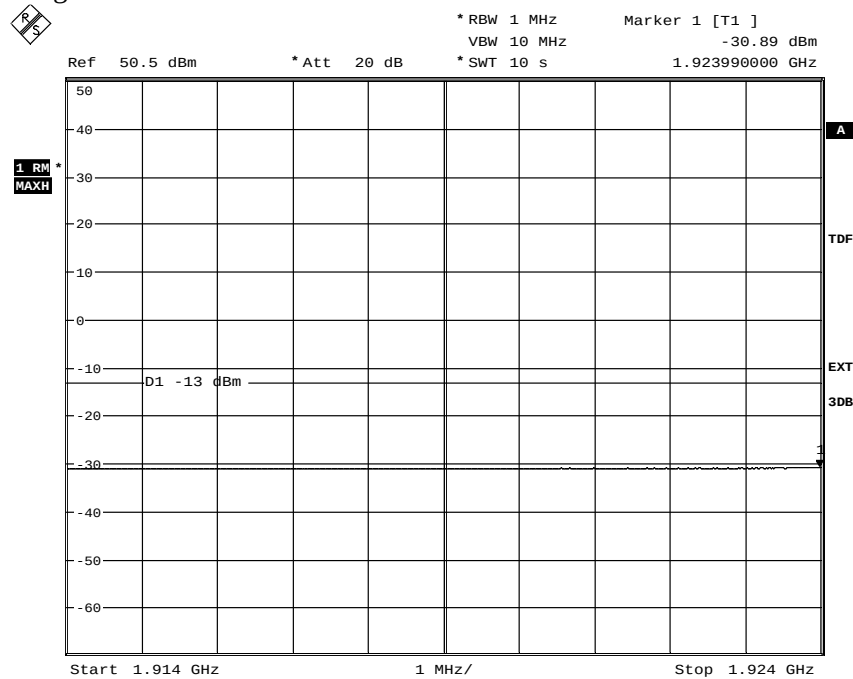

Date: 11.NOV.2013 21:43:18


Appendix 4

Diagram 6 a:

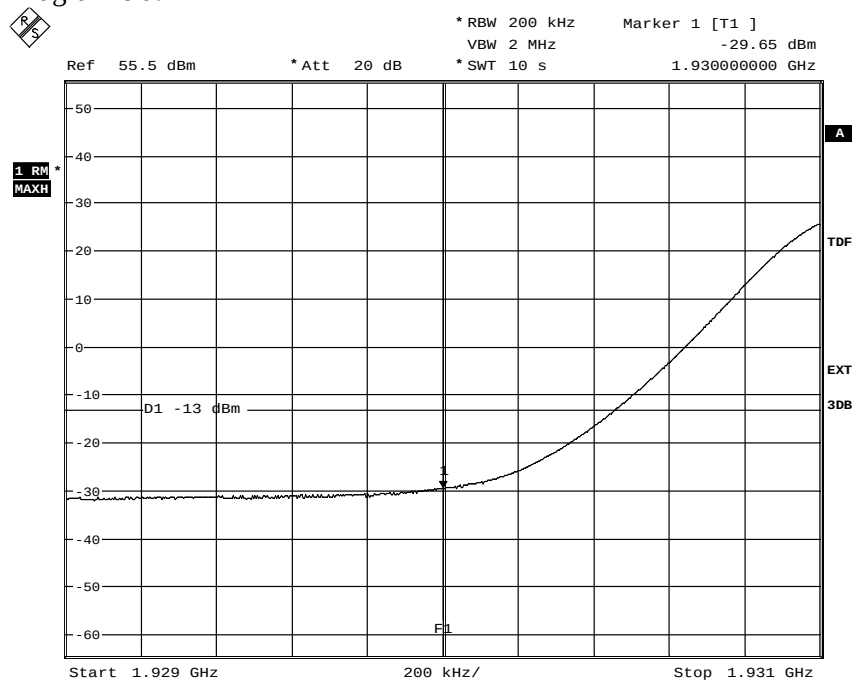

Date: 11.NOV.2013 21:47:27


Diagram 6 b:

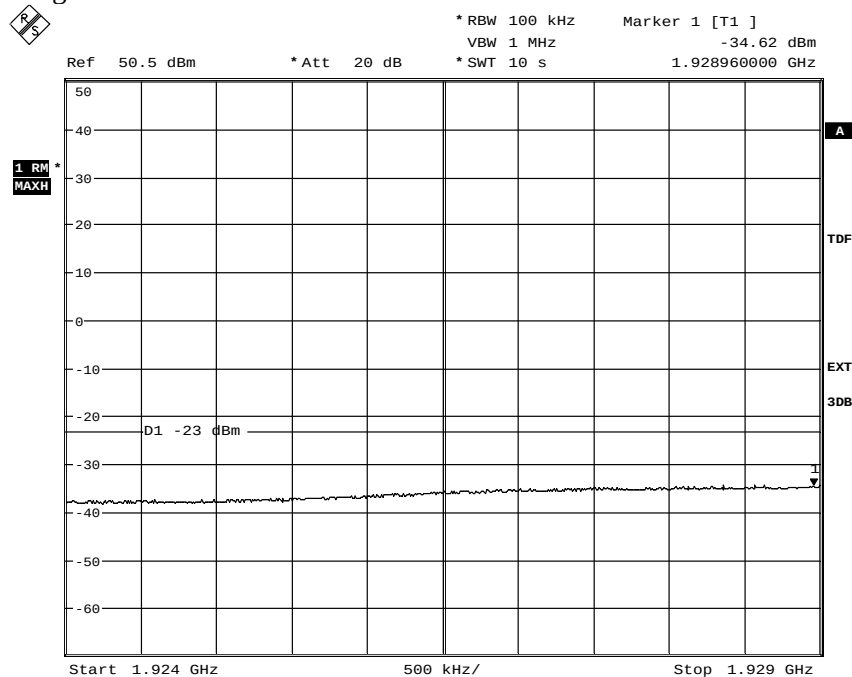

Date: 11.NOV.2013 21:46:45

Appendix 4


Diagram 6 c:

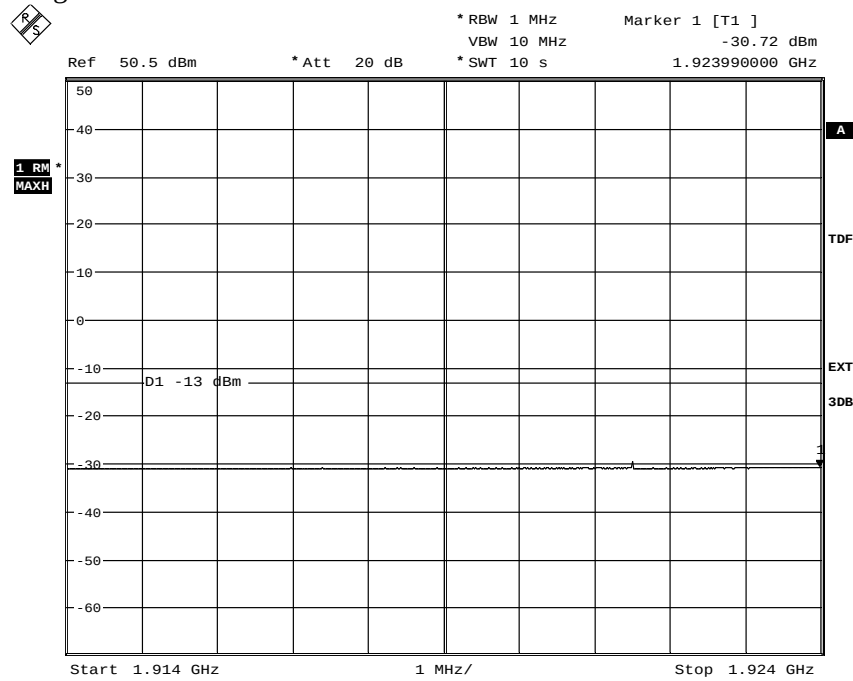

Date: 11.NOV.2013 21:45:53


Appendix 4

Diagram 7 a:

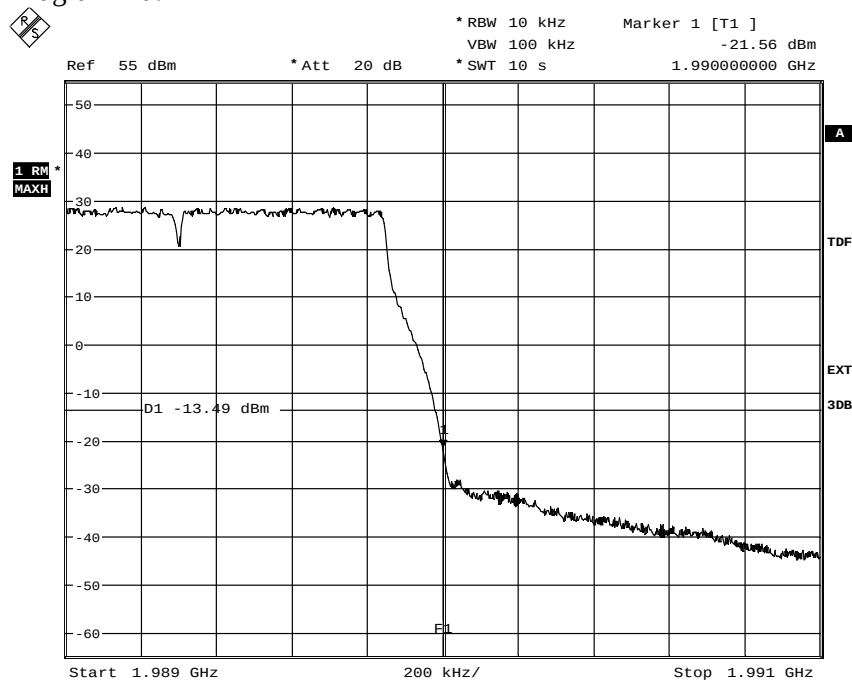

Date: 12.NOV.2013 12:47:43

Diagram 7 b:

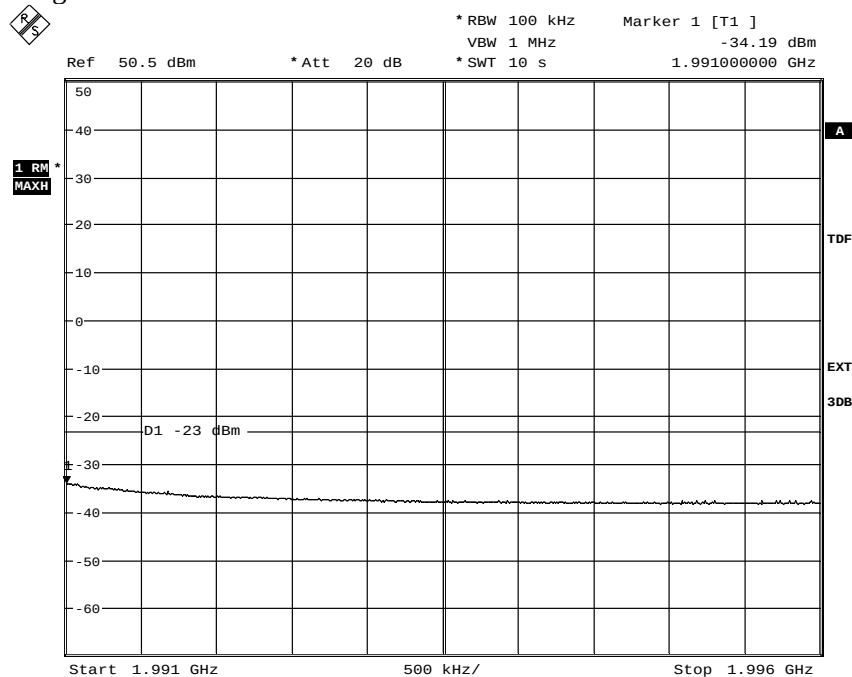


Date: 12.NOV.2013 12:48:51



Appendix 4


Diagram 7 c:

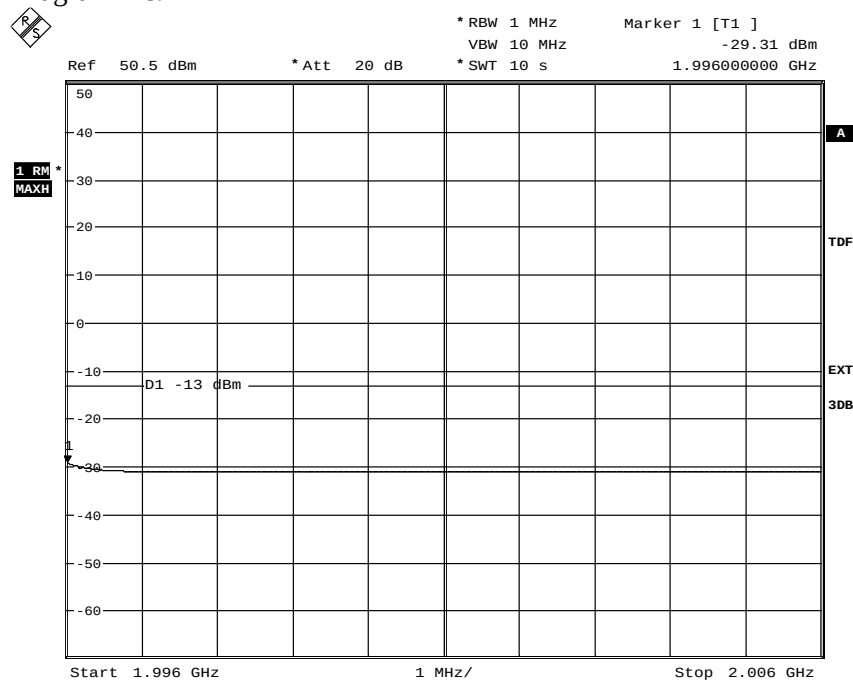

Date: 12.NOV.2013 12:49:54


Appendix 4

Diagram 8 a:

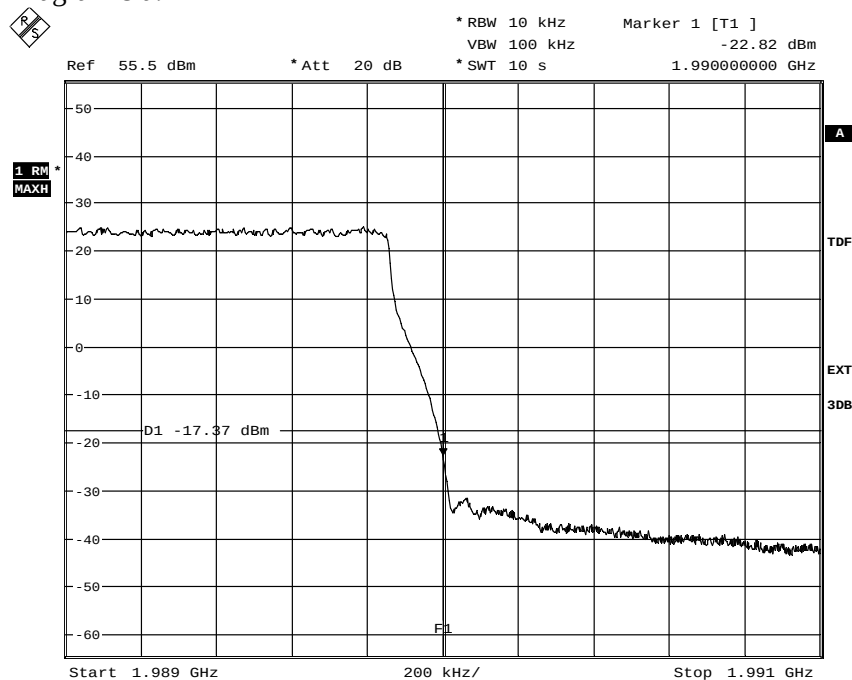

Date: 12.NOV.2013 13:20:25

Diagram 8 b:

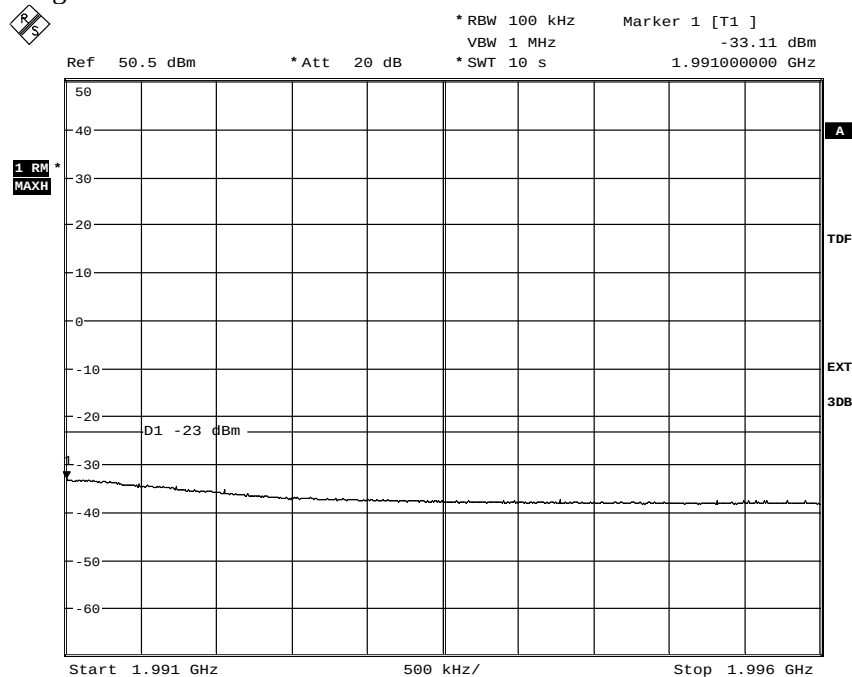


Date: 12.NOV.2013 13:07:22



Appendix 4


Diagram 8 c:

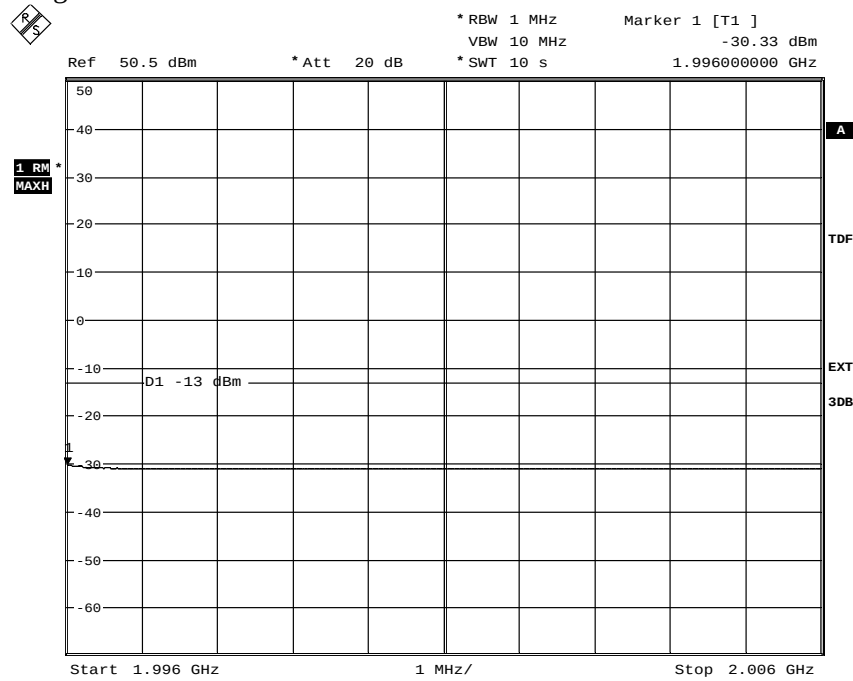

Date: 12.NOV.2013 13:06:27


Appendix 4

Diagram 9 a:

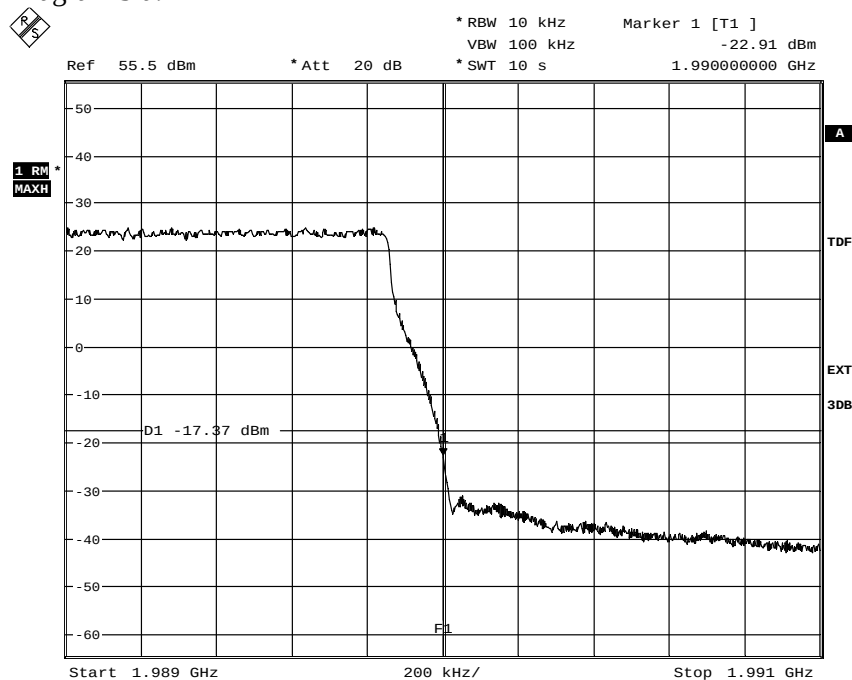

Date: 12.NOV.2013 13:02:32

Diagram 9 b:

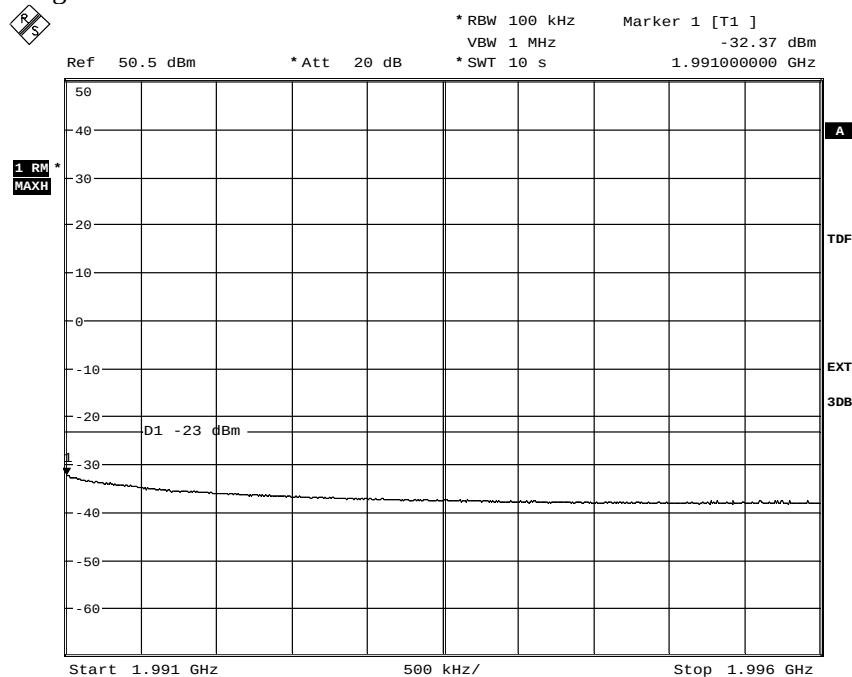


Date: 12.NOV.2013 13:04:04



Appendix 4


Diagram 9 c:

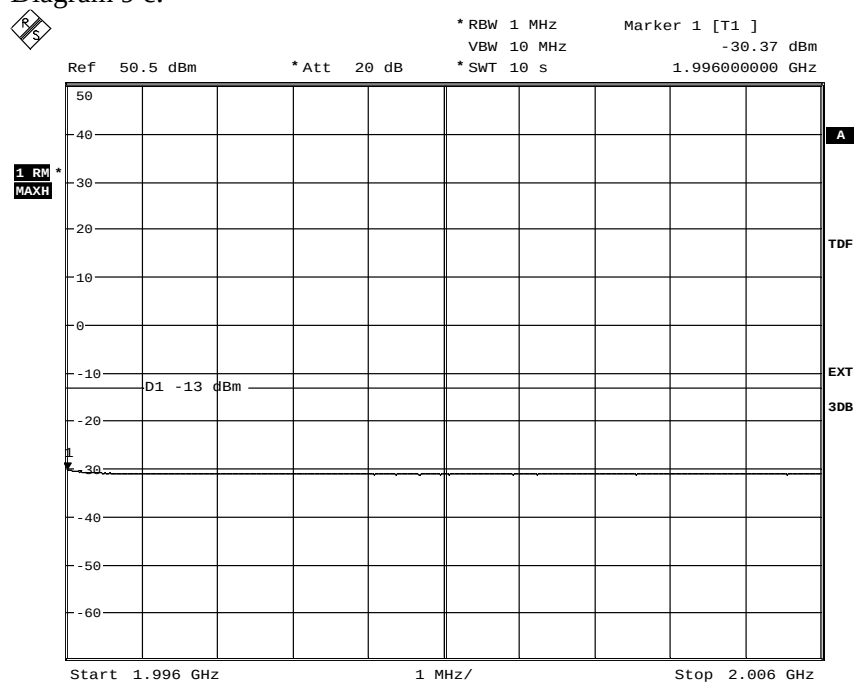

Date: 12.NOV.2013 13:04:46


Appendix 4

Diagram 10 a:

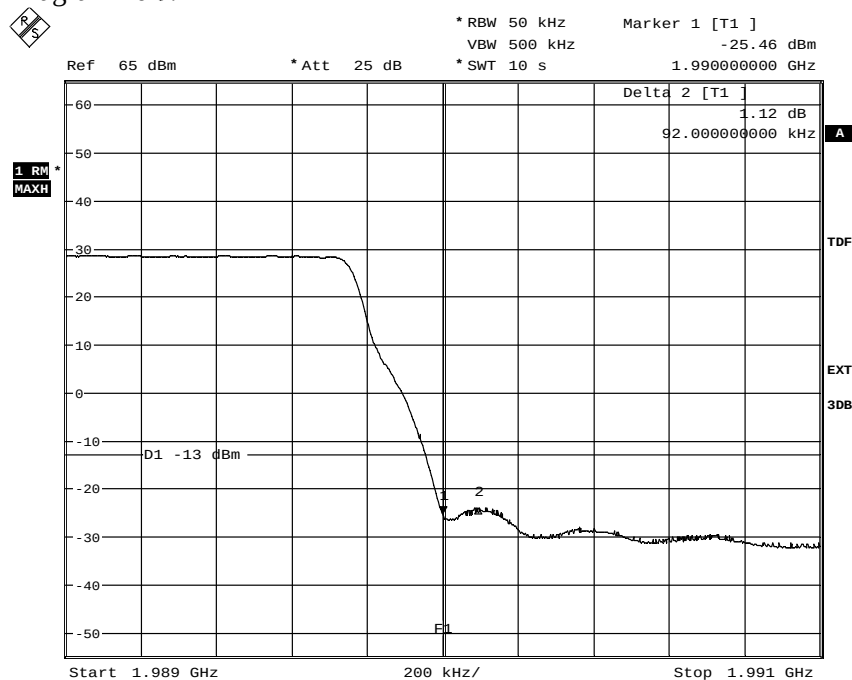

Date: 12.NOV.2013 13:32:28

Diagram 10 b:

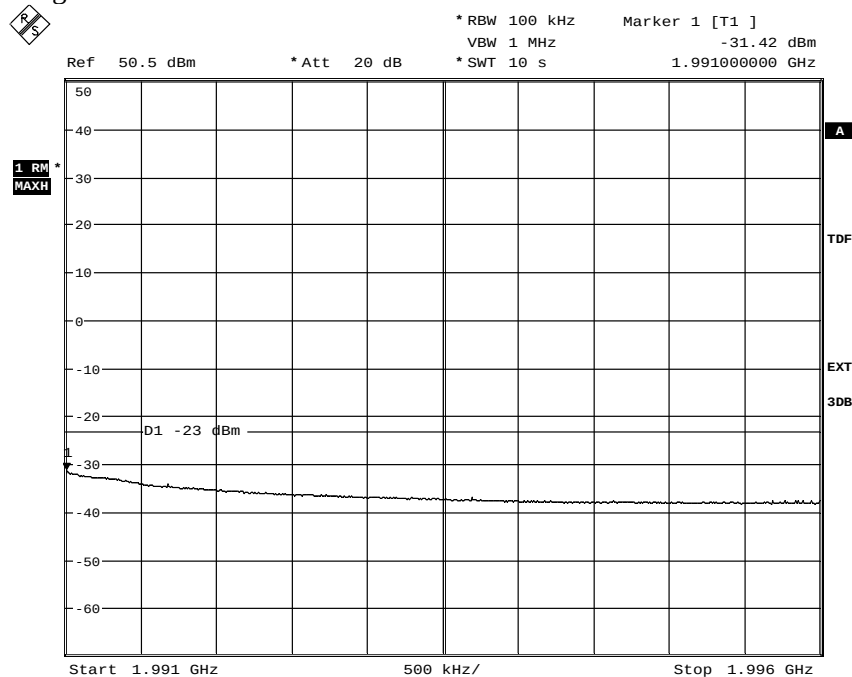


Date: 12.NOV.2013 13:41:42



Appendix 4


Diagram 10 c:

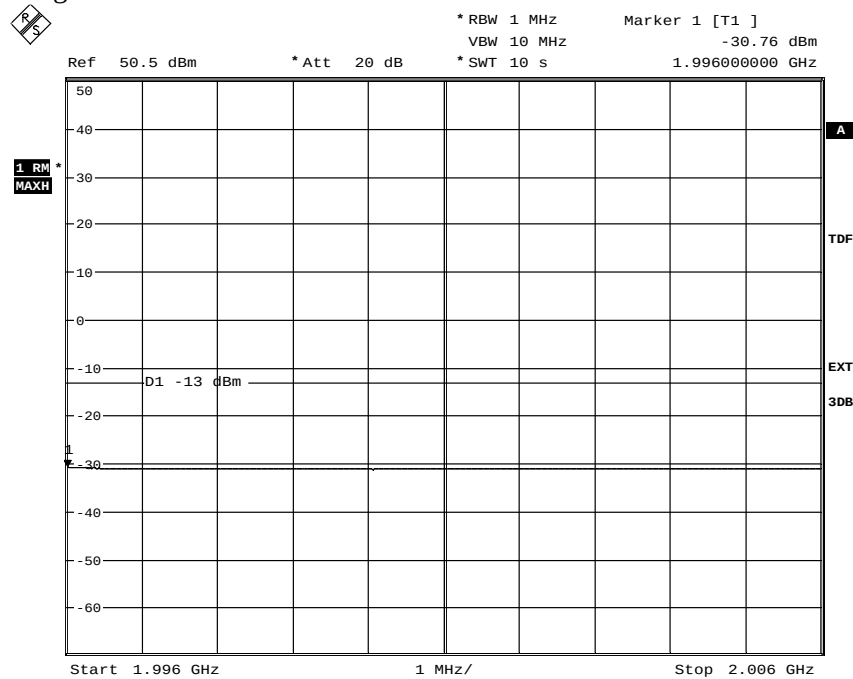

Date: 12.NOV.2013 13:42:33


Appendix 4

Diagram 11 a:

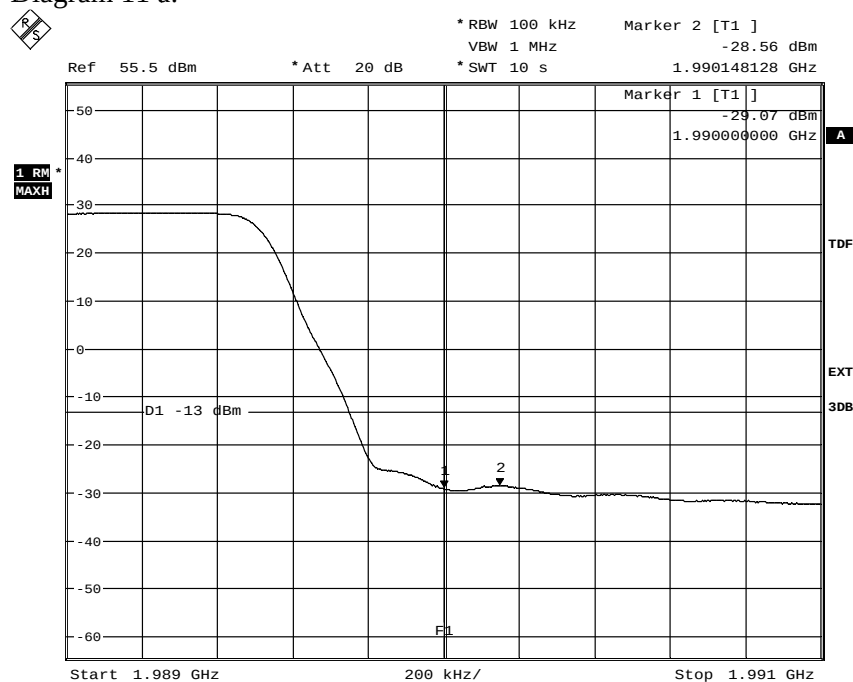

Date: 12.NOV.2013 13:50:50

Diagram 11 b:

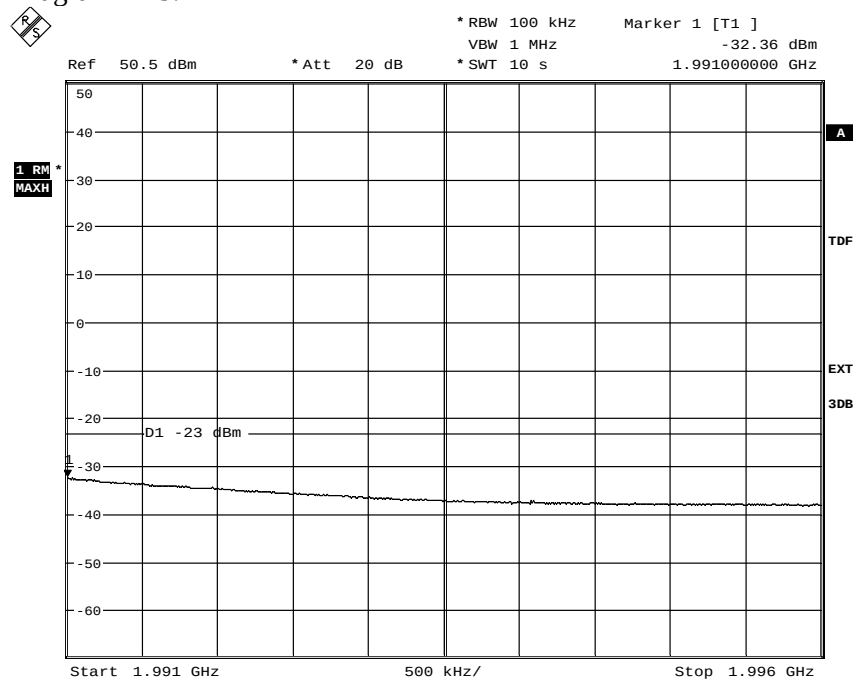


Date: 12.NOV.2013 13:48:25



Appendix 4


Diagram 11 c:

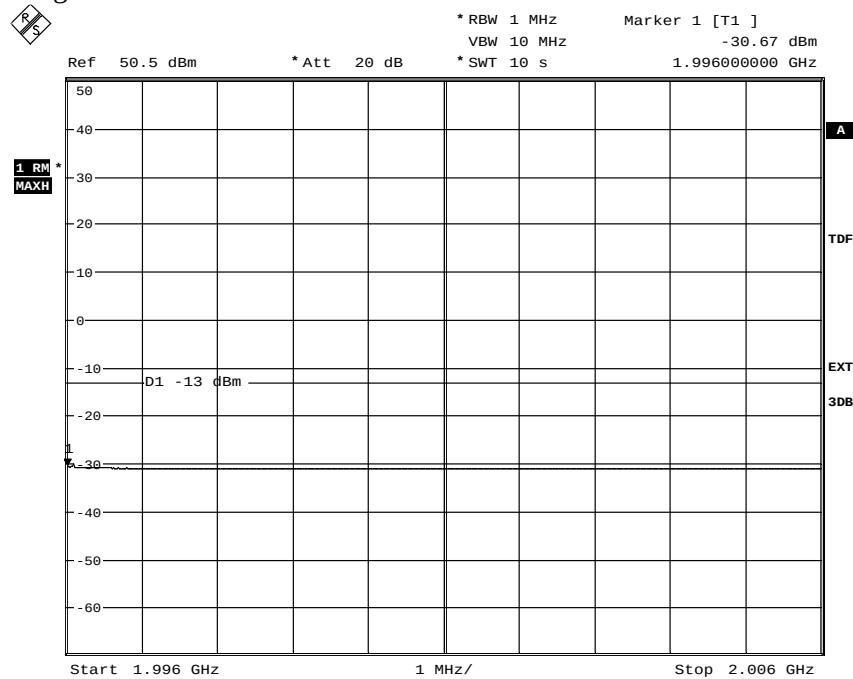

Date: 12.NOV.2013 13:47:01


Appendix 4

Diagram 12 a:

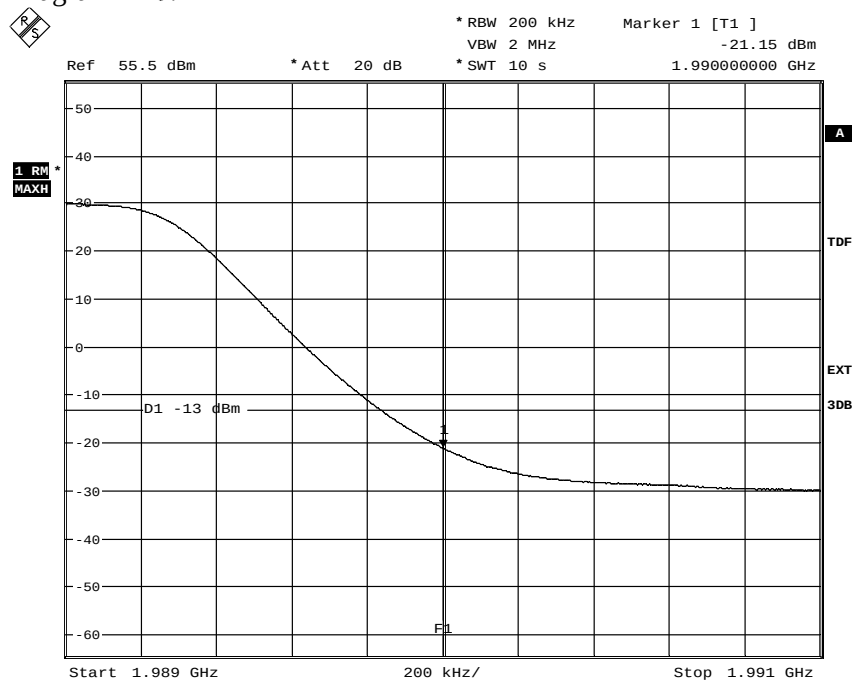

Date: 12.NOV.2013 13:53:39

Diagram 12 b:

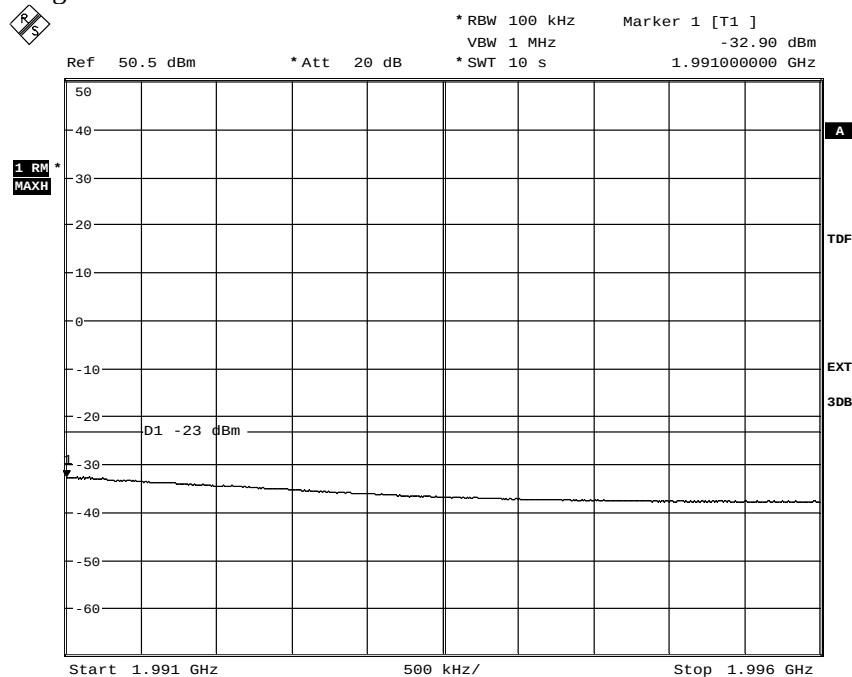


Date: 12.NOV.2013 13:56:07



Appendix 4


Diagram 12 c:

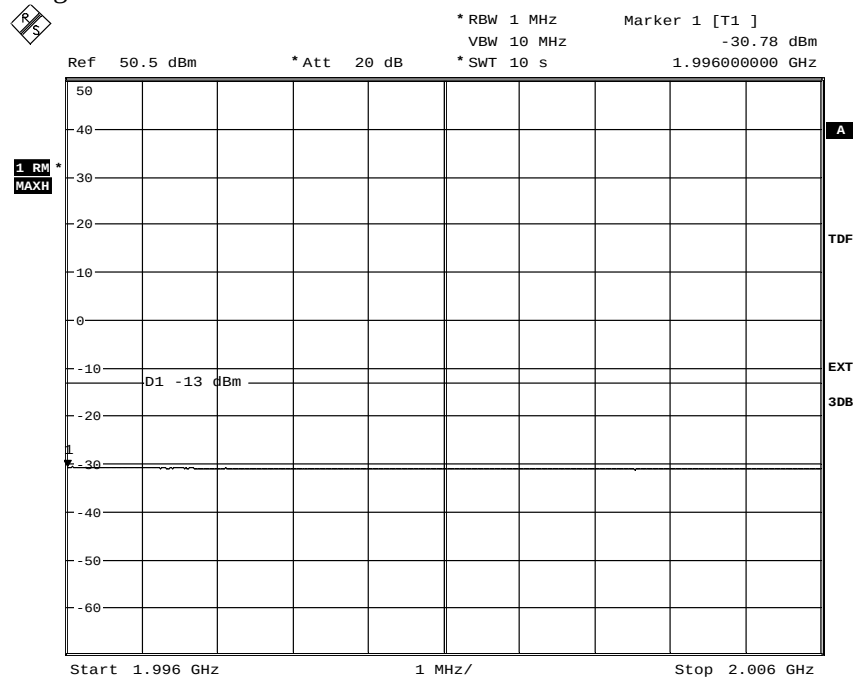

Date: 12.NOV.2013 13:57:01


Appendix 4

Diagram 13 a:

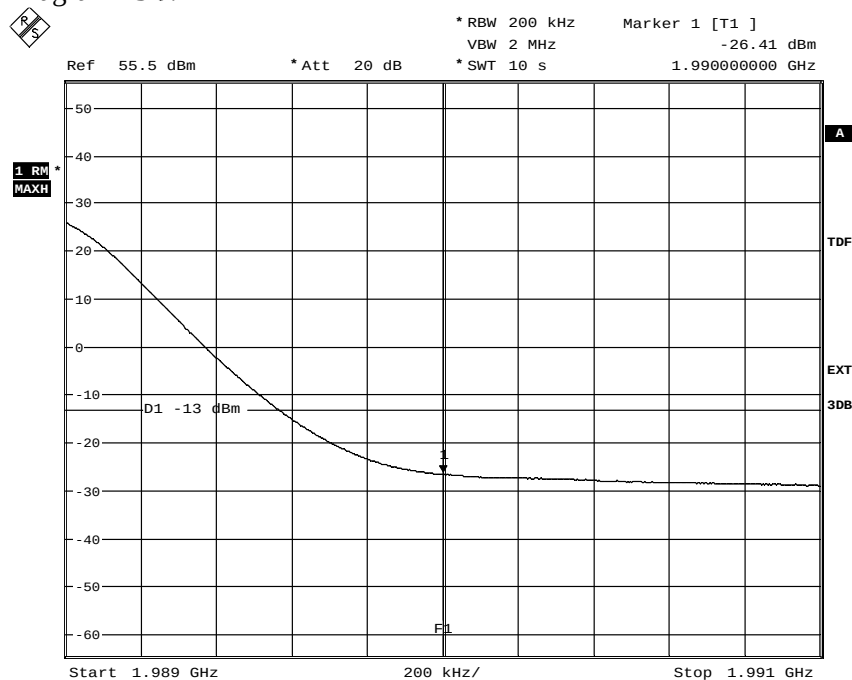

Date: 12.NOV.2013 11:50:55


Diagram 13 b:

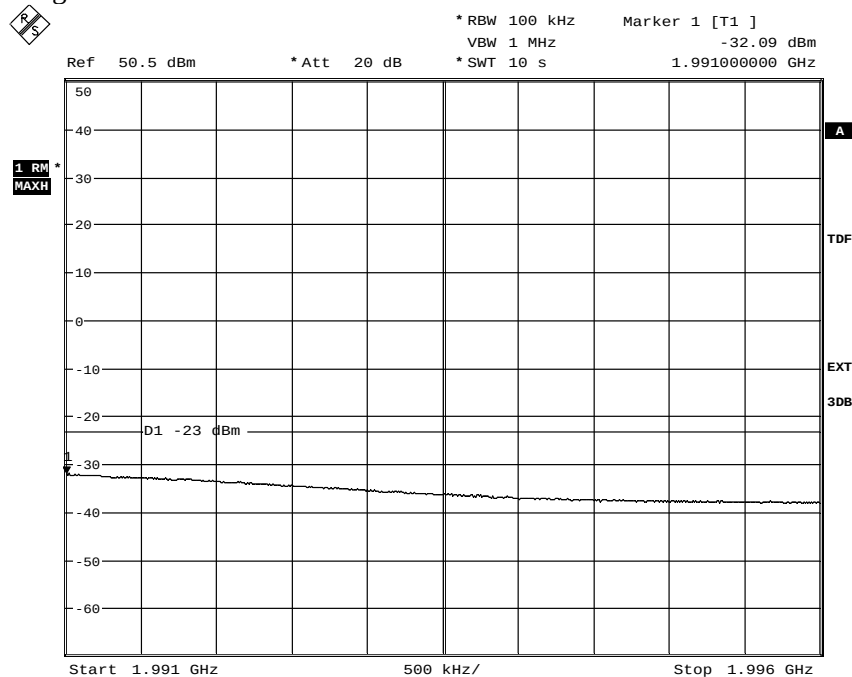

Date: 12.NOV.2013 11:52:06

Appendix 4


Diagram 13 c:

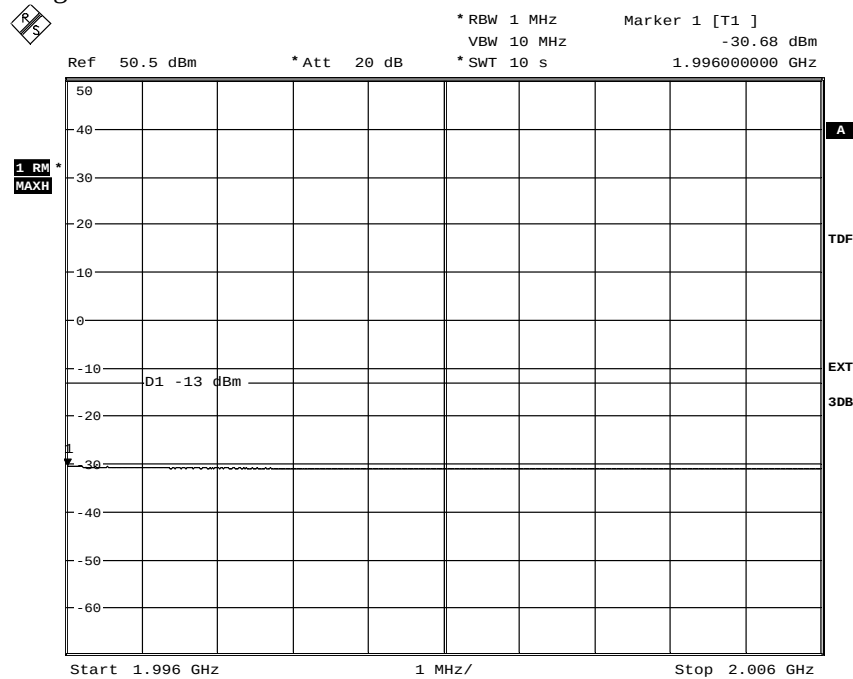

Date: 12.NOV.2013 11:52:53


Appendix 4

Diagram 14 a:

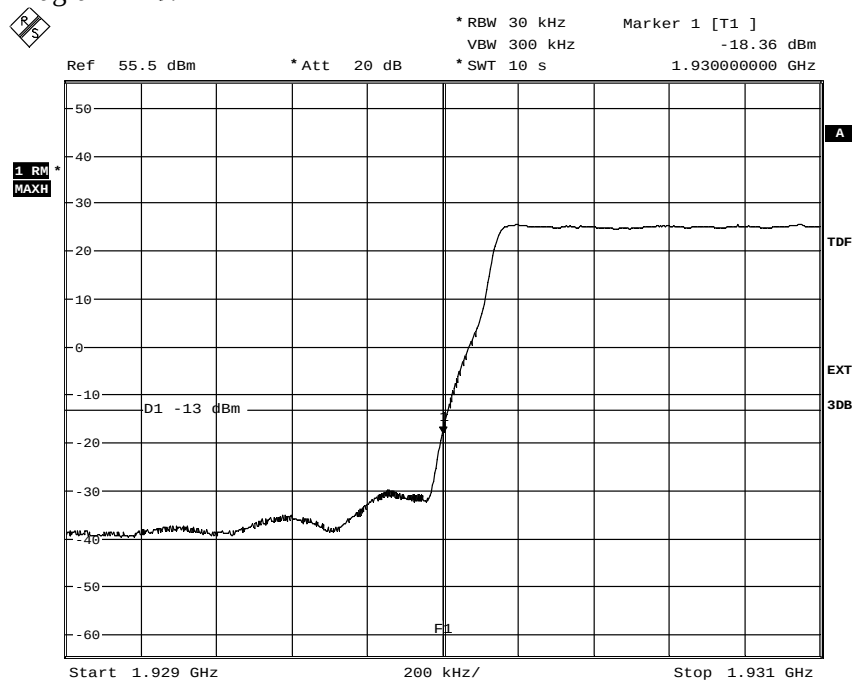

Date: 7.NOV.2013 19:59:23


Diagram 14 b:

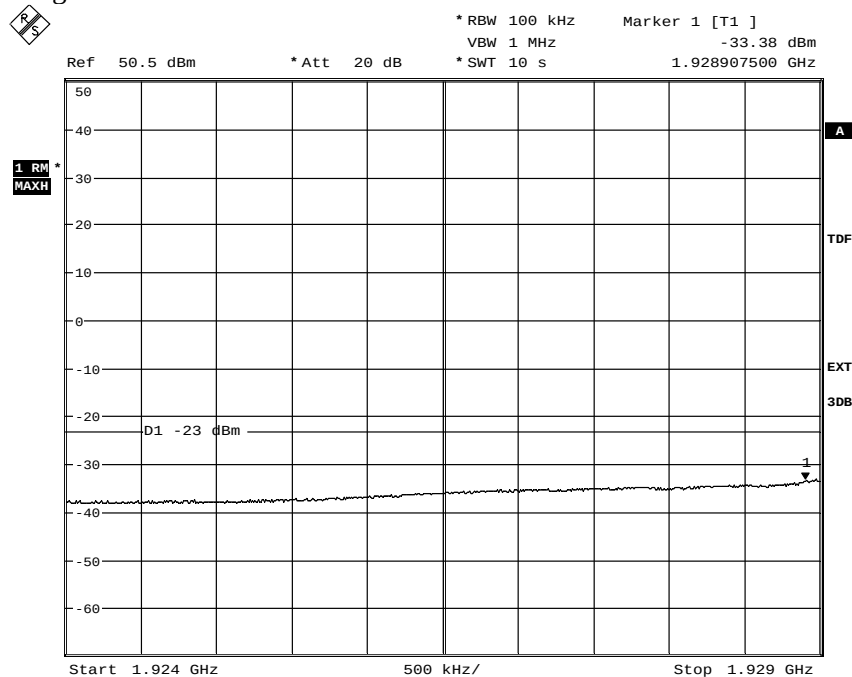

Date: 7.NOV.2013 20:00:33

Appendix 4


Diagram 14 c:

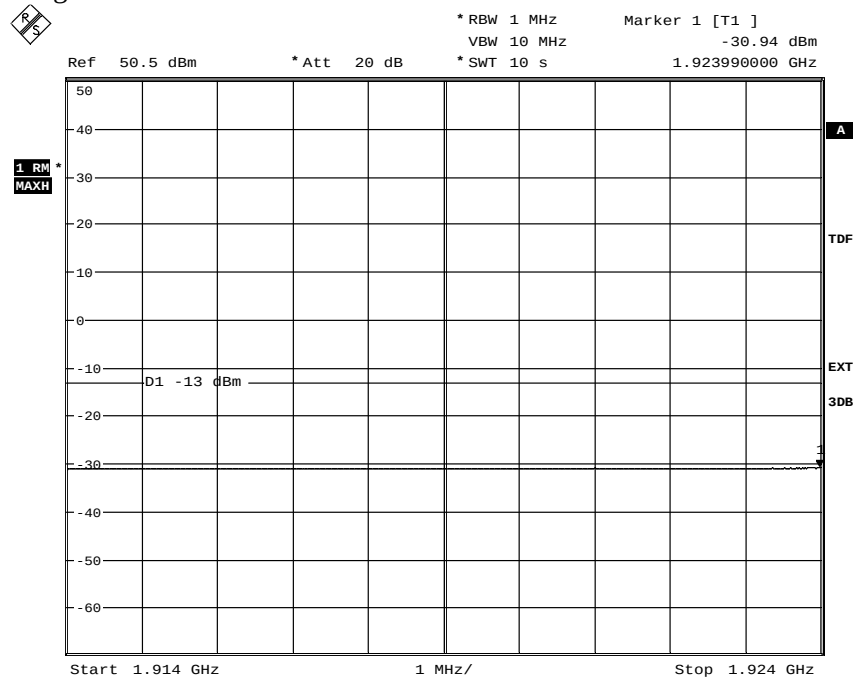

Date: 7.NOV.2013 20:01:41


Appendix 4

Diagram 15 a:

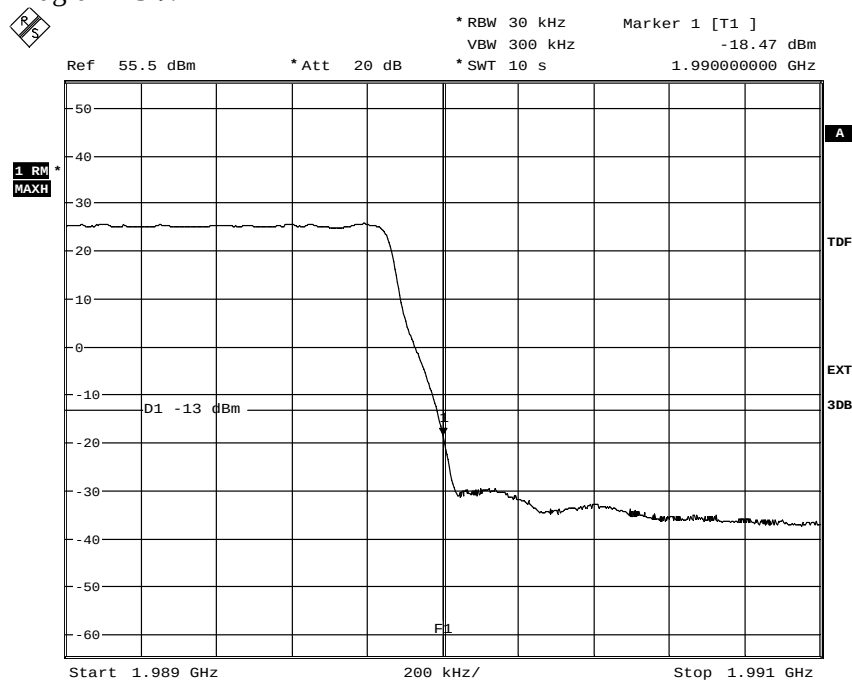

Date: 11.NOV.2013 15:24:54


Diagram 15 b:

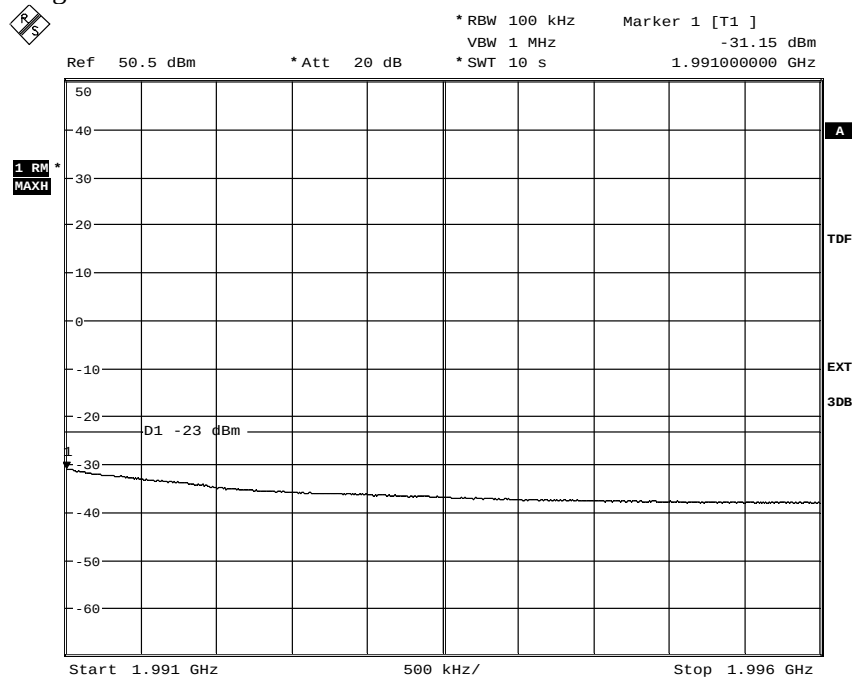

Date: 7.NOV.2013 18:25:34

Appendix 4

Diagram 15 c:

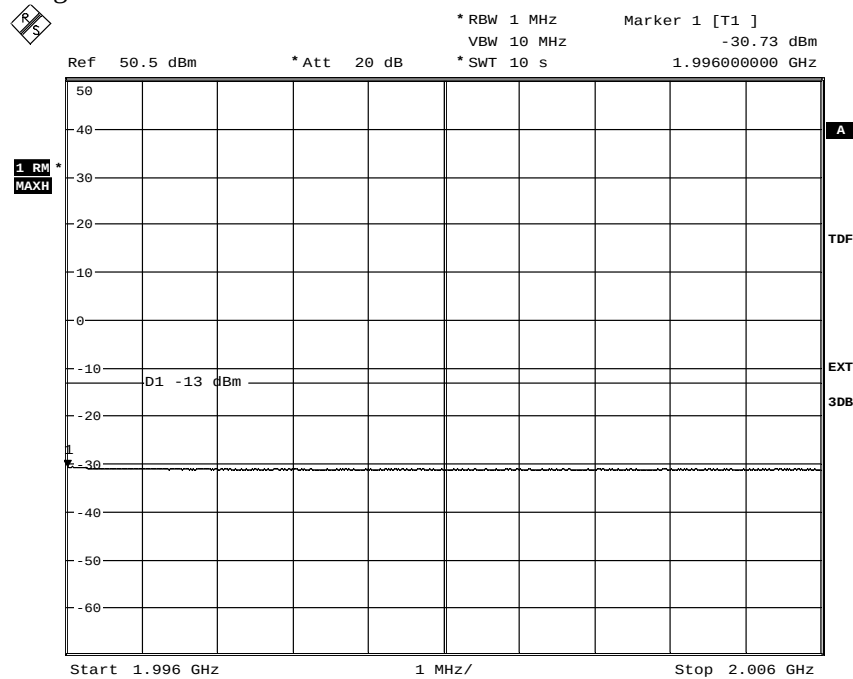

Date: 11.NOV.2013 15:26:05

Appendix 5

Conducted spurious emission measurements according to CFR 47 §2.1051 / IC RSS-133 6.5

Date	Temperature	Humidity
2013-11-07	22 °C ± 3 °C	31 % ± 5 %
2013-11-08	22 °C ± 3 °C	31 % ± 5 %
2013-11-11	21 °C ± 3 °C	35 % ± 5 %
2013-11-12	21 °C ± 3 °C	35 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), (iii) “measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v02r01

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
High pass filter	901 502
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 5

1- carrier MIMO

Diagram	BW configuration [MHz]	Symbolic name	Test mode
1 a+b+c+d	1.4	B	Primary
2 a+b+c+d	20	B	Primary
3 a+b+c+d	1.4	M	Primary
4 a+b+c+d	1.4	M	Secondary
5 a+b+c+d	3	M	Primary
6 a+b+c+d	5	M	Primary
7 a+b+c+d	10	M	Primary
8 a+b+c+d	15	M	Primary
9 a+b+c+d	20	M	Primary
10 a+b+c+d	20	M	Secondary
11 a+b+c+d	1.4	T	Primary
12 a+b+c+d	20	T	Primary

2- carrier MIMO

Diagram	BW configuration [MHz]	Symbolic name	Test mode
13 a+b+c+d+e	1.4	B2im1	Primary
14 a+b+c+d+e	1.4	B2im2	Primary
15 a+b+c+d	1.4	M2	Primary
16 a+b+c+d+e	1.4	T2im1	Primary
17 a+b+c+d+e	1.4	T2im2	Primary

The diagrams are shown on the following pages.

Appendix 5

Remarks

The emission at 9 kHz on some of the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through. The upper frequency boundary was chosen to cover 10x the highest TX fundamental frequency.

Limits


CFR 47 §24.238 and IC RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----


Appendix 5

Diagram 1 a:

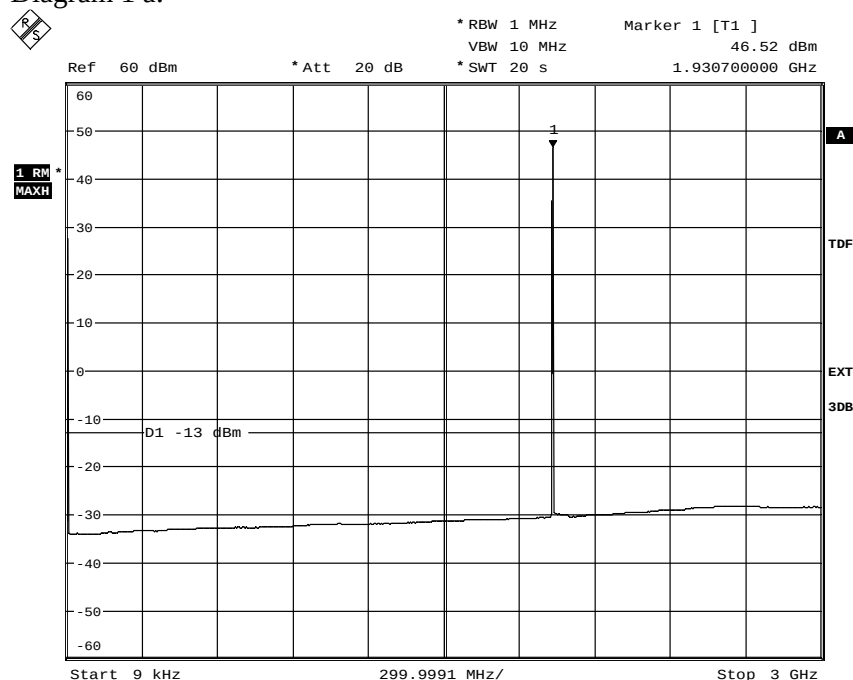

Date: 11.NOV.2013 20:32:44


Diagram 1 b:

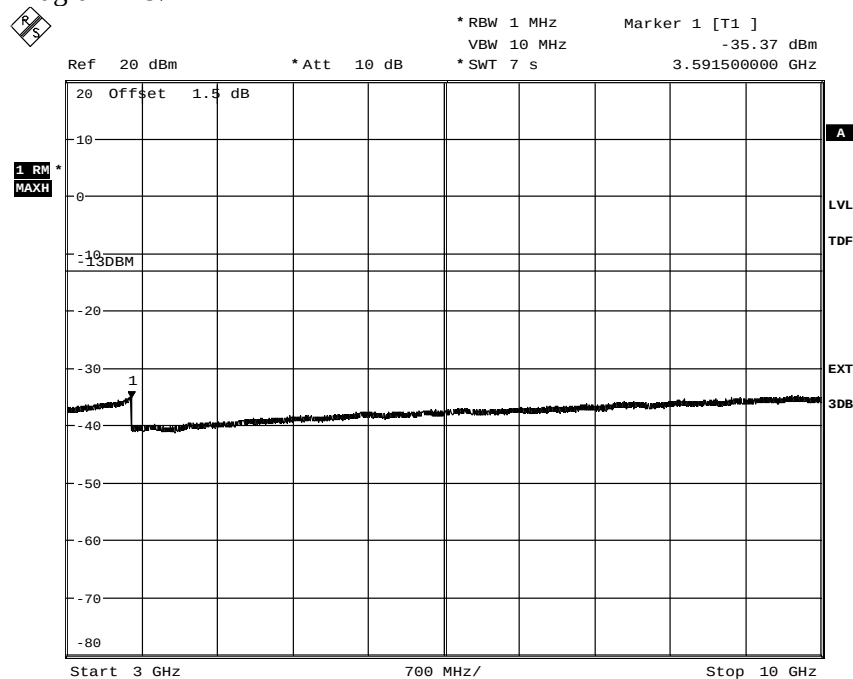

Date: 11.NOV.2013 20:35:52


Appendix 5

Diagram 1 c:

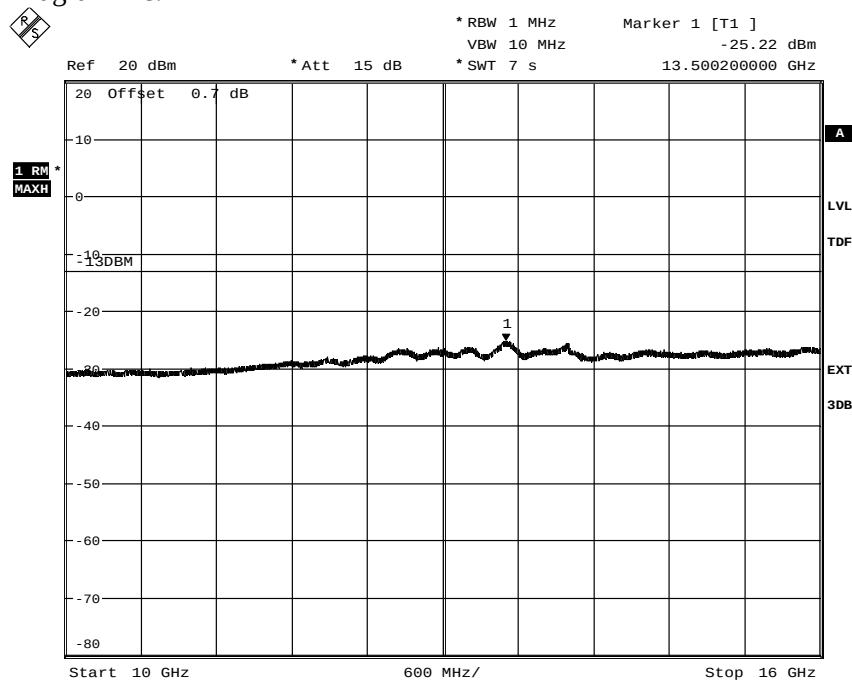

Date: 11.NOV.2013 20:36:41


Diagram 1 d:

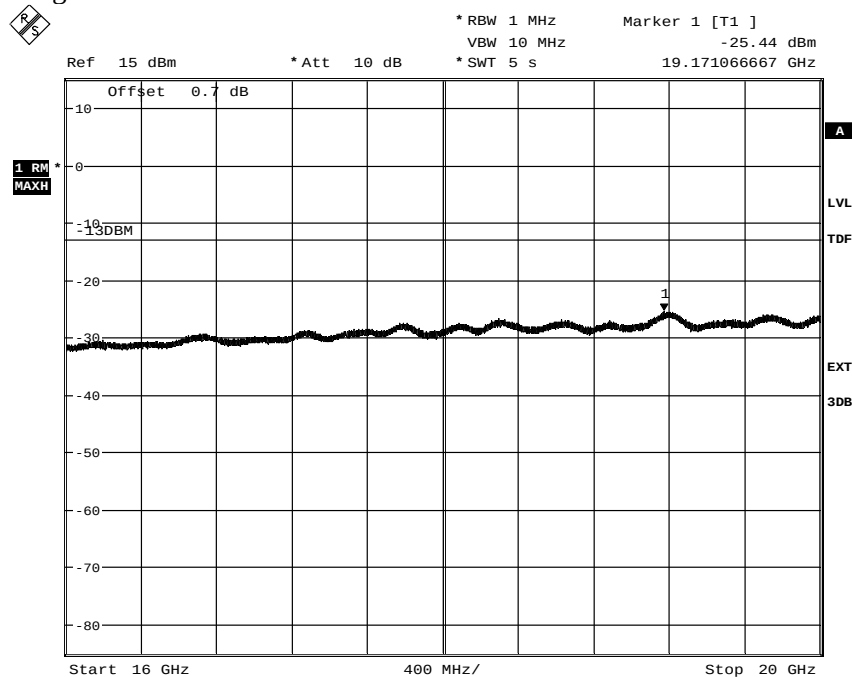

Date: 11.NOV.2013 20:37:32


Appendix 5

Diagram 2 a:

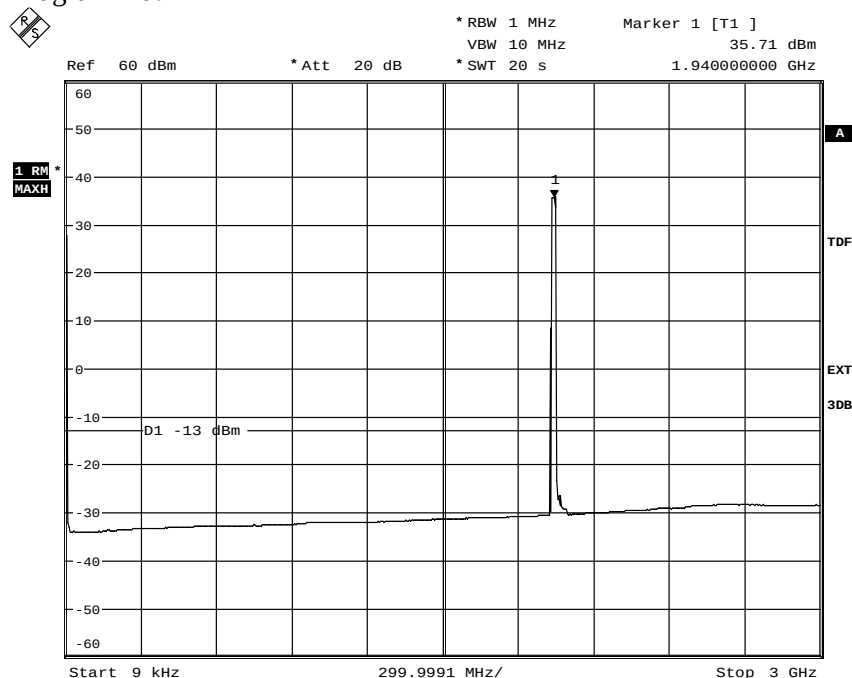

Date: 11.NOV.2013 21:53:44


Diagram 2 b:

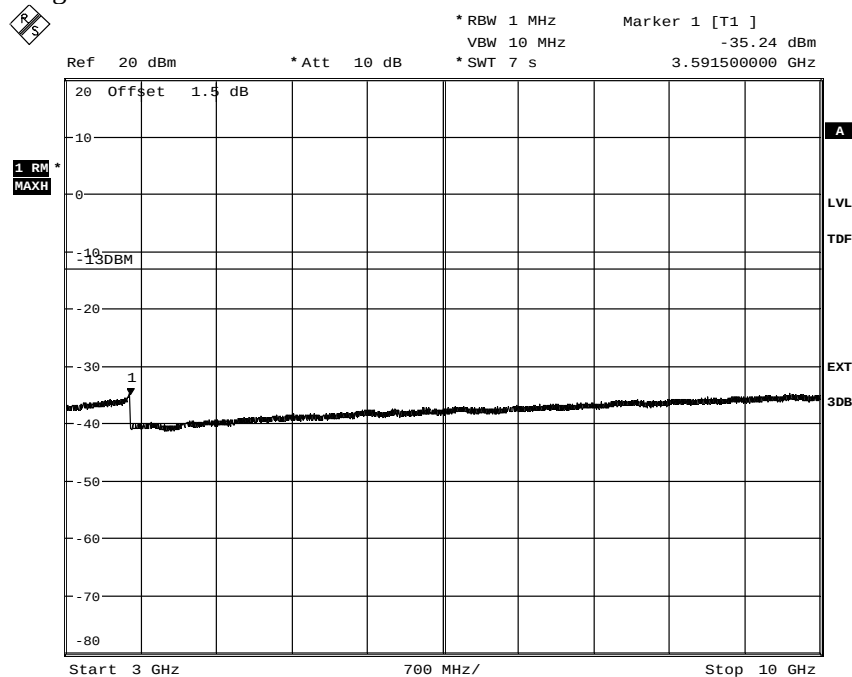

Date: 12.NOV.2013 08:42:10


Appendix 5

Diagram 2 c:

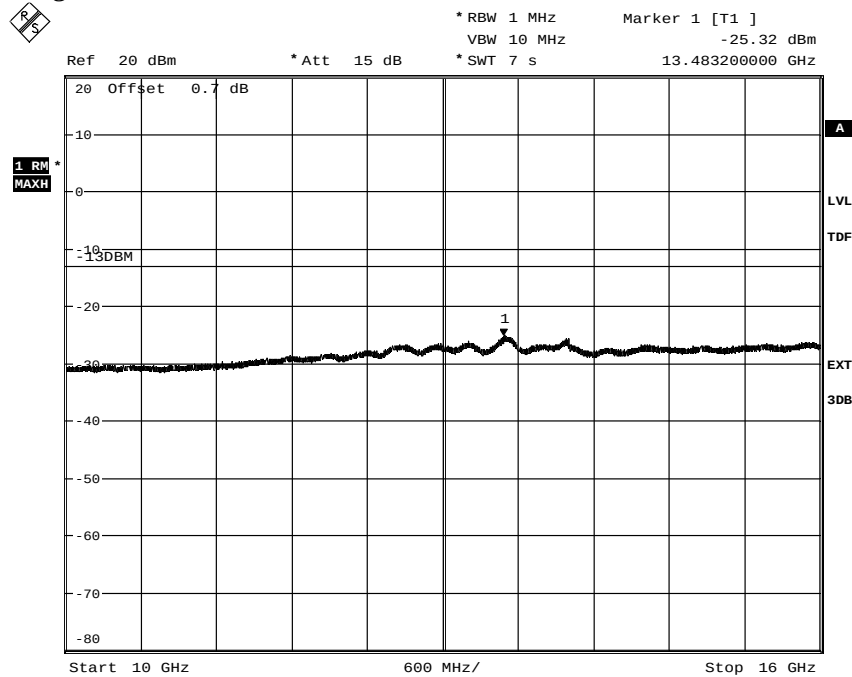

Date: 12.NOV.2013 08:43:14


Diagram 2 d:

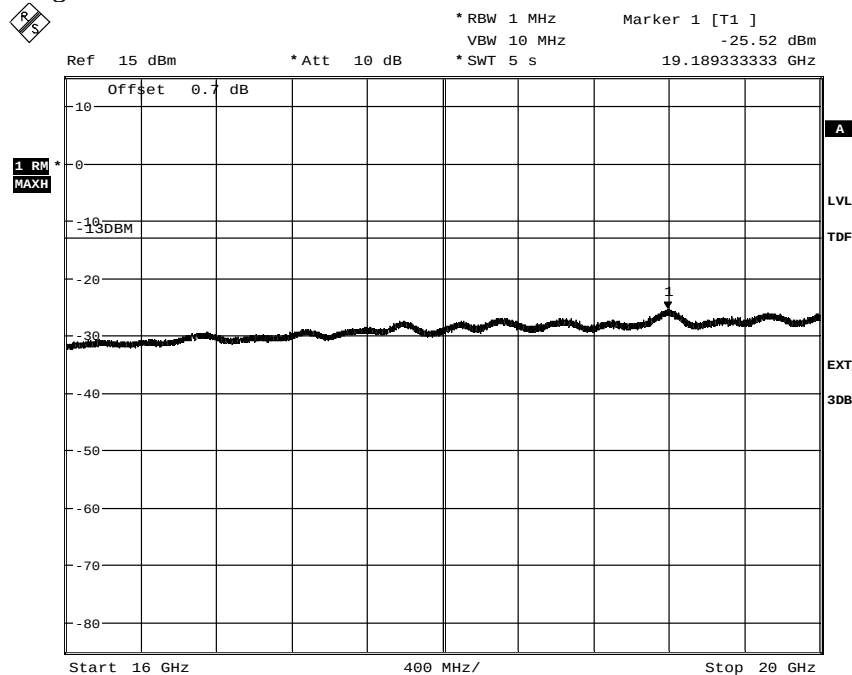

Date: 12.NOV.2013 08:44:01


Appendix 5

Diagram 3 a:

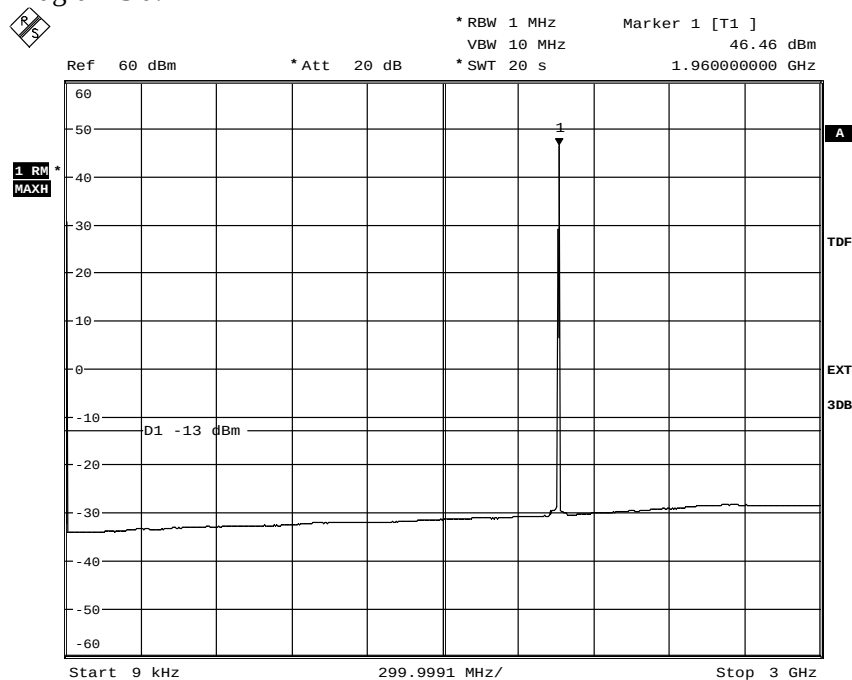

Date: 12.NOV.2013 10:03:47

Diagram 3 b:

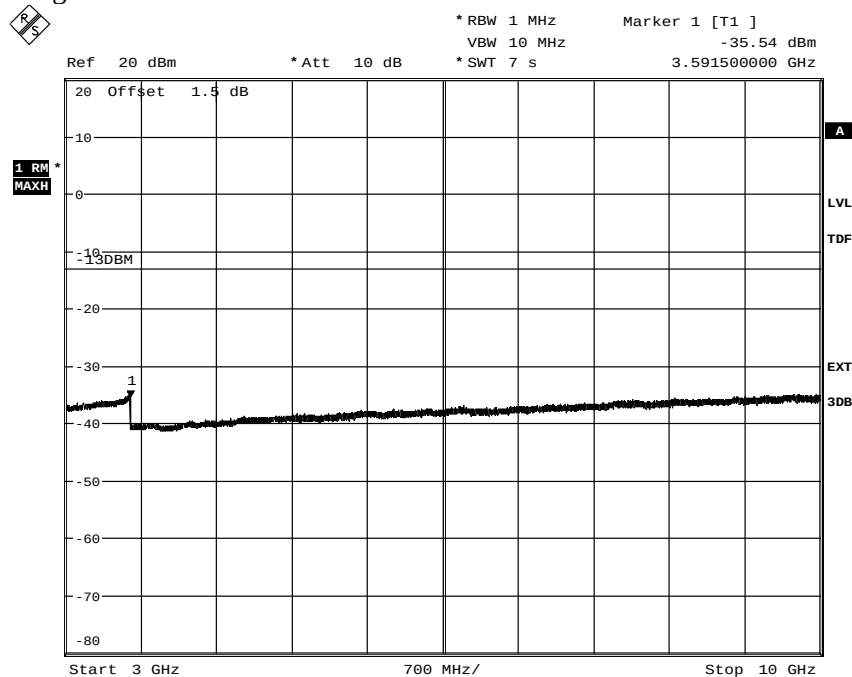


Date: 12.NOV.2013 10:02:00




Appendix 5

Diagram 3 c:

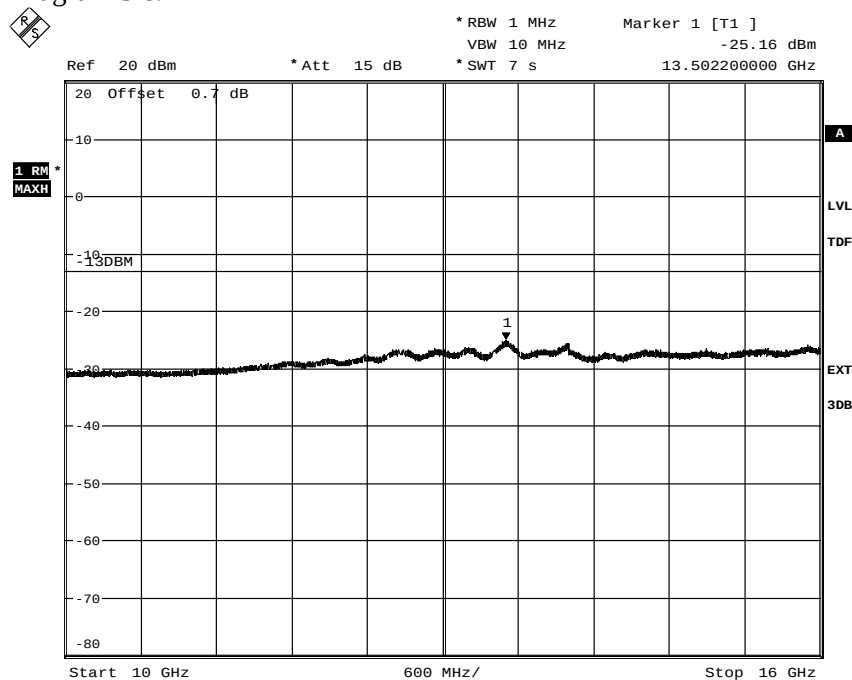

Date: 12.NOV.2013 10:01:20


Diagram 3 d:

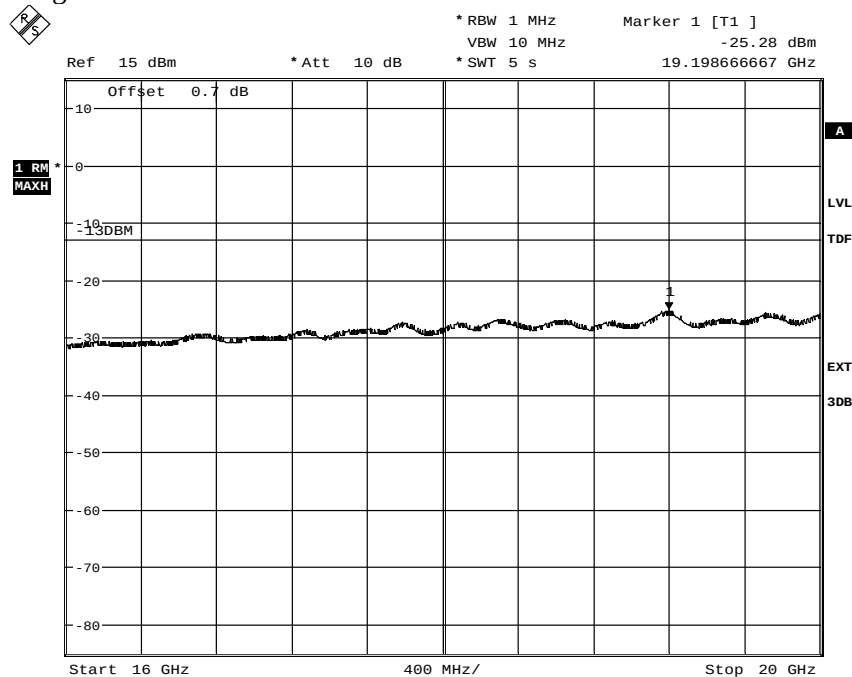

Date: 12.NOV.2013 10:00:33


Appendix 5

Diagram 4 a:

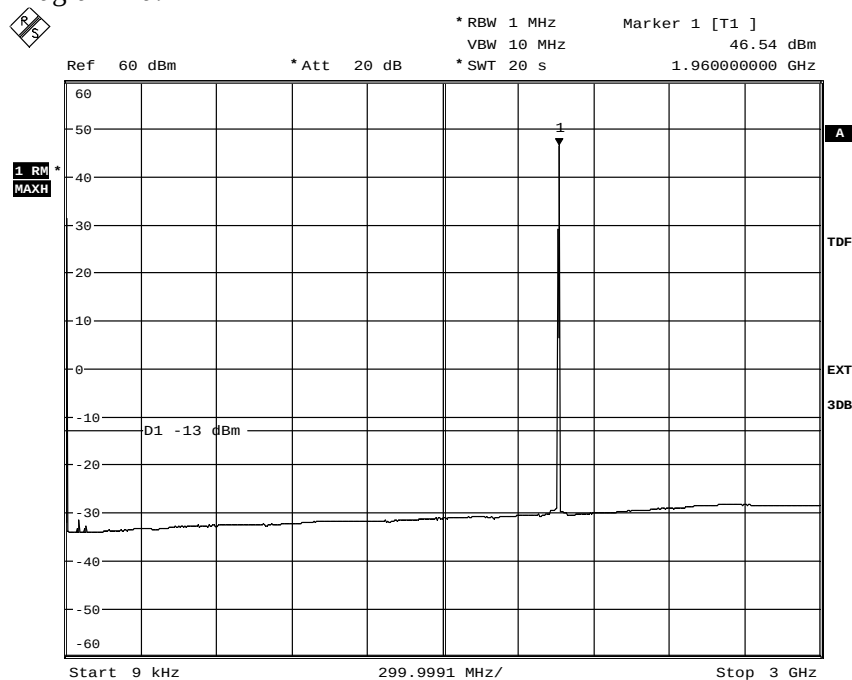

Date: 12.NOV.2013 09:06:48


Diagram 4 b:

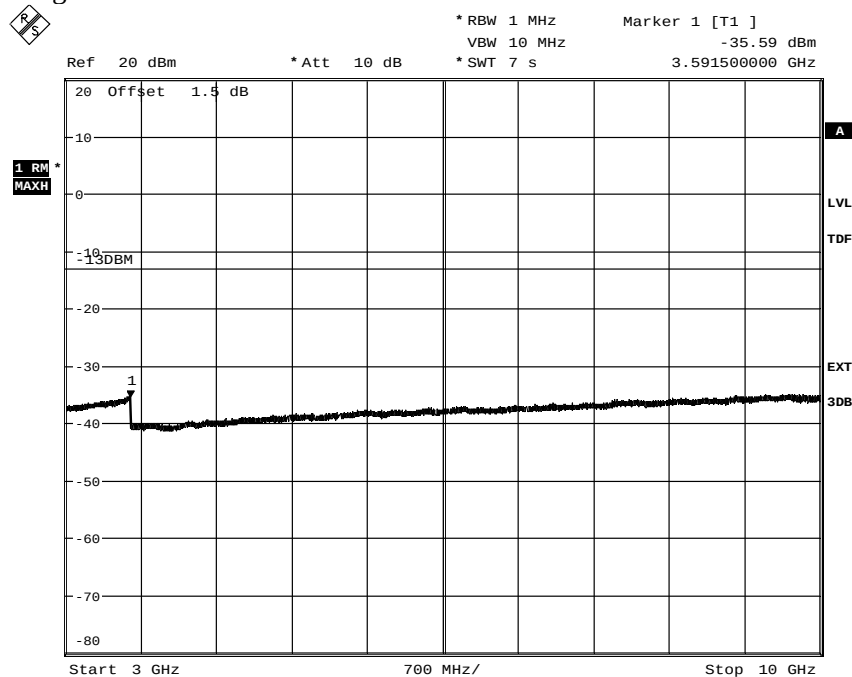

Date: 12.NOV.2013 09:05:04


Appendix 5

Diagram 4 c:

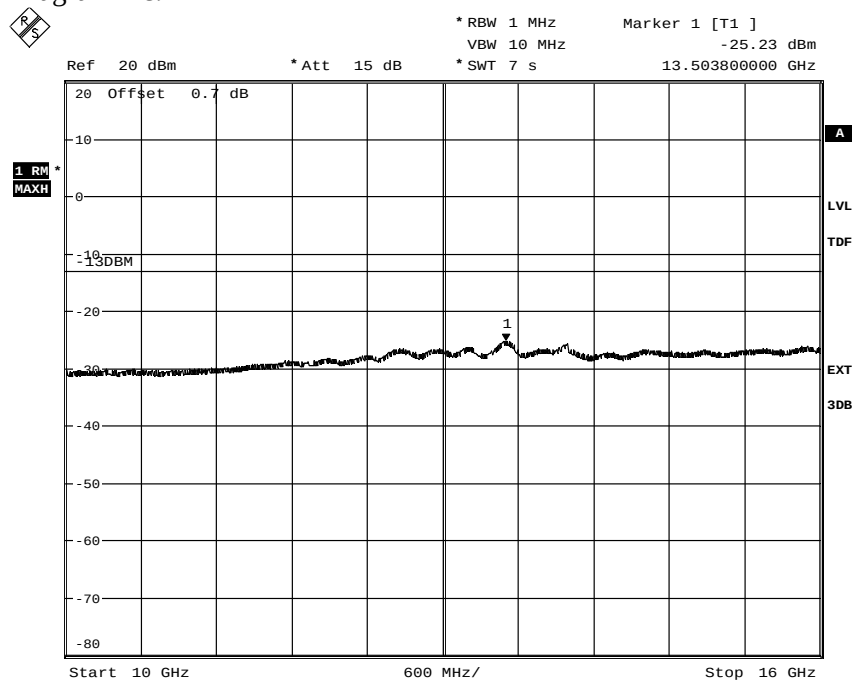

Date: 12.NOV.2013 09:04:08


Diagram 4 d:

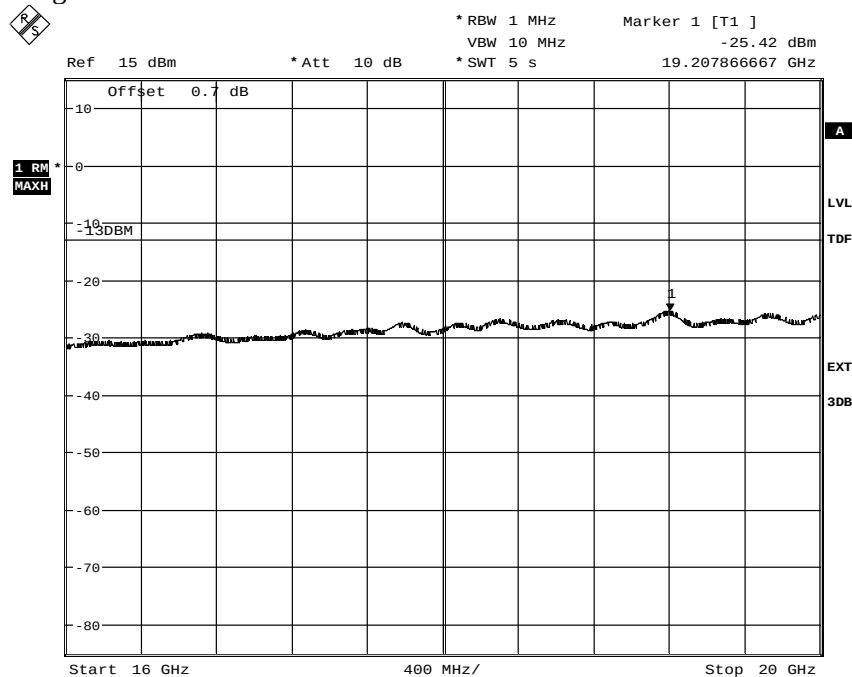

Date: 12.NOV.2013 09:02:08


Appendix 5

Diagram 5 a:

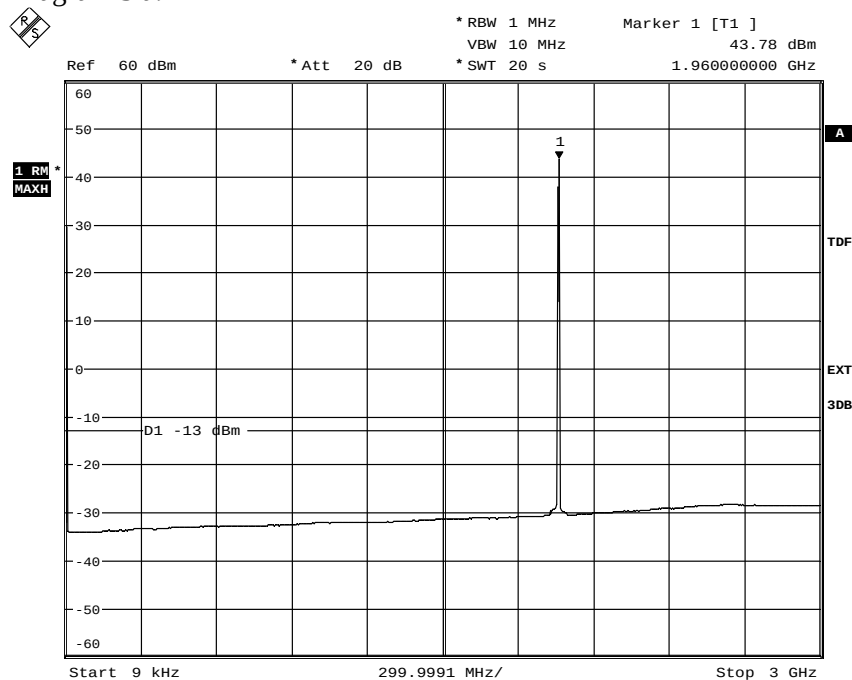

Date: 12.NOV.2013 09:54:57


Diagram 5 b:

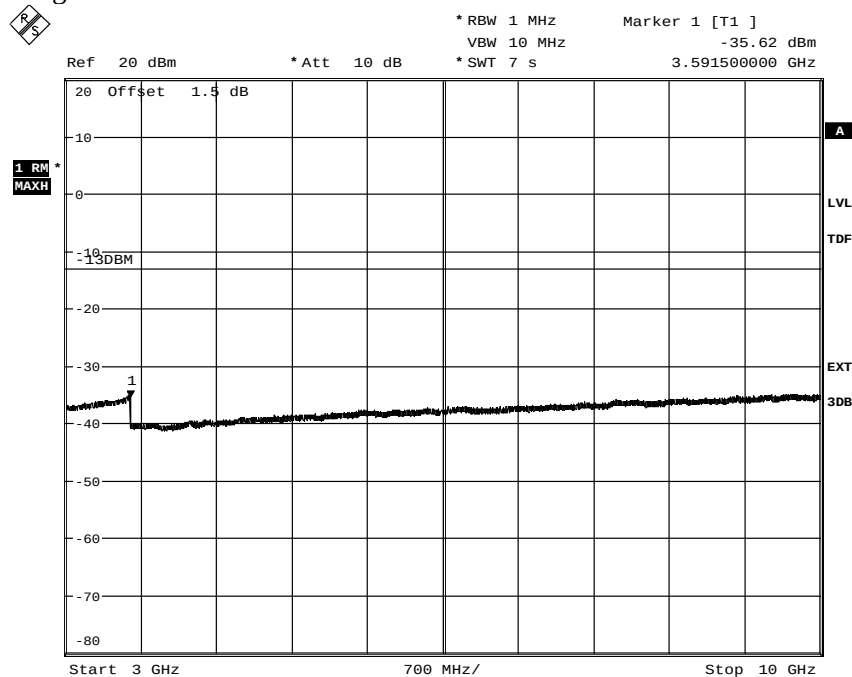

Date: 12.NOV.2013 09:56:49


Appendix 5

Diagram 5 c:

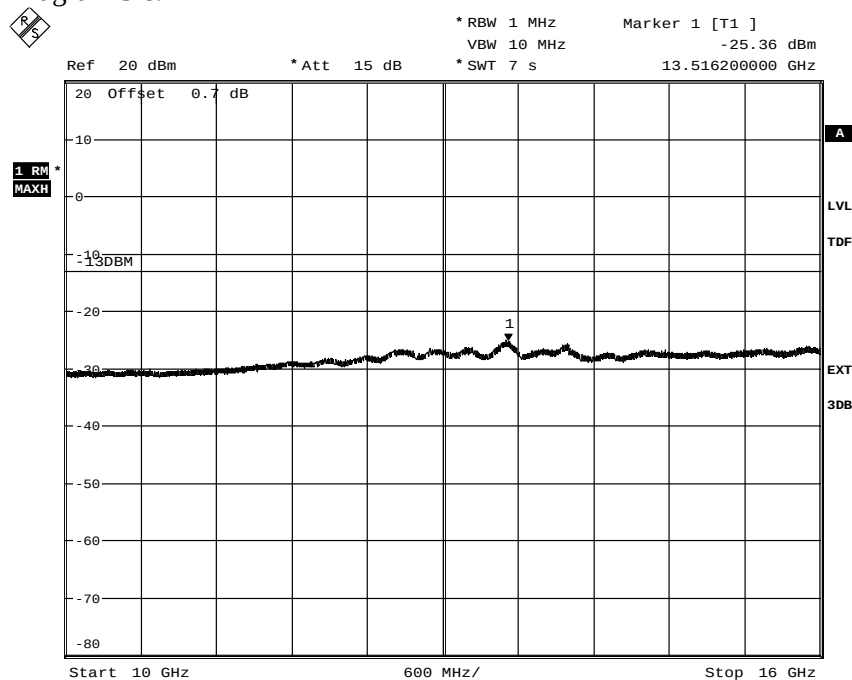

Date: 12.NOV.2013 09:57:39


Diagram 5 d:

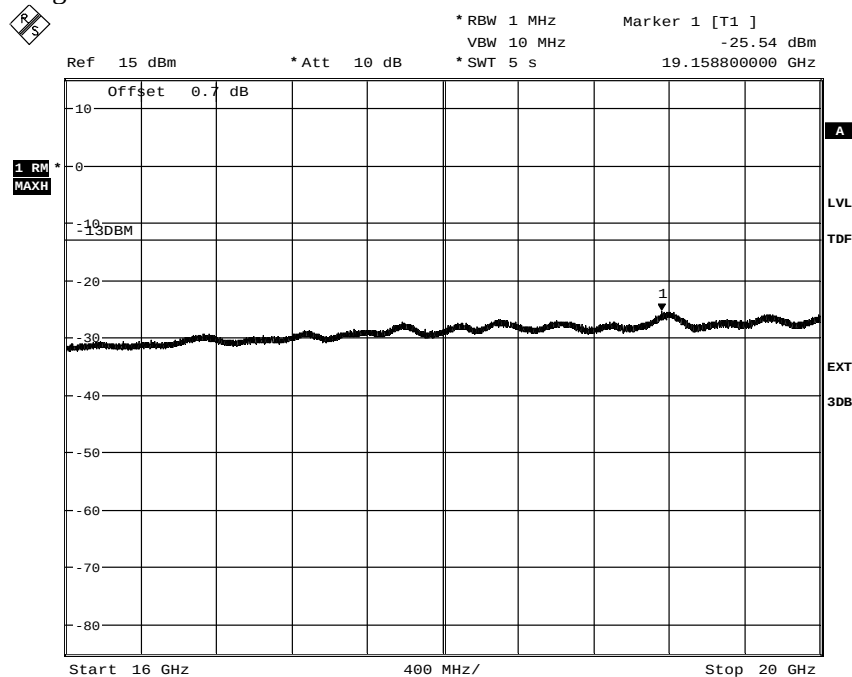

Date: 12.NOV.2013 09:58:27


Appendix 5

Diagram 6 a:

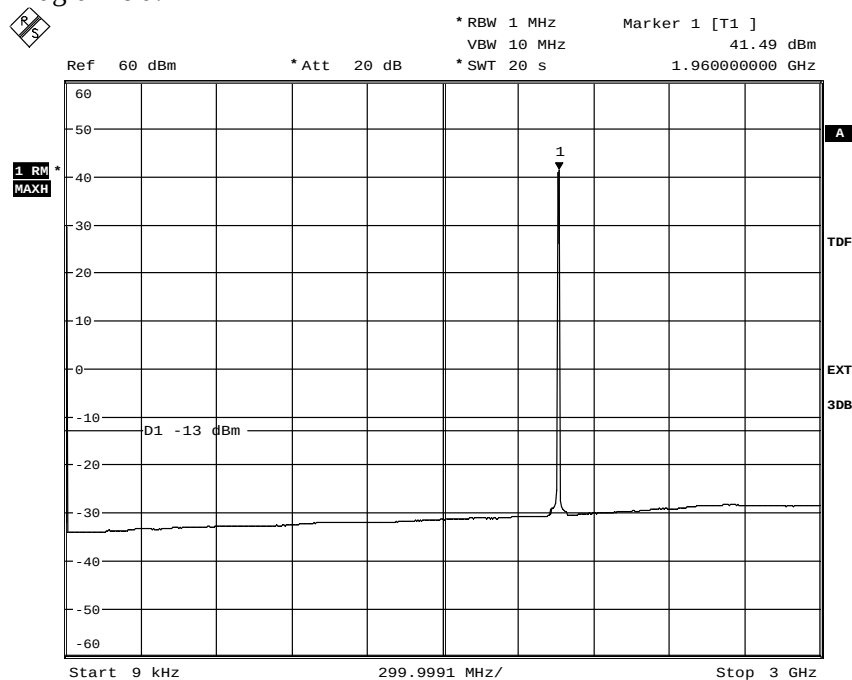

Date: 12.NOV.2013 10:39:19


Diagram 6 b:

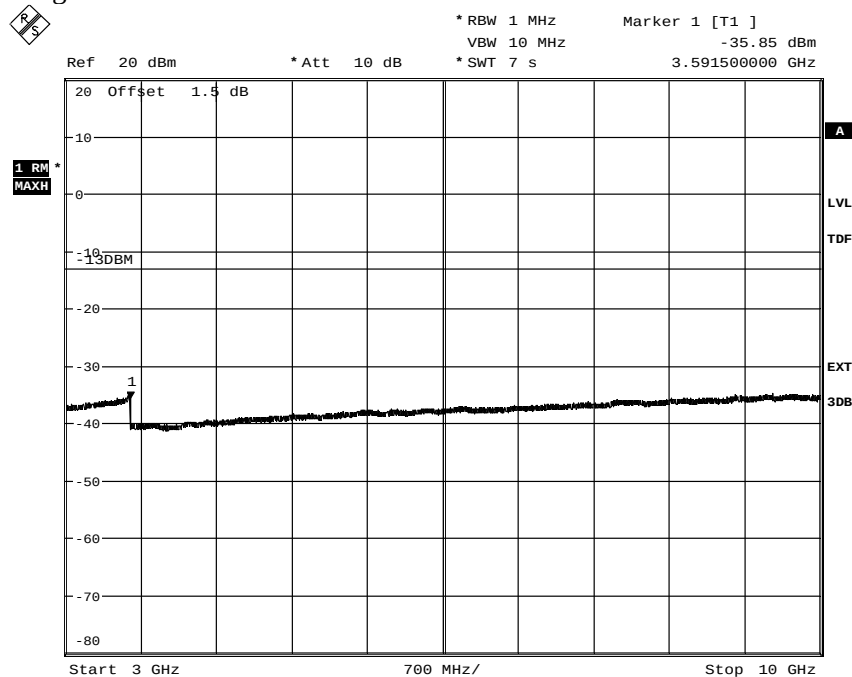

Date: 12.NOV.2013 10:41:08


Appendix 5

Diagram 6 c:

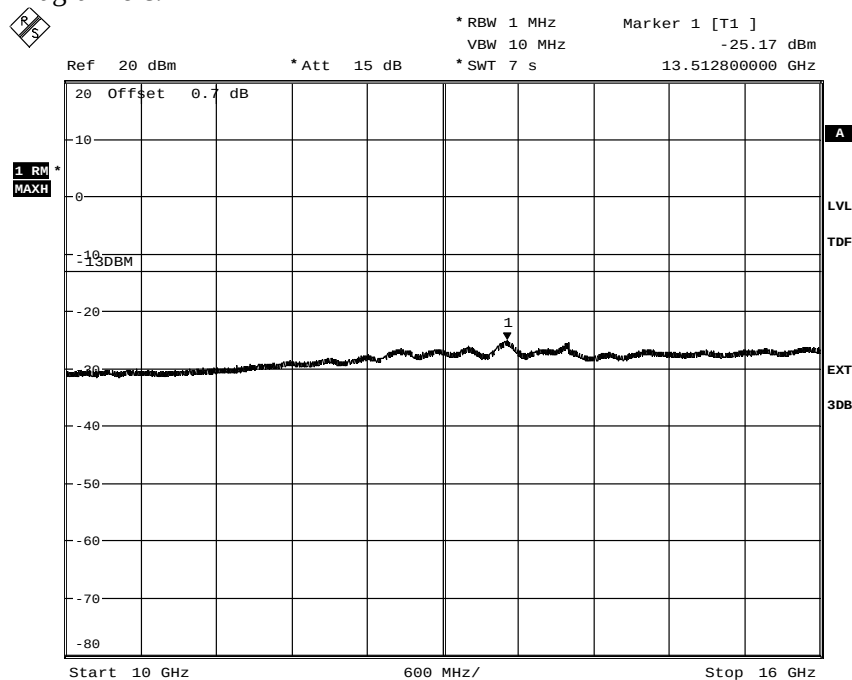

Date: 12.NOV.2013 10:42:25


Diagram 6 d:

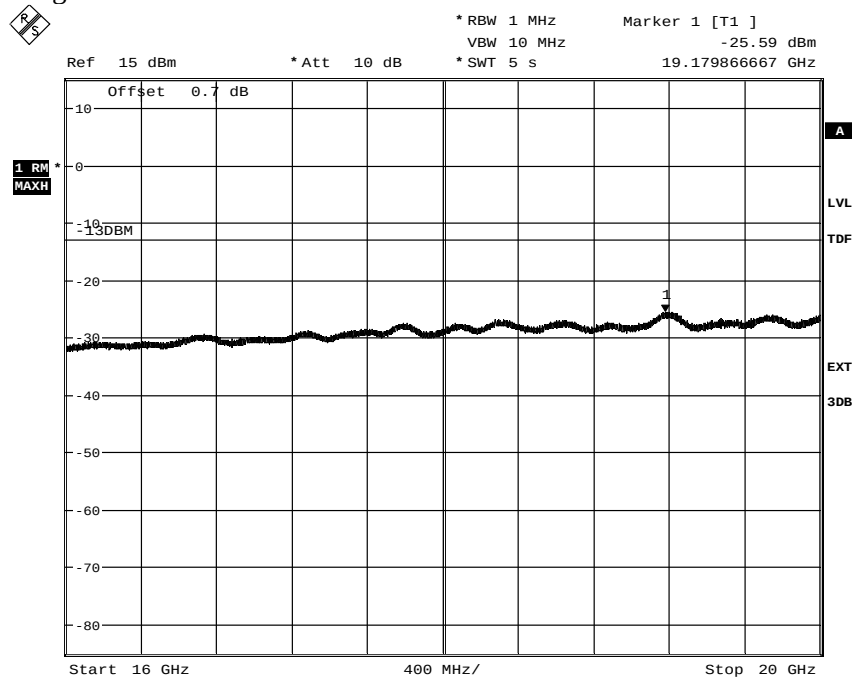

Date: 12.NOV.2013 10:43:13


Appendix 5

Diagram 7 a:

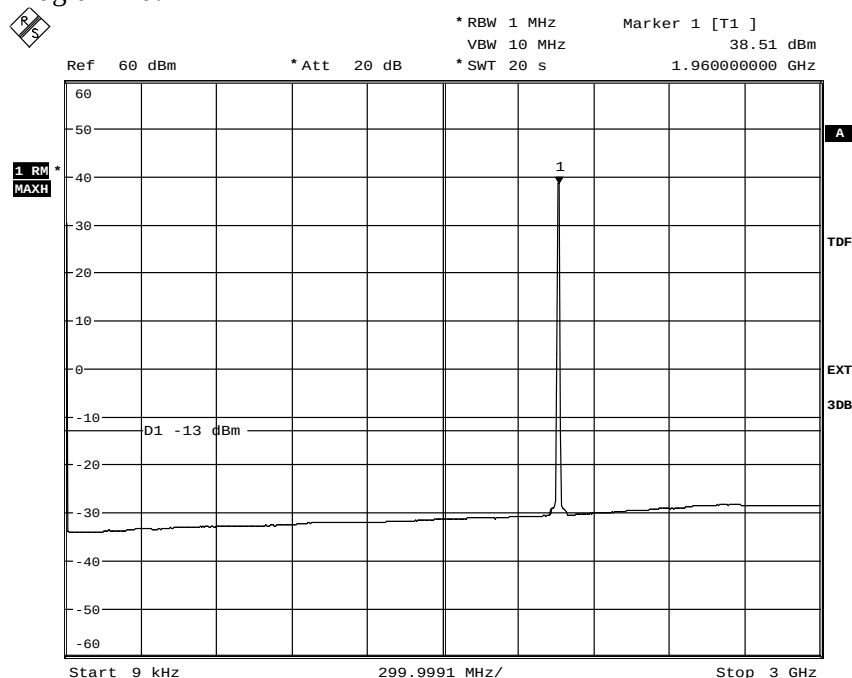

Date: 12.NOV.2013 10:48:04


Diagram 7 b:

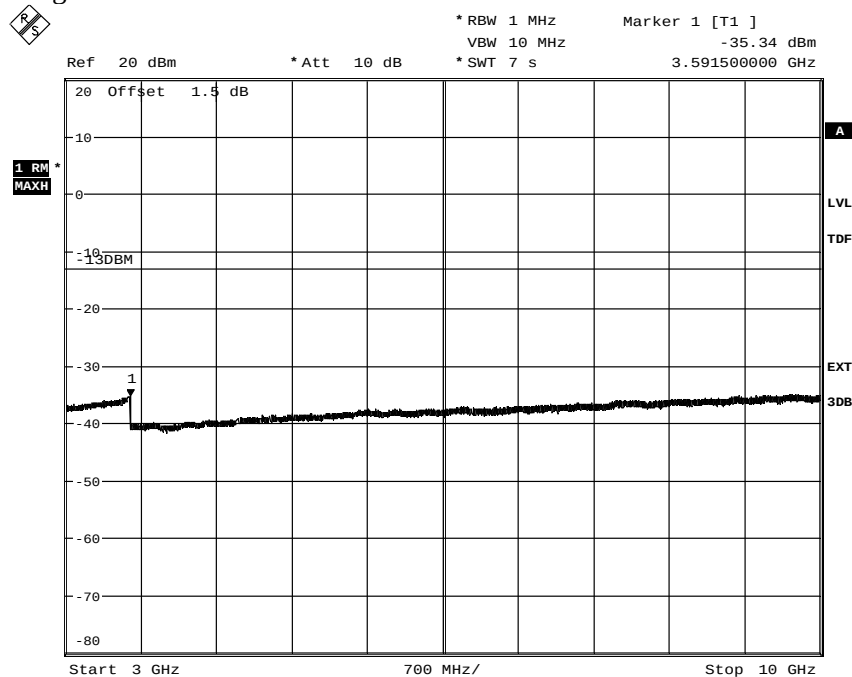

Date: 12.NOV.2013 10:46:43


Appendix 5

Diagram 7 c:

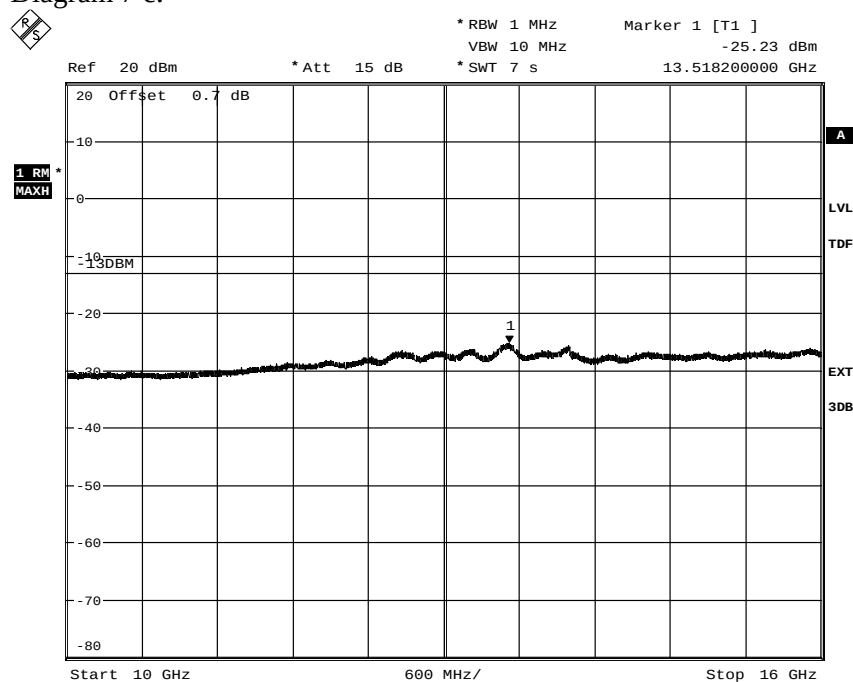

Date: 12.NOV.2013 10:45:57


Diagram 7 d:

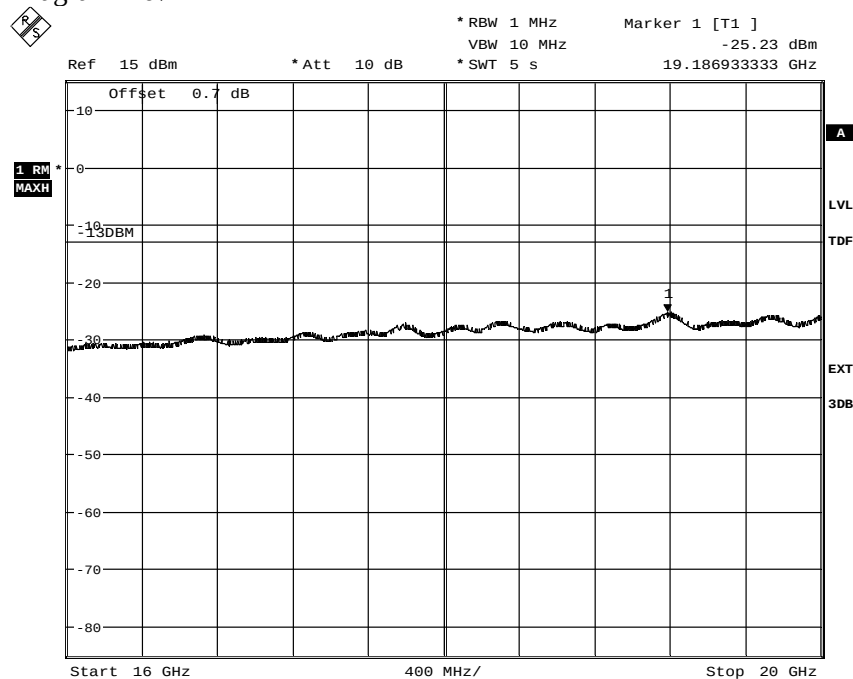

Date: 12.NOV.2013 10:44:58


Appendix 5

Diagram 8 a:

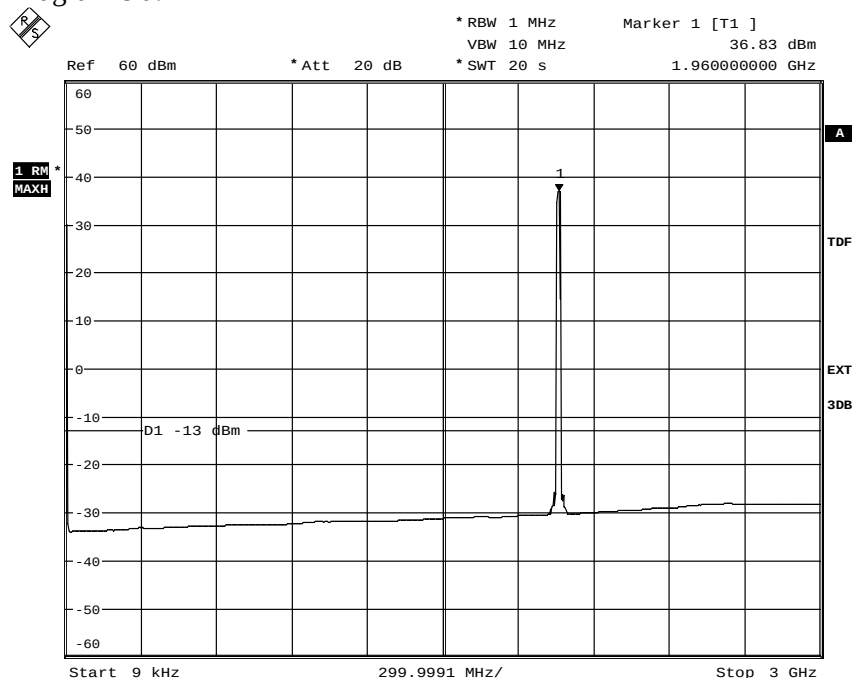

Date: 12.NOV.2013 11:28:52


Diagram 8 b:

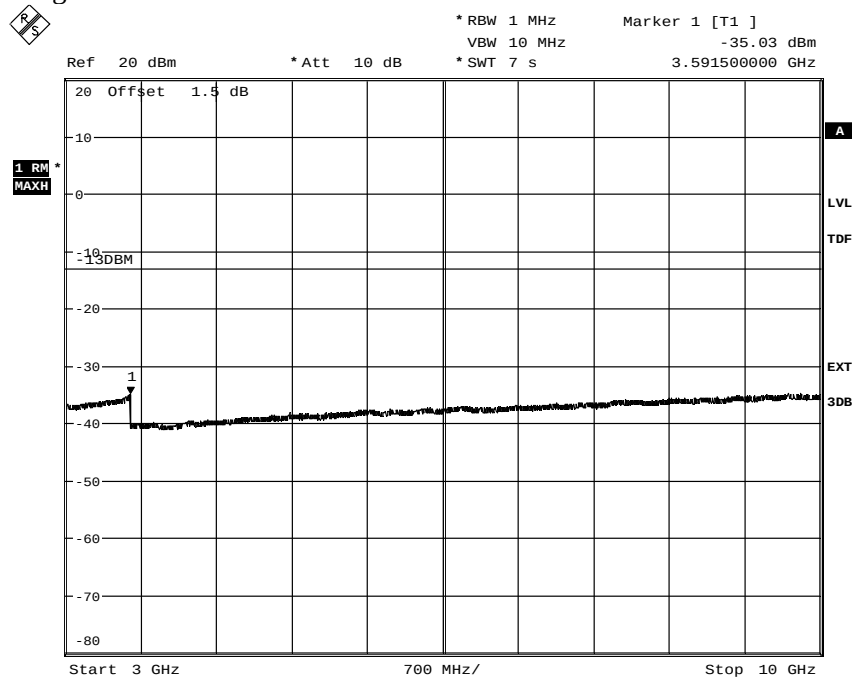

Date: 12.NOV.2013 11:32:14


Appendix 5

Diagram 8 c:

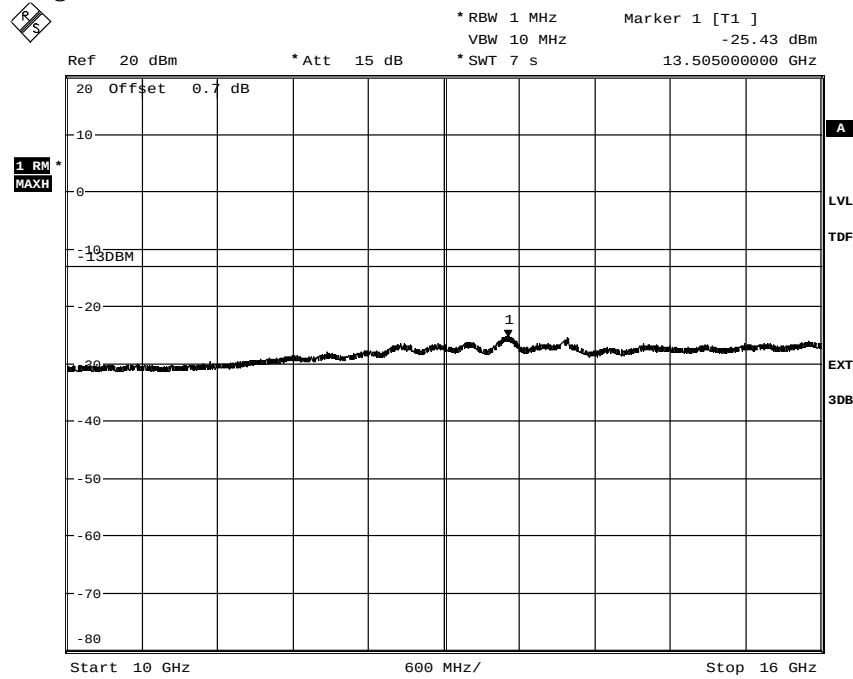

Date: 12.NOV.2013 11:33:14


Diagram 8 d:

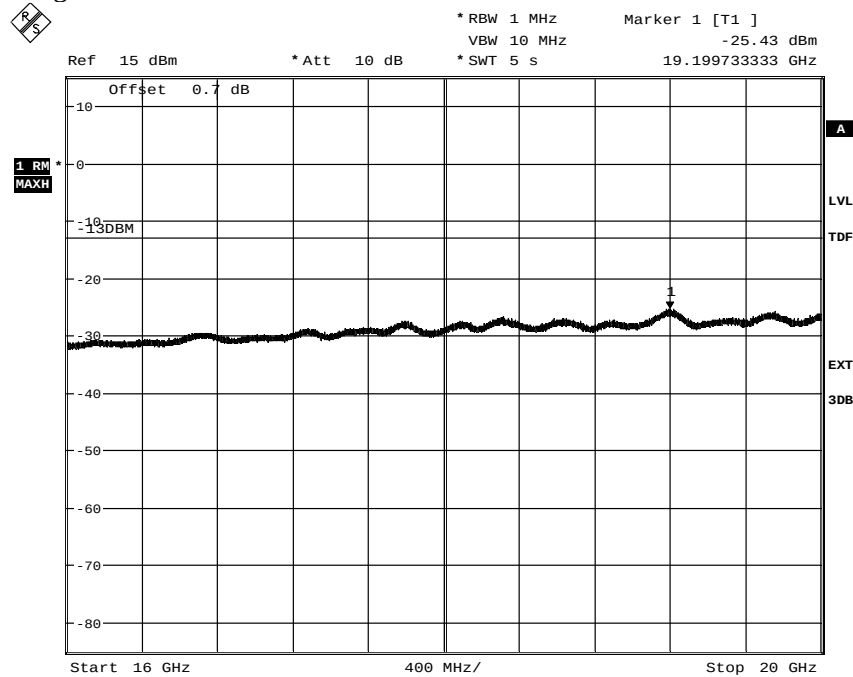

Date: 12.NOV.2013 11:33:54


Appendix 5

Diagram 9 a:

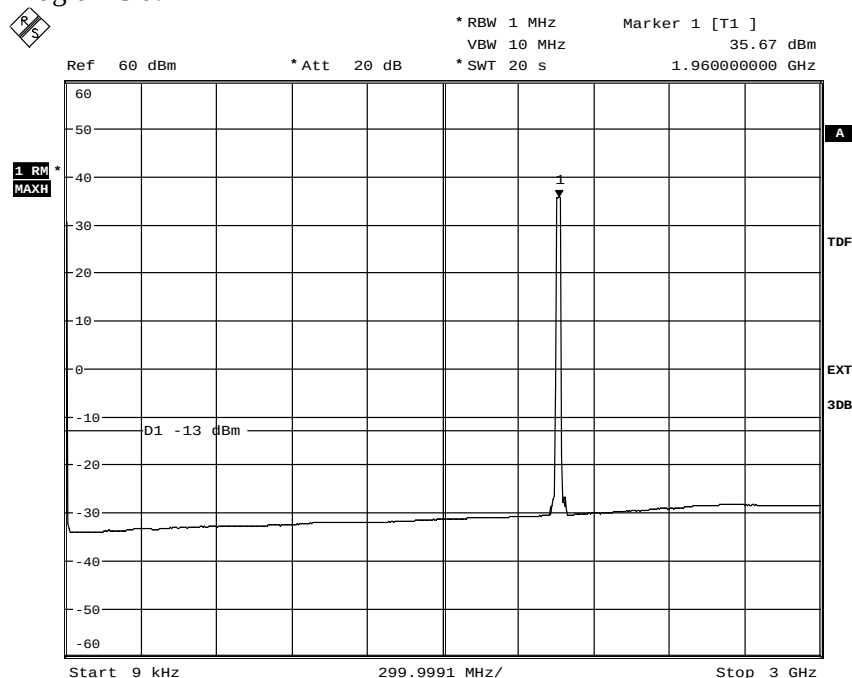

Date: 12.NOV.2013 11:38:56


Diagram 9 b:

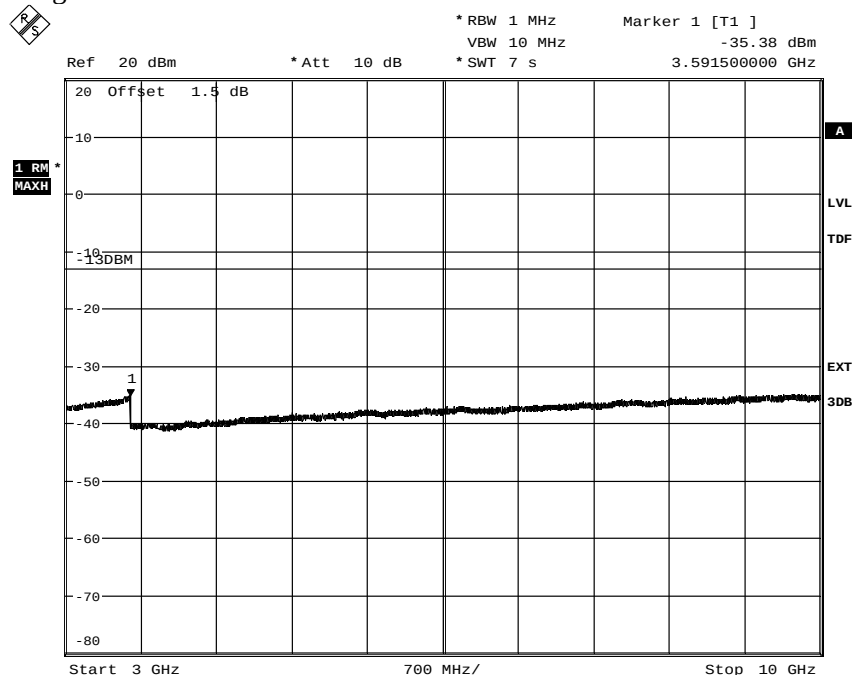

Date: 12.NOV.2013 11:37:20


Appendix 5

Diagram 9 c:

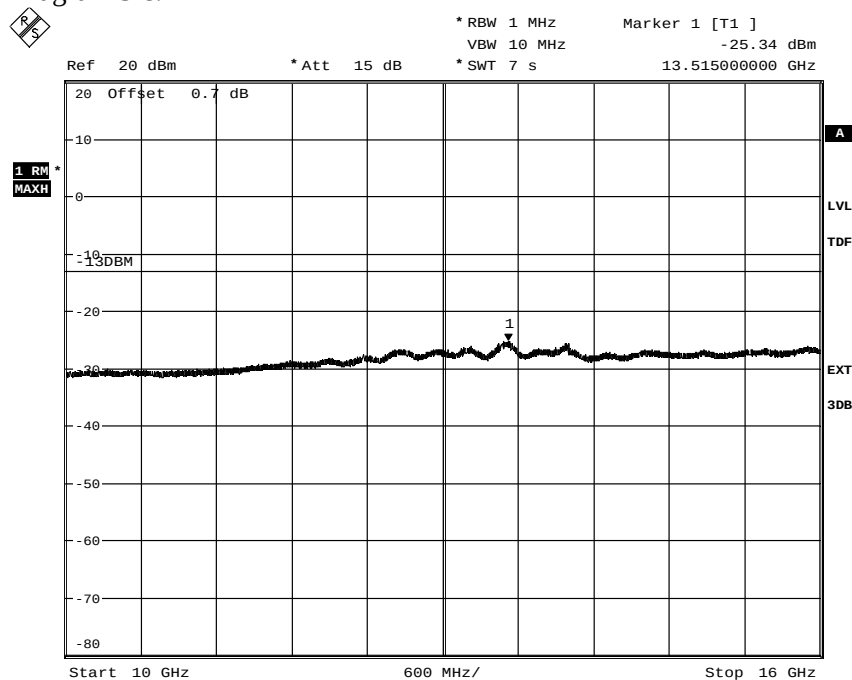

Date: 12.NOV.2013 11:36:30


Diagram 9 d:

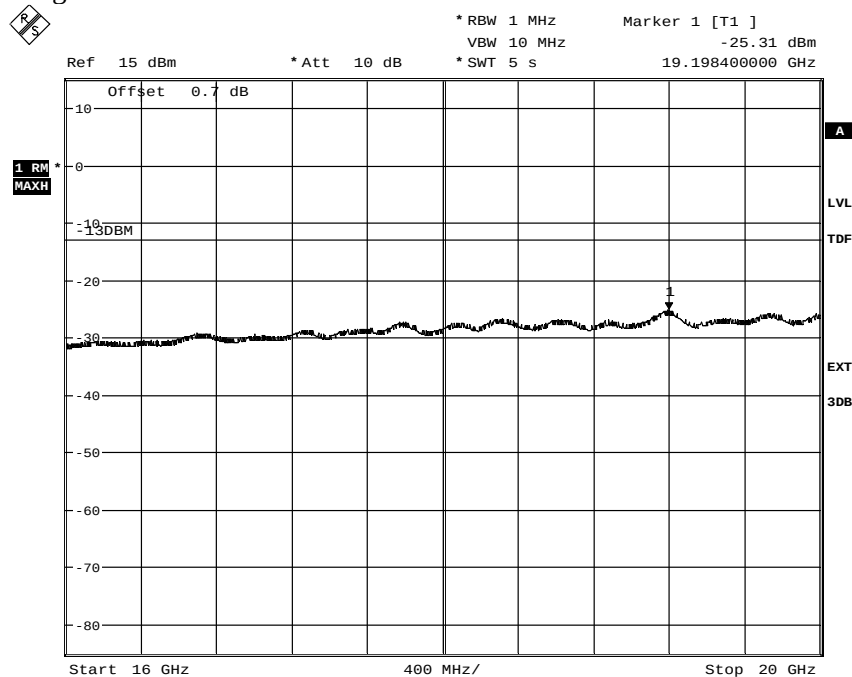

Date: 12.NOV.2013 11:35:47


Appendix 5

Diagram 10 a:

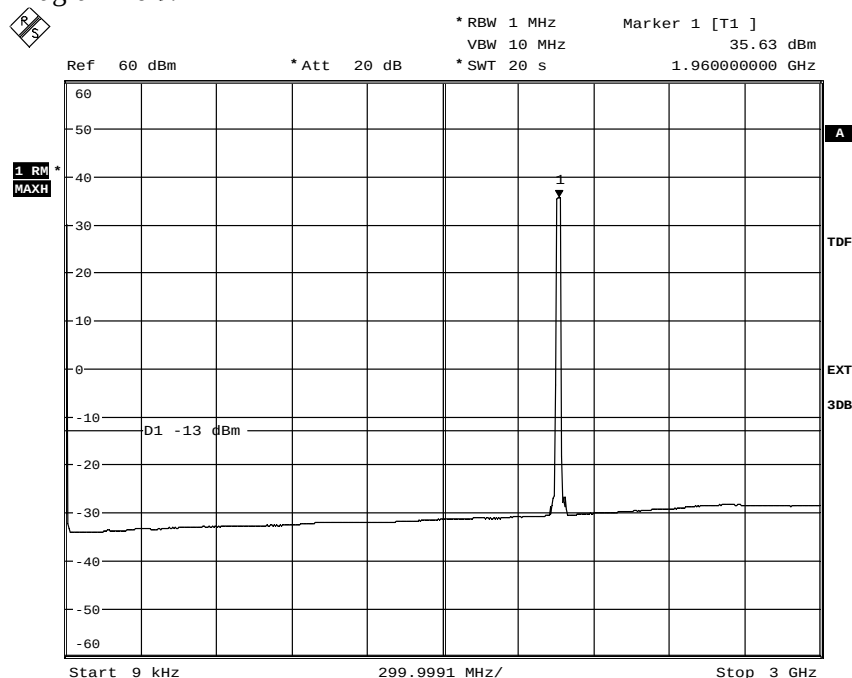

Date: 12.NOV.2013 08:55:12


Diagram 10 b:

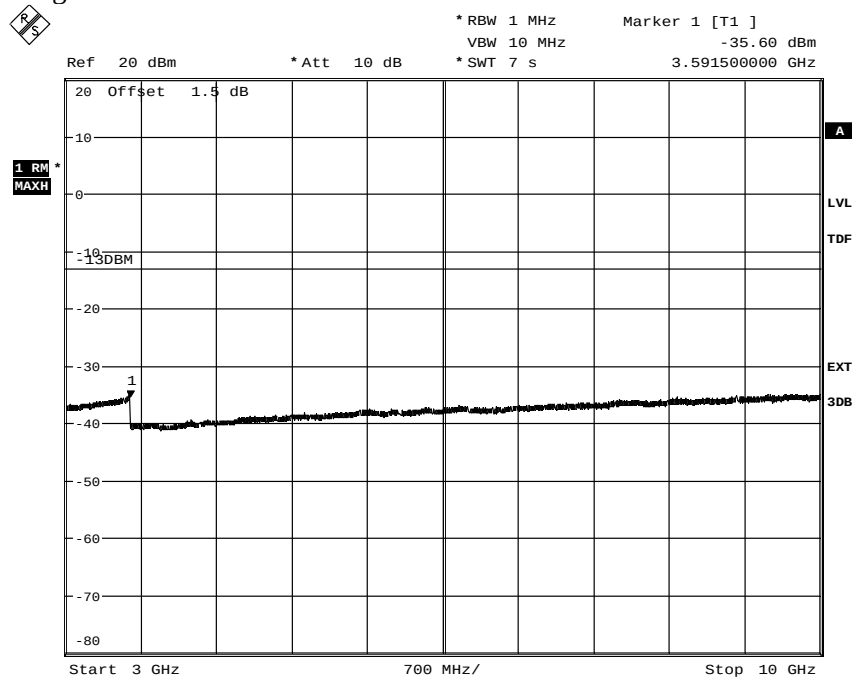

Date: 12.NOV.2013 08:57:13


Appendix 5

Diagram 10 c:

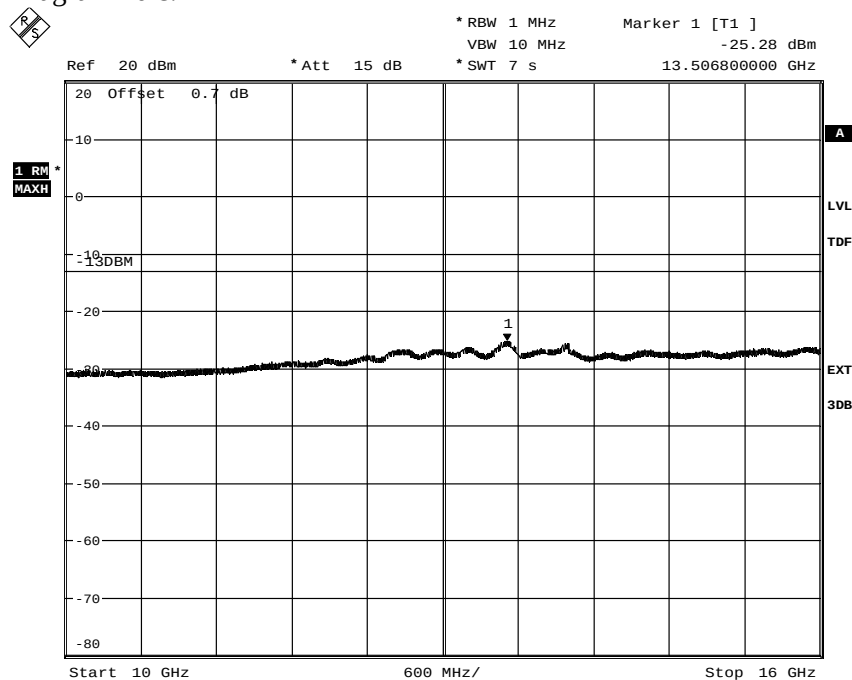

Date: 12.NOV.2013 08:58:43


Diagram 10 d:

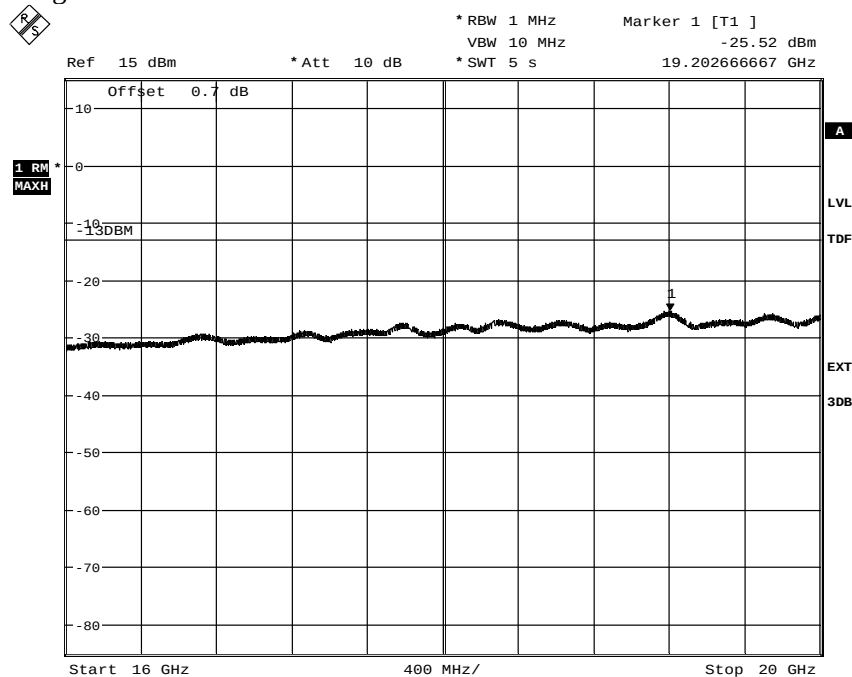

Date: 12.NOV.2013 09:00:13


Appendix 5

Diagram 11 a:

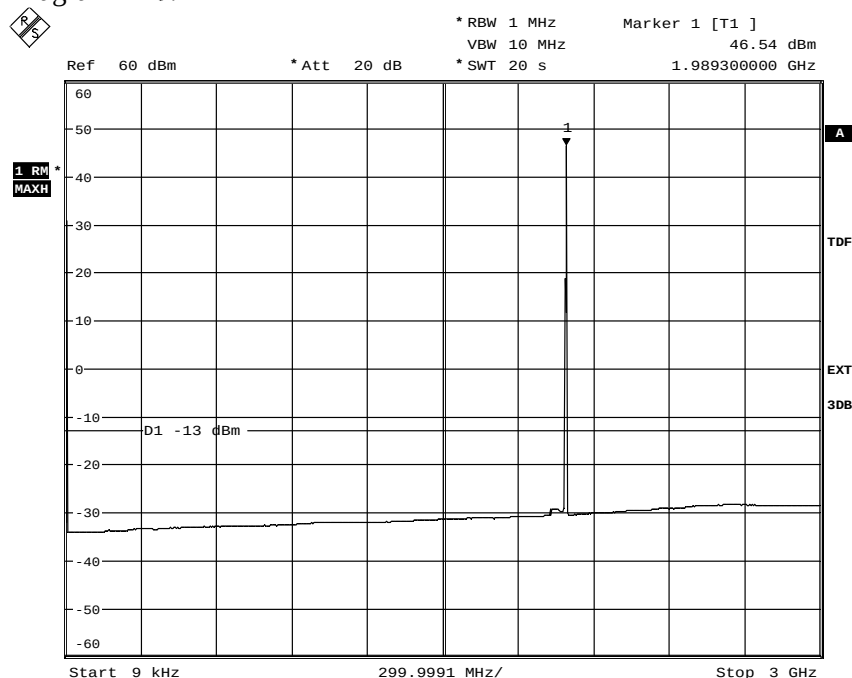

Date: 12.NOV.2013 12:03:51


Diagram 11 b:

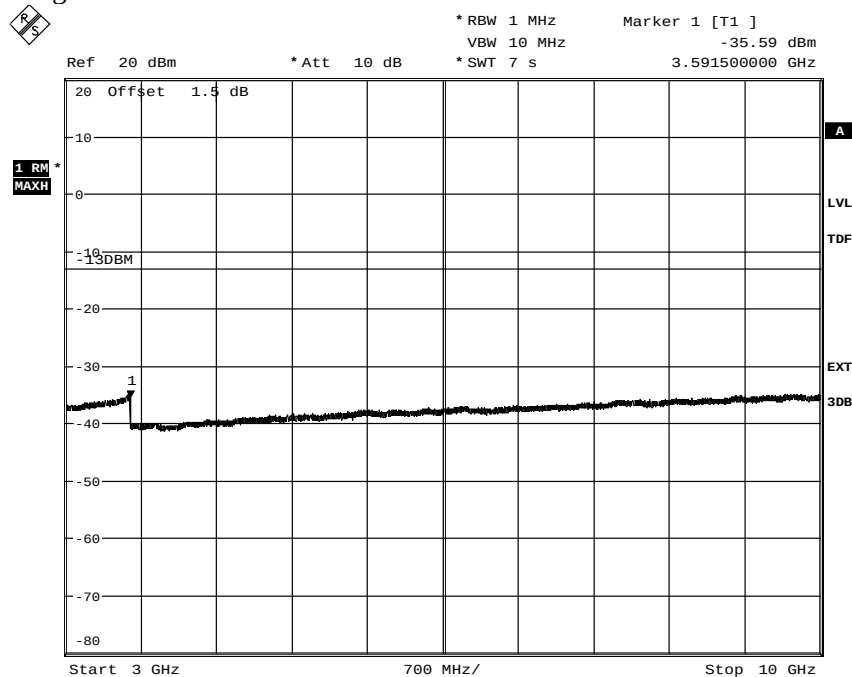

Date: 12.NOV.2013 12:02:26


Appendix 5

Diagram 11 c:

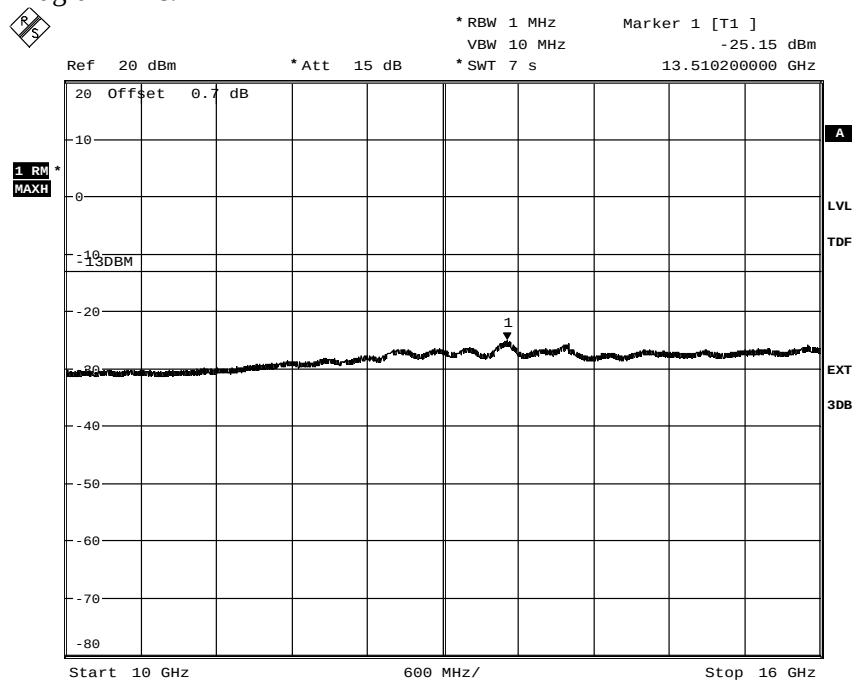

Date: 12.NOV.2013 12:01:36


Diagram 11 d:

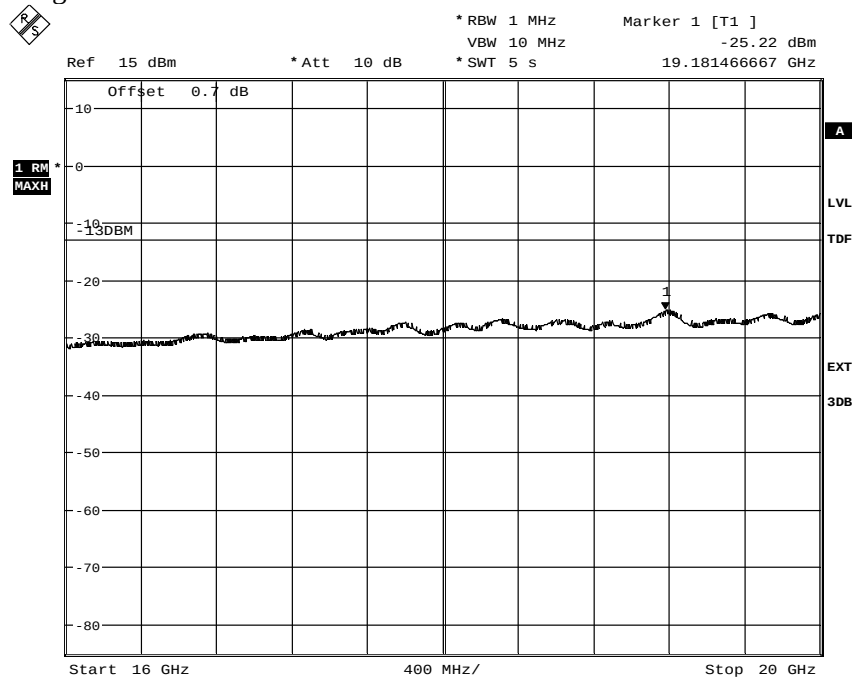

Date: 12.NOV.2013 12:00:36


Appendix 5

Diagram 12 a:

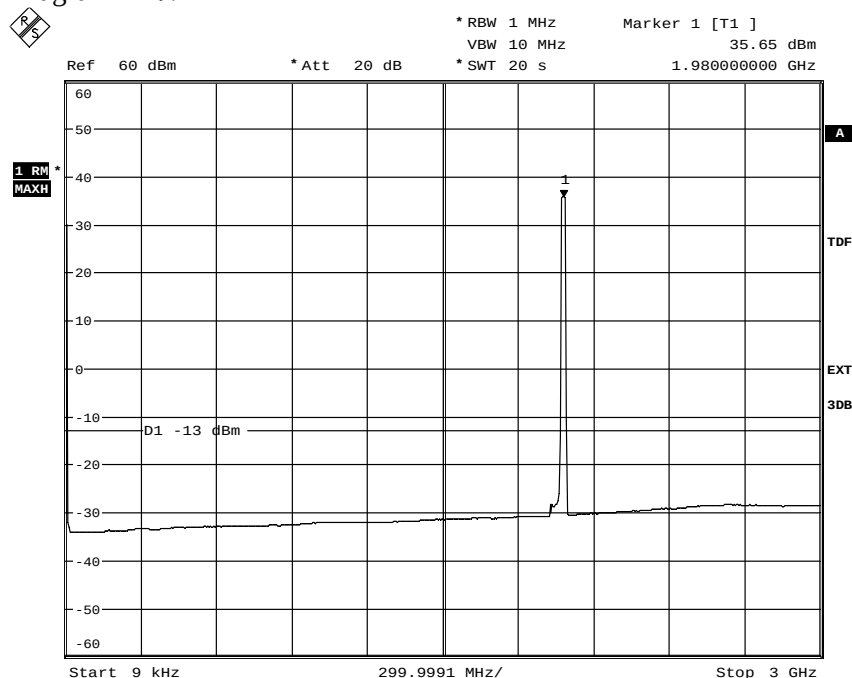

Date: 12.NOV.2013 11:54:27


Diagram 12 b:

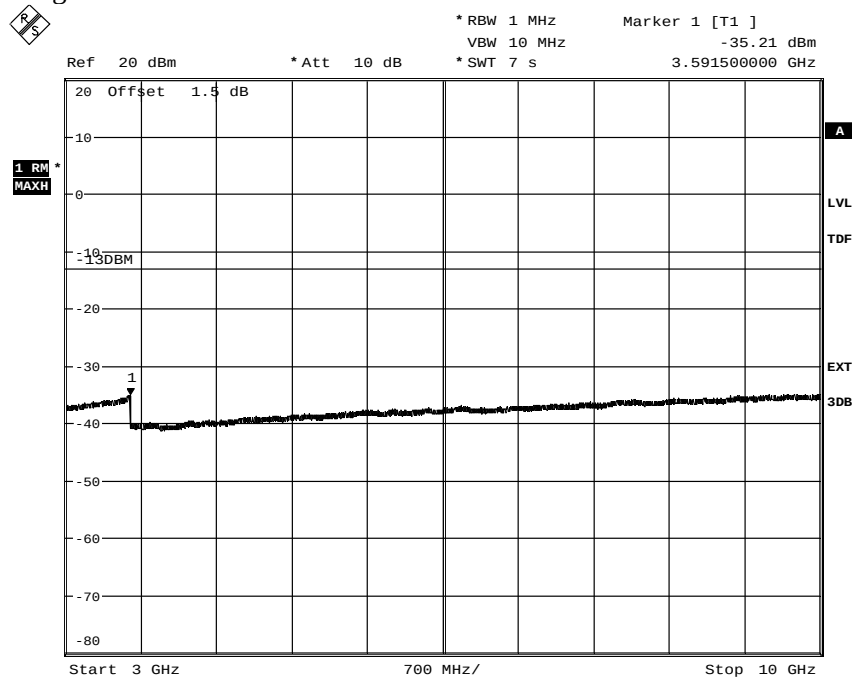

Date: 12.NOV.2013 11:56:31


Appendix 5

Diagram 12 c:

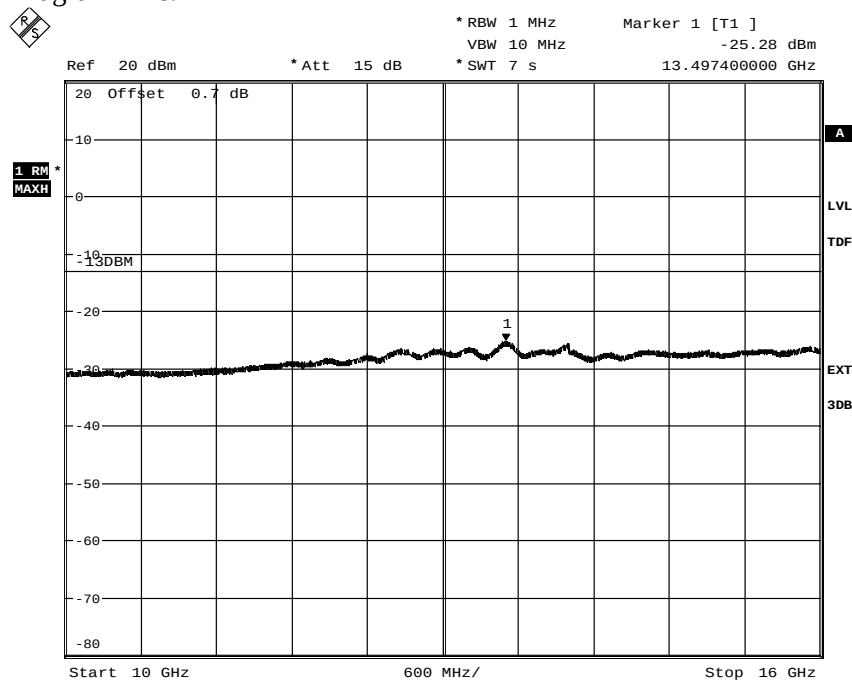

Date: 12.NOV.2013 11:57:29

Diagram 12 d:

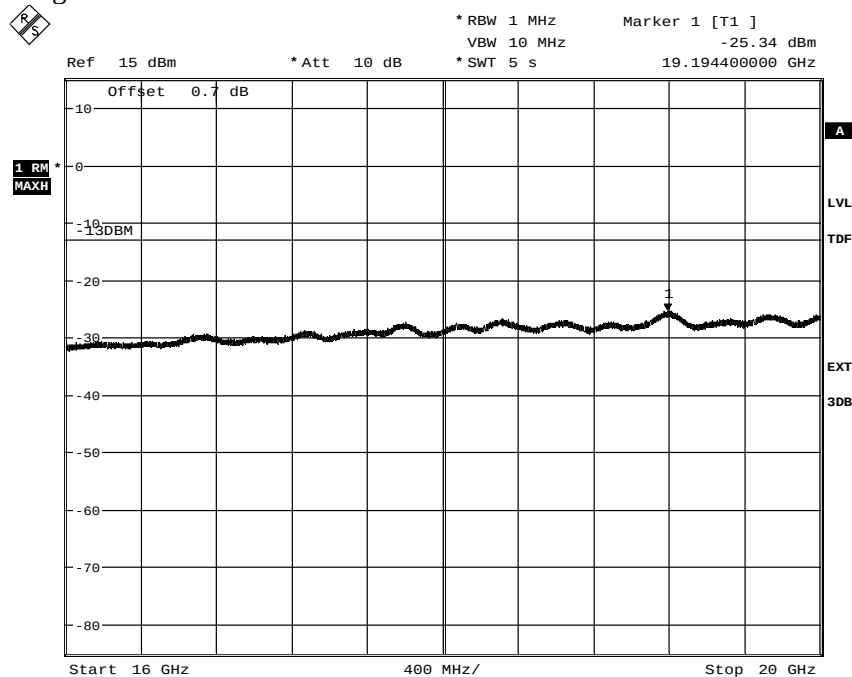


Date: 12.NOV.2013 11:58:18




Appendix 5

Diagram 13 a:

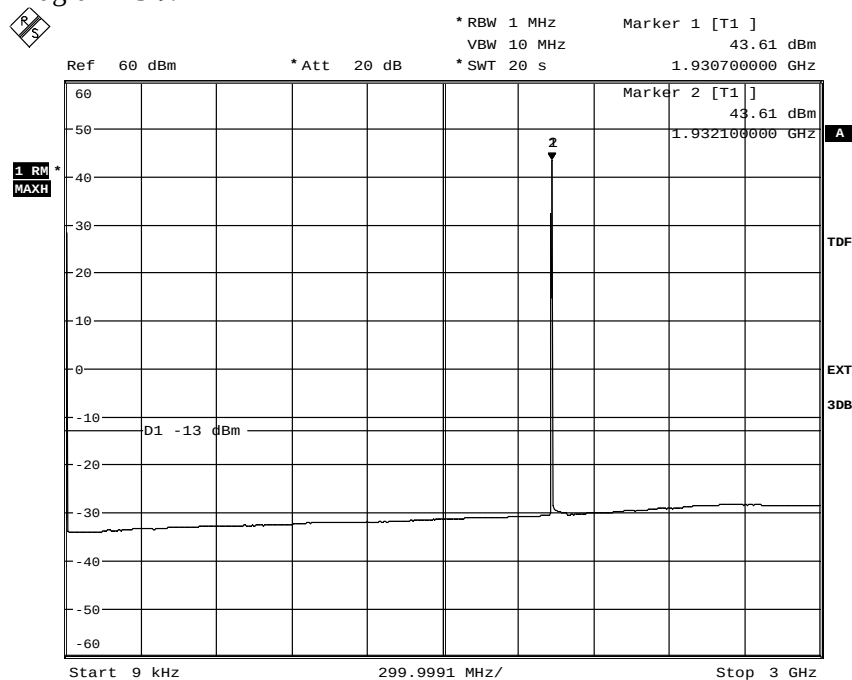

Date: 7.NOV.2013 19:57:14


Diagram 13 b:

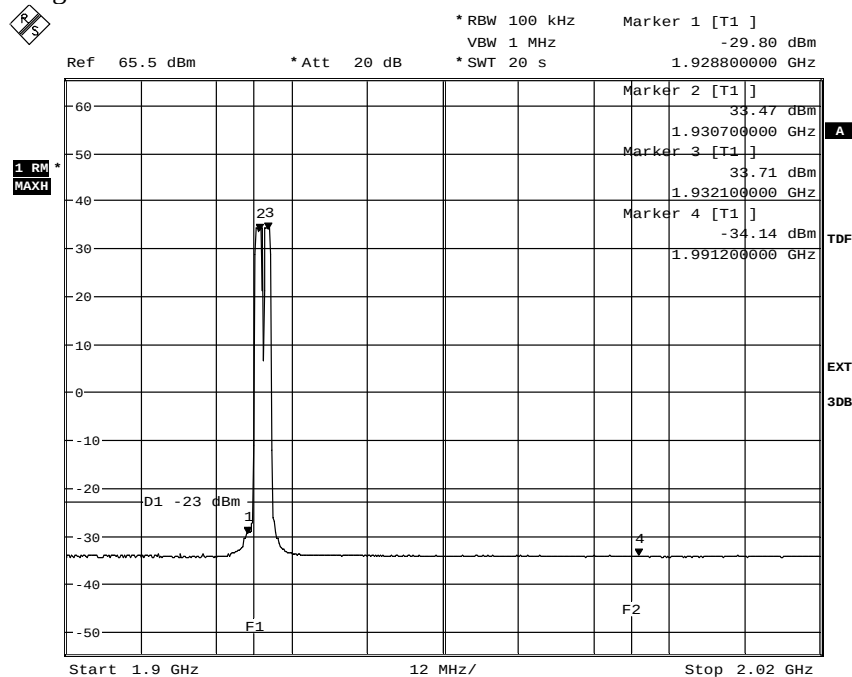

Date: 7.NOV.2013 19:56:11


Appendix 5

Diagram 13 c:

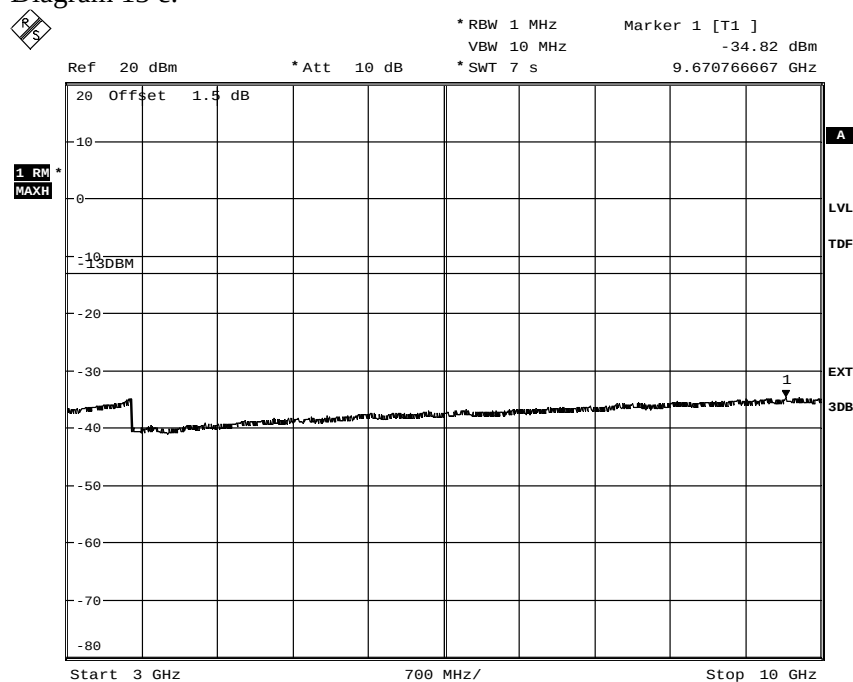

Date: 7.NOV.2013 19:53:04


Diagram 13 d:

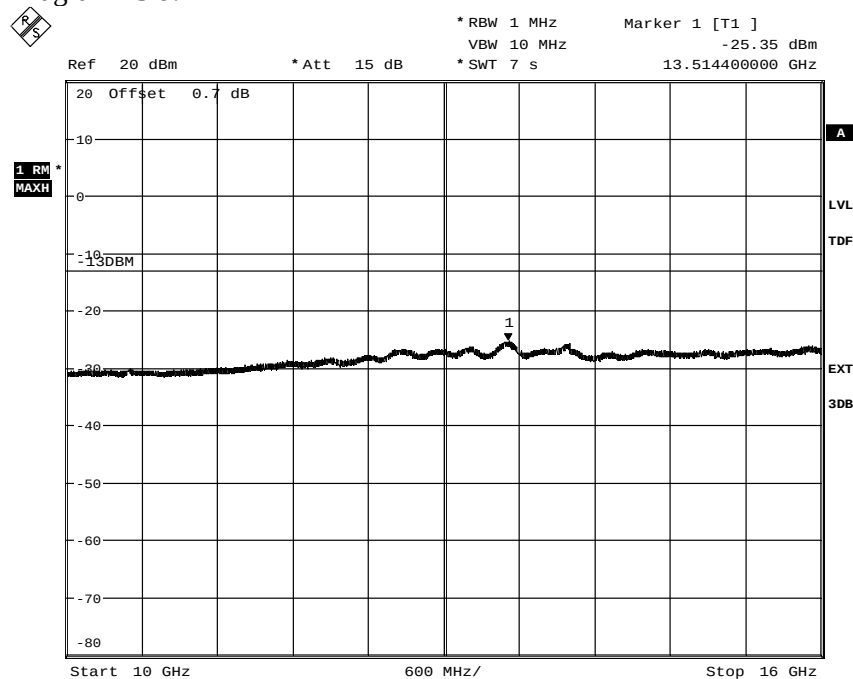

Date: 7.NOV.2013 19:53:42

Appendix 5


Diagram 13 e:

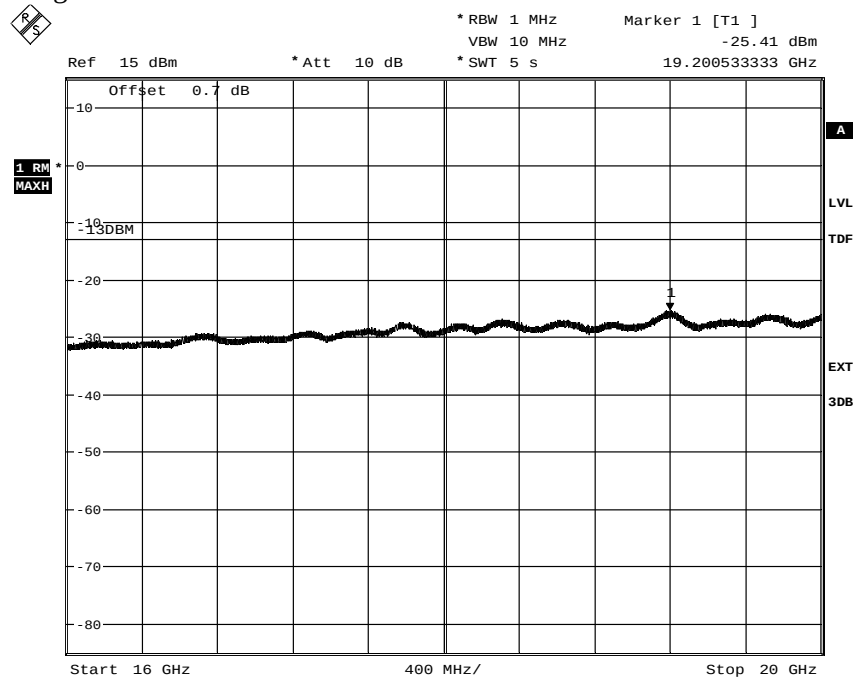

Date: 7.NOV.2013 19:54:13


Appendix 5

Diagram 14 a:

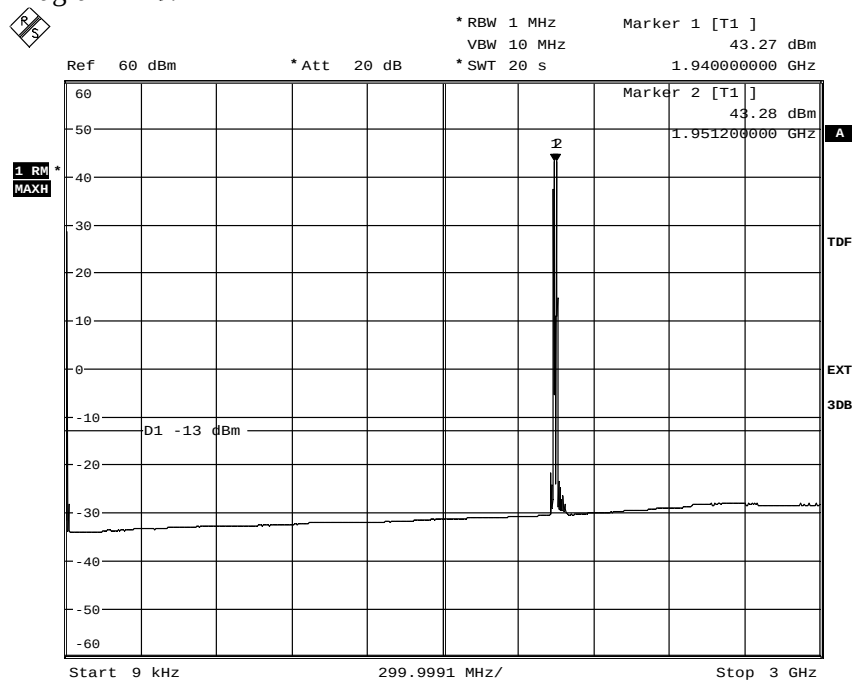

Date: 7.NOV.2013 19:50:22


Diagram 14 b:

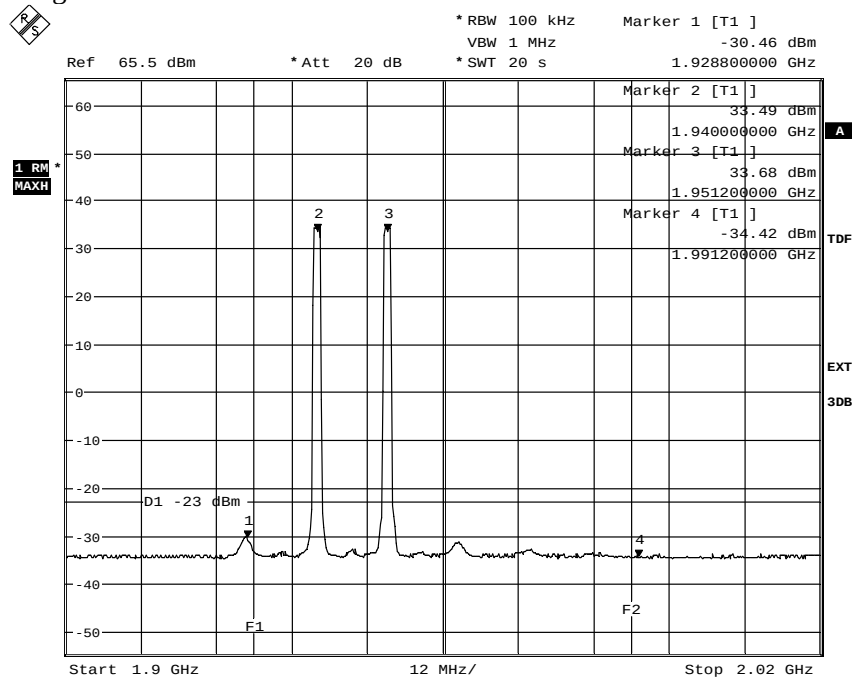

Date: 7.NOV.2013 19:51:01


Appendix 5

Diagram 14 c:

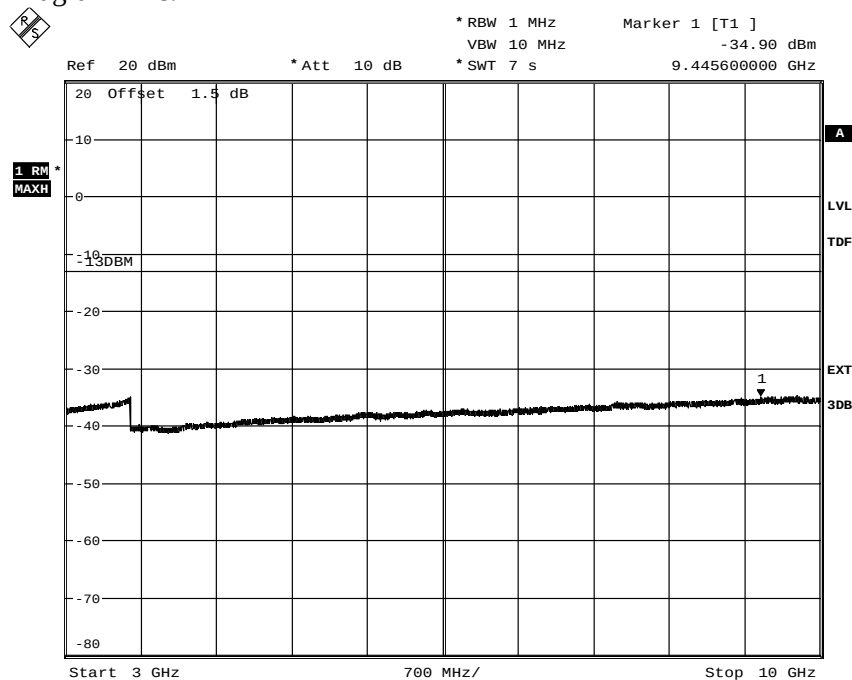

Date: 7.NOV.2013 19:48:04


Diagram 14 d:

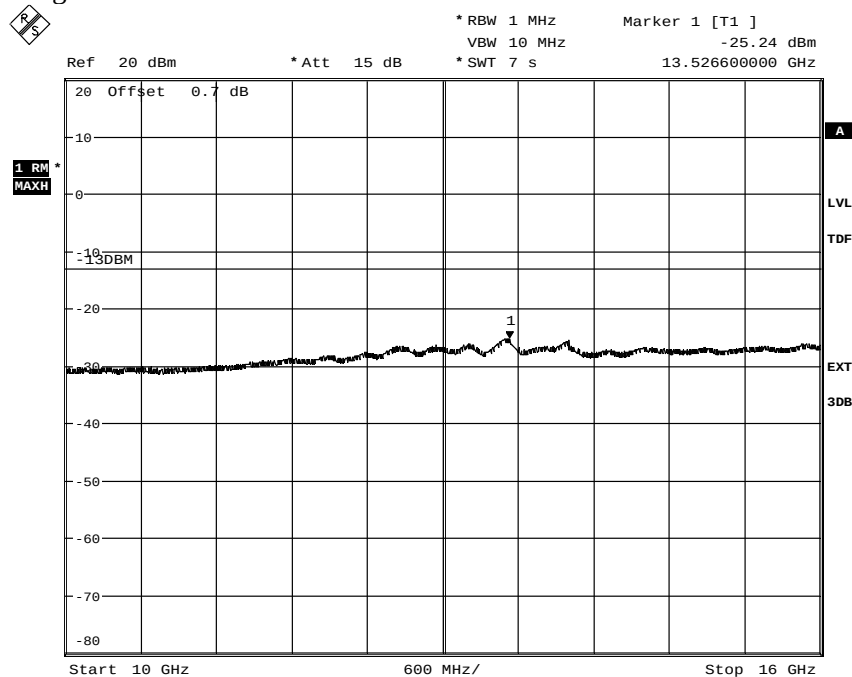

Date: 7.NOV.2013 19:47:26

Appendix 5


Diagram 14 e:

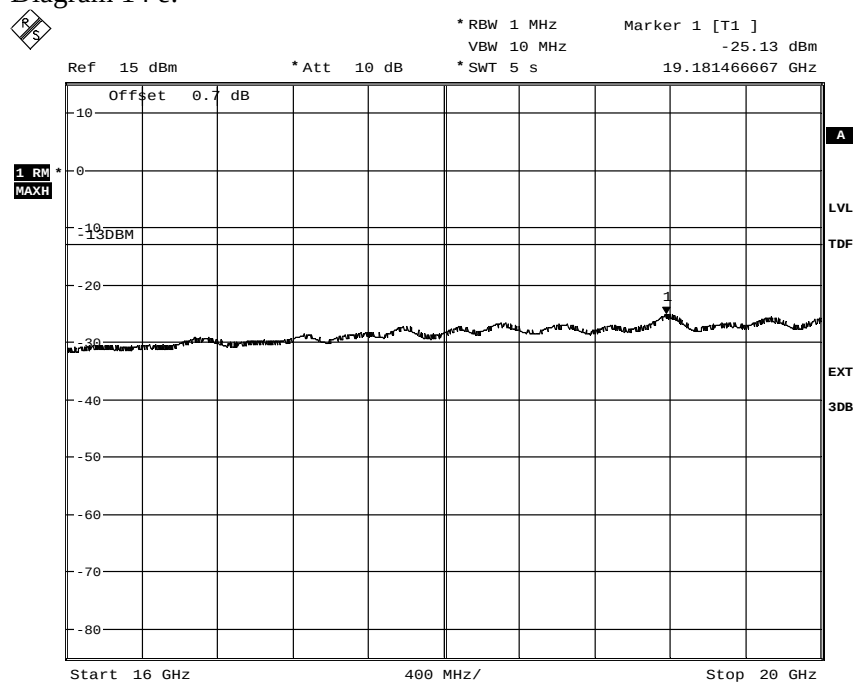

Date: 7.NOV.2013 19:45:49


Appendix 5

Diagram 15 a:

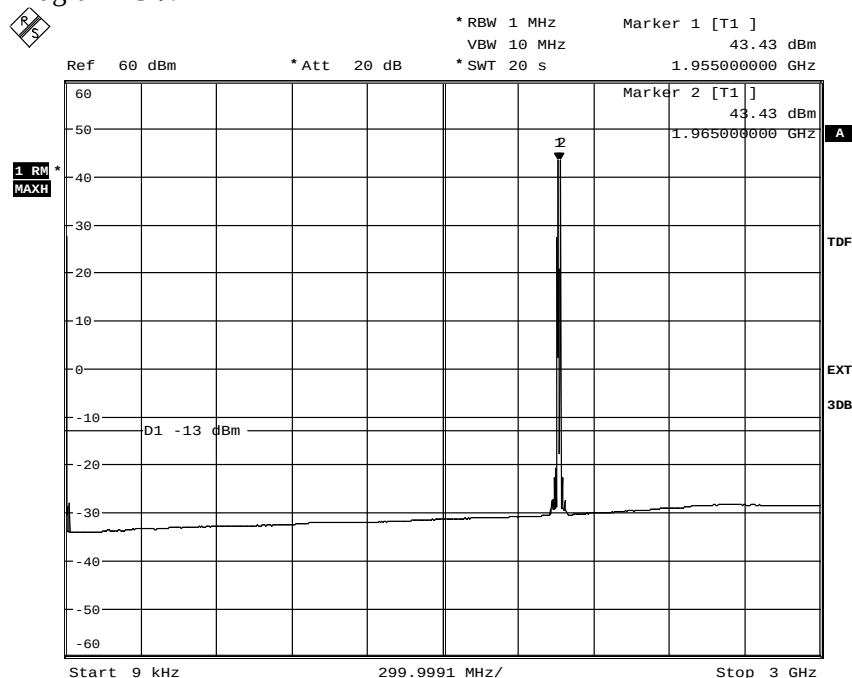

Date: 7.NOV.2013 19:39:13

Diagram 15 b:

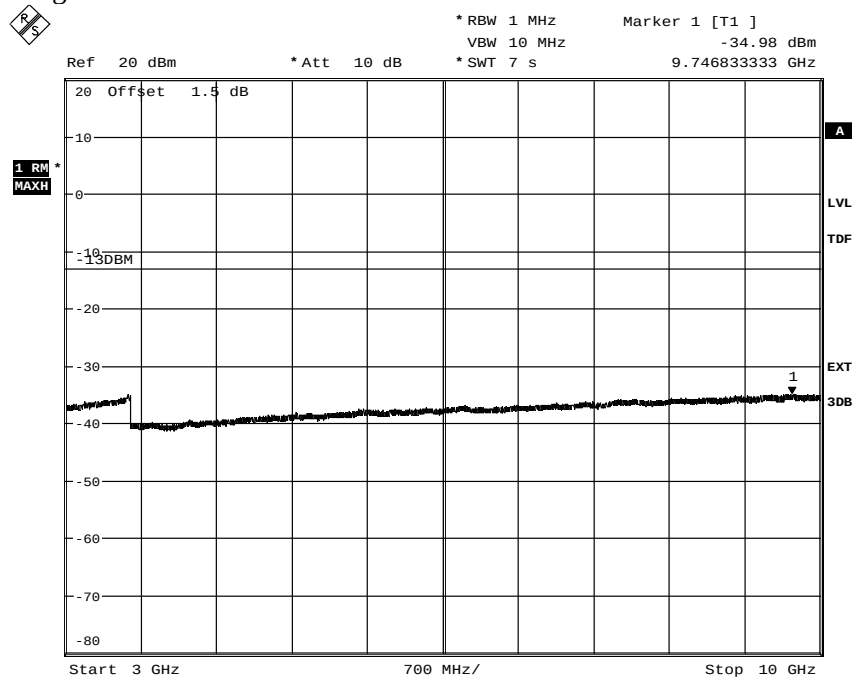


Date: 7.NOV.2013 19:41:37




Appendix 5

Diagram 15 c:

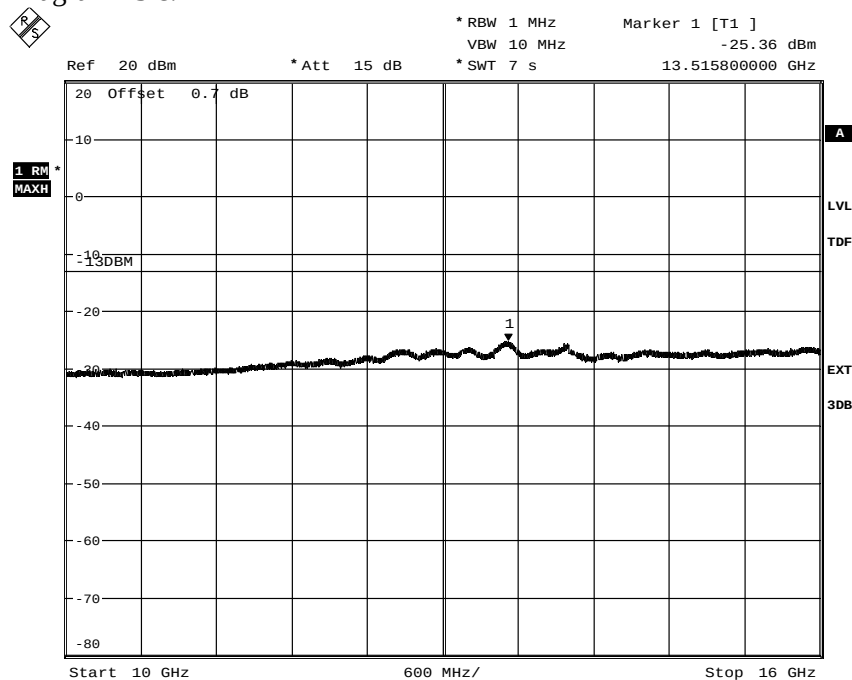

Date: 7.NOV.2013 19:42:13


Diagram 15 d:

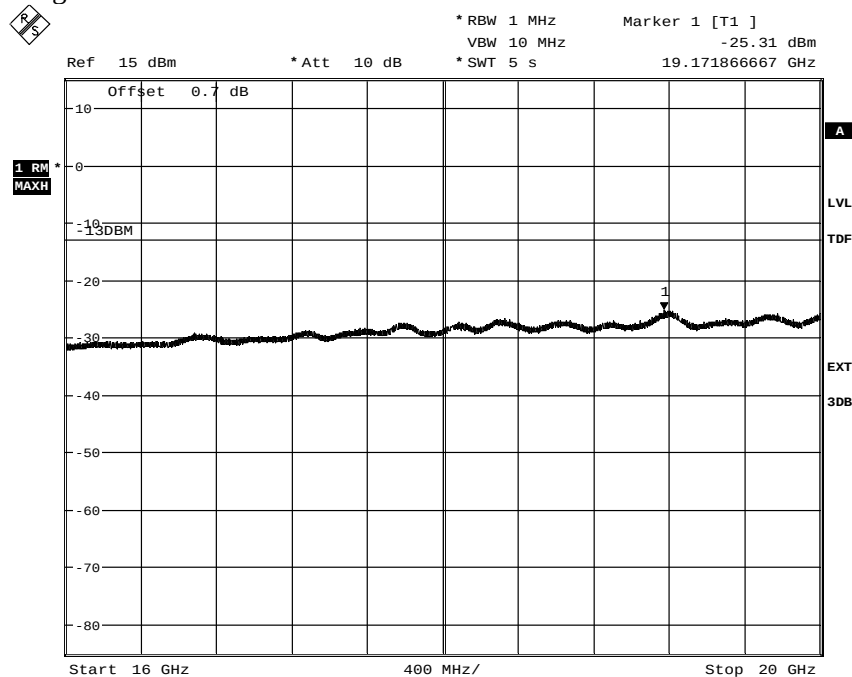

Date: 7.NOV.2013 19:42:52


Appendix 5

Diagram 16 a:

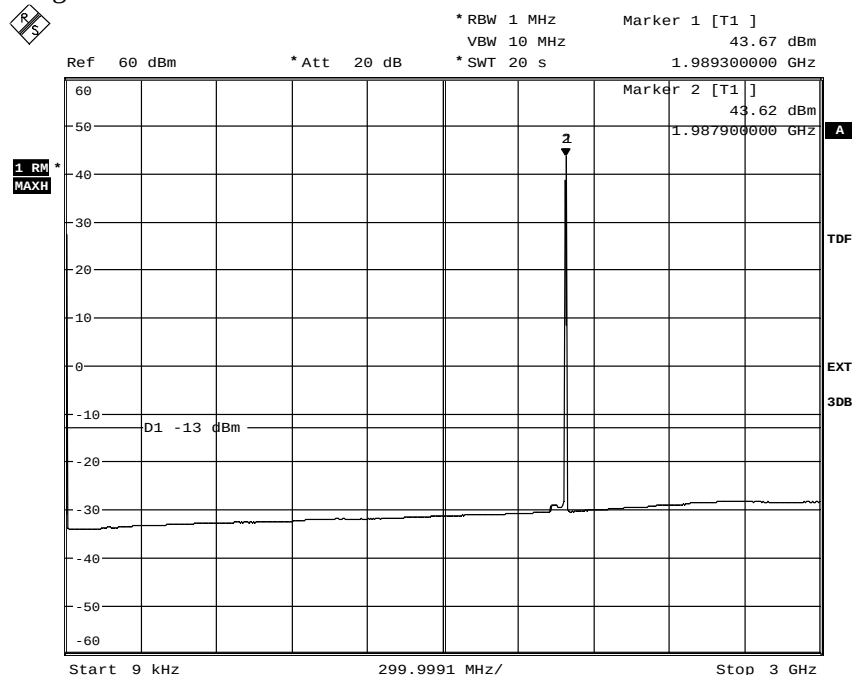

Date: 7.NOV.2013 19:03:08

Diagram 16 b:

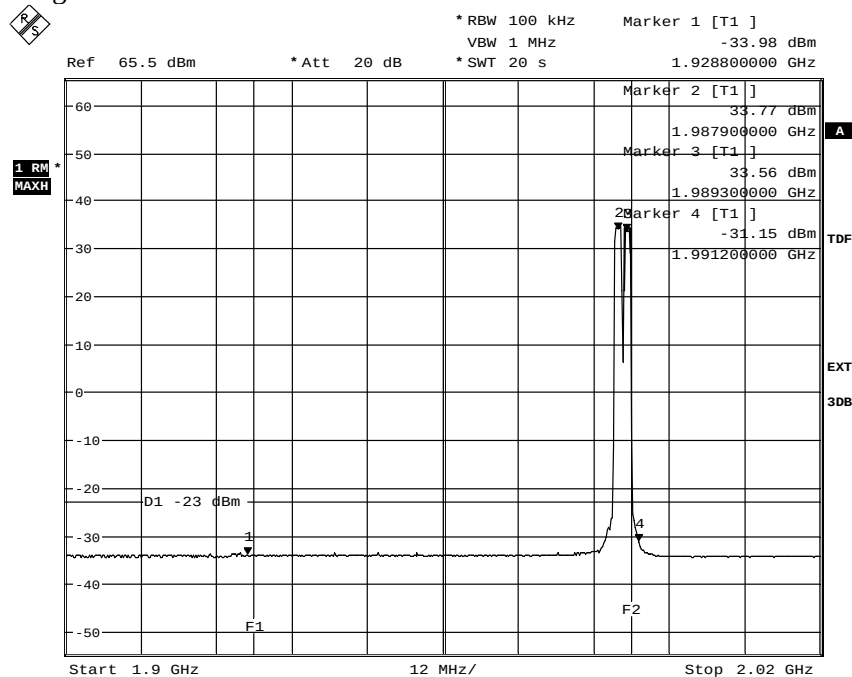


Date: 7.NOV.2013 19:07:38




Appendix 5

Diagram 16 c:

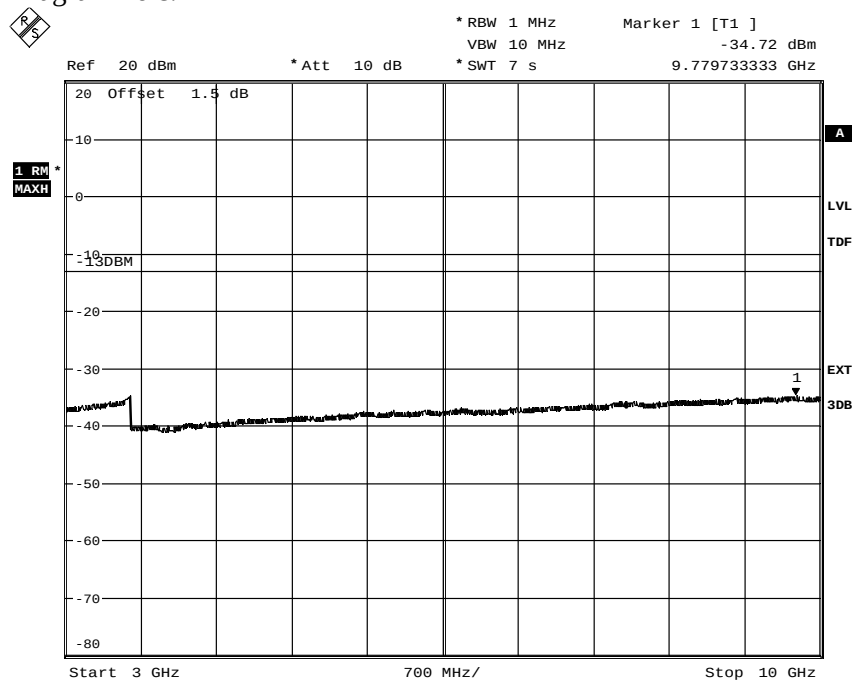

Date: 7.NOV.2013 19:11:29


Diagram 16 d:

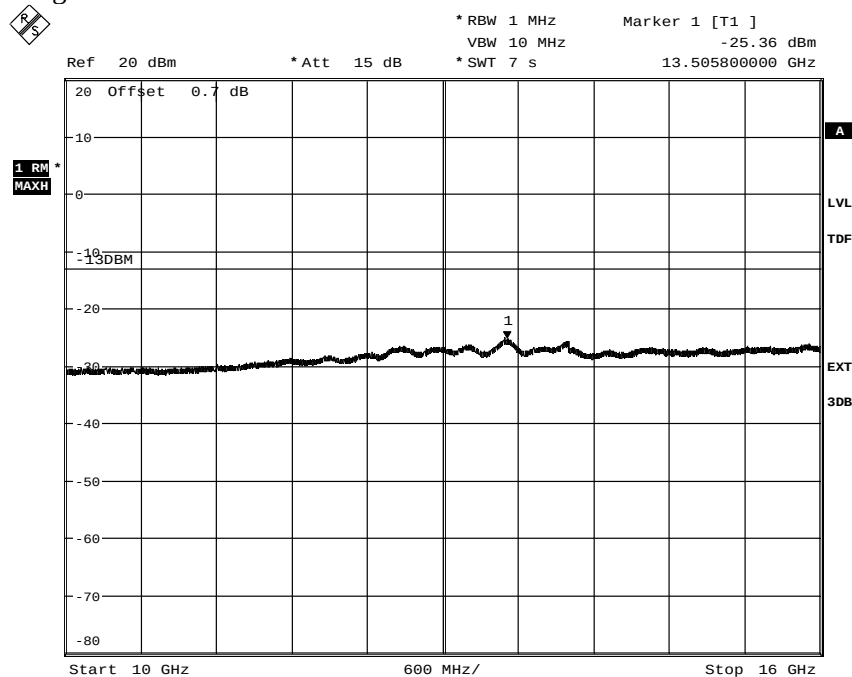

Date: 7.NOV.2013 19:14:38

Appendix 5


Diagram 16 e:

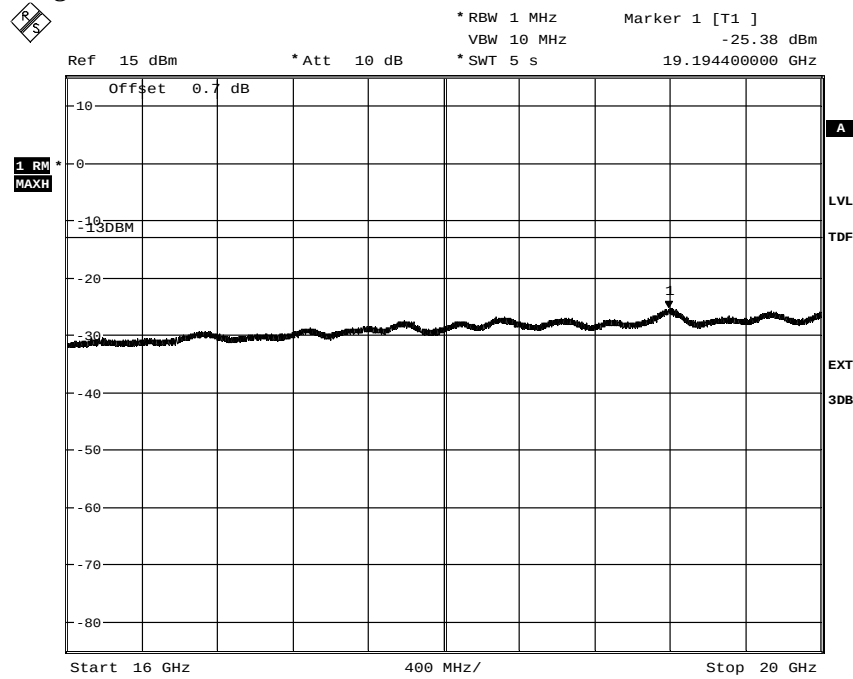

Date: 7.NOV.2013 19:16:33


Appendix 5

Diagram 17 a:

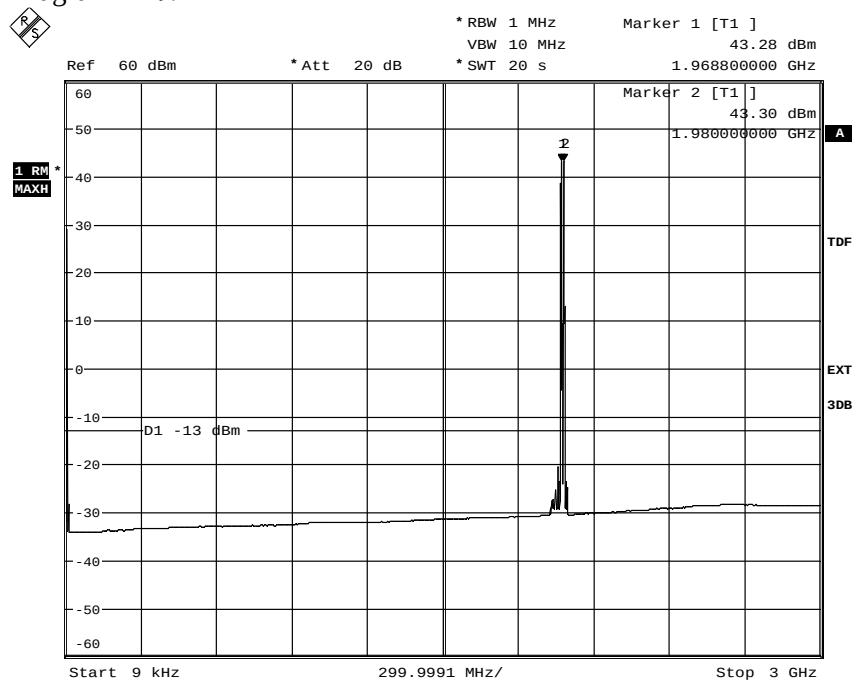

Date: 7.NOV.2013 19:31:29


Diagram 17 b:

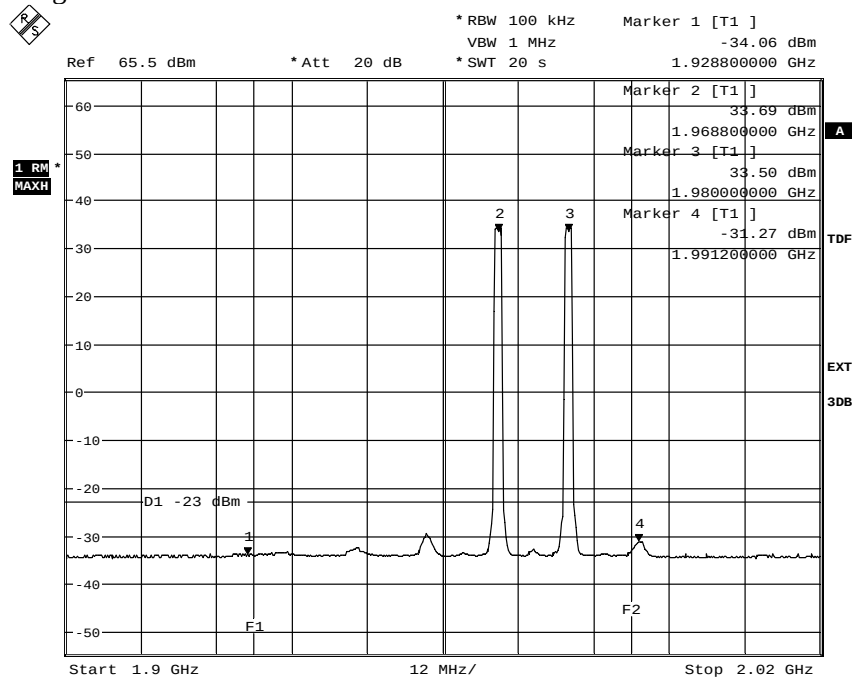

Date: 7.NOV.2013 19:30:20


Appendix 5

Diagram 17 c:

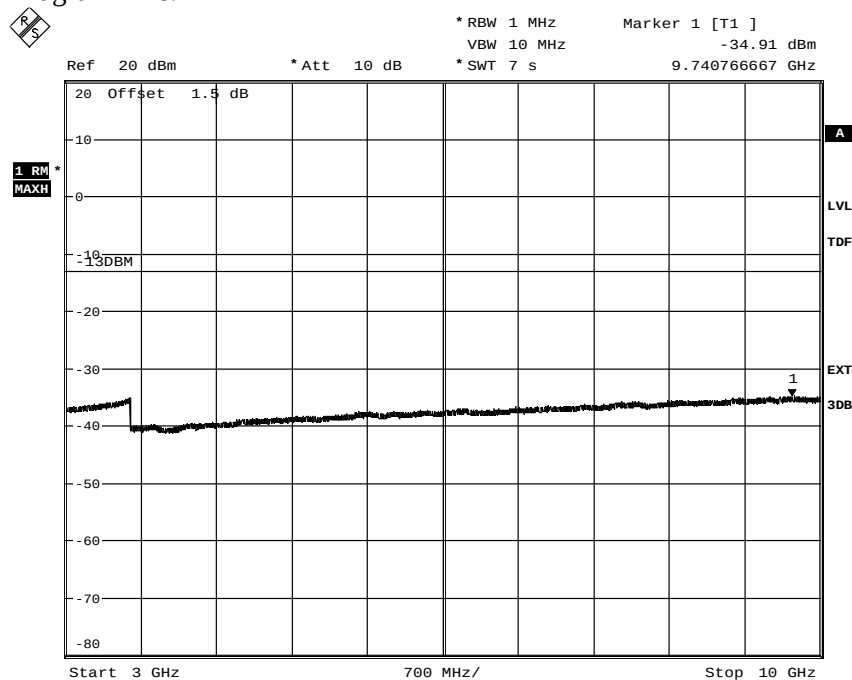

Date: 7.NOV.2013 19:28:12


Diagram 17 d:

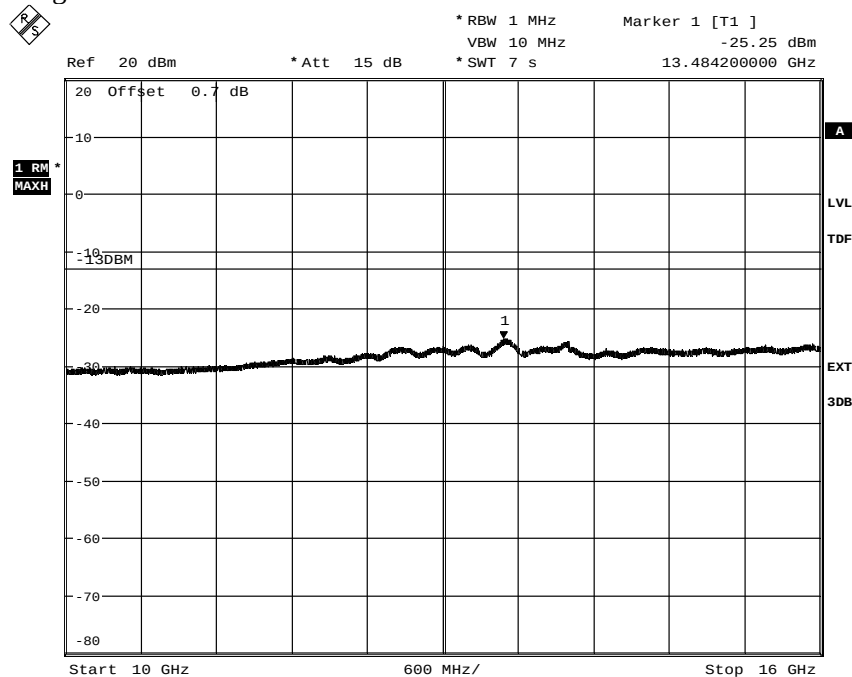

Date: 7.NOV.2013 19:27:25

Appendix 5

Diagram 17 e:

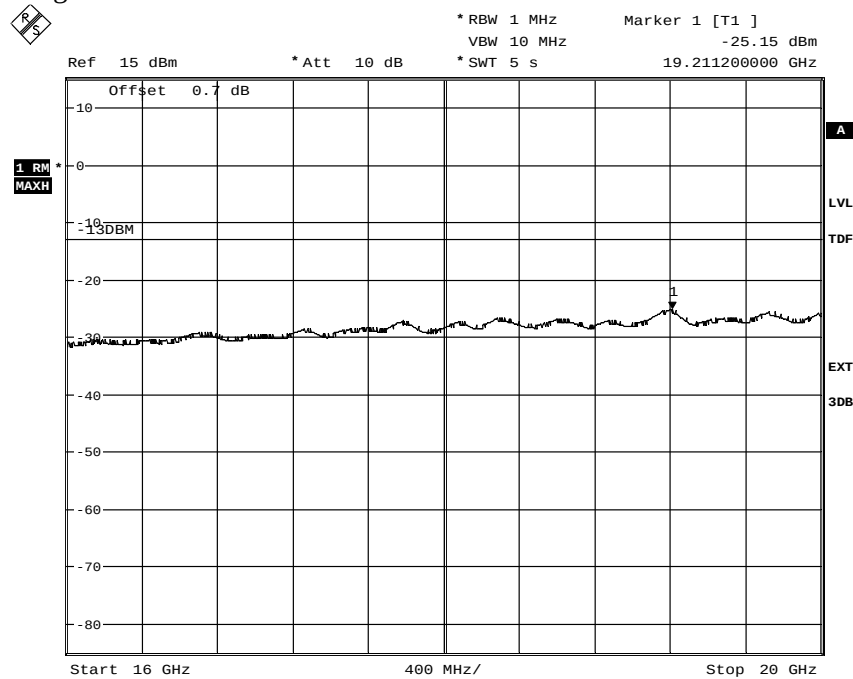

Date: 7.NOV.2013 19:24:36

Appendix 6

Field strength of spurious radiation measurements according to 47 CFR 2.1053 / IC RSS-139 6.5

Date	Temperature	Humidity
2013-11-07	22 °C ± 3 °C	31 % ± 5 %
2013-11-08	22 °C ± 3 °C	31 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 - 20 GHz.

In the frequency range 30 MHz - 20 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was


$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

Appendix 6

The test set-up during the spurious radiation measurements is shown in the picture below:

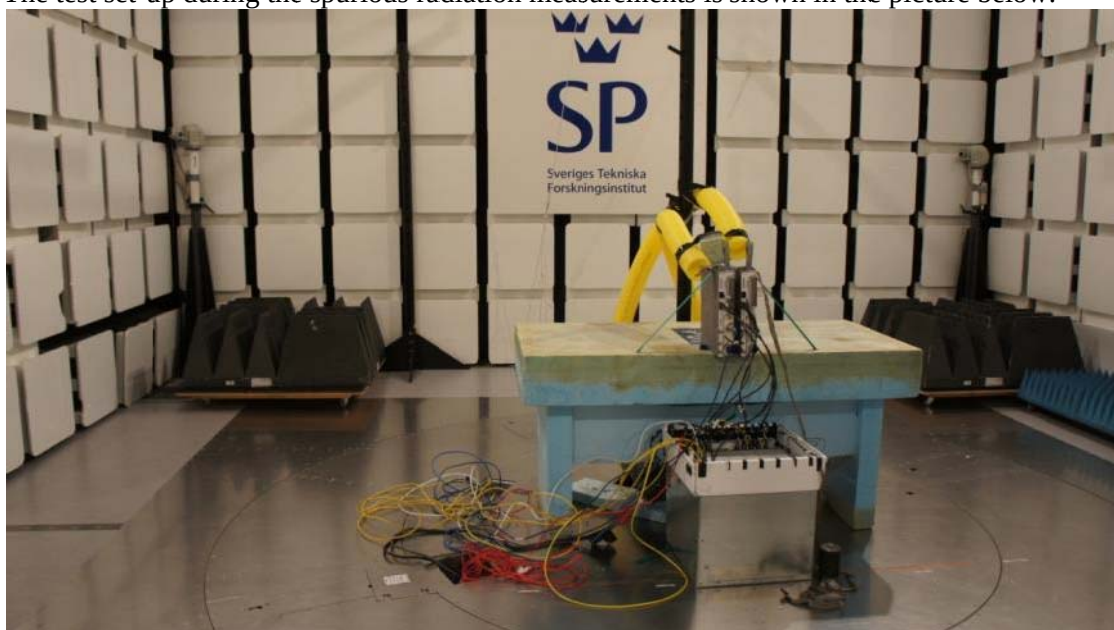

Measurement equipment

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU 26	901 553
R&S FSIQ 40	503 738
EMC 32 ver. 8.52.0	503 899
Chase Bilog Antenna CBL 6111A	503 182
EMCO Horn Antenna 3115	502 175
High pass filter, RLC Electronics	503 739
Miteq, Low Noise Amplifier	503 285
Schwarzbeck preamplifier BBV 9742	504 085
µComp Nordic, Low Noise Amplifier	901 545
Temperature and humidity meter, Testo 625	504 188

Tested configurations

Symbolic name
B
M
T
B2

Appendix 6

Results for worst emissions found

Diagram	Symbolic name
1 a-d	B

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-20000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

CFR 47 §24.238 and IC RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----

Appendix 6

Diagram 1 a:


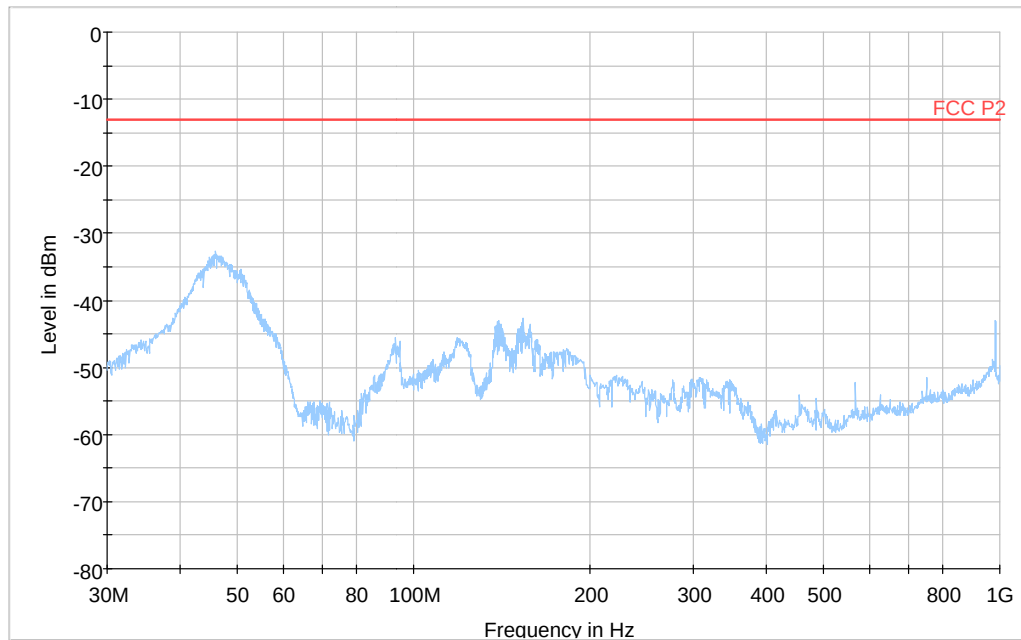



Diagram 1 b:

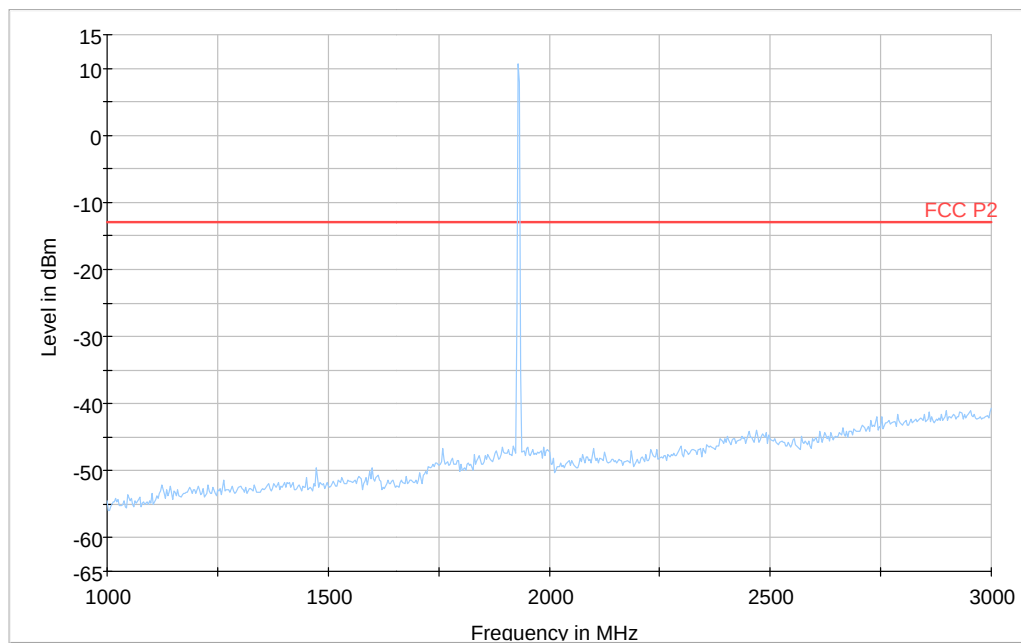

Note: The emission at 1932.4 MHz is the carrier frequency and shall be ignored in the context.

Appendix 6

Diagram 1 c:

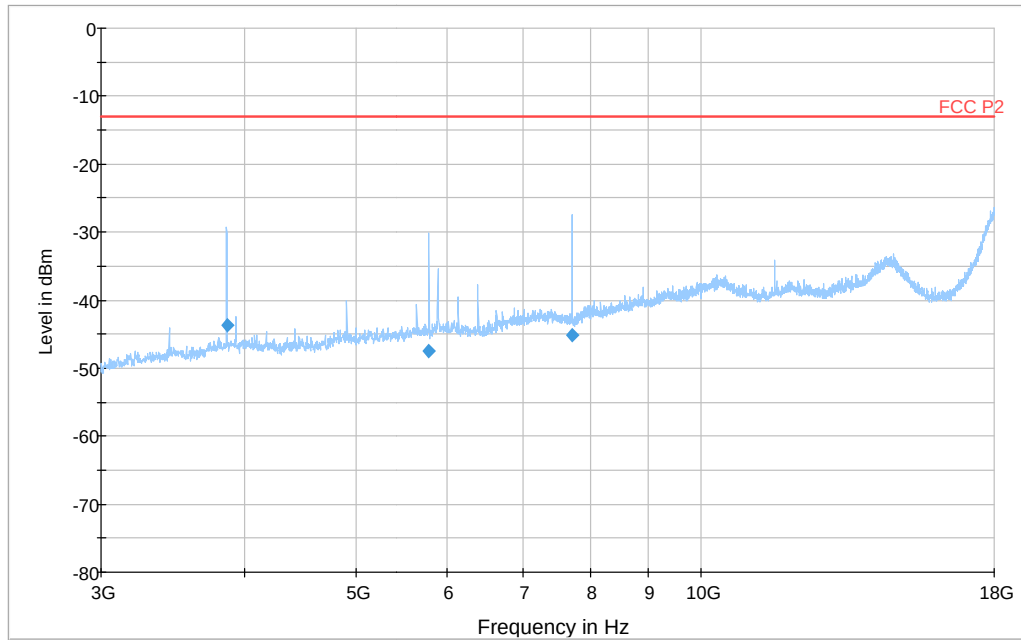


Final Result RMS

Frequency (MHz)	RMS (dBm)	Meas. Time (s)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
3861.504	-43.6	5	1000	100	V	44	-89.7	30.6	-13.0
5791.666	-47.5	5	1000	129	H	53	-87.8	34.5	-13.0
7723.484	-45.2	5	1000	109	V	90	-82.6	32.2	-13.0

Appendix 6

Diagram 1 d:

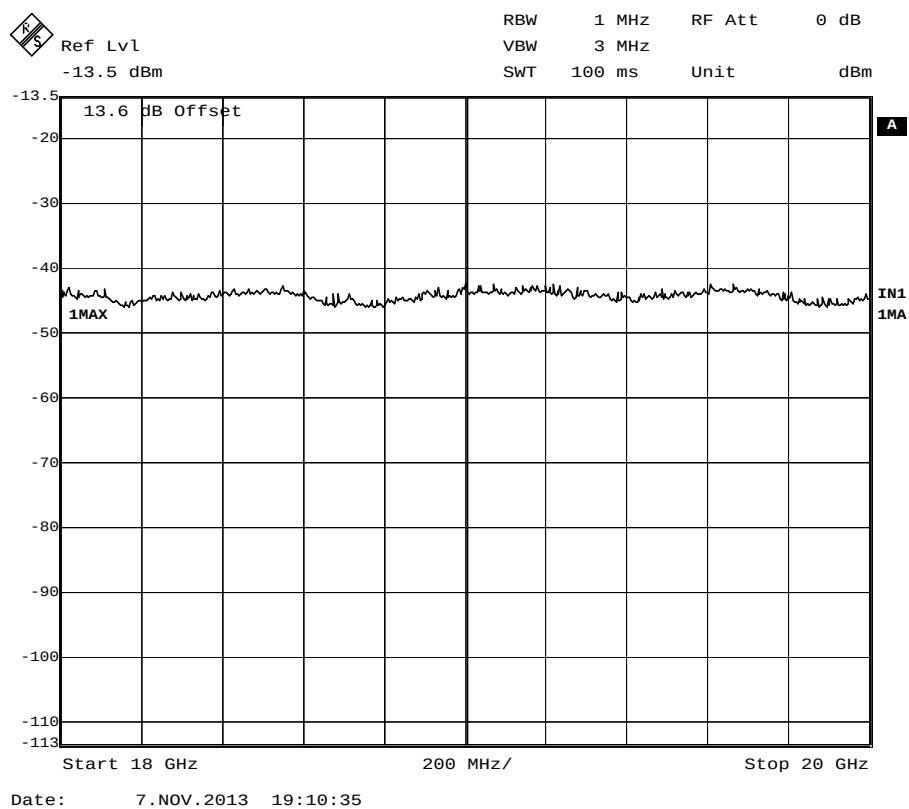

Appendix 7

Frequency stability measurements according to CFR 47 §24.235 / IC RSS 133 6.3

Date 2014-04 -17 to 2014-04-24	Temperature (test equipment) 22-24 °C ± 3 °C	Humidity (test equipment) 24-27 % ± 5 %
-----------------------------------	---	--

Test set-up and procedure

The measurement was made per 3GPP TS 36.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	502 282
Testo 635, Temperature and humidity meter	504 203
Temperature cabinet	503 360

Results

Nominal Voltage -48 V DC

Maximum output power at mid channel (M). Rated output power level at connector RF A (maximum): 47.8 dBm (60 W)

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	Temp. (°C)	
-48.0	+20	16
-55.2	+20	15
-40.8	+20	15
-48.0	+30	-19
-48.0	+40	-15
-48.0	+50	-14
-48.0	+10	-20
-48.0	0	-13
-48.0	-10	-15
-48.0	-20	-17
-48.0	-30	-17
Maximum freq. error (Hz)		-20
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Appendix 7

Remark

It was deemed sufficient to test one combination of TX frequency modulation, as all combinations share a common internal reference to derive the TX frequency from.

Limit according to:

§24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS-133 6.3 Frequency stability:

The carrier frequency shall not depart from the reference frequency in excess of ± 1.0 ppm (± 1960 Hz) for base stations when tested to the temperature and supply voltage variations specified in RSS-Gen.

Complies?	Yes
-----------	-----

Appendix 6

External photos


Front side:




Back side:




Product Label:

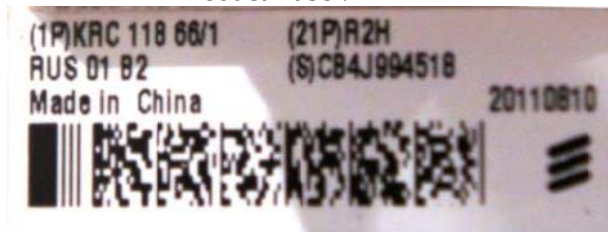

Left side:

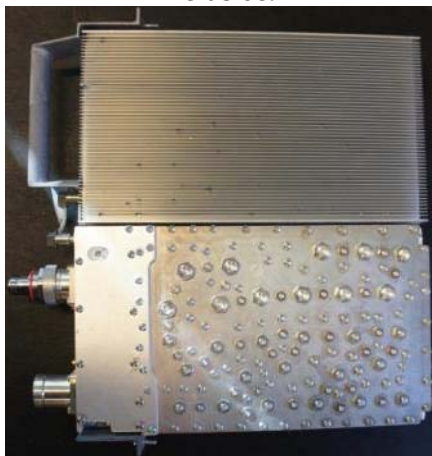

Right side:

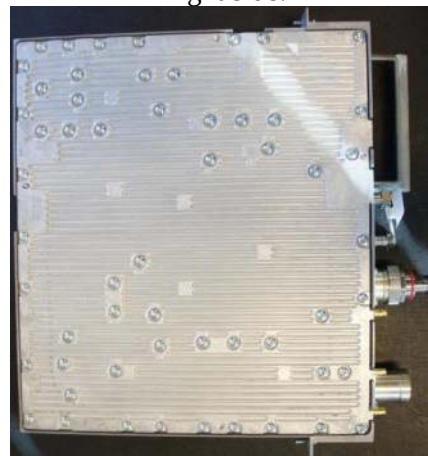

Appendix 6

Top side:



Bottom side:

