



390 Bora-ri, Giheung-eup, Yongin-si, Gyeunggi-do, Republic of Korea (Zip Code:449-904)

TEL : (82)31-286-5881 FAX : (82)31-286-2661

<http://www.koreaemc.co.kr> mscho@koreaemc.com

CERTIFICATE OF COMPLIANCE

(CLASS B)

CERTIFICATION OF COMPLIANCE is hereby issued to the named Applicant and is **VALID ONLY** for the equipment identified below:

Date of Tested : May. 07. 2005

Applicant's Name : **StoneBridge Co.,LTD**

Applicant's Address : 3F, Sejin Bldg, 84-2 Yangjae-Dong, Seocho-Gu, Seoul, Korea

Manufacturer's Name : **StoneBridge Co.,LTD**

Manufacturer's Address : 3F, Sejin Bldg, 84-2 Yangjae-Dong, Seocho-Gu, Seoul, Korea

Declares that the product

Product Description : Keyboard

Brand Name : StoneBridge

Model Number : SBC-1000U

FCC ID : TAJSBC-1000U

Conforms to FCC Rules and Regulations Part 15 Subpart B requirements.

This product herewith complies with the requirements of the FCC Rules and Regulations as listed below:

Part 15.107: Conducted Emissions.

Part 15.109: Radiated Spurious Emissions.

TESTED and CERTIFIED by:


KOREA EMC LABORATORY

390 Bora-ri, Giheung-eup,
Yongin-si, Gyeunggi-do,
Republic of Korea (Zip Code:449-904)

Date : May. 10. 2005

Report No : KEL05-F05005

Authorized Signature :

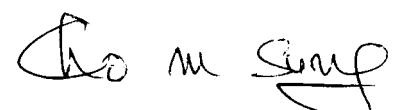

M. S. CHO / President

TABLE OF CONTENTS

DESCRIPTION	Page
0. VERIFICATION OF COMPLIANCE	3
1. GENERAL INFORMATION	
1.1 Product Description	4
1.2 Related Submittal(s)/Grant(s)	4
1.3 Tested System Details	4
1.4 System Configuration	4
1.5 General Setup of the test Shield room	5
1.6 Test Facility	5
2. Measurement Procedure	
2.1 System test configuration	6
2.1.1 Video mode Justification	6
2.1.2 EUT Exercise S/W	6
2.2 Special Accessories	6
2.3 Equipment Modification	6
2.4 Connected Cable	6
2.5 System Configuration Diagram	6
2.6 Preliminary testing	7
2.7 Shielded Enclosure	7
2.8 Data Reporting Format	7
2.9 Operating Condition	7
2.10 Conditioning of the EUT	7
2.11 Power Line Conducted Emissions	8
2.12 Open field Radiated Emissions Tests	8
3. Measurement Data	
3.1 Conducted Emission Data	9
3.2 Conducted Emission Graph	10-11
3.3 Radiated Emission Data	12
3.4 Summary	13
4. Labeling Requirement	14
Appendix	
- A : Test set-up Photographs (Conducted and Radiated)	
- B : External Photographs of E.U.T	
- C : Internal Photographs of E.U.T	
- D : FCC ID label location information and sample	
- E : Block Diagram	
- F : User's Manual	

0 . VERIFICATION OF COMPLIANCE

Equipment Under Test : Keyboard

Model Number : SBC-1000U

Serial Number : Representative manufacturing sample

Manufacturer : StoneBridge Co.,LTD
3F, Sejin Bldg, 84-2 Yangjae-Dong, Seocho-Gu,
Seoul, Korea

Type of Test : FCC CLASS B

Report Number : KEL05-F05005

Date Tested : May. 07. 2005

Tested By : W.S.CHOI

The results show that the sample equipment tested as described in this reports is in compliance with the CLASS B conducted and radiated emission limits of FCC Rules Part 15, Subpart B.

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The SBC-1000U is a Keyboard made by StoneBridge Co.,LTD in Korea. Refer to the user's manual for more information.

ITEM	SPECIFICATION
Power	DC 5 V
Interface	USB
Dimension	477 X 197 X 37 mm

* E.U.T uses 6 MHz Clock.

1.2 Related Submittal(s)/Grant(s)

N/A

1.3 Tested System Details

Type	Model Name	FCC ID	Serial NO	Manufacturer
Keyboard	SBC-1000U	TAJSBC-1000U	Representative manufacturing sample	StoneBridge Co.,LTD
PC	DreamSys/JLC	DoC	5007403100124	Sambo
Monitor	L665	DoC	27729072 B	EIZO
Serial Mouse	M-CE15-9F	DZLMCE15	LT292R00295	Logitech
USB Mouse	U813I-O	DoC	K020803612	HP
MIC	RM-1000	-	KEM-A-SI01	HANIL
Printer	2225C+	DSI6XU2225	3119S96116	HP
Adapter	PW118	Verification	KA0502F53	AULT INC.
Keyboard	TRI-750(W)	DoC	147004403025654	Solid Year Co., Ltd.
Mouse	M-SBF69	DoC	HCA41302692	Suzhou Logitech

1.4 System Configuration

Type	Model Name	Serial NO	Manufacturer	Remark
MAIN B/D	HT82K629A-000W	NONE	StoneBridge Co.,LTD	Korea

1.5 General Set-up of the Test Shielded Room

The EUT was set up in accordance with the suggested configuration given in FCC measurement Procedure ANSI C63.4-2003. The measurement are performed in the shielded room which dimension is 3.0*7.0*2.5(m). The EUT was placed on a non conductive table which is 1.0*1.5(m), 80 cm above an earthed ground plane and is kept at least 1m from any other earthed ground plane except the rear of table top being removed 40 cm from a vertical conducting plane.

Power to the EUT was provided through the LISN(NSLK8128, SCHWARZBECK) which has the Impedance vs Frequency Characteristic in accordance with the conducted setup photographs in Appendix-A Impedance Characteristic of LISN. Peripheral equipment required to provide a functional system(support equipment) for EUT testing was powered through another LISN(KNW-407, KYORITSU).

Power to the LISN was filtered to eliminate ambient signal interference. A coaxial type connector which provides a 50 Ohm terminating impedance was provided for the test instrument. The excess length of the power cord was wrapped in the two non metallic pegs attached to the top of the LISN. The two pegs are 9 cm high, approximately 2.0 cm in diameter and that are spaced 6 cm on the center apart.

1.6 Test Facility

Location: Korea EMC Laboratory

390 Bora-ri, Giheung-eup,
Yongin-si, Gyeunggi-do,
Republic of Korea (Zip Code:449-904)

Site : - 3 m/10 m Open Area Testing Site No.1
- 3 m Semi-Anechoic Chamber No.1
- Shielded Room No.1

The Open Field Radiated and Indoor Line Conducted sites are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4-2003. Korea EMC Lab. was refiled in FCC in April. 13. 2005.

Description	Model	Manufacturer	Serial No	Due Cal.
TESTRECEIVER	ESVS10	Rohde & Schwarz	825120/006	2005.10.15
TESTRECEIVER	ESCS30	Rohde & Schwarz	100054	2005.11.25
BI-LOG	VULB9160	SCHWARZBECK	3121	2005.11.30
LISN(for E.U.T.)	NSLK 8128	SCHWARZBECK	8128144	2005.11.04
AMPLIFIER	87405A	Hewlett-Packard	2944A06481	2005.07.18
LISN(for Peripheral)	KNW-407	KYORITSU	8-8833-14	2005.12.11
PLOTTOR	7550A	Hewlett-Packard	2407A00471	-
Attenuator	8491A	Hewlett-Packard	30907	-

The calibration of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors are applied in accordance with instruments contained in the manual for the measuring instrument.

2. MEASUREMENT PROCEDURES

2.1 System Test Configuration

2.1.1 Video mode Justification

N/A

2.1.2 EUT Exercise Software

Measure inputting Key executing MSWORD after connect Keyboard with PC and peripheral device,

2.2 Special Accessories


2.3 Equipment Modifications

No equipment modifications were performed during testing.

2.4 Connected cable

Beginning device		Last device		Standard of cable	
Type	I/O Port	Type	I/O Port	length (m)	shielding
Keyboard	USB	PC	USB	1.8	Shielded
PC	RS-232	Serial Mouse		1.5	Shielded
"	USB	USB Mouse		1.5	Shielded
"	PS/2	Keyboard		1.5	Shielded
"	PS/2	Mouse		1.5	Shielded
"	Parallel	Printer	Parallel	1.5	Shielded(Core)
"	MIC	MIC		1.5	Shielded
"	VGA	Monitor	VGA	1.5	Shielded(Core)
"	Line-out	Monitor	Line-in	1.5	Shielded
Printer	Power	Adapter		1.5	Core

2.5 System Configuration Diagram

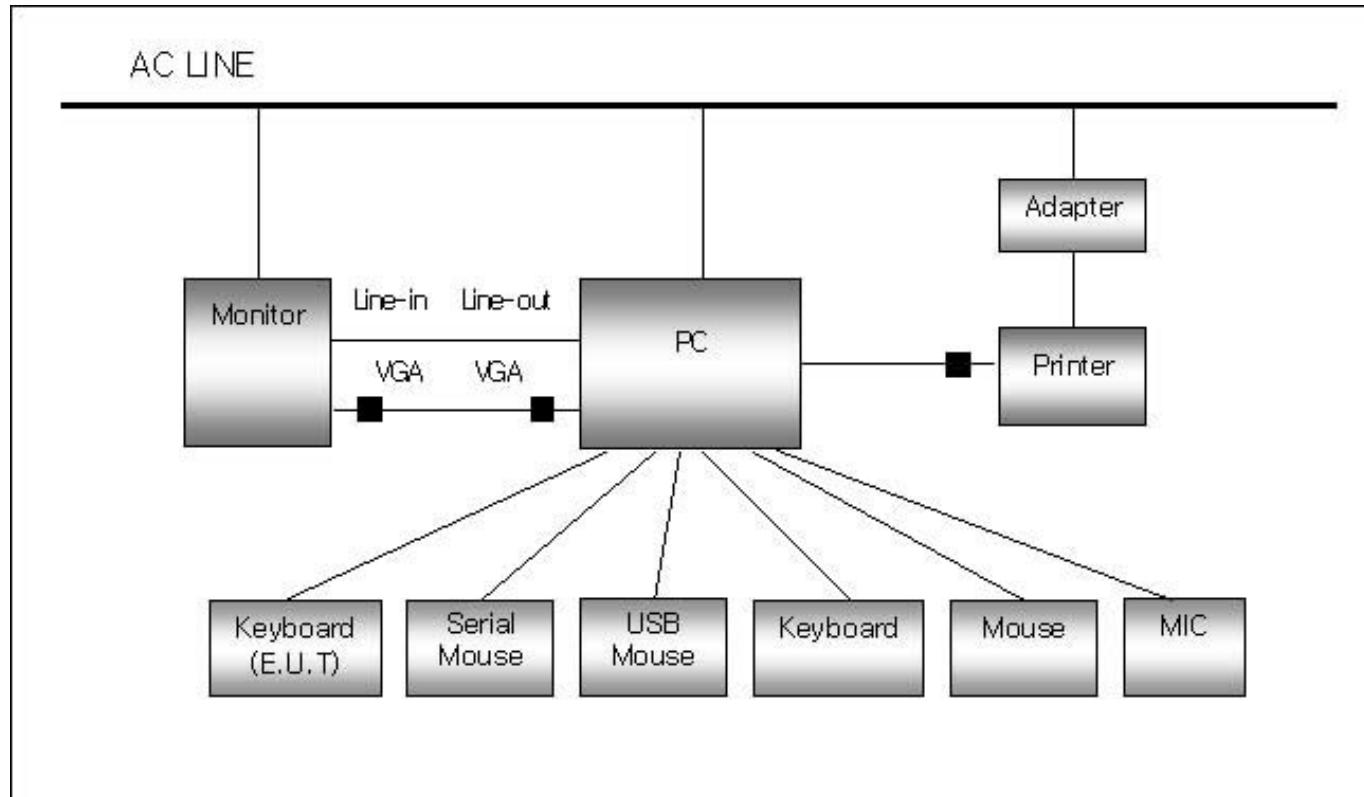

2.6 PRELIMINARY TESTING

It is often valuable to performing preliminary radiated measurements at a closer distance than specified for compliance to determine the emission characteristics of the EUT. At close-in distance, it is easier to determine the spectrum signature of EUT, and if applicable, the EUT configuration that emanate the maximum level of emissions. The data may not be precisely correlatable results.

2.7 SHIELDED ENCLOSURE

To search the Radiated frequency outline of an EUT a shielded screen room may be used. If the shielded room is used for radiated data, the data page will state that the EUT was in a shielded enclosure. All data collected in a screen room for radiated emissions is for frequency outline only. If an EUT is placed in screen room for Line Conducted Data, the data page will show that a screen room was used and data frequencies and levels will be correct and used for test data.

2.8 DATA REPORTING FORMAT

The measurement results expressed in accordance with C63.4 and specified limits where applicable are presented in tabular or graphical form, or alternatively as recorder charts or photographs of a spectrum analyzer display, showing the level vs. frequency.

2.9 OPERATING CONDITIONS

The EUT was operated at the specified load conditions(mechanical and/or electrical)for which it was designed.

2.10 CONDITIONING OF THE EUT

The EUT was operated for a sufficient period of time to approximate normal operating conditions.

2.11 Power line Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in FCC Measurement Procedure ANSI C63.4-2003. The measurements are performed in a 3m x 6m x 2.5m shielded room. A wooden table which height is 80 cm is located at the center of the shielded room; desktop EUTs are placed on top of this table. The rear of the EUT and table are placed 40 cm apart from the shielded room wall. All items on the table (or test-table) were placed at least 10 cm apart each other. Excess EUT power cord is folded back and forth to form a 30 cm by 40 cm bundle. Interconnecting cables which hang closer than 40 cm to the ground plane are folded back and forth to form a 30 cm by 40 cm long bundle, hanging approximately in the middle between the ground plane and table. The EUT power cord was plugged into a LISN 80 cm away, while all other devices were plugged into a second LISN, also 80 cm away.

The highest emissions were also analyzed in detail by operating the spectrum analyzer in fixed tuned mode to determine the precise amplitude of the emissions. On the other hand, the interconnecting cables were moved around the table to maximize the emissions, and the position of the peripheral devices were interchanged to check whether there is any changes in emissions.

NOTE : The resolution bandwidth and video bandwidth of test receiver is 10 kHz for Quasi-peak detection (QP) at frequency below 30 MHz. Q.P value A.V limit when do over by A.V mode conversion after measure .

2.12 Open field Radiated Emissions Tests

The EUT and support equipment are set up on the turntable in an open field site. Desktop EUTs are set up on a wooden stand (test-table), 80 cm above the ground plane. All items on the table were placed at least 10 cm apart each other. Interconnecting cables which hang closer than 40 cm to the ground plane are folded back and forth to form a 30 cm by 40 cm long bundle, hanging approximately between the ground plane and table. The highest emissions were also analyzed, in detail, with the tuned aerial to search the precise amplitude of the emissions. On the other hand, the interconnecting cables were moved around the table and if the highest amplitudes is observed, the EUT is rotated in the horizontal plane while changing the antenna polarization to the vertical plane to maximize the field strength. Once the maximum field strength is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. The position of the peripheral devices are interchanged to check for any changes in emissions. In rare instances, the maximum field strength may occur with the antenna polarized between vertical and horizontal.

NOTE : The resolution bandwidth and video bandwidth of test receiver is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz

3. Measurement Data

3.1 CONDUCTED EMISSION DATA

TEST : Keyboard ; SBC-1000U

DATE : May. 07. 2005

Freq. (MHz)	EUT State	Polarity (H/N)	Level (Q.P/A.V) dB(uV)	LIMIT (Q.P/A.V) dB(uV)	Margin for(Q.P/A.V) dB
0.151		L1	29.8	66.0	36.2
0.187		L1	50.3	64.9	14.6
0.253		L1	46.8	63.1	16.3
0.314		L1	39.8	61.3	21.5
0.376		L1	34.6	59.5	24.9
0.442		L1	31.6	57.7	26.1
	Refer to Note				
0.568		L1	30.2	56.0	25.8
0.631		L1	31.4	56.0	24.6
0.821		L1	28.5	56.0	27.5
0.946		L1	30.4	56.0	25.6
2.208		L1	33.2	56.0	22.8
2.903		L1	33.3	56.0	22.7
5.426		L1	35.0	60.0	25.0
6.626		L1	32.6	60.0	27.4
7.822		L1	32.3	60.0	27.7
9.779		L1	35.0	60.0	25.0
11.045		L1	36.1	60.0	23.9
13.063		L1	34.3	60.0	25.7

Notes: The test is implemented in a shielded room in accordance with ANSI C63.4

L1 : HOT LINE , L2 : NEUTRAL LINE

Test Engineer.

Reviewed by.

3122


S. G. Moon

3.2 Conducted Emission Graph

Korea EMC Laboratory Conducted Emission

Comment: L1
PRC RED AVI BLACK

Scan Settings (1 Range) | Frequencies | Receiver Settings
Start Stop Step IF BW Detector H-Time Atten Preset
150K 30M 0.05 8K PK+AV 20ms 10dBm OFF

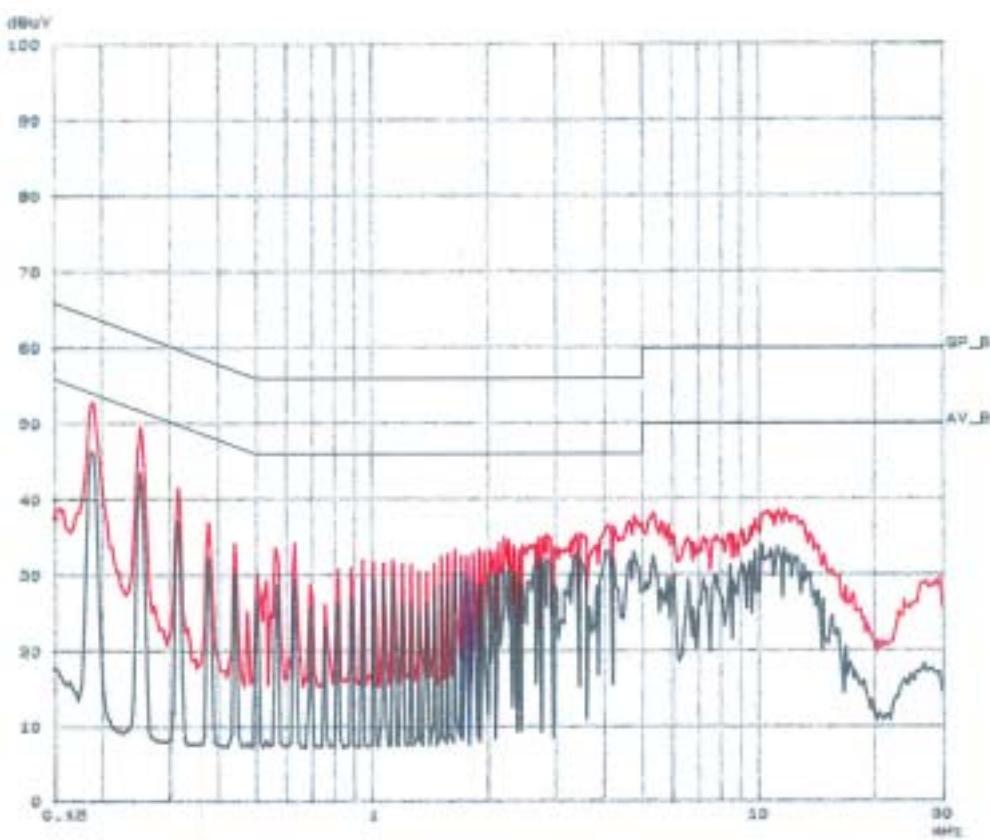


Red : PK, Black : AV
LINE EMISSION GRAPH(L1)

Korea EMC Laboratory
Conducted Emission

Comment: L2
PK: RED AV: BLACK

Scan Settings (1 Range) | Frequency Scan | Receiver Settings |
Start Stop Step IF BW Detector H-Time Atten Pressp
500K 30M 0.25 8K PG+AV 0.0ms 10dB/LN OFF

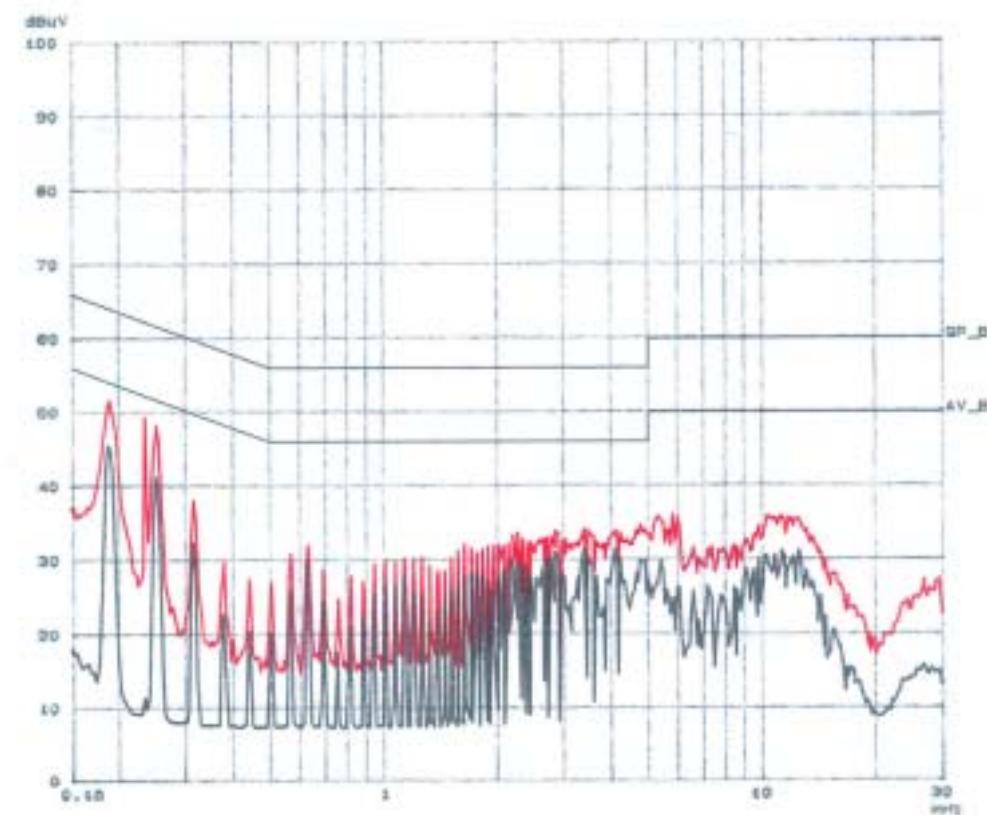


Red : PK, Black: AV
LINE EMISSION GRAPH(L2)

3.2 RADIATED EMISSION DATA

TEST : Keyboard : SBC-1000U

DATE : May. 07. 2005

Freq. (MHz)	EUT State	Level (dBuV)	Preamp -Pads (dB)	Af (dB/m)	Cl (dB)	Hor. /Ver	ha(m) Azimuth	Total Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)
84.003	Refer to note	38.18	21.30	7.82	2.0	H	2.2/200	26.7	40.0	13.3
85.350		34.58	21.30	7.82	2.0	H	3.0/180	23.1	40.0	16.9
89.940		33.38	21.30	7.82	2.0	H	3.2/270	21.9	43.5	21.6
126.120		27.97	21.30	10.93	2.4	H	2.8/100	20.0	43.5	23.5
133.140		28.97	21.30	10.93	2.4	V	1.0/180	21.0	43.5	22.5
199.020		29.55	21.30	11.35	2.7	H	2.5/180	22.3	43.5	21.2
240.060		29.55	21.30	10.56	3.1	H	2.4/170	21.9	46.0	24.1
333.600		24.90	21.30	13.61	4.3	H	2.3/260	21.5	46.0	24.5
398.000		23.45	21.30	14.66	4.5	H	2.5/180	21.3	46.0	24.7
455.400		22.47	21.30	16.73	4.9	V	1.0/260	22.8	46.0	23.2
598.900		23.86	21.30	17.94	5.2	V	1.0/180	25.7	46.0	20.3
666.100		22.39	21.30	19.91	6.0	H	1.8/160	27.0	46.0	19.0

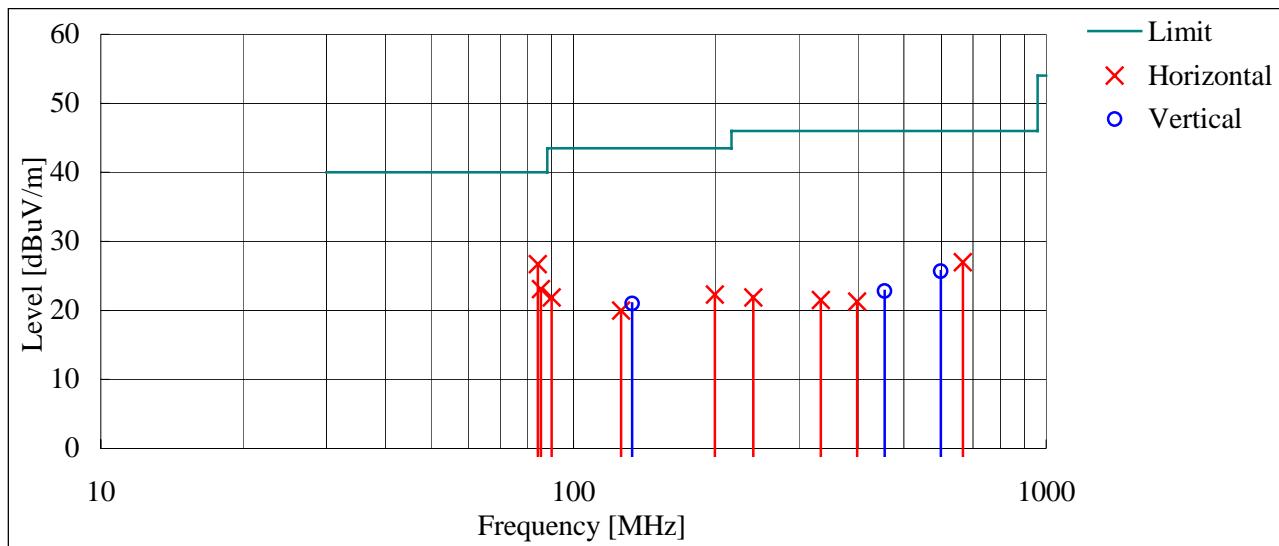

Notes: The test is performed in a distance of 3m. Af : Antenna factor, Cl : Cable loss

The test is performed in accordance with ANSI C63.4

Test Engineer.

Reviewed by.

31.05.2005

S. G. Moon

3.3 SUMMARY

Company	: StoneBridge Co.,LTD
Equipment Under Test	: Keyboard
Model Number	: SBC-1000U
Serial Number	: Representative manufacturing sample
Type of Test	: FCC CLASS B
Passed/Failed	: PASSED

The Equipment Under Test(EUT) was configured and operated in a manner which tends to maximize its emission characteristics in a typical application. Power and signal distribution, ground, interconnecting cabling, and physical placement of equipment were simulating the typical application and usage in so far as practicable.

LINE CONDUCTED TEST: An unshielded power cord was used to connect the EUT to a LISN Box which supplied 120 VAC/60 Hz power. The EUT was tested according to C63.4 test specifications. Line conductance scanned from 150 kHz to 30 MHz range on both Line 1(hot side) and Line 2(neutral side). ***The highest emission was observed at 0.187 MHz on Line 1 with a margin of 14.6 dB from the limit.*** All line conductance emissions were within the FCC CLASS B requirements for compliance.

RADIATED TEST: The EUT was placed on a three meter open field test site according to C63.4 test specifications. Preliminary scans ranged from 30 MHz to 1 GHz in both vertical and horizontal polarizations in all possible modes of operation. The highest six point of emission levels were recorded as data each ranges of limit. ***The highest emission was observed at 84.003 MHz(Horizontal) with margin of 13.3 dB from the limit.*** All radiated emissions were within the FCC CLASS B requirements for compliance.

4. LABELING REQUIREMENT

Section 15.19 of the Code of Federal Regulation

1) A CLASS B computing device subject to certification by the Commission shall be identified pursuant to par. 2.925 et Seq of this chapter. In addition, the label shall include the following statement:

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This Device may not cause harmful interference, and
(2) This device must accept any interference received,
including interference that may cause undesired
operation.

Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified in this Section is required to be affixed only to the main control unit.

The users manual or instruction manual for the EUT shall contain the following statement or equivalent.

Caution: Changes or Modifications not expressly approved by the party responsible for compliance could void the users authority to operate the equipment.

If the EUT requires accessories such as special shielded cables and/or connectors to enable compliance with emission limits, the instruction manual for the EUT shall include appropriate instructions on the first page of the text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

For a CLASS B digital device or peripheral, the instructions furnished the user shall include the following or similar statement placed in a prominent location in the text of the manual.

Note: This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.