

FCC CERTIFICATION
On Behalf of
All About Game, Inc.

Tree Stand Locator Light
Model No.: AAGH91

FCC ID: TANAGH91

Prepared for : All About Game, Inc.
Address : 6818 N, Frostwood Parkway, Peoria, IL 61616, USA

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20051193
Date of Test : July 25, 2005
Date of Report : July 28, 2005

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty.....	4
2. MEASURING DEVICE AND TEST EQUIPMENT	5
3. THE FIELD STRENGTH OF RADIATION EMISSION	6
3.1. Block Diagram of Test Setup.....	6
3.2. The Field Strength of Radiation Emission Measurement Limits.....	6
3.3. Configuration of EUT on Measurement	7
3.4. Operating Condition of EUT	7
3.5. Test Procedure	7
3.6. The Field Strength of Radiation Emission Measurement Results	8
4. OCCUPIED BANDWIDTH	10
4.1. Block Diagram of Test Setup.....	10
4.2. The Bandwidth of Emission Limit According To Section 15.231(c)	10
4.3. EUT Configuration on Measurement	11
4.4. Operating Condition of EUT	11
4.5. Test Procedure	11
4.6. Measurement Result	12
5. RELEASE TIME MEASUREMENT.....	13
5.1. Block Diagram of Test Setup.....	13
5.2. Release Time Measurement According To Section 15.231(a)	13
5.3. EUT Configuration on Measurement	14
5.4. Operating Condition of EUT	14
5.5. Test Procedure	14
5.6. Measurement Result	15
APPENDIX I (TEST CURVES) (6pages)	

Test Report Certification

Applicant : All About Game, Inc.
 Manufacturer : All About Game, Inc.
 EUT Description : Tree Stand Locator Light
 (A) MODEL NO.: AAGH91
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: 12V DC ("23A" battery Type)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.231: 2004 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : July 25, 2005

Prepared by :



(Engineer)

Reviewer :



(Quality Manager)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Tree Stand Locator Light

Model Number : AAGH91

Power Supply : 12V DC ("23A" battery Type)

Memo : This submittal is transmitter of Tree stand locator light, The receiver is compliance with Subpart B is authorized under a DOC procedure.

Applicant : All About Game, Inc.

Address : 6818 N, Frostwood Parkway, Peoria, IL 61616, USA

Manufacturer : All About Game, Inc.

Address : 6818 N, Frostwood Parkway, Peoria, IL 61616, USA

Date of sample received : July 20, 2005

Date of Test : July 25, 2005

1.2. Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen, May 10, 2004
	Accredited by FCC, May 10, 2004
	The Certificate Registration Number is 253065
	Accredited by Industry Canada, May 18, 2004
	The Certificate Registration Number is IC 5077
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted Emission Uncertainty = $\pm 2.66\text{dB}$

Radiated Emission Uncertainty = $\pm 4.26\text{dB}$

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.02.2006
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	01.02.2006
Bilog Antenna	Chase	CBL6112B	2591	01.02.2006
Horn Antenna	Rohde&Schwarz	HF906	100013	01.02.2006
Spectrum Analyzer	Anritsu	MS2651B	6200238856	01.02.2006
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	01.02.2006
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100305	01.02.2006
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100310	01.02.2006
Signal Generator	GW	GAG-810	0913317	01.02.2006

3. THE FIELD STRENGTH OF RADIATION EMISSION


3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Tree Stand Locator Light)

3.1.2. Anechoic Chamber Test Setup Diagram

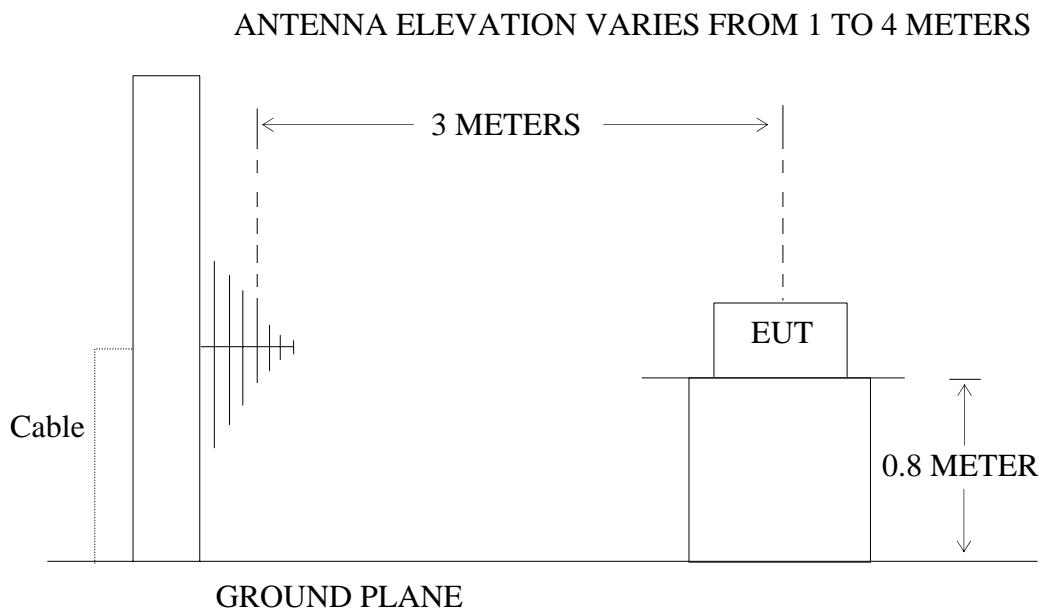

(EUT: Tree Stand Locator Light)

3.2. The Field Strength of Radiation Emission Measurement Limits

3.2.1 Radiation Emission Measurement Limits According to Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [μ V/m]	Field Strength of Spurious Emission [Average] [μ V/m]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, The formulas for calculating the maximum permitted fundamental

field strengths are as follows: for the band 130-174MHz, μ V/m at 3 meters=56.81818(F)-6136.3636; For the band 260-470MHz, μ V/m at 3 meters=41.6667(F)-7083.3333. The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

3.2.2 Restricted Band Radiation Emission Measurement Limits According to Section 15.205 and Section15.209

3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1. Tree Stand Locator Light (EUT)

Model Number	:	AAGH91
Serial Number	:	N/A
Manufacturer	:	All About Game, Inc.

3.4.Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in measuring modes (TX) measure it.

3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz, and 1MHz in 1000-4000MHz.

The frequency range from 30MHz to 4000MHz is checked.

3.6. The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 315MHz to 3150MHz is investigated.

Date of Test:	July 25, 2005	Temperature:	22°C
EUT:	Tree Stand Locator Light	Humidity:	50%
Model No.:	AAGH91	Power Supply:	12V DC ("23A" battery Type)
Test Mode:	TX	Test Engineer:	Andy

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
315.000	49.5	54.1	13.0	62.5	67.1	75.6	95.6	13.1	28.5	Horizontal
630.000	28.3	33.5	20.9	49.2	54.4	55.6	75.6	6.4	21.2	
945.000	20.3	24.7	25.4	45.7	50.1	55.6	75.6	9.9	25.5	
1260.000	11.4	16.1	31.2	42.6	47.3	55.6	75.6	13	28.3	
*1575.000	10.3	15.3	35.7	46.0	51.0	54	74	8.0	23.0	
1890.000	28.7	33.3	16.4	45.1	49.7	55.6	75.6	10.5	25.9	
*2205.000	27.2	32.0	16.2	43.4	48.2	54	74	10.6	25.8	
2520.000	24.2	29.7	17.8	42.0	47.5	55.6	75.6	13.6	28.1	
*2835.000	22.9	27.6	18.7	41.6	46.3	54	74	12.4	27.7	
3150.000	17.5	23.1	19.6	37.1	42.7	55.6	75.6	18.5	32.9	
315.000	54.7	59.1	13.0	67.7	72.1	75.6	95.6	7.9	23.5	Vertical
630.000	31.1	36.6	20.9	52.0	57.5	55.6	75.6	3.6	18.1	
945.000	22.0	26.8	25.4	47.4	52.2	55.6	75.6	8.2	23.4	
1260.000	14.3	18.8	31.2	45.5	50.0	55.6	75.6	10.1	25.6	
*1575.000	11.3	16.8	35.7	47.0	52.5	54	74	7.0	21.5	
1890.000	31.3	35.7	16.4	47.7	52.1	55.6	75.6	7.9	23.5	
*2205.000	29.4	34.1	16.2	45.6	50.3	54	74	8.4	23.7	
2520.000	24.5	29.8	17.8	42.3	47.6	55.6	75.6	13.3	28.0	
*2835.000	22.7	27.5	18.7	41.4	46.2	54	74	12.6	27.8	
3150.000	18.9	23.4	19.6	38.5	43.0	55.6	75.6	17.1	32.6	

Note:

1. *: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission Above 1000MHz and falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.


2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. FCC Limit for Average Measurement = $41.6667(315)-7083.3333 = 6041.6772 \mu\text{V}/\text{m} = 75.6 \text{ dB}\mu\text{V}/\text{m}$

Reviewer :



4. OCCUPIED BANDWIDTH


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Tree Stand Locator Light)

4.1.2. Anechoic Chamber Test Setup Diagram

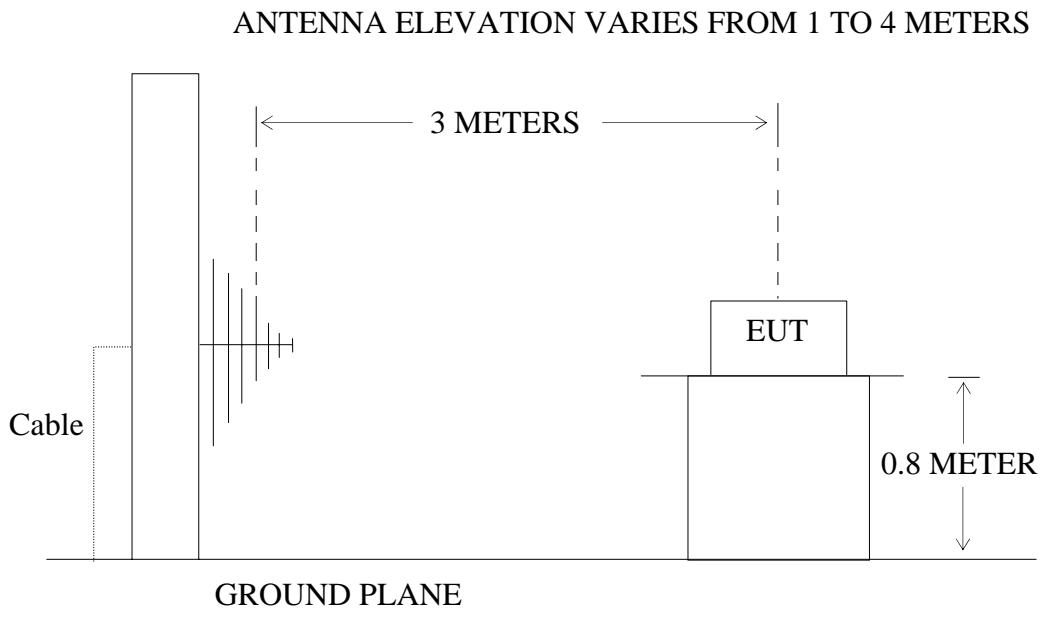

(EUT: Tree Stand Locator Light)

4.2. The Bandwidth of Emission Limit According To Section 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $315\text{MHz} \times 0.25\% = 787.5\text{KHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

4.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1.Tree Stand Locator Light (EUT)

Model Number : AAGH91
Serial Number : N/A
Manufacturer : All About Game, Inc.

4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3.Let the EUT work in measuring mode (TX) measure it.

4.5.Test Procedure

4.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 10kHz, Span = 1MHz.

4.5.2. Set SPA Max hold. Mark peak, -20dB

4.6. Measurement Result

The EUT does meet the FCC requirement.

-20dB bandwidth = 70KHz < 787.5KHz.

The spectral diagrams in appendix I.

Reviewer : Seaw

5. RELEASE TIME MEASUREMENT


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Tree Stand Locator Light)

5.1.2. Anechoic Chamber Test Setup Diagram

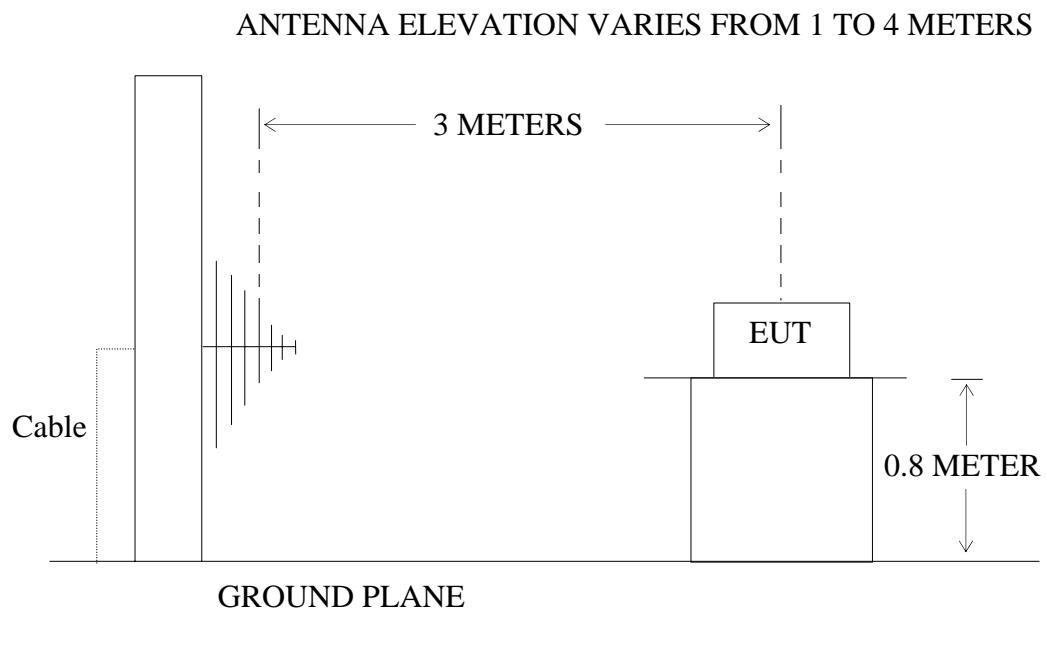

5.2. Release Time Measurement According To Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.Tree Stand Locator Light (EUT)

Model Number : AAGH91
Serial Number : N/A
Manufacturer : All About Game, Inc.

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in measuring mode (TX) measure it.

5.5.Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 100kHz, Span = 0Hz. Sweep time = 5seconds.


5.5.2. Set EUT as normal operation and press Transmitter button for 2.21 seconds.

5.5.3. Set SPA View. Delta Mark time.

5.6. Measurement Result

The release time less than 5 seconds.


The spectral diagrams in appendix I.

Reviewer : 

APPENDIX I (Test Curves)

Radiated Disturbance**FCC PART 15**


EUT: Tree Stand Locator Light M/N: AAGH91
Manufacturer: All About Game, Inc.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment: DC 12V
:

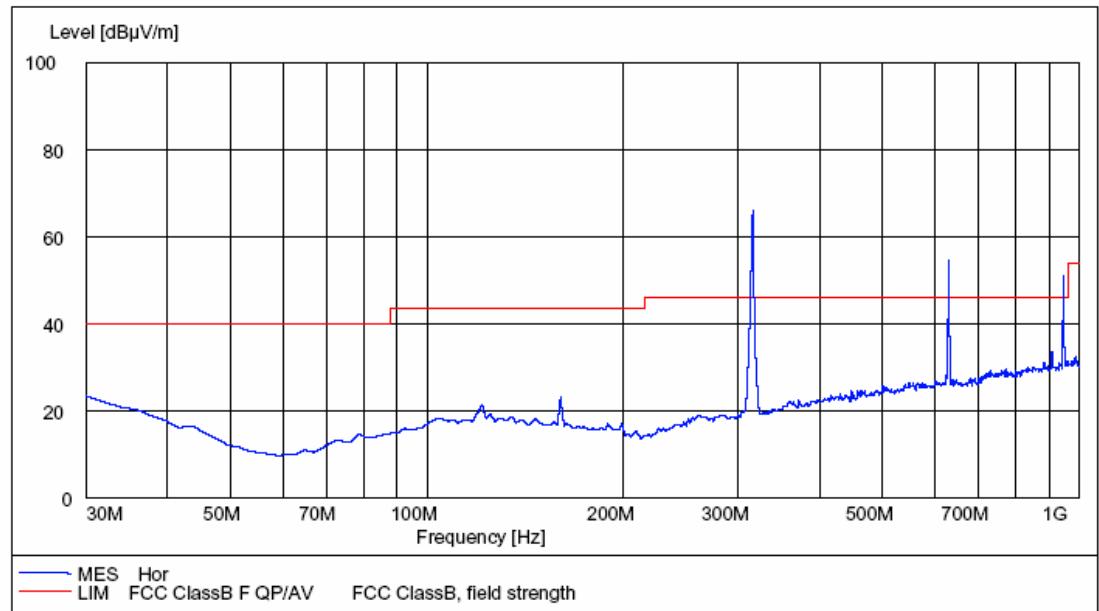

Radiated Disturbance

FCC PART 15

EUT: Tree Stand Locator Light M/N: AAGH91
Manufacturer: All About Game, Inc.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment: DC 12V
:

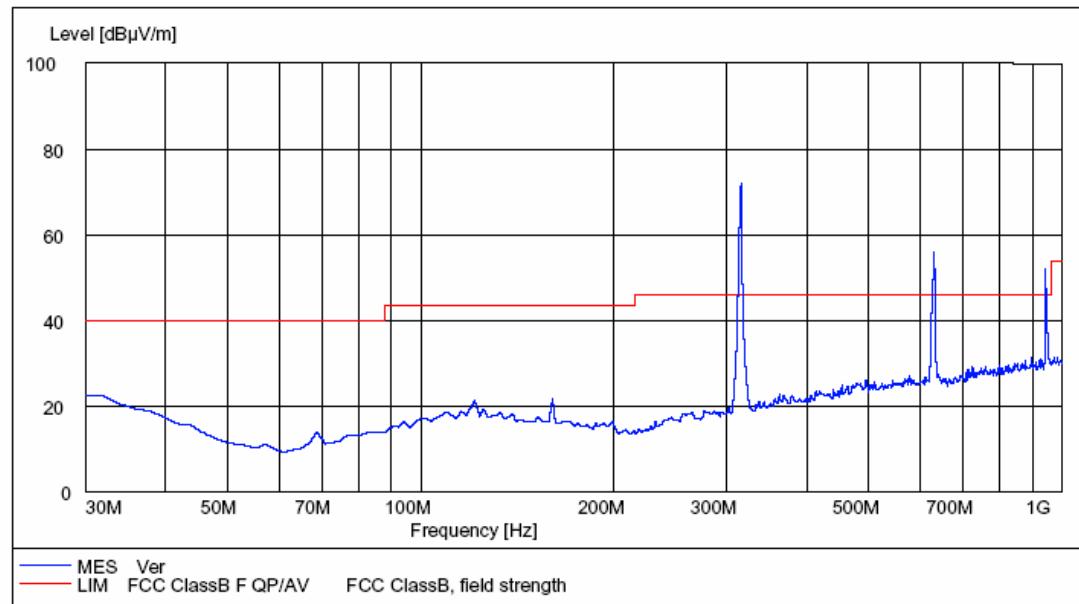


Radiated Disturbance

FCC PART 15

EUT: Tree Stand Locator Light
Manufacturer: All About Game, Inc.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Horizontal
Comment: DC 12V
:

M/N: AAGH91

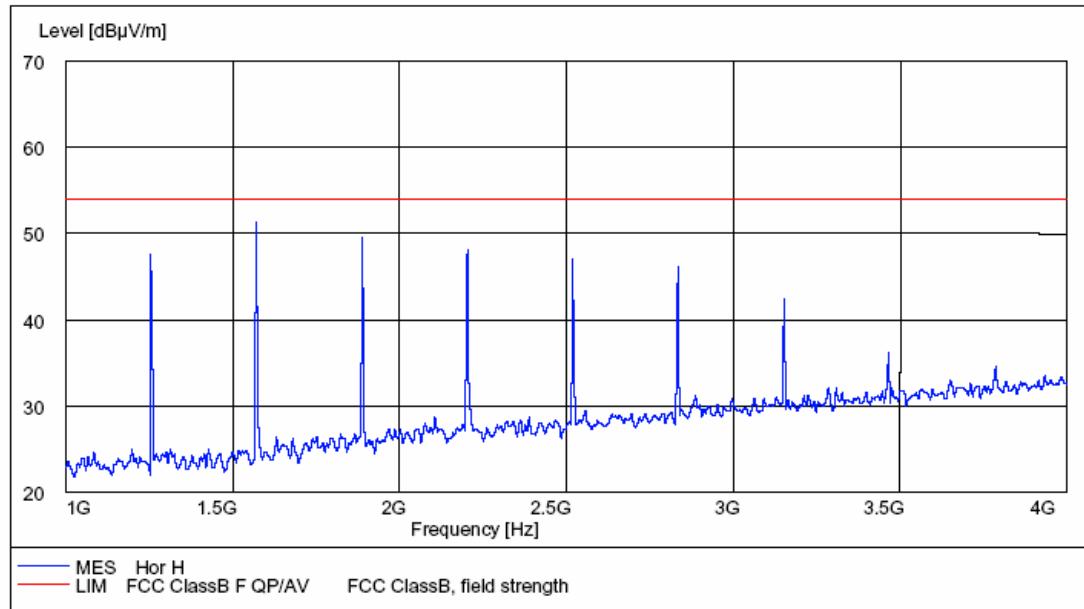

Radiated Disturbance**FCC PART 15**

EUT: Tree Stand Locator Light
Manufacturer: All About Game, Inc.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment: DC 12V
:

