



**SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 821 55555
Fax: +86 (0) 20 820 75059
Email: ee.guangzhou@sgs.com
FEDERAL COMMUNICATIONS COMMISSION
Registration number: 282399

Report No.: GZEM151000552701
Page: 1 of 18
FCC ID: TAPMC-ST1323BT

TEST REPORT

The following sample(s) was/were submitted and identified on behalf of the client as:

Application No.:	GZEM1510005527HS
Applicant:	Guangdong MD Consumer Electric Manufacturing Co.,Ltd
Manufacturer:	Same as the applicant.
FCC ID:	TAPMC-ST1323BT
Product Description:	induction cooker
Model No.:	MC-STW1323BT
Standards:	CFR 47 FCC PART 18: 2014
Date of Receipt:	2015-10-30
Date of Test:	2015-11-02 to 2015-11-05
Date of Issue:	2015-12-07
Test Result:	Pass*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kobe Jian
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.


The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-12-07		Original

Authorized for issue by:			
Tested By	 (Terry Lai) / Project Engineer	2015-11-02 to 2015-11-05 Date	
Prepared By	 (June Chen) / Clerk	2015-12-04 Date	
Checked By	 (Crystal Wang) / Reviewer	2015-12-07 Date	



3 Test Summary

Electromagnetic Interference (EMI)				
Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission (9 kHz to 30 MHz)	FCC CFR 47 PART 18: 2014	FCC OST/ MP-5:1986	18.307(a)	PASS
Radiated Emission (9 kHz to 30 MHz)	FCC CFR 47 PART 18: 2014	FCC OST/ MP-5:1986	18.305(b)	PASS
Remark : EUT: In this whole report EUT means Equipment Under Test.				



4 Contents

1	Cover Page	1
2	Version	2
3	Test Summary	3
4	Contents	4
5	General Information.....	5
5.1	Client Information.....	5
5.2	General Description of E.U.T.	5
5.1	Details of E.U.T.	5
5.2	Description of Support Units	5
5.3	Deviation from Standards	5
5.4	General Test Climate During Testing	5
5.5	Abnormalities from Standard Conditions	5
5.6	Test Location.....	5
5.7	Test Facility	6
6	Equipment List.....	7
7	Emission Test Results	9
7.1	Conducted Emissions, 9 kHz to 30 MHz	9
7.2	Radiated Emissions, 9 kHz to 30 MHz	13



5 General Information

5.1 Client Information

Applicant: Guangdong MD Consumer Electric Manufacturing Co.,Ltd
Address of Applicant: 19 Sanle Road,Beijiao,Shunde, Foshan, Guangdong
Manufacturer: Same as the applicant.
Address of Manufacturer: Same as the applicant.

5.2 General Description of E.U.T.

Product Description: Induction Cooker
Model No.: MC-STW1323BT

5.1 Details of E.U.T.

Rated Supply (Voltage): AC 120V 60Hz
Power Cable: 1.5m x 2 wires unscreened AC mains cable.

5.2 Description of Support Units

The EUT has been tested with water as load and a ceramic enamel pot (supplied by SGS).

5.3 Deviation from Standards

None.

5.4 General Test Climate During Testing

Temperature: 15-30 °C Humidity: 30-70 %RH Atmospheric Pressure: 860-1060 mbar

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Location

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663
Tel: +86 20 82155555 Fax: +86 20 82075059



5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



6 Equipment List

Conducted Emission						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2015-03-02	2016-03-01
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2015-09-24	2016-09-23
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2015-03-02	2016-03-01
EMC0107	Coaxial Cable	SGS	2m	N/A	2014-07-25	2016-07-24
EMC0106	Voltage Probe	SGS	N/A	N/A	2014-04-19	2016-04-19
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2015-09-28	2016-09-27
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2015-09-28	2016-09-27
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2015-09-28	2016-09-27
EMC2047	CDN	Elektronik- Feinmechanik	L-801:AF2	2793	2015-09-19	2018-09-18
EMC2048	CDN	Elektronik- Feinmechanik	L-801:M2/M3	2738	2015-09-25	2018-09-24
EMC2062	6dB Attenuator	HP	8491A	24487	2014-04-19	2016-04-19
EMC0167	Conical metal housing	SGS-EMC	N/A	N/A	2014-04-19	2016-04-19



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM151000552701

Page: 8 of 18

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal. Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2014-12-05	2016-12-04
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2015-03-02	2016-03-01
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2015-03-03	2016-03-02
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2014-04-19	2016-04-18
EMC2025	Trilog Broadband Antenna 30-1000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	9160-3372	2014-07-14	2017-07-13
EMC0524	Bi-log Type Antenna	Schaffner - Chase	CBL6112B	2966	2013-08-31	2016-08-30
EMC0519	Bilog Type Antenna	Schaffner - Chase	CBL6143	5070	2014-05-04	2017-05-03
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2013-08-31	2016-08-31
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2015-03-02	2016-03-01
EMC2065	Amplifier	HP	8447F	N/A	2015-07-18	2016-07-17
EMC0075	310N Amplifier	Sonoma	310N	272683	2015-03-02	2016-03-01
EMC0523	Active Loop Antenna	EMCO	6502	42963	2014-03-22	2016-03-21
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2014-05-26	2017-05-25
EMC2079	High Pass Filter (915MHz)	FSY MICROWAVE	HM1465-9SS	009	2015-03-02	2016-03-01
EMC2069	2.4GHz filter	Micro-Tronics	BRM 50702	149	2015-03-02	2016-03-01
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-05-03	2016-05-02

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal. Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2015-09-17	2016-09-16
EMC0007	DMM	Fluke	73	70671122	2015-09-17	2016-09-16



7 Emission Test Results

7.1 Conducted Emissions, 9 kHz to 30 MHz

Test Requirement: FCC Part 18
Test Method: FCC OST/ MP-5
Test Date: 2015-11-02
Power Supply: AC 120V 60Hz
Frequency Range: 9 kHz to 30 MHz
Detector: Peak for pre-scan, Quasi-Peak and Average for the final result.
(200 Hz Resolution Bandwidth for 9 kHz to 150 kHz,
9 kHz Resolution Bandwidth for 150 kHz to 30 MHz)


Limit:

Frequency range MHz	AC mains terminals dB (μV)	
	Quasi-peak	Average
0.009 to 0.05	110	—
0.05 to 0.15	90 to 80*	—
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.05 MHz to 0.5 MHz.		
Note2: The lower limit is applicable at the transition frequency.		

7.1.1 E.U.T. Operation

Test the EUT in cooking mode with full power.

7.1.2 Test Setup and Procedure

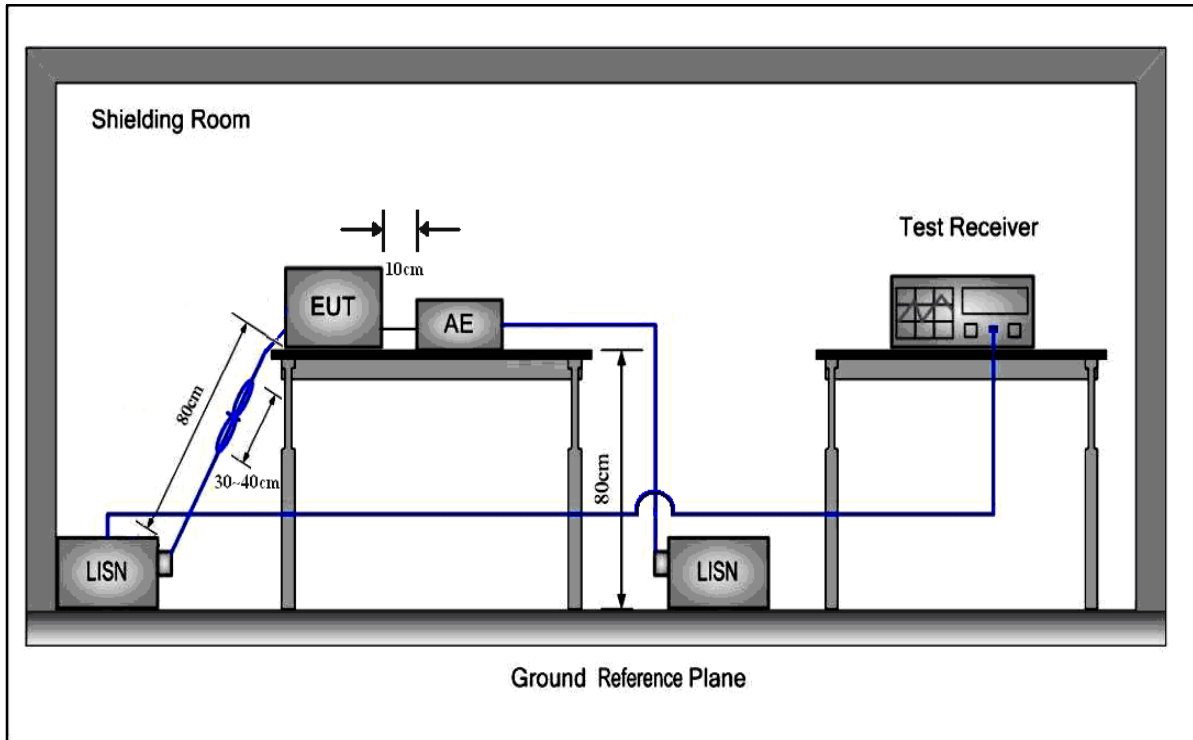

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to nominal power supply through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 1 m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.




7.1.3 Measurement Data

Pre-scan was performed with peak detected on both live and neutral cable. Quasi-peak & average measurements were performed at the frequencies which maximum peak emission level was detected. Please see the attached Quasi-peak and Average test results.

Live line:

Peak Scan

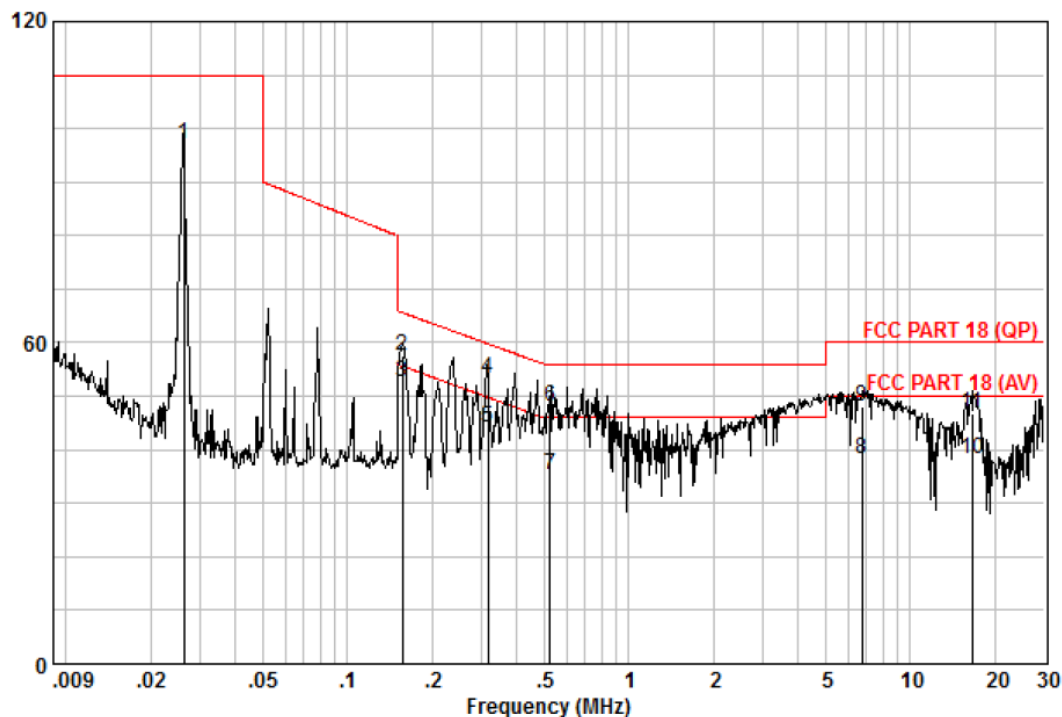

Quasi-peak and Average measurement:


Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.026	87.21	0.00	10.05	97.26	110.00	-12.74	QP
0.157	47.96	0.10	9.60	57.66	65.60	-7.95	QP
0.157	42.79	0.10	9.60	52.49	55.60	-3.12	AVERAGE
0.315	43.48	0.06	9.70	53.24	59.84	-6.60	QP
0.315	34.53	0.06	9.70	44.29	49.84	-5.55	AVERAGE
0.527	38.32	0.03	9.70	48.05	56.00	-7.95	QP
0.527	25.46	0.03	9.70	35.19	46.00	-10.81	AVERAGE
6.769	28.20	0.25	9.79	38.24	50.00	-11.76	AVERAGE
6.769	38.05	0.25	9.79	48.09	60.00	-11.91	QP
16.661	27.86	0.37	10.00	38.24	50.00	-11.76	AVERAGE
16.661	36.51	0.37	10.00	46.89	60.00	-13.11	QP

Level = Read Level + Cable Loss + LISN Factor.



Neutral line:

Peak Scan

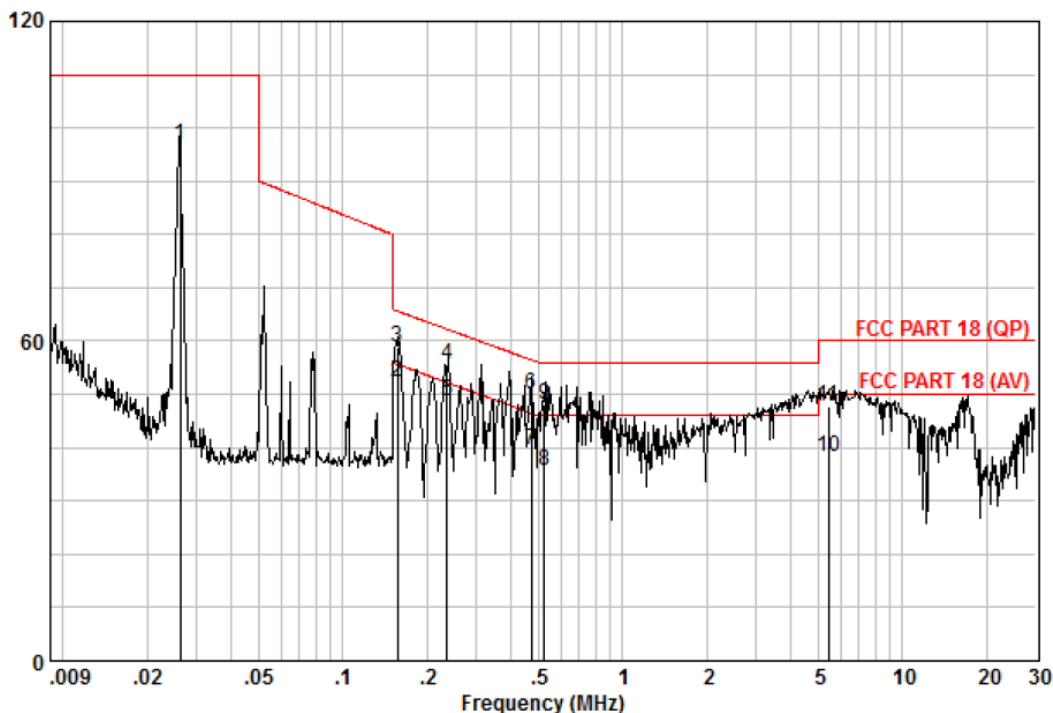

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.026	86.67	0.00	9.97	96.64	110.00	-13.36	QP
0.156	42.49	0.10	9.66	52.25	55.65	-3.40	AVERAGE
0.156	48.94	0.10	9.66	58.70	65.65	-6.95	QP
0.235	45.85	0.08	9.66	55.59	62.26	-6.67	QP
0.235	39.09	0.08	9.66	48.83	52.26	-3.43	AVERAGE
0.471	40.47	0.04	9.66	50.17	56.49	-6.32	QP
0.471	29.94	0.04	9.66	39.64	46.49	-6.85	AVERAGE
0.527	25.95	0.03	9.66	35.65	46.00	-10.35	AVERAGE
0.527	38.32	0.03	9.66	48.02	56.00	-7.98	QP
5.447	28.26	0.22	9.72	38.20	50.00	-11.80	AVERAGE
5.447	37.71	0.22	9.72	47.65	60.00	-12.35	QP

Level = Read Level + Cable Loss + LISN Factor.



7.2 Radiated Emissions, 9 kHz to 30 MHz

Test Requirement: FCC Part 18
Test Method: FCC OST/ MP-5
Power Supply: AC 120V 60Hz
Test Date: 2015-11-05
Frequency Range: 9 kHz to 30 MHz
Measurement Distance: 10m
Detector: Peak for pre-scan, Average for the final result
(200 Hz Resolution Bandwidth for 9 kHz to 150 kHz
9 kHz Resolution Bandwidth for 150 kHz to 30 MHz)

Limit:


Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Induction cooking ranges	Below 90 kHz	Any	1,500	430
	On or above 90 kHz	Any	300	430

For Induction cooking ranges and the operating frequency is below 90 kHz, the field strength limit is 1,500 $\mu\text{V/m}$ @30m,
i.e. $20\lg(1500)+20\lg(30/10)=63.52+9.54=73.06\text{dBuV/m}$ @ 10m distance.

7.2.1 E.U.T. Operation

Test the EUT in cooking mode with full power.

7.2.2 Test Setup and Procedure

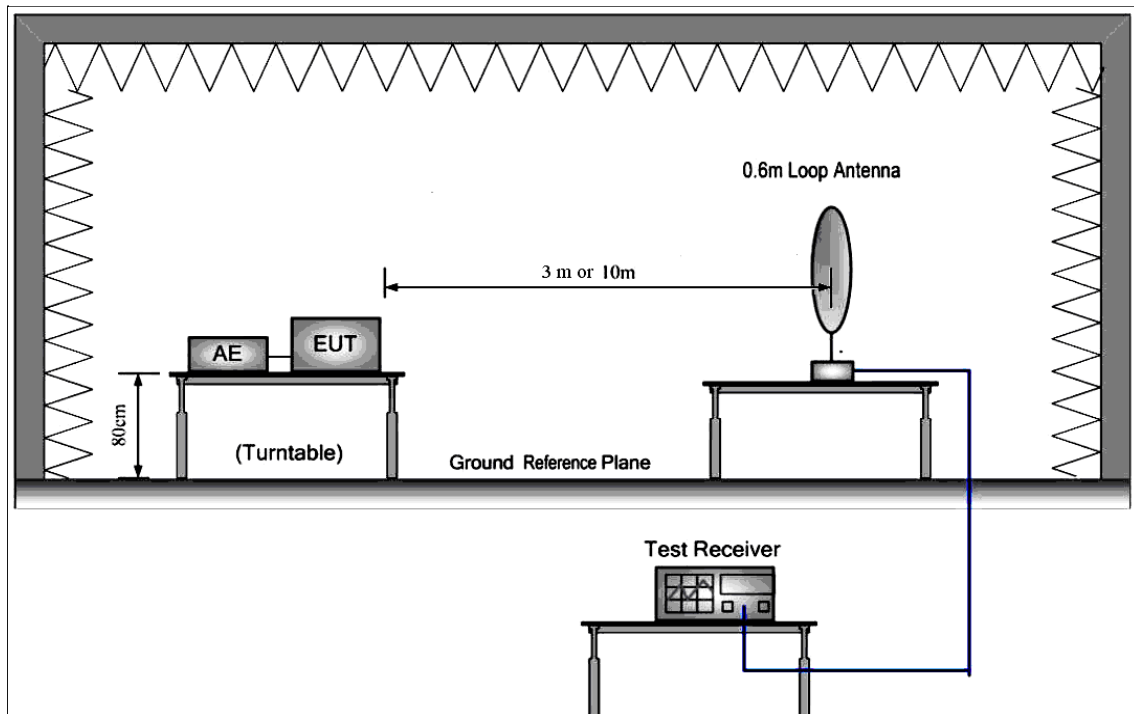

1. The magnetic emissions test was conducted in a semi-anechoic chamber.
2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane; The mains cables shall drape to the ground reference plane.
3. The tabletop EUT was placed upon a non-metallic table 1 m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of magnetic emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum signature data plots of the EUT. The frequencies of maximum emission were determined in the final magnetic emissions measurement. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, the antenna was supported in the vertical plane and be rotatable about a vertical axis. The antenna height was set at around 2 m above the ground reference plane.




7.2.3 Measurement Data

9k-0.15k

Vertical:

Peak scan

Level (dBuV/m)

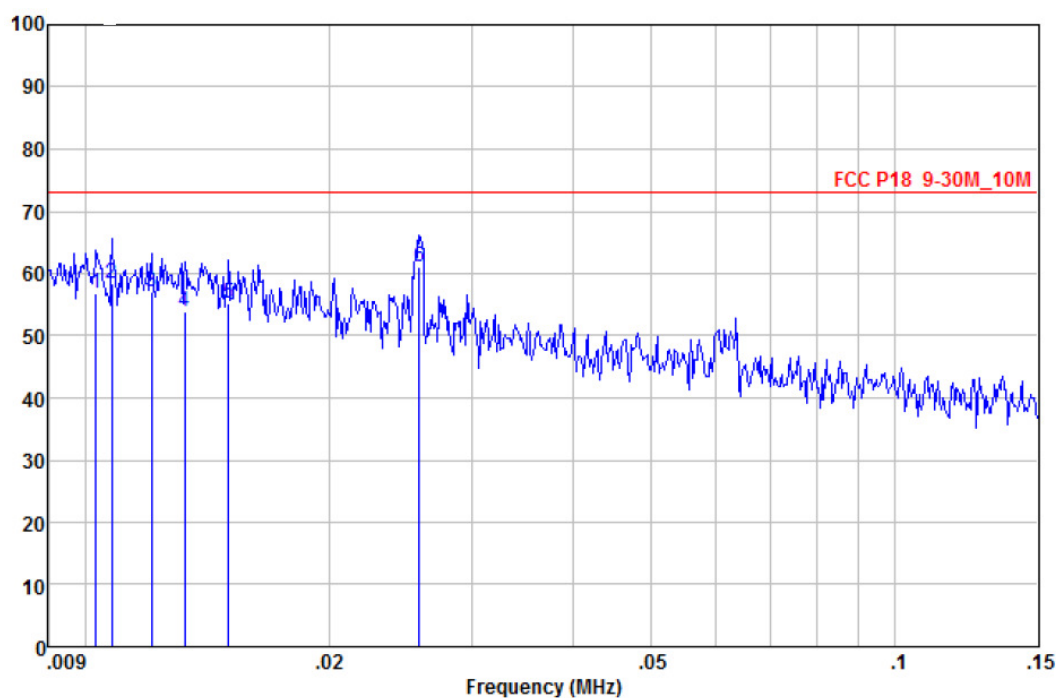

Average measurement

Freq	ReadAntenna	Cable	Preamp	Limit	Over			
Level	Factor	Loss	Factor	Line	Limit	Remark		
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
0.010	66.46	21.68	0.00	31.32	56.82	73.06	-16.24	Average
0.011	68.27	21.53	0.00	31.32	58.48	73.06	-14.58	Average
0.012	67.52	20.96	0.00	31.34	57.14	73.06	-15.92	Average
0.013	65.02	20.21	0.00	31.35	53.88	73.06	-19.18	Average
0.015	67.90	18.56	0.00	31.37	55.09	73.06	-17.97	Average
0.026	76.46	16.16	0.00	31.53	61.09	73.06	-11.97	Average


Level = Read Level + Antenna Factor + Cable Loss-Preamp Factor



Horizontal:

Peak scan

Level (dBuV/m)

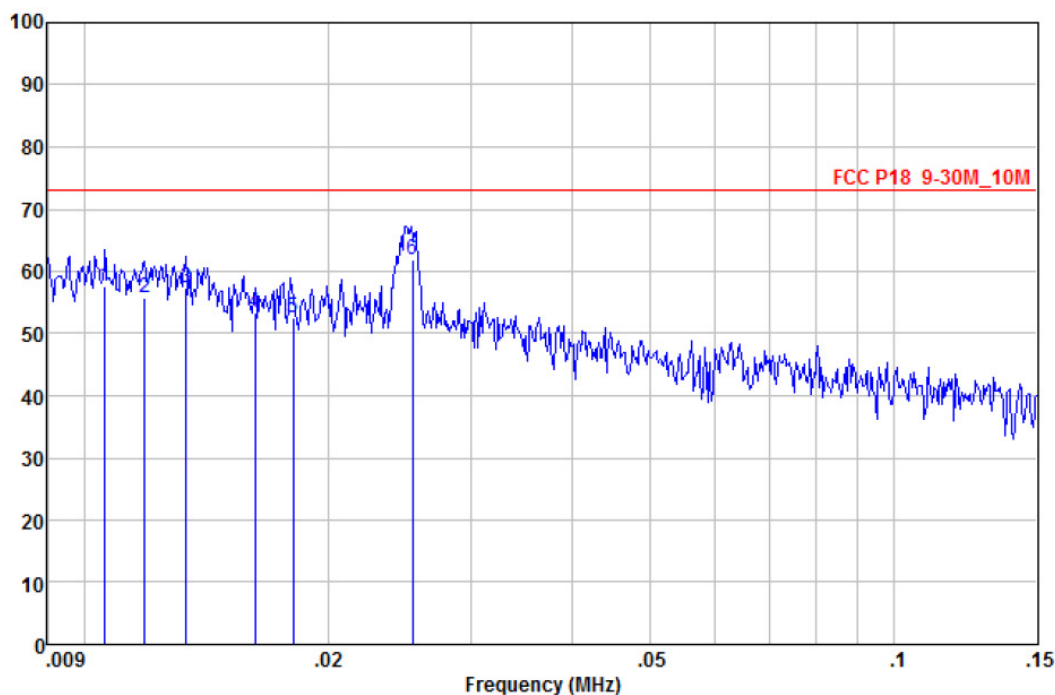

Average measurement

Freq	ReadAntenna	Cable	Preamp		Limit	Over	
Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
0.011	67.30	21.59	0.00	31.32	57.57	73.06	-15.49 Average
0.012	65.90	21.06	0.00	31.33	55.63	73.06	-17.43 Average
0.013	68.54	20.13	0.00	31.35	57.32	73.06	-15.74 Average
0.016	66.84	17.87	0.00	31.39	53.32	73.06	-19.74 Average
0.018	66.72	17.29	0.00	31.41	52.60	73.06	-20.46 Average
0.025	77.22	16.23	0.00	31.52	61.93	73.06	-11.13 Average

Level = Read Level + Antenna Factor + Cable Loss-Preamp Factor




0.15M-30M

Vertical:

Peak scan

Level (dBuV/m)

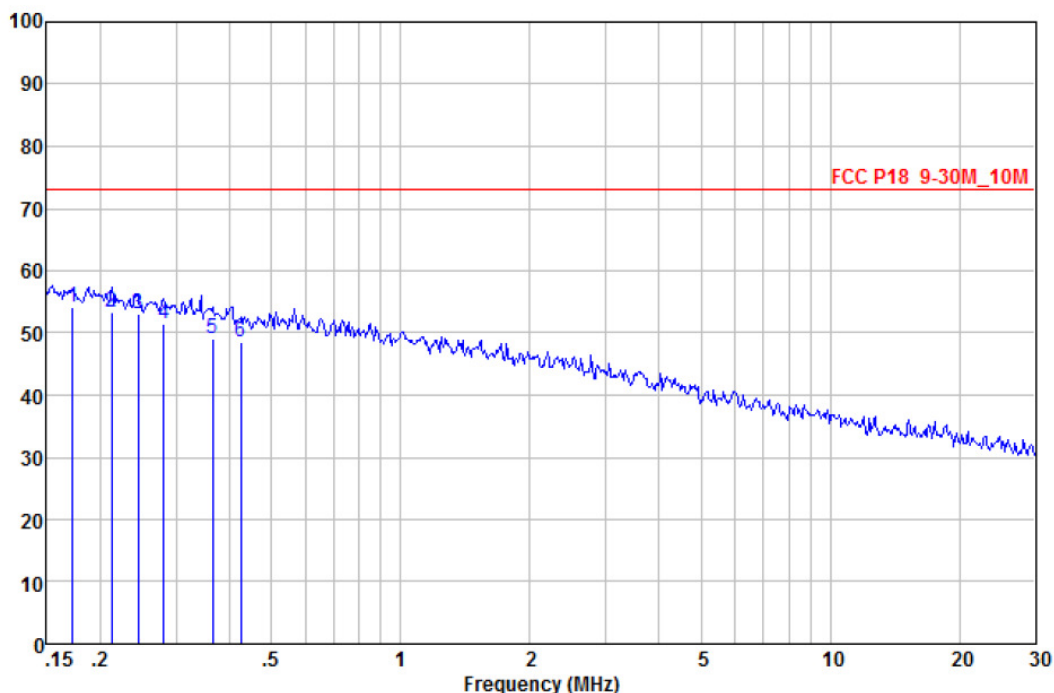

Average measurement

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit	
	dBuV	dB/m	dB	dB		dBuV/m	dB	
0.172	73.23	12.80	0.09	32.02	54.10	73.06	-18.96	Average
0.213	72.43	12.80	0.12	32.02	53.33	73.06	-19.73	Average
0.244	72.33	12.80	0.10	32.03	53.20	73.06	-19.86	Average
0.280	70.58	12.77	0.09	32.04	51.40	73.06	-21.66	Average
0.365	68.46	12.61	0.05	32.05	49.07	73.06	-23.99	Average
0.424	67.89	12.54	0.04	32.06	48.41	73.06	-24.65	Average

Level = Read Level + Antenna Factor + Cable Loss-Preamp Factor



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch


Report No.: GZEM151000552701

Page: 18 of 18

Horizontal:

Peak scan

Level (dBuV/m)

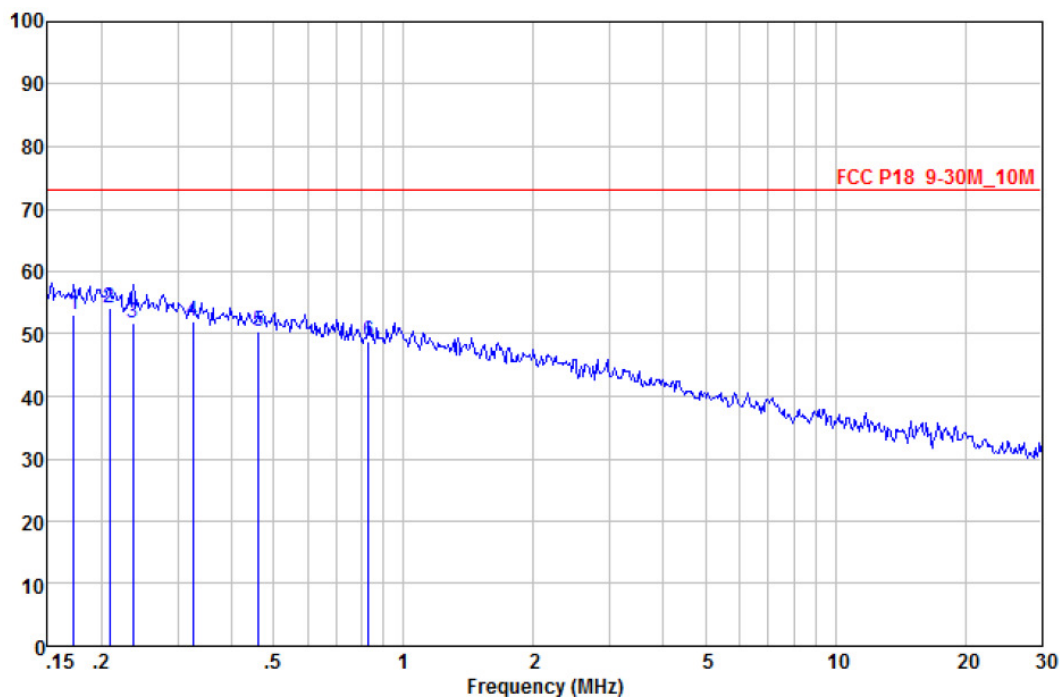

Average measurement

Freq	Read	Antenna	Cable	Preamp	Limit	Over	
MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
0.172	72.13	12.80	0.09	32.02	53.00	73.06	-20.06 Average
0.208	73.33	12.80	0.13	32.02	54.24	73.06	-18.82 Average
0.237	70.91	12.80	0.11	32.03	51.79	73.06	-21.27 Average
0.325	71.39	12.71	0.07	32.04	52.13	73.06	-20.93 Average
0.461	69.80	12.52	0.05	32.07	50.30	73.06	-22.76 Average
0.830	68.15	12.66	0.05	32.13	48.73	73.06	-24.33 Average

Level = Read Level + Antenna Factor + Cable Loss-Preamp Factor

--End of Report--