

P51 NR N71_DFT-QPSK20M_Rear Face_1cm_Ch136100_50RB_OS28_Ant0

Communication System: NR; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750_0309 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 43.039$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.34, 8.97, 9.88) @ 680.5 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.143 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.88 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 79.2%

Maximum value of SAR (measured) = 0.146 W/kg

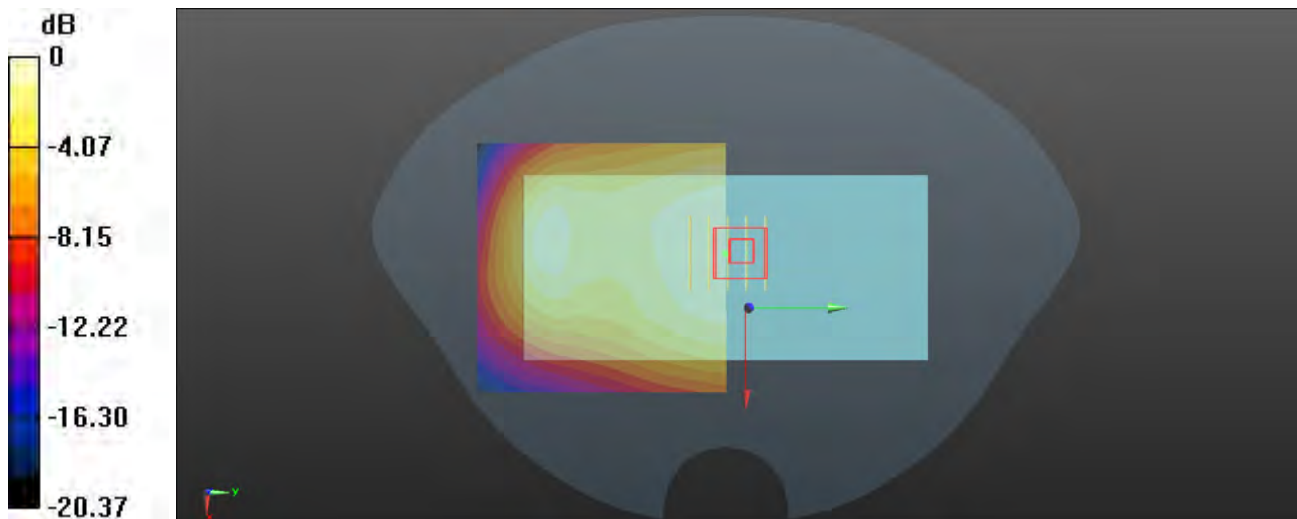

0 dB = 0.146 W/kg

P52 NR N77_CP-QPSK100M_Rear Face_1cm_Ch633334_137RB_OS68_Ant5+3

Communication System: NR; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium: HSL3500_0612 Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.821$ S/m; $\epsilon_r = 39.674$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.7, 6.61, 6.72) @ 3500.01 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.848 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.420 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.833 W/kg

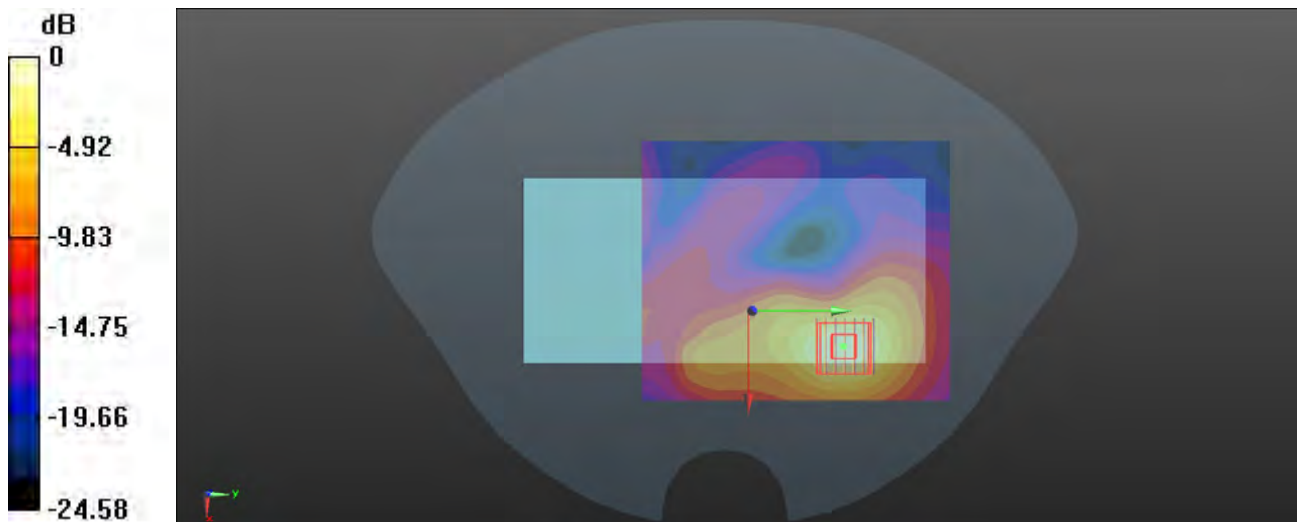

0 dB = 0.833 W/kg

P53 NR N78_CP-QPSK100M_Rear Face_1cm_Ch633334_137RB_OS0_Ant5+3

Communication System: NR; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium: HSL3500_0613 Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.821$ S/m; $\epsilon_r = 39.686$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.7, 6.61, 6.72) @ 3500.01 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.933 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.217 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.3%

Maximum value of SAR (measured) = 0.903 W/kg

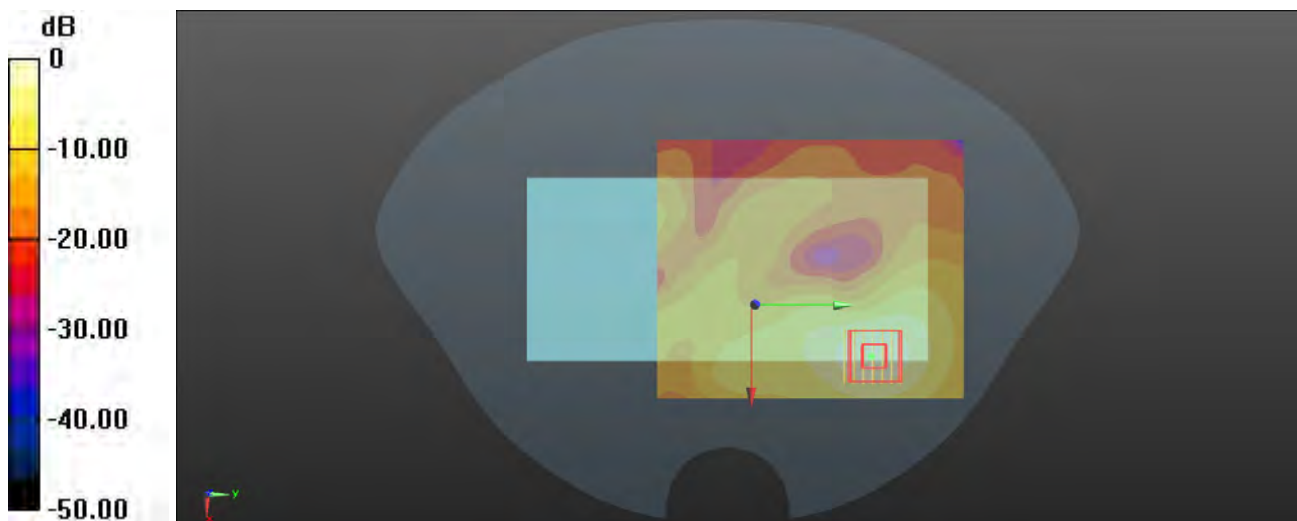

0 dB = 0.903 W/kg

P54 WLAN2.4G_802.11b_Rear Face_1cm_Ch11_Ant5+6

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_0607 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.62, 7.65, 7.52) @ 2462 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.507 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.312 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.497 W/kg

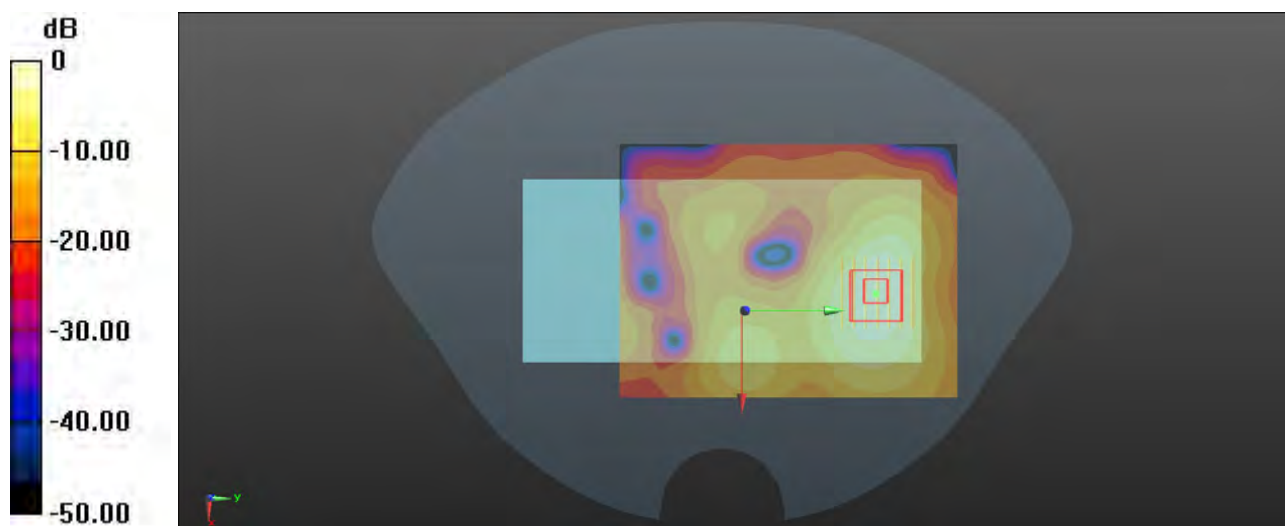

0 dB = 0.497 W/kg

P55 WLAN5G_802.11a_Rear Face_1cm_Ch52_Ant5+6

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1.007

Medium: HSL5G_0619 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.645$ S/m; $\epsilon_r = 36.183$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(5.05, 4.95, 5.04) @ 5260 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.370 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.566 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.379 W/kg

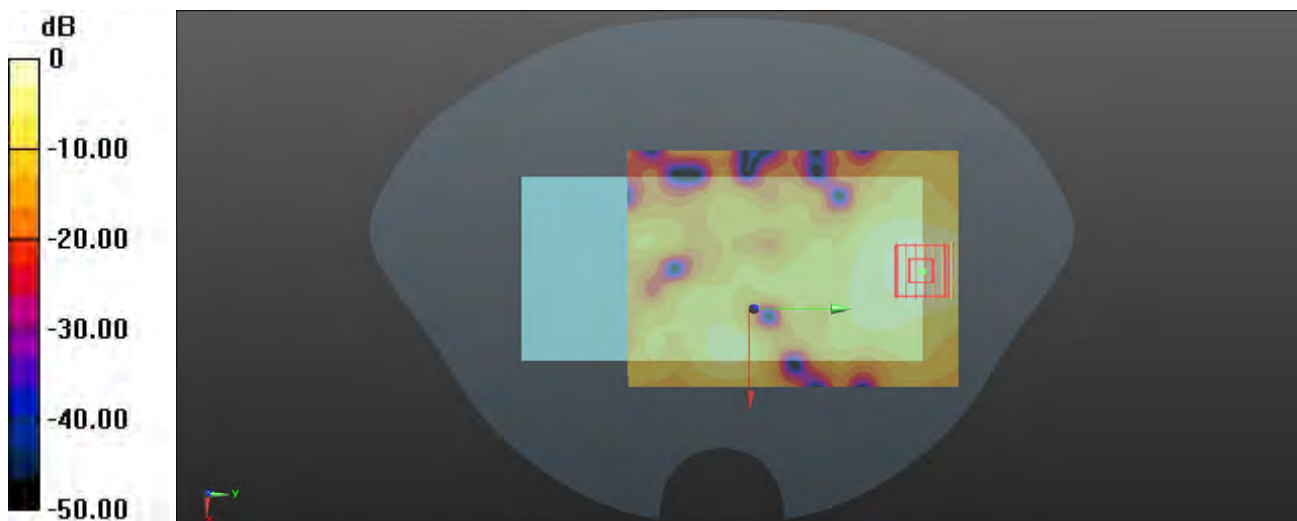

0 dB = 0.379 W/kg

P56 WLAN5G_802.11a_Front Face_1cm_Ch116_Ant5

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.007

Medium: HSL5G_0620 Medium parameters used: $f = 5580$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 34.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.65, 4.62, 4.65) @ 5580 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.279 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.6680 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.253 W/kg

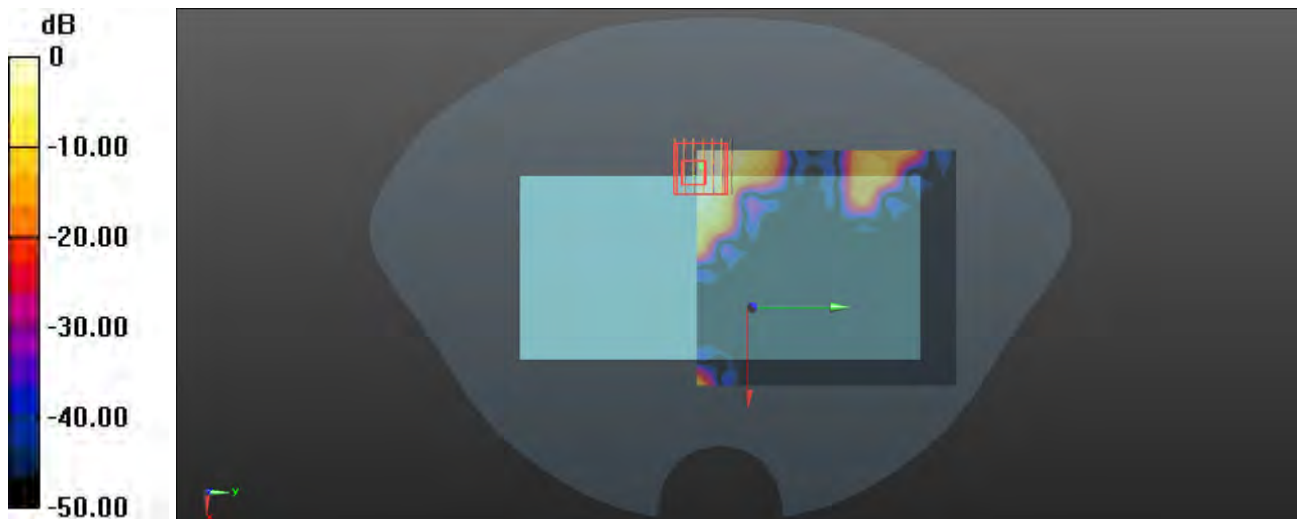

0 dB = 0.253 W/kg

P57 WLAN5G_802.11a_Front Face_1cm_Ch165_Ant5+6

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.005

Medium: HSL5G_0623 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.227$ S/m; $\epsilon_r = 35.151$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.59, 4.56, 4.63) @ 5825 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.229 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.050 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 0.180 W/kg

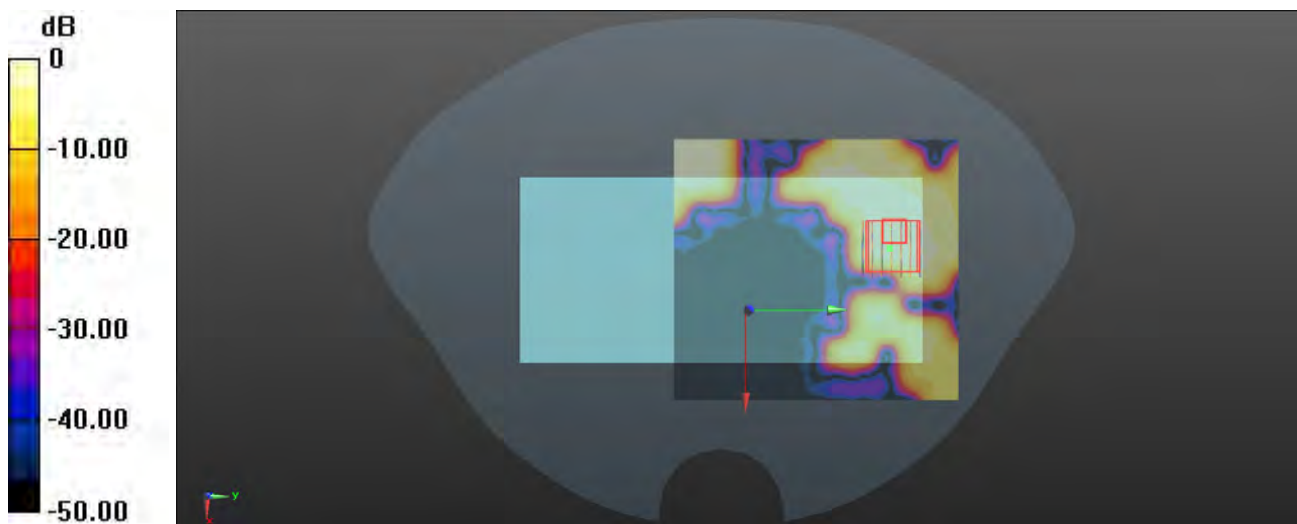

0 dB = 0.180 W/kg

P58 BT_GFSK_Front Face_1cm_Ch78_Ant5

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:2.175

Medium: HSL2450_0607 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.169$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.62, 7.65, 7.52) @ 2480 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0290 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.186 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.0495 W/kg

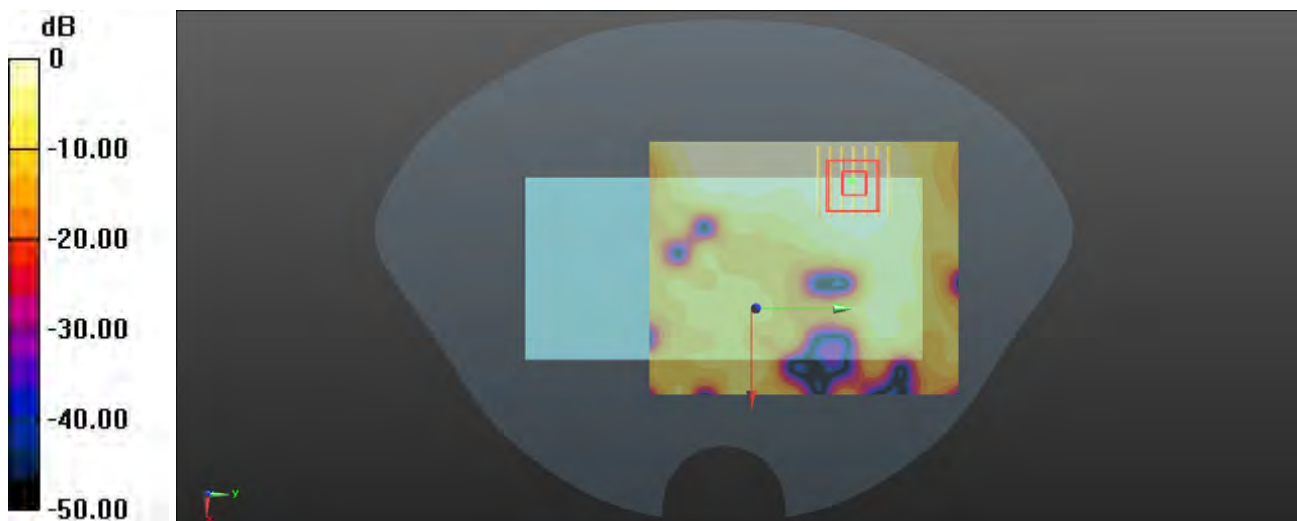

0 dB = 0.0495 W/kg

P59 GSM850_GPRS 2Tx Slot_Rear Face_1cm_Ch189_Ant0

Communication System: GPRS 2Tx Slot; Frequency: 836.4 MHz; Duty Cycle: 1:4.15

Medium: HSL835_0310 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 42.958$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.94, 9.14, 8.98) @ 836.4 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.342 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.164 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.367 W/kg

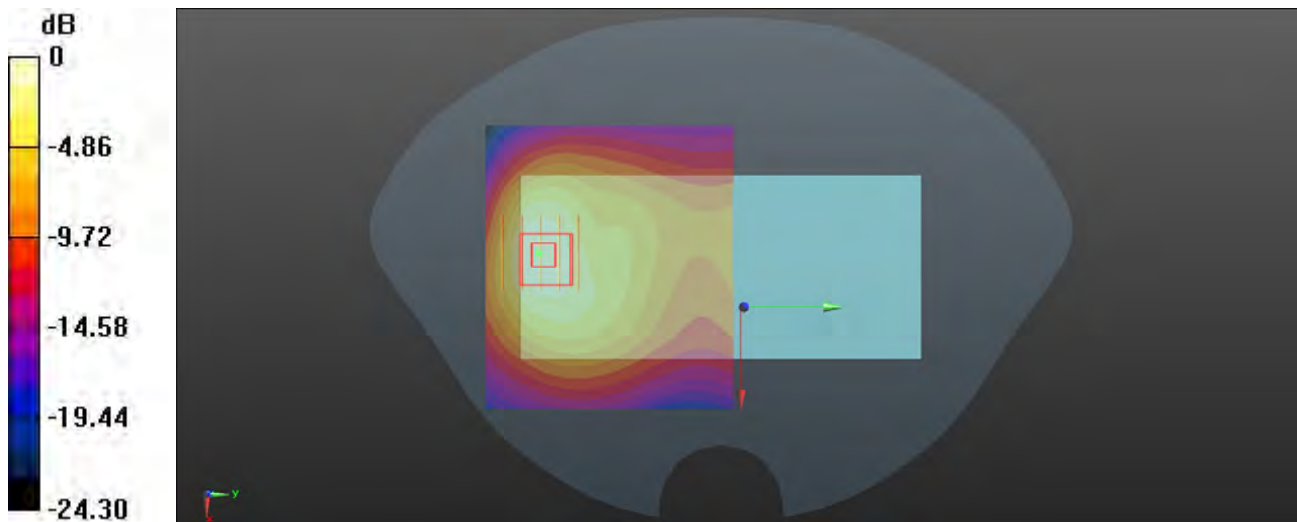

0 dB = 0.367 W/kg

P60 GSM1900_GPRS 4Tx Slot_Rear Face_1cm_Ch512_Ant0

Communication System: GPRS 4Tx Slot; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08

Medium: HSL1950_0605 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.21$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.76, 7.82, 7.71) @ 1850.2 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.530 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.630 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 0.368 W/kg

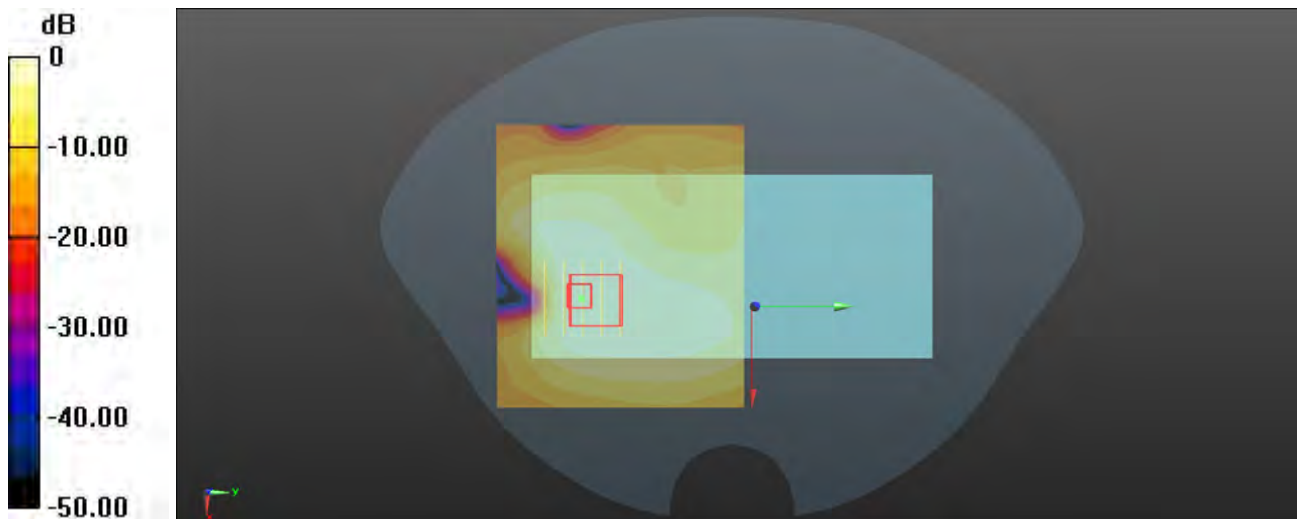

0 dB = 0.368 W/kg

P61 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9538_Ant0

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1950_0606 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 39.335$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.76, 7.82, 7.71) @ 1907.6 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.595 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.07 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.593 W/kg

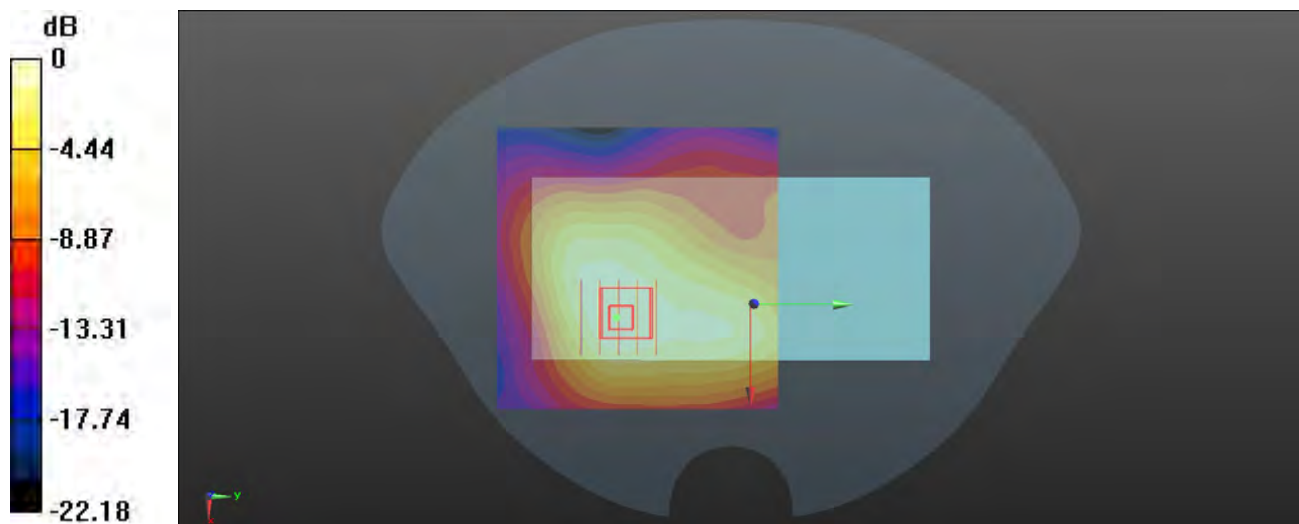

0 dB = 0.593 W/kg

P62 WCDMA IV_RMC12.2K_Rear Face_1cm_Ch1513_Ant0

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750_0604 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 40.131$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.17, 8.10) @ 1752.6 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.599 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.55 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.574 W/kg

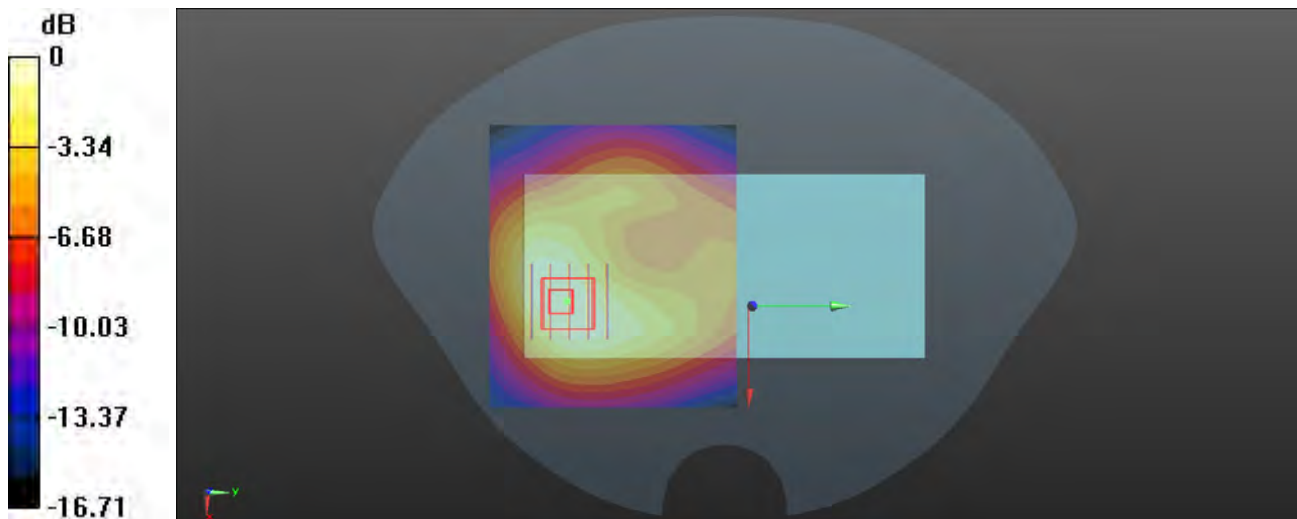

0 dB = 0.574 W/kg

P63 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4233_Ant0

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835_0310 Medium parameters used: $f = 847$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.93$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.94, 9.14, 8.98) @ 846.6 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.404 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.447 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.430 W/kg

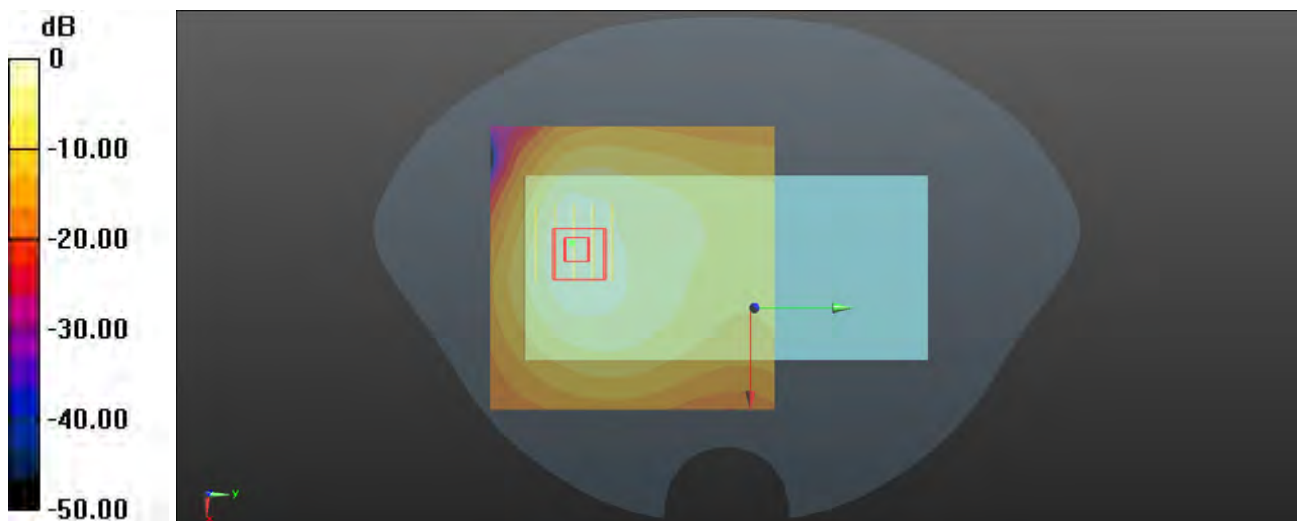

0 dB = 0.430 W/kg

P64 LTE 2_QPSK20M_Right Side_1cm_Ch18900_50RB_OS50_Ant1

Communication System: LTE_FDD; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1950_0606 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.333$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.76, 7.82, 7.71) @ 1900 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.481 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.395 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.466 W/kg

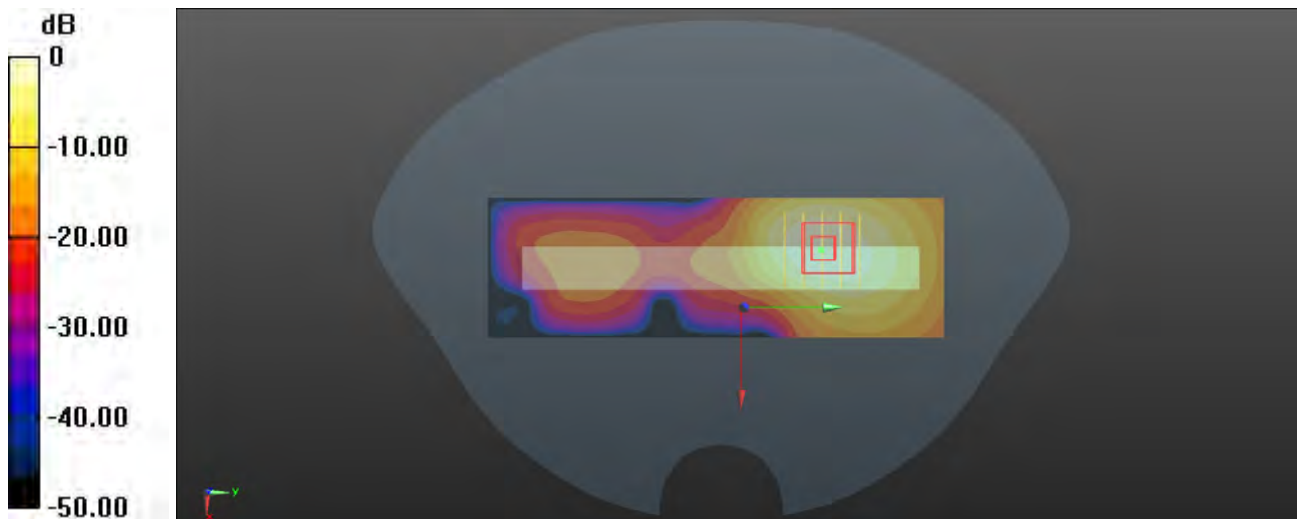

0 dB = 0.466 W/kg

P65 LTE 5_QPSK10M_Rear Face_1cm_Ch20600_1RB_OS0_Ant0

Communication System: LTE_FDD; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL835_0311 Medium parameters used: $f = 844$ MHz; $\sigma = 0.946$ S/m; $\epsilon_r = 42.935$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.94, 9.14, 8.98) @ 844 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.388 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.266 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.404 W/kg

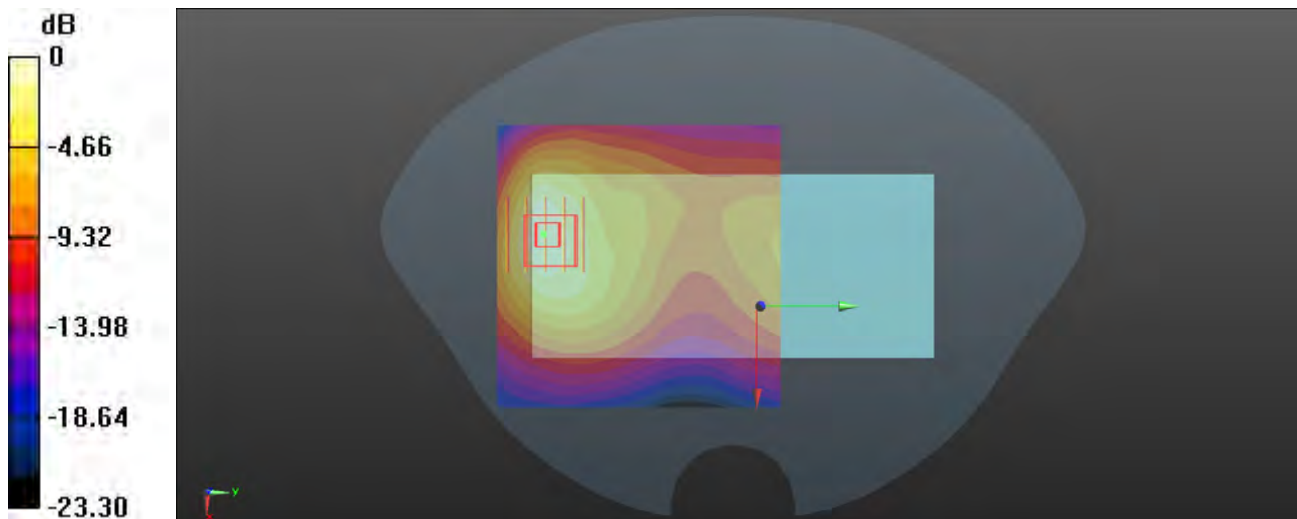

0 dB = 0.404 W/kg

P66 LTE 7_QPSK20M_Rear Face_1cm_Ch20850_1RB_OS0_Ant0

Communication System: LTE_FDD; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2550_0608 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.52, 7.57, 7.43) @ 2510 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.560 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.485 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.562 W/kg

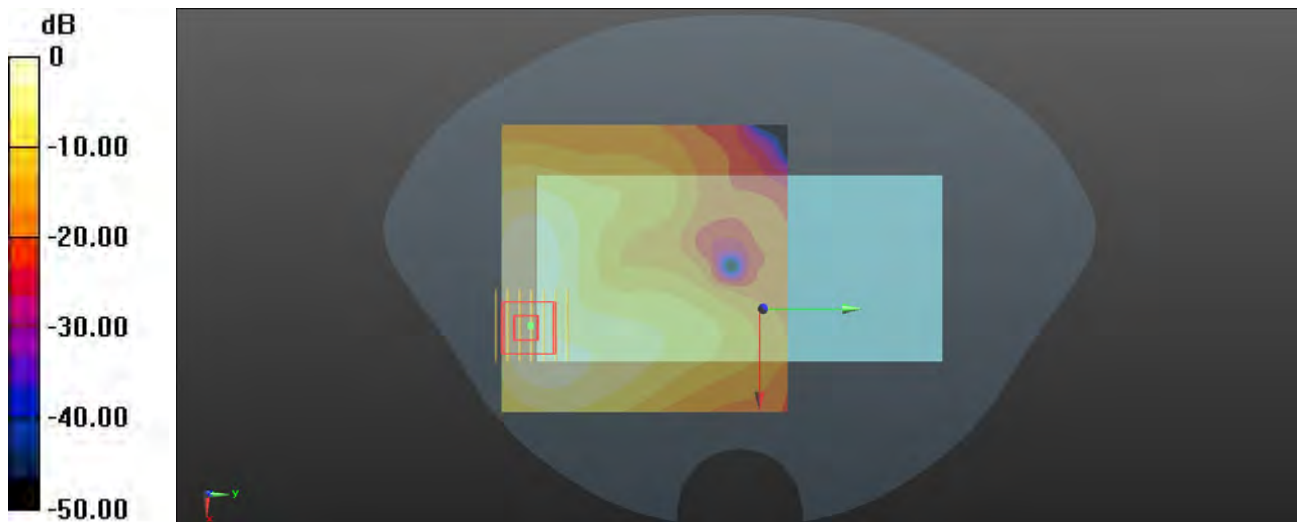

0 dB = 0.562 W/kg

P67 LTE 12_QPSK10M_Rear Face_1cm_Ch23060_1RB_OS49_Ant0

Communication System: LTE_FDD; Frequency: 704 MHz; Duty Cycle: 1:1

Medium: HSL750_0308 Medium parameters used: $f = 704$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.987$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.34, 8.97, 9.88) @ 704 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.137 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.23 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 0.139 W/kg

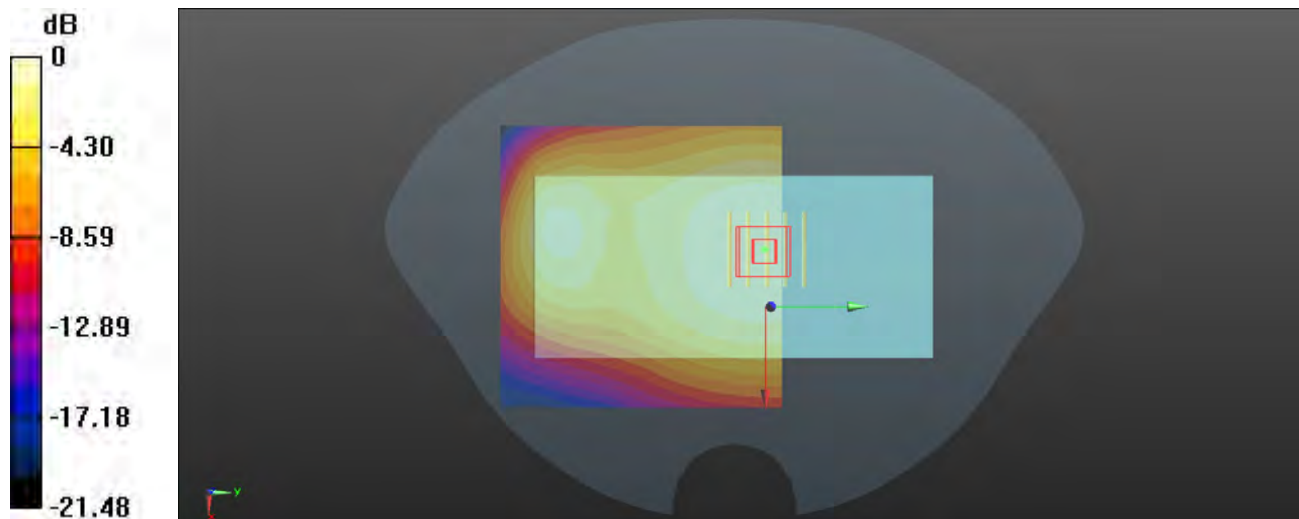

P68 LTE 13_QPSK10M_Rear Face_1cm_Ch23230_1RB_OS0_Ant0

Communication System: LTE_FDD; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750_0308 Medium parameters used: $f = 782$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.748$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.34, 8.97, 9.88) @ 782 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.802 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 0.171 W/kg

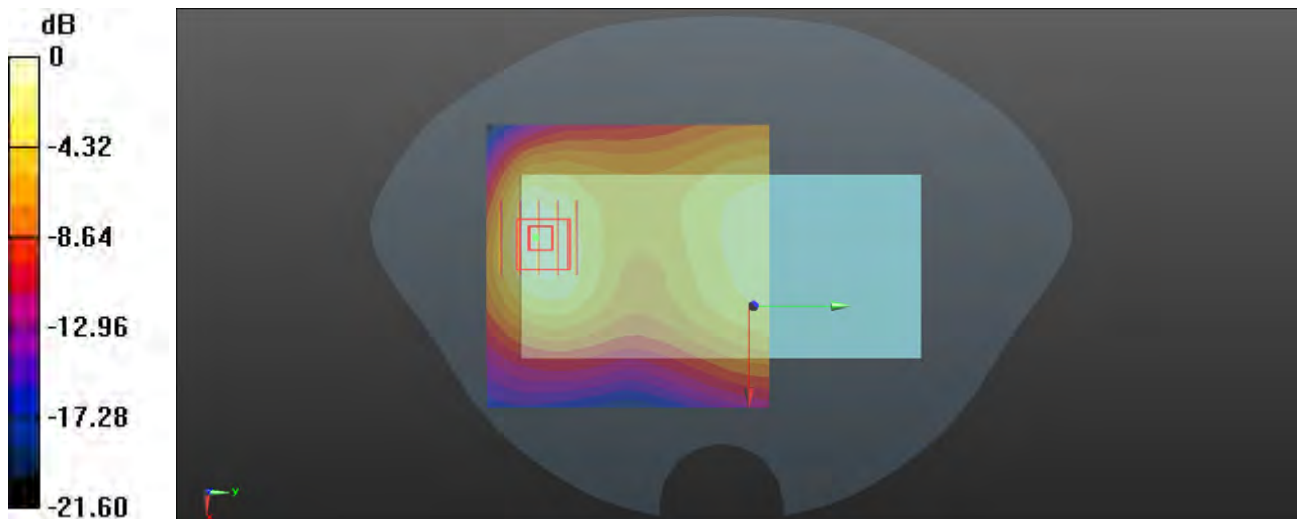

0 dB = 0.171 W/kg