




FCC PART 15, SUBPART C TEST REPORT

For

Roku, Inc.

1155 Coleman Ave,
San Jose, CA 95110, USA

FCC ID: TC2-R1036

Report Type: Original Report	Model: 4800X
Prepared By: Christian McCaig Test Engineer	
Report Number: R2006012-DTS	
Report Date: 2020-08-25	
Reviewed By: Simon Ma RF Supervisor	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

1	General Description.....	5
1.1	Product Description for Equipment Under Test (EUT)	5
1.2	Objective.....	5
1.3	Related Submittal(s)/Grant(s)	5
1.4	Test Methodology	5
1.5	Measurement Uncertainty	5
1.6	Test Facility Registrations	6
1.7	Test Facility Accreditations	6
2	System Test Configuration.....	9
2.1	Justification.....	9
2.2	EUT Exercise Software.....	9
2.3	Duty Cycle Correction Factor	10
2.4	Equipment Modifications.....	13
2.5	Local Support Equipment	13
2.6	Support Equipment	13
2.7	Interface Ports and Cabling.....	13
3	Summary of Test Results	14
4	FCC §15.203 - Antenna Requirements	15
4.1	Applicable Standards	15
4.2	Antenna Description	15
5	FCC §2.1091, §15.247(i) – RF Exposure.....	16
5.1	Applicable Standards	16
5.2	MPE Prediction.....	16
5.3	MPE Results	17
6	FCC §15.207 - AC Line Conducted Emissions.....	18
6.1	Applicable Standards	18
6.2	Test Setup	18
6.3	Test Procedure	18
6.4	Corrected Amplitude and Margin Calculation	19
6.5	Test Setup Block Diagram	19
6.6	Test Equipment List and Details.....	20
6.7	Test Environmental Conditions	20
6.8	Summary of Test Results	20
6.9	Conducted Emissions Test Plots and Data.....	21
7	FCC §15.209, §15.247(d) - Spurious Radiated Emissions	23
7.1	Applicable Standards	23
7.2	Test Setup	25
7.3	Test Procedure	25
7.4	Corrected Amplitude and Margin Calculation	25
7.5	Test Equipment List and Details.....	26
7.6	Test Environmental Conditions	26
7.7	Summary of Test Results	27
7.8	Radiated Emissions Test Results	28
8	FCC §15.247(a) (2) - Emission Bandwidth	36
8.1	Applicable Standards	36
8.2	Measurement Procedure.....	36
8.3	Test Equipment List and Details.....	36
8.4	Test Environmental Conditions	36
8.5	Test Results.....	37
9	FCC §15.247(b) (3) - Output Power Measurement.....	56
9.1	Applicable Standards	56

9.2	Measurement Procedure.....	56
9.3	Test Equipment List and Details.....	56
9.4	Test Environmental Conditions	56
9.5	Test Results.....	57
10	FCC §15.247(d)– 100 kHz Bandwidth of Band Edges.....	58
10.1	Applicable Standards	58
10.2	Measurement Procedure.....	58
10.3	Test Equipment List and Details.....	58
10.4	Test Environmental Conditions	58
10.5	Test Results.....	59
11	FCC §15.247(e) – Power Spectral Density	65
11.1	Applicable Standards	65
11.2	Measurement Procedure.....	65
11.3	Test Equipment List and Details.....	65
11.4	Test Environmental Conditions	65
11.5	Test Results.....	66
12	FCC §15.247(d) – Spurious Emissions at Antenna Terminals.....	76
12.1	Applicable Standards	76
12.2	Test Procedure	76
12.3	Test Equipment List and Details.....	76
12.4	Test Environmental Conditions	77
12.5	Test Results.....	77
13	Annex A (Normative) – EUT Test Setup Photographs.....	86
14	Annex B (Normative) – EUT External Photographs	87
15	Annex C (Normative) – EUT Internal Photographs.....	88
16	Annex D (Normative) - A2LA Electrical Testing Certificate.....	89

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2006012-DTS	Original Report	2020-08-25

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of *Roku, Inc.*, and their product model: *4800X*, FCC ID: TC2-R1036, or the “EUT” as referred to in this report. It is a Set-top-box.

1.2 Objective

This test report was prepared on behalf of *Roku, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules.

The objective was to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment DSS with FCC ID: TC2-R1036

FCC Part 15, Subpart E, Equipment NII with FCC ID: TC2-R1036

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2

2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;

- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test software used was PuTTY. The software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting	
		Ant A	Ant B
802.11b	2412	83	95
	2437	118	93
	2462	94	99
802.11g	2412	57	73
	2437	127	127
	2462	64	76
802.11n20	2412	62	62
	2437	127	127
	2462	62	62

Data Rates Tested:

802.11b mode: 1Mbps

802.11g mode: 6Mbps

802.11n HT20 mode: MCS0

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v05r02 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).


Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	12.40	12.80	96.88	0.14
802.11g	2.04	2.30	88.70	0.52
802.11n20	1.89	2.06	91.75	0.37

Duty Cycle = On Time (ms)/ Period (ms)


Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plots.


802.11b mode

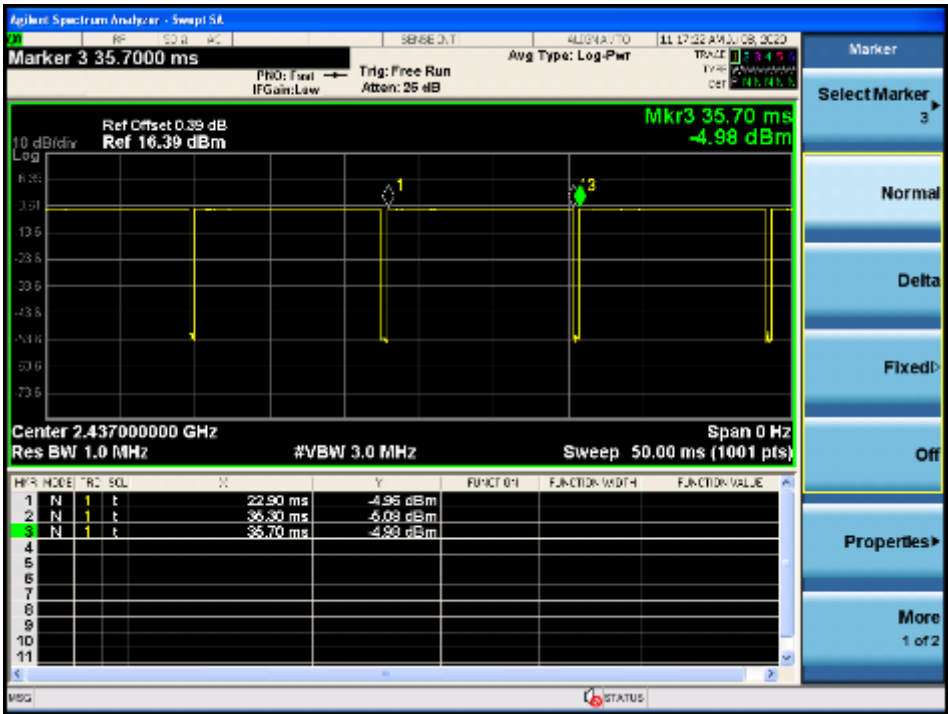

802.11g mode

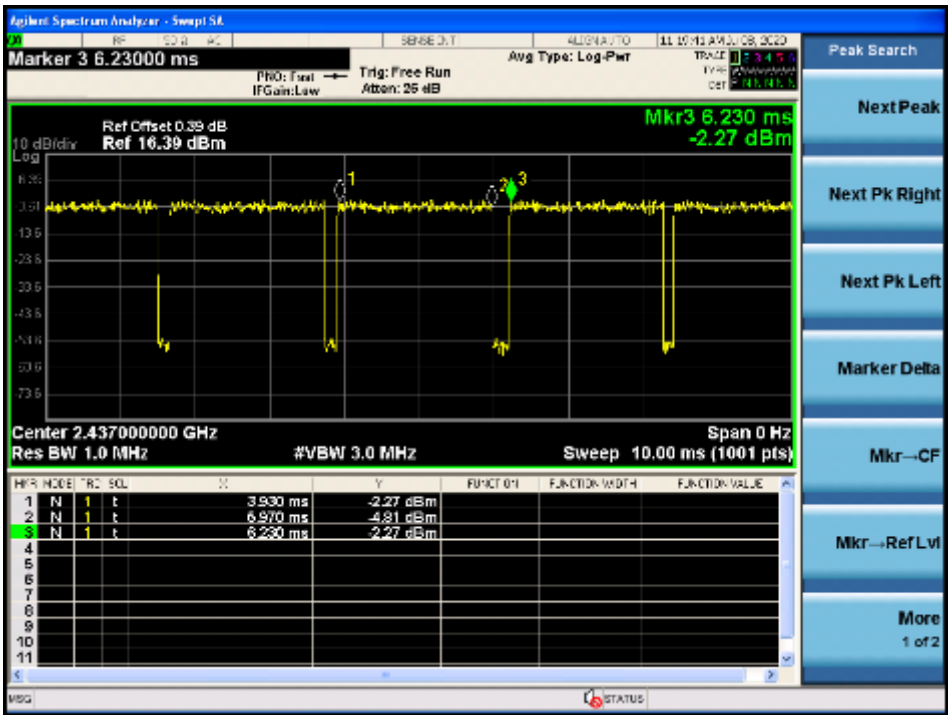

802.11n20 mode

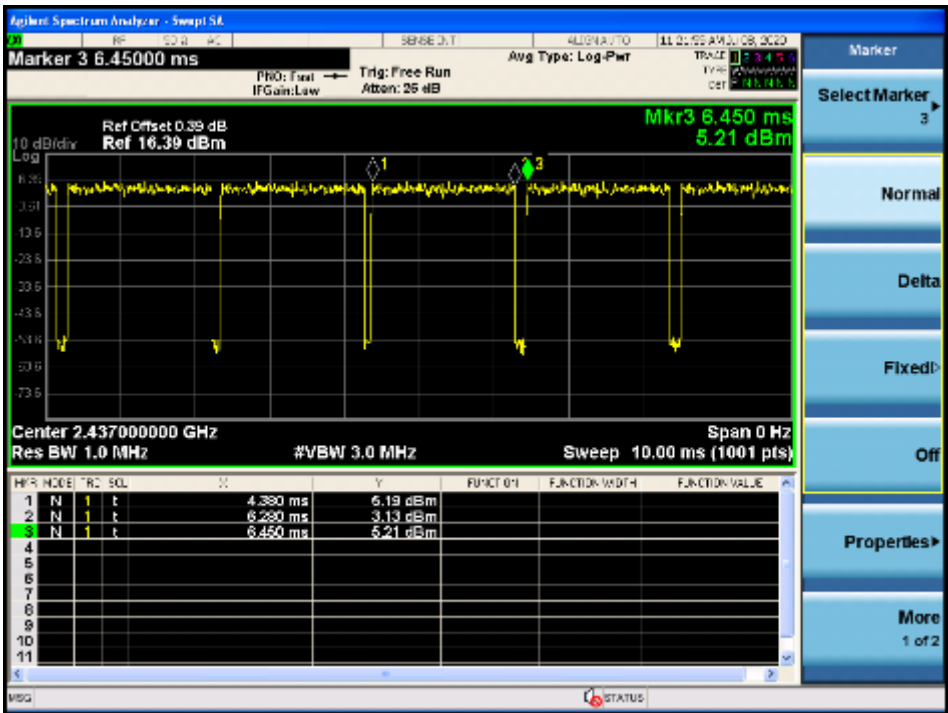

2.4 Equipment Modifications

N/A

2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E6410

2.6 Support Equipment

Manufacturer	Description	Model
Roku, Inc.	Debug Board	-

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB Cable	< 1 m	Laptop	EUT
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

Results reported relate only to the product tested.

FCC Rules	Description of Test	Results
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207	AC Line Conducted Emissions	Compliant
FCC §2.1091, §15.247(i)	RF Exposure	Compliant ¹
FCC §2.1051, §15.247 (d)	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247 (d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2)	6 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3)	Maximum Peak Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant

4 FCC §15.203 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Description

The antennas used by the EUT are permanent attached antennas.

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Bluetooth Metal Antenna	2400-2483.5	2.7
2.4GHz Wi-Fi Metal Antenna (Ant A)	2400-2483.5	2.4
2.4GHz Wi-Fi PCB Antenna (Ant B)	2400-2483.5	3.9
5GHz Wi-Fi Metal Antenna (Ant A)	5150-5850	4.7
5GHz Wi-Fi PCB Antenna (Ant B)	5150-5850	4.5

5 FCC §2.1091, §15.247(i) – RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to KDB 447 498 Section (7.2), “simultaneous transmission of MPE test exclusion applies when the sum of the MPE ratios for all simultaneous transmitting antennas incorporated in a host device, based on calculated or measured field strengths or power density, is ≤ 1.0 . The MPE ratio of each antenna is determined at the minimum *test separation distance* required by the operating configurations and exposure conditions of the host device, according to the ratio of field strengths or power density to MPE limit, at the test frequency.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Where: f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF field.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

2.4 Wi-Fi

Worst Case: 802.11n20, 2437 MHz

Maximum peak output power at antenna input terminal (dBm): 27.75

Maximum peak output power at antenna input terminal (mW): 595.66

Prediction distance (cm): 20

Prediction frequency (MHz): 2437

Maximum Directional Antenna Gain, typical (dBi): 6.19

Maximum Antenna Gain (numeric): 4.159

Power density of prediction frequency at 20.0 cm (mW/cm²): 0.493

FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²): 1.0

The device is compliant with the requirement FCC MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.493 mW/cm². Limit is 1.0 mW/cm².

Radio Co-location

2.4 GHz Wi-Fi and 5 GHz Wi-Fi simultaneous transmission is not supported.

Worst case colocation 2.4 GHz Wi-Fi and 2.4 GHz Classic Bluetooth:

Frequency Band	Max Conducted Power(dBm)	Evaluated Distance (cm)	Worst-Case MPE (mW/cm ²)	MPE Limit (mW/cm ²)	Worst-Case MPE Ratios	Sum of MPE Ratios	Limit
Worst Case							
2.4 GHz WiFi	27.75	20	0.493	1.0	49.3%	50.4%	1
2.4 GHz Classic BT	14.58	20	0.011	1.0	1.1%		

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

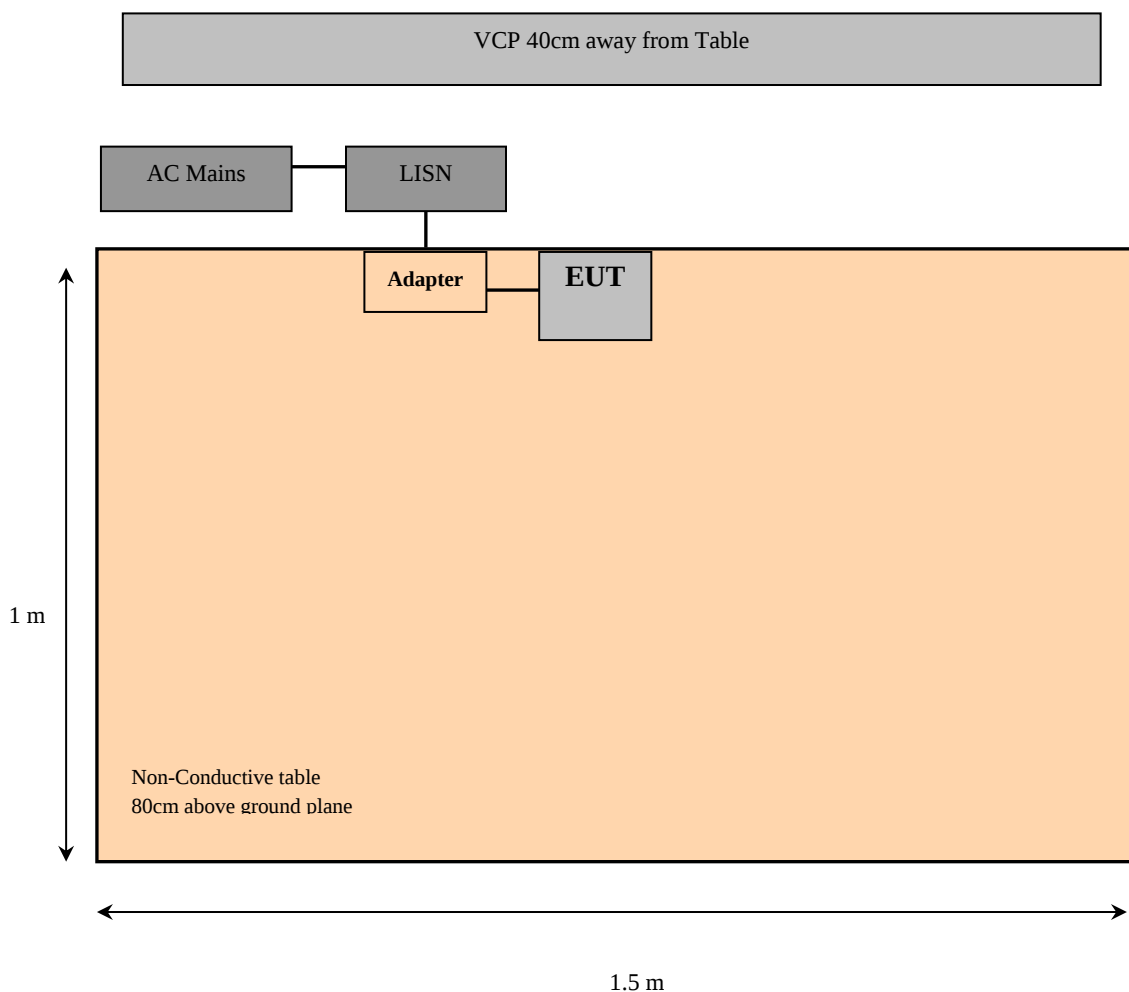

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950.03	100338	2018-07-05	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2019-07-31	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150202	2020-02-27	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2019-07-11	14 months
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) "A2LA Policy on Metrological Traceability".

6.7 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	101.31 kPa

The testing was performed by Matthew Riego de Dios on 2020-06-30 in the Ground Plane test site.

6.8 Summary of Test Results


According to the recorded data in following table, the EUT complied with the FCC 15C standard's conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-9.71	0.150255	Neutral	0.15-30

6.9 Conducted Emissions Test Plots and Data

Worst Case: 802.11n20 mode - 2437MHz


120 V, 60 Hz – Line

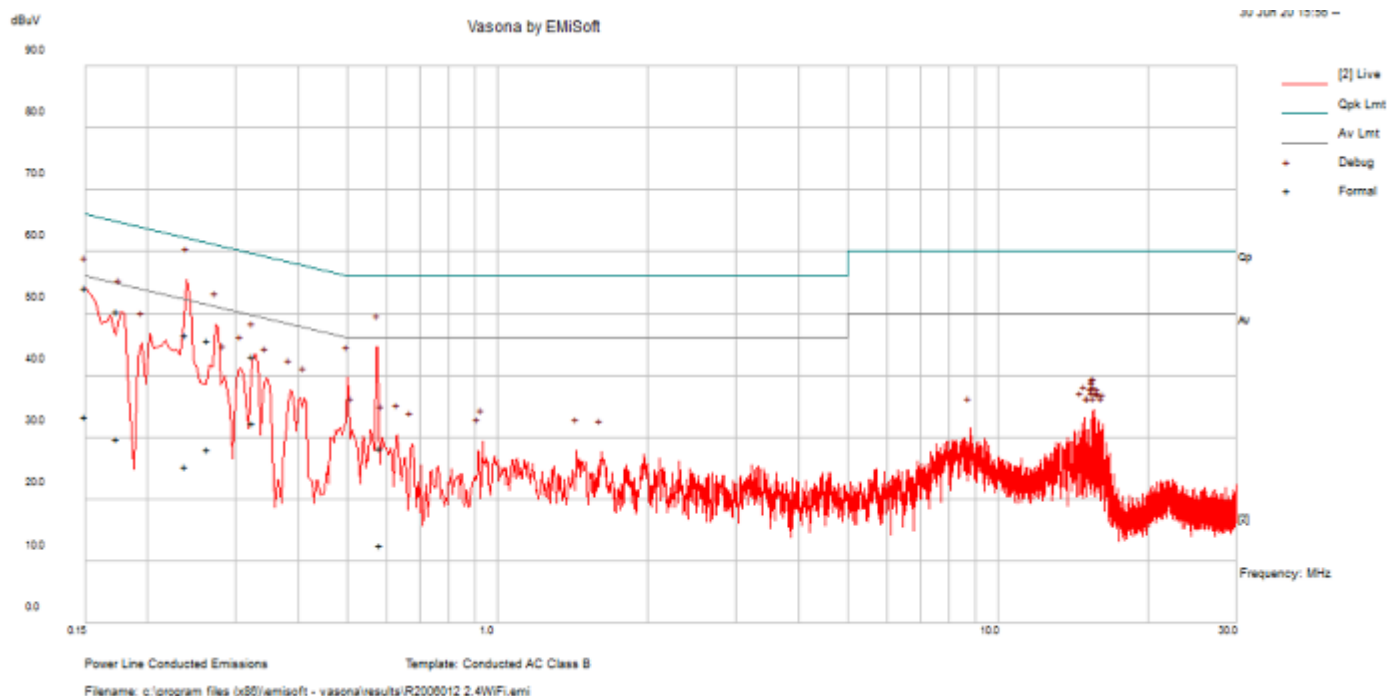

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.238854	46.5	Line	62.14	-15.63	QP
0.582915	28.31	Line	56	-27.69	QP
0.15	54.26	Line	66	-11.74	QP
0.264338	45.78	Line	61.29	-15.51	QP
0.174033	50.5	Line	64.77	-14.26	QP
0.324823	43.27	Line	59.58	-16.31	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.238854	25.24	Line	52.14	-26.89	Ave.
0.582915	12.55	Line	46	-33.45	Ave.
0.15	33.44	Line	56	-22.56	Ave.
0.264338	28.09	Line	51.29	-23.2	Ave.
0.174033	29.83	Line	54.77	-24.94	Ave.
0.324823	32.43	Line	49.58	-17.15	Ave.

120 V, 60 Hz – Neutral

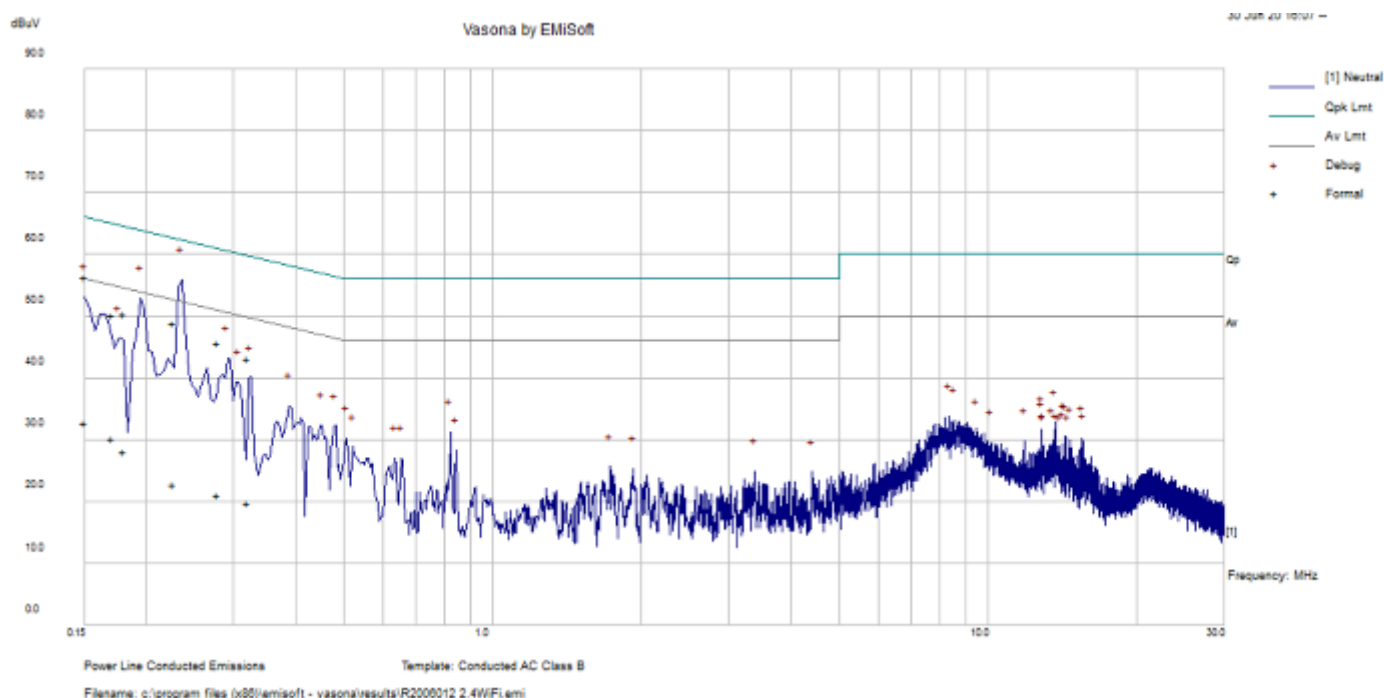

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.227527	48.98	Neutral	62.54	-13.56	QP
0.179892	50.31	Neutral	64.49	-14.18	QP
0.150255	56.28	Neutral	65.99	-9.71	QP
0.278981	45.69	Neutral	60.85	-15.16	QP
0.170217	50.29	Neutral	64.95	-14.66	QP
0.320215	43.27	Neutral	59.7	-16.43	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.227527	22.86	Neutral	52.54	-29.68	Ave.
0.179892	27.99	Neutral	54.49	-26.5	Ave.
0.150255	32.76	Neutral	55.99	-23.22	Ave.
0.278981	21.04	Neutral	50.85	-29.8	Ave.
0.170217	30.22	Neutral	54.95	-24.72	Ave.
0.320215	19.82	Neutral	49.7	-29.88	Ave.

7 FCC §15.209, §15.247(d) - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

(1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto

(2) Average: RBW = 1MHz / VBW = 10Hz or 1/T / Sweep = Auto

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	MY48250238	2019-07-26	1 year
Rhode & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2018-10-26	2 years
BACL	5m3 Sensitivity Box	1	2	2019-10-02	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Biconilog Antenna	JB3	A020106-2	2019-11-20	2 years
ETS Lindgren	Horn Antenna	3117	00218973	2019-02-13	2 years
Wisewave	Antenna, Horn	ARH-4223-02	10555-02	2020-02-05	2 years
Wisewave	Antenna, Horn	ARH-2823-02	10555-01	2020-02-05	2 years
-	SMA cable	-	-	Each time ¹	N/A
IW Microwave	150 Series 2.92mm Cable	KPS1501AN-3780-KPS	DC 1925	2019-09-11	1 year
IW Microwave	157 Series Cable Armored with 2.92mm Male Plugs on Both Sides	KPS-1571AN-2400	DC 1922	2020-06-06	1 year
MDP Digital	Times Microwave LMR 400 UltraFlex Coaxial Cable 35'	LMR400UF	BACL1904161	2020-05-20	1 year
AH Systems	Preamplifier	PAM 1840 VH	170	2019-09-24	1 year
Agilent	Preamplifier	8449B	3147A00400	2020-02-27	1 year
HP	Pre Amplifier	8447D	2443A04374	2019-08-13	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) "A2LA Policy on Metrological Traceability".

7.6 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Christian McCaig and Matthew Riego de Dios from 2020-06-09 to 2020-07-13 in 5m chamber 3.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C standard's radiated emissions limits, and had the worst margin of:

2.4 GHz Wi-Fi


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Radio, Mode, channel
-0.58	4874	Horizontal	N20 mode, middle channel

Please refer to the following table and plots for specific test result details

7.8 Radiated Emissions Test Results

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

Worst Case Colocation: n20 mode, 2437MHz + GFSK , 2441MHz

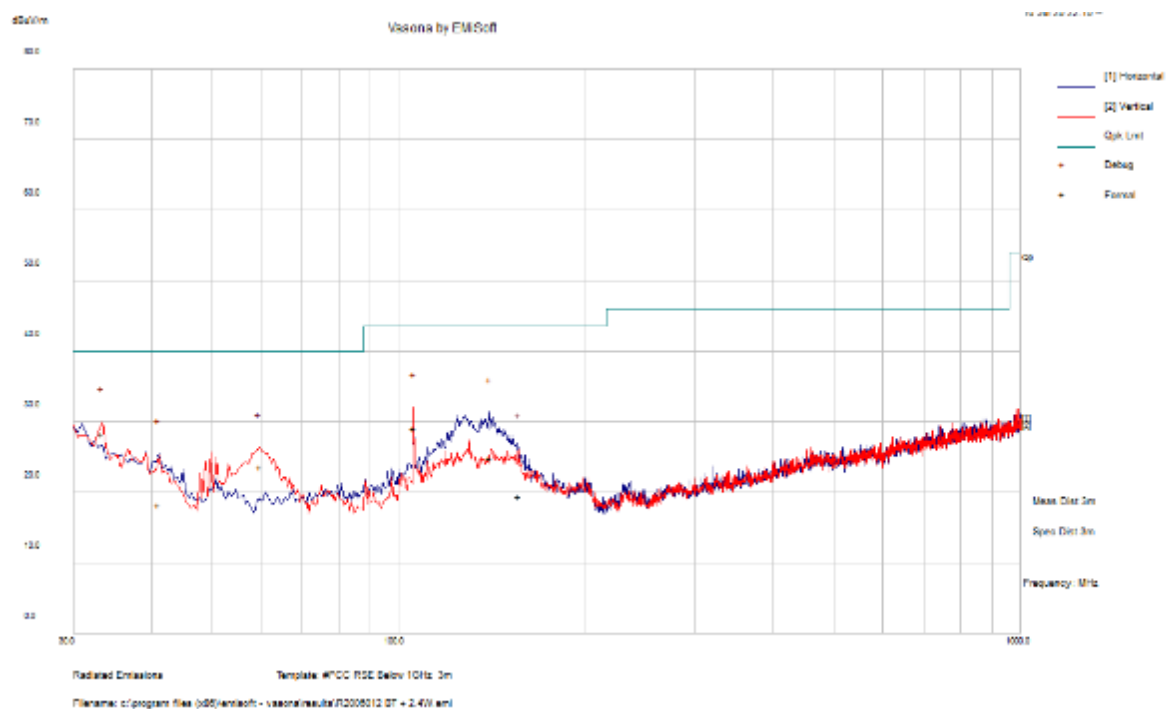

Frequency (MHz)	Corrected Amplitude (dBuV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV/m)	Margin (dB)	Comment
33.289	28.42	100	V	17	40	-11.58	QP
105.745	29.25	124	V	103	43.5	-14.25	QP
140.09475	24.81	185	H	261	43.5	-18.69	QP
59.8145	23.67	112	V	47	40	-16.33	QP
41.0805	18.24	131	V	299	40	-21.76	QP
155.8455	19.56	207	H	24	43.5	-23.94	QP

2) 1–25 GHz Measured at 3 meters

802.11b mode Antenna A

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	59.53	335	150	V	32.6	6.33	36.34	62.12	74	-11.88	Peak
2390	53.41	295	290	H	32.6	6.33	36.34	56.00	74	-18.00	Peak
2390	50.54	335	150	V	32.6	6.33	36.34	53.13	54	-0.87	Ave
2390	45.74	295	290	H	32.6	6.33	36.34	48.33	54	-5.67	Ave
4824	45.19	0	100	V	35	9.89	35.43	54.65	74	-19.35	Peak
4824	46.06	0	100	H	35	9.89	35.43	55.52	74	-18.48	Peak
4824	33.12	0	100	V	35	9.89	35.43	42.58	54	-11.42	Ave
4824	33.22	0	100	H	35	9.89	35.43	42.68	54	-11.32	Ave
7236	45.17	0	100	V	36.1	9.83	35.82	55.28	74	-18.72	Peak
7236	45.92	0	100	H	36.1	9.83	35.82	56.03	74	-17.97	Peak
7236	33.62	0	100	V	36.1	9.83	35.82	43.73	54	-10.27	Ave
7236	33.07	0	100	H	36.1	9.83	35.82	43.18	54	-10.82	Ave
Middle Channel 2437 MHz											
4874	48.22	50	300	V	35.2	10.96	35.43	58.95	74	-15.05	Peak
4874	47.94	28	292	H	35.2	10.96	35.43	58.67	74	-15.33	Peak
4874	34.78	50	300	V	35.2	10.96	35.43	45.51	54	-8.49	Ave
4874	35.55	28	292	H	35.2	10.96	35.43	46.28	54	-7.72	Ave
7311	46.26	0	100	V	36.1	10.95	35.82	57.49	74	-16.51	Peak
7311	46.33	0	100	H	36.1	10.95	35.82	57.56	74	-16.44	Peak
7311	33.28	0	100	V	36.1	10.95	35.82	44.51	54	-9.49	Ave
7311	33.74	0	100	H	36.1	10.95	35.82	44.97	54	-9.03	Ave
High Channel 2462 MHz											
2483.5	59.15	13	100	V	33	5.65	36.34	61.46	74	-12.54	Peak
2483.5	53.25	340	300	H	33	5.65	36.34	55.56	74	-18.44	Peak
2483.5	50.90	13	100	V	33	5.65	36.34	53.21	54	-0.79	Ave
2483.5	44.59	340	300	H	33	5.65	36.34	46.90	54	-7.10	Ave
4924	46.34	0	100	V	35.4	11.07	35.43	57.38	74	-16.62	Peak
4924	46.26	0	100	H	35.4	11.07	35.43	57.3	74	-16.7	Peak
4924	33.59	0	100	V	35.4	11.07	35.43	44.63	54	-9.37	Ave
4924	33.81	0	100	H	35.4	11.07	35.43	44.85	54	-9.15	Ave
7386	45.35	0	100	V	36.1	12.73	35.9	58.28	74	-15.72	Peak
7386	45.82	0	100	H	36.1	12.73	35.9	58.75	74	-15.25	Peak
7386	33.08	0	100	V	36.1	12.73	35.9	46.01	54	-7.99	Ave
7386	33.01	0	100	H	36.1	12.73	35.9	45.94	54	-8.06	Ave

802.11b mode Antenna B

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	55.13	160	29	V	32.6	6.33	36.34	57.72	74	-16.28	Peak
2390	59.35	226	145	H	32.6	6.33	36.34	61.94	74	-12.06	Peak
2390	47.39	160	290	V	32.6	6.33	36.34	49.98	54	-4.02	Ave
2390	50.78	226	145	H	32.6	6.33	36.34	53.37	54	-0.63	Ave
4824	47.27	250	300	V	35	9.89	35.43	56.73	74	-17.27	Peak
4824	47.96	15	265	H	35	9.89	35.43	57.42	74	-16.58	Peak
4824	41.57	250	300	V	35	9.89	35.43	51.03	54	-2.97	Ave
4824	42.47	15	265	H	35	9.89	35.43	51.93	54	-2.07	Ave
7236	46.02	0	100	V	36.1	9.83	35.82	56.13	74	-17.87	Peak
7236	45.43	0	100	H	36.1	9.83	35.82	55.54	74	-18.46	Peak
7236	33.17	0	100	V	36.1	9.83	35.82	43.28	54	-10.72	Ave
7236	33.39	0	100	H	36.1	9.83	35.82	43.5	54	-10.5	Ave
Middle Channel 2437 MHz											
4874	48.06	260	280	V	35.2	10.96	35.43	58.79	74	-15.21	Peak
4874	48.34	15	270	H	35.2	10.96	35.43	59.07	74	-14.93	Peak
4874	35.50	260	280	V	35.2	10.96	35.43	46.23	54	-7.77	Ave
4874	37.57	15	270	H	35.2	10.96	35.43	48.30	54	-5.70	Ave
7311	44.61	0	100	V	36.1	10.95	35.82	55.84	74	-18.16	Peak
7311	44.92	0	100	H	36.1	10.95	35.82	56.15	74	-17.85	Peak
7311	33.05	0	100	V	36.1	10.95	35.82	44.28	54	-9.72	Ave
7311	32.54	0	100	H	36.1	10.95	35.82	43.77	54	-10.23	Ave
High Channel 2462 MHz											
2483.5	54.51	172	265	V	33	5.65	36.34	56.82	74	-17.18	Peak
2483.5	57.78	260	260	H	33	5.65	36.34	60.09	74	-13.91	Peak
2483.5	46.06	172	265	V	33	5.65	36.34	48.37	54	-5.63	Ave
2483.5	50.41	260	60	H	33	5.65	36.34	52.72	54	-1.28	Ave
4924	48.64			V	35.4	11.07	35.43	59.68	74	-14.32	Peak
4924	49.87	20	245	H	35.4	11.07	35.43	60.91	74	-13.09	Peak
4924	36.09			V	35.4	11.07	35.43	47.13	54	-6.87	Ave
4924	37.47	20	245	H	35.4	11.07	35.43	48.51	54	-5.49	Ave
7386	45.16	0	100	V	36.1	12.73	35.9	58.09	74	-15.91	Peak
7386	45.45	0	100	H	36.1	12.73	35.9	58.38	74	-15.62	Peak
7386	32.89	0	100	V	36.1	12.73	35.9	45.82	54	-8.18	Ave
7386	32.95	0	100	H	36.1	12.73	35.9	45.88	54	-8.12	Ave

802.11g mode Antenna A

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	65.87	15	155	V	32.6	6.33	36.34	68.46	74	-5.54	Peak
2390	58.86	345	290	H	32.6	6.33	36.34	61.45	74	-12.55	Peak
2390	50.38	15	155	V	32.6	6.33	36.34	52.97	54	-1.03	Ave
2390	45.38	345	290	H	32.6	6.33	36.34	47.97	54	-6.03	Ave
4824	46.32	0	100	V	35	9.89	35.43	55.78	74	-18.22	Peak
4824	45.74	0	100	H	35	9.89	35.43	55.2	74	-18.8	Peak
4824	33.55	0	100	V	35	9.89	35.43	43.01	54	-10.99	Ave
4824	33.64	0	100	H	35	9.89	35.43	43.1	54	-10.9	Ave
7236	46.59	0	100	V	36.1	9.83	35.82	56.7	74	-17.3	Peak
7236	45.67	0	100	H	36.1	9.83	35.82	55.78	74	-18.22	Peak
7236	33.54	0	100	V	36.1	9.83	35.82	43.65	54	-10.35	Ave
7236	33.17	0	100	H	36.1	9.83	35.82	43.28	54	-10.72	Ave
Middle Channel 2437 MHz											
4874	47.29	60	270	V	35.2	10.96	35.43	58.02	74	-15.98	Peak
4874	47.17	8	125	H	35.2	10.96	35.43	57.90	74	-16.10	Peak
4874	35.12	60	270	V	35.2	10.96	35.43	45.85	54	-8.15	Ave
4874	34.85	8	125	H	35.2	10.96	35.43	45.58	54	-8.42	Ave
7311	45.85	0	100	V	36.1	10.95	35.82	57.08	74	-16.92	Peak
7311	45.69	0	100	H	36.1	10.95	35.82	56.92	74	-17.08	Peak
7311	33.83	0	100	V	36.1	10.95	35.82	45.06	54	-8.94	Ave
7311	33.75	0	100	H	36.1	10.95	35.82	44.98	54	-9.02	Ave
High Channel 2462 MHz											
2483.5	66.07	190	178	V	33	5.65	36.34	68.38	74	-5.62	Peak
2483.5	61.66	342	262	H	33	5.65	36.34	63.97	74	-10.03	Peak
2483.5	50.55	190	178	V	33	5.65	36.34	52.86	54	-1.14	Ave
2483.5	46.99	342	262	H	33	5.65	36.34	49.30	54	-4.70	Ave
4924	46.43	0	100	V	35.4	11.07	35.43	57.47	74	-16.53	Peak
4924	45.53	0	100	H	35.4	11.07	35.43	56.57	74	-17.43	Peak
4924	34.56	0	100	V	35.4	11.07	35.43	45.6	54	-8.4	Ave
4924	34.11	0	100	H	35.4	11.07	35.43	45.15	54	-8.85	Ave
7386	45.79	0	100	V	36.1	12.73	35.9	58.72	74	-15.28	Peak
7386	45.67	0	100	H	36.1	12.73	35.9	58.6	74	-15.4	Peak
7386	33.42	0	100	V	36.1	12.73	35.9	46.35	54	-7.65	Ave
7386	33.27	0	100	H	36.1	12.73	35.9	46.2	54	-7.8	Ave


802.11g mode Antenna B

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	62.65	290	108	V	32.6	6.33	36.34	65.24	74	-8.76	Peak
2390	65.64	80	108	H	32.6	6.33	36.34	68.23	74	-5.77	Peak
2390	48.27	290	108	V	32.6	6.33	36.34	50.86	54	-3.14	Ave
2390	50.63	80	108	H	32.6	6.33	36.34	53.22	54	-0.78	Ave
4824	46.09	0	100	V	35	9.89	35.43	55.55	74	-18.45	Peak
4824	46.33	0	100	H	35	9.89	35.43	55.79	74	-18.21	Peak
4824	33.85	0	100	V	35	9.89	35.43	43.31	54	-10.69	Ave
4824	34.03	0	100	H	35	9.89	35.43	43.49	54	-10.51	Ave
7236	46.19	0	100	V	36.1	9.83	35.82	56.3	74	-17.7	Peak
7236	46.27	0	100	H	36.1	9.83	35.82	56.38	74	-17.62	Peak
7236	33.74	0	100	V	36.1	9.83	35.82	43.85	54	-10.15	Ave
7236	34.13	0	100	H	36.1	9.83	35.82	44.24	54	-9.76	Ave
Middle Channel 2437 MHz											
4874	50.14	50	250	V	35.2	10.96	35.43	60.87	74	-13.13	Peak
4874	50.73	10	245	H	35.2	10.96	35.43	61.46	74	-12.54	Peak
4874	39.64	50	250	V	35.2	10.96	35.43	50.37	54	-3.63	Ave
4874	41.04	10	245	H	35.2	10.96	35.43	51.77	54	-2.23	Ave
7311	45.55	0	100	V	36.1	10.95	35.82	56.78	74	-17.22	Peak
7311	45.49	0	100	H	36.1	10.95	35.82	56.72	74	-17.28	Peak
7311	33.79	0	100	V	36.1	10.95	35.82	45.02	54	-8.98	Ave
7311	33.62	0	100	H	36.1	10.95	35.82	44.85	54	-9.15	Ave
High Channel 2462 MHz											
2483.5	63.90	190	300	V	33	5.65	36.34	66.21	74	-7.79	Peak
2483.5	64.82	80	300	H	33	5.65	36.34	67.13	74	-6.87	Peak
2483.5	49.60	190	300	V	33	5.65	36.34	51.91	54	-2.09	Ave
2483.5	50.39	80	300	H	33	5.65	36.34	52.70	54	-1.30	Ave
4924	46.39	0	100	V	35.4	11.07	35.43	57.43	74	-16.57	Peak
4924	46.07	0	100	H	35.4	11.07	35.43	57.11	74	-16.89	Peak
4924	34.28	0	100	V	35.4	11.07	35.43	45.32	54	-8.68	Ave
4924	34.17	0	100	H	35.4	11.07	35.43	45.21	54	-8.79	Ave
7386	45.95	0	100	V	36.1	12.73	35.9	58.88	74	-15.12	Peak
7386	45.9	0	100	H	36.1	12.73	35.9	58.83	74	-15.17	Peak
7386	33.94	0	100	V	36.1	12.73	35.9	46.87	54	-7.13	Ave
7386	33.81	0	100	H	36.1	12.73	35.9	46.74	54	-7.26	Ave

802.11n20 mode


Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	65.39	180	255	V	32.6	6.33	36.34	67.98	74	-6.02	Peak
2390	62.66	218	255	H	32.6	6.33	36.34	65.25	74	-8.75	Peak
2390	50.63	180	255	V	32.6	6.33	36.34	53.22	54	-0.78	Ave
2390	46.48	218	255	H	32.6	6.33	36.34	49.07	54	-4.93	Ave
4824	45.57	0	100	V	35	9.89	35.43	55.03	74	-18.97	Peak
4824	45.6	0	100	H	35	9.89	35.43	55.06	74	-18.94	Peak
4824	32.94	0	100	V	35	9.89	35.43	42.4	54	-11.6	Ave
4824	33.95	0	100	H	35	9.89	35.43	43.41	54	-10.59	Ave
7236	46.07	0	100	V	36.1	9.83	35.82	56.18	74	-17.82	Peak
7236	46.41	0	100	H	36.1	9.83	35.82	56.52	74	-17.48	Peak
7236	33.34	0	100	V	36.1	9.83	35.82	43.45	54	-10.55	Ave
7236	33.89	0	100	H	36.1	9.83	35.82	44	54	-10	Ave
Middle Channel 2437 MHz											
4874	55.23	50	238	V	35.2	10.96	35.43	65.96	74	-8.04	Peak
4874	55.04	10	245	H	35.2	10.96	35.43	65.77	74	-8.23	Peak
4874	41.53	50	238	V	35.2	10.96	35.43	52.26	54	-1.74	Ave
4874	42.69	10	245	H	35.2	10.96	35.43	53.42	54	-0.58	Ave
7311	45.35	0	100	V	36.1	10.95	35.82	56.58	74	-17.42	Peak
7311	45.25	0	100	H	36.1	10.95	35.82	56.48	74	-17.52	Peak
7311	33.56	0	100	V	36.1	10.95	35.82	44.79	54	-9.21	Ave
7311	33.64	0	100	H	36.1	10.95	35.82	44.87	54	-9.13	Ave
High Channel 2462 MHz											
2483.5	65.86	15	160	V	33	5.65	36.34	68.17	74	-5.83	Peak
2483.5	60.66	337	270	H	33	5.65	36.34	62.97	74	-11.03	Peak
2483.5	50.19	15	160	V	33	5.65	36.34	52.50	54	-1.50	Ave
2483.5	44.48	337	270	H	33	5.65	36.34	46.79	54	-7.21	Ave
4924	45.36	0	100	V	35.4	11.07	35.43	56.4	74	-17.6	Peak
4924	46.16	0	100	H	35.4	11.07	35.43	57.2	74	-16.8	Peak
4924	34.49	0	100	V	35.4	11.07	35.43	45.53	54	-8.47	Ave
4924	34.7	0	100	H	35.4	11.07	35.43	45.74	54	-8.26	Ave
7386	46.42	0	100	V	36.1	12.73	35.9	59.35	74	-14.65	Peak
7386	44.71	0	100	H	36.1	12.73	35.9	57.64	74	-16.36	Peak
7386	33.87	0	100	V	36.1	12.73	35.9	46.8	54	-7.2	Ave
7386	33.94	0	100	H	36.1	12.73	35.9	46.87	54	-7.13	Ave

1 GHz – 18 GHz Worst Case Scan at 1 Meter
Worst Case Colocation: n20 mode, 2437MHz + GFSK , 2441MHz

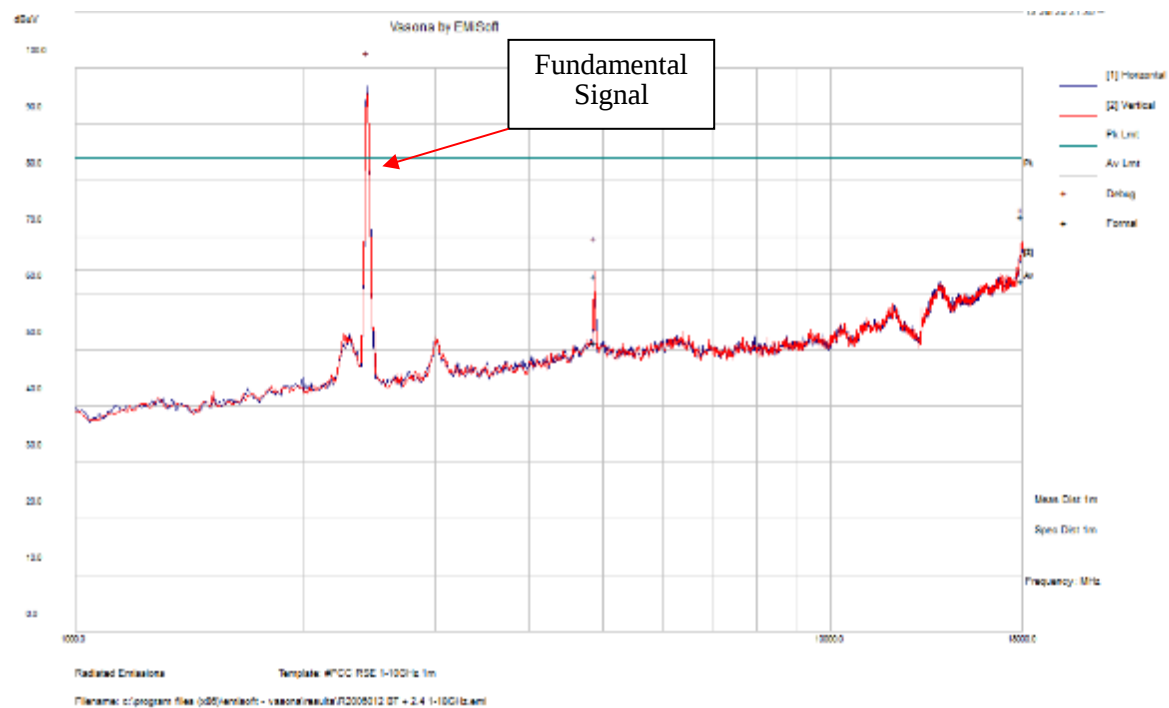

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
17956.91	73.77	233	H	56	84	-10.23	Peak
4875.5525	63.28	109	V	276	84	-20.72	Peak
17956.91	62.24	233	H	56	64	-1.76	Average
4875.5525	51.22	109	V	276	64	-12.78	Average

18 GHz – 26.5 GHz Worst Case Scan at 1 Meter
Worst Case Colocation: n20 mode, 2437MHz + GFSK , 2441MHz

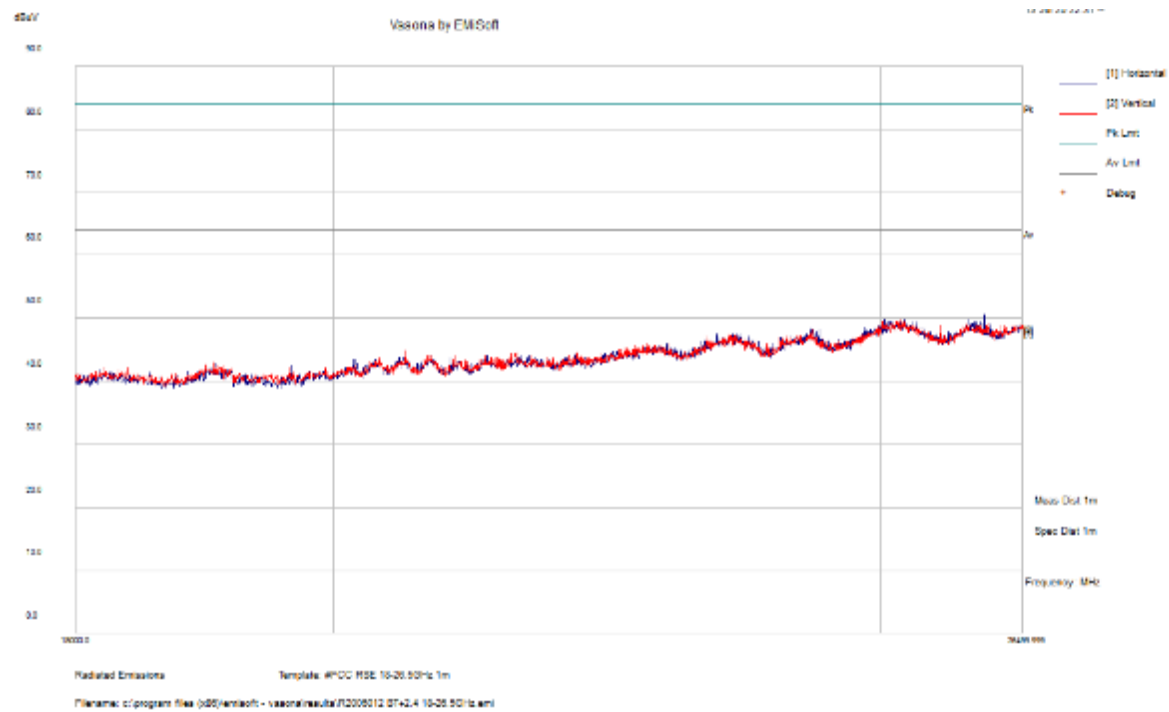

8 FCC §15.247(a) (2) - Emission Bandwidth

8.1 Applicable Standards

According to ECFR §15.247(a) (2), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

8.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	N9010A	MY48030852	2020-02-10	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) "A2LA Policy on Metrological Traceability".

8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2020-06-26 in RF site.


8.5 Test Results

Channel	Frequency (MHz)	6 dB OBW (MHz)		99% OBW (MHz)		6 dB OBW Limit (kHz)	Result
		Antenna A	Antenna B	Antenna A	Antenna B		
802.11b							
Low	2412	10.16	10.17	14.64	14.68	≥ 500	Pass
Middle	2437	10.16	10.18	15.91	14.66	≥ 500	Pass
High	2462	10.16	10.16	14.75	14.69	≥ 500	Pass
802.11g							
Low	2412	15.72	15.62	16.52	16.50	≥ 500	Pass
Middle	2437	16.36	15.49	33.87	31.13	≥ 500	Pass
High	2462	15.57	15.95	16.51	16.54	≥ 500	Pass
802.11n20							
Low	2412	16.72	16.89	17.68	17.66	≥ 500	Pass
Middle	2437	16.67	15.72	34.83	30.94	≥ 500	Pass
High	2462	15.04	15.46	17.65	17.63	≥ 500	Pass


Please refer to the following plots for detailed test results:

802.11b mode


Low Channel 6 dB OBW Antenna A

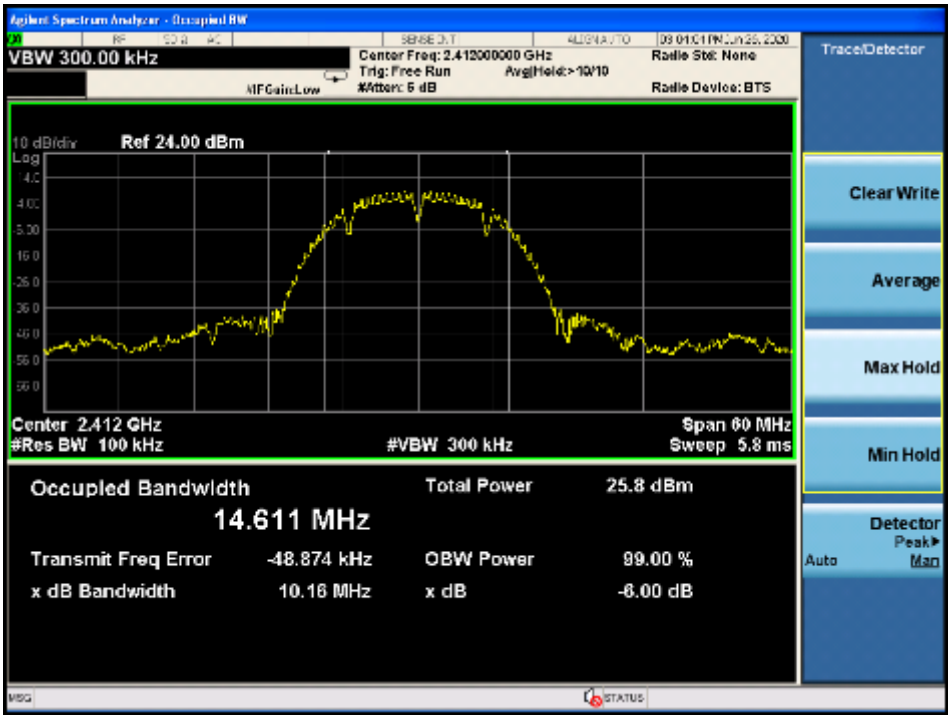

Low Channel 6 dB OBW Antenna B

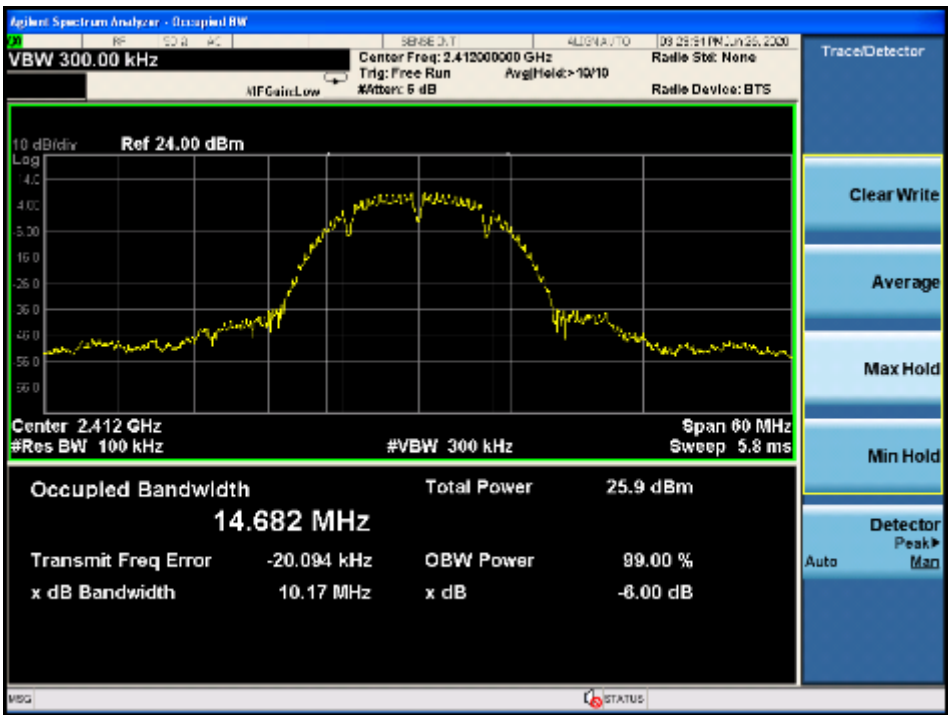

Low Channel 99% dB OBW Antenna A

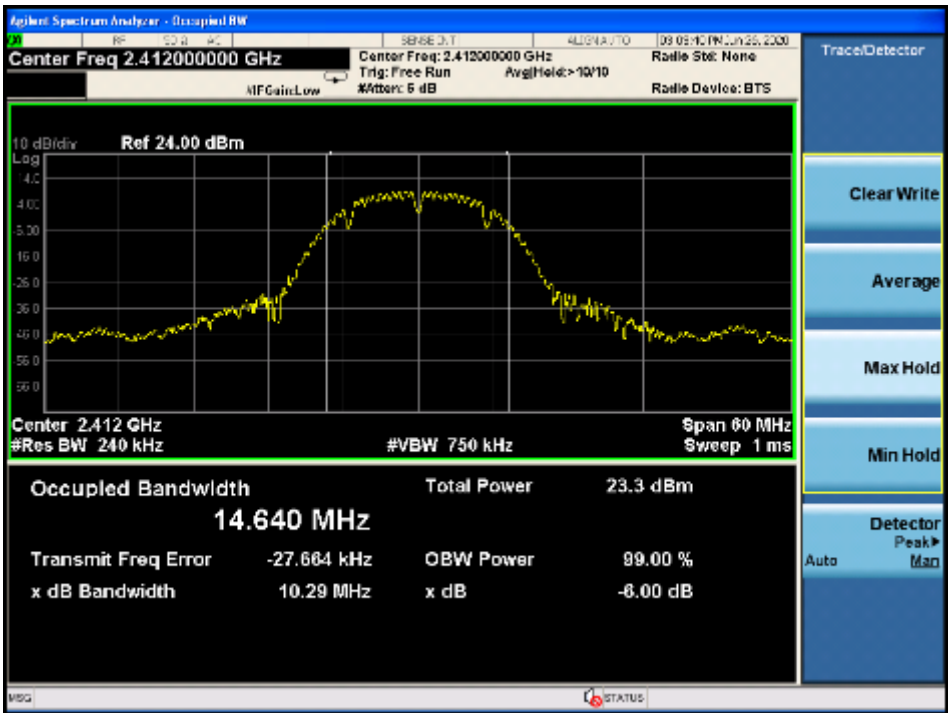


Low Channel 99% dB OBW Antenna B



Mid Channel 6 dB OBW Antenna A




Mid Channel 6 dB OBW Antenna B

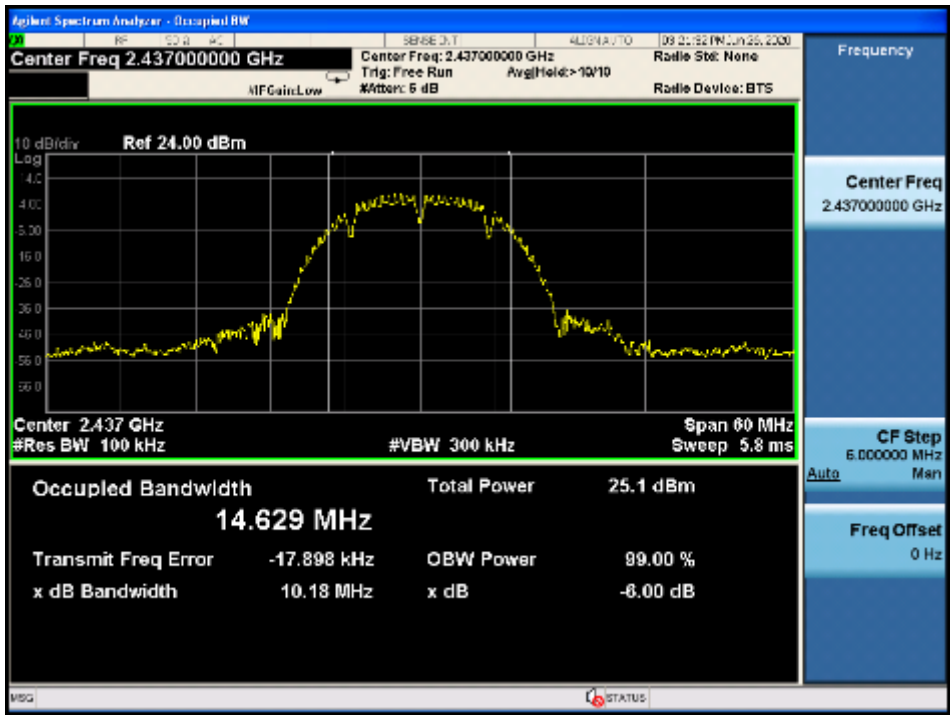


Mid Channel 99% dB OBW Antenna A




Mid Channel 99% dB OBW Antenna B

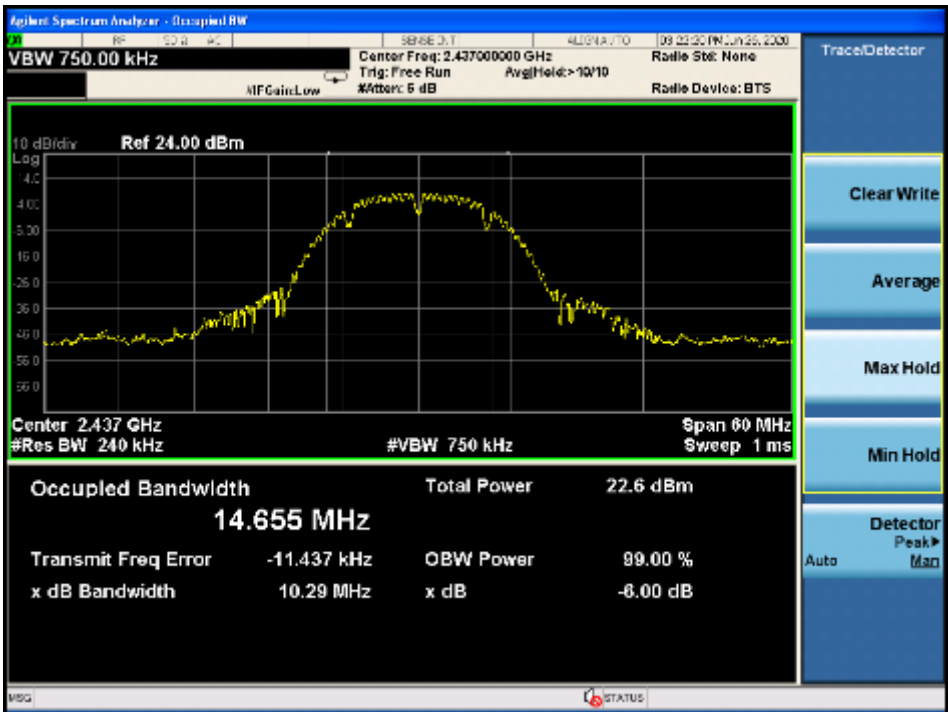


High Channel 6 dB OBW Antenna A

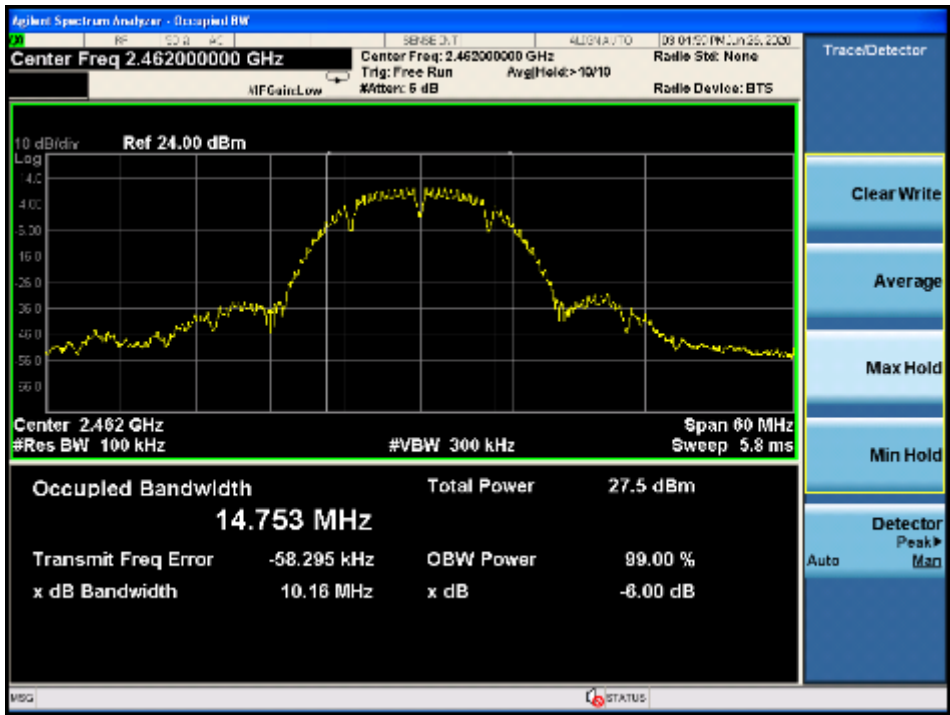


High Channel 6 dB OBW Antenna B

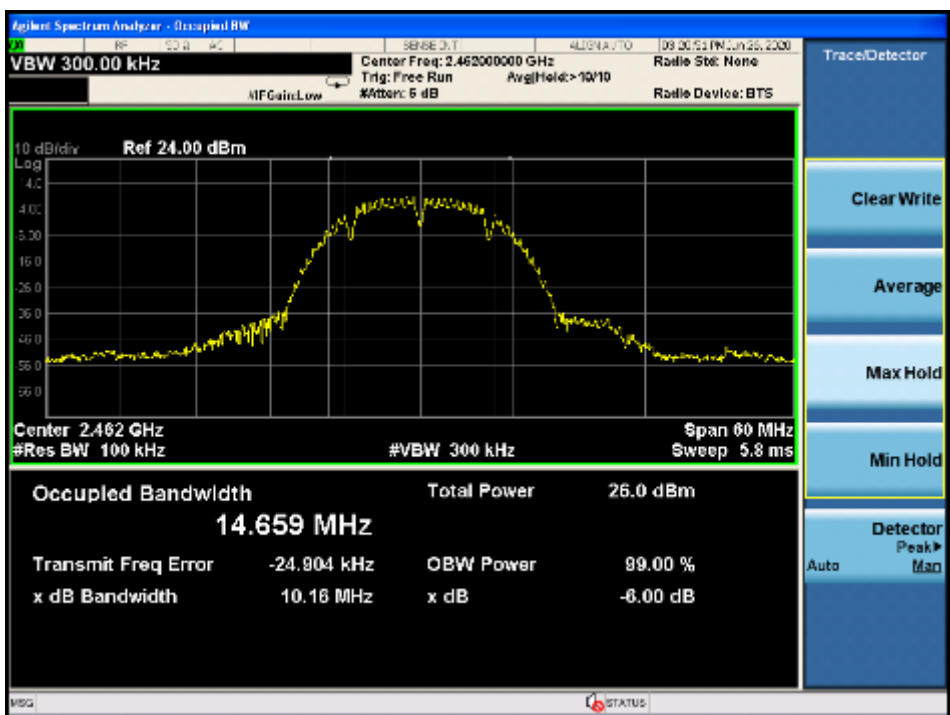

High Channel 99% dB OBW Antenna A

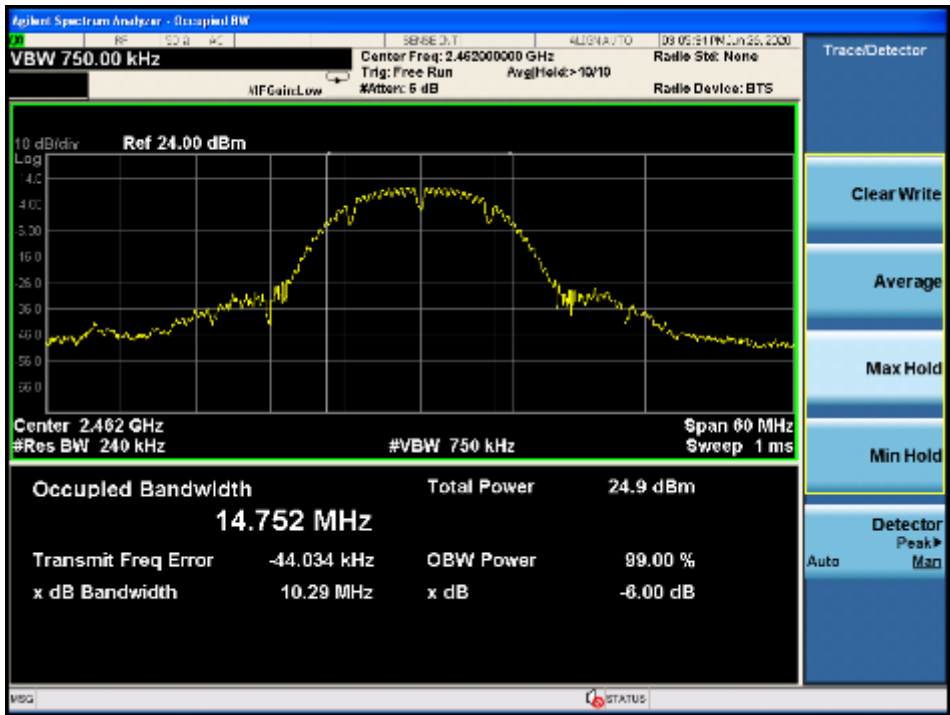


High Channel 99% dB OBW Antenna B

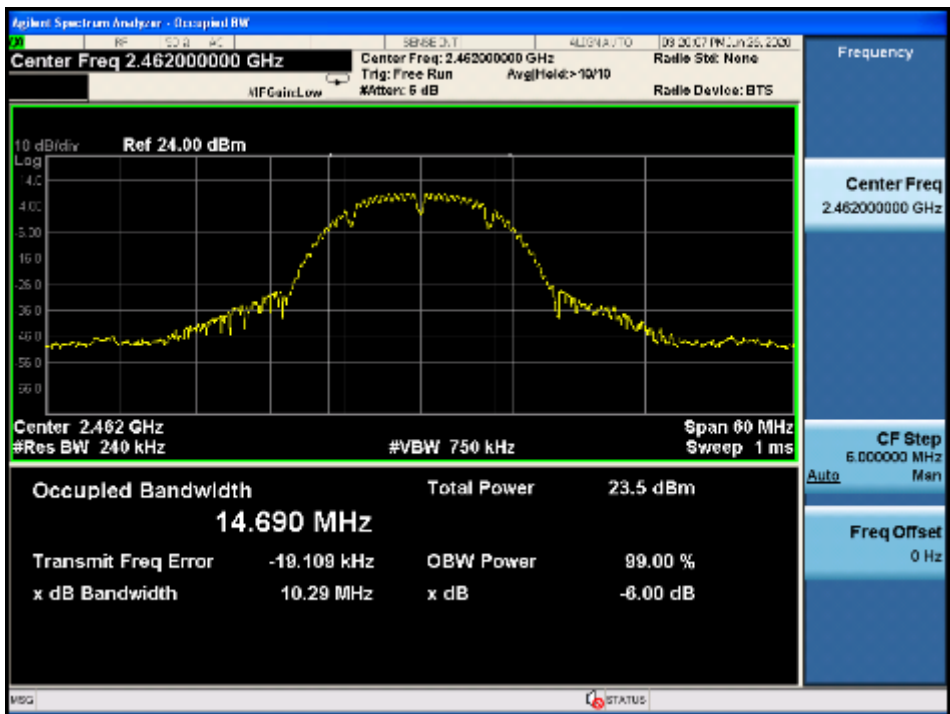

802.11g mode


Low Channel 6 dB OBW Antenna A

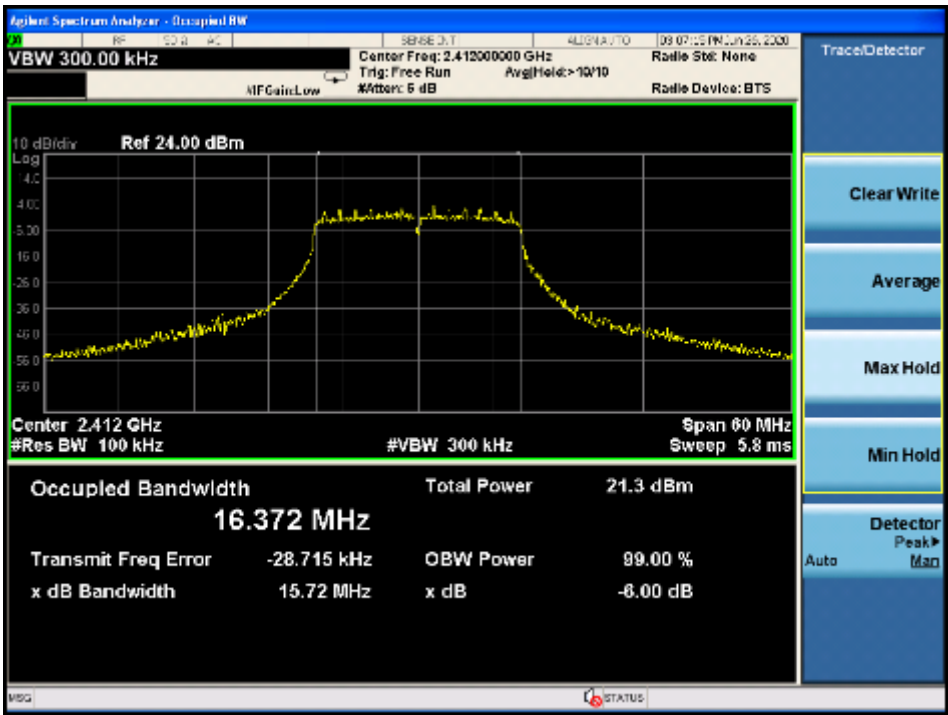

Low Channel 6 dB OBW Antenna B



Low Channel 99% dB OBW Antenna A

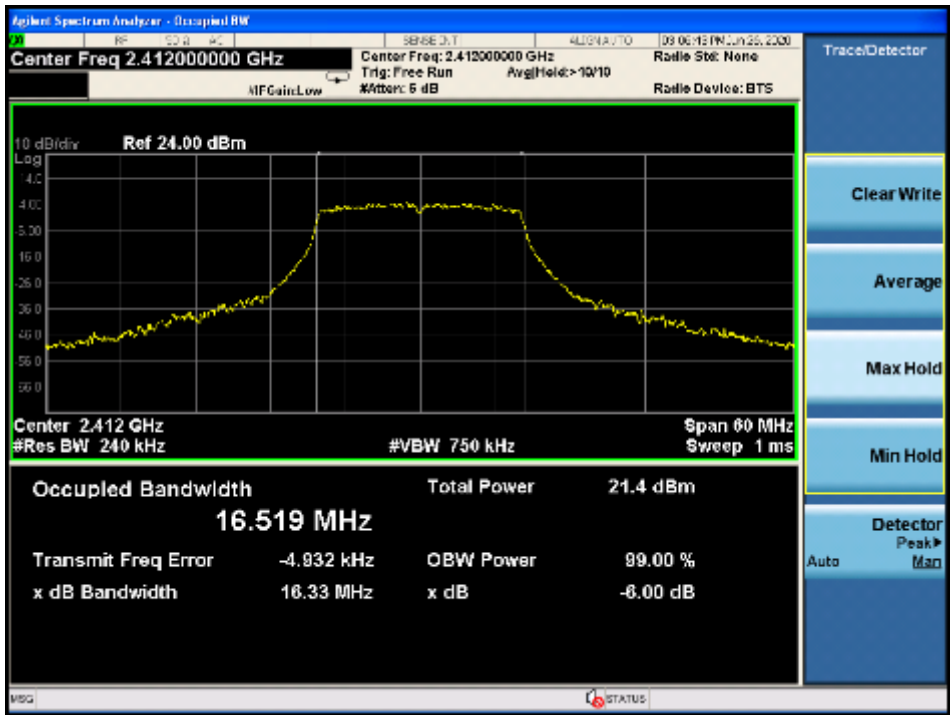


Low Channel 99% dB OBW Antenna B




Mid Channel 6 dB OBW Antenna A




Mid Channel 6 dB OBW Antenna B

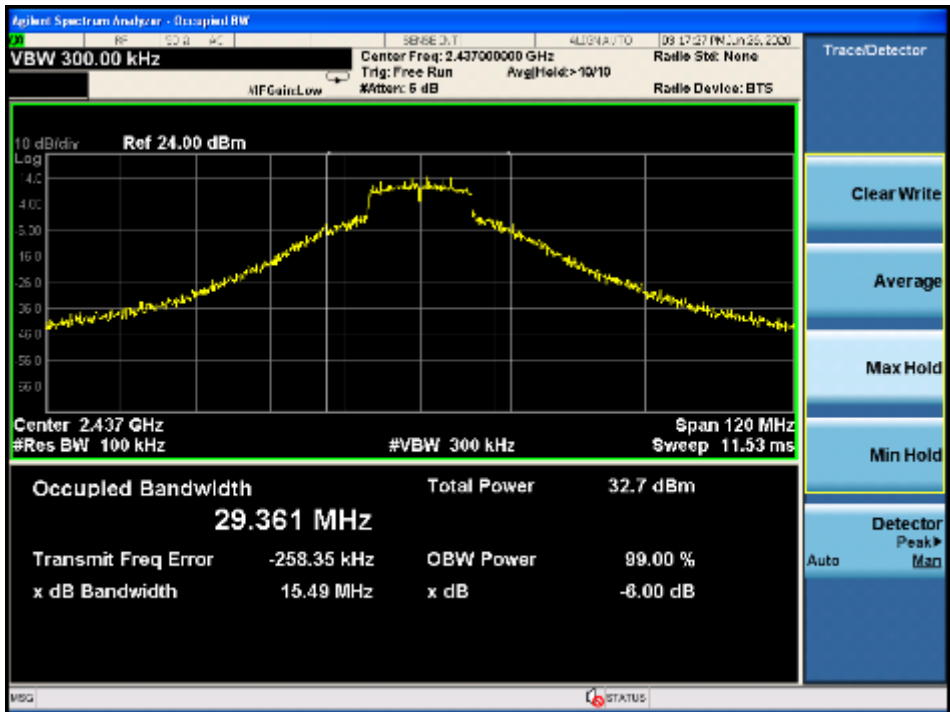


Mid Channel 99% dB OBW Antenna A

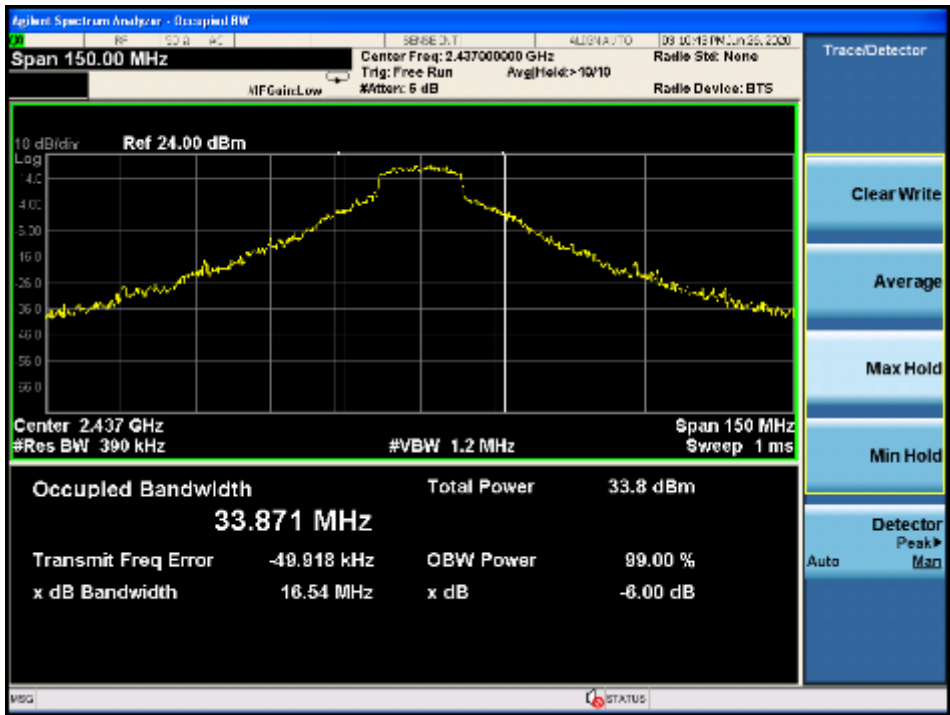


Mid Channel 99% dB OBW Antenna B

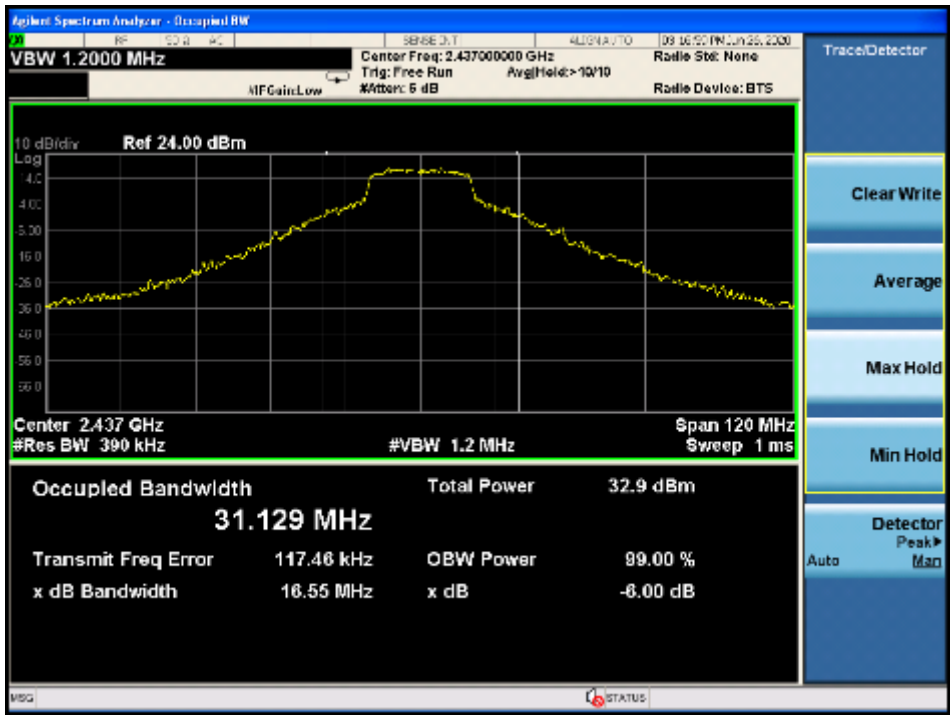

High Channel 6 dB OBW Antenna A

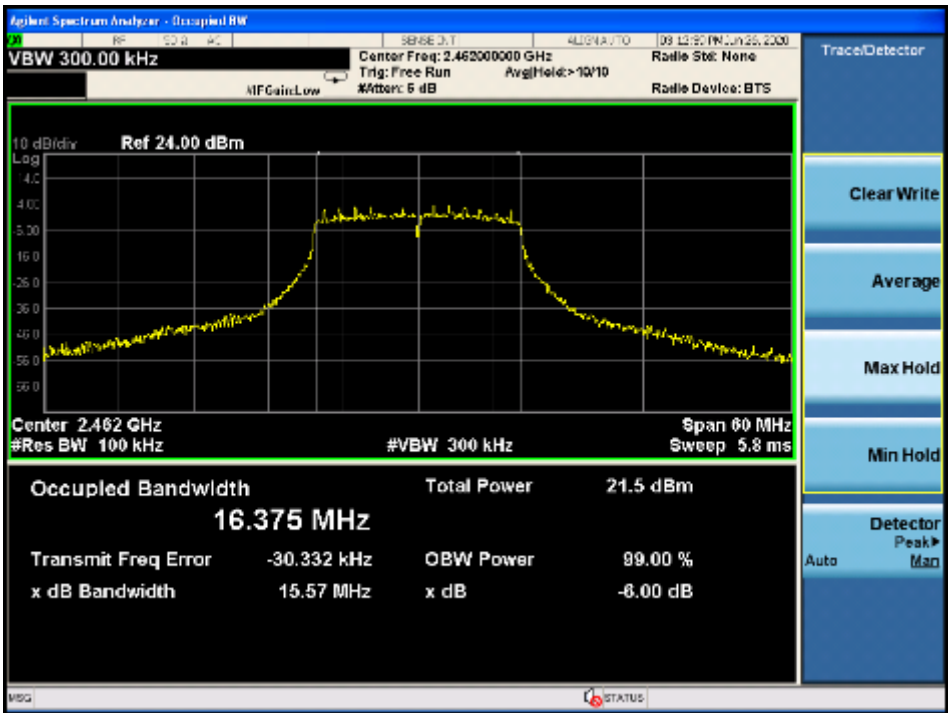

High Channel 6 dB OBW Antenna B

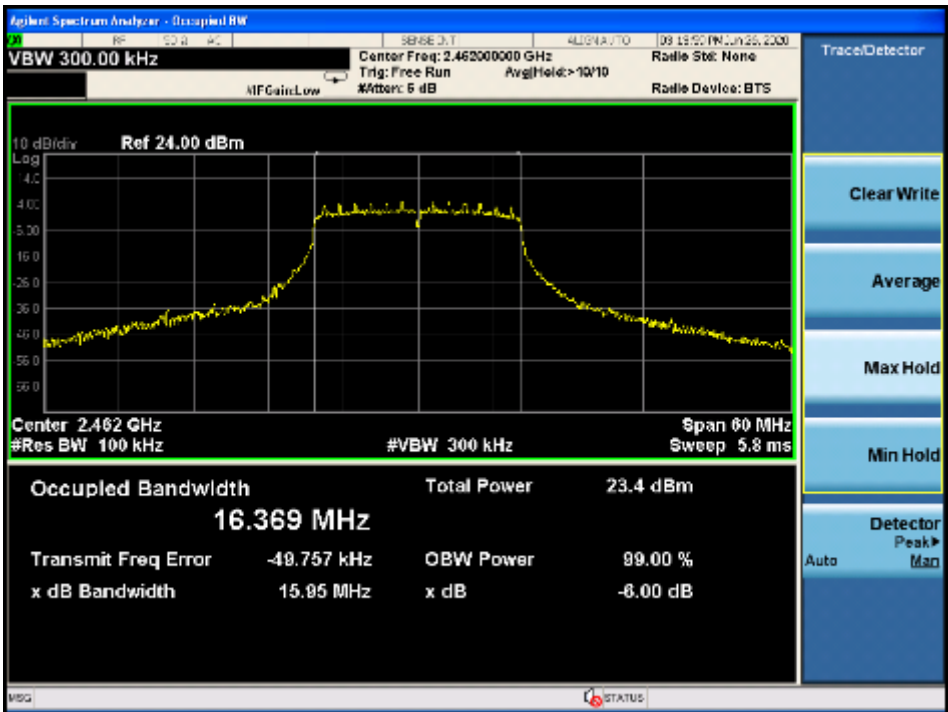

High Channel 99% dB OBW Antenna A



High Channel 99% dB OBW Antenna B




802.11n20 mode

Low Channel 6 dB OBW Antenna A



Low Channel 6 dB OBW Antenna B

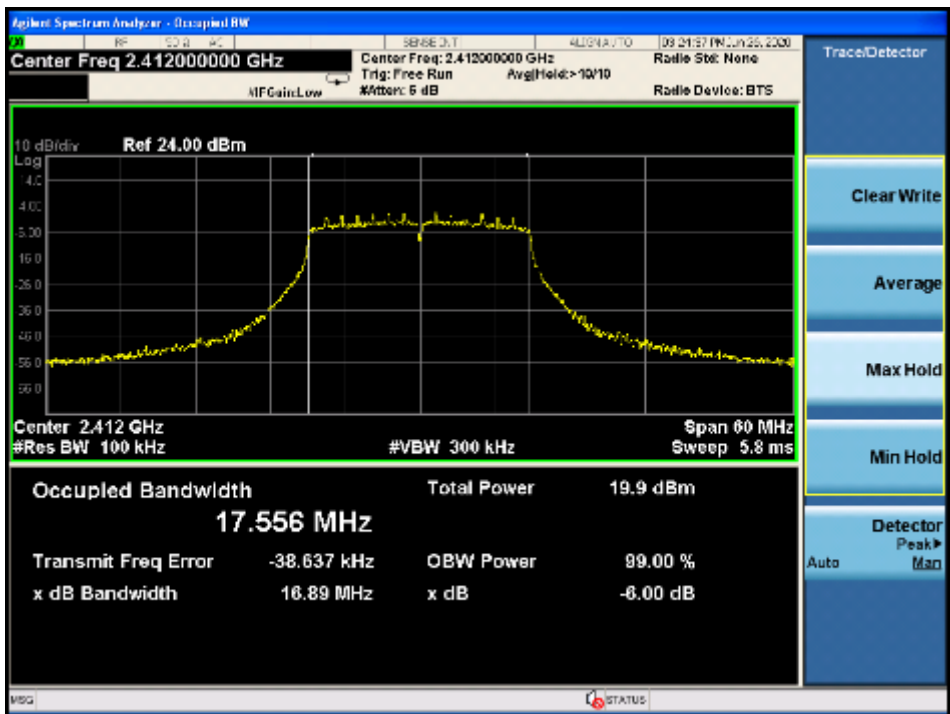

Low Channel 99% dB OBW Antenna A




Low Channel 99% dB OBW Antenna B



Mid Channel 6 dB OBW Antenna A



Mid Channel 6 dB OBW Antenna B

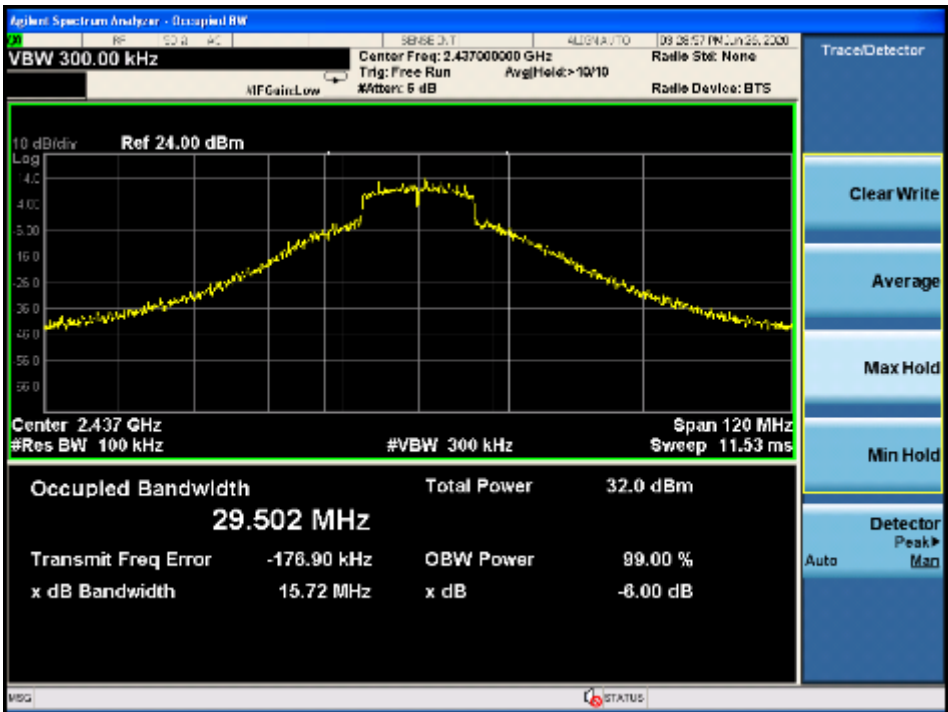


Mid Channel 99% dB OBW Antenna A




Mid Channel 99% dB OBW Antenna B



High Channel 6 dB OBW Antenna A

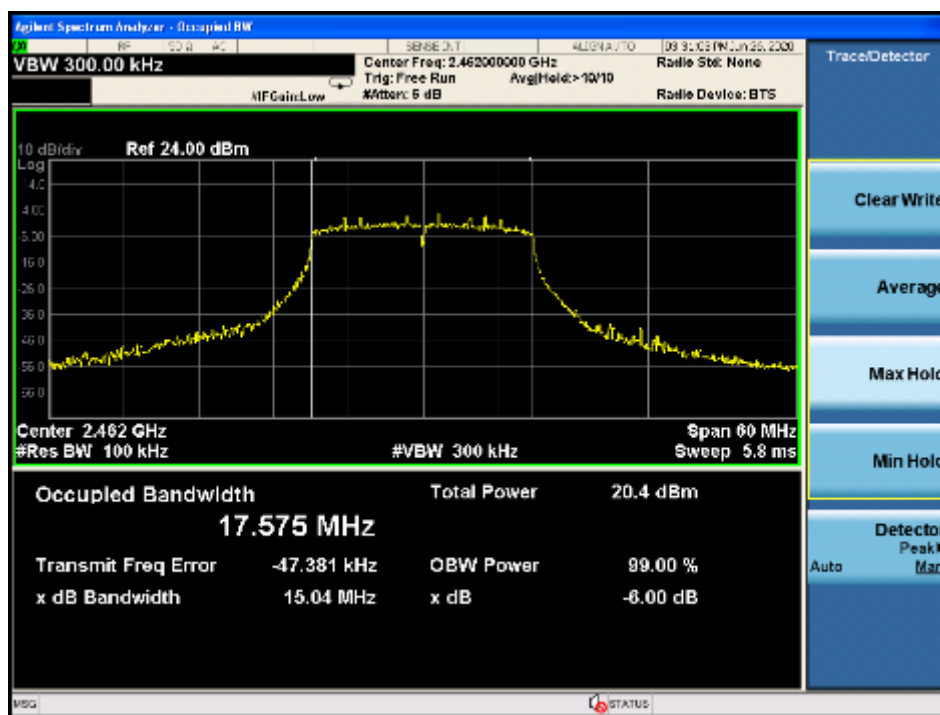

High Channel 6 dB OBW Antenna B

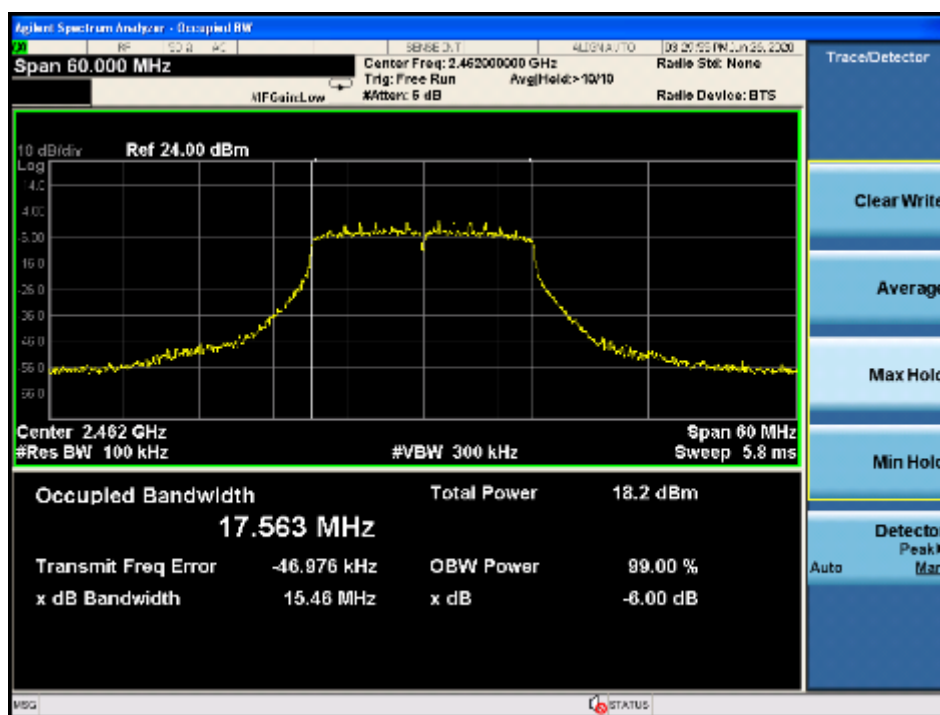

High Channel 99% dB OBW Antenna A



High Channel 99% dB OBW Antenna B



9 FCC §15.247(b) (3) - Output Power Measurement

9.1 Applicable Standards

According to ECFR §15.247(b) (3) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
-	RF cable	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A
ETS- Lingerin	Power Sensor	7002-006	160097	2018-12-31	2 years

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) "A2LA Policy on Metrological Traceability".

9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christopher Casteel on 2020-06-19 in RF site.

9.5 Test Results

Channel	Frequency (MHz)	Conducted Output Power (dBm)			Output Power Limit (dBm)	Result
		Antenna A	Antenna B	Total		
802.11b						
Low	2412	18.33	18.73	-	30	Pass
Middle	2437	24.44	17.97	-	30	Pass
High	2462	19.89	17.97	-	30	Pass
802.11g						
Low	2412	14.49	17.01	-	30	Pass
Middle	2437	25.72	24.99	-	30	Pass
High	2462	15.52	16.73	-	30	Pass
802.11 n20						
Low	2422	15.12	12.99	17.19	29	Pass
Middle	2437	24.95	24.52	27.75	29	Pass
High	2462	13.76	11.86	15.92	29	Pass

Note: When the directional gain is greater than 6dBi, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain for 802.11n20 mode is 6.19 dBi calculated based on method specified in KDB 662911 D01.

Note: Duty Cycle correction factor has already been added to the measurement.

10 FCC §15.247(d)– 100 kHz Bandwidth of Band Edges

10.1 Applicable Standards

According to ECFR §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	N9010A	MY48030852	2020-02-10	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) “A2LA Policy on Metrological Traceability”.*

10.4 Test Environmental Conditions


Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2020-06-26 in RF site.


10.5 Test Results

802.11 b mode


Low Channel Antenna A

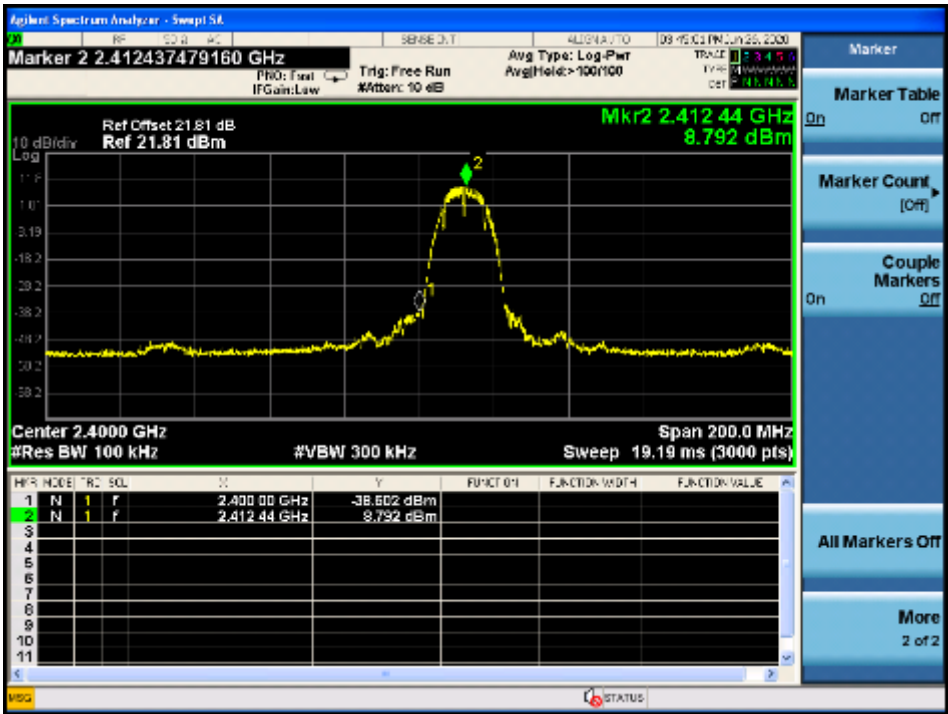


Low Channel Antenna B

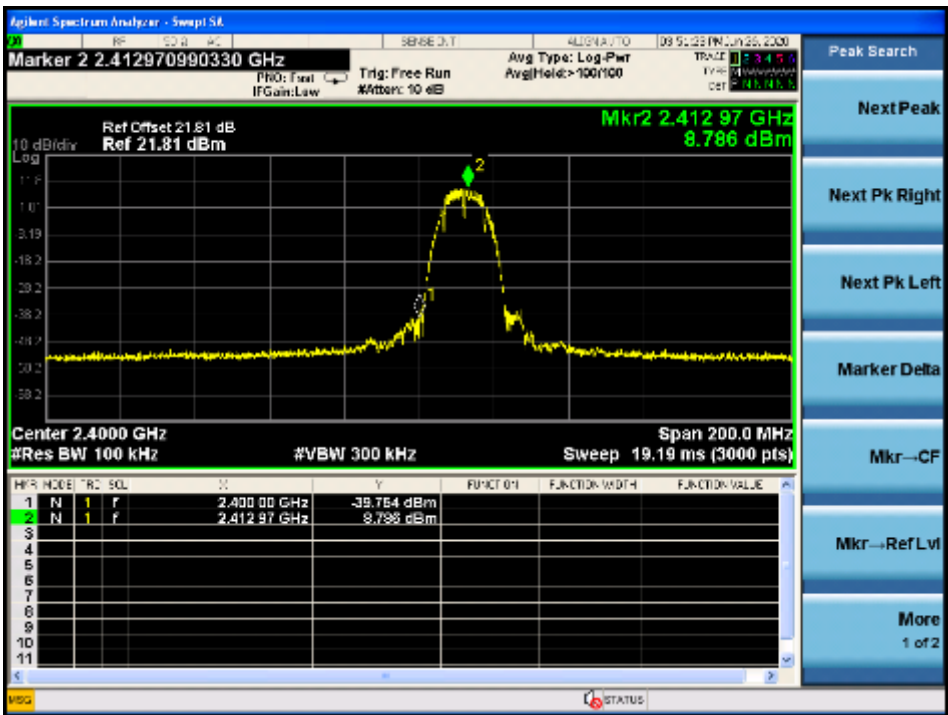

High Channel Antenna A

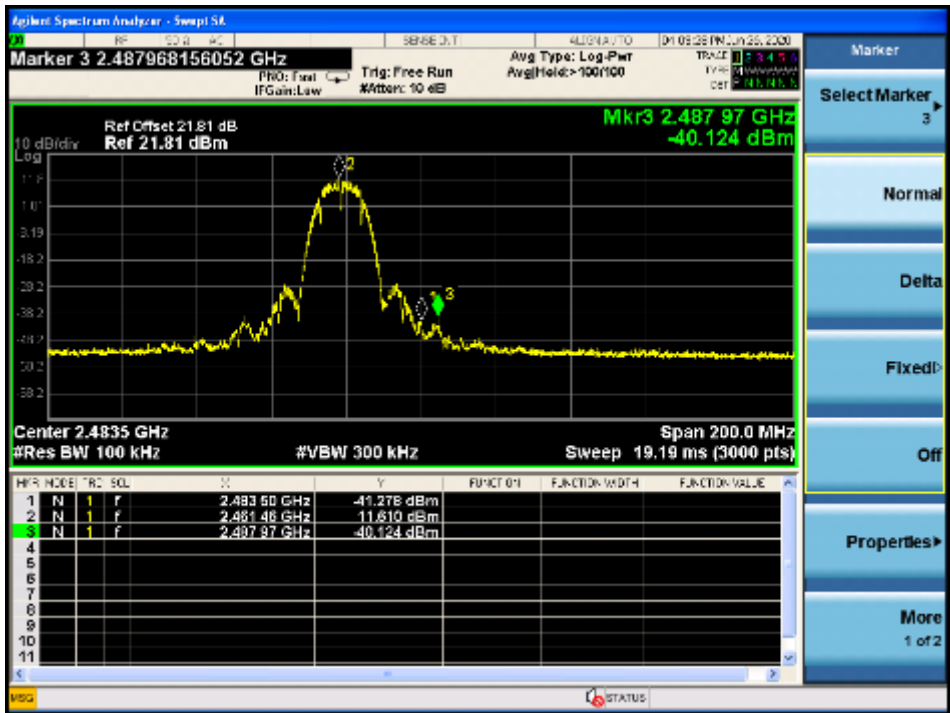


High Channel Antenna B

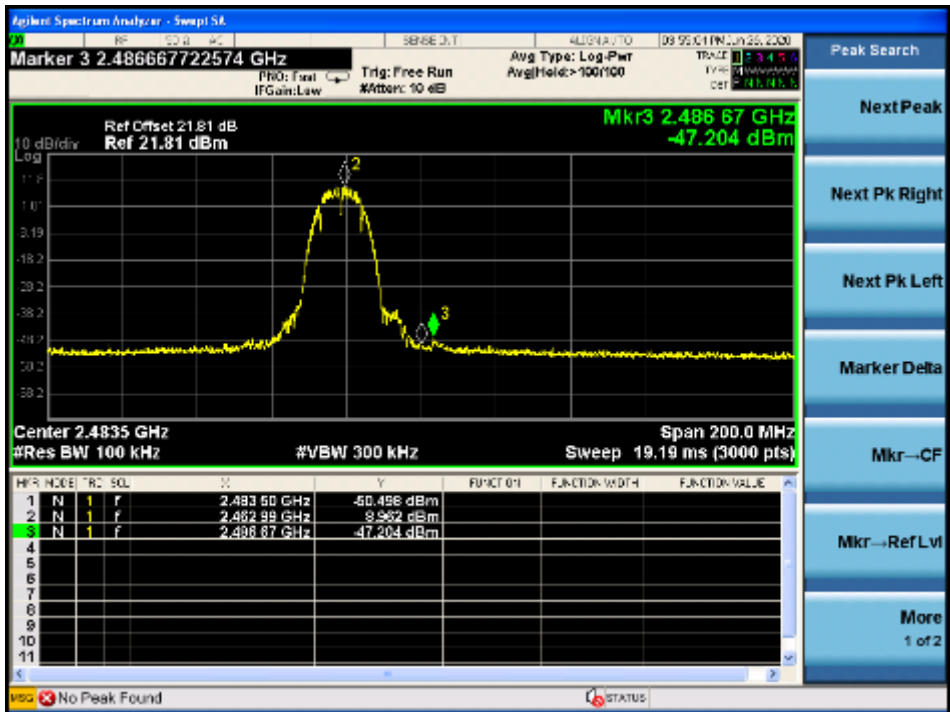


802.11 g mode


Low Channel Antenna A

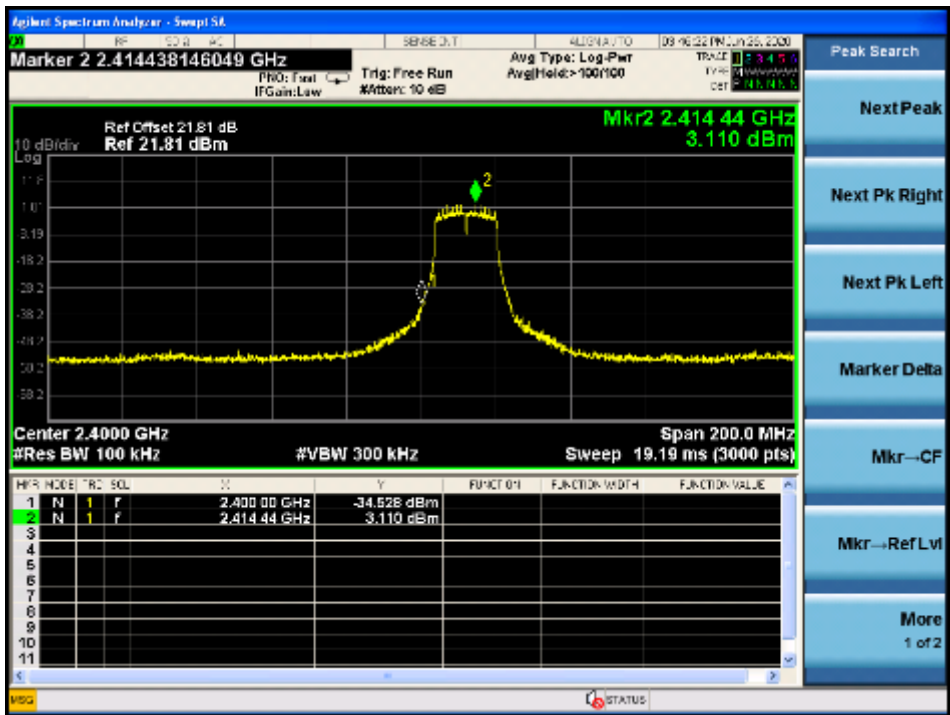


Low Channel Antenna B

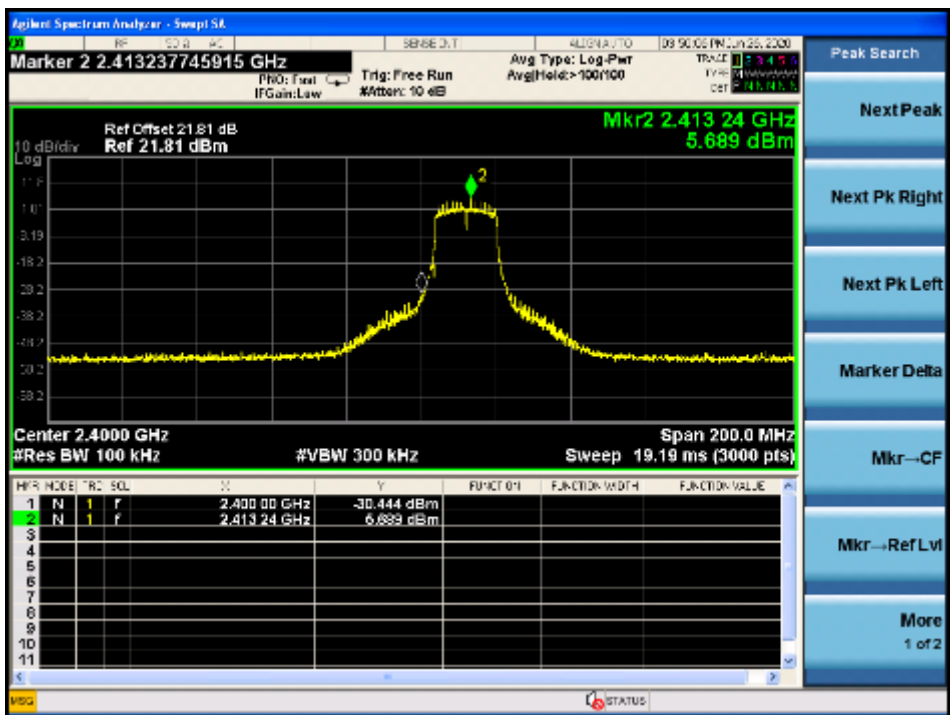

High Channel Antenna A

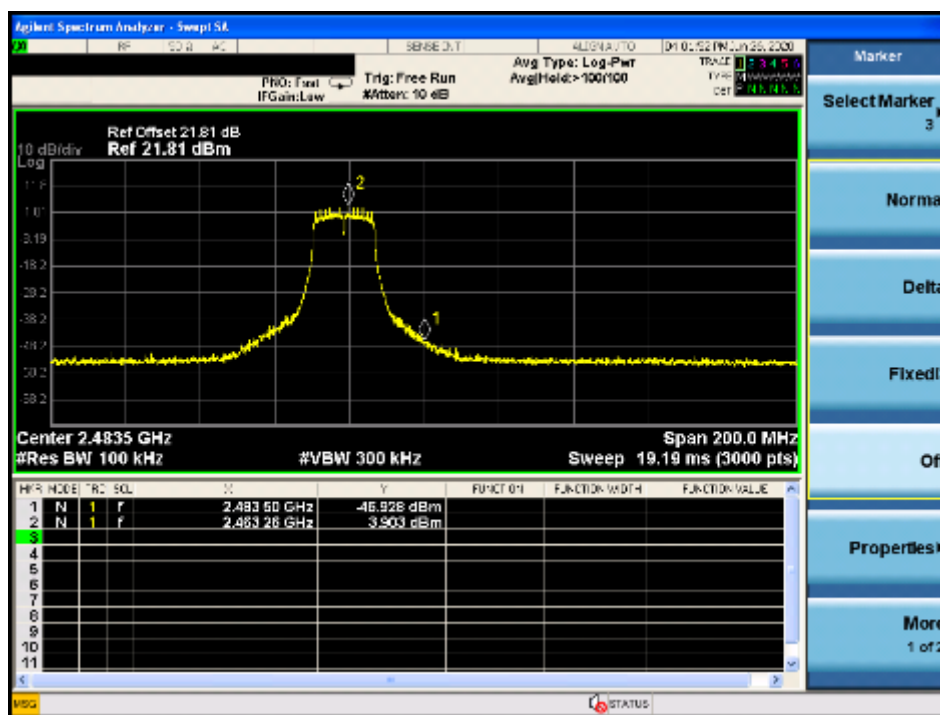


High Channel Antenna B

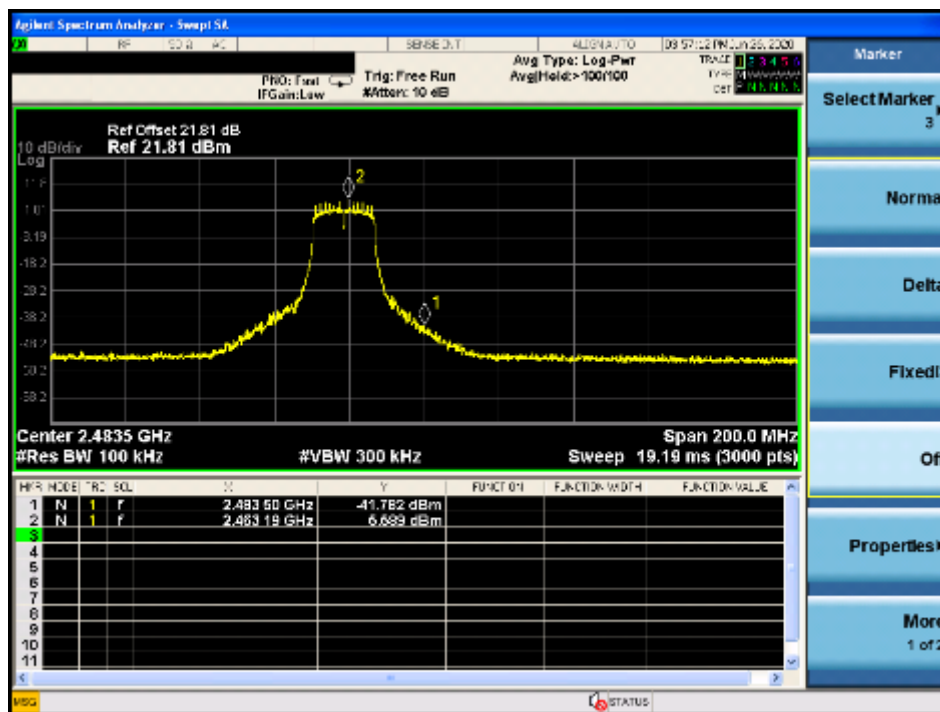


802.11 n20 mode


Low Channel Antenna A

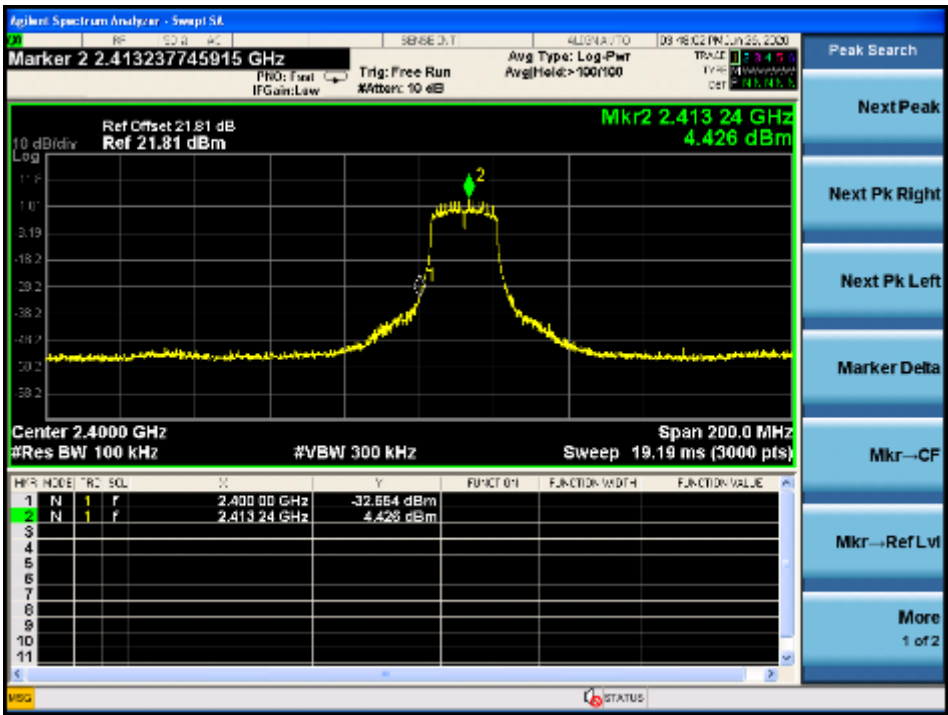


Low Channel Antenna B

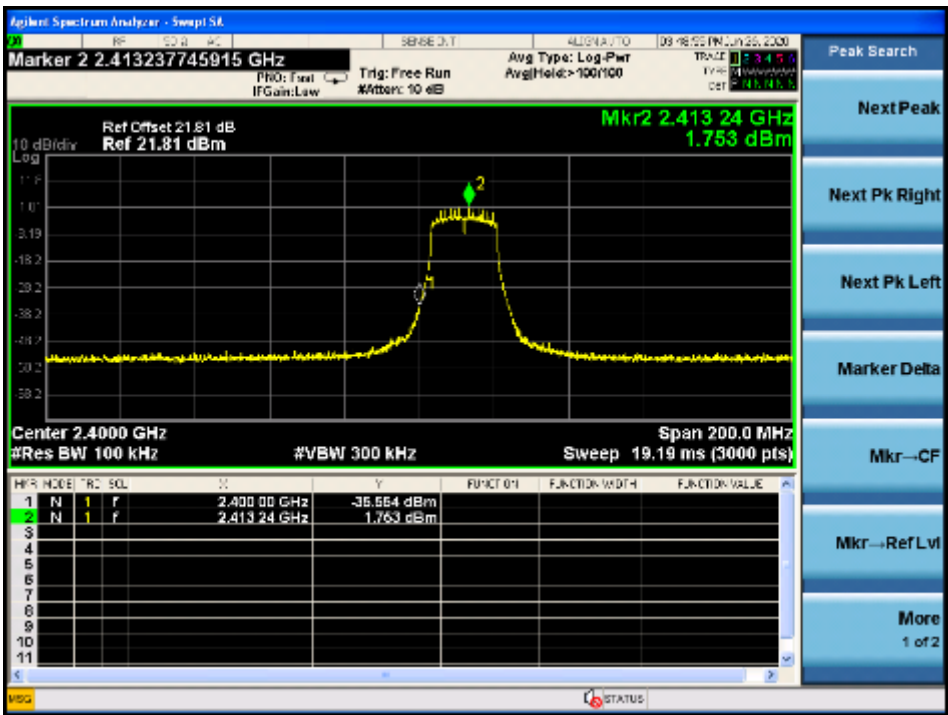

High Channel Antenna A

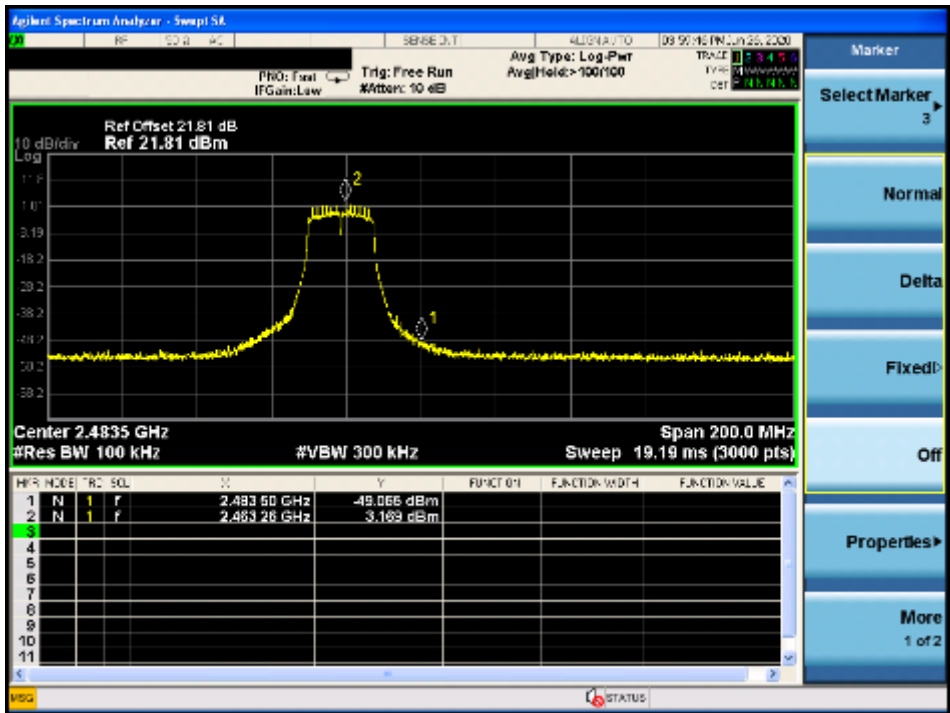

High Channel Antenna B

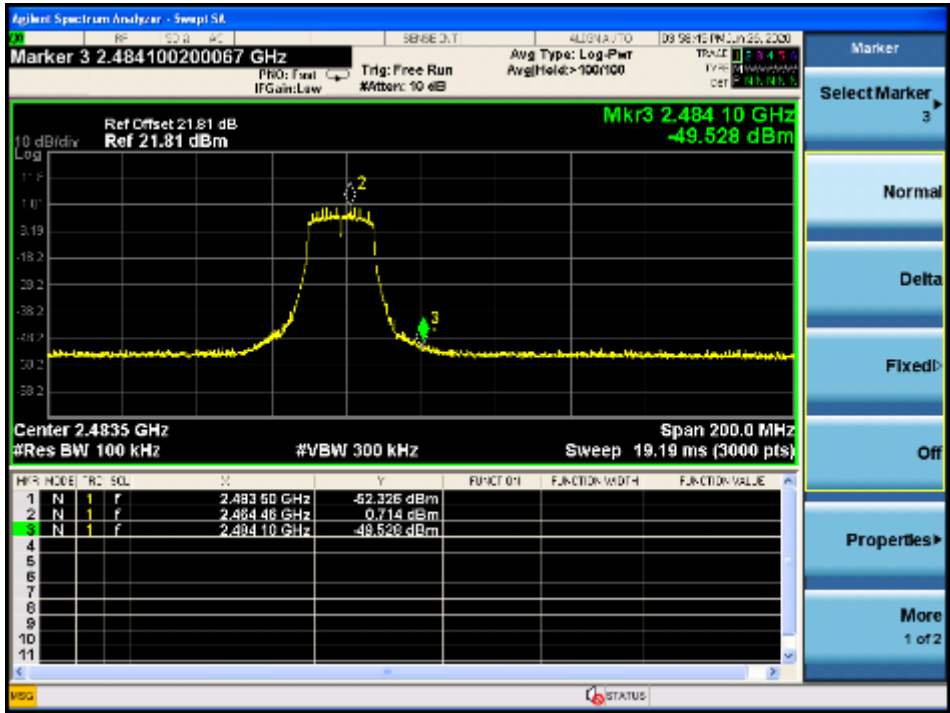

11 FCC §15.247(e) – Power Spectral Density

11.1 Applicable Standards

According to ECFR §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	N9010A	MY48030852	2020-02-10	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) “A2LA Policy on Metrological Traceability”.

11.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2020-06-26 in RF site.

11.5 Test Results

Channel	Frequency (MHz)	PSD (dBm/3kHz)		Corrected PSD (dBm/3kHz)		Limit (dBm/3kHz)
		Antenna A	Antenna B	Antenna A	Antenna B	
802.11b mode						
Low	2412	-2.679	-4.597	-2.539	-4.457	8
Middle	2437	1.577	-5.405	1.717	-5.265	8
High	2462	-3.213	-4.367	-3.073	-4.227	8
802.11g mode						
Low	2412	-10.566	-8.919	-10.046	-8.399	8
Middle	2437	1.371	-0.189	1.891	0.331	8
High	2462	-10.390	-7.625	-9.87	-7.105	8
802.11n20 mode						
Low	2412	-11.075	-12.669	-8.418		7
Middle	2437	0.407	-0.041	3.569		7
High	2462	-11.243	-13.549	-8.864		7


*Note: Corrected PSD (dBm/3kHz) = PSD(dBm/3kHz) + Duty Cycle Correction Factor

Note: When the directional gain is greater than 6dBi, similar to the total conducted output power, the total power spectrum density shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain for 802.11n20 mode is 6.19 dBi calculated based on method specified in KDB 662911 D01.

Please refer to the following plots for detailed test results

802.11b mode


Low Channel Antenna A

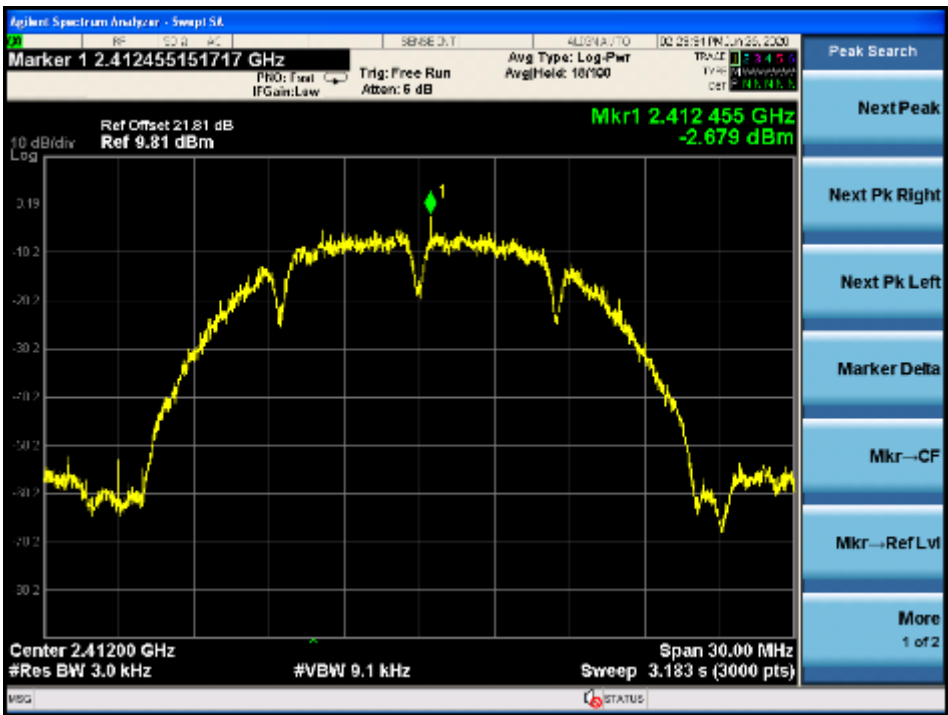


Low Channel Antenna B




Mid Channel Antenna A

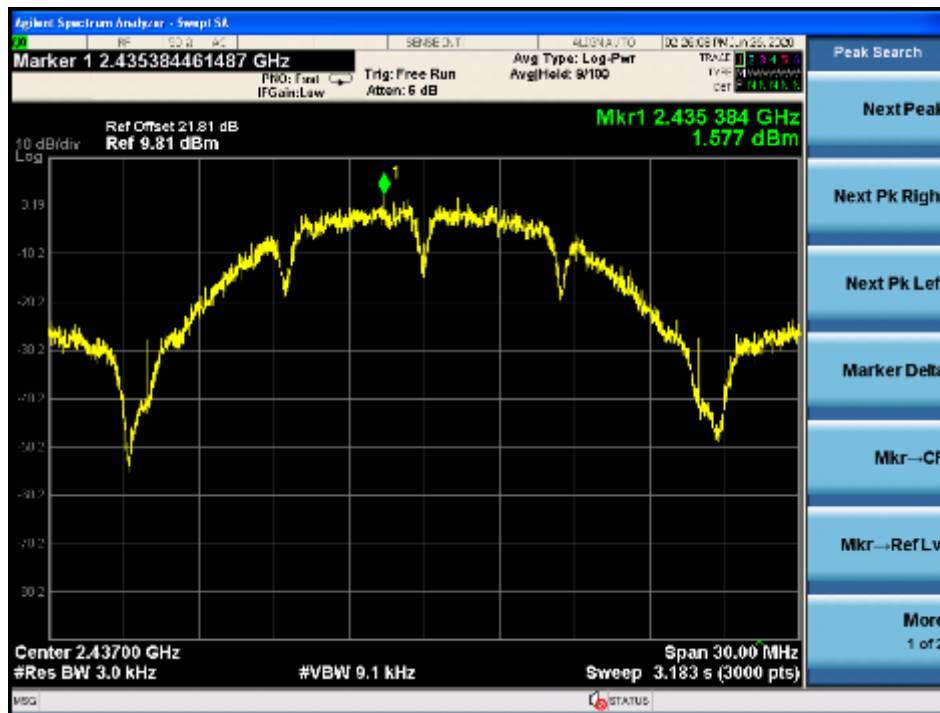


Mid Channel Antenna B

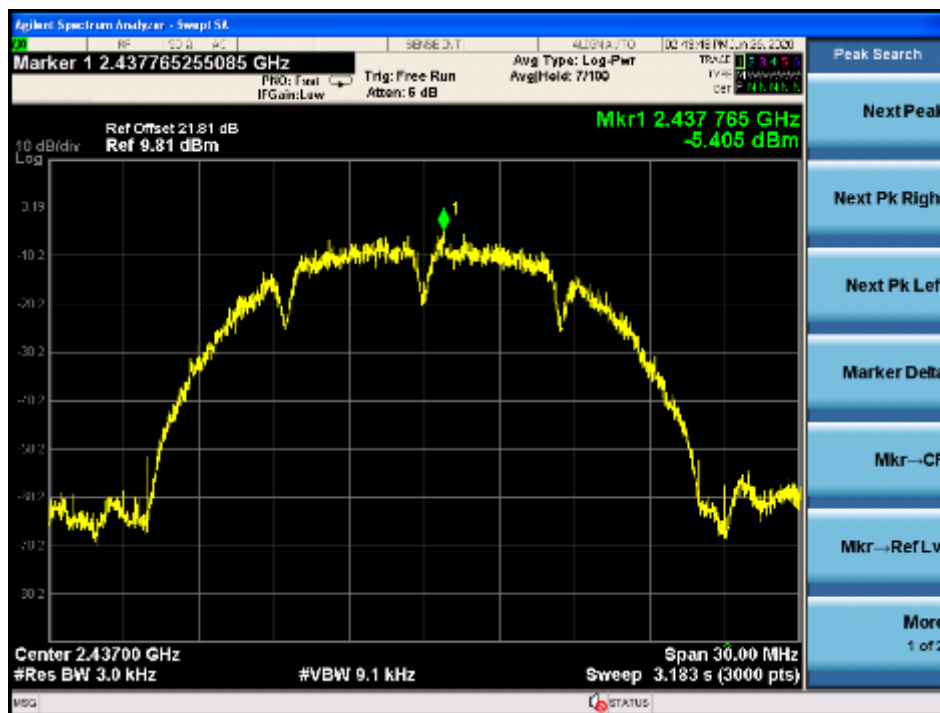

High Channel Antenna A

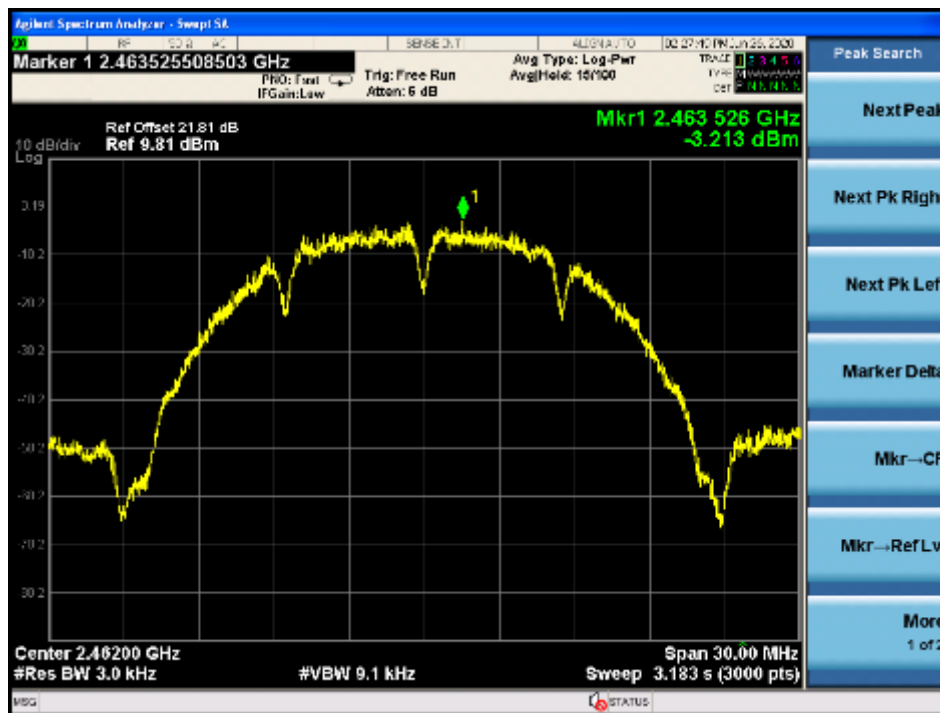


High Channel Antenna B

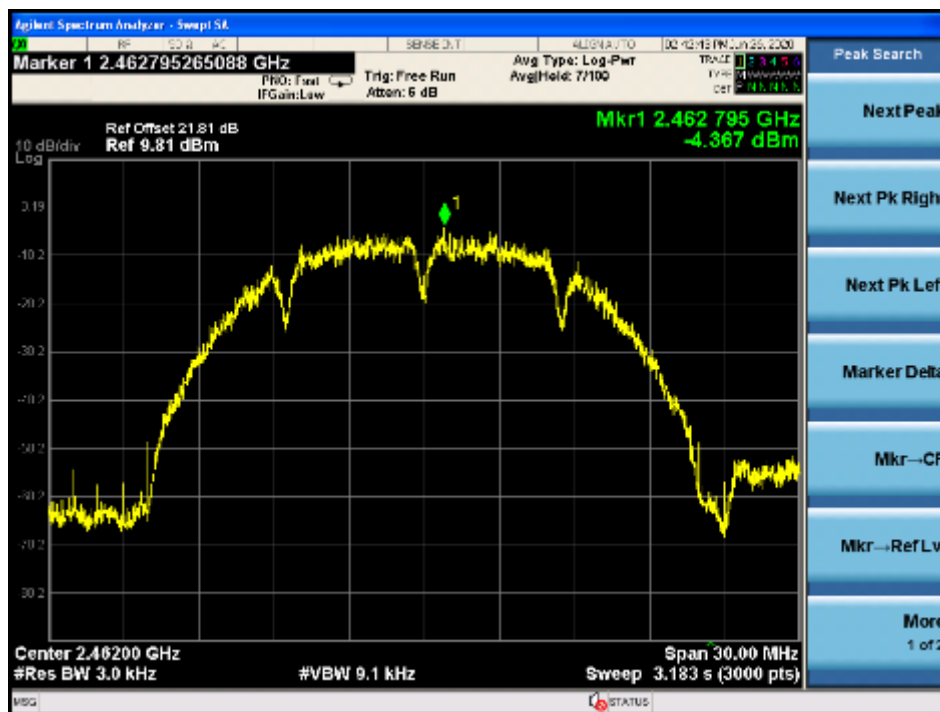


802.11g mode


Low Channel Antenna A

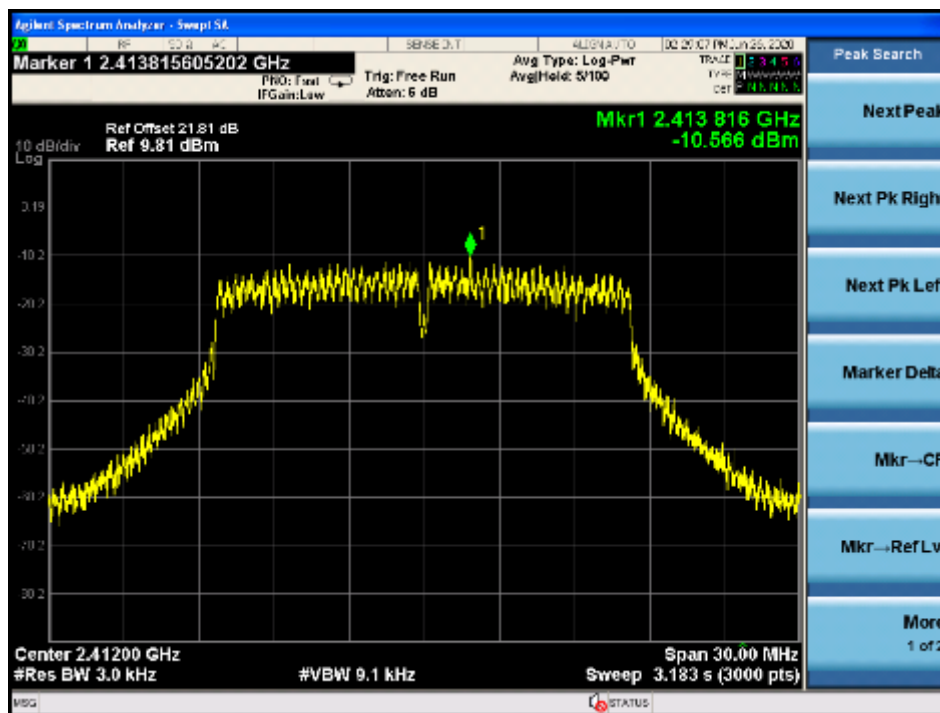


Low Channel Antenna B

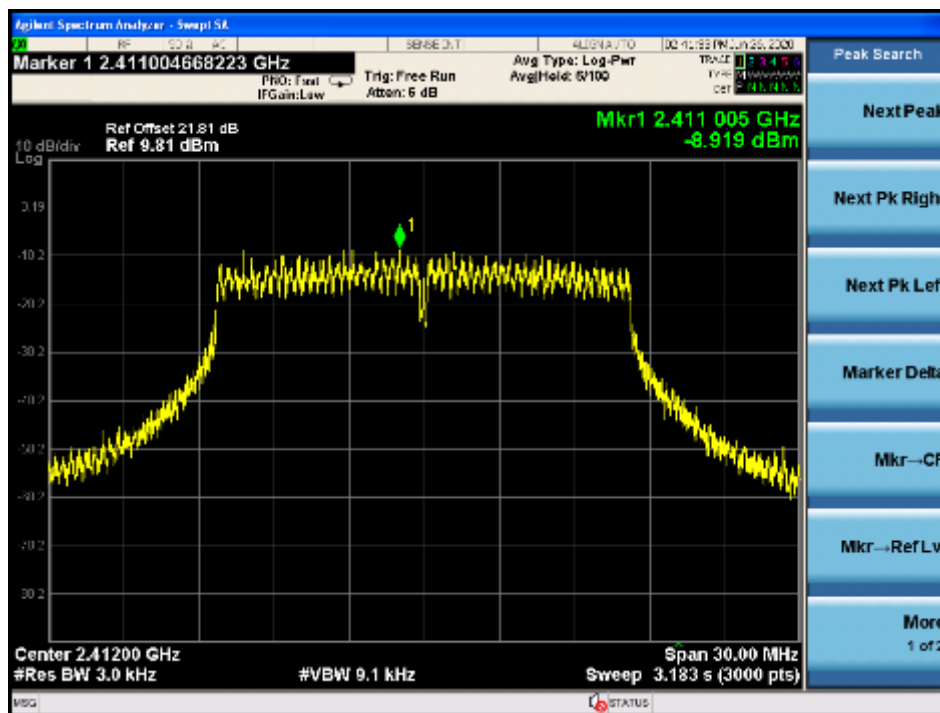


Mid Channel Antenna A

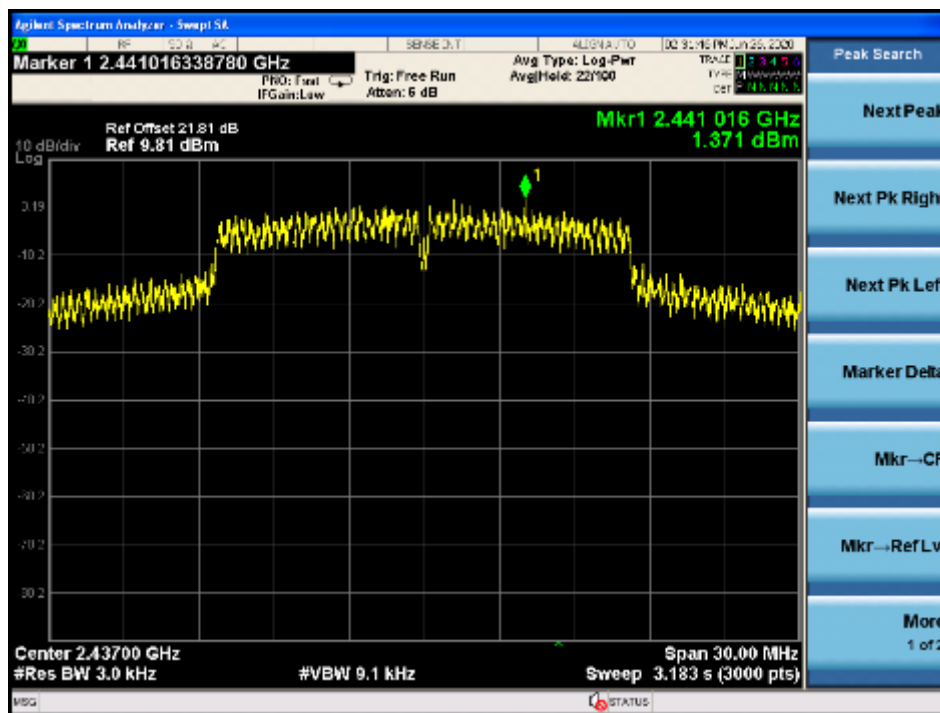


Mid Channel Antenna B

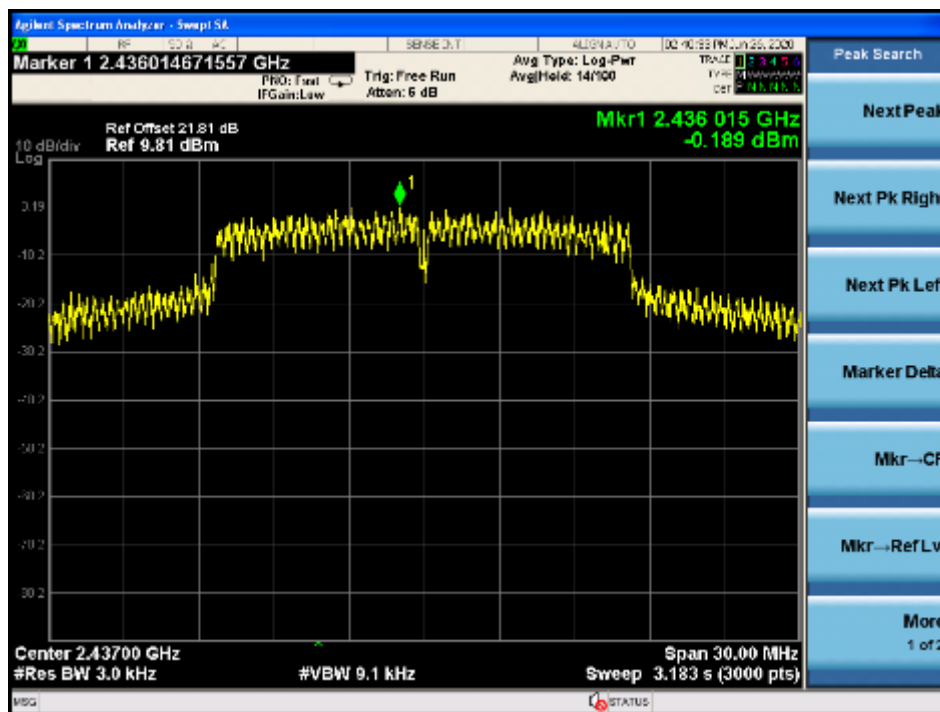

High Channel Antenna A

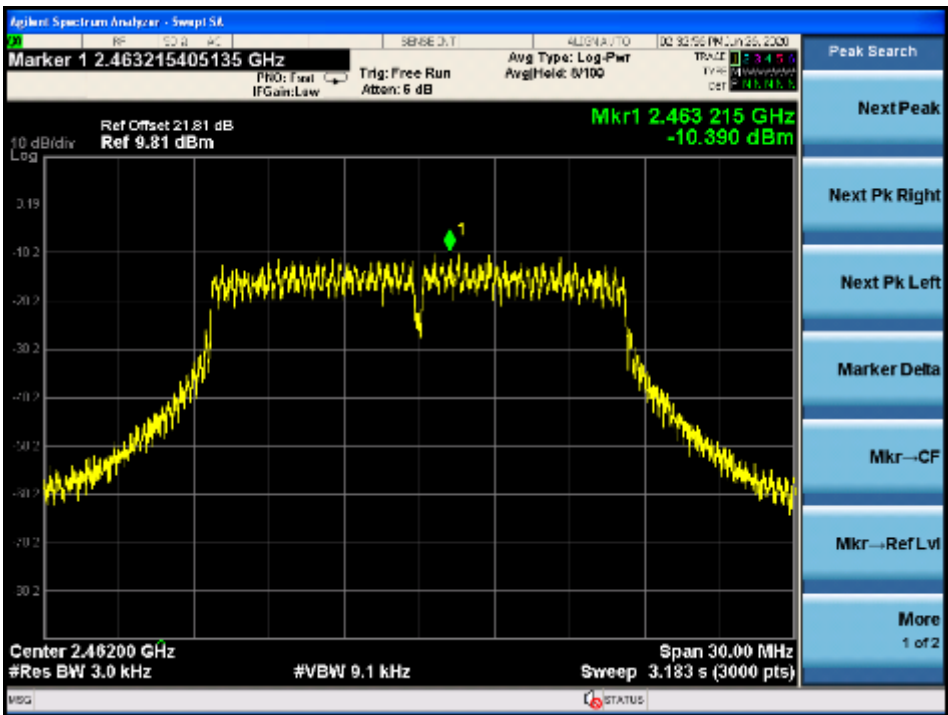


High Channel Antenna B

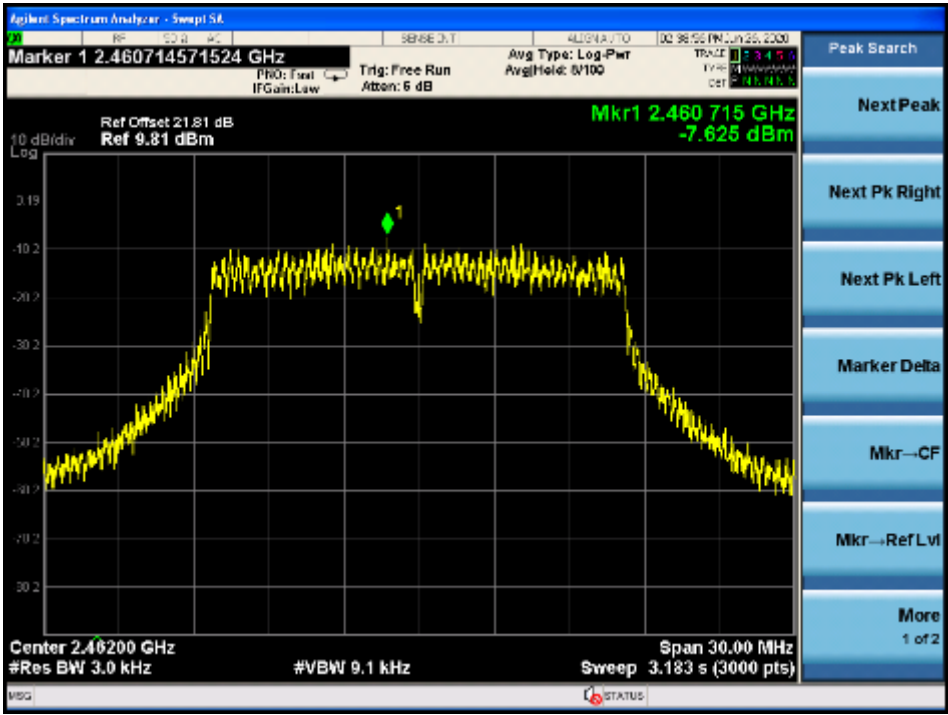


802.11n20 mode


Low Channel Antenna A

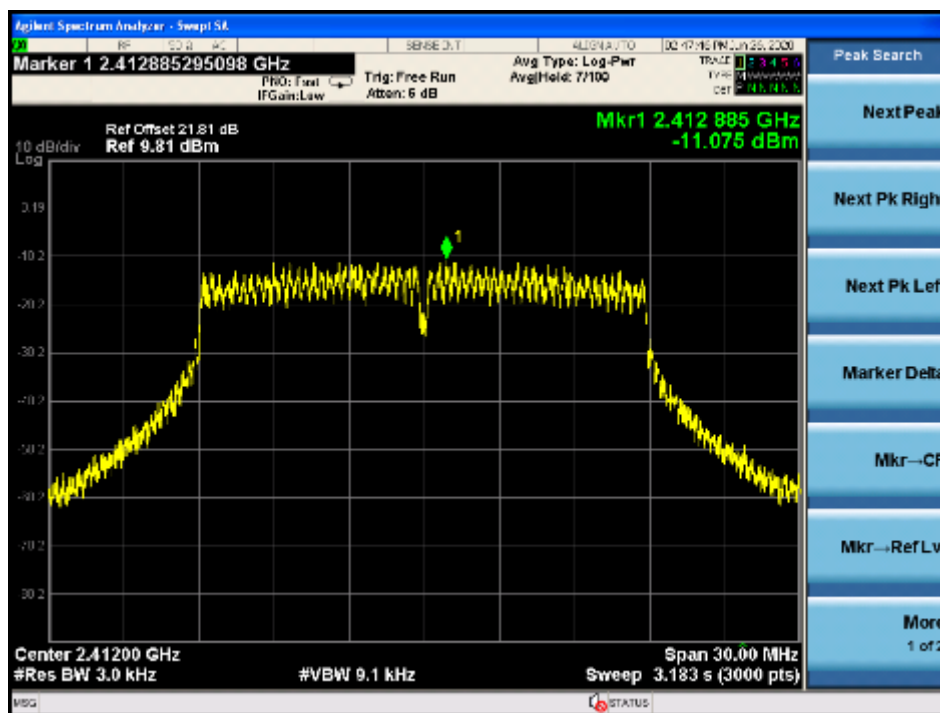


Low Channel Antenna B

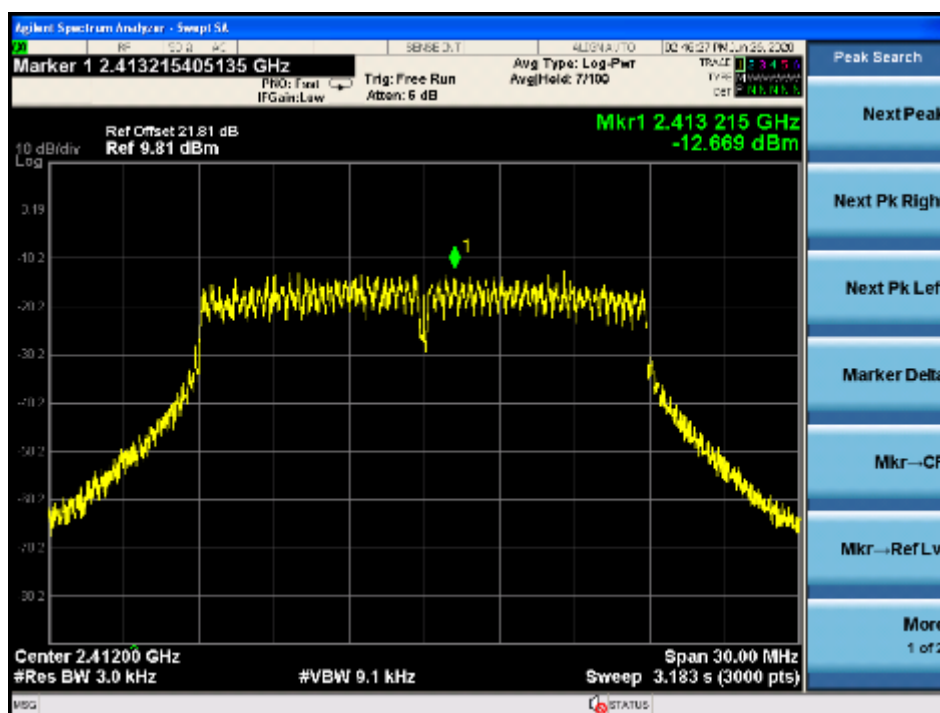


Mid Channel Antenna A

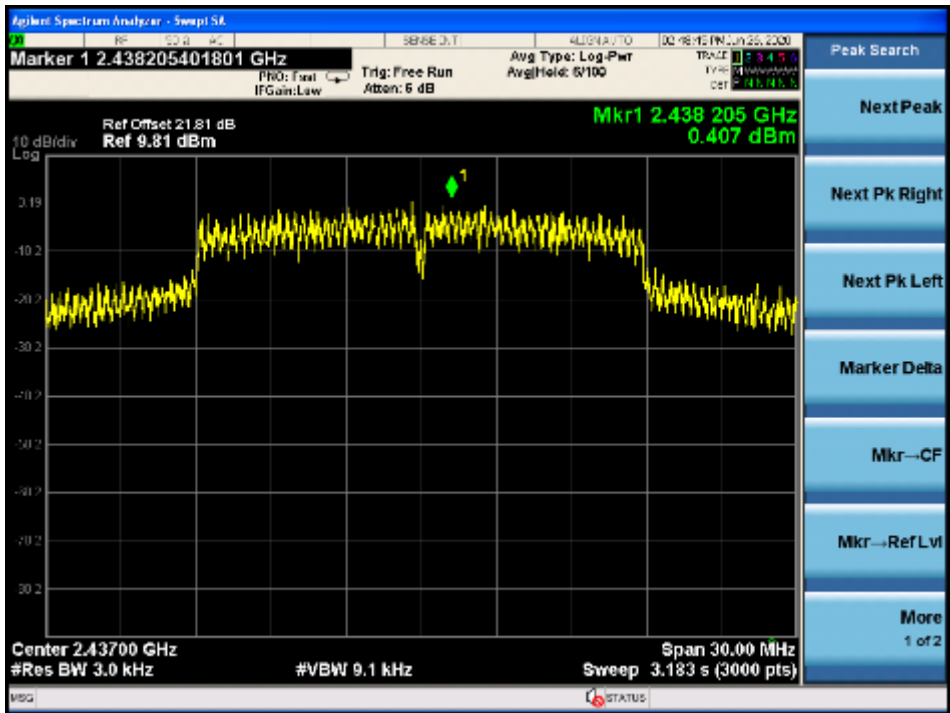


Mid Channel Antenna B

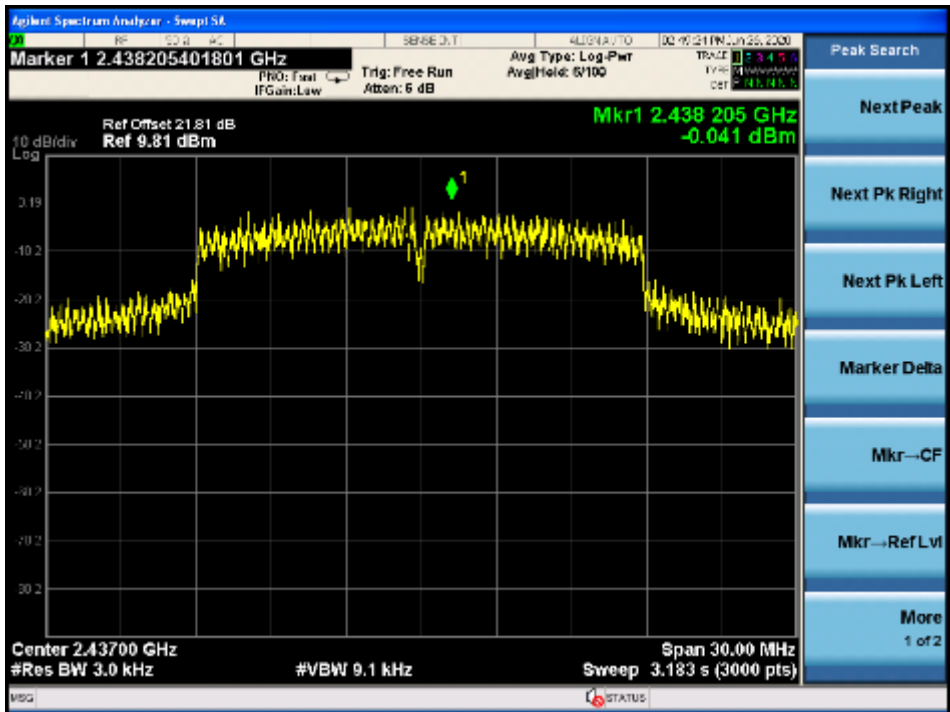

High Channel Antenna A

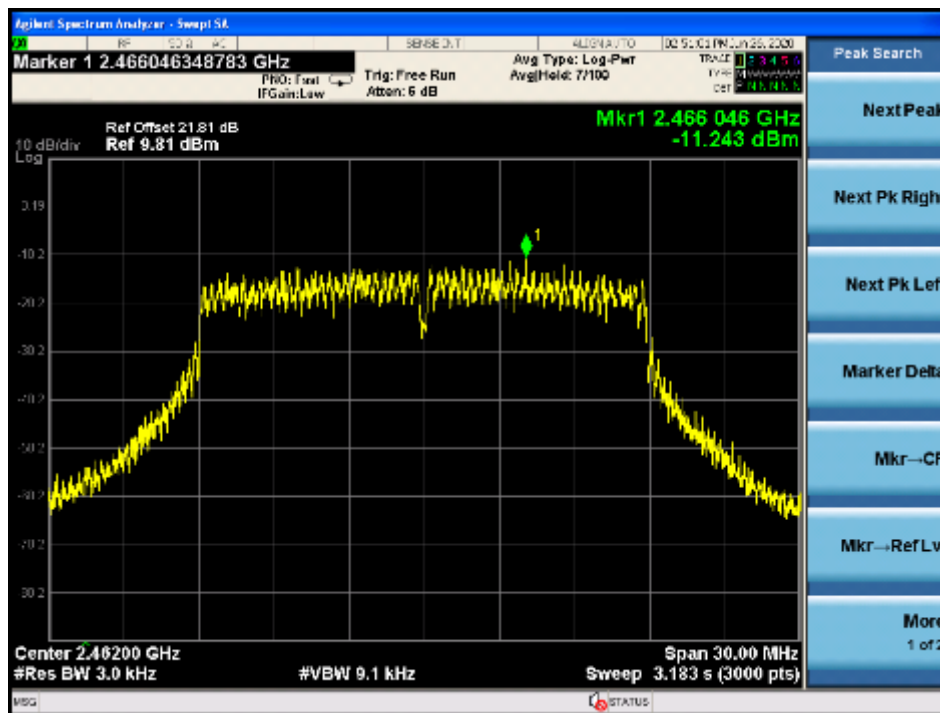

High Channel Antenna B

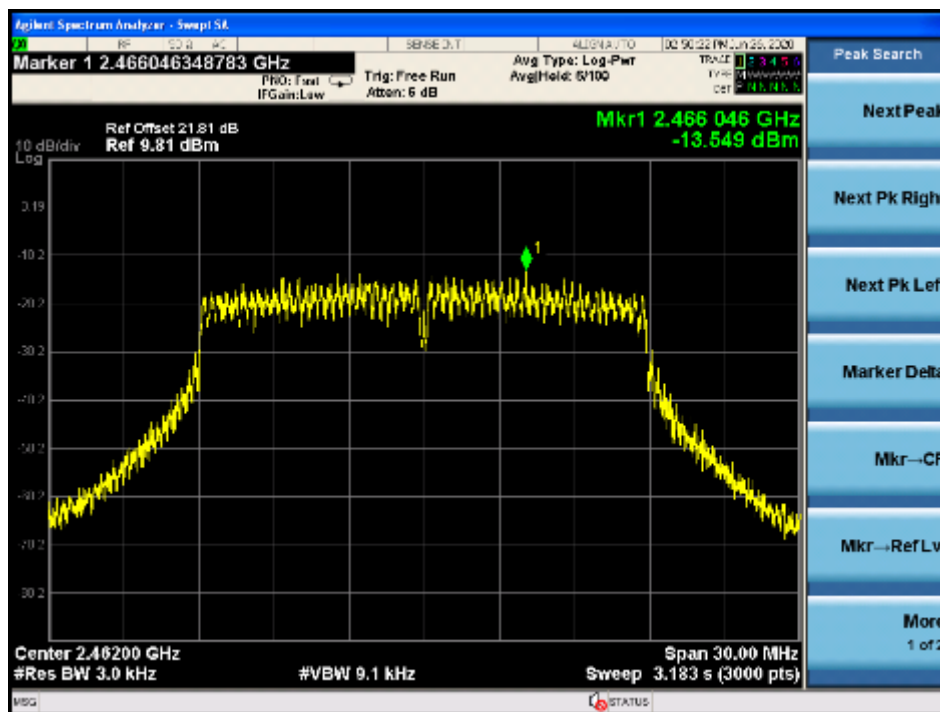

12 FCC §15.247(d) – Spurious Emissions at Antenna Terminals

12.1 Applicable Standards

For ECFR §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

12.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	MY48250238	2019-06-26	18 Months
-	RF cable	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) “A2LA Policy on Metrological Traceability”.

12.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Christian McCaig on 2020-06-29 in RF site.

12.5 Test Results


Please refer to following plots.

802.11b mode


Antenna A Low Channel 2412MHz

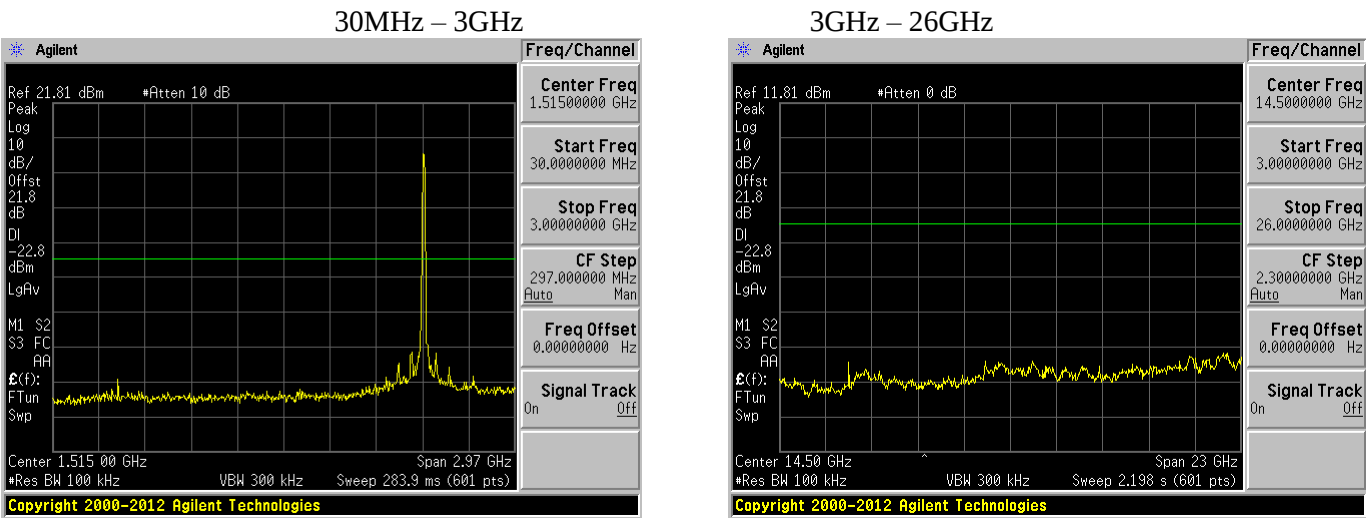


Antenna A Mid Channel 2437MHz

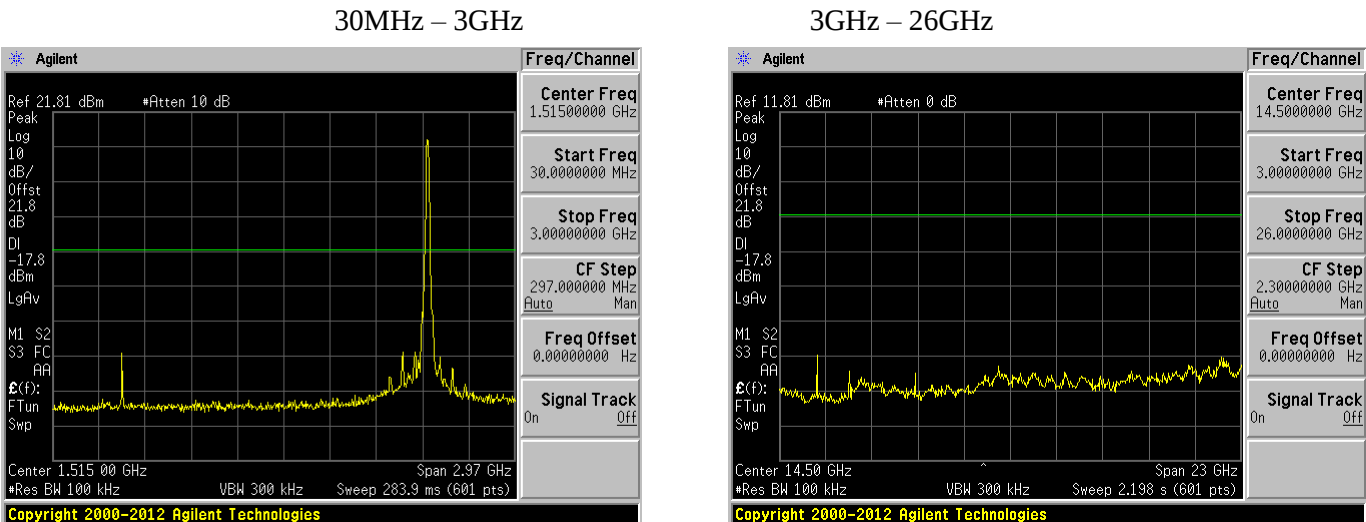


Antenna A High Channel 2462MHz

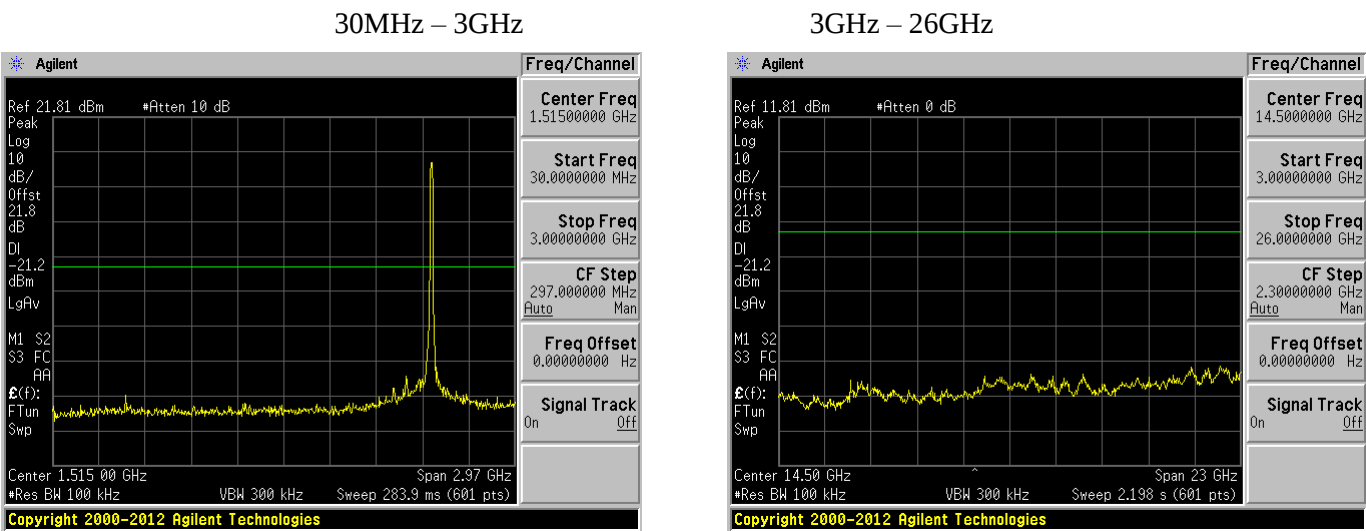


Antenna B Low Channel 2412MHz

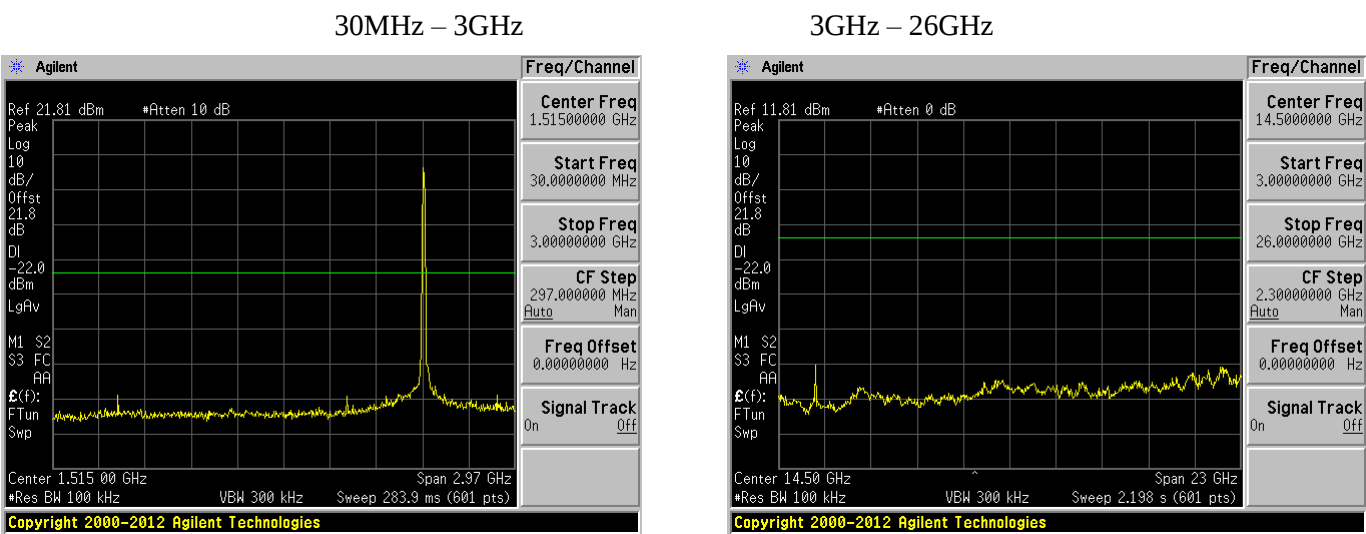

Antenna B Mid Channel 2437MHz

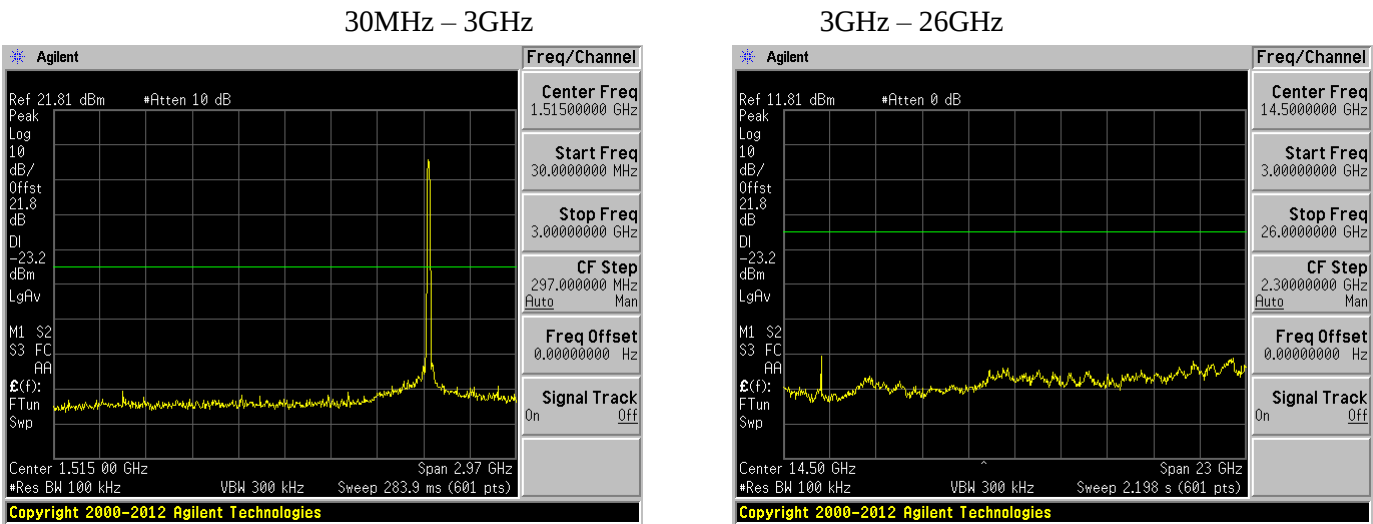


Antenna B High Channel 2462MHz

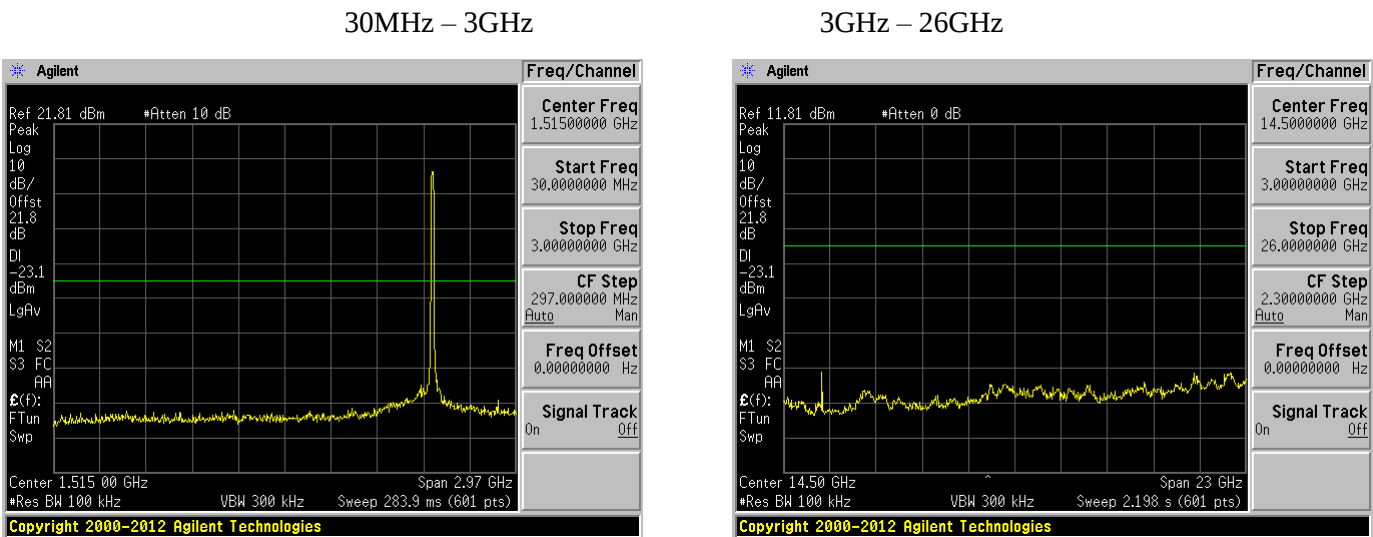


802.11g mode

Antenna A Low Channel 2412MHz

30MHz – 3GHz

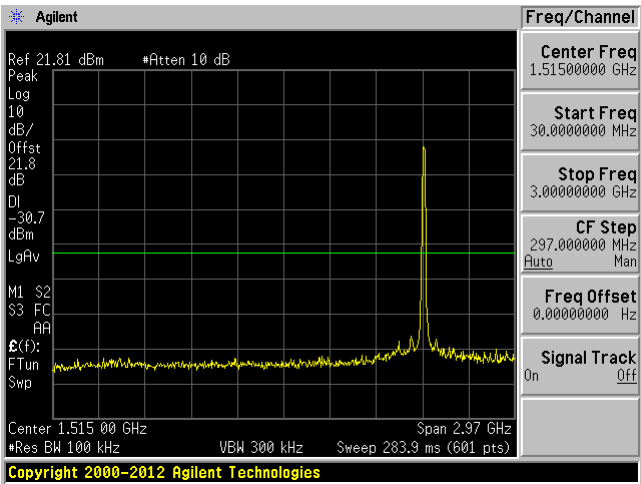


3GHz – 26GHz

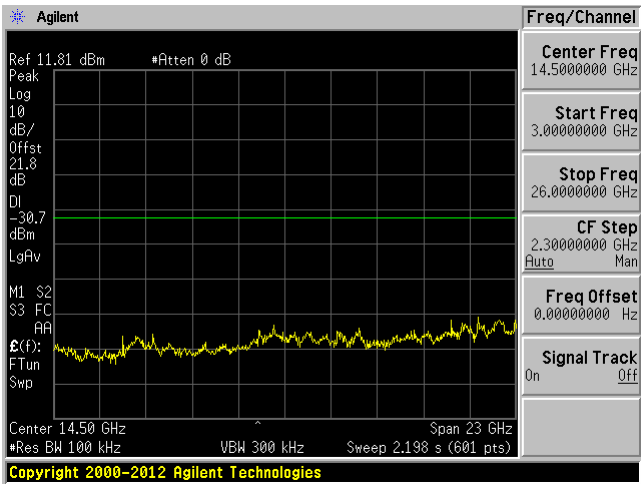


Antenna A Mid Channel 2437MHz


30MHz – 3GHz

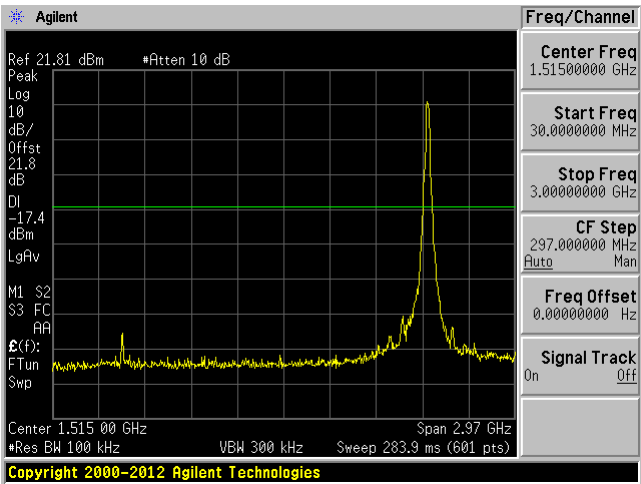


3GHz – 26GHz

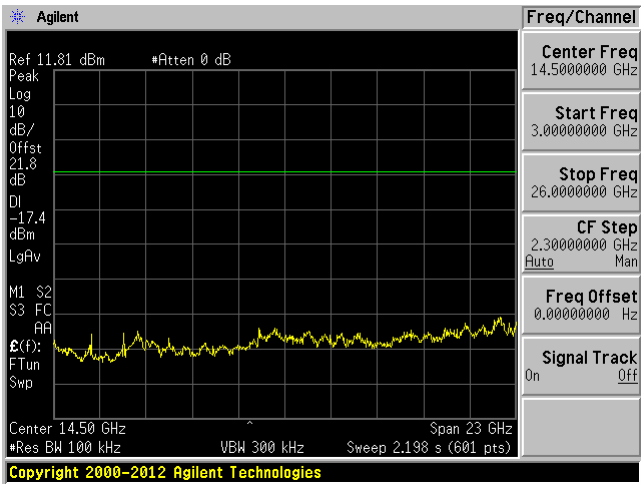


Antenna A High Channel 2462MHz

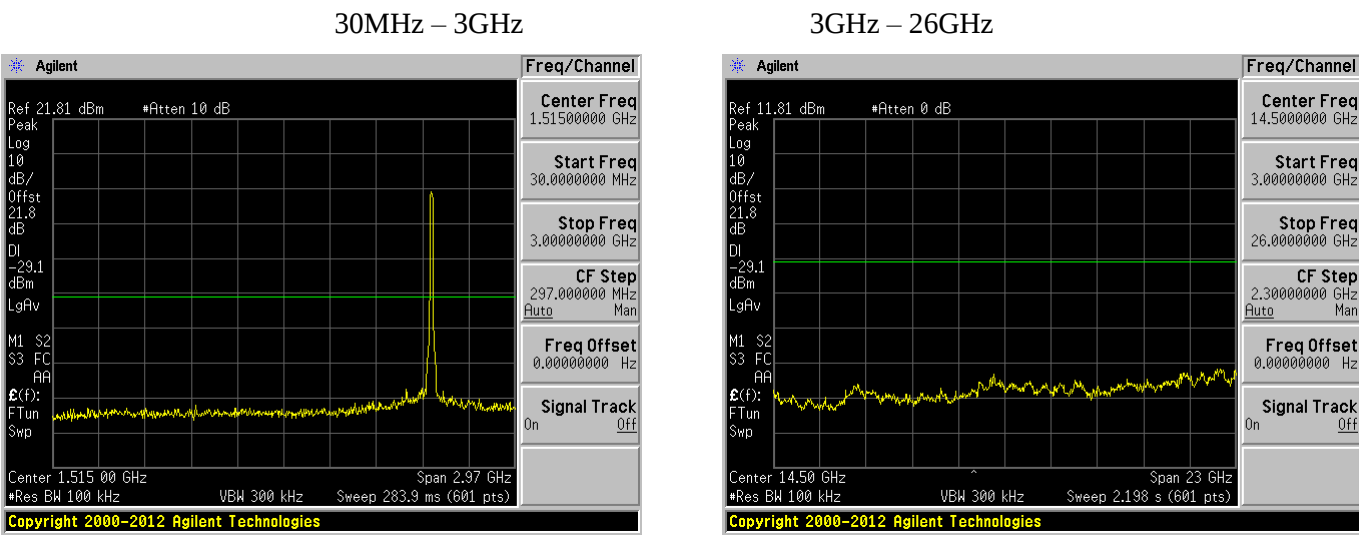


Antenna B Low Channel 2412MHz

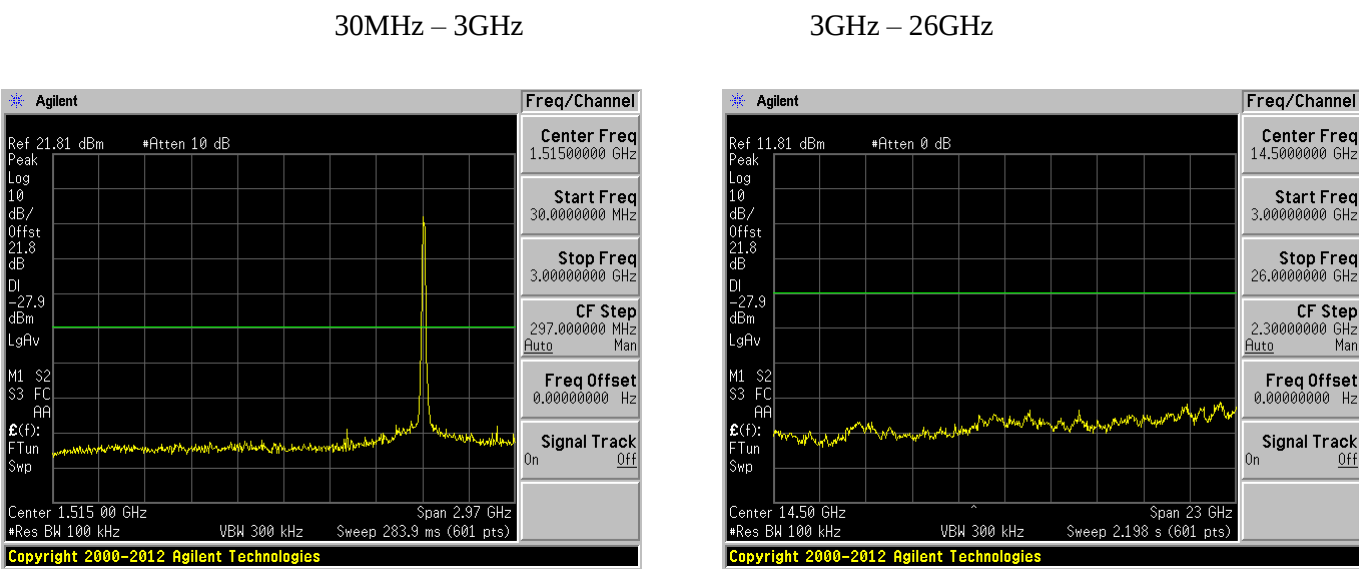

Antenna B Mid Channel 2437MHz

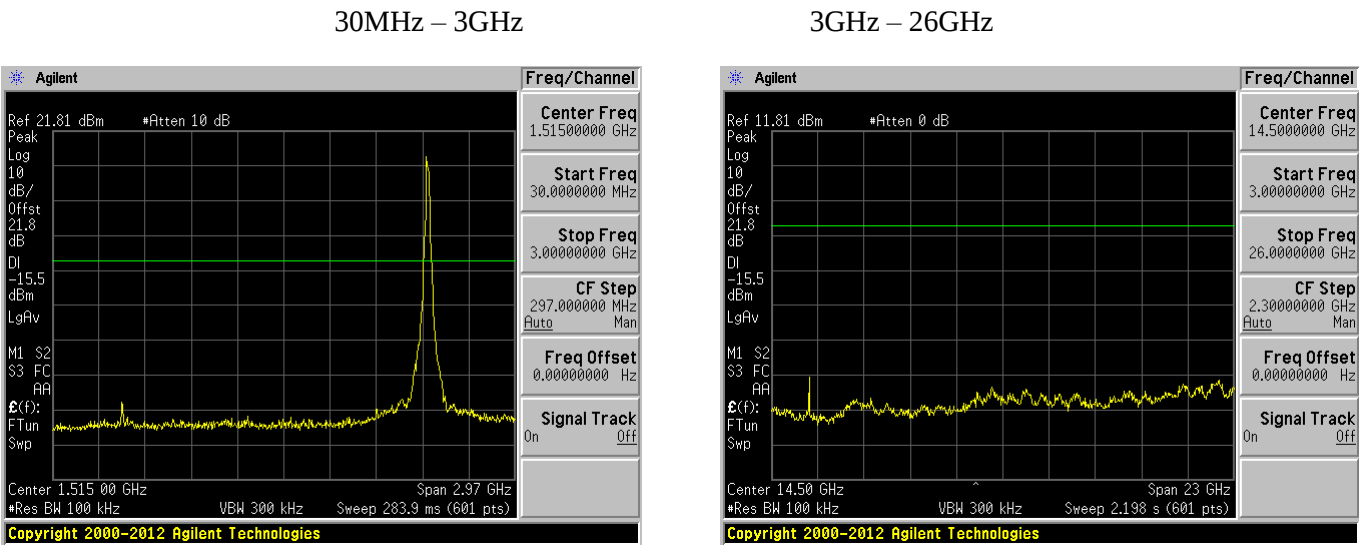


Antenna B High Channel 2462MHz

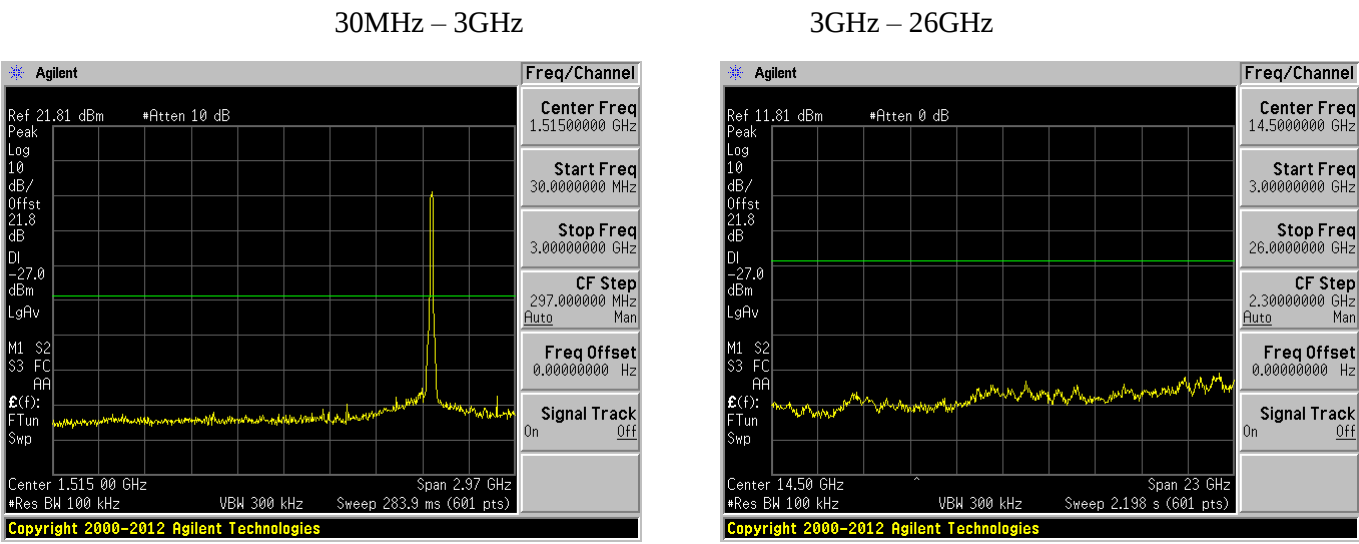


802.11 n20 mode

Antenna A Low Channel 2412MHz

30MHz – 3GHz

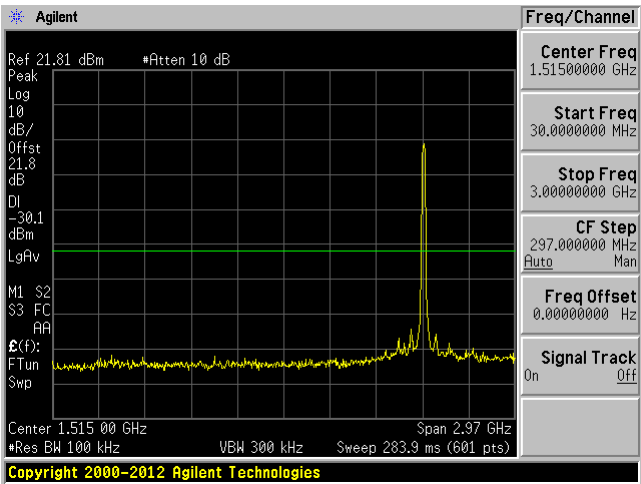


3GHz – 26GHz

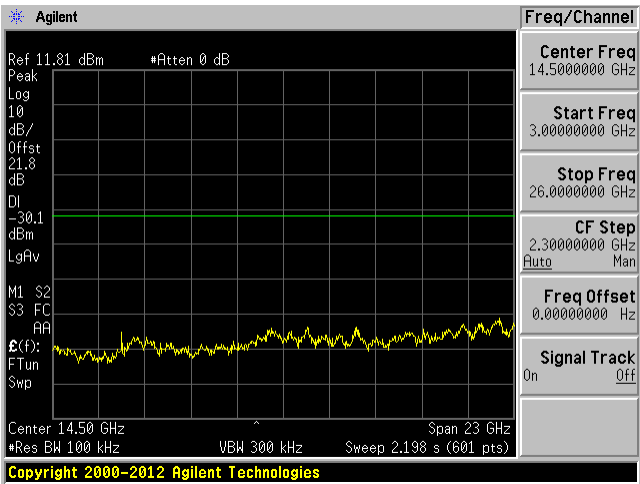


Antenna A Mid Channel 2437MHz

30MHz – 3GHz


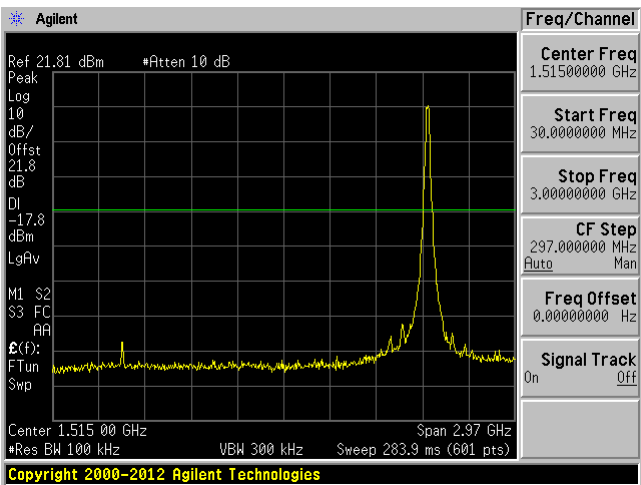


3GHz – 26GHz

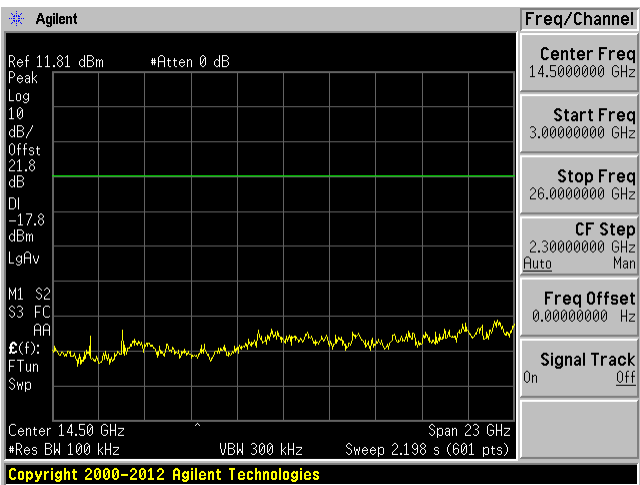



Antenna A High Channel 2462MHz

30MHz – 3GHz3GHz – 26GHz

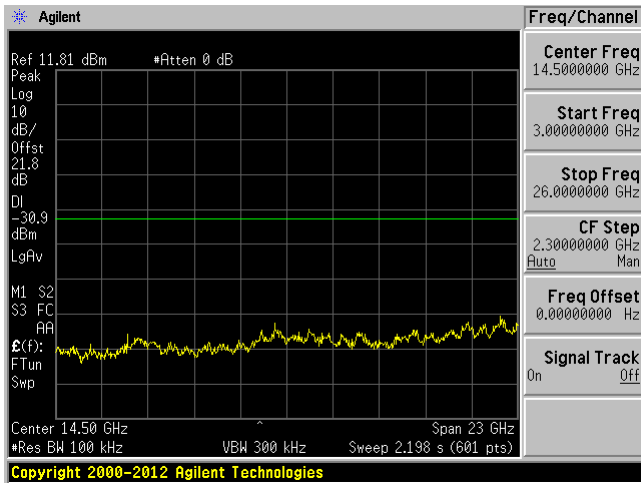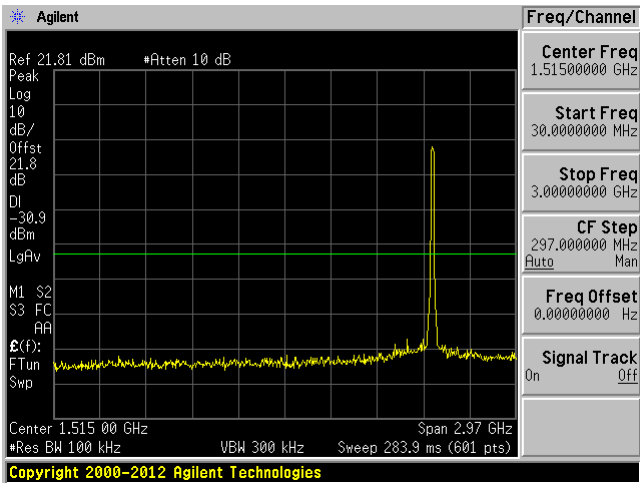



Antenna B Low Channel 2412MHz

30MHz – 3GHz3GHz – 26GHz

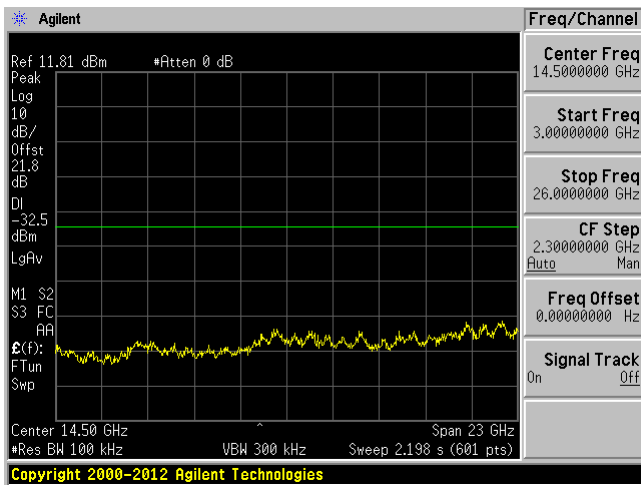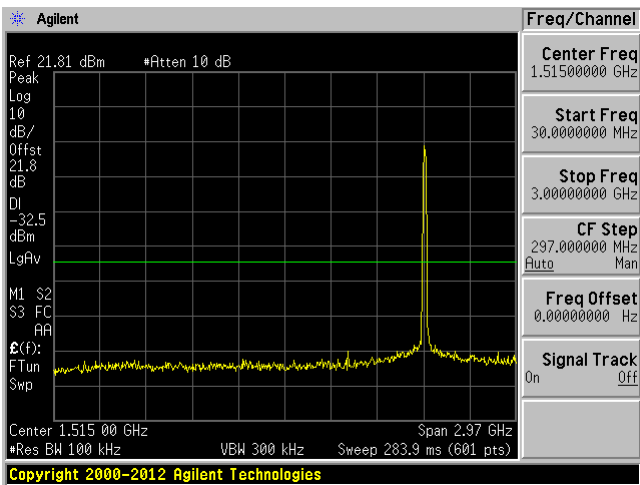



Antenna B Mid Channel 2437MHz

30MHz – 3GHz3GHz – 26GHz

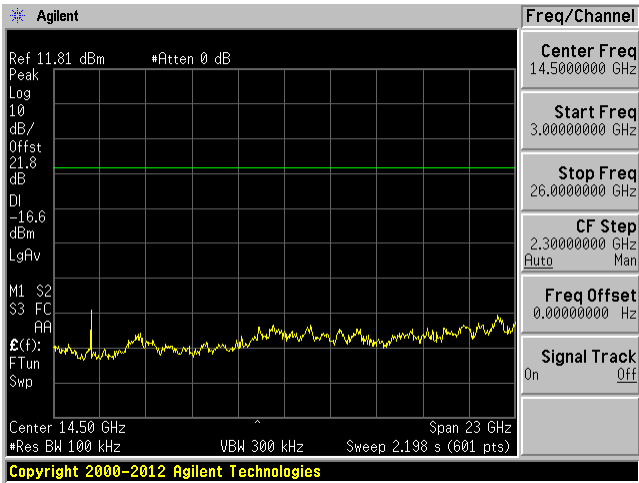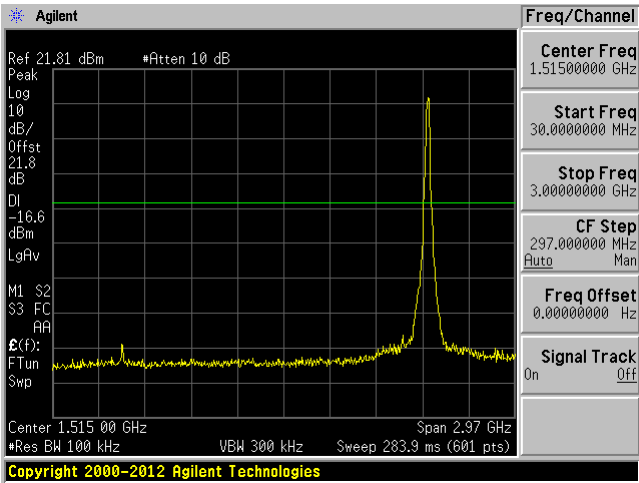

Antenna B High Channel 2462MHz

30MHz – 3GHz3GHz – 26GHz

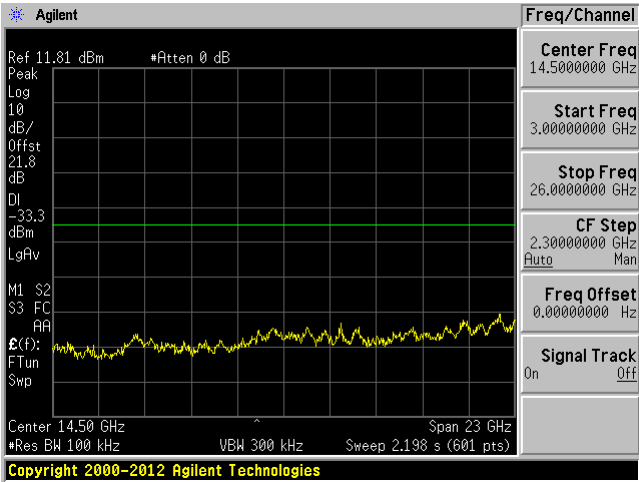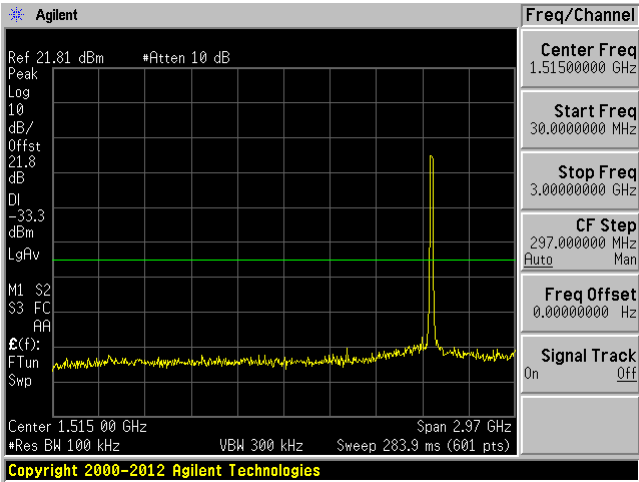

13 Annex A (Normative) – EUT Test Setup Photographs

Please refer to the attachment.

14 Annex B (Normative) – EUT External Photographs

Please refer to the attachment.

15 Annex C (Normative) – EUT Internal Photographs

Please refer to the attachment.

16 Annex D (Normative) - A2LA Electrical Testing Certificate**Accredited Laboratory**

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 2nd day of October 2018.

A blue ink signature of the Vice President, Accreditation Services.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2020
Revised June 5, 2019

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---