

# FCC Part 15 Subpart B&C §15.247

## Test Report

|                             |                                            |
|-----------------------------|--------------------------------------------|
| <b>Equipment Under Test</b> | <b>Bluetooth Mono Headset</b>              |
| <b>Model Name</b>           | <b>MF280</b>                               |
| <b>Applicant</b>            | <b>MOVON CORPORATION</b>                   |
| <b>FCC ID</b>               | <b>TDU-MF280</b>                           |
| <b>Manufacturer</b>         | <b>QINGDAO MOVON ELECTRONICS CO., LTD.</b> |
| <b>Date of Test(s)</b>      | <b>2011.07.20 ~ 2011.08.05</b>             |
| <b>Date of Issue</b>        | <b>2011.08.08.</b>                         |

In the configuration tested, the EUT complied with the standards specified above.

| <b>Issue to</b>                                                                                                                             | <b>Issue by</b>                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MOVON CORPORATION<br>Hyunjuk Bldg., 140-28,<br>Sanseong-dong, Gangnam-Gu,<br>Seoul, Korea<br>Tel.: +82 +2 2050 4670<br>Fax: +82 +2 539 5692 | MOVON CORPORATION<br>194-1, Geumeo-ri, Pogok-eup,<br>Cheoin-gu, Yongin-si, Gyeonggi-do,<br>Korea, 449-812<br>Tel.: +82 +31 338 8837<br>Fax: +82 +31 338 8847 |

### Revision history

| Revision | Date of issue      | Description                                                        | Revised by |
|----------|--------------------|--------------------------------------------------------------------|------------|
| --       | August. 8, 2011    | Initial                                                            | --         |
| 1        | August. 11, 2011   | Radiated emissions 3 orthogonal planes test added in page 10.13.20 | Issac Jin  |
| 2        | September. 6, 2011 | Conducted emission test added in page 41. 42. 43                   | Issac Jin  |

## **Table of contents**

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| 1. ATTESTATION OF TEST RESULTS.....                                               | 4  |
| 2. EUT DESCRIPTION.....                                                           | 5  |
| 3. INFORMATION ABOUT THE FHSS CHARACTERISTICS.....                                | 5  |
| 4. MEASUREMENT EQUIPMENT .....                                                    | 6  |
| 5. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS ..... | 7  |
| 7. 20 dB BANDWIDTH MEASUREMENT & 99 % BANDWIDTH MEASUREMENT.....                  | 21 |
| 8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....                                    | 26 |
| 9. HOPPING CHANNEL SEPARATION .....                                               | 30 |
| 10. NUMBER OF HOPPING FREQUENCY.....                                              | 32 |
| 11. TIME OF OCCUPANCY(DWELL TIME) .....                                           | 34 |
| 12. ANTENNA REQUIREMENT .....                                                     | 38 |
| 13. RF EXPOSURE EVALUATION .....                                                  | 39 |
| 14. CONDUCTED EMISSION.....                                                       | 41 |
| 15. TEST SETUP PHOTO OF EUT .....                                                 | 44 |

## 1. Attestation of test results

### 1.1. Details of applicant

Applicant : MOVON CORPORATON  
 Address : Hyunjuk Bldg., 140-28, Sanseong-dong, Gangnam-Gu, Seoul, Korea  
 Contact Person : Wood Park  
 Telephone : +82 +2 2050 4670  
 Fax : +82 +2 539 9666

### 1.2. Summary of test results


The EUT has been tested according to the following specifications;

| Section in FCC part 15              | Description                                                             | Result |
|-------------------------------------|-------------------------------------------------------------------------|--------|
| §15.205(a)<br>§15.209<br>§15.247(d) | Transmitter radiated spurious emissions,<br>Conducted spurious emission | C      |
| §15.109(a)                          | Receiver radiated spurious emission                                     | C      |
| §15.247(a)(1)                       | 20 dB bandwidth and 99 % bandwidth                                      | C      |
| §15.247(b)(1)                       | Maximum peak output power                                               | C      |
| §15.247(a)(1)                       | Frequency separation                                                    | C      |
| §15.247(a)(1)(iii)                  | Number of hopping frequency                                             | C      |
| §15.247(a)(1)(iii)                  | Time of occupancy(Dwell time)                                           | C      |
| §15.247(i)<br>§1.1307(b)(1)         | RF exposure evaluation                                                  | C      |

#### ※ Abbreviation

C Complied  
 N/A Not applicable  
 F Fail

#### Approval Signatories

| Test and Report Completed by :                                                      | Report Approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Issac Jin<br>Test Engineer<br>MOVON CORPORATION                                     | Tony Nam<br>Technical Manager<br>MOVON CORPORATION                                   |

## 2. EUT Description

|                      |                        |
|----------------------|------------------------|
| Kind of product      | Bluetooth Mono Headset |
| Model                | MF280                  |
| Serial Number        | N/A                    |
| Power supply         | DC 3.70 V              |
| Frequency range      | 2 402 MHz ~ 2 480 MHz  |
| Modulation technique | GFSK                   |
| Number of channels   | 79                     |
| Operating conditions | - 20 °C ~ + 55 °C      |
| Antenna gain         | 1.36 dBi(Max.)         |

### 2.1. Declarations by the manufacturer

The EUT does not do anything at charging mode (Power is turned off when it is charging)

### 2.2. Details of modification

None

## 3. Information about the FHSS characteristics

### 3.1. Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

### 3.2. Medium access protocol

The manufacturer declares that the device uses Bluetooth protocol.  
It confirmed that Medium access protocol is implemented.

### 3.3. Occupied hops while the equipment is operating

While the equipment is operating (transmitting and/or receiving) each channel of the hopping sequence is occupied at least once during four times the product of the dwell time per hop and the number of channels.

#### 4. Measurement equipment

| Equipment                 | Manufacturer | Model           | Calibration due. |
|---------------------------|--------------|-----------------|------------------|
| EMI Test Receiver         | R&S          | ESIB26          | 2011-12-27       |
| Signal Generator          | R&S          | SMR27           | 2011-12-27       |
| Spectrum Analyzer         | R&S          | FSV-40          | 2011-10-22       |
| Bluetooth Tester          | TESCON       | TC-3000B        | 2011-11-23       |
| Power Meter               | Agilent      | E4416A          | 2011-11-23       |
| Power Sensor              | Agilent      | 9327A           | 2011-11-23       |
| Double Redge Horn Antenna | R&S          | HF906           | 2012-12-17       |
| Horn Antenna              | A.H.SYSTEMS  | SAS-572         | 2011-09-14       |
| Ultra Broadband Antenna   | R&S          | HL562           | 2011-11-30       |
| Power Amplifier           | MITEQ        | AM-1431         | 2011-12-24       |
| Power Amplifier           | MITEQ        | AFS43-01002600  | 2011-12-24       |
| High Pass Filter          | Wainwright   | WHK3.0/18G-10SS | 2011-11-23       |
| DC Power Supply           | HP           | 6674A           | 2011-12-21       |
| Controller                | INNCO        | CO2000          | N/A              |
| Antenna Master            | INNCO        | MA4000          | N/A              |

#### ※ Remark;

#### Support equipment


| Description       | Manufacturer         | Model    | Serial number   |
|-------------------|----------------------|----------|-----------------|
| Notebook computer | Samsung Electronics. | SENS P30 | W3179RFX300144N |

## 5. Transmitter radiated spurious emissions and conducted spurious emissions


### 5.1. Test setup

#### 5.1.1. Transmitter radiated spurious emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

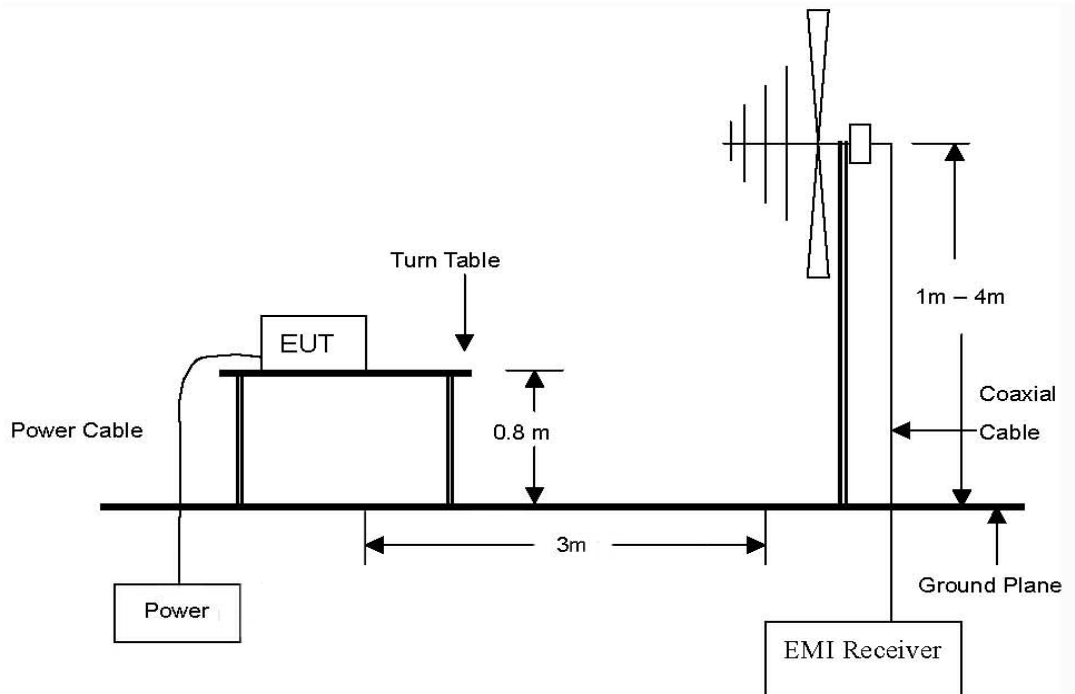

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

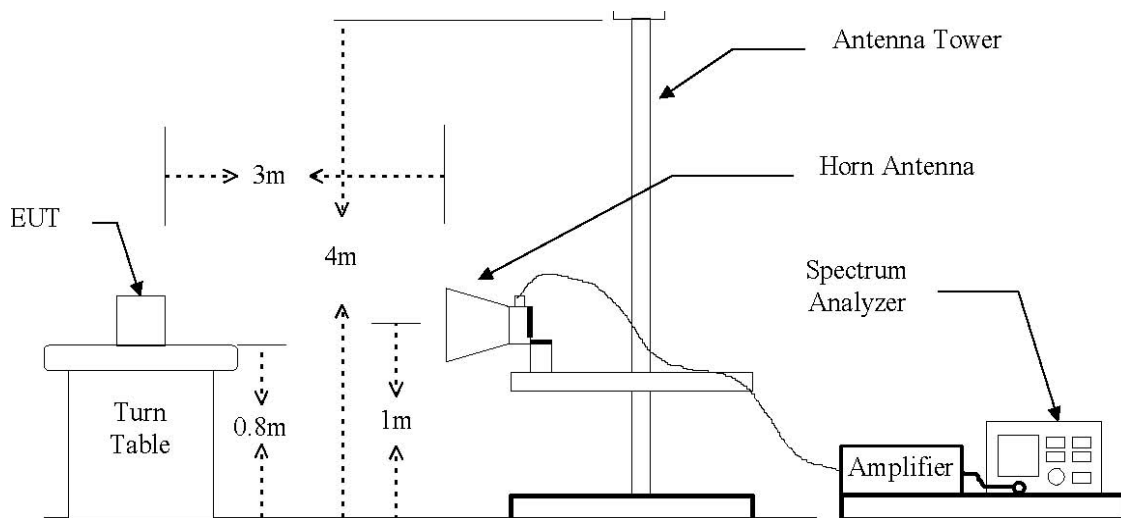

## 5.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.109(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency<br>(MHz) | Distance<br>(Meters) | Radiated<br>(dB $\mu$ V/m) | Radiated<br>( $\mu$ V/m) |
|--------------------|----------------------|----------------------------|--------------------------|
| 30 - 88            | 3                    | 40.0                       | 100                      |
| 88 – 216           | 3                    | 43.5                       | 150                      |
| 216 – 960          | 3                    | 46.0                       | 200                      |
| Above 960          | 3                    | 54.0                       | 500                      |

### 5.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

#### 5.3.1. Test procedures for radiated spurious emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### ※ Remark;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

#### 5.3.2. Test procedures for conducted spurious emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 100 kHz.

## 5.4. Test result

Ambient temperature: 23 °C

Relative humidity: 46 % R.H.

### 5.4.1. Spurious radiated emission

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 40 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

**Operation mode: GFSK**

**A. Low channel (2 402 MHz)**

| Radiated emissions |                |               | Ant. | Correction factors |               | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 37.70              | 47.31          | Peak          | V    | 17.56              | -40.24        | 24.63           | 40.00          | 15.37       |
| 93.90              | 44.58          | Peak          | V    | 11.36              | -40.08        | 15.86           | 43.50          | 27.64       |
| 105.10             | 47.42          | Peak          | V    | 11.61              | -40.04        | 18.99           | 43.50          | 24.51       |
| 364.80             | 46.45          | Peak          | H    | 14.05              | -38.50        | 22.00           | 46.00          | 24.00       |
| 648.40             | 43.10          | Peak          | V    | 19.44              | -37.68        | 24.85           | 46.00          | 21.15       |
| 809.79             | 52.81          | Peak          | V    | 20.76              | -37.94        | 35.63           | 46.00          | 10.37       |
| Above 960.00       | Not detected   |               |      |                    |               |                 |                |             |

## B. Middle channel (2 441 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 37.70              | 46.03                | Peak          | H    | 17.56              | -40.24        | 23.35                 | 40.00                | 16.65       |
| 93.90              | 42.98                | Peak          | H    | 11.36              | -40.08        | 14.26                 | 43.50                | 29.24       |
| 105.1              | 41.10                | Peak          | V    | 11.61              | -40.04        | 12.67                 | 43.50                | 30.83       |
| 364.80             | 45.21                | Peak          | H    | 14.05              | -38.50        | 20.76                 | 46.00                | 25.24       |
| 609.10             | 43.21                | Peak          | H    | 18.85              | -37.80        | 24.27                 | 46.00                | 21.73       |
| 809.79             | 50.93                | Peak          | V    | 20.76              | -37.94        | 33.75                 | 46.00                | 12.25       |
| Above 960.00       | Not detected         |               |      |                    |               |                       |                      |             |

**C. High channel (2 480 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 37.70              | 43.72                | Peak          | V    | 17.56              | -40.24        | 21.04                 | 40.00                | 18.96       |
| 93.90              | 42.95                | Peak          | V    | 11.36              | -40.08        | 14.23                 | 43.50                | 29.27       |
| 105.10             | 40.63                | Peak          | V    | 11.61              | -40.04        | 12.20                 | 43.50                | 31.30       |
| 366.20             | 45.63                | Peak          | H    | 14.10              | -38.49        | 21.24                 | 46.00                | 24.76       |
| 648.40             | 42.92                | Peak          | V    | 19.44              | -37.68        | 24.67                 | 46.00                | 21.33       |
| 809.79             | 50.89                | Peak          | V    | 20.76              | -37.94        | 33.71                 | 46.00                | 12.29       |
| Above 960.00       | Not detected         |               |      |                    |               |                       |                      |             |

**※ Remark**

- Actual = Reading + Ant. factor + Amp + CL (Cable loss)

### 5.4.2. Spurious radiated emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 40 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: GFSK

#### A. Low channel (2 402 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 390.00*          | 49.75                | Peak          | H    | 28.76              | -38.61        | 39.90                 | 74.00                | 34.10       |
| 2 390.00*          | 37.98                | Average       | H    | 28.76              | -38.61        | 28.13                 | 54.00                | 25.87       |
| 2 390.00*          | 49.57                | Peak          | V    | 28.76              | -38.61        | 39.72                 | 74.00                | 34.28       |
| 2 390.00*          | 38.08                | Average       | V    | 28.76              | -38.61        | 28.23                 | 54.00                | 25.77       |
| 4 804.00           | 62.13                | Peak          | H    | 32.82              | -35.65        | 59.30                 | 74.00                | 14.70       |
| 4 804.00           | 43.46                | Average       | H    | 32.82              | -35.65        | 40.63                 | 54.00                | 13.37       |
| 4 804.00           | 58.11                | Peak          | V    | 32.82              | -35.65        | 55.28                 | 74.00                | 18.72       |
| 4 804.00           | 41.24                | Average       | V    | 32.82              | -35.65        | 38.41                 | 54.00                | 15.59       |
| Above 4 900.00     | Not detected         |               |      |                    |               |                       |                      |             |

#### B. Middle channel (2 441 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 882.00           | 61.58                | Peak          | H    | 33.08              | -35.58        | 59.08                 | 74.00                | 14.92       |
| 4 882.00           | 43.24                | Average       | H    | 33.08              | -35.58        | 40.74                 | 54.00                | 13.26       |
| 4 882.00           | 57.22                | Peak          | V    | 33.08              | -35.58        | 54.72                 | 74.00                | 19.28       |
| 4 882.00           | 41.04                | Average       | V    | 33.08              | -35.58        | 38.54                 | 54.00                | 15.46       |
| Above 4 900.00     | Not detected         |               |      |                    |               |                       |                      |             |

### C. High channel (2 480 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 483.50*          | 48.92                | Peak          | H    | 29.09              | -38.58        | 39.43                 | 74.00                | 34.57       |
| 2 483.50*          | 37.45                | Average       | H    | 29.09              | -38.58        | 27.96                 | 54.00                | 26.04       |
| 2 483.50*          | 50.39                | Peak          | V    | 29.09              | -38.58        | 40.90                 | 74.00                | 33.10       |
| 2 483.50*          | 38.28                | Average       | V    | 29.09              | -38.58        | 28.79                 | 54.00                | 25.21       |
| 4 960.00           | 61.72                | Peak          | H    | 33.33              | -35.52        | 59.53                 | 74.00                | 14.47       |
| 4 960.00           | 44.94                | Average       | H    | 33.33              | -35.52        | 42.75                 | 54.00                | 11.25       |
| 4 960.00           | 56.32                | Peak          | V    | 33.33              | -35.52        | 54.13                 | 74.00                | 19.87       |
| 4 960.00           | 42.56                | Average       | V    | 33.33              | -35.52        | 40.37                 | 54.00                | 13.63       |
| Above 5 000.00     | Not detected         |               |      |                    |               |                       |                      |             |



#### ※ Remark

1. "\*" means the restricted band.
2. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. Actual = Reading + Ant. factor + Amp + CL (Cable loss)



### 5.4.3. Spurious RF conducted emissions: Plot of spurious RF conducted emission

Operation mode: GFSK



#### A. Low channel (2 402 MHz)

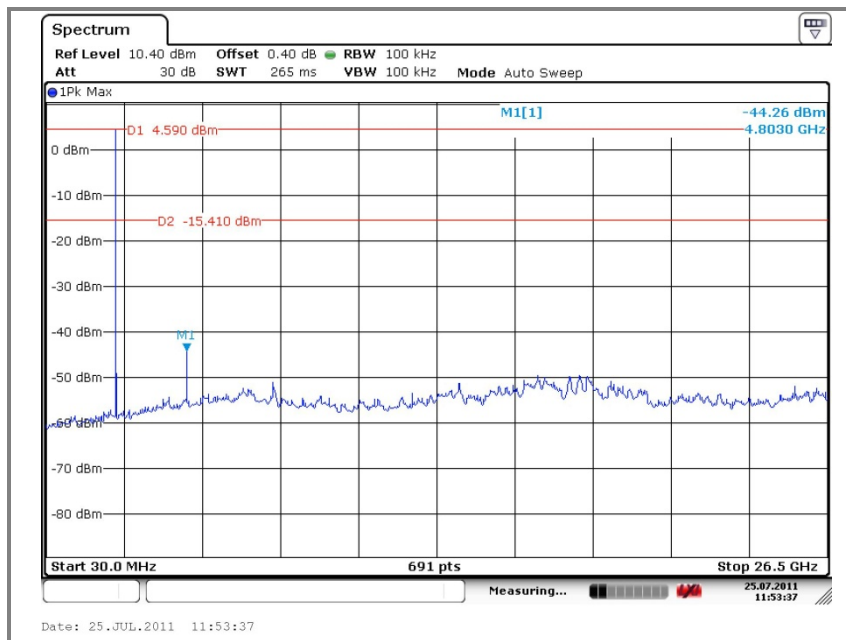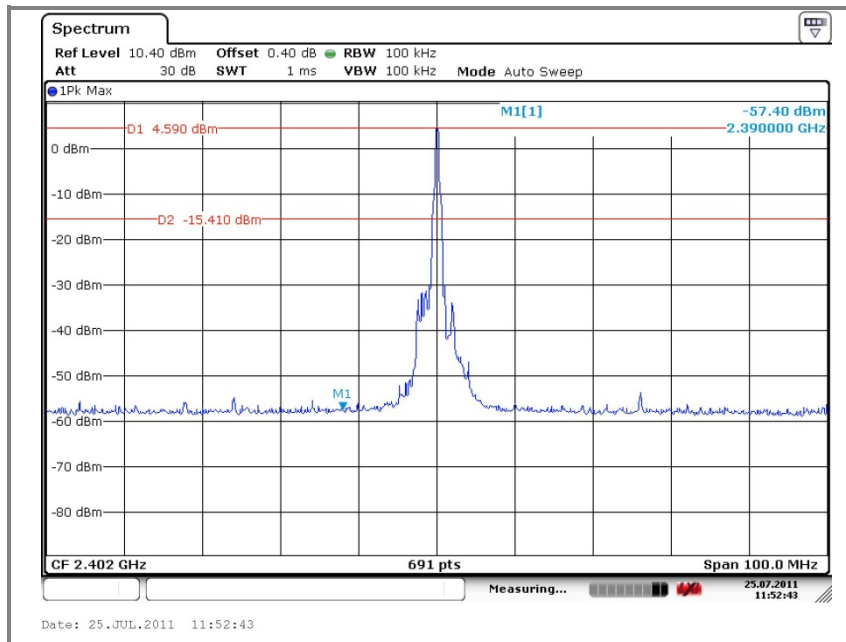


## B. Middle channel (2 441 MHz)

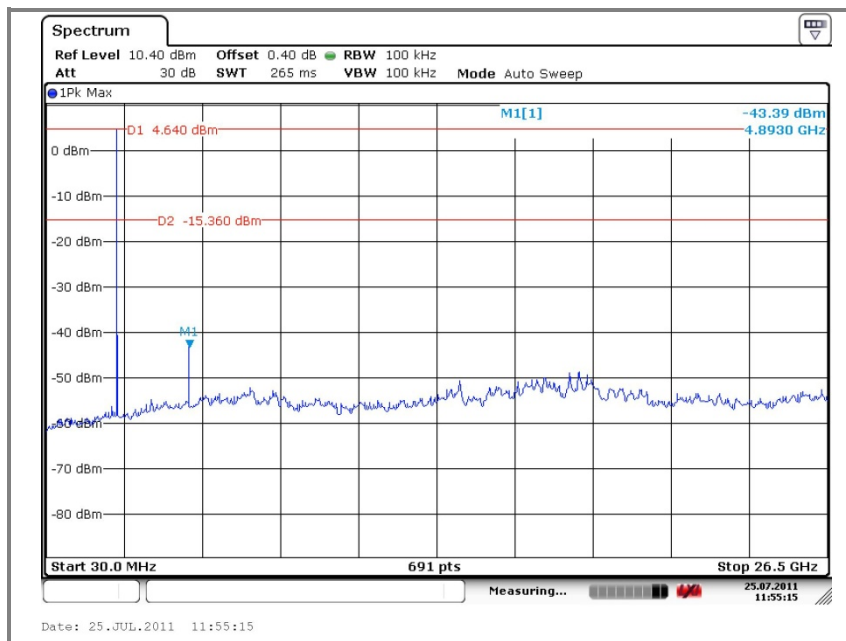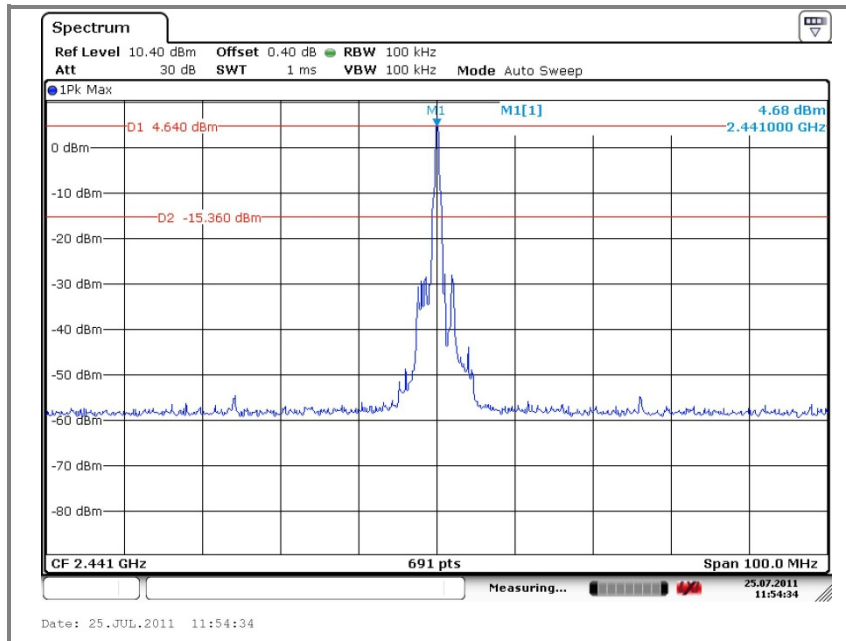

### C. High channel (2 480 MHz)

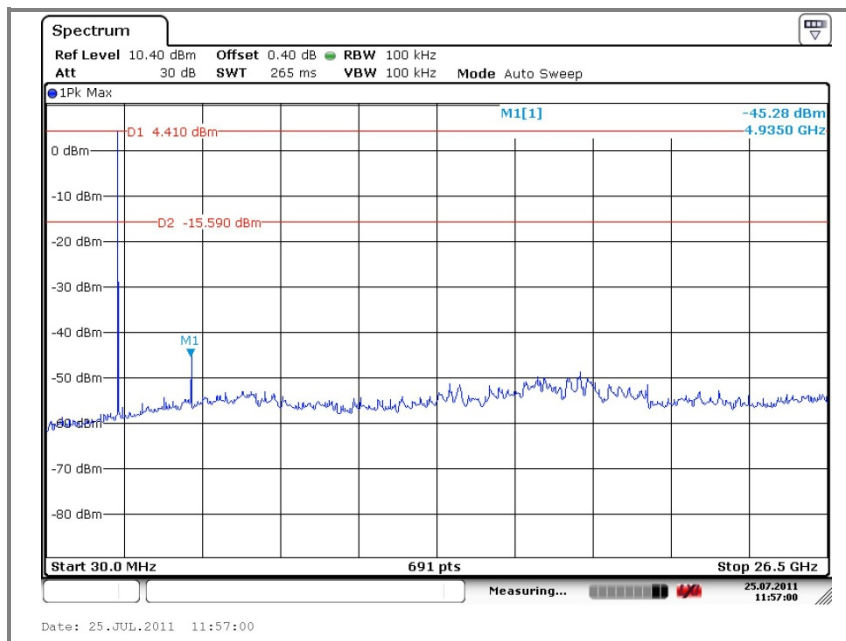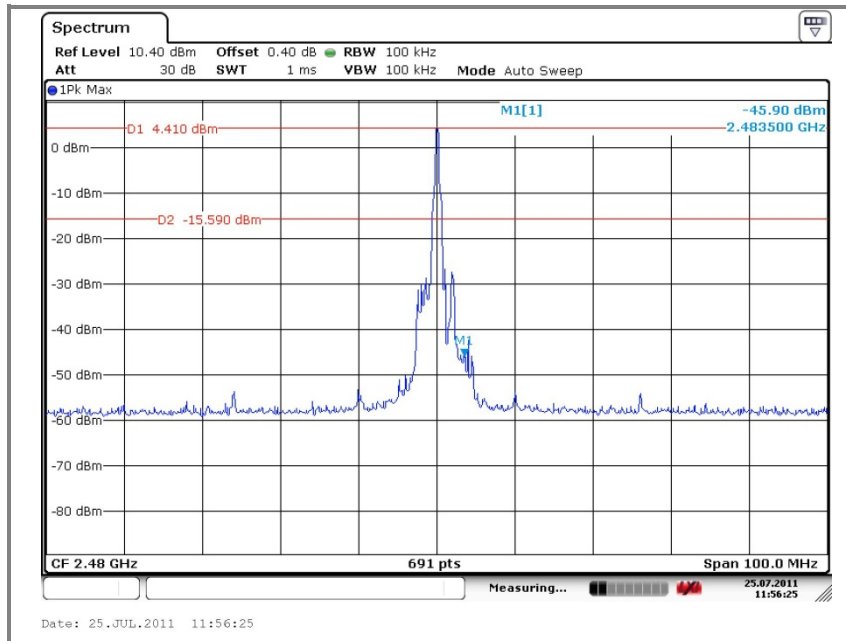

## D. Band edge at hopping mode

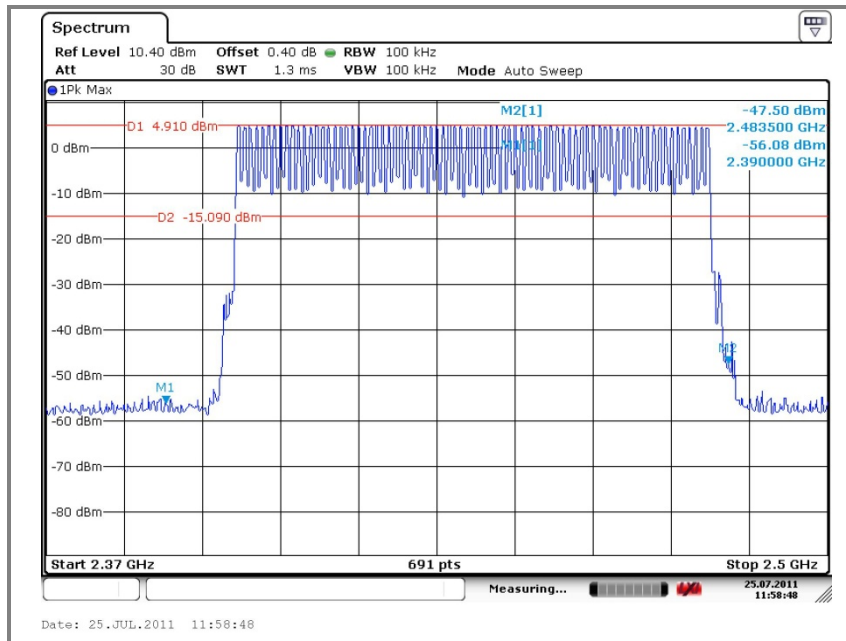

**6. Receiver radiated spurious emissions****6.1. Test setup**

Same as clause 5.1.

**6.1.1. Receiver radiated spurious emissions**

Same as clause 5.1.1

**6.2. Limit**

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

| Frequency<br>(MHz) | Distance<br>(Meters) | Radiated<br>(dB $\mu$ V/m) | Radiated<br>( $\mu$ V/m) |
|--------------------|----------------------|----------------------------|--------------------------|
| 30 - 88            | 3                    | 40.0                       | 100                      |
| 88 – 216           | 3                    | 43.5                       | 150                      |
| 216 – 960          | 3                    | 46.0                       | 200                      |
| Above 960          | 3                    | 54.0                       | 500                      |

**6.3. Test procedures**

Same as clause 2.3.

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

**6.3.1. Test procedures for radiated spurious emissions**

Same as Clause 5.3.1.

## 6.4. Test results

Ambient temperature: 23 °C

Relative humidity: 46 % R.H.

### 6.4.1. Spurious radiated emission.

The frequency spectrum from 30 MHz to 26.5 GHz was investigated. Emission levels are not reported much lower than the limits by over 40 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: GFSK

#### A. Low channel (2 402 MHz)


| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 134.60             | 36.77                | Peak          | H    | 10.56              | -39.97        | 7.36                  | 43.50                | 36.14       |
| 194.90             | 36.42                | Peak          | H    | 9.78               | -39.75        | 6.45                  | 43.50                | 37.05       |
| 371.80             | 45.14                | Peak          | H    | 14.33              | -38.48        | 20.99                 | 46.00                | 25.01       |
| 443.40             | 37.87                | Peak          | H    | 16.78              | -38.32        | 16.33                 | 46.00                | 29.67       |
| 545.90             | 36.49                | Peak          | H    | 18.08              | -37.95        | 16.63                 | 46.00                | 29.37       |
| 648.36             | 37.10                | Peak          | H    | 19.44              | -37.68        | 18.85                 | 46.00                | 27.15       |
| Above 960.00       | Not detected         |               |      |                    |               |                       |                      |             |

#### ※ Remark:

1. All spurious emission at channels are almost the same from 30 MHz to 26.5 GHz, so that the low channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Amp + CL (Cable loss)

## 7. 20 dB bandwidth measurement & 99 % bandwidth measurement

### 7.1. Test setup



### 7.2. Limit

Not applicable

### 7.3. Test procedure

1. The 20 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 10 kHz, VBW = 10 kHz, Span = 5 MHz.

#### 7.4. Test results



Ambient temperature: 23 °C

Relative humidity: 46 % R.H.



| Operation mode | Frequency(MHz) | 20 dB bandwidth(MHz) | 99 % bandwidth(MHz) |
|----------------|----------------|----------------------|---------------------|
| GFSK           | 2 402          | 0.948                | 0.861               |
|                | 2 441          | 0.948                | 0.876               |
|                | 2 480          | 0.948                | 0.876               |

Operation mode: GFSK



A. Low channel (2 402 MHz) – 20 dB bandwidth & 99 % bandwidth

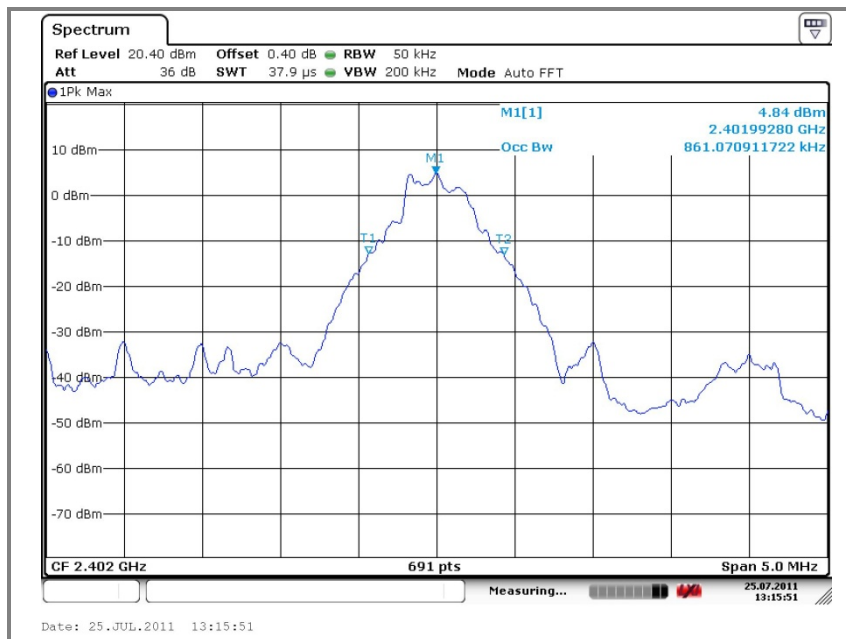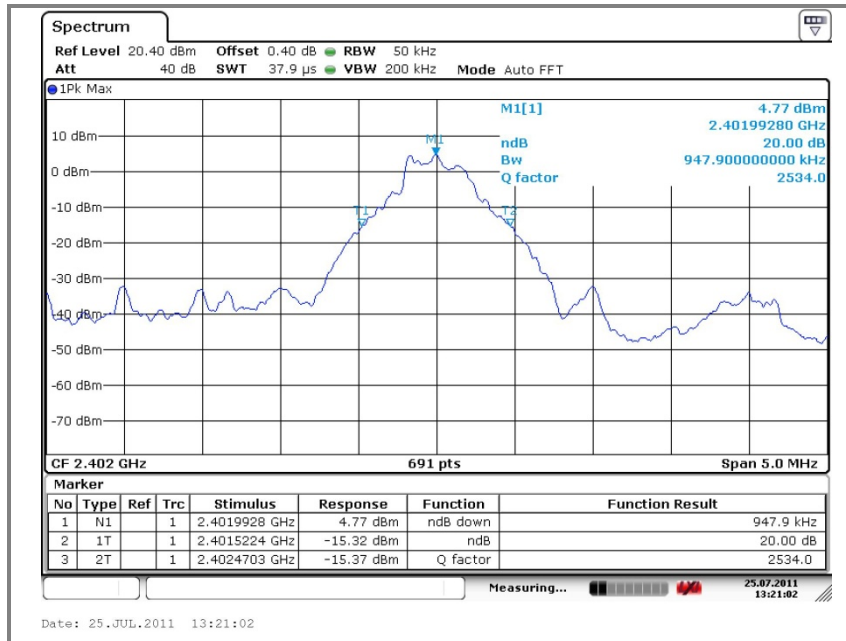

## B. Middle channel (2 441 MHz) – 20 dB bandwidth & 99 % bandwidth

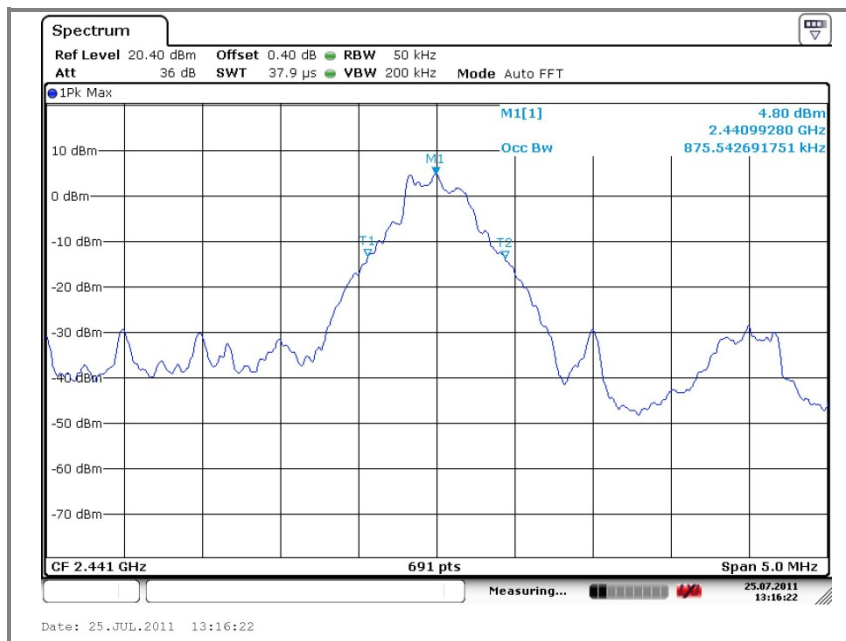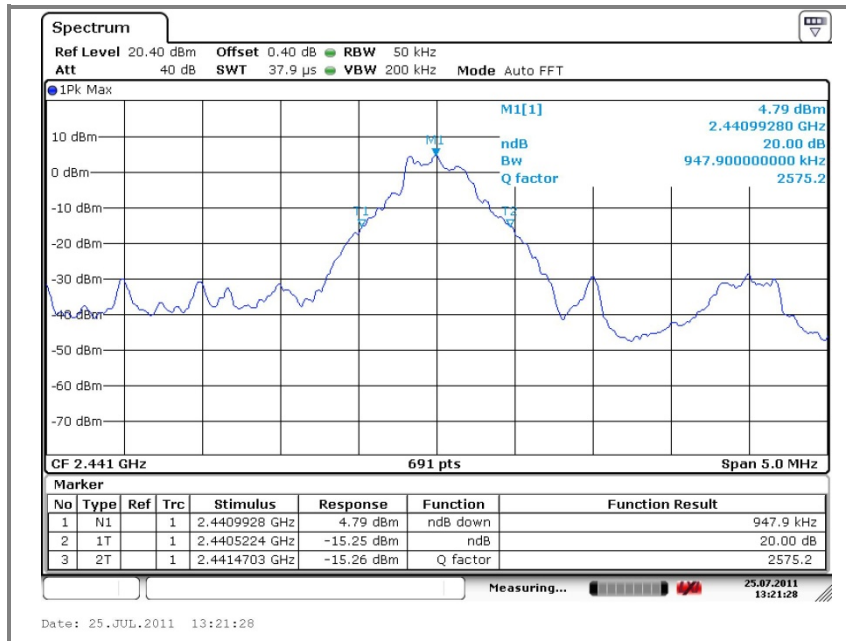


C. High channel (2 480 MHz) – 20 dB bandwidth & 99 % bandwidth

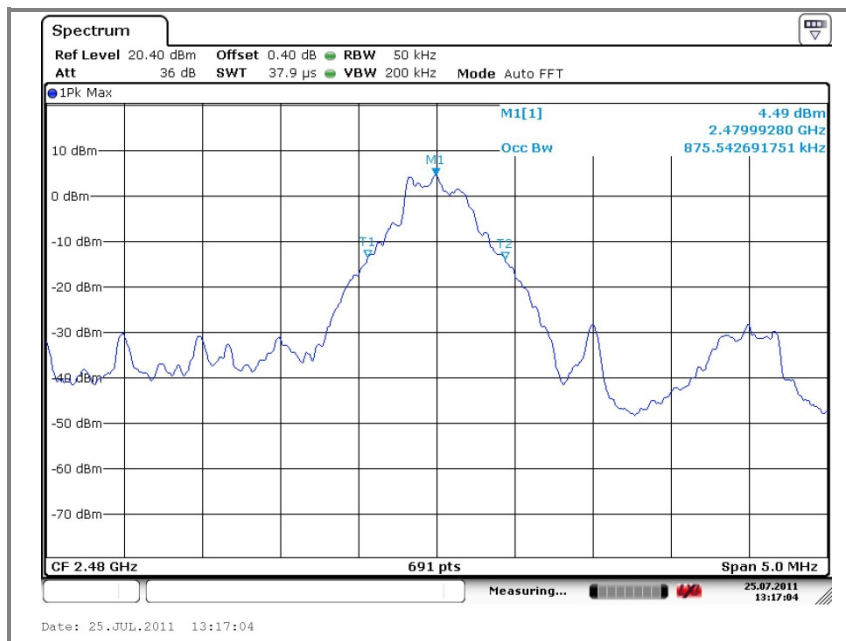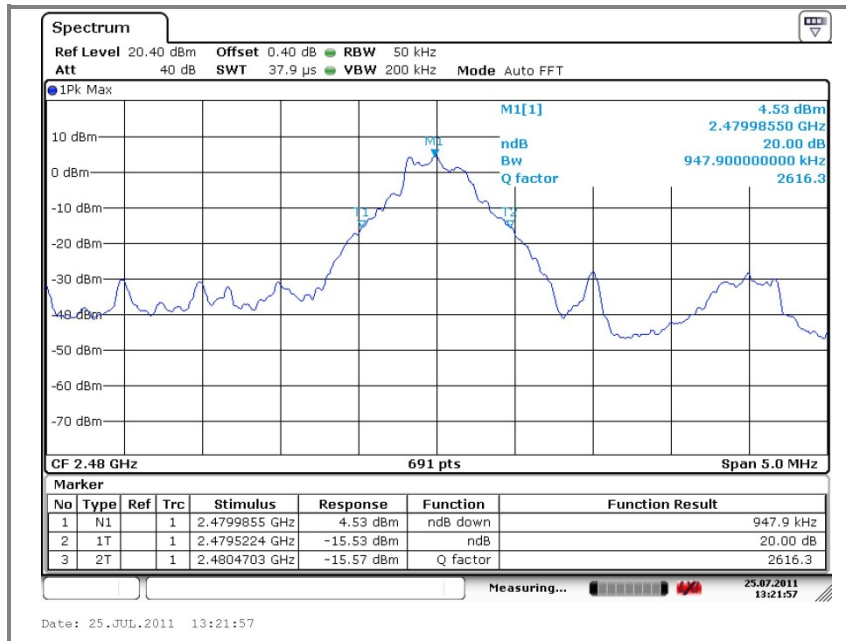

## 8. Maximum peak output power measurement

### 8.1. Test setup.



### 8.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

### 8.3. Test procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using;  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW ≥ 20 dB BW, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold

#### 8.4. Test results


Ambient temperature: 23 °C

Relative humidity: 46 % R.H.


| Operation mode | Frequency(MHz) | Peak output power(dBm) | Limit(dBm) |
|----------------|----------------|------------------------|------------|
| GFSK           | 2 402          | 4.91                   | 30         |
|                | 2 441          | 4.97                   | 30         |
|                | 2 480          | 4.70                   | 30         |

Operation mode: GFSK


### A. Low channel (2 402 MHz)

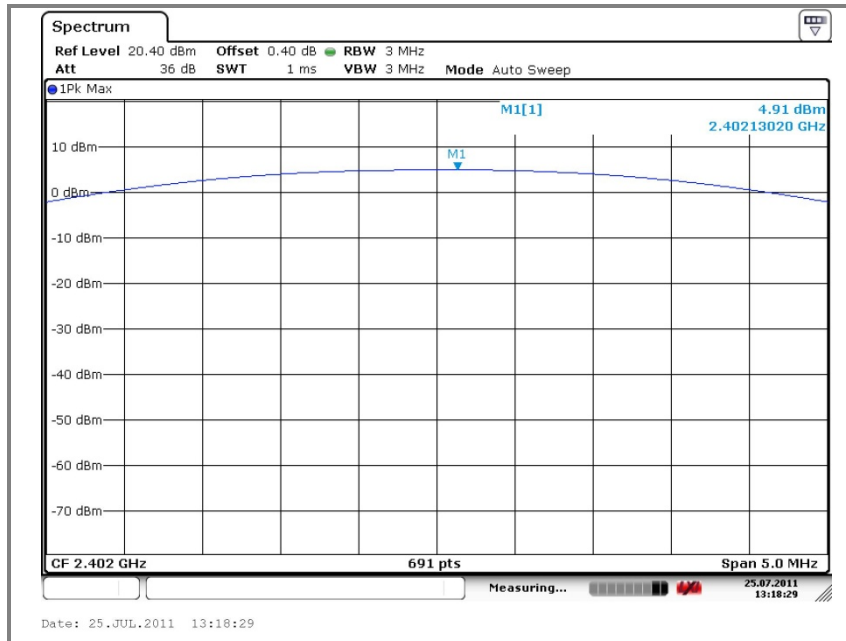

### B. Middle channel (2 441 MHz)

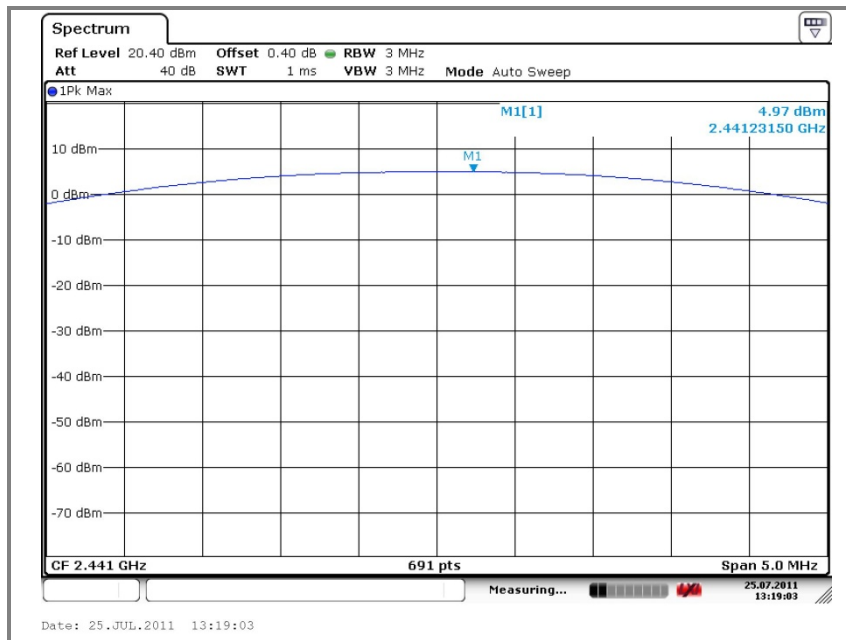


### C. High channel (2 480 MHz)

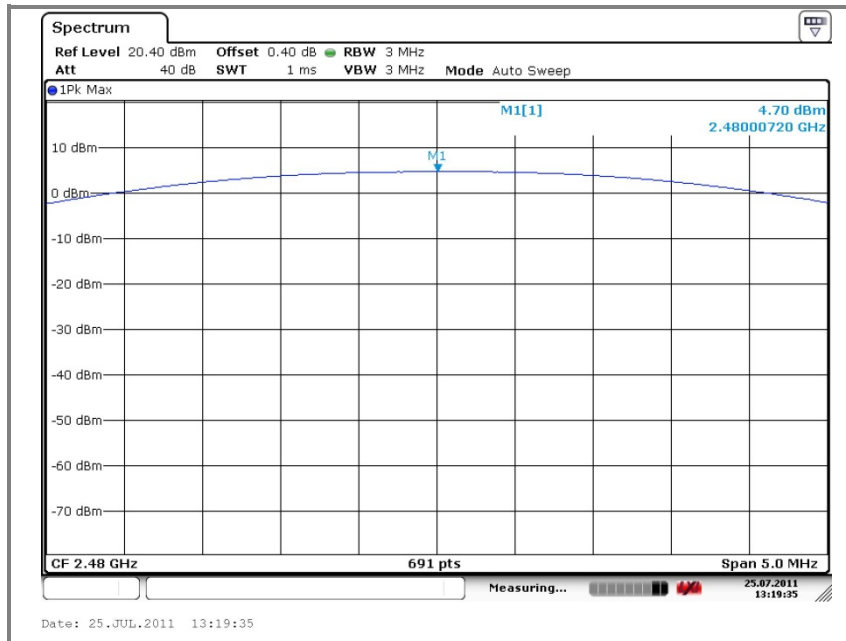

## 9. Hopping channel separation

### 9.1. Test setup



### 9.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2 400 – 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 9.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the max hold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer mark function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW = 100 kHz, VBW = 100 kHz, Span = 5 MHz and Sweep = auto.

## 9.4. Test results


Ambient temperature: 23 °C  
Relative humidity: 46 % R.H.

| Operation mode | Frequency (MHz) | Adjacent hopping Channel separation (kHz) | Two-third of 20 dB bandwidth (kHz) | Minimum bandwidth (kHz) |
|----------------|-----------------|-------------------------------------------|------------------------------------|-------------------------|
| GFSK           | 2 441           | 1 000                                     | 632                                | 25                      |

### ※ Remark:


20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20 dB bandwidth or Minimum bandwidth.

Operation mode : GFSK

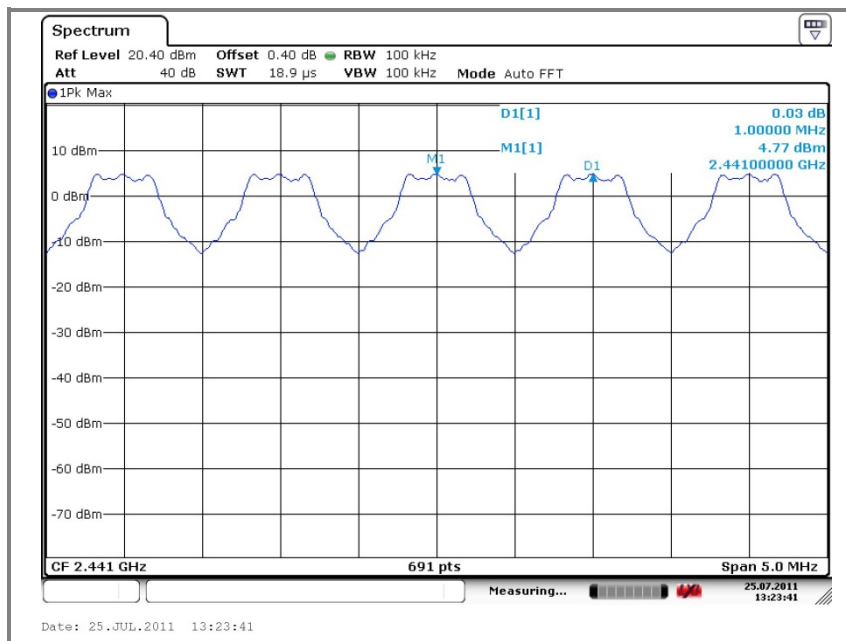

## 10. Number of hopping frequency

### 10.1. Test setup



### 10.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2 400 - 2 483.5 MHz bands shall use at least 15 hopping frequencies.

### 10.3. Test procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
3. Set spectrum analyzer Start = 2 400 MHz, Stop = 2 441.5 MHz, Sweep = auto and Start = 2 441.5 MHz, Stop = 2 483.5 MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW = 300 kHz.
5. Max hold, view and count how many channel in the band.



### 10.4. Test results


Ambient temperature: 23 °C

Relative humidity: 46 % R.H.

| Operation mode | Number of Hopping Frequency | Limit |
|----------------|-----------------------------|-------|
| GFSK           | 79                          | ≥ 15  |

Operation mode: GFSK

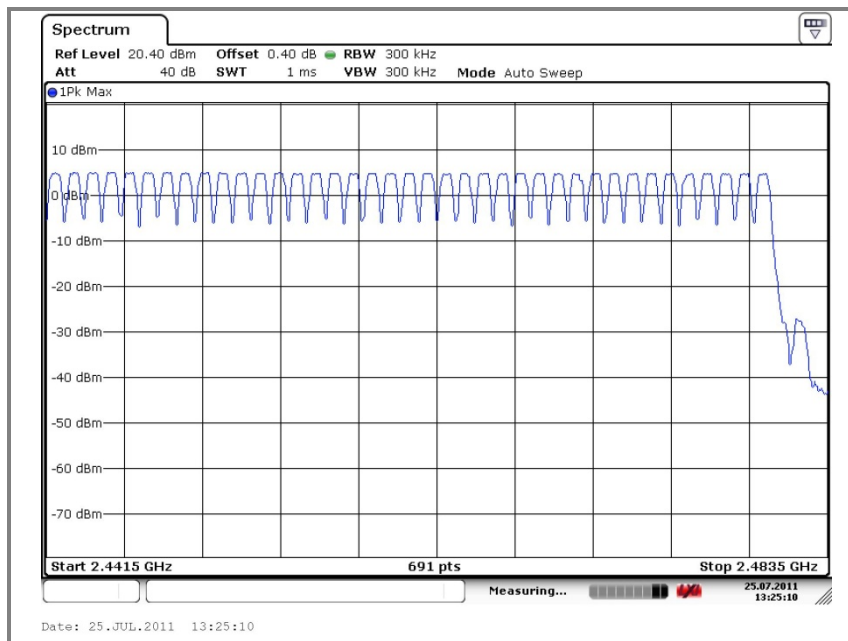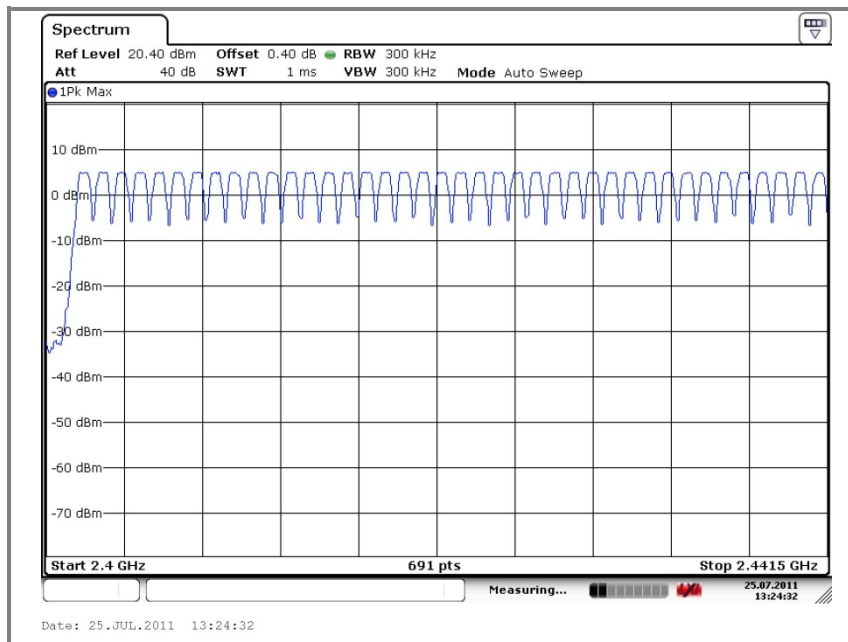

**11. Time of occupancy(Dwell time)****11.1. Test setup****11.2. Limit**

§15.247(a)(1)(iii) For frequency hopping system operating in the 2 400 – 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time = 0.4(s) \* 79 = 31.6(s)

**11.3. Test procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth has 6 type of payload, DH1, DH3, DH5. The hopping rate is 1 600 per second.

#### 11.4. Test results

Ambient temperature: 23 °C

Relative humidity: 46 % R.H.

Time of occupancy on the TX channel in 31.6 sec

= time domain slot length × (hop rate ÷ number of hop per channel) × 31.6

Operation mode: GFSK

| Packet type | Frequency (MHz) | Dwell Time (ms) | Time of occupancy on the Tx channel in 31.6 sec (ms) | Limit for time of occupancy on the Tx Channel in 31.6 sec (ms) |
|-------------|-----------------|-----------------|------------------------------------------------------|----------------------------------------------------------------|
| DH1         | 2 441           | 0.391           | 125.12                                               | 400                                                            |
| DH3         | 2 441           | 1.652           | 264.32                                               | 400                                                            |
| DH5         | 2 441           | 2.891           | 308.37                                               | 400                                                            |

※ Remark:


DH1:  $0.391 \text{ (ms)} \times [(1\ 600 \div 2) \div 79] \times 31.6 \text{ (s)} = 125.12 \text{ (ms)}$

DH3:  $1.652 \text{ (ms)} \times [(1\ 600 \div 4) \div 79] \times 31.6 \text{ (s)} = 264.32 \text{ (ms)}$


DH5:  $2.891 \text{ (ms)} \times [(1\ 600 \div 6) \div 79] \times 31.6 \text{ (s)} = 308.37 \text{ (ms)}$

Operation mode: GFSK


### A. DH1

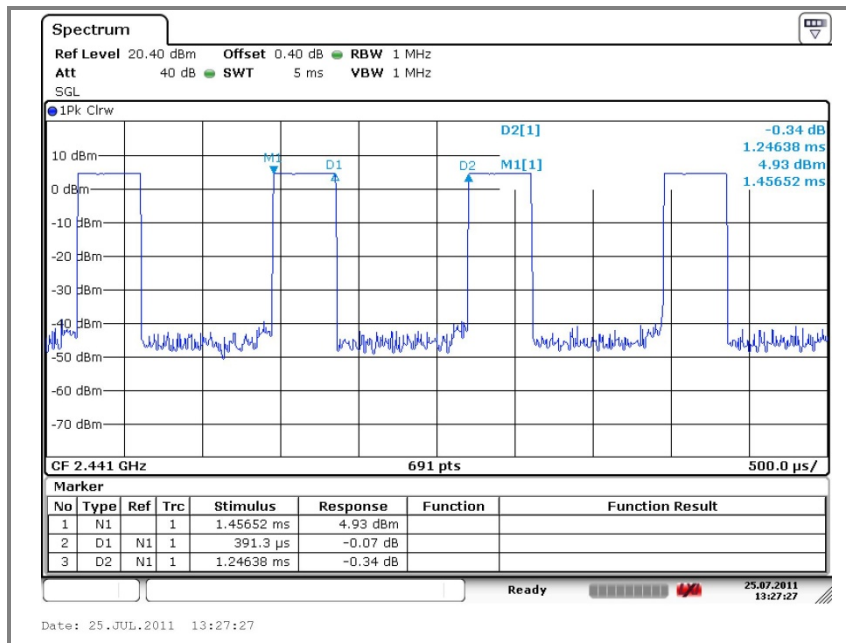

### B. DH3

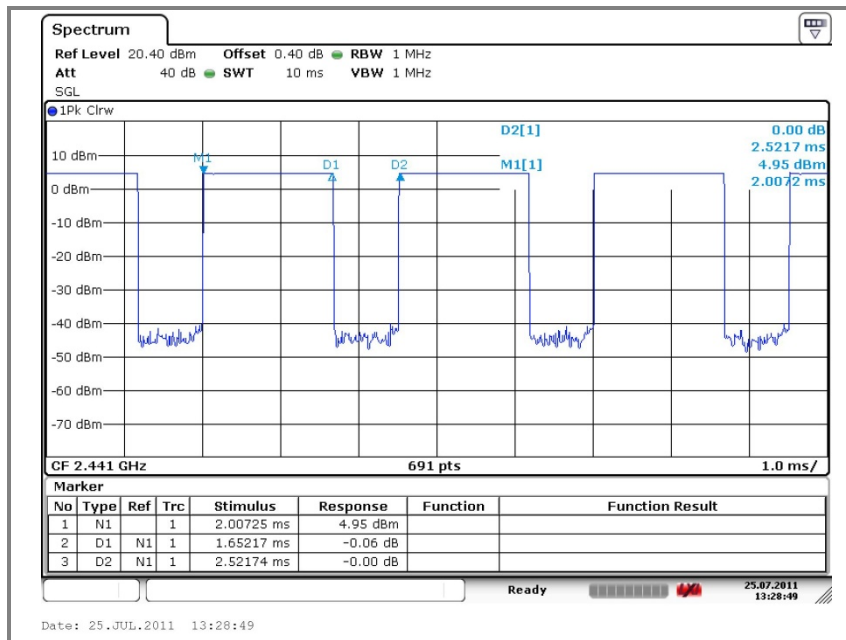

C. DH5

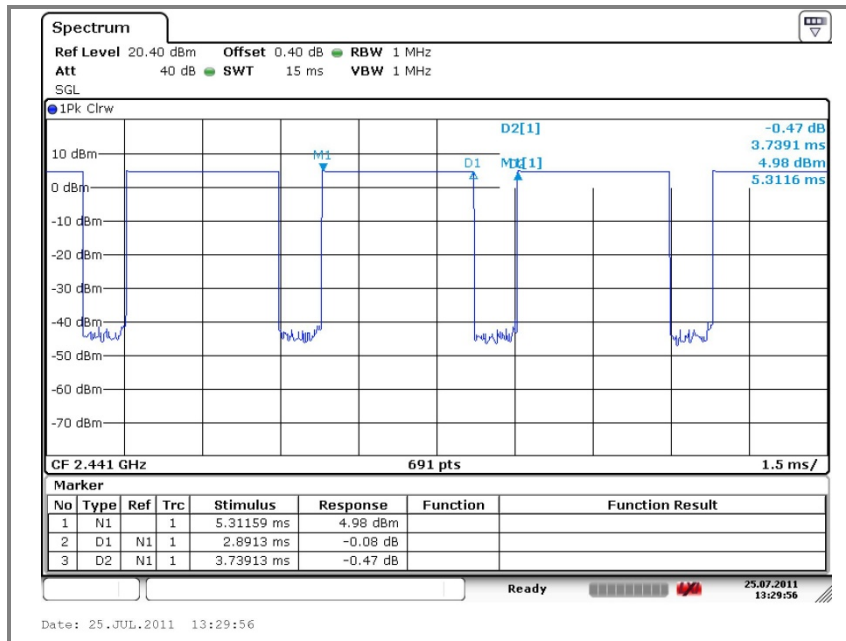

## **12. Antenna requirement**

### **12.1. Standard Applicable**

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi.

### **12.2. Antenna Connected Construction**

Antenna used in this product is Integral type (Chip Antenna) gain of 1.36 dBi.

### 13. RF exposure evaluation

#### 13.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b)

##### Limits for maximum permissible exposure (MPE)

| Frequency range<br>(MHz)                                | Electric field<br>strength(V/m) | Magnetic field<br>strength (A/m) | Power density<br>(mW/cm <sup>2</sup> ) | Average time |
|---------------------------------------------------------|---------------------------------|----------------------------------|----------------------------------------|--------------|
| (A) Limits for Occupational / Control exposures         |                                 |                                  |                                        |              |
| 300 – 1 500                                             | --                              | --                               | F/300                                  | 6            |
| 1 500 – 100 000                                         | --                              | --                               | 5                                      | 6            |
| (B) Limits for General Population / Uncontrol Exposures |                                 |                                  |                                        |              |
| 300 – 1 500                                             | --                              | --                               | F/1 500                                | 6            |
| <u>1 500 – 100 000</u>                                  | --                              | --                               | <u>1</u>                               | <u>30</u>    |

#### 13.2. Friis transmission formula

$$Pd = (P_{out} \times G) / (4 \times \pi \times R^2)$$

Where Pd = power density in mW/cm<sup>2</sup>

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.141 6

R = distance between observation point and center of the radiator in cm

Pd the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 13.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

### 13.4. Output power into antenna & RF exposure evaluation distance


| Operating mode | Frequency (MHz) | Output average power to antenna (dBm) | Antenna gain (dBi) | Power density at 20 cm (mW/cm <sup>2</sup> ) | Limit (mW/cm <sup>2</sup> ) |
|----------------|-----------------|---------------------------------------|--------------------|----------------------------------------------|-----------------------------|
| GFSK           | 2 402           | 0.20                                  | 1.36               | 0.000 29                                     | 1                           |
|                | 2 441           | 0.24                                  | 1.36               | 0.000 29                                     |                             |
|                | 2 480           | -0.09                                 | 1.36               | 0.000 27                                     |                             |

#### ※ Remark

The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup> .

## 14. Conducted Emission

### 14.1. Test setup

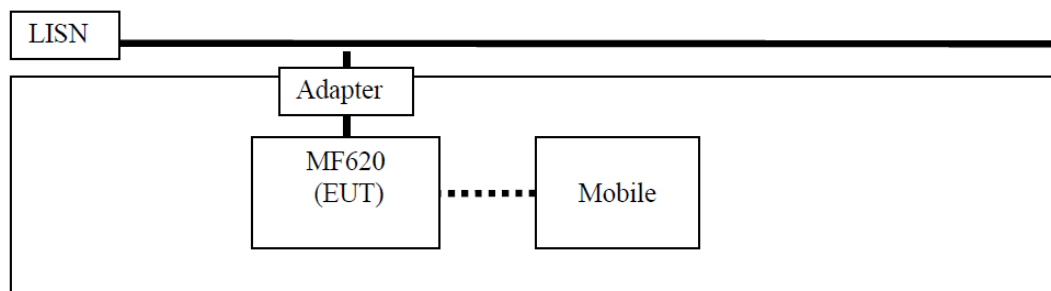

### 14.2. Limit

| Frequency of emission<br>(MHz) | Conducted limit<br>(dB $\mu$ V) |           |
|--------------------------------|---------------------------------|-----------|
|                                | Quasi-Peak                      | Average   |
| 0.15 – 0.5                     | 66 to 56*                       | 56 to 46* |
| 0.5 – 5                        | 56                              | 46        |
| 5 – 30                         | 60                              | 50        |

\* Decreases with the logarithm of frequency.

### 14.3. Test procedure

Conducted emissions measurements were made in accordance with section 11. "Measurement of Information Technology Equipment" of ANSI C63.3-2009. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 $\Omega$ /50uH LISN as the input transducer to a spectrum Analyzer or a Field Intensity Meter. The measurements were made with detector set for "peak" amplitude within a bandwidth of 10kHz or for "quasi-peak" within a bandwidth of 9kHz.

## 14.4. Test results

Ambient temperature: 23 °C


Relative humidity: 46 % R.H.

### Test mode: L Line

| Frequency (MHz) | Line | Level (dB $\mu$ V) |         | Limit (dB $\mu$ V) |         | Margin (dB $\mu$ V) |         |
|-----------------|------|--------------------|---------|--------------------|---------|---------------------|---------|
|                 |      | Q-Peak             | Average | Q-Peak             | Average | Q-Peak              | Average |
| 0.366           | L1   | 37.02              | 20.09   | 58.60              | 48.60   | 21.58               | 28.51   |
| 0.568           | L1   | 29.01              | 17.74   | 56.00              | 46.00   | 26.99               | 28.26   |
| 0.708           | L1   | 25.68              | 25.09   | 56.00              | 46.00   | 30.32               | 20.91   |

### ※ Remark:

Margin = Limit - Level

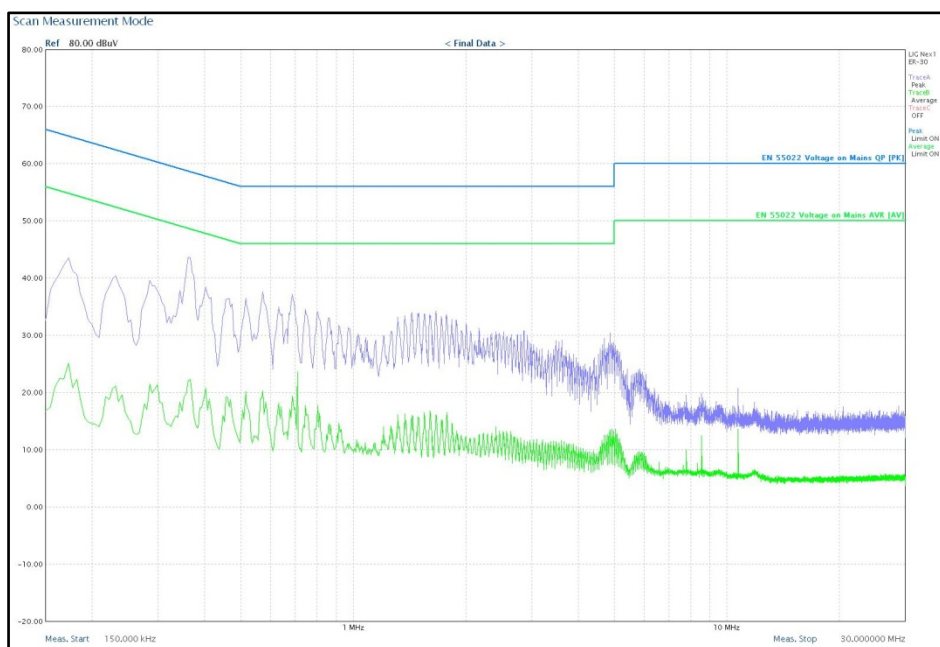


**Test mode: N Line**

| Frequency (MHz) | Line | Level (dB $\mu$ V) |         | Limit (dB $\mu$ V) |         | Margin (dB $\mu$ V) |         |
|-----------------|------|--------------------|---------|--------------------|---------|---------------------|---------|
|                 |      | Q-Peak             | Average | Q-Peak             | Average | Q-Peak              | Average |
| 0.366           | N    | 37.45              | 26.29   | 58.60              | 48.60   | 21.15               | 22.31   |
| 0.573           | N    | 33.11              | 21.46   | 56.00              | 46.00   | 22.89               | 24.54   |
| 0.708           | N    | 28.34              | 24.68   | 56.00              | 46.00   | 27.66               | 21.32   |

**※ Remark:**

Margin = Limit - Level

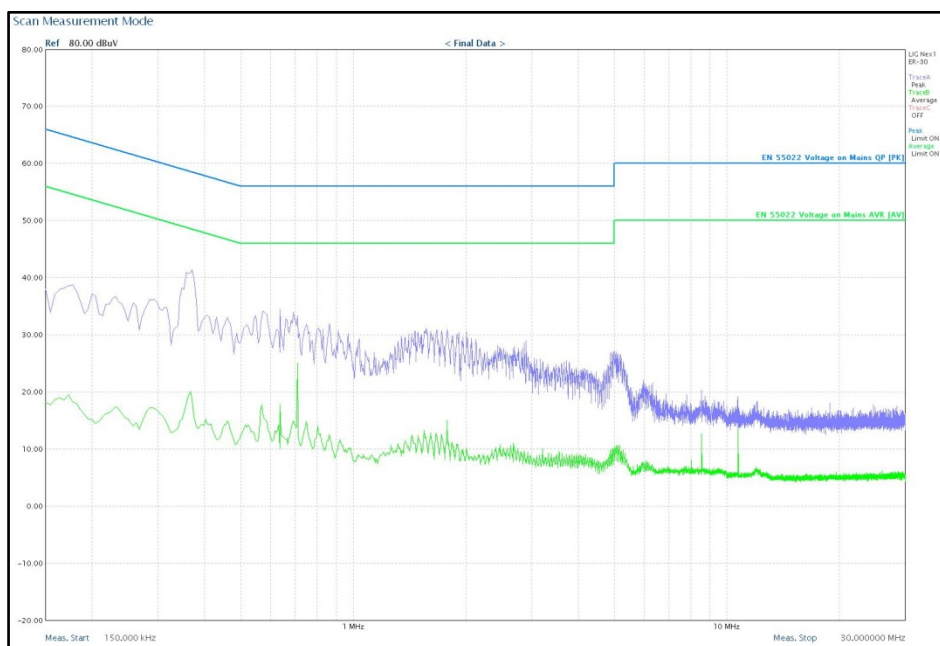

**15. Test setup photo of EUT****Photo of radiated spurious emission**