



802.11ac-VHT40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 38 (5190MHz)

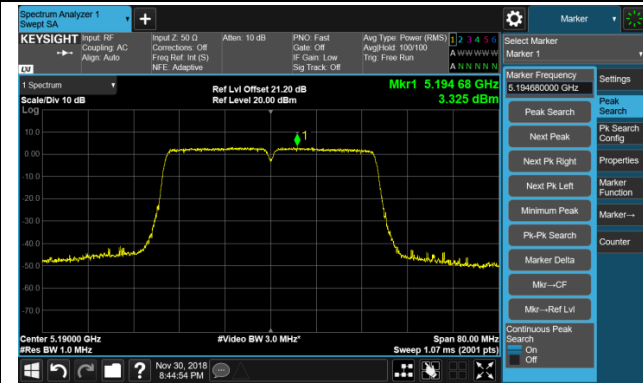


Channel 46 (5230MHz)

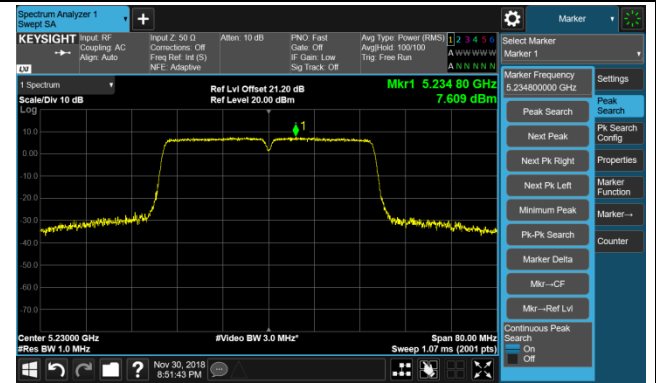


Channel 54 (5270MHz)




Channel 62 (5310MHz)

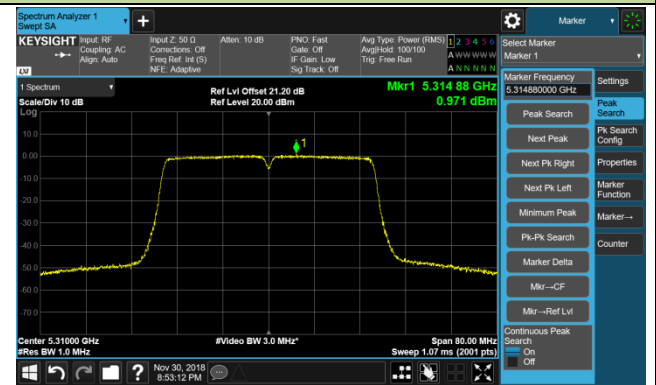


Channel 102 (5510MHz)

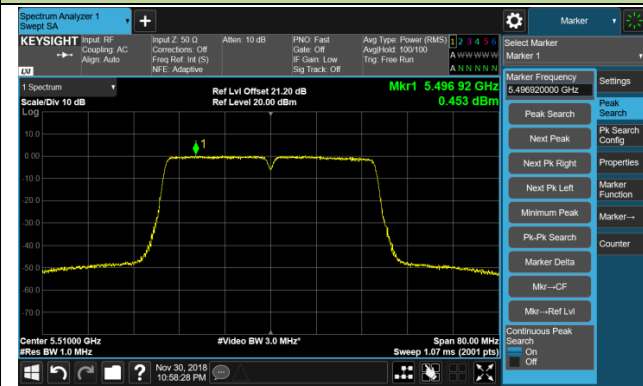


Channel 118 (5590MHz)

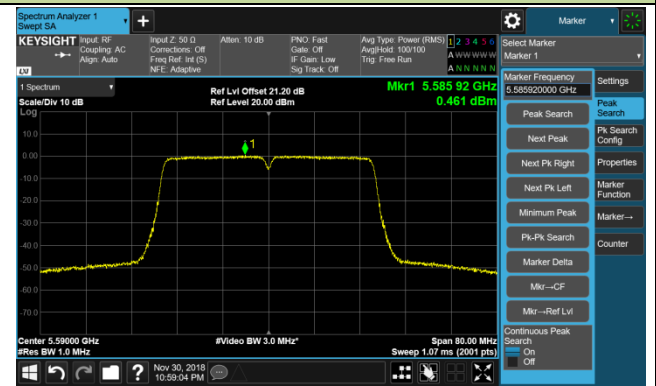

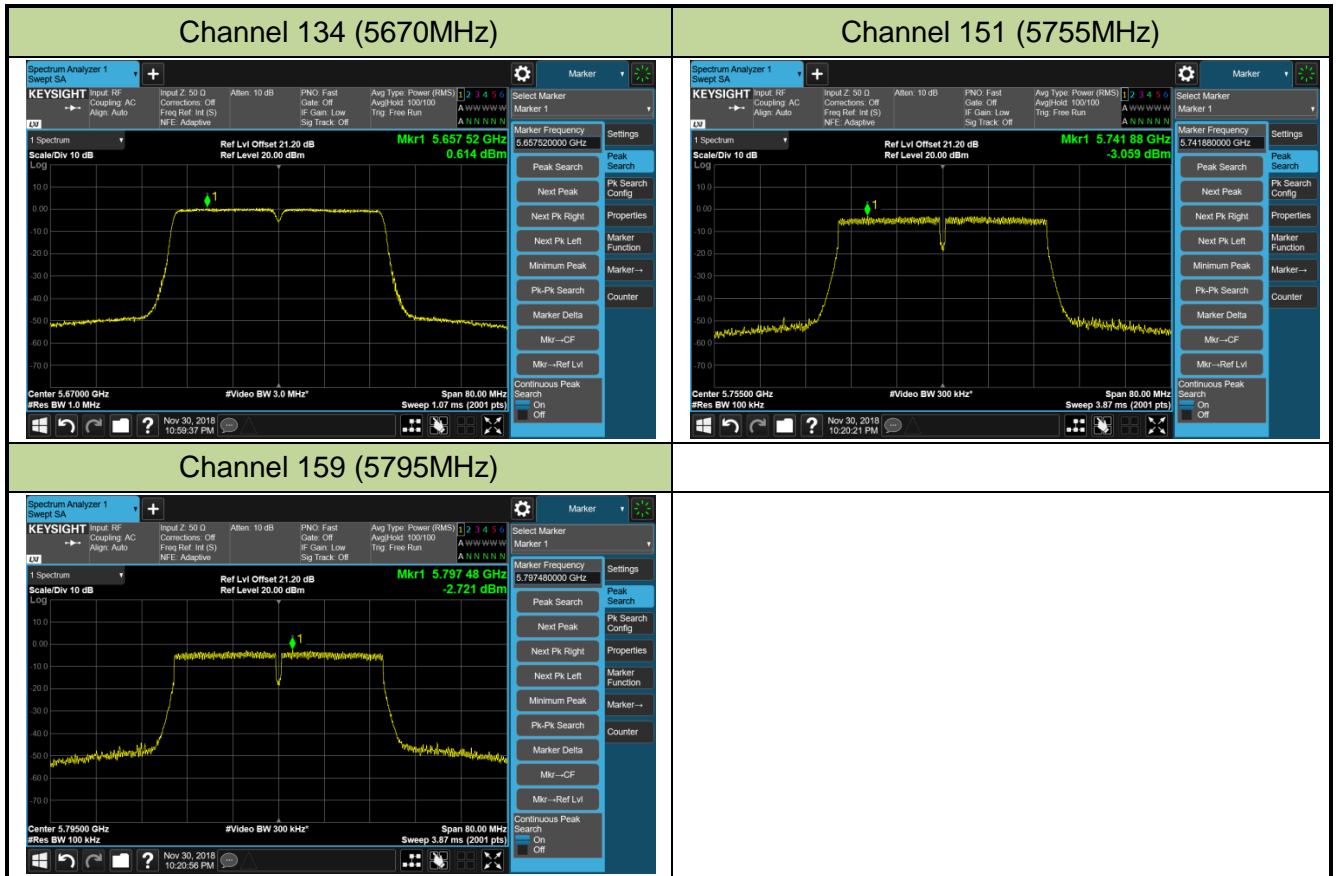


802.11ac-VHT80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 42 (5210MHz)

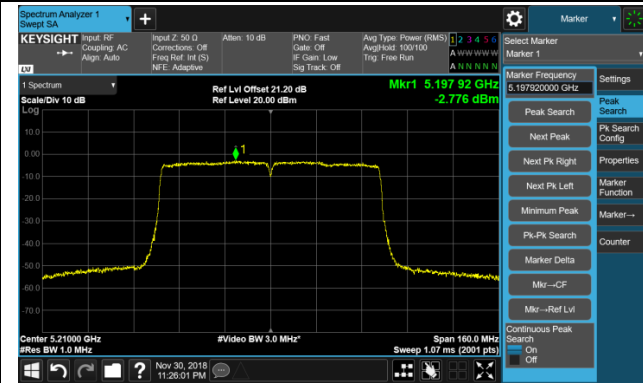


Channel 58 (5290MHz)

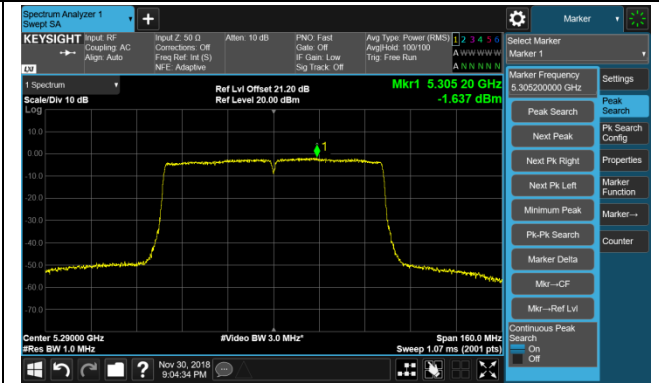


Channel 106 (5530MHz)

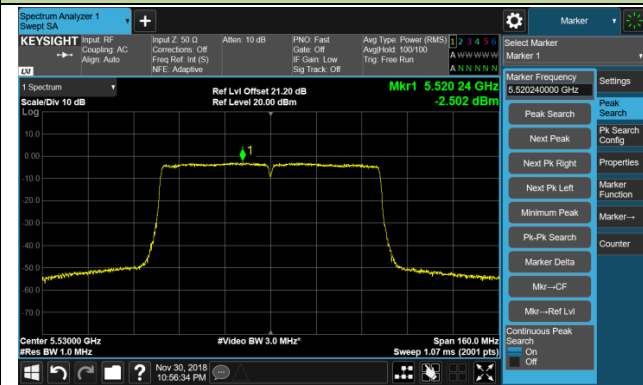

Channel 122 (5610MHz)

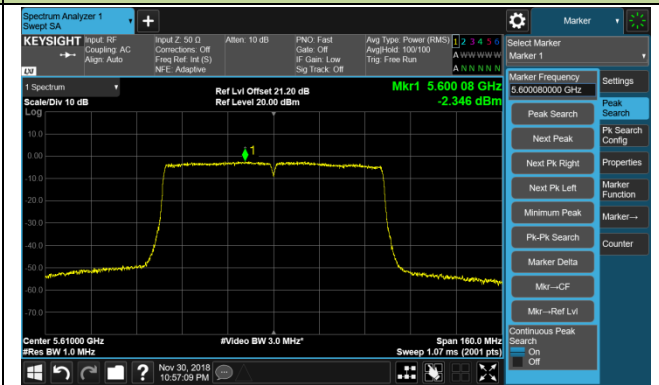

Channel 155 (5775MHz)

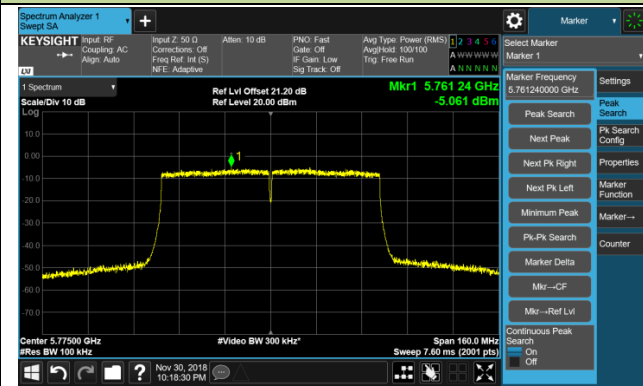


802.11ac-VHT160 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 50 (5250MHz)




Channel 114 (5570MHz)

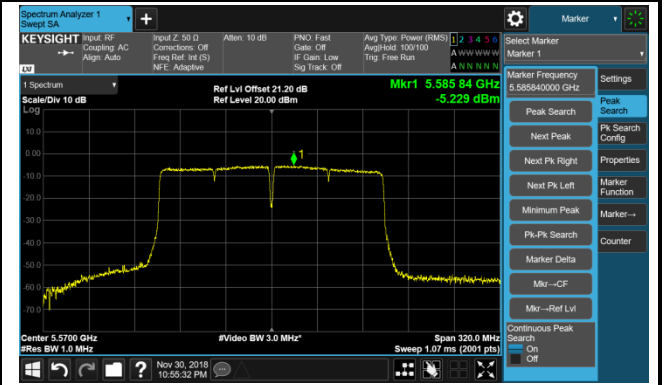


802.11ax-HE20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 36 (5180MHz)

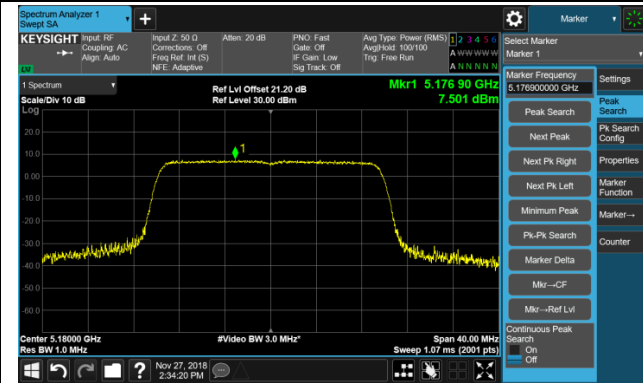


Channel 44 (5220MHz)

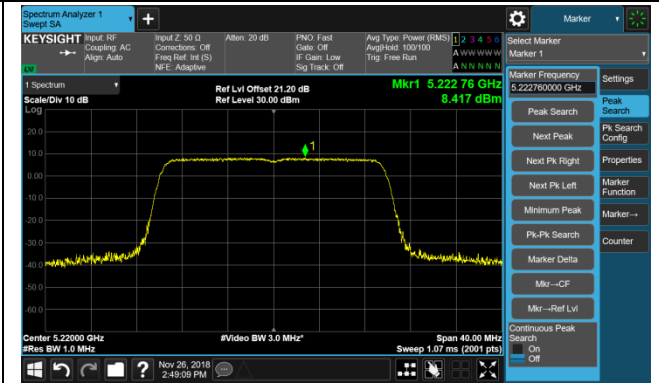


Channel 48 (5240MHz)



Channel 52 (5260MHz)

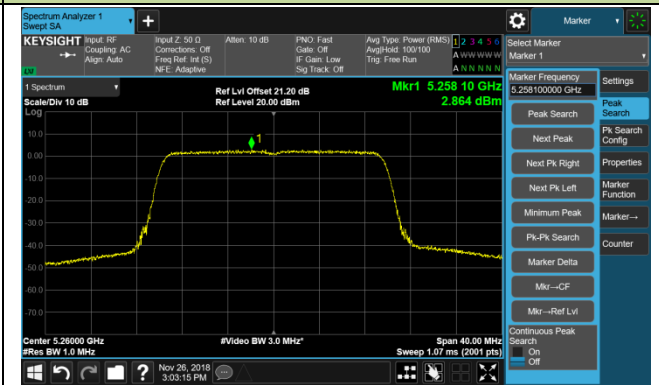


Channel 60 (5300MHz)

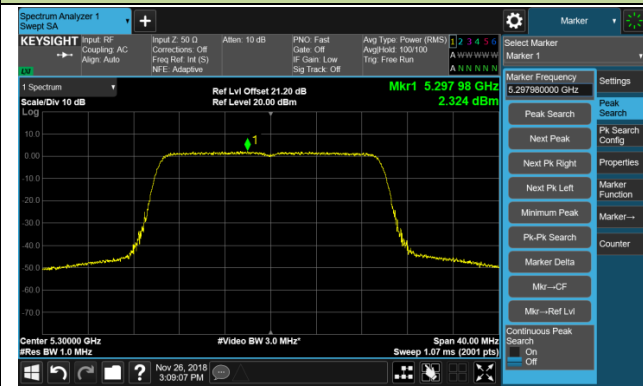


Channel 64 (5320MHz)



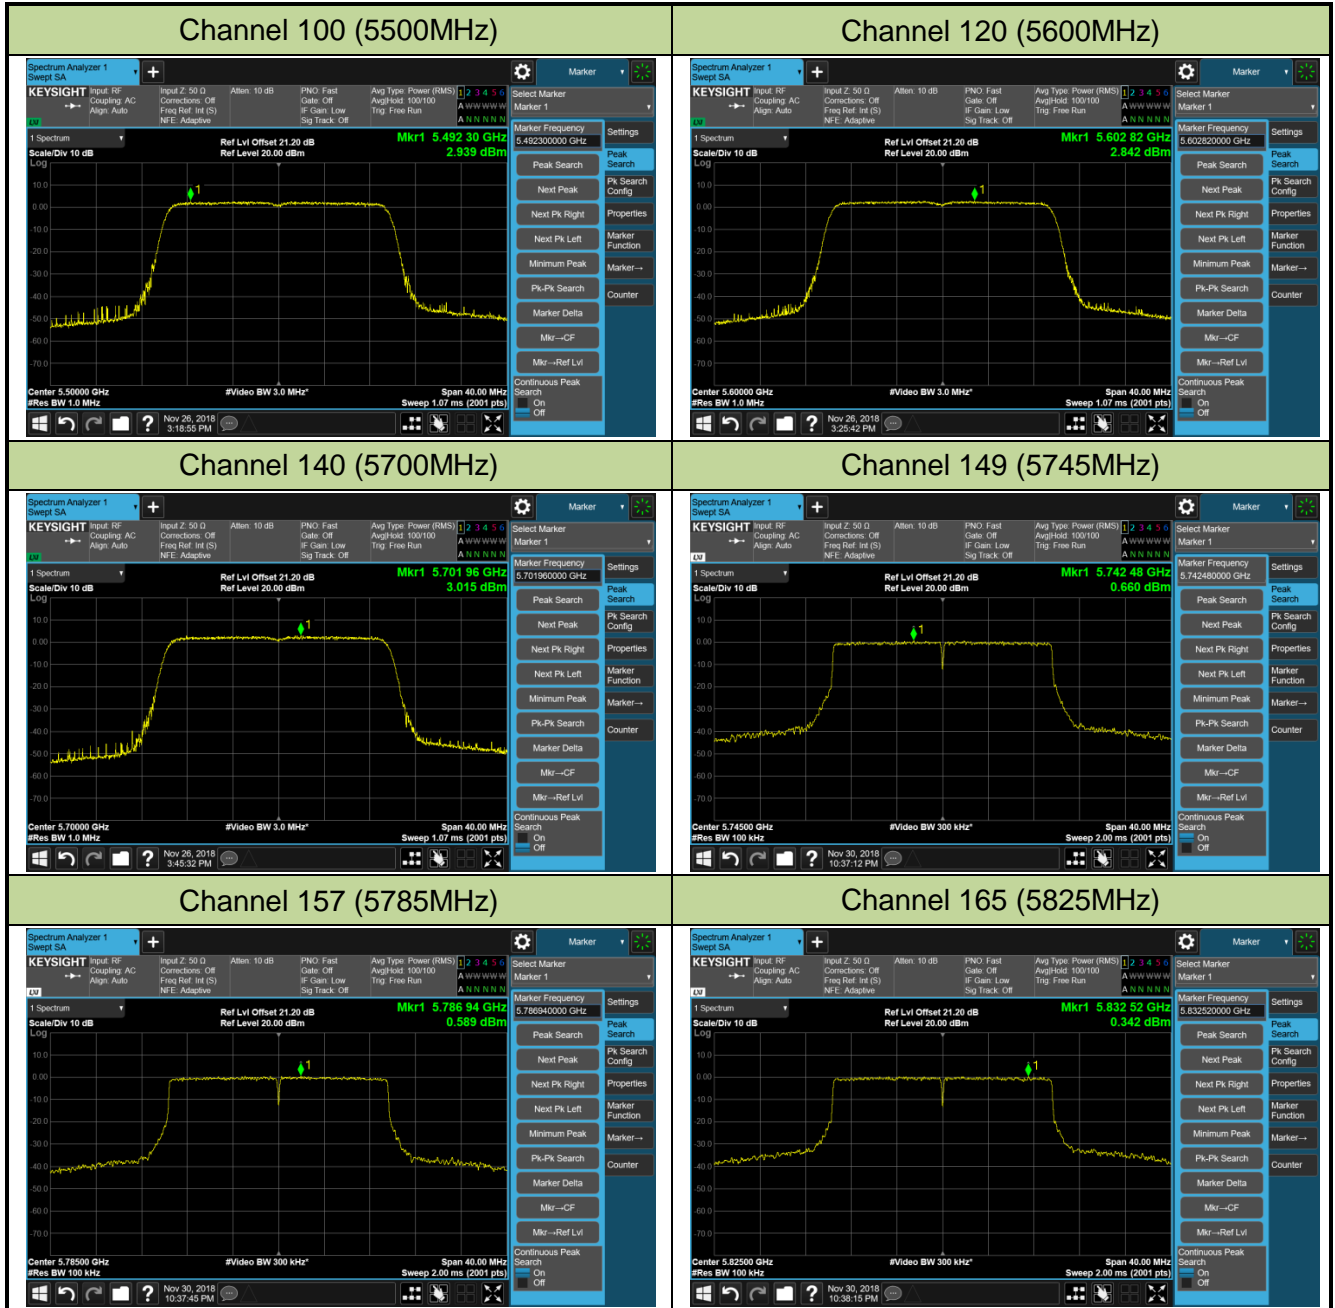


802.11ax-HE40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 38 (5190MHz)

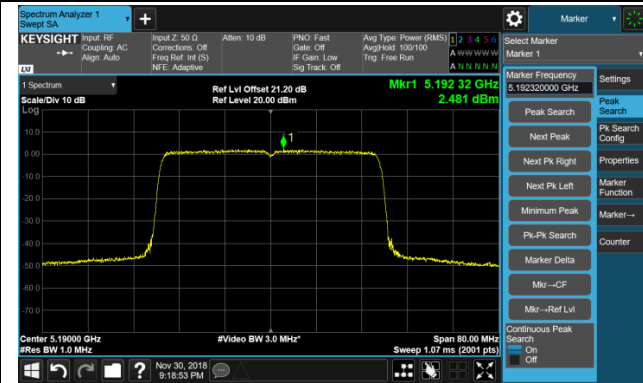


Channel 46 (5230MHz)

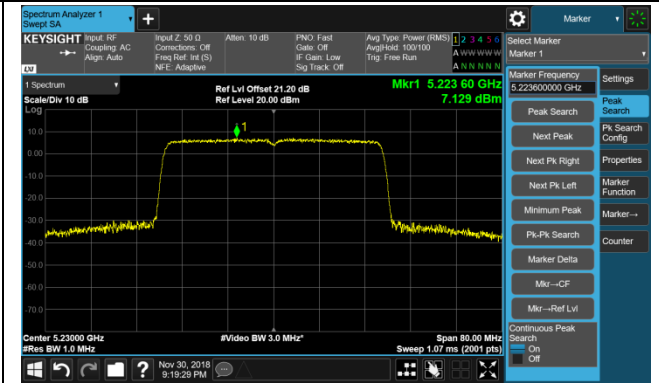


Channel 54 (5270MHz)




Channel 62 (5310MHz)

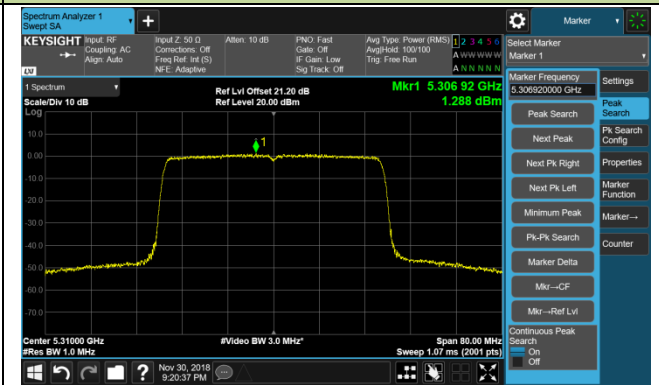


Channel 102 (5510MHz)

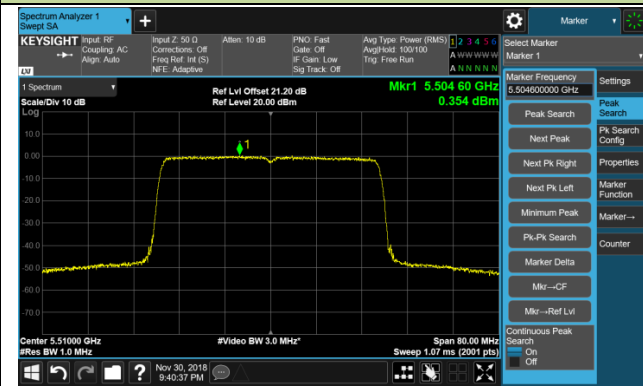


Channel 118 (5590MHz)

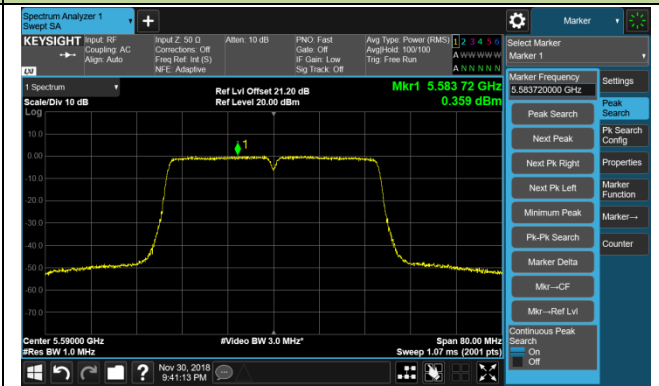

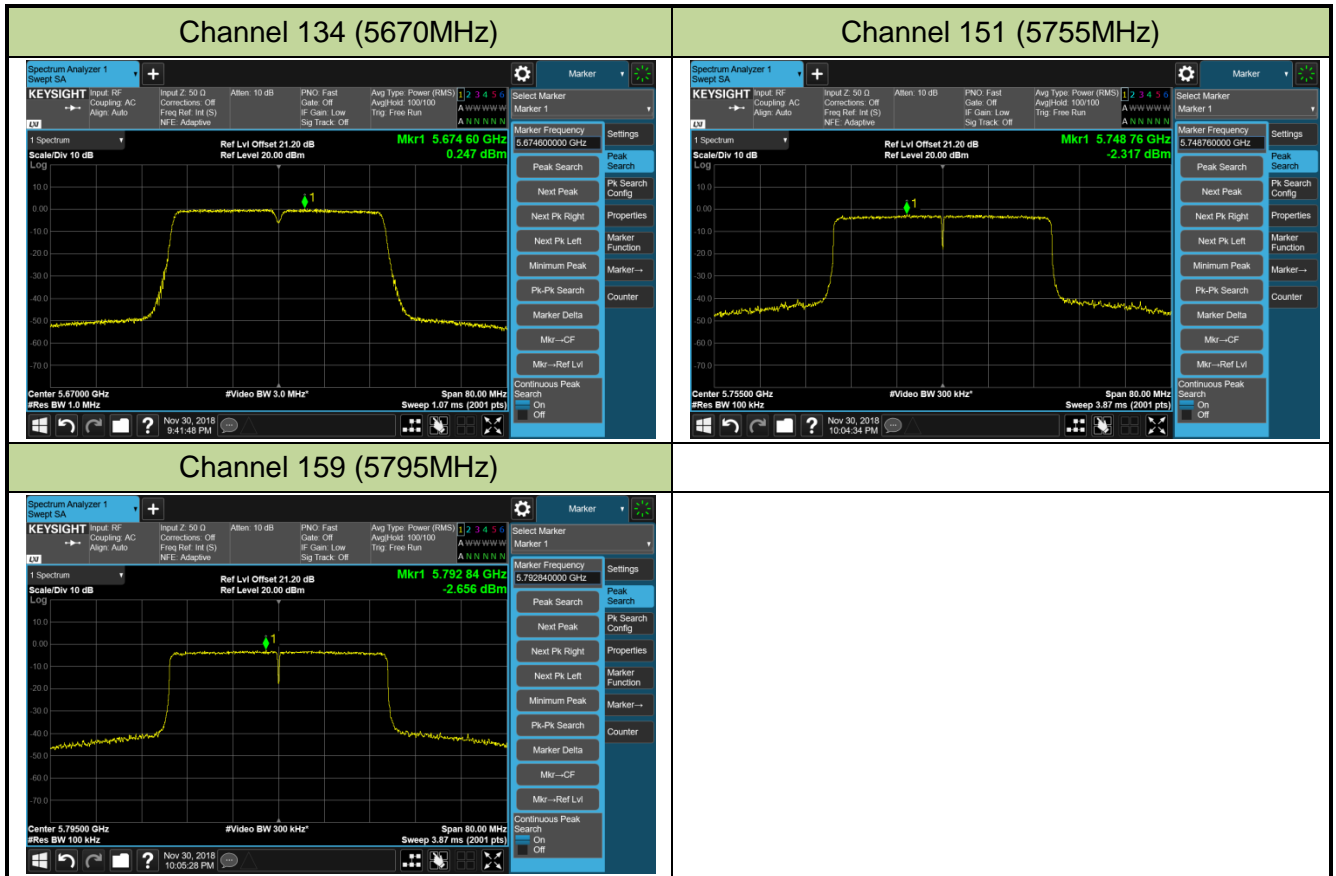


802.11ax-HE80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 42 (5210MHz)

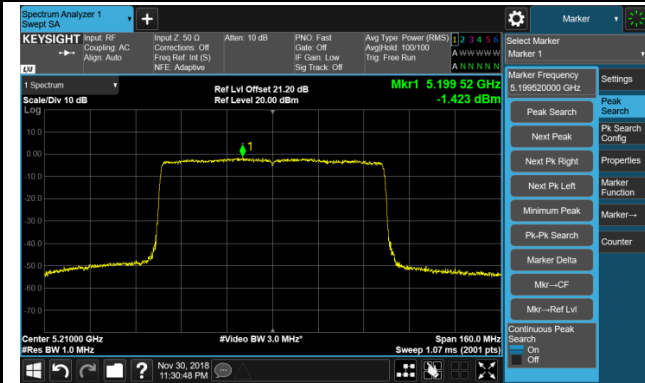


Channel 58 (5290MHz)

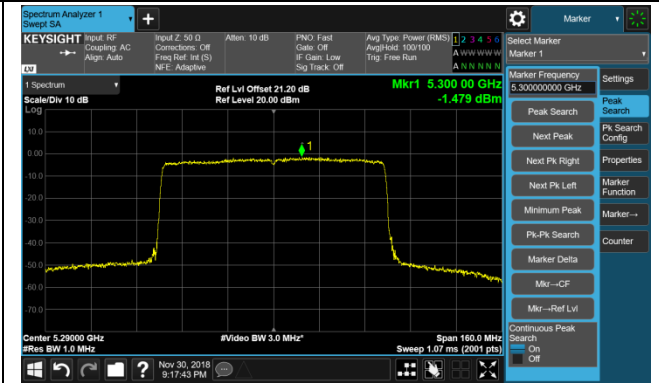

Channel 106 (5530MHz)



Channel 122 (5610MHz)

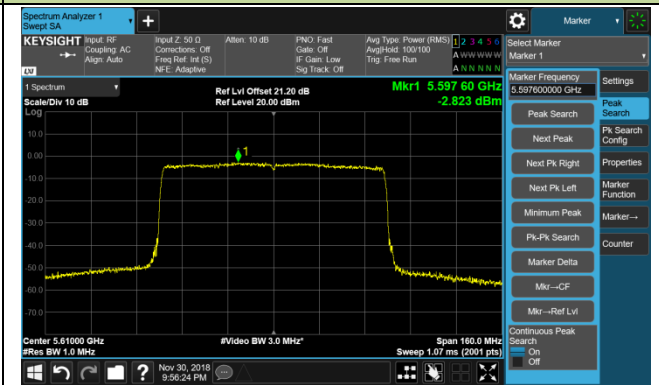



Channel 155 (5775MHz)



802.11ax-HE160 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 50 (5250MHz)

Channel 114 (5570MHz)

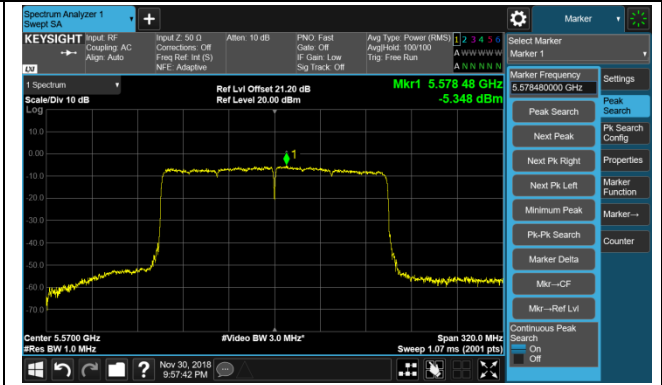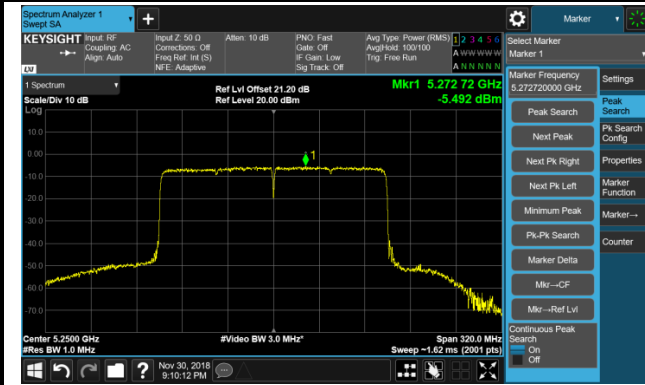

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5GHz band (IEEE 802.11 specification).

7.7.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

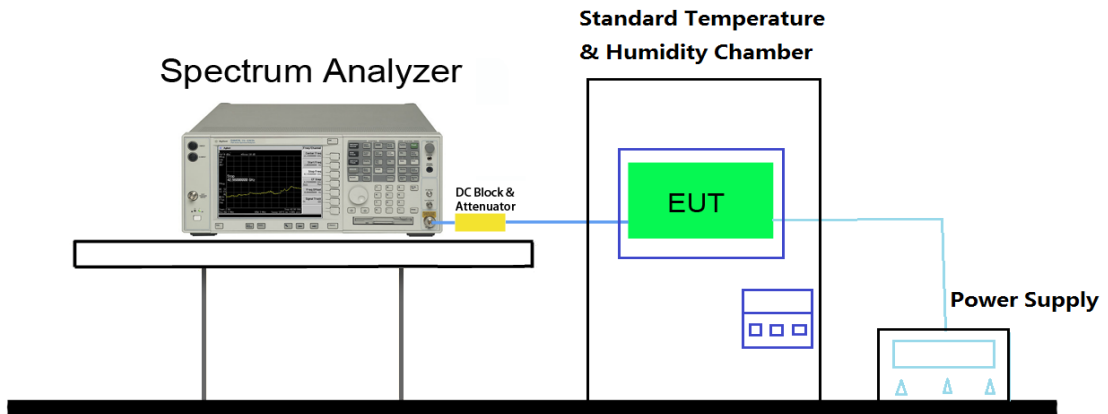

7.7.4. Test Result

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	-30 ~ 50°C
Test Time	2018/11/28	Relative Humidity	46 ~ 55%RH
Test Site	TR3	Test Time	2018/08/16
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (W)	Temp (°C)	Frequency Tolerance (ppm)
100%	120	- 30	-5.35
		- 20	-5.86
		- 10	-5.18
		0	-4.27
		+ 10	-3.14
		+ 20 (Ref)	-3.91
		+ 30	-4.65
		+ 40	-4.15
		+ 50	-4.46
115%	138	+ 20	-3.83
85%	102	+ 20	-4.74

Note: Frequency Tolerance (ppm) = $\frac{\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}]\}}{\text{Declared Frequency (Hz)}} * 10^6$.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup


9kHz ~30MHz Test Setup:

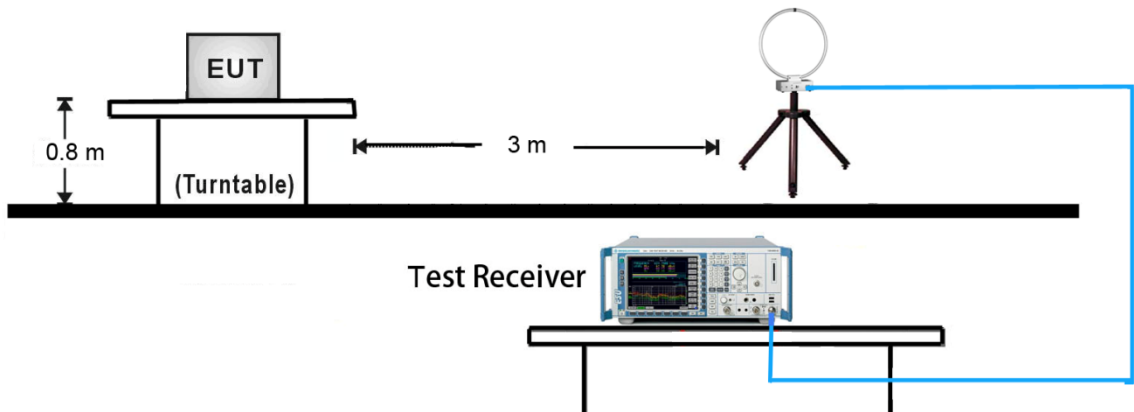


30MHz ~ 1GHz Test Setup:

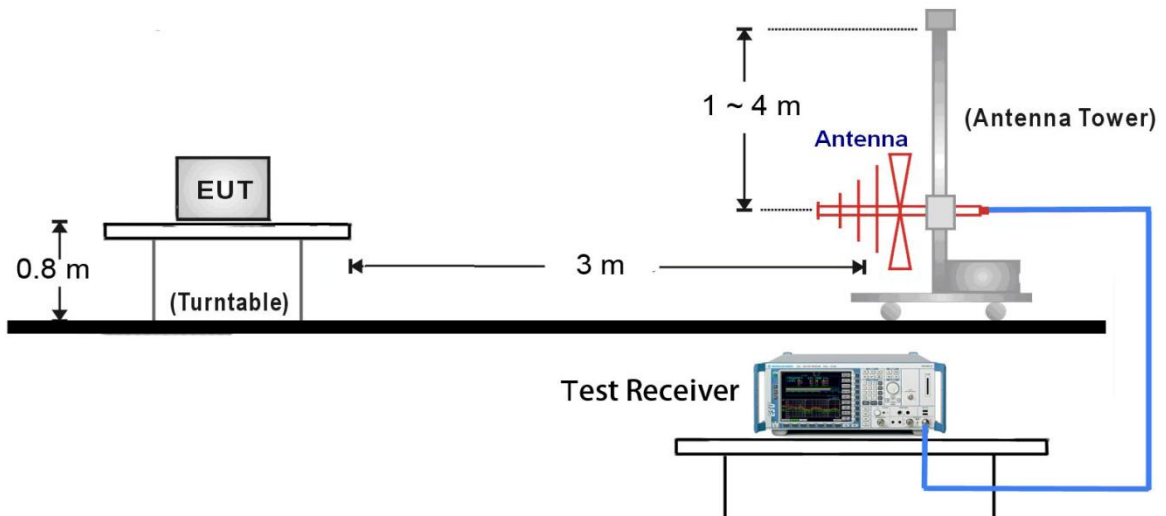

1GHz ~18GHz Test Setup:

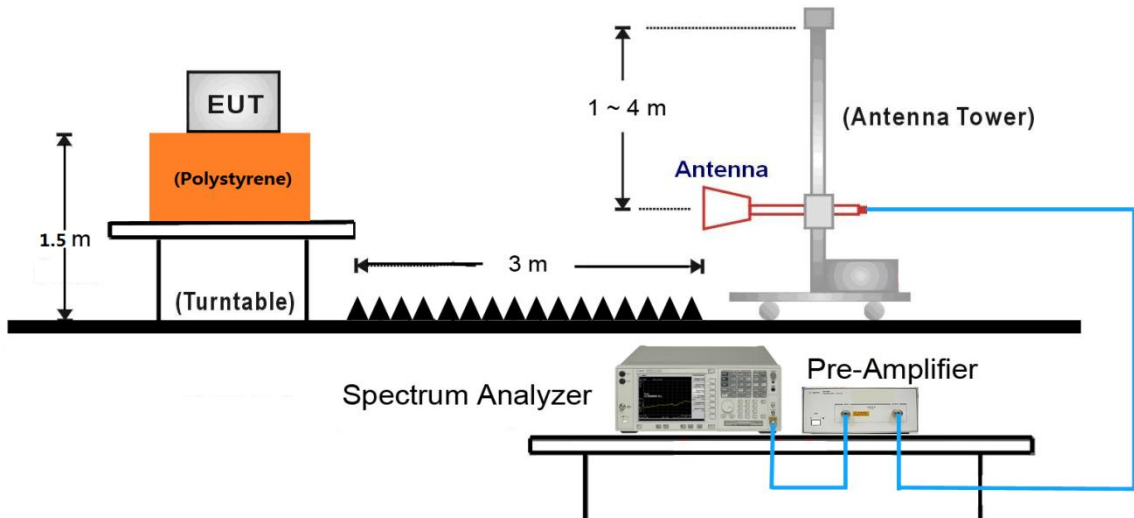

18GHz ~40GHz Test Setup:

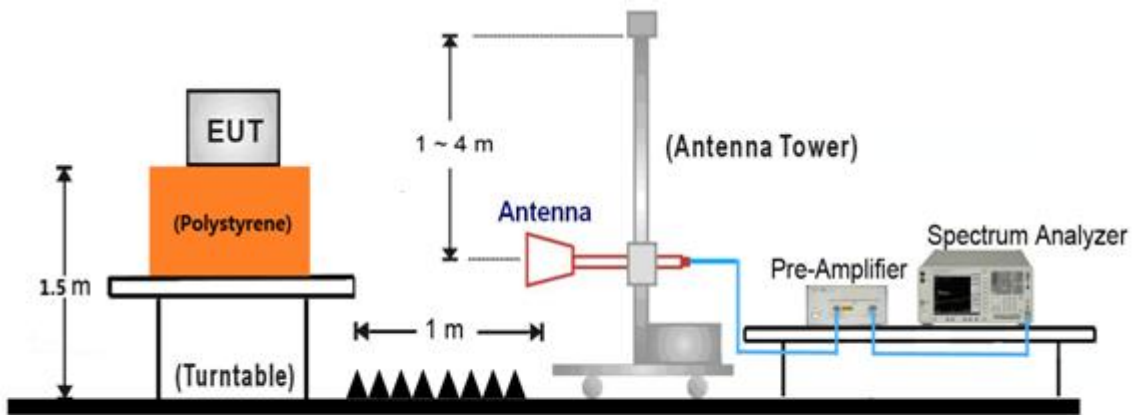

7.8.5. Test Result

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	8735.0	34.4	13.9	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	42.9	15.4	58.3	68.2	-9.9	Peak	Horizontal
	11667.5	34.4	19.3	53.7	74.0	-20.3	Peak	Horizontal
	12492.0	34.7	18.5	53.2	74.0	-20.8	Peak	Horizontal
*	8862.5	34.5	14.0	48.5	68.2	-19.7	Peak	Vertical
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Vertical
	10902.5	35.5	18.3	53.8	74.0	-20.2	Peak	Vertical
	12160.5	34.1	18.9	53.0	74.0	-21.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8862.5	35.6	14.0	49.6	68.2	-18.6	Peak	Horizontal
*	10001.5	42.2	15.4	57.6	68.2	-10.6	Peak	Horizontal
	10851.5	35.2	18.1	53.3	74.0	-20.7	Peak	Horizontal
	11922.5	34.6	18.6	53.2	74.0	-20.8	Peak	Horizontal
*	8811.5	33.9	14.0	47.9	68.2	-20.3	Peak	Vertical
*	10001.5	41.6	15.4	57.0	68.2	-11.2	Peak	Vertical
	11531.5	34.4	19.4	53.8	74.0	-20.2	Peak	Vertical
	15654.0	35.9	20.4	56.3	74.0	-17.7	Peak	Vertical
	15654.0	23.3	20.4	43.7	54.0	-10.3	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8658.5	35.2	13.6	48.8	68.2	-19.4	Peak	Horizontal
*	10001.5	42.0	15.4	57.4	68.2	-10.8	Peak	Horizontal
	11506.0	34.1	19.4	53.5	74.0	-20.5	Peak	Horizontal
	15705.0	35.9	20.5	56.4	74.0	-17.6	Peak	Horizontal
	15705.0	23.0	20.5	43.5	54.0	-10.5	Average	Vertical
*	8854.0	35.4	14.0	49.4	68.2	-18.8	Peak	Vertical
*	10001.5	41.7	15.4	57.1	68.2	-11.1	Peak	Vertical
	10851.5	33.9	18.1	52.0	74.0	-22.0	Peak	Vertical
*	11752.5	33.7	18.9	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8658.5	35.3	13.6	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	41.7	15.4	57.1	68.2	-11.1	Peak	Horizontal
	10868.5	35.4	18.2	53.6	74.0	-20.4	Peak	Horizontal
	12203.0	33.9	18.8	52.7	74.0	-21.3	Peak	Horizontal
*	8854.0	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	38.1	15.4	53.5	68.2	-14.7	Peak	Vertical
	11123.5	34.2	18.6	52.8	74.0	-21.2	Peak	Vertical
	11965.0	33.3	18.6	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8837.0	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	11038.5	33.6	18.5	52.1	74.0	-21.9	Peak	Horizontal
	11905.5	32.3	18.6	50.9	74.0	-23.1	Peak	Horizontal
*	8718.0	33.2	13.8	47.0	68.2	-21.2	Peak	Vertical
*	10001.5	38.7	15.4	54.1	68.2	-14.1	Peak	Vertical
	11429.5	33.7	19.2	52.9	74.0	-21.1	Peak	Vertical
	12067.0	33.4	18.8	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8786.0	34.5	13.9	48.4	68.2	-19.8	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	11072.5	33.7	18.6	52.3	74.0	-21.7	Peak	Horizontal
	11982.0	33.7	18.7	52.4	74.0	-21.6	Peak	Horizontal
*	8837.0	34.0	14.0	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Vertical
	10979.0	34.2	18.5	52.7	74.0	-21.3	Peak	Vertical
	12033.0	33.7	18.8	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	34.2	14.0	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	41.6	15.4	57.0	68.2	-11.2	Peak	Horizontal
	11038.5	34.3	18.5	52.8	74.0	-21.2	Peak	Horizontal
	12466.5	34.1	18.5	52.6	74.0	-21.4	Peak	Horizontal
*	8667.0	34.6	13.6	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	38.2	15.4	53.6	68.2	-14.6	Peak	Vertical
	11336.0	33.4	19.0	52.4	74.0	-21.6	Peak	Vertical
	11956.5	33.4	18.6	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	34.3	14.0	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	39.1	15.4	54.5	68.2	-13.7	Peak	Horizontal
	10783.5	34.1	17.8	51.9	74.0	-22.1	Peak	Horizontal
	11523.0	33.3	19.4	52.7	74.0	-21.3	Peak	Horizontal
*	8845.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	41.9	15.4	57.3	68.2	-10.9	Peak	Vertical
	11557.0	33.0	19.5	52.5	74.0	-21.5	Peak	Vertical
	12220.0	31.8	18.7	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	32.1	13.7	45.8	68.2	-22.4	Peak	Horizontal
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Horizontal
	11370.0	32.1	19.0	51.1	74.0	-22.9	Peak	Horizontal
	12169.0	30.5	18.8	49.3	74.0	-24.7	Peak	Horizontal
*	8760.5	34.1	13.9	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	40.0	15.4	55.4	68.2	-12.8	Peak	Vertical
	10936.5	33.8	18.4	52.2	74.0	-21.8	Peak	Vertical
	11667.5	33.0	19.3	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8675.5	34.3	13.7	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Horizontal
	10843.0	34.0	18.1	52.1	74.0	-21.9	Peak	Horizontal
	12398.5	32.4	18.4	50.8	74.0	-23.2	Peak	Horizontal
*	8922.0	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	38.1	15.4	53.5	68.2	-14.7	Peak	Vertical
	11140.5	34.4	18.7	53.1	74.0	-20.9	Peak	Vertical
	12160.5	33.3	18.9	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8684.0	33.5	13.7	47.2	68.2	-21.0	Peak	Horizontal
*	10001.5	42.4	15.4	57.8	68.2	-10.4	Peak	Horizontal
	11013.0	33.6	18.5	52.1	74.0	-21.9	Peak	Horizontal
	11659.0	33.8	19.3	53.1	74.0	-20.9	Peak	Horizontal
*	8828.5	34.0	14.0	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	38.4	15.4	53.8	68.2	-14.4	Peak	Vertical
	11633.5	33.8	19.4	53.2	74.0	-20.8	Peak	Vertical
	12271.0	33.5	18.6	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11a - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	33.9	14.0	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	42.3	15.4	57.7	68.2	-10.5	Peak	Horizontal
	11217.0	34.1	18.8	52.9	74.0	-21.1	Peak	Horizontal
	12373.0	33.2	18.4	51.6	74.0	-22.4	Peak	Horizontal
*	8828.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	38.3	15.4	53.7	68.2	-14.5	Peak	Vertical
	11463.5	33.1	19.3	52.4	74.0	-21.6	Peak	Vertical
	12169.0	33.1	18.8	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8820.0	35.3	14.0	49.3	68.2	-18.9	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	10851.5	34.3	18.1	52.4	74.0	-21.6	Peak	Horizontal
	12203.0	33.0	18.8	51.8	74.0	-22.2	Peak	Horizontal
*	8888.0	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	10868.5	34.9	18.2	53.1	74.0	-20.9	Peak	Vertical
	11735.5	32.8	19.0	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8820.0	33.2	14.0	47.2	68.2	-21.0	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	11021.5	33.1	18.5	51.6	74.0	-22.4	Peak	Horizontal
	11548.5	33.1	19.4	52.5	74.0	-21.5	Peak	Horizontal
*	8879.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	39.5	15.4	54.9	68.2	-13.3	Peak	Vertical
	10860.0	34.2	18.2	52.4	74.0	-21.6	Peak	Vertical
	11667.5	32.9	19.3	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8667.0	33.7	13.6	47.3	68.2	-20.9	Peak	Horizontal
*	10001.5	39.5	15.4	54.9	68.2	-13.3	Peak	Horizontal
	11404.0	32.9	19.1	52.0	74.0	-22.0	Peak	Horizontal
	12458.0	33.4	18.4	51.8	74.0	-22.2	Peak	Horizontal
*	8905.0	33.7	14.0	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	11064.0	34.2	18.5	52.7	74.0	-21.3	Peak	Vertical
	12483.5	33.5	18.5	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8701.0	34.1	13.8	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	42.2	15.4	57.6	68.2	-10.6	Peak	Horizontal
	11208.5	33.5	18.8	52.3	74.0	-21.7	Peak	Horizontal
	12245.5	34.0	18.7	52.7	74.0	-21.3	Peak	Horizontal
*	8718.0	33.5	13.8	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	39.0	15.4	54.4	68.2	-13.8	Peak	Vertical
	11378.5	32.6	19.1	51.7	74.0	-22.3	Peak	Vertical
	12279.5	33.0	18.6	51.6	74.0	-22.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8769.0	33.7	13.9	47.6	68.2	-20.6	Peak	Horizontal
*	10001.5	40.7	15.4	56.1	68.2	-12.1	Peak	Horizontal
	10851.5	34.8	18.1	52.9	74.0	-21.1	Peak	Horizontal
	12602.5	33.6	18.7	52.3	74.0	-21.7	Peak	Horizontal
*	8845.5	33.7	14.0	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Vertical
	11123.5	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical
	11752.5	33.5	18.9	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8735.0	32.9	13.9	46.8	68.2	-21.4	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	11251.0	33.3	18.8	52.1	74.0	-21.9	Peak	Horizontal
	12288.0	33.0	18.6	51.6	74.0	-22.4	Peak	Horizontal
*	8667.0	34.6	13.6	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	38.0	15.4	53.4	68.2	-14.8	Peak	Vertical
	10851.5	35.0	18.1	53.1	74.0	-20.9	Peak	Vertical
	11846.0	30.9	18.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8820.0	34.2	14.0	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	10928.0	34.3	18.4	52.7	74.0	-21.3	Peak	Horizontal
	11633.5	33.0	19.4	52.4	74.0	-21.6	Peak	Horizontal
*	8684.0	34.6	13.7	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	11293.5	33.5	18.9	52.4	74.0	-21.6	Peak	Vertical
	12007.5	31.5	18.7	50.2	74.0	-23.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8794.5	34.5	13.9	48.4	68.2	-19.8	Peak	Horizontal
*	10001.5	41.5	15.4	56.9	68.2	-11.3	Peak	Horizontal
	11361.5	33.0	19.0	52.0	74.0	-22.0	Peak	Horizontal
	11973.5	33.7	18.7	52.4	74.0	-21.6	Peak	Horizontal
*	8692.5	33.1	13.7	46.8	68.2	-21.4	Peak	Vertical
*	10001.5	38.7	15.4	54.1	68.2	-14.1	Peak	Vertical
	11132.0	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical
	11667.5	33.2	19.3	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8913.5	33.9	14.0	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	10928.0	33.6	18.4	52.0	74.0	-22.0	Peak	Horizontal
	11548.5	32.8	19.4	52.2	74.0	-21.8	Peak	Horizontal
*	8811.5	34.0	14.0	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Vertical
	11412.5	33.3	19.1	52.4	74.0	-21.6	Peak	Vertical
	12509.0	33.1	18.5	51.6	74.0	-22.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8624.5	34.5	13.5	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	10936.5	33.6	18.4	52.0	74.0	-22.0	Peak	Horizontal
	11489.0	33.8	19.3	53.1	74.0	-20.9	Peak	Horizontal
*	8692.5	34.2	13.7	47.9	68.2	-20.3	Peak	Vertical
*	10001.5	38.6	15.4	54.0	68.2	-14.2	Peak	Vertical
	10979.0	35.0	18.5	53.5	74.0	-20.5	Peak	Vertical
	12245.5	33.1	18.7	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8718.0	34.0	13.8	47.8	68.2	-20.4	Peak	Horizontal
*	10001.5	38.4	15.4	53.8	68.2	-14.4	Peak	Horizontal
	10885.5	33.5	18.3	51.8	74.0	-22.2	Peak	Horizontal
	11574.0	32.7	19.5	52.2	74.0	-21.8	Peak	Horizontal
*	8769.0	33.4	13.9	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	38.0	15.4	53.4	68.2	-14.8	Peak	Vertical
	10843.0	35.6	18.1	53.7	74.0	-20.3	Peak	Vertical
	12466.5	33.4	18.5	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8905.0	34.3	14.0	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	11106.5	34.7	18.6	53.3	74.0	-20.7	Peak	Horizontal
	12228.5	33.7	18.7	52.4	74.0	-21.6	Peak	Horizontal
*	8794.5	33.9	13.9	47.8	68.2	-20.4	Peak	Vertical
*	10001.5	38.5	15.4	53.9	68.2	-14.3	Peak	Vertical
	10894.0	34.5	18.3	52.8	74.0	-21.2	Peak	Vertical
	12237.0	33.1	18.7	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8658.5	33.5	13.6	47.1	68.2	-21.1	Peak	Horizontal
*	10001.5	38.5	15.4	53.9	68.2	-14.3	Peak	Horizontal
	10894.0	34.5	18.3	52.8	74.0	-21.2	Peak	Horizontal
	11684.5	32.8	19.2	52.0	74.0	-22.0	Peak	Horizontal
*	8803.0	34.8	14.0	48.8	68.2	-19.4	Peak	Vertical
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Vertical
	11064.0	33.1	18.5	51.6	74.0	-22.4	Peak	Vertical
	11667.5	32.9	19.3	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6967.0	37.3	10.3	47.6	68.2	-20.6	Peak	Horizontal
*	7953.0	37.4	12.5	49.9	68.2	-18.3	Peak	Horizontal
	8157.0	36.1	12.1	48.2	74.0	-25.8	Peak	Horizontal
	9015.5	33.3	14.2	47.5	74.0	-26.5	Peak	Horizontal
*	7018.0	36.0	10.7	46.7	68.2	-21.5	Peak	Vertical
*	7893.5	36.3	12.4	48.7	68.2	-19.5	Peak	Vertical
	8250.5	35.1	11.9	47.0	74.0	-27.0	Peak	Vertical
	9092.0	32.7	14.4	47.1	74.0	-26.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8667.0	34.1	13.6	47.7	68.2	-20.5	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	10792.0	34.5	17.9	52.4	74.0	-21.6	Peak	Horizontal
	12237.0	32.7	18.7	51.4	74.0	-22.6	Peak	Horizontal
*	8828.5	34.6	14.0	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	38.5	15.4	53.9	68.2	-14.3	Peak	Vertical
	10860.0	34.8	18.2	53.0	74.0	-21.0	Peak	Vertical
	11293.5	33.8	18.9	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	62
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	40.1	15.4	55.5	68.2	-12.7	Peak	Horizontal
*	10817.5	34.5	18.0	52.5	74.0	-21.5	Peak	Horizontal
	11625.0	33.4	19.4	52.8	74.0	-21.2	Peak	Horizontal
	8624.5	34.2	13.5	47.7	68.2	-20.5	Peak	Horizontal
*	10001.5	39.5	15.4	54.9	68.2	-13.3	Peak	Vertical
*	10902.5	34.1	18.3	52.4	74.0	-21.6	Peak	Vertical
	11871.5	33.1	18.7	51.8	74.0	-22.2	Peak	Vertical
	10001.5	40.1	15.4	55.5	68.2	-12.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.1	14.0	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Horizontal
	10970.5	34.0	18.4	52.4	74.0	-21.6	Peak	Horizontal
	12058.5	32.6	18.8	51.4	74.0	-22.6	Peak	Horizontal
*	8692.5	34.5	13.7	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	11030.0	33.9	18.5	52.4	74.0	-21.6	Peak	Vertical
	11948.0	33.0	18.6	51.6	74.0	-22.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8854.0	34.0	14.0	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	40.9	15.4	56.3	68.2	-11.9	Peak	Horizontal
	10792.0	34.4	17.9	52.3	74.0	-21.7	Peak	Horizontal
	12526.0	33.7	18.6	52.3	74.0	-21.7	Peak	Horizontal
*	8845.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	39.1	15.4	54.5	68.2	-13.7	Peak	Vertical
	11013.0	34.1	18.5	52.6	74.0	-21.4	Peak	Vertical
	12262.5	32.8	18.6	51.4	74.0	-22.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8624.5	35.7	13.5	49.2	68.2	-19.0	Peak	Horizontal
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Horizontal
	10936.5	34.2	18.4	52.6	74.0	-21.4	Peak	Horizontal
	11667.5	32.9	19.3	52.2	74.0	-21.8	Peak	Horizontal
*	8828.5	35.6	14.0	49.6	68.2	-18.6	Peak	Vertical
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Vertical
	11489.0	33.1	19.3	52.4	74.0	-21.6	Peak	Vertical
	12135.0	32.8	18.9	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.9	14.0	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	40.0	15.4	55.4	68.2	-12.8	Peak	Horizontal
	10877.0	34.4	18.2	52.6	74.0	-21.4	Peak	Horizontal
	12135.0	32.9	18.9	51.8	74.0	-22.2	Peak	Horizontal
*	8845.5	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	40.0	15.4	55.4	68.2	-12.8	Peak	Vertical
	10877.0	34.4	18.2	52.6	74.0	-21.4	Peak	Vertical
	12135.0	32.9	18.9	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8879.5	34.3	14.0	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	11089.5	33.7	18.6	52.3	74.0	-21.7	Peak	Horizontal
	12492.0	33.5	18.5	52.0	74.0	-22.0	Peak	Horizontal
*	8811.5	33.7	14.0	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	11081.0	33.8	18.6	52.4	74.0	-21.6	Peak	Vertical
	11956.5	33.3	18.6	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8854.0	35.1	14.0	49.1	68.2	-19.1	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	10919.5	34.4	18.4	52.8	74.0	-21.2	Peak	Horizontal
	12024.5	33.6	18.8	52.4	74.0	-21.6	Peak	Horizontal
*	8837.0	34.2	14.0	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	38.3	15.4	53.7	68.2	-14.5	Peak	Vertical
	11446.5	33.8	19.2	53.0	74.0	-21.0	Peak	Vertical
	12160.5	33.7	18.9	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8760.5	35.1	13.9	49.0	68.2	-19.2	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	10902.5	35.0	18.3	53.3	74.0	-20.7	Peak	Horizontal
	12135.0	33.6	18.9	52.5	74.0	-21.5	Peak	Horizontal
*	8624.5	34.7	13.5	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	38.4	15.4	53.8	68.2	-14.4	Peak	Vertical
	10834.5	34.9	18.1	53.0	74.0	-21.0	Peak	Vertical
	11480.5	31.9	19.3	51.2	74.0	-22.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8701.0	33.4	13.8	47.2	68.2	-21.0	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	10843.0	35.0	18.1	53.1	74.0	-20.9	Peak	Horizontal
	11497.5	33.3	19.3	52.6	74.0	-21.4	Peak	Horizontal
*	8769.0	34.5	13.9	48.4	68.2	-19.8	Peak	Vertical
*	10001.5	37.7	15.4	53.1	68.2	-15.1	Peak	Vertical
	11582.5	31.1	19.5	50.6	74.0	-23.4	Peak	Vertical
	15722.0	36.0	20.5	56.5	74.0	-17.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8777.5	33.7	13.9	47.6	68.2	-20.6	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	10979.0	33.7	18.5	52.2	74.0	-21.8	Peak	Horizontal
	11965.0	33.3	18.6	51.9	74.0	-22.1	Peak	Horizontal
*	8735.0	34.2	13.9	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	38.5	15.4	53.9	68.2	-14.3	Peak	Vertical
	11429.5	34.1	19.2	53.3	74.0	-20.7	Peak	Vertical
	12245.5	33.4	18.7	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8820.0	33.4	14.0	47.4	68.2	-20.8	Peak	Horizontal
*	10001.5	42.0	15.4	57.4	68.2	-10.8	Peak	Horizontal
	11616.5	33.9	19.4	53.3	74.0	-20.7	Peak	Horizontal
	12203.0	32.9	18.8	51.7	74.0	-22.3	Peak	Horizontal
*	8667.0	35.1	13.6	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	36.6	15.4	52.0	68.2	-16.2	Peak	Vertical
	11370.0	33.1	19.0	52.1	74.0	-21.9	Peak	Vertical
	12203.0	32.9	18.8	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	34.0	13.7	47.7	68.2	-20.5	Peak	Horizontal
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Horizontal
	10868.5	34.0	18.2	52.2	74.0	-21.8	Peak	Horizontal
	12152.0	33.3	18.9	52.2	74.0	-21.8	Peak	Horizontal
*	8811.5	33.0	14.0	47.0	68.2	-21.2	Peak	Vertical
*	10001.5	38.3	15.4	53.7	68.2	-14.5	Peak	Vertical
	11565.5	33.1	19.5	52.6	74.0	-21.4	Peak	Vertical
	12143.5	33.0	18.9	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8803.0	34.1	14.0	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	10843.0	35.2	18.1	53.3	74.0	-20.7	Peak	Horizontal
	11710.0	33.8	19.1	52.9	74.0	-21.1	Peak	Horizontal
*	8905.0	34.7	14.0	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	39.3	15.4	54.7	68.2	-13.5	Peak	Vertical
	11242.5	33.5	18.8	52.3	74.0	-21.7	Peak	Vertical
	11973.5	33.5	18.7	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8794.5	34.2	13.9	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	40.0	15.4	55.4	68.2	-12.8	Peak	Horizontal
	11310.5	33.8	18.9	52.7	74.0	-21.3	Peak	Horizontal
	12007.5	32.0	18.7	50.7	74.0	-23.3	Peak	Horizontal
*	8837.0	33.3	14.0	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	38.6	15.4	54.0	68.2	-14.2	Peak	Vertical
	10860.0	34.3	18.2	52.5	74.0	-21.5	Peak	Vertical
	11633.5	32.6	19.4	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8684.0	34.9	13.7	48.6	68.2	-19.6	Peak	Horizontal
*	10001.5	40.9	15.4	56.3	68.2	-11.9	Peak	Horizontal
	11480.5	34.4	19.3	53.7	74.0	-20.3	Peak	Horizontal
	12288.0	33.1	18.6	51.7	74.0	-22.3	Peak	Horizontal
*	8735.0	32.7	13.9	46.6	68.2	-21.6	Peak	Vertical
*	10001.5	39.1	15.4	54.5	68.2	-13.7	Peak	Vertical
	10800.5	34.8	17.9	52.7	74.0	-21.3	Peak	Vertical
	12177.5	33.8	18.8	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8667.0	35.5	13.6	49.1	68.2	-19.1	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	10868.5	34.5	18.2	52.7	74.0	-21.3	Peak	Horizontal
	11939.5	34.5	18.6	53.1	74.0	-20.9	Peak	Horizontal
*	8871.0	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	11319.0	33.4	18.9	52.3	74.0	-21.7	Peak	Vertical
	12245.5	33.2	18.7	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8582.0	35.6	13.4	49.0	68.2	-19.2	Peak	Horizontal
*	10001.5	41.5	15.4	56.9	68.2	-11.3	Peak	Horizontal
	11557.0	33.2	19.5	52.7	74.0	-21.3	Peak	Horizontal
	11982.0	33.9	18.7	52.6	74.0	-21.4	Peak	Horizontal
*	8803.0	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	39.0	15.4	54.4	68.2	-13.8	Peak	Vertical
	10902.5	34.4	18.3	52.7	74.0	-21.3	Peak	Vertical
	12220.0	33.5	18.7	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8862.5	35.2	14.0	49.2	68.2	-19.0	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	11174.5	32.6	18.7	51.3	74.0	-22.7	Peak	Horizontal
	11948.0	31.5	18.6	50.1	74.0	-23.9	Peak	Horizontal
*	8701.0	33.5	13.8	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	40.1	15.4	55.5	68.2	-12.7	Peak	Vertical
	11472.0	34.1	19.3	53.4	74.0	-20.6	Peak	Vertical
	12577.0	33.4	18.6	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8803.0	35.2	14.0	49.2	68.2	-19.0	Peak	Horizontal
*	10001.5	42.3	15.4	57.7	68.2	-10.5	Peak	Horizontal
	11446.5	34.1	19.2	53.3	74.0	-20.7	Peak	Horizontal
	12075.5	33.5	18.9	52.4	74.0	-21.6	Peak	Horizontal
*	8828.5	35.1	14.0	49.1	68.2	-19.1	Peak	Vertical
*	10129.0	37.0	15.9	52.9	68.2	-15.3	Peak	Vertical
	11489.0	34.3	19.3	53.6	74.0	-20.4	Peak	Vertical
	12237.0	34.4	18.7	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8701.0	34.9	13.8	48.7	68.2	-19.5	Peak	Horizontal
*	10001.5	42.1	15.4	57.5	68.2	-10.7	Peak	Horizontal
	11004.5	34.9	18.5	53.4	74.0	-20.6	Peak	Horizontal
	12033.0	34.4	18.8	53.2	74.0	-20.8	Peak	Horizontal
*	8820.0	35.2	14.0	49.2	68.2	-19.0	Peak	Vertical
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Vertical
	11472.0	34.7	19.3	54.0	74.0	-20.0	Peak	Vertical
	12092.5	34.3	18.9	53.2	74.0	-20.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8913.5	34.9	14.0	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	42.8	15.4	58.2	68.2	-10.0	Peak	Horizontal
	11106.5	34.6	18.6	53.2	74.0	-20.8	Peak	Horizontal
	11642.0	34.5	19.4	53.9	74.0	-20.1	Peak	Horizontal
*	8811.5	35.2	14.0	49.2	68.2	-19.0	Peak	Vertical
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Vertical
	11574.0	34.0	19.5	53.5	74.0	-20.5	Peak	Vertical
	12254.0	34.7	18.6	53.3	74.0	-20.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	62
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8854.0	35.1	14.0	49.1	68.2	-19.1	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	10936.5	34.7	18.4	53.1	74.0	-20.9	Peak	Horizontal
	12194.5	33.8	18.8	52.6	74.0	-21.4	Peak	Horizontal
*	8701.0	35.3	13.8	49.1	68.2	-19.1	Peak	Vertical
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Vertical
	11378.5	34.3	19.1	53.4	74.0	-20.6	Peak	Vertical
	12356.0	33.6	18.4	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8837.0	34.1	14.0	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	10894.0	35.2	18.3	53.5	74.0	-20.5	Peak	Horizontal
	11710.0	33.0	19.1	52.1	74.0	-21.9	Peak	Horizontal
*	8684.0	34.5	13.7	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	38.9	15.4	54.3	68.2	-13.9	Peak	Vertical
	10911.0	34.0	18.4	52.4	74.0	-21.6	Peak	Vertical
	12475.0	33.2	18.5	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8769.0	34.4	13.9	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	40.1	15.4	55.5	68.2	-12.7	Peak	Horizontal
	10834.5	34.3	18.1	52.4	74.0	-21.6	Peak	Horizontal
	12007.5	33.3	18.7	52.0	74.0	-22.0	Peak	Horizontal
*	8752.0	33.8	13.9	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Vertical
	10817.5	35.2	18.0	53.2	74.0	-20.8	Peak	Vertical
	11786.5	34.0	18.8	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	33.9	13.7	47.6	68.2	-20.6	Peak	Horizontal
*	10001.5	40.7	15.4	56.1	68.2	-12.1	Peak	Horizontal
	10953.5	34.6	18.4	53.0	74.0	-21.0	Peak	Horizontal
	12058.5	33.3	18.8	52.1	74.0	-21.9	Peak	Horizontal
*	8769.0	33.4	13.9	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Vertical
	10970.5	33.6	18.4	52.0	74.0	-22.0	Peak	Vertical
	12441.0	33.8	18.4	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
*	17252.0	41.5	25.6	67.1	68.2	-1.1	Peak	Horizontal
	17855.5	28.6	30.3	58.9	74.0	-15.1	Peak	Horizontal
	17923.5	29.6	31.0	60.6	74.0	-13.4	Peak	Horizontal
*	10001.5	39.3	15.4	54.7	68.2	-13.5	Peak	Vertical
*	17260.5	33.5	25.6	59.2	68.2	-9.0	Peak	Vertical
	17753.5	31.3	29.3	60.6	74.0	-13.4	Peak	Vertical
	17932.0	29.3	31.1	60.5	74.0	-13.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	41.5	15.4	56.9	68.2	-11.3	Peak	Horizontal
*	17388.0	39.2	26.4	65.6	68.2	-2.6	Peak	Horizontal
	17821.5	31.0	30.0	61.0	74.0	-13.0	Peak	Horizontal
	17983.0	30.9	31.8	62.7	74.0	-11.3	Peak	Horizontal
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Vertical
*	17396.5	34.3	26.5	60.8	68.2	-7.4	Peak	Vertical
	17821.5	30.8	30.0	60.8	74.0	-13.2	Peak	Vertical
	17949.0	30.3	31.4	61.7	74.0	-12.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	42
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8641.5	35.9	13.5	49.4	68.2	-18.8	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	10834.5	35.6	18.1	53.7	74.0	-20.3	Peak	Horizontal
	11531.5	33.6	19.4	53.0	74.0	-21.0	Peak	Horizontal
*	8777.5	34.0	13.9	47.9	68.2	-20.3	Peak	Vertical
*	9967.5	36.5	15.3	51.8	68.2	-16.4	Peak	Vertical
	11106.5	34.2	18.6	52.8	74.0	-21.2	Peak	Vertical
	11999.0	33.7	18.7	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	58
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.6	14.0	48.6	68.2	-19.6	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	11123.5	34.5	18.6	53.1	74.0	-20.9	Peak	Horizontal
	12228.5	33.1	18.7	51.8	74.0	-22.2	Peak	Horizontal
*	8879.5	35.5	14.0	49.5	68.2	-18.7	Peak	Vertical
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Vertical
	10911.0	34.6	18.4	53.0	74.0	-21.0	Peak	Vertical
	11684.5	33.2	19.2	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	106
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	35.1	14.0	49.1	68.2	-19.1	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	11310.5	34.2	18.9	53.1	74.0	-20.9	Peak	Horizontal
	12543.0	33.5	18.6	52.1	74.0	-21.9	Peak	Horizontal
*	8786.0	35.0	13.9	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Vertical
	11302.0	33.7	18.9	52.6	74.0	-21.4	Peak	Vertical
	12169.0	33.6	18.8	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	122
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8811.5	35.3	14.0	49.3	68.2	-18.9	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	11310.5	34.3	18.9	53.2	74.0	-20.8	Peak	Horizontal
	11956.5	33.8	18.6	52.4	74.0	-21.6	Peak	Horizontal
*	8854.0	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	39.3	15.4	54.7	68.2	-13.5	Peak	Vertical
	10919.5	34.3	18.4	52.7	74.0	-21.3	Peak	Vertical
	12067.0	33.9	18.8	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	155
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8786.0	34.0	13.9	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	42.0	15.4	57.4	68.2	-10.8	Peak	Horizontal
	11166.0	34.1	18.7	52.8	74.0	-21.2	Peak	Horizontal
	12007.5	33.4	18.7	52.1	74.0	-21.9	Peak	Horizontal
*	8828.5	35.0	14.0	49.0	68.2	-19.2	Peak	Vertical
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Vertical
	11463.5	33.1	19.3	52.4	74.0	-21.6	Peak	Vertical
	11684.5	33.1	19.2	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT160 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	50
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8854.0	34.1	14.0	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	42.4	15.4	57.8	68.2	-10.4	Peak	Horizontal
	10979.0	34.2	18.5	52.7	74.0	-21.3	Peak	Horizontal
	11871.5	33.4	18.7	52.1	74.0	-21.9	Peak	Horizontal
*	8735.0	33.8	13.9	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	41.6	15.4	57.0	68.2	-11.2	Peak	Vertical
	10775.0	35.5	17.8	53.3	74.0	-20.7	Peak	Vertical
	11990.5	34.1	18.7	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT160 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	114
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8769.0	33.5	13.9	47.4	68.2	-20.8	Peak	Horizontal
*	10001.5	42.6	15.4	58.0	68.2	-10.2	Peak	Horizontal
	11098.0	33.4	18.6	52.0	74.0	-22.0	Peak	Horizontal
	11616.5	34.0	19.4	53.4	74.0	-20.6	Peak	Horizontal
*	8828.5	34.5	14.0	48.5	68.2	-19.7	Peak	Vertical
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Vertical
	11098.0	34.6	18.6	53.2	74.0	-20.8	Peak	Vertical
	12169.0	33.5	18.8	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8667.0	33.9	13.6	47.5	68.2	-20.7	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	11395.5	33.5	19.1	52.6	74.0	-21.4	Peak	Horizontal
	12458.0	33.2	18.4	51.6	74.0	-22.4	Peak	Horizontal
*	8769.0	34.0	13.9	47.9	68.2	-20.3	Peak	Vertical
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Vertical
	10885.5	34.5	18.3	52.8	74.0	-21.2	Peak	Vertical
	12024.5	33.3	18.8	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8820.0	34.0	14.0	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	10834.5	35.2	18.1	53.3	74.0	-20.7	Peak	Horizontal
	12058.5	32.9	18.8	51.7	74.0	-22.3	Peak	Horizontal
*	8845.5	34.5	14.0	48.5	68.2	-19.7	Peak	Vertical
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Vertical
	11455.0	33.8	19.2	53.0	74.0	-21.0	Peak	Vertical
	12169.0	32.3	18.8	51.1	74.0	-22.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.9	14.0	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	11030.0	34.2	18.5	52.7	74.0	-21.3	Peak	Horizontal
	12109.5	33.6	18.9	52.5	74.0	-21.5	Peak	Horizontal
*	8777.5	34.6	13.9	48.5	68.2	-19.7	Peak	Vertical
*	10001.5	40.1	15.4	55.5	68.2	-12.7	Peak	Vertical
	10987.5	34.1	18.5	52.6	74.0	-21.4	Peak	Vertical
	11973.5	33.1	18.7	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	35.0	13.7	48.7	68.2	-19.5	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	11421.0	33.9	19.1	53.0	74.0	-21.0	Peak	Horizontal
	12237.0	33.4	18.7	52.1	74.0	-21.9	Peak	Horizontal
*	8862.5	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Vertical
	10962.0	35.5	18.4	53.9	74.0	-20.1	Peak	Vertical
	12398.5	34.1	18.4	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8650.0	36.2	13.6	49.8	68.2	-18.4	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	11438.0	33.5	19.2	52.7	74.0	-21.3	Peak	Horizontal
	12220.0	32.4	18.7	51.1	74.0	-22.9	Peak	Horizontal
*	8769.0	33.4	13.9	47.3	68.2	-20.9	Peak	Vertical
*	9899.5	34.1	15.4	49.5	68.2	-18.7	Peak	Vertical
	11072.5	32.8	18.6	51.4	74.0	-22.6	Peak	Vertical
	11506.0	33.2	19.4	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8837.0	34.8	14.0	48.8	68.2	-19.4	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	11506.0	33.2	19.4	52.6	74.0	-21.4	Peak	Horizontal
	12296.5	33.2	18.6	51.8	74.0	-22.2	Peak	Horizontal
*	8735.0	34.9	13.9	48.8	68.2	-19.4	Peak	Vertical
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Vertical
	11055.5	34.5	18.5	53.0	74.0	-21.0	Peak	Vertical
	11897.0	31.1	18.6	49.7	74.0	-24.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8794.5	35.4	13.9	49.3	68.2	-18.9	Peak	Horizontal
*	10001.5	42.4	15.4	57.8	68.2	-10.4	Peak	Horizontal
	11319.0	34.8	18.9	53.7	74.0	-20.3	Peak	Horizontal
	12169.0	32.5	18.8	51.3	74.0	-22.7	Peak	Horizontal
*	8701.0	35.0	13.8	48.8	68.2	-19.4	Peak	Vertical
*	10001.5	39.7	15.4	55.1	68.2	-13.1	Peak	Vertical
	10860.0	34.6	18.2	52.8	74.0	-21.2	Peak	Vertical
	11786.5	32.7	18.8	51.5	74.0	-22.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8709.5	34.0	13.8	47.8	68.2	-20.4	Peak	Horizontal
*	10001.5	41.5	15.4	56.9	68.2	-11.3	Peak	Horizontal
	10996.0	35.9	18.5	54.4	74.0	-19.6	Peak	Horizontal
	11948.0	33.9	18.6	52.5	74.0	-21.5	Peak	Horizontal
*	8939.0	35.5	14.0	49.5	68.2	-18.7	Peak	Vertical
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Vertical
	10936.5	33.9	18.4	52.3	74.0	-21.7	Peak	Vertical
	11922.5	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8803.0	34.3	14.0	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	10928.0	34.6	18.4	53.0	74.0	-21.0	Peak	Horizontal
	11931.0	33.2	18.6	51.8	74.0	-22.2	Peak	Horizontal
*	8837.0	34.6	14.0	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Vertical
	11021.5	31.9	18.5	50.4	74.0	-23.6	Peak	Vertical
	12330.5	31.8	18.5	50.3	74.0	-23.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	40.9	15.4	56.3	68.2	-11.9	Peak	Horizontal
*	17243.5	40.2	25.5	65.7	68.2	-2.5	Peak	Horizontal
	17830.0	31.2	30.1	61.3	74.0	-12.7	Peak	Horizontal
	17881.0	28.5	30.5	59.0	74.0	-15.0	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Vertical
*	17226.5	34.9	25.4	60.3	68.2	-7.9	Peak	Vertical
	17830.0	31.3	30.1	61.4	74.0	-12.6	Peak	Vertical
	17983.0	30.4	31.8	62.2	74.0	-11.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	42.2	15.4	57.6	68.2	-10.6	Peak	Horizontal
*	17345.5	39.7	26.1	65.8	68.2	-2.4	Peak	Horizontal
	17830.0	32.5	30.1	62.6	74.0	-11.4	Peak	Horizontal
	17889.5	30.4	30.6	61.0	74.0	-13.0	Peak	Horizontal
*	10001.5	40.0	15.4	55.4	68.2	-12.8	Peak	Vertical
*	17345.5	33.6	26.1	59.7	68.2	-8.5	Peak	Vertical
	17821.5	31.2	30.0	61.2	74.0	-12.8	Peak	Vertical
	17821.5	31.2	30.0	61.2	74.0	-12.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	42.1	15.4	57.5	68.2	-10.7	Peak	Horizontal
*	17481.5	40.0	26.9	66.9	68.2	-1.3	Peak	Horizontal
	17830.0	32.2	30.1	62.3	74.0	-11.7	Peak	Horizontal
	17915.0	29.8	30.9	60.7	74.0	-13.3	Peak	Horizontal
*	10001.5	42.1	15.4	57.5	68.2	-10.7	Peak	Vertical
*	17473.0	36.4	26.9	63.3	68.2	-4.9	Peak	Vertical
	17855.5	29.7	30.3	60.0	74.0	-14.0	Peak	Vertical
	17957.5	30.8	31.5	62.3	74.0	-11.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8769.0	34.2	13.9	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	11395.5	33.7	19.1	52.8	74.0	-21.2	Peak	Horizontal
	12075.5	33.3	18.9	52.2	74.0	-21.8	Peak	Horizontal
*	8862.5	34.7	14.0	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Vertical
	10902.5	33.7	18.3	52.0	74.0	-22.0	Peak	Vertical
	12288.0	33.3	18.6	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8888.0	34.3	14.0	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	10987.5	34.4	18.5	52.9	74.0	-21.1	Peak	Horizontal
	11540.0	33.5	19.4	52.9	74.0	-21.1	Peak	Horizontal
*	8879.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Vertical
	10860.0	34.5	18.2	52.7	74.0	-21.3	Peak	Vertical
	12271.0	33.2	18.6	51.8	74.0	-22.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8769.0	34.2	13.9	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	10851.5	35.1	18.1	53.2	74.0	-20.8	Peak	Horizontal
	12160.5	33.6	18.9	52.5	74.0	-21.5	Peak	Horizontal
*	8845.5	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	39.7	15.4	55.1	68.2	-13.1	Peak	Vertical
	10877.0	33.8	18.2	52.0	74.0	-22.0	Peak	Vertical
	11608.0	32.9	19.4	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	62
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8701.0	34.2	13.8	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	11038.5	33.8	18.5	52.3	74.0	-21.7	Peak	Horizontal
	11939.5	33.7	18.6	52.3	74.0	-21.7	Peak	Horizontal
*	8845.5	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	38.9	15.4	54.3	68.2	-13.9	Peak	Vertical
	11208.5	34.2	18.8	53.0	74.0	-21.0	Peak	Vertical
	12220.0	33.4	18.7	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8743.5	34.6	13.9	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	42.4	15.4	57.8	68.2	-10.4	Peak	Horizontal
	11387.0	34.7	19.1	53.8	74.0	-20.2	Peak	Horizontal
	12143.5	34.3	18.9	53.2	74.0	-20.8	Peak	Horizontal
*	8701.0	36.2	13.8	50.0	68.2	-18.2	Peak	Vertical
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Vertical
	11089.5	35.4	18.6	54.0	74.0	-20.0	Peak	Vertical
	11854.5	33.9	18.7	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8735.0	33.9	13.9	47.8	68.2	-20.4	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	11106.5	34.6	18.6	53.2	74.0	-20.8	Peak	Horizontal
	12126.5	34.6	18.9	53.5	74.0	-20.5	Peak	Horizontal
*	8862.5	35.1	14.0	49.1	68.2	-19.1	Peak	Vertical
*	10001.5	40.9	15.4	56.3	68.2	-11.9	Peak	Vertical
	10928.0	32.5	18.4	50.9	74.0	-23.1	Peak	Vertical
	12109.5	32.3	18.9	51.2	74.0	-22.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8879.5	35.7	14.0	49.7	68.2	-18.5	Peak	Horizontal
*	10001.5	41.5	15.4	56.9	68.2	-11.3	Peak	Horizontal
	11650.5	33.8	19.3	53.1	74.0	-20.9	Peak	Horizontal
	12424.0	33.9	18.4	52.3	74.0	-21.7	Peak	Horizontal
*	8701.0	35.6	13.8	49.4	68.2	-18.8	Peak	Vertical
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Vertical
	11310.5	34.0	18.9	52.9	74.0	-21.1	Peak	Vertical
	11659.0	34.0	19.3	53.3	74.0	-20.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	41.8	15.4	57.2	68.2	-11.0	Peak	Horizontal
*	17269.0	38.3	25.7	64.0	68.2	-4.2	Peak	Horizontal
	17830.0	31.3	30.1	61.4	74.0	-12.6	Peak	Horizontal
	17932.0	30.2	31.1	61.3	74.0	-12.7	Peak	Horizontal
*	8888.0	35.5	14.0	49.5	68.2	-18.7	Peak	Vertical
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Vertical
	11336.0	34.1	19.0	53.1	74.0	-20.9	Peak	Vertical
	12211.5	34.0	18.8	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10001.5	42.3	15.4	57.7	68.2	-10.5	Peak	Horizontal
*	17388.0	40.3	26.4	66.7	68.2	-1.5	Peak	Horizontal
	17830.0	32.1	30.1	62.2	74.0	-11.8	Peak	Horizontal
	17838.5	30.3	30.1	60.4	74.0	-13.6	Peak	Horizontal
*	8752.0	34.7	13.9	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Vertical
	11455.0	33.8	19.2	53.0	74.0	-21.0	Peak	Vertical
	12347.5	34.1	18.4	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	42
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8701.0	35.2	13.8	49.0	68.2	-19.2	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	11438.0	33.5	19.2	52.7	74.0	-21.3	Peak	Horizontal
	12067.0	33.0	18.8	51.8	74.0	-22.2	Peak	Horizontal
*	8905.0	33.9	14.0	47.9	68.2	-20.3	Peak	Vertical
*	10001.5	39.0	15.4	54.4	68.2	-13.8	Peak	Vertical
	11089.5	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical
	11939.5	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	58
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8624.5	35.6	13.5	49.1	68.2	-19.1	Peak	Horizontal
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Horizontal
	11055.5	34.4	18.5	52.9	74.0	-21.1	Peak	Horizontal
	11659.0	32.8	19.3	52.1	74.0	-21.9	Peak	Horizontal
*	8828.5	34.0	14.0	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	10826.0	34.4	18.0	52.4	74.0	-21.6	Peak	Vertical
	11990.5	33.3	18.7	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	106
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	10868.5	34.4	18.2	52.6	74.0	-21.4	Peak	Horizontal
	11863.0	33.3	18.7	52.0	74.0	-22.0	Peak	Horizontal
*	8845.5	35.3	14.0	49.3	68.2	-18.9	Peak	Vertical
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Vertical
	10868.5	34.7	18.2	52.9	74.0	-21.1	Peak	Vertical
	12109.5	33.6	18.9	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	122
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	34.3	14.0	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Horizontal
	11412.5	33.6	19.1	52.7	74.0	-21.3	Peak	Horizontal
	12271.0	32.2	18.6	50.8	74.0	-23.2	Peak	Horizontal
*	8794.5	34.5	13.9	48.4	68.2	-19.8	Peak	Vertical
*	10001.5	39.5	15.4	54.9	68.2	-13.3	Peak	Vertical
	10783.5	35.1	17.8	52.9	74.0	-21.1	Peak	Vertical
	11727.0	34.2	19.0	53.2	74.0	-20.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	155
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.8	14.0	48.8	68.2	-19.4	Peak	Horizontal
*	10001.5	41.6	15.4	57.0	68.2	-11.2	Peak	Horizontal
	11421.0	33.5	19.1	52.6	74.0	-21.4	Peak	Horizontal
	12339.0	31.7	18.5	50.2	74.0	-23.8	Peak	Horizontal
*	8854.0	34.2	14.0	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Vertical
	11404.0	34.9	19.1	54.0	74.0	-20.0	Peak	Vertical
	12126.5	33.5	18.9	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE160 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	50
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8709.5	33.6	13.8	47.4	68.2	-20.8	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	11472.0	33.5	19.3	52.8	74.0	-21.2	Peak	Horizontal
	12407.0	33.7	18.4	52.1	74.0	-21.9	Peak	Horizontal
*	8896.5	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Vertical
	10877.0	34.5	18.2	52.7	74.0	-21.3	Peak	Vertical
	12143.5	34.2	18.9	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE160 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	114
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	35.5	14.0	49.5	68.2	-18.7	Peak	Horizontal
*	10001.5	41.8	15.4	57.2	68.2	-11.0	Peak	Horizontal
	10911.0	35.0	18.4	53.4	74.0	-20.6	Peak	Horizontal
	11888.5	33.6	18.6	52.2	74.0	-21.8	Peak	Horizontal
*	8811.5	33.3	14.0	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	39.3	15.4	54.7	68.2	-13.5	Peak	Vertical
	11072.5	34.8	18.6	53.4	74.0	-20.6	Peak	Vertical
	12007.5	31.8	18.7	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	10970.5	35.1	18.4	53.5	74.0	-20.5	Peak	Horizontal
	11803.5	34.4	18.7	53.1	74.0	-20.9	Peak	Horizontal
*	8845.5	34.4	14.0	48.4	68.2	-19.8	Peak	Vertical
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Vertical
	10885.5	35.1	18.3	53.4	74.0	-20.6	Peak	Vertical
	12449.5	34.6	18.4	53.0	74.0	-21.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8837.0	34.4	14.0	48.4	68.2	-19.8	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	11132.0	33.8	18.6	52.4	74.0	-21.6	Peak	Horizontal
	12279.5	33.5	18.6	52.1	74.0	-21.9	Peak	Horizontal
*	8896.5	34.2	14.0	48.2	68.2	-20.0	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	11412.5	34.0	19.1	53.1	74.0	-20.9	Peak	Vertical
	12220.0	33.2	18.7	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8735.0	33.0	13.9	46.9	68.2	-21.3	Peak	Horizontal
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Horizontal
	11327.5	34.4	18.9	53.3	74.0	-20.7	Peak	Horizontal
	11846.0	32.2	18.7	50.9	74.0	-23.1	Peak	Horizontal
*	8871.0	35.7	14.0	49.7	68.2	-18.5	Peak	Vertical
*	10001.5	37.6	15.4	53.0	68.2	-15.2	Peak	Vertical
	11098.0	33.4	18.6	52.0	74.0	-22.0	Peak	Vertical
	11446.5	33.2	19.2	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8777.5	34.8	13.9	48.7	68.2	-19.5	Peak	Horizontal
*	10001.5	40.1	15.4	55.5	68.2	-12.7	Peak	Horizontal
	11157.5	34.0	18.7	52.7	74.0	-21.3	Peak	Horizontal
	11761.0	33.5	18.9	52.4	74.0	-21.6	Peak	Horizontal
*	8820.0	34.6	14.0	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	37.4	15.4	52.8	68.2	-15.4	Peak	Vertical
	11327.5	33.6	18.9	52.5	74.0	-21.5	Peak	Vertical
	12271.0	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8726.5	34.4	13.8	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Horizontal
	10800.5	35.3	17.9	53.2	74.0	-20.8	Peak	Horizontal
	11744.0	32.9	18.9	51.8	74.0	-22.2	Peak	Horizontal
*	8675.5	33.4	13.7	47.1	68.2	-21.1	Peak	Vertical
*	9721.0	36.2	14.7	50.9	68.2	-17.3	Peak	Vertical
	10843.0	34.2	18.1	52.3	74.0	-21.7	Peak	Vertical
	11472.0	33.0	19.3	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8616.0	33.9	13.5	47.4	68.2	-20.8	Peak	Horizontal
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Horizontal
	10928.0	34.2	18.4	52.6	74.0	-21.4	Peak	Horizontal
	12126.5	33.5	18.9	52.4	74.0	-21.6	Peak	Horizontal
*	8743.5	33.0	13.9	46.9	68.2	-21.3	Peak	Vertical
*	10001.5	38.2	15.4	53.6	68.2	-14.6	Peak	Vertical
	11421.0	33.1	19.1	52.2	74.0	-21.8	Peak	Vertical
	11897.0	32.2	18.6	50.8	74.0	-23.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	32.5	13.7	46.2	68.2	-22.0	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	10877.0	33.3	18.2	51.5	74.0	-22.5	Peak	Horizontal
	11684.5	33.5	19.2	52.7	74.0	-21.3	Peak	Horizontal
*	8624.5	35.2	13.5	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	37.4	15.4	52.8	68.2	-15.4	Peak	Vertical
	10936.5	34.3	18.4	52.7	74.0	-21.3	Peak	Vertical
	11684.5	33.8	19.2	53.0	74.0	-21.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8556.5	35.3	13.2	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Horizontal
	11166.0	34.1	18.7	52.8	74.0	-21.2	Peak	Horizontal
	11421.0	33.3	19.1	52.4	74.0	-21.6	Peak	Horizontal
*	8692.5	33.6	13.7	47.3	68.2	-20.9	Peak	Vertical
*	10001.5	37.7	15.4	53.1	68.2	-15.1	Peak	Vertical
	11378.5	34.3	19.1	53.4	74.0	-20.6	Peak	Vertical
	12016.0	33.3	18.7	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8888.0	33.9	14.0	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Horizontal
	11157.5	33.9	18.7	52.6	74.0	-21.4	Peak	Horizontal
	11854.5	34.7	18.7	53.4	74.0	-20.6	Peak	Horizontal
*	8667.0	35.5	13.6	49.1	68.2	-19.1	Peak	Vertical
*	10001.5	39.0	15.4	54.4	68.2	-13.8	Peak	Vertical
	11429.5	35.0	19.2	54.2	74.0	-19.8	Peak	Vertical
	12101.0	33.4	18.9	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8658.5	35.5	13.6	49.1	68.2	-19.1	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	11387.0	33.2	19.1	52.3	74.0	-21.7	Peak	Horizontal
	11693.0	33.6	19.2	52.8	74.0	-21.2	Peak	Horizontal
*	8854.0	35.3	14.0	49.3	68.2	-18.9	Peak	Vertical
*	10001.5	37.3	15.4	52.7	68.2	-15.5	Peak	Vertical
	11370.0	33.7	19.0	52.7	74.0	-21.3	Peak	Vertical
	12075.5	33.3	18.9	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	11344.5	33.6	19.0	52.6	74.0	-21.4	Peak	Horizontal
	12169.0	32.8	18.8	51.6	74.0	-22.4	Peak	Horizontal
*	8692.5	32.8	13.7	46.5	68.2	-21.7	Peak	Vertical
*	10001.5	38.0	15.4	53.4	68.2	-14.8	Peak	Vertical
	10953.5	34.8	18.4	53.2	74.0	-20.8	Peak	Vertical
	11769.5	34.3	18.8	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8896.5	34.7	14.0	48.7	68.2	-19.5	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	11115.0	34.9	18.6	53.5	74.0	-20.5	Peak	Horizontal
	12169.0	33.1	18.8	51.9	74.0	-22.1	Peak	Horizontal
*	8871.0	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Vertical
	10860.0	34.5	18.2	52.7	74.0	-21.3	Peak	Vertical
	11497.5	33.8	19.3	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8854.0	34.1	14.0	48.1	68.2	-20.1	Peak	Horizontal
*	10001.5	41.8	15.4	57.2	68.2	-11.0	Peak	Horizontal
	11132.0	33.8	18.6	52.4	74.0	-21.6	Peak	Horizontal
	12169.0	31.6	18.8	50.4	74.0	-23.6	Peak	Horizontal
*	8616.0	34.4	13.5	47.9	68.2	-20.3	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	11149.0	34.3	18.7	53.0	74.0	-21.0	Peak	Vertical
	12135.0	33.7	18.9	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8786.0	34.5	13.9	48.4	68.2	-19.8	Peak	Horizontal
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Horizontal
	10894.0	35.0	18.3	53.3	74.0	-20.7	Peak	Horizontal
	11472.0	33.1	19.3	52.4	74.0	-21.6	Peak	Horizontal
*	8854.0	35.4	14.0	49.4	68.2	-18.8	Peak	Vertical
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Vertical
	10902.5	34.3	18.3	52.6	74.0	-21.4	Peak	Vertical
	11965.0	33.9	18.6	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8633.0	34.0	13.5	47.5	68.2	-20.7	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	11183.0	34.4	18.7	53.1	74.0	-20.9	Peak	Horizontal
	11659.0	33.5	19.3	52.8	74.0	-21.2	Peak	Horizontal
*	8735.0	33.8	13.9	47.7	68.2	-20.5	Peak	Vertical
*	10154.5	36.8	16.0	52.8	68.2	-15.4	Peak	Vertical
	10800.5	35.1	17.9	53.0	74.0	-21.0	Peak	Vertical
	11489.0	33.8	19.3	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	62
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.4	14.0	48.4	68.2	-19.8	Peak	Horizontal
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Horizontal
	10843.0	35.4	18.1	53.5	74.0	-20.5	Peak	Horizontal
	12126.5	34.1	18.9	53.0	74.0	-21.0	Peak	Horizontal
*	8845.5	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	37.0	15.4	52.4	68.2	-15.8	Peak	Vertical
	11421.0	33.2	19.1	52.3	74.0	-21.7	Peak	Vertical
	12177.5	33.2	18.8	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8888.0	35.2	14.0	49.2	68.2	-19.0	Peak	Horizontal
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Horizontal
	11234.0	34.0	18.8	52.8	74.0	-21.2	Peak	Horizontal
	12271.0	32.2	18.6	50.8	74.0	-23.2	Peak	Horizontal
*	8641.5	35.1	13.5	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	39.1	15.4	54.5	68.2	-13.7	Peak	Vertical
	11123.5	35.0	18.6	53.6	74.0	-20.4	Peak	Vertical
	12067.0	34.1	18.8	52.9	74.0	-21.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8709.5	34.4	13.8	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	41.3	15.4	56.7	68.2	-11.5	Peak	Horizontal
	10902.5	34.8	18.3	53.1	74.0	-20.9	Peak	Horizontal
	11871.5	33.4	18.7	52.1	74.0	-21.9	Peak	Horizontal
*	8752.0	35.0	13.9	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	39.5	15.4	54.9	68.2	-13.3	Peak	Vertical
	10843.0	34.4	18.1	52.5	74.0	-21.5	Peak	Vertical
	11650.5	33.8	19.3	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8667.0	34.6	13.6	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Horizontal
	10911.0	35.1	18.4	53.5	74.0	-20.5	Peak	Horizontal
	11846.0	32.0	18.7	50.7	74.0	-23.3	Peak	Horizontal
*	8658.5	33.7	13.6	47.3	68.2	-20.9	Peak	Vertical
*	9942.0	35.4	15.3	50.7	68.2	-17.5	Peak	Vertical
	10860.0	34.6	18.2	52.8	74.0	-21.2	Peak	Vertical
	11480.5	33.6	19.3	52.9	74.0	-21.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8837.0	34.0	14.0	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	10817.5	35.1	18.0	53.1	74.0	-20.9	Peak	Horizontal
	11642.0	33.2	19.4	52.6	74.0	-21.4	Peak	Horizontal
*	8777.5	34.9	13.9	48.8	68.2	-19.4	Peak	Vertical
*	10001.5	38.5	15.4	53.9	68.2	-14.3	Peak	Vertical
	11336.0	33.7	19.0	52.7	74.0	-21.3	Peak	Vertical
	12424.0	33.7	18.4	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8786.0	34.1	13.9	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Horizontal
	10834.5	36.4	18.1	54.5	74.0	-19.5	Peak	Horizontal
	11574.0	33.2	19.5	52.7	74.0	-21.3	Peak	Horizontal
*	8633.0	34.5	13.5	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	38.1	15.4	53.5	68.2	-14.7	Peak	Vertical
	10792.0	35.3	17.9	53.2	74.0	-20.8	Peak	Vertical
	11693.0	33.5	19.2	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	42
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.2	14.0	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Horizontal
	10979.0	33.9	18.5	52.4	74.0	-21.6	Peak	Horizontal
	12109.5	33.4	18.9	52.3	74.0	-21.7	Peak	Horizontal
*	8624.5	35.1	13.5	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	38.0	15.4	53.4	68.2	-14.8	Peak	Vertical
	10817.5	34.9	18.0	52.9	74.0	-21.1	Peak	Vertical
	11718.5	33.4	19.0	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	58
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8675.5	34.5	13.7	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	40.0	15.4	55.4	68.2	-12.8	Peak	Horizontal
	10987.5	34.3	18.5	52.8	74.0	-21.2	Peak	Horizontal
	11956.5	33.9	18.6	52.5	74.0	-21.5	Peak	Horizontal
*	8692.5	34.3	13.7	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	36.5	15.4	51.9	68.2	-16.3	Peak	Vertical
	10877.0	35.1	18.2	53.3	74.0	-20.7	Peak	Vertical
	12390.0	34.0	18.4	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	106
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8726.5	33.9	13.8	47.7	68.2	-20.5	Peak	Horizontal
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Horizontal
	11302.0	34.4	18.9	53.3	74.0	-20.7	Peak	Horizontal
	12288.0	33.9	18.6	52.5	74.0	-21.5	Peak	Horizontal
*	8837.0	34.0	14.0	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	38.7	15.4	54.1	68.2	-14.1	Peak	Vertical
	10877.0	35.5	18.2	53.7	74.0	-20.3	Peak	Vertical
	12152.0	33.5	18.9	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	122
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8777.5	34.9	13.9	48.8	68.2	-19.4	Peak	Horizontal
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Horizontal
	11123.5	34.3	18.6	52.9	74.0	-21.1	Peak	Horizontal
	12271.0	32.1	18.6	50.7	74.0	-23.3	Peak	Horizontal
*	8794.5	34.7	13.9	48.6	68.2	-19.6	Peak	Vertical
*	10477.5	34.8	17.1	51.9	68.2	-16.3	Peak	Vertical
	11565.5	33.3	19.5	52.8	74.0	-21.2	Peak	Vertical
	11786.5	31.6	18.8	50.4	74.0	-23.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	155
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8862.5	34.9	14.0	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	40.4	15.4	55.8	68.2	-12.4	Peak	Horizontal
	11225.5	34.2	18.8	53.0	74.0	-21.0	Peak	Horizontal
	12126.5	33.6	18.9	52.5	74.0	-21.5	Peak	Horizontal
*	8871.0	34.4	14.0	48.4	68.2	-19.8	Peak	Vertical
*	10001.5	37.2	15.4	52.6	68.2	-15.6	Peak	Vertical
	11319.0	34.0	18.9	52.9	74.0	-21.1	Peak	Vertical
	12424.0	34.3	18.4	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT160 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	50
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	10894.0	34.2	18.3	52.5	74.0	-21.5	Peak	Horizontal
	11684.5	33.8	19.2	53.0	74.0	-21.0	Peak	Horizontal
*	8862.5	34.7	14.0	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	37.6	15.4	53.0	68.2	-15.2	Peak	Vertical
	10877.0	35.0	18.2	53.2	74.0	-20.8	Peak	Vertical
	11642.0	32.8	19.4	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ac-VHT160 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	114
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8735.0	34.3	13.9	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Horizontal
	10928.0	34.3	18.4	52.7	74.0	-21.3	Peak	Horizontal
	12169.0	32.3	18.8	51.1	74.0	-22.9	Peak	Horizontal
*	8709.5	34.5	13.8	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	36.9	15.4	52.3	68.2	-15.9	Peak	Vertical
	11421.0	33.9	19.1	53.0	74.0	-21.0	Peak	Vertical
	12007.5	33.0	18.7	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8735.0	33.7	13.9	47.6	68.2	-20.6	Peak	Horizontal
*	10001.5	40.7	15.4	56.1	68.2	-12.1	Peak	Horizontal
	11038.5	34.1	18.5	52.6	74.0	-21.4	Peak	Horizontal
	11684.5	33.6	19.2	52.8	74.0	-21.2	Peak	Horizontal
*	8675.5	34.8	13.7	48.5	68.2	-19.7	Peak	Vertical
*	9823.0	35.0	15.6	50.6	68.2	-17.6	Peak	Vertical
	11038.5	32.5	18.5	51.0	74.0	-23.0	Peak	Vertical
	11548.5	34.0	19.4	53.4	74.0	-20.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8811.5	33.9	14.0	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	10843.0	35.1	18.1	53.2	74.0	-20.8	Peak	Horizontal
	11395.5	33.6	19.1	52.7	74.0	-21.3	Peak	Horizontal
*	8658.5	35.0	13.6	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	38.3	15.4	53.7	68.2	-14.5	Peak	Vertical
	11115.0	34.2	18.6	52.8	74.0	-21.2	Peak	Vertical
	11956.5	33.7	18.6	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	35.3	14.0	49.3	68.2	-18.9	Peak	Horizontal
*	10001.5	41.5	15.4	56.9	68.2	-11.3	Peak	Horizontal
	11395.5	33.6	19.1	52.7	74.0	-21.3	Peak	Horizontal
	12135.0	33.0	18.9	51.9	74.0	-22.1	Peak	Horizontal
*	8769.0	33.6	13.9	47.5	68.2	-20.7	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	10885.5	34.9	18.3	53.2	74.0	-20.8	Peak	Vertical
	11557.0	33.6	19.5	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8675.5	32.9	13.7	46.6	68.2	-21.6	Peak	Horizontal
*	10001.5	40.7	15.4	56.1	68.2	-12.1	Peak	Horizontal
	11463.5	34.3	19.3	53.6	74.0	-20.4	Peak	Horizontal
	11948.0	31.8	18.6	50.4	74.0	-23.6	Peak	Horizontal
*	8828.5	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	38.6	15.4	54.0	68.2	-14.2	Peak	Vertical
	10945.0	34.9	18.4	53.3	74.0	-20.7	Peak	Vertical
	11489.0	34.3	19.3	53.6	74.0	-20.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8862.5	34.2	14.0	48.2	68.2	-20.0	Peak	Horizontal
*	10001.5	39.1	15.4	54.5	68.2	-13.7	Peak	Horizontal
	10834.5	34.4	18.1	52.5	74.0	-21.5	Peak	Horizontal
	11378.5	33.7	19.1	52.8	74.0	-21.2	Peak	Horizontal
*	8854.0	35.0	14.0	49.0	68.2	-19.2	Peak	Vertical
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Vertical
	10800.5	35.6	17.9	53.5	74.0	-20.5	Peak	Vertical
	12101.0	33.8	18.9	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8845.5	35.0	14.0	49.0	68.2	-19.2	Peak	Horizontal
*	10001.5	40.3	15.4	55.7	68.2	-12.5	Peak	Horizontal
	11200.0	34.0	18.7	52.7	74.0	-21.3	Peak	Horizontal
	12007.5	33.5	18.7	52.2	74.0	-21.8	Peak	Horizontal
*	8854.0	34.5	14.0	48.5	68.2	-19.7	Peak	Vertical
*	10001.5	36.9	15.4	52.3	68.2	-15.9	Peak	Vertical
	10962.0	34.5	18.4	52.9	74.0	-21.1	Peak	Vertical
	12211.5	34.6	18.8	53.4	74.0	-20.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8879.5	34.6	14.0	48.6	68.2	-19.6	Peak	Horizontal
*	10001.5	41.1	15.4	56.5	68.2	-11.7	Peak	Horizontal
	11072.5	34.2	18.6	52.8	74.0	-21.2	Peak	Horizontal
	12152.0	32.9	18.9	51.8	74.0	-22.2	Peak	Horizontal
*	8854.0	34.1	14.0	48.1	68.2	-20.1	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	10766.5	36.0	17.7	53.7	74.0	-20.3	Peak	Vertical
	12279.5	34.6	18.6	53.2	74.0	-20.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	35.3	13.7	49.0	68.2	-19.2	Peak	Horizontal
*	10001.5	39.9	15.4	55.3	68.2	-12.9	Peak	Horizontal
	11106.5	33.9	18.6	52.5	74.0	-21.5	Peak	Horizontal
	12177.5	33.5	18.8	52.3	74.0	-21.7	Peak	Horizontal
*	8922.0	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	37.8	15.4	53.2	68.2	-15.0	Peak	Vertical
	10996.0	34.9	18.5	53.4	74.0	-20.6	Peak	Vertical
	11684.5	33.2	19.2	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.8	14.0	48.8	68.2	-19.4	Peak	Horizontal
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Horizontal
	11115.0	33.7	18.6	52.3	74.0	-21.7	Peak	Horizontal
	12160.5	33.6	18.9	52.5	74.0	-21.5	Peak	Horizontal
*	8769.0	33.4	13.9	47.3	68.2	-20.9	Peak	Vertical
*	10112.0	34.8	15.8	50.6	68.2	-17.6	Peak	Vertical
	10715.5	34.9	17.5	52.4	74.0	-21.6	Peak	Vertical
	11404.0	34.6	19.1	53.7	74.0	-20.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8684.0	35.8	13.7	49.5	68.2	-18.7	Peak	Horizontal
*	10001.5	40.9	15.4	56.3	68.2	-11.9	Peak	Horizontal
	11438.0	33.8	19.2	53.0	74.0	-21.0	Peak	Horizontal
	11922.5	34.8	18.6	53.4	74.0	-20.6	Peak	Horizontal
*	8624.5	34.6	13.5	48.1	68.2	-20.1	Peak	Vertical
*	9950.5	35.1	15.3	50.4	68.2	-17.8	Peak	Vertical
	11421.0	34.4	19.1	53.5	74.0	-20.5	Peak	Vertical
	12432.5	33.6	18.4	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8599.0	36.3	13.4	49.7	68.2	-18.5	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	11123.5	33.7	18.6	52.3	74.0	-21.7	Peak	Horizontal
	12271.0	33.2	18.6	51.8	74.0	-22.2	Peak	Horizontal
*	8684.0	34.3	13.7	48.0	68.2	-20.2	Peak	Vertical
*	10171.5	34.4	16.1	50.5	68.2	-17.7	Peak	Vertical
	10877.0	33.1	18.2	51.3	74.0	-22.7	Peak	Vertical
	12016.0	34.0	18.7	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8743.5	34.0	13.9	47.9	68.2	-20.3	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	11548.5	34.3	19.4	53.7	74.0	-20.3	Peak	Horizontal
	12194.5	33.2	18.8	52.0	74.0	-22.0	Peak	Horizontal
*	8820.0	34.3	14.0	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	37.9	15.4	53.3	68.2	-14.9	Peak	Vertical
	10970.5	32.4	18.4	50.8	74.0	-23.2	Peak	Vertical
	11735.5	31.7	19.0	50.7	74.0	-23.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8726.5	34.0	13.8	47.8	68.2	-20.4	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	11404.0	33.9	19.1	53.0	74.0	-21.0	Peak	Horizontal
	12645.0	33.7	18.7	52.4	74.0	-21.6	Peak	Horizontal
*	8692.5	35.0	13.7	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	11183.0	34.0	18.7	52.7	74.0	-21.3	Peak	Vertical
	12135.0	33.8	18.9	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	33.0	13.7	46.7	68.2	-21.5	Peak	Horizontal
*	9772.0	34.5	14.9	49.4	68.2	-18.8	Peak	Horizontal
	11310.5	33.9	18.9	52.8	74.0	-21.2	Peak	Horizontal
	12152.0	33.9	18.9	52.8	74.0	-21.2	Peak	Horizontal
*	8820.0	34.7	14.0	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	39.6	15.4	55.0	68.2	-13.2	Peak	Vertical
	10826.0	34.6	18.0	52.6	74.0	-21.4	Peak	Vertical
	11599.5	34.2	19.4	53.6	74.0	-20.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8616.0	33.6	13.5	47.1	68.2	-21.1	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	11395.5	34.2	19.1	53.3	74.0	-20.7	Peak	Horizontal
	11786.5	32.5	18.8	51.3	74.0	-22.7	Peak	Horizontal
*	8803.0	33.7	14.0	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	39.0	15.4	54.4	68.2	-13.8	Peak	Vertical
	11574.0	33.4	19.5	52.9	74.0	-21.1	Peak	Vertical
	11948.0	31.9	18.6	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	62
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	35.7	14.0	49.7	68.2	-18.5	Peak	Horizontal
*	10001.5	41.6	15.4	57.0	68.2	-11.2	Peak	Horizontal
	11378.5	33.9	19.1	53.0	74.0	-21.0	Peak	Horizontal
	12041.5	33.9	18.8	52.7	74.0	-21.3	Peak	Horizontal
*	8692.5	33.0	13.7	46.7	68.2	-21.5	Peak	Vertical
*	9899.5	33.5	15.4	48.9	68.2	-19.3	Peak	Vertical
	10792.0	34.4	17.9	52.3	74.0	-21.7	Peak	Vertical
	11642.0	33.2	19.4	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8879.5	35.6	14.0	49.6	68.2	-18.6	Peak	Horizontal
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Horizontal
	10843.0	34.3	18.1	52.4	74.0	-21.6	Peak	Horizontal
	12016.0	33.9	18.7	52.6	74.0	-21.4	Peak	Horizontal
*	8658.5	33.0	13.6	46.6	68.2	-21.6	Peak	Vertical
*	10214.0	34.6	16.3	50.9	68.2	-17.3	Peak	Vertical
	11463.5	33.5	19.3	52.8	74.0	-21.2	Peak	Vertical
	12271.0	33.6	18.6	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8701.0	34.5	13.8	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	11472.0	33.6	19.3	52.9	74.0	-21.1	Peak	Horizontal
	12364.5	33.7	18.4	52.1	74.0	-21.9	Peak	Horizontal
*	8845.5	34.9	14.0	48.9	68.2	-19.3	Peak	Vertical
*	9959.0	38.1	15.3	53.4	68.2	-14.8	Peak	Vertical
	10902.5	34.0	18.3	52.3	74.0	-21.7	Peak	Vertical
	11565.5	34.0	19.5	53.5	74.0	-20.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8675.5	34.9	13.7	48.6	68.2	-19.6	Peak	Horizontal
*	10001.5	40.5	15.4	55.9	68.2	-12.3	Peak	Horizontal
	10843.0	35.1	18.1	53.2	74.0	-20.8	Peak	Horizontal
	12288.0	34.1	18.6	52.7	74.0	-21.3	Peak	Horizontal
*	8743.5	34.8	13.9	48.7	68.2	-19.5	Peak	Vertical
*	10001.5	37.1	15.4	52.5	68.2	-15.7	Peak	Vertical
	11293.5	33.5	18.9	52.4	74.0	-21.6	Peak	Vertical
	11795.0	33.8	18.8	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8735.0	35.0	13.9	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	11888.5	34.4	18.6	53.0	74.0	-21.0	Peak	Horizontal
	13359.0	33.9	21.2	55.1	74.0	-18.9	Peak	Horizontal
*	8828.5	34.5	14.0	48.5	68.2	-19.7	Peak	Vertical
*	10350.0	34.4	16.8	51.2	68.2	-17.0	Peak	Vertical
	10919.5	34.0	18.4	52.4	74.0	-21.6	Peak	Vertical
	11650.5	33.3	19.3	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8777.5	35.0	13.9	48.9	68.2	-19.3	Peak	Horizontal
*	10001.5	41.0	15.4	56.4	68.2	-11.8	Peak	Horizontal
	10885.5	35.3	18.3	53.6	74.0	-20.4	Peak	Horizontal
	11463.5	33.5	19.3	52.8	74.0	-21.2	Peak	Horizontal
*	8701.0	34.5	13.8	48.3	68.2	-19.9	Peak	Vertical
*	10001.5	38.8	15.4	54.2	68.2	-14.0	Peak	Vertical
	10868.5	35.9	18.2	54.1	74.0	-19.9	Peak	Vertical
	11446.5	34.7	19.2	53.9	74.0	-20.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	42
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8786.0	34.4	13.9	48.3	68.2	-19.9	Peak	Horizontal
*	10001.5	41.2	15.4	56.6	68.2	-11.6	Peak	Horizontal
	10928.0	34.6	18.4	53.0	74.0	-21.0	Peak	Horizontal
	12543.0	33.8	18.6	52.4	74.0	-21.6	Peak	Horizontal
*	8803.0	35.7	14.0	49.7	68.2	-18.5	Peak	Vertical
*	9976.0	35.6	15.3	50.9	68.2	-17.3	Peak	Vertical
	10936.5	34.7	18.4	53.1	74.0	-20.9	Peak	Vertical
	11710.0	33.5	19.1	52.6	74.0	-21.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	58
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	34.0	14.0	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	40.8	15.4	56.2	68.2	-12.0	Peak	Horizontal
	11455.0	33.1	19.2	52.3	74.0	-21.7	Peak	Horizontal
	12271.0	31.8	18.6	50.4	74.0	-23.6	Peak	Horizontal
*	8854.0	34.6	14.0	48.6	68.2	-19.6	Peak	Vertical
*	10001.5	39.4	15.4	54.8	68.2	-13.4	Peak	Vertical
	10826.0	32.3	18.0	50.3	74.0	-23.7	Peak	Vertical
	11531.5	33.4	19.4	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	106
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8862.5	34.5	14.0	48.5	68.2	-19.7	Peak	Horizontal
*	10001.5	39.8	15.4	55.2	68.2	-13.0	Peak	Horizontal
	10826.0	34.7	18.0	52.7	74.0	-21.3	Peak	Horizontal
	11591.0	33.6	19.5	53.1	74.0	-20.9	Peak	Horizontal
*	8888.0	35.2	14.0	49.2	68.2	-19.0	Peak	Vertical
*	10001.5	38.0	15.4	53.4	68.2	-14.8	Peak	Vertical
	11353.0	34.8	19.0	53.8	74.0	-20.2	Peak	Vertical
	12160.5	33.6	18.9	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	122
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8709.5	34.2	13.8	48.0	68.2	-20.2	Peak	Horizontal
*	10001.5	40.6	15.4	56.0	68.2	-12.2	Peak	Horizontal
	10800.5	34.8	17.9	52.7	74.0	-21.3	Peak	Horizontal
	11846.0	33.8	18.7	52.5	74.0	-21.5	Peak	Horizontal
*	8616.0	35.4	13.5	48.9	68.2	-19.3	Peak	Vertical
*	10001.5	37.3	15.4	52.7	68.2	-15.5	Peak	Vertical
	11038.5	34.3	18.5	52.8	74.0	-21.2	Peak	Vertical
	12245.5	33.3	18.7	52.0	74.0	-22.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/16
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	155
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8854.0	33.4	14.0	47.4	68.2	-20.8	Peak	Horizontal
*	10001.5	41.4	15.4	56.8	68.2	-11.4	Peak	Horizontal
	10783.5	34.3	17.8	52.1	74.0	-21.9	Peak	Horizontal
	12092.5	33.2	18.9	52.1	74.0	-21.9	Peak	Horizontal
*	10001.5	36.8	15.4	52.2	68.2	-16.0	Peak	Vertical
*	10545.5	35.7	17.2	52.9	68.2	-15.3	Peak	Vertical
	11055.5	34.2	18.5	52.7	74.0	-21.3	Peak	Vertical
	12483.5	34.3	18.5	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE160 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	50
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.5	33.5	13.7	47.2	68.2	-21.0	Peak	Horizontal
*	10001.5	39.5	15.4	54.9	68.2	-13.3	Peak	Horizontal
	11336.0	33.7	19.0	52.7	74.0	-21.3	Peak	Horizontal
	12441.0	33.9	18.4	52.3	74.0	-21.7	Peak	Horizontal
*	8709.5	33.9	13.8	47.7	68.2	-20.5	Peak	Vertical
*	10001.5	38.2	15.4	53.6	68.2	-14.6	Peak	Vertical
	11480.5	32.3	19.3	51.6	74.0	-22.4	Peak	Vertical
	12118.0	32.5	18.9	51.4	74.0	-22.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX11000 MU-MIMO Tri-Band Gaming Router	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2018/08/19
Test Mode:	802.11ax-HE160 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	114
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8828.5	33.7	14.0	47.7	68.2	-20.5	Peak	Horizontal
*	10001.5	40.2	15.4	55.6	68.2	-12.6	Peak	Horizontal
	11310.5	33.7	18.9	52.6	74.0	-21.4	Peak	Horizontal
	12483.5	33.3	18.5	51.8	74.0	-22.2	Peak	Horizontal
*	8624.5	34.5	13.5	48.0	68.2	-20.2	Peak	Vertical
*	10001.5	37.0	15.4	52.4	68.2	-15.8	Peak	Vertical
	11208.5	34.4	18.8	53.2	74.0	-20.8	Peak	Vertical
	11684.5	33.7	19.2	52.9	74.0	-21.1	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2018/12/01 - 00:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz

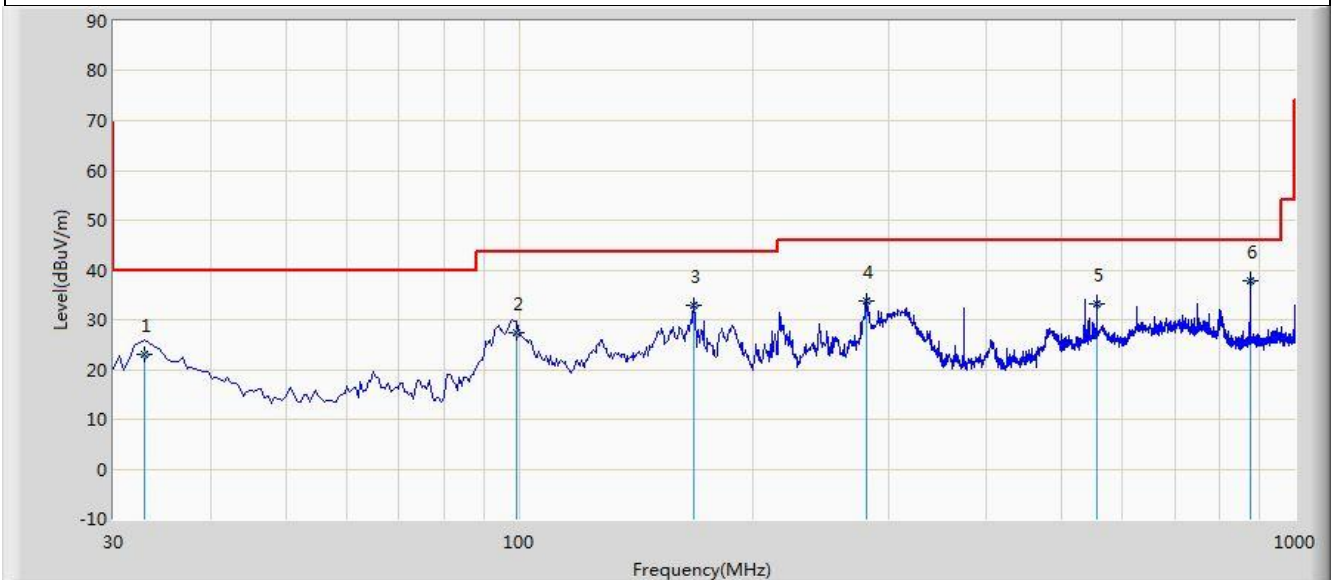Test Mode: There is the worst case within frequency range 30MHz~1GHz. (5G Wi-Fi)


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			32.880	23.041	10.478	-16.959	40.000	12.563	QP
2			99.360	27.328	14.347	-16.172	43.500	12.981	QP
3		*	167.740	32.778	22.498	-10.722	43.500	10.280	QP
4			280.780	33.637	19.247	-12.363	46.000	14.390	QP
5			555.837	33.260	13.744	-12.740	46.000	19.516	QP
6			875.365	37.710	13.492	-8.290	46.000	24.218	QP


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/12/01 - 00:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz

Test Mode: There is the worst case within frequency range 30MHz~1GHz. (5G Wi-Fi)

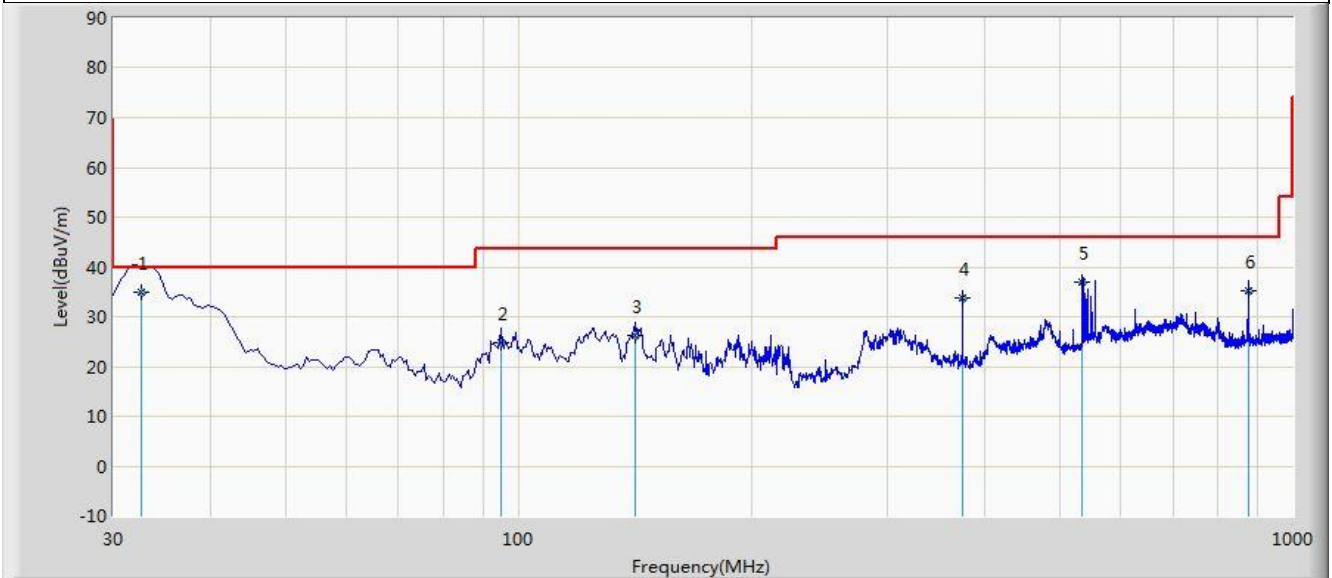

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			32.660	35.023	22.500	-4.977	40.000	12.523	QP
2			94.990	24.900	12.493	-18.600	43.500	12.408	QP
3		*	141.550	26.282	16.733	-17.218	43.500	9.549	QP
4			374.835	33.650	17.225	-12.350	46.000	16.425	QP
5			535.370	36.991	17.891	-9.009	46.000	19.100	QP
6			875.355	35.348	11.130	-10.652	46.000	24.218	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.


7.9.4. Test Setup

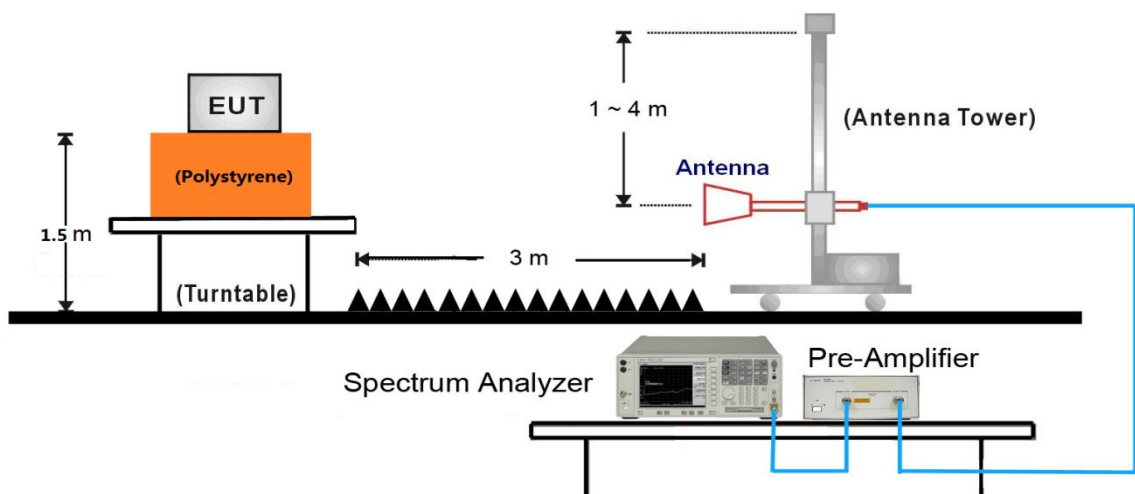

This item was performed with the WIFI antenna connected.

7.9.5. Test Result

Site: AC1	Time: 2018/11/26 - 20:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

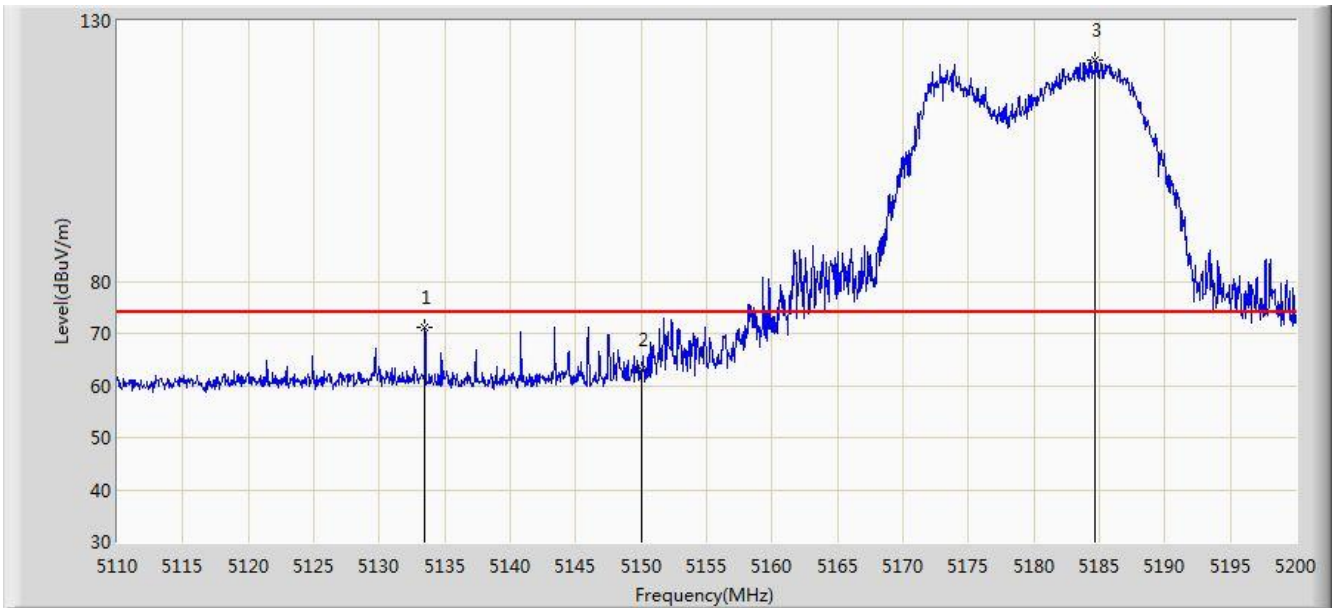

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.490	71.211	67.036	-2.789	74.000	4.175	PK
2			5150.000	62.901	58.732	-11.099	74.000	4.170	PK
3		*	5184.700	122.360	118.308	N/A	N/A	4.053	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.954	47.785	-2.046	54.000	4.170	AV
2	X	*	5184.835	111.448	107.396	N/A	N/A	4.052	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)