


Site: AC1	Time: 2018/11/26 - 20:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

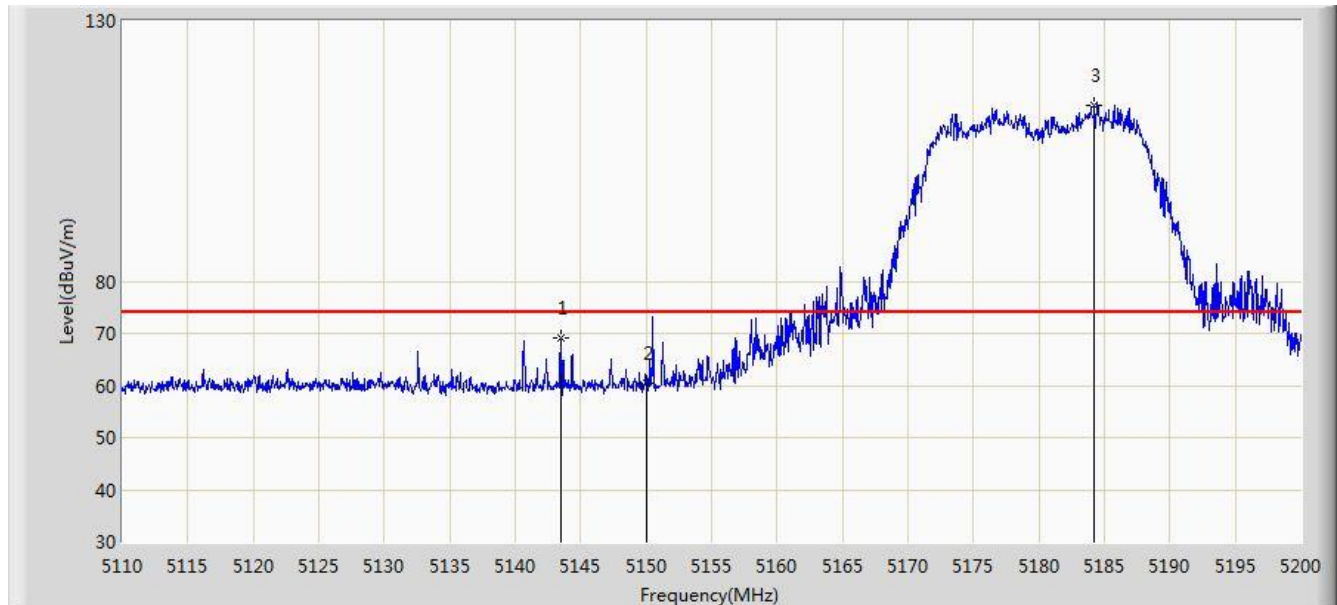


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.480	69.127	64.951	-4.873	74.000	4.175	PK
2			5150.000	60.549	56.380	-13.451	74.000	4.170	PK
3		*	5184.250	113.749	109.695	N/A	N/A	4.053	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

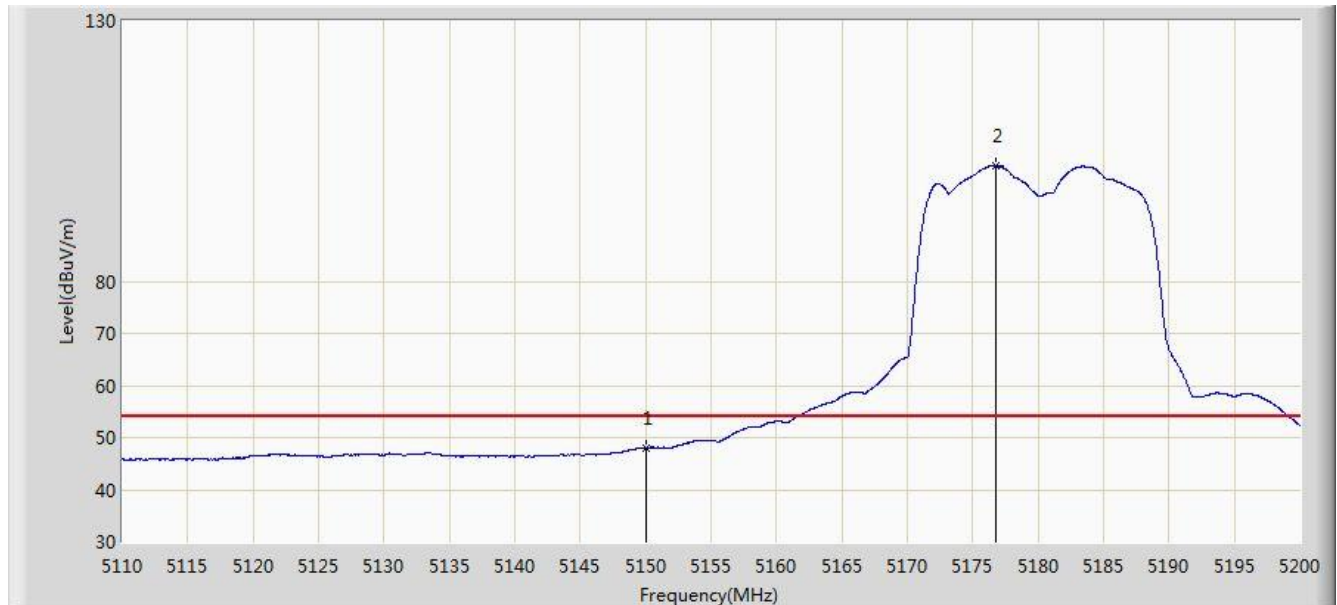


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.040	43.871	-5.960	54.000	4.170	AV
2		*	5176.735	102.207	98.127	N/A	N/A	4.081	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

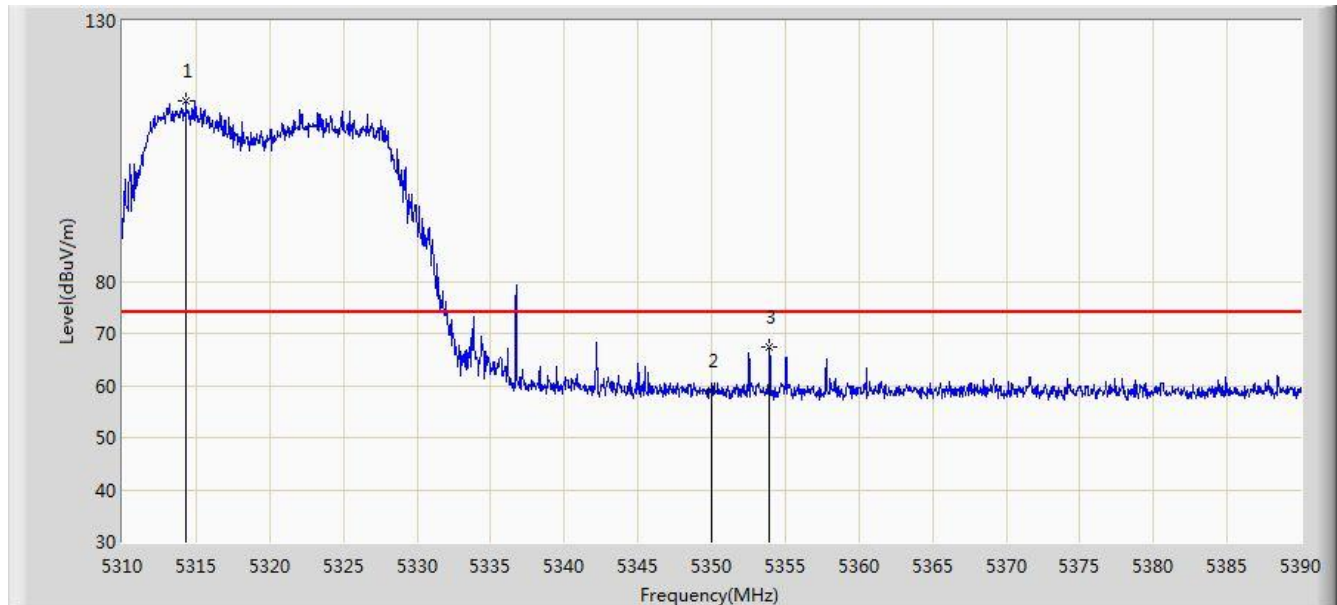


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.320	114.698	110.860	N/A	N/A	3.839	PK
2			5350.000	59.038	55.133	-14.962	74.000	3.904	PK
3			5353.920	67.469	63.557	-6.531	74.000	3.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

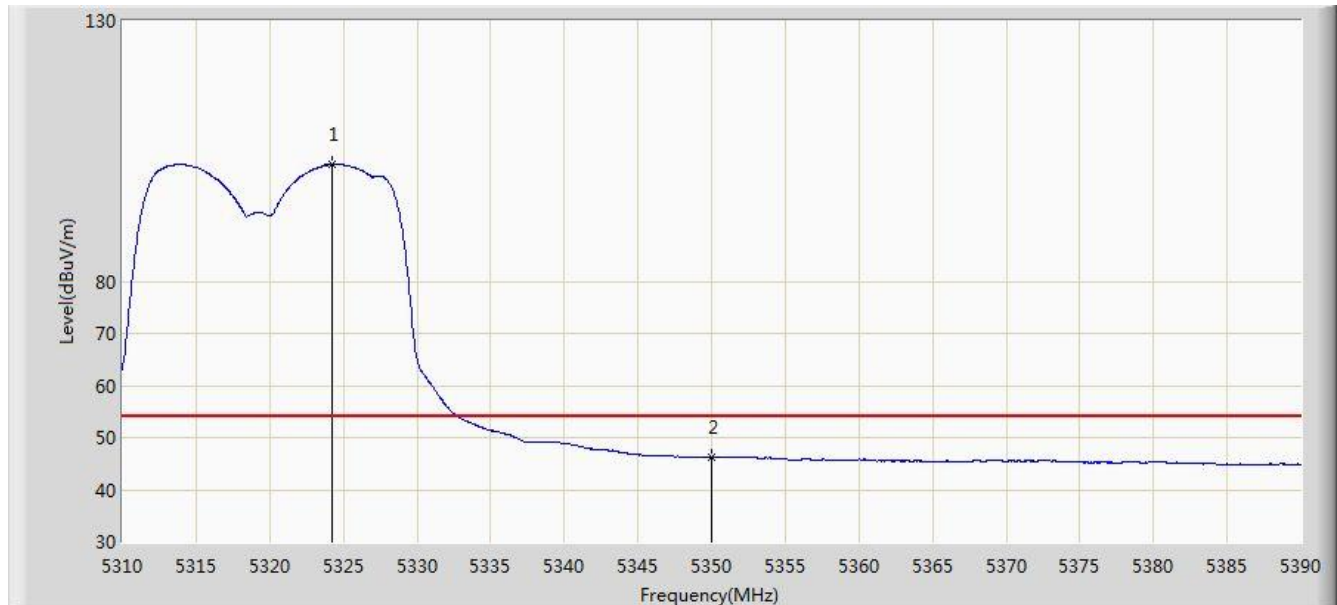


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.240	102.531	98.674	N/A	N/A	3.857	AV
2			5350.000	46.260	42.355	-7.740	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

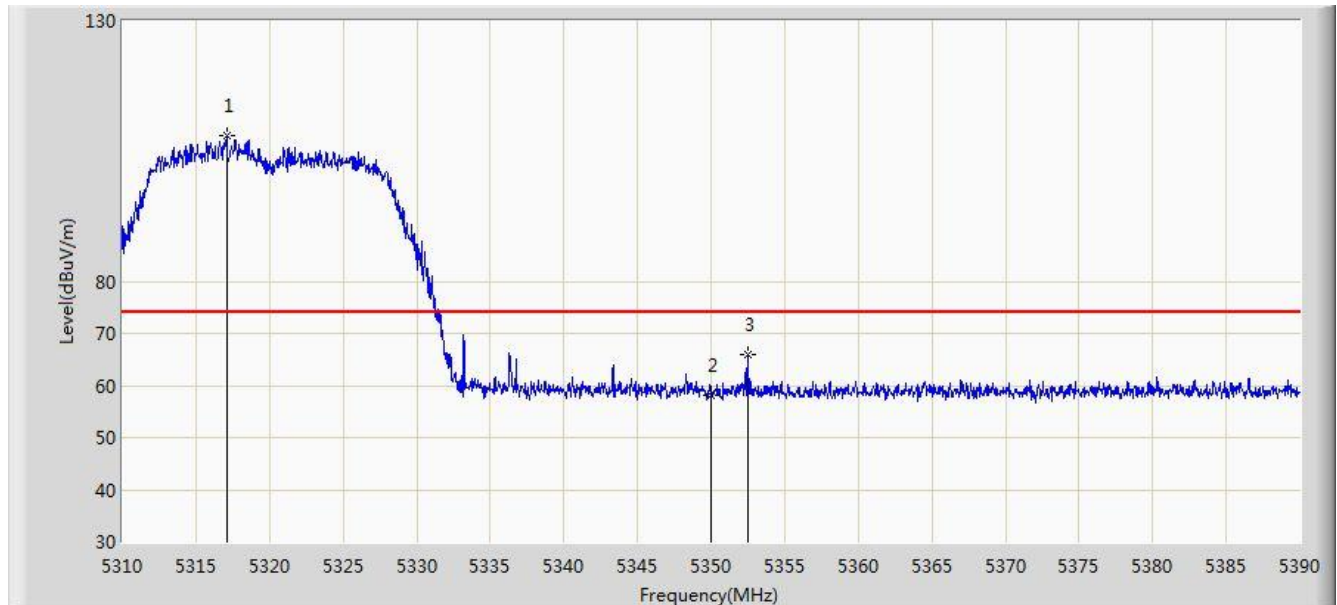


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.120	107.899	104.056	N/A	N/A	3.842	PK
2			5350.000	58.153	54.248	-15.847	74.000	3.904	PK
3			5352.480	65.869	61.960	-8.131	74.000	3.909	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

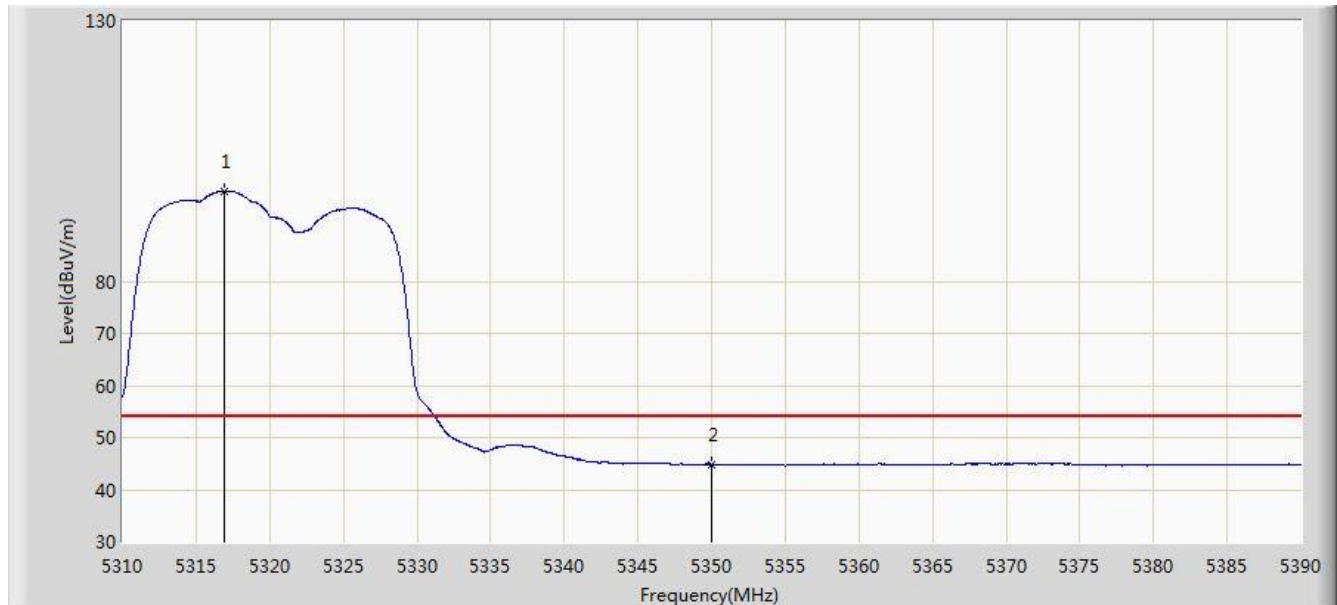


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.920	97.374	93.531	N/A	N/A	3.842	AV
2			5350.000	44.839	40.934	-9.161	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 02:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

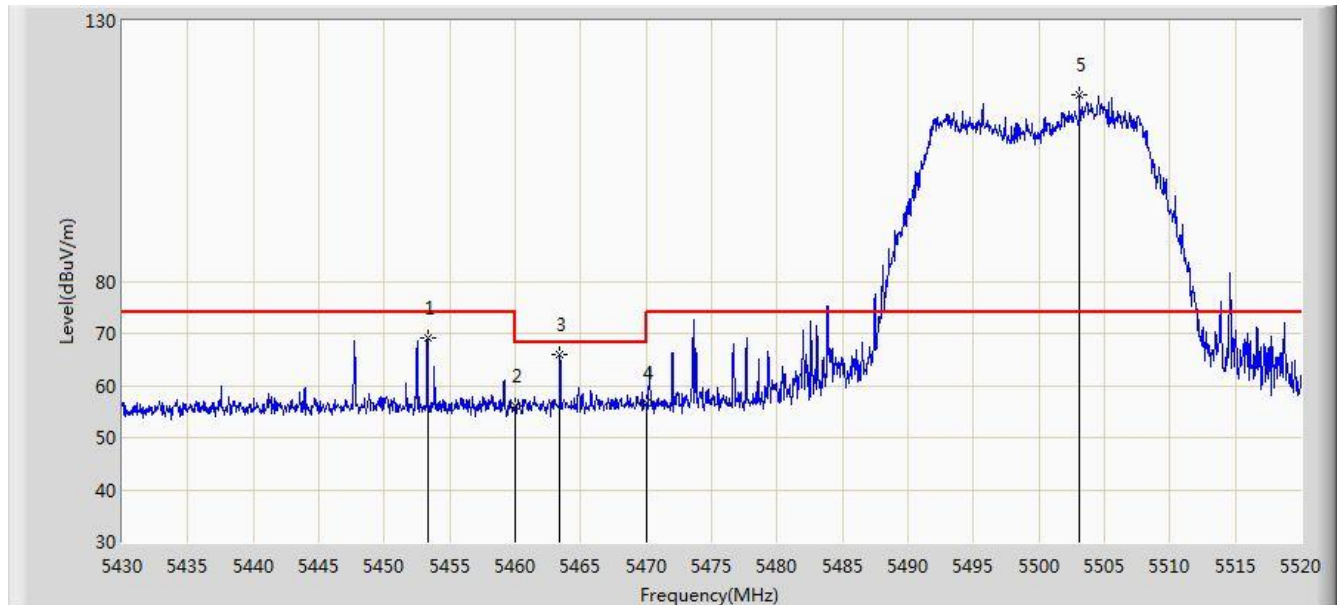


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.310	69.130	64.965	-4.870	74.000	4.165	PK
2			5460.000	56.038	51.858	-17.962	74.000	4.180	PK
3			5463.435	66.070	61.882	-2.130	68.200	4.187	PK
4			5470.000	56.710	52.508	-11.490	68.200	4.202	PK
5		*	5503.080	115.821	111.540	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 02:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

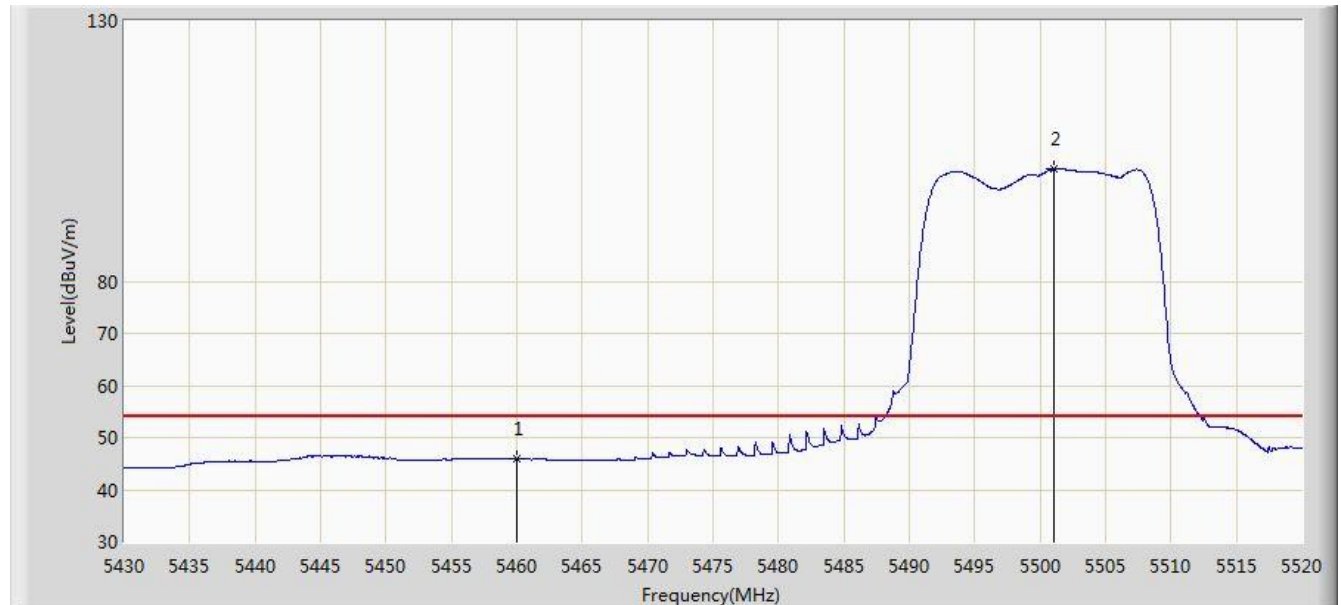


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.867	41.687	-8.133	54.000	4.180	AV
2		*	5501.055	101.595	97.320	N/A	N/A	4.275	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 02:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

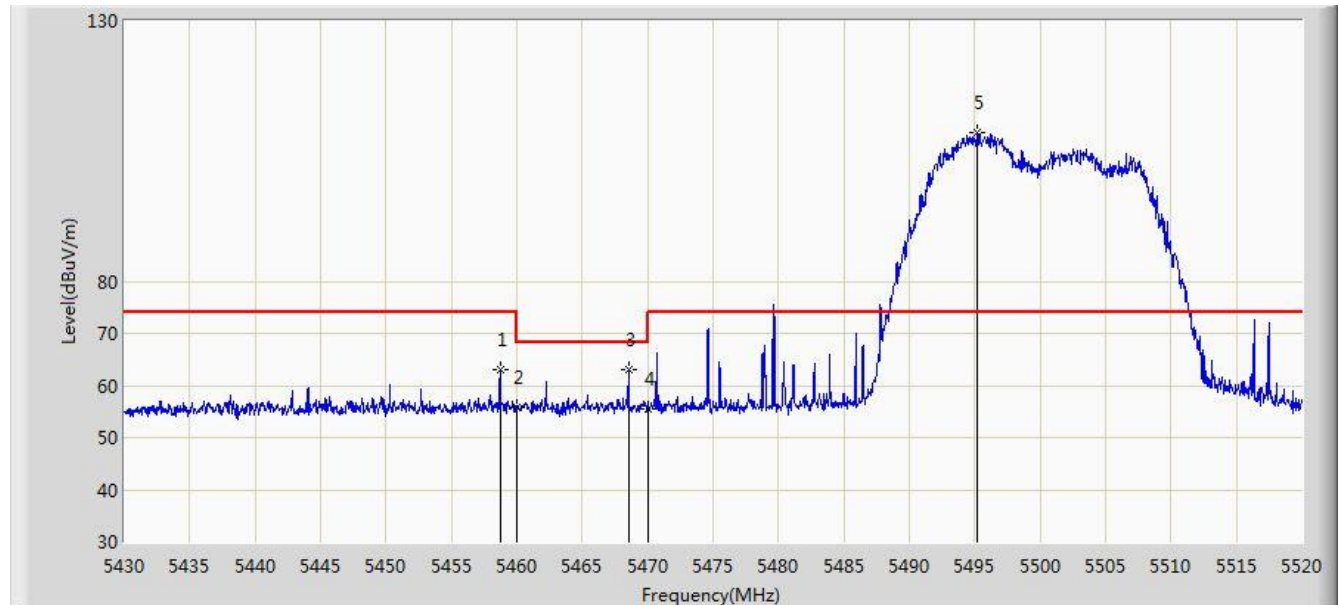


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.710	63.186	59.008	-10.814	74.000	4.178	PK
2			5460.000	55.709	51.529	-18.291	74.000	4.180	PK
3			5468.520	63.127	58.928	-5.073	68.200	4.199	PK
4			5470.000	55.568	51.366	-12.632	68.200	4.202	PK
5		*	5495.160	108.426	104.166	N/A	N/A	4.259	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 02:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

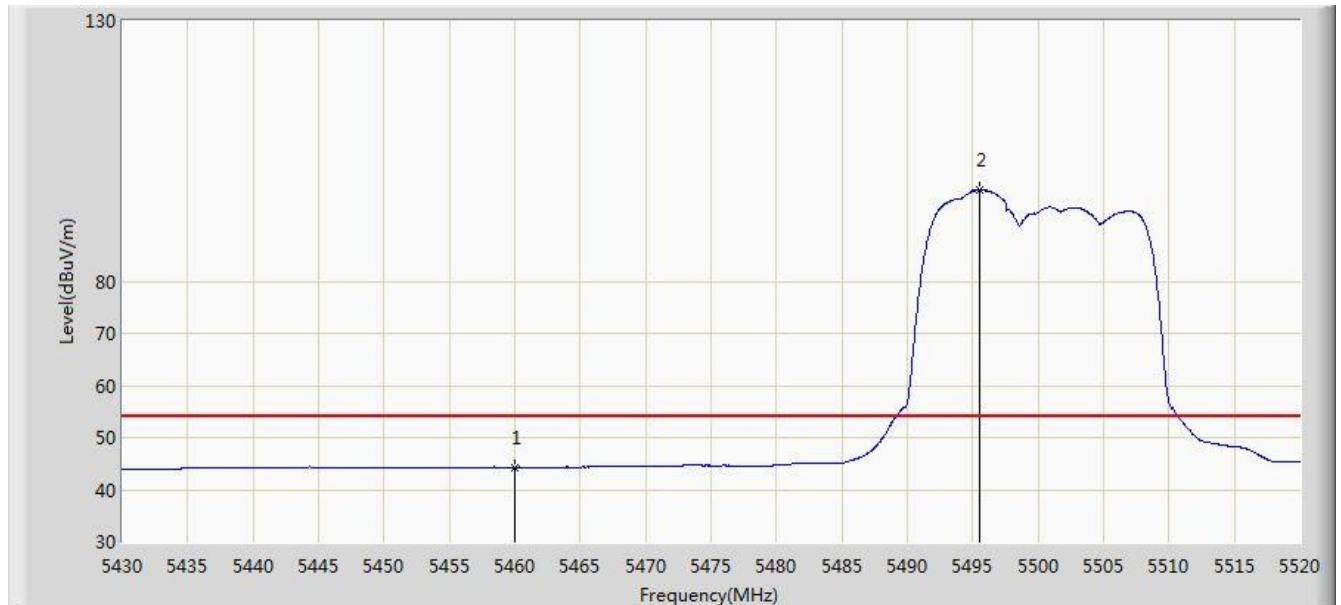


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.325	40.145	-9.675	54.000	4.180	AV
2		*	5495.475	97.482	93.222	N/A	N/A	4.260	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:17
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz (CDD Mode)	

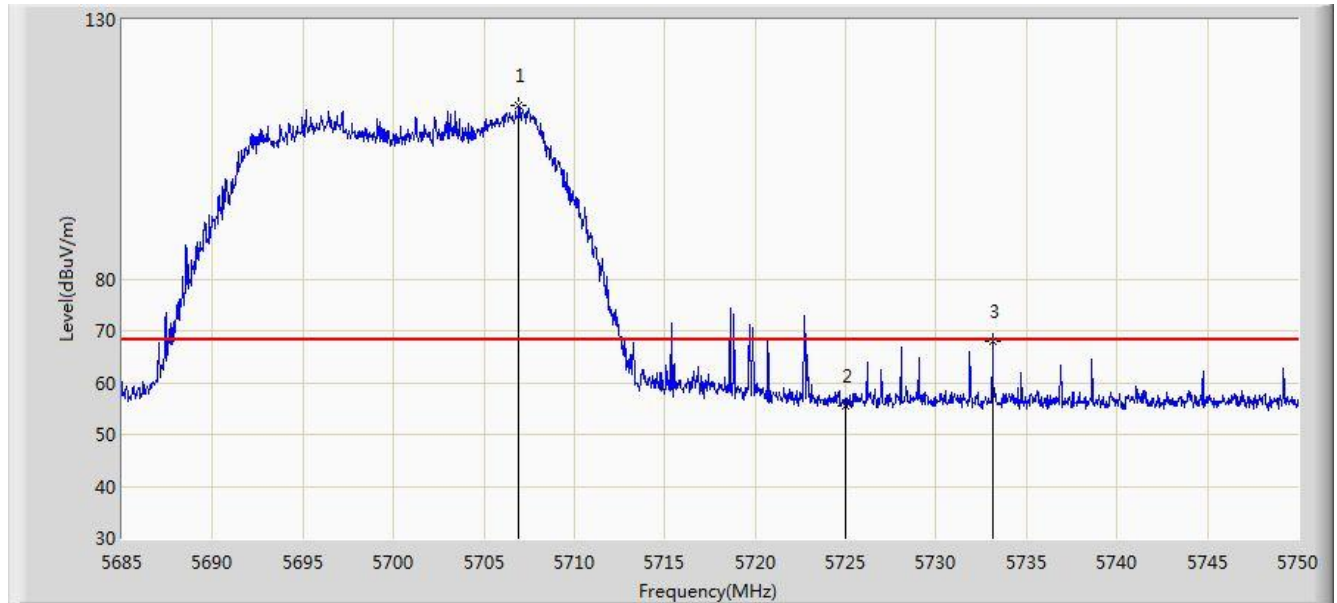

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.937	113.439	108.524	N/A	N/A	4.915	PK
2			5725.000	55.641	50.612	-12.559	68.200	5.029	PK
3			5733.132	67.851	62.770	-0.349	68.200	5.081	PK

Site: AC1	Time: 2018/11/28 - 04:22
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz (CDD Mode)	

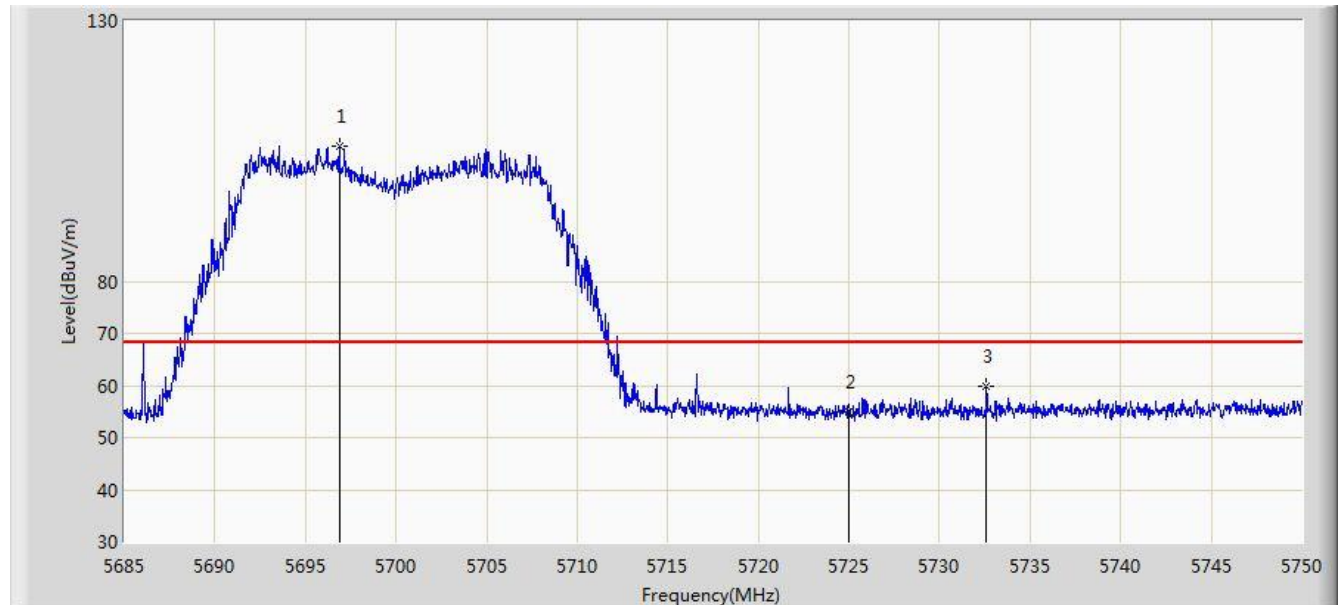


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.862	105.997	101.135	N/A	N/A	4.861	PK
2			5725.000	54.995	49.966	-13.205	68.200	5.029	PK
3			5732.580	59.719	54.642	-8.481	68.200	5.077	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:12
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode)	

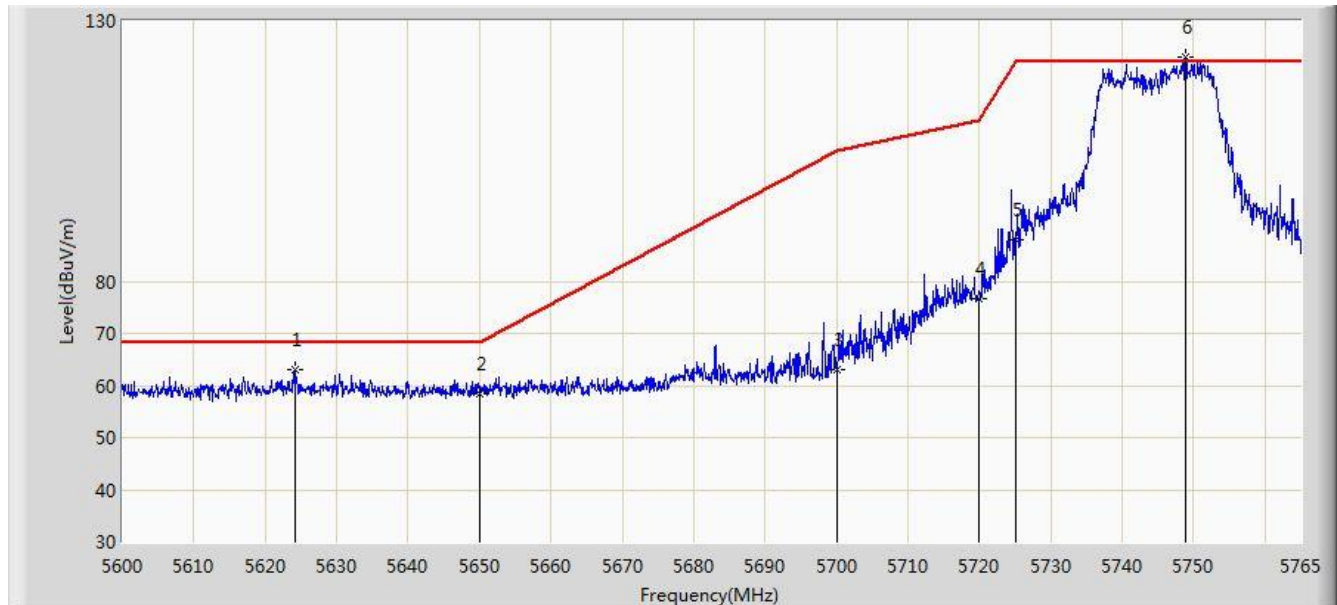


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5624.090	63.181	58.589	-5.019	68.200	4.592	PK
2			5650.000	58.443	53.772	-9.757	68.200	4.671	PK
3			5700.000	62.975	58.097	-42.225	105.200	4.878	PK
4			5720.000	76.717	71.720	-34.083	110.800	4.997	PK
5			5725.000	88.095	83.066	-34.105	122.200	5.029	PK
6		*	5748.913	123.137	117.960	N/A	N/A	5.177	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:17
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode)	

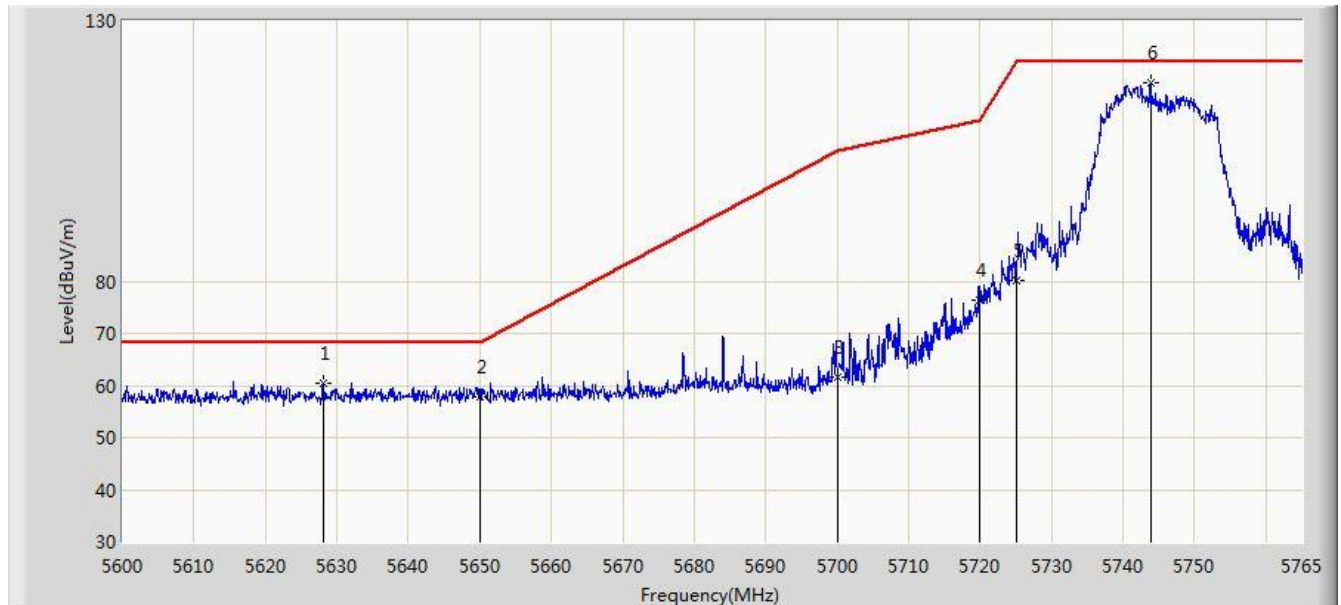


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5628.050	60.308	55.704	-7.892	68.200	4.604	PK
2			5650.000	57.776	53.105	-10.424	68.200	4.671	PK
3			5700.000	61.470	56.592	-43.730	105.200	4.878	PK
4			5720.000	76.482	71.485	-34.318	110.800	4.997	PK
5			5725.000	80.193	75.164	-42.007	122.200	5.029	PK
6		*	5743.880	118.004	112.855	N/A	N/A	5.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:20
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode)	

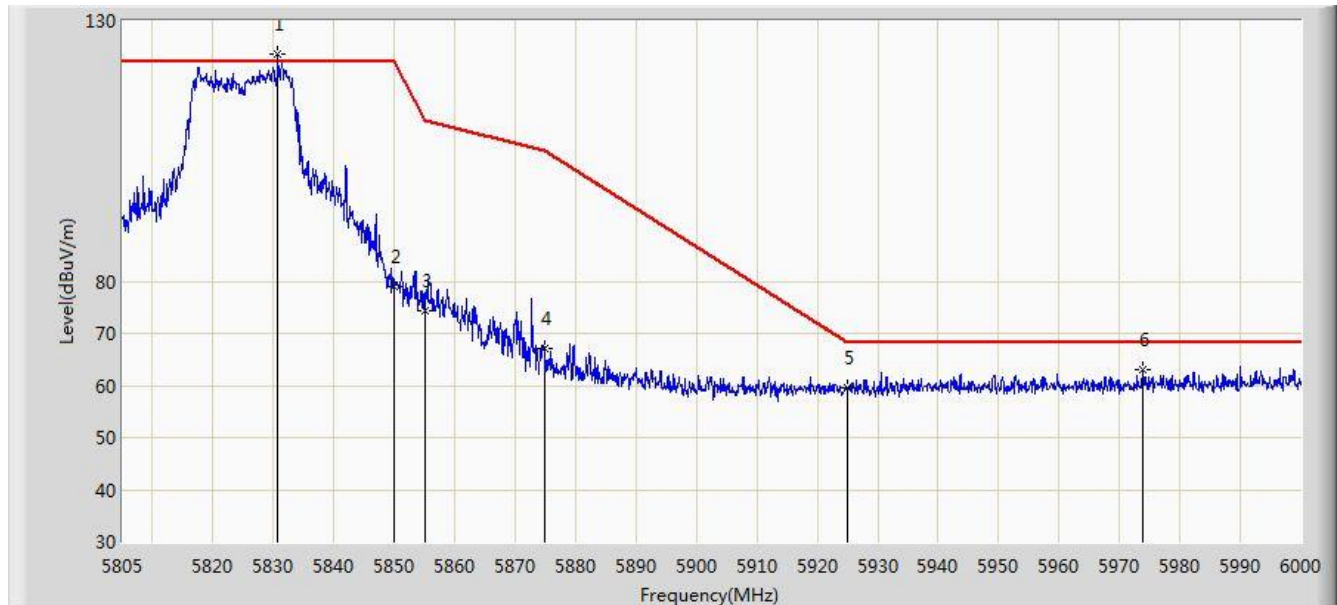


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.740	123.598	117.977	N/A	N/A	5.621	PK
2			5850.000	79.015	73.289	-43.185	122.200	5.726	PK
3			5855.000	74.365	68.619	-36.435	110.800	5.746	PK
4			5875.000	67.123	61.303	-38.077	105.200	5.820	PK
5			5925.000	59.457	53.491	-8.743	68.200	5.967	PK
6			5973.967	63.171	57.103	-5.029	68.200	6.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:23
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode)	

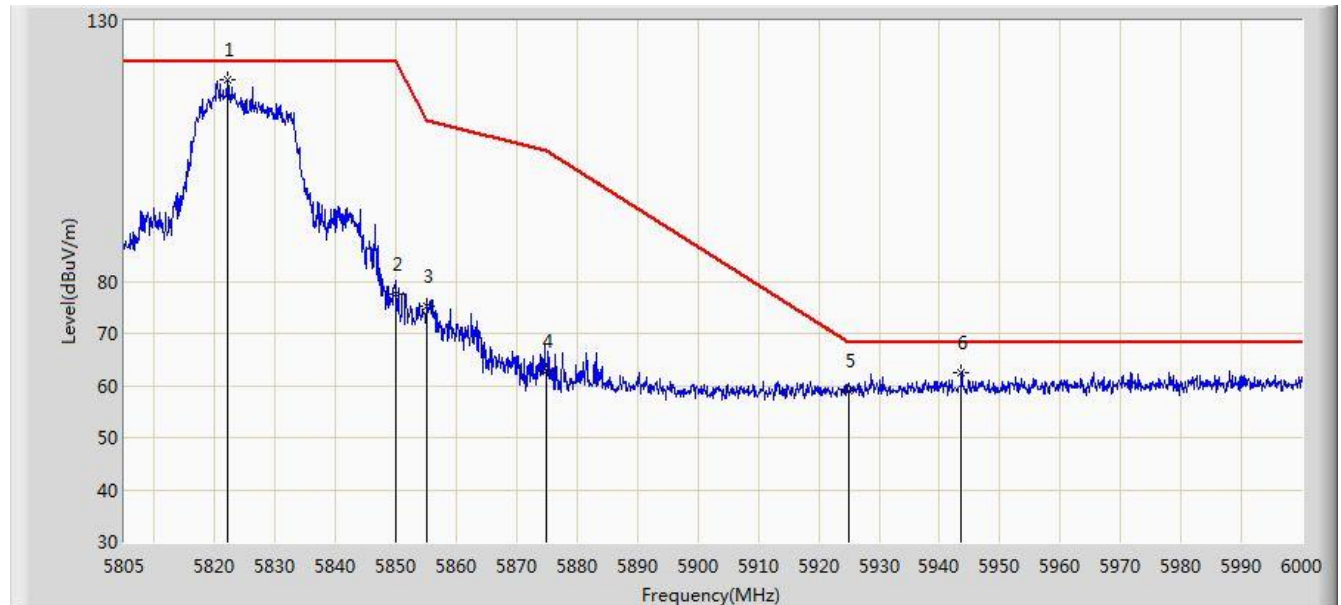


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.160	118.559	112.988	N/A	N/A	5.571	PK
2			5850.000	77.533	71.807	-44.667	122.200	5.726	PK
3			5855.000	75.206	69.460	-35.594	110.800	5.746	PK
4			5875.000	62.653	56.833	-42.547	105.200	5.820	PK
5			5925.000	58.985	53.019	-9.215	68.200	5.967	PK
6			5943.645	62.517	56.505	-5.683	68.200	6.012	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

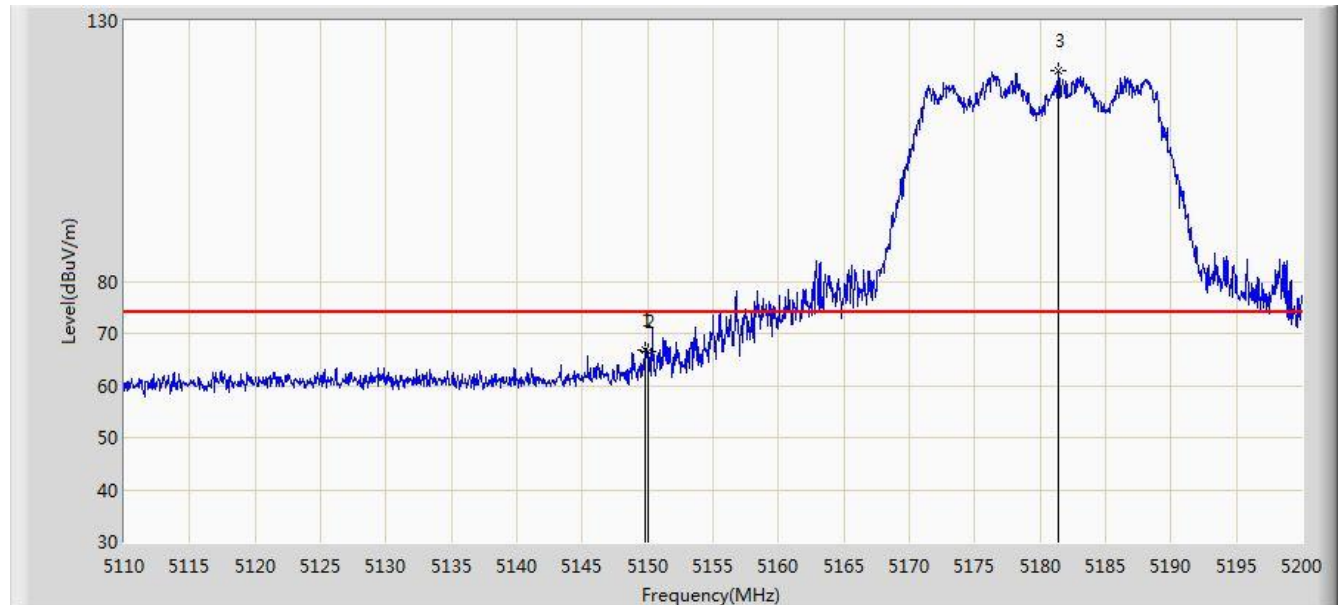


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.825	66.691	62.521	-7.309	74.000	4.170	PK
2			5150.000	66.399	62.230	-7.601	74.000	4.170	PK
3		*	5181.370	120.471	116.407	N/A	N/A	4.064	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

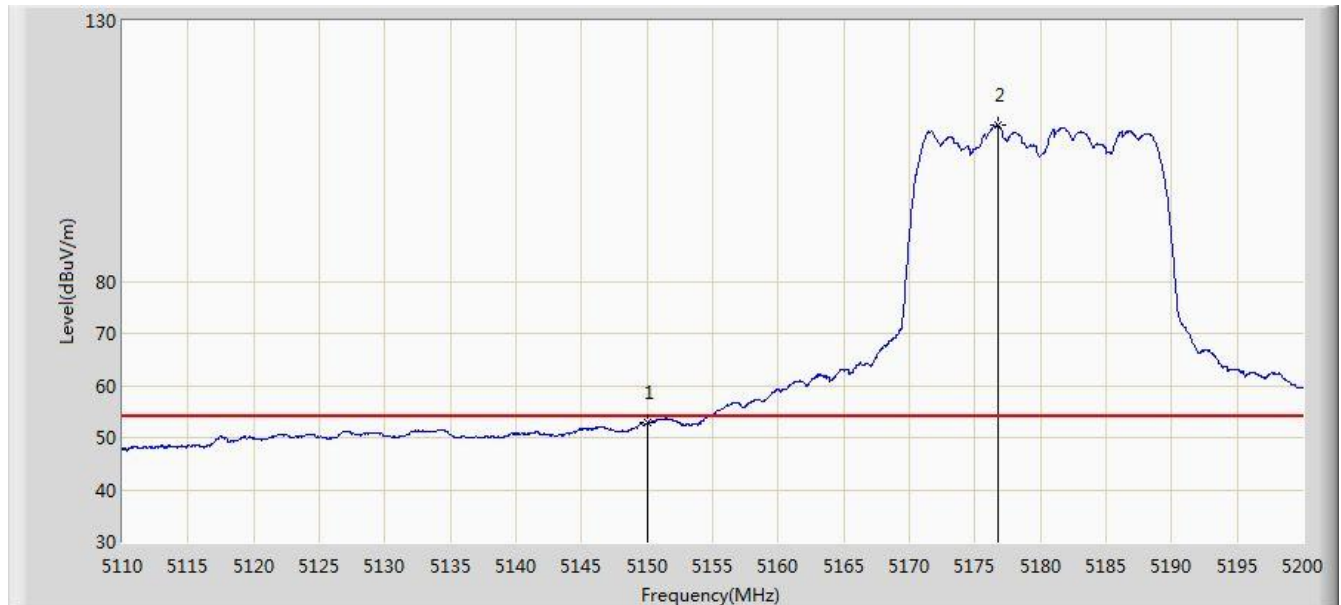


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.761	48.592	-1.239	54.000	4.170	AV
2	X	*	5176.735	110.007	105.927	N/A	N/A	4.081	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

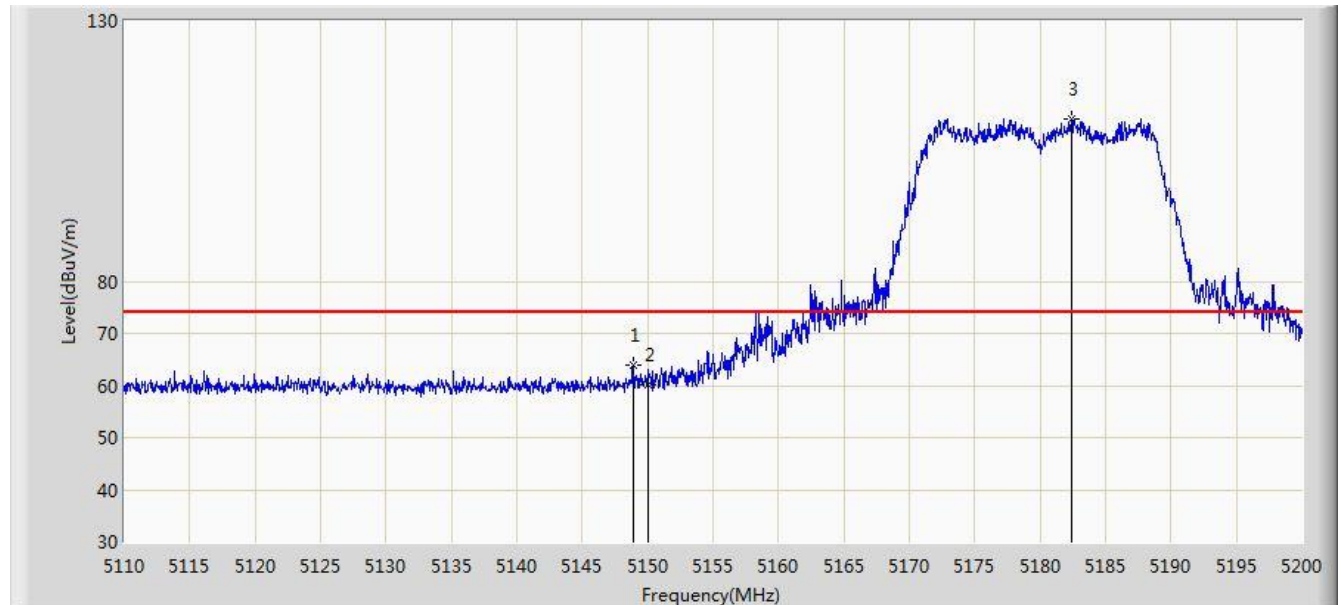


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.880	63.990	59.817	-10.010	74.000	4.173	PK
2			5150.000	60.249	56.080	-13.751	74.000	4.170	PK
3		*	5182.360	111.166	107.106	N/A	N/A	4.061	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

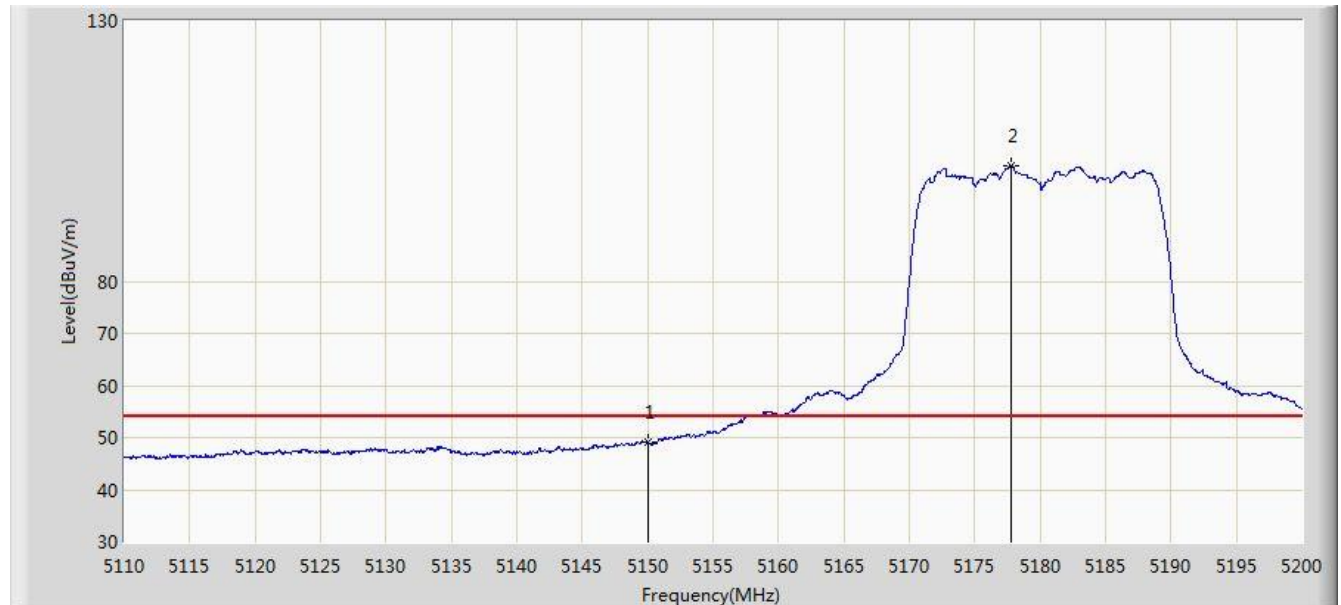


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.224	45.055	-4.776	54.000	4.170	AV
2		*	5177.815	102.273	98.196	N/A	N/A	4.076	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

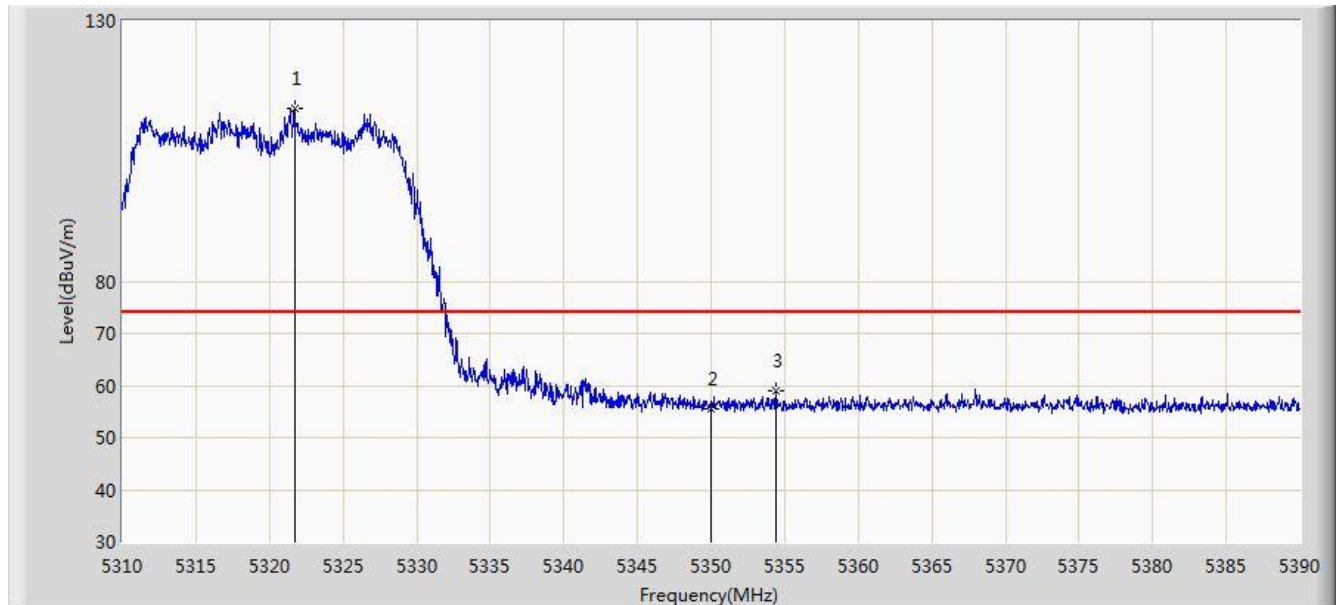


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.680	113.066	109.214	N/A	N/A	3.852	PK
2			5350.000	55.638	51.733	-18.362	74.000	3.904	PK
3			5354.400	58.842	54.929	-15.158	74.000	3.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

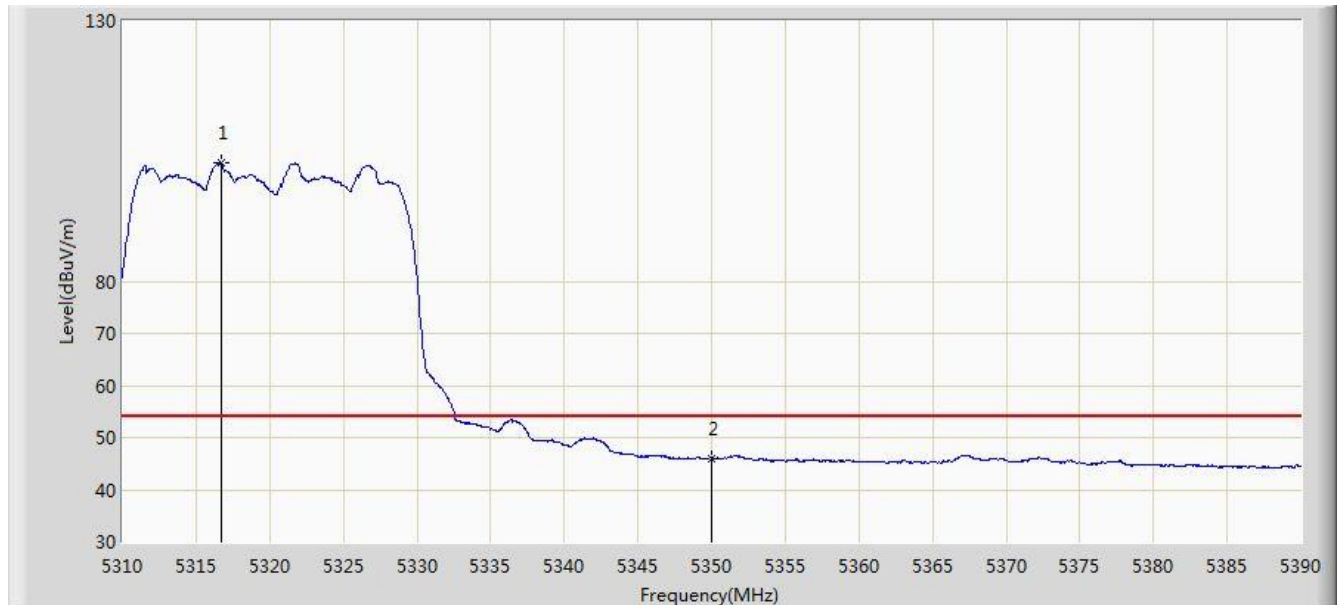


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.680	102.633	98.791	N/A	N/A	3.843	AV
2			5350.000	46.061	42.156	-7.939	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

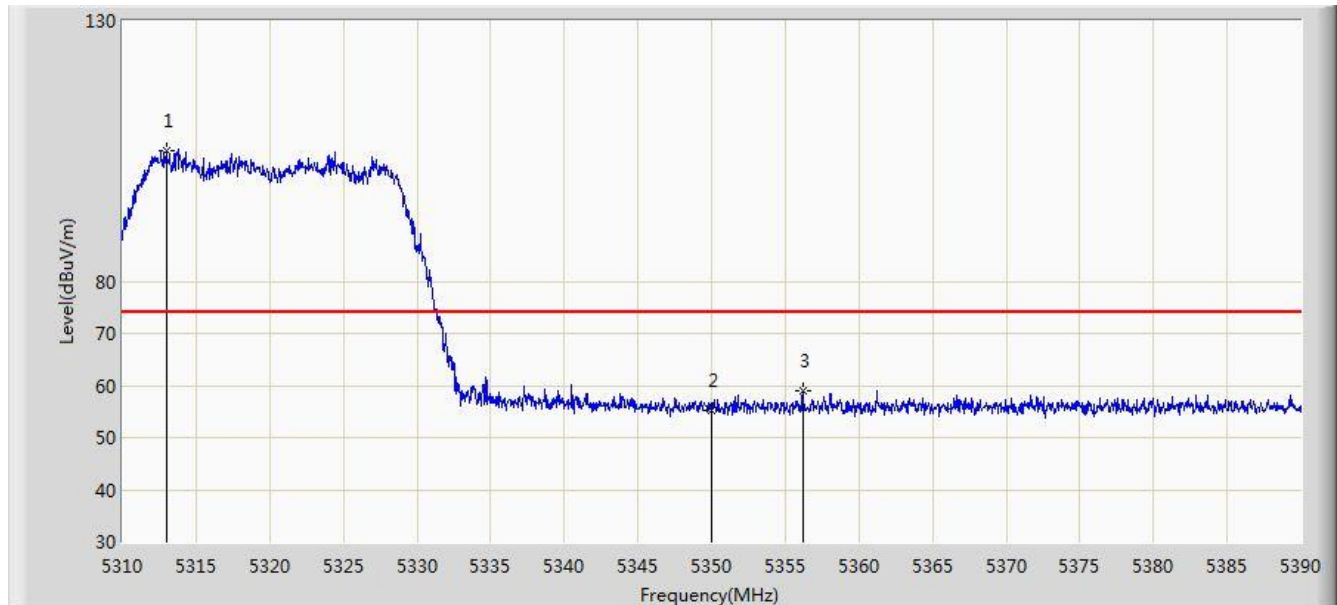


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.960	105.140	101.305	N/A	N/A	3.836	PK
2			5350.000	55.106	51.201	-18.894	74.000	3.904	PK
3			5356.200	59.075	55.159	-14.925	74.000	3.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

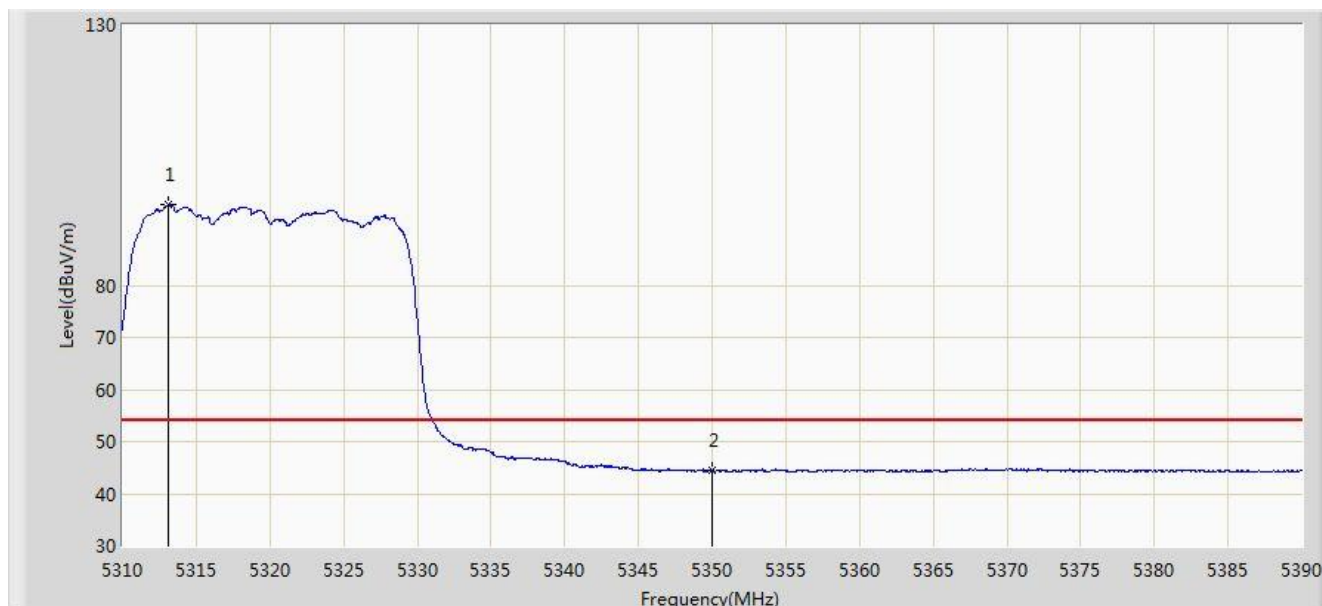


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.080	95.417	91.581	N/A	N/A	3.836	AV
2			5350.000	44.362	40.457	-9.638	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

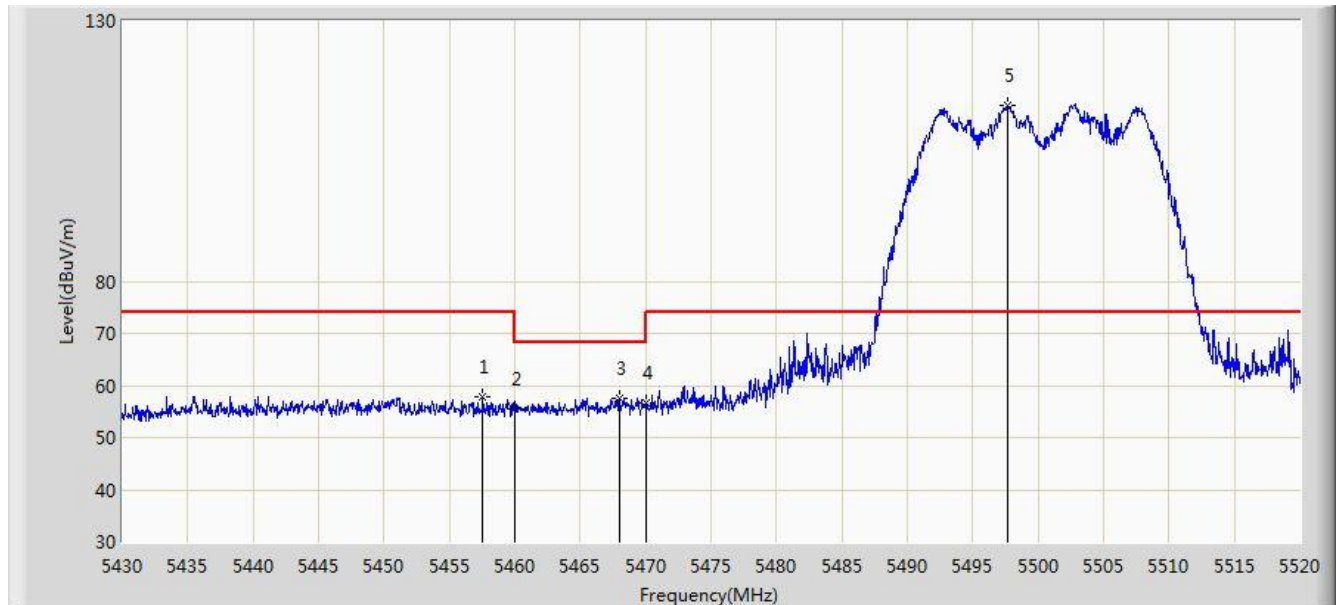

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.540	57.814	53.639	-16.186	74.000	4.176	PK
2			5460.000	55.397	51.217	-18.603	74.000	4.180	PK
3			5467.980	57.460	53.262	-10.740	68.200	4.198	PK
4			5470.000	56.638	52.436	-11.562	68.200	4.202	PK
5		*	5497.725	113.828	109.563	N/A	N/A	4.265	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.430	46.974	42.818	-7.026	54.000	4.157	AV
2			5460.000	45.498	41.318	-8.502	54.000	4.180	AV
3		*	5497.815	103.602	99.336	N/A	N/A	4.266	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

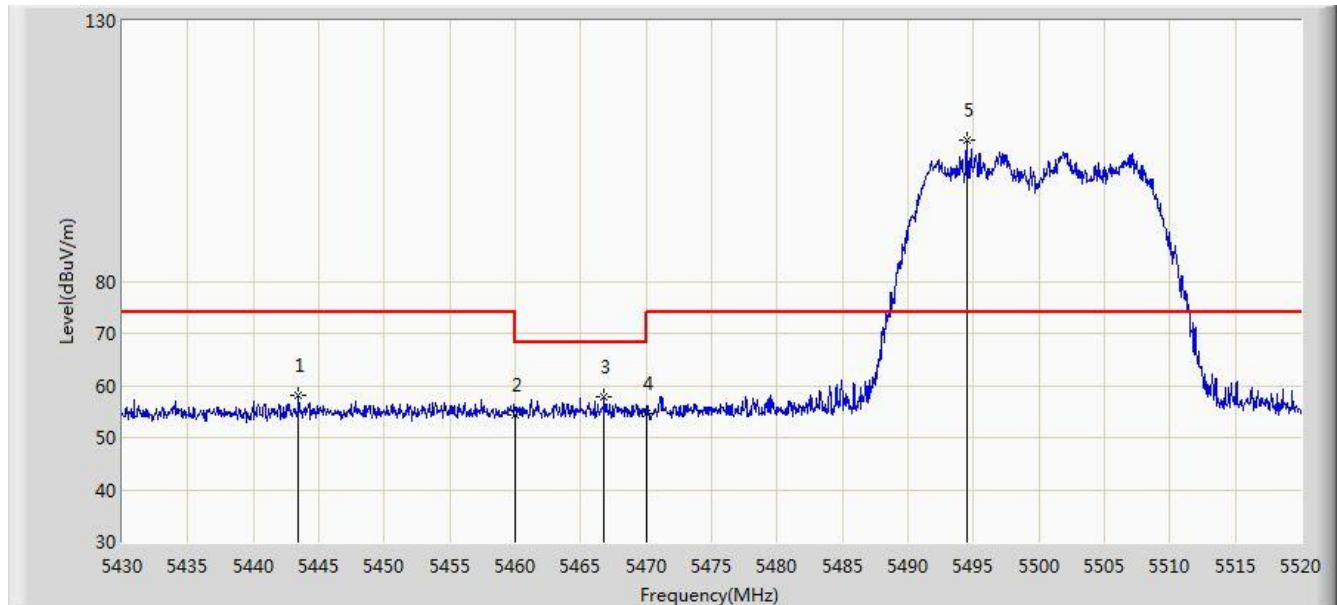


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.455	58.061	53.927	-15.939	74.000	4.134	PK
2			5460.000	54.396	50.216	-19.604	74.000	4.180	PK
3			5466.765	57.825	53.630	-10.375	68.200	4.196	PK
4			5470.000	54.571	50.369	-13.629	68.200	4.202	PK
5		*	5494.485	107.123	102.865	N/A	N/A	4.258	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

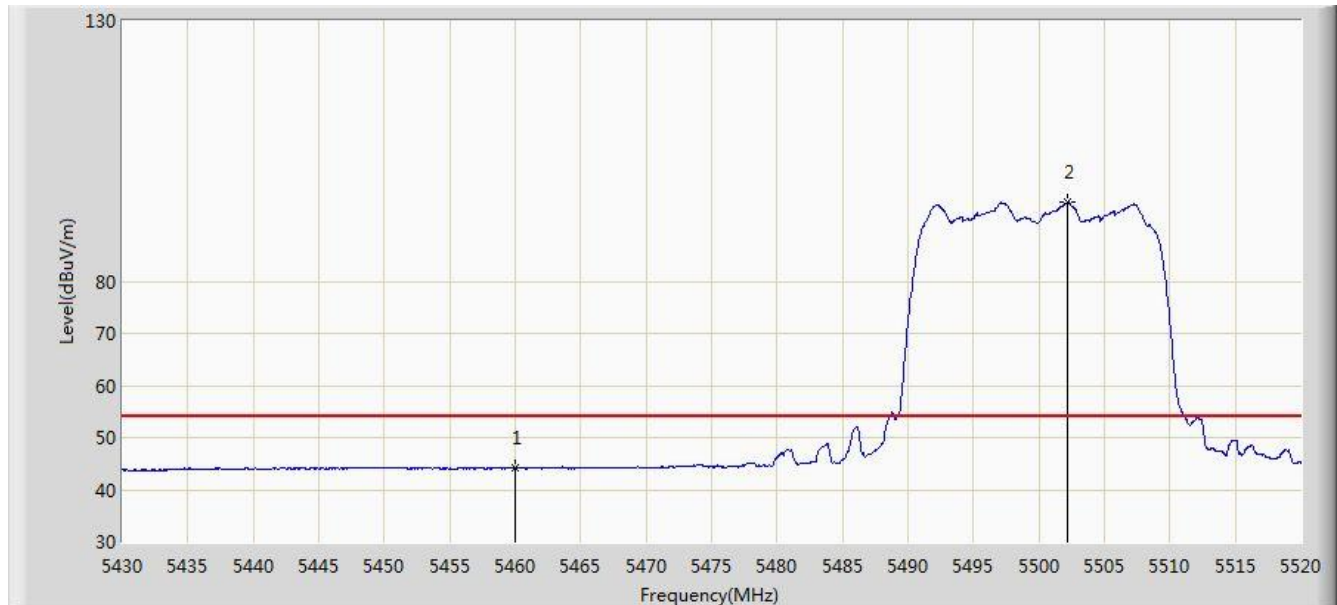


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.094	39.914	-9.906	54.000	4.180	AV
2		*	5502.135	95.126	90.848	N/A	N/A	4.278	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:28
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz (CDD Mode)	

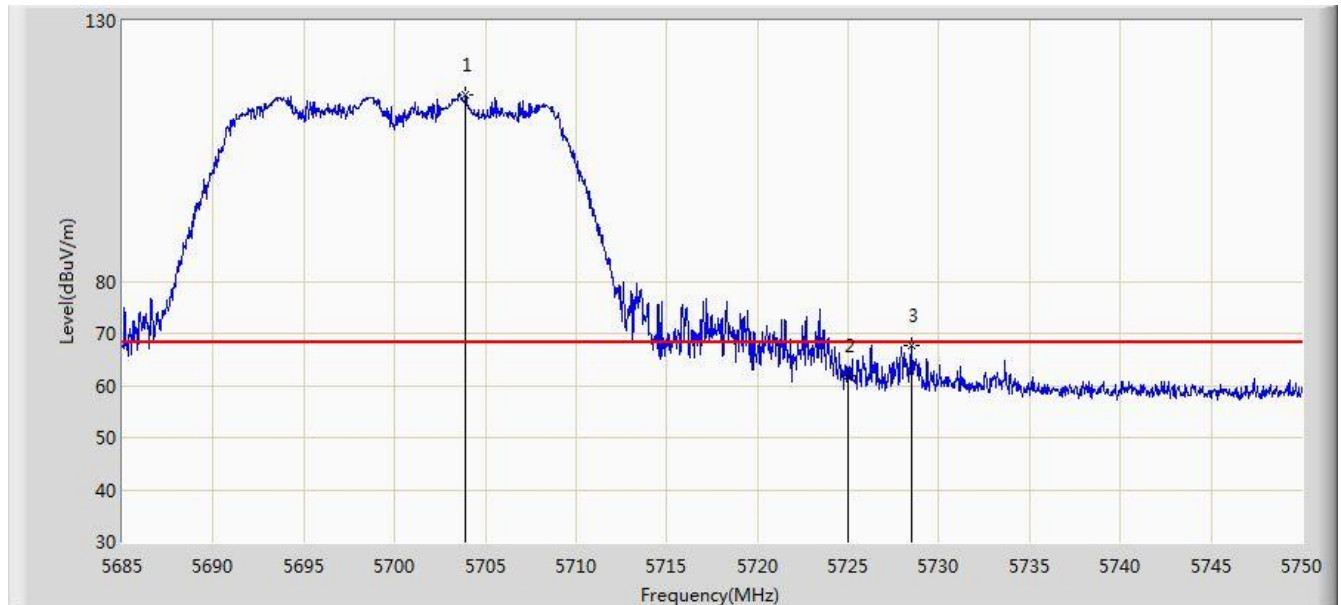


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.915	115.880	110.981	N/A	N/A	4.899	PK
2			5725.000	61.806	56.777	-6.394	68.200	5.029	PK
3			5728.485	67.601	62.550	-0.599	68.200	5.051	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:29
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz (CDD Mode)	

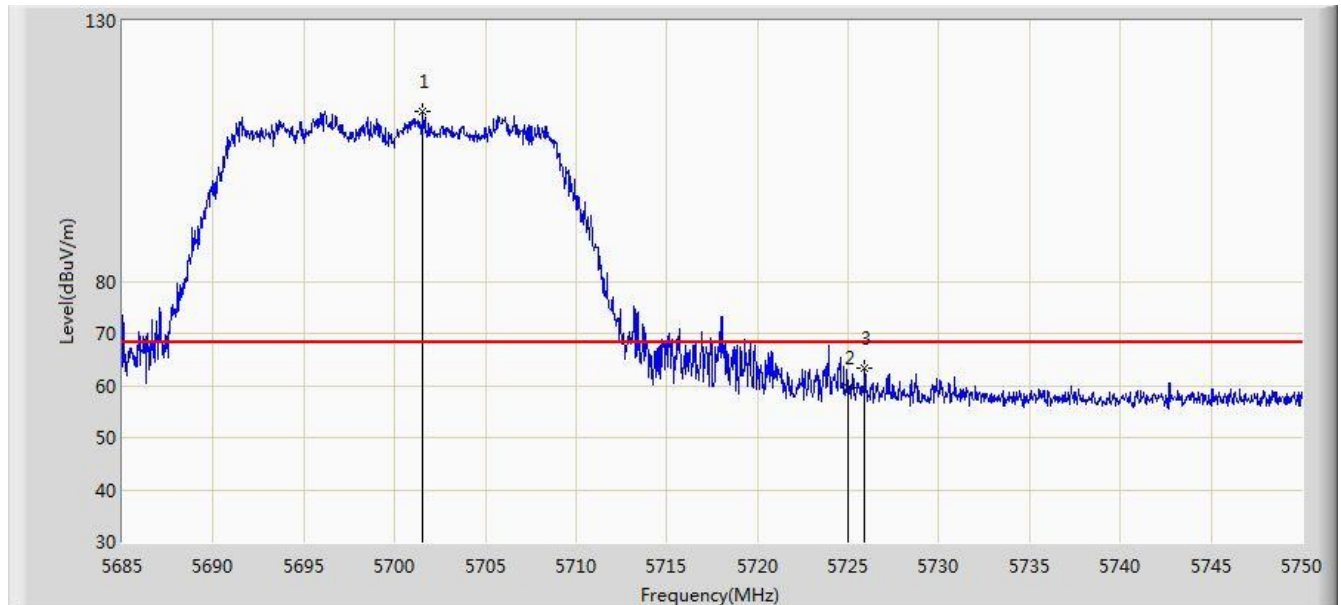


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.575	112.722	107.835	N/A	N/A	4.886	PK
2			5725.000	59.427	54.398	-8.773	68.200	5.029	PK
3			5725.917	63.254	58.219	-4.946	68.200	5.036	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:54
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode)	

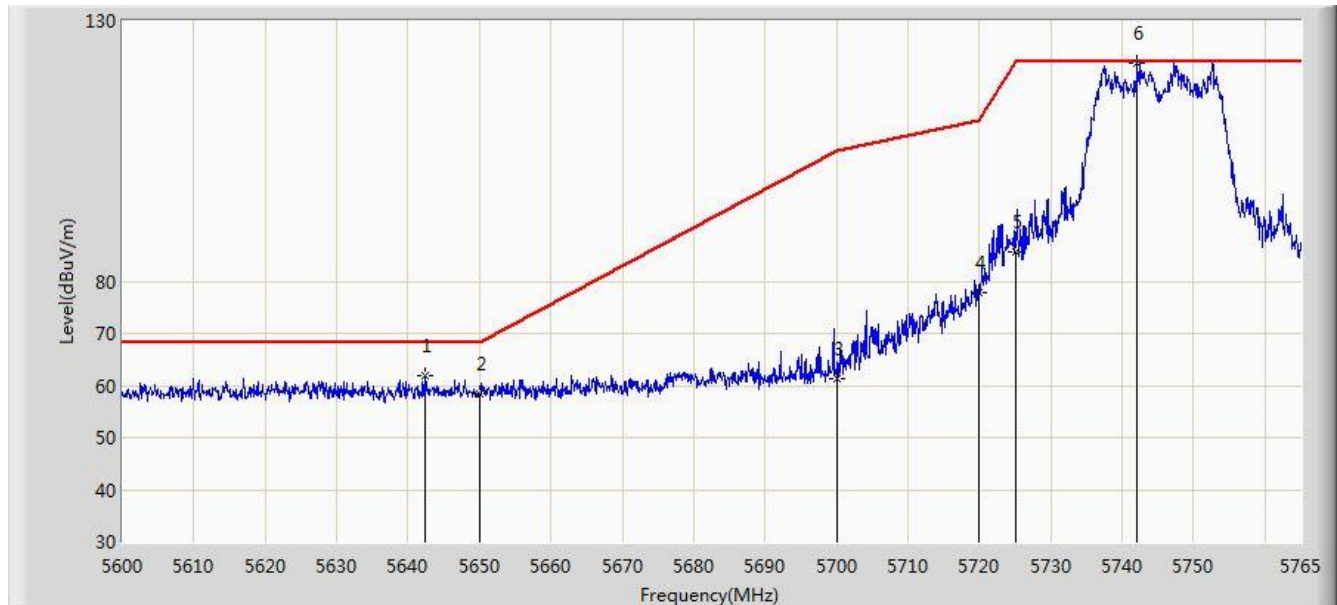


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5642.487	61.951	57.305	-6.249	68.200	4.646	PK
2			5650.000	58.483	53.812	-9.717	68.200	4.671	PK
3			5700.000	61.341	56.463	-43.859	105.200	4.878	PK
4			5720.000	77.789	72.792	-33.011	110.800	4.997	PK
5			5725.000	85.620	80.591	-36.580	122.200	5.029	PK
6		*	5742.065	122.026	116.888	N/A	N/A	5.137	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:57
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode)	

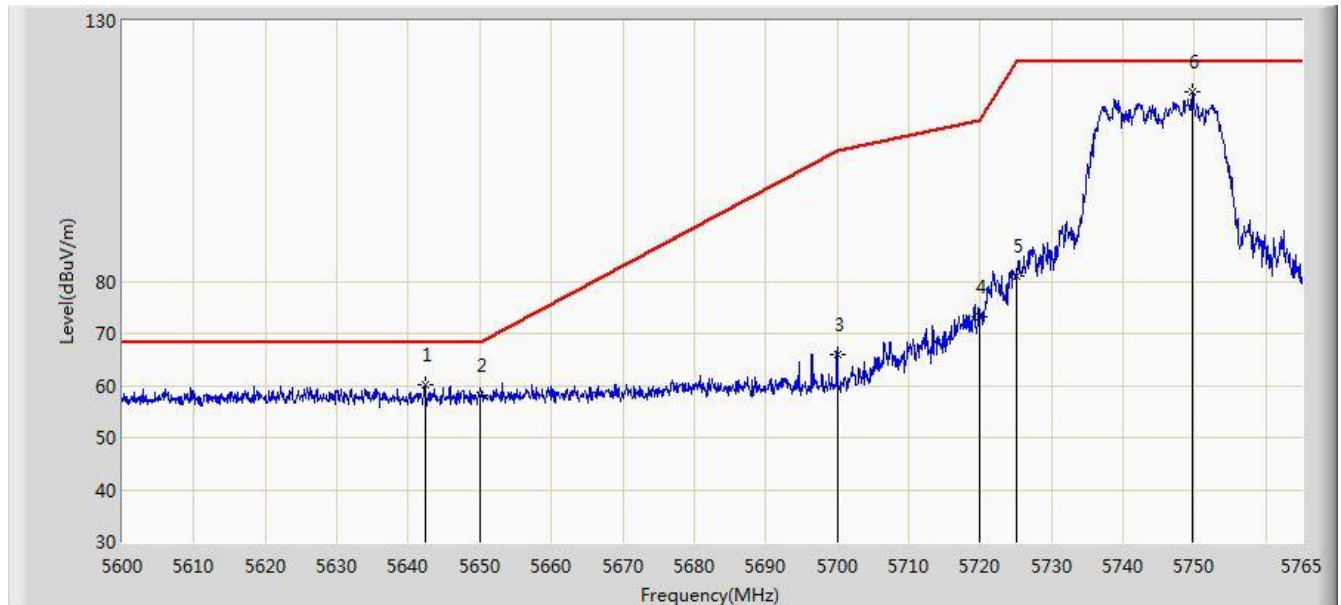


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5642.322	60.126	55.481	-8.074	68.200	4.646	PK
2			5650.000	57.998	53.327	-10.202	68.200	4.671	PK
3			5700.000	66.035	61.157	-39.165	105.200	4.878	PK
4			5720.000	73.158	68.161	-37.642	110.800	4.997	PK
5			5725.000	80.921	75.892	-41.279	122.200	5.029	PK
6		*	5749.655	116.238	111.057	N/A	N/A	5.181	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 03:59
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode)	

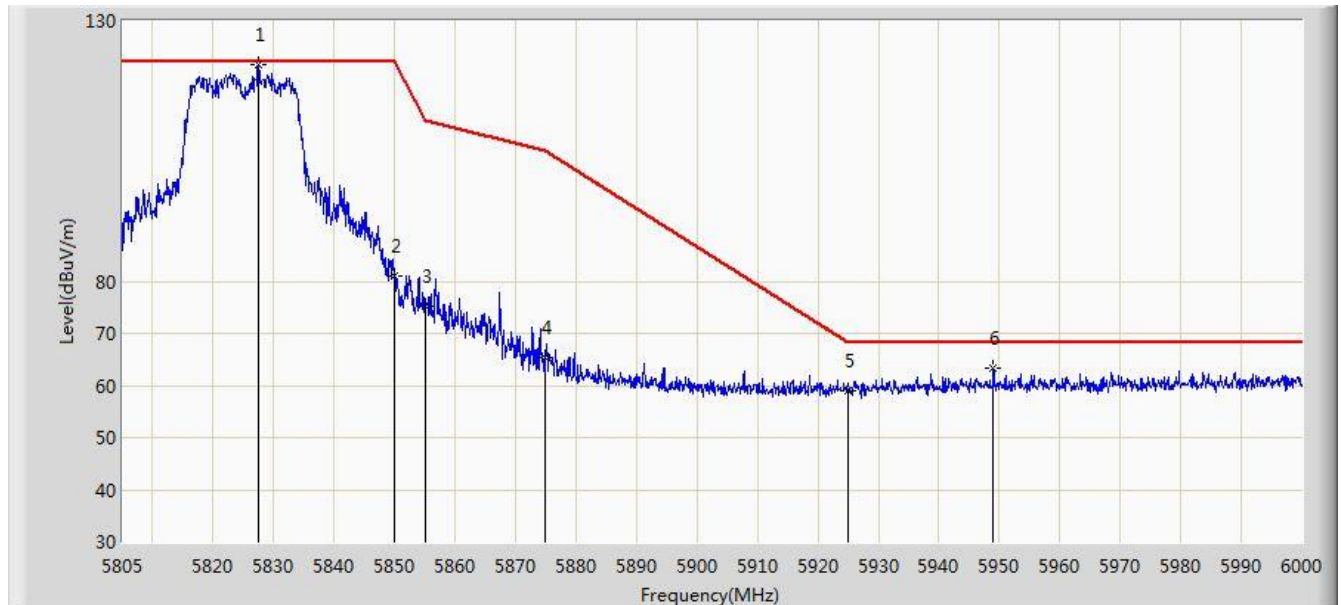


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.425	121.512	115.910	N/A	N/A	5.602	PK
2			5850.000	81.035	75.309	-41.165	122.200	5.726	PK
3			5855.000	75.236	69.490	-35.564	110.800	5.746	PK
4			5875.000	65.259	59.439	-39.941	105.200	5.820	PK
5			5925.000	59.060	53.094	-9.140	68.200	5.967	PK
6			5949.007	63.387	57.363	-4.813	68.200	6.024	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:02
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode)	

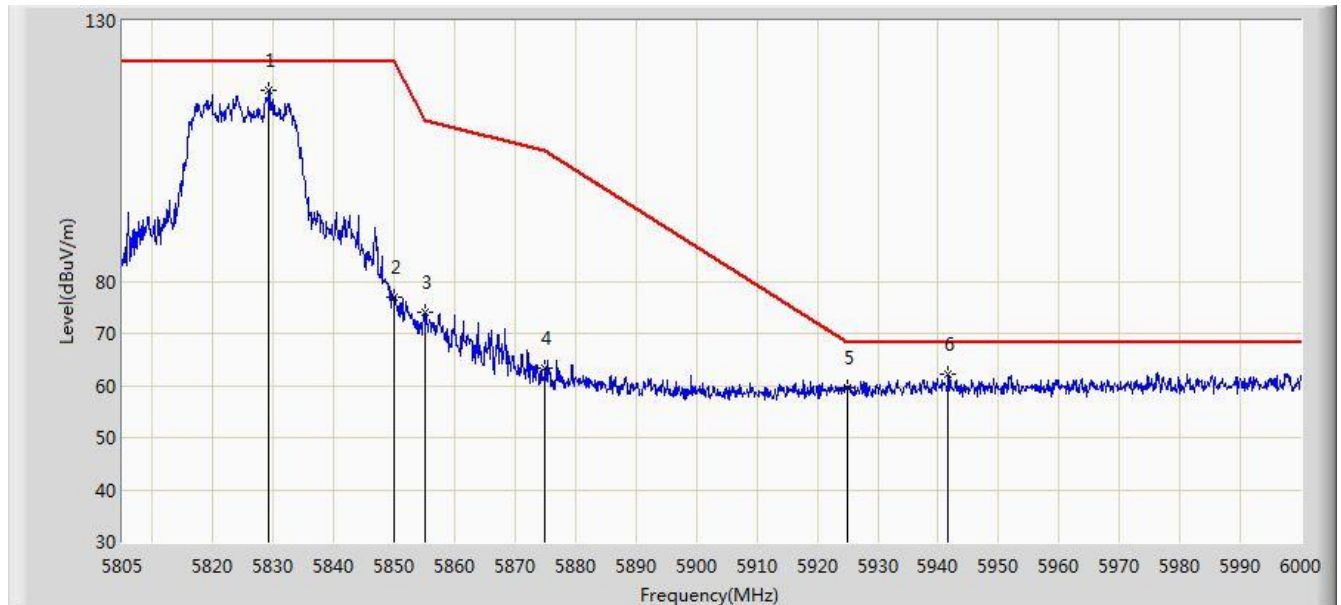


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.277	116.777	111.164	N/A	N/A	5.613	PK
2			5850.000	76.948	71.222	-45.252	122.200	5.726	PK
3			5855.000	73.937	68.191	-36.863	110.800	5.746	PK
4			5875.000	63.269	57.449	-41.931	105.200	5.820	PK
5			5925.000	59.434	53.468	-8.766	68.200	5.967	PK
6			5941.695	62.213	56.205	-5.987	68.200	6.007	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:00
Limit: FCC_Part15.209_RE(3m)	Engineer:Max Wang
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

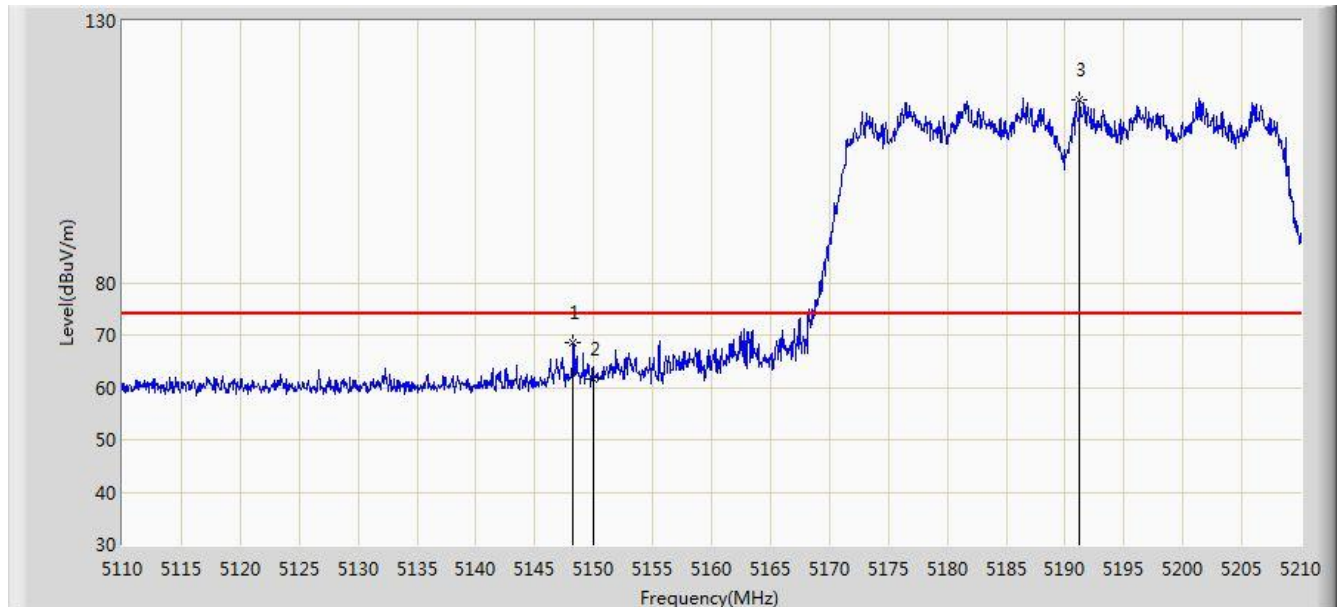


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.250	68.585	64.410	-5.415	74.000	4.174	PK
2			5150.000	61.623	57.454	-12.377	74.000	4.170	PK
3		*	5191.250	114.959	110.930	N/A	N/A	4.029	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 19:58
Limit: FCC_Part15.209_RE(3m)	Engineer:Max Wang
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

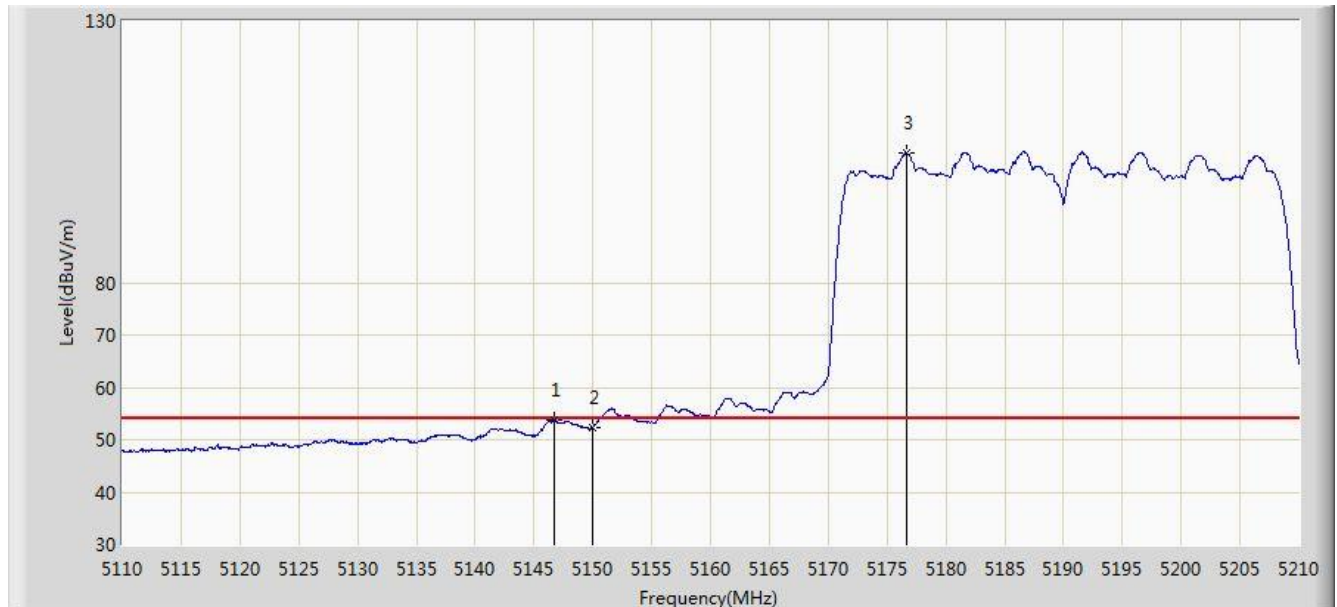


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.750	53.731	49.555	-0.269	54.000	4.176	AV
2			5150.000	52.285	48.116	-1.715	54.000	4.170	AV
3		*	5176.650	104.691	100.610	N/A	N/A	4.080	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:02
Limit: FCC_Part15.209_RE(3m)	Engineer:Max Wang
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

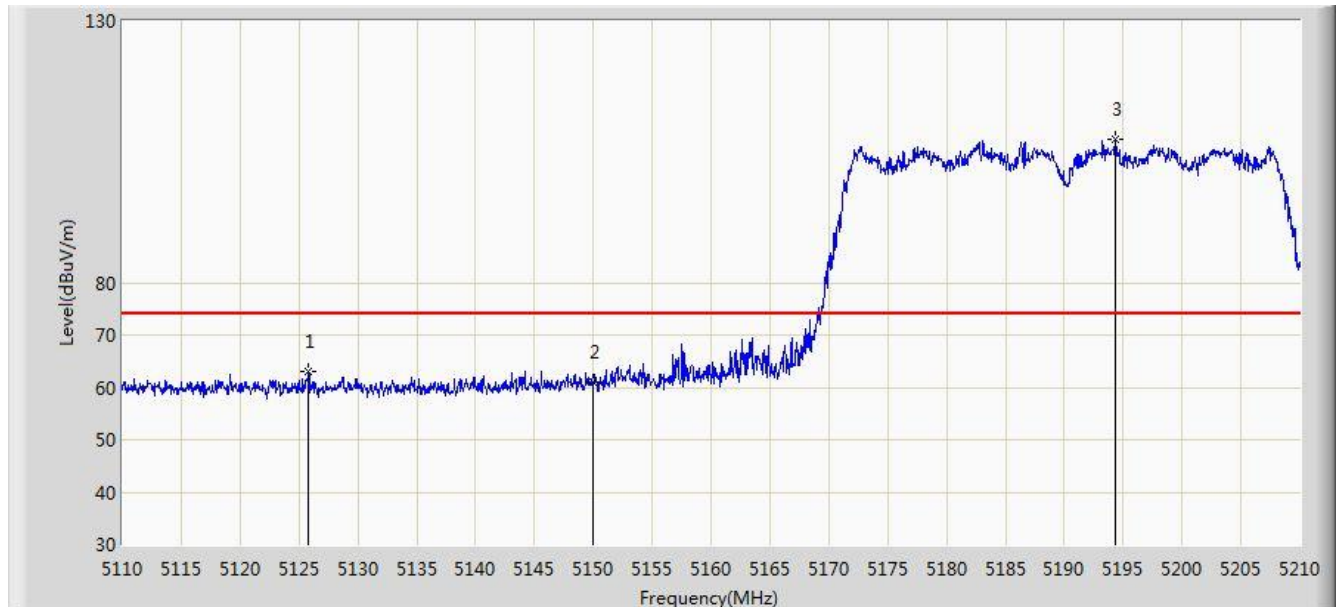


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.850	63.065	58.890	-10.935	74.000	4.175	PK
2			5150.000	60.905	56.736	-13.095	74.000	4.170	PK
3		*	5194.300	107.511	103.493	N/A	N/A	4.019	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:07
Limit: FCC_Part15.209_RE(3m)	Engineer:Max Wang
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

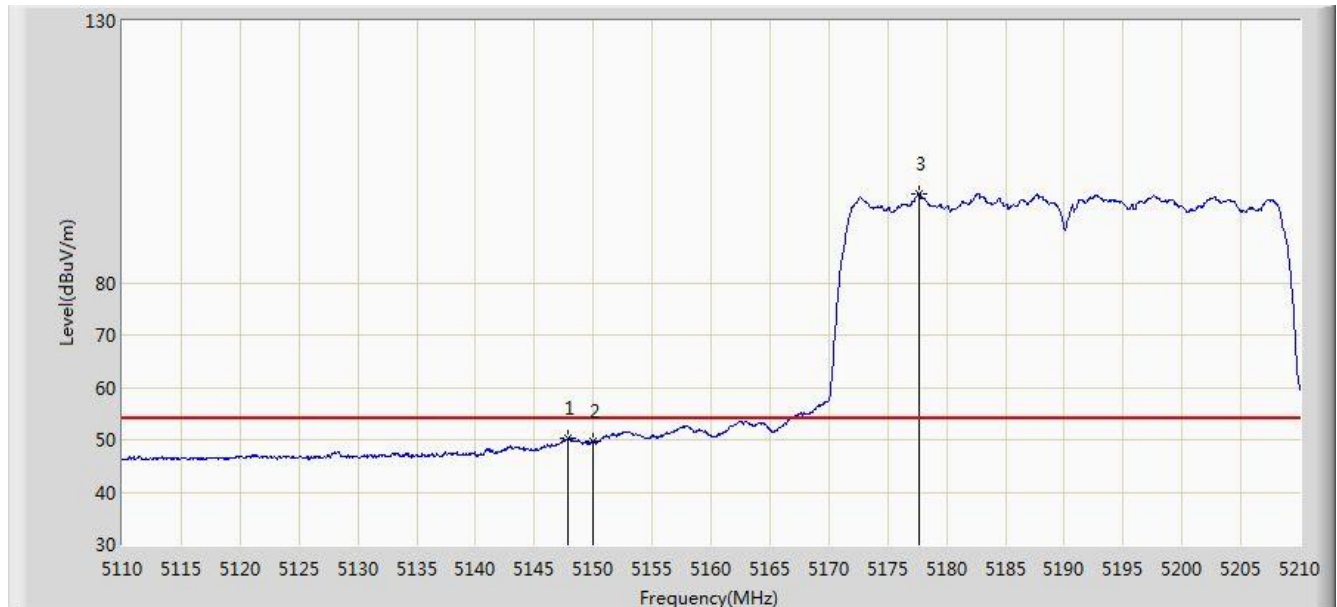

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.900	50.411	46.235	-3.589	54.000	4.176	AV
2			5150.000	49.594	45.425	-4.406	54.000	4.170	AV
3		*	5177.700	96.939	92.862	N/A	N/A	4.077	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.460	65.064	60.888	-8.936	74.000	4.175	PK
2			5150.000	61.514	57.345	-12.486	74.000	4.170	PK
3		*	5227.040	117.527	113.609	N/A	N/A	3.918	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.950	51.042	46.867	-2.958	54.000	4.175	AV
2			5150.000	49.612	45.443	-4.388	54.000	4.170	AV
3		*	5232.010	107.196	103.293	N/A	N/A	3.903	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz (CDD Mode)	

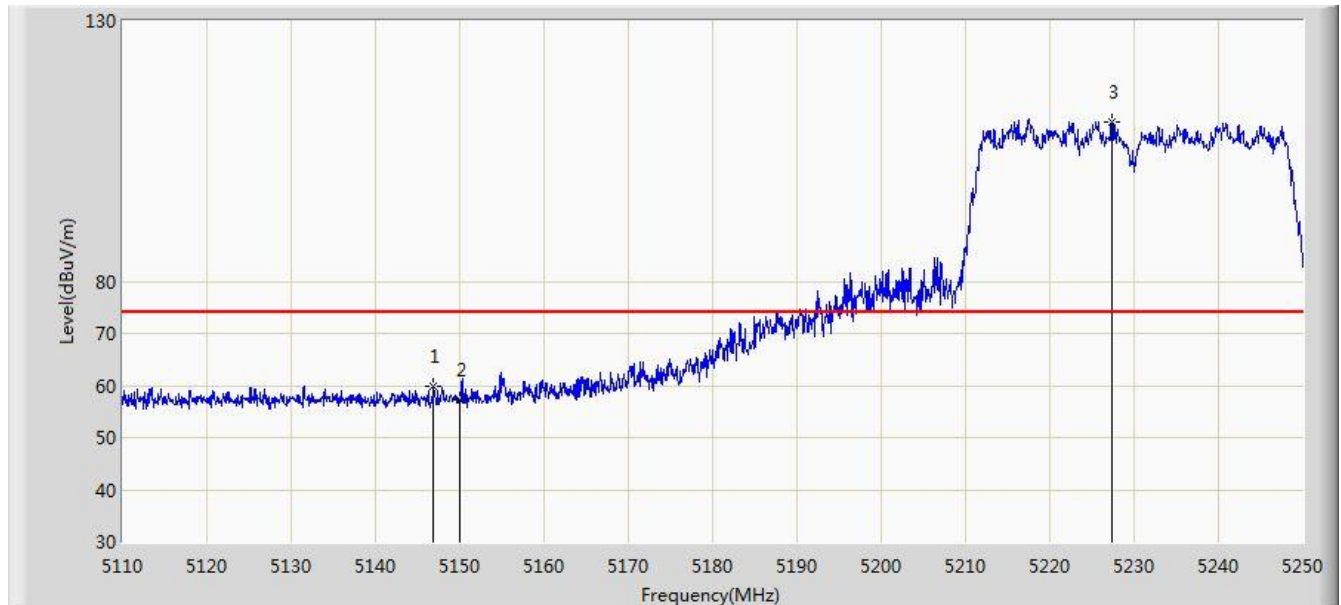


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.890	59.800	55.624	-14.200	74.000	4.176	PK
2			5150.000	57.379	53.210	-16.621	74.000	4.170	PK
3		*	5227.390	110.590	106.673	N/A	N/A	3.917	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz (CDD Mode)	

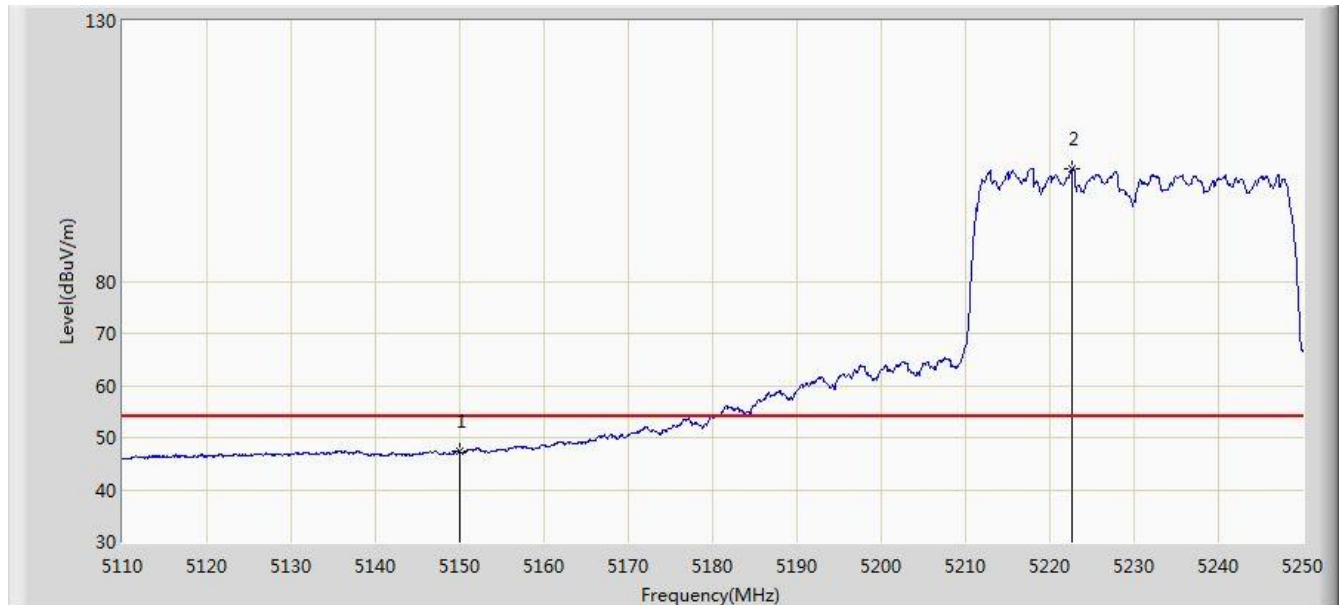


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.280	43.111	-6.720	54.000	4.170	AV
2		*	5222.700	101.648	97.717	N/A	N/A	3.931	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

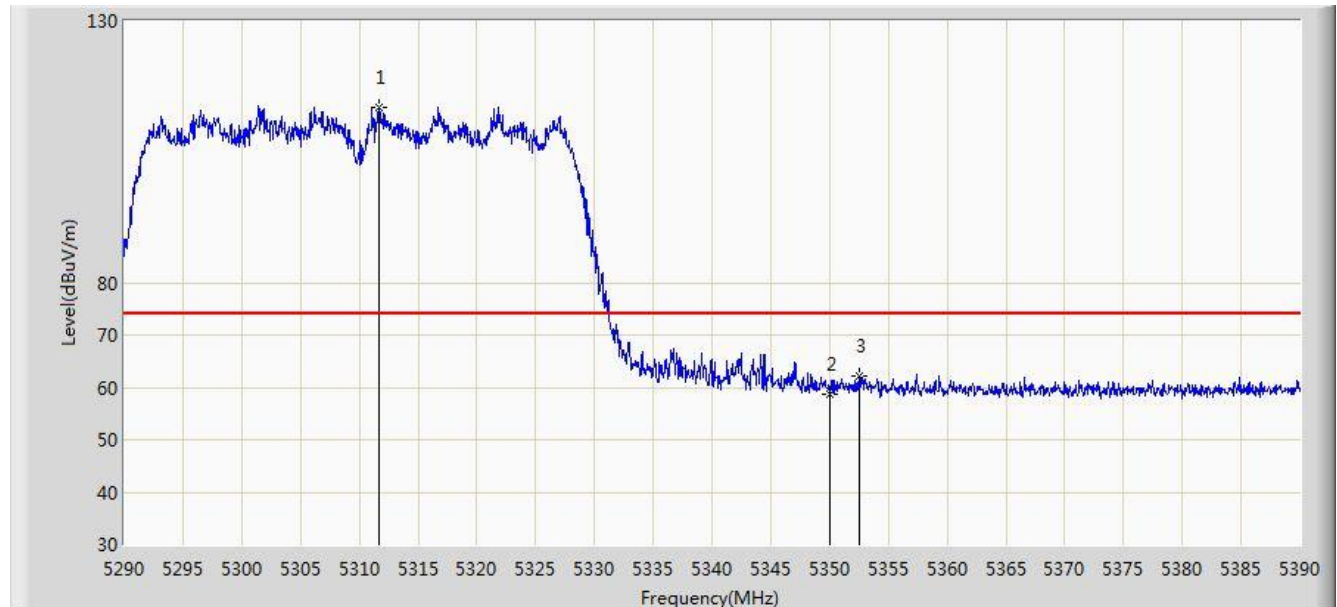


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.700	113.549	109.716	N/A	N/A	3.834	PK
2			5350.000	58.680	54.775	-15.320	74.000	3.904	PK
3			5352.550	62.313	58.404	-11.687	74.000	3.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

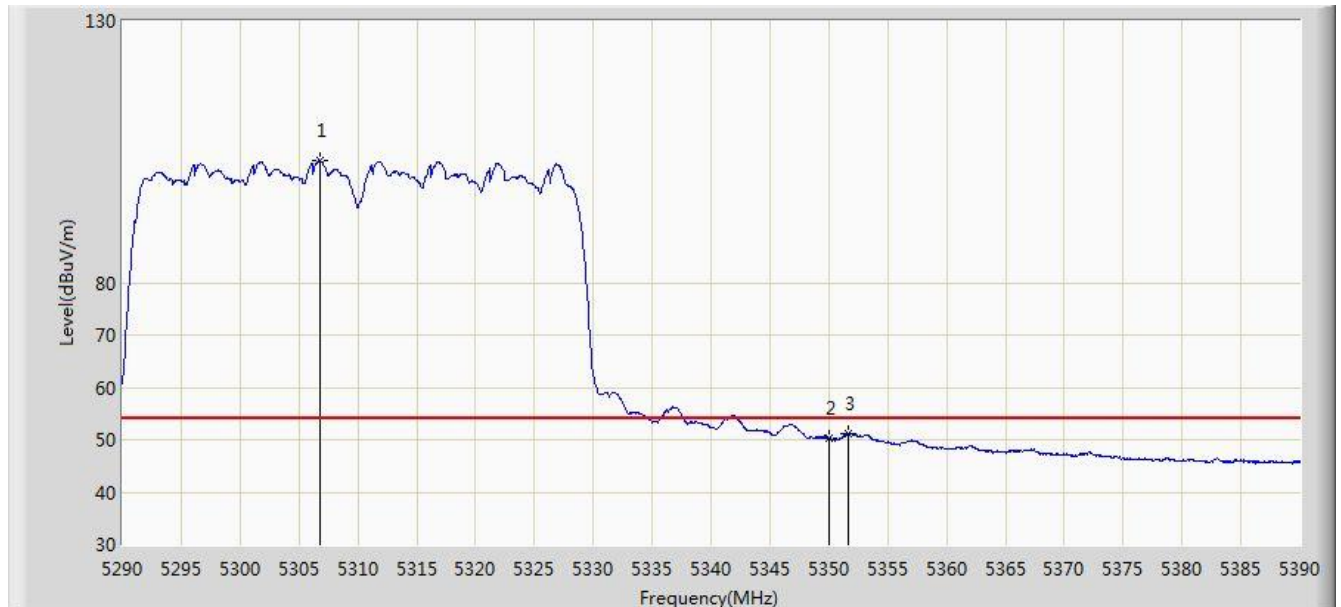


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.750	103.231	99.407	N/A	N/A	3.824	AV
2			5350.000	50.327	46.422	-3.673	54.000	3.904	AV
3			5351.700	51.094	47.186	-2.906	54.000	3.908	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

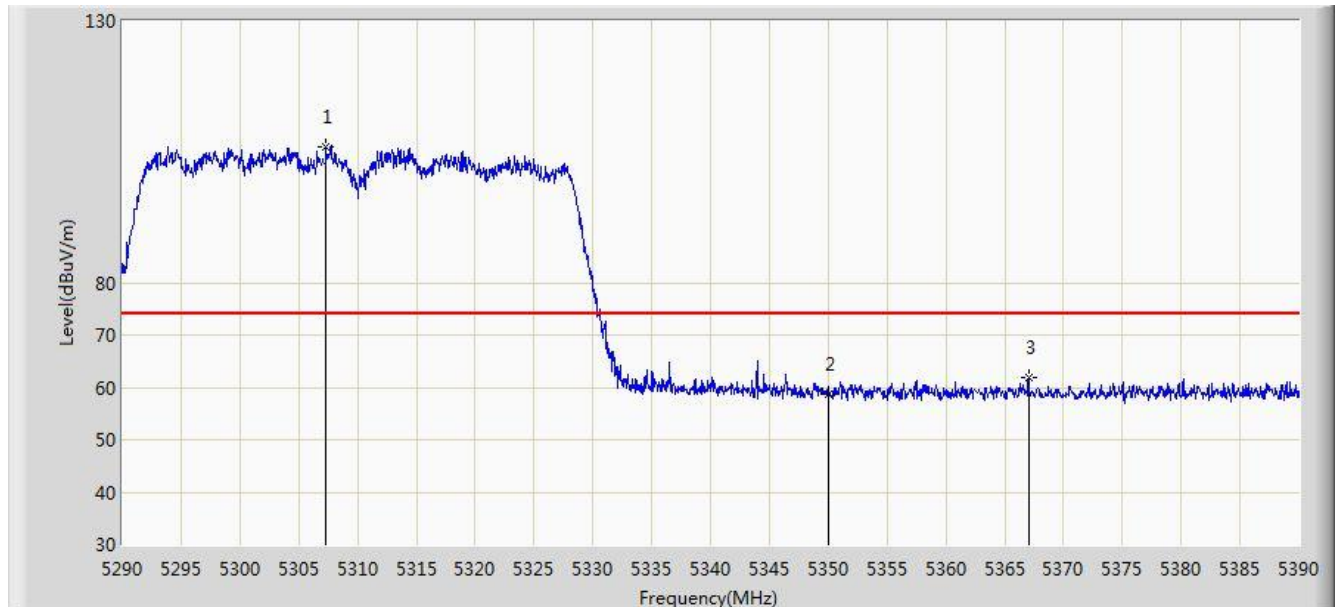


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.350	105.964	102.139	N/A	N/A	3.825	PK
2			5350.000	58.729	54.824	-15.271	74.000	3.904	PK
3			5367.050	61.869	57.934	-12.131	74.000	3.936	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 20:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

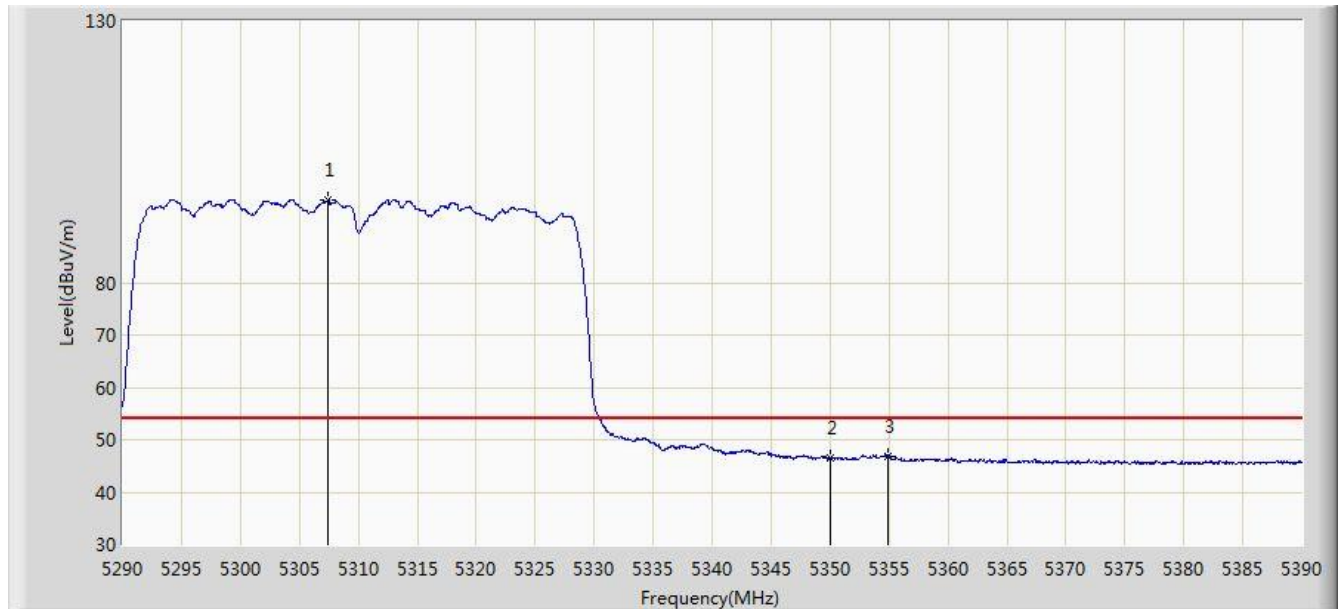


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.400	95.697	91.872	N/A	N/A	3.825	AV
2			5350.000	46.587	42.682	-7.413	54.000	3.904	AV
3			5354.950	46.940	43.026	-7.060	54.000	3.913	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

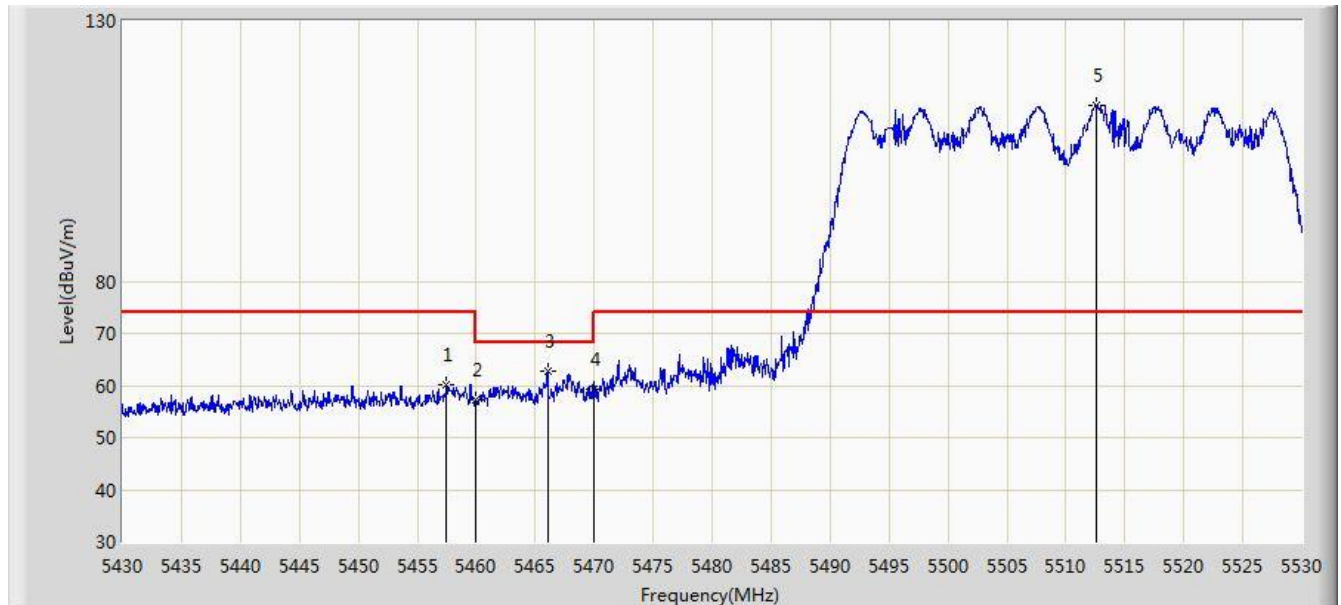


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.500	60.047	55.872	-13.953	74.000	4.175	PK
2			5460.000	57.310	53.130	-16.690	74.000	4.180	PK
3			5466.050	62.678	58.484	-5.522	68.200	4.193	PK
4			5470.000	59.170	54.968	-9.030	68.200	4.202	PK
5		*	5512.550	113.911	109.602	N/A	N/A	4.309	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

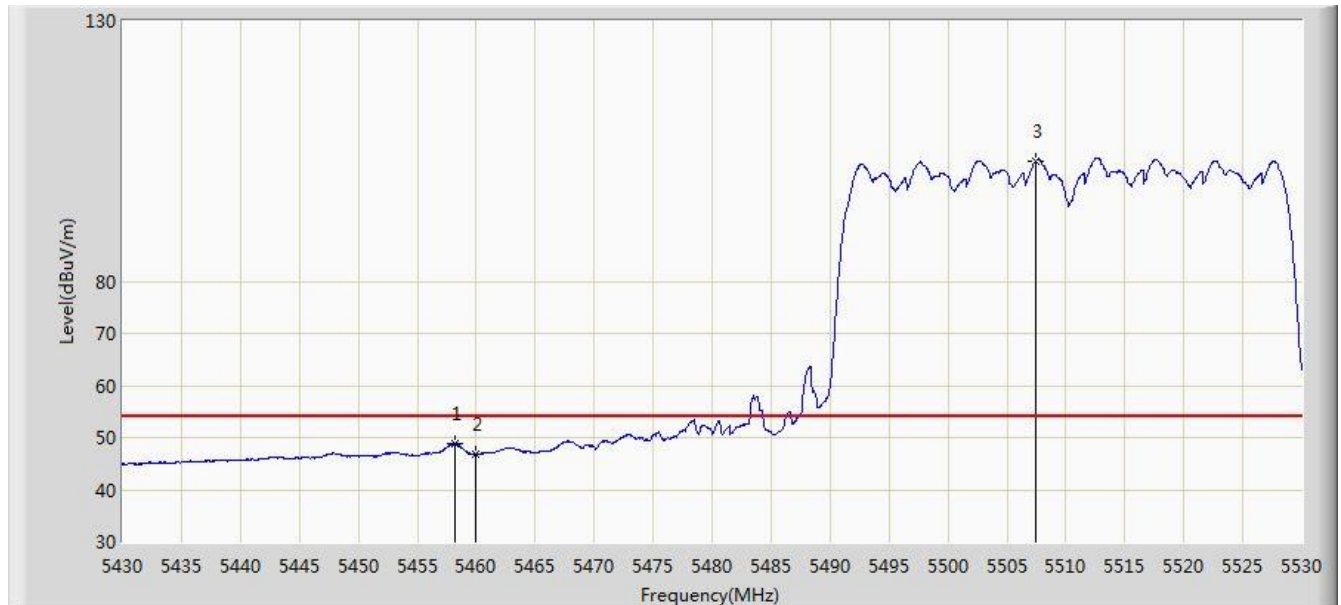


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.150	48.831	44.655	-5.169	54.000	4.176	AV
2			5460.000	46.696	42.516	-7.304	54.000	4.180	AV
3		*	5507.500	103.160	98.866	N/A	N/A	4.294	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

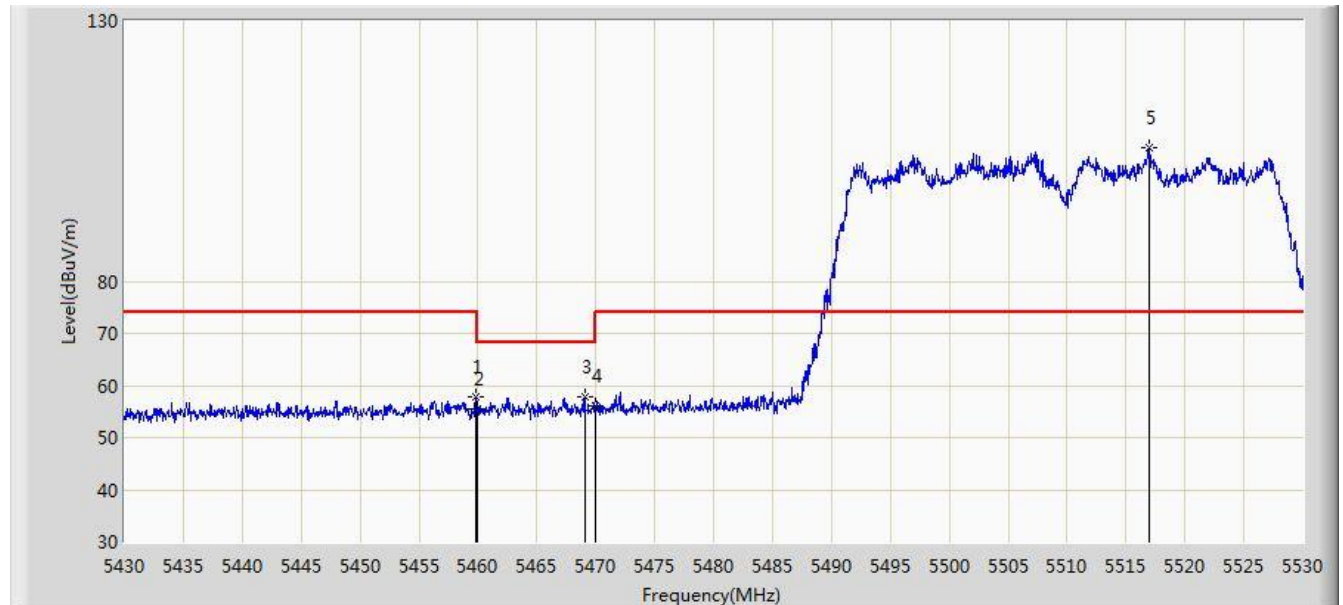


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.800	57.881	53.701	-16.119	74.000	4.180	PK
2			5460.000	55.567	51.387	-18.433	74.000	4.180	PK
3			5469.050	57.758	53.558	-10.442	68.200	4.201	PK
4			5470.000	56.156	51.954	-12.044	68.200	4.202	PK
5		*	5516.950	105.646	101.324	N/A	N/A	4.321	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

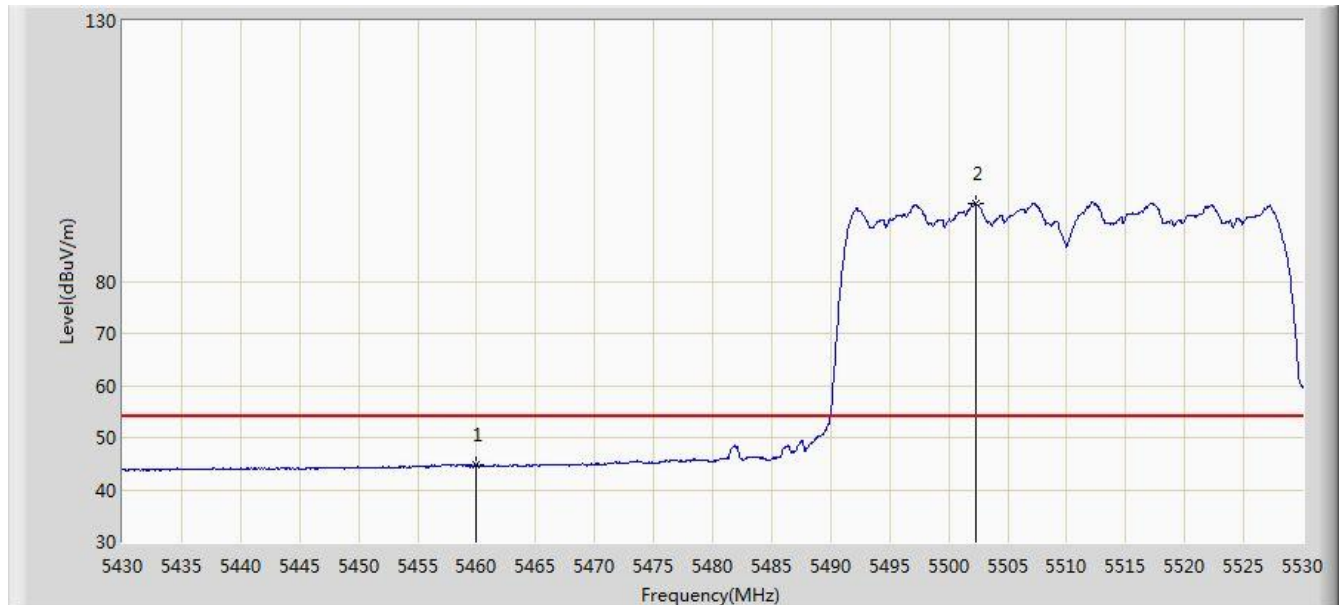


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.705	40.525	-9.295	54.000	4.180	AV
2		*	5502.250	94.794	90.515	N/A	N/A	4.278	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:31
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz (CDD Mode)	

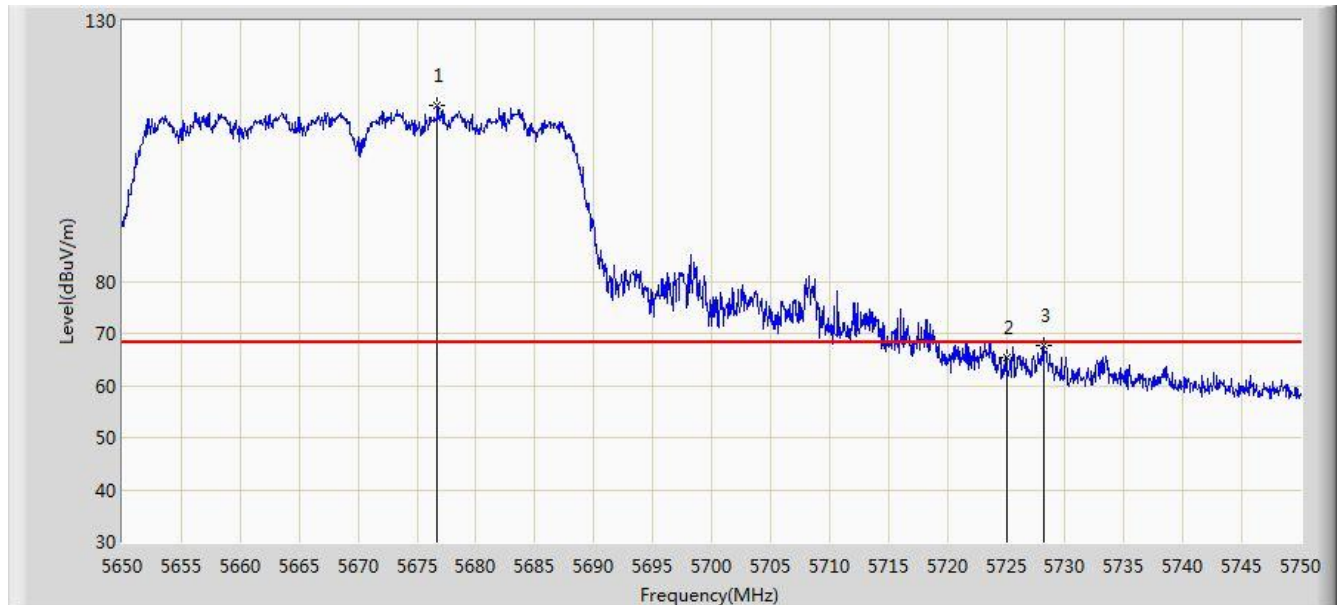


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.750	113.634	108.860	N/A	N/A	4.775	PK
2			5725.000	65.239	60.210	-2.961	68.200	5.029	PK
3			5728.150	67.802	62.753	-0.398	68.200	5.049	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:34
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz (CDD Mode)	

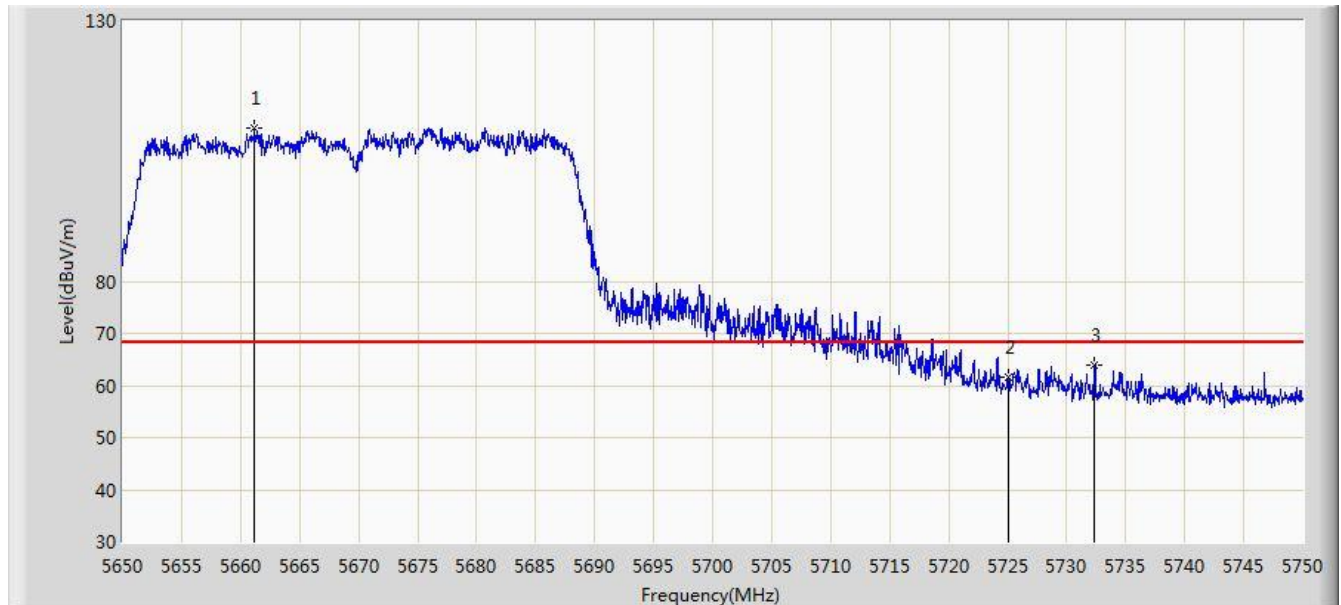


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.200	109.398	104.686	N/A	N/A	4.712	PK
2			5725.000	61.622	56.593	-6.578	68.200	5.029	PK
3			5732.350	64.015	58.939	-4.185	68.200	5.076	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:29
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode)	

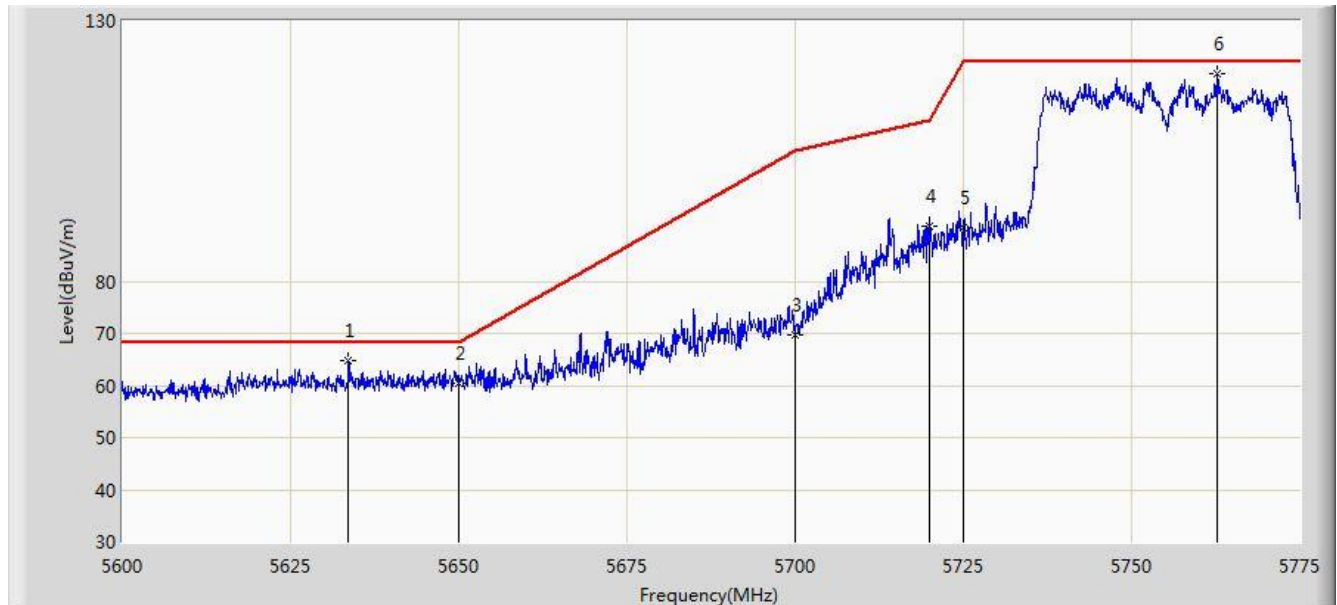


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5633.600	64.845	60.226	-3.355	68.200	4.620	PK
2			5650.000	60.419	55.748	-7.781	68.200	4.671	PK
3			5700.000	69.786	64.908	-35.414	105.200	4.878	PK
4			5720.000	90.559	85.562	-20.241	110.800	4.997	PK
5			5725.000	90.228	85.199	-31.972	122.200	5.029	PK
6		*	5762.750	119.818	114.564	N/A	N/A	5.254	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:31
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode)	

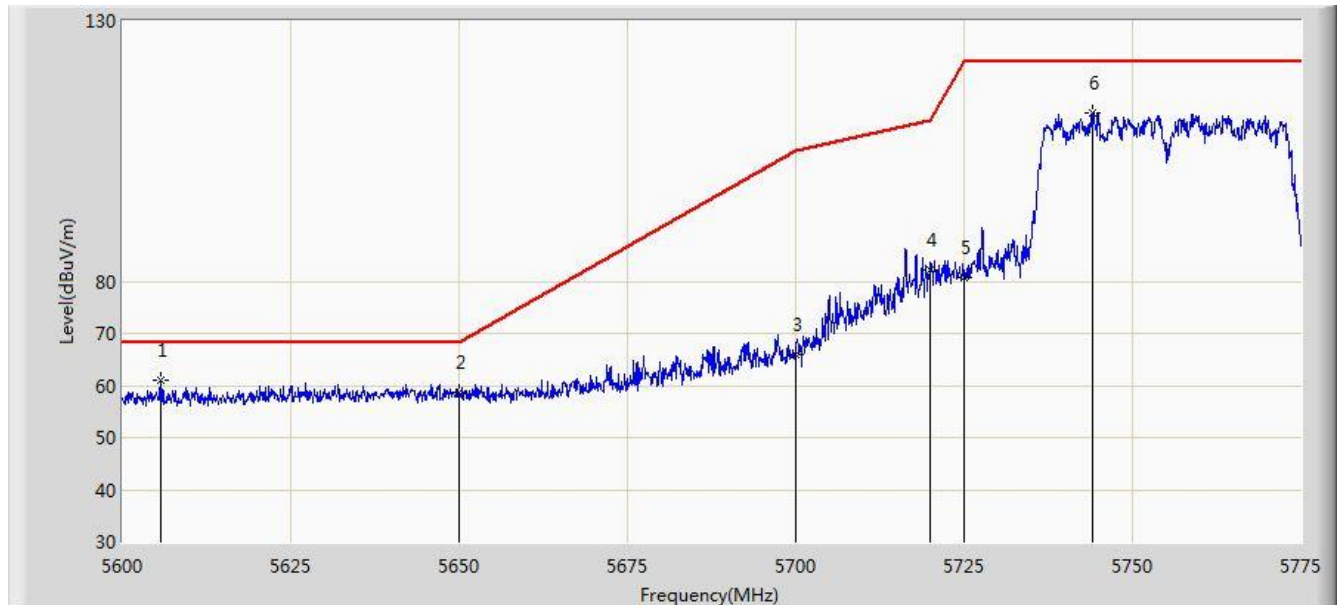


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5605.600	60.974	56.434	-7.226	68.200	4.540	PK
2			5650.000	58.551	53.880	-9.649	68.200	4.671	PK
3			5700.000	65.838	60.960	-39.362	105.200	4.878	PK
4			5720.000	82.064	77.067	-28.736	110.800	4.997	PK
5			5725.000	80.591	75.562	-41.609	122.200	5.029	PK
6			5744.112	112.320	107.170	N/A	N/A	5.151	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:34
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode)	

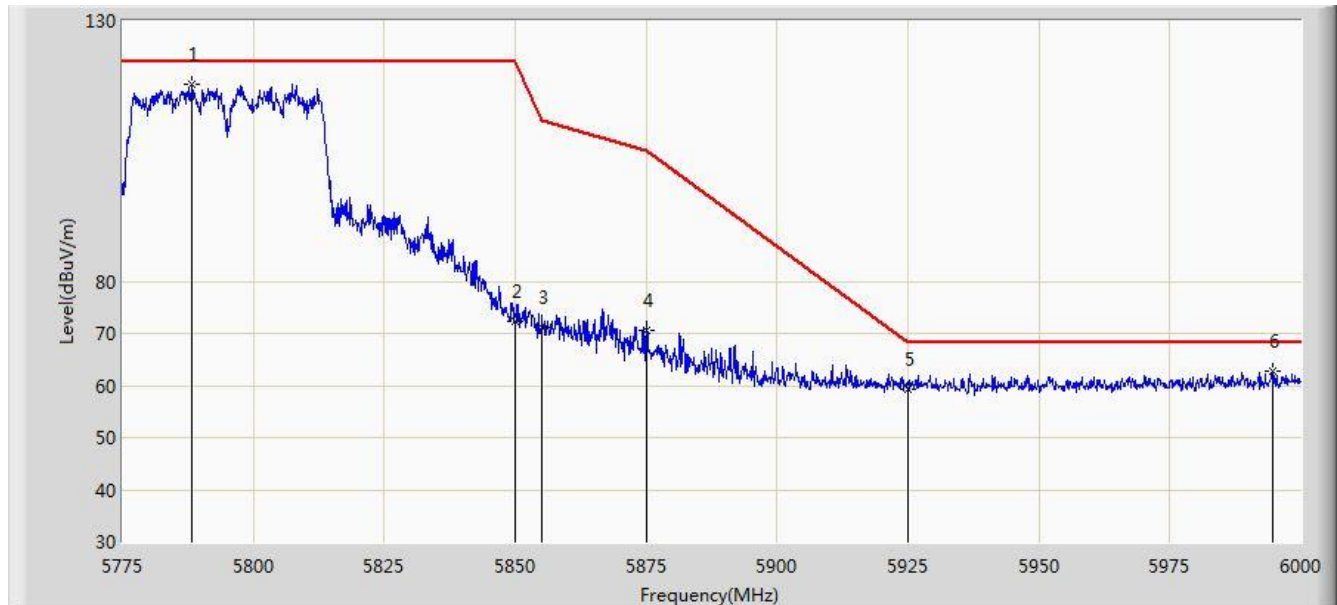


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5788.163	117.918	112.535	N/A	N/A	5.382	PK
2			5850.000	72.280	66.554	-49.920	122.200	5.726	PK
3			5855.000	71.234	65.488	-39.566	110.800	5.746	PK
4			5875.000	70.502	64.682	-34.698	105.200	5.820	PK
5			5925.000	59.246	53.280	-8.954	68.200	5.967	PK
6			5994.600	62.877	56.776	-5.323	68.200	6.101	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:38
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode)	

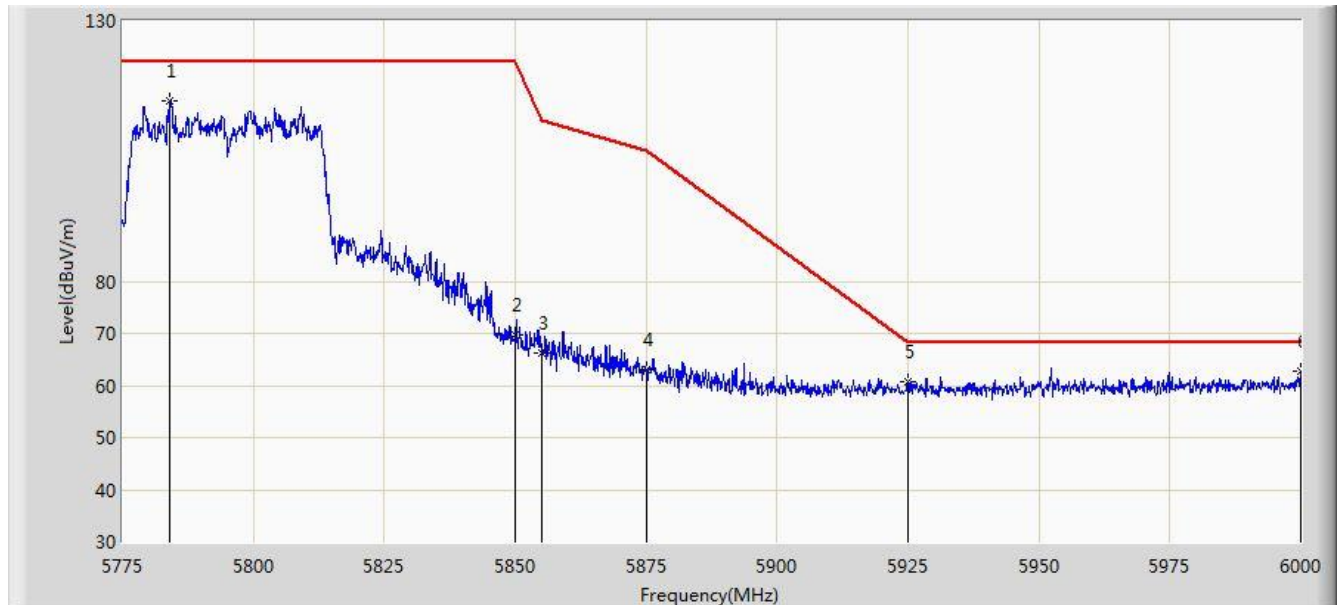


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5784.112	114.503	109.141	N/A	N/A	5.362	PK
2			5850.000	69.643	63.917	-52.557	122.200	5.726	PK
3			5855.000	66.239	60.493	-44.561	110.800	5.746	PK
4			5875.000	63.184	57.364	-42.016	105.200	5.820	PK
5			5925.000	60.760	54.794	-7.440	68.200	5.967	PK
6		*	5999.888	62.801	56.690	-5.399	68.200	6.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

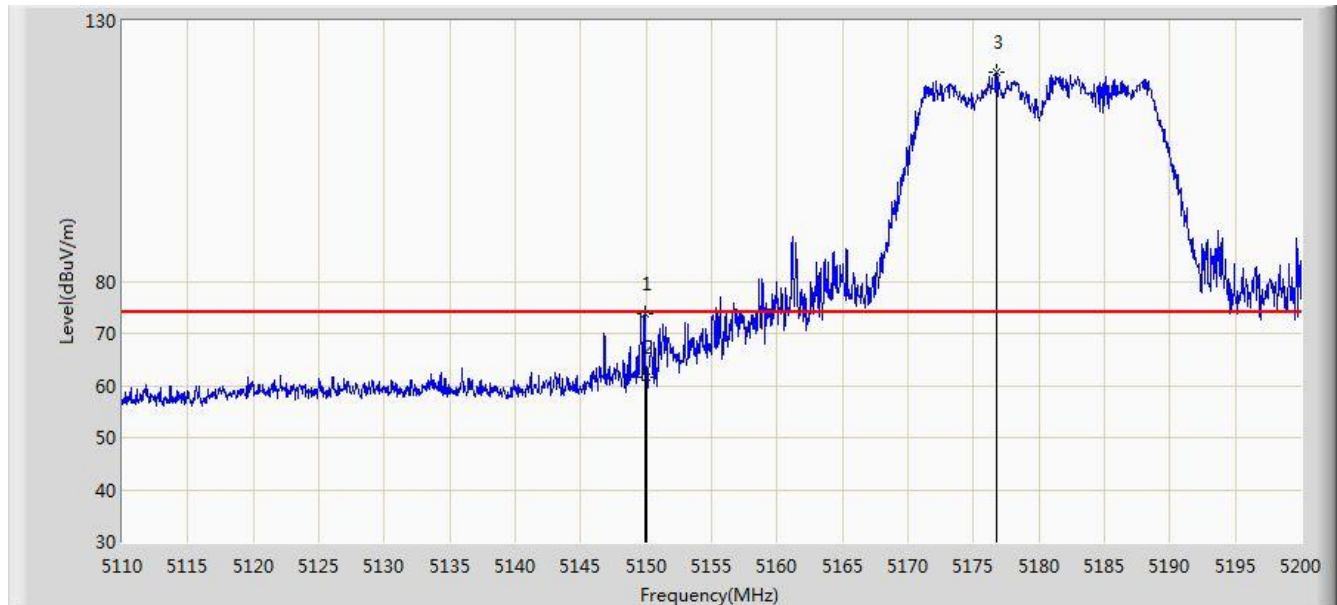


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.870	73.837	69.667	-0.163	74.000	4.170	PK
2			5150.000	61.671	57.502	-12.329	74.000	4.170	PK
3		*	5176.735	120.277	116.197	N/A	N/A	4.081	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

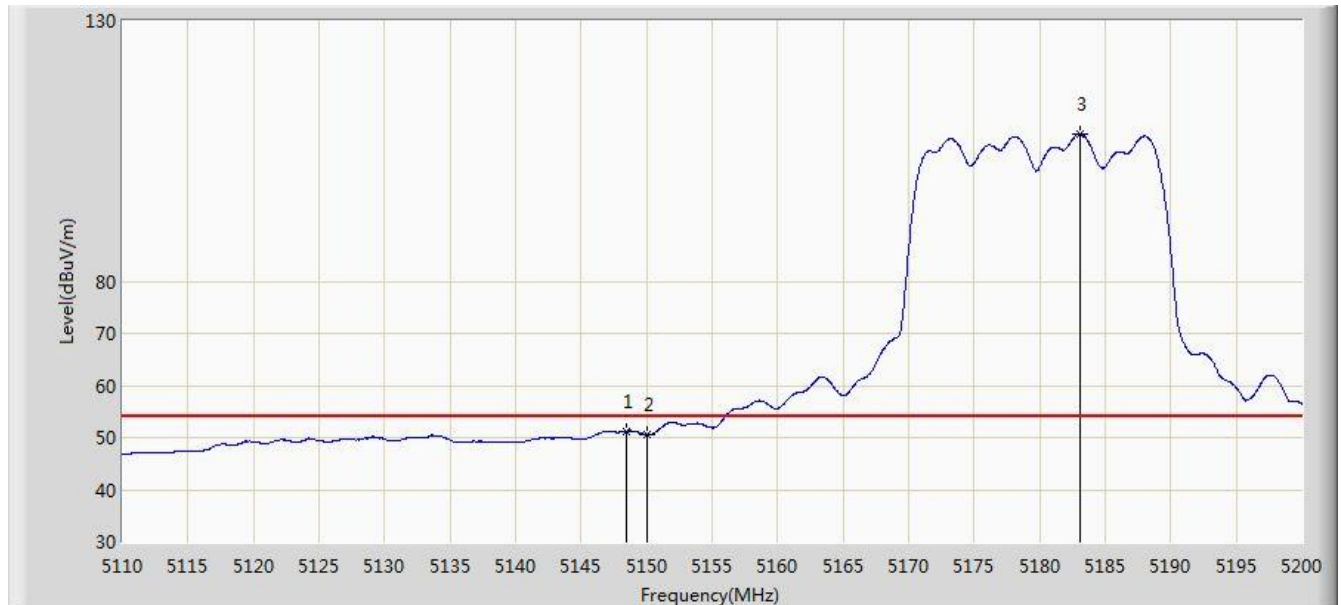


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.475	51.278	47.104	-2.722	54.000	4.174	AV
2			5150.000	50.547	46.378	-3.453	54.000	4.170	AV
3	X	*	5183.035	108.329	104.271	N/A	N/A	4.057	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

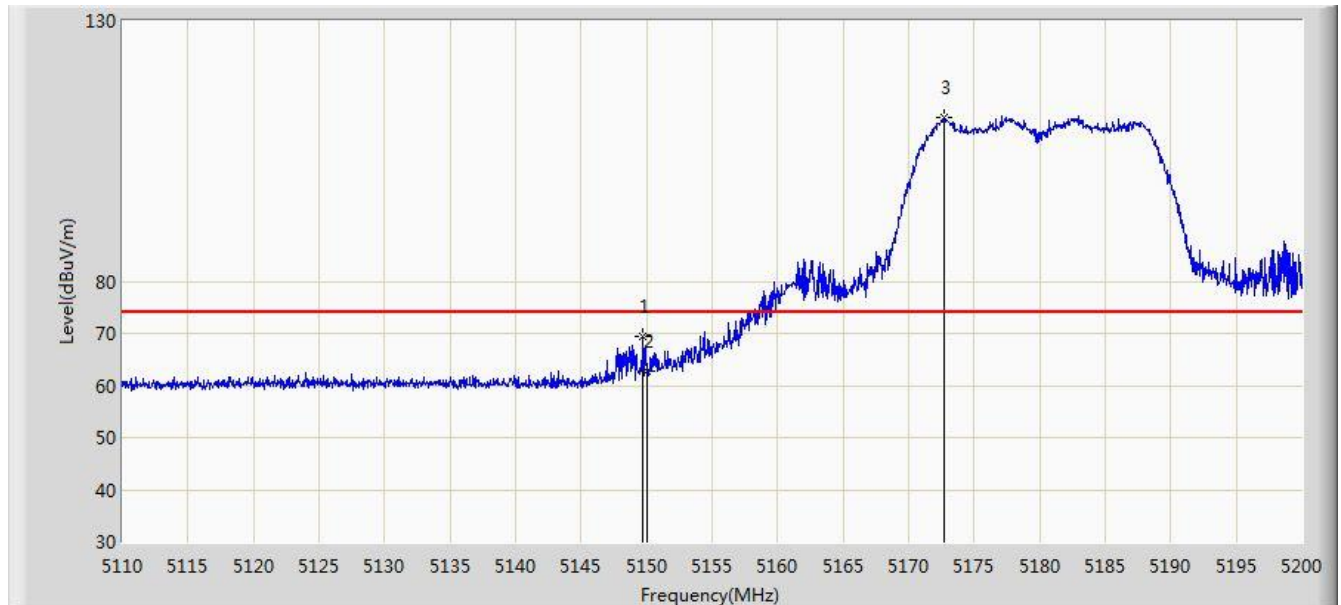


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.735	69.300	65.130	-4.700	74.000	4.170	PK
2			5150.000	62.809	58.640	-11.191	74.000	4.170	PK
3		*	5172.685	111.385	107.290	N/A	N/A	4.095	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

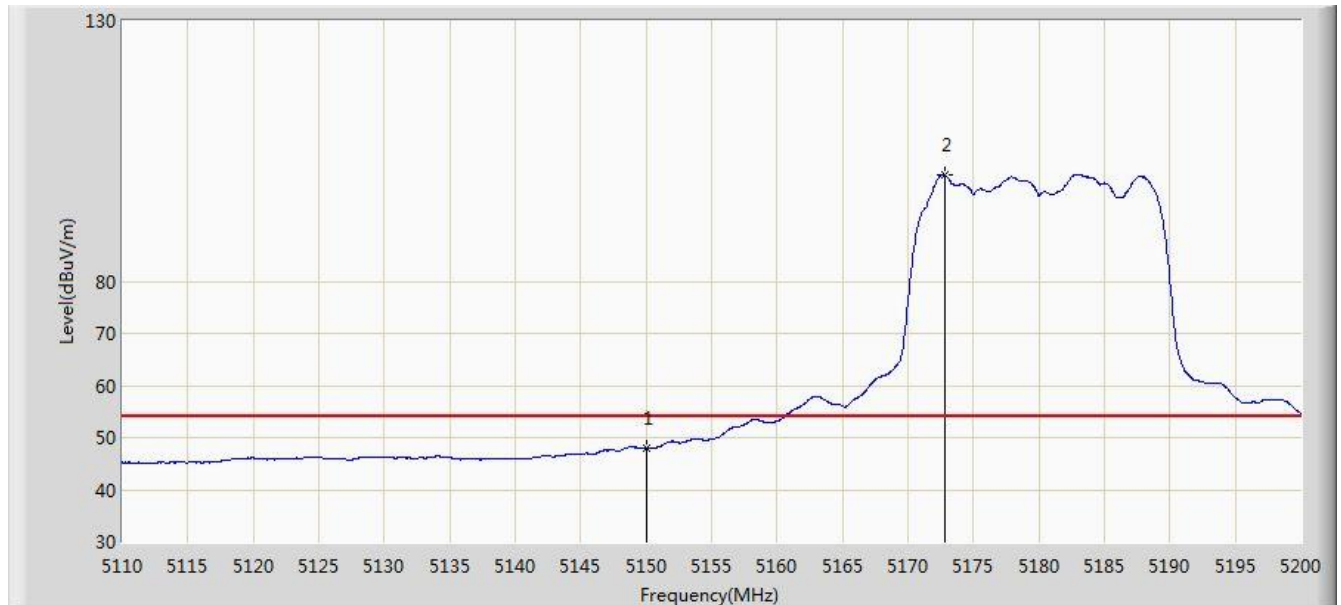


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.063	43.894	-5.937	54.000	4.170	AV
2		*	5172.820	100.380	96.286	N/A	N/A	4.094	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

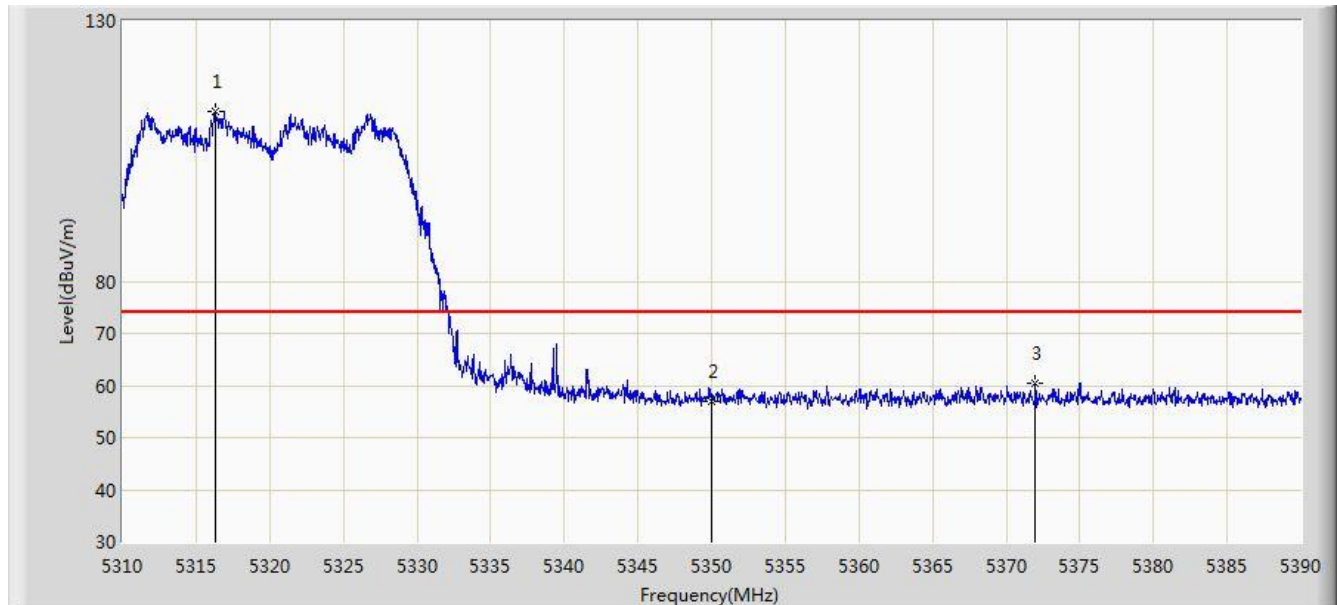


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.280	112.523	108.681	N/A	N/A	3.842	PK
2			5350.000	56.817	52.912	-17.183	74.000	3.904	PK
3			5372.000	60.503	56.558	-13.497	74.000	3.944	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

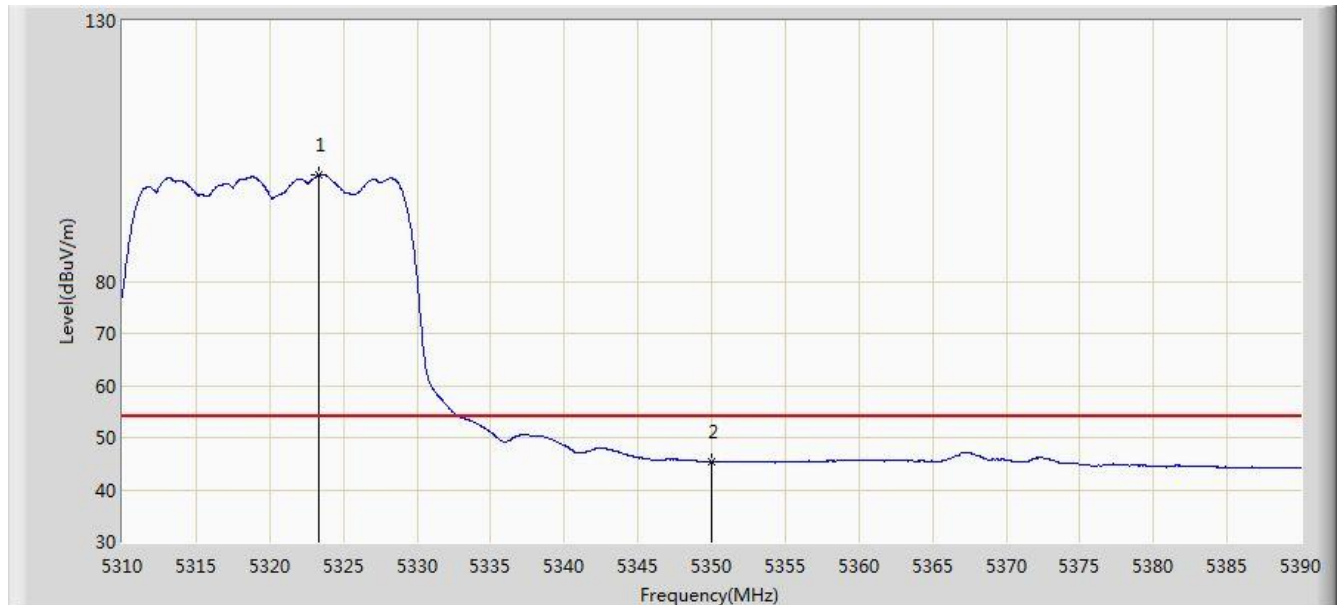


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.360	100.391	96.536	N/A	N/A	3.855	AV
2			5350.000	45.477	41.572	-8.523	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

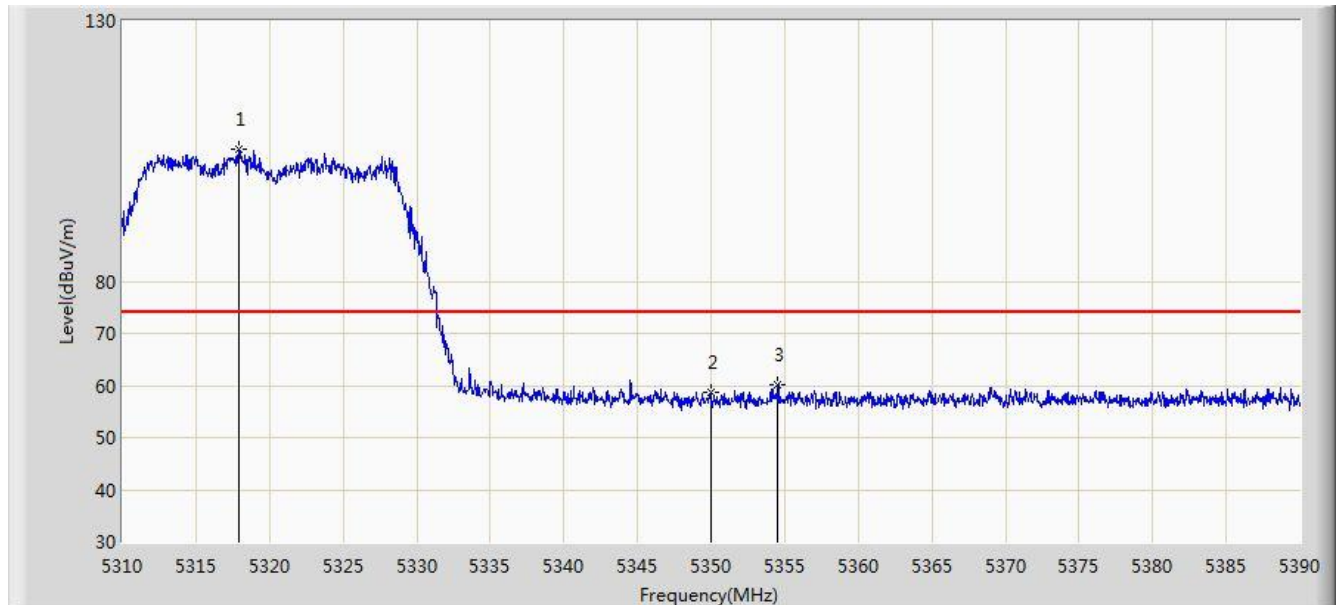


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.960	105.269	101.424	N/A	N/A	3.845	PK
2			5350.000	58.559	54.654	-15.441	74.000	3.904	PK
3			5354.560	60.032	56.119	-13.968	74.000	3.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

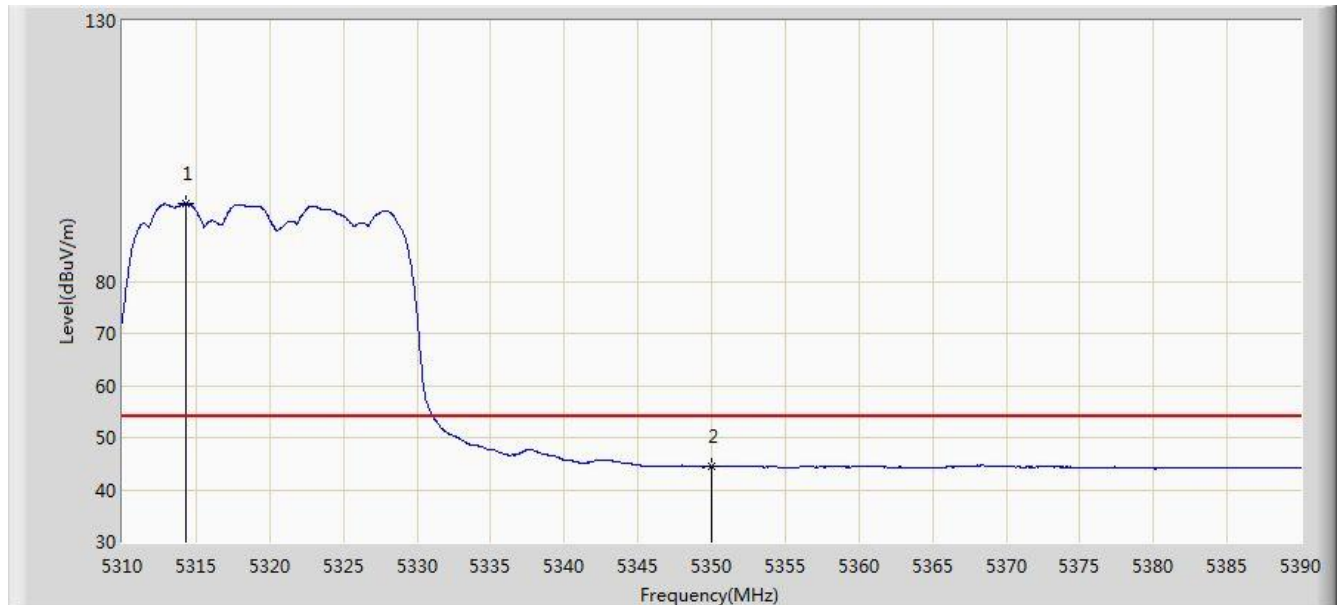


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.320	94.880	91.042	N/A	N/A	3.839	AV
2			5350.000	44.528	40.623	-9.472	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

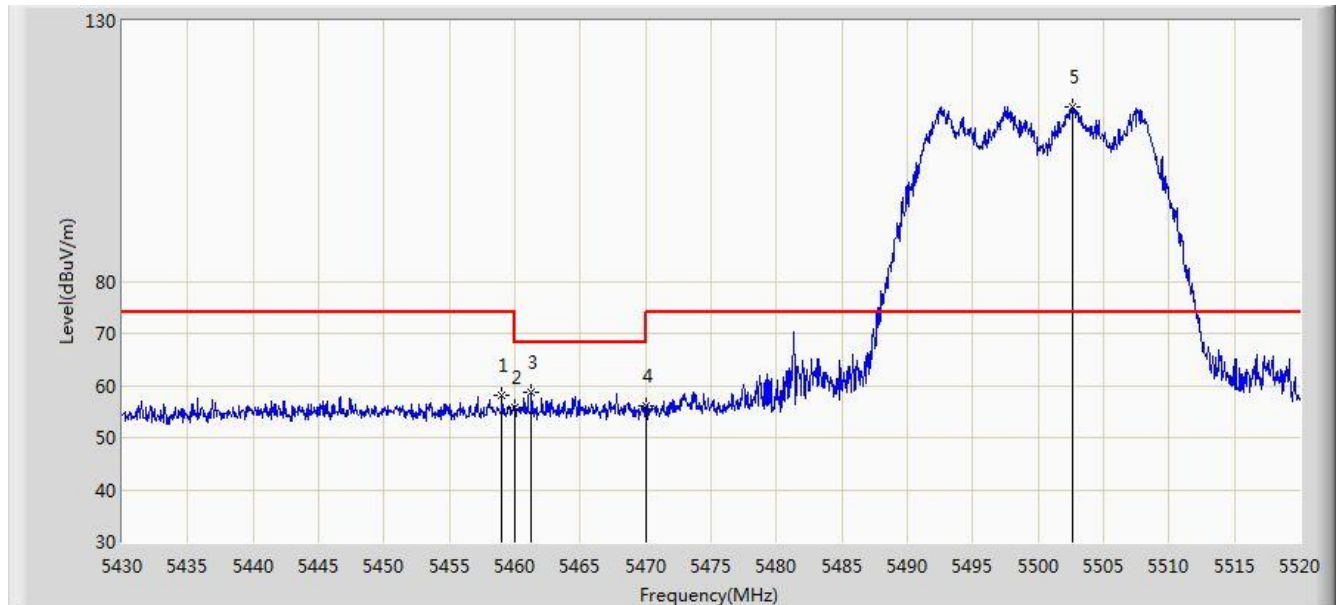


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.025	58.204	54.026	-15.796	74.000	4.178	PK
2			5460.000	55.911	51.731	-18.089	74.000	4.180	PK
3			5461.275	58.777	54.594	-9.423	68.200	4.183	PK
4			5470.000	56.176	51.974	-12.024	68.200	4.202	PK
5		*	5502.675	113.409	109.129	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

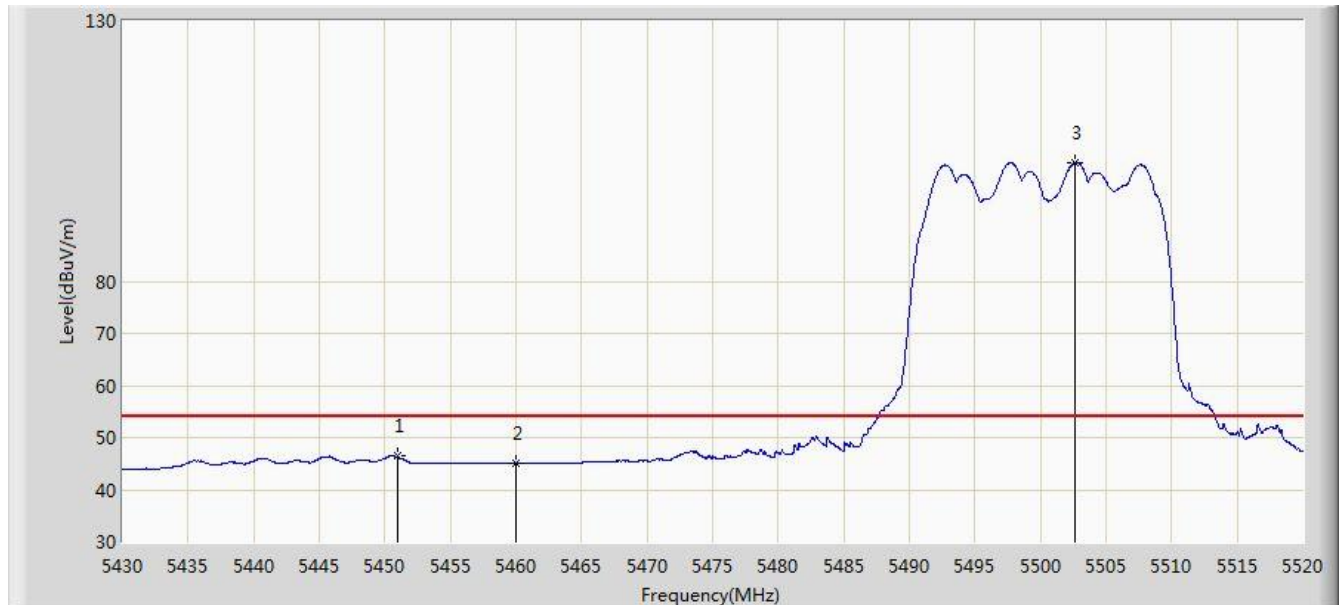


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.970	46.421	42.263	-7.579	54.000	4.158	AV
2			5460.000	45.124	40.944	-8.876	54.000	4.180	AV
3		*	5502.675	102.839	98.559	N/A	N/A	4.281	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

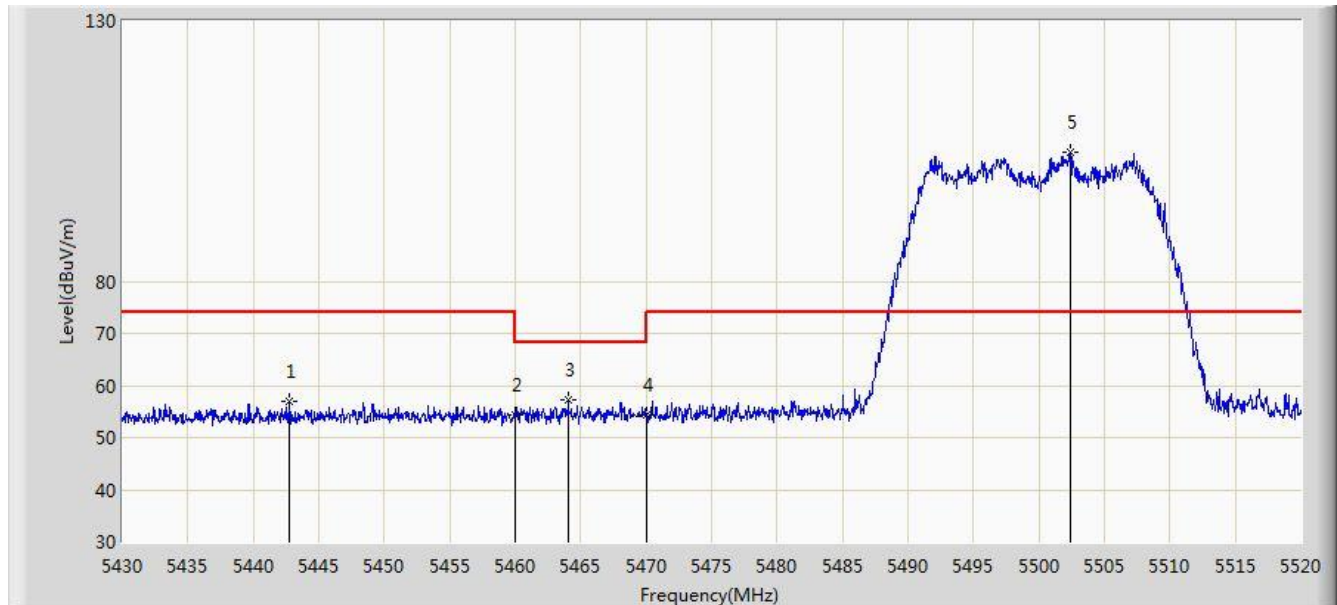


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5442.735	56.887	52.755	-17.113	74.000	4.133	PK
2			5460.000	54.313	50.133	-19.687	74.000	4.180	PK
3			5464.065	57.130	52.941	-11.070	68.200	4.189	PK
4			5470.000	54.488	50.286	-13.712	68.200	4.202	PK
5		*	5502.405	104.829	100.550	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 04:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

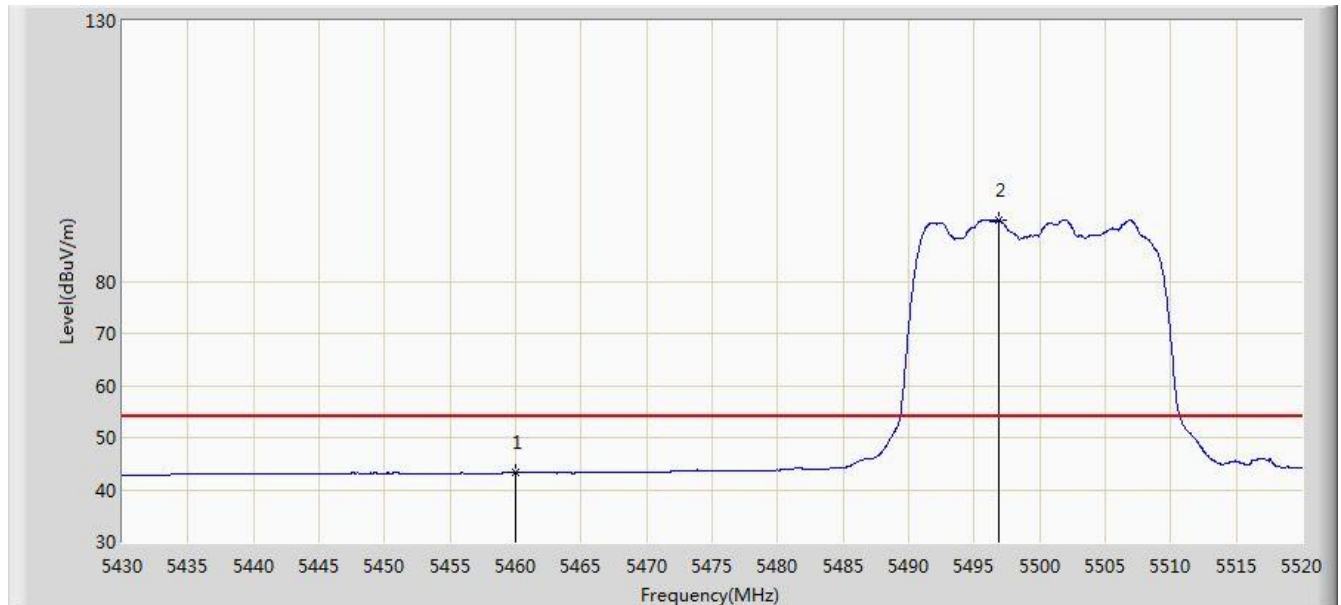


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	43.238	39.058	-10.762	54.000	4.180	AV
2		*	5496.870	91.737	87.474	N/A	N/A	4.264	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:40
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz (CDD Mode)	

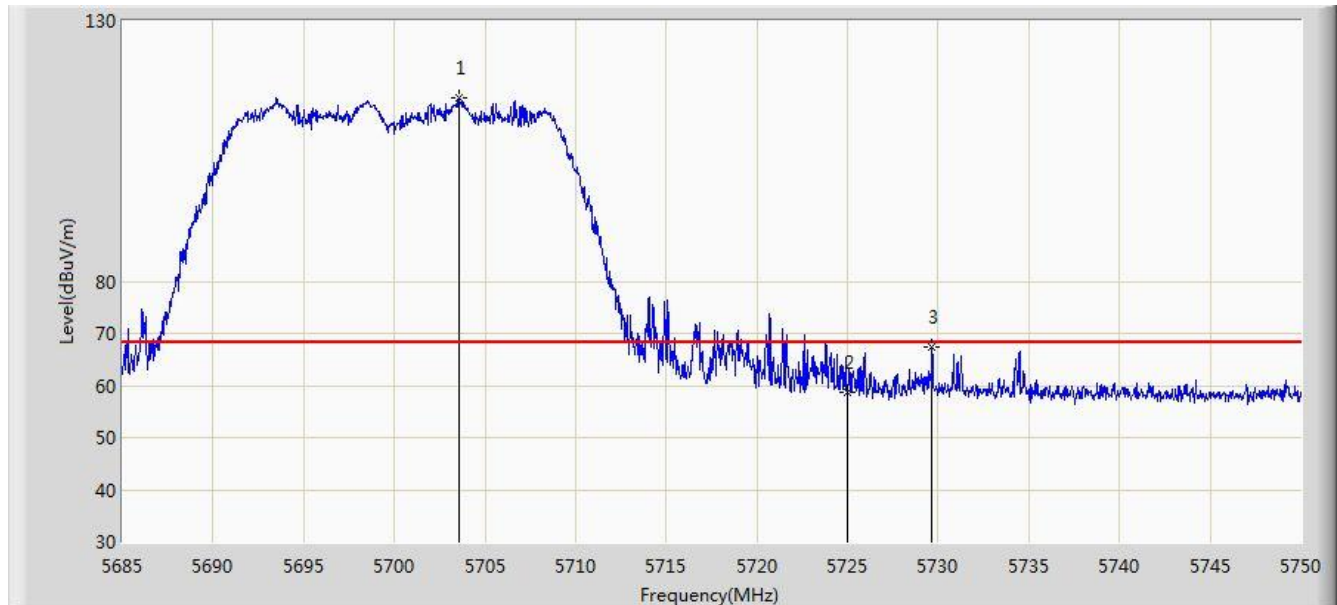


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.558	115.200	110.303	N/A	N/A	4.897	PK
2			5725.000	58.643	53.614	-9.557	68.200	5.029	PK
3			5729.655	67.260	62.201	-0.940	68.200	5.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:41
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz (CDD Mode)	

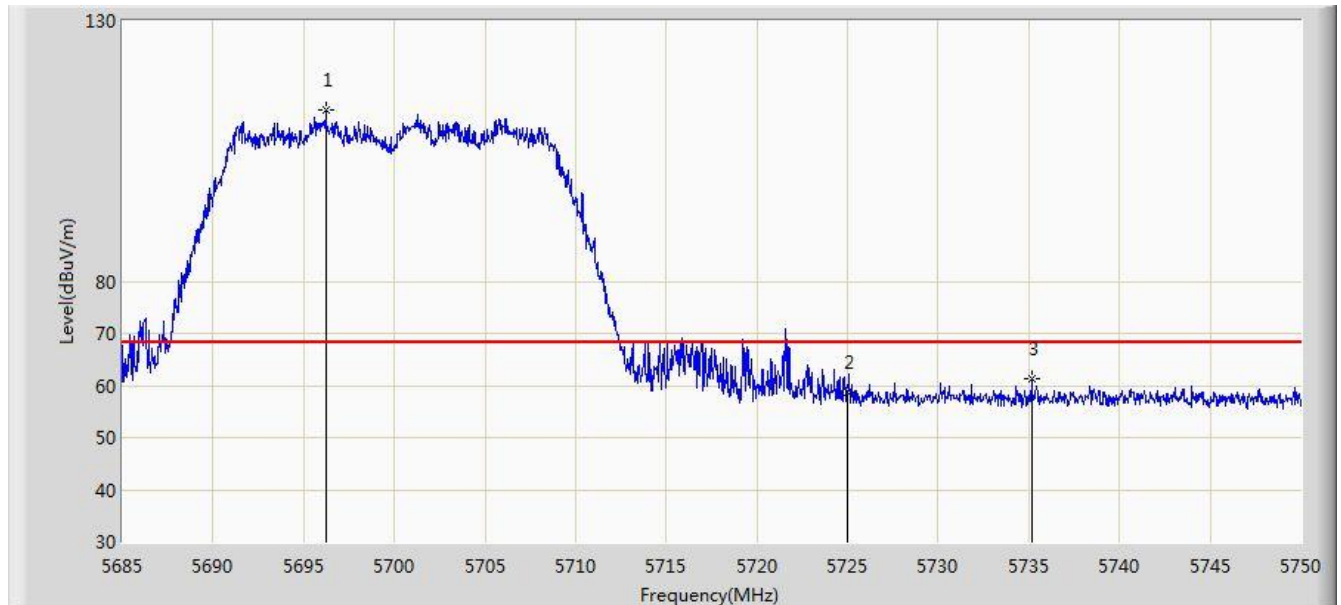


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.245	112.774	107.916	N/A	N/A	4.859	PK
2			5725.000	58.650	53.621	-9.550	68.200	5.029	PK
3			5735.147	61.328	56.234	-6.872	68.200	5.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:09
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz (CDD Mode)	

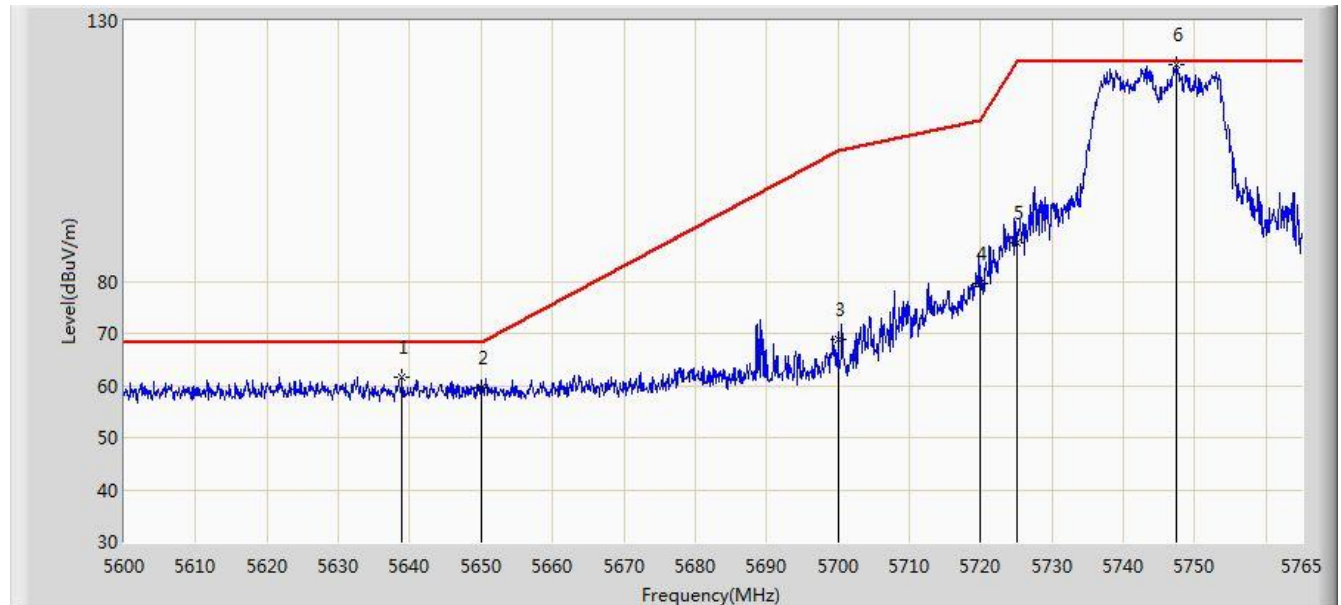


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.940	61.675	57.040	-6.525	68.200	4.635	PK
2			5650.000	59.536	54.865	-8.664	68.200	4.671	PK
3			5700.000	68.974	64.096	-36.226	105.200	4.878	PK
4			5720.000	79.537	74.540	-31.263	110.800	4.997	PK
5			5725.000	87.348	82.319	-34.852	122.200	5.029	PK
6		*	5747.428	121.672	116.503	N/A	N/A	5.169	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:12
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz (CDD Mode)	

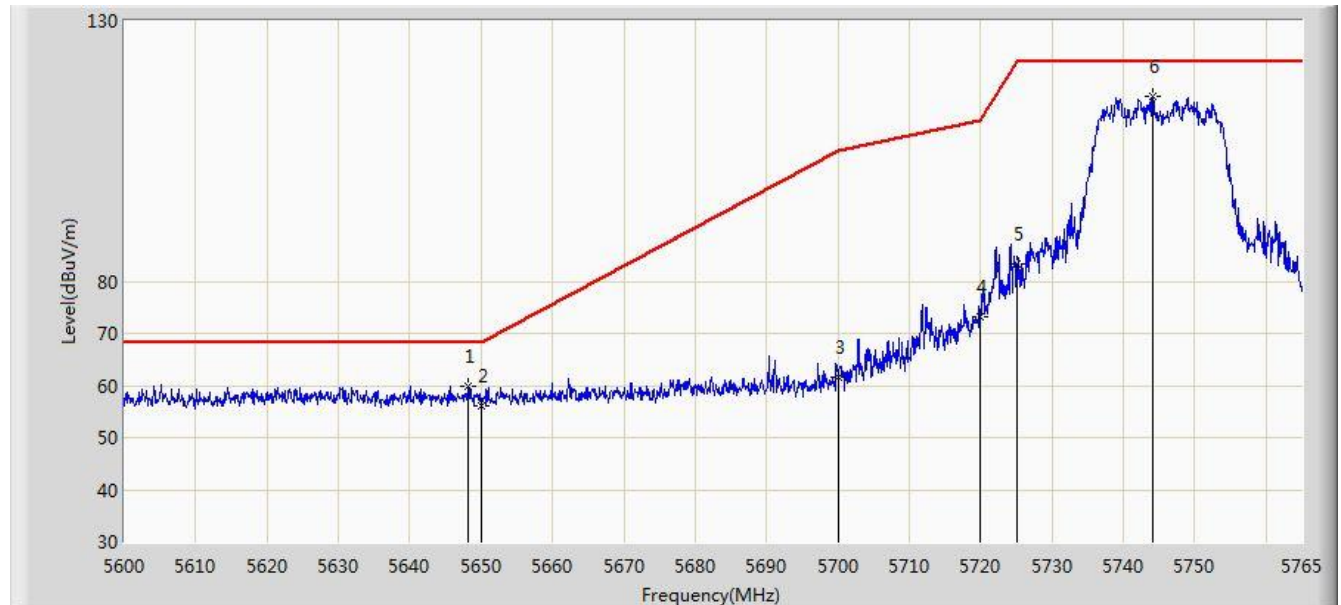


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5648.098	59.805	55.140	-8.395	68.200	4.665	PK
2			5650.000	56.047	51.376	-12.153	68.200	4.671	PK
3			5700.000	61.659	56.781	-43.541	105.200	4.878	PK
4			5720.000	73.253	68.256	-37.547	110.800	4.997	PK
5			5725.000	83.255	78.226	-38.945	122.200	5.029	PK
6		*	5744.045	115.483	110.333	N/A	N/A	5.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:14
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz (CDD Mode)	

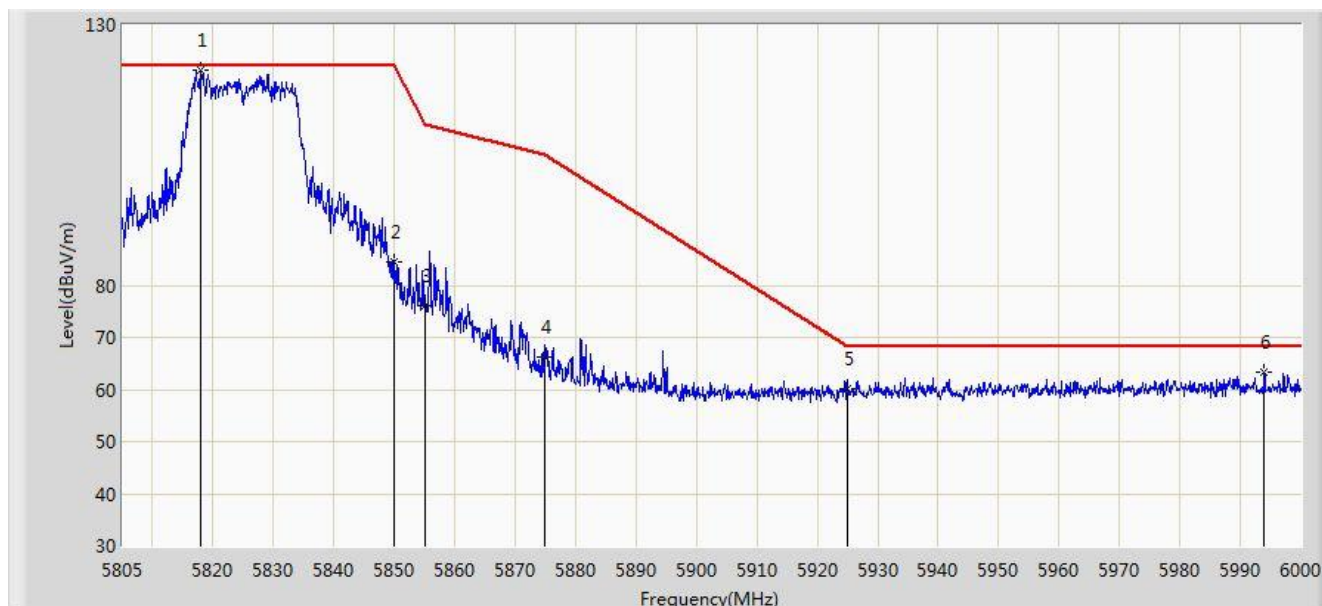


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5817.870	121.165	115.619	N/A	N/A	5.546	PK
2			5850.000	84.575	78.849	-37.625	122.200	5.726	PK
3			5855.000	76.121	70.375	-34.679	110.800	5.746	PK
4			5875.000	66.297	60.477	-38.903	105.200	5.820	PK
5			5925.000	60.217	54.251	-7.983	68.200	5.967	PK
6			5993.955	63.231	57.131	-4.969	68.200	6.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:17
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz (CDD Mode)	

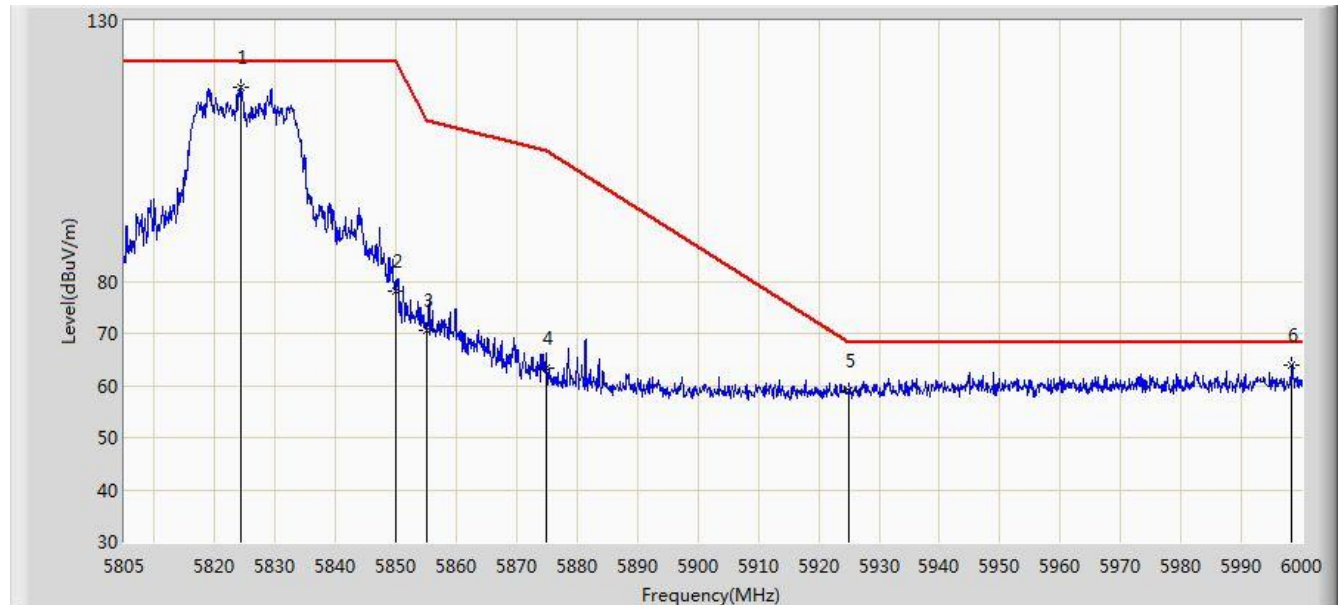


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5824.305	117.274	111.690	N/A	N/A	5.584	PK
2			5850.000	78.124	72.398	-44.076	122.200	5.726	PK
3			5855.000	70.657	64.911	-40.143	110.800	5.746	PK
4			5875.000	63.205	57.385	-41.995	105.200	5.820	PK
5			5925.000	59.094	53.128	-9.106	68.200	5.967	PK
6		*	5998.342	63.939	57.831	-4.261	68.200	6.108	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

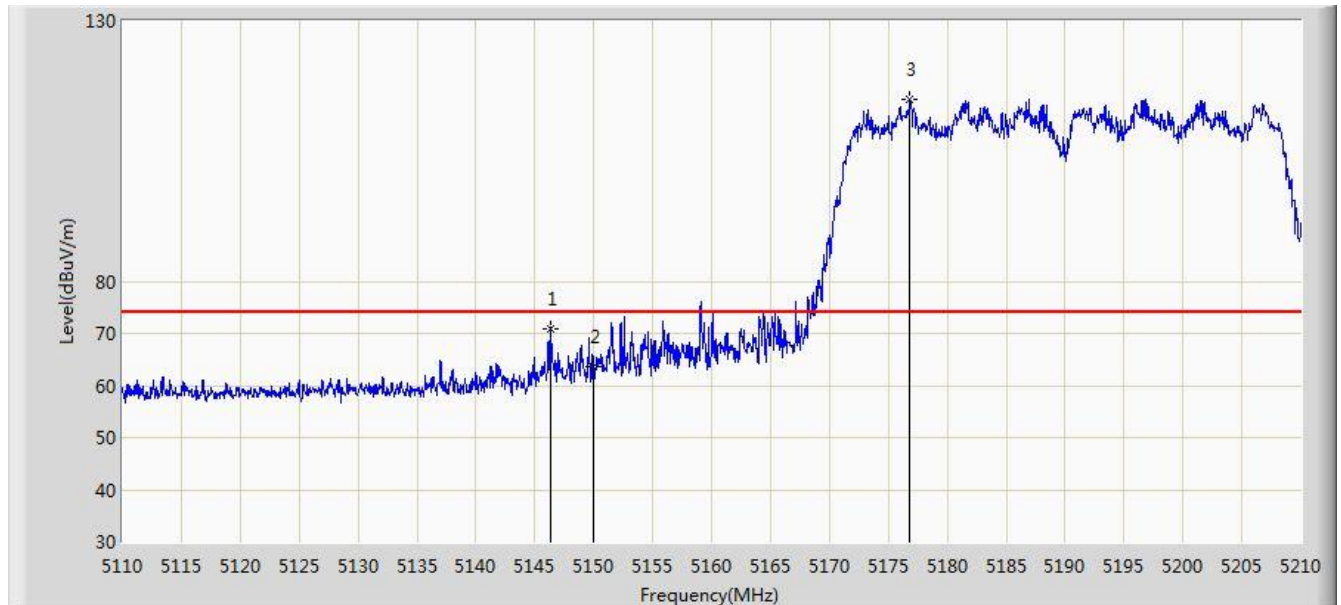


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.350	70.965	66.789	-3.035	74.000	4.176	PK
2			5150.000	63.514	59.345	-10.486	74.000	4.170	PK
3		*	5176.850	115.007	110.927	N/A	N/A	4.081	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

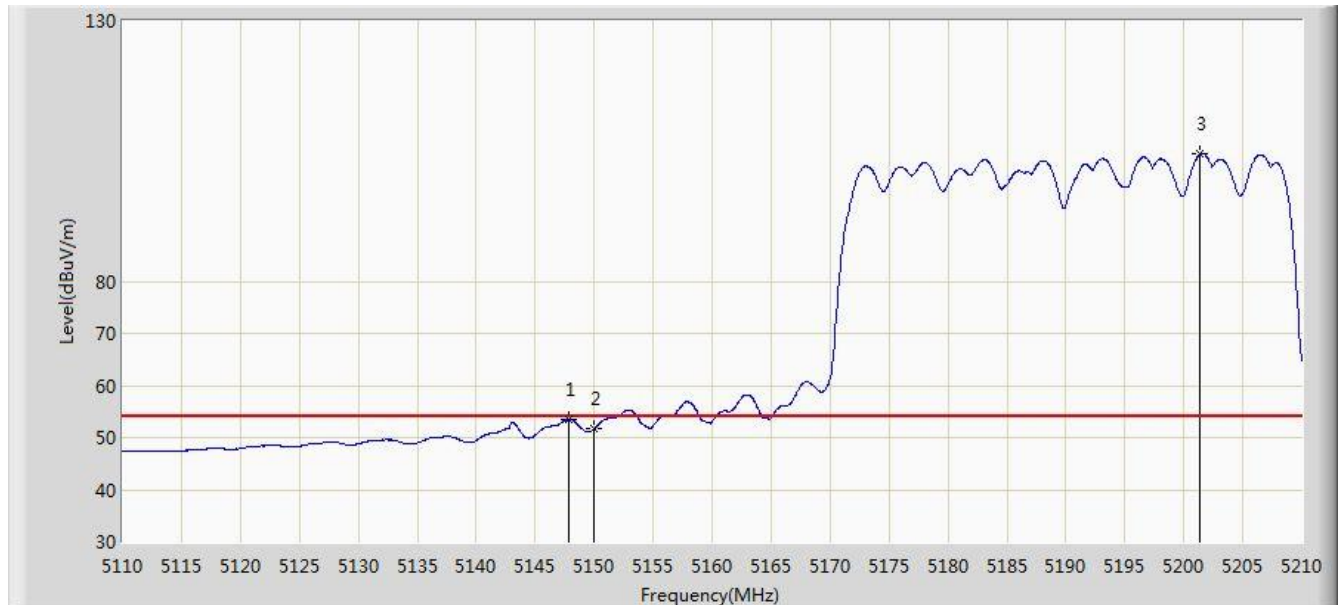


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.850	53.483	49.307	-0.517	54.000	4.176	AV
2			5150.000	51.709	47.540	-2.291	54.000	4.170	AV
3		*	5201.400	104.415	100.421	N/A	N/A	3.994	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 21:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

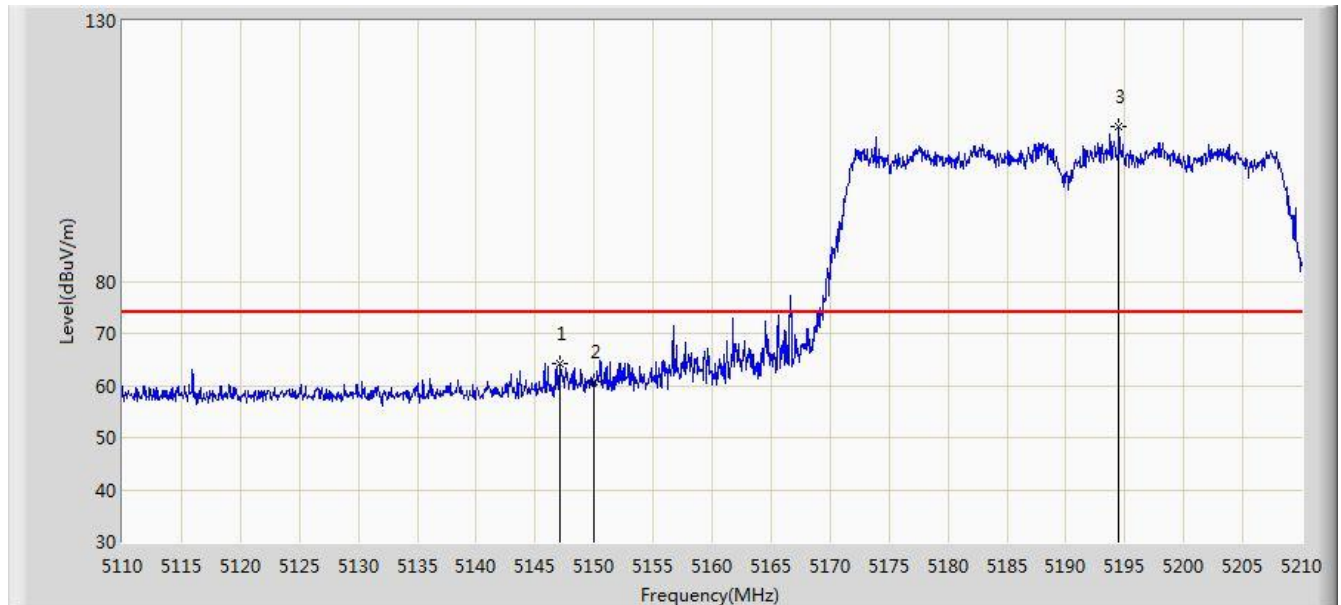


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.100	64.134	59.958	-9.866	74.000	4.176	PK
2			5150.000	60.641	56.472	-13.359	74.000	4.170	PK
3		*	5194.500	109.770	105.753	N/A	N/A	4.017	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

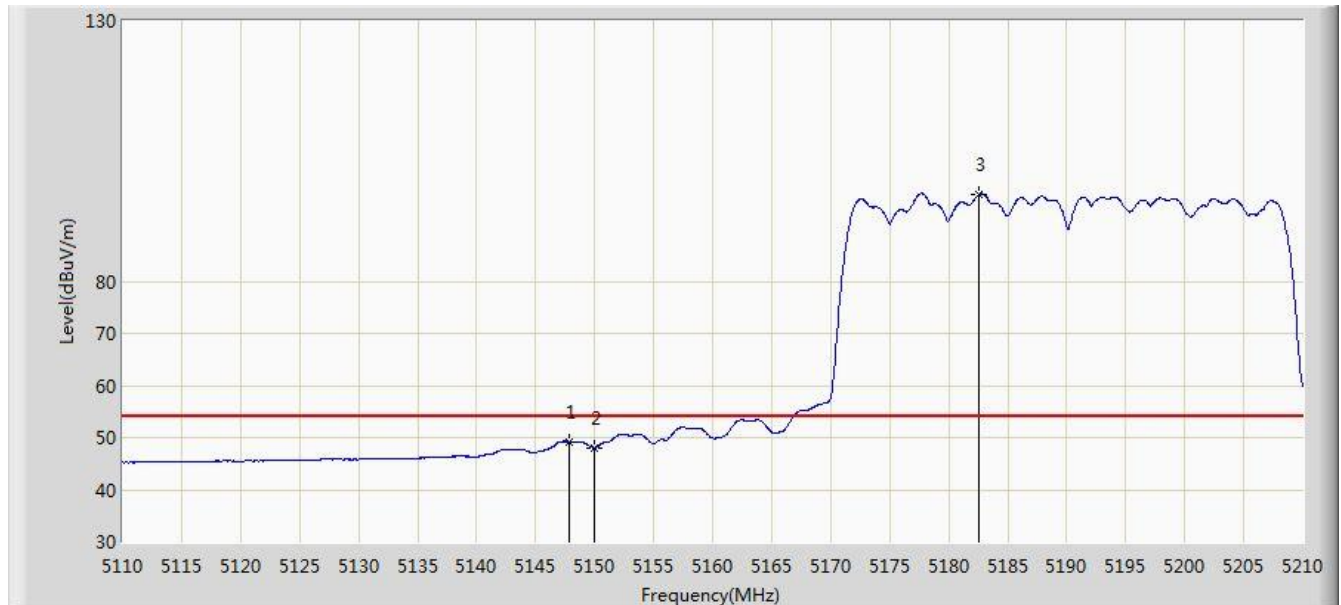


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.900	49.119	44.943	-4.881	54.000	4.176	AV
2			5150.000	48.068	43.899	-5.932	54.000	4.170	AV
3		*	5182.550	96.631	92.571	N/A	N/A	4.060	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5230MHz (CDD Mode)	

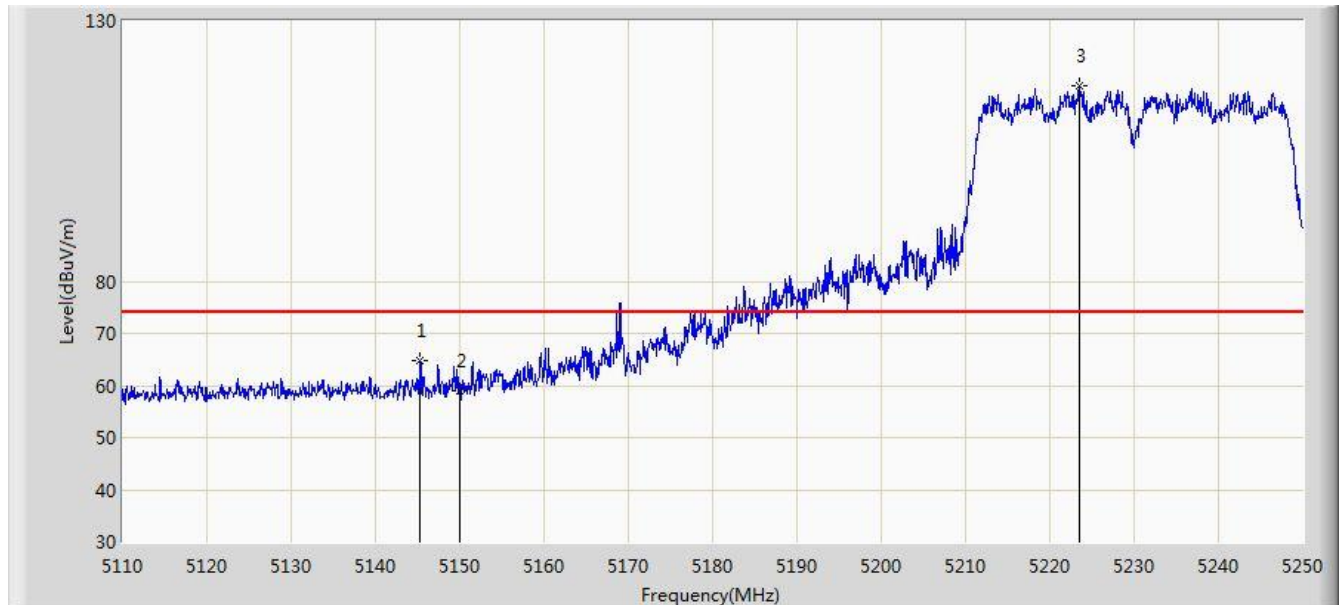


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.350	64.738	60.562	-9.262	74.000	4.176	PK
2			5150.000	59.006	54.837	-14.994	74.000	4.170	PK
3		*	5223.540	117.455	113.527	N/A	N/A	3.928	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5230MHz (CDD Mode)	

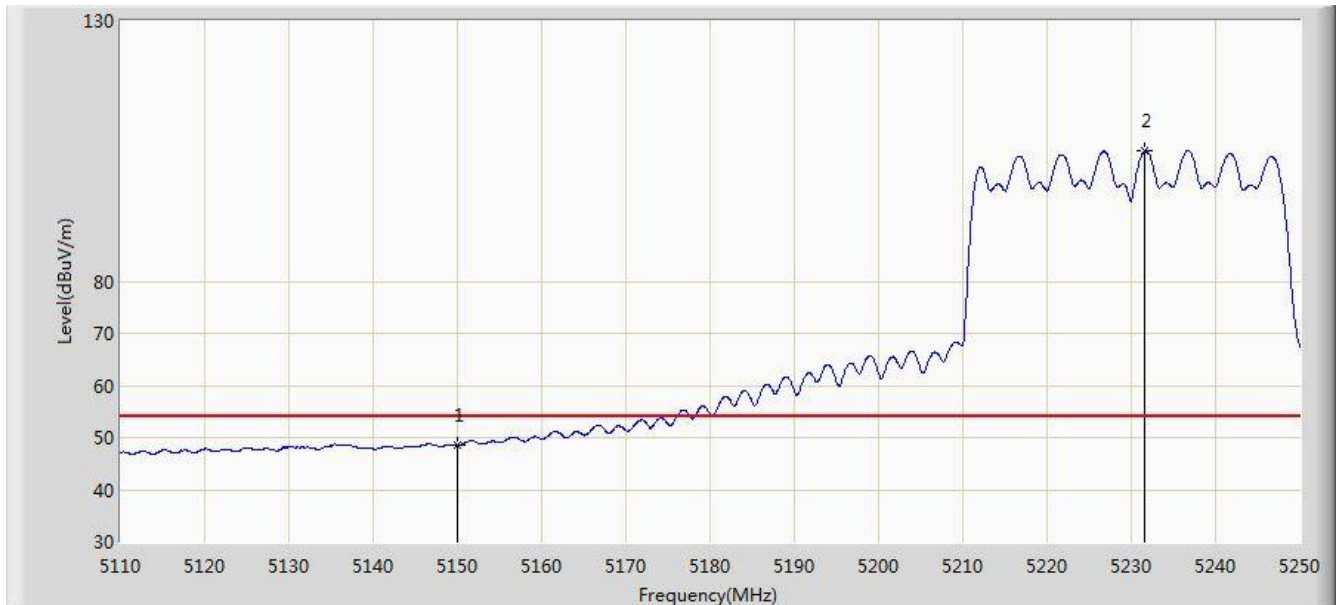


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.506	44.337	-5.494	54.000	4.170	AV
2		*	5231.660	105.058	101.154	N/A	N/A	3.905	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5230MHz (CDD Mode)	

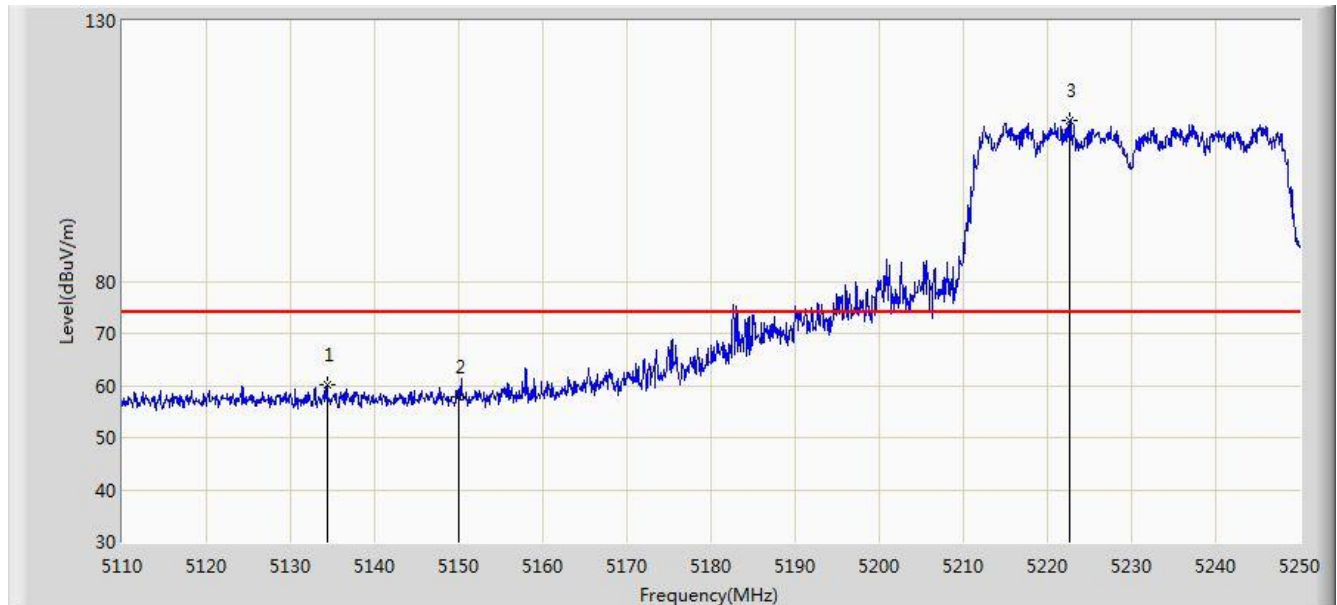

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.360	60.115	55.940	-13.885	74.000	4.175	PK
2			5150.000	57.715	53.546	-16.285	74.000	4.170	PK
3		*	5222.700	110.980	107.049	N/A	N/A	3.931	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5230MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.260	42.091	-7.740	54.000	4.170	AV
2		*	5217.730	101.112	97.166	N/A	N/A	3.946	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

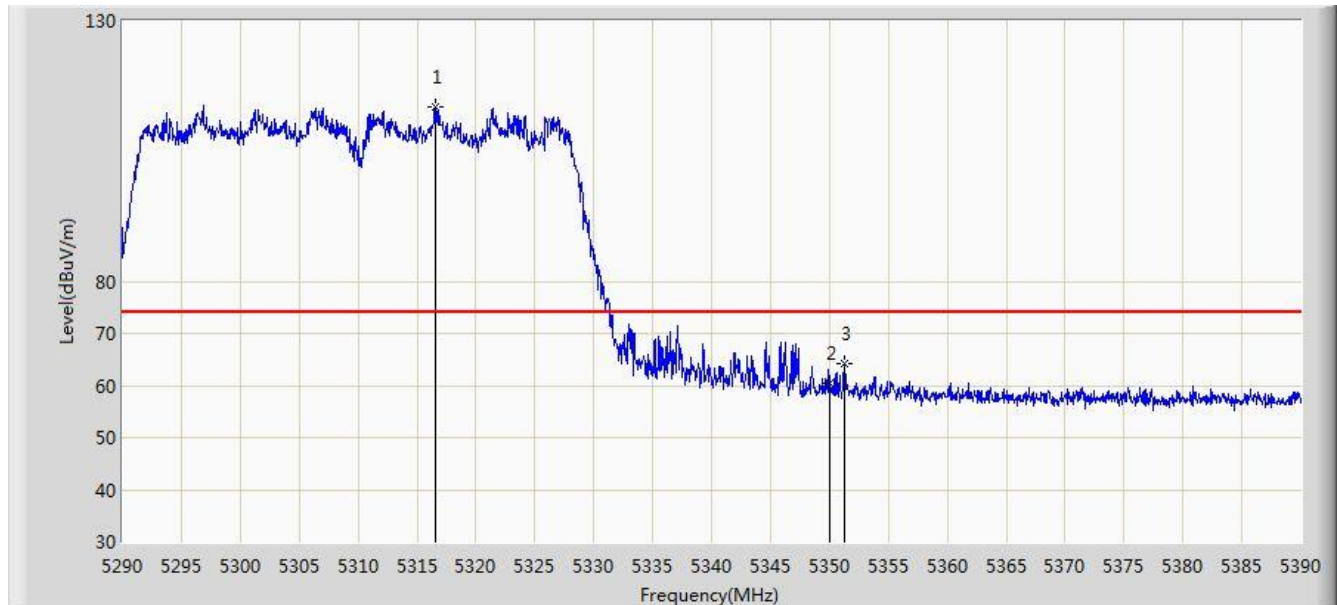


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.600	113.461	109.619	N/A	N/A	3.843	PK
2			5350.000	60.366	56.461	-13.634	74.000	3.904	PK
3			5351.300	64.061	60.154	-9.939	74.000	3.907	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

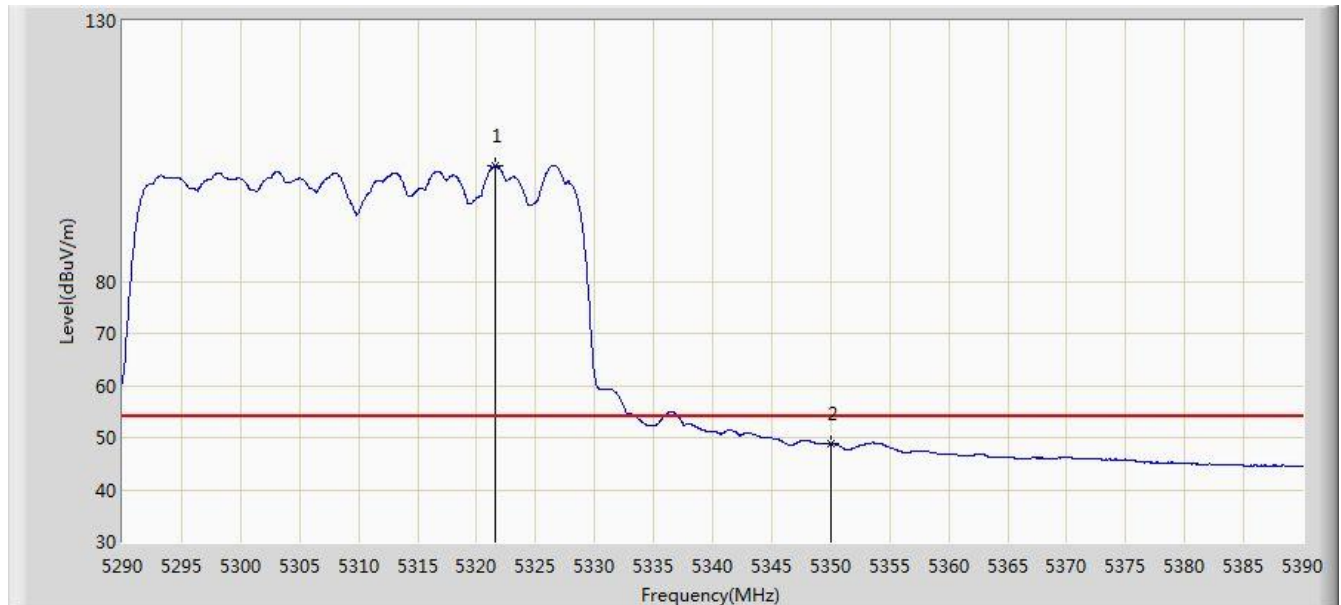


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.550	102.223	98.372	N/A	N/A	3.851	AV
2			5350.000	48.791	44.886	-5.209	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

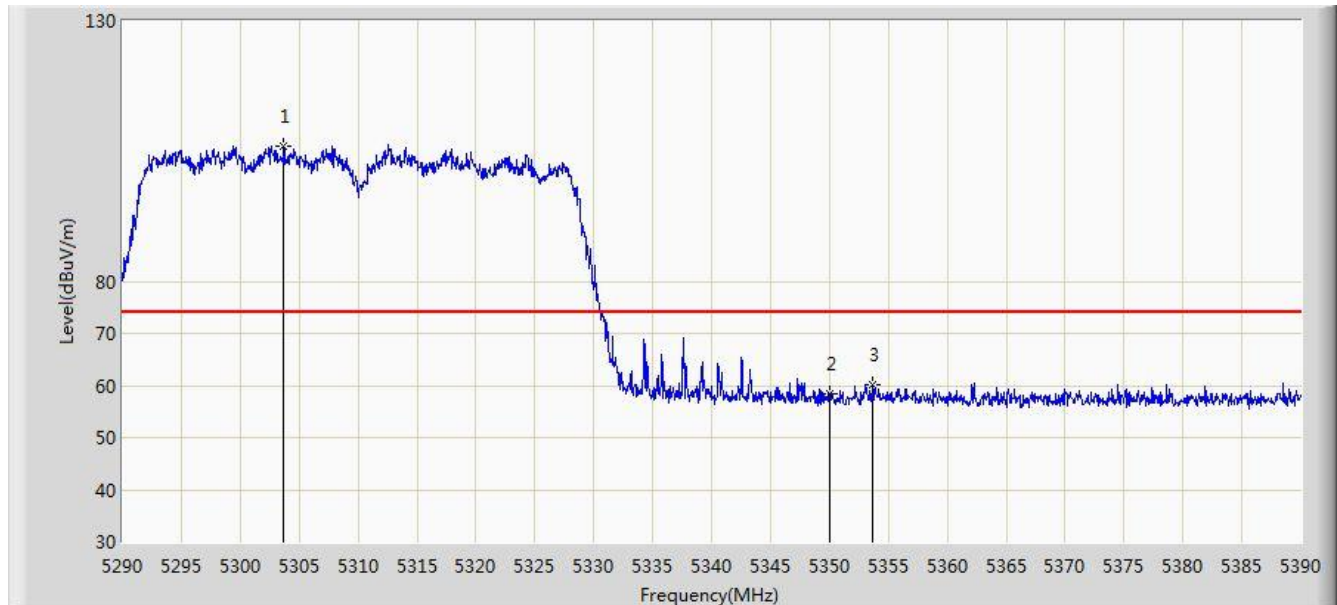


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.700	105.991	102.173	N/A	N/A	3.819	PK
2			5350.000	58.319	54.414	-15.681	74.000	3.904	PK
3			5353.600	60.142	56.231	-13.858	74.000	3.911	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

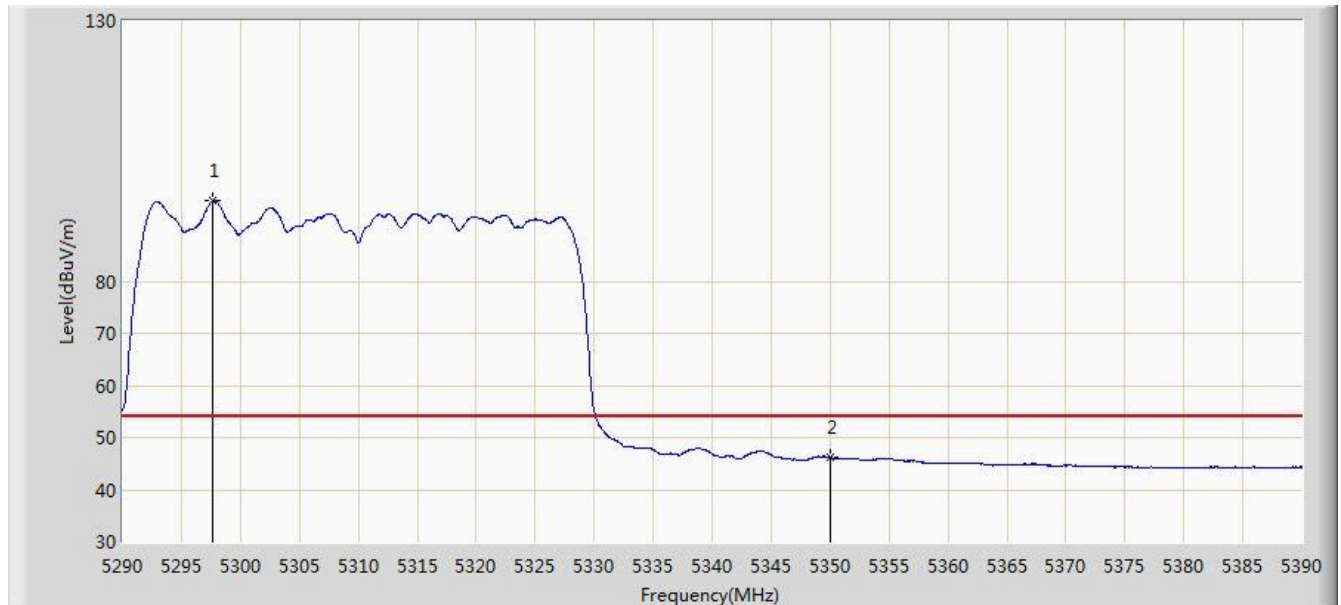


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.700	95.375	91.560	N/A	N/A	3.815	AV
2			5350.000	46.325	42.420	-7.675	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

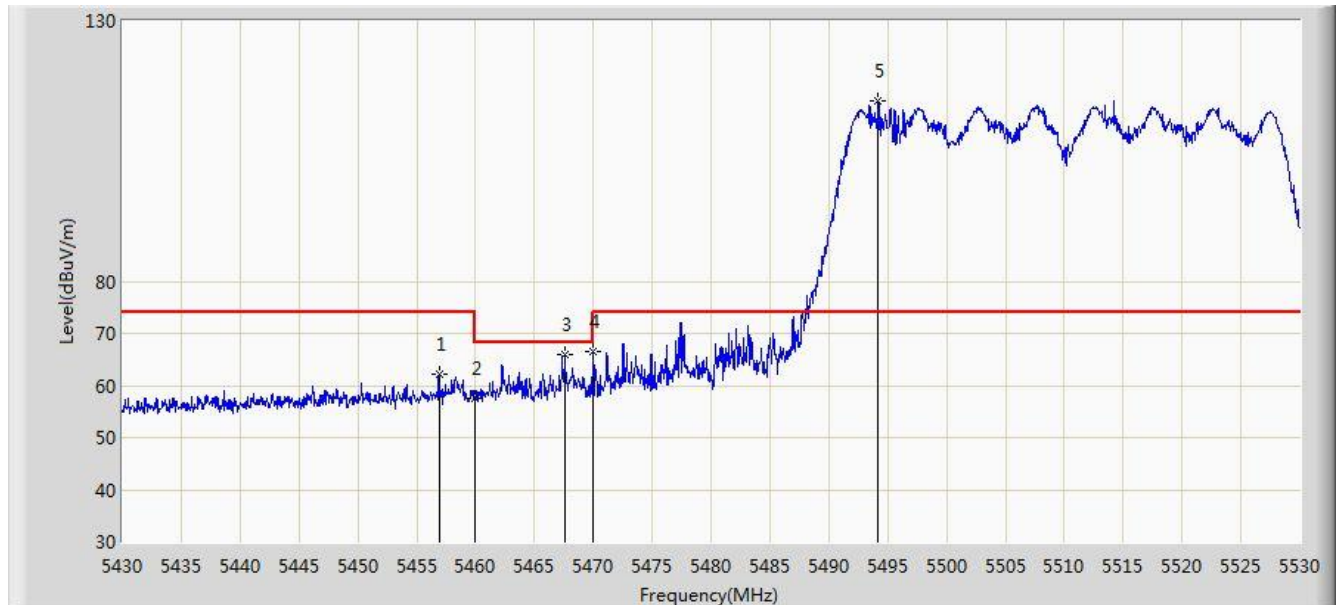


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.900	62.239	58.065	-11.761	74.000	4.173	PK
2			5460.000	57.621	53.441	-16.379	74.000	4.180	PK
3			5467.600	66.050	61.853	-2.150	68.200	4.197	PK
4			5470.000	66.562	62.360	-1.638	68.200	4.202	PK
5		*	5494.200	114.653	110.396	N/A	N/A	4.257	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

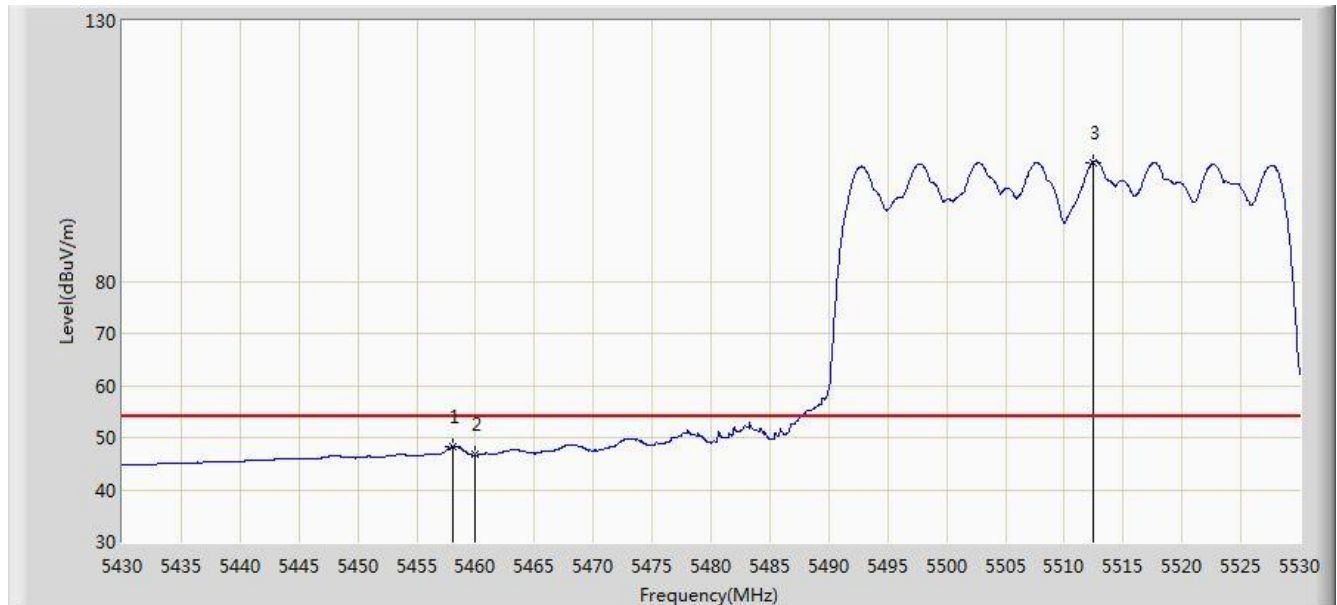


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.100	48.275	44.099	-5.725	54.000	4.176	AV
2			5460.000	46.667	42.487	-7.333	54.000	4.180	AV
3		*	5512.450	102.894	98.586	N/A	N/A	4.308	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

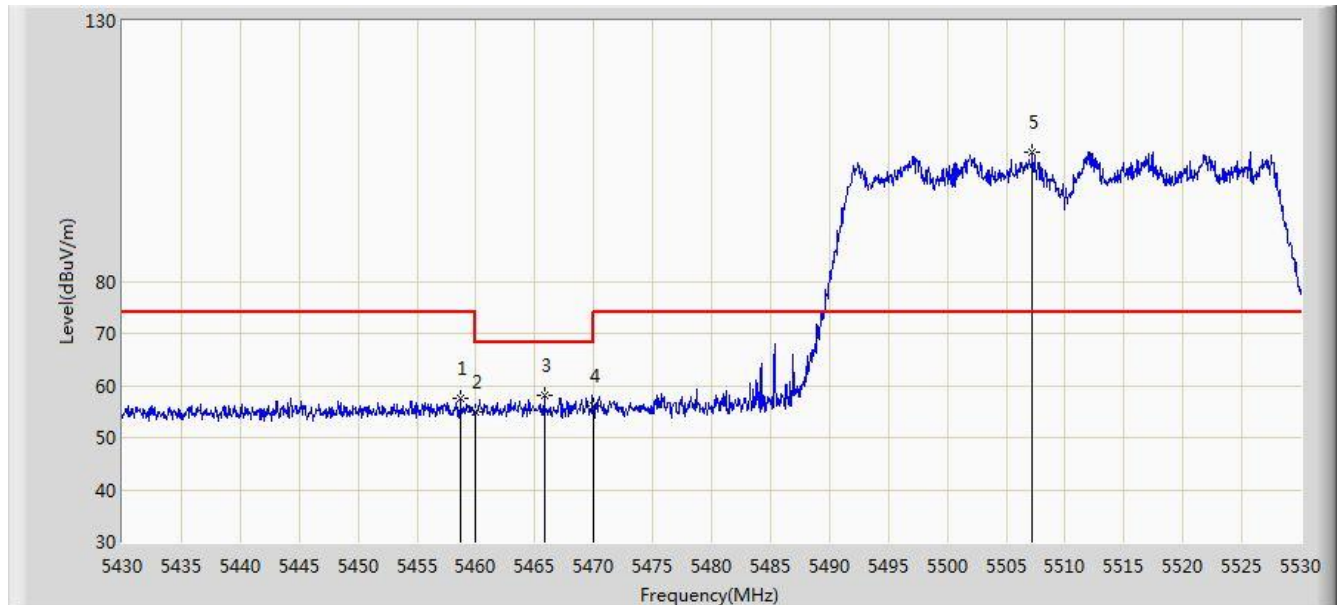


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.700	57.551	53.373	-16.449	74.000	4.178	PK
2			5460.000	54.887	50.707	-19.113	74.000	4.180	PK
3			5465.800	58.043	53.850	-10.157	68.200	4.193	PK
4			5470.000	55.947	51.745	-12.253	68.200	4.202	PK
5		*	5507.200	104.678	100.385	N/A	N/A	4.293	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

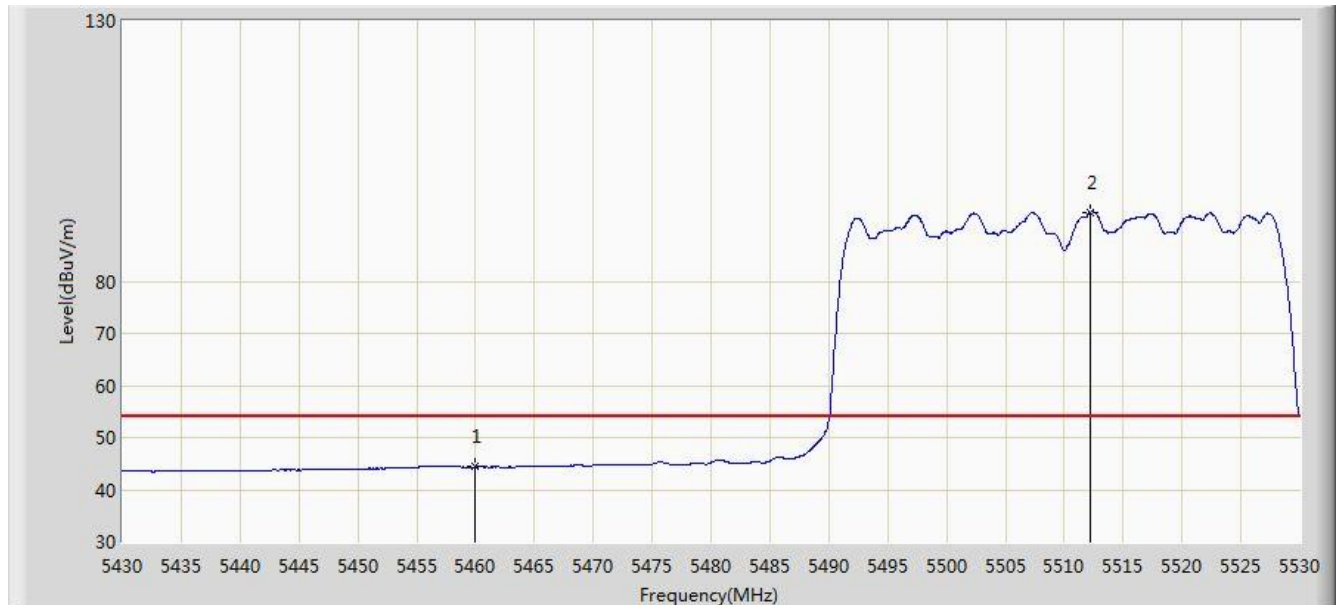


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.351	40.171	-9.649	54.000	4.180	AV
2		*	5512.200	93.258	88.950	N/A	N/A	4.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:43
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz (CDD Mode)	

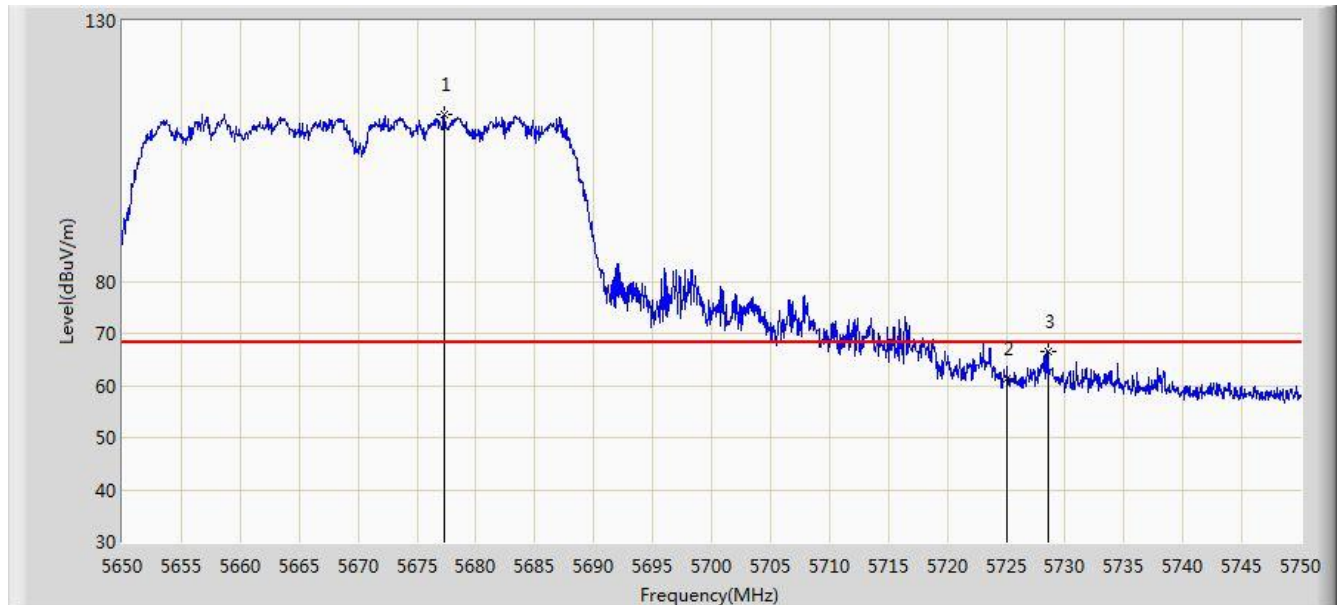


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5677.300	111.964	107.188	N/A	N/A	4.777	PK
2			5725.000	61.347	56.318	-6.853	68.200	5.029	PK
3			5728.550	66.509	61.457	-1.691	68.200	5.052	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:46
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz (CDD Mode)	

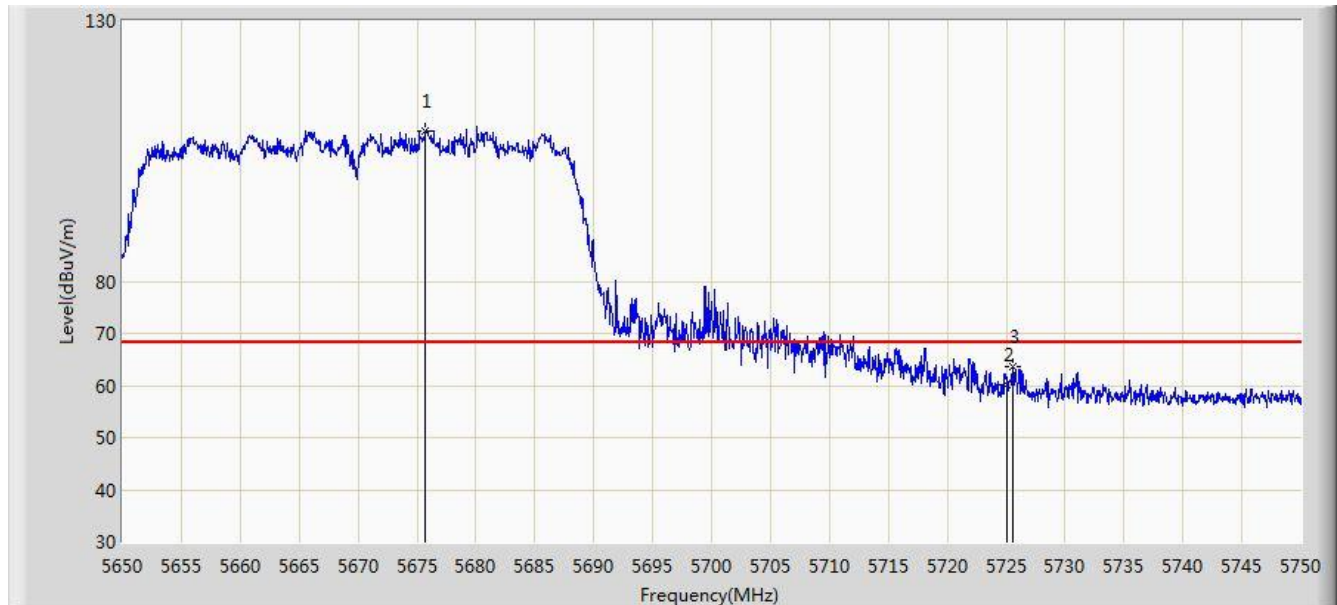


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.700	108.807	104.037	N/A	N/A	4.770	PK
2			5725.000	60.238	55.209	-7.962	68.200	5.029	PK
3			5725.600	63.725	58.692	-4.475	68.200	5.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:40
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz (CDD Mode)	

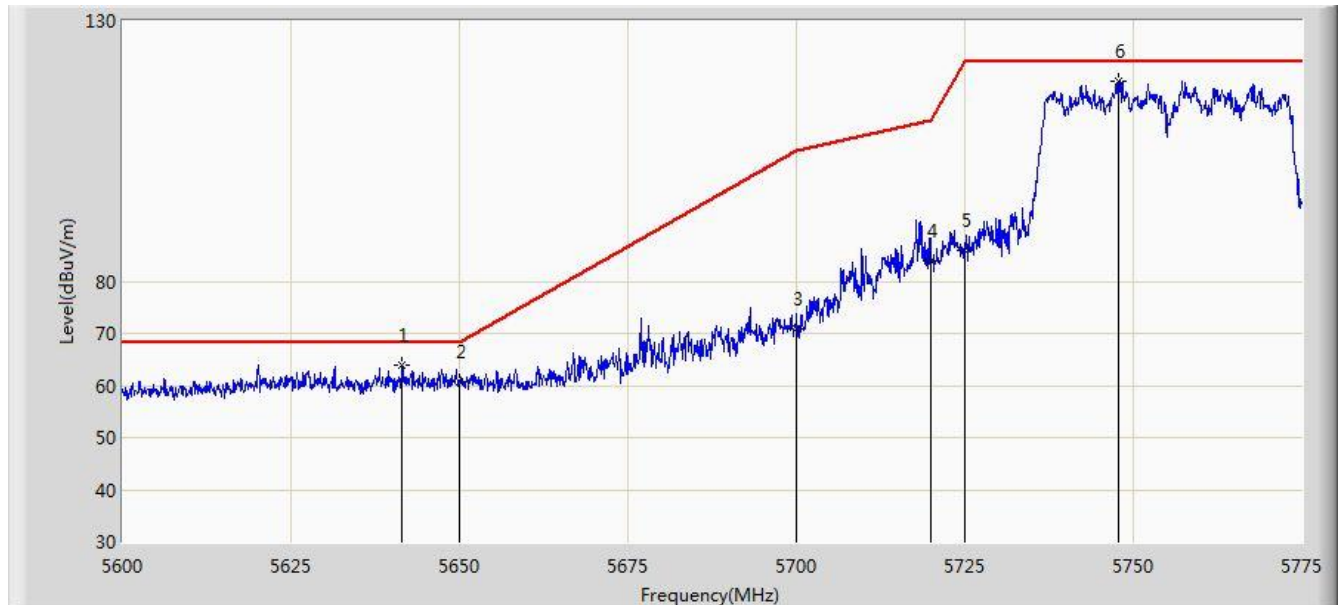


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.475	63.999	59.356	-4.201	68.200	4.643	PK
2			5650.000	60.742	56.071	-7.458	68.200	4.671	PK
3			5700.000	70.777	65.899	-34.423	105.200	4.878	PK
4			5720.000	84.032	79.035	-26.768	110.800	4.997	PK
5			5725.000	86.057	81.028	-36.143	122.200	5.029	PK
6		*	5747.700	118.546	113.376	N/A	N/A	5.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:44
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz (CDD Mode)	

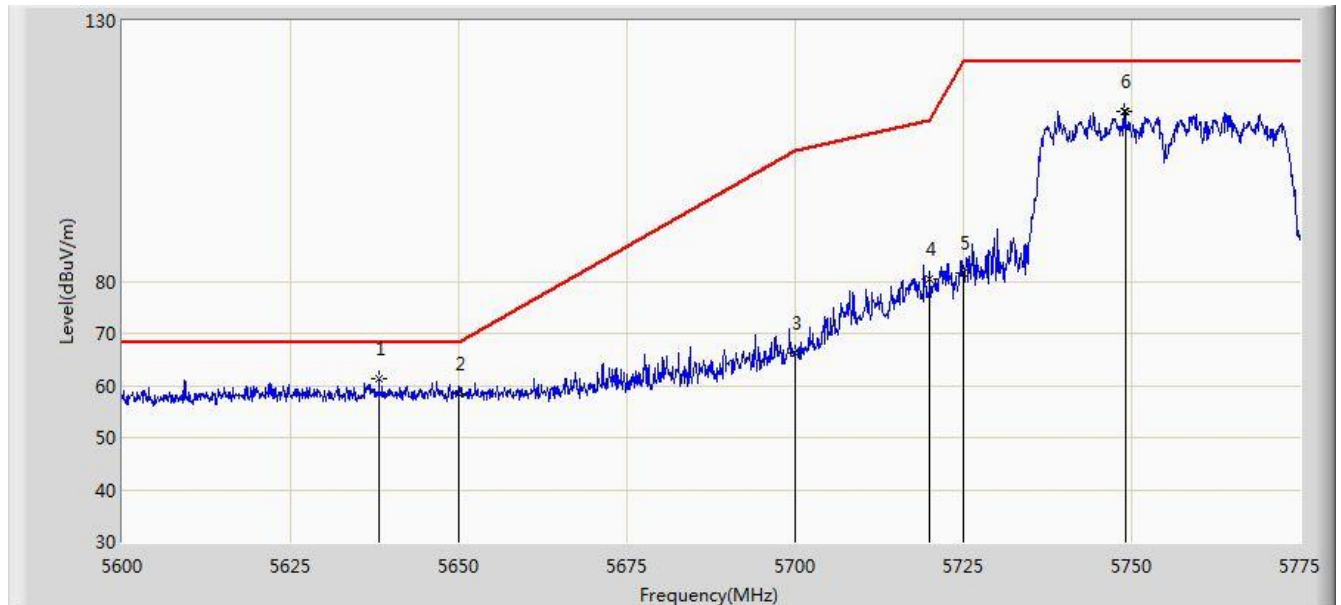


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.150	61.303	56.671	-6.897	68.200	4.632	PK
2			5650.000	58.534	53.863	-9.666	68.200	4.671	PK
3			5700.000	66.255	61.377	-38.945	105.200	4.878	PK
4			5720.000	80.428	75.431	-30.372	110.800	4.997	PK
5			5725.000	81.677	76.648	-40.523	122.200	5.029	PK
6			5749.013	112.509	107.331	N/A	N/A	5.177	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:46
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz (CDD Mode)	

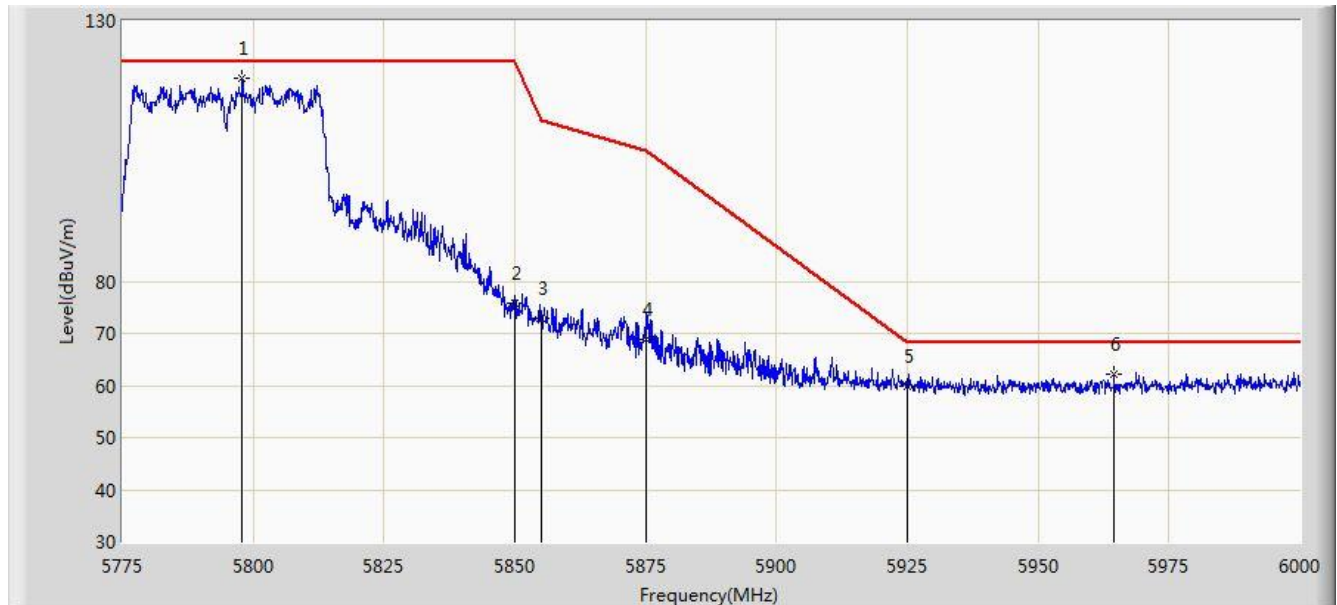


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5797.950	118.856	113.422	N/A	N/A	5.435	PK
2			5850.000	75.925	70.199	-46.275	122.200	5.726	PK
3			5855.000	72.960	67.214	-37.840	110.800	5.746	PK
4			5875.000	68.954	63.134	-36.246	105.200	5.820	PK
5			5925.000	59.943	53.977	-8.257	68.200	5.967	PK
6			5964.450	62.261	56.209	-5.939	68.200	6.051	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 05:49
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz (CDD Mode)	

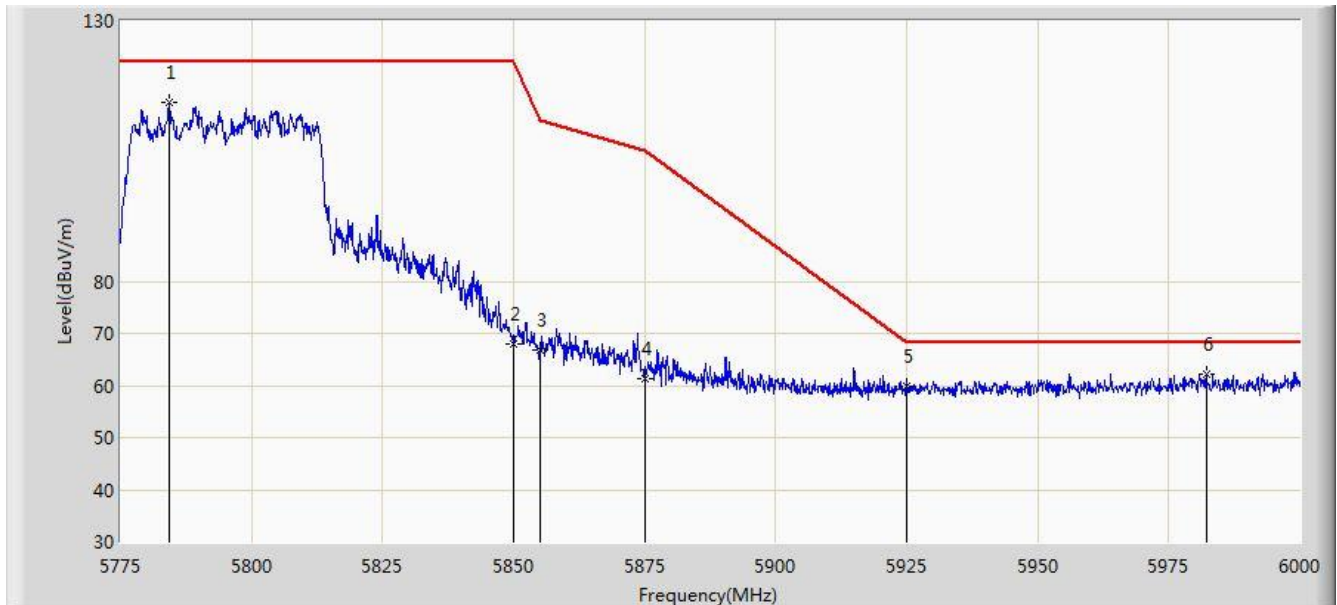


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5784.225	114.474	109.111	N/A	N/A	5.363	PK
2			5850.000	67.900	62.174	-54.300	122.200	5.726	PK
3			5855.000	66.949	61.203	-43.851	110.800	5.746	PK
4			5875.000	61.162	55.342	-44.038	105.200	5.820	PK
5			5925.000	59.851	53.885	-8.349	68.200	5.967	PK
6		*	5982.112	62.185	56.104	-6.015	68.200	6.082	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

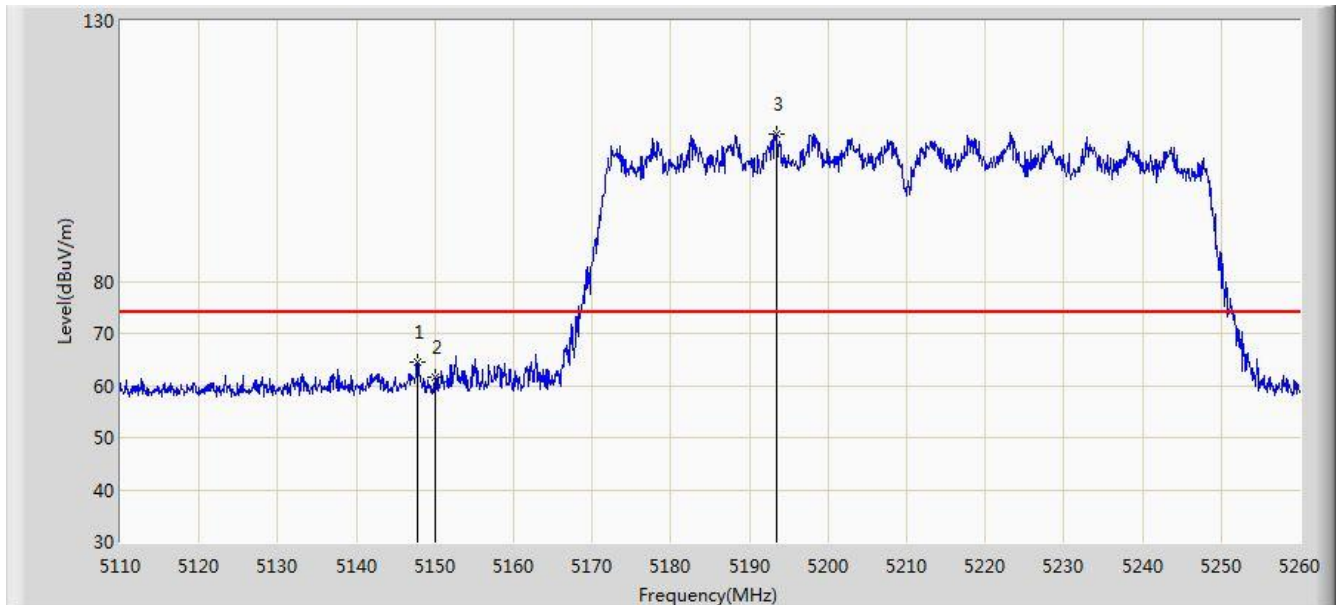


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.875	64.580	60.404	-9.420	74.000	4.176	PK
2			5150.000	61.584	57.415	-12.416	74.000	4.170	PK
3		*	5193.475	108.160	104.139	N/A	N/A	4.021	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

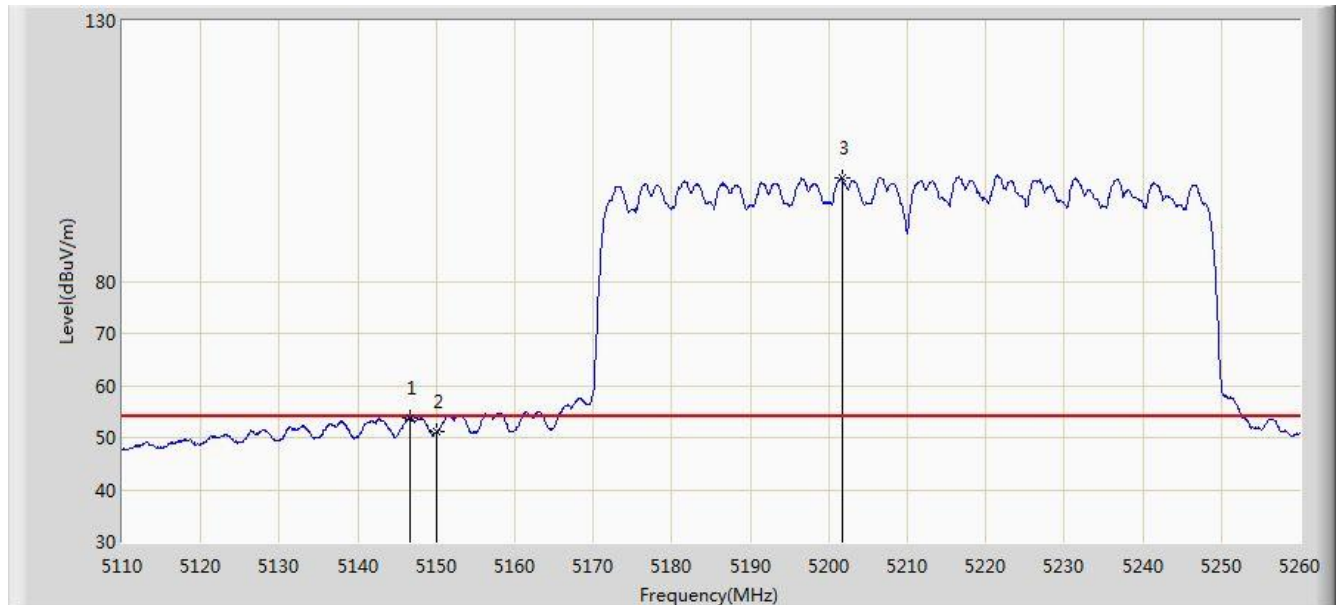


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.600	53.761	49.585	-0.239	54.000	4.176	AV
2			5150.000	51.110	46.941	-2.890	54.000	4.170	AV
3		*	5201.650	99.722	95.729	N/A	N/A	3.994	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

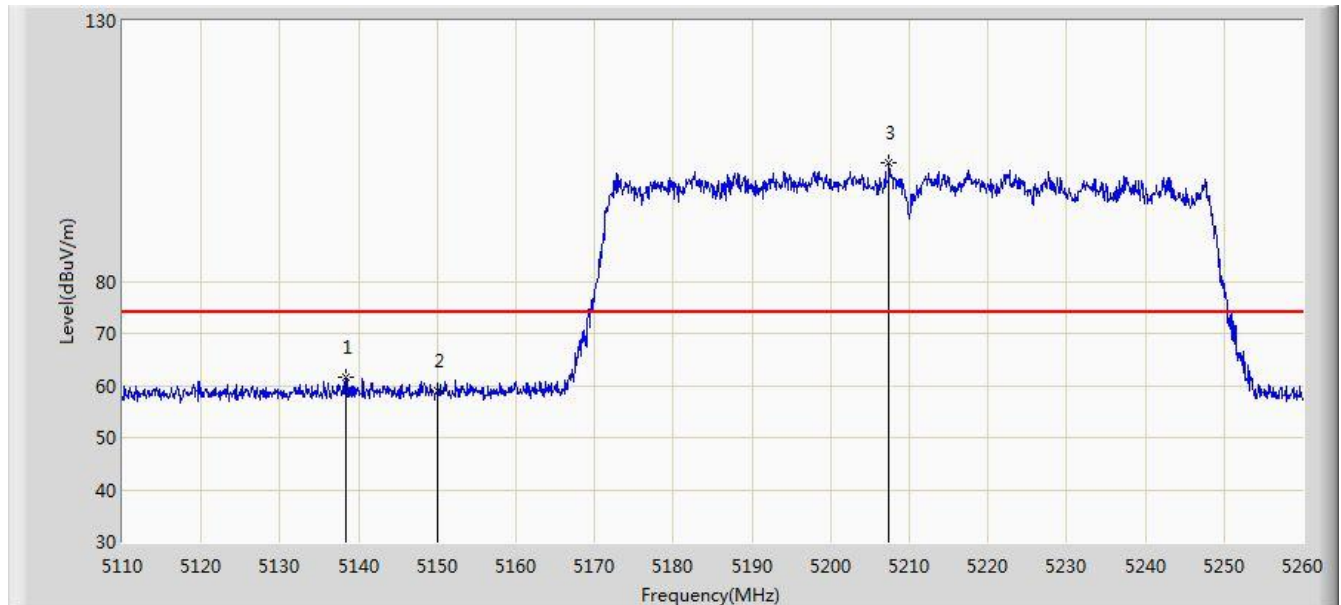


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.350	61.609	57.434	-12.391	74.000	4.175	PK
2			5150.000	58.937	54.768	-15.063	74.000	4.170	PK
3		*	5207.350	102.807	98.830	N/A	N/A	3.976	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 22:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

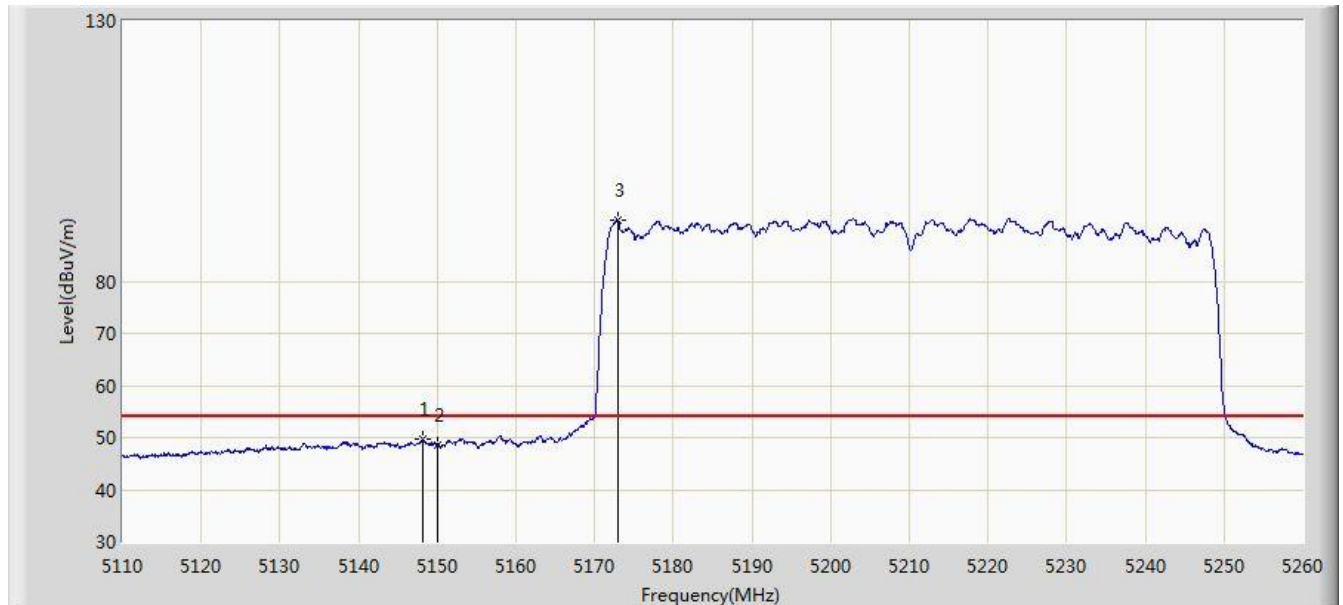


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.175	49.566	45.391	-4.434	54.000	4.174	AV
2			5150.000	48.430	44.261	-5.570	54.000	4.170	AV
3		*	5172.925	91.675	87.581	N/A	N/A	4.094	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

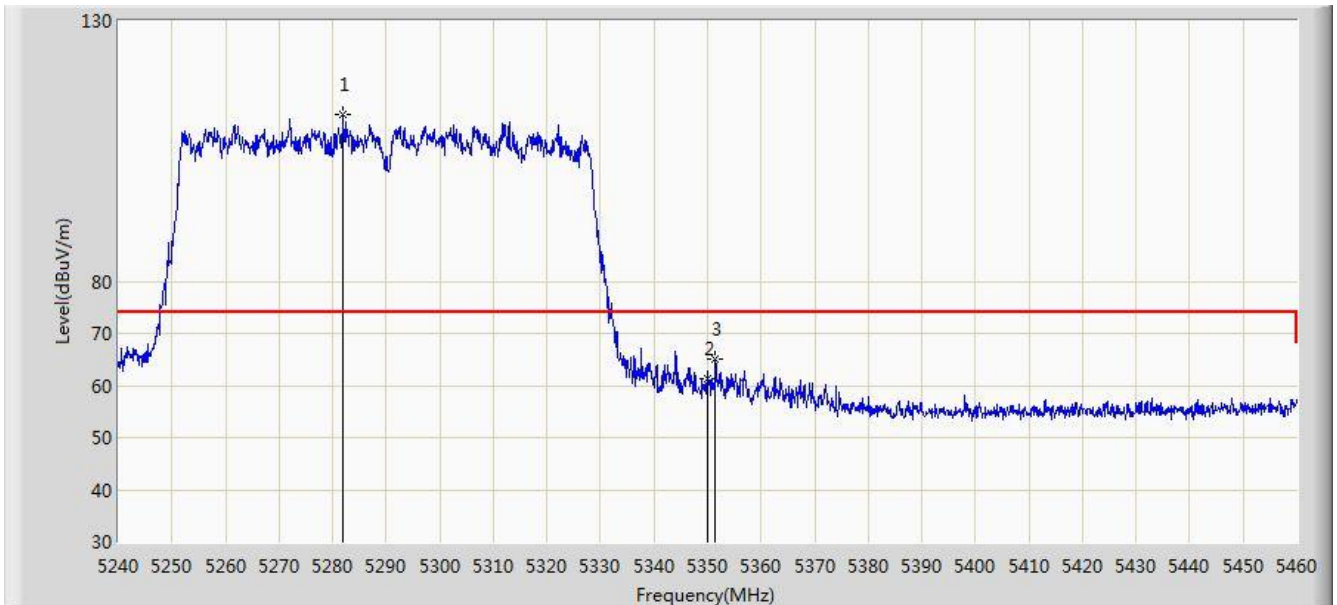


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.910	112.160	108.335	N/A	N/A	3.826	PK
2			5350.000	61.359	57.454	-12.641	74.000	3.904	PK
3			5351.430	65.090	61.183	-8.910	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

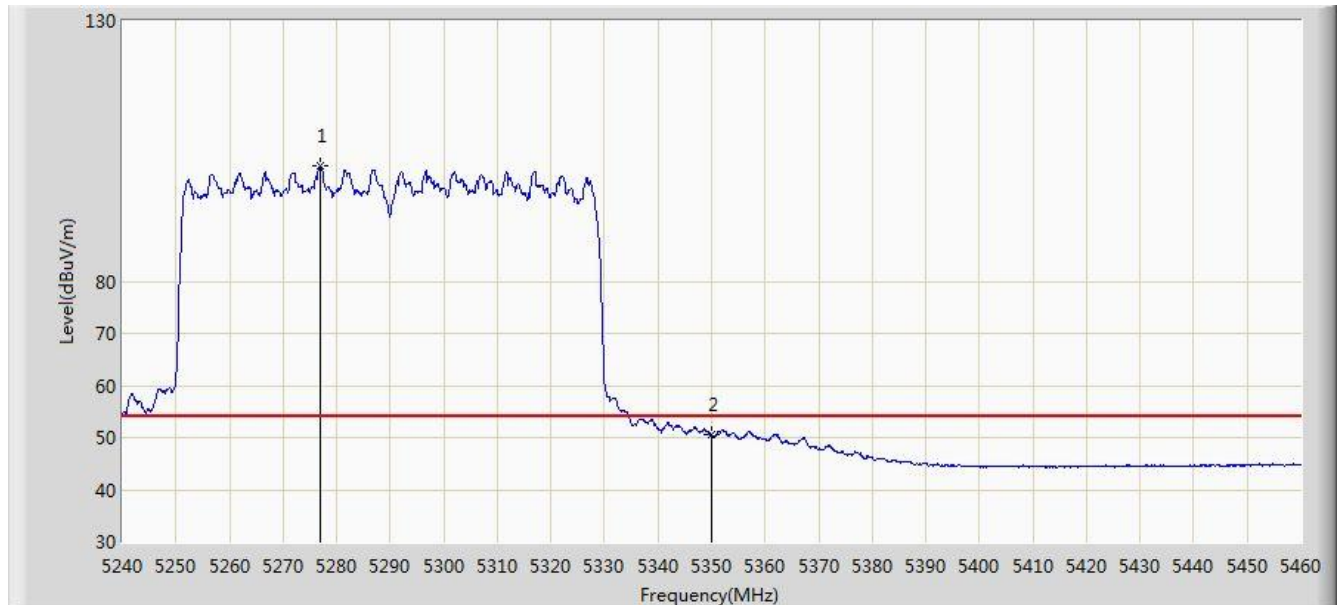


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5276.850	102.136	98.307	N/A	N/A	3.829	AV
2			5350.000	50.440	46.535	-3.560	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

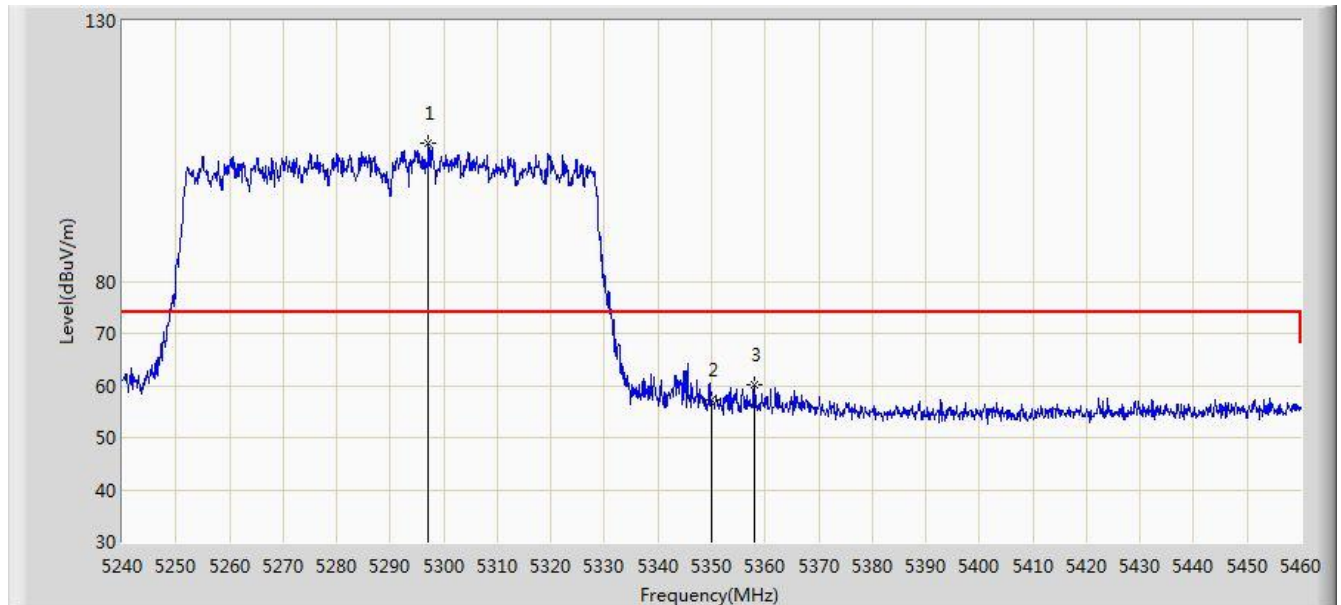


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.200	106.409	102.594	N/A	N/A	3.815	PK
2			5350.000	57.183	53.278	-16.817	74.000	3.904	PK
3			5357.920	60.214	56.295	-13.786	74.000	3.919	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

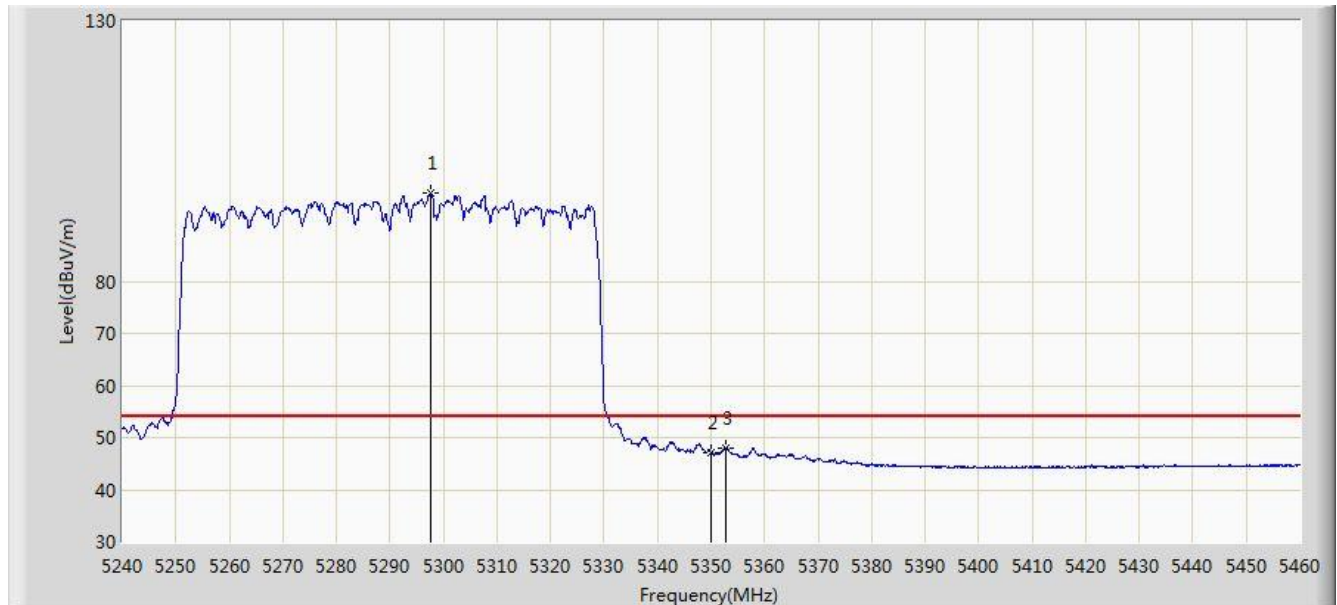


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.750	96.879	93.064	N/A	N/A	3.815	AV
2			5350.000	47.131	43.226	-6.869	54.000	3.904	AV
3			5352.750	47.925	44.015	-6.075	54.000	3.910	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

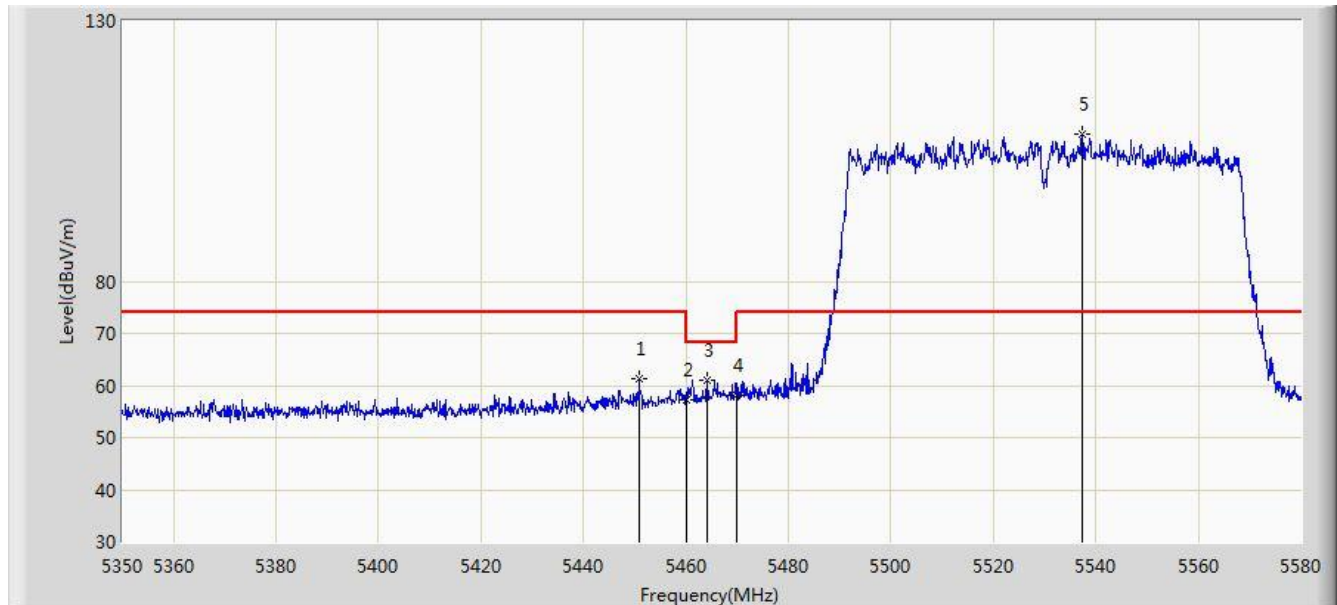


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.855	61.211	57.053	-12.789	74.000	4.158	PK
2			5460.000	57.200	53.020	-16.800	74.000	4.180	PK
3			5464.080	60.970	56.781	-7.230	68.200	4.189	PK
4			5470.000	58.158	53.956	-10.042	68.200	4.202	PK
5		*	5537.450	108.238	103.854	N/A	N/A	4.384	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

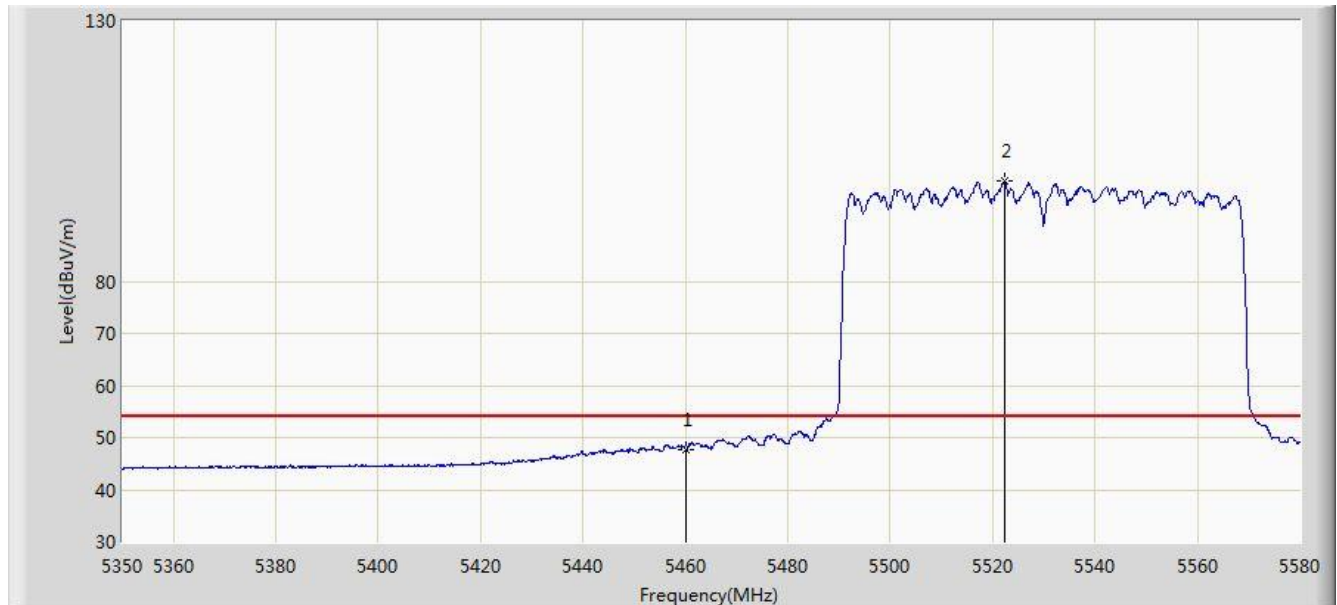


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.794	43.614	-6.206	54.000	4.180	AV
2		*	5522.270	99.162	94.824	N/A	N/A	4.338	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

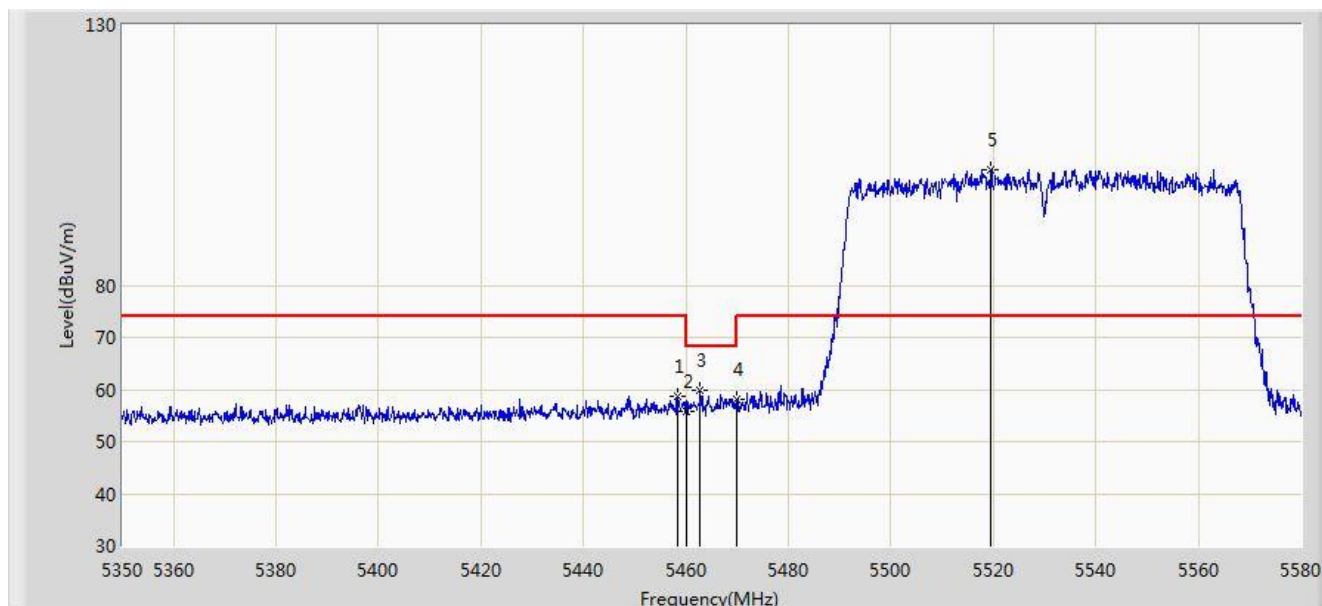


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.330	58.648	54.471	-15.352	74.000	4.177	PK
2			5460.000	55.760	51.580	-18.240	74.000	4.180	PK
3			5462.815	59.742	55.556	-8.458	68.200	4.186	PK
4			5470.000	58.205	54.003	-9.995	68.200	4.202	PK
5		*	5519.510	102.287	97.957	N/A	N/A	4.330	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

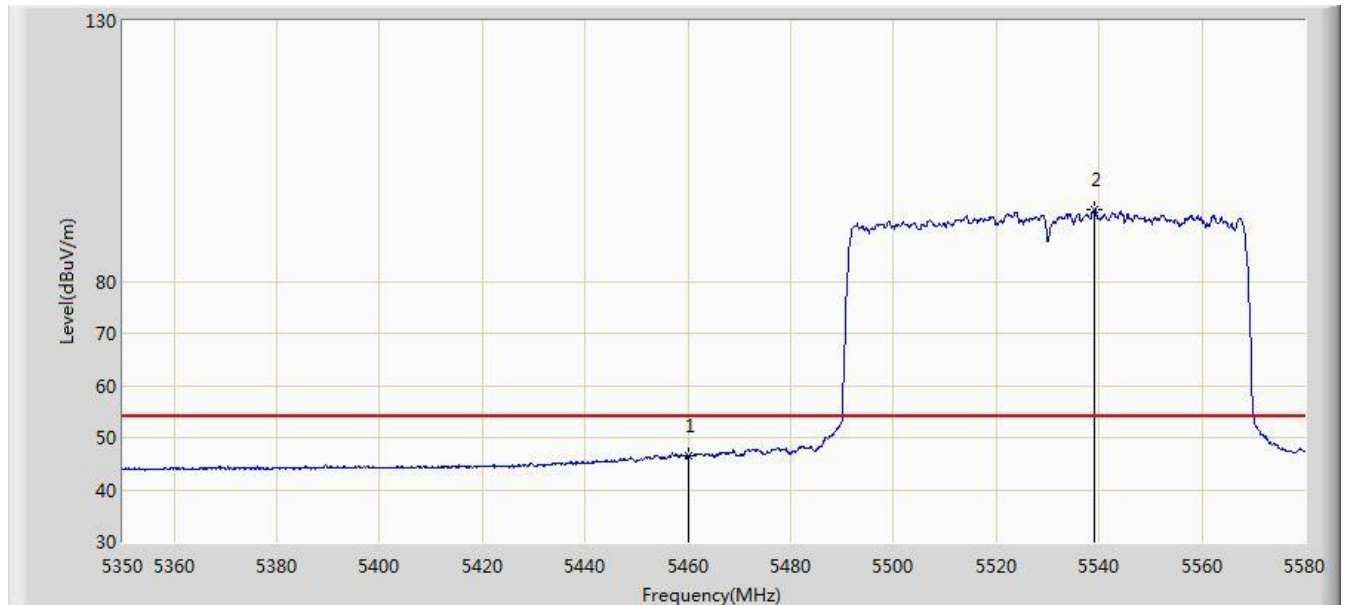


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.443	42.263	-7.557	54.000	4.180	AV
2		*	5539.175	93.864	89.475	N/A	N/A	4.389	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 15:03
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz (CDD Mode)	

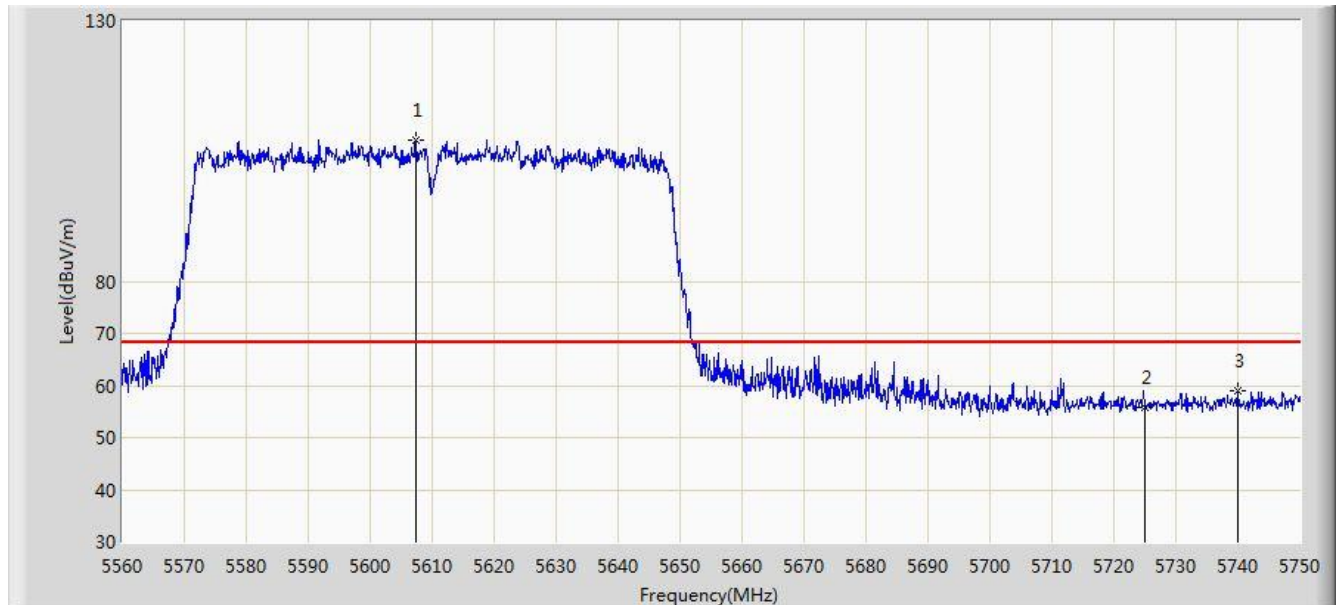


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5607.310	106.963	102.419	N/A	N/A	4.544	PK
2			5725.000	55.738	50.709	-12.462	68.200	5.029	PK
3			5739.930	58.906	53.782	-9.294	68.200	5.123	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 15:05
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz (CDD Mode)	

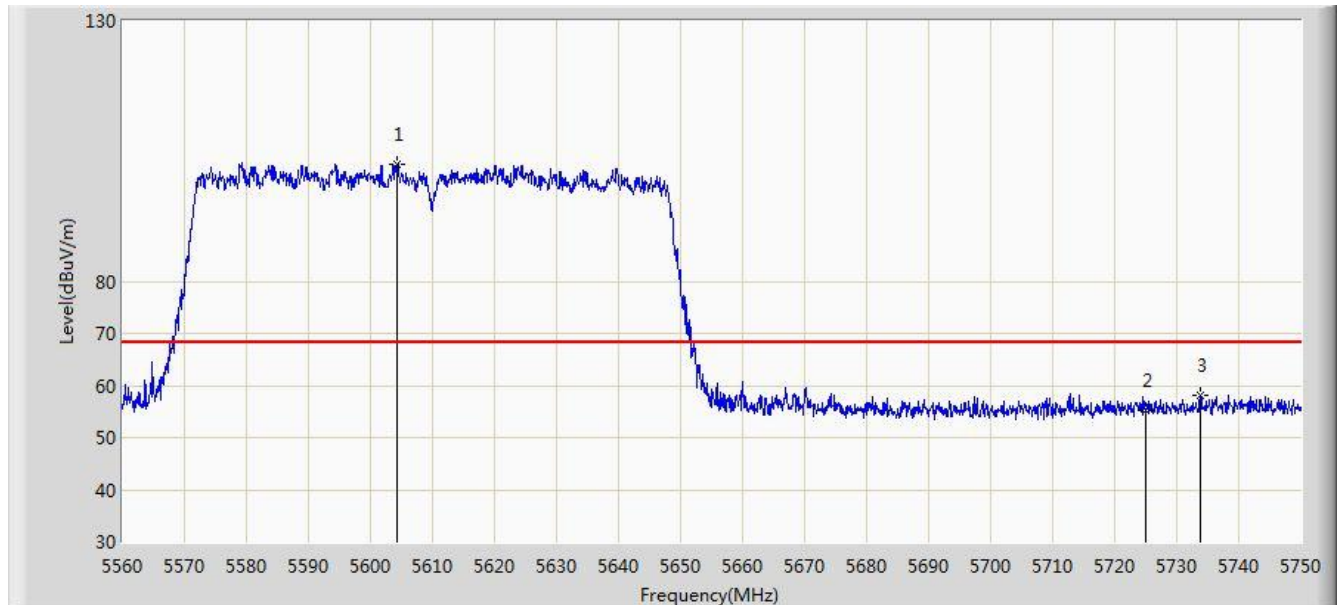


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5604.365	102.547	98.010	N/A	N/A	4.537	PK
2			5725.000	55.170	50.141	-13.030	68.200	5.029	PK
3			5733.850	58.192	53.107	-10.008	68.200	5.086	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:27
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz (CDD Mode)	

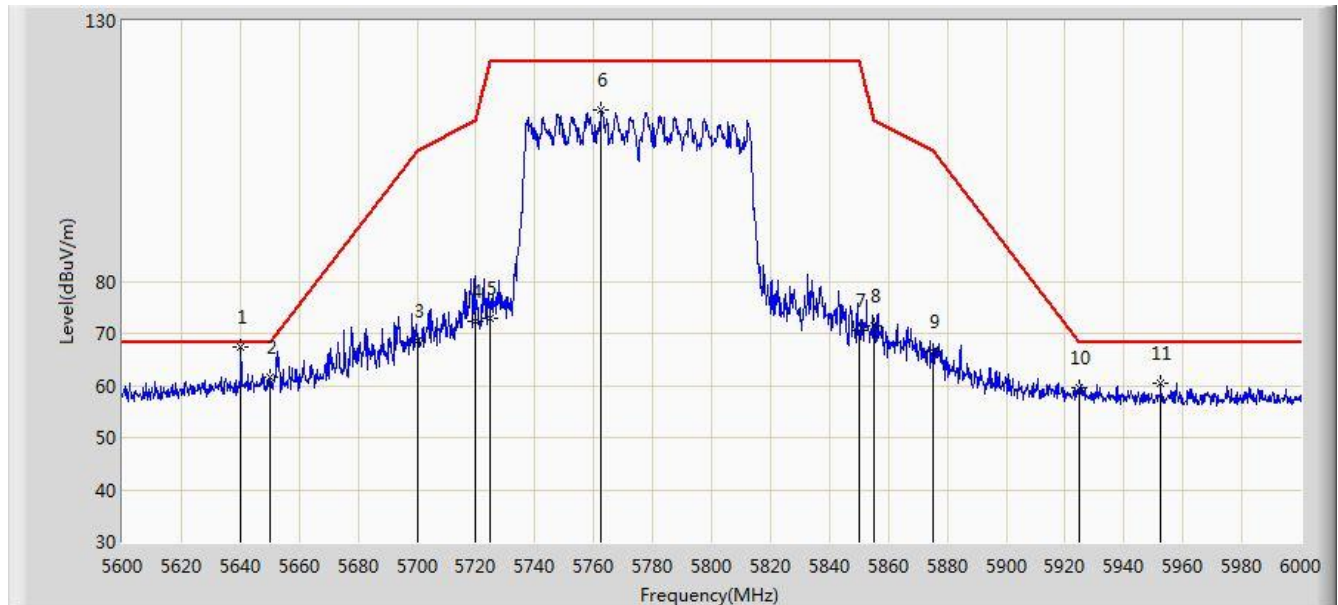


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.200	67.259	62.620	-0.941	68.200	4.638	PK
2			5650.000	61.608	56.937	-6.592	68.200	4.671	PK
3			5700.000	68.572	63.694	-36.628	105.200	4.878	PK
4			5720.000	72.343	67.346	-38.457	110.800	4.997	PK
5			5725.000	73.006	67.977	-49.194	122.200	5.029	PK
6			5762.600	112.765	107.512	N/A	N/A	5.253	PK
7			5850.000	70.441	64.715	-51.759	122.200	5.726	PK
8			5855.000	71.522	65.776	-39.278	110.800	5.746	PK
9			5875.000	66.589	60.769	-38.611	105.200	5.820	PK
10			5925.000	59.421	53.455	-8.779	68.200	5.967	PK
11			5952.400	60.354	54.323	-7.846	68.200	6.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:29
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz (CDD Mode)	

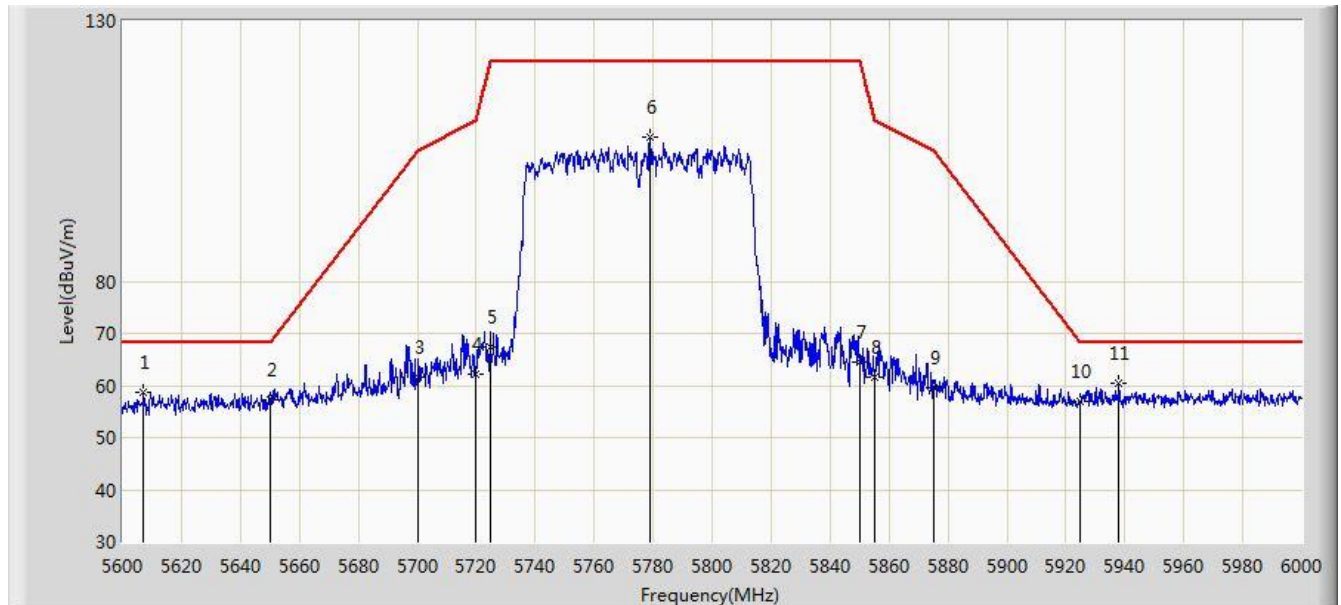


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5607.000	58.755	54.212	-9.445	68.200	4.543	PK
2			5650.000	57.158	52.487	-11.042	68.200	4.671	PK
3			5700.000	61.639	56.761	-43.561	105.200	4.878	PK
4			5720.000	62.257	57.260	-48.543	110.800	4.997	PK
5			5725.000	67.251	62.222	-54.949	122.200	5.029	PK
6			5778.800	107.599	102.264	N/A	N/A	5.336	PK
7			5850.000	64.490	58.764	-57.710	122.200	5.726	PK
8			5855.000	61.600	55.854	-49.200	110.800	5.746	PK
9			5875.000	59.472	53.652	-45.728	105.200	5.820	PK
10			5925.000	56.928	50.962	-11.272	68.200	5.967	PK
11		*	5937.800	60.457	54.459	-7.743	68.200	5.998	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

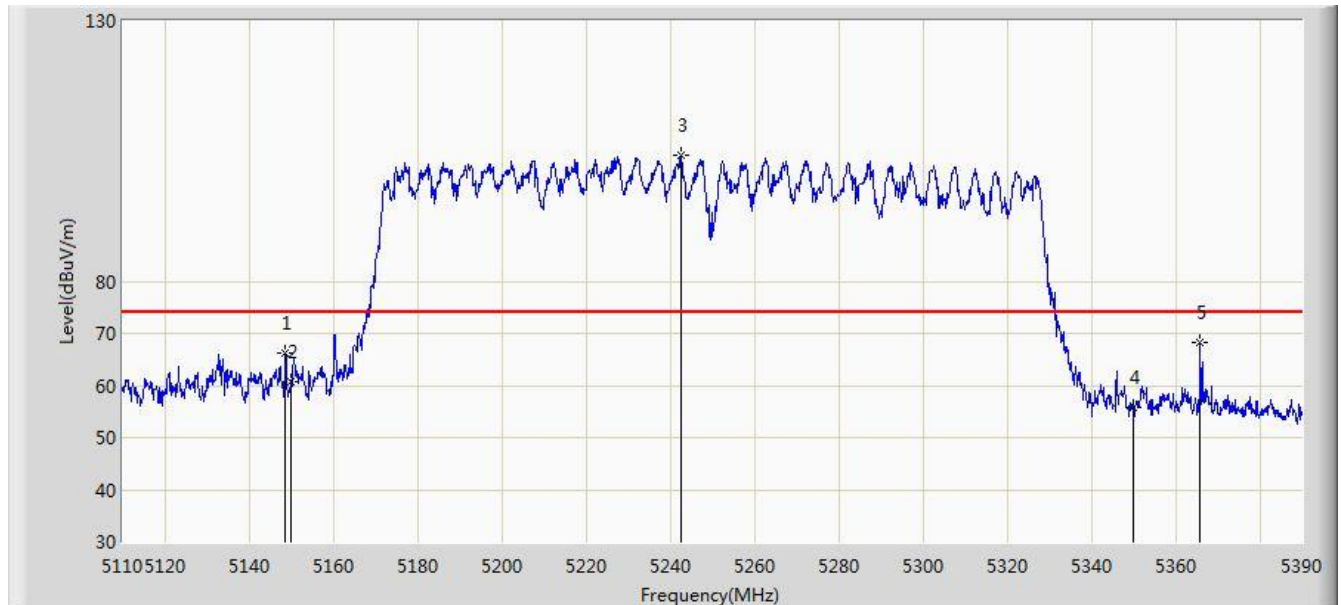

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.640	66.193	62.019	-7.807	74.000	4.174	PK
2			5150.000	60.777	56.608	-13.223	74.000	4.170	PK
3		*	5242.580	104.249	100.377	N/A	N/A	3.872	PK
4			5350.000	55.900	51.995	-18.100	74.000	3.904	PK
5			5365.780	68.259	64.326	-5.741	74.000	3.932	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)