


EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2422MHz(Beamforming Mode)	Test Voltage	120V/60Hz

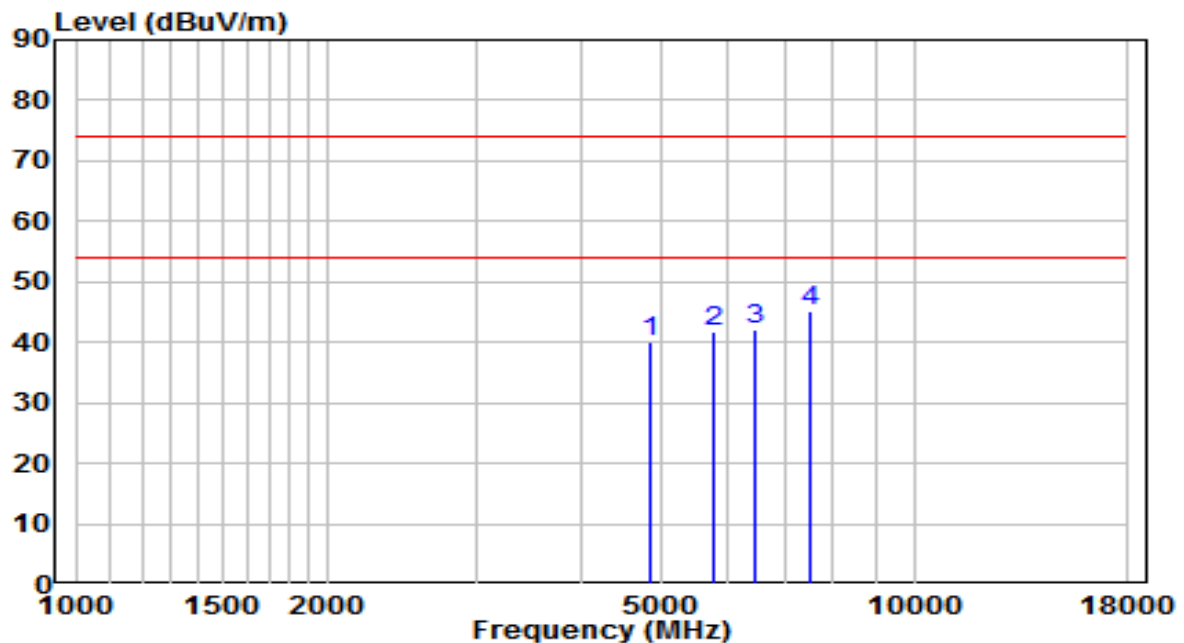


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4842.000	36.90	3.23	40.13	-33.87	74.00	Peak
2	5785.500	36.83	4.97	41.80	-32.20	74.00	Peak
3	6465.500	34.53	7.56	42.09	-31.91	74.00	Peak
4	* 7528.000	33.56	11.74	45.30	-28.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2422MHz(Beamforming Mode)	Test Voltage	120V/60Hz

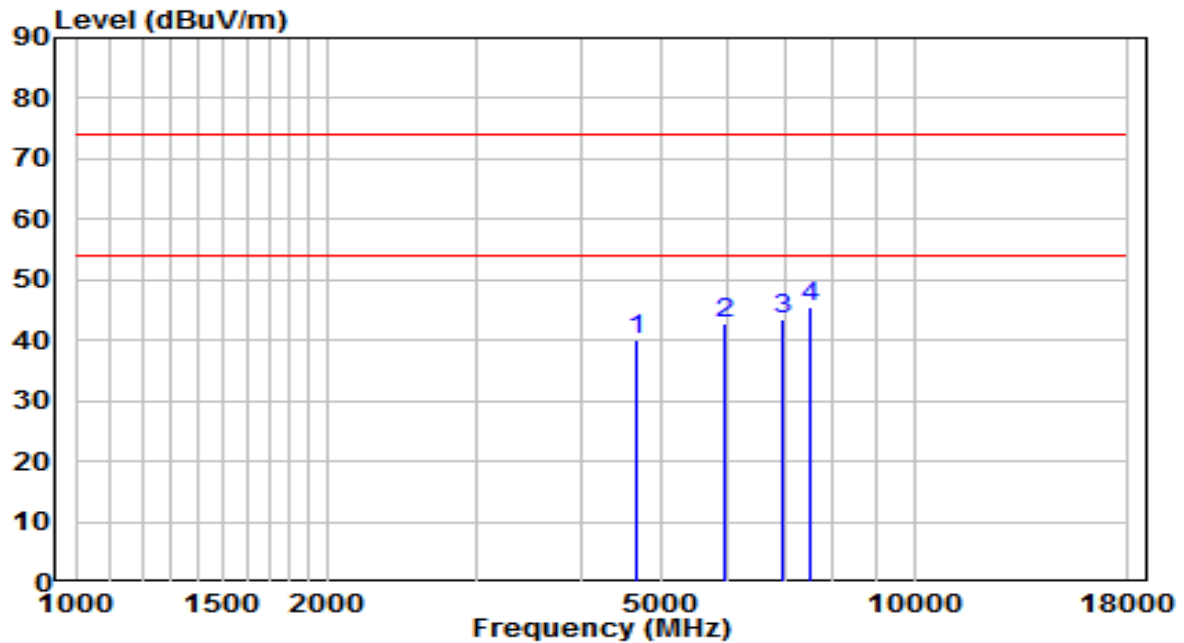


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	4672.000	37.04	2.89	39.94	-34.06	74.00	Peak
2	5955.500	37.22	5.62	42.84	-31.16	74.00	Peak
3	6958.500	33.06	10.36	43.42	-30.58	74.00	Peak
4	* 7528.000	33.70	11.74	45.44	-28.56	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2427MHz(Beamforming Mode)	Test Voltage	120V/60Hz

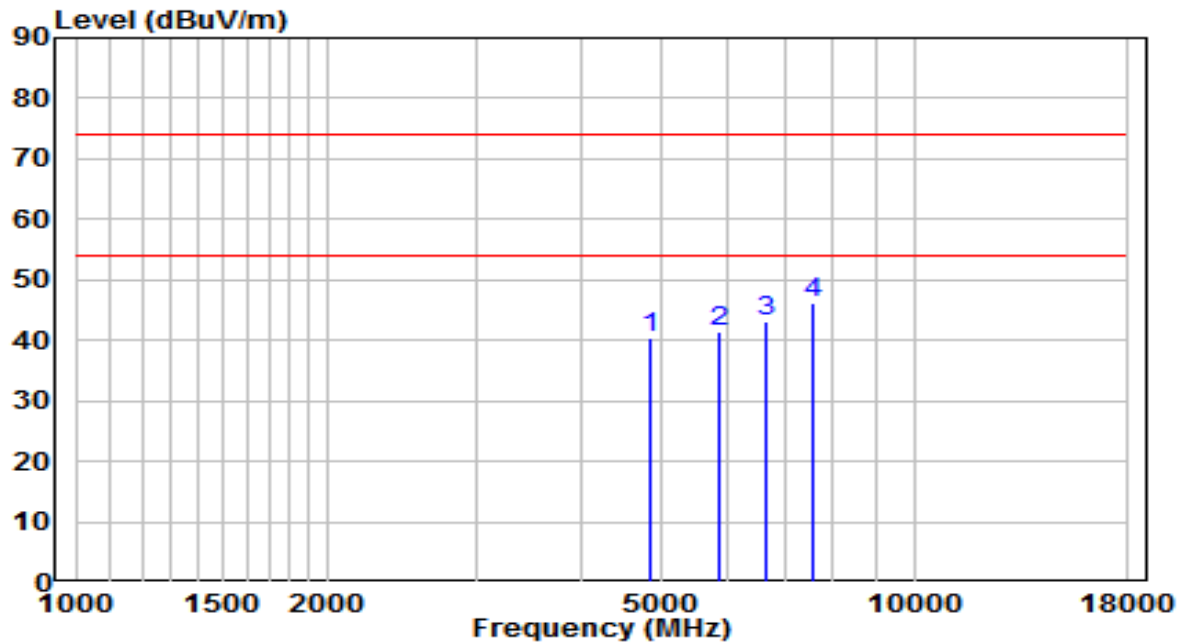


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	4833.500	37.35	3.22	40.57	-33.43	74.00	Peak
2	5853.500	36.36	5.23	41.58	-32.42	74.00	Peak
3	6669.500	34.61	8.68	43.29	-30.71	74.00	Peak
4	* 7553.500	34.45	11.77	46.22	-27.78	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2427MHz(Beamforming Mode)	Test Voltage	120V/60Hz

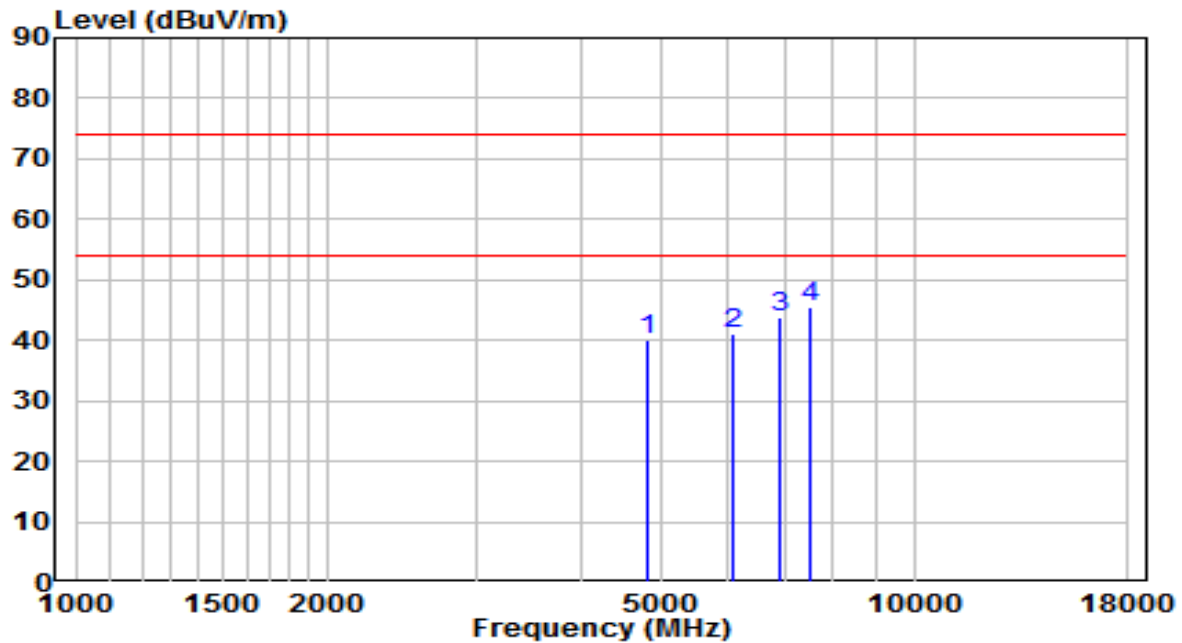


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4816.500	37.02	3.18	40.20	-33.80	74.00	Peak
2	6091.500	34.86	6.14	41.00	-33.00	74.00	Peak
3	6899.000	33.86	10.01	43.87	-30.13	74.00	Peak
4	* 7511.000	33.67	11.73	45.40	-28.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2432MHz(Beamforming Mode)	Test Voltage	120V/60Hz

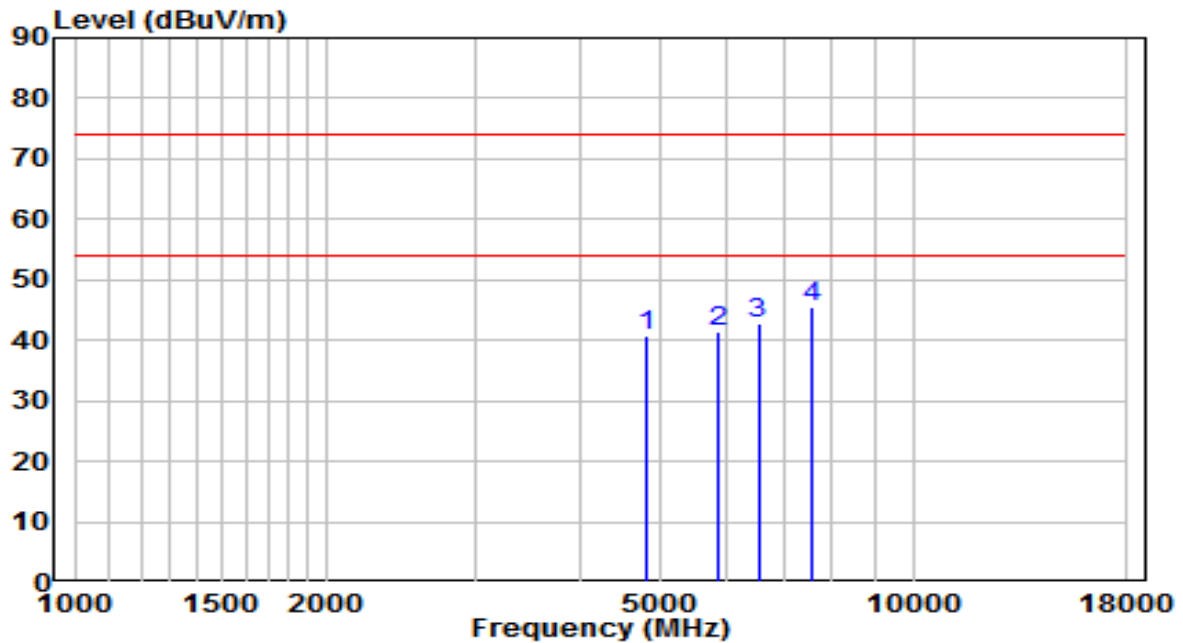


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4816.500	37.63	3.18	40.81	-33.19	74.00	Peak
2	5836.500	36.27	5.16	41.43	-32.57	74.00	Peak
3	6533.500	34.87	7.89	42.76	-31.24	74.00	Peak
4	* 7553.500	33.76	11.77	45.53	-28.47	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2432MHz(Beamforming Mode)	Test Voltage	120V/60Hz

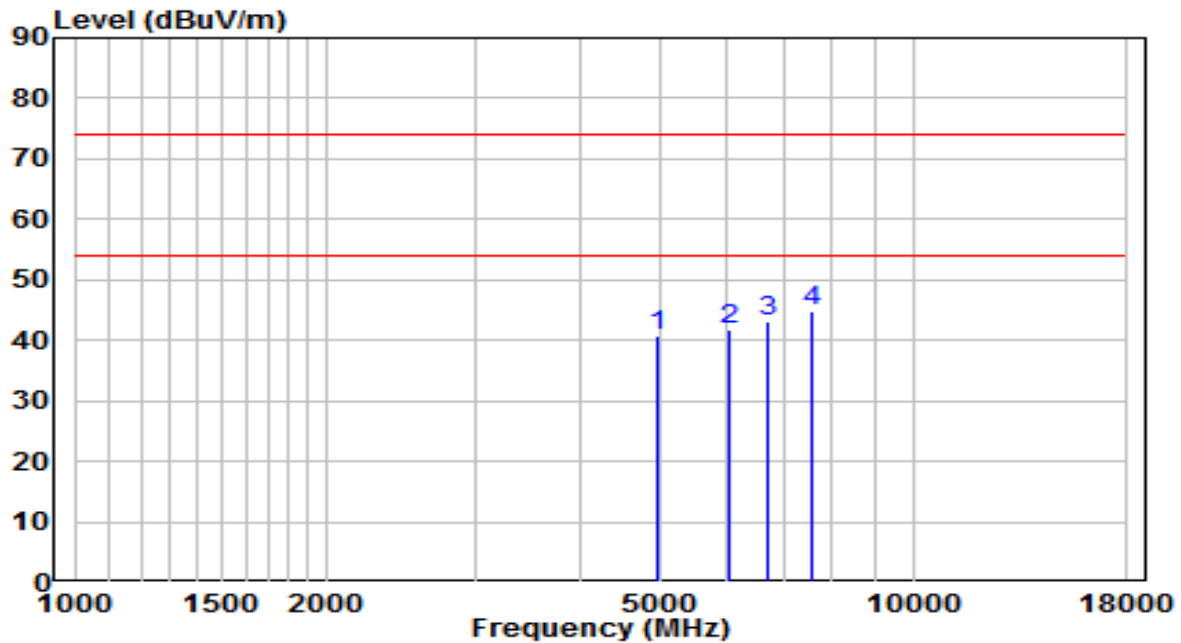


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4944.000	37.33	3.44	40.77	-33.23	74.00	Peak
2	6023.500	35.91	5.88	41.79	-32.21	74.00	Peak
3	6686.500	34.50	8.78	43.28	-30.72	74.00	Peak
4	* 7553.500	33.05	11.77	44.82	-29.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2437MHz(Beamforming Mode)	Test Voltage	120V/60Hz

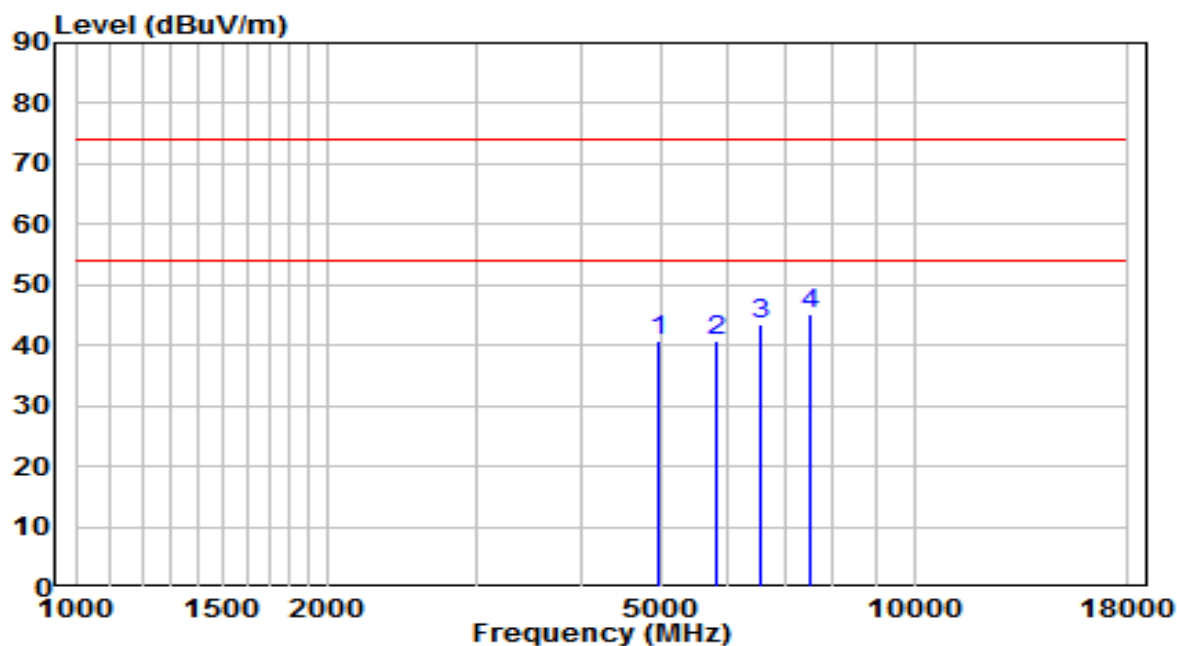


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4944.000	37.17	3.44	40.61	-33.39	74.00	Peak
2	5802.500	35.87	5.03	40.90	-33.10	74.00	Peak
3	6576.000	35.25	8.14	43.38	-30.62	74.00	Peak
4	* 7528.000	33.39	11.74	45.14	-28.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2437MHz(Beamforming Mode)	Test Voltage	120V/60Hz

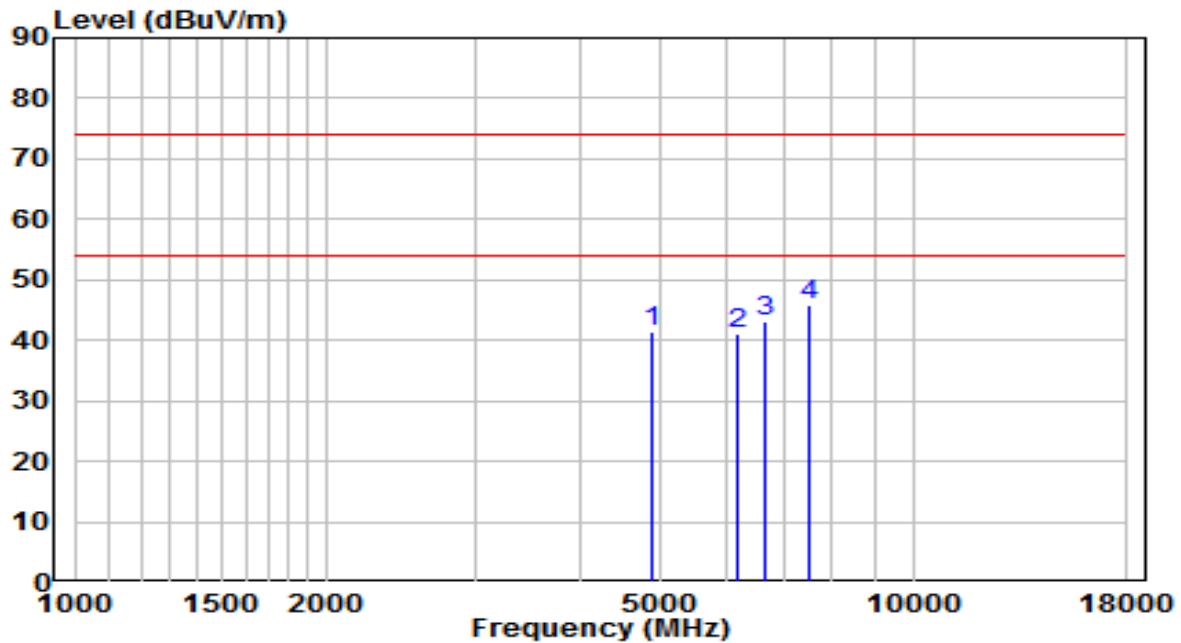


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4876.000	38.23	3.30	41.53	-32.47	74.00	Peak
2	6159.500	34.84	6.40	41.24	-32.76	74.00	Peak
3	6669.500	34.29	8.68	42.97	-31.03	74.00	Peak
4	* 7528.000	34.09	11.74	45.83	-28.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2442MHz(Beamforming Mode)	Test Voltage	120V/60Hz

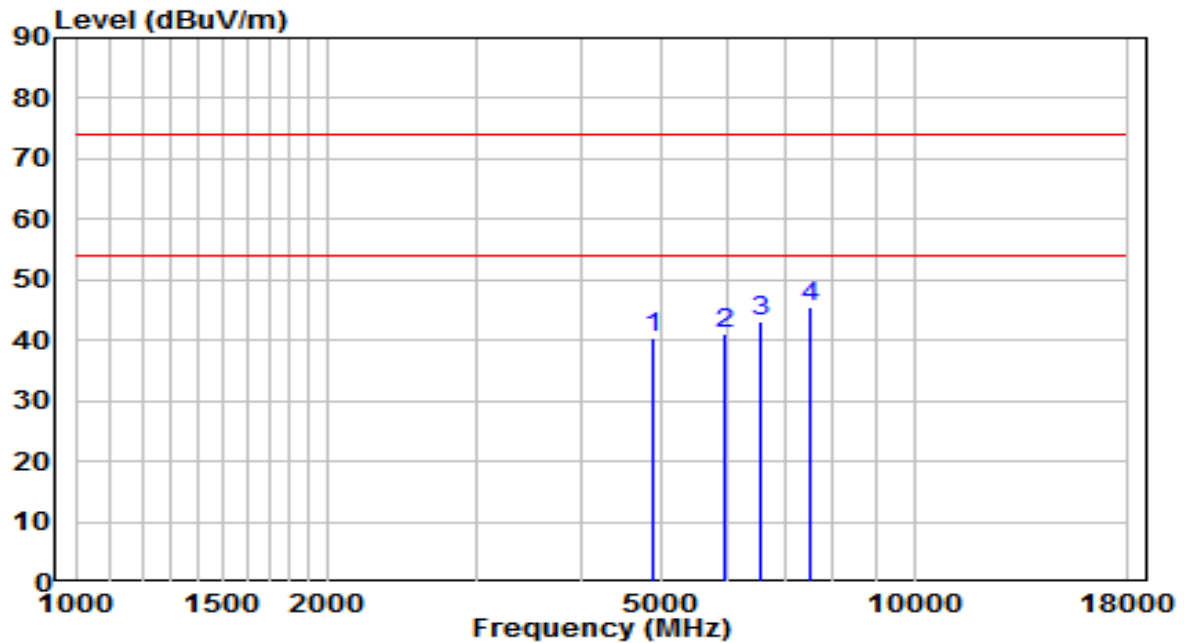


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	4876.000	37.19	3.30	40.49	-33.51	74.00	Peak
2	5955.500	35.34	5.62	40.96	-33.04	74.00	Peak
3	6559.000	35.11	8.04	43.15	-30.85	74.00	Peak
4	* 7528.000	33.62	11.74	45.37	-28.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2447MHz(Beamforming Mode)	Test Voltage	120V/60Hz

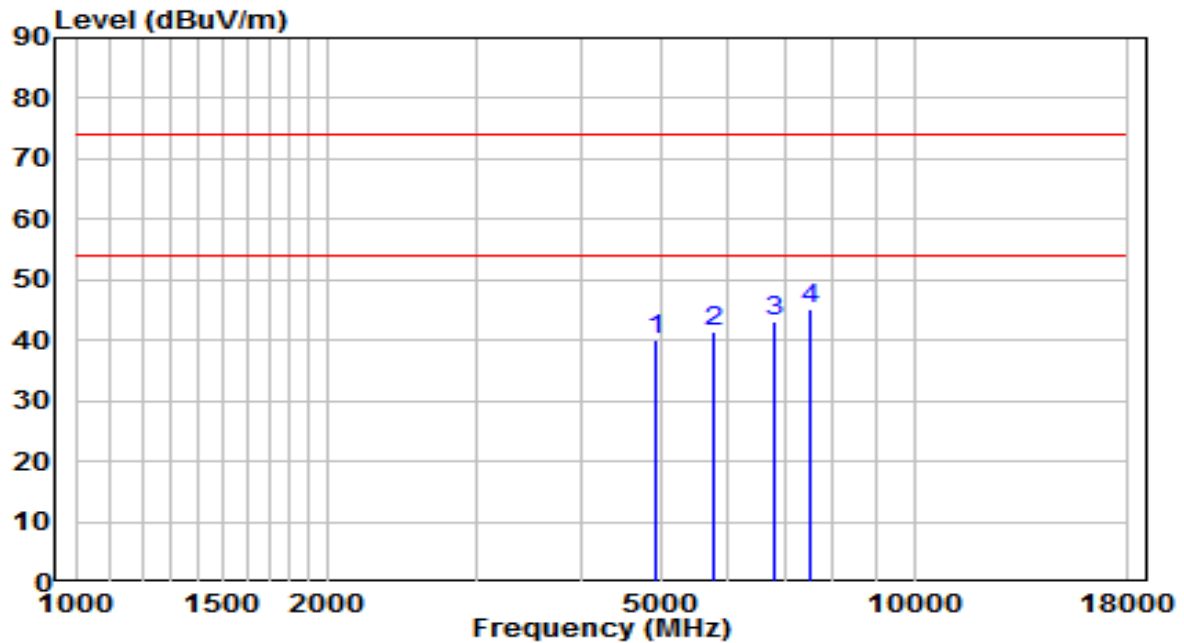


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4927.000	36.81	3.40	40.22	-33.78	74.00	Peak
2	5760.000	36.65	4.87	41.52	-32.48	74.00	Peak
3	6822.500	33.72	9.57	43.29	-30.71	74.00	Peak
4	* 7528.000	33.60	11.74	45.34	-28.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2447MHz(Beamforming Mode)	Test Voltage	120V/60Hz

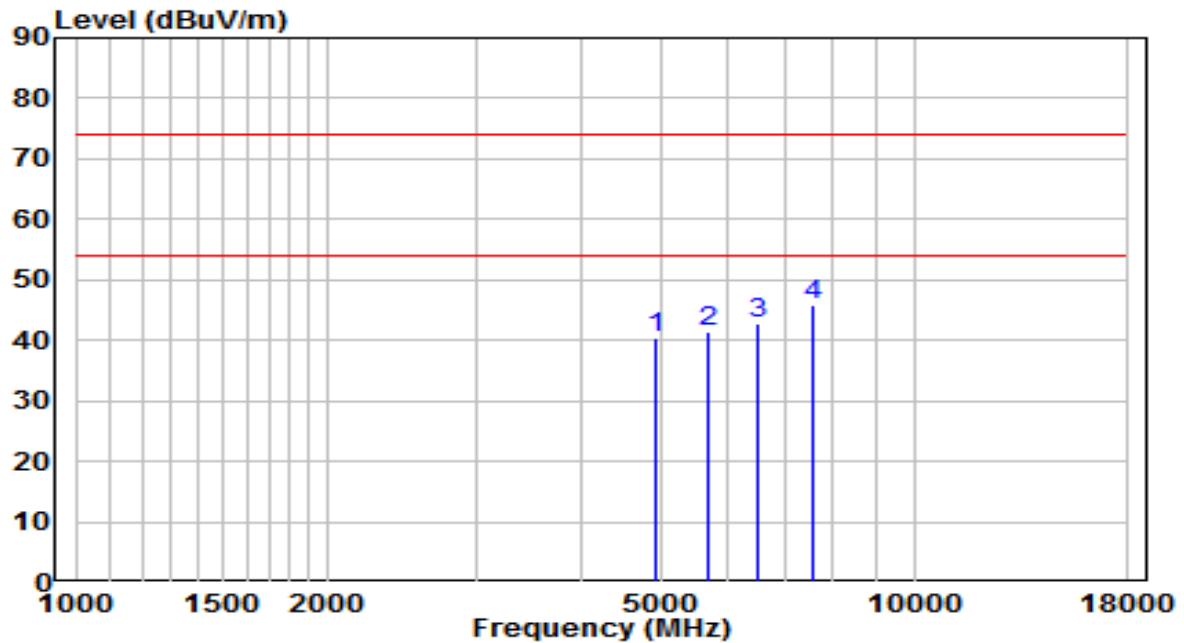


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4927.000	37.08	3.40	40.48	-33.52	74.00	Peak
2	5692.000	36.82	4.61	41.43	-32.57	74.00	Peak
3	6499.500	35.14	7.70	42.84	-31.16	74.00	Peak
4	* 7553.500	34.01	11.77	45.78	-28.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2452MHz(Beamforming Mode)	Test Voltage	120V/60Hz

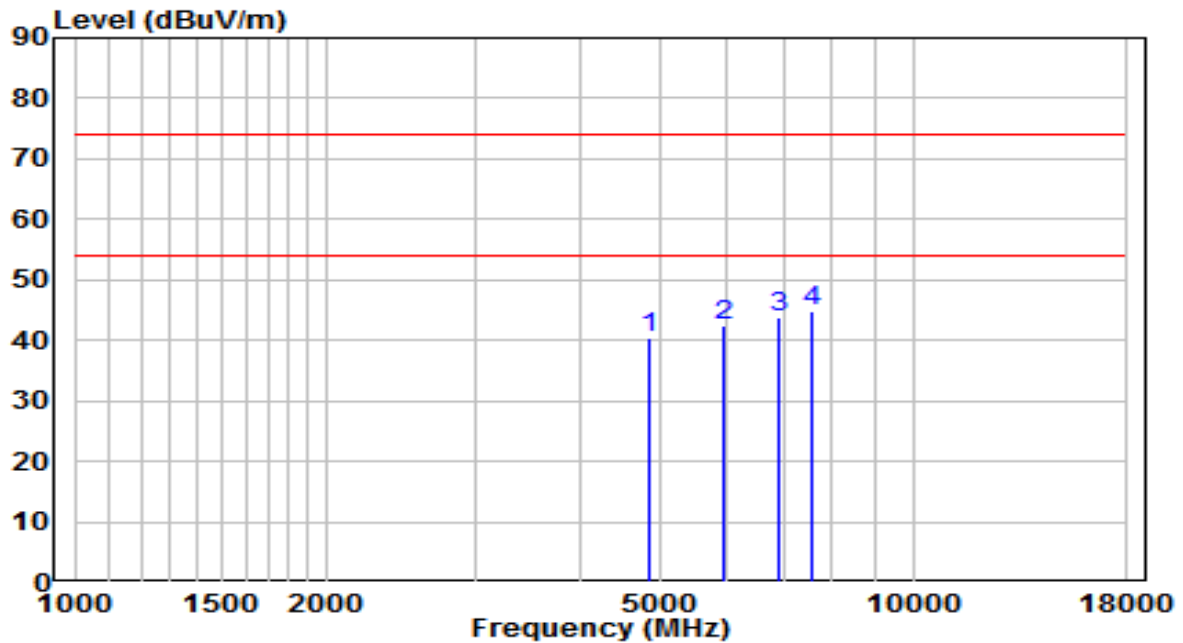


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4842.000	37.26	3.23	40.49	-33.51	74.00	Peak
2	5938.500	37.01	5.55	42.57	-31.43	74.00	Peak
3	6916.000	33.67	10.11	43.78	-30.22	74.00	Peak
4	* 7553.500	33.07	11.77	44.84	-29.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2452MHz(Beamforming Mode)	Test Voltage	120V/60Hz

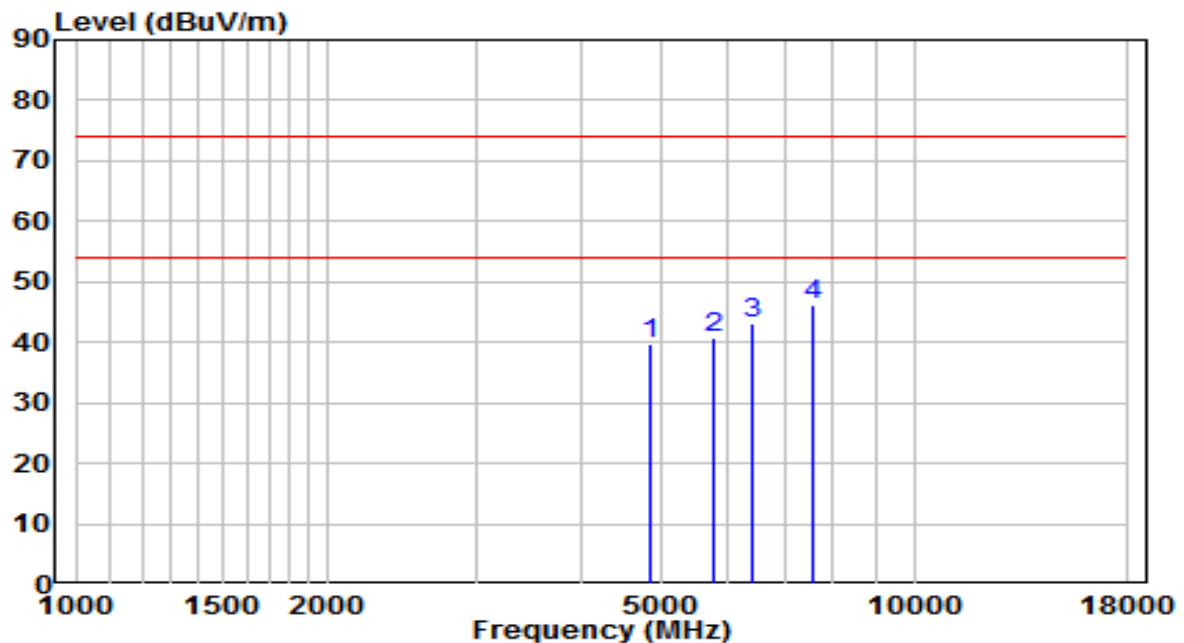


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4842.000	36.63	3.23	39.86	-34.14	74.00	Peak
2	5768.500	35.76	4.90	40.66	-33.34	74.00	Peak
3	6423.000	35.58	7.40	42.98	-31.02	74.00	Peak
4	* 7596.000	34.21	11.81	46.03	-27.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 2442MHz(Beamforming Mode)	Test Voltage	120V/60Hz

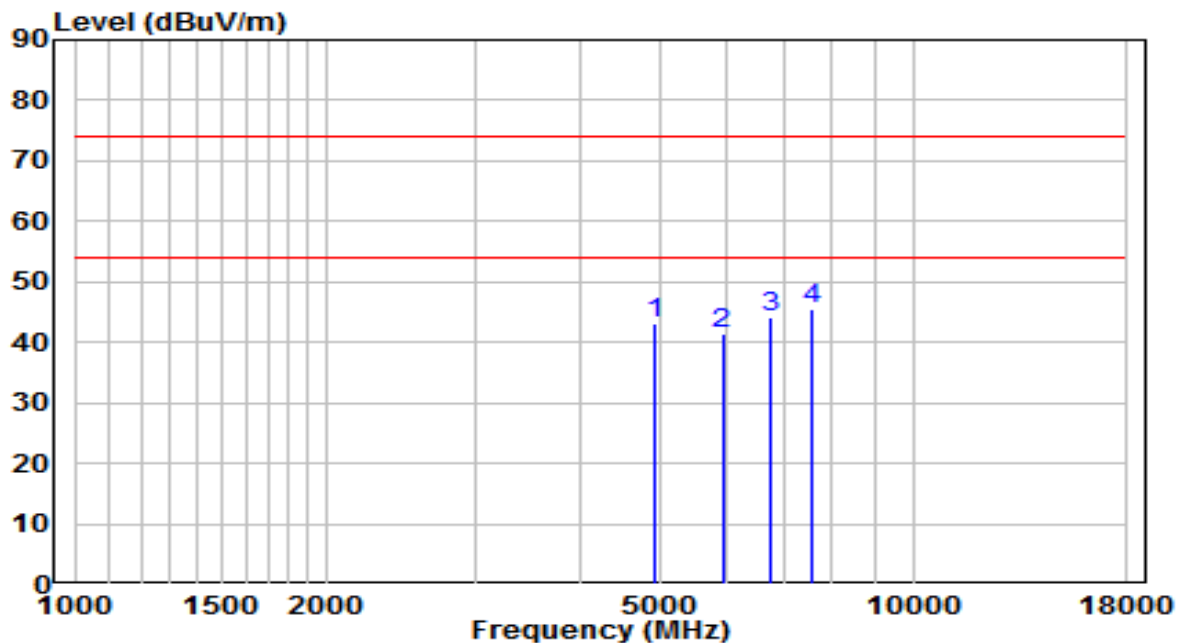


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4901.500	39.75	3.35	43.10	-30.90	74.00	Peak
2	5921.500	35.88	5.49	41.37	-32.63	74.00	Peak
3	6780.000	34.99	9.32	44.31	-29.69	74.00	Peak
4	* 7596.000	33.67	11.81	45.48	-28.52	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The Worst Case of Radiated Emission below 1GHz:

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	TW VULB 9162 30MHz-8GHz_2019	Temp. / Humidity	22.4°C/39.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Worse Case	Test Voltage	120V/60Hz

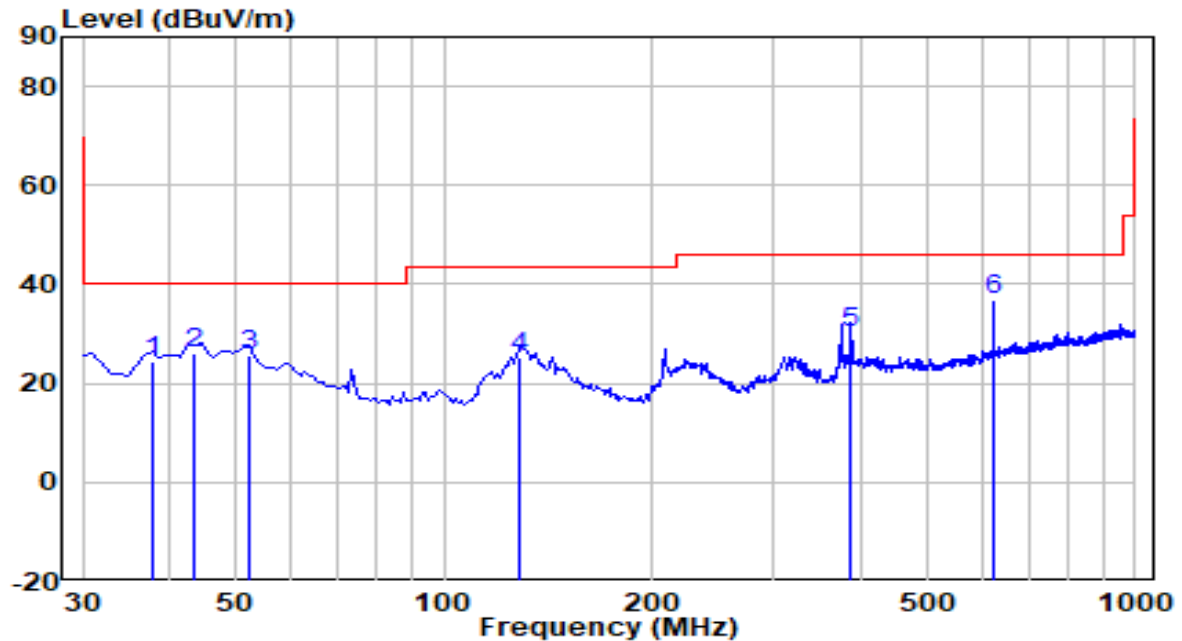


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	37.760	4.44	19.93	24.37	-15.63	40.00	QP
2	43.580	4.72	21.19	25.91	-14.09	40.00	QP
3	52.310	4.32	21.29	25.61	-14.39	40.00	QP
4	128.940	9.06	16.09	25.15	-18.35	43.50	QP
5	387.930	6.20	23.98	30.18	-15.82	46.00	QP
6	* 624.610	8.96	27.90	36.86	-9.14	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	TW VULB 9162 30MHz-8GHz_2019	Temp. / Humidity	22.4°C/39.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Worse Case	Test Voltage	120V/60Hz

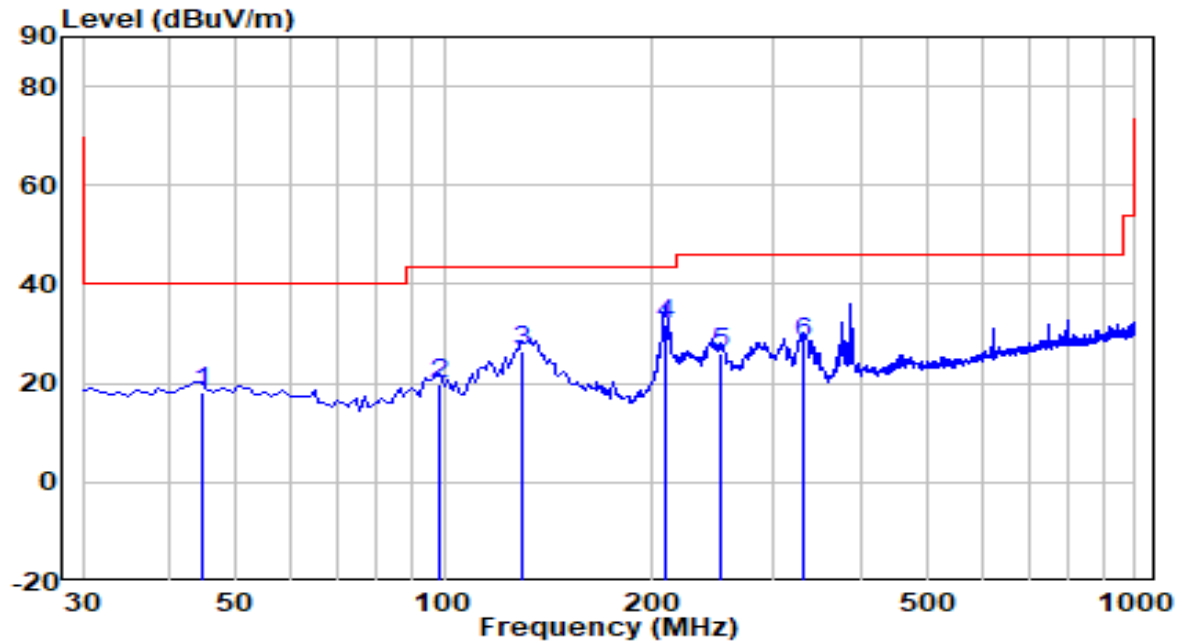

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	44.550	-3.14	21.33	18.19	-21.81	40.00	QP
2	98.870	0.66	19.35	20.01	-23.49	43.50	QP
3	129.910	10.65	15.99	26.64	-16.86	43.50	QP
4 *	209.450	13.39	18.61	32.00	-11.50	43.50	QP
5	251.160	5.73	20.54	26.27	-19.73	46.00	QP
6	329.730	5.65	22.61	28.26	-17.74	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4.Test Setup

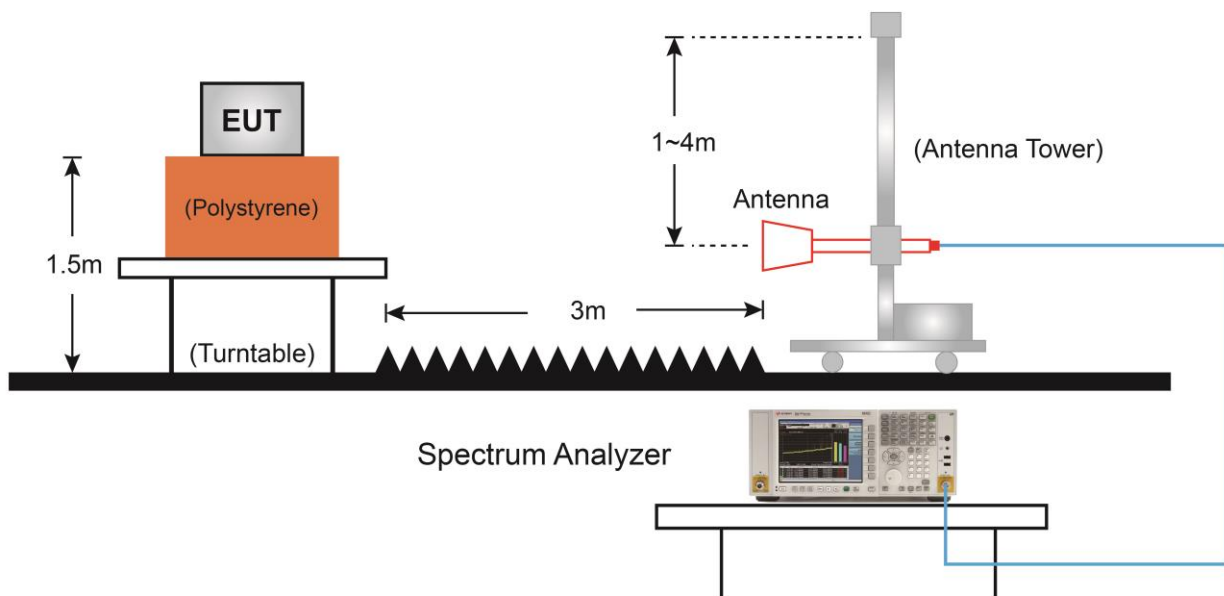

7.7.5.Test Result

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

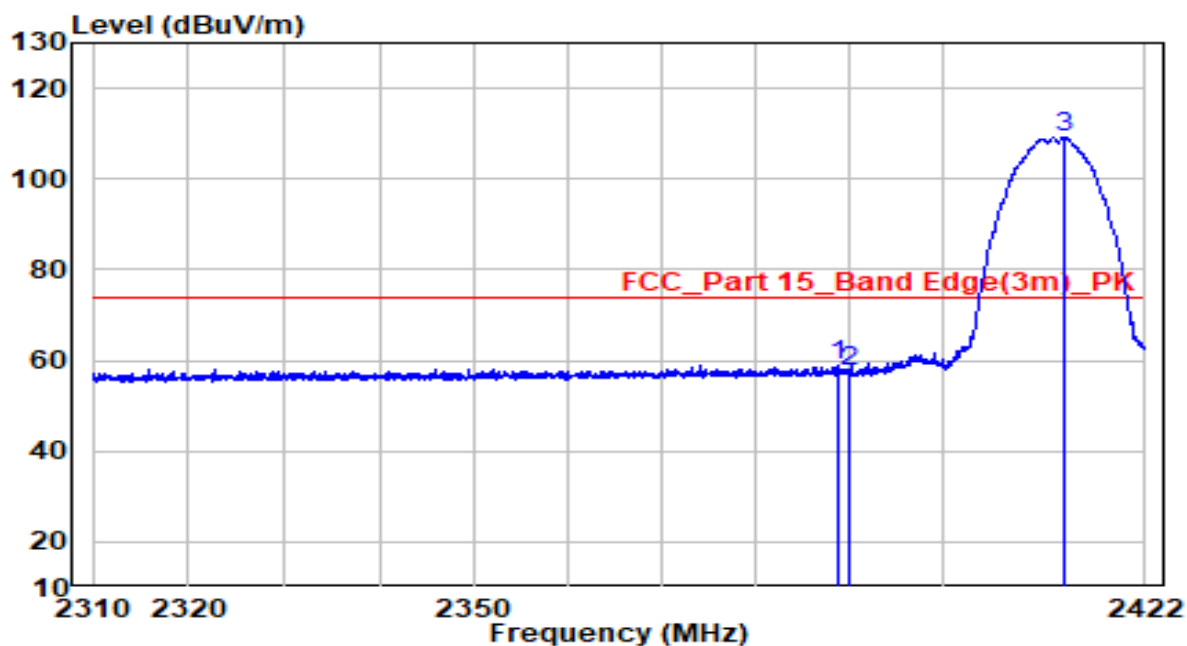


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2388.848	26.43	32.29	58.72	-15.28	74.00	Peak
2	2390.000	25.47	32.30	57.76	-16.24	74.00	Peak
3	*	76.77	32.40	109.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

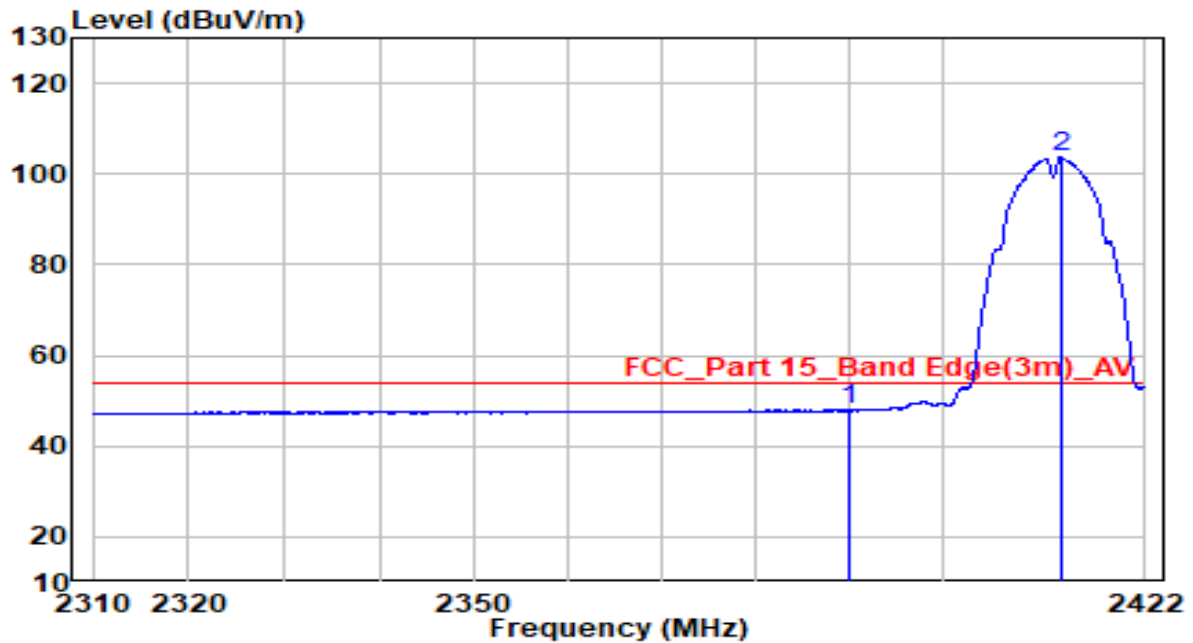


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.55	32.30	47.85	-6.15	54.00	Average
2	* 2412.760	71.17	32.40	103.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

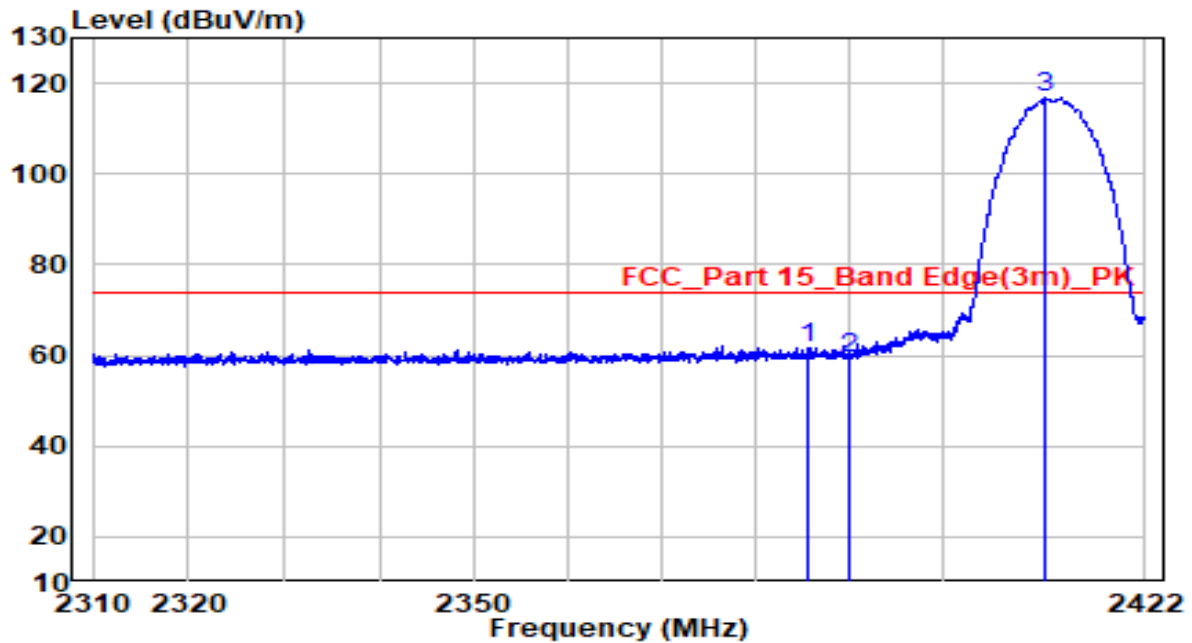


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2385.544	29.57	32.28	61.85	-12.15	74.00	Peak
2	2390.000	27.18	32.30	59.47	-14.53	74.00	Peak
3	*	84.41	32.39	116.80	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

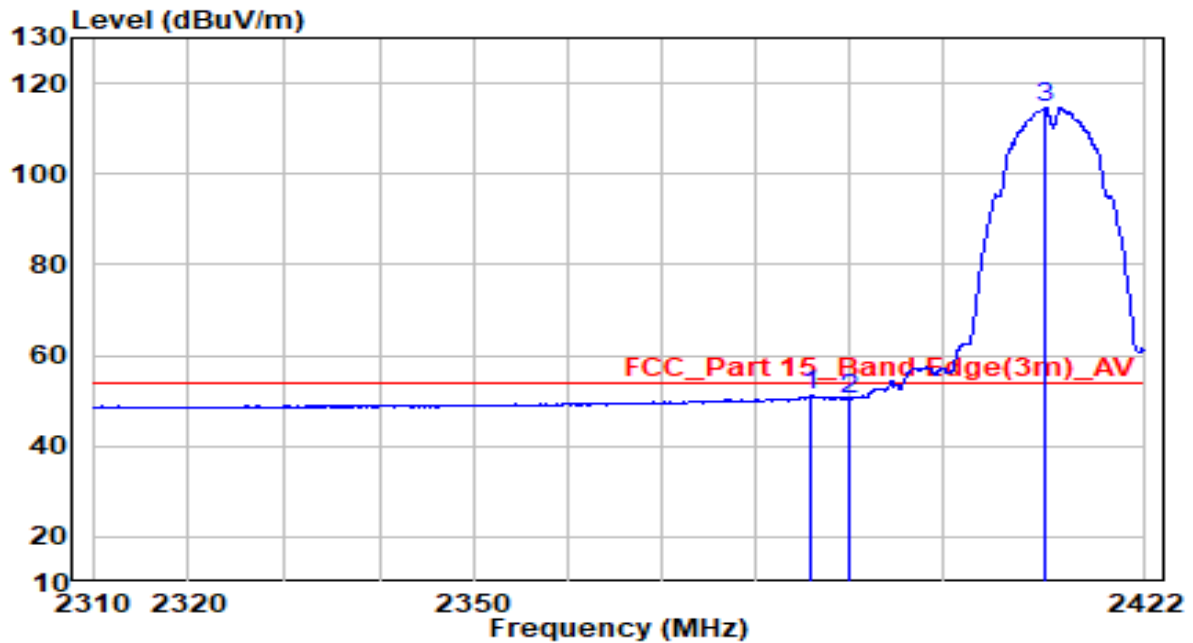


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2385.824	18.82	32.28	51.10	-2.90	54.00	Average
2	2390.000	18.10	32.30	50.40	-3.60	54.00	Average
3	*	82.42	32.39	114.81	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

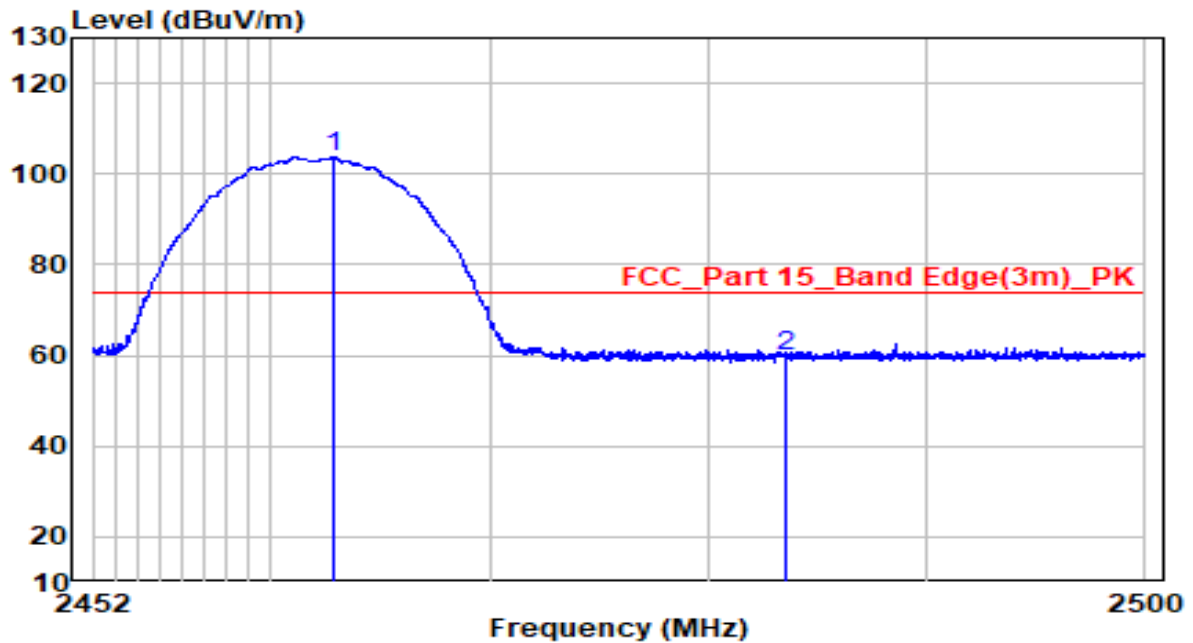


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.872	71.10	32.62	103.72	N/A	N/A	Peak
2		2483.500	26.94	32.71	59.65	-14.35	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

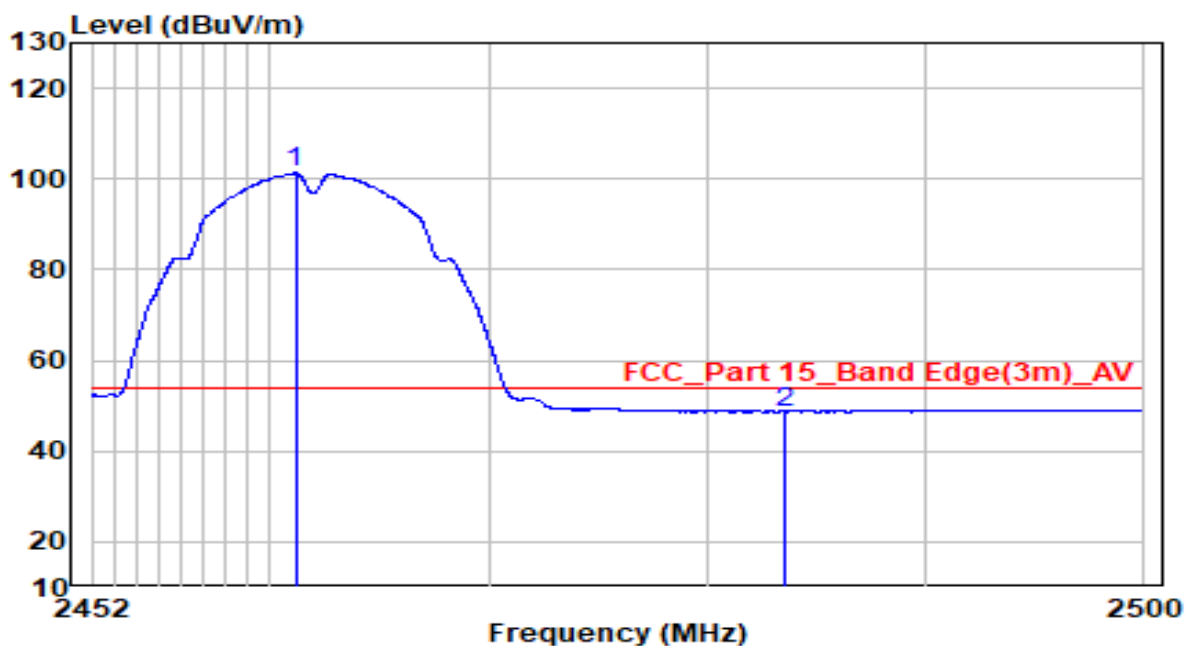


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.216	68.67	32.61	101.28	N/A	N/A	Average
2		2483.500	16.00	32.71	48.71	-5.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

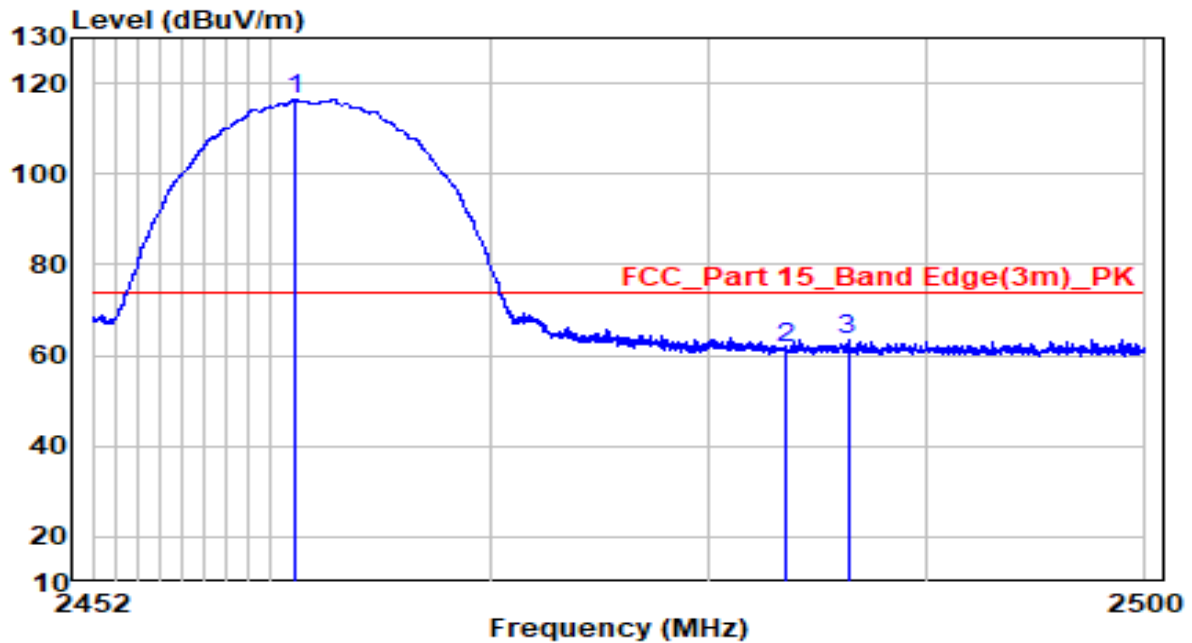


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.120	83.78	32.61	116.39	N/A	N/A	Peak
2		2483.500	28.69	32.71	61.40	-12.60	74.00	Peak
3		2486.344	30.73	32.72	63.45	-10.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

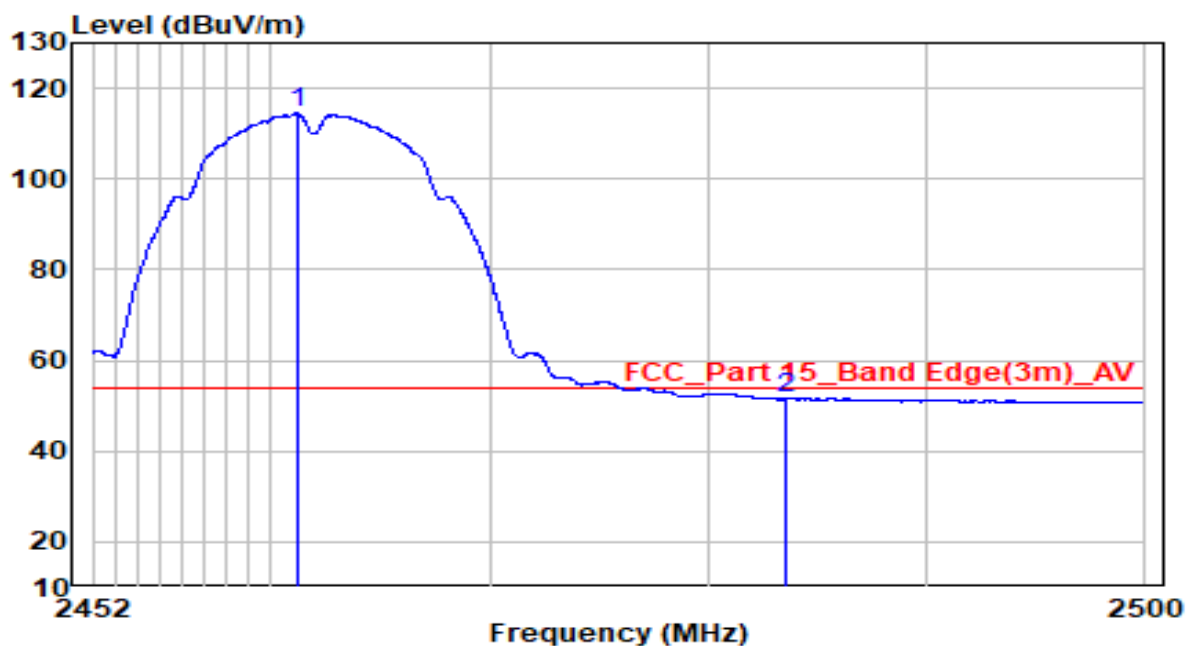


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.240	81.82	32.61	114.43	N/A	N/A	Average
2		2483.500	18.80	32.71	51.51	-2.49	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

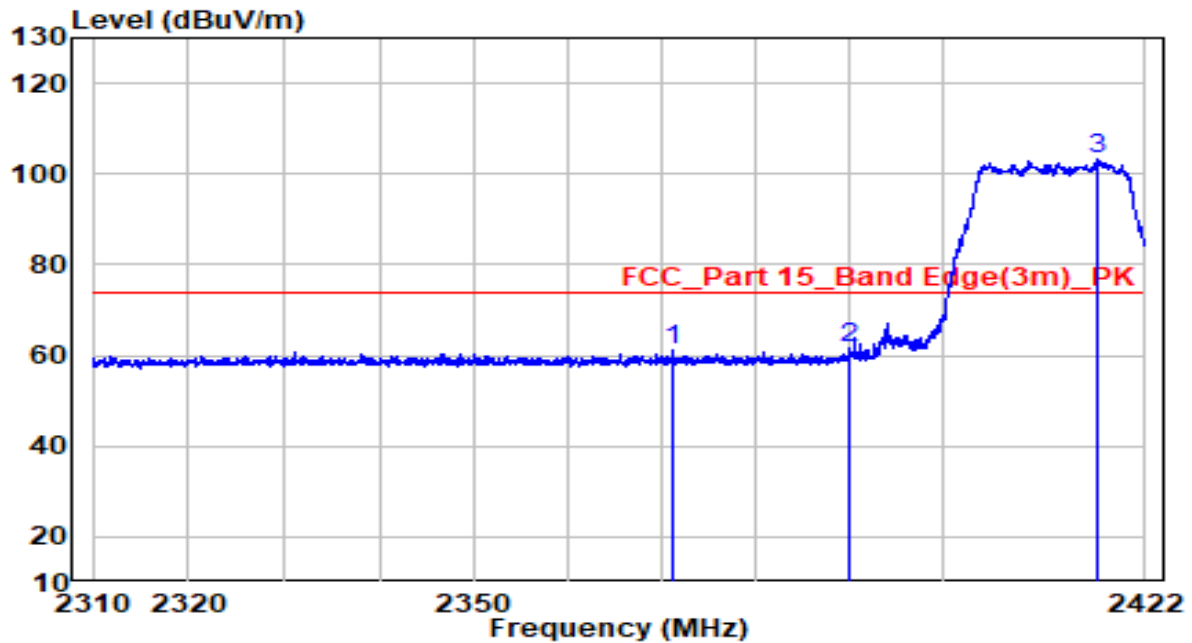


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2371.208	28.94	32.21	61.16	-12.84	74.00	Peak
2	2390.000	29.16	32.30	61.46	-12.54	74.00	Peak
3	*	70.80	32.41	103.21	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

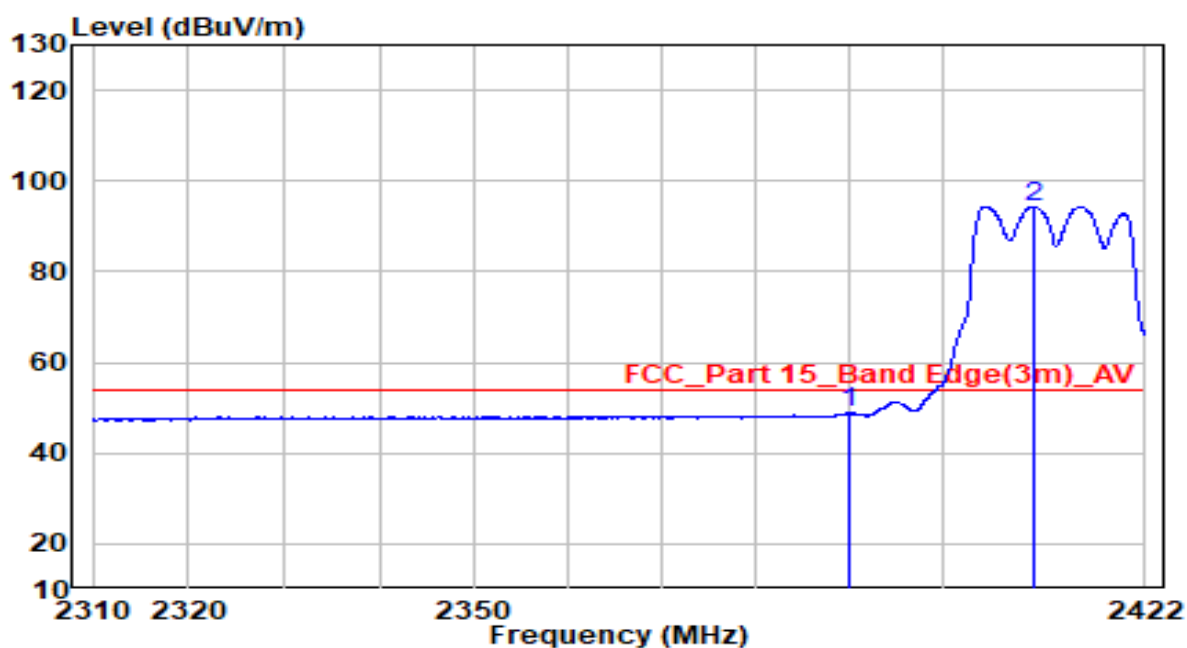


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.42	32.30	48.72	-5.28	54.00	Average
2	* 2409.792	62.03	32.38	94.41	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

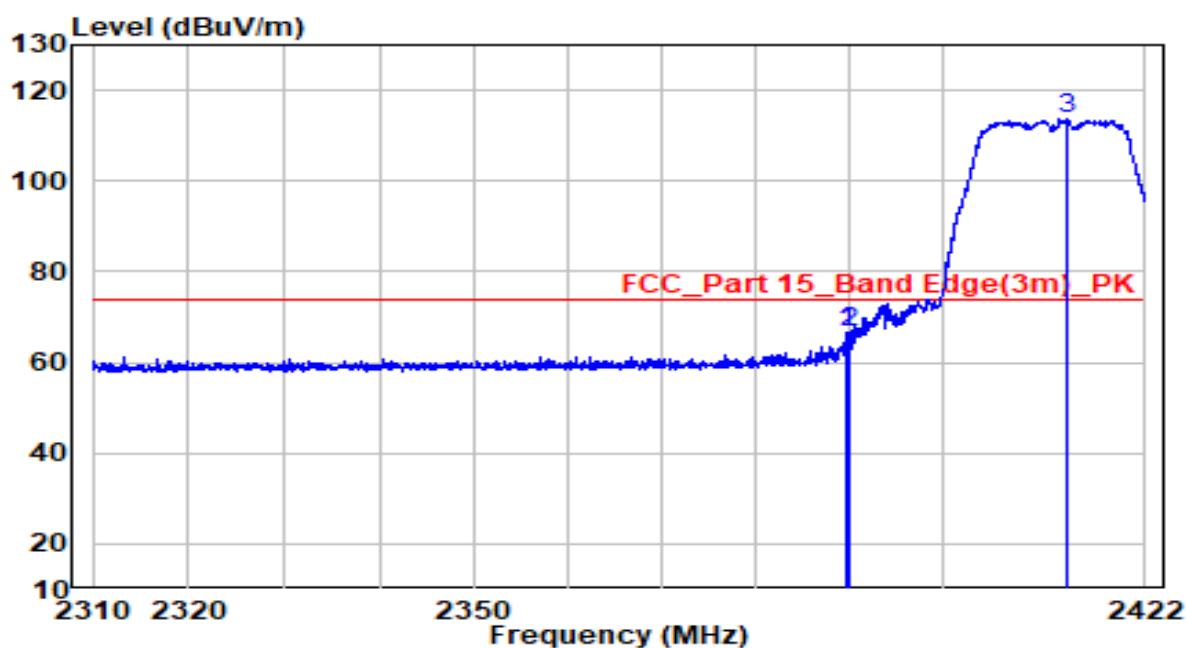


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.688	34.20	32.29	66.50	-7.50	74.00	Peak
2	2390.000	34.14	32.30	66.44	-7.56	74.00	Peak
3	* 2413.488	81.32	32.40	113.72	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

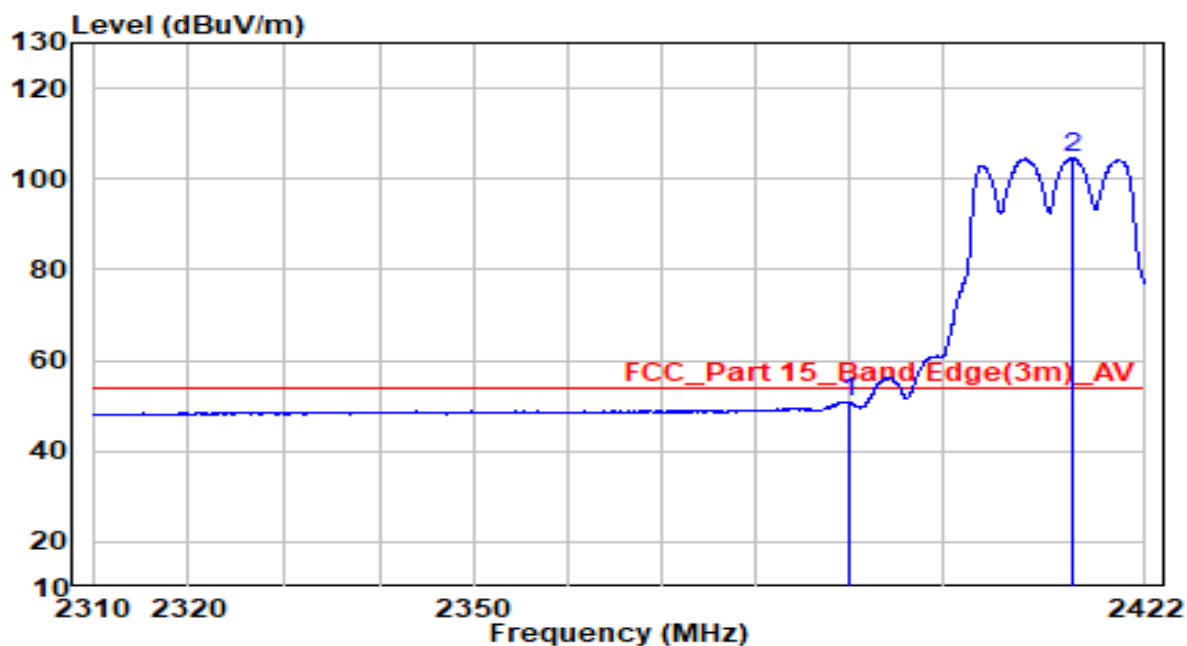


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.48	32.30	50.77	-3.23	54.00	Average
2	* 2414.104	72.17	32.40	104.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

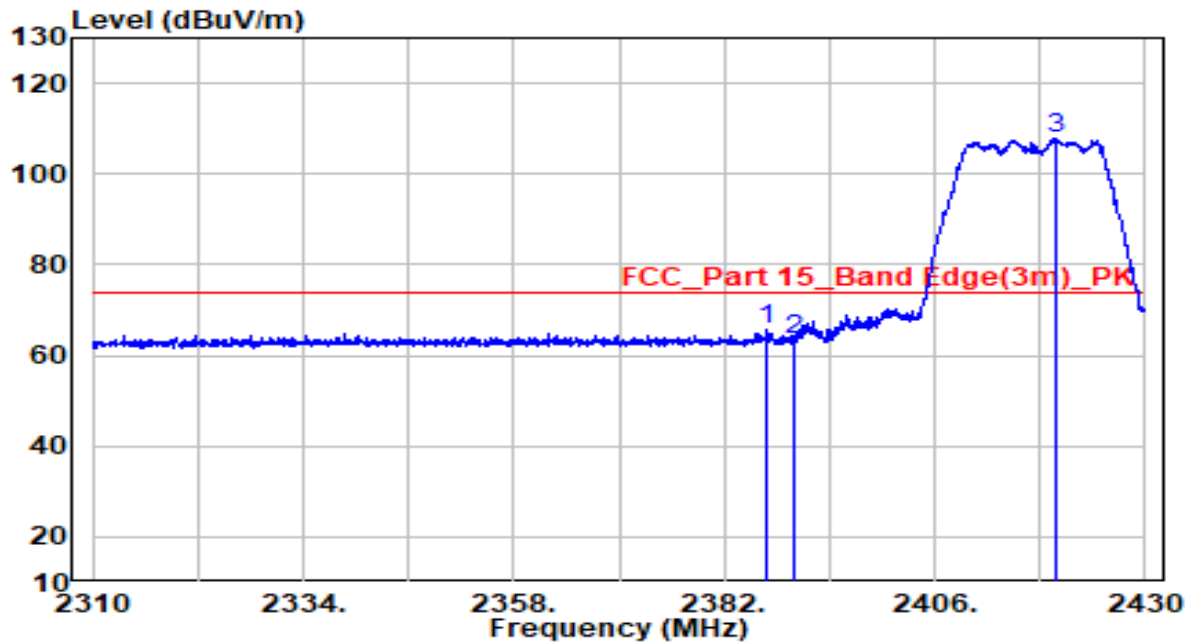


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.800	33.26	32.28	65.54	-8.46	74.00	Peak
2	2390.000	31.02	32.30	63.32	-10.68	74.00	Peak
3	*	75.28	32.43	107.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

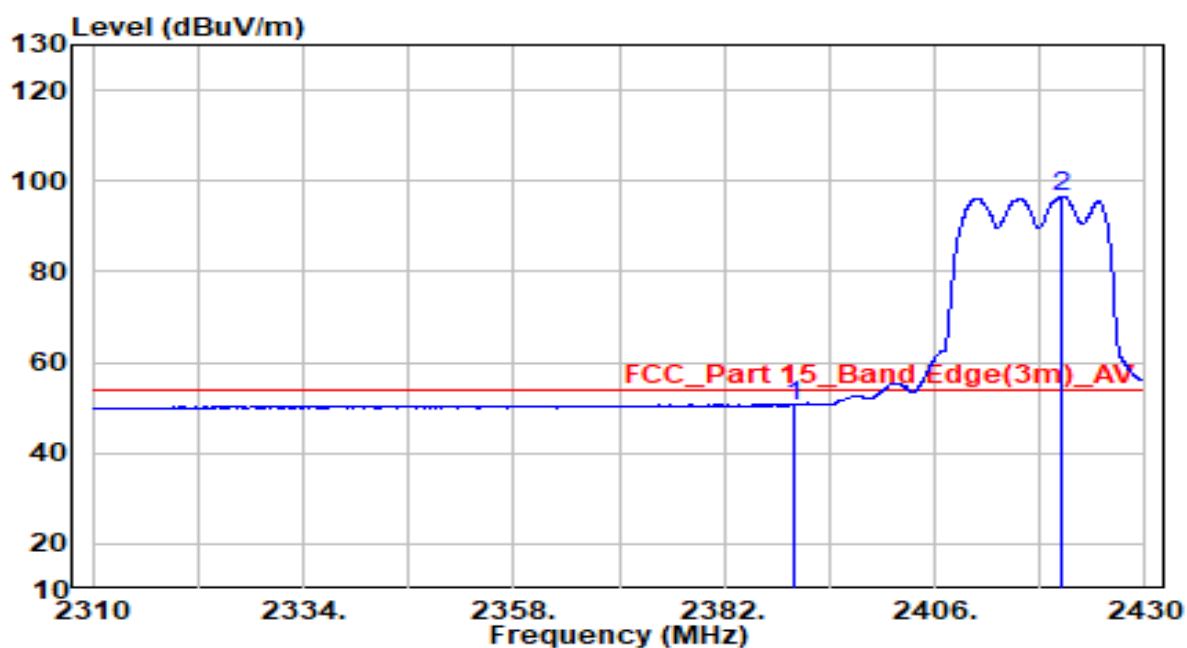


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.23	32.30	50.53	-3.47	54.00	Average
2	* 2420.400	63.96	32.43	96.39	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

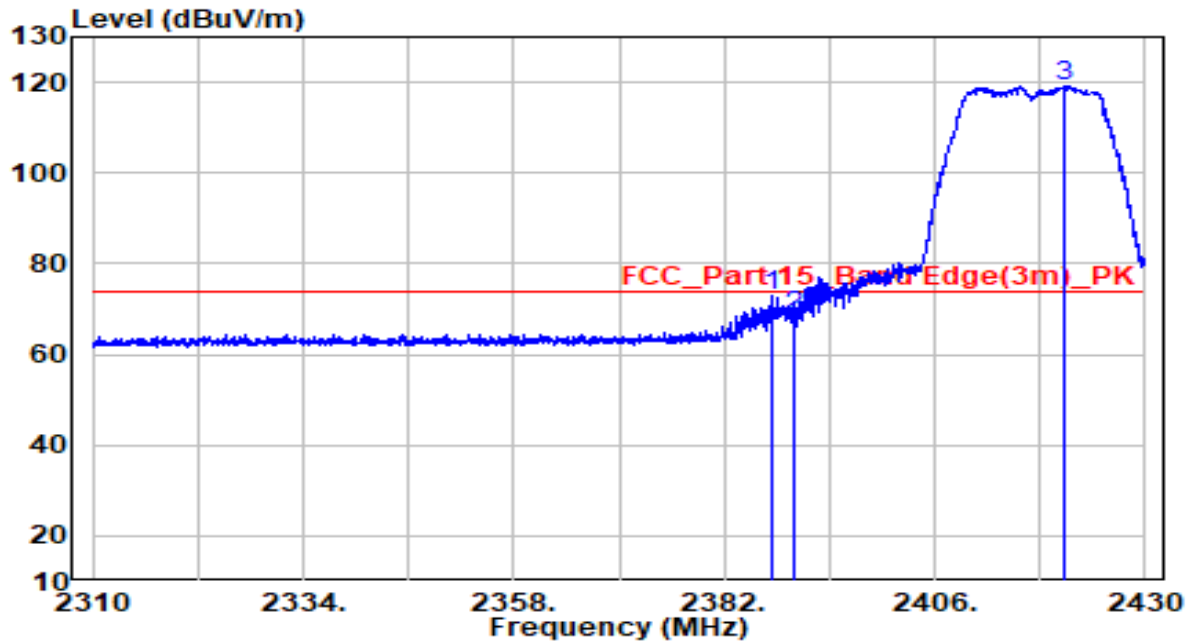


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.520	40.46	32.29	72.75	-1.25	74.00	Peak
2	2390.000	35.97	32.30	68.26	-5.74	74.00	Peak
3	* 2420.760	86.71	32.43	119.14	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

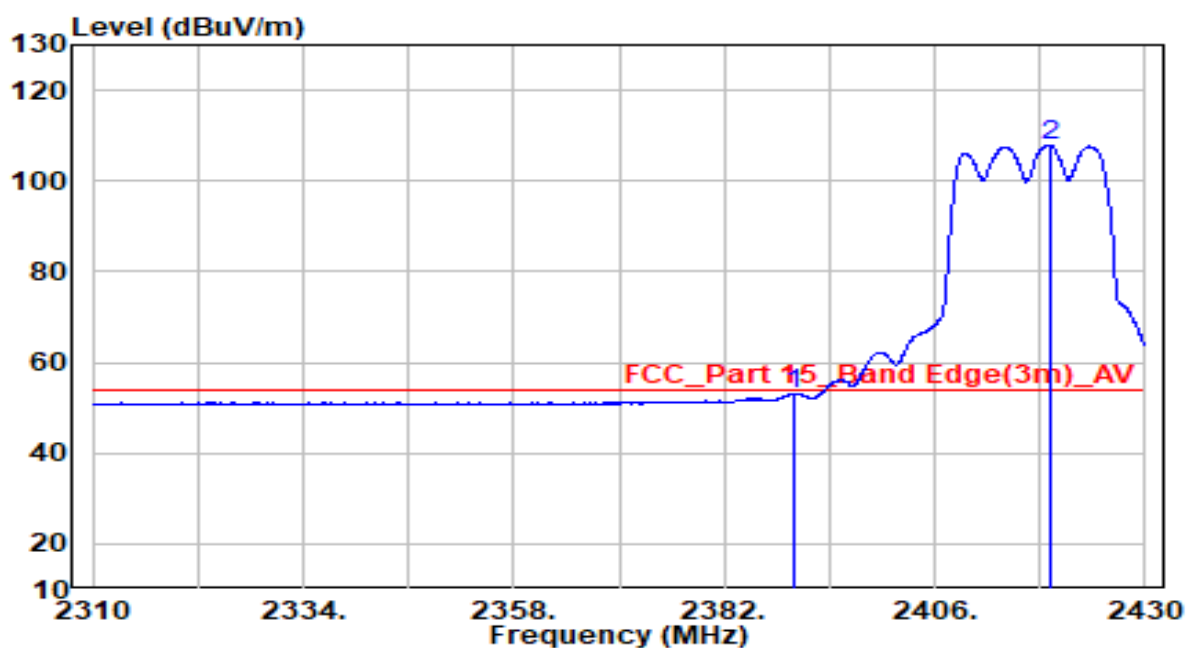


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.71	32.30	53.00	-1.00	54.00	Average
2	* 2419.080	75.42	32.42	107.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

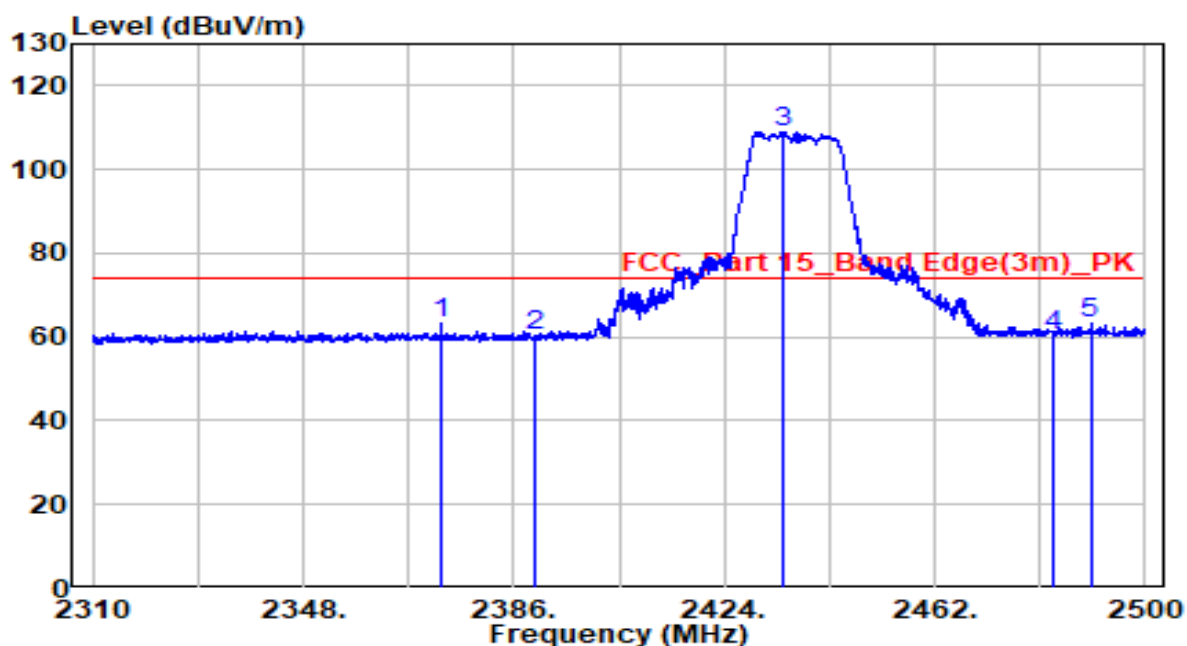


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2372.985	31.06	32.22	63.28	-10.72	74.00	Peak
2	2390.000	27.82	32.30	60.12	-13.88	74.00	Peak
3	* 2434.735	76.58	32.49	109.07	N/A	N/A	Peak
4	2483.500	27.68	32.71	60.39	-13.61	74.00	Peak
5	2490.120	30.43	32.74	63.17	-10.83	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

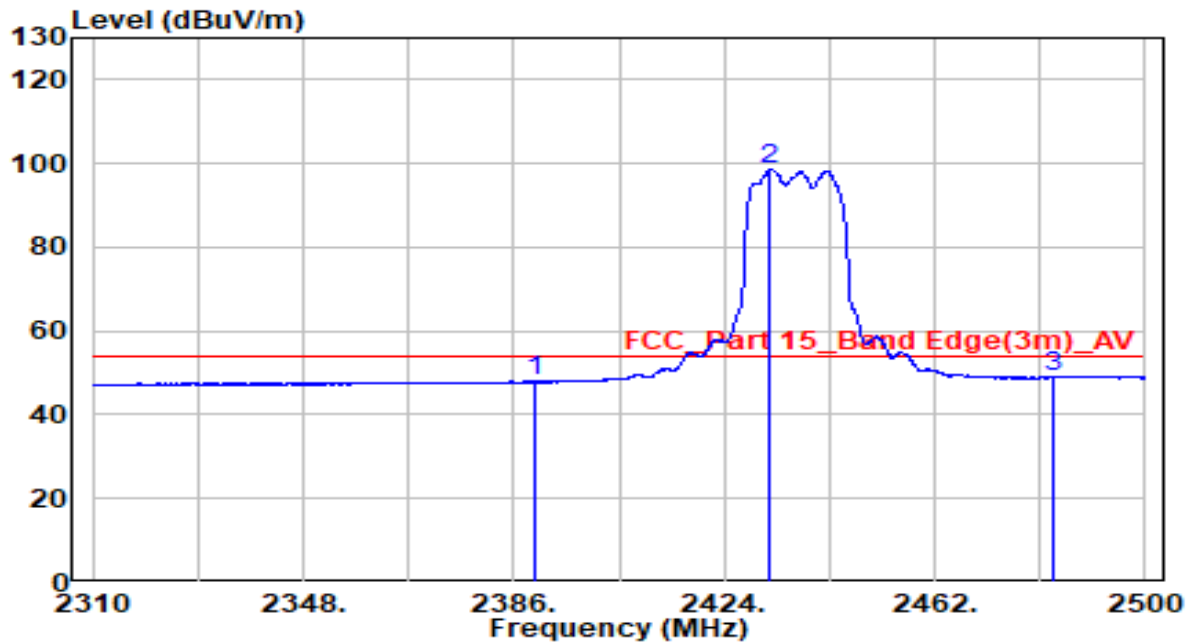


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.69	32.30	47.99	-6.01	54.00	Average
2	* 2432.360	66.25	32.48	98.73	N/A	N/A	Average
3	2483.500	16.18	32.71	48.89	-5.11	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

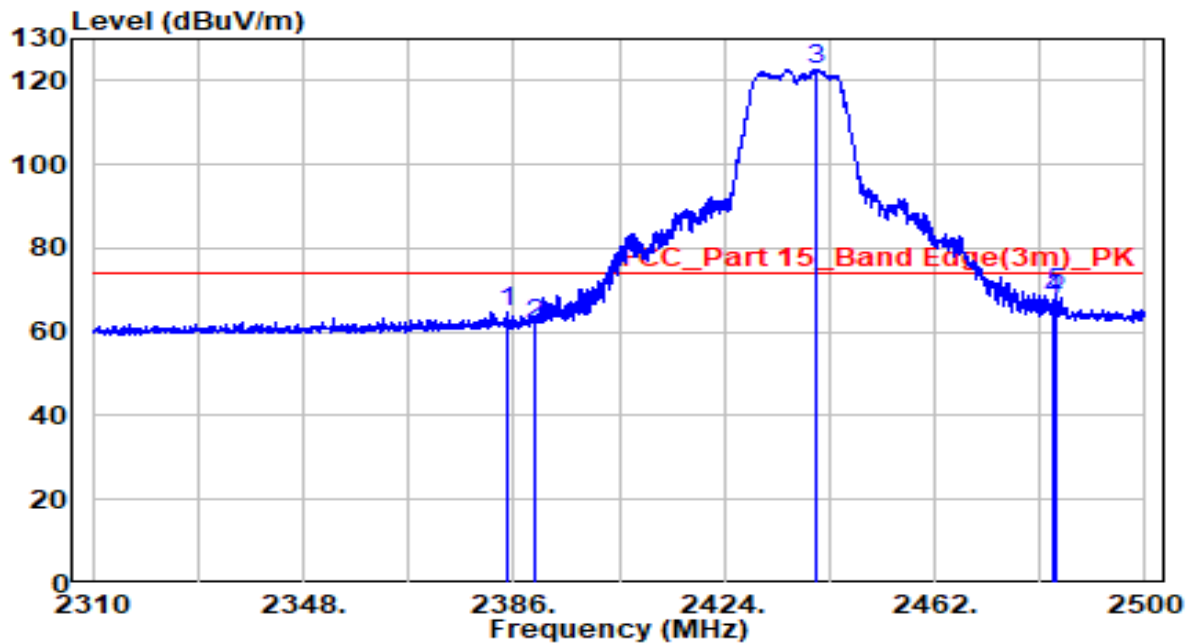


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2384.860	32.35	32.27	64.62	-9.38	74.00	Peak
2	2390.000	29.74	32.30	62.04	-11.96	74.00	Peak
3	* 2440.625	90.26	32.52	122.77	N/A	N/A	Peak
4	2483.500	34.90	32.71	67.61	-6.39	74.00	Peak
5	2483.945	36.25	32.71	68.96	-5.04	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

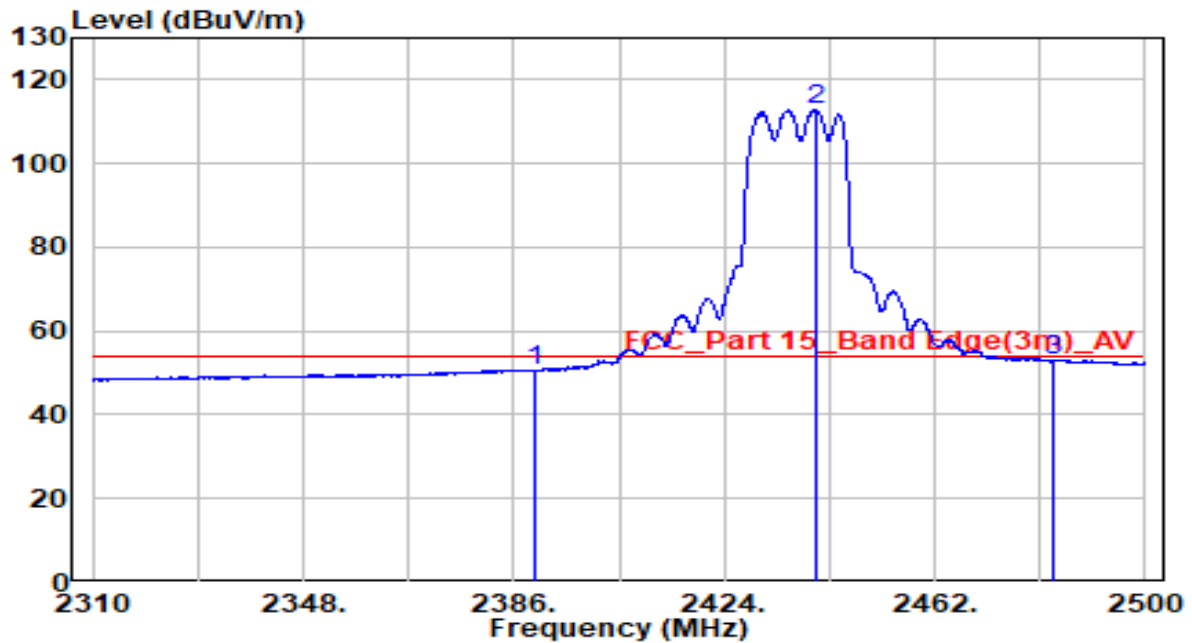


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.29	32.30	50.59	-3.41	54.00	Average
2	* 2440.435	80.21	32.52	112.72	N/A	N/A	Average
3	2483.500	20.18	32.71	52.89	-1.11	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

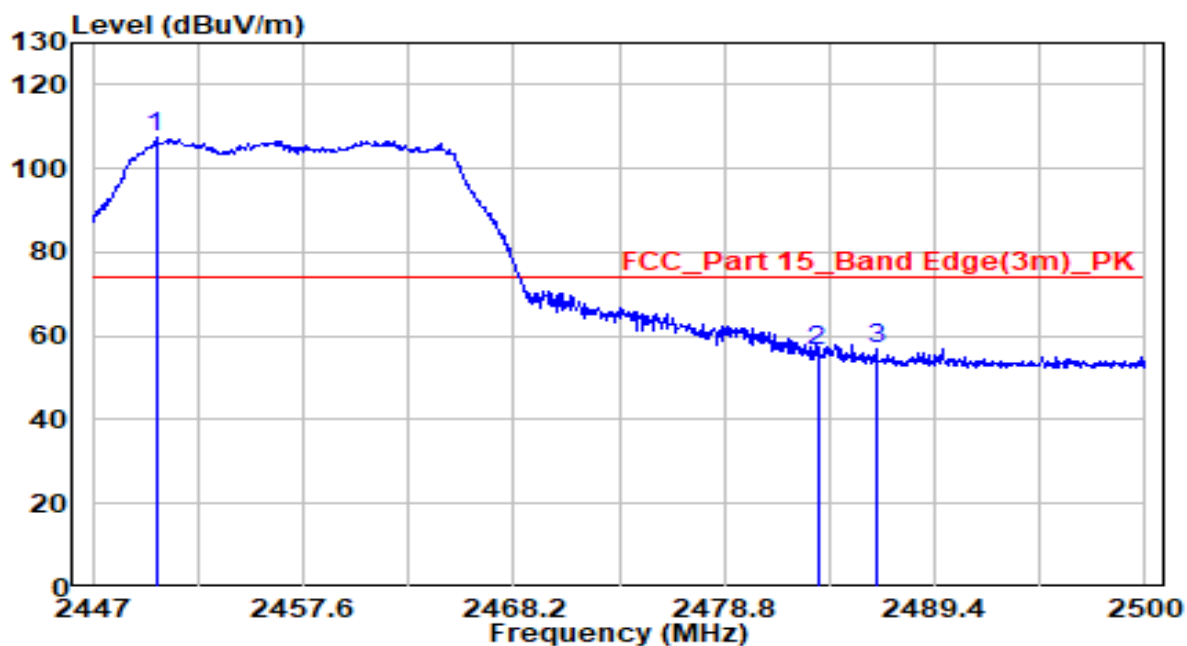


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.180	74.81	32.56	107.37	N/A	N/A	Peak
2		2483.500	23.88	32.71	56.59	-17.41	74.00	Peak
3		2486.485	24.32	32.72	57.04	-16.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

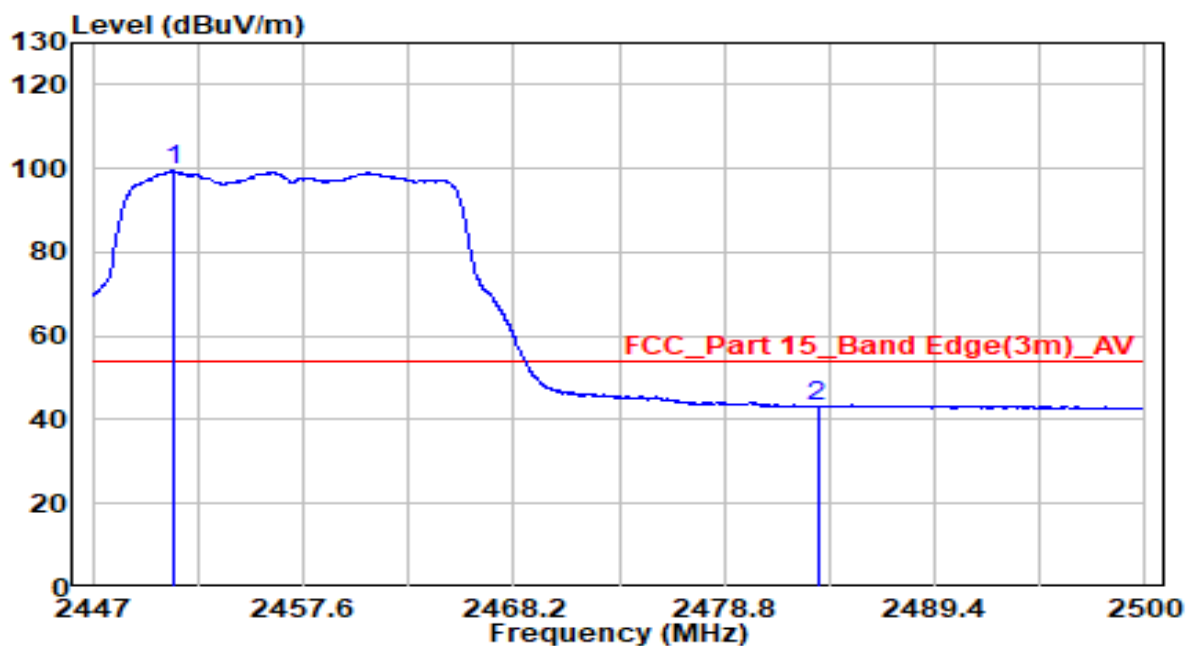


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2451.028	66.82	32.56	99.38	N/A	N/A	Average
2		2483.500	10.49	32.71	43.20	-10.80	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

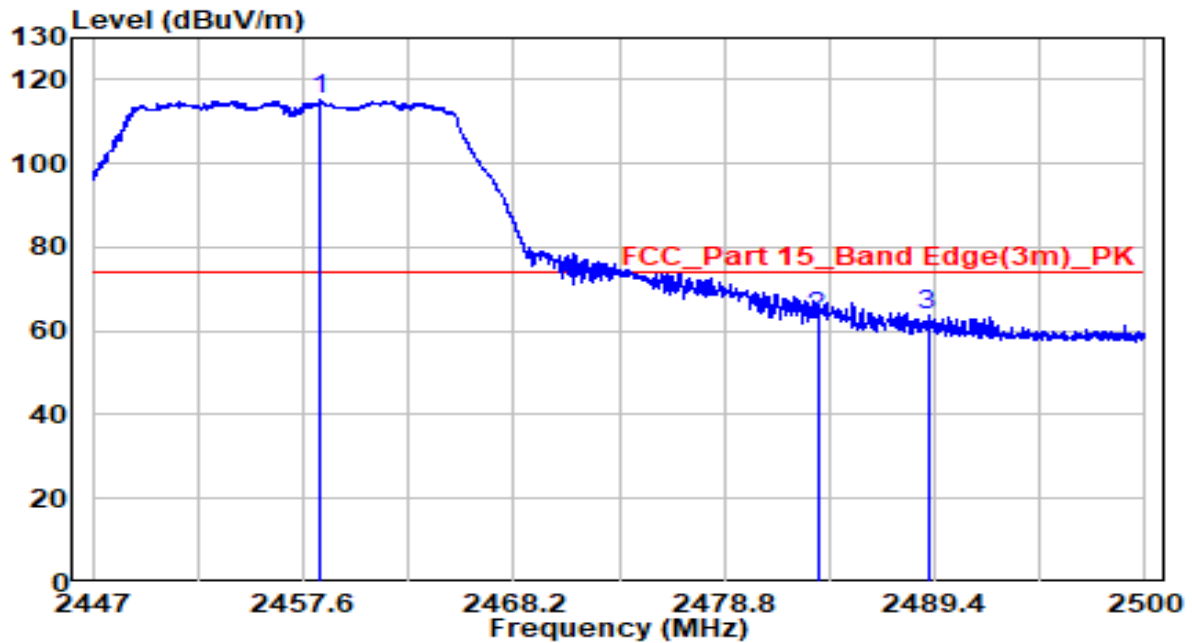


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2458.475	82.55	32.60	115.15	N/A	N/A	Peak
2		2483.500	30.62	32.71	63.32	-10.68	74.00	Peak
3		2489.055	30.95	32.73	63.69	-10.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

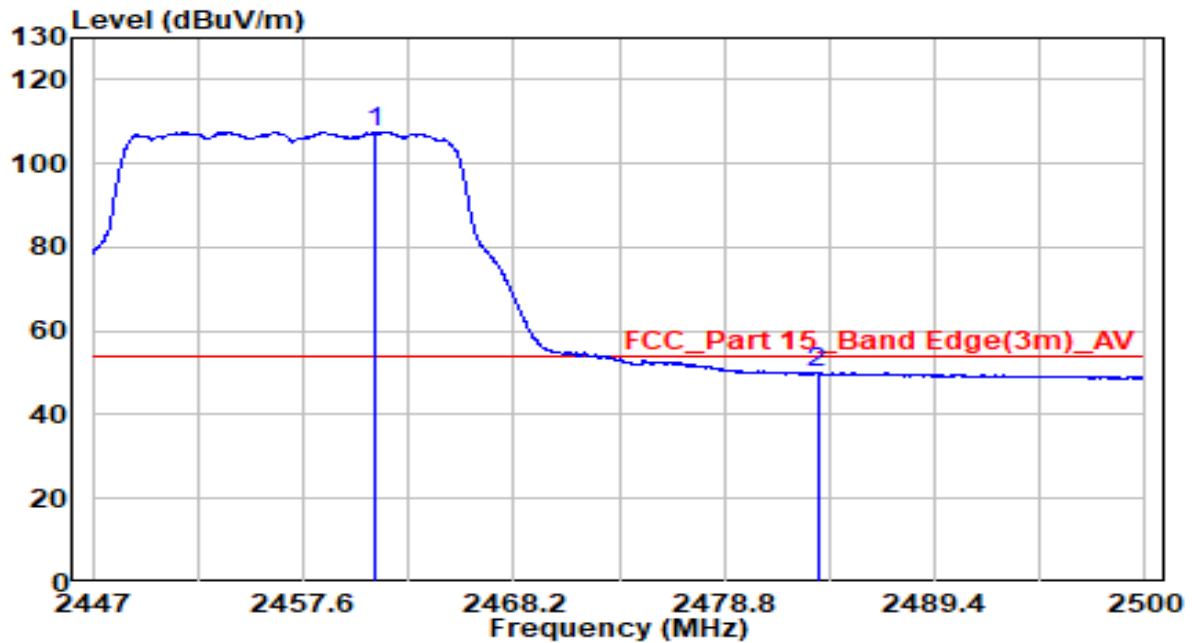


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.230	75.03	32.61	107.64	N/A	N/A	Average
2		2483.500	17.21	32.71	49.92	-4.08	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

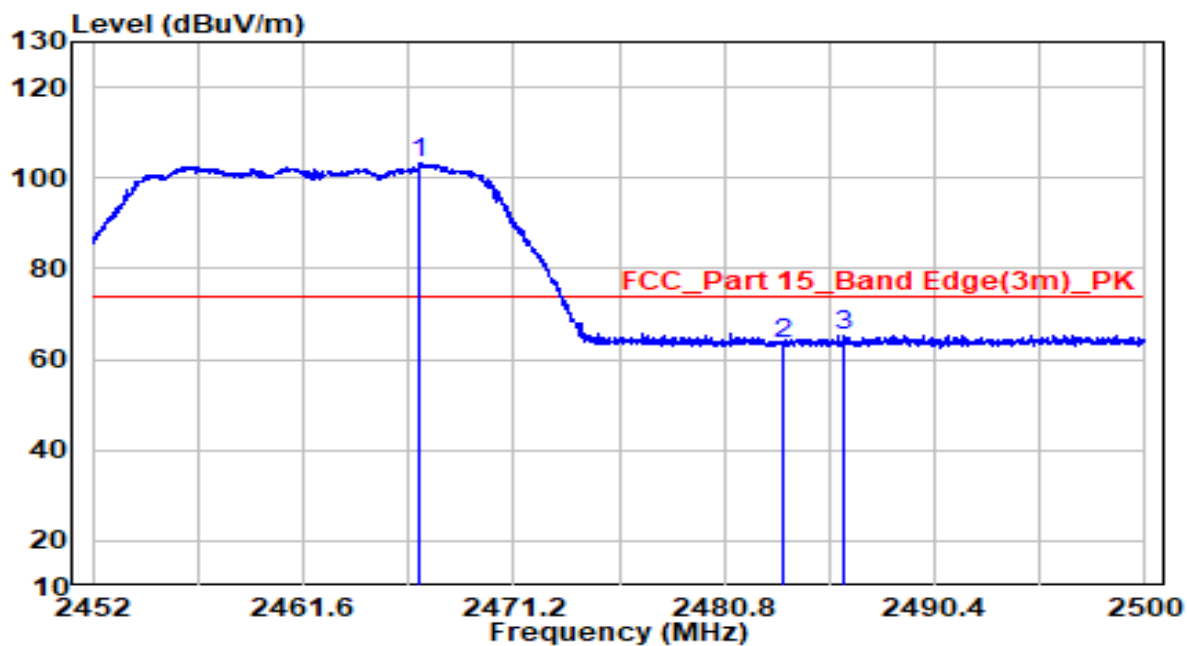


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2466.880	70.67	32.63	103.31	N/A	N/A	Peak
2		2483.500	30.67	32.71	63.38	-10.62	74.00	Peak
3		2486.296	32.74	32.72	65.46	-8.54	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

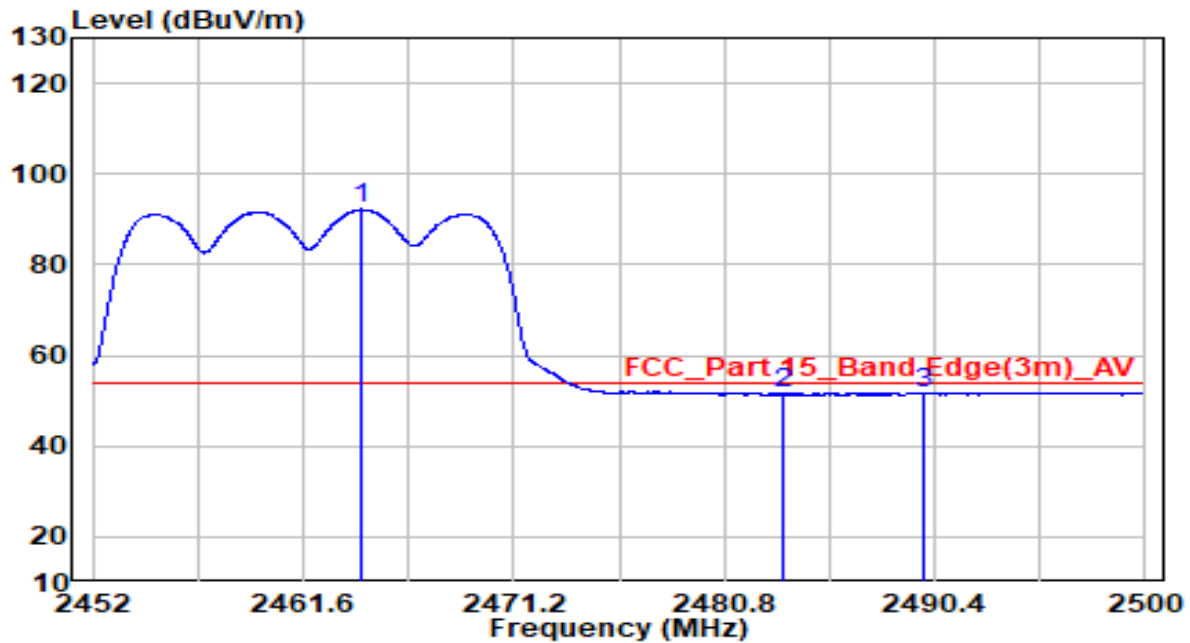


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2464.288	59.58	32.62	92.20	N/A	N/A	Average
2		2483.500	18.82	32.71	51.52	-2.48	54.00	Average
3		2489.848	19.11	32.74	51.85	-2.15	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

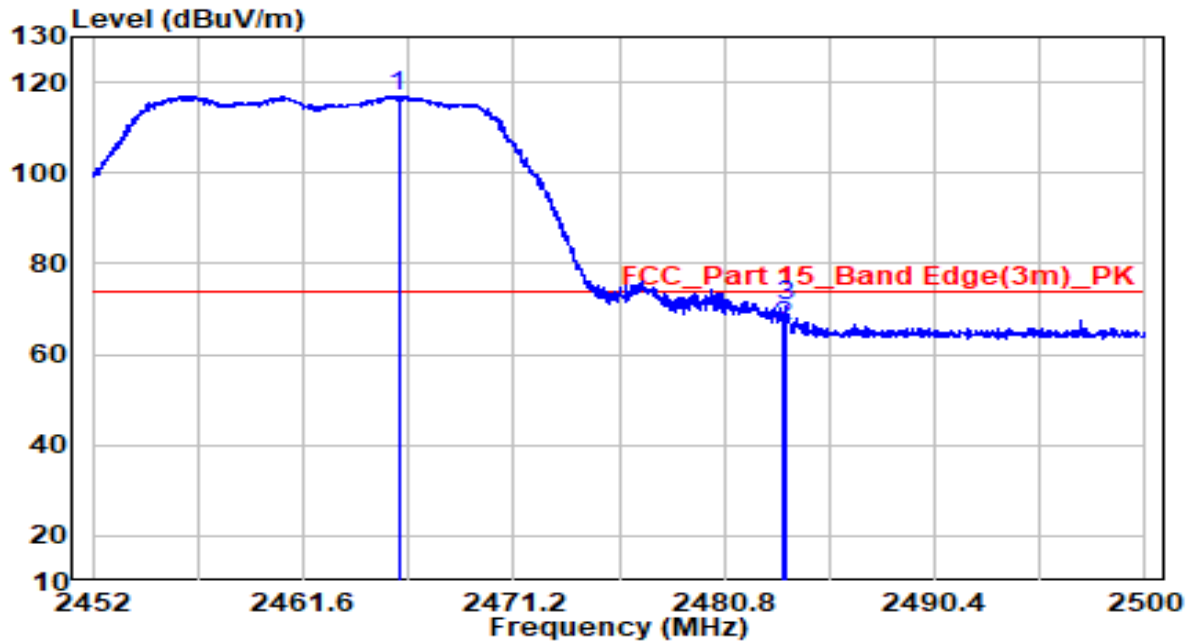


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2465.944	84.28	32.63	116.91	N/A	N/A	Peak
2		2483.500	33.54	32.71	66.25	-7.75	74.00	Peak
3		2483.560	37.80	32.71	70.51	-3.49	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

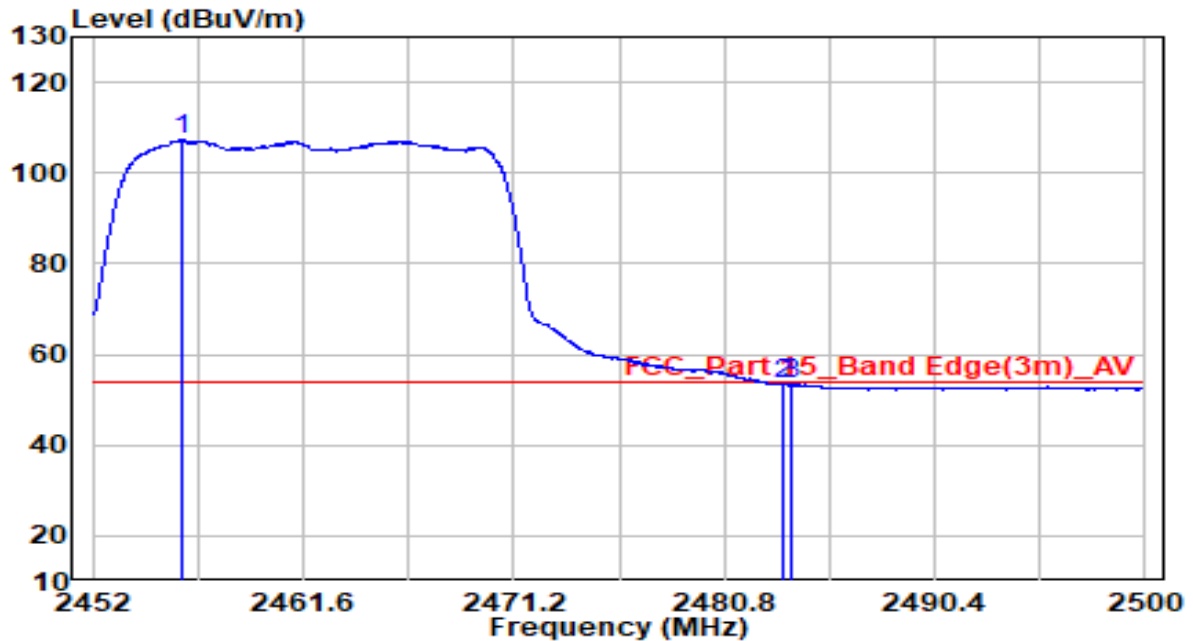


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2456.104	74.59	32.59	107.18	N/A	N/A	Average
2		2483.500	20.79	32.71	53.50	-0.50	54.00	Average
3		2483.920	20.85	32.71	53.56	-0.44	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

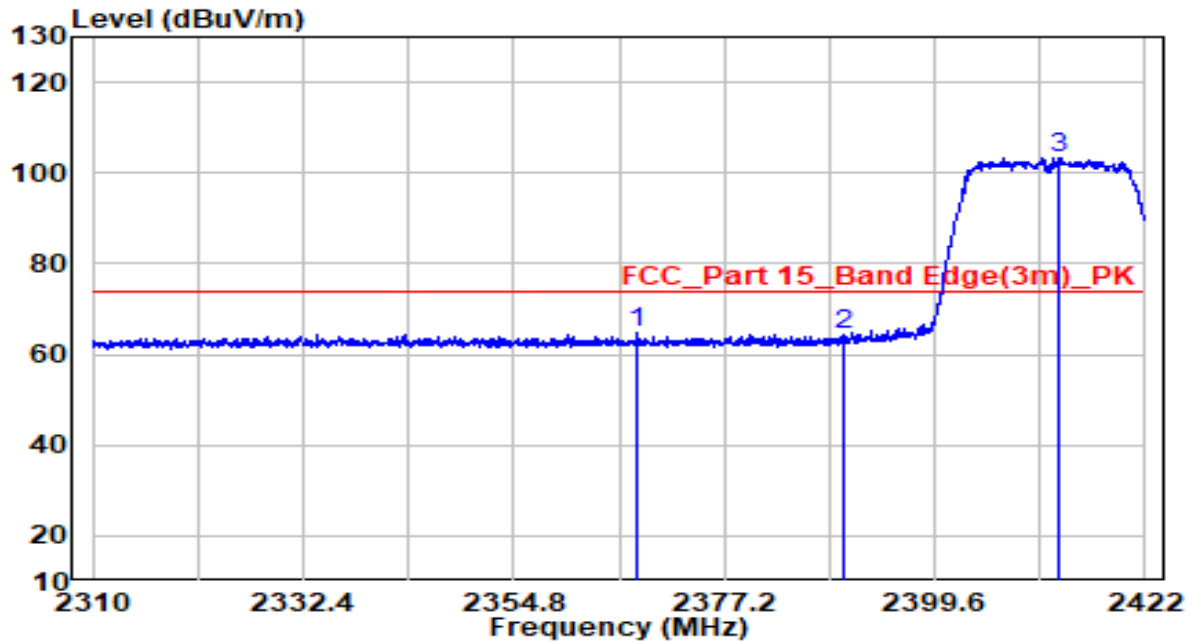


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2368.016	32.39	32.20	64.59	-9.41	74.00	Peak
2	2390.000	31.96	32.30	64.25	-9.75	74.00	Peak
3	* 2412.816	70.89	32.40	103.29	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

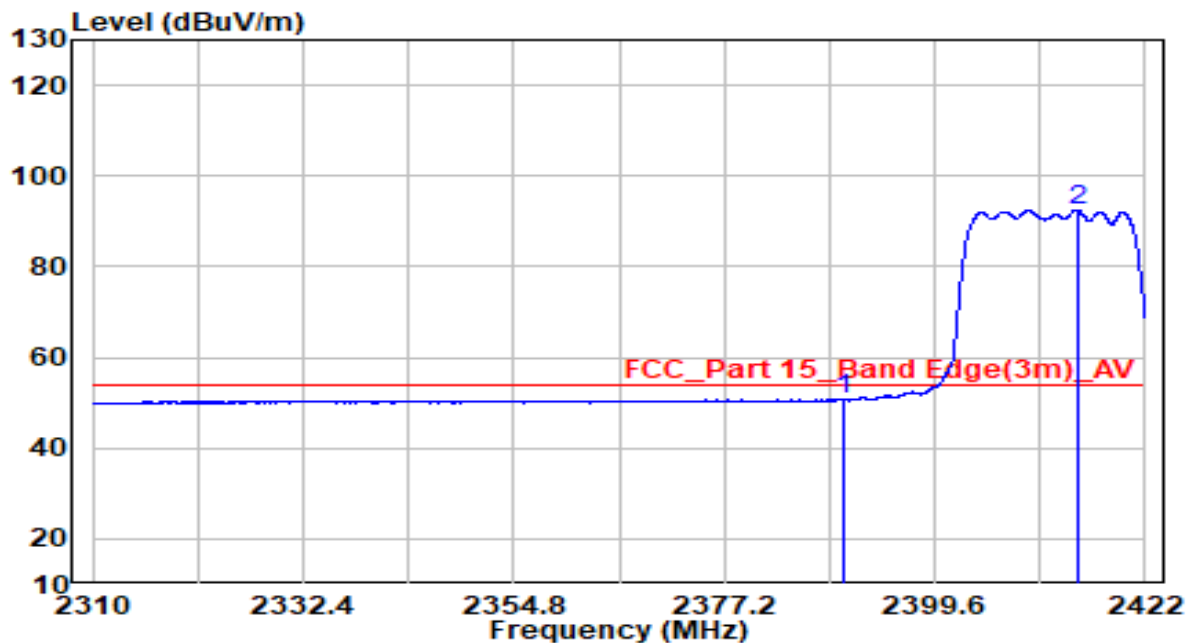


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.43	32.30	50.72	-3.28	54.00	Average
2	* 2414.720	60.18	32.40	92.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

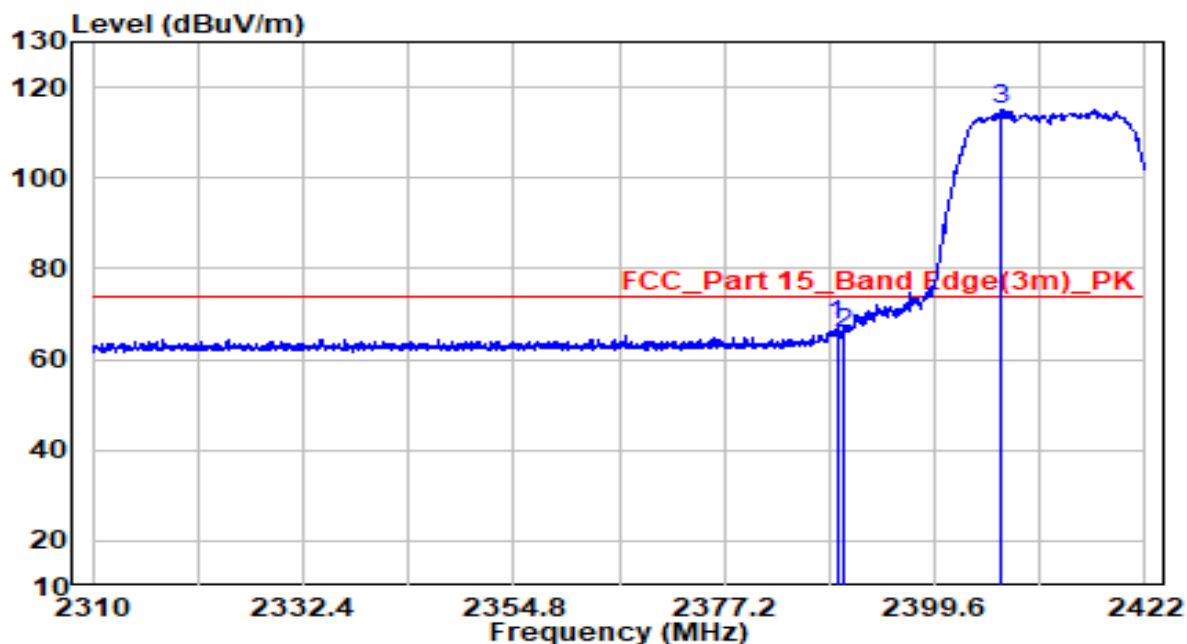


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.184	35.19	32.29	67.48	-6.52	74.00	Peak
2	2390.000	33.35	32.30	65.65	-8.35	74.00	Peak
3	* 2406.712	82.88	32.37	115.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

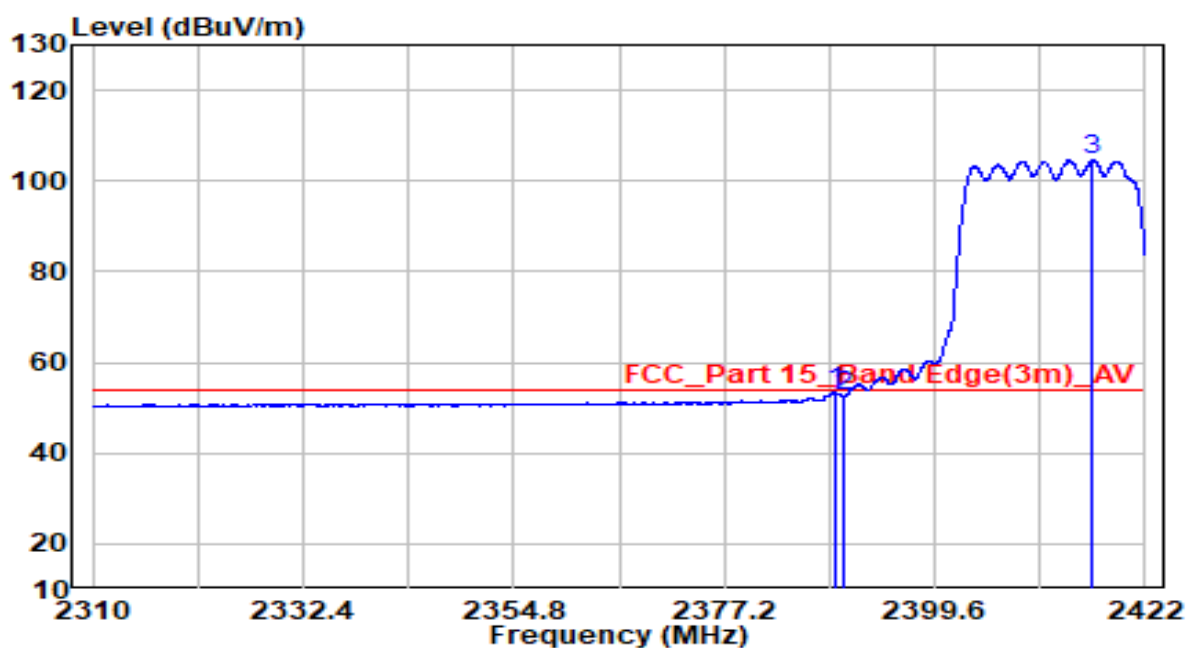


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.016	21.19	32.29	53.48	-0.52	54.00	Average
2	2390.000	20.33	32.30	52.63	-1.37	54.00	Average
3	* 2416.456	72.16	32.41	104.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

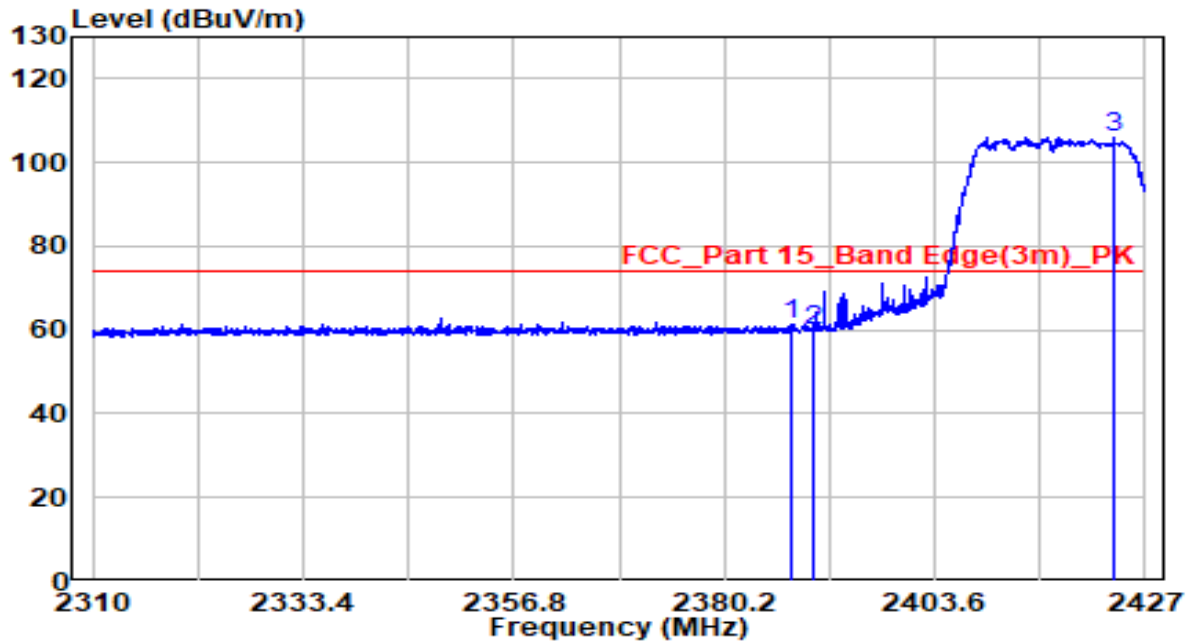


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.629	29.11	32.29	61.40	-12.60	74.00	Peak
2	2390.000	27.41	32.30	59.70	-14.30	74.00	Peak
3	* 2423.431	73.67	32.44	106.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

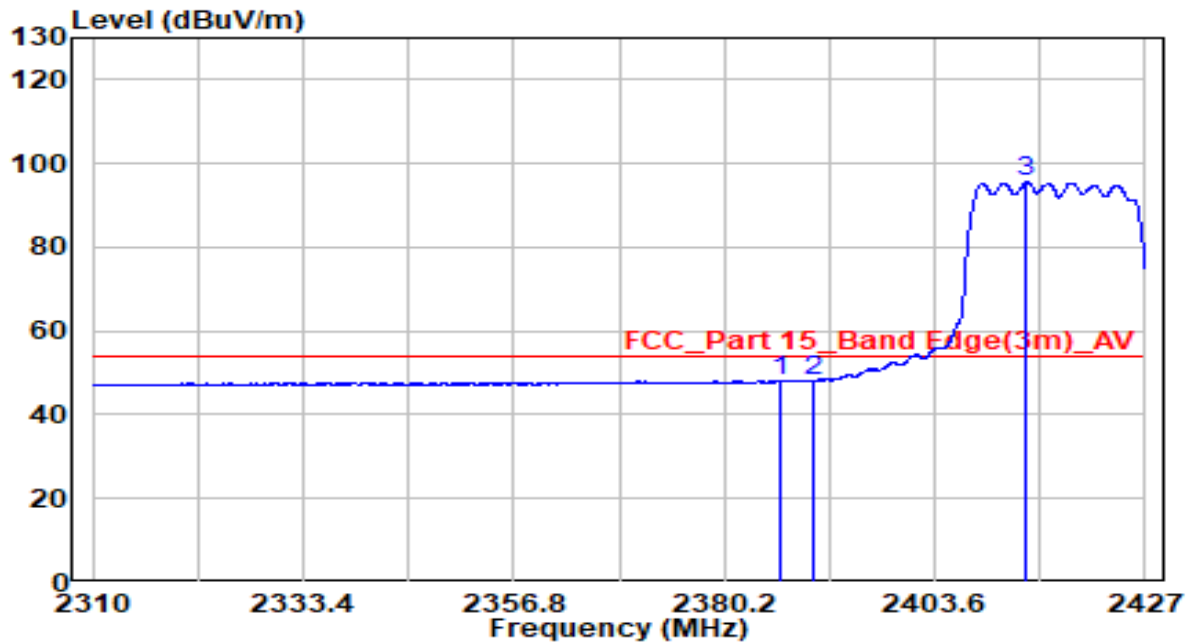


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.576	15.87	32.28	48.15	-5.85	54.00	Average
2	2390.000	15.66	32.30	47.96	-6.04	54.00	Average
3	*	63.10	32.40	95.50	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

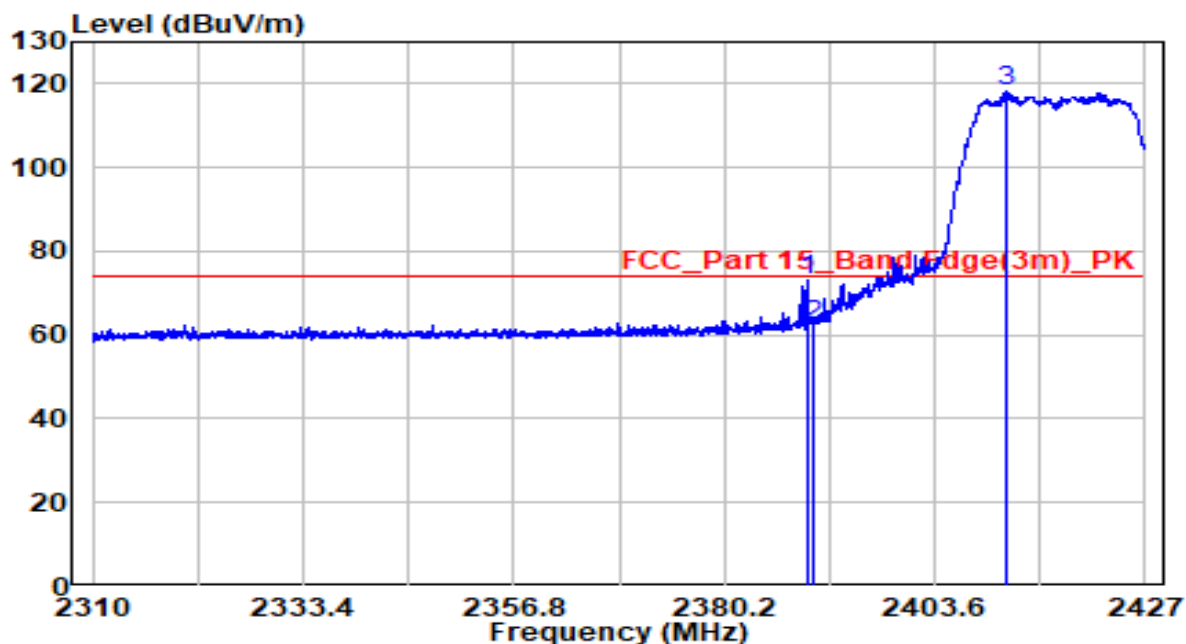


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.560	40.63	32.29	72.92	-1.08	74.00	Peak
2	2390.000	29.83	32.30	62.13	-11.87	74.00	Peak
3	* 2411.498	85.76	32.39	118.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

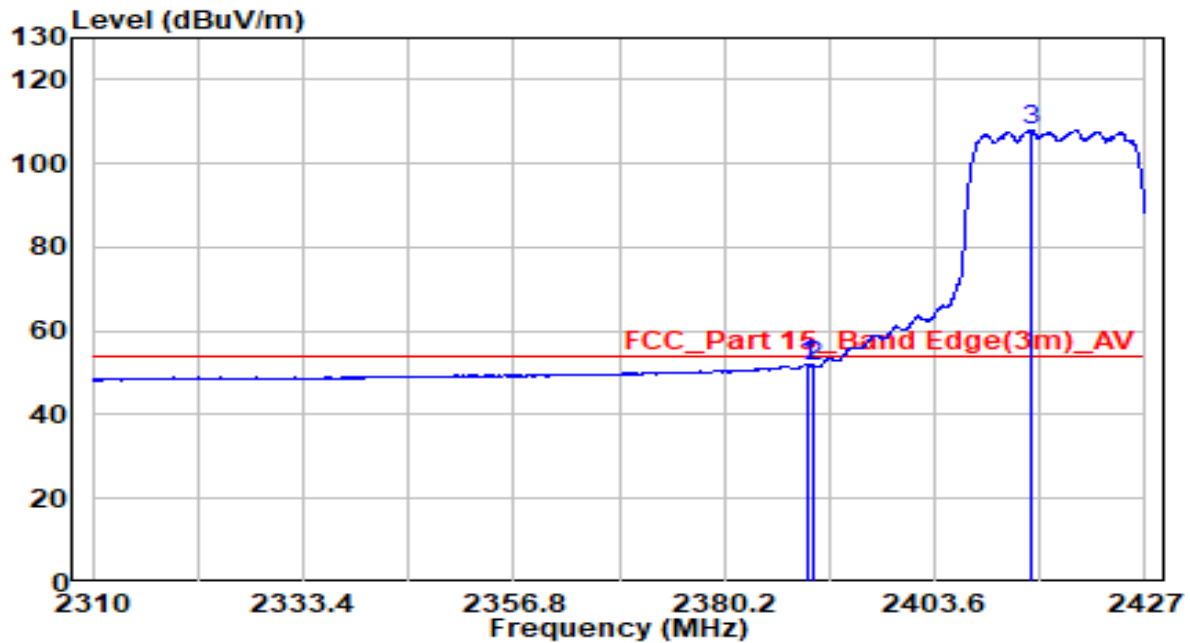


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.385	19.74	32.29	52.04	-1.96	54.00	Average
2	2390.000	19.32	32.30	51.62	-2.38	54.00	Average
3	* 2414.305	75.68	32.40	108.08	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

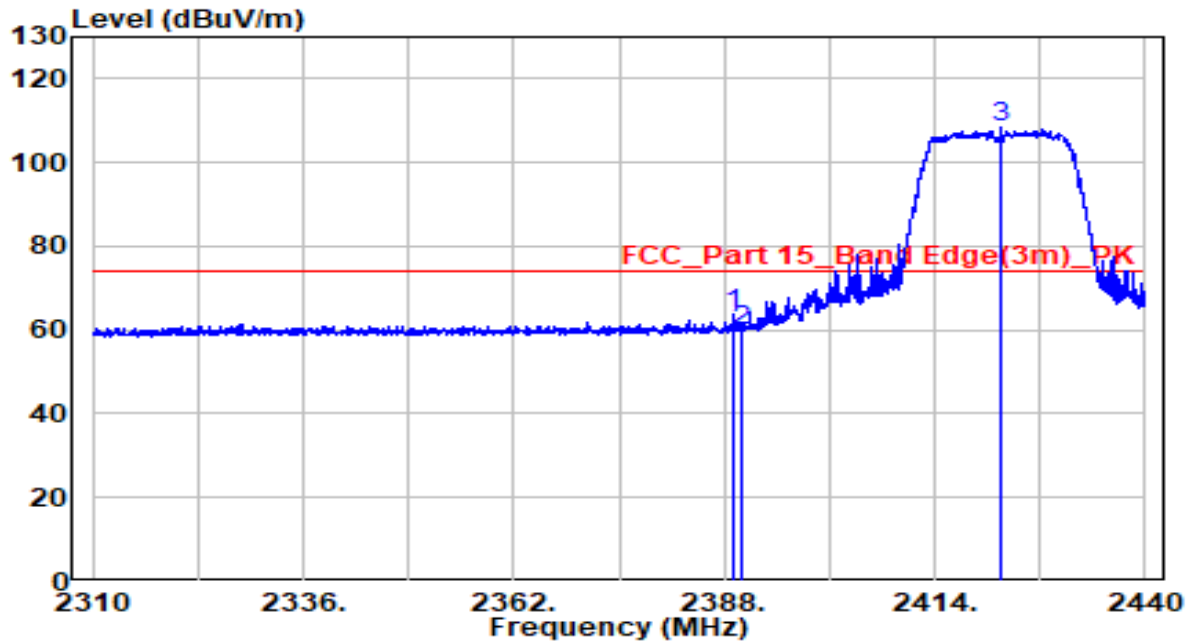


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.040	31.32	32.29	63.61	-10.39	74.00	Peak
2	2390.000	27.54	32.30	59.84	-14.16	74.00	Peak
3	* 2422.190	75.98	32.44	108.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

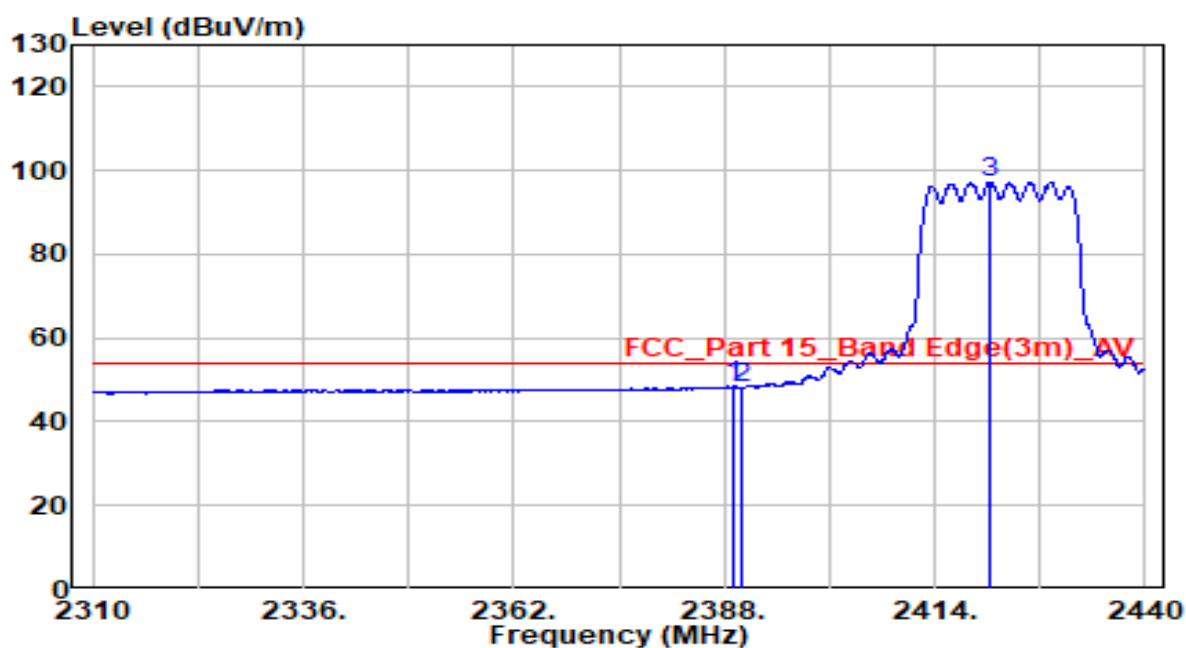


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.300	16.11	32.29	48.40	-5.60	54.00	Average
2	2390.000	15.90	32.30	48.20	-5.80	54.00	Average
3	* 2420.825	64.84	32.43	97.27	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

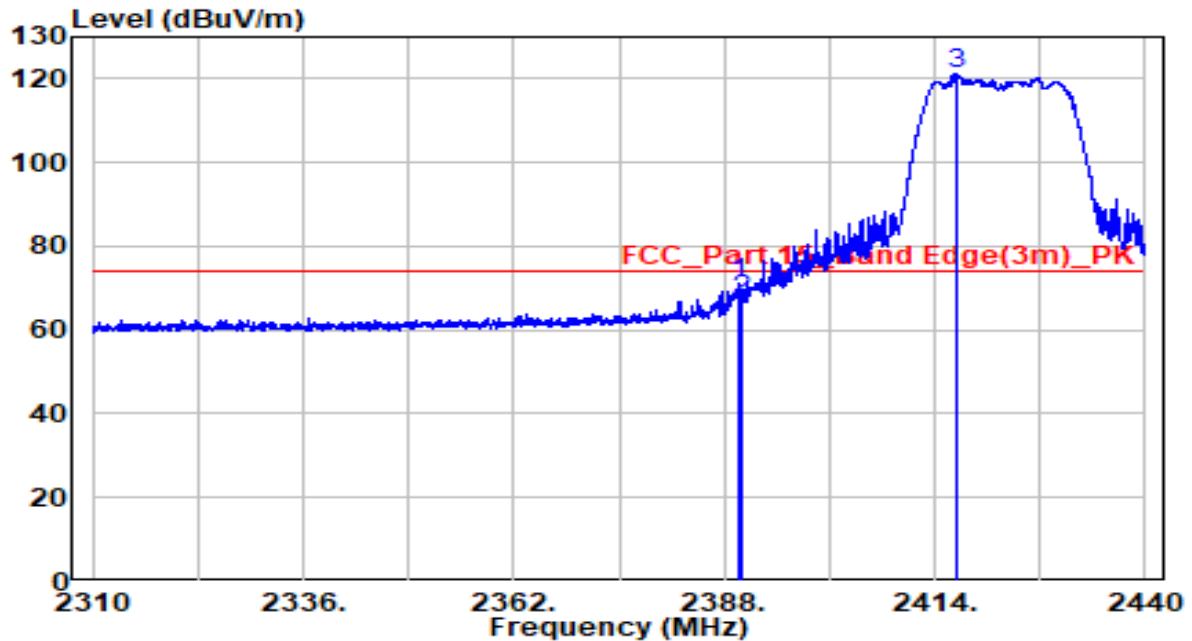


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.755	38.62	32.29	70.92	-3.08	74.00	Peak
2	2390.000	34.82	32.30	67.12	-6.88	74.00	Peak
3	* 2416.600	88.66	32.41	121.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

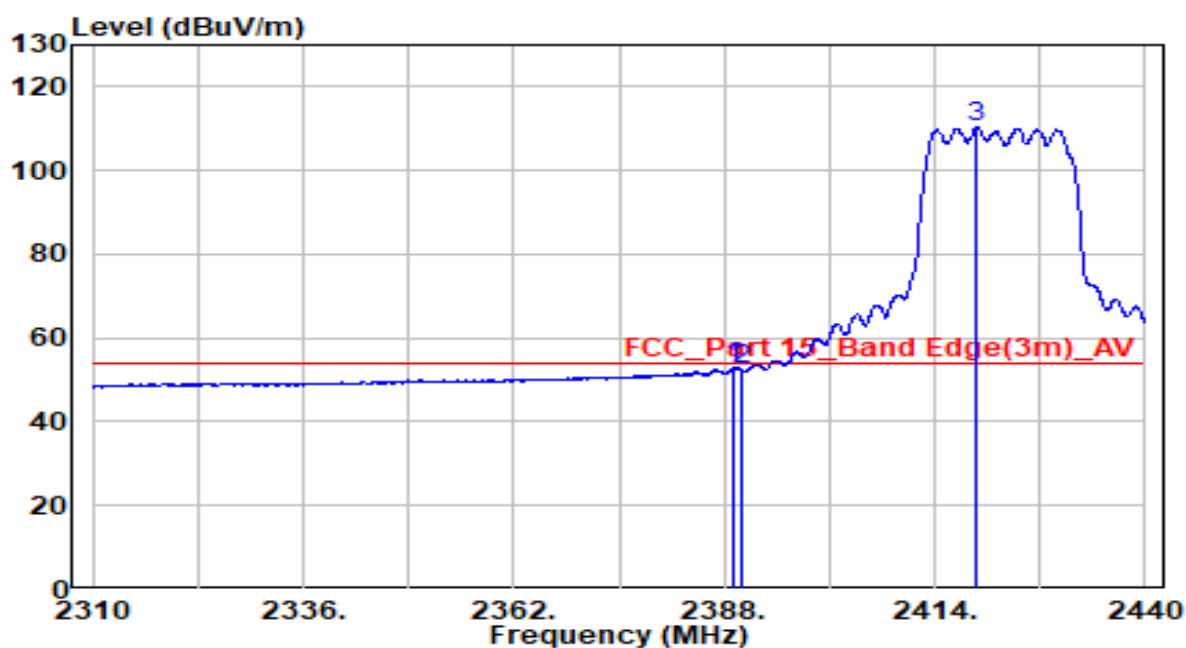


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.235	20.60	32.29	52.89	-1.11	54.00	Average
2	2390.000	20.21	32.30	52.50	-1.50	54.00	Average
3	* 2419.265	77.99	32.42	110.41	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

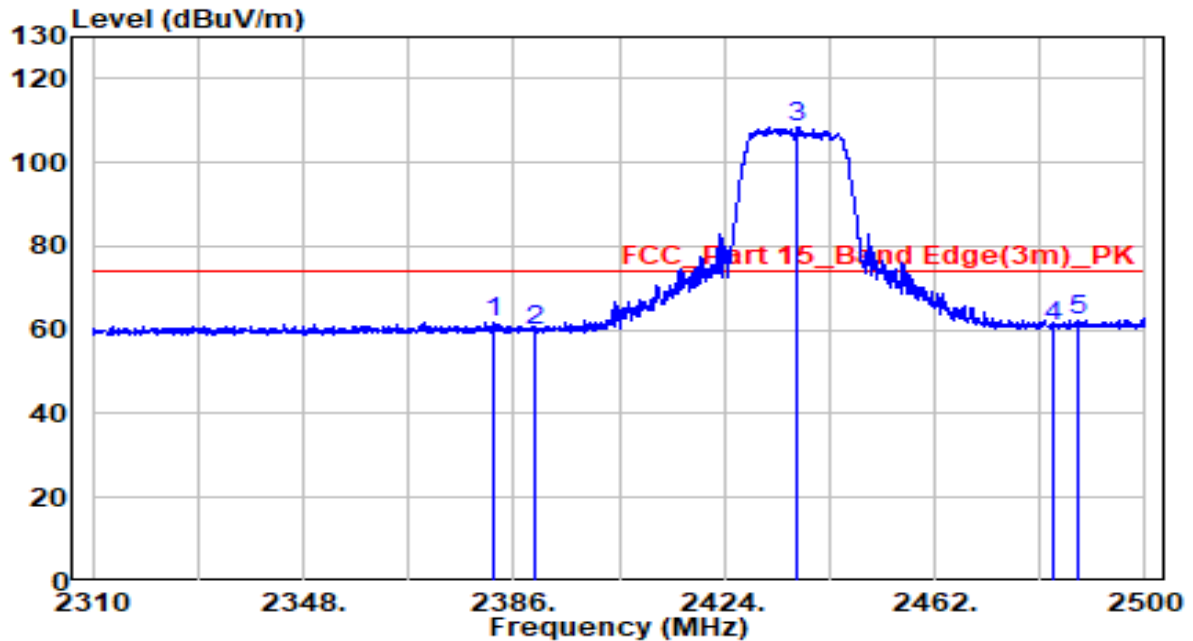


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2382.200	29.36	32.26	61.62	-12.38	74.00	Peak
2	2390.000	27.79	32.30	60.09	-13.91	74.00	Peak
3	* 2437.300	75.95	32.50	108.45	N/A	N/A	Peak
4	2483.500	28.31	32.71	61.02	-12.98	74.00	Peak
5	2487.840	29.44	32.73	62.17	-11.83	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

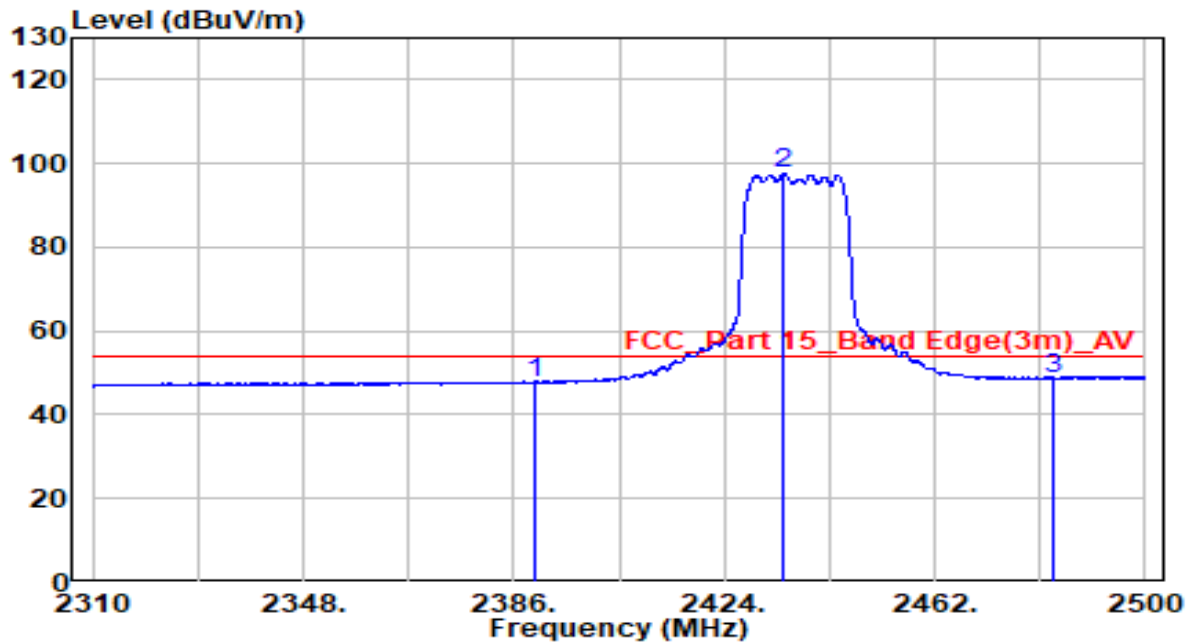


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.40	32.30	47.70	-6.30	54.00	Average
2	* 2434.830	65.03	32.49	97.53	N/A	N/A	Average
3	2483.500	16.04	32.71	48.75	-5.25	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

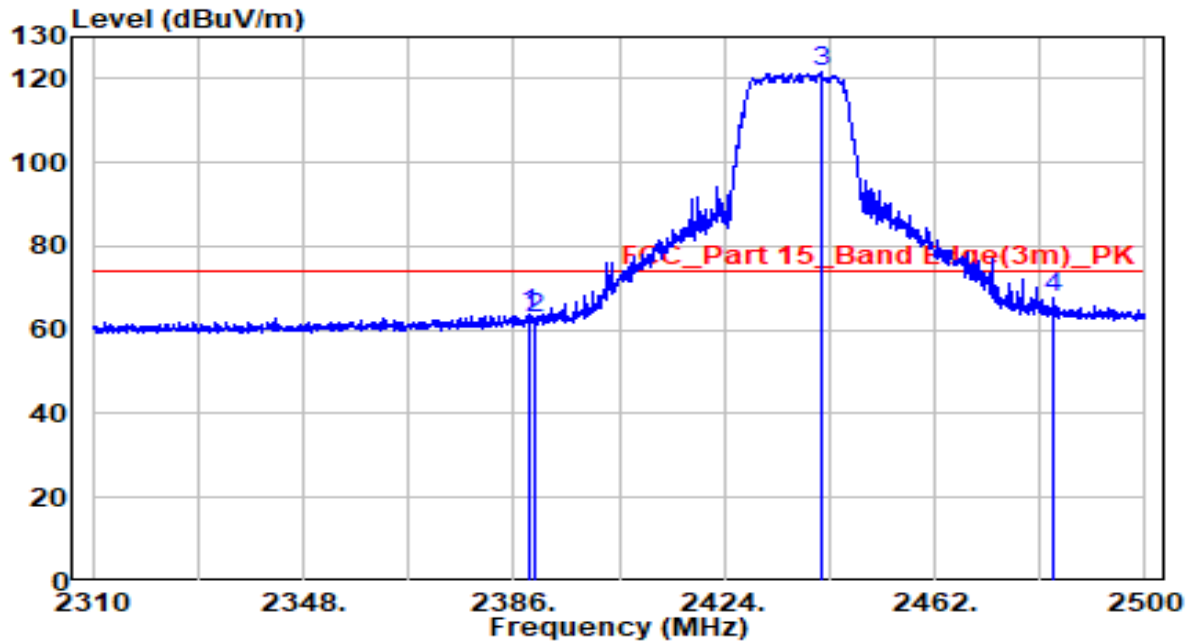


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.850	31.56	32.29	63.85	-10.15	74.00	Peak
2	2390.000	30.25	32.30	62.55	-11.45	74.00	Peak
3	* 2441.480	89.20	32.52	121.72	N/A	N/A	Peak
4	2483.500	34.95	32.71	67.66	-6.34	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

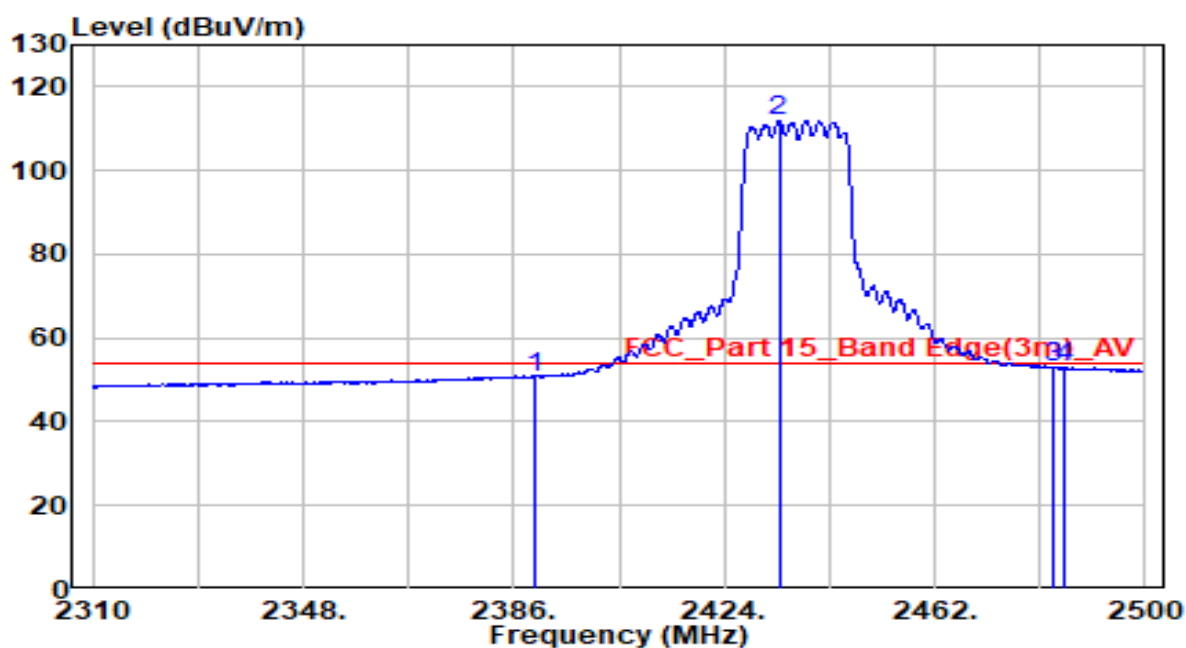


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.47	32.30	50.77	-3.23	54.00	Average
2	* 2433.880	79.27	32.49	111.76	N/A	N/A	Average
3	2483.500	20.12	32.71	52.83	-1.17	54.00	Average
4	2485.560	20.30	32.72	53.02	-0.98	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

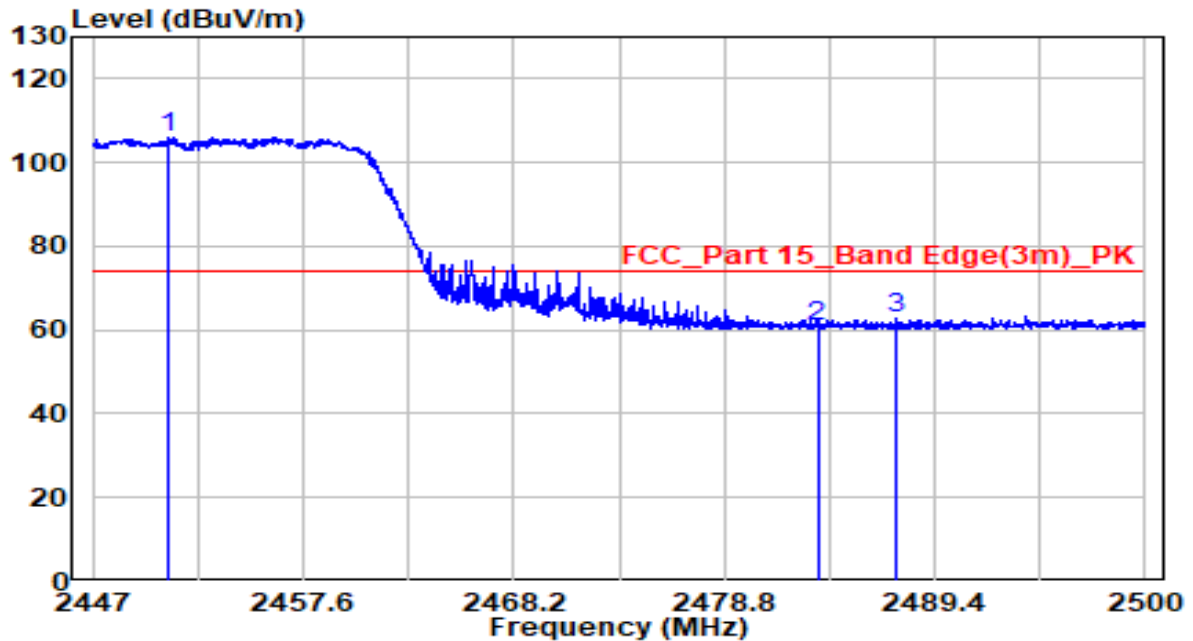


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.763	73.58	32.56	106.14	N/A	N/A	Peak
2		2483.500	28.10	32.71	60.81	-13.19	74.00	Peak
3		2487.492	29.84	32.72	62.57	-11.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

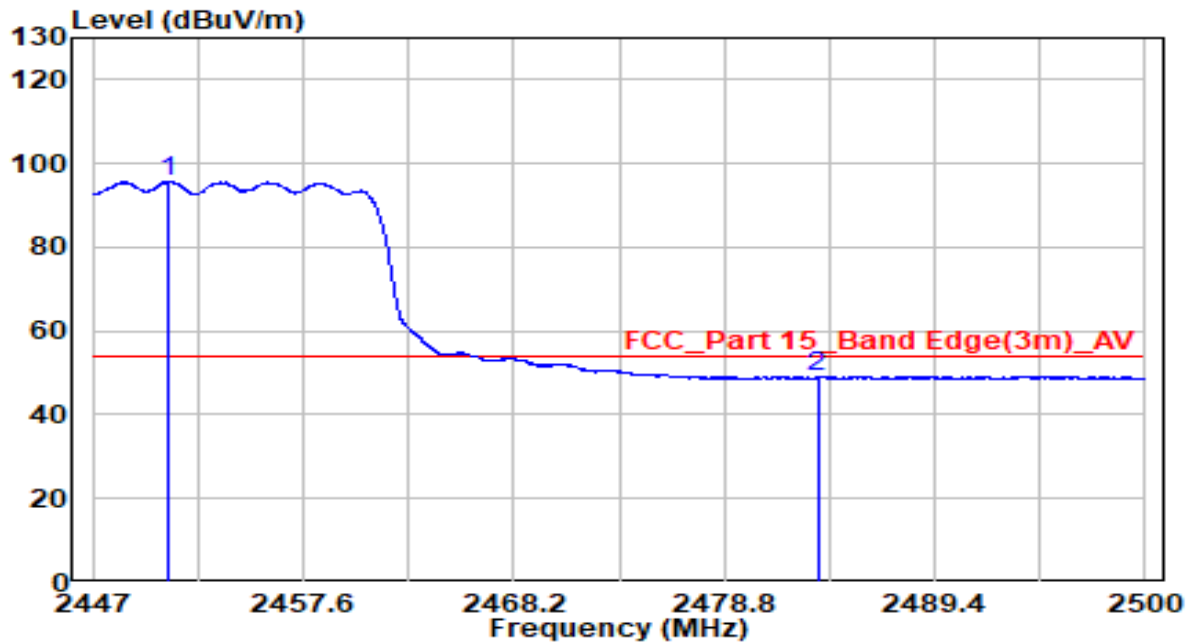


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.790	63.13	32.56	95.69	N/A	N/A	Average
2		2483.500	16.11	32.71	48.82	-5.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

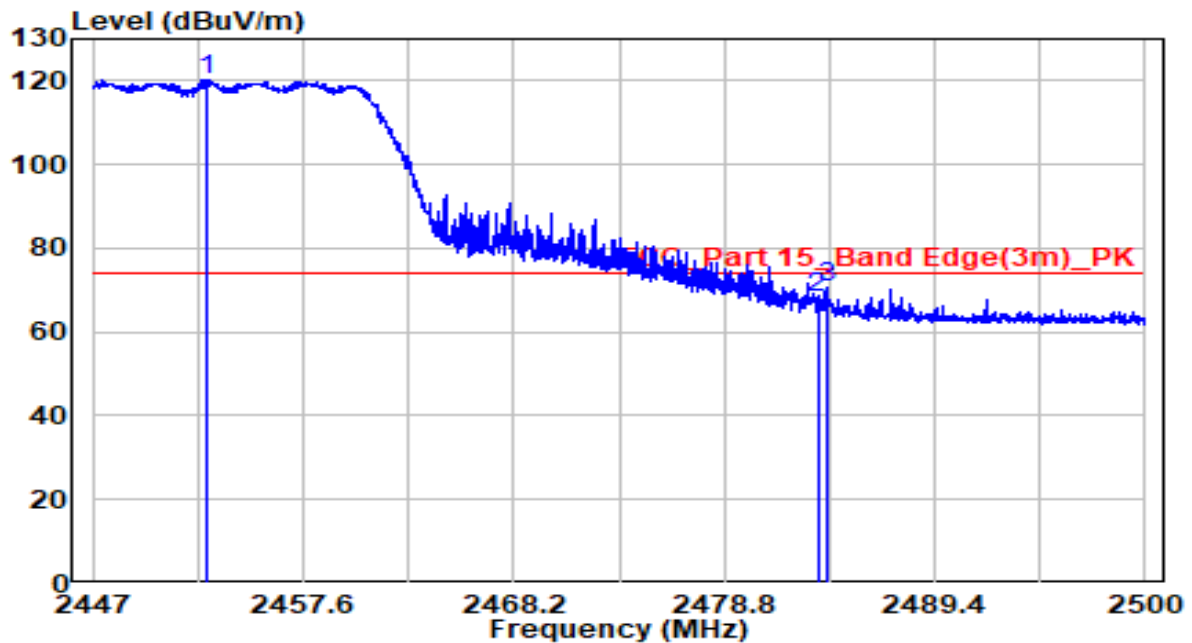


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2452.724	87.73	32.57	120.30	N/A	N/A	Peak
2		2483.500	35.47	32.71	68.18	-5.82	74.00	Peak
3		2483.968	37.83	32.71	70.54	-3.46	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

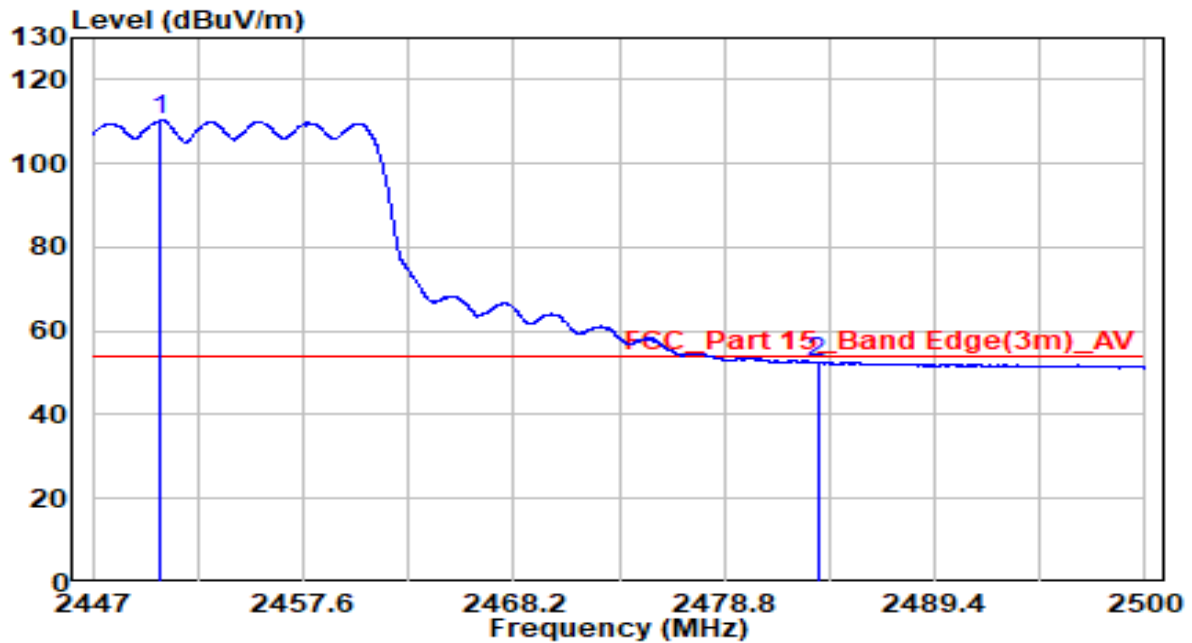


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.445	77.71	32.56	110.27	N/A	N/A	Average
2		2483.500	19.75	32.71	52.45	-1.55	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

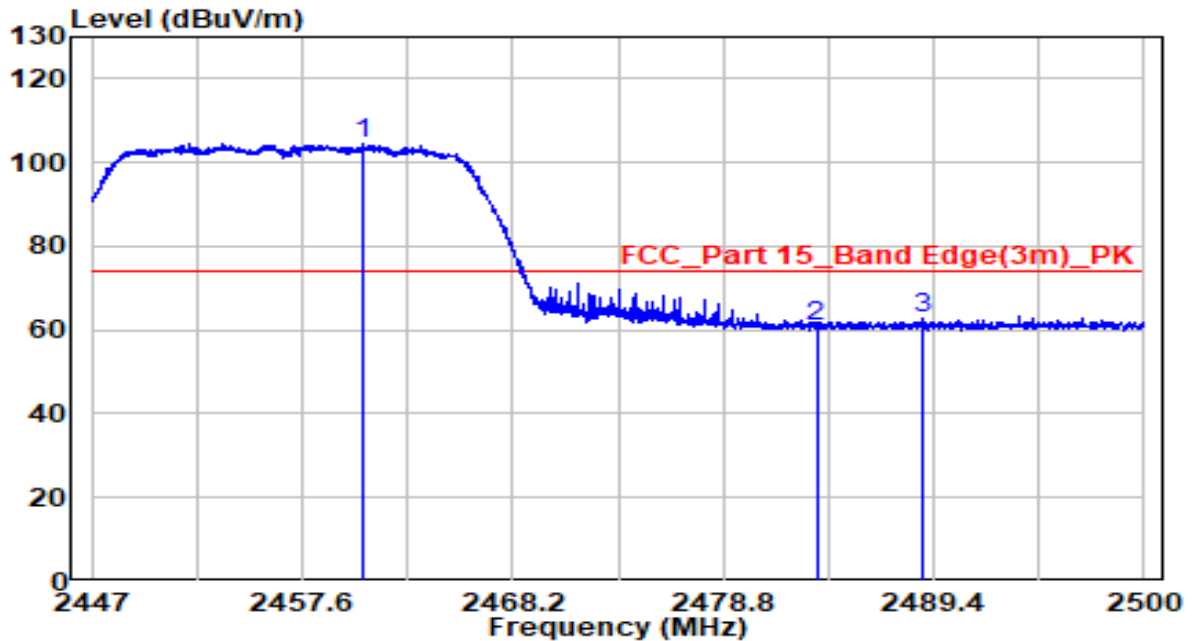


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.647	72.01	32.61	104.62	N/A	N/A	Peak
2		2483.500	28.13	32.71	60.84	-13.16	74.00	Peak
3		2488.817	29.86	32.73	62.59	-11.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

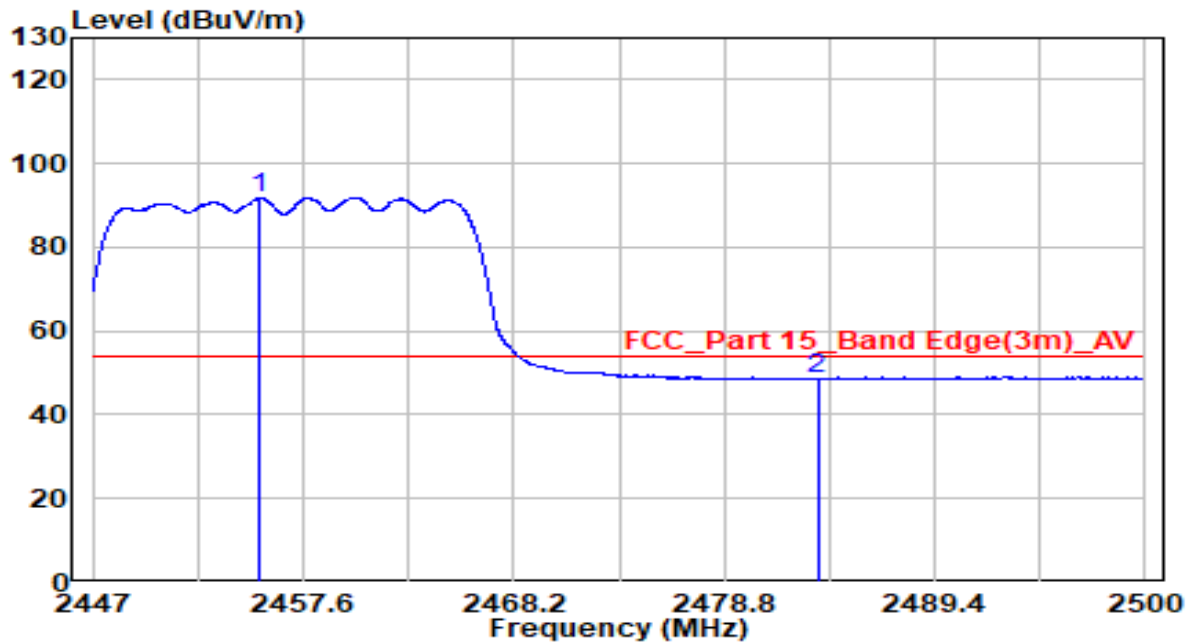


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2455.427	59.26	32.58	91.84	N/A	N/A	Average
2		2483.500	15.86	32.71	48.57	-5.43	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

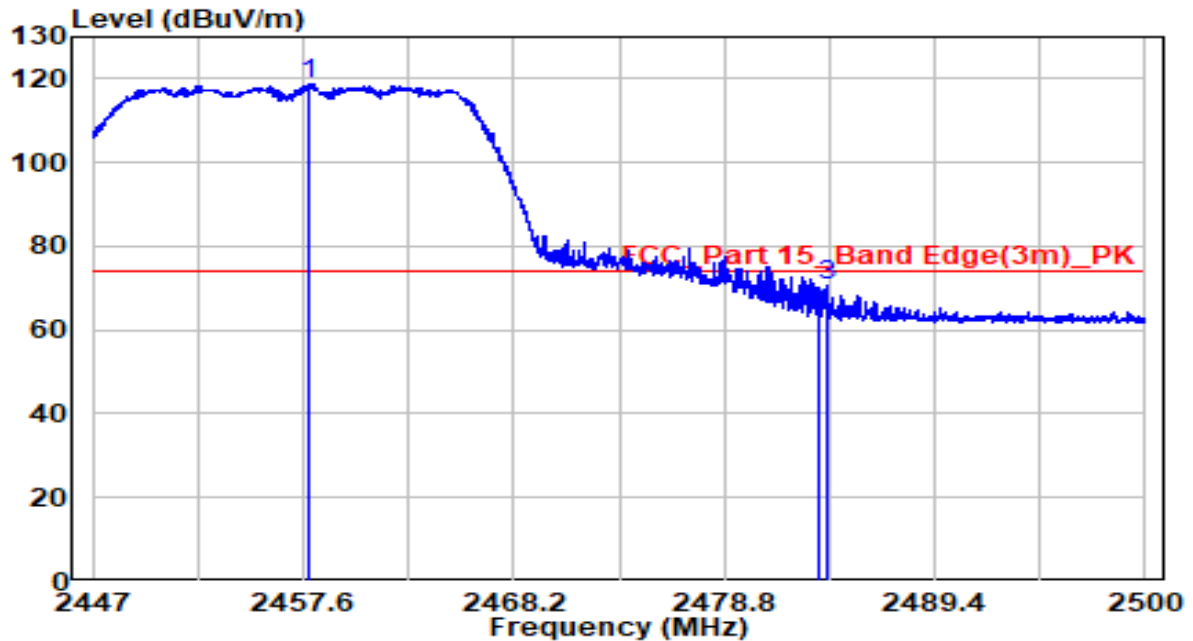


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2457.892	86.23	32.59	118.83	N/A	N/A	Peak
2		2483.500	30.92	32.71	63.63	-10.37	74.00	Peak
3		2483.941	37.81	32.71	70.52	-3.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

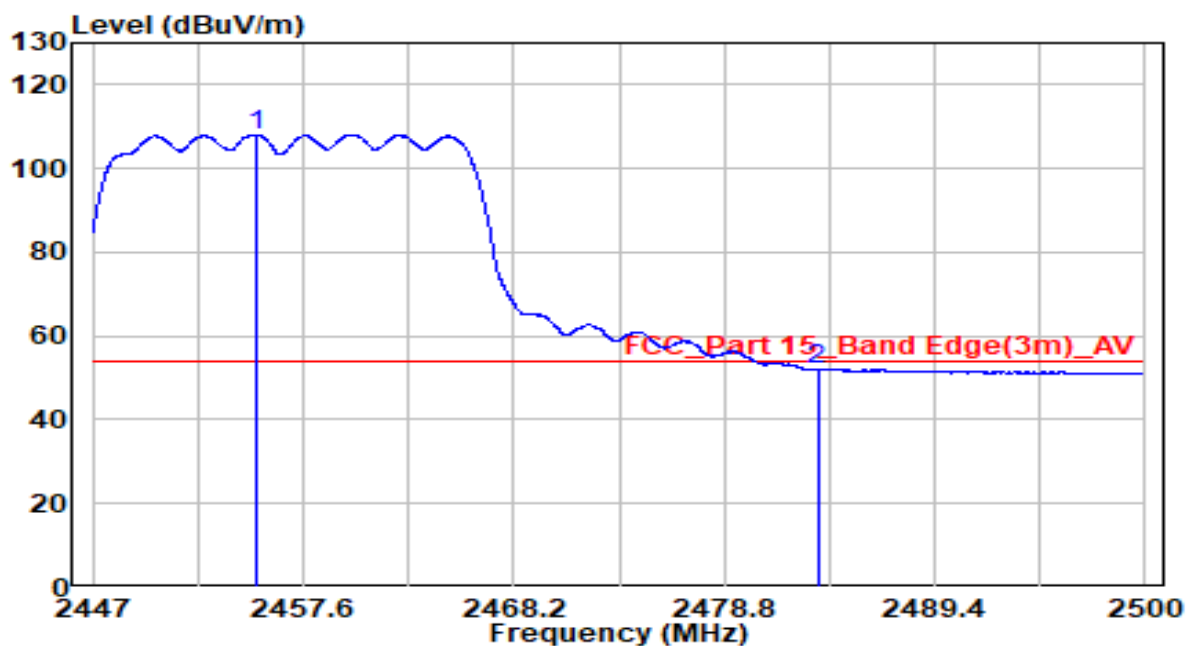


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2455.188	75.57	32.58	108.16	N/A	N/A	Average
2		2483.500	19.26	32.71	51.97	-2.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

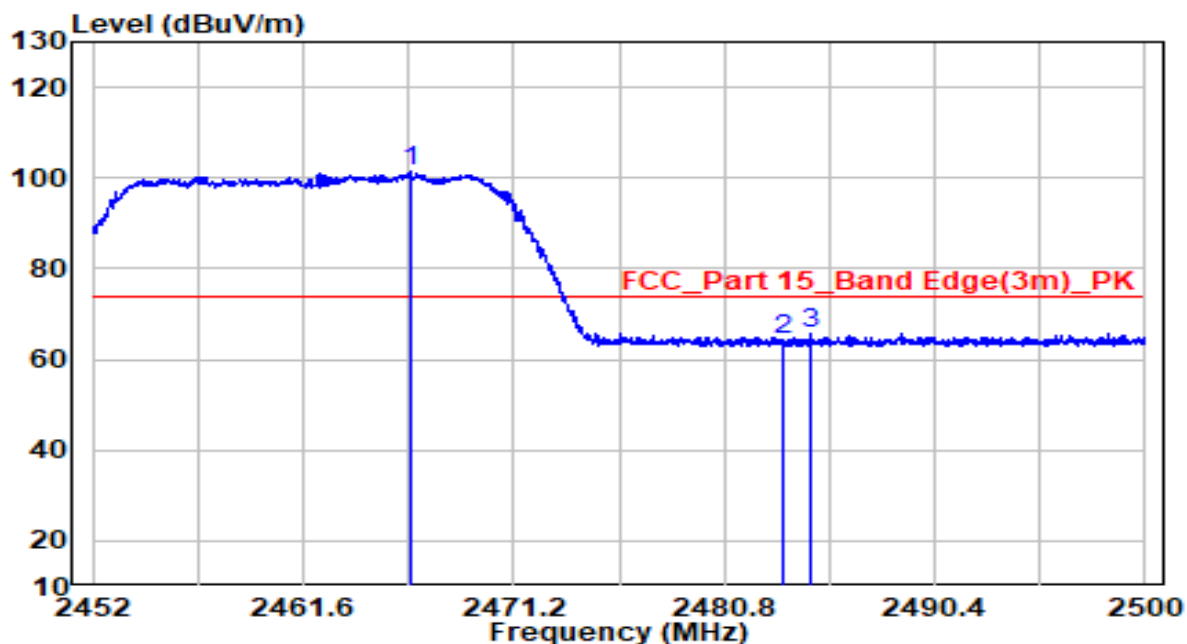


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2466.544	68.64	32.63	101.27	N/A	N/A	Peak
2		2483.500	31.53	32.71	64.24	-9.76	74.00	Peak
3		2484.760	33.18	32.71	65.89	-8.11	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

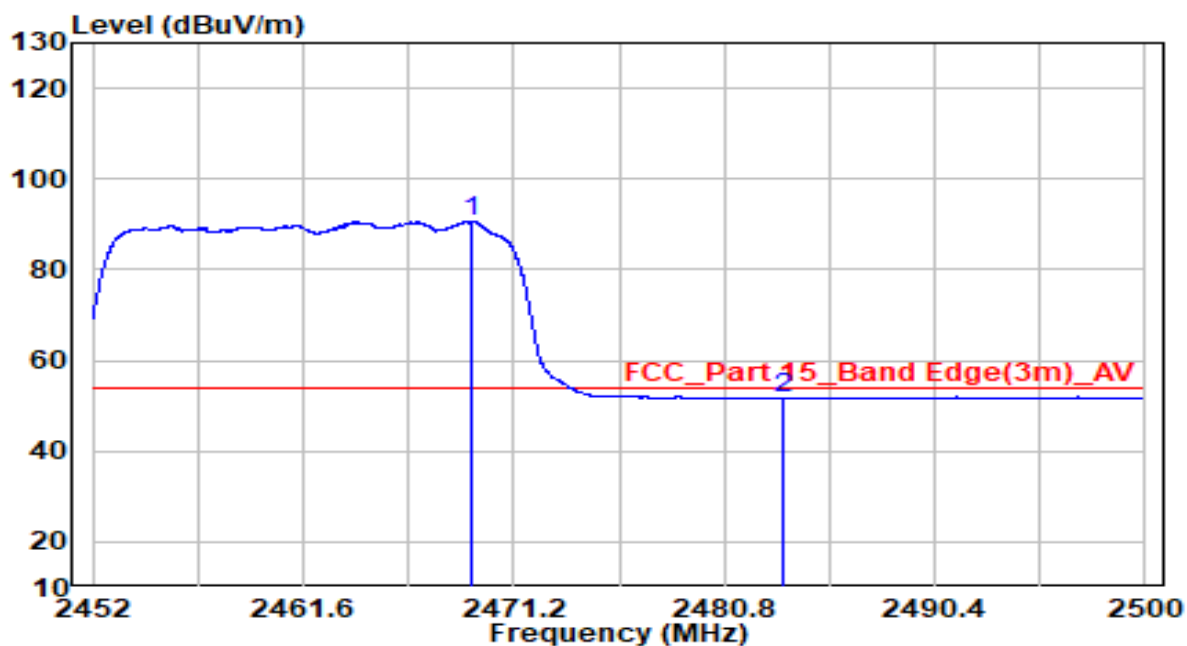


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2469.328	58.00	32.65	90.64	N/A	N/A	Average
2		2483.500	18.79	32.71	51.49	-2.51	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

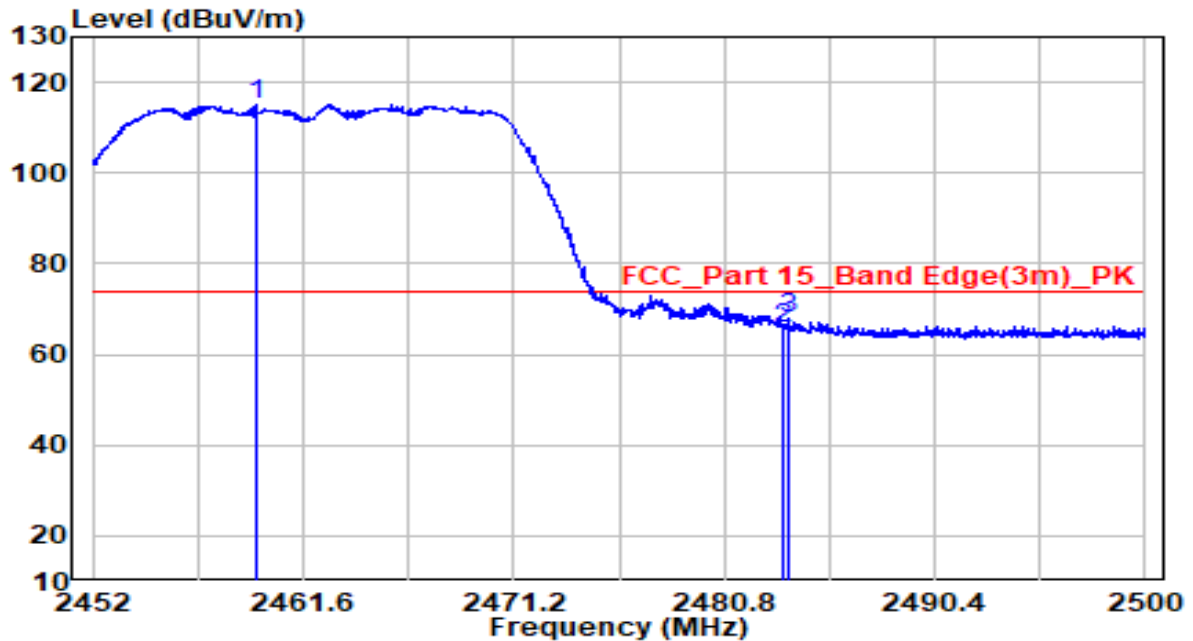


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2459.440	82.46	32.60	115.06	N/A	N/A	Peak
2		2483.500	33.17	32.71	65.88	-8.12	74.00	Peak
3		2483.704	35.13	32.71	67.84	-6.16	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

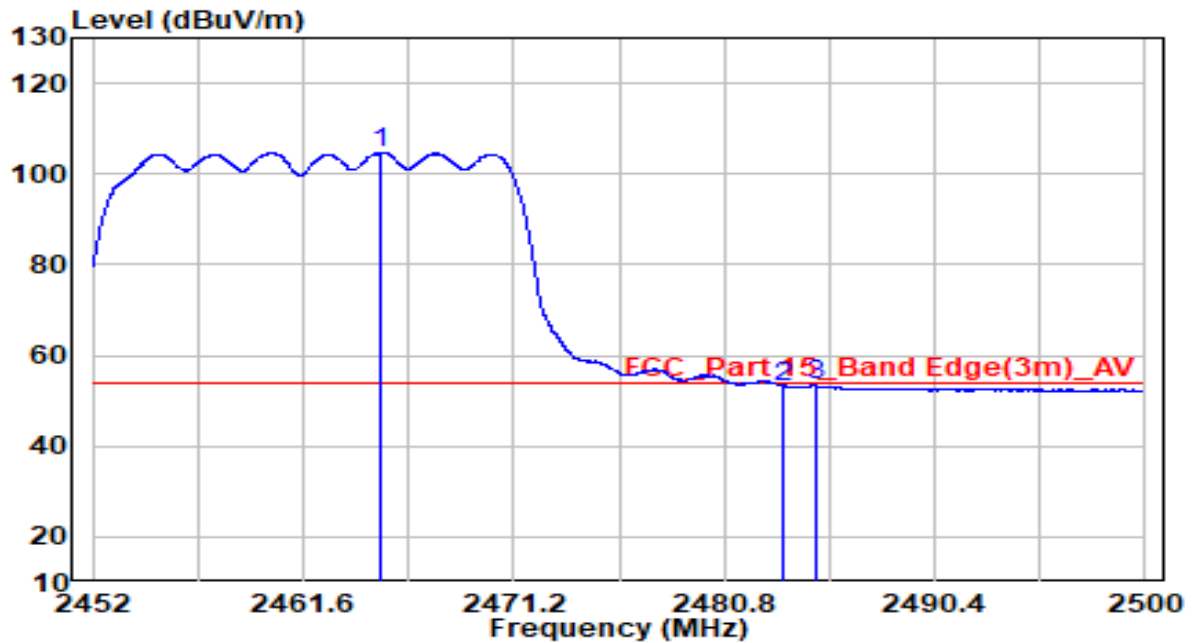


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2465.176	72.07	32.63	104.70	N/A	N/A	Average
2		2483.500	20.41	32.71	53.12	-0.88	54.00	Average
3		2485.000	20.77	32.71	53.48	-0.52	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

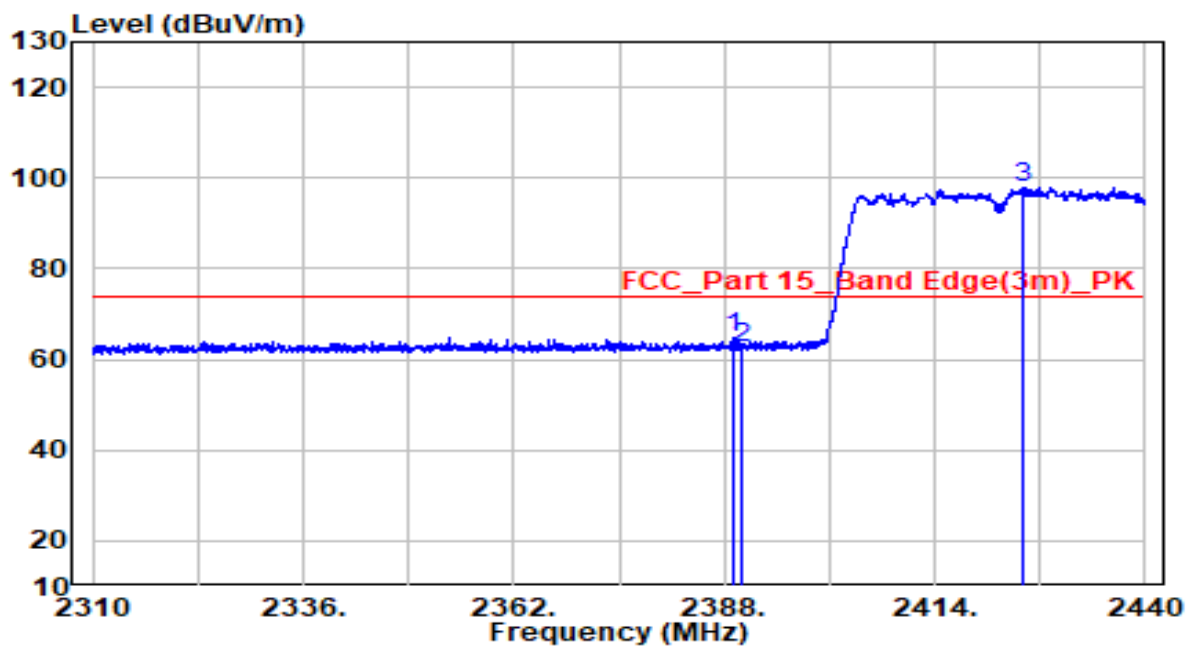


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.235	32.41	32.29	64.71	-9.29	74.00	Peak
2	2390.000	30.32	32.30	62.62	-11.38	74.00	Peak
3	* 2424.920	65.38	32.45	97.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

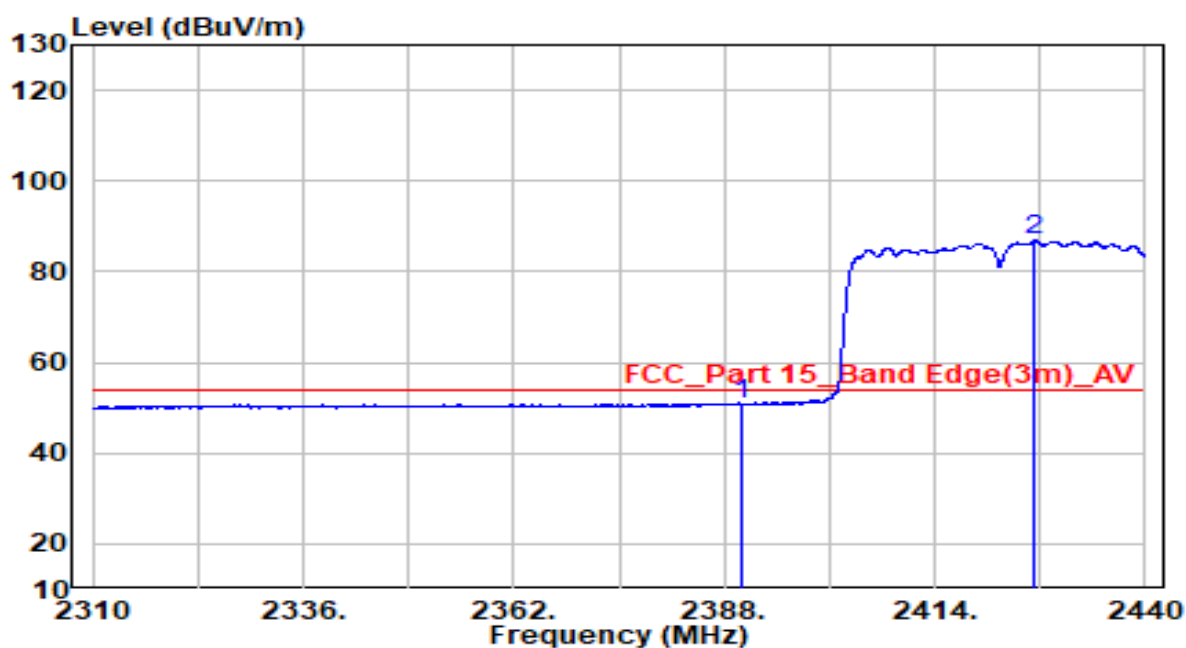


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.51	32.30	50.81	-3.19	54.00	Average
2	* 2426.415	54.52	32.46	86.97	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

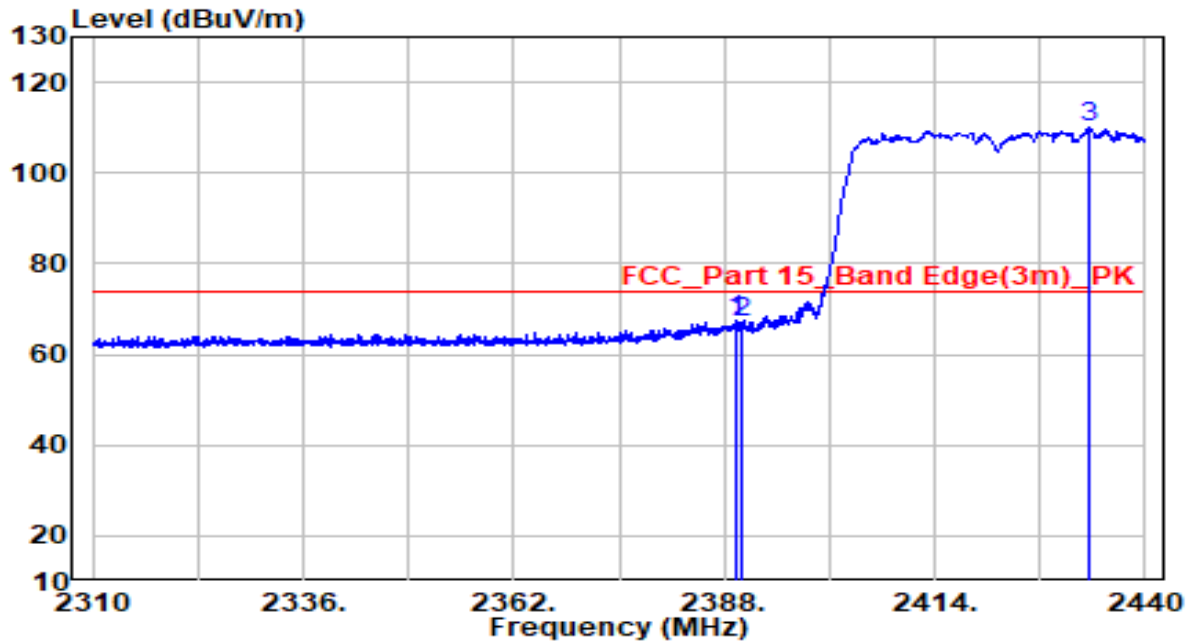


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.430	35.21	32.29	67.50	-6.50	74.00	Peak
2	2390.000	34.63	32.30	66.93	-7.07	74.00	Peak
3	* 2433.045	77.38	32.49	109.87	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

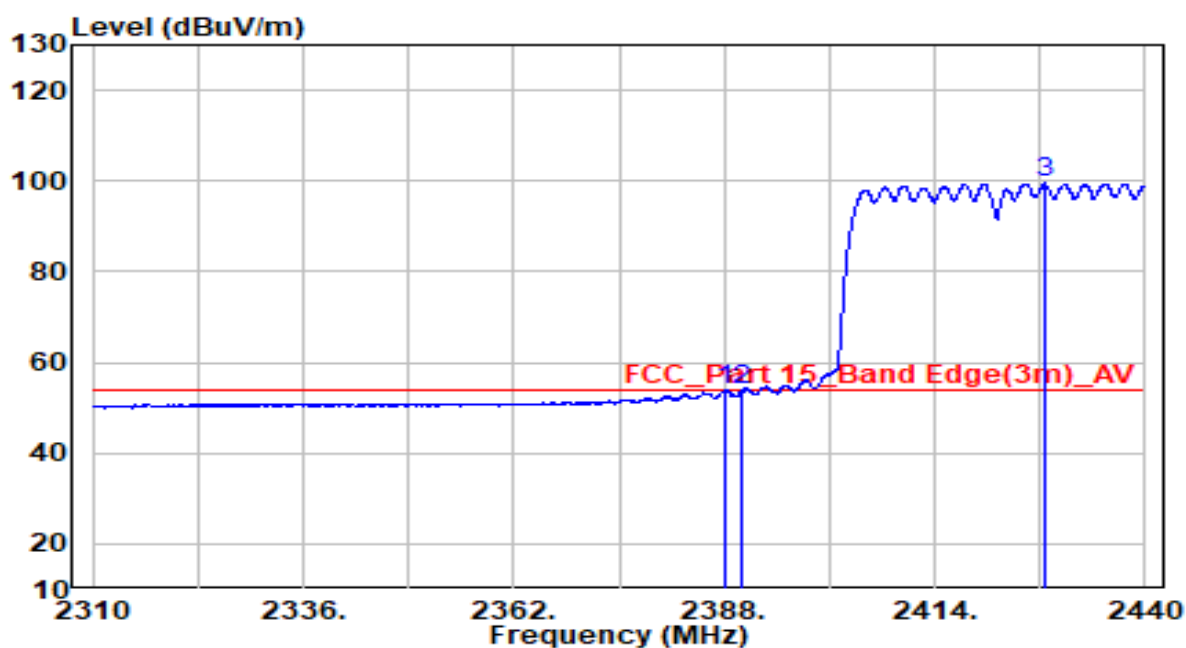


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.260	21.66	32.29	53.95	-0.05	54.00	Average
2	2390.000	21.43	32.30	53.72	-0.28	54.00	Average
3	* 2427.520	67.01	32.46	99.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode)	Test Voltage	120V/60Hz

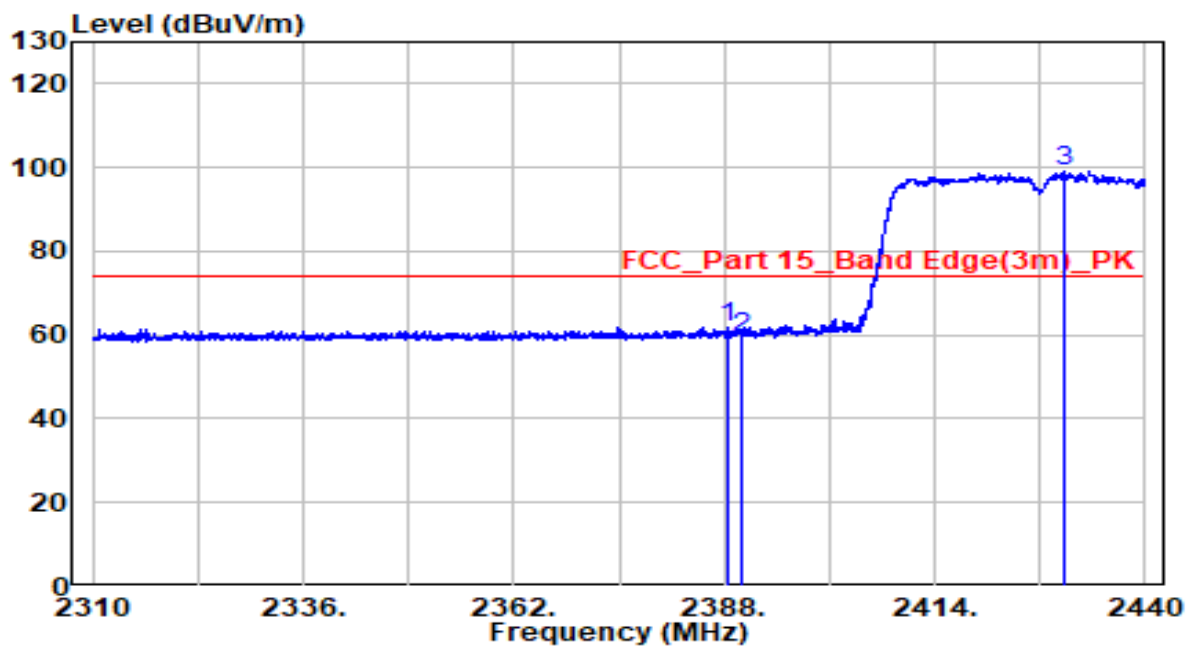


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.325	29.72	32.29	62.01	-11.99	74.00	Peak
2	2390.000	27.13	32.30	59.43	-14.57	74.00	Peak
3	* 2429.990	66.67	32.47	99.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode)	Test Voltage	120V/60Hz

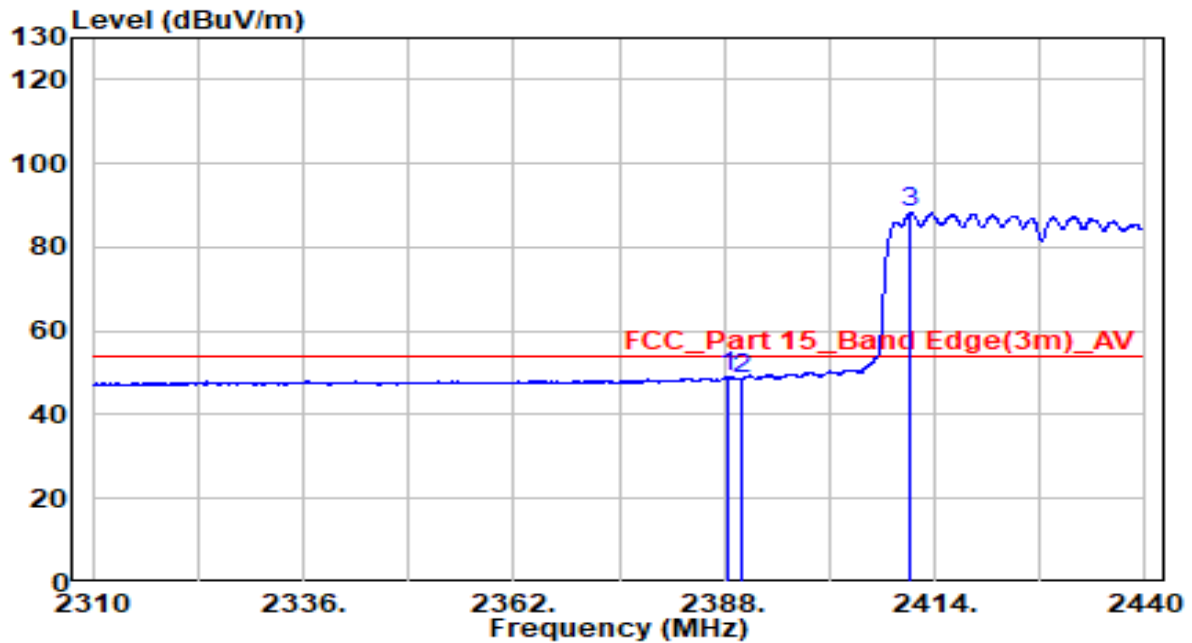


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.390	16.74	32.29	49.03	-4.97	54.00	Average
2	2390.000	16.43	32.30	48.73	-5.27	54.00	Average
3	* 2411.075	55.77	32.39	88.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode)	Test Voltage	120V/60Hz

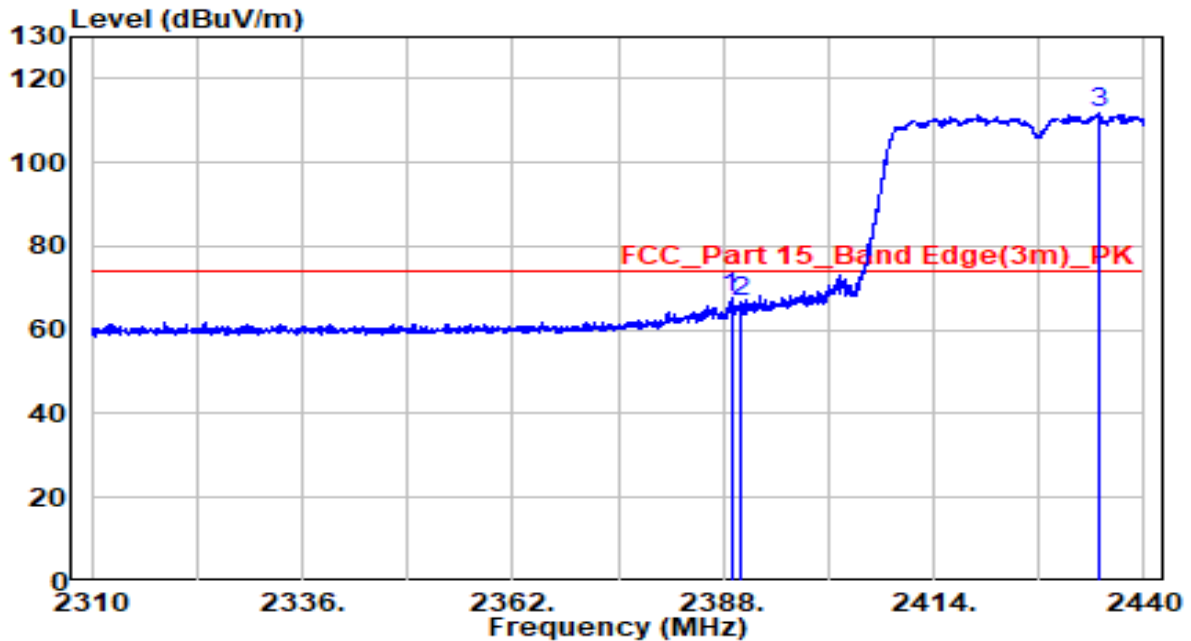


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.975	35.65	32.29	67.94	-6.06	74.00	Peak
2	2390.000	34.60	32.30	66.90	-7.10	74.00	Peak
3	* 2434.280	79.46	32.49	111.95	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode)	Test Voltage	120V/60Hz

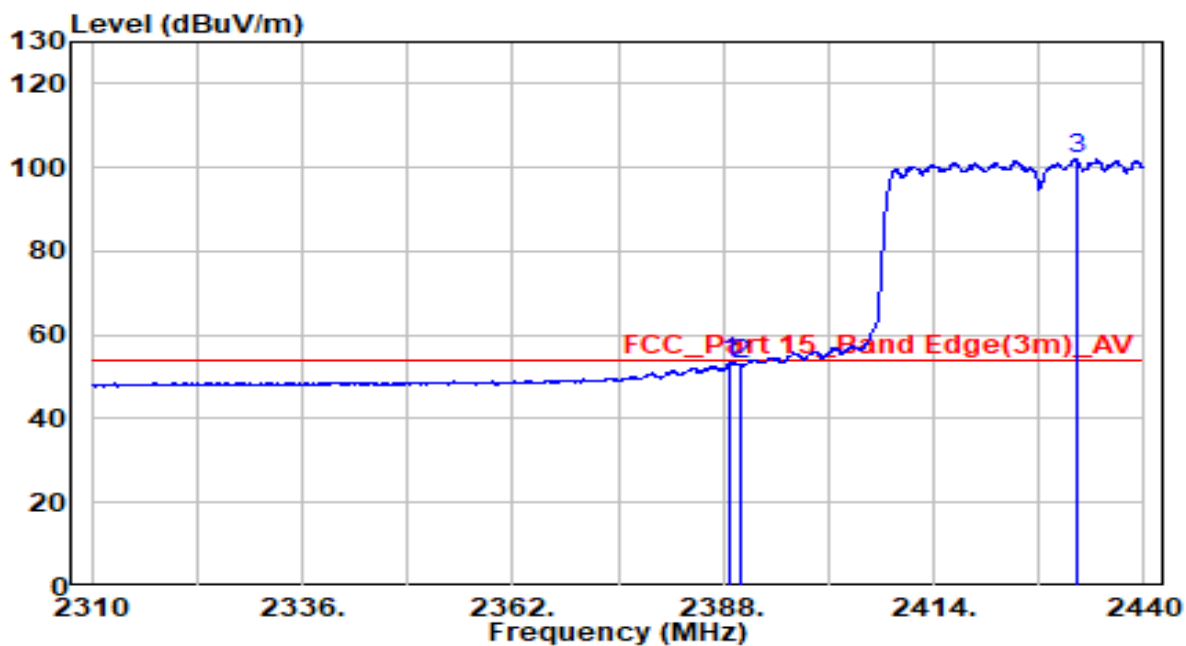


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.910	21.07	32.29	53.36	-0.64	54.00	Average
2	2390.000	20.51	32.30	52.81	-1.19	54.00	Average
3	* 2431.615	69.34	32.48	101.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

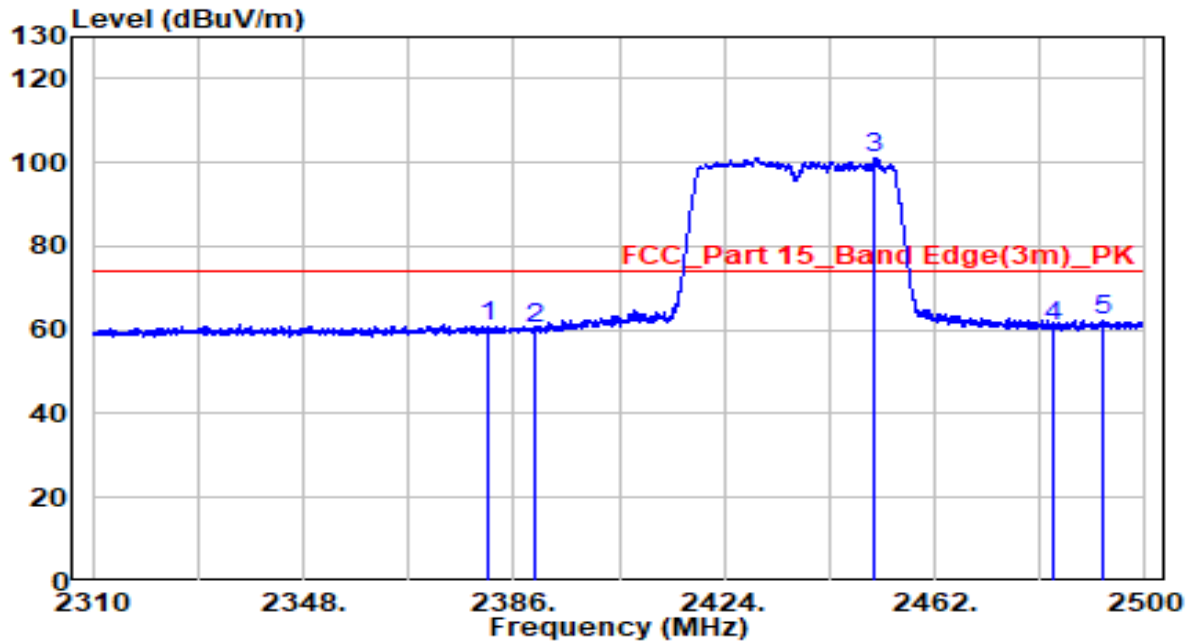


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2381.440	28.77	32.26	61.03	-12.97	74.00	Peak
2	2390.000	28.19	32.30	60.49	-13.51	74.00	Peak
3	* 2451.170	68.40	32.57	100.97	N/A	N/A	Peak
4	2483.500	28.24	32.71	60.95	-13.05	74.00	Peak
5	2492.495	29.46	32.75	62.21	-11.79	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

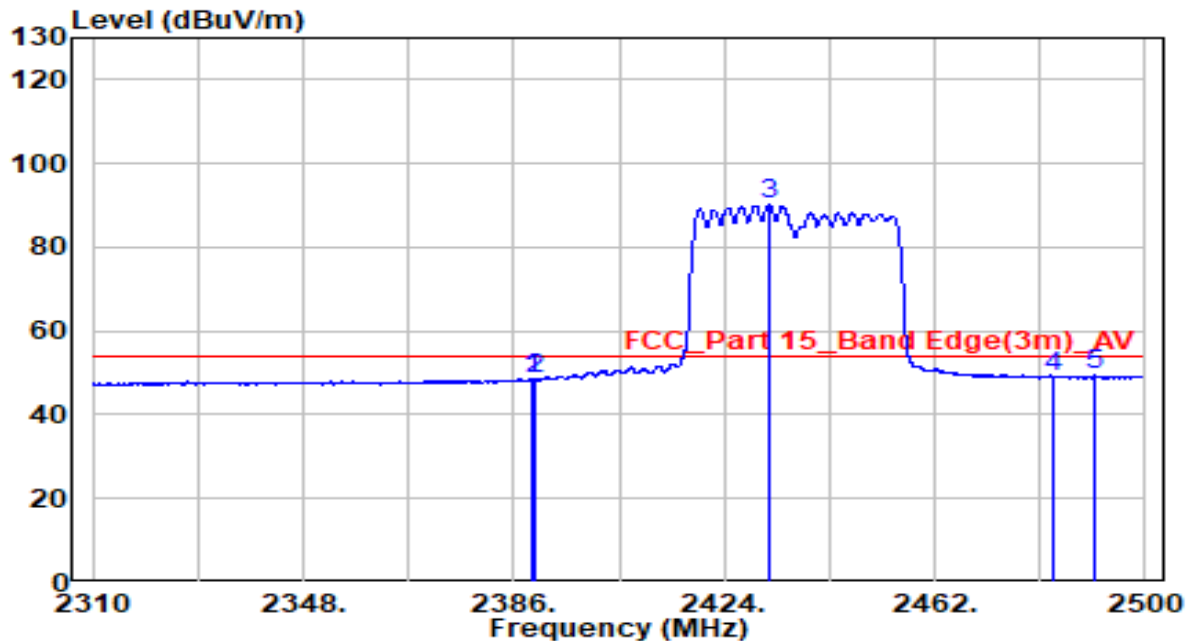


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.515	16.38	32.29	48.67	-5.33	54.00	Average
2	2390.000	16.08	32.30	48.38	-5.62	54.00	Average
3	* 2432.170	57.80	32.48	90.28	N/A	N/A	Average
4	2483.500	16.27	32.71	48.98	-5.02	54.00	Average
5	2490.975	16.60	32.74	49.34	-4.66	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

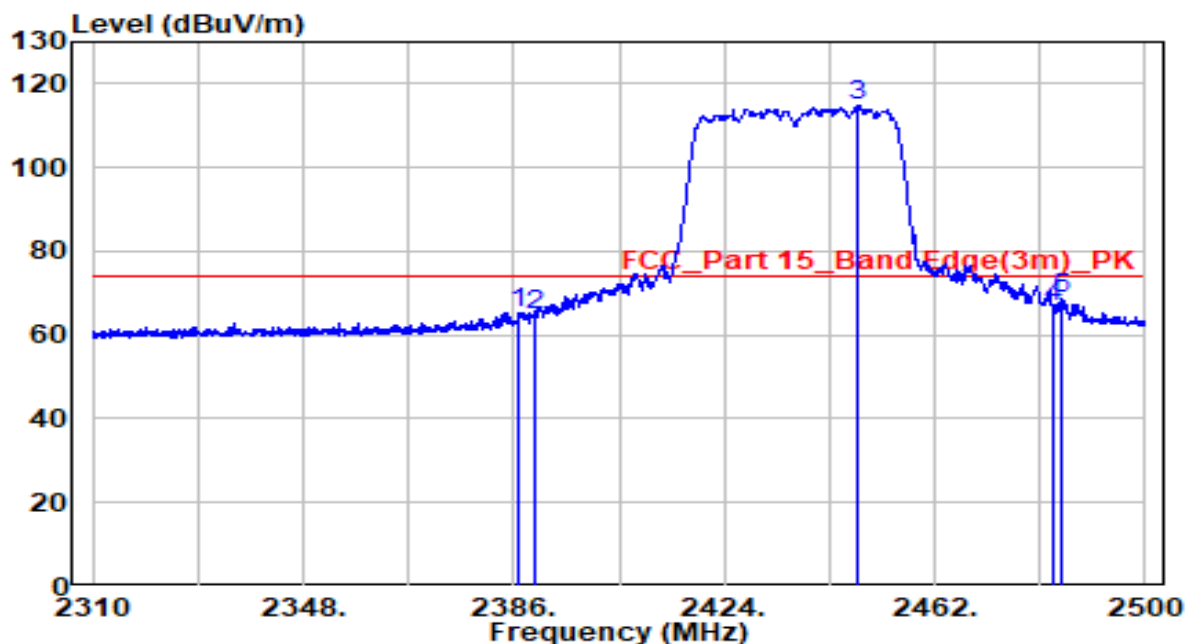


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.760	33.20	32.28	65.48	-8.52	74.00	Peak
2	2390.000	32.53	32.30	64.83	-9.17	74.00	Peak
3	* 2448.225	82.44	32.55	114.99	N/A	N/A	Peak
4	2483.500	34.09	32.71	66.80	-7.20	74.00	Peak
5	2484.800	35.98	32.71	68.69	-5.31	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

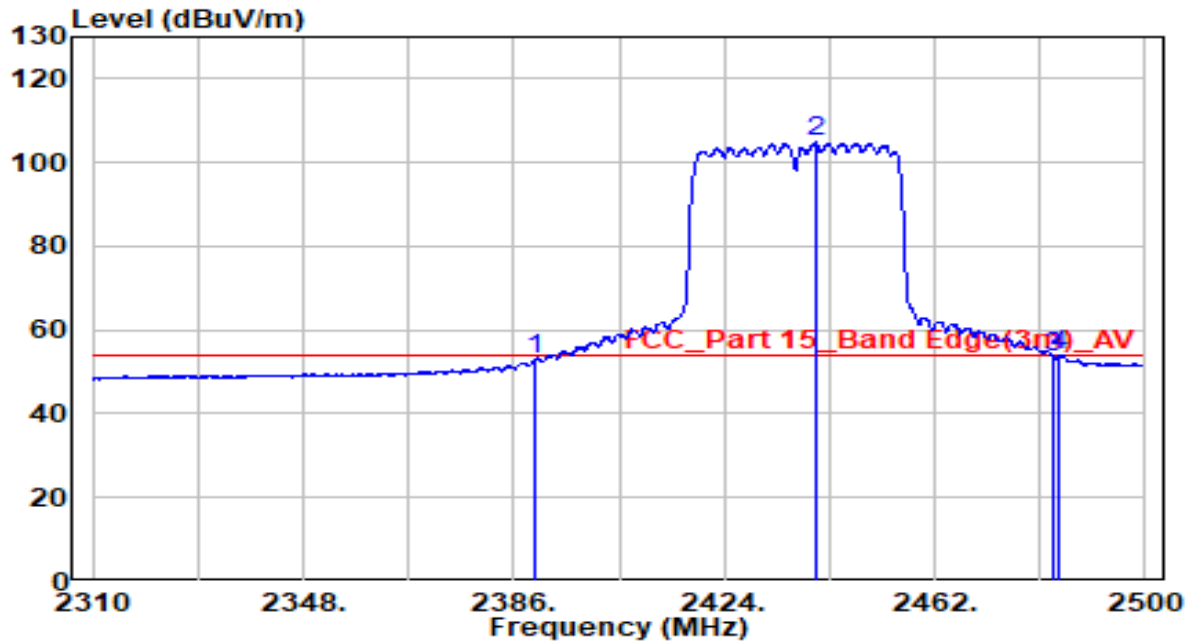


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.69	32.30	52.99	-1.01	54.00	Average
2	* 2440.530	72.50	32.52	105.02	N/A	N/A	Average
3	2483.500	20.99	32.71	53.70	-0.30	54.00	Average
4	2484.515	21.24	32.71	53.95	-0.05	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode)	Test Voltage	120V/60Hz

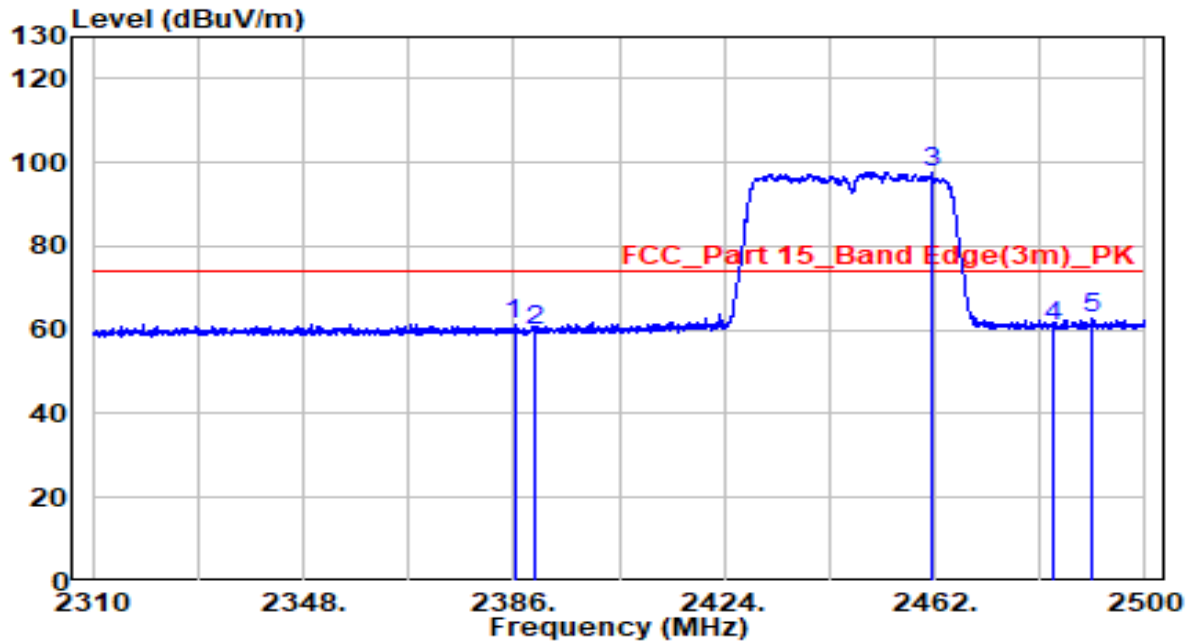


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.095	29.23	32.28	61.51	-12.49	74.00	Peak
2	2390.000	27.50	32.30	59.80	-14.20	74.00	Peak
3	* 2461.525	65.24	32.61	97.85	N/A	N/A	Peak
4	2483.500	28.34	32.71	61.05	-12.95	74.00	Peak
5	2490.215	29.97	32.74	62.71	-11.29	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode)	Test Voltage	120V/60Hz

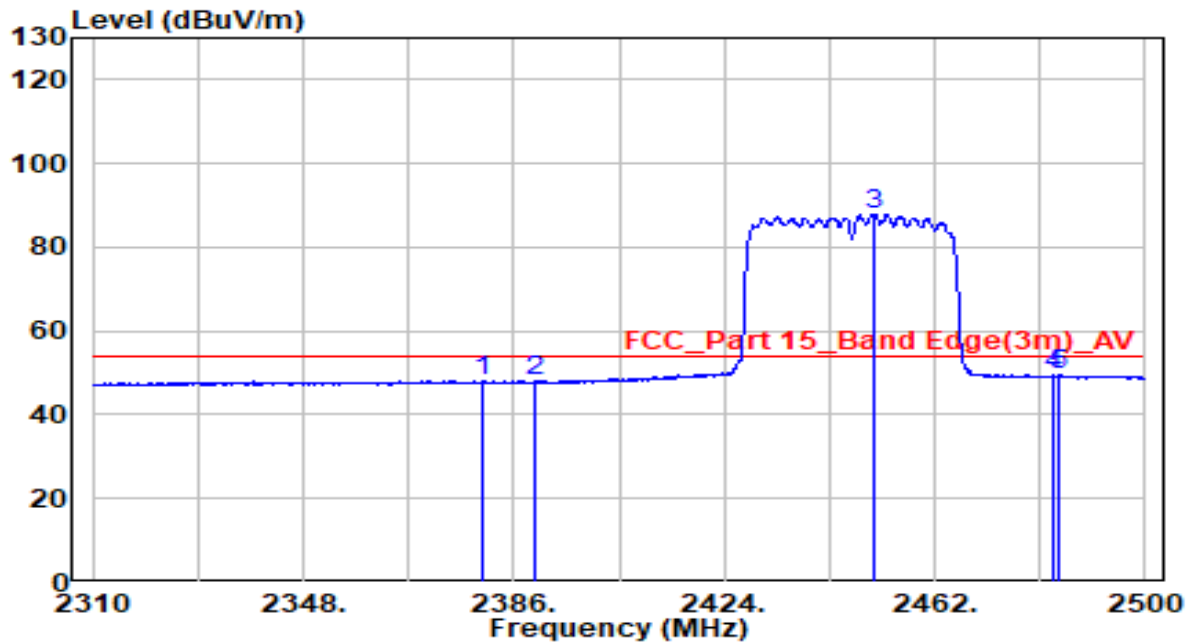


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2380.300	15.81	32.25	48.06	-5.94	54.00	Average
2	2390.000	15.64	32.30	47.94	-6.06	54.00	Average
3	* 2451.075	55.35	32.56	87.91	N/A	N/A	Average
4	2483.500	16.67	32.71	49.38	-4.62	54.00	Average
5	2484.610	16.71	32.71	49.42	-4.58	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode)	Test Voltage	120V/60Hz

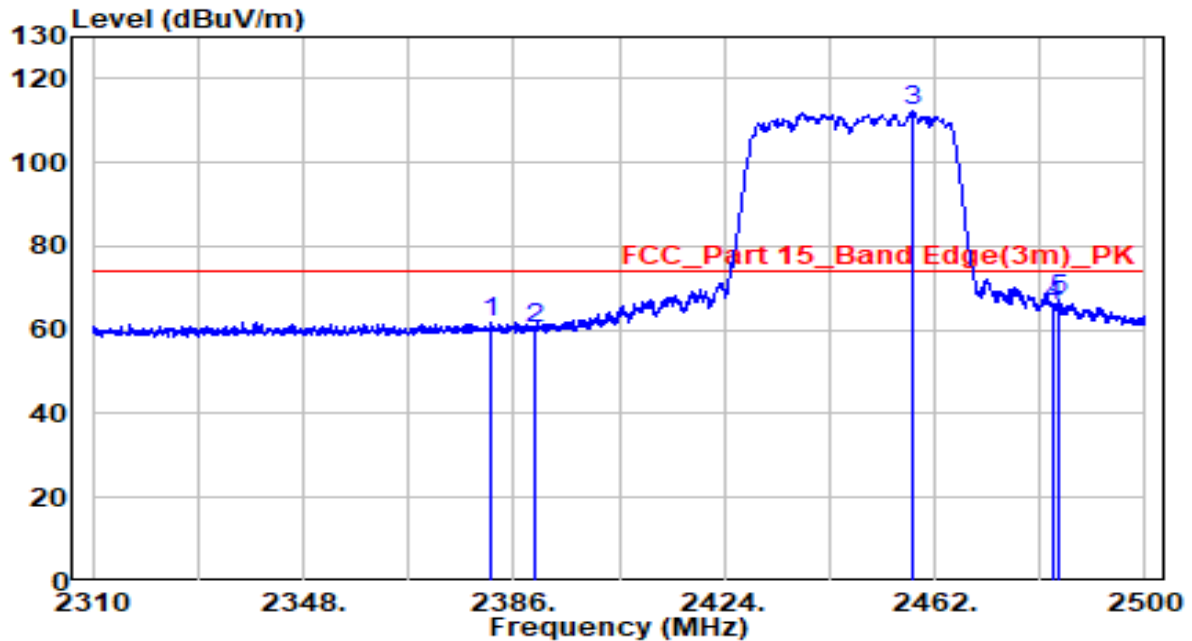


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2381.915	29.56	32.26	61.82	-12.18	74.00	Peak
2	2390.000	28.02	32.30	60.32	-13.68	74.00	Peak
3	* 2458.200	79.50	32.60	112.10	N/A	N/A	Peak
4	2483.500	33.06	32.71	65.77	-8.23	74.00	Peak
5	2484.515	34.66	32.71	67.37	-6.63	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode)	Test Voltage	120V/60Hz

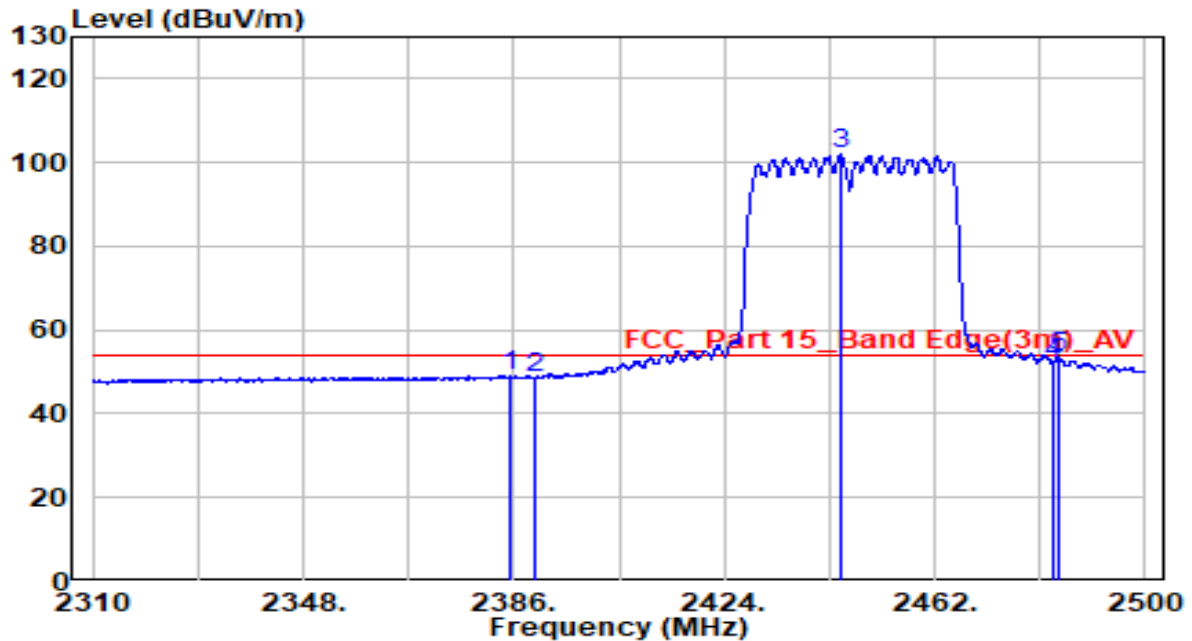


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2385.335	16.90	32.28	49.17	-4.83	54.00	Average
2	2390.000	16.48	32.30	48.78	-5.22	54.00	Average
3	* 2444.995	69.36	32.54	101.90	N/A	N/A	Average
4	2483.500	19.26	32.71	51.97	-2.03	54.00	Average
5	2484.515	20.87	32.71	53.58	-0.42	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

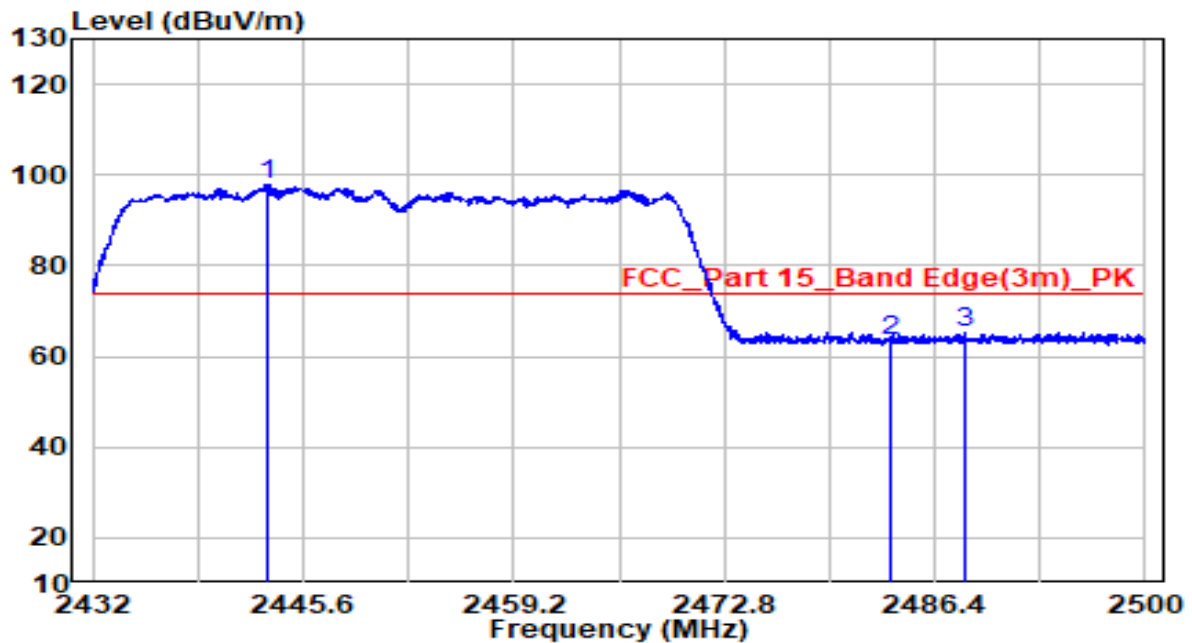


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2443.322	65.46	32.53	97.99	N/A	N/A	Peak
2		2483.500	30.76	32.71	63.47	-10.53	74.00	Peak
3		2488.372	32.66	32.73	65.39	-8.61	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

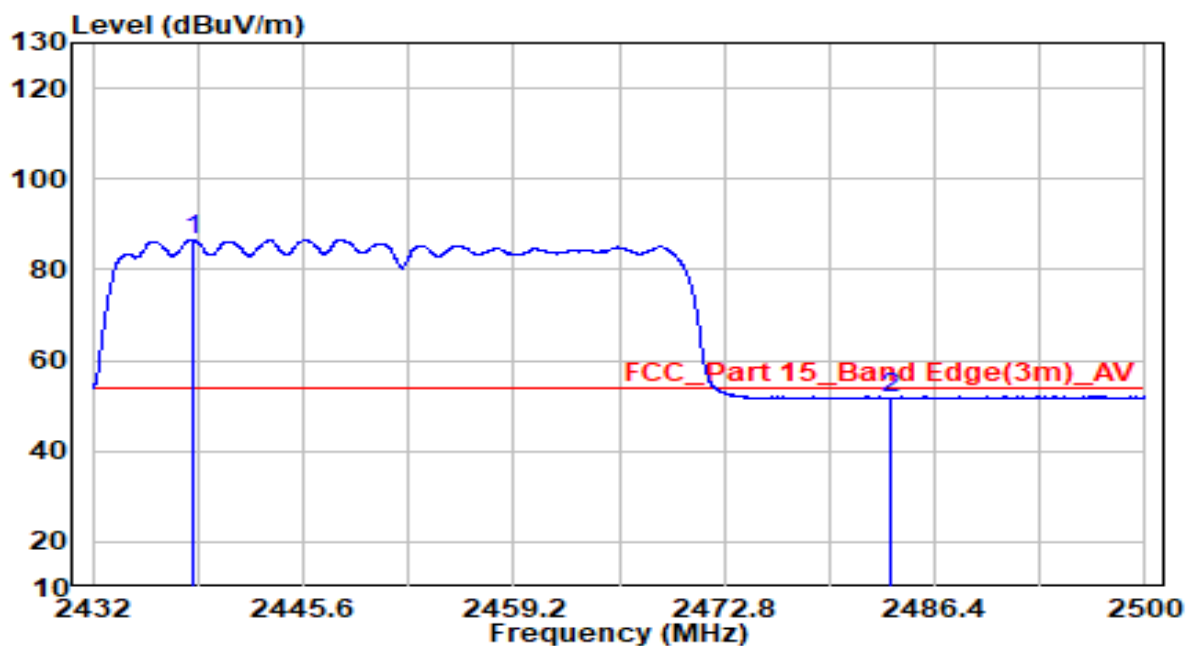


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2438.460	54.19	32.51	86.70	N/A	N/A	Average
2		2483.500	18.95	32.71	51.66	-2.34	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

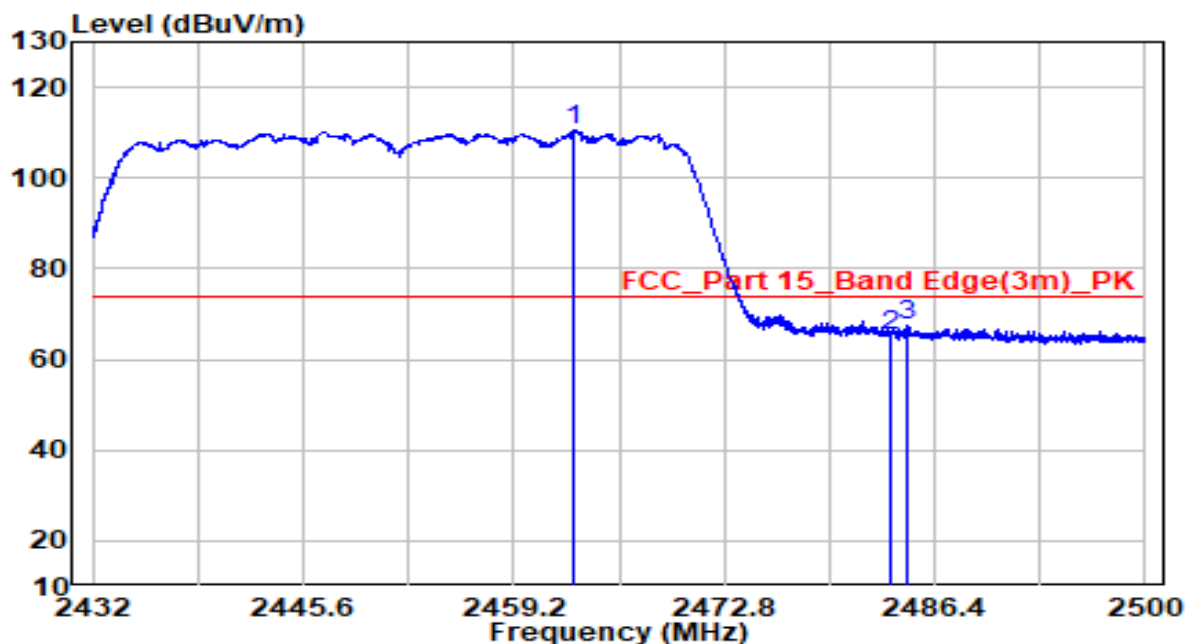


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2463.144	77.69	32.62	110.31	N/A	N/A	Peak
2		2483.500	32.67	32.71	65.38	-8.62	74.00	Peak
3		2484.598	34.92	32.71	67.64	-6.36	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

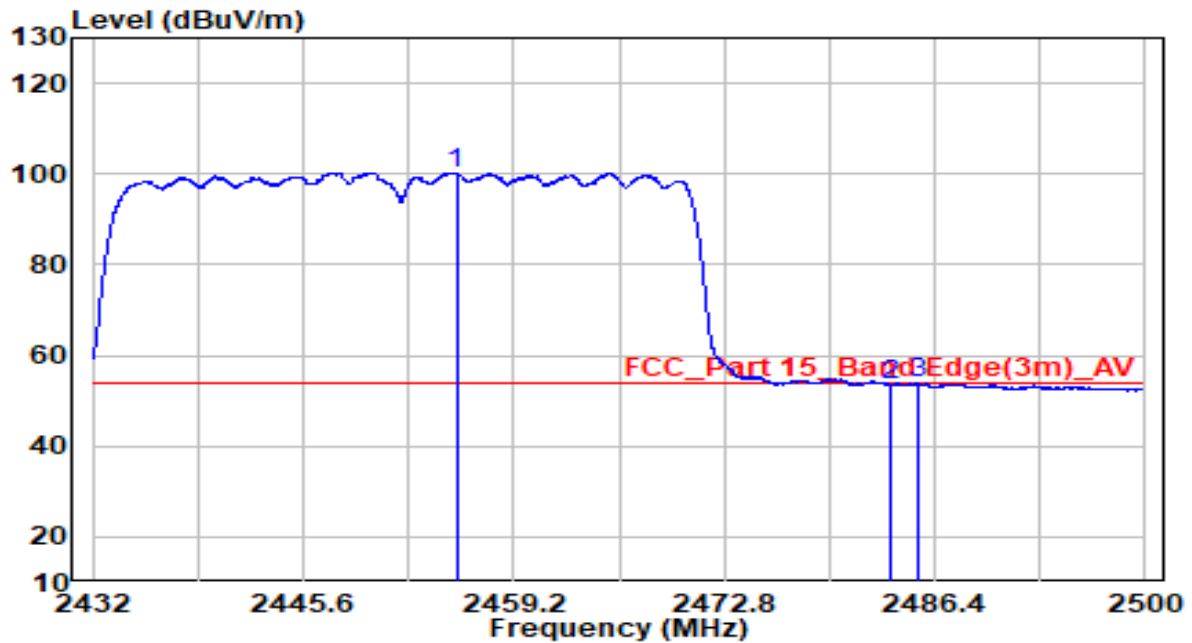


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2455.494	67.74	32.58	100.33	N/A	N/A	Average
2		2483.500	20.86	32.71	53.56	-0.44	54.00	Average
3		2485.380	21.16	32.72	53.88	-0.12	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

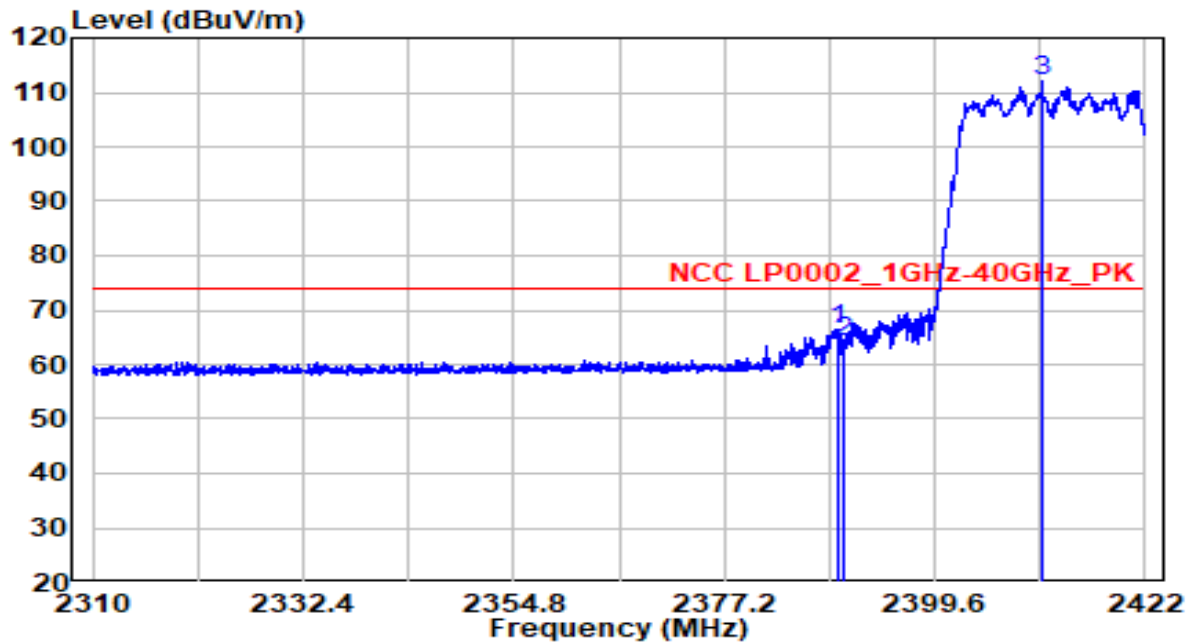


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.464	34.17	32.29	66.46	-7.54	74.00	Peak
2	2390.000	31.71	32.30	64.01	-9.99	74.00	Peak
3	*	79.75	32.39	112.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412 MHz (CDD Mode)	Test Voltage	120V/60Hz

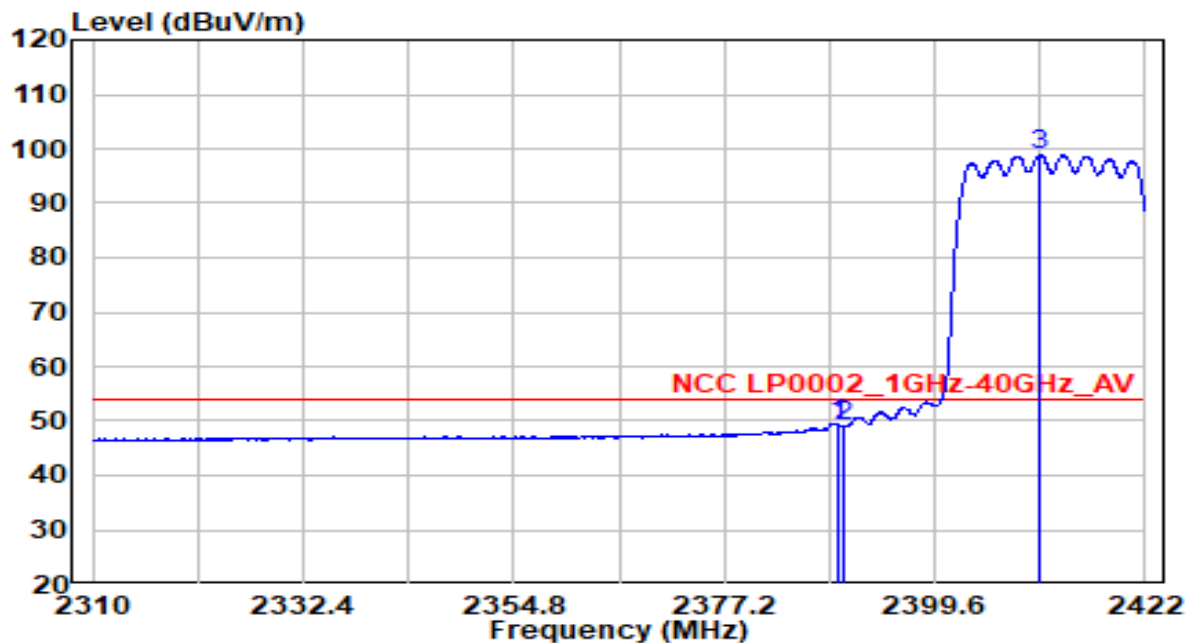


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.352	17.27	32.29	49.56	-4.44	54.00	Average
2	2390.000	16.74	32.30	49.04	-4.96	54.00	Average
3	* 2410.856	66.43	32.39	98.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412 MHz (CDD Mode)	Test Voltage	120V/60Hz

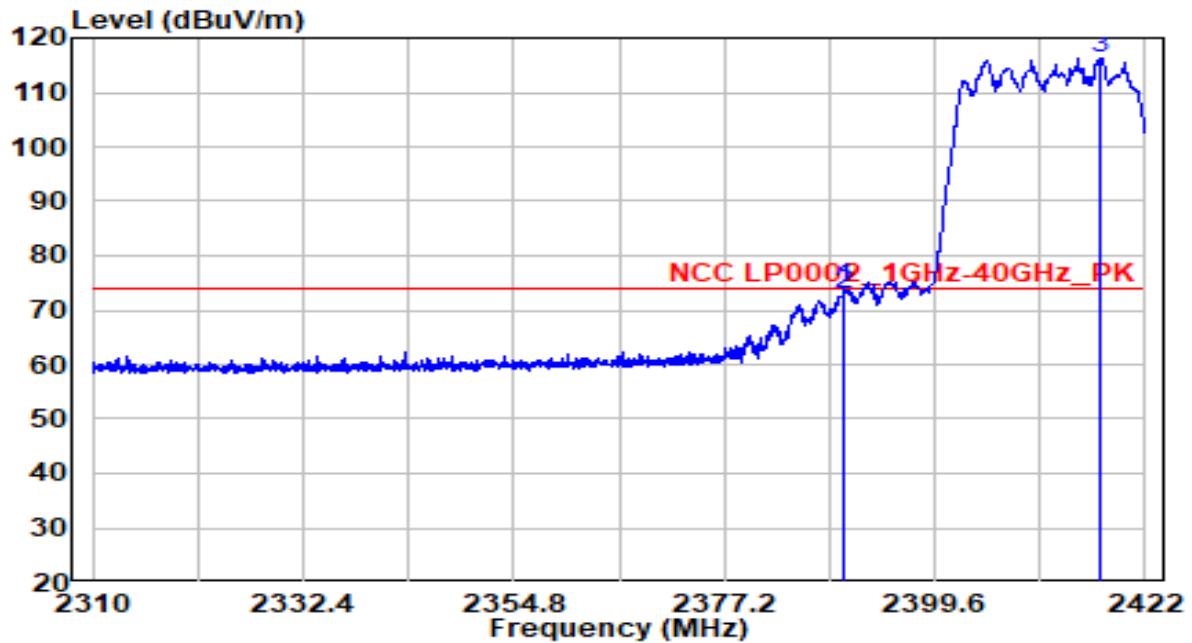


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.912	41.61	32.30	73.91	-0.09	74.00	Peak
2	2390.000	40.48	32.30	72.78	-1.22	74.00	Peak
3	* 2417.240	83.73	32.42	116.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412 MHz (CDD Mode)	Test Voltage	120V/60Hz

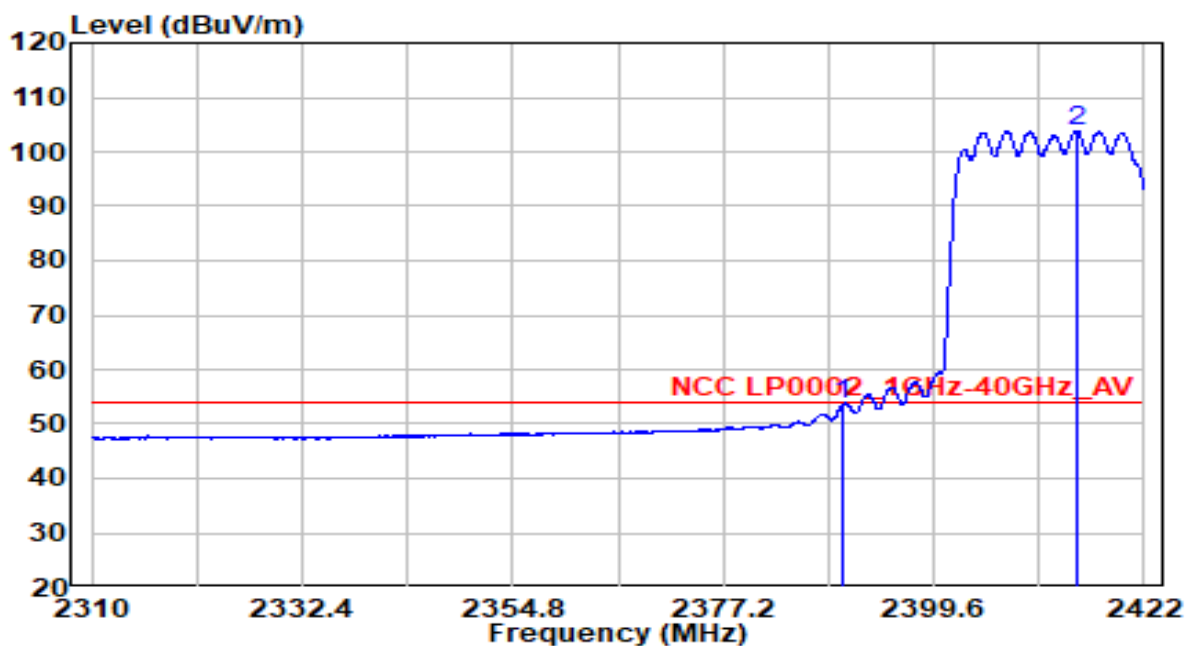


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	21.38	32.30	53.68	-0.32	54.00	Average
2	* 2414.776	71.38	32.41	103.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2417 MHz (CDD Mode)	Test Voltage	120V/60Hz

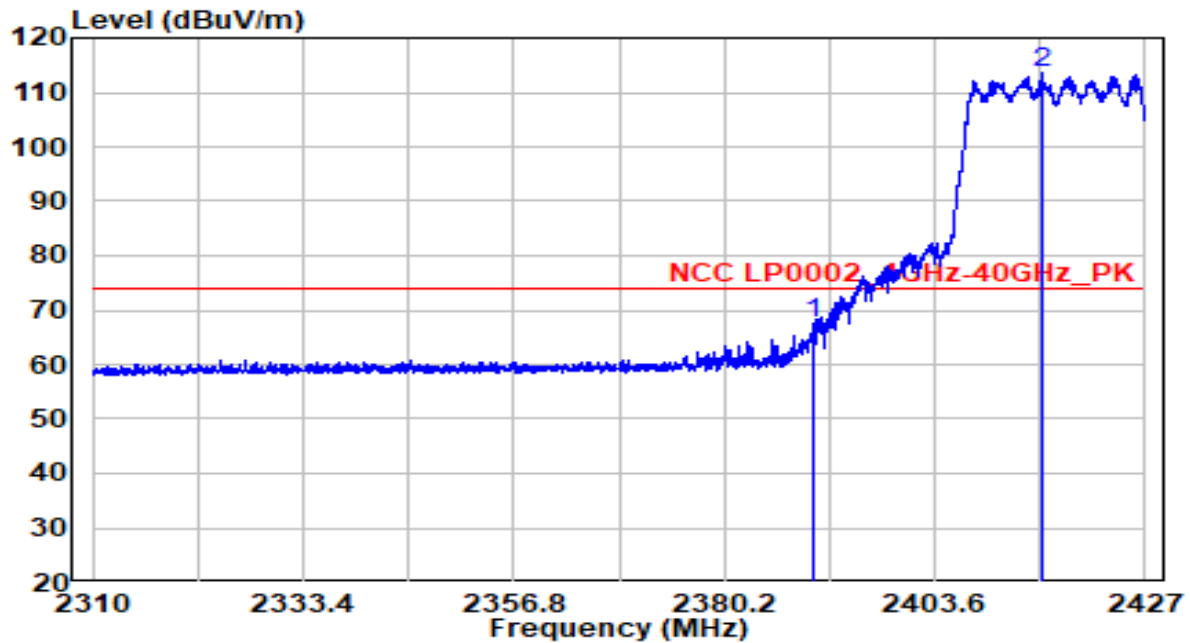


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	35.21	32.30	67.51	-6.49	74.00	Peak
2	* 2415.476	81.33	32.41	113.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2417 MHz (CDD Mode)	Test Voltage	120V/60Hz

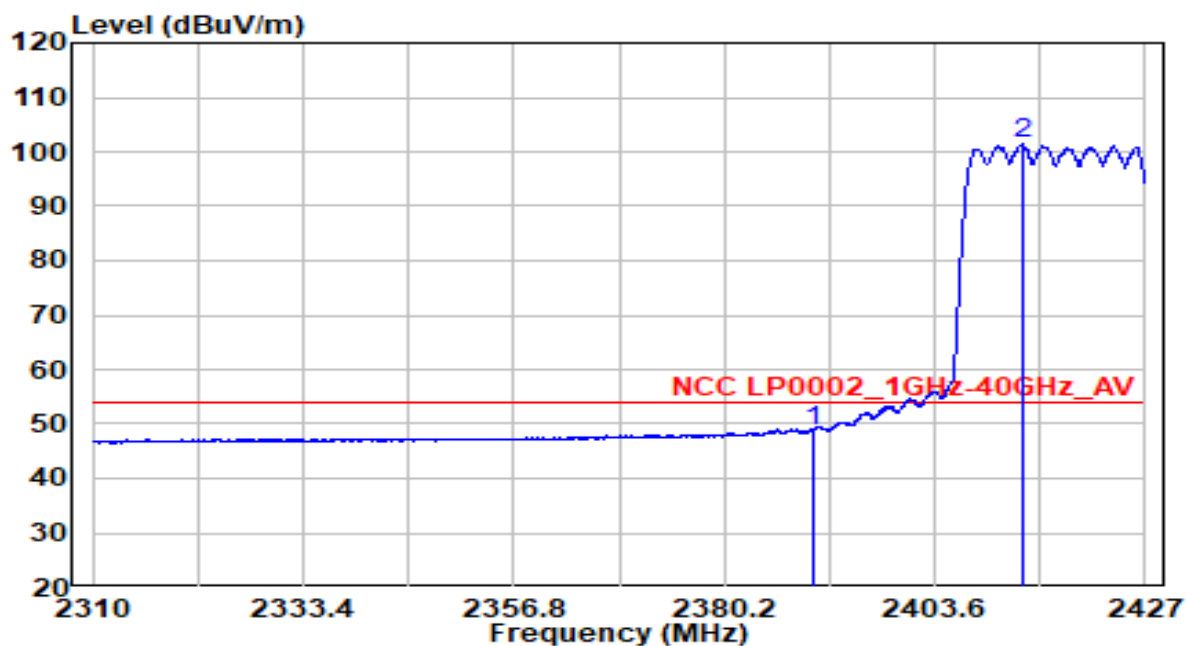


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.37	32.30	48.66	-5.34	54.00	Average
2	* 2413.311	68.95	32.40	101.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2417 MHz (CDD Mode)	Test Voltage	120V/60Hz

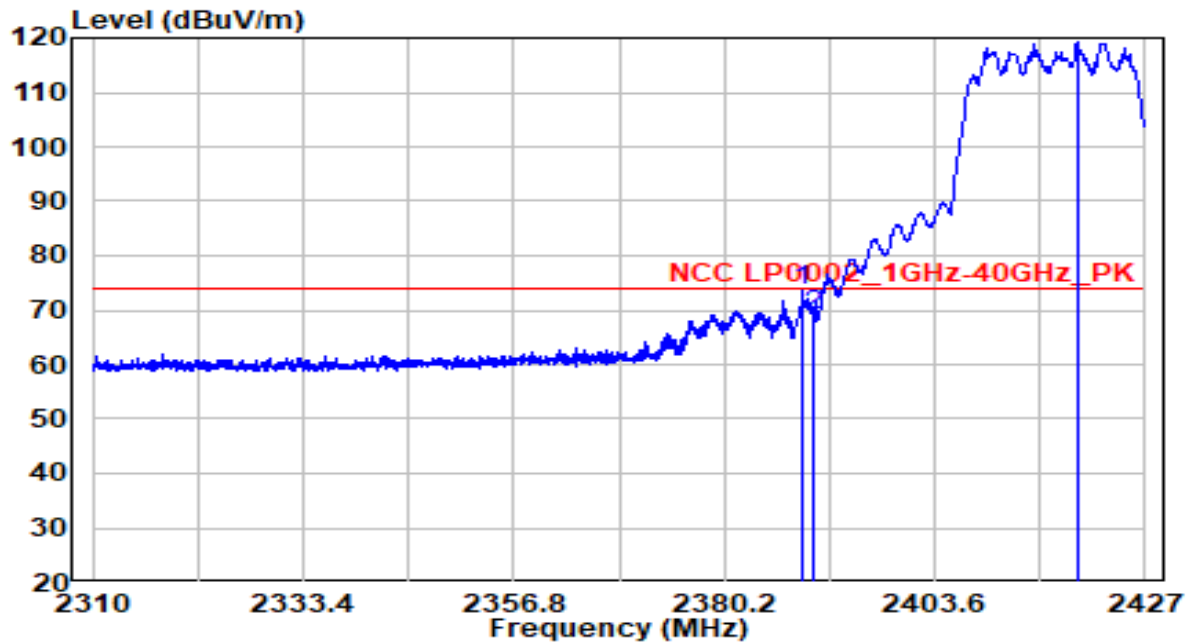


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.975	41.28	32.29	73.57	-0.43	74.00	Peak
2	2390.000	36.88	32.30	69.17	-4.83	74.00	Peak
3	*	2419.629	86.79	32.43	119.22	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2417 MHz (CDD Mode)	Test Voltage	120V/60Hz

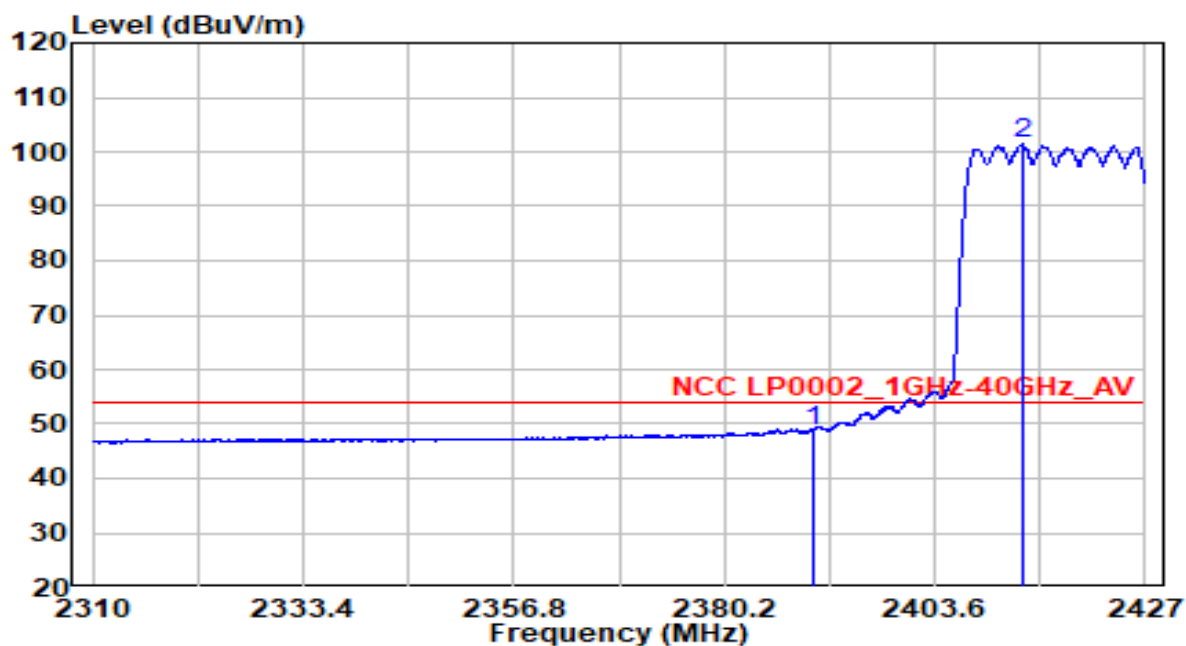


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.37	32.30	48.66	-5.34	54.00	Average
2	* 2413.311	68.95	32.40	101.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2422 MHz (CDD Mode)	Test Voltage	120V/60Hz

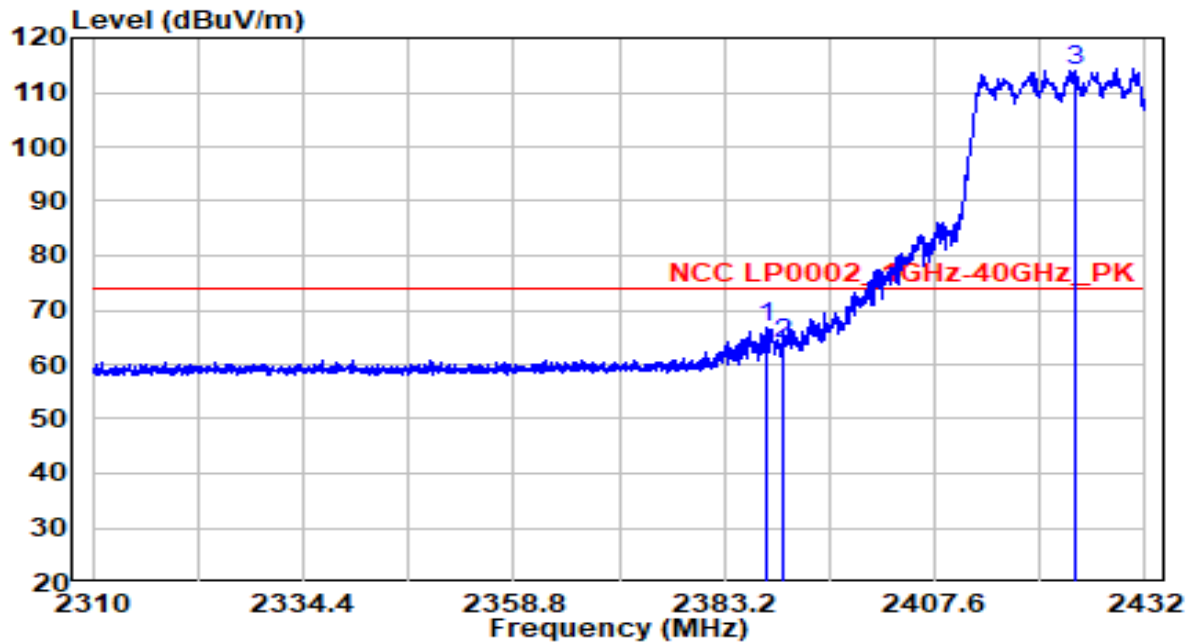


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.202	34.64	32.29	66.92	-7.08	74.00	Peak
2	2390.000	31.29	32.30	63.59	-10.41	74.00	Peak
3	* 2423.948	81.50	32.45	113.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2422 MHz (CDD Mode)	Test Voltage	120V/60Hz

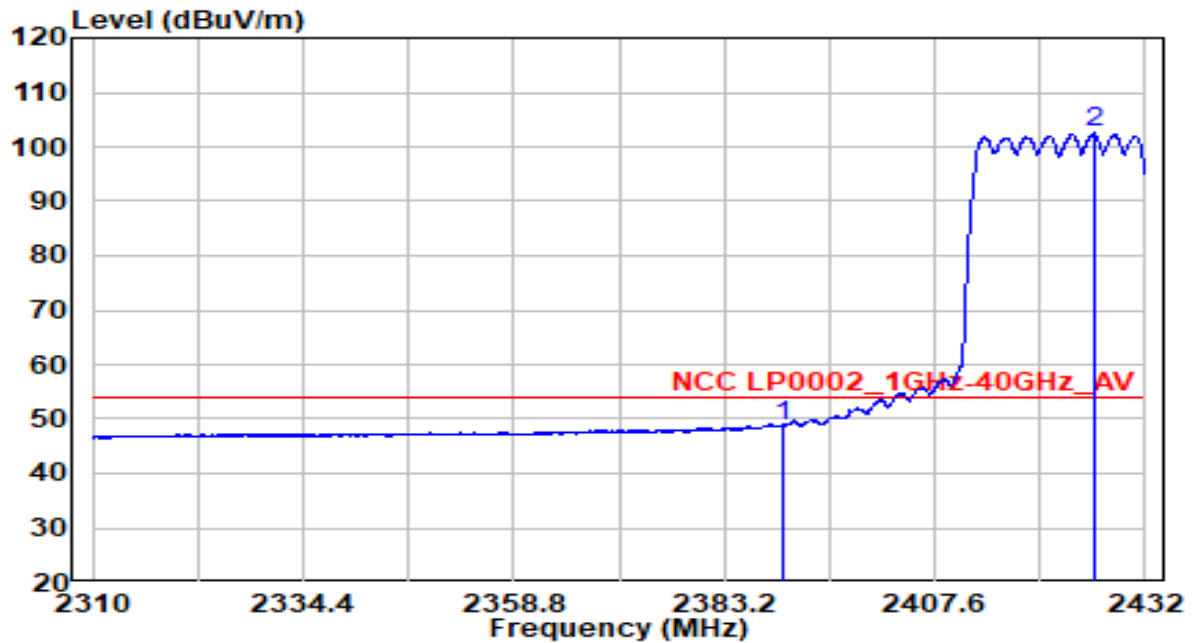


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.40	32.30	48.70	-5.30	54.00	Average
2	* 2426.205	70.01	32.46	102.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2422 MHz (CDD Mode)	Test Voltage	120V/60Hz

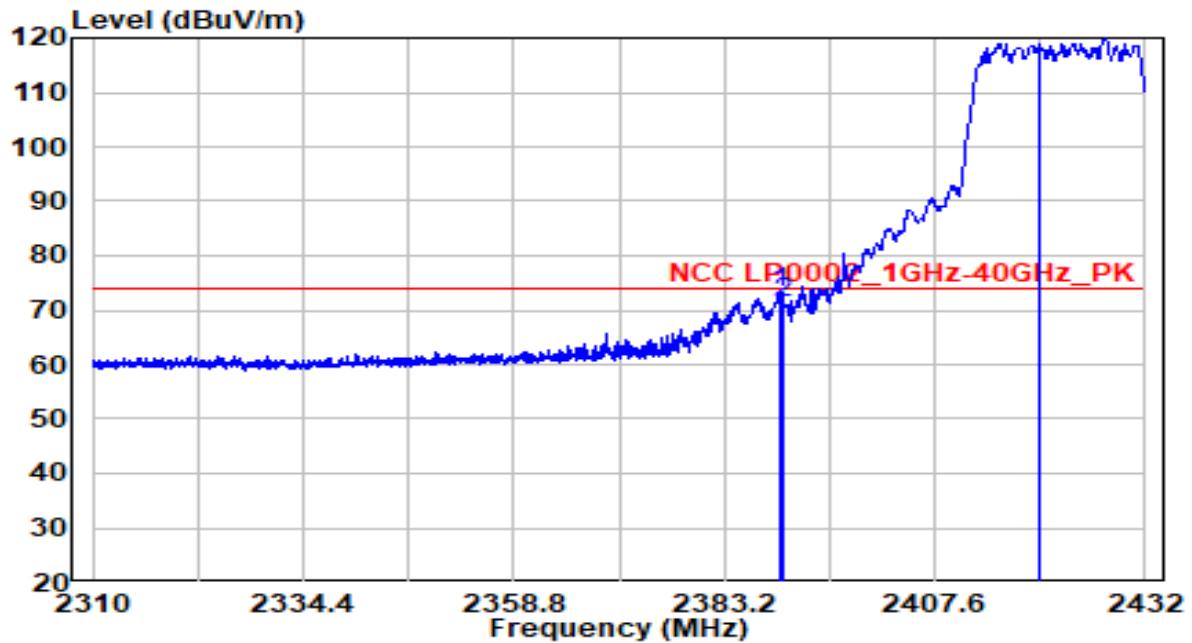


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2389.727	40.85	32.29	73.15	-0.85	74.00	Peak
2	2390.000	38.94	32.30	71.23	-2.77	74.00	Peak
3	* 2419.678	86.62	32.43	119.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-06-02
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	25.3°C/70.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2422 MHz (CDD Mode)	Test Voltage	120V/60Hz

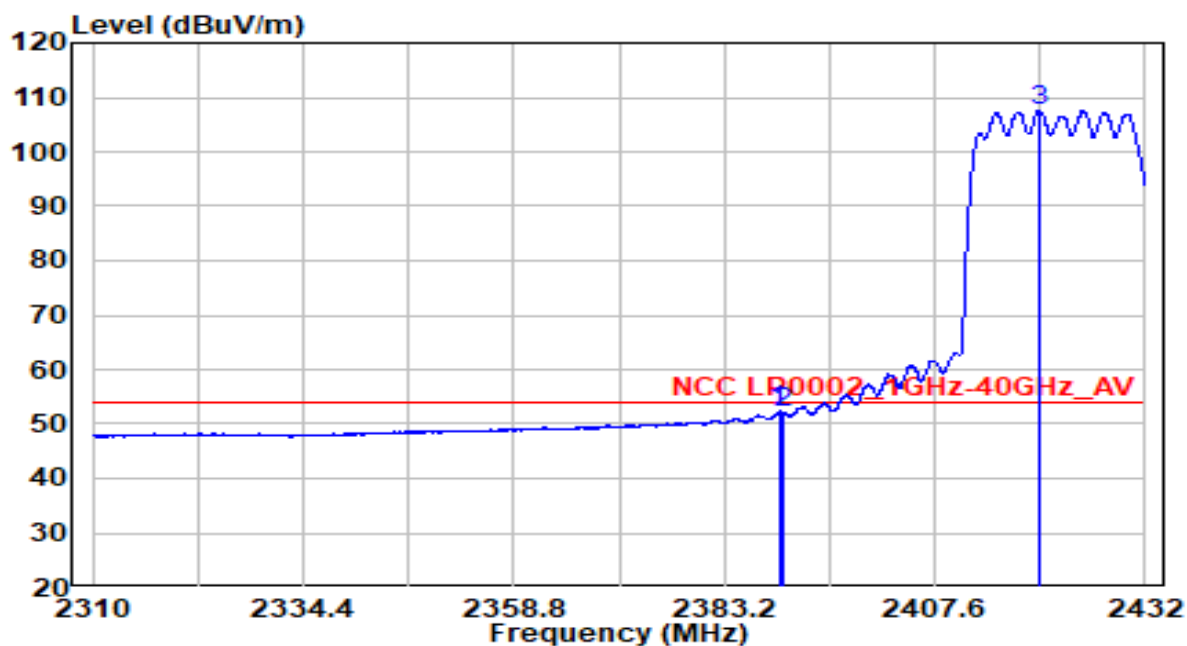


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.544	19.99	32.29	52.28	-1.72	54.00	Average
2	2390.000	19.84	32.30	52.13	-1.87	54.00	Average
3	* 2419.739	75.04	32.43	107.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

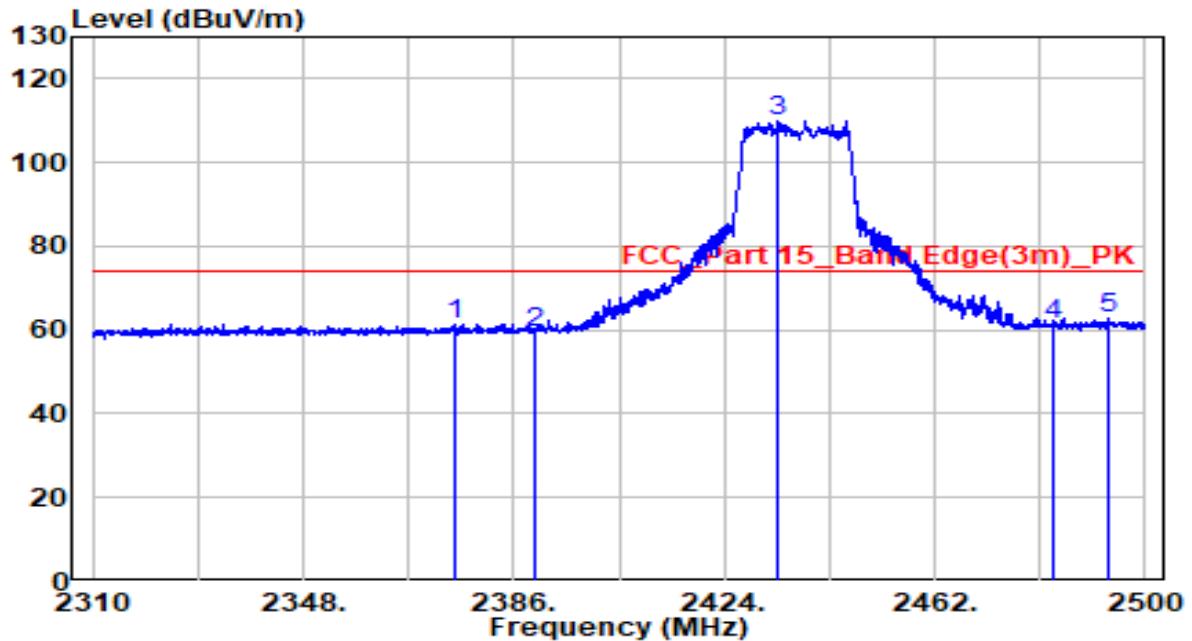


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2375.455	29.23	32.23	61.46	-12.54	74.00	Peak
2	2390.000	27.30	32.30	59.60	-14.40	74.00	Peak
3	* 2433.785	77.35	32.49	109.84	N/A	N/A	Peak
4	2483.500	28.83	32.71	61.54	-12.46	74.00	Peak
5	2493.255	29.85	32.75	62.60	-11.40	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

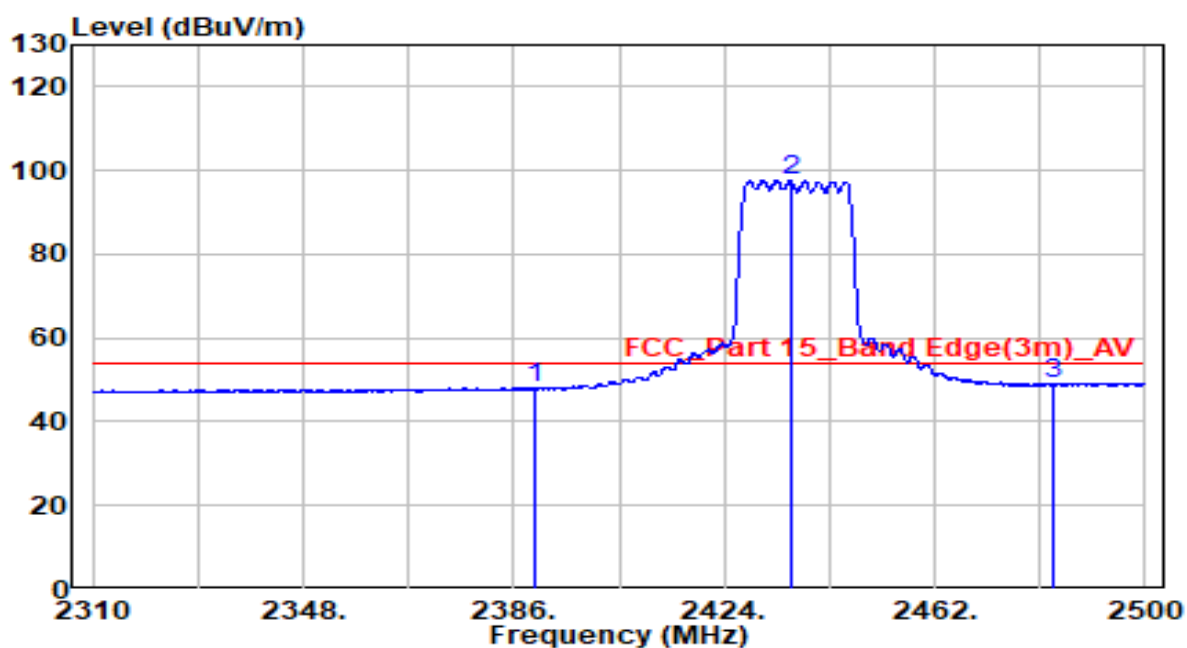


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.54	32.30	47.83	-6.17	54.00	Average
2	* 2435.970	65.12	32.50	97.62	N/A	N/A	Average
3	2483.500	16.15	32.71	48.85	-5.15	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

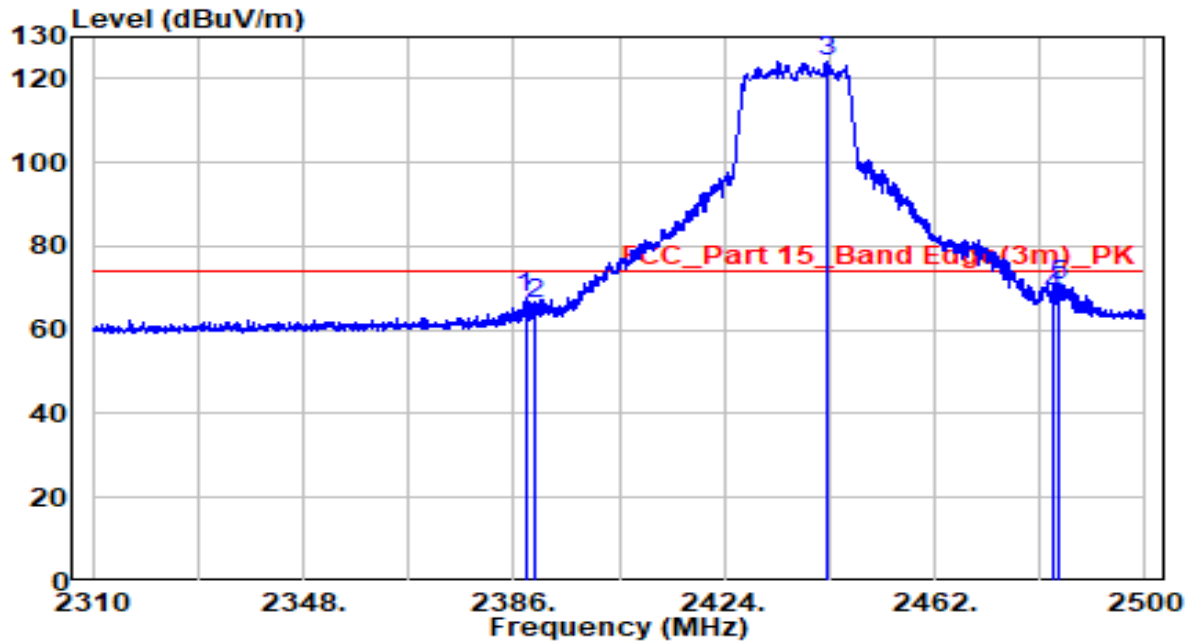


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.090	35.57	32.29	67.86	-6.14	74.00	Peak
2	2390.000	33.76	32.30	66.06	-7.94	74.00	Peak
3	* 2442.525	91.67	32.53	124.20	N/A	N/A	Peak
4	2483.500	35.37	32.71	68.08	-5.92	74.00	Peak
5	2484.420	37.99	32.71	70.70	-3.30	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

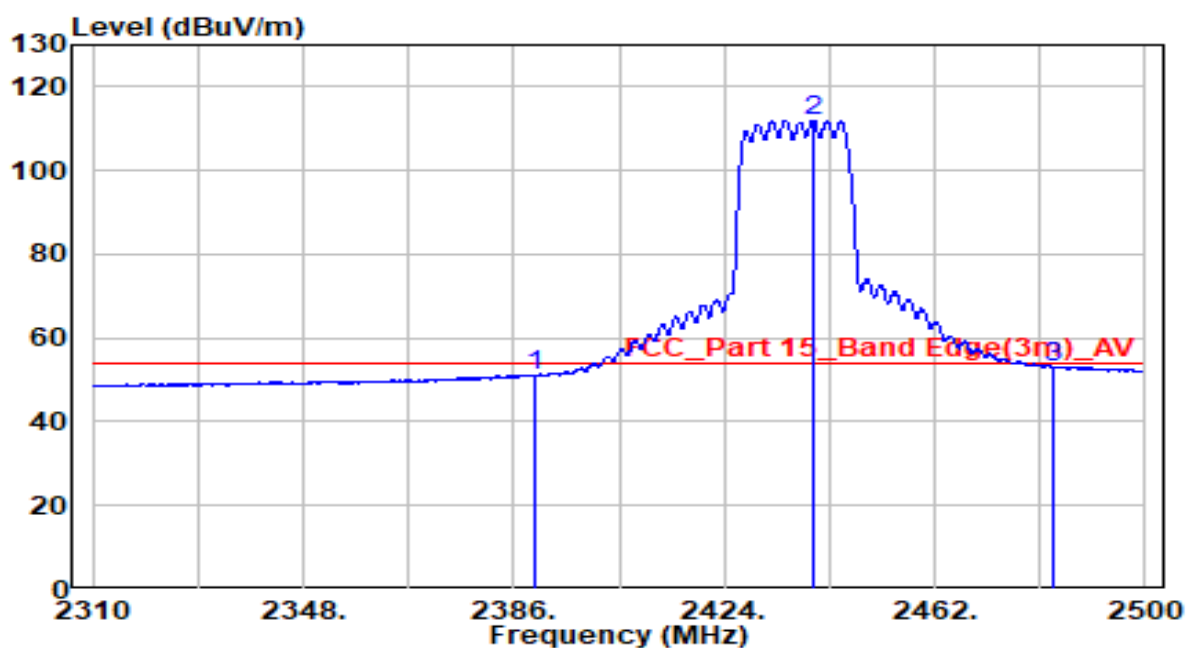


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.73	32.30	51.03	-2.97	54.00	Average
2	* 2440.150	79.57	32.52	112.09	N/A	N/A	Average
3	2483.500	20.23	32.71	52.94	-1.06	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

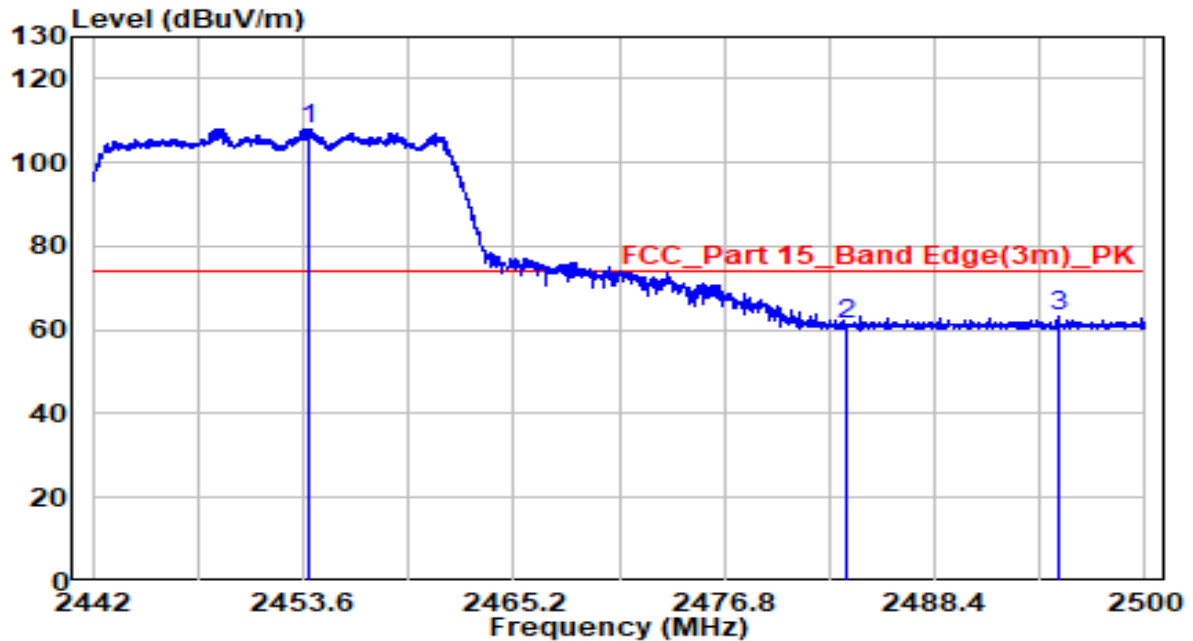


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2453.861	75.54	32.58	108.12	N/A	N/A	Peak
2		2483.500	28.75	32.71	61.45	-12.55	74.00	Peak
3		2495.215	30.53	32.76	63.29	-10.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

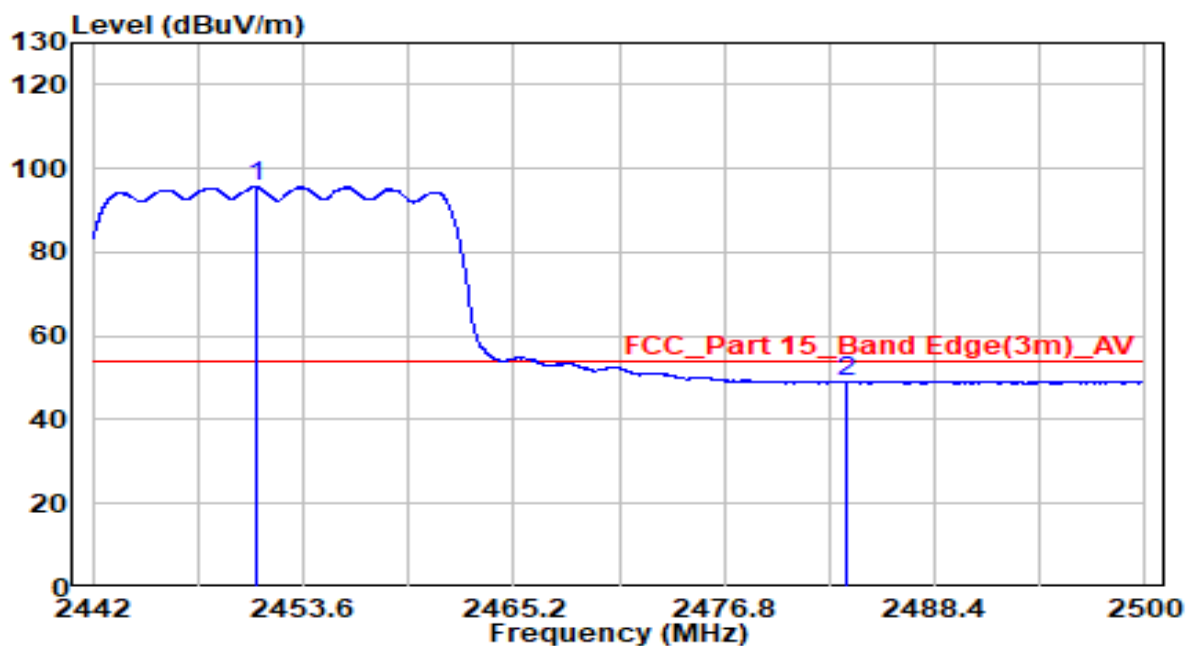


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.961	63.07	32.56	95.63	N/A	N/A	Average
2		2483.500	16.21	32.71	48.92	-5.08	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

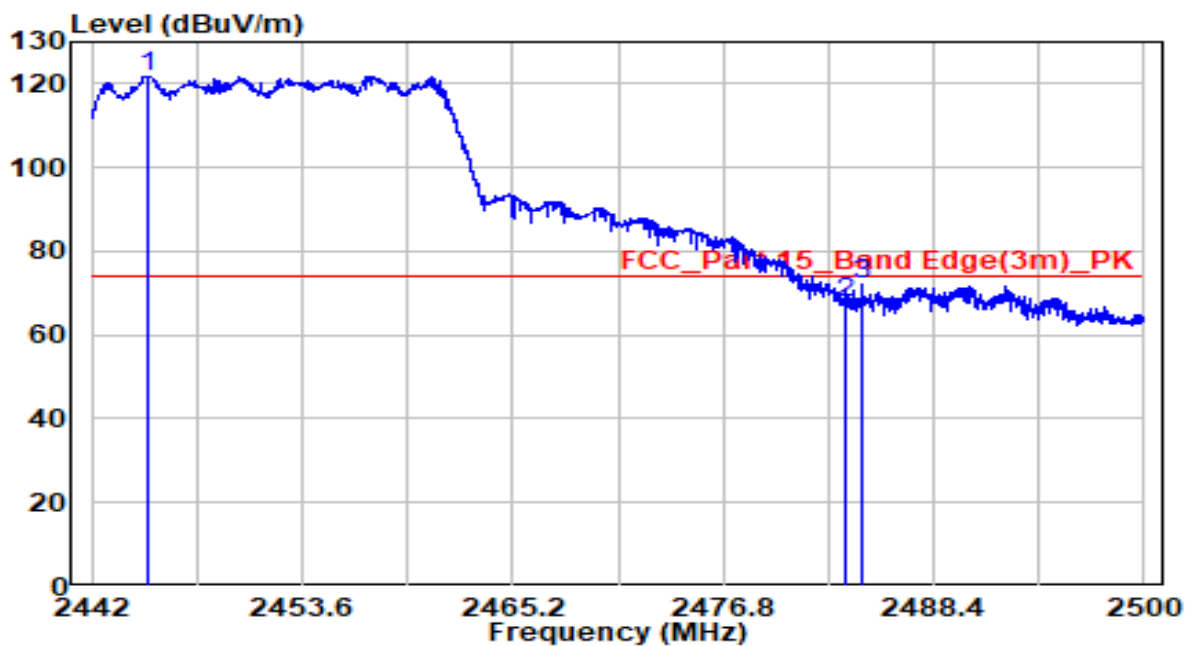


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2445.074	89.35	32.54	121.88	N/A	N/A	Peak
2		2483.500	35.03	32.71	67.74	-6.26	74.00	Peak
3		2484.456	39.57	32.71	72.28	-1.72	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

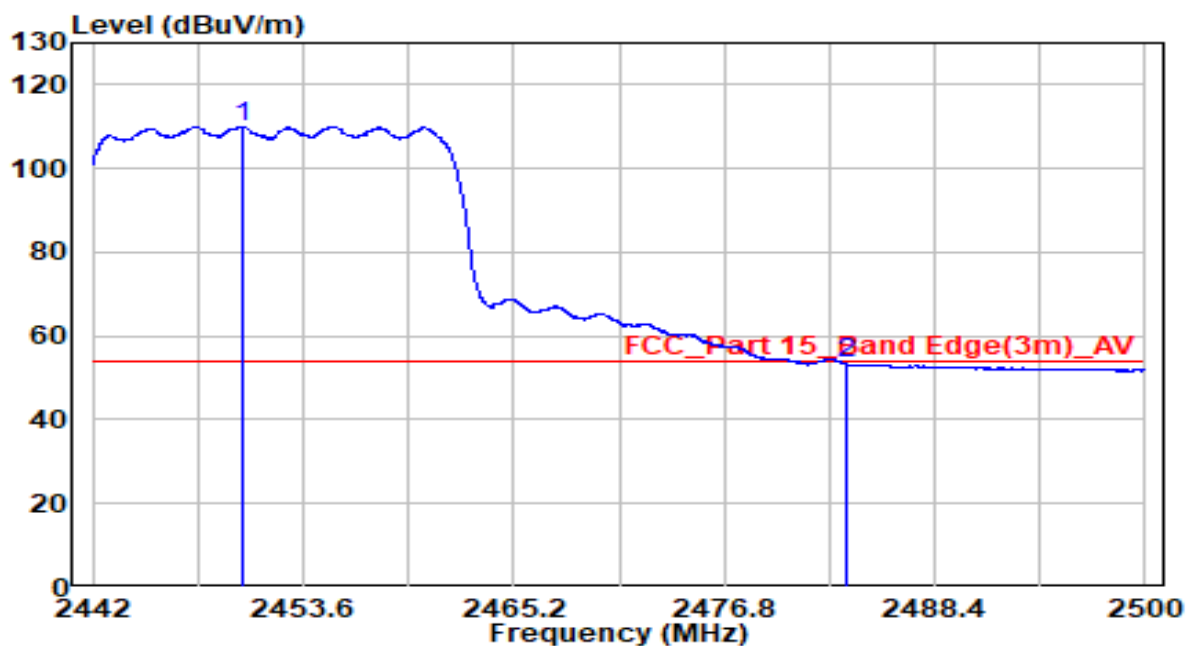


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.207	77.43	32.56	109.99	N/A	N/A	Average
2		2483.500	20.63	32.71	53.34	-0.66	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

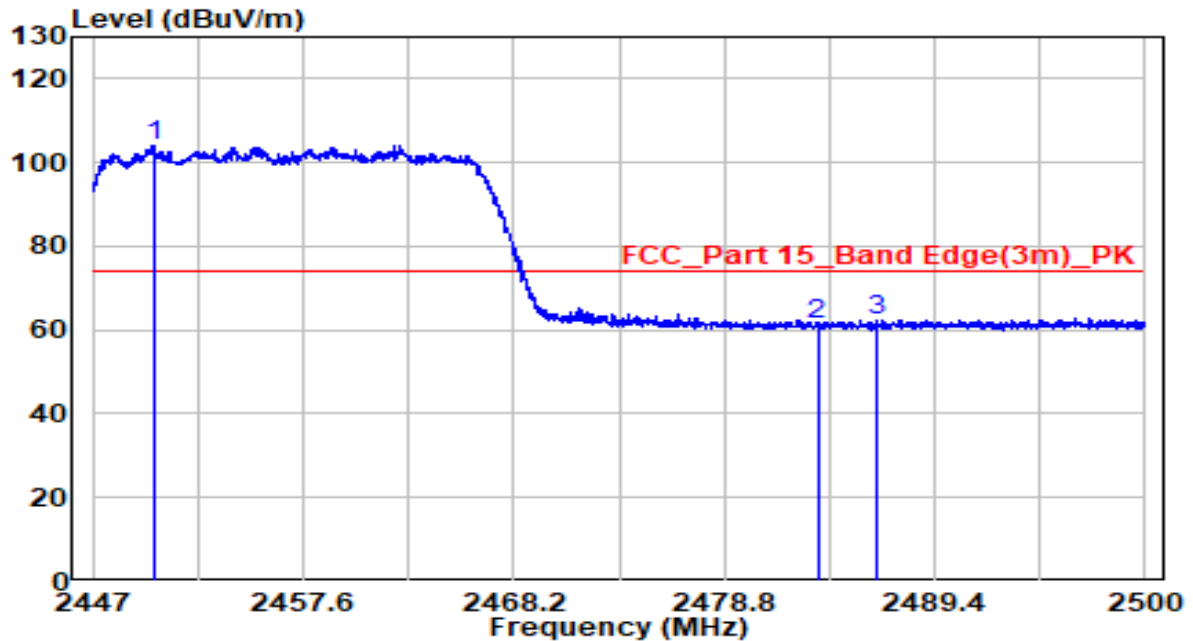


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.048	71.39	32.56	103.95	N/A	N/A	Peak
2		2483.500	28.47	32.71	61.18	-12.82	74.00	Peak
3		2486.511	29.80	32.72	62.53	-11.47	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

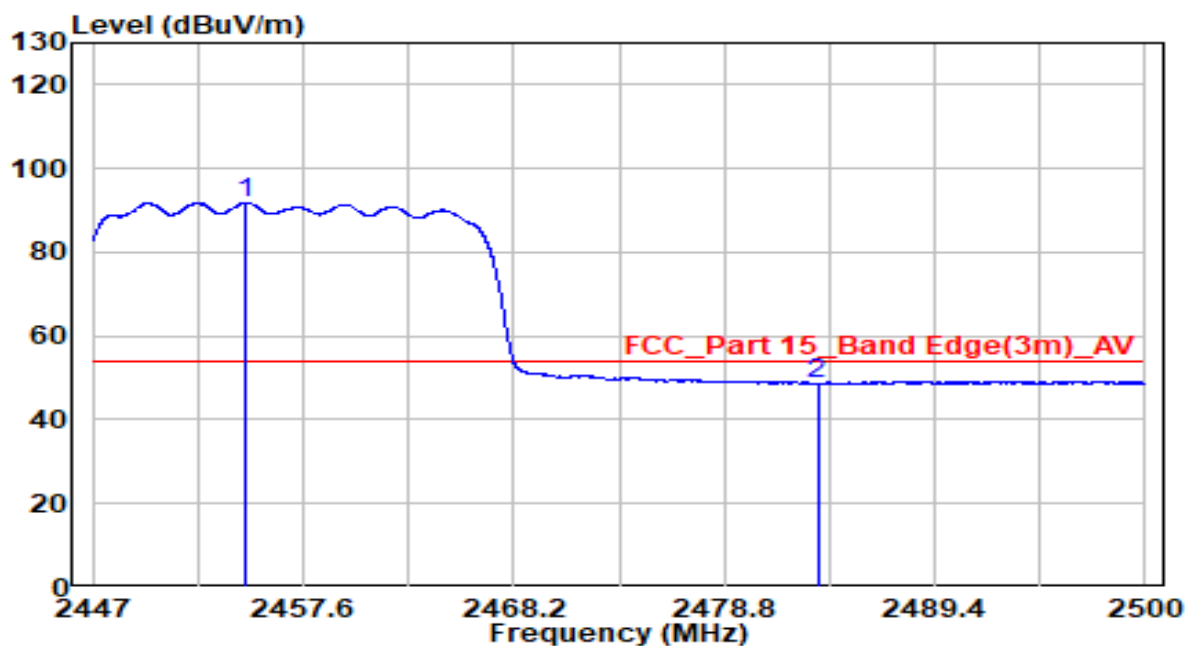


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2454.658	59.21	32.58	91.79	N/A	N/A	Average
2		2483.500	15.99	32.71	48.69	-5.31	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

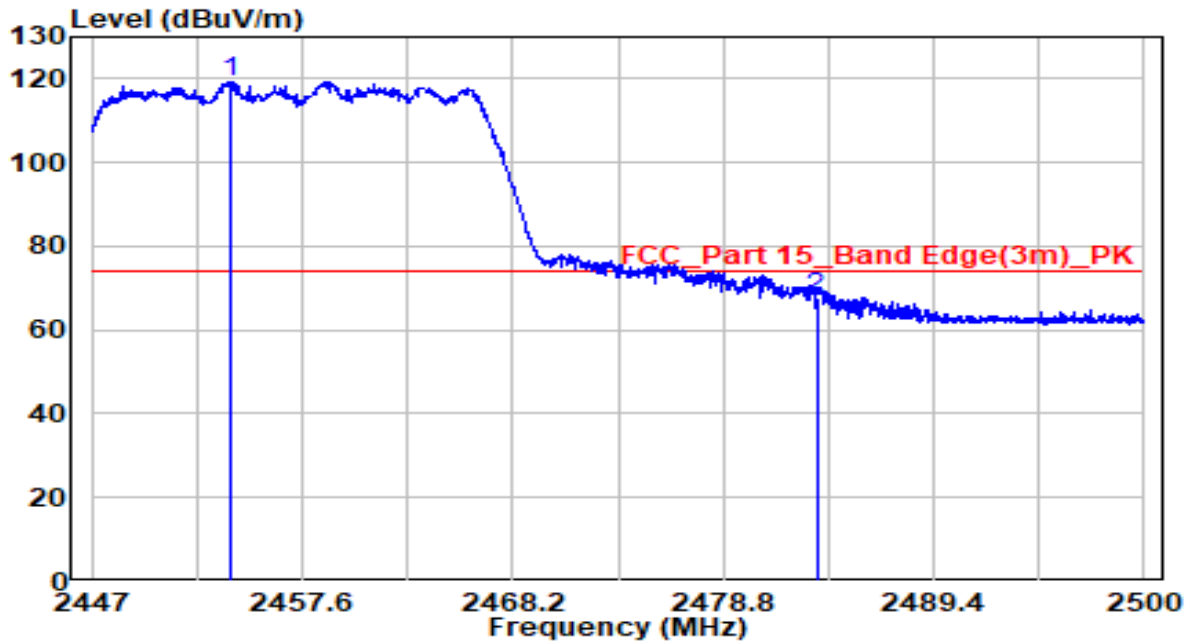


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2453.943	86.86	32.58	119.44	N/A	N/A	Peak
2		2483.500	35.05	32.71	67.76	-6.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

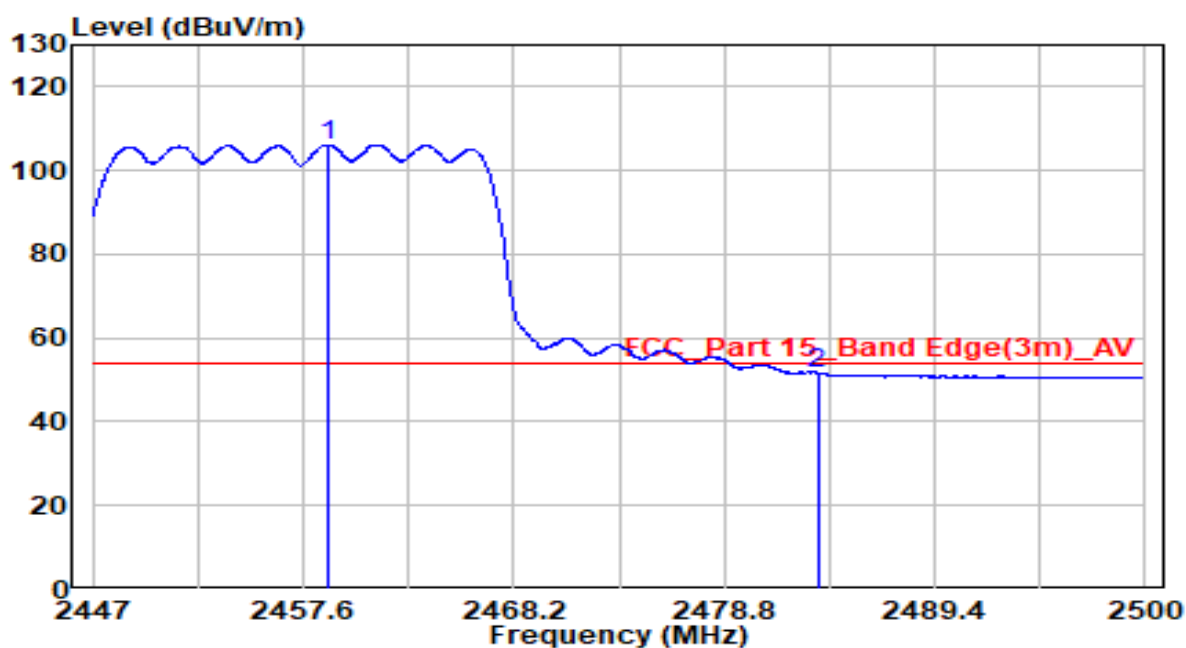


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2458.819	73.58	32.60	106.18	N/A	N/A	Average
2		2483.500	18.82	32.71	51.53	-2.47	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

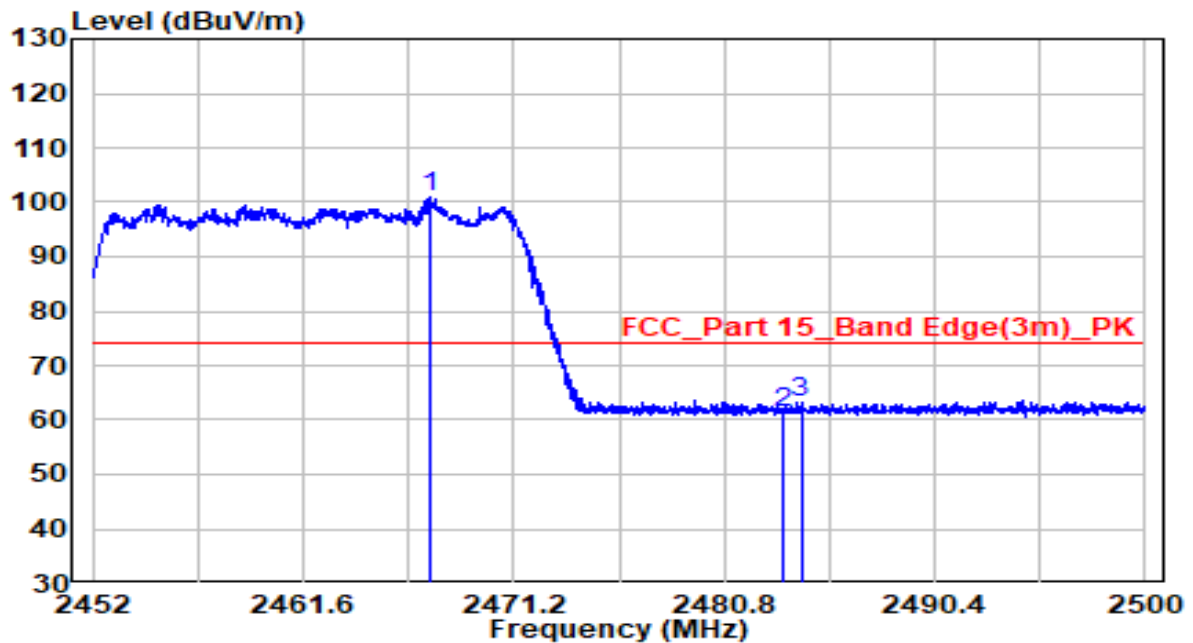


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2467.360	68.22	32.64	100.85	N/A	N/A	Peak
2		2483.500	28.56	32.71	61.27	-12.73	74.00	Peak
3		2484.304	30.53	32.71	63.25	-10.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

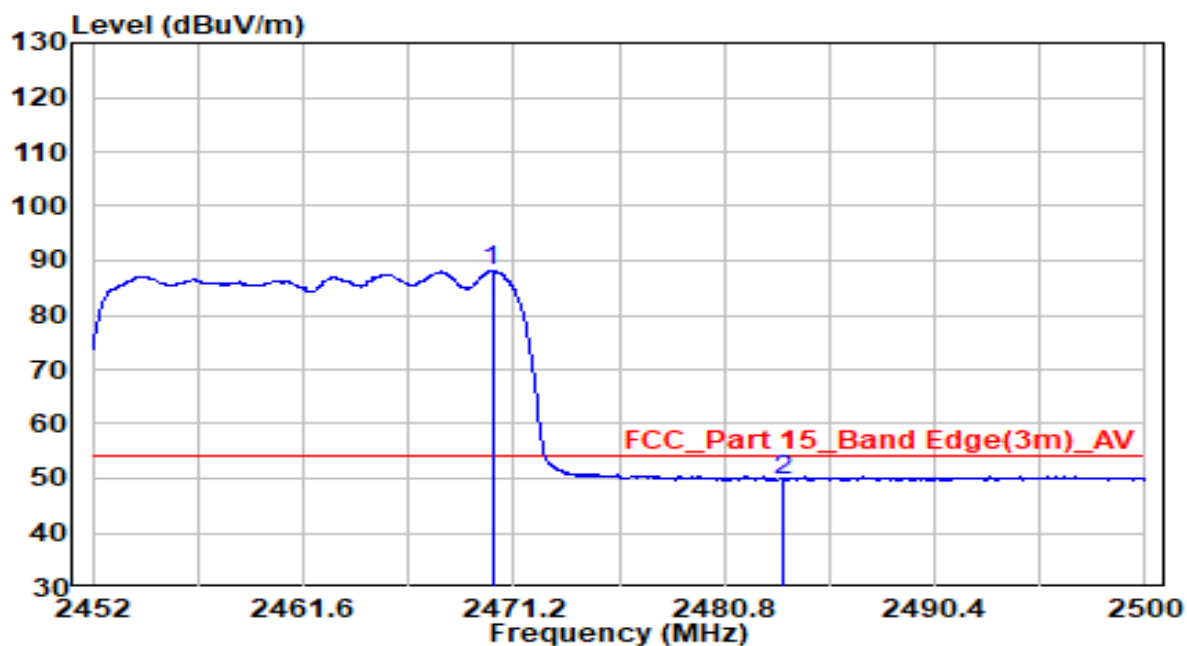


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2470.216	55.52	32.65	88.16	N/A	N/A	Average
2		2483.500	17.08	32.71	49.79	-4.21	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

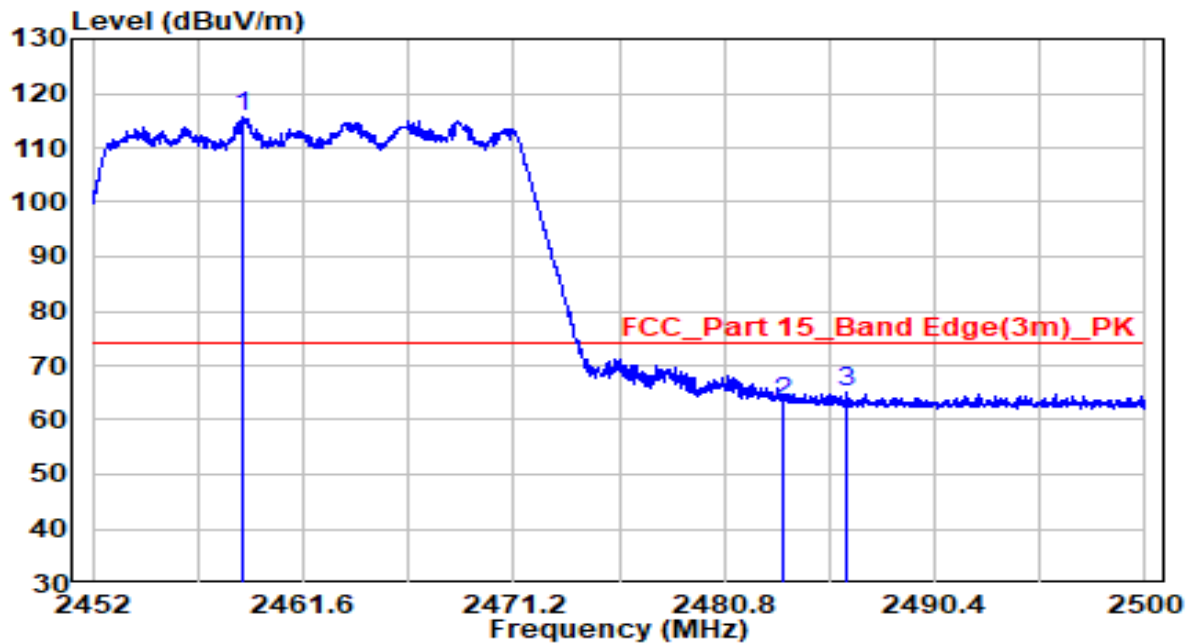


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2458.816	82.95	32.60	115.55	N/A	N/A	Peak
2		2483.500	30.55	32.71	63.25	-10.75	74.00	Peak
3		2486.344	32.45	32.72	65.17	-8.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

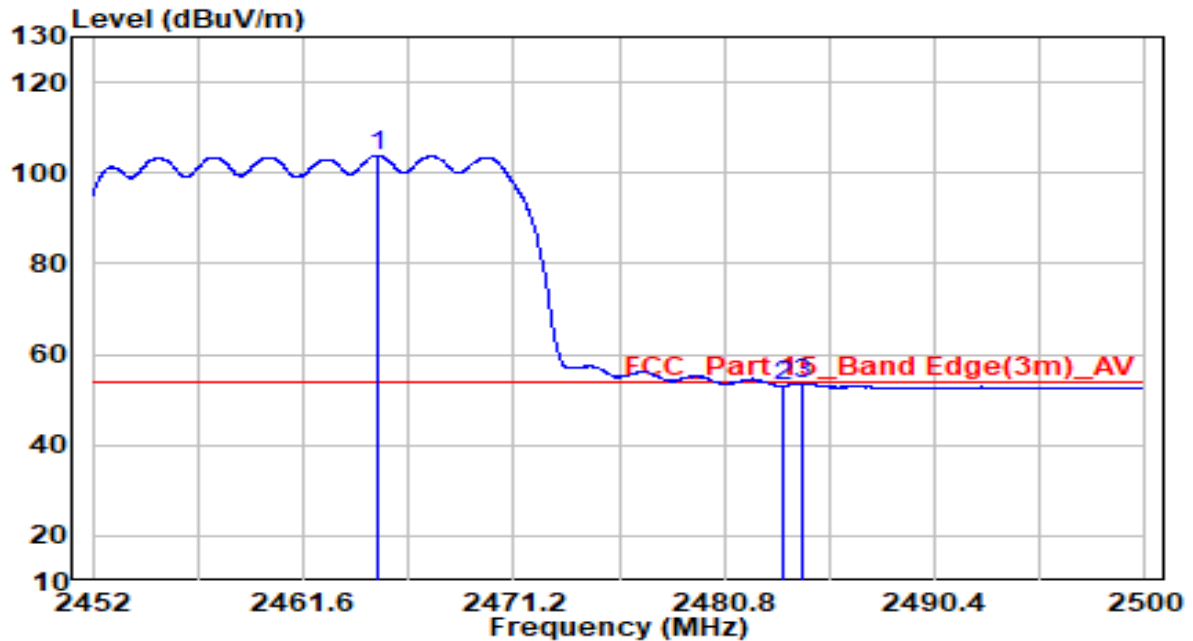


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2464.984	71.25	32.63	103.88	N/A	N/A	Average
2		2483.500	20.48	32.71	53.18	-0.82	54.00	Average
3		2484.376	20.85	32.71	53.56	-0.44	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

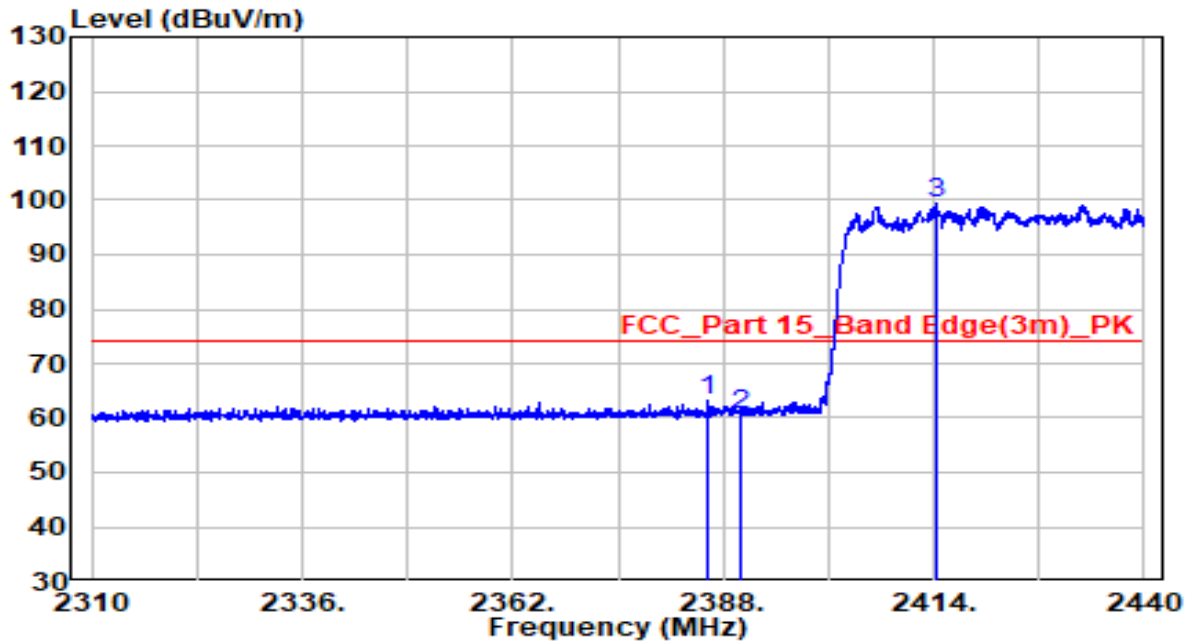


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.050	31.01	32.28	63.29	-10.71	74.00	Peak
2	2390.000	28.28	32.30	60.58	-13.42	74.00	Peak
3	* 2414.390	66.89	32.40	99.29	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

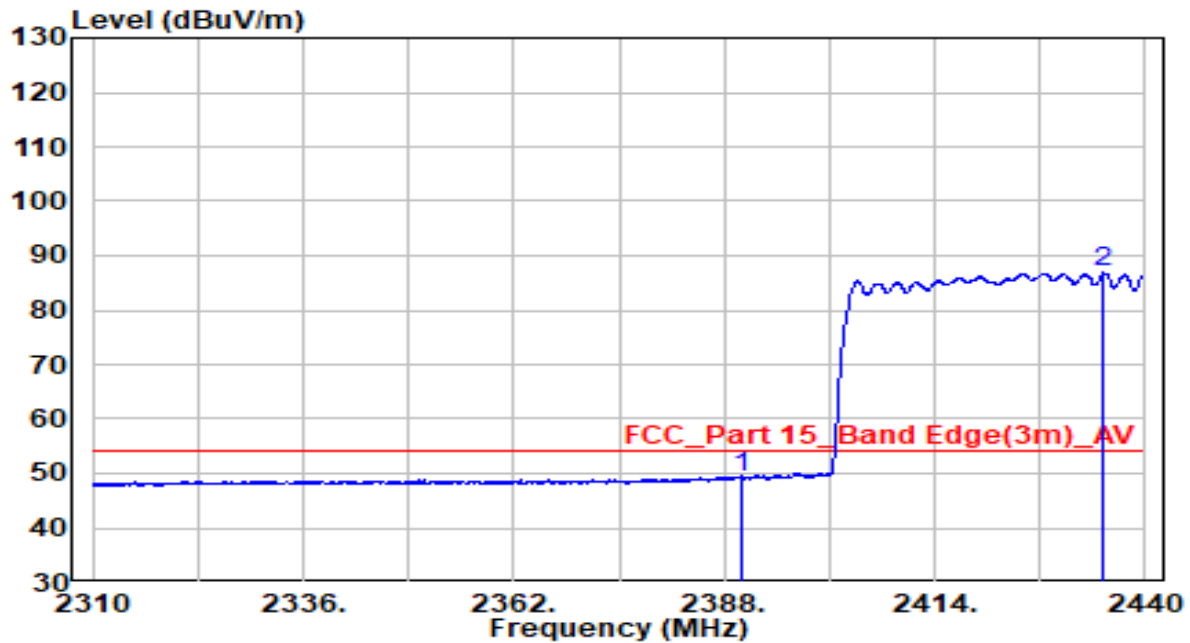


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.78	32.30	49.08	-4.92	54.00	Average
2	* 2434.930	54.31	32.49	86.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

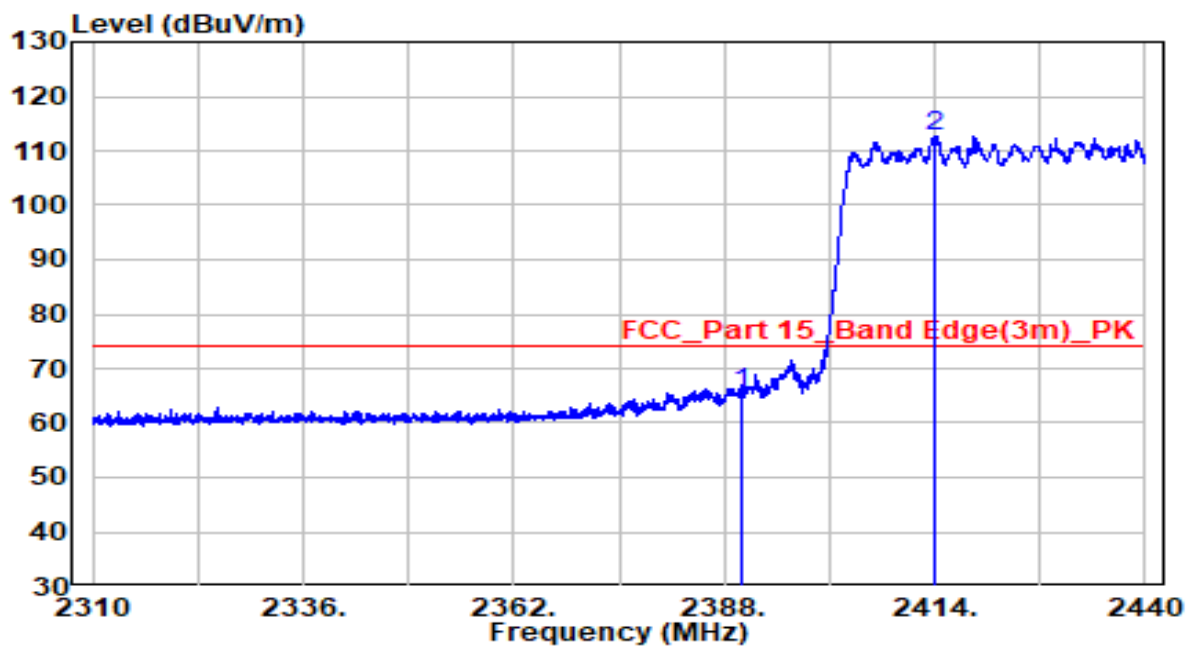


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	33.07	32.30	65.37	-8.63	74.00	Peak
2	* 2414.000	80.36	32.40	112.76	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

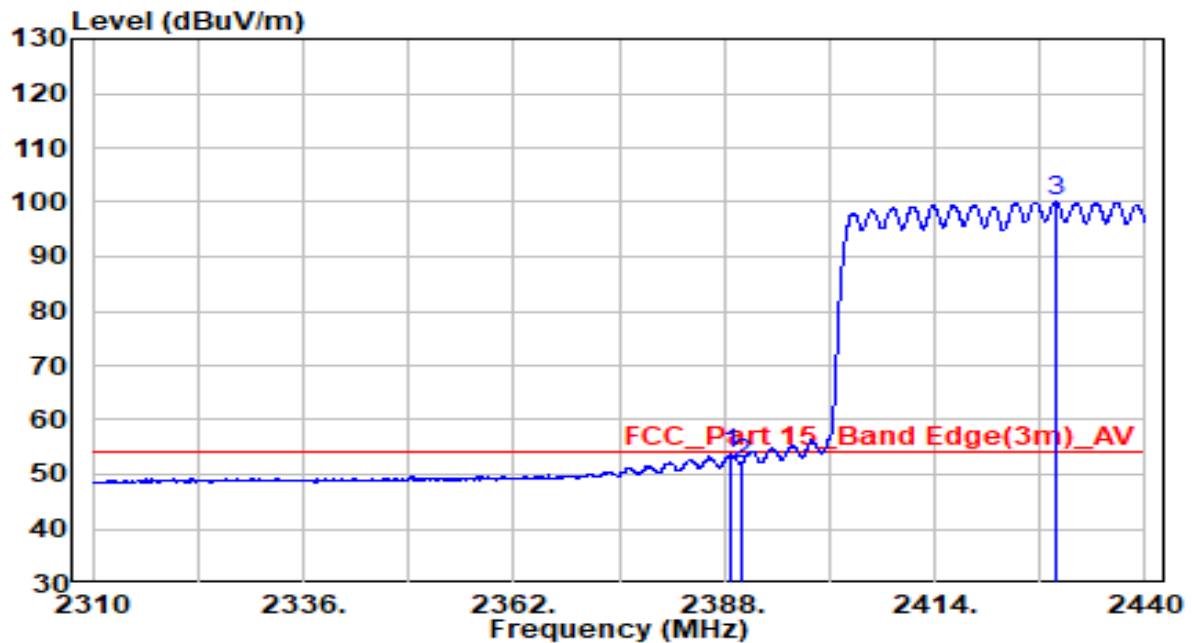


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.780	21.57	32.29	53.86	-0.14	54.00	Average
2	2390.000	19.69	32.30	51.99	-2.01	54.00	Average
3	* 2429.015	67.64	32.47	100.11	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

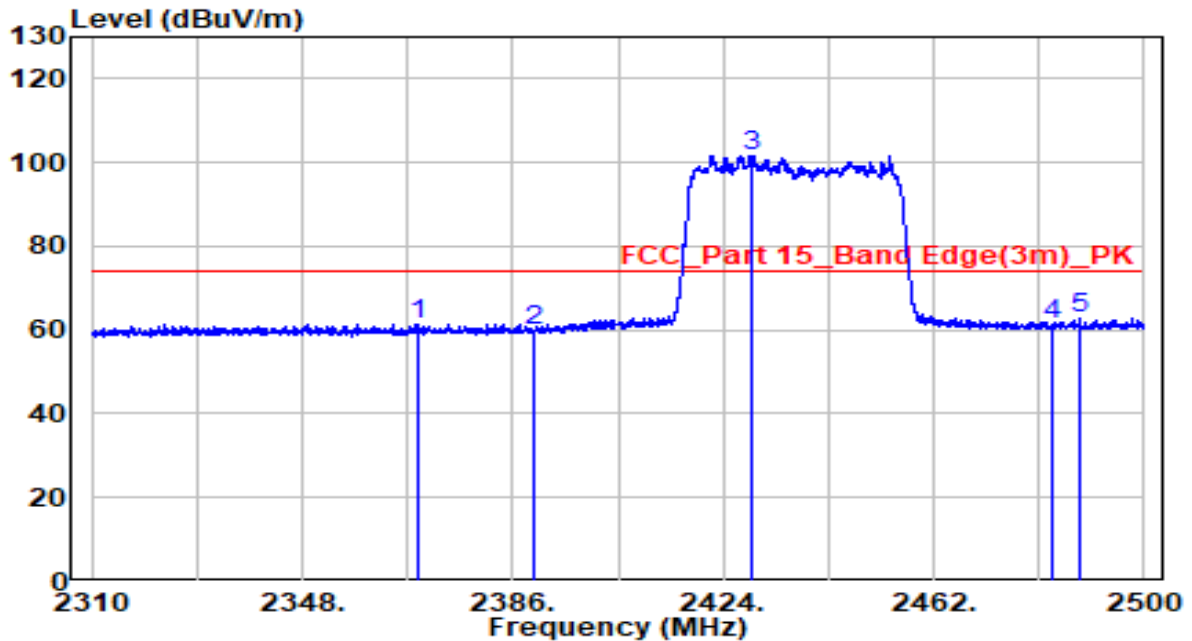


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2368.710	29.34	32.20	61.54	-12.46	74.00	Peak
2	2390.000	27.70	32.30	60.00	-14.00	74.00	Peak
3	* 2429.320	69.22	32.47	101.69	N/A	N/A	Peak
4	2483.500	28.43	32.71	61.14	-12.86	74.00	Peak
5	2488.505	30.03	32.73	62.76	-11.24	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

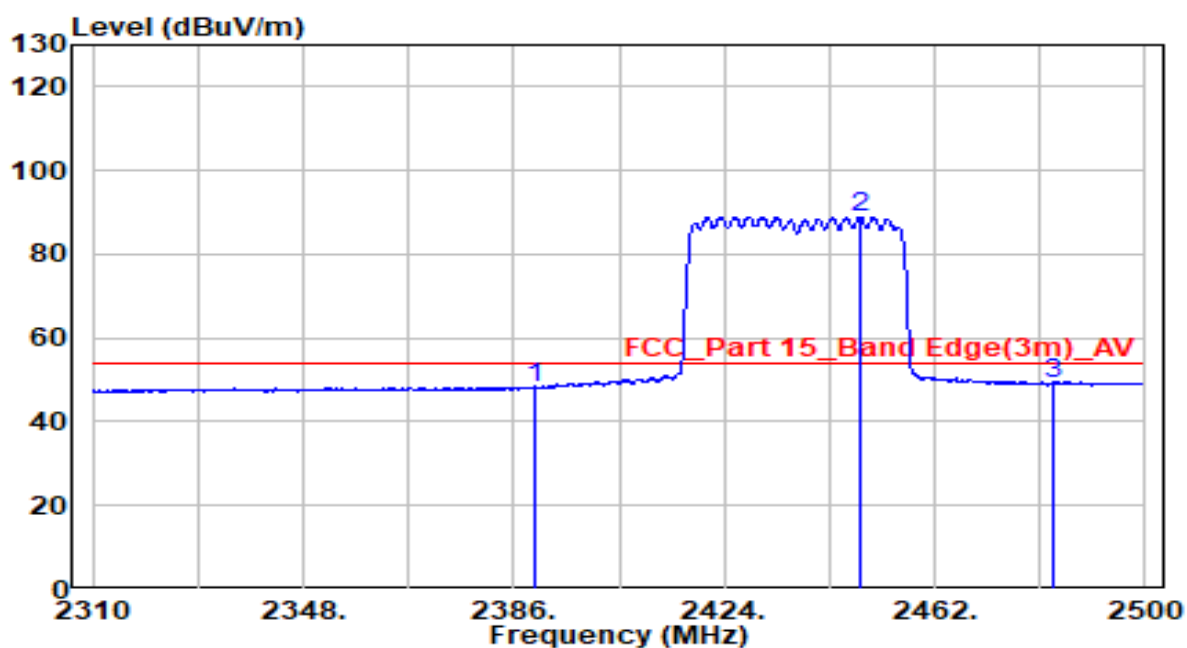


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.82	32.30	48.11	-5.89	54.00	Average
2	* 2448.415	56.44	32.55	89.00	N/A	N/A	Average
3	2483.500	16.48	32.71	49.19	-4.81	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

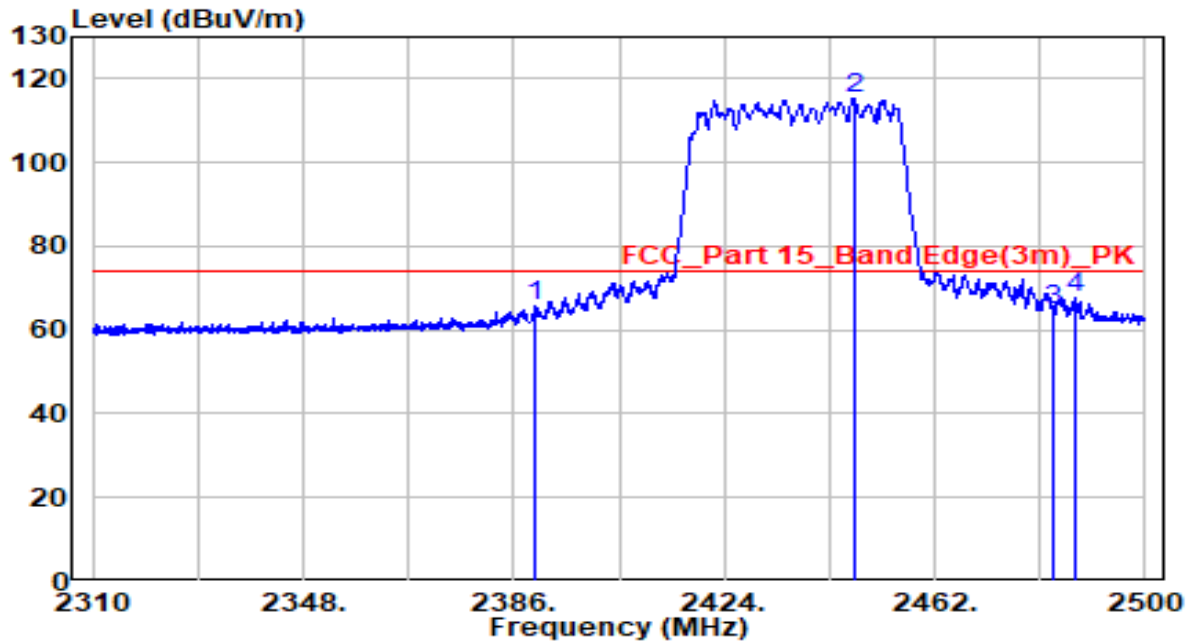


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	33.48	32.30	65.78	-8.22	74.00	Peak
2	* 2447.370	82.62	32.55	115.17	N/A	N/A	Peak
3	2483.500	32.06	32.71	64.77	-9.23	74.00	Peak
4	2487.175	35.14	32.72	67.86	-6.14	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

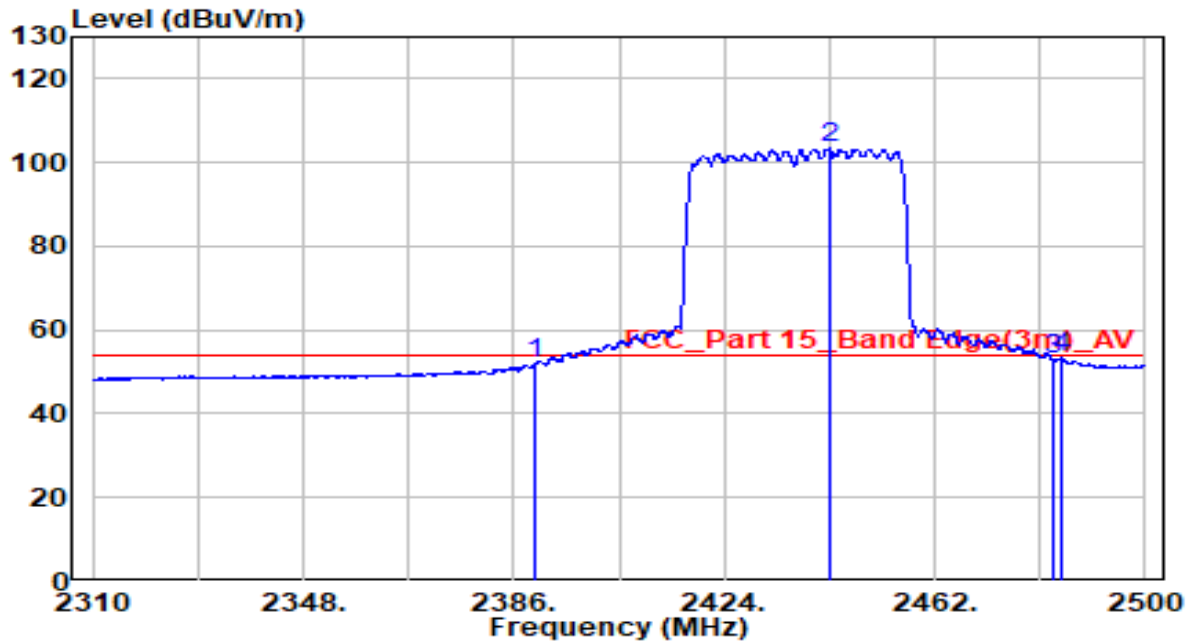


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.77	32.30	52.07	-1.93	54.00	Average
2	* 2443.000	70.85	32.53	103.38	N/A	N/A	Average
3	2483.500	20.10	32.71	52.81	-1.19	54.00	Average
4	2484.800	20.52	32.71	53.23	-0.77	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

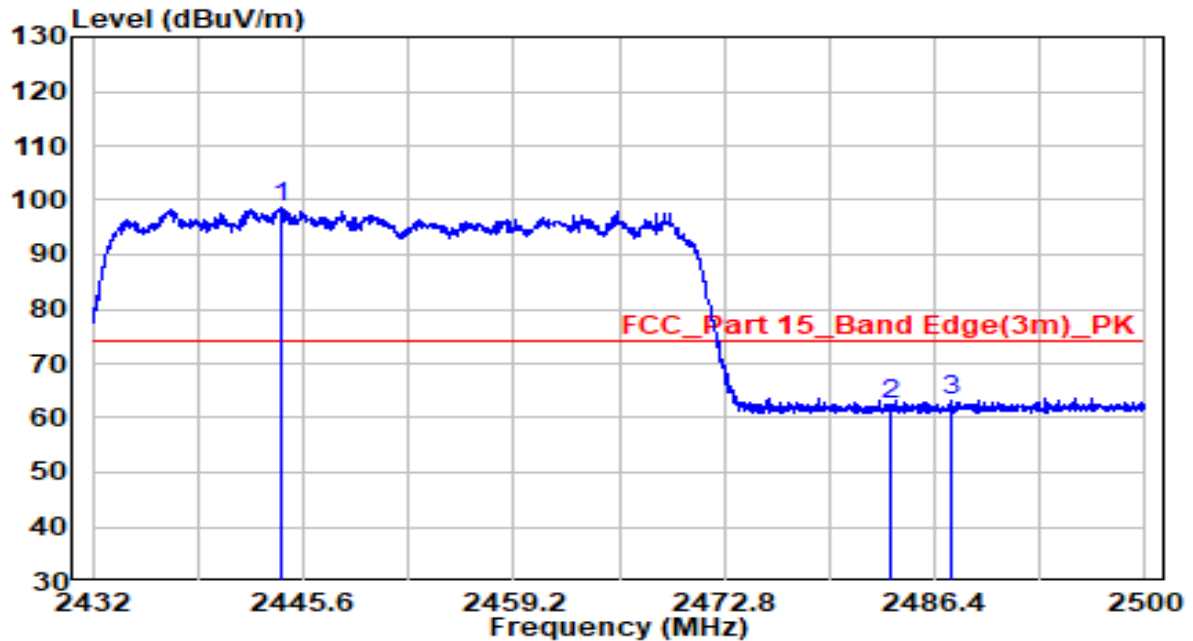


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2444.138	65.98	32.53	98.51	N/A	N/A	Peak
2		2483.500	29.57	32.71	62.28	-11.72	74.00	Peak
3		2487.454	30.42	32.72	63.15	-10.85	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

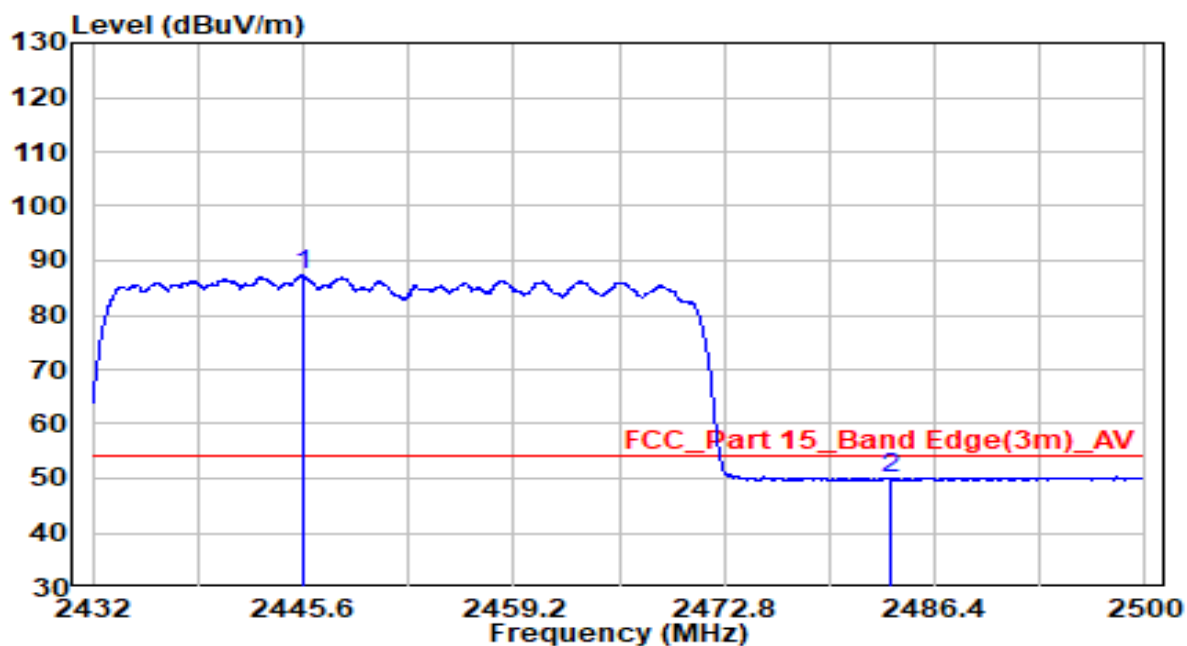


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2445.532	54.73	32.54	87.27	N/A	N/A	Average
2		2483.500	17.12	32.71	49.83	-4.17	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

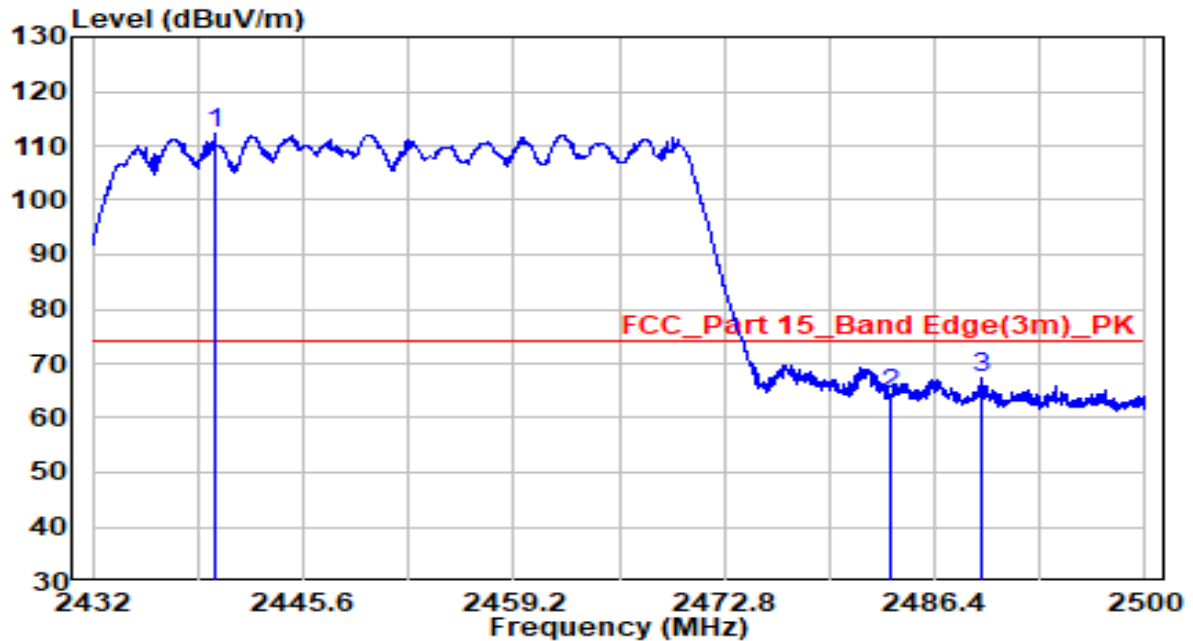


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2439.922	79.72	32.52	112.23	N/A	N/A	Peak
2		2483.500	31.55	32.71	64.25	-9.75	74.00	Peak
3		2489.358	34.60	32.73	67.33	-6.67	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	17°C/51%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

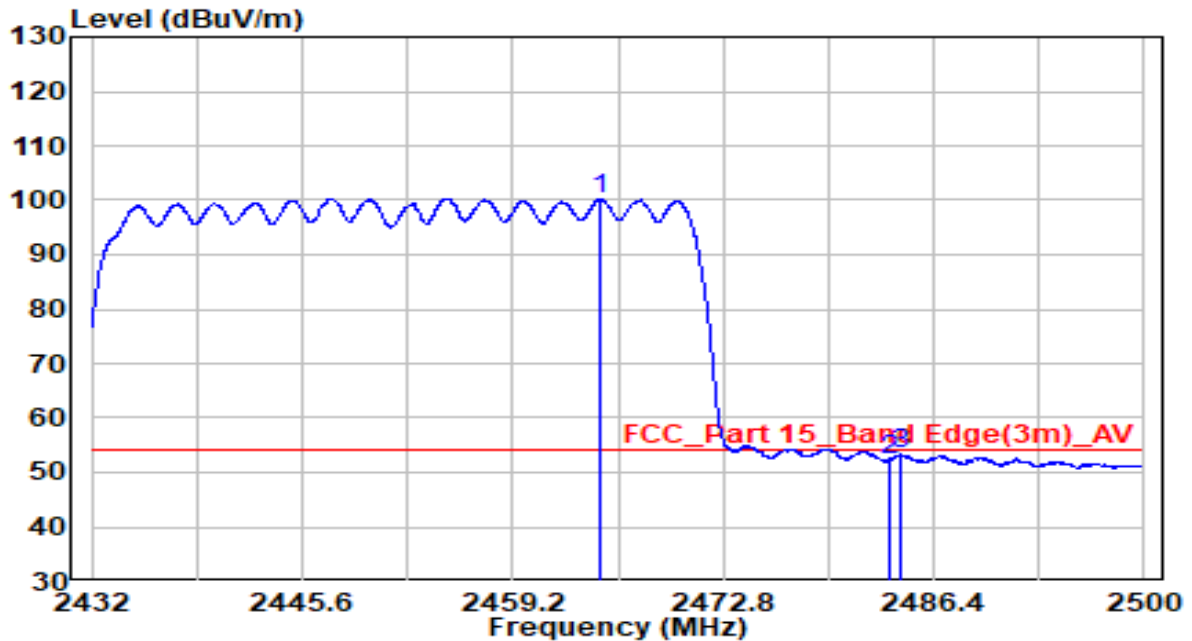


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2464.878	67.61	32.63	100.23	N/A	N/A	Average
2		2483.500	19.73	32.71	52.44	-1.56	54.00	Average
3		2484.224	20.53	32.71	53.24	-0.76	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

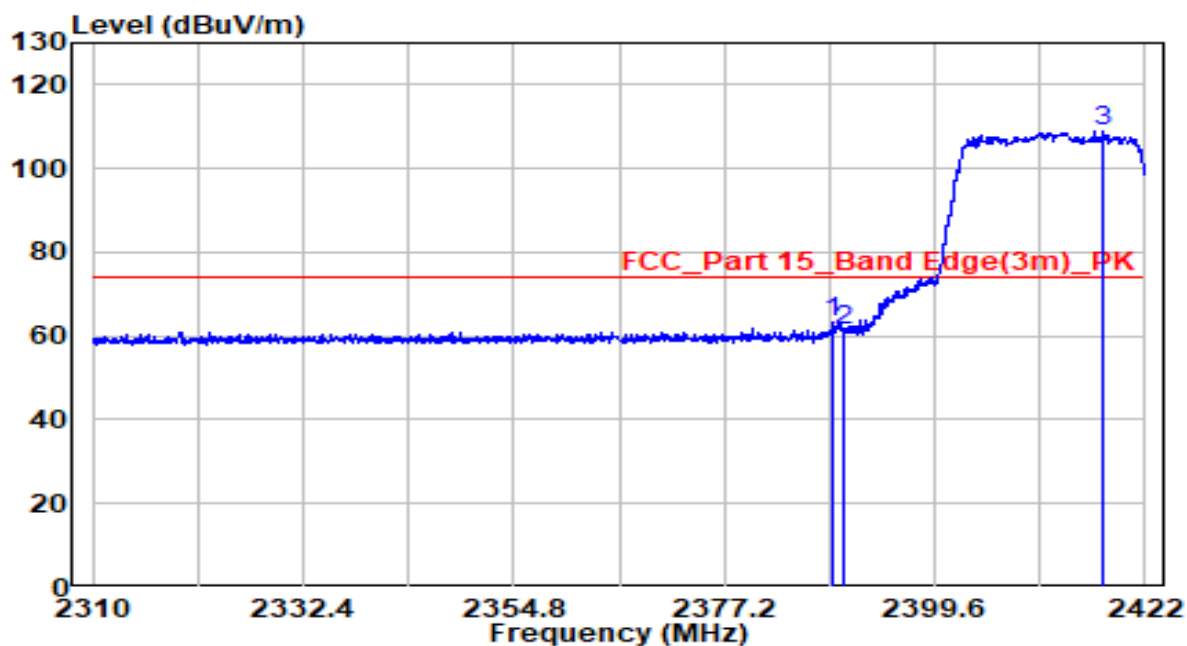


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.680	30.80	32.29	63.09	-10.91	74.00	Peak
2	2390.000	29.12	32.30	61.41	-12.59	74.00	Peak
3	* 2417.464	76.68	32.42	109.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

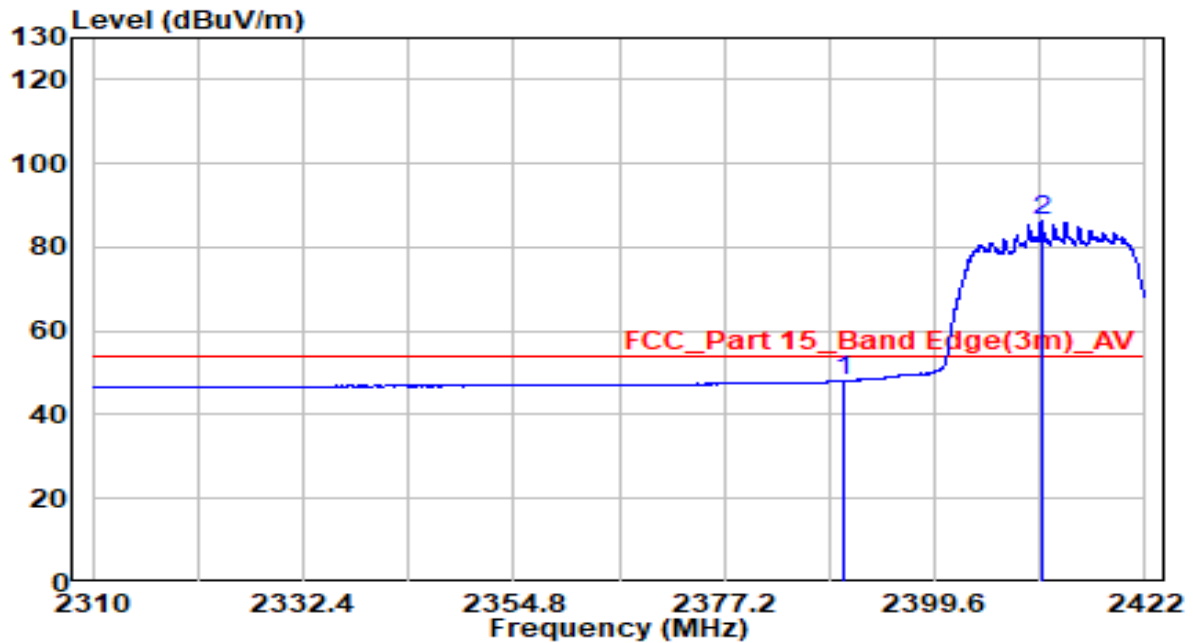


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.74	32.30	48.04	-5.96	54.00	Average
2	* 2410.912	53.80	32.39	86.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

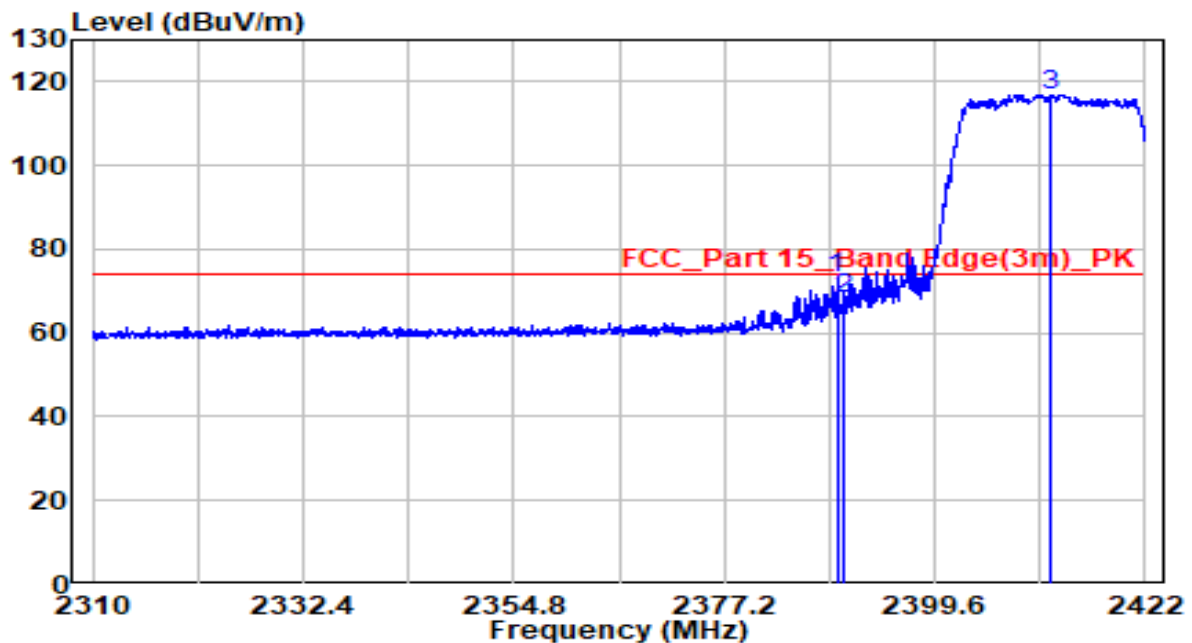


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.184	40.77	32.29	73.06	-0.94	74.00	Peak
2	2390.000	35.76	32.30	68.06	-5.94	74.00	Peak
3	* 2411.976	84.56	32.39	116.95	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

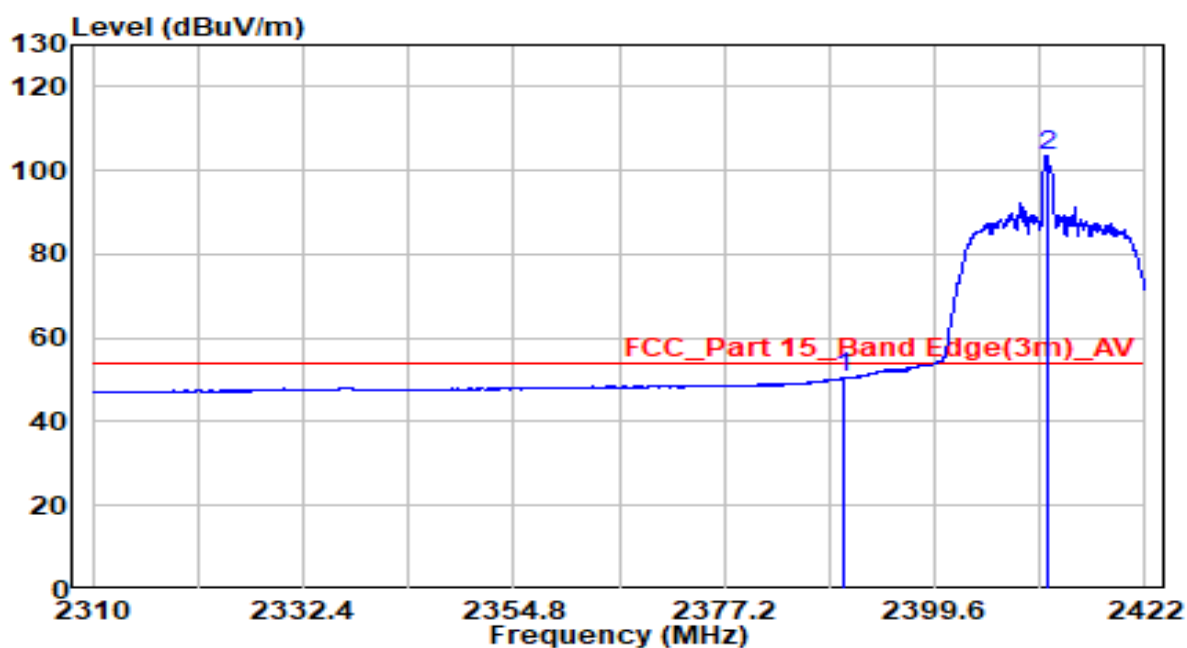


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.06	32.30	50.36	-3.64	54.00	Average
2	* 2411.528	70.95	32.39	103.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

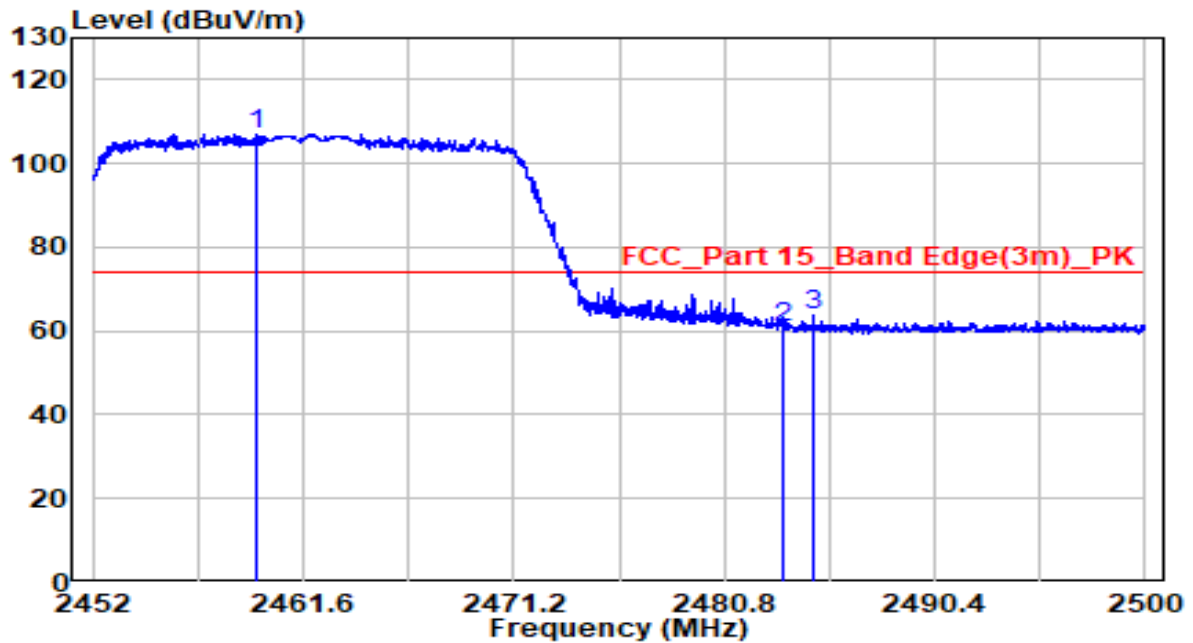


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2459.488	74.53	32.60	107.13	N/A	N/A	Peak
2		2483.500	28.21	32.71	60.92	-13.08	74.00	Peak
3		2484.880	31.30	32.71	64.02	-9.98	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

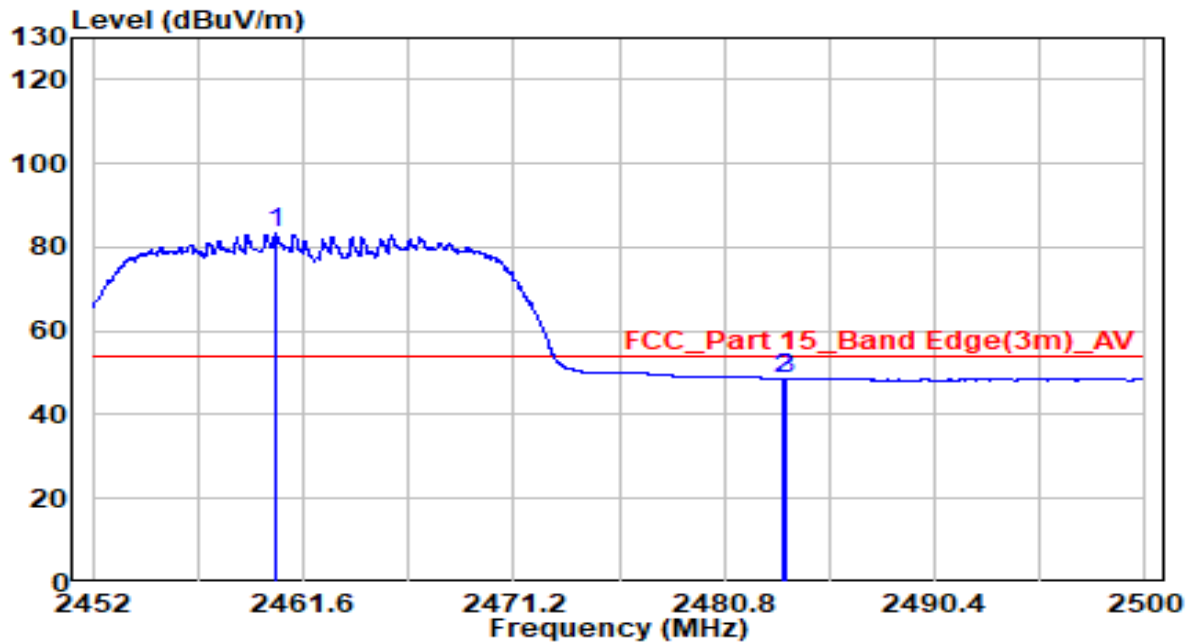


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2460.352	50.95	32.61	83.56	N/A	N/A	Average
2		2483.500	15.84	32.71	48.55	-5.45	54.00	Average
3		2483.632	15.88	32.71	48.59	-5.41	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

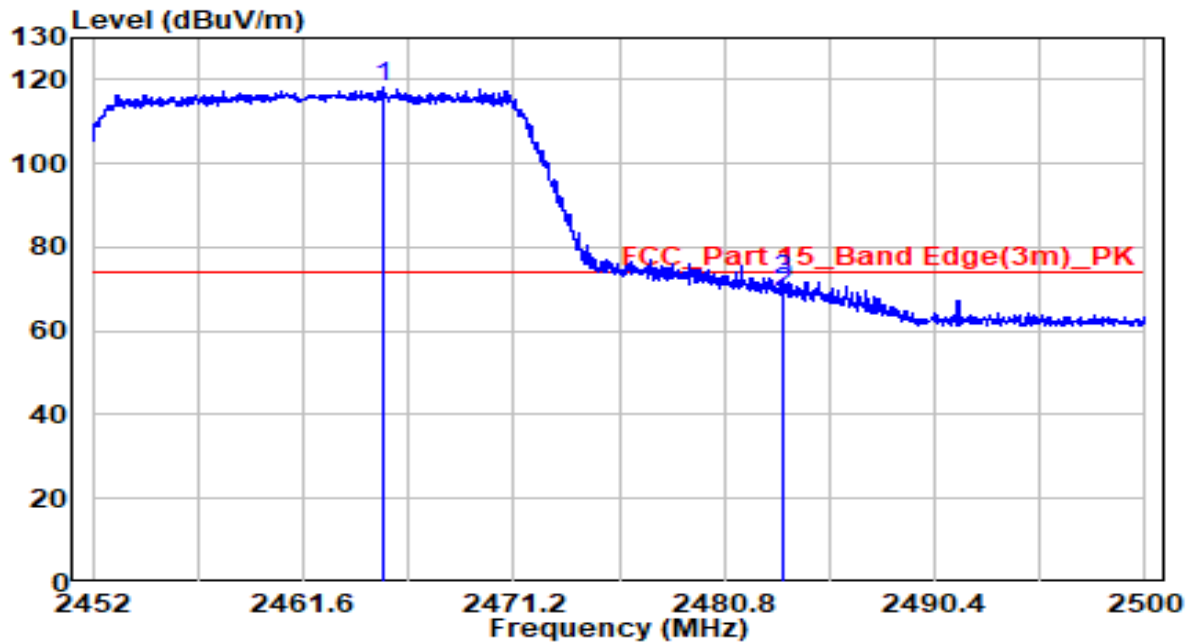


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2465.272	85.41	32.63	118.04	N/A	N/A	Peak
2		2483.500	36.69	32.71	69.40	-4.60	74.00	Peak
3		2483.512	39.62	32.71	72.33	-1.67	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

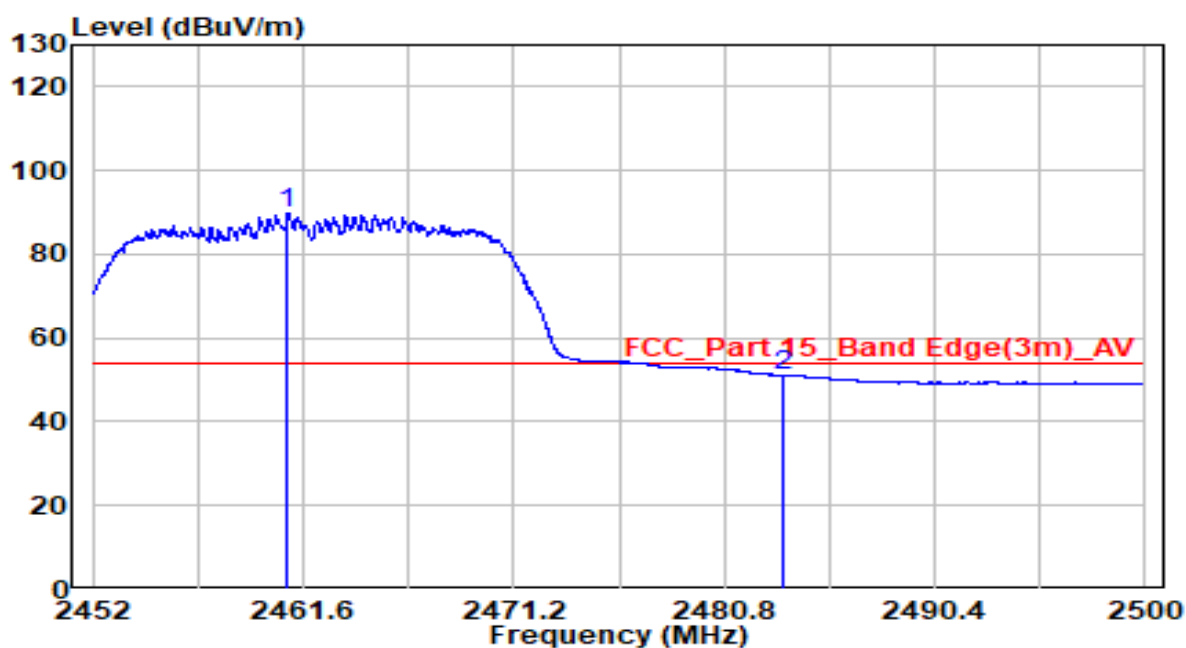


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.904	57.21	32.61	89.82	N/A	N/A	Average
2		2483.500	18.37	32.71	51.08	-2.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

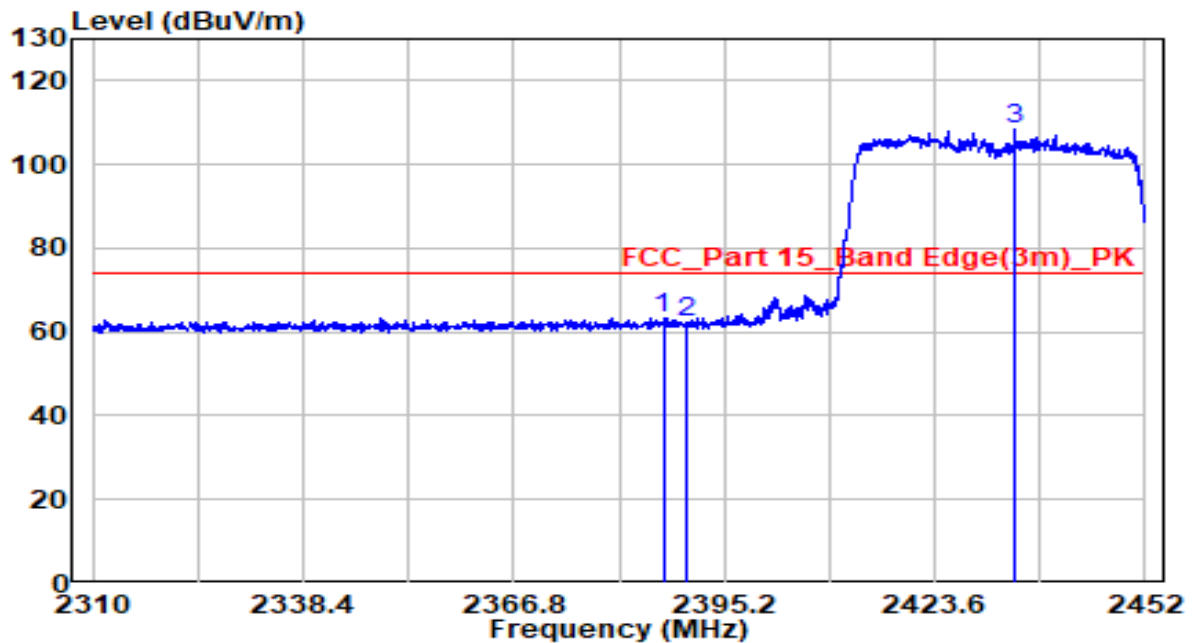


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.964	31.14	32.28	63.43	-10.57	74.00	Peak
2	2390.000	30.17	32.30	62.46	-11.54	74.00	Peak
3	* 2434.392	75.82	32.49	108.31	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

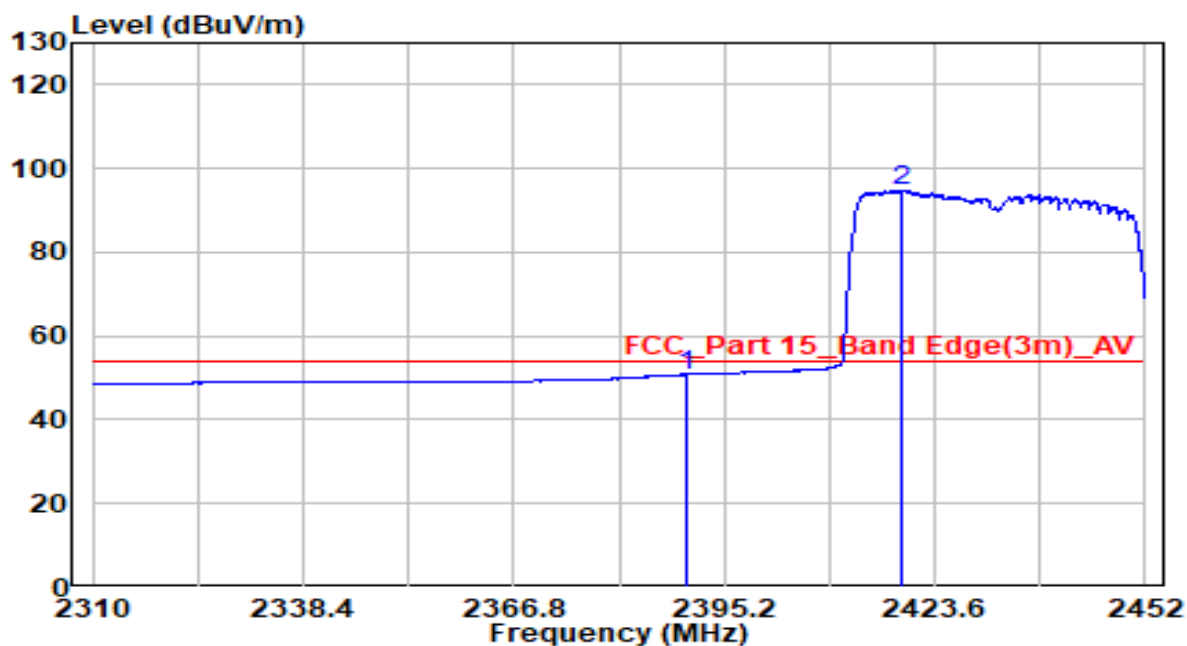


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.46	32.30	50.76	-3.24	54.00	Average
2	* 2419.198	62.36	32.42	94.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

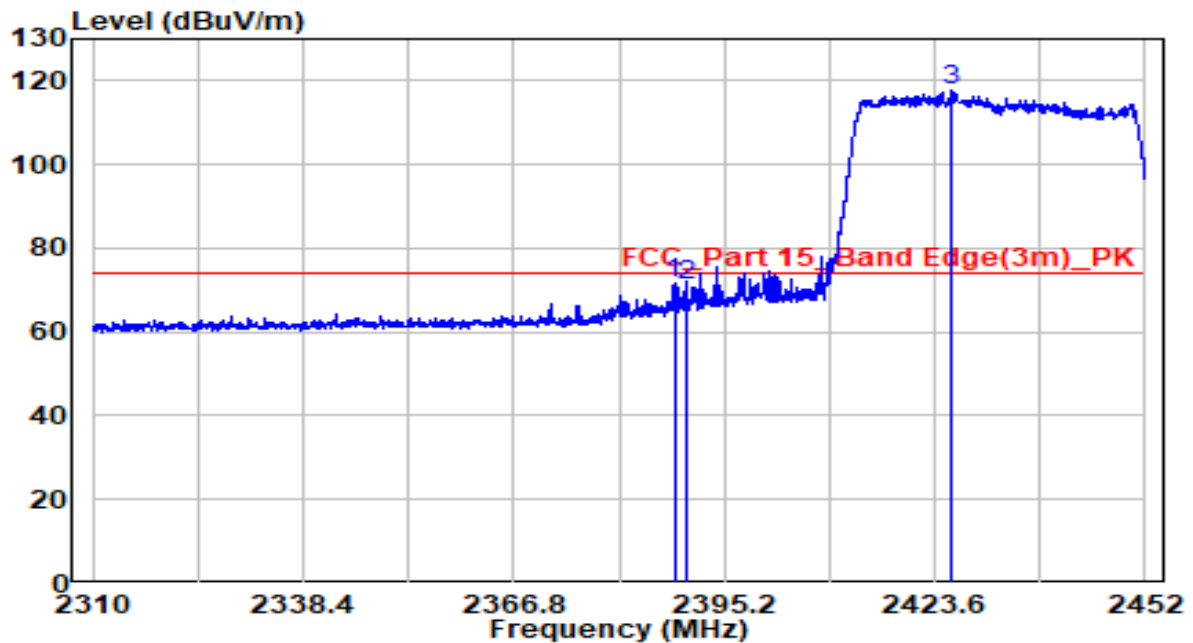


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.455	39.31	32.29	71.60	-2.40	74.00	Peak
2	2390.000	38.65	32.30	70.94	-3.06	74.00	Peak
3	* 2425.943	85.52	32.45	117.98	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

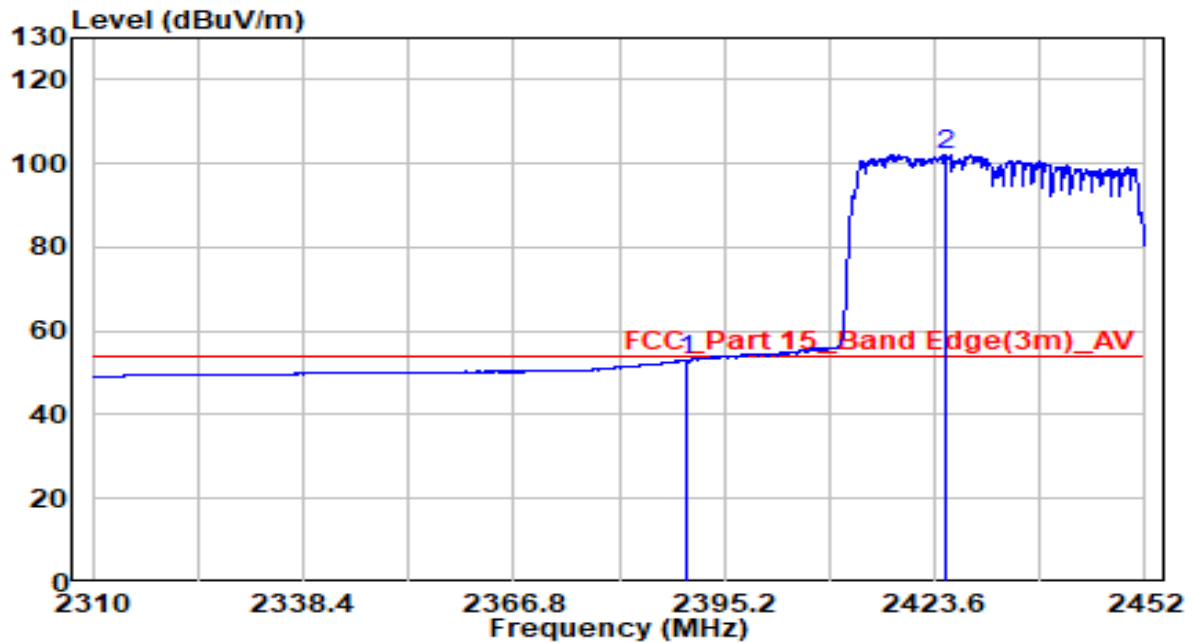


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.73	32.30	53.03	-0.97	54.00	Average
2	* 2425.091	69.63	32.45	102.09	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

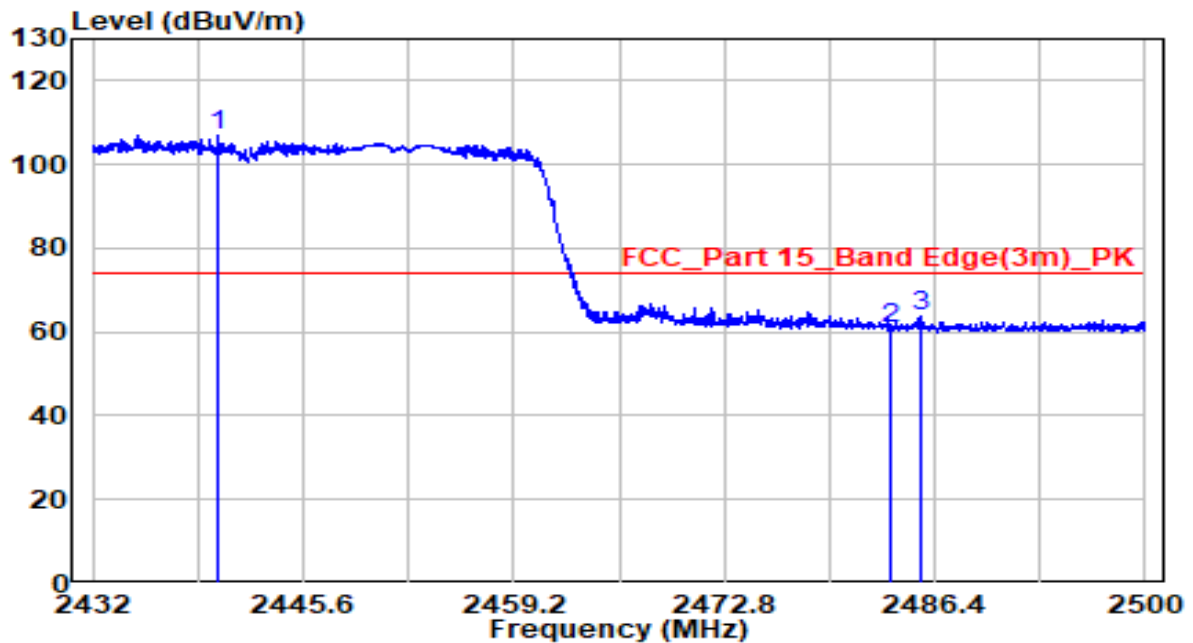


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2440.126	74.18	32.52	106.70	N/A	N/A	Peak
2		2483.500	28.15	32.71	60.86	-13.14	74.00	Peak
3		2485.448	31.04	32.72	63.75	-10.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

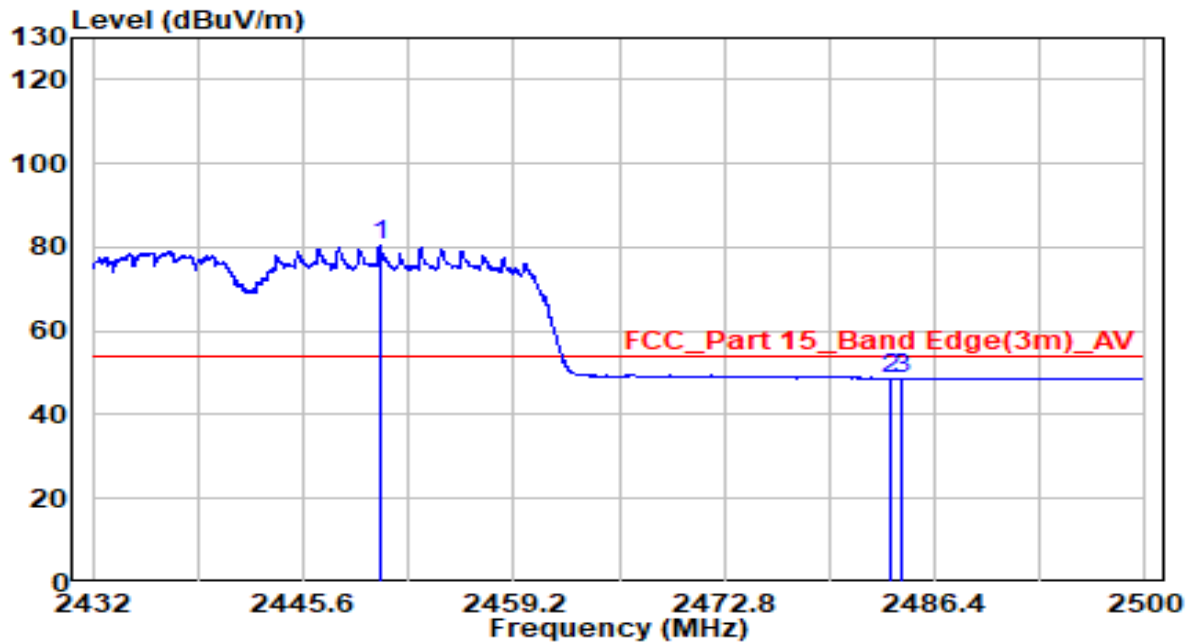


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.530	47.69	32.56	80.25	N/A	N/A	Average
2		2483.500	16.03	32.71	48.74	-5.26	54.00	Average
3		2484.292	16.07	32.71	48.79	-5.21	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

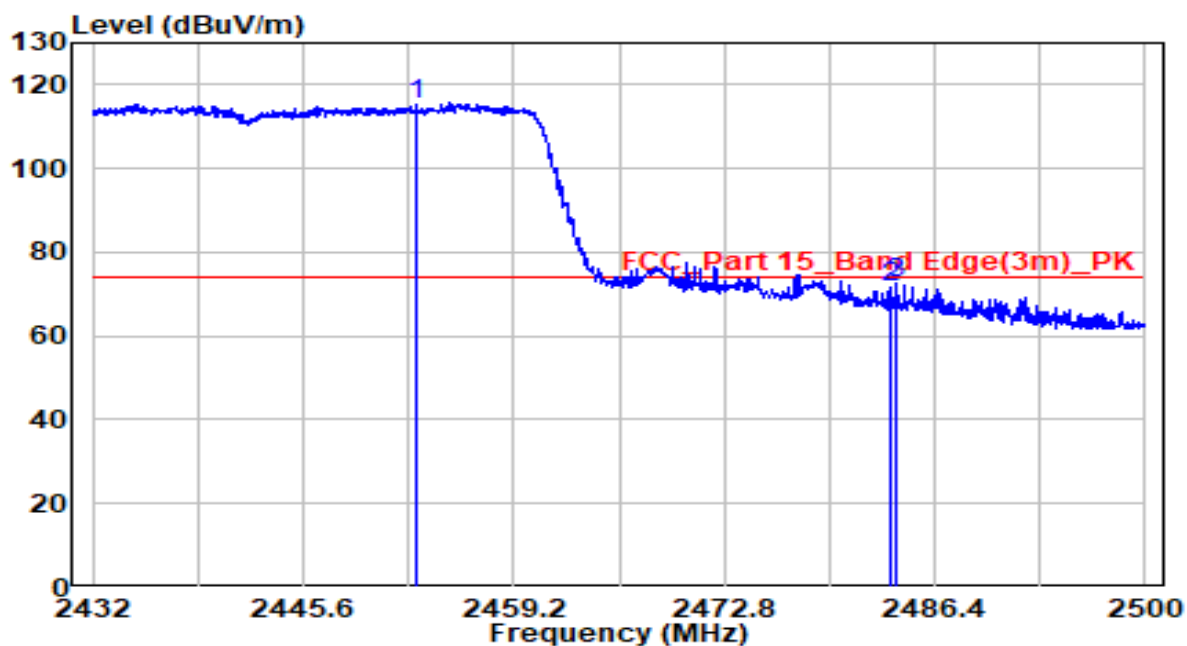


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2452.944	82.73	32.57	115.30	N/A	N/A	Peak
2		2483.500	38.98	32.71	71.69	-2.31	74.00	Peak
3		2483.986	39.90	32.71	72.61	-1.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.1°C/38.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

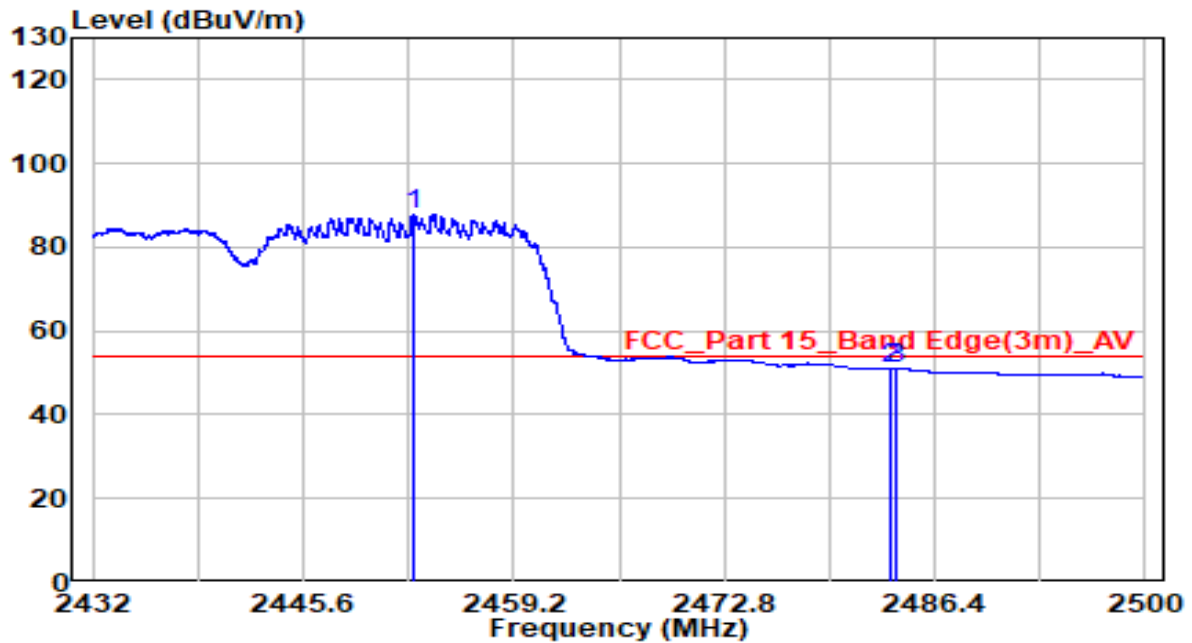

No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2452.808	55.43	32.57	88.00	N/A	N/A	Average
2		2483.500	18.24	32.71	50.94	-3.06	54.00	Average
3		2483.884	18.31	32.71	51.01	-2.99	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

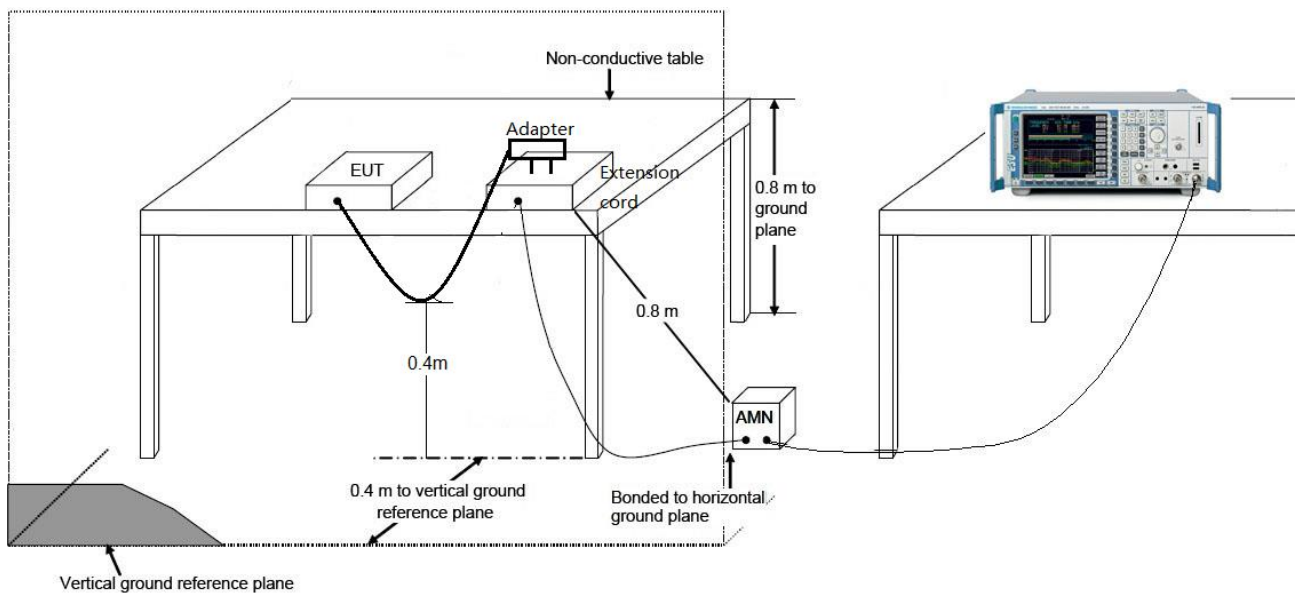

7.8.3.Test Result

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	CE_ENV216-L1 (Filter ON)_2020	Temp. / Humidity	25.2°C /47.6%
Polarity	Line1	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

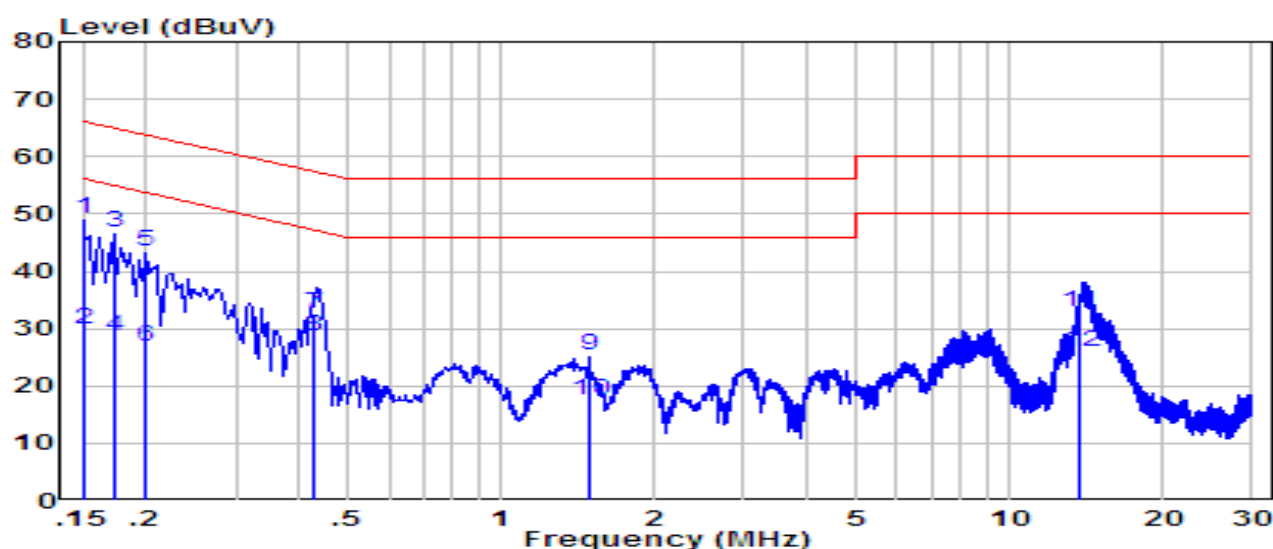


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.150	39.52	9.61	49.13	-16.87	66.00	QP
2		0.150	20.32	9.61	29.93	-26.07	56.00	Average
3		0.173	37.16	9.57	46.73	-18.09	64.82	QP
4		0.173	19.16	9.57	28.73	-26.09	54.82	Average
5		0.199	33.78	9.61	43.39	-20.26	63.65	QP
6		0.199	17.28	9.61	26.89	-26.76	53.65	Average
7		0.428	22.87	9.60	32.47	-24.82	57.29	QP
8		0.428	19.13	9.60	28.73	-18.56	47.29	Average
9		1.490	15.67	9.67	25.35	-30.65	56.00	QP
10		1.490	7.97	9.67	17.65	-28.35	46.00	Average
11		13.680	22.86	9.92	32.78	-27.22	60.00	QP
12		13.680	16.16	9.92	26.08	-23.92	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	CE_ENV216-N (Filter ON)_2020	Temp. / Humidity	25.2°C /47.6%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

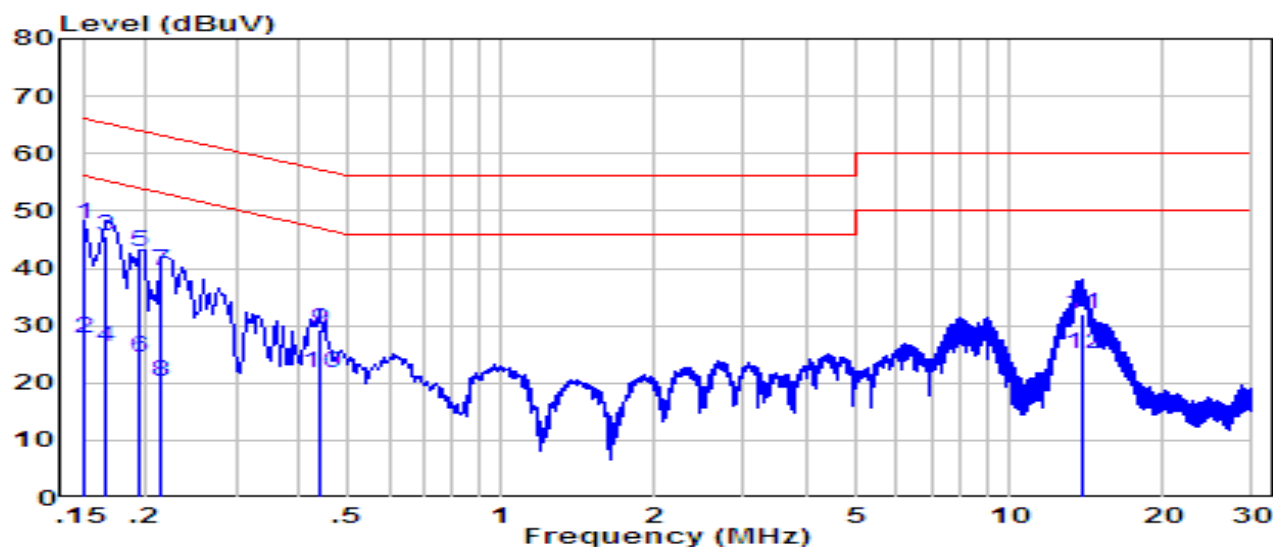

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.150	38.21	9.62	47.83	-18.17	66.00	QP
2		0.150	18.21	9.62	27.83	-28.17	56.00	Average
3		0.166	35.92	9.61	45.53	-19.63	65.16	QP
4		0.166	16.62	9.61	26.23	-28.93	55.16	Average
5		0.194	33.22	9.61	42.83	-21.03	63.86	QP
6		0.194	14.82	9.61	24.43	-29.43	53.86	Average
7		0.214	29.82	9.61	39.43	-23.62	63.05	QP
8		0.214	10.52	9.61	20.13	-32.92	53.05	Average
9		0.442	19.64	9.61	29.25	-27.77	57.02	QP
10		0.442	12.16	9.61	21.77	-25.25	47.02	Average
11		13.890	22.13	9.95	32.08	-27.92	60.00	QP
12		13.890	15.23	9.95	25.18	-24.82	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “ 2004TW0002-UT” file.

Appendix B - EUT Photograph

Refer to “ 2004TW0002-UE” file.