


## NOTES:

1. MATERIAL: .002 THICK POLYESTER WITH 3M #400 OR #7921 ACRYLIC ADHESIVE.
  - A. BACKING: SILICONE RELEASE LINER.
  - B. FACE COLOR: WHITE WITH BLACK INK.
2. ENVIRONMENTAL:
  - A. TEMPERATURE RANGE: -40 °C TO +85 °C.
  - B. ADHESIVE, MATERIAL AND INK SHALL BE RESISTANCE TO UV DEGRADITION.
  - C. LIGHT AND HUMIDITY AS SPECIFIED IN UL 969-OUTDOOR EXPOSURE TEST.

REVISIONS							
DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE	APPROVED
01	3829	SLDW	RELEASE FOR QUOTE / PROTOTYPE	-	-	-	-

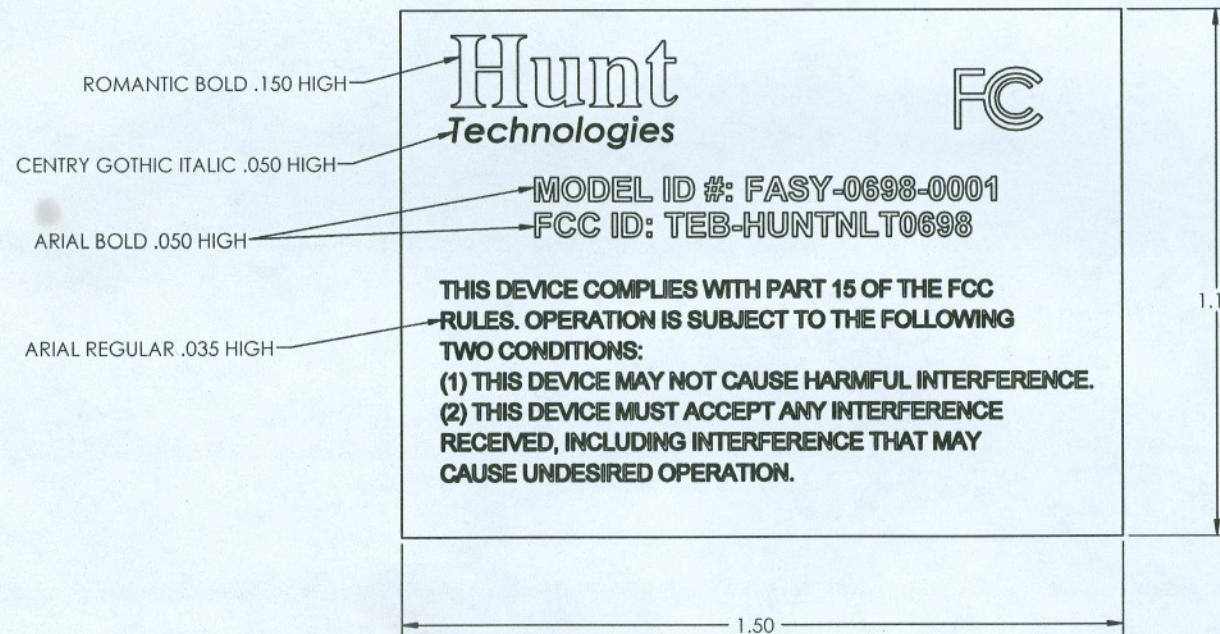

UNCONTROLLED

DO NOT SCALE DRAWING	CHECKED BY:	DATED:	COMPANY: HUNT TECHNOLOGIES, INC. PEQUOT LAKES, MN 56472			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ± .03 ± 1/64 ±1° 3 PL ± .015	INITIATOR:	DATED:	TITLE: LABEL, FCC, ENCLOSURE SNIFFER MODULE			
MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. ( ) DENOTES REFERENCE ONLY.	QUALITY ASSURANCE:	DATED:	PART NO. LABL-00223			
	MANUFACTURING:	DATED:	DRAWN BY:	DWG. NO.	DATED:	SCALE: SIZE: SHEET:
			S. O'BRYAN	LABL-00223	11/28/06	NONE B 1 OF 1

## NOTICE:

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO HUNT TECHNOLOGIES INC. ANY USE OR DISCLOSURE WITHOUT WRITTEN PERMISSION IS PROHIBITED.