


NOTES:

1. MATERIAL: .002 THICK POLYESTER WITH 3M #400 OR #7921 ACRYLIC ADHESIVE.
A. BACKING: SILICONE RELEASE LINER.
B. FACE COLOR: WHITE WITH BLACK INK.
2. ENVIRONMENTAL:
A. TEMPERATURE RANGE: -40°C TO +85°C.
B. ADHESIVE, MATERIAL AND INK SHALL BE RESISTANCE TO UV DEGRADATION.
C. LIGHT AND HUMIDITY AS SPECIFIED IN UL 969-OUTDOOR EXPOSURE TEST.

REVISIONS

DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE	APPROVED
01	3829	SLDW	RELEASE FOR QUOTE / PROTOTYPE	-	-	-	-

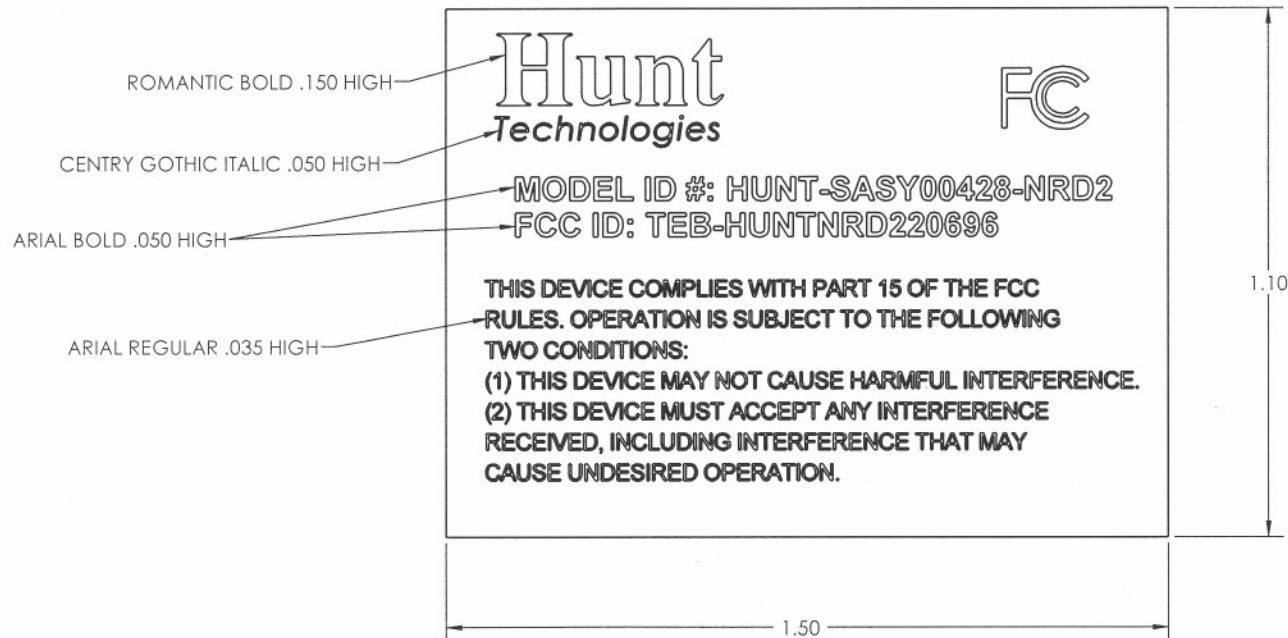

NOTICE:
THIS DOCUMENT CONTAINS INFORMATION
PROPRIETARY TO HUNT TECHNOLOGIES INC.
ANY USE OR DISCLOSURE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ± .03 ± 1/64 ± 1° 3 PL ± .015 MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. () DENOTES REFERENCE ONLY.	CHECKED BY:	DATED:	COMPANY:			
	INITIATOR:	DATED:	HUNT TECHNOLOGIES, INC.			
	S. LESSER	01-17/07	PEQUOT LAKES, MN 56472			
	QUALITY ASSURANCE:	DATED:	TITLE:			
			LABEL, FCC, NRD2 MODULE			
	MANUFACTURING:	DATED:	PART NO.			
			LABL-00300			
	DRAWN BY:	DATED:	DWG. NO.	DATED:	SCALE:	SIZE:
	S. O'BRYAN	01/17/07	LABL-00300	01/17/07	NONE	B
						SHEET:
						1 OF 1