


NOTES:

1. MATERIAL: .002 THICK POLYESTER WITH 3M #400 OR #7921 ACRYLIC ADHESIVE.
 - A. BACKING: SILICONE RELEASE LINER.
 - B. FACE COLOR: WHITE WITH BLACK INK.
2. ENVIRONMENTAL:
 - A. TEMPERATURE RANGE: -40 °C TO +85 °C.
 - B. ADHESIVE, MATERIAL AND INK SHALL BE RESISTANCE TO UV DEGRADITION.
 - C. LIGHT AND HUMIDITY AS SPECIFIED IN UL 969-OUTDOOR EXPOSURE TEST.

REVISIONS							
DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE	APPROVED
01	3829	SLDW	RELEASE FOR QUOTE / PROTOTYPE	-	-	-	-

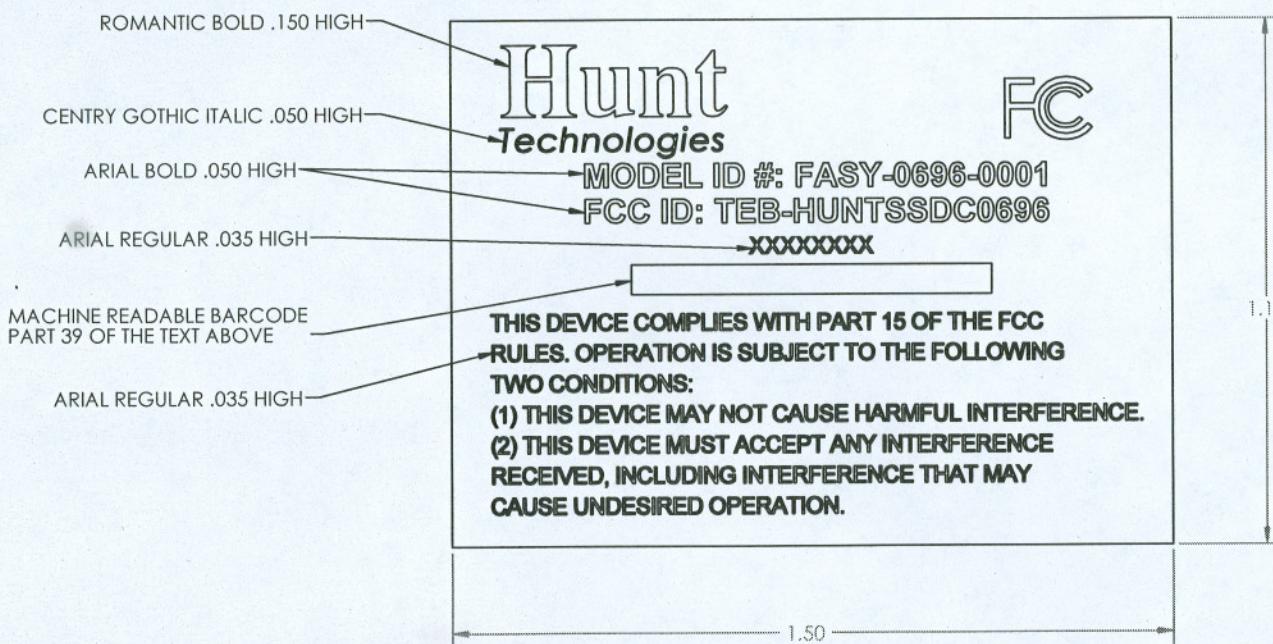

UNCONTROLLED

DO NOT SCALE DRAWING	CHECKED BY:	DATED:	COMPANY:
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ± .03 ± 1/64 ±1° 3 PL ± .015	INITIATOR: M. BAJCZYK	DATED: 11/28/06	PEQUOT LAKES, MN 56472
MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. () DENOTES REFERENCE ONLY.	QUALITY ASSURANCE:	DATED:	TITLE: LABEL, FCC, STATSIGNAL DATA COLLECTOR
	MANUFACTURING:	DATED:	PART NO. LABL-00222
	DRAWN BY: S. O'BRYAN	DATED: 11/28/06	DWG. NO. LABL-00222
			DATED: 11/28/06
		SCALE: NONE	SIZE: B
			SHEET: 1 OF 1

NOTICE:
 THIS DOCUMENT CONTAINS INFORMATION
 PROPRIETARY TO HUNT TECHNOLOGIES INC.
 ANY USE OR DISCLOSURE WITHOUT WRITTEN
 PERMISSION IS PROHIBITED.