


NOTES:

1. MATERIAL: .002 THICK POLYESTER WITH 3M #400 OR #7921 ACRYLIC ADHESIVE.
 - A. BACKING: SILICONE RELEASE LINER.
 - B. FACE COLOR: WHITE WITH BLACK INK.
2. ENVIRONMENTAL:
 - A. TEMPERATURE RANGE: -40 °C TO +85 °C.
 - B. ADHESIVE, MATERIAL AND INK SHALL BE RESISTANCE TO UV DEGRADATION.
 - C. LIGHT AND HUMIDITY AS SPECIFIED IN UL 969-OUTDOOR EXPOSURE TEST.

REVISIONS

DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE	APPROVED
01	3829	SLDW	RELEASE FOR QUOTE / PROTOTYPE	-	-	-	-

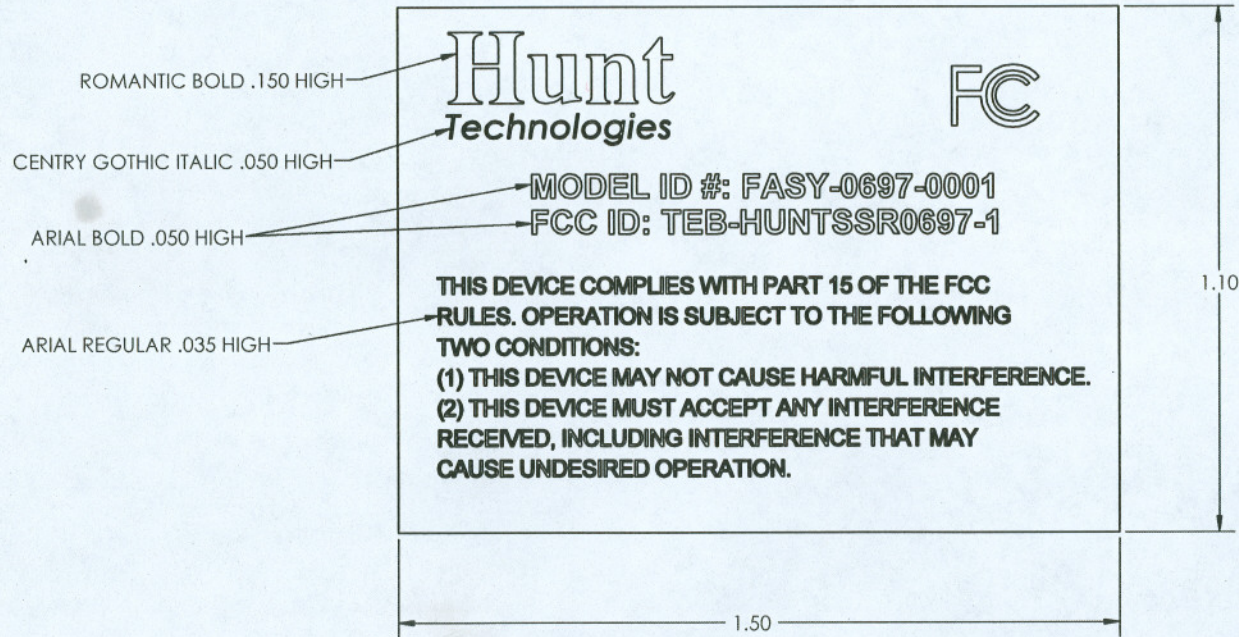

UNCONTROLLED

NOTICE:
THIS DOCUMENT CONTAINS INFORMATION
PROPRIETARY TO HUNT TECHNOLOGIES INC.
ANY USE OR DISCLOSURE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ± .03 ± 1/64 ± 1° 3 PL ± .015 MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. () DENOTES REFERENCE ONLY.	CHECKED BY:	DATED:	COMPANY:			
	INITIATOR:	DATED:	HUNT TECHNOLOGIES, INC.			
	QUALITY ASSURANCE:	DATED:	PEQUOT LAKES, MN 56472			
	MANUFACTURING:	DATED:	TITLE: LABEL, FCC, ENCLOSURE STAT SIGNAL 1/2 WATT REP			
	DRAWN BY:	DATED:	PART NO. LABL-00220			
	S. O'BRYAN	11/28/06	DWG. NO. LABL-00220	DATED: 11/28/06	SCALE: NONE	SHEET: 1 OF 1