

## **FCC Part 15.247 Transmitter Certification**

900 MHz ISM Band  
Frequency Hopping Spread Spectrum Transmitter

### **Test Report**

FCC ID: TEB-HUNTSU825

FCC Rule Part: 15.247

Test Begin Date: 11/4/2009  
Test End Date: 12/4/2009

Report Issue Date: 1/6/2010

## Table of Contents

|  |           |
|--|-----------|
| <b>1.0 GENERAL.....</b>  | <b>3</b>  |
| <b>1.1 PURPOSE .....</b>   | <b>3</b>  |
| <b>1.2 PRODUCT DESCRIPTION .....</b>   | <b>3</b>  |
| <b>1.2.1 General.....</b>  | <b>3</b>  |
| <b>1.2.2 Intended Use.....</b>   | <b>3</b>  |
| <b>2.0 STATEMENT OF COMPLIANCE.....</b>  | <b>3</b>  |
| <b>3.0 APPLICABLE STANDARD REFERENCES.....</b>   | <b>5</b>  |
| <b>4.0 LIST OF TEST EQUIPMENT .....</b>  | <b>5</b>  |
| <b>5.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM.....</b>   | <b>6</b>  |
| <b>6.0 SUMMARY OF TESTS.....</b>   | <b>6</b>  |
| <b>6.1 FREQUENCIES TO BE EXAMINED [§15.31(M)] .....</b>  | <b>6</b>  |
| <b>6.2 ANTENNA REQUIREMENT [§15.203] .....</b>   | <b>6</b>  |
| <b>6.3 ANTENNA CHARACTERISTICS [§15.204]</b>   | <b>7</b>  |
| <b>6.3.1 Antenna Type.....</b>   | <b>7</b>  |
| <b>6.3.2 Antenna Manufacturer.....</b>   | <b>7</b>  |
| <b>6.3.3 Antenna Gain.....</b>   | <b>7</b>  |
| <b>6.4 POWER LINE CONDUCTED EMISSIONS [§15.207]</b>  | <b>7</b>  |
| <b>6.4.1 Test Methodology.....</b>   | <b>7</b>  |
| <b>6.4.2 Test Results.....</b>   | <b>7</b>  |
| <b>6.5 RADIATED EMISSIONS [§15.109] AND RADIATED SPURIOUS EMISSIONS (RESTRICTED BANDS) [§15.205]</b> | <b>7</b>  |
| <b>6.5.1 Test Methodology.....</b>   | <b>7</b>  |
| <b>6.5.2 Calculation of allowed limit for Radiated Spurious Emissions .....</b>                      | <b>8</b>  |
| <b>6.5.3 Test Results.....</b>   | <b>8</b>  |
| <b>6.6 PEAK OUTPUT POWER – [§15.247(B)(2)] .....</b>   | <b>8</b>  |
| <b>6.6.1 Test Methodology (Conducted Method).....</b>  | <b>8</b>  |
| <b>6.6.2 Test Results.....</b>   | <b>8</b>  |
| <b>6.6.3 De Facto EIRP Limit .....</b>   | <b>10</b> |
| <b>6.6.4 RF Exposure Compliance Requirements.....</b>  | <b>10</b> |
| <b>6.7 CHANNEL USAGE REQUIREMENTS [§15.247(A) (1)] .....</b>   | <b>10</b> |
| <b>6.7.1 Carrier Frequency Separation.....</b>   | <b>10</b> |
| <b>6.7.1.1 Test Methodology .....</b>  | <b>10</b> |
| <b>6.7.1.2 Test Results .....</b>  | <b>10</b> |
| <b>6.7.2 Number of Hopping Channels.....</b>   | <b>11</b> |
| <b>6.7.3 Channel Dwell Time.....</b>   | <b>13</b> |
| <b>6.7.3.1 Test Methodology .....</b>  | <b>13</b> |
| <b>6.7.3.2 Test Results .....</b>  | <b>14</b> |
| <b>6.7.4 20dB Bandwidth .....</b>  | <b>14</b> |
| <b>6.7.4.1 Test Methodology .....</b>  | <b>14</b> |
| <b>6.7.4.2 Test Results .....</b>  | <b>14</b> |
| <b>6.8 BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS [§15.247(c)] .....</b>                            | <b>20</b> |
| <b>6.8.1 Band-Edge Compliance of RF Conducted Emissions .....</b>                                    | <b>20</b> |
| <b>6.8.1.1 Test Methodology .....</b>  | <b>20</b> |
| <b>6.8.1.2 Test Results .....</b>  | <b>20</b> |
| <b>6.8.2 RF Conducted Spurious Emissions.....</b>  | <b>24</b> |
| <b>6.8.2.1 Test Methodology .....</b>  | <b>24</b> |
| <b>6.8.2.2 Test Results .....</b>  | <b>24</b> |
| <b>7.0 CONCLUSION .....</b>  | <b>26</b> |

**Additional Exhibits Included In Filing**

|                                   |  |
|-----------------------------------|--|
| Exhibit A - External Photo        | Exhibit I - SDR Statement                      |
| Exhibit B - Internal Photos       | Exhibit J - Conducted Emissions                |
| Exhibit C - FCC Label             | Exhibit K - Radiated Emissions 30 MHz to 1 GHz |
| Exhibit D - Product Ship Sheet    | Exhibit L - Restricted Band                    |
| Exhibit E - Test Setup Photos     | Exhibit N - Radiated Emissions Sketch          |
| Exhibit F - Operational Statement | Exhibit O - Modular Approval (900 MHz).doc     |
| Exhibit G - Schematic             | Exhibit P - RF Exposure.doc                    |
| Exhibit H - Block Diagram         |  |

**1.0 GENERAL****1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15, Subpart C of the FCC's Code of Federal Regulations.

**1.2 Product Description****1.2.1 General**

Hunt Technologies' S4e Universal RF endpoint model 825 consists of a 900 MHz transceiver and a separate ZigBee transceiver on a single printed circuit board. The 900 MHz circuit, operating in the 902-928 MHz frequency band, is a frequency hopping spread spectrum transceiver utilizing GFSK modulation. The ZigBee circuit is a direct sequence spread spectrum transmitter operating in the 2400-2483.5 MHz unlicensed band and utilizing O-QPSK modulation. The 825 module will be assembled into a Landis+Gyr S4e meter before delivery to the customer. This report specifically addresses the testing of the 900 MHz transceiver.

Exhibits A and B are detailed external and internal photographs of the EUT.

**1.2.2 Intended Use**

The S4e Universal RF endpoint model 825 will be transmitting and receiving over 902-928 MHz ISM band. It collects metering data from the meter module and transmits it to electric utility companies. It can also receive and repeat data from other similar modules or a central collector module.

**2.0 STATEMENT OF COMPLIANCE****§2.907 Certification**

This is an application for certification.

**§2.911 Application**

- a) This is an application and has been filed electronically with form 731.
- b) All information required has been supplied.
- c) The applicant has signed the application (electronically).
- d) The technical data has been signed.
- e) Applicant signature block on electronic form 731 completed by officer of the company or authorized company personnel.
- f) The appropriate fee has been paid.

**§2.915 Grant**

This application demonstrates that all applicable technical standards have been met.

**§2.925 Label**

Each piece of equipment for which authorization will be granted will be uniquely identified with "TEB-HUNTSU825". The required statement will appear with the FCC ID on the outside cover of the product. Exhibit C, "Exhibit C - FCC Label.pdf" shows the external label and Exhibit D, "Exhibit D - Product Ship Sheet.pdf" is the product's ship-sheet (pamphlet) provided to the end-user that contains the required compliance statement as defined by §15.19.

**§2.947 Measurement Procedure**

- a) The scan of the restricted bands was made in a radiated manner. The radiated measurement procedure follows ANSI C63.4 procedure.
- b) All other RF measurements were made in a conducted manner.
- c) Procedural notes are contained in this test report.
- d) A list of test equipment used is contained in this test report.

**§2.948 Description of Measurement Facilities**

Measurements were performed at TUV Testing Services Open Test Site. The FCC keeps a full description of the measurement facilities on file. TUV's acceptance and approval is dated as December 5, 1993 in a letter received from the FCC. TUV FCC OATS #90983, IC OATS #2932L-1

The address of the test facility is:

TÜV Product Service  
19035 Wild Mountain Road  
Taylors Falls, MN 55084-1758  
Phone: 651-638-0297  
Contact: Joel Schneider  
Test Engineer in Charge

See Exhibit N, "Exhibit N - Radiated Emissions Sketch.pdf" for a sketch of radiated measurement setup.

The radiated emissions, the power line conducted emissions, the RF conducted emissions above 1 GHz, and the RF conducted spurious emissions were tested at TUV.

The remainder of the RF conducted emissions tests (including peak output power, conducted emissions, channel usage requirements tests, band edge compliance, and part of the RF conducted spurious emissions) were done at the following address:

Hunt Technologies, Inc.  
6436 County Rd. 11  
Pequot Lakes, MN 56472

**§2.1033 Application for Certification**

- a) Form 731 has been electronically filed on 1/6/2010. Items that did not apply were left blank.
- b) This technical report contains the following information where applicable.
  - 1. Full name and mailing address of manufacturer and applicant for certification:  
**Hunt Technologies, LLC**  
**6436 County Rd. 11**  
**Pequot Lakes, MN 56472**
  - 2. FCC Identifier:  
**TEB-HUNTSU825**
  - 3. Brief Description of circuit functions and device operation:

See Exhibit F, "Exhibit F - Operational Statement.pdf" for operational description

See Exhibit G, "Exhibit G - Schematic.pdf" for schematic

4. Block Diagram:

See Exhibit H, "Exhibit H - Block Diagram.pdf"

5. Report of the measurements of conducted and radiated emissions:

See figs. in section 6 and Exhibits J and K shown and discussed later in this report

6. Photographs

External: See Exhibit A, "Exhibit A - External Photo.pdf"

Internal: See Exhibit B, "Exhibit B - Internal Photos.pdf"

Test Setup: See Exhibit E, "Exhibit E - Test Setup Photos.pdf"

7. Peripheral or Accessory devices:

There are no peripheral or accessory devices designed to operate with this product.

8. Transition Rules

This application is not pursuant to the transition rules of §15.37

9. Application for scanning receivers:

Not applicable to this device.

10. Application for operation within the 59-64GHz band:

Not applicable to this device.

c) Composite Systems

Not applicable to this device.

d) Software Defined Radio

Not applicable to this device. See Exhibit I, "Exhibit I - SDR Statement.pdf"

### 3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:



- ANSI C63.4-1992: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures (October 2004)
- US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators (October 2004)
- FCC OET Bulletin 65 Appendix C - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields

### 4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications. The equipment used to do all Radiated testing and Power Line Conducted Emissions is the property of TUV Product Services and is located at their Taylor's Falls facility. The FCC keeps a full description of TUV's measurement facilities on file. The equipment listed below was used at Hunt Technologies' Pequot Lakes, MN facility to do all RF conducted measurements.

**Table 4.0-1: Test Equipment**

| Mfg.    | Equip. Type       | Model  | S/N        | Cal. Due  |
|---------|-------------------|--------|------------|-----------|
| Agilent | Spectrum Analyzer | E4404B | MY41440735 | 7/30/2010 |
| Agilent | Spectrum Analyzer | E4407B | MY45106578 | 7/30/2010 |

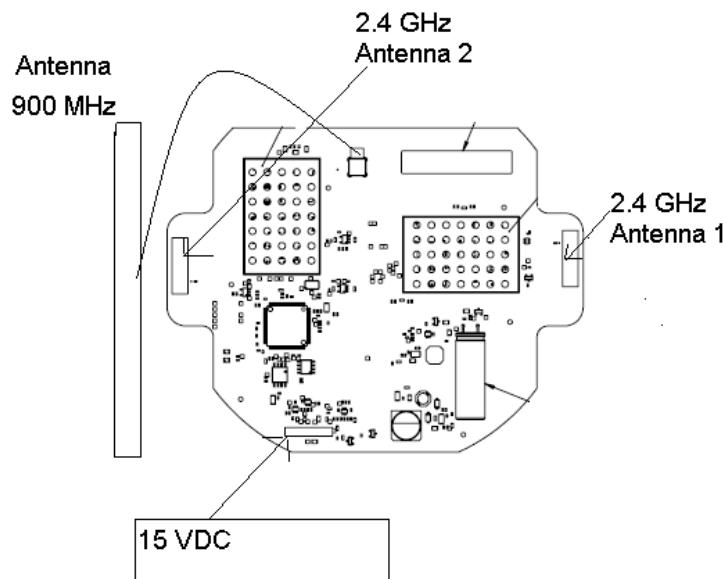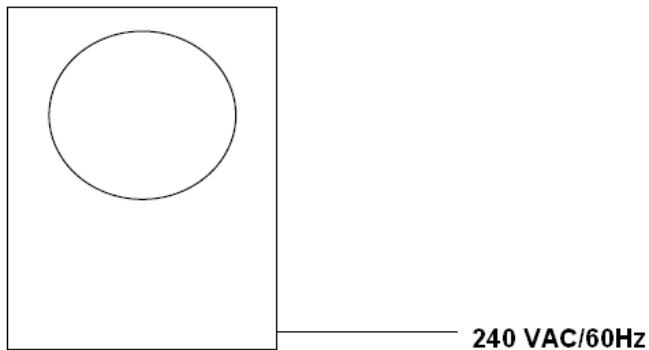**5.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM****Figure 5.0-1: Radiated Emissions Test Setup****Figure 5.0-2: Power Line Conducted Emissions Test Setup****6.0 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

**6.1 Frequencies to be Examined [§15.31(m)]**

In accordance with the guidelines of §15.31(m), all conducted and radiated measurements were performed at the lowest (902.10 MHz), middle (915.00 MHz), and highest (927.900 MHz) frequencies that the product will transmit. For baud rates above 38400 KBPS measurements were performed at the lowest (902.30 MHz), middle (914.90 MHz), and highest (927.80 MHz) that the product will transmit.

**6.2 Antenna Requirement [§15.203]**

The transmitter antenna is external to the circuit board and utilizes a unique IPEX male connector on the antennas feed cable. The female IPEX connector is soldered to the circuit board at the manufacturing plant. The Antenna and the module are assembled as a pair and integrated in a solid state metering device as described above in section 1.2.1.

### 6.3 Antenna Characteristics [§15.204]

There is only one antenna proposed for use with this device. This antenna has the following characteristics:

#### 6.3.1 Antenna Type

The antenna is approximately a 1/2 wave Dipole at 915 MHz.

#### 6.3.2 Antenna Manufacturer

MMG/Sky Wave Antennas

#### 6.3.3 Antenna Gain

The 1/2 wave Dipole is a well known antenna type. The theoretical gain of an ideal 1/2 wave Dipole is 2.15 dBi. The antenna on this transmitter has some non-ideal characteristics. Therefore, the antenna gain will be somewhat lower than the ideal number of 2.15 dBi.

### 6.4 Power Line Conducted Emissions [§15.207]

#### 6.4.1 Test Methodology

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz.

#### 6.4.2 Test Results

The summary of the results are shown below in figure 6.4-1. For the complete test report, see Exhibit J, "Exhibit J - Conducted Emissions.pdf"

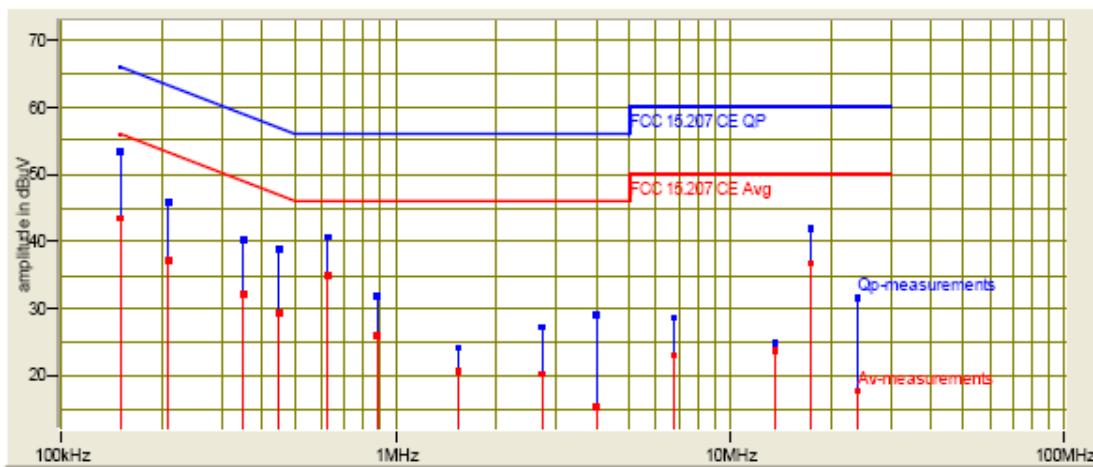


Figure 6.4-1: Power Line Conducted Emissions Summary

### 6.5 Radiated Emissions [§15.109] and Radiated Spurious Emissions (Restricted Bands) [§15.205]

#### 6.5.1 Test Methodology

Radiated emissions tests were performed over the frequency range of 30MHz to 1 GHz and in the restricted bands up to 10 GHz, greater than 10 times the highest fundamental frequency. The restricted band tests were done at the lowest, middle, and highest transmit frequencies.

Measurements of the radiated field strength were made at a distance of 3m from the boundary of the equipment under test (EUT) and the receiving antenna. The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300

kHz. For frequencies above 1000MHz, average measurements were made using an RBW of 1 MHz and a VBW of 10 Hz and peak measurements were made with RBW of 1 MHz and a VBW of 1 MHz. See Exhibit N, "Exhibit N - Radiated Emissions Sketch.pdf" for a sketch of the test setup.

### **6.5.2 Calculation of allowed limit for Radiated Spurious Emissions**

For spurs above 1000 MHz, §15.205(b) allows duty cycle averaging per §15.35. This device transmits packets less than 400 ms and longer than 100 ms, therefore, there is no duty cycle correction for this product.

### **6.5.3 Test Results**

Radiated spurious emissions found in the band of 30MHz to 10GHz are all below the applicable limits. Each emission found to be in a restricted band as defined by section 15.205, was compared to the radiated emission limits as defined in section 15.209. Results are shown in Exhibit K, "Exhibit K - Radiated Emissions 30 MHz to 1 GHz.pdf" and Exhibit L, "Exhibit L - Restricted Band.pdf". The signals from the fundamental frequencies were all under the 1W limit. No significant harmonic emission was detected within the restricted bands. Only the lowest baud rate was checked for spurious because it is worst case. One channel was tested at the highest baud rate and all levels were lower than at the lowest baud rate. This verifies the theory that the lowest baud rate is the worst case for radiated emission levels.

## **6.6 Peak Output Power – [§15.247(b)(2)]**

### **6.6.1 Test Methodology (Conducted Method)**

The 20dB bandwidth of the EUT was within the resolution bandwidth of spectrum analyzer, therefore the power measurement was made using the spectrum analyzer method. The resolution and video bandwidth were set to > 20 dB bandwidth of the emission measured (300 kHz/1 MHz). The device employs >50 channels, therefore the power is limited to 1 Watt.

### **6.6.2 Test Results**

Results are shown below in table 6.6-1 and the worst case was plotted and shown in figure 6.6-1 to 6.6-3 below:

**Table 6.6-1: RF Output Power**

| Frequency (MHz) | Level (dBm) |
|-----------------|-------------|
| 902.10          | 25.95       |
| 915.00          | 25.99       |
| 927.900         | 25.39       |

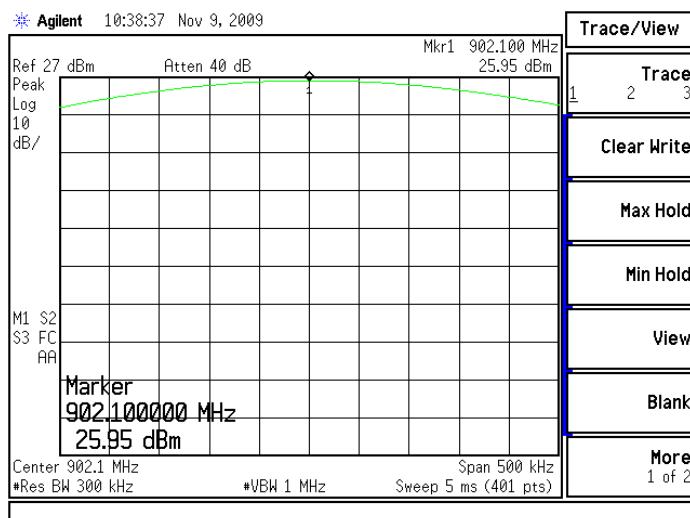


Figure 6.6-1: Output Power – Low Channel

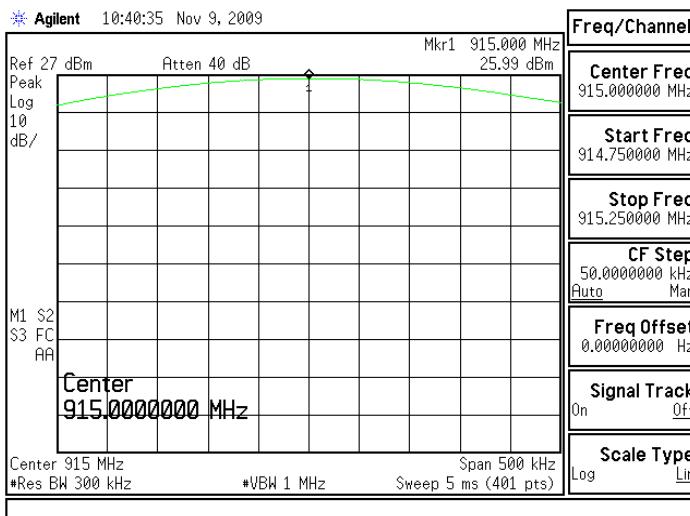


Figure 6.6-2: Output Power – Mid Channel

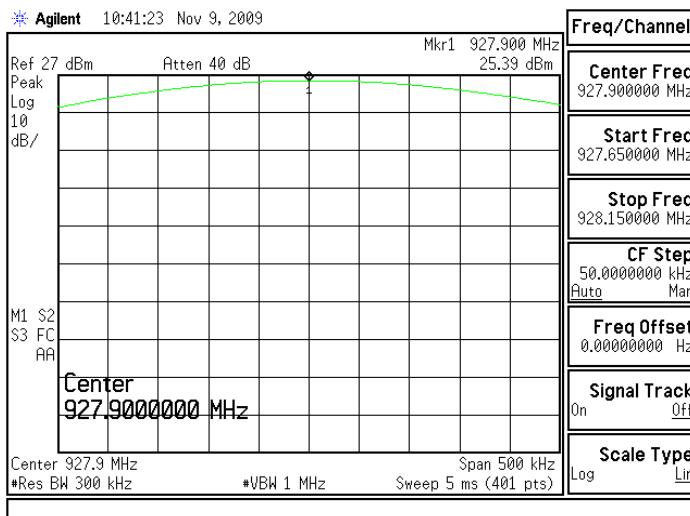


Figure 6.6-3: Output Power – High Channel

**6.6.3 De Facto EIRP Limit**

The gain of the transmit antenna is given earlier in this report. Because the gain of the antenna is less than 6 dBi, the peak output power need not be reduced to comply with this requirement.

**6.6.4 RF Exposure Compliance Requirements**

This device is not intended to operate within 20 cm of a person's body. Therefore, RF exposure requirements are not applicable to this application for certification.

**6.7 Channel Usage Requirements [§15.247(a) (1)]**

**15.247(a)(1):** Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**15.247(a) (1) (i):** For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**6.7.1 Carrier Frequency Separation****6.7.1.1 Test Methodology**

The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to  $\geq 1\%$  of the span.

**6.7.1.2 Test Results**

The adjacent channel separation for a System with  $\leq 38.4$  KBPS was measured to be approximately 100 kHz. The adjacent channel separation for baud rates above 38.4 KBPS were measured to be approximately 300 kHz. Results are shown in figures 6.7.1-1 and 6.7.1-2 below:

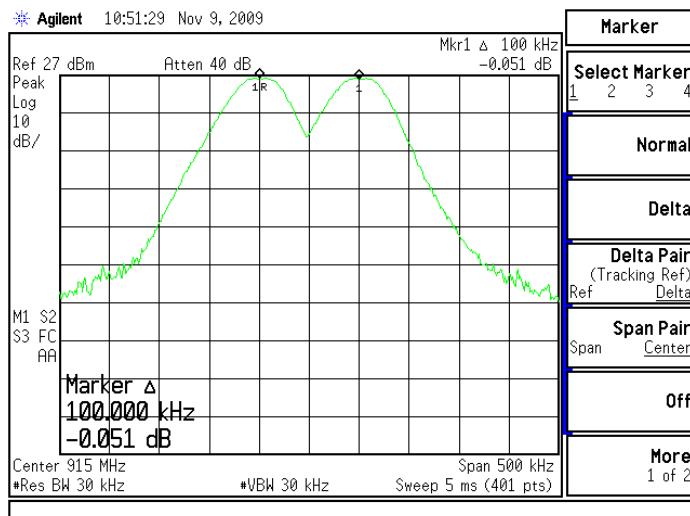


Figure 6.7.1-1: Carrier Frequency Separation &lt;=38.4KBPS

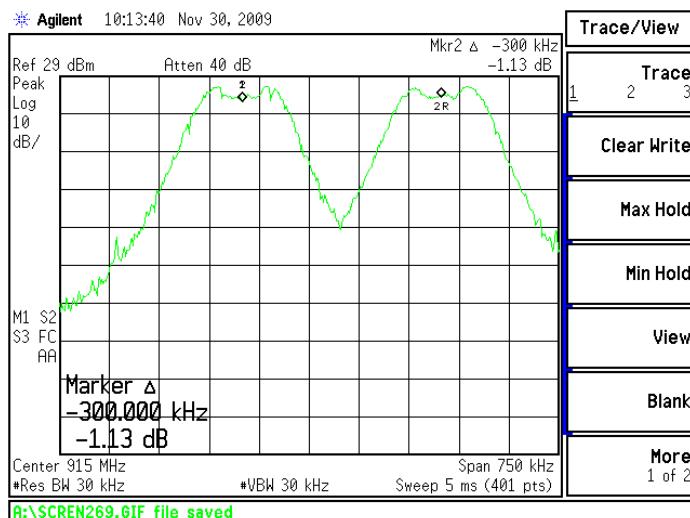


Figure 6.7.1-2: Carrier Frequency Separation 76.8 and 115.2 KBPS

## 6.7.2 Number of Hopping Channels

The 20dB bandwidth of the device is less than 250 kHz. The device employs at least 50 hopping channels as required. The device will use one frequency list. The list of channels in pseudo-random order resides in non-volatile memory. The device starts at the first frequency in the list, and then proceeds through to the end of the list, looping back around to the first frequency when done. This guarantees equal usage of all channels in the list.

The maximum baud rate can be set to any of the radio's available baud rates: 9.6 kbps, 19.2 kbps, 38.4 kbps, 76.8 kbps, or 115.2 kbps. If the maximum baud rate is greater than 38.4 kbps (i.e. set at 76.8 kbps or 115.2 kbps), the radio will use wide channel mode, with 86 channels, and a spacing of 300 kHz. If the maximum baud rate is 38.4 kbps or less, the radio may either use wide channel mode or narrow channel mode, with 240 channels and a spacing of 100 kHz. Note the wide channel lowest frequency is 902.3 MHz, and highest frequency is 927.8 MHz. The narrow channel lowest tested frequency is 902.1 MHz and highest is 927.9 MHz. Note that currently the channel list for narrow channel mode only uses 904 MHz through 927.9 MHz; however, 902.1 MHz was used for testing in case it is ever desired to do a permissive change to change the hop sequence to include all possible 100 kHz channels in the 902-928 MHz band.

Table 6.7.2-1 lists the frequencies and hopping order of the narrow channel mode. Table 6.7.2-2 lists the frequencies and hopping order of the wide channel mode.

| Channel | Freq (MHz) |
|---------|------------|---------|------------|---------|------------|---------|------------|---------|------------|
| 86      | 910.6      | 69      | 908.9      | 252     | 927.2      | 214     | 923.4      | 208     | 922.8      |
| 211     | 923.1      | 256     | 927.6      | 200     | 922        | 28      | 904.8      | 84      | 910.4      |
| 173     | 919.3      | 176     | 919.6      | 185     | 920.5      | 158     | 917.8      | 21      | 904.1      |
| 141     | 916.1      | 52      | 907.2      | 36      | 905.6      | 77      | 909.7      | 121     | 914.1      |
| 72      | 909.2      | 134     | 915.4      | 131     | 915.1      | 124     | 914.4      | 125     | 914.5      |
| 166     | 918.6      | 242     | 926.2      | 32      | 905.2      | 61      | 908.1      | 81      | 910.1      |
| 63      | 908.3      | 228     | 924.8      | 22      | 904.2      | 147     | 916.7      | 165     | 918.5      |
| 23      | 904.3      | 187     | 920.7      | 235     | 925.5      | 191     | 921.1      | 95      | 911.5      |
| 180     | 920        | 82      | 910.2      | 222     | 924.2      | 150     | 917        | 182     | 920.2      |
| 227     | 924.7      | 174     | 919.4      | 108     | 912.8      | 171     | 919.1      | 122     | 914.2      |
| 40      | 906        | 230     | 925        | 99      | 911.9      | 41      | 906.1      | 229     | 924.9      |
| 144     | 916.4      | 241     | 926.1      | 126     | 914.6      | 188     | 920.8      | 216     | 923.6      |
| 33      | 905.3      | 133     | 915.3      | 152     | 917.2      | 89      | 910.9      | 253     | 927.3      |
| 195     | 921.5      | 169     | 918.9      | 193     | 921.3      | 220     | 924        | 204     | 922.4      |
| 154     | 917.4      | 30      | 905        | 254     | 927.4      | 127     | 914.7      | 70      | 809        |
| 190     | 921        | 136     | 915.6      | 146     | 916.6      | 20      | 904        | 44      | 906.4      |
| 236     | 925.6      | 178     | 919.8      | 34      | 905.4      | 217     | 923.7      | 259     | 927.9      |
| 149     | 916.9      | 216     | 923        | 49      | 906.9      | 114     | 913.4      | 240     | 926        |
| 143     | 916.3      | 71      | 909.1      | 255     | 927.5      | 111     | 913.1      | 48      | 906.8      |
| 181     | 920.1      | 205     | 922.5      | 129     | 914.9      | 213     | 923.3      | 66      | 908.6      |
| 232     | 925.2      | 192     | 921.2      | 209     | 922.9      | 35      | 905.5      | 79      | 909.9      |
| 123     | 914.3      | 85      | 910.5      | 94      | 911.4      | 42      | 906.2      | 132     | 915.2      |
| 233     | 925.3      | 53      | 907.3      | 140     | 916        | 172     | 919.2      | 245     | 926.5      |
| 38      | 905.8      | 202     | 922.2      | 83      | 910.3      | 25      | 904.5      | 120     | 914        |
| 118     | 913.8      | 37      | 905.7      | 257     | 927.7      | 59      | 907.9      | 67      | 908.7      |
| 60      | 908        | 43      | 906.3      | 237     | 925.7      | 87      | 910.7      | 183     | 920.3      |
| 201     | 922.1      | 54      | 907.4      | 135     | 915.5      | 168     | 918.8      | 248     | 926.8      |
| 198     | 921.8      | 243     | 926.3      | 234     | 925.4      | 196     | 921.6      | 78      | 909.8      |
| 116     | 913.6      | 64      | 908.4      | 92      | 911.2      | 223     | 924.3      | 80      | 910        |
| 91      | 911.1      | 68      | 908.8      | 57      | 907.7      | 24      | 904.4      | 93      | 911.3      |
| 212     | 923.2      | 100     | 912        | 109     | 912.9      | 225     | 924.5      | 184     | 920.4      |
| 221     | 924.1      | 239     | 925.9      | 249     | 926.0      | 103     | 912.3      | 74      | 909.4      |
| 96      | 911.5      | 29      | 904.9      | 215     | 923.5      | 151     | 917.1      | 153     | 917.3      |
| 157     | 917.7      | 177     | 919.7      | 179     | 919.9      | 203     | 922.3      | 65      | 908.5      |
| 247     | 926.7      | 139     | 915.9      | 258     | 927.8      | 197     | 921.7      | 159     | 917.9      |
| 167     | 918.7      | 117     | 913.7      | 186     | 920.6      | 219     | 923.9      | 142     | 916.2      |
| 224     | 924.4      | 148     | 916.8      | 244     | 928.4      | 87      | 911.7      | 58      | 907.8      |
| 246     | 926.6      | 75      | 909.5      | 189     | 920.9      | 51      | 907.1      | 164     | 918.4      |
| 238     | 925.8      | 206     | 922.5      | 31      | 905.1      | 98      | 911.8      | 163     | 918.3      |
| 46      | 906.6      | 226     | 924.6      | 73      | 909.3      | 45      | 906.5      | 90      | 911        |
| 39      | 905.9      | 155     | 917.5      | 130     | 915        | 156     | 917.6      | 106     | 912.6      |
| 251     | 927.1      | 47      | 906.7      | 194     | 921.4      | 101     | 912.1      | 145     | 916.5      |
| 115     | 913.5      | 62      | 908.2      | 162     | 918.2      | 50      | 907        | 76      | 909.6      |
| 128     | 914.8      | 138     | 915.8      | 119     | 913.9      | 27      | 904.7      | 199     | 921.9      |
| 110     | 913        | 231     | 925.1      | 107     | 912.7      | 207     | 922.7      |         |            |
| 160     | 918        | 113     | 913.3      | 88      | 910.8      | 250     | 927        |         |            |
| 56      | 907.6      | 137     | 915.7      | 175     | 919.5      | 102     | 912.2      |         |            |
| 26      | 904.6      | 55      | 907.5      | 170     | 919        | 112     | 913.2      |         |            |
| 161     | 918.1      | 105     | 912.5      | 218     | 923.8      | 104     | 912.4      |         |            |

**Table 6.7.2-1: Hop / Frequency Table for Baud rates < 38.4 KBPS  
(narrow channel mode)**

| Hop # | Channel | Freq (MHz) |  | Hop # | Channel | Freq (MHz) |  | Hop # | Channel | Freq (MHz) |
|-------|---------|------------|--|-------|---------|------------|--|-------|---------|------------|
| 0     | 76      | 925.1      |  | 29    | 36      | 913.1      |  | 58    | 6       | 904.1      |
| 1     | 19      | 908        |  | 30    | 34      | 912.5      |  | 59    | 78      | 925.7      |
| 2     | 71      | 923.6      |  | 31    | 13      | 906.2      |  | 60    | 21      | 908.6      |
| 3     | 77      | 925.4      |  | 32    | 20      | 908.3      |  | 61    | 51      | 917.6      |
| 4     | 68      | 922.7      |  | 33    | 17      | 907.4      |  | 62    | 82      | 926.9      |
| 5     | 24      | 909.5      |  | 34    | 70      | 923.3      |  | 63    | 59      | 920        |
| 6     | 83      | 927.2      |  | 35    | 39      | 914        |  | 64    | 30      | 911.3      |
| 7     | 23      | 909.2      |  | 36    | 73      | 924.2      |  | 65    | 81      | 926.6      |
| 8     | 42      | 914.9      |  | 37    | 10      | 905.3      |  | 66    | 60      | 920.3      |
| 9     | 11      | 905.6      |  | 38    | 48      | 916.7      |  | 67    | 75      | 924.8      |
| 10    | 72      | 923.9      |  | 39    | 26      | 910.1      |  | 68    | 3       | 903.2      |
| 11    | 5       | 903.8      |  | 40    | 28      | 910.7      |  | 69    | 84      | 927.5      |
| 12    | 58      | 919.7      |  | 41    | 54      | 918.5      |  | 70    | 22      | 908.9      |
| 13    | 62      | 920.9      |  | 42    | 47      | 916.4      |  | 71    | 80      | 926.3      |
| 14    | 12      | 905.9      |  | 43    | 74      | 924.5      |  | 72    | 37      | 913.4      |
| 15    | 49      | 917        |  | 44    | 46      | 916.1      |  | 73    | 38      | 913.7      |
| 16    | 9       | 905        |  | 45    | 45      | 915.8      |  | 74    | 85      | 927.8      |
| 17    | 18      | 907.7      |  | 46    | 53      | 918.2      |  | 75    | 43      | 915.2      |
| 18    | 65      | 921.8      |  | 47    | 29      | 911        |  | 76    | 15      | 906.8      |
| 19    | 55      | 918.8      |  | 48    | 0       | 902.3      |  | 77    | 14      | 906.5      |
| 20    | 2       | 902.9      |  | 49    | 33      | 912.2      |  | 78    | 52      | 917.9      |
| 21    | 64      | 921.5      |  | 50    | 67      | 922.4      |  | 79    | 69      | 923        |
| 22    | 27      | 910.4      |  | 51    | 1       | 902.6      |  | 80    | 40      | 914.3      |
| 23    | 44      | 915.5      |  | 52    | 4       | 903.5      |  | 81    | 8       | 904.7      |
| 24    | 41      | 914.6      |  | 53    | 57      | 919.4      |  | 82    | 66      | 922.1      |
| 25    | 56      | 919.1      |  | 54    | 61      | 920.6      |  | 83    | 7       | 904.4      |
| 26    | 25      | 909.8      |  | 55    | 35      | 912.8      |  | 84    | 50      | 917.3      |
| 27    | 31      | 911.6      |  | 56    | 16      | 907.1      |  | 85    | 79      | 926        |
| 28    | 32      | 911.9      |  | 57    | 63      | 921.2      |  |       |         |            |

**Table 6.7.2-2: Hop / Frequency Table for Baud rates > 38.4 KBPS  
(wide channel mode)**

### 6.7.3 Channel Dwell Time

#### 6.7.3.1 Test Methodology

The analyzer is centered on the measured emission's center frequency and the span set to 0 Hz. The RBW was set to 3 MHz and the VBW to 3 MHz Sweep time was set to 500 ms to capture the burst duration of the emission. The marker-delta function of the analyzer was employed to measure the burst duration.

### 6.7.3.2 Test Results

The transmission time is < 400 milliseconds and there are 240 transmitter frequencies used sequentially. The dwell time is < 400 ms per channel within a 20 second period. A typical transmission is shown in figure 6.7.3-1 below:

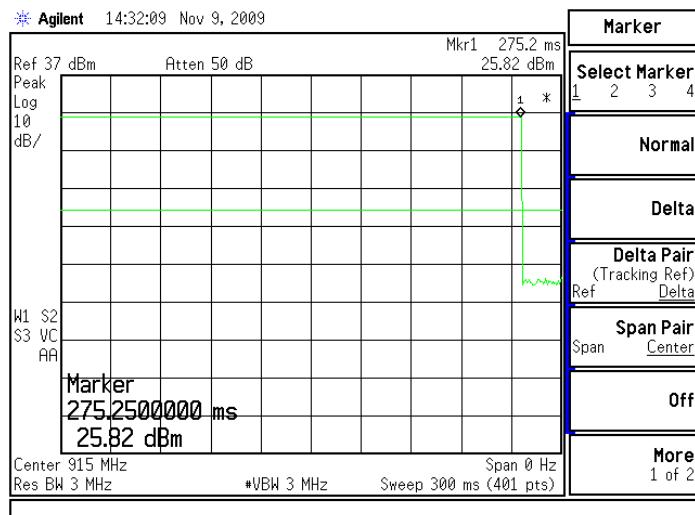


Figure 6.7.3-1: Channel Dwell Time

### 6.7.4 20dB Bandwidth

#### 6.7.4.1 Test Methodology


The spectrum analyzer span was set to 2 to 3 times the estimated 20 dB bandwidth of the emission. The RBW was to  $\geq 1\%$  of the estimated 20 dB bandwidth. The trace was set to max hold with a peak detector active. The N-dB down function of the analyzer was utilized to determine the 20 dB bandwidth of the emission. The span and RBW were examined and re-adjusted if necessary to meet the requirements of 2 to 3 time the 20 bandwidth for the span and  $\geq 1\%$  of the 20 dB bandwidth for the RBW.

#### 6.7.4.2 Test Results

Results are summarized below in table 6.7.4-1 below. Plots are shown below in Figure 6.7.4-1 through 6.7.4-15.

**Table 6.7.4-1: 20dB Bandwidth  
For all Baud Rates BPS**

| Channel     | Frequency (MHz) | 20dB Bandwidth (kHz) |
|-------------|-----------------|----------------------|
| Low 9600    | 902.10          | 24.00                |
| Mid 9600    | 915.00          | 24.00                |
| High 9600   | 927.90          | 23.50                |
| Low 19200   | 902.10          | 52.2                 |
| Mid 19200   | 915.00          | 52.20                |
| High 19200  | 927.90          | 45.30                |
| Low 38400   | 902.10          | 86.00                |
| Mid 38400   | 915.00          | 84.00                |
| High 38400  | 927.9           | 83.00                |
| Low 76800   | 902.30          | 181.00               |
| Mid 76800   | 914.9           | 209.00               |
| High 76800  | 927.80          | 174.00               |
| Low 115200  | 902.30          | 228.00               |
| Mid 115200  | 914.90          | 244.00               |
| High 115200 | 927.80          | 239.00               |

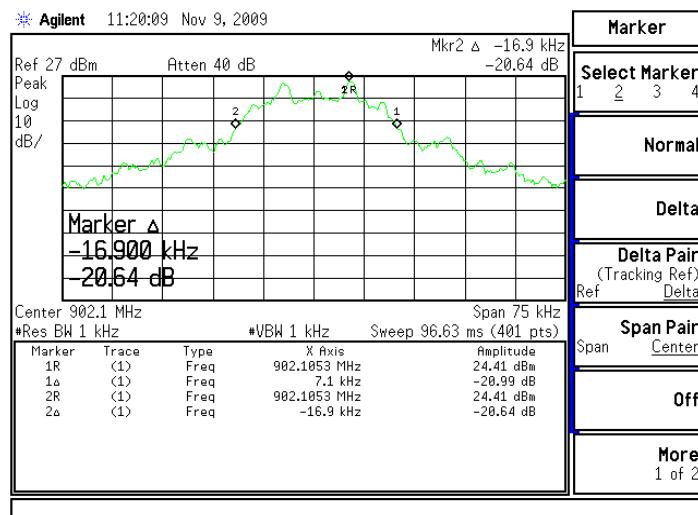

**Figure 6.7.4-1: 20dB Bandwidth – Low Channel (9600 BPS)**

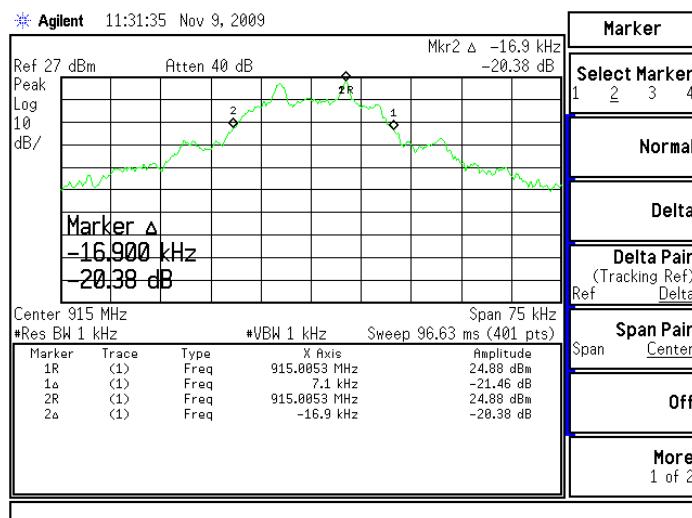


Figure 6.7.4-2: 20dB Bandwidth – Mid Channel (9600 BPS)

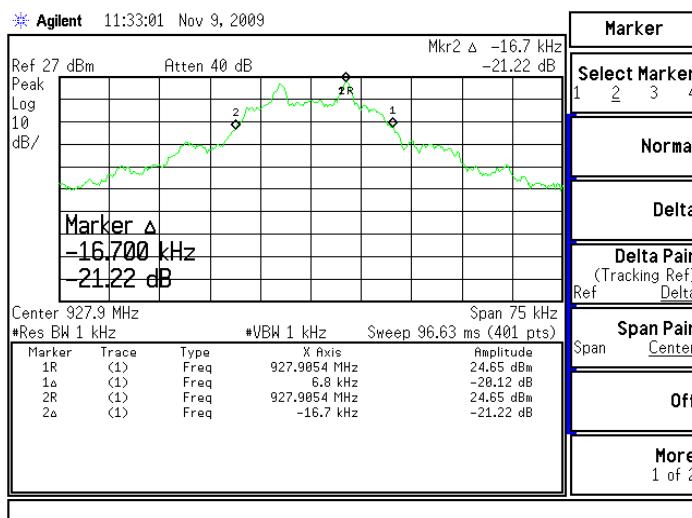


Figure 6.7.4-3: 20dB Bandwidth – High Channel (9600 BPS)

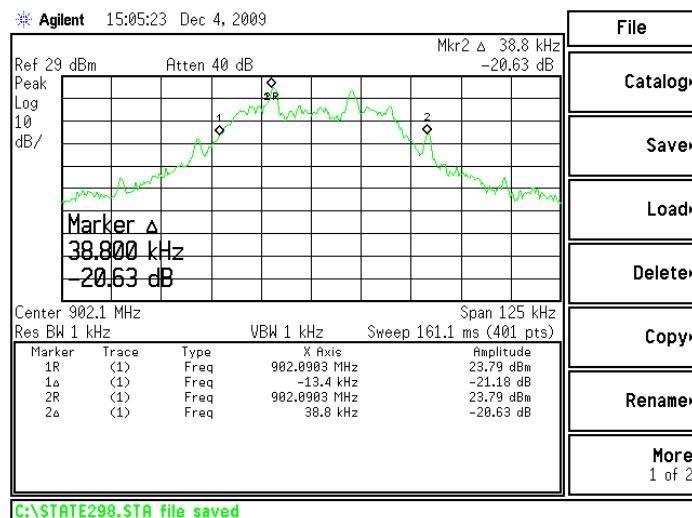
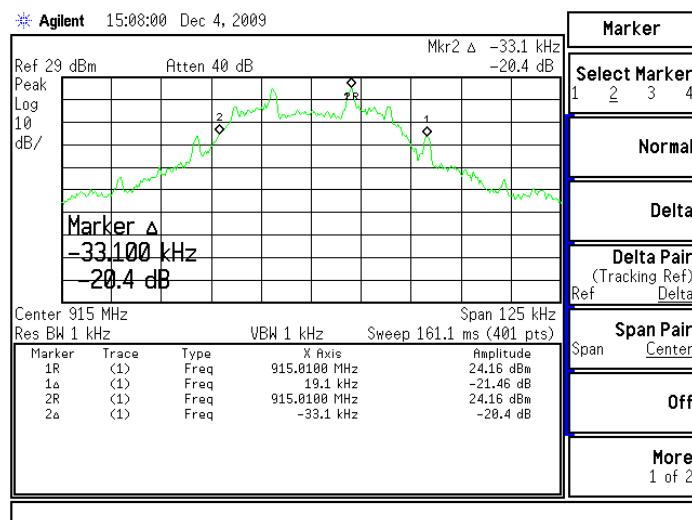
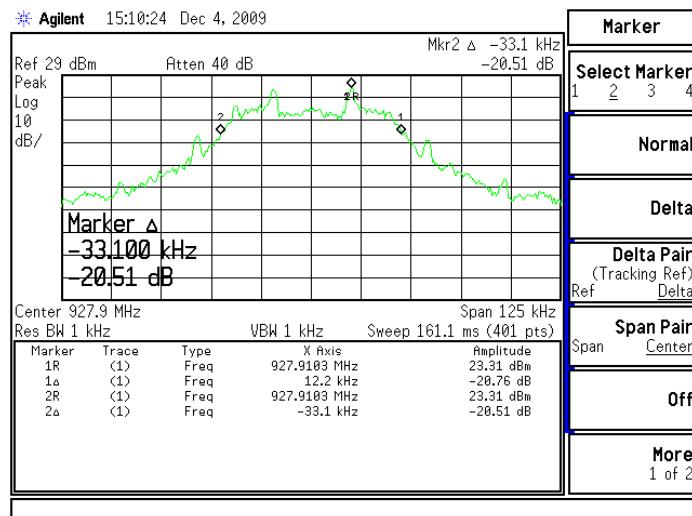
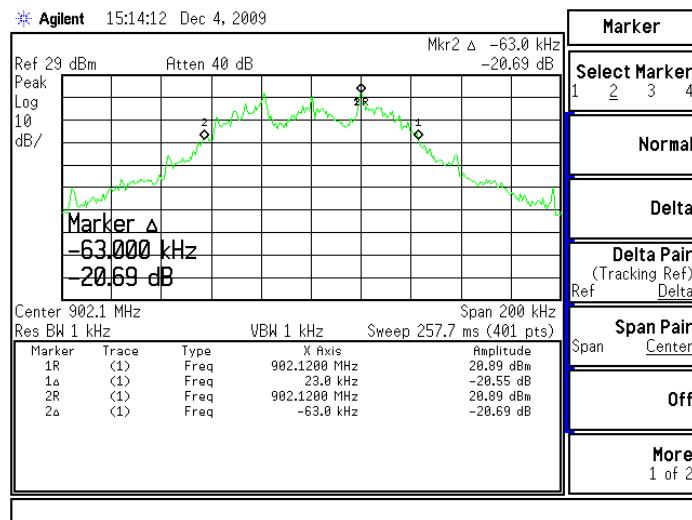
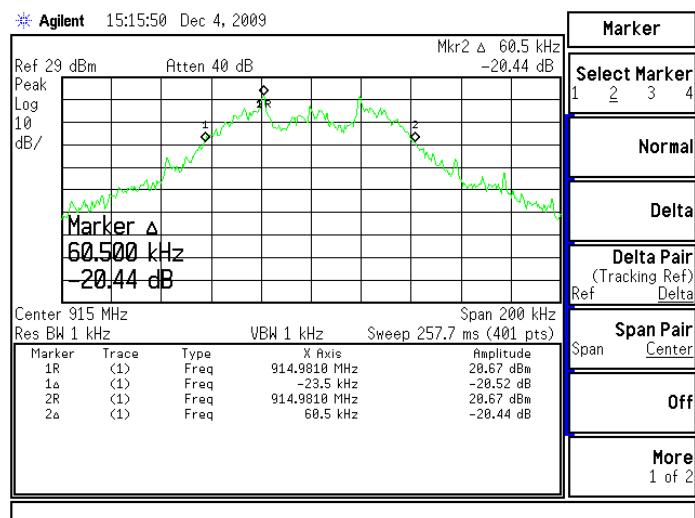
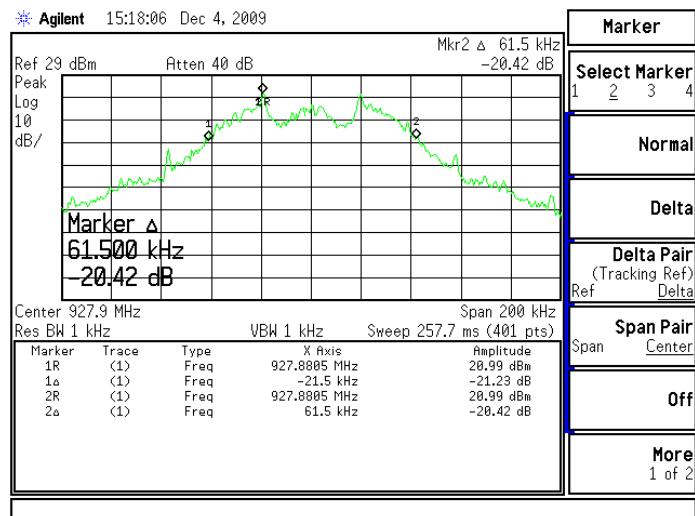
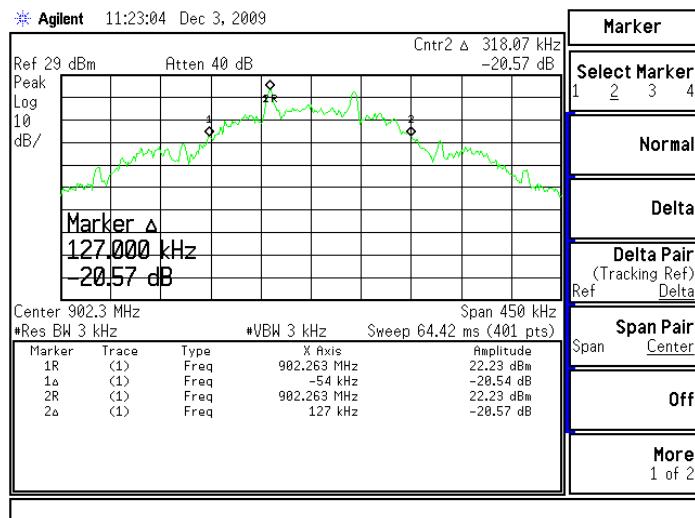


Figure 6.7.4-4: 20dB Bandwidth – Low Channel (19200 BPS)

**Figure 6.7.4-5: 20dB Bandwidth – Mid Channel (19200 BPS)****Figure 6.7.4-6: 20dB Bandwidth – High Channel (19200 BPS)****Figure 6.7.4-7: 20dB Bandwidth – Low Channel (38400 BPS)**

**Figure 6.7.4-8: 20dB Bandwidth – Mid Channel (38400 BPS)****Figure 6.7.4-9: 20dB Bandwidth – High Channel (38400 BPS)****Figure 6.7.4-10 20dB Bandwidth – Low Channel (76800 BPS)**

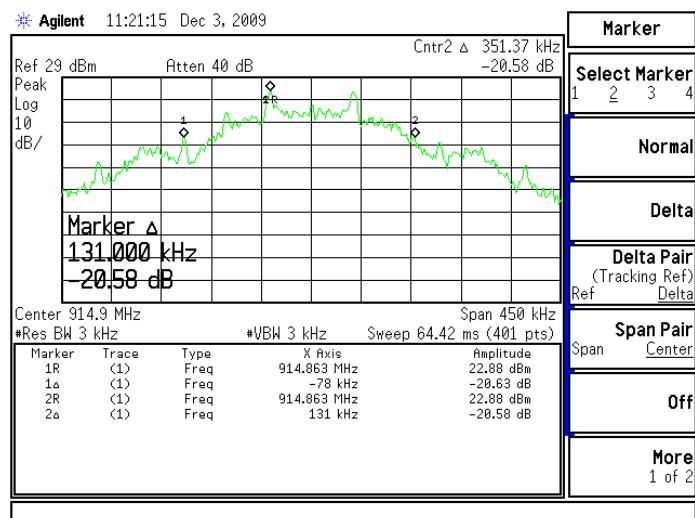


Figure 6.7.4-11: 20dB Bandwidth – Mid Channel (76800 BPS)

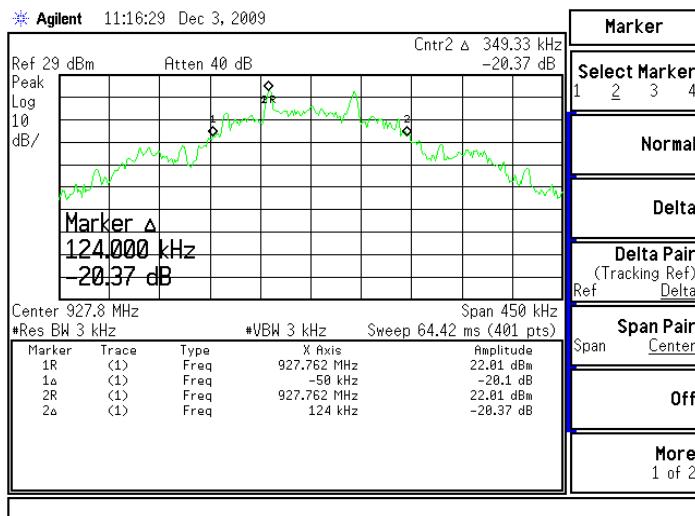


Figure 6.7.4-12: 20dB Bandwidth – High Channel (76800 BPS)

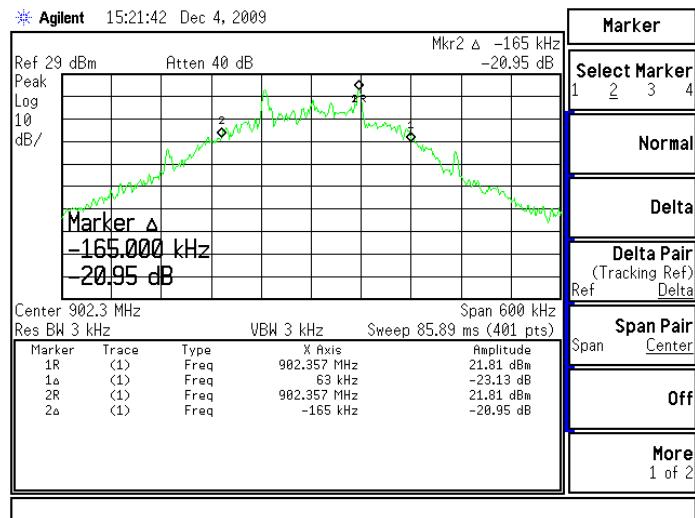


Figure 6.7.4-13: 20dB Bandwidth – Low Channel (115200 BPS)

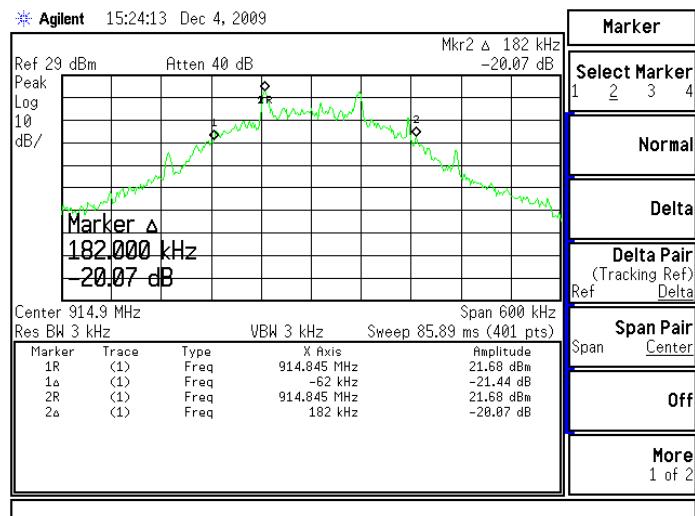


Figure 6.7.4-14: 20dB Bandwidth – Mid Channel (115200 BPS)

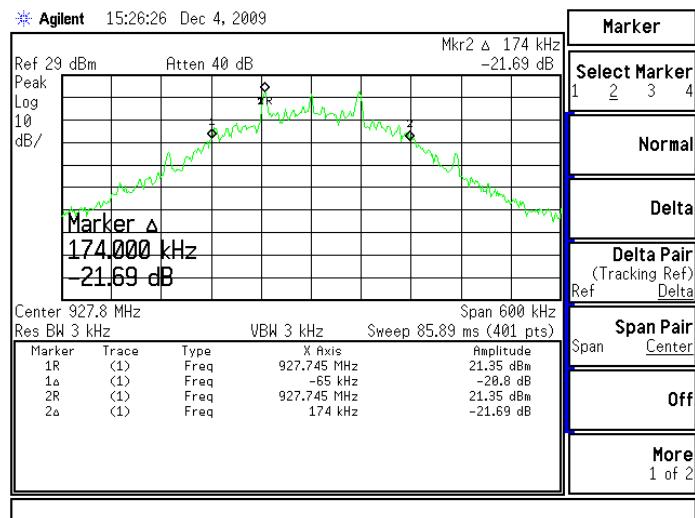


Figure 6.7.4-15: 20dB Bandwidth – High Channel (115200 BPS)

## 6.8 Band-Edge Compliance and Spurious Emissions [§15.247(c)]

### 6.8.1 Band-Edge Compliance of RF Conducted Emissions

#### 6.8.1.1 Test Methodology

The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 30 kHz, which is  $\geq 1\%$  of the span, and the VBW was set to 1 MHz.

#### 6.8.1.2 Test Results

In a 100 kHz bandwidth at the lower and upper band-edge, the radio frequency power that was produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. Band-edge compliance is displayed in Figures 6.8.1-1 thru 6.8.1-10.

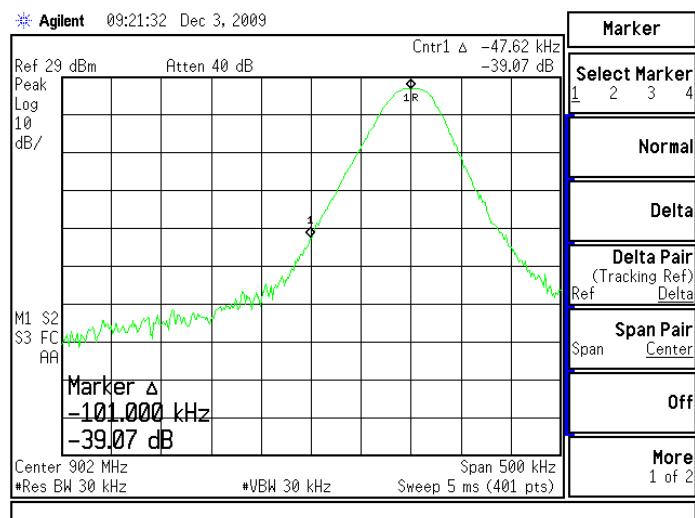


Figure 6.8.1-1: Lower Band-Edge (9600 BPS)

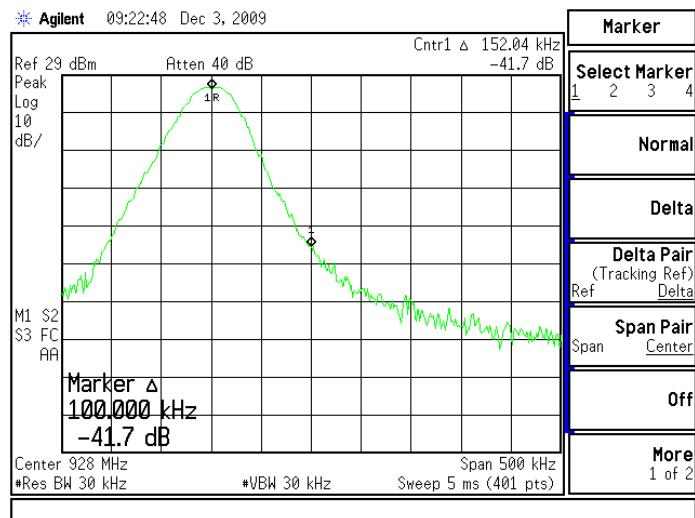


Figure 6.8.1-2: Upper Band-Edge (9600 BPS)

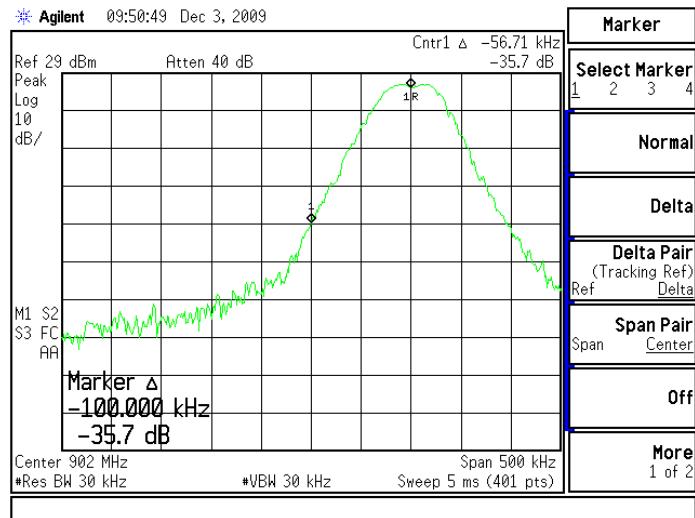


Figure 6.8.1-3: Lower Band-Edge (19200 BPS)

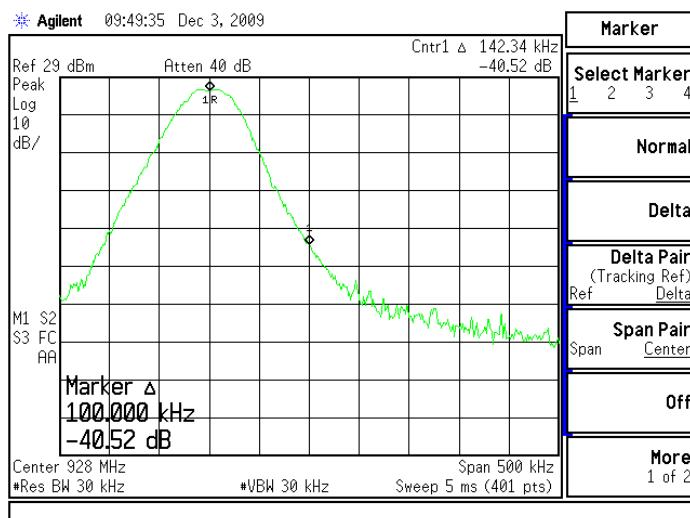


Figure 6.8.1-4: Upper Band-Edge (19200 BPS)

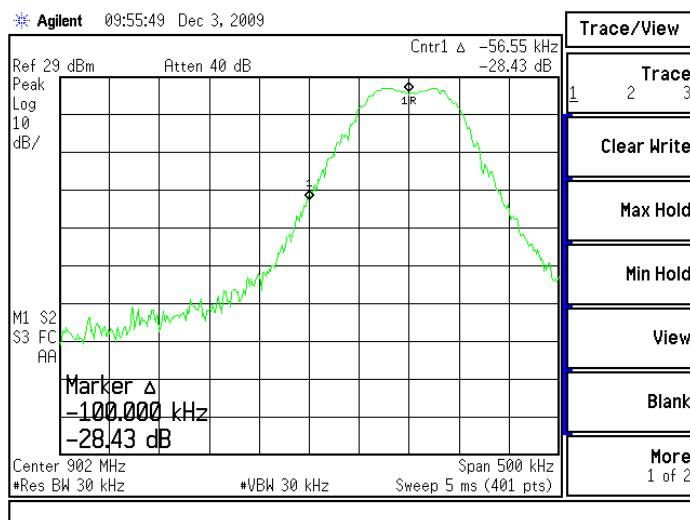


Figure 6.8.1-5: Lower Band-Edge (38400 BPS)

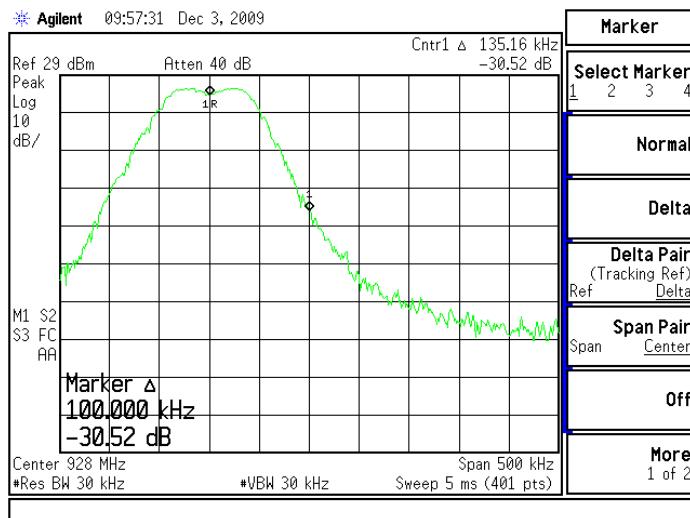


Figure 6.8.1-6: Upper Band-Edge (38400 BPS)

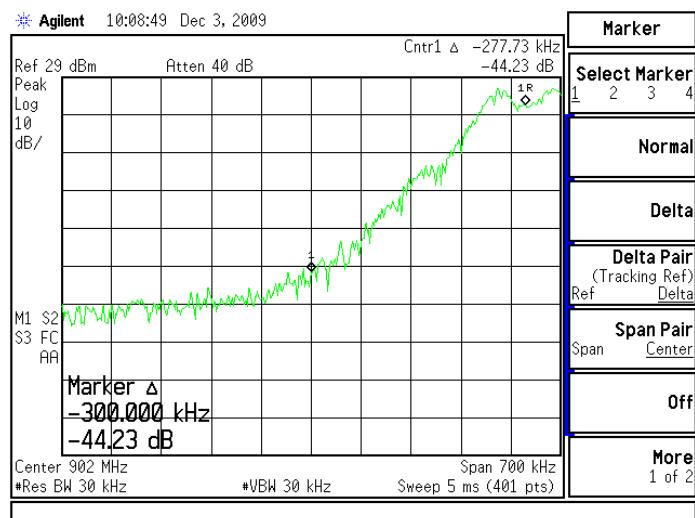


Figure 6.8.1-7: Lower Band-Edge (76800 BPS)

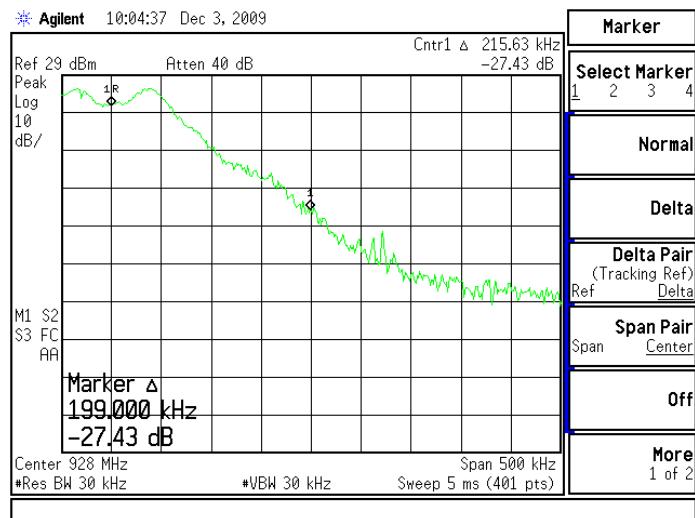


Figure 6.8.1-8: Upper Band-Edge (76800 BPS)

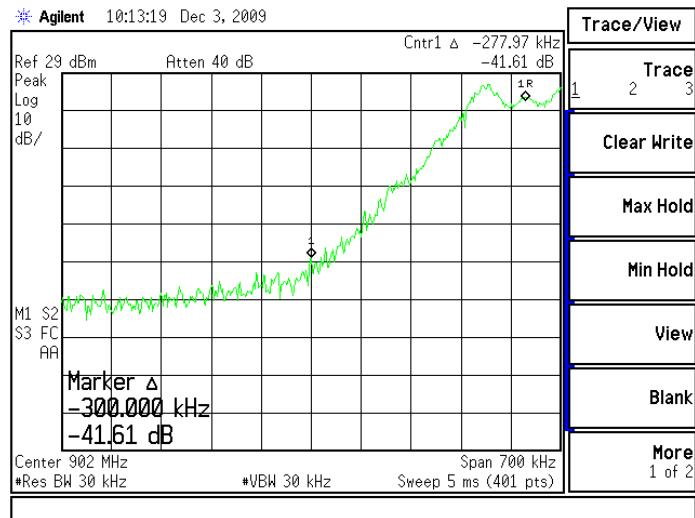


Figure 6.8.1-9: Lower Band-Edge (115200 BPS)

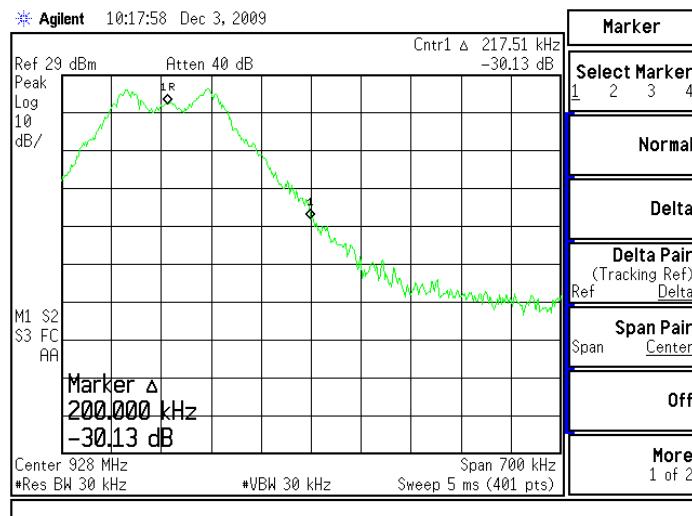


Figure 6.8.1-10: Upper Band-Edge (115200 BPS)

## 6.8.2 RF Conducted Spurious Emissions

### 6.8.2.1 Test Methodology

The EUT was investigated for conducted spurious emissions from 30MHz to 10GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's VBW was set to 100 kHz and the RBW was set to 1MHz. A peak detector function was used with the trace set to max hold.

### 6.8.2.2 Test Results

All emission found were greater than 20dB down from the fundamental carrier. The RF conducted spurious emissions were measured in the band of 30MHz to 10GHz. Results are shown below in Figure 6.8.2-1 through 6.8.2-6.

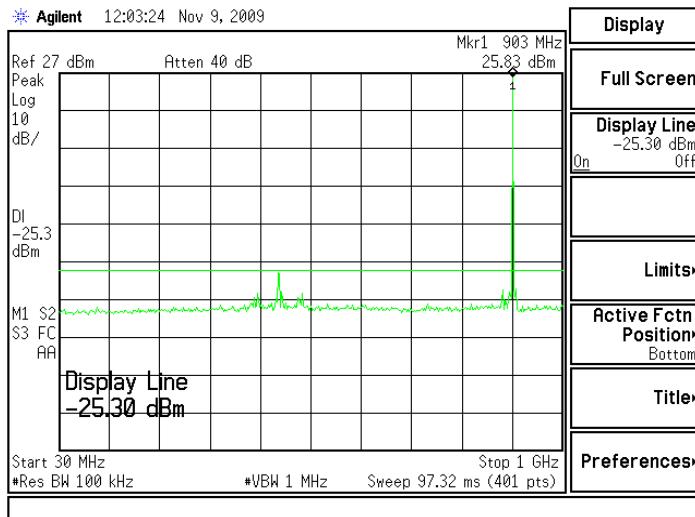


Figure 6.8.2-1: RF Conducted Spurious Emissions – Low Channel

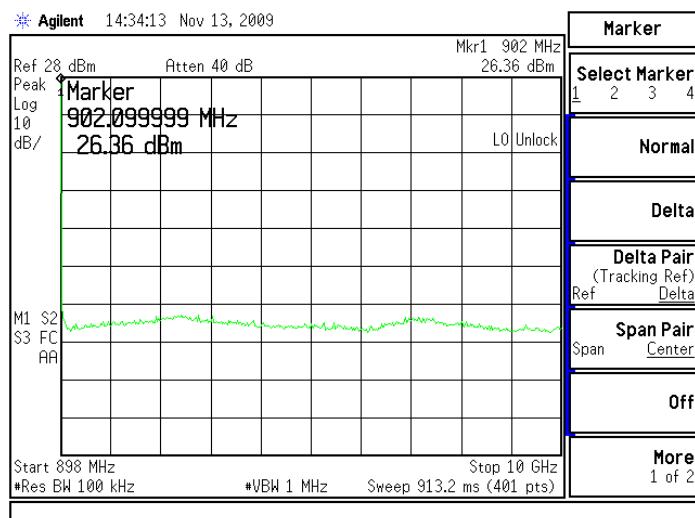


Figure 6.8.2-2: RF Conducted Spurious Emissions – Low Channel

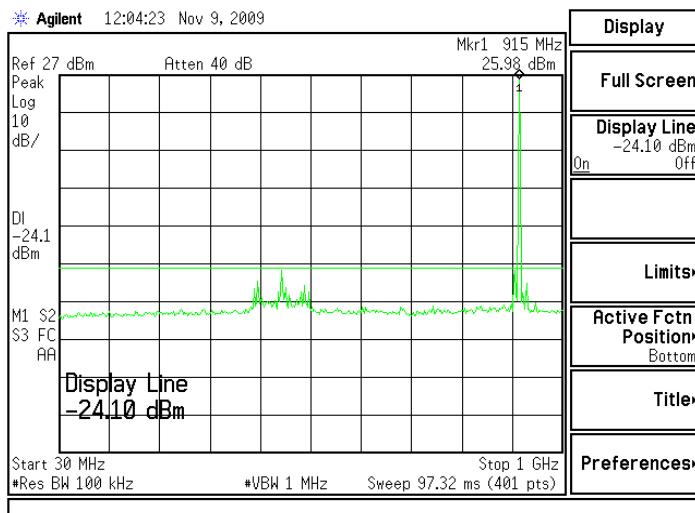


Figure 6.8.2-3: RF Conducted Spurious Emissions – Mid Channel

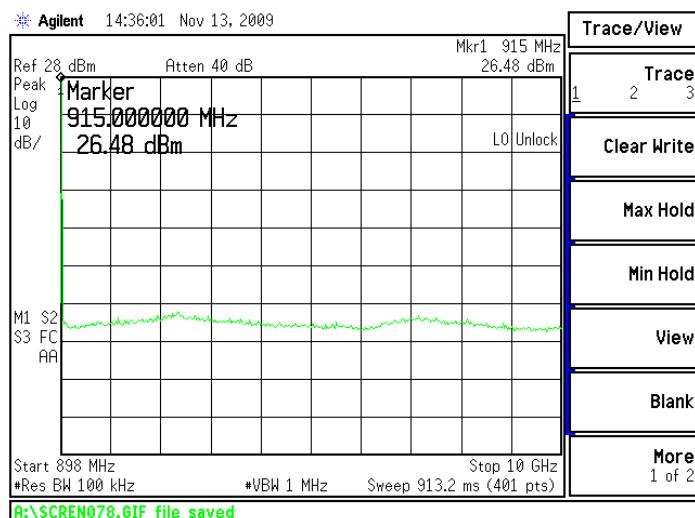


Figure 6.8.2-4: RF Conducted Spurious Emissions – Mid Channel

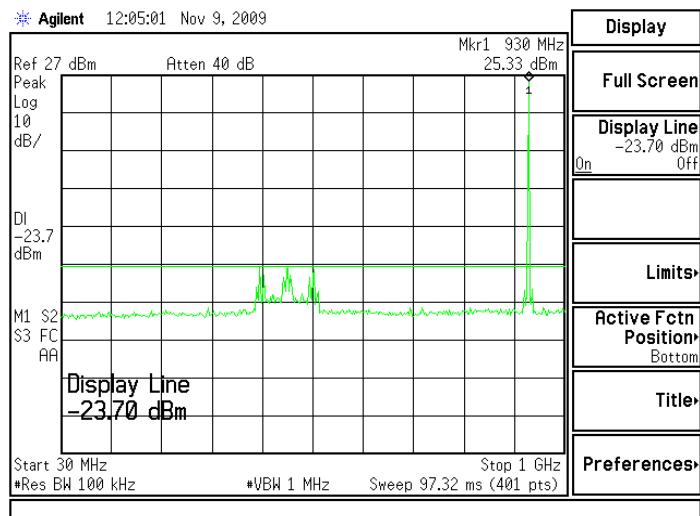


Figure 6.8.2-5: RF Conducted Spurious Emissions – High Channel

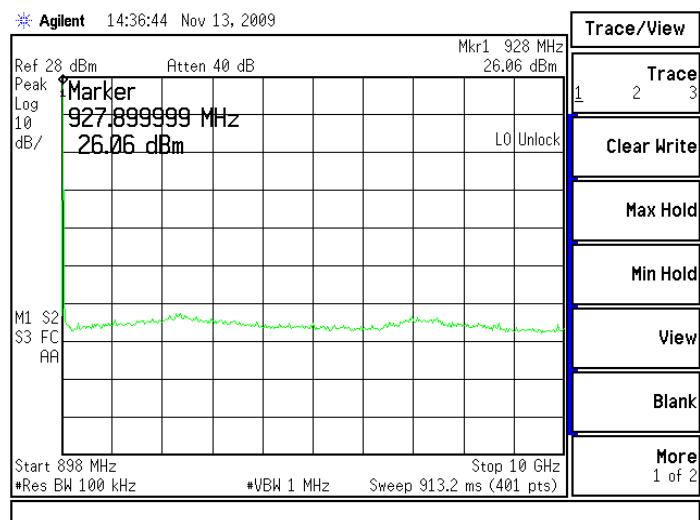


Figure 6.8.2-6: RF Conducted Spurious Emissions – High Channel

## 7.0 CONCLUSION

The S4e Universal RF endpoint model 825, manufactured by Hunt Technologies, LLC, meets the requirements of FCC Part 15 subpart C.