

FCC PART 15 C
EMI MEASUREMENT AND TEST REPORT
For
SHENZHEN BAOXIN TECH CO.,LTD.

3/F Guangtong Industry BLG, Futian District, Shenzhen city, China

FCC ID: TF5-BX88-CLASS-1

July 17, 2005

This Report Concerns: ☐ Original Report	Equipment Type: Bluetooth Dongle
Test Engineer: Jimmy Li	
Report No.: SE05F-090E	
Test Date: June 28-July 13, 2005	
Reviewed By: Adum Liu	
Prepared By: S&E Product Technology Service Co., Ltd. Room407,Block A Shennan Garden,Hi-Tech Industrial Park, Shenzhen 518057, P.R. China . Tel: 86-755-26636573, 26630631 Fax: 86-755-26630557	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of S&E Product Technology Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
2. SYSTEM TEST CONFIGURATION	6
2.1 DESCRIPTION OF TEST CONFIGURATION	6
2.2 EQUIPMENT MODIFICATIONS	6
2.3 DESCRIPTION OF TEST AUXILIARY EQUIPMENTS	6
2.4 CONFIGURATION OF TEST SETUP	6
2.5 BLOCK DIAGRAM OF TEST SETUP	7
2.6 LIST OF MEASURING EQUIPMENTS USED	8
3. SUMMARY OF TEST RESULTS	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 ANTENNA CONNECTED CONSTRUCTION	10
5. TEST OF CONDUCTED EMISSION	11
5.1 MEASUREMENT UNCERTAINTY	11
5.2 APPLICABLE STANDARD	11
5.3 EUT SETUP	11
5.4 INSTRUMENT SETTING	12
5.5 TEST EQUIPMENT LIST AND DETAILS	12
5.6 TEST PROCEDURE	12
5.7 TEST DATA	12
6. TEST OF HOPPING CHANNEL BANDWIDTH	15
6.1 MEASUREMENT UNCERTAINTY	15
6.2 APPLICABLE STANDARD	15
6.3 EUT SETUP	15
6.4 INSTRUMENT SETTING	15
6.5 TEST EQUIPMENT LIST AND DETAILS	15
6.6 TEST PROCEDURE	15
6.7 TEST DATA	16
7. TEST OF HOPPING CHANNEL SEPARATION	19
7.1 MEASUREMENT UNCERTAINTY	19
7.2 APPLICABLE STANDARD	19
7.3 EUT SETUP	19
7.4 INSTRUMENT SETTING	19
7.5 TEST EQUIPMENT LIST AND DETAILS	19
7.6 TEST PROCEDURE	19
7.7 TEST DATA	20
8. TEST OF NUMBER OF HOPPING FREQUENCY	23
8.1 APPLICABLE STANDARD	23
8.2 EUT SETUP	23
8.3 INSTRUMENT SETTING	23
8.4 TEST EQUIPMENT LIST AND DETAILS	23
8.5 TEST PROCEDURE	23
8.6 TEST DATA	24
9. TEST OF DWELL TIME OF EACH FREQUENCY	25
9.1 MEASUREMENT UNCERTAINTY	25
9.2 APPLICABLE STANDARD	25
9.3 EUT SETUP	25

9.4 INSTRUMENT SETTING	25
9.5 TEST EQUIPMENT LIST AND DETAILS.....	25
9.6 TEST PROCEDURE.....	25
9.7 TEST DATA	26
10. TEST OF MAXIMUM PEAK OUTPUT POWER	30
10.1 MEASUREMENT UNCERTAINTY	30
10.2 APPLICABLE STANDARD	30
10.3 EUT SETUP.....	30
10.4 INSTRUMENT SETTING.....	30
10.5 TEST EQUIPMENT LIST AND DETAILS.....	30
10.6 TEST PROCEDURE	30
10.7 TEST DATA	31
11. TEST OF BAND EDGES EMISSION.....	34
11.1 MEASUREMENT UNCERTAINTY	34
11.2 APPLICABLE STANDARD	34
11.3 EUT SETUP.....	34
11.4 INSTRUMENT SETTING.....	35
11.5 TEST EQUIPMENT LIST AND DETAILS.....	35
11.6 TEST PROCEDURE	35
11.7 TEST DATA	36
12. TEST OF SPURIOUS RADIATED EMISSION.....	38
12.1 MEASUREMENT UNCERTAINTY	38
12.2 APPLICABLE STANDARD	38
12.3 EUT SETUP.....	38
12.4 INSTRUMENT SETTING.....	39
12.5 TEST EQUIPMENT LIST AND DETAILS.....	39
12.6 TEST PROCEDURE	39
12.7 TEST DATA	40

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **ShenZhen BaoXin TECH CO.,LTD.**

Address of applicant: 3/F Guangtong Industry BLG, Futian District, Shenzhen city, China

Tel: 86-755-83313908 Fax: 86-755-83106279

Manufacturer: **ShenZhen BaoXin TECH CO.,LTD.**

Address of manufacturer: 3/F Guangtong Industry BLG, Futian District, Shenzhen city, China

Tel: 86-755-83313908 Fax: 86-755-83106279

General Description of E.U.T

The *ShenZhen BaoXin TECH CO.,LTD.*'s product, model number: *CLASS-1* or the "EUT" as referred to in this report is a *Bluetooth Dongle*. The EUT is measured approximately 5.3cm L x 1.7cm W x 0.9cm H or 5.8cm L x 1.8cm W x 0.9cm H

The technical data has been listed following:

Items	Description
Type of Modulation	GFSK(FHSS)
Frequency Band	2402 MHz ~ 2479 MHz
Number of Channels	78 2402 MHz +n MHz n=0,1,2,.....77
Channel Bandwidth	1 MHz
Operation Range	50m
Antenna Type	Built-in Antenna
Power Rating	5 VDC from PC System
Temperature Range (Operating)	-20 ~ 55 °C

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All measurement required was performed at laboratory of Shenzhen Huatongwei International Inspection Co., Ltd at Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China and The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

VCCI – Registration No.: 2218

Test site at Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been fully described in reports submitted to the Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Article 8 of the VCCI regulations on December 25, 1997. The VCCI Registration No.: 2218

The facility also complies with the radiated and AC line conducted test site criteria set forth in CISPR 16-1: 2002, CISPR16-2: 2002.

2. SYSTEM TEST CONFIGURATION

2.1 Description of Test Configuration

The EUT was configured for testing according to ANSI C63.4-2003.

The final qualification test was performed with the EUT operating at normal mode


2.2 Equipment Modifications

No modifications were made to the EUT.


2.3 Description of Test Auxiliary Equipments

Description:	Manufacturer	Model No.	Certificate
Host Computer	Dell	MTC2	CE, FCC
Monitor	Dell	E772C	CE, FCC
Keyboard	Dell	SK-8110	CE, FCC
Mouse	Dell	SAW34	CE, FCC
Printer	HP	Laser Jet 6l Pro	CE, FCC

2.4 Configuration of Test Setup

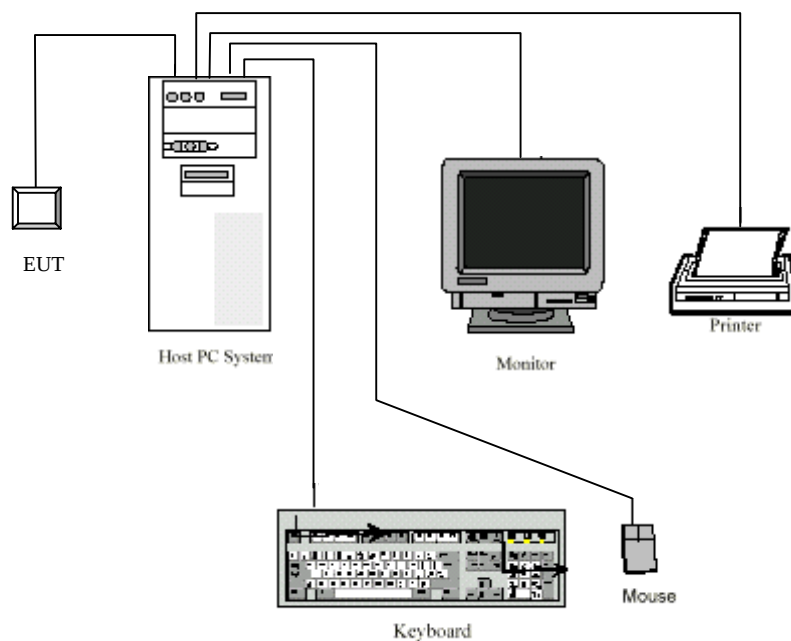

2.5 Block Diagram of Test Setup

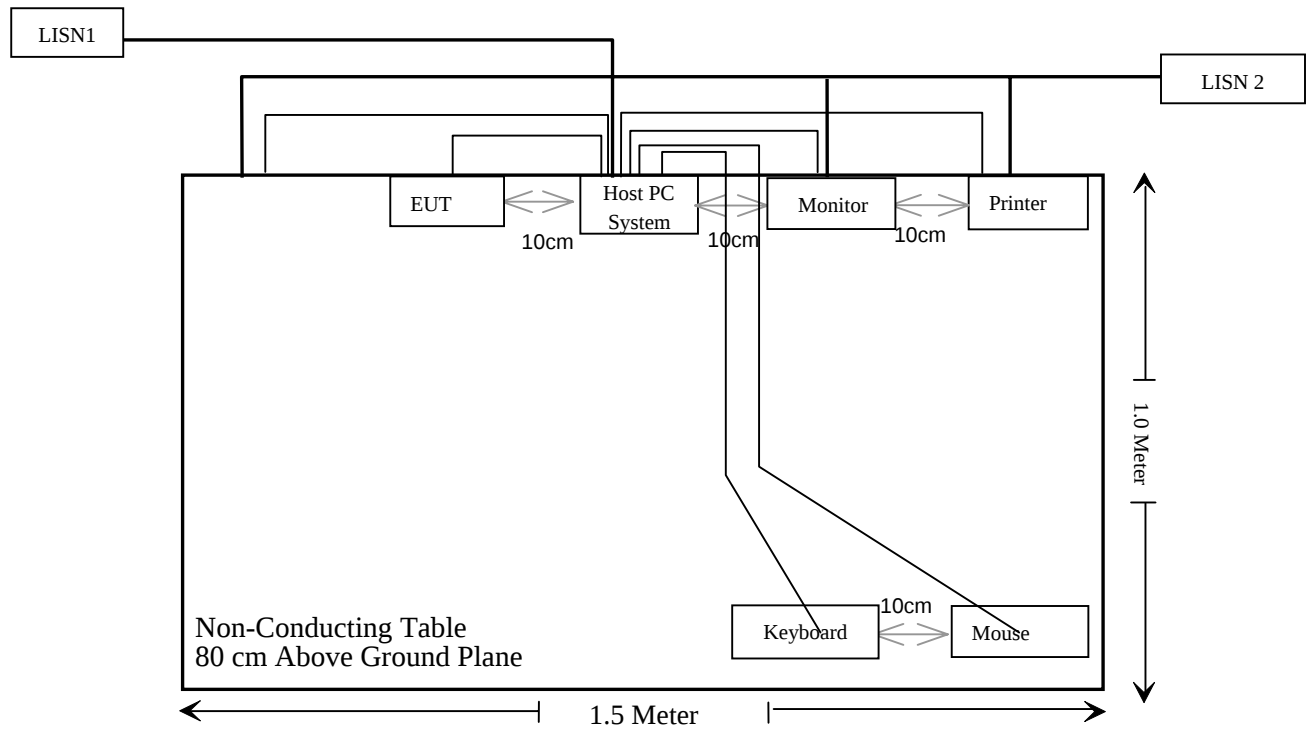

2.6 List of Measuring Equipments Used

Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	2004/11	1 year
2	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2004/11	1 year
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2004/11	1 year
4	LISN	COM Power	LI-200	12212	2004/11	1 year
5	LISN	COM Power	LI-200	12019	2004/11	1 year
6	3m/5m Semi-Anechoic Chamber	ETS	N/A	N/A	2004/11	1 year
7	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	2004/11	1 year
8	Receiver/ Spectrum Analyzer	ROHDE & SCHWARZ	ESCI	100106	2005/3	1 year
9	Spectrum Analyzer	HP	8593EM	3536A00107	2004/11	1 year
10	Spectrum Analyzer	HP	7405	US39440156	2004/11	1 year
11	Ultra-Broadband Antenna	R/S	HL562	100015	2004/11	1 year
12	Horn Antenna	R/S	HF906	100039	2004/11	1 year
13	Horn Antenna	Schwarzbeck	BBHA9170	154	2004/11	1 year
14	RF Test Panel	R/S	TS / RSP	335015/ 0017	N/A	N/A
15	Turntable	ETS	2088	2149	N/A	N/A
16	Antenna Mast	ETS	2075	2346	N/A	N/A

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.203/15.247(b)/(c)	Antenna Requirement	Pass
15.207	AC Power Line Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass

4. ANTENNA REQUIREMENT

4.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.

5. TEST OF CONDUCTED EMISSION

5.1 Measurement Uncertainty


All test results complied with Section 15.207 requirements. Measurement Uncertainty is 2.4 dB.

5.2 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150 ~ 0.500	66 ~ 56	56 ~ 46
0.500 ~ 5.000	56	46
5.000 ~ 30.00	60	50

5.3 EUT Setup

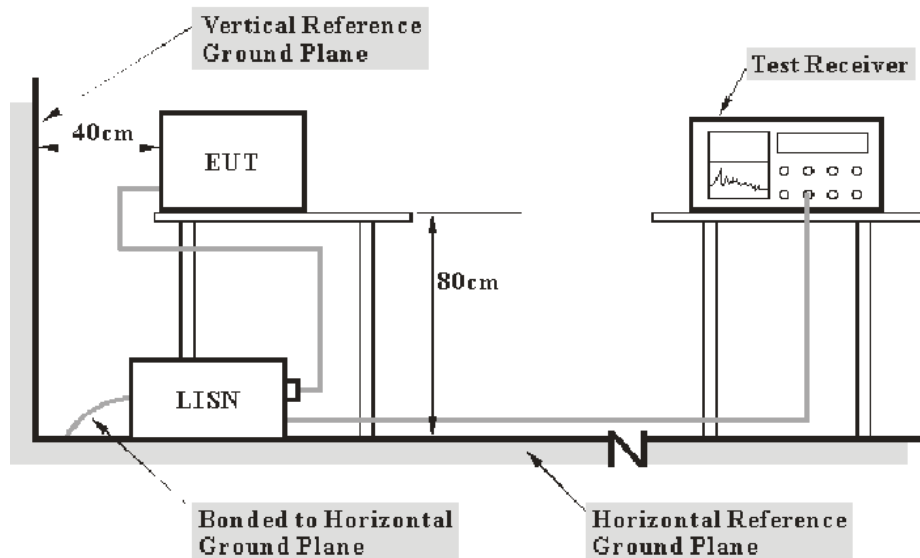

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.

The EUT was connected to a 120 VAC/ 60Hz power source

5.4 Instrument Setting

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

5.5 Test Equipment List and Details

See section 2.6.

5.6 Test Procedure

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

5.7 Test Data


Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

CONDUCTED EMISSION TEST DATA

EUT: Bluetooth Dongle
 Operating Condition: Communicating with PC
 Test Site: HTW 3# Shielded Room
 Operator: Andy
 Test Specification: DC 5V from PC System(AC 120V/60Hz)
 Comment: Live Line
 Start of Test: 06/29/05 / 10:13:21AM

SCAN TABLE: "Voltage (150K-30M)QP"

Short Description: 150K-30M Voltage
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz ESH2-Z5_1000280
 Average

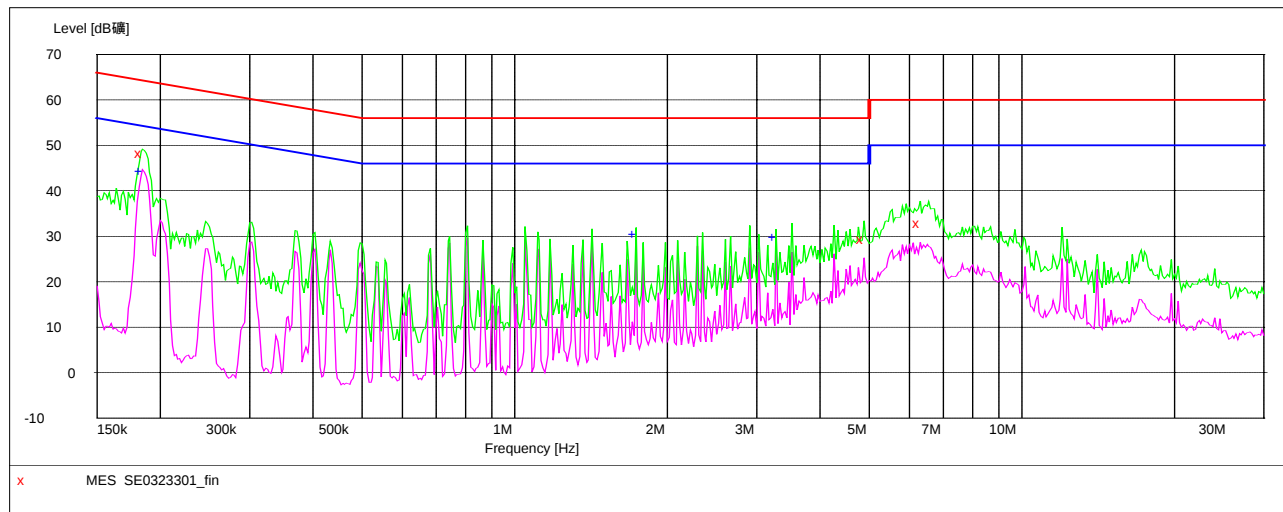**MEASUREMENT RESULT: "SE0629301_fin"**

06/29/05 10:17AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.184524	48.20	11.1	64	16.1	QP	L1	GND
4.879143	29.40	10.4	56	26.6	QP	L1	GND
6.296230	32.90	10.6	60	27.1	QP	L1	GND

MEASUREMENT RESULT: "SE0629301_fin2"

06/29/05 10:19AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.184524	44.40	11.1	54	9.9	AV	L1	GND
1.731704	30.60	10.5	46	15.4	AV	L1	GND
3.275798	29.70	10.5	46	16.3	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: Bluetooth Dongle
 Operating Condition: Communicating with PC
 Test Site: HTW 3# Shielded Room
 Operator: Andy
 Test Specification: DC 5V from PC System(AC 120V/60Hz)
 Comment: Neutral Line
 Start of Test: 06/29/05 / 10:22:37AM

SCAN TABLE: "Voltage (150K-30M)QP"

Short Description: 150K-30M Voltage
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz ESH2-Z5_1000280
 Average

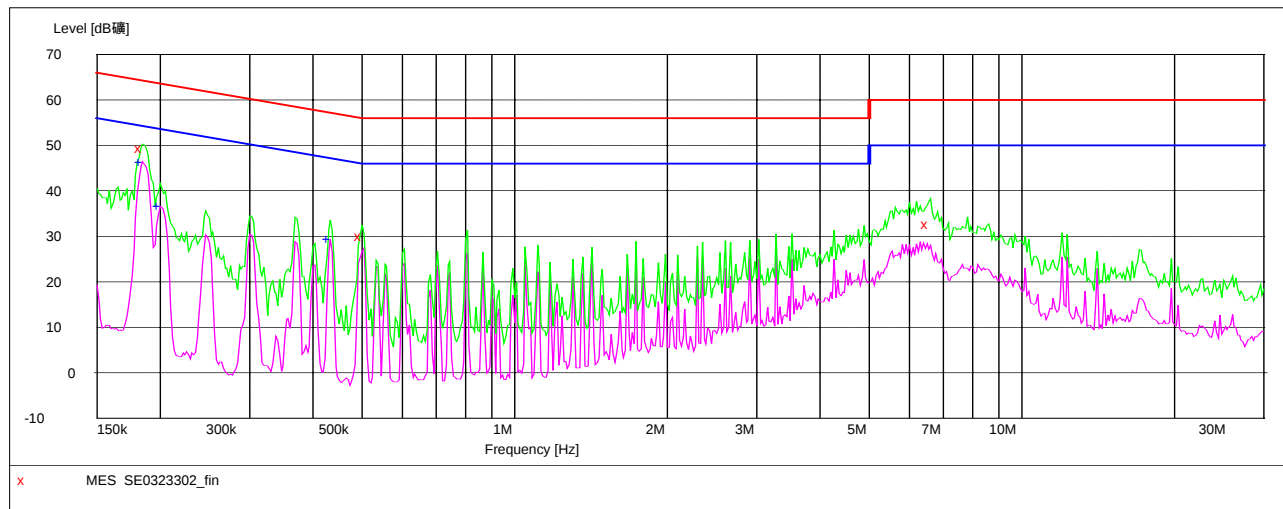**MEASUREMENT RESULT: "SE0629302_fin"**

06/29/05 10:25AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.184524	49.50	11.1	64	14.8	QP	N	GND
0.499605	30.10	10.5	56	25.9	QP	N	GND
6.552140	32.60	10.6	60	27.4	QP	N	GND

MEASUREMENT RESULT: "SE0629302_fin2"

06/29/05 10:27AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.184524	46.40	11.1	54	7.9	AV	N	GND
0.199826	36.60	10.9	54	17.0	AV	N	GND
0.432845	29.30	10.5	47	17.9	AV	N	GND

6. Test of Hopping Channel Bandwidth

6.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(a)(1) requirements. Measurement Uncertainty is 1×10^{-5} dB.

6.2 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

6.3 EUT Setup

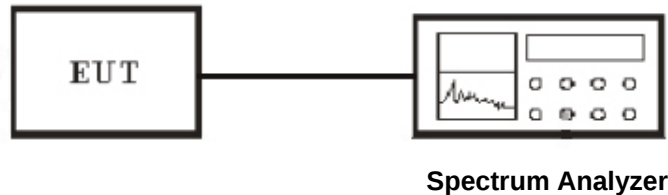

6.4 Instrument Setting

Refer to section 6.6 Test Procedure.

6.5 Test Equipment List and Details

See section 2.6.

6.6 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The spectrum width with level higher than 20dB below the peak level.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

6.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
GFSK(FHSS)	00	2402.07	268	>25
GFSK(FHSS)	38	2441.07	336	>25
GFSK(FHSS)	77	2479.07	334	>25

Channel 00 :

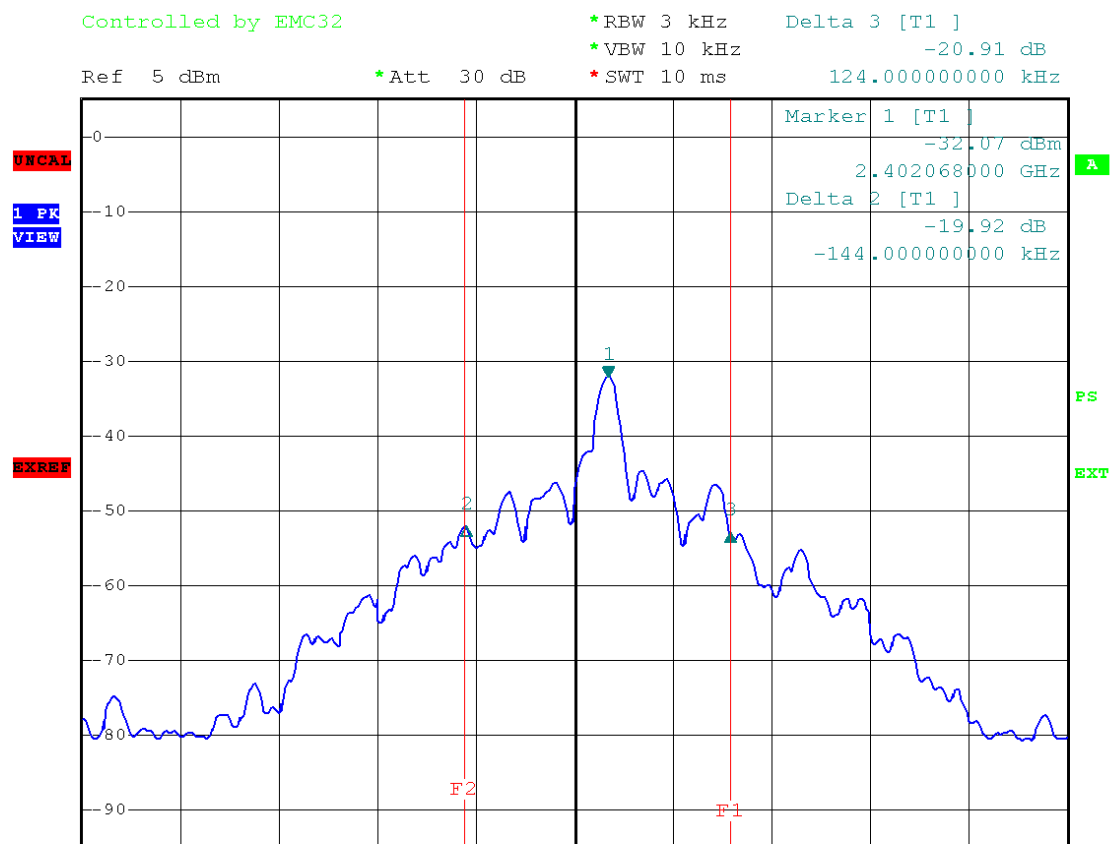


EBCF-226 LINE:N

Date: 9.JUL.2005 18:04:07

FCC PART 15 C Report

Channel 77 :

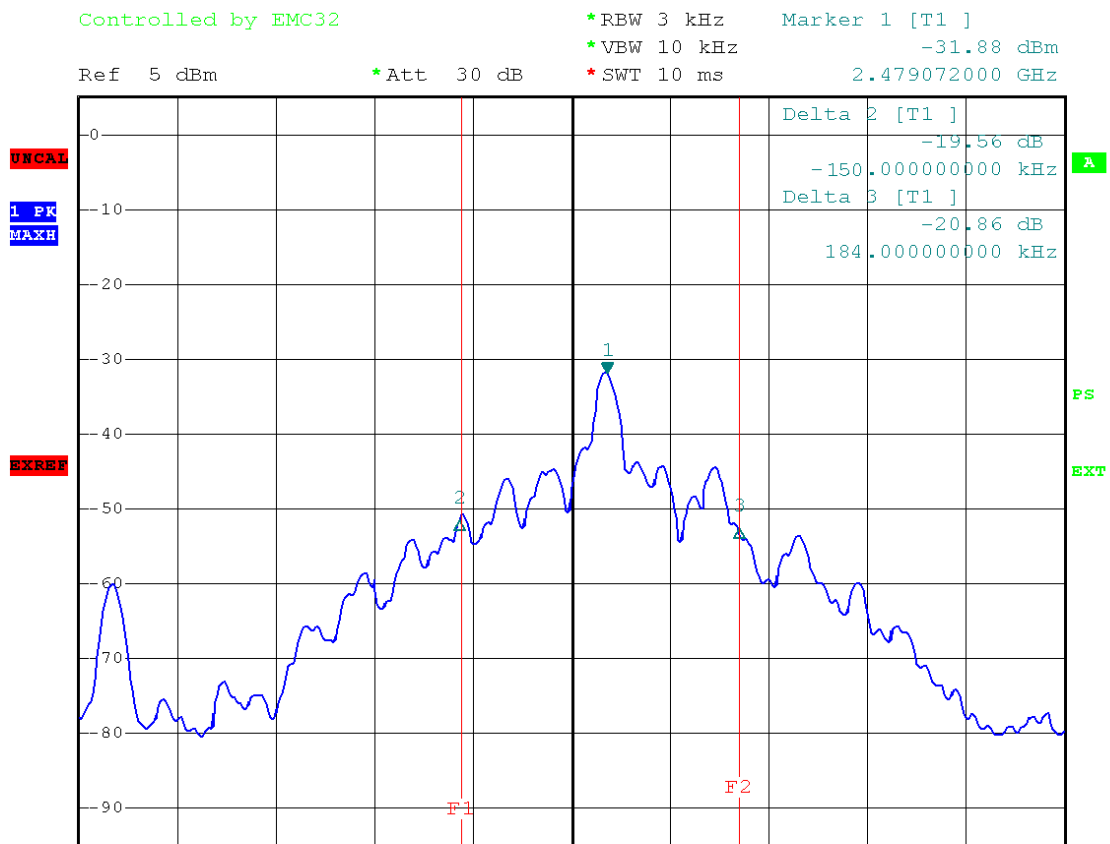

EBCF-226 LINE:N

Date: 9.JUL.2005 18:08:03

7. Test of Hopping Channel Separation

7.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(a)(1) requirements. Measurement Uncertainty is 1×10^{-5} dB.

7.2 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.3 EUT Setup

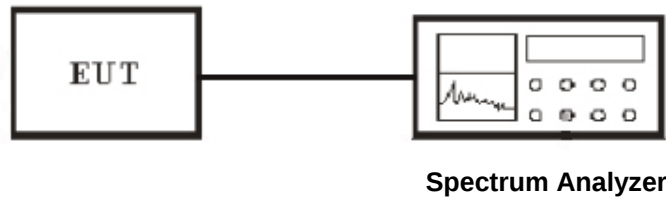

7.4 Instrument Setting

Refer to section 7.6 Test Procedure.

7.5 Test Equipment List and Details

See section 2.6.

7.6 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

7.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Channel No.	Frequency (MHz)	Hopping Channel Separation (kHz)	Min. Limit (kHz)
GFSK(FHSS)	00	2402.05	1016	268
GFSK(FHSS)	38	2441.06	1003	336
GFSK(FHSS)	77	2479.06	994	334


Channel 00 :

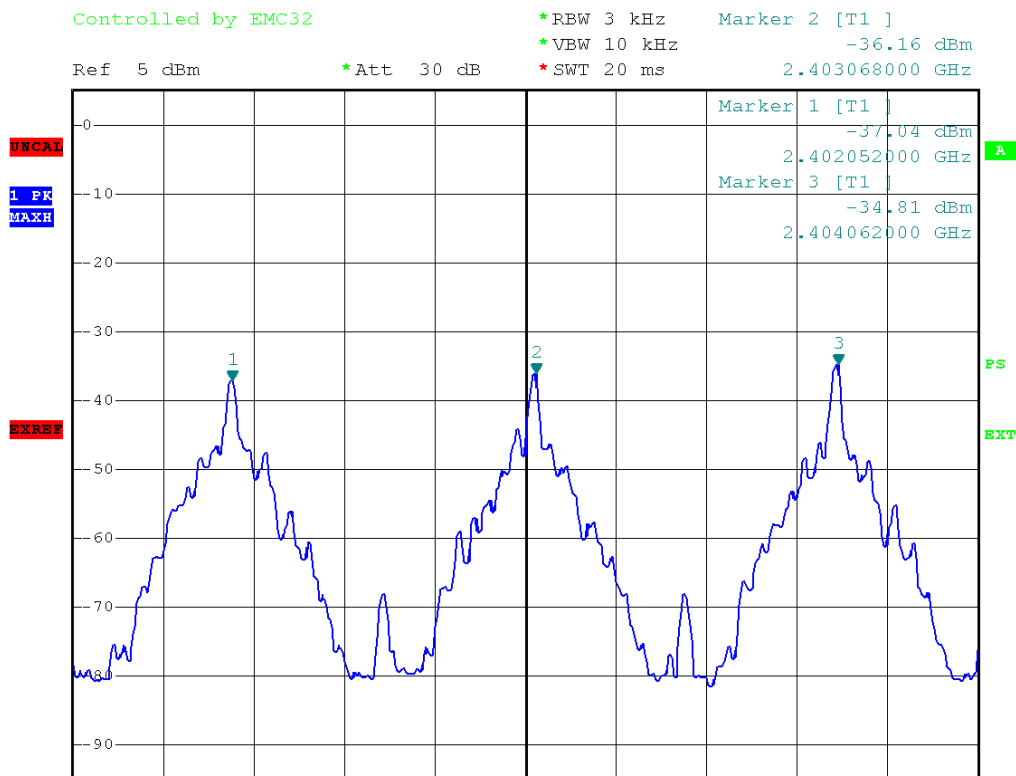

EBCF-226 LINE:N

Date: 9.JUL.2005 17:06:32


Channel 38 :

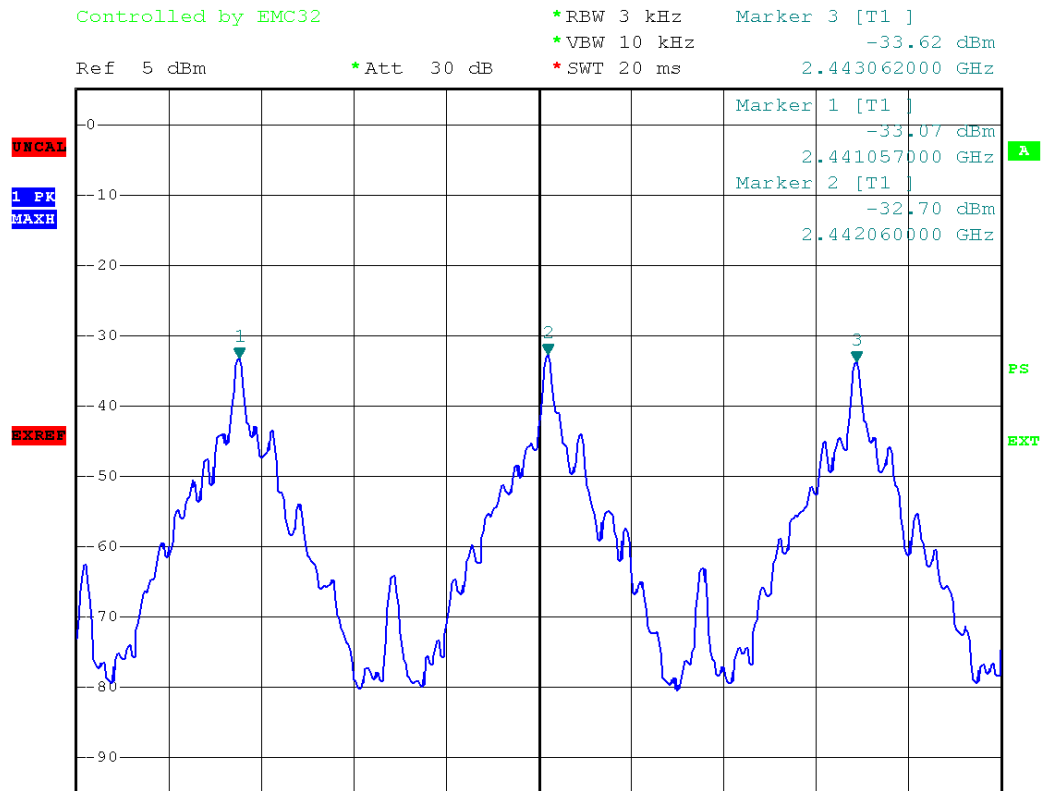

EBCF-226 LINE:N

Date: 9.JUL.2005 17:08:30

Channel 77 :

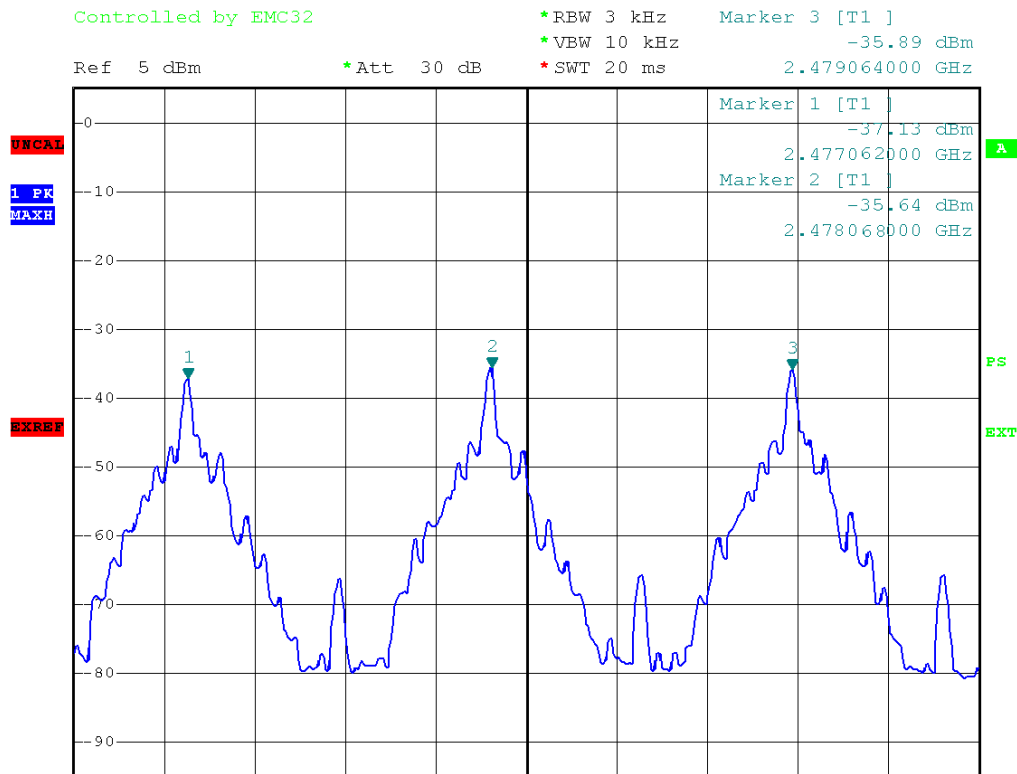

EBCF-226 LINE:N


Date: 9.JUL.2005 17:12:53

8. Test of Number of Hopping Frequency

8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

8.2 EUT Setup

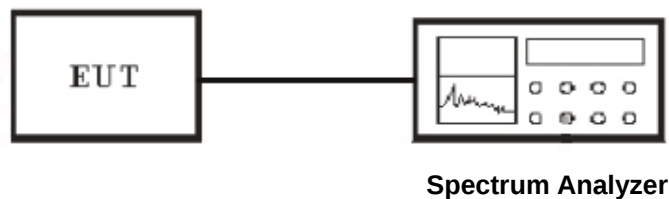

8.3 Instrument Setting

Refer to section 8.6 Test Procedure.

8.4 Test Equipment List and Details

See section 2.6.


8.5 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

8.6 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Channel No.	Frequency (MHz)	Number of Hopping Channel (Channels)	Min. Limit (kHz)
GFSK(FHSS)	00~77	2402.0~2479.0	78	>15

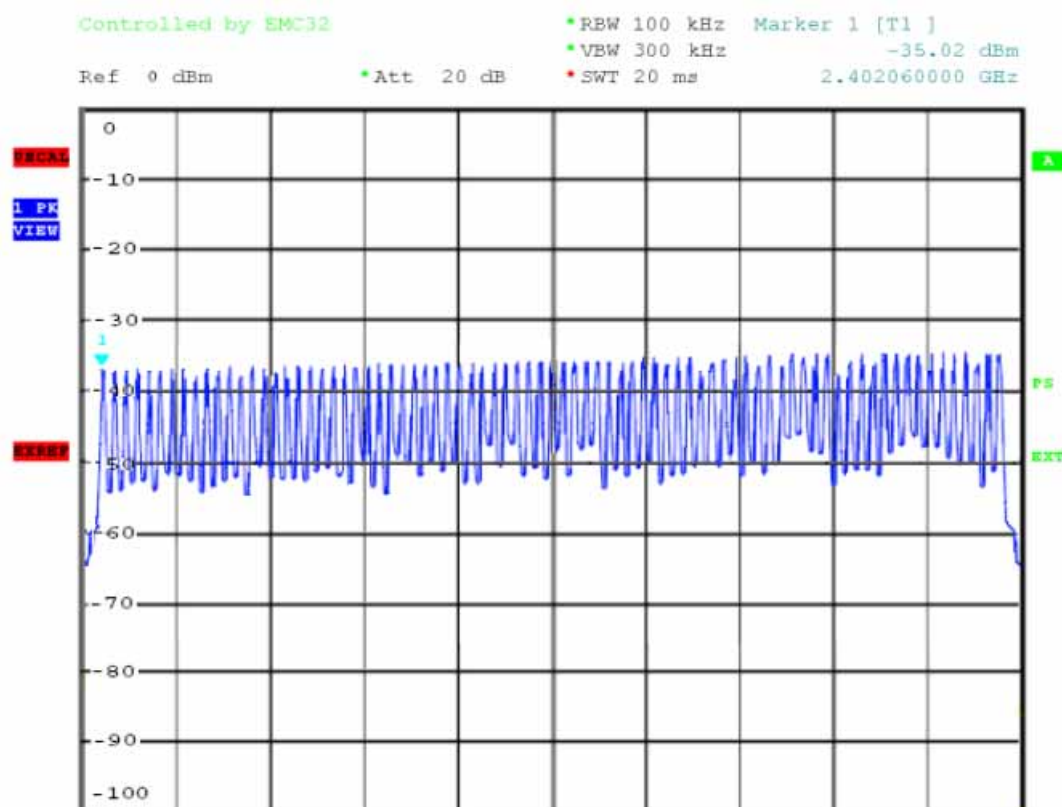

EBCF-226 LINE:N

Date: 9.JUL.2005 16:46:05

9. Test of Dwell Time of Each Frequency

9.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(a)(1)(iii) requirements. Measurement Uncertainty is 1×10^{-5} .

9.2 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

9.3 EUT Setup

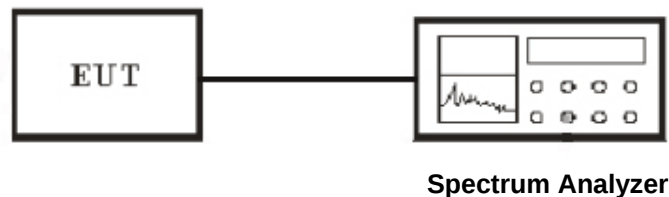

9.4 Instrument Setting

Refer to section 9.6 Test Procedure.

9.5 Test Equipment List and Details

See section 2.6.

9.6 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

9.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (μ s)	Min. Limit (ms)
GFSK(FHSS)	00	2402.07	398	400
GFSK(FHSS)	38	2441.07	398	400
GFSK(FHSS)	77	2479.07	391	400

The period is $0.4(\text{Sec}) \times 79(\text{Channels}) = 31.6\text{sec}$

$31.6(\text{Sec}) \times 10(\text{hoping/sec}) = 316(\text{hops})$

Per one period of On time is: 1.26ms(Channel 00) , 1.26ms (Channel 38),
1.24ms(Channel 77)


The Result is:

Channel 00 the dwell time is $1.26 \times 316 = 398\text{ms}$

Channel 38 the dwell time is $1.26 \times 316 = 398\text{ms}$

Channel 77 the dwell time is $1.24 \times 316 = 391\text{ms}$


Channel 00 :

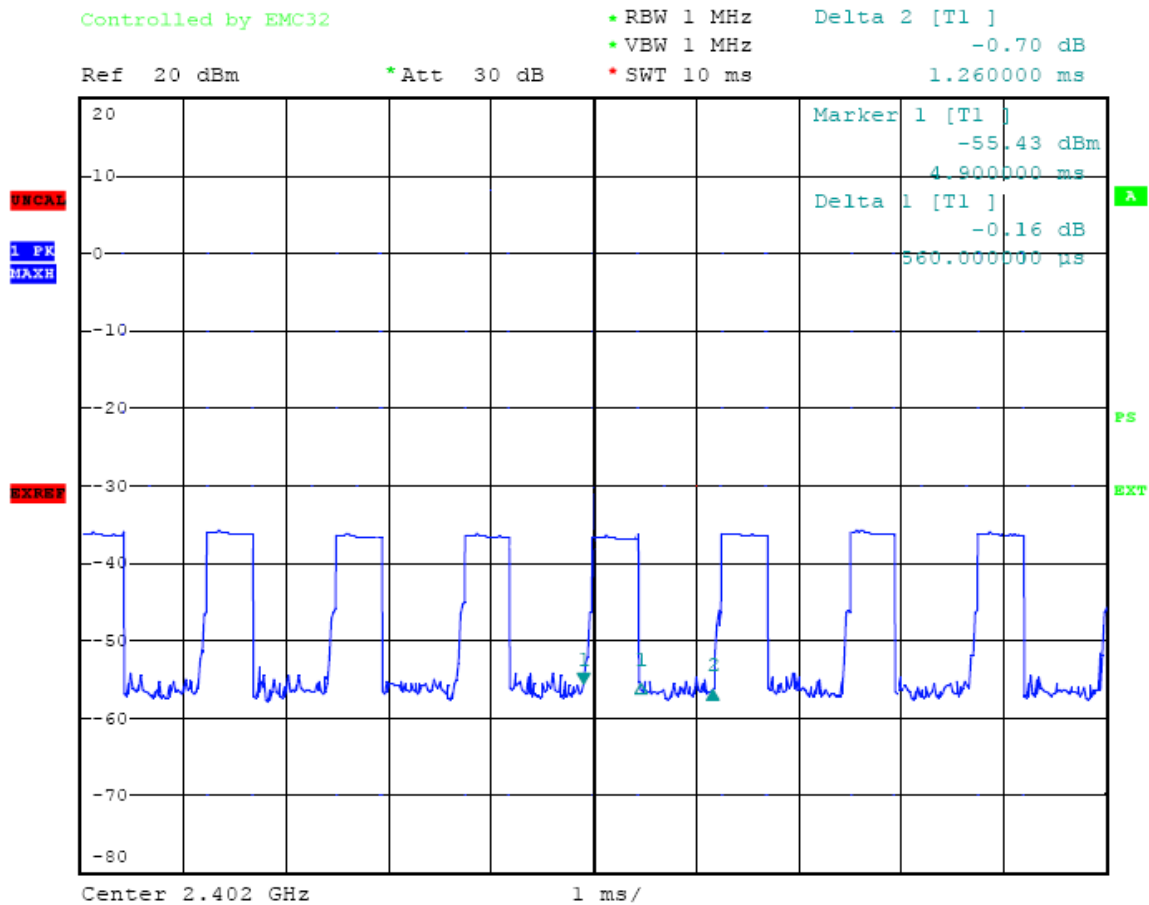

EBCF-226 LINE:N

Date: 6.JUL.2005 10:22:05


Channel 38 :

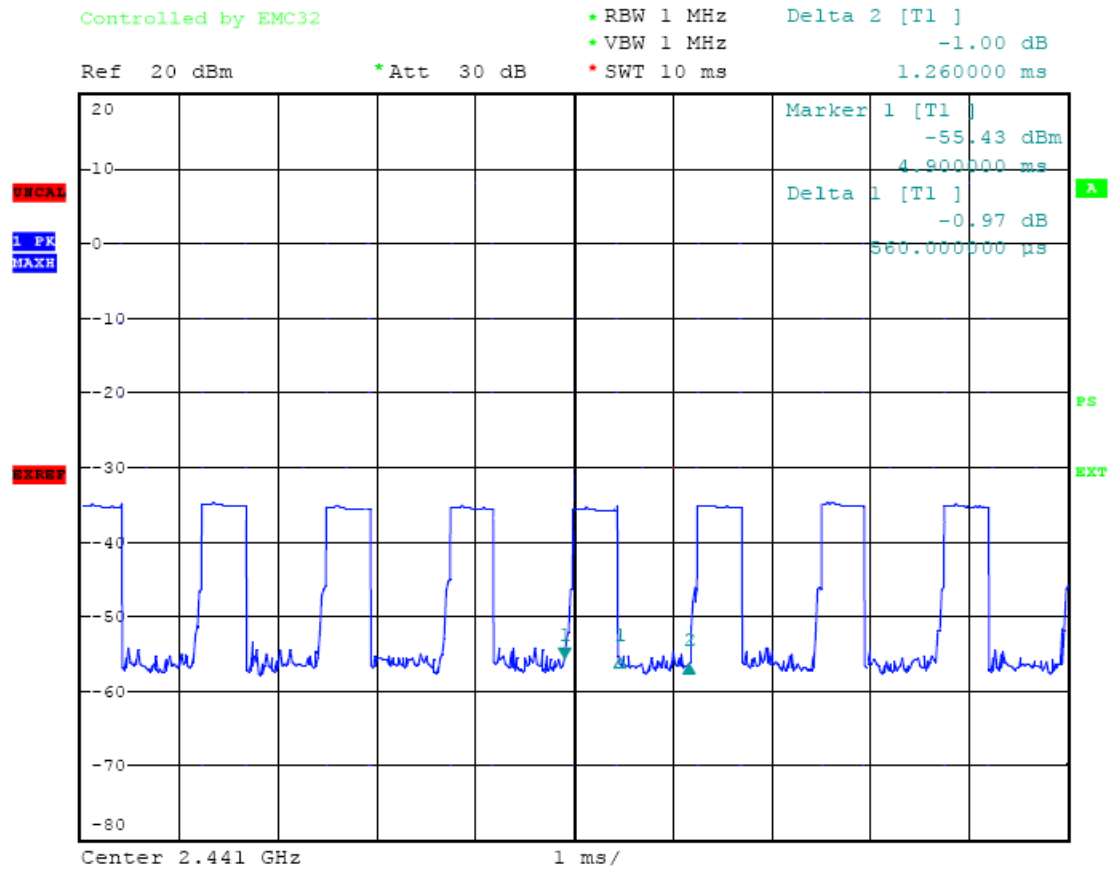

EBCF-226 LINE:N

Date: 6.JUL.2005 10:26:12

Channel 77 :

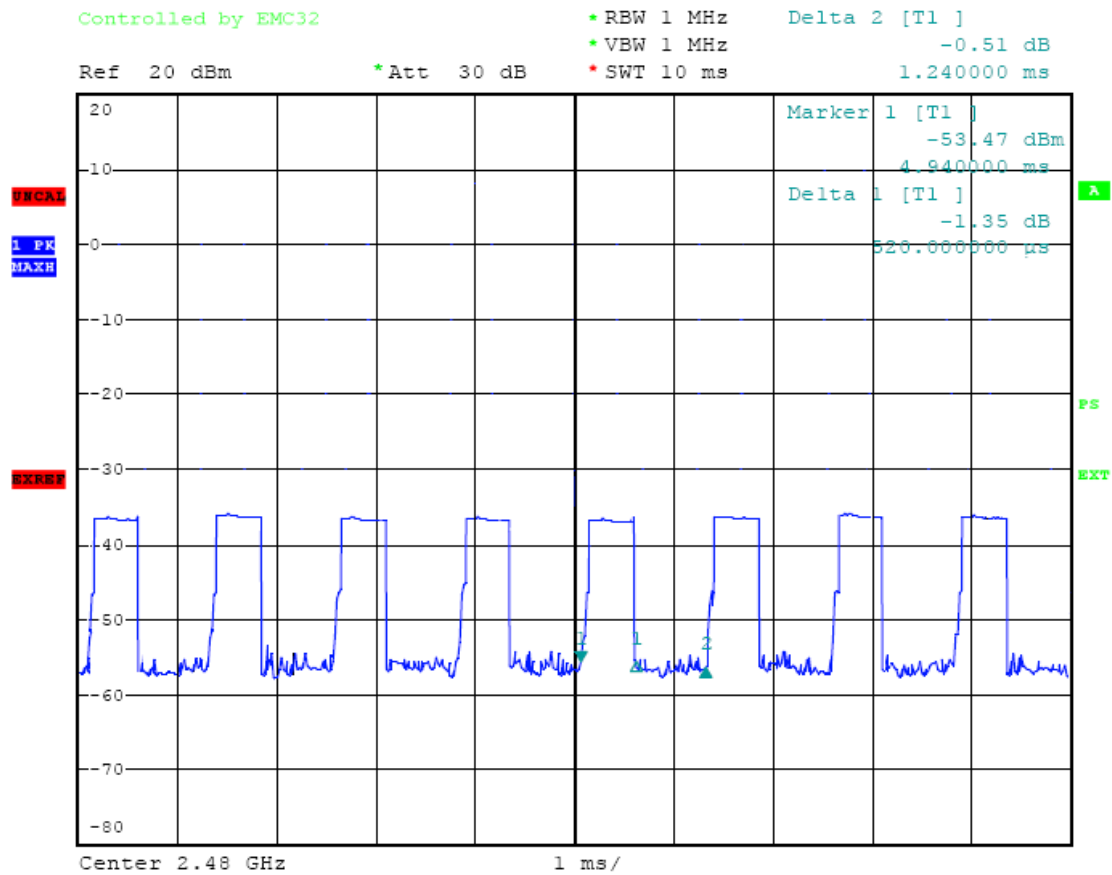

EBCF-226 LINE:N

Date: 6.JUL.2005 10:46:05

10. Test of Maximum Peak Output Power

10.1 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer and cable loss.

All test results complied with Section 15.247(b)(1) requirements. Measurement Uncertainty is 1.5dB.

10.2 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

10.3 EUT Setup

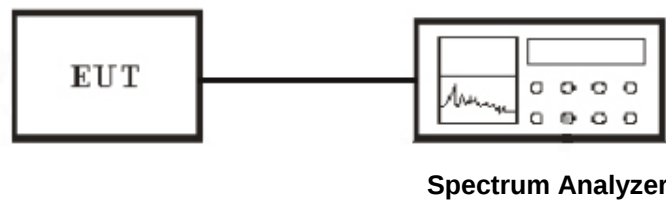

10.4 Instrument Setting

Refer to section 10.6 Test Procedure.

10.5 Test Equipment List and Details

See section 2.6.

10.6 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

10.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dBm)
GFSK(FHSS)	00	2402.07	-38.33	20.9	59.2
GFSK(FHSS)	38	2441.07	-36.47	20.9	57.4
GFSK(FHSS)	77	2479.07	-35.72	20.9	55.6


Channel 00 :

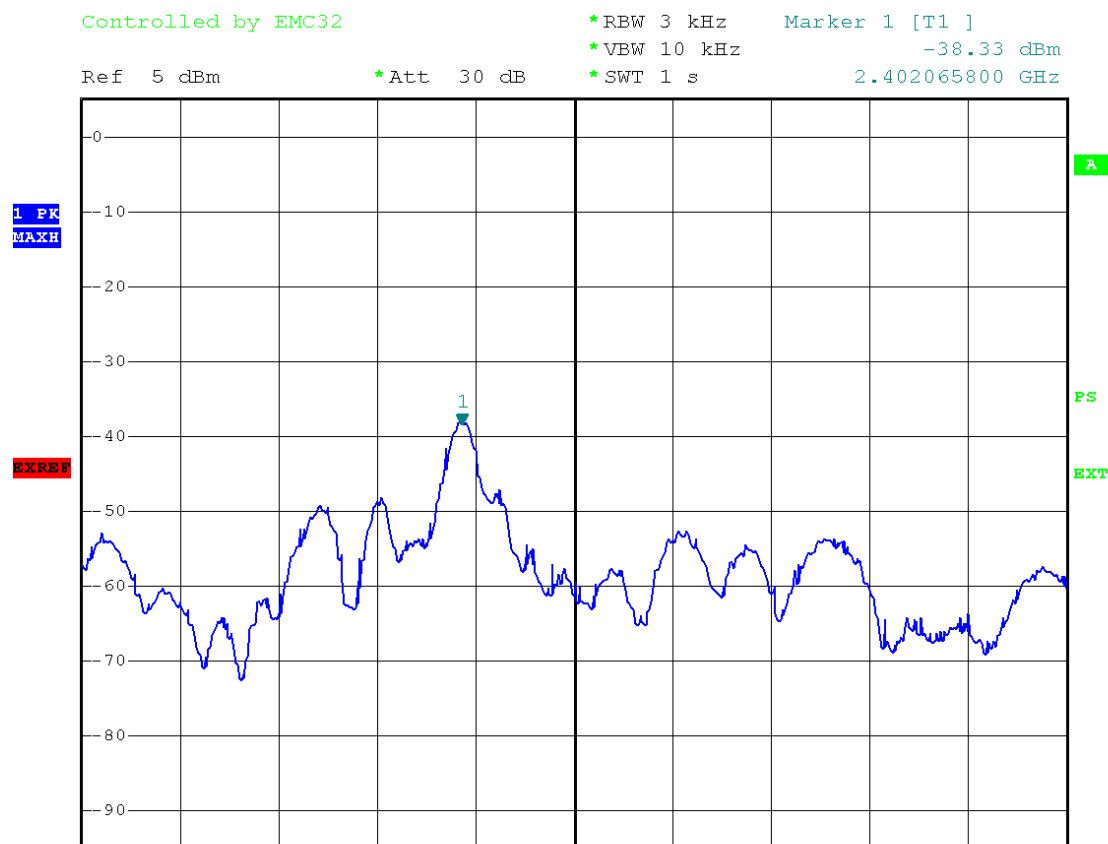

EBCF-226 LINE:N

Date: 9.JUL.2005 17:37:00


Channel 38 :

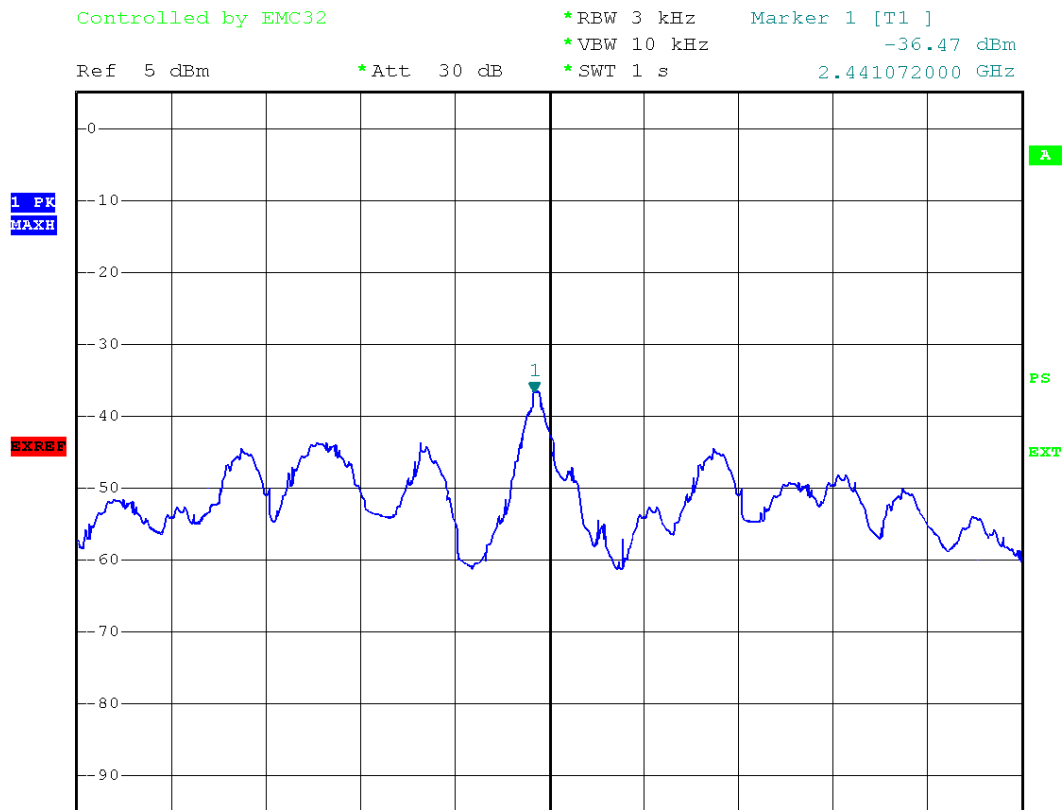

EBCF-226 LINE:N

Date: 7.JUL.2005 16:21:05

Channel 77 :

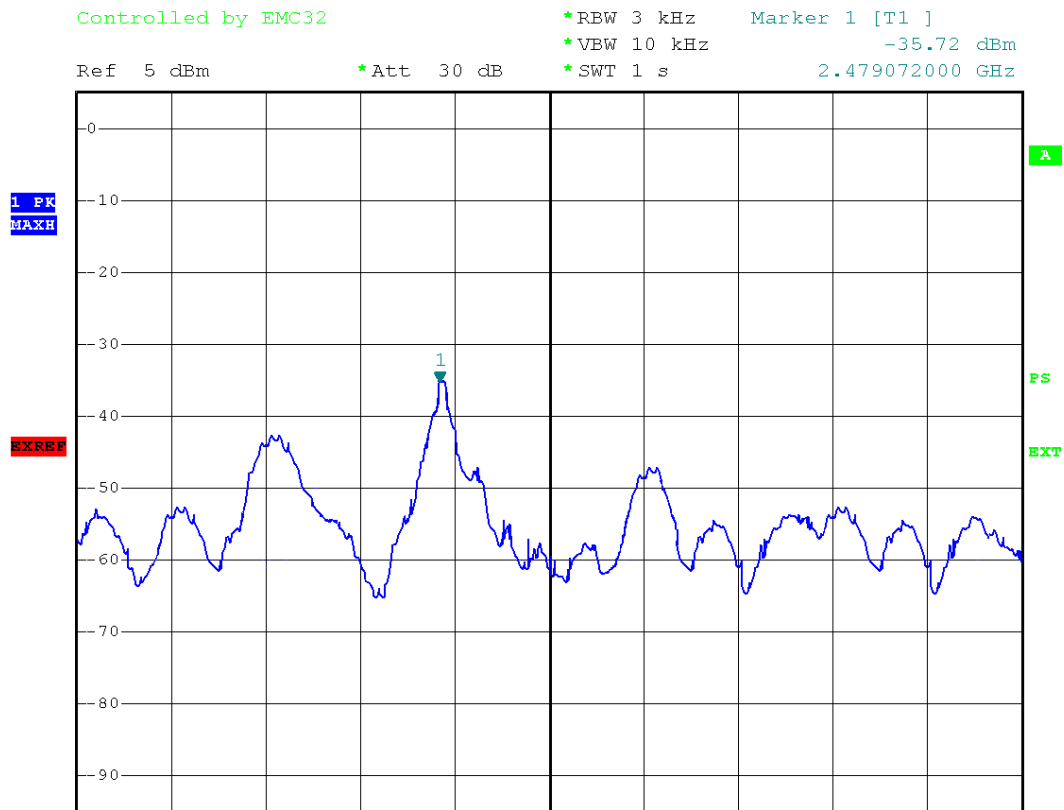

EBCF-226 LINE:N

Date: 7.JUL.2005 13:37:00



11. Test of Band Edges Emission

11.1 Measurement Uncertainty


All test results complied with Section 15.247(d) requirements. Measurement Uncertainty is 2.6 dB.

11.2 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth power, based on either an RF emissions that fall in the restricted radiated emission limits specified

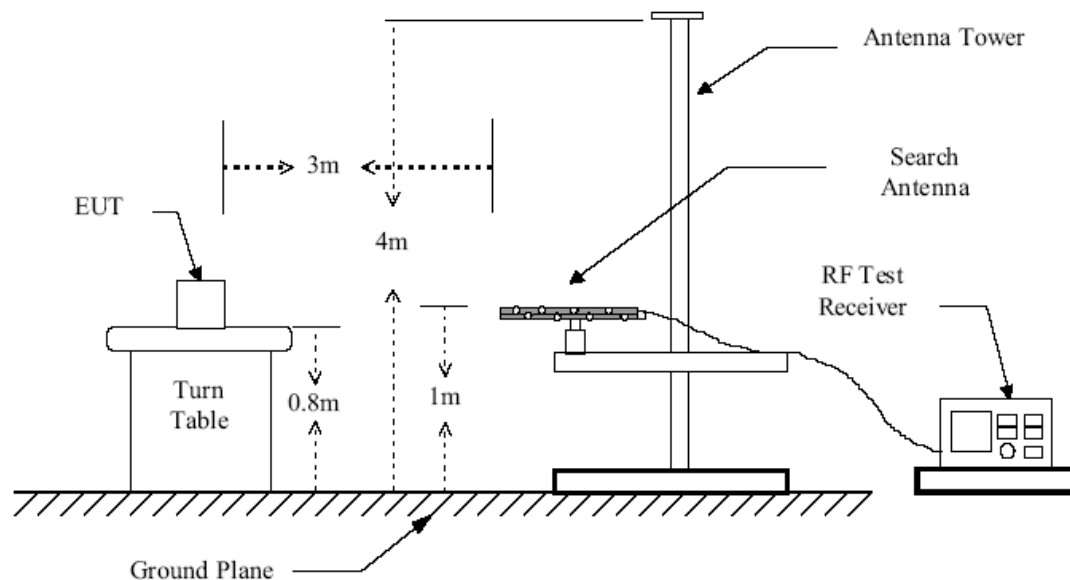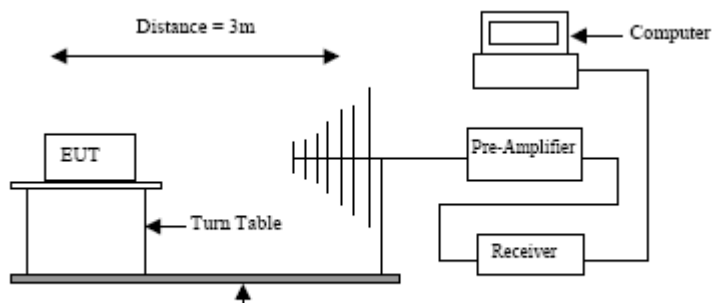

Conducted Measurement Setup

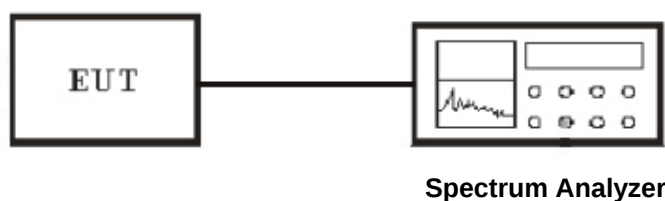

11.4 Instrument Setting

Refer to section 11.6 Test Procedure.

11.5 Test Equipment List and Details

See section 2.6.

11.6 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement

1. Configure the EUT according to ANSI C63.4.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.


11.7 Test Data

Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	Jimmy Li

Radiated Test Result


Frequency (MHz)	Antenna Polarization	Emission Read Value (dBμV/m)	Limits (dBμV/m)
<2400	H	35.97	54
>2483.5	H	37.51	54

Conducted Test Result

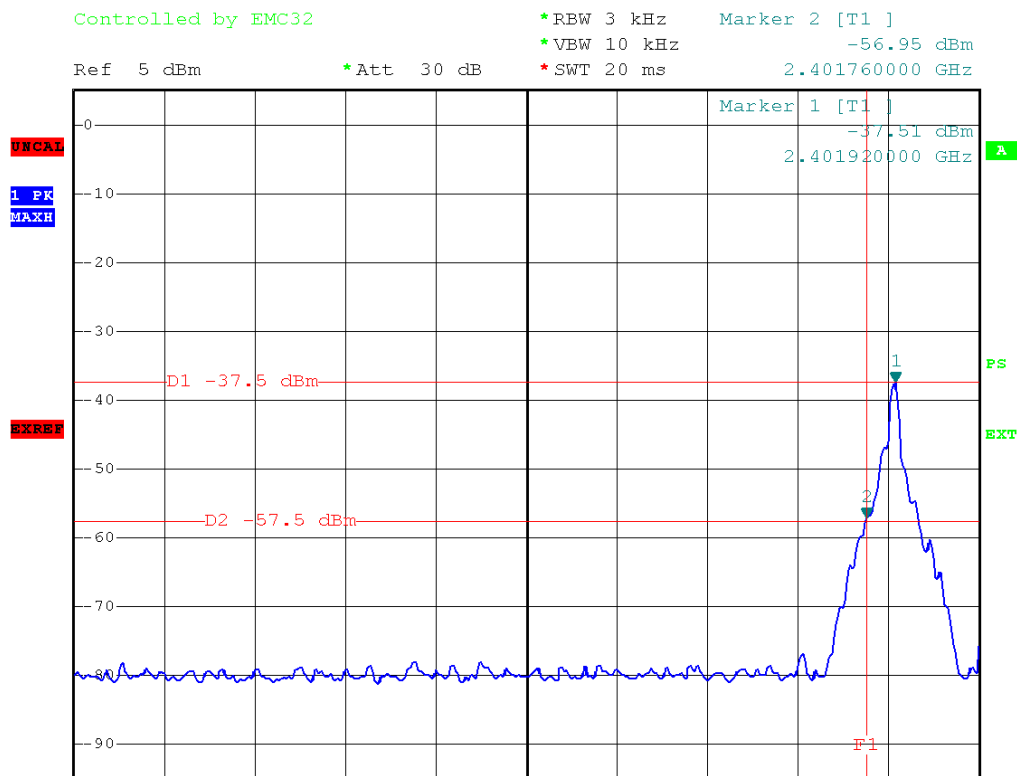

EBCF-226 LINE:N

Date: 9.JUL.2005 17:25:46

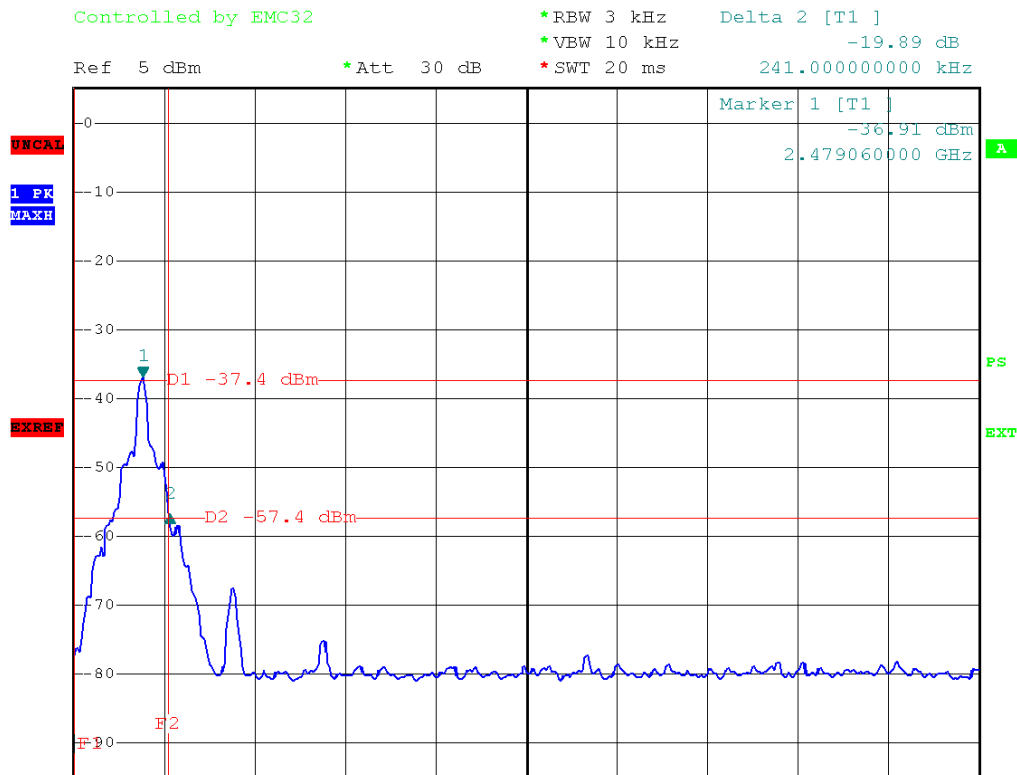

EBCF-226 LINE:N

Date: 9.JUL.2005 17:29:31

12. Test of Spurious Radiated Emission

12.1 Measurement Uncertainty

All test results complied with Section 15.247(d) requirements. Measurement Uncertainty is 2.6 dB.

12.2 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

12.3 EUT Setup

Radiated Measurement Setup

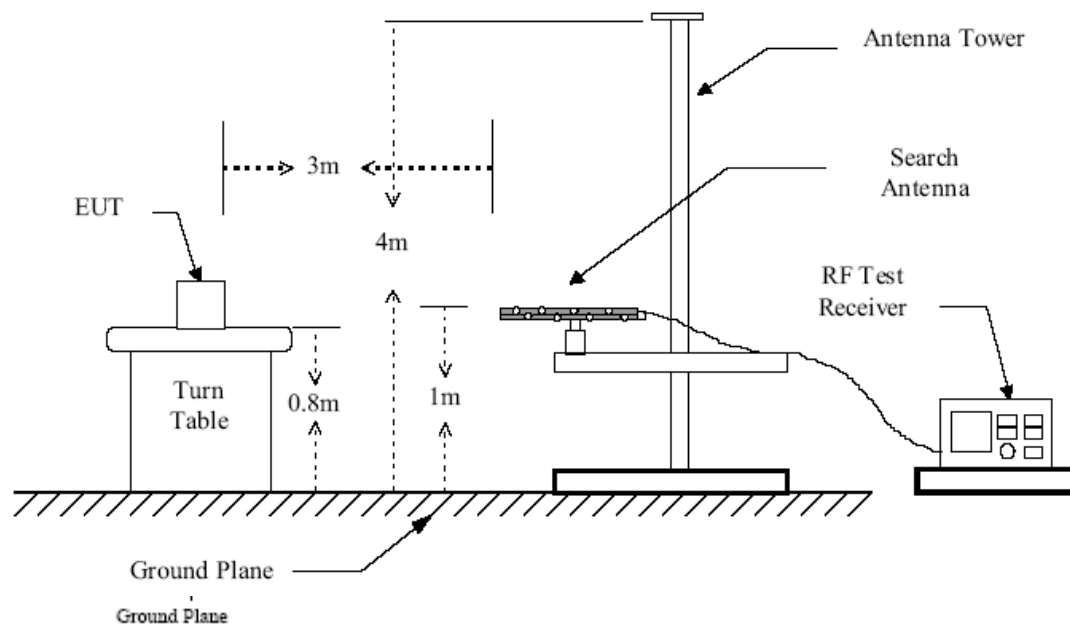


Figure 1 : Frequencies measured below 1 GHz configuration


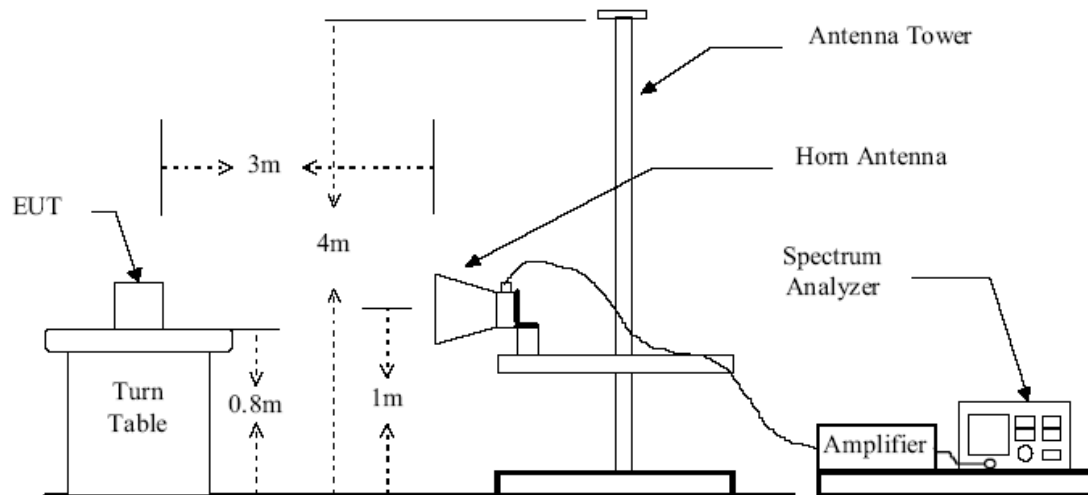


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

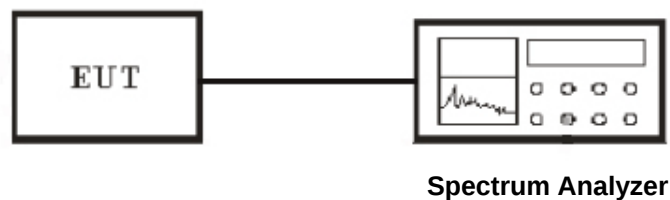

12.4 Instrument Setting

Refer to section 12.6 Test Procedure.

12.5 Test Equipment List and Details

See section 2.6.

12.6 Test Procedure

Radiated Measurement

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.

5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

Conducted Measurement

1. For emission above 1GHz,conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

12.7 Test Data


Temperature ()	22~23
Humidity (%RH)	50~54
Barometric Pressure (mbar)	950~1000
EUT	Bluetooth Dongle
M/N	CLASS-1
Operation Condition	GFSK(FHSS)
Testing Engineer	East Wang

RADIATED EMISSION TEST DATA

EUT: Bluetooth Dongle
 Operating Condition: Transmitting
 Test Site: 3m CHAMBER
 Operator: Jimmy
 Test Specification: DC 5V from PC System (AC 120V/60Hz)
 Comment: Polarisation: Horizontal
 Start of Test: 07/01/05 / 03:58:45PM

SCAN TABLE: "test Field(30M-1G)"

Short Description: Field Strength(30M-1G)
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width QuasiPeak Time Bandw.
 30.0 MHz 1.0 GHz 60.0 kHz HL562new

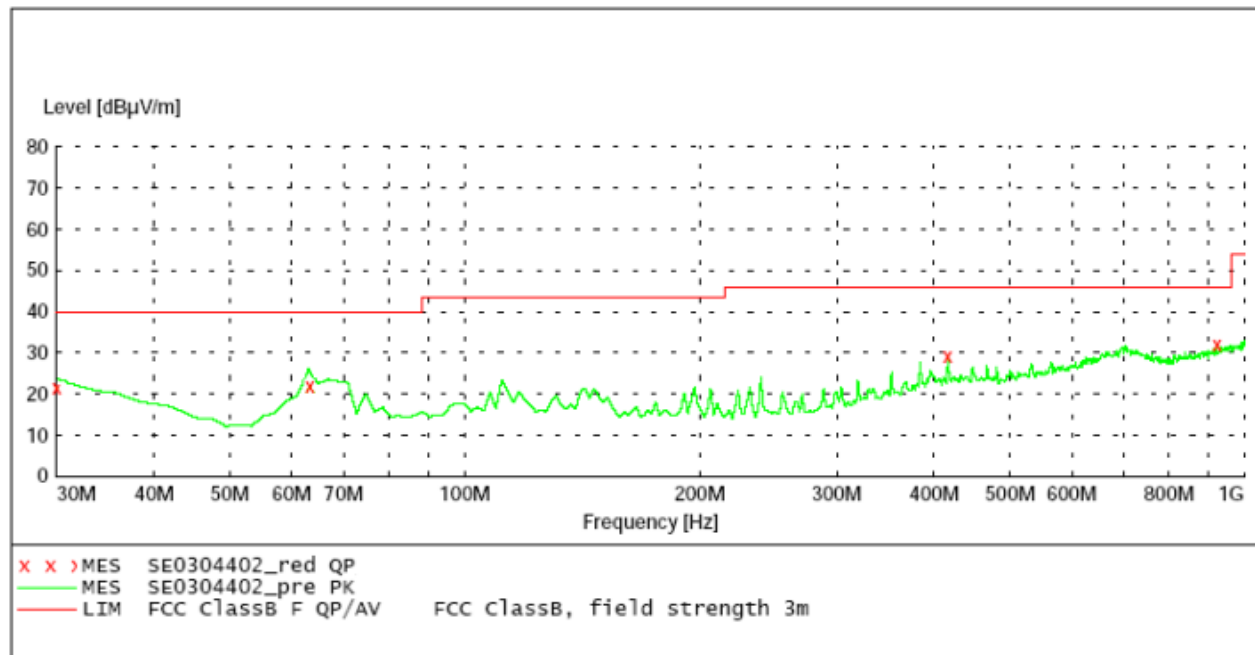**MEASUREMENT RESULT: "SE0701407_fin QP"**

07/01/05 4:05PM


Frequency MHz	Level dBµV/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dBµV/m	Margin dB
30.000000	20.90	169.00	100.0	HOR	17.1	40.0	19.1
62.511022	21.70	38.00	100.0	HOR	15.7	40.0	18.3
428.276553	28.92	70.00	100.0	HOR	21.9	46.0	17.1
923.547094	31.21	38.00	100.0	HOR	22.6	46.0	14.8

RADIATED EMISSION TEST DATA

EUT: Bluetooth Dongle
 Operating Condition: Transmitting
 Test Site: 3m CHAMBER
 Operator: Jimmy
 Test Specification: DC 5V from PC System (AC 120V/60Hz)
 Comment: Polarisation: Vertical
 Start of Test: 07/01/05 / 04:10:13PM

SCAN TABLE: "test Field(30M-1G)"

Short Description: Field Strength(30M-1G)
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width QuasiPeak Time Bandw.
 30.0 MHz 1.0 GHz 60.0 kHz HL562new

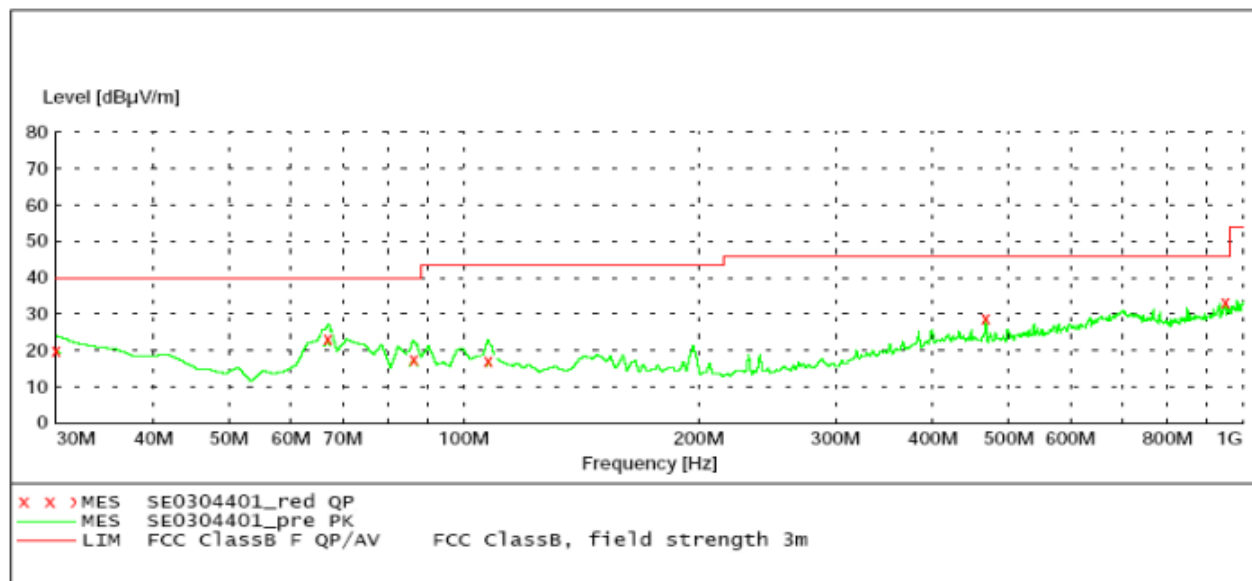**MEASUREMENT RESULT: "SE0701406_fin QP"**

07/01/05 4:16PM


Frequency MHz	Level dBµV/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dBµV/m	Margin dB
30.000000	20.58	102.00	100.0	VER	11.2	40.0	19.4
66.411623	22.34	5.00	100.0	VER	12.1	40.0	17.7
87.276553	18.16	102.00	100.0	VER	11.9	40.0	21.8
112.085760	17.98	98.00	100.0	VER	12.4	43.5	25.5
468.411623	28.84	173.00	100.0	VER	16.1	46.0	17.2
945.276553	32.78	254.00	100.0	VER	18.9	46.0	13.2

RADIATED EMISSION TEST DATA

EUT: Bluetooth Dongle
 Operating Condition: Transmitting
 Test Site: 3m CHAMBER
 Operator: Jimmy
 Test Specification: DC 5V from PC System (AC 120V/60Hz)
 Comment: Polarisation: Horizontal
 Start of Test: 07/02/05 / 09:13:34AM

SCAN TABLE: "test Field(1G -18G)"

Short Description:	Field Strength(1G -18G)			Meas.	IF	Transducer
Start	Stop	Step	Detector	Time	Bandw.	
Frequency	Frequency	Width	Peak			
1GHz	18.0 GHz	60.0 kHz	Peak	1.0 s	1MHz	HF906new

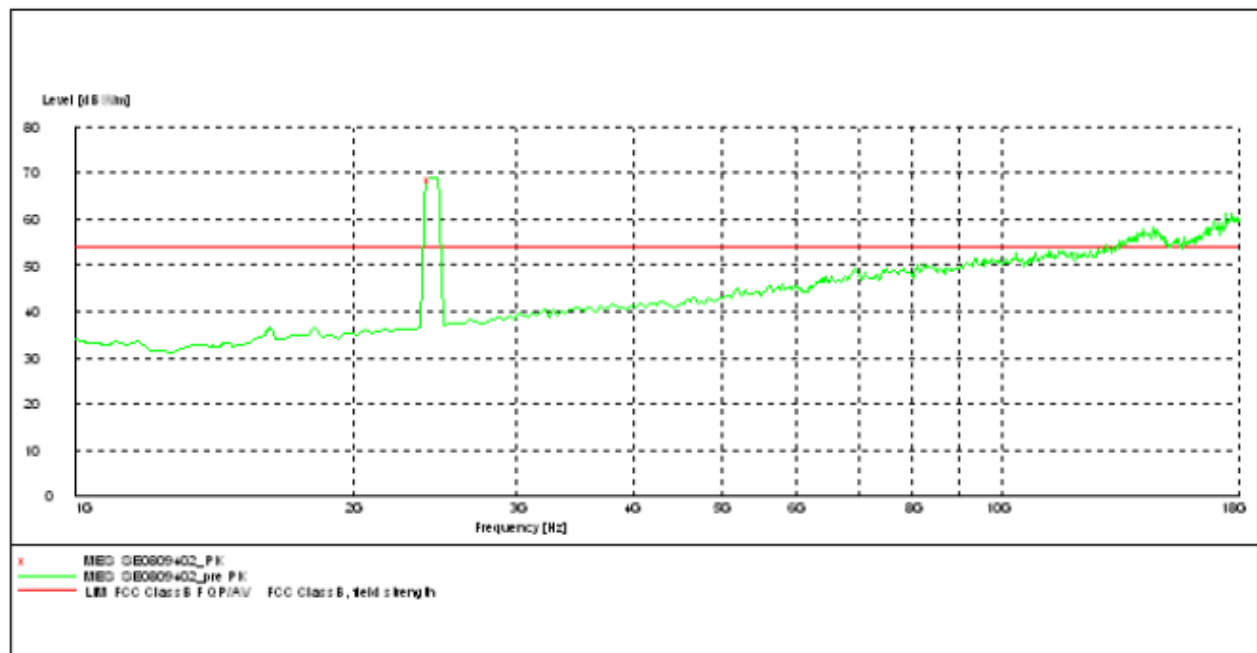**MEASUREMENT RESULT: "SE0702409_pre PK"**

07/02/05 9:20AM


Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
2408.057852	68.92	102.00	100.0	HOR	-3.3	54.0	-18.9

RADIATED EMISSION TEST DATA

EUT: Bluetooth Dongle
 Operating Condition: Transmitting
 Test Site: 3m CHAMBER
 Operator: Jimmy
 Test Specification: DC 5V from PC System (AC 120V/60Hz)
 Comment: Polarisation: Vertical
 Start of Test: 07/02/05 / 09:22:56AM

SCAN TABLE: "test Field(1G -18G)"

Short Description:	Field Strength(1G -18G)		Meas.	IF	Transducer
Start	Stop	Step	Detector	Time	Bandw.
Frequency	Frequency	Width	iPeak		
1GHz	18.0 GHz	60.0 kHz		1.0 s	1MHz
					HF906new


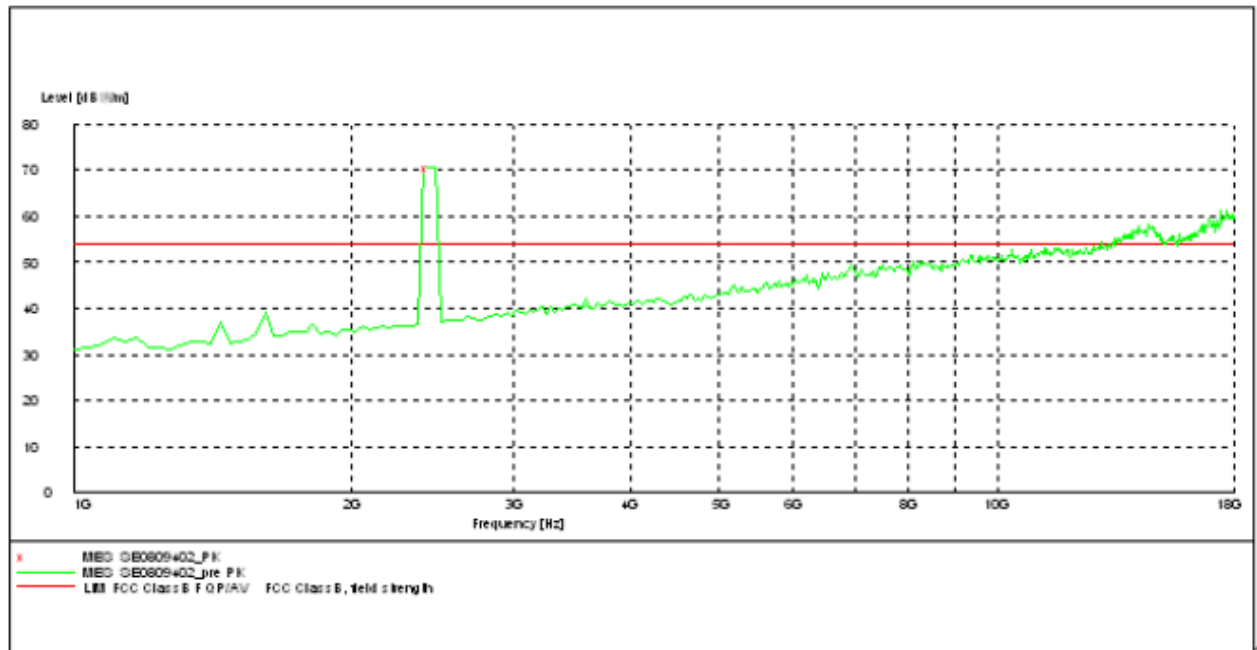
**MEASUREMENT RESULT: "SE0702410_pre PK"**


07/02/05 9:30AM

Frequency MHz	Level dB μ V/m	Azimuth deg	Height cm	Polarisation	Transd dB	Limit dB μ V/m	Margin dB
2414.929860	70.23	177.00	100.0	VER	-3.4	54.0	-16.2


CONDUCTED TEST RESULT



Channel 00 :

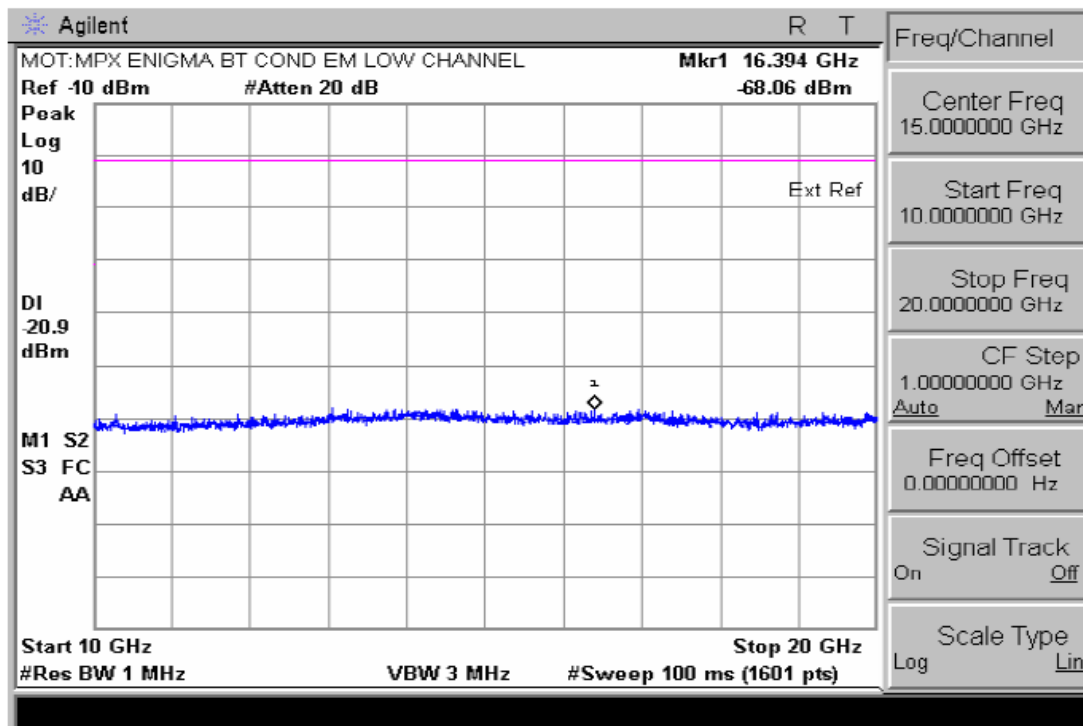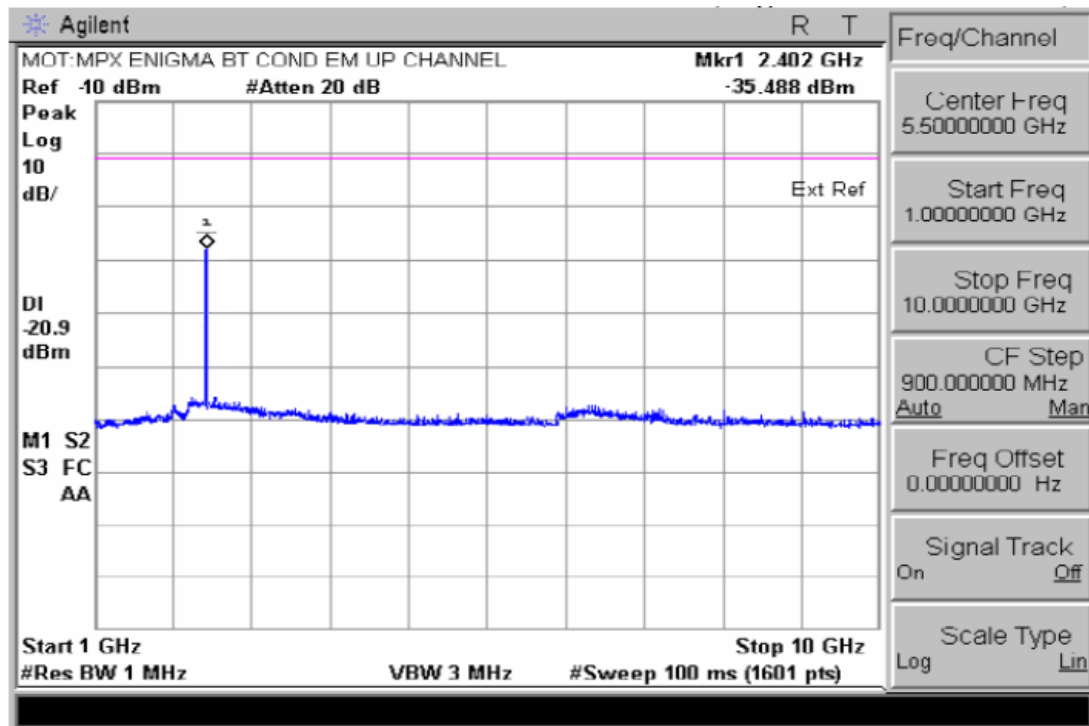

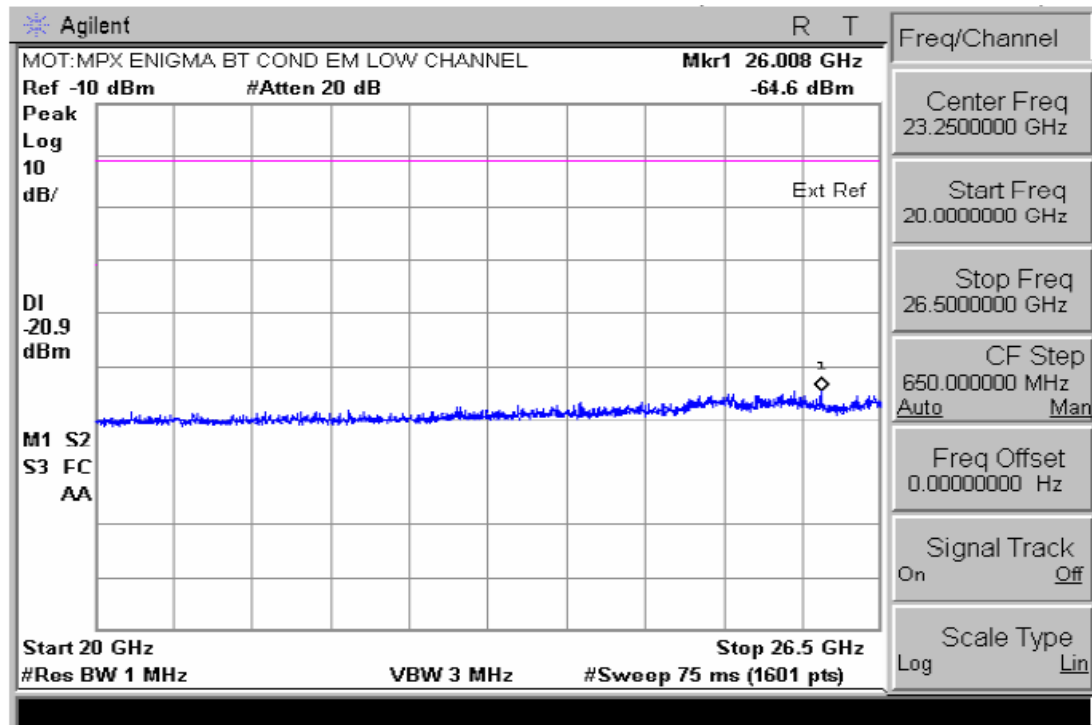

Channel 38 :

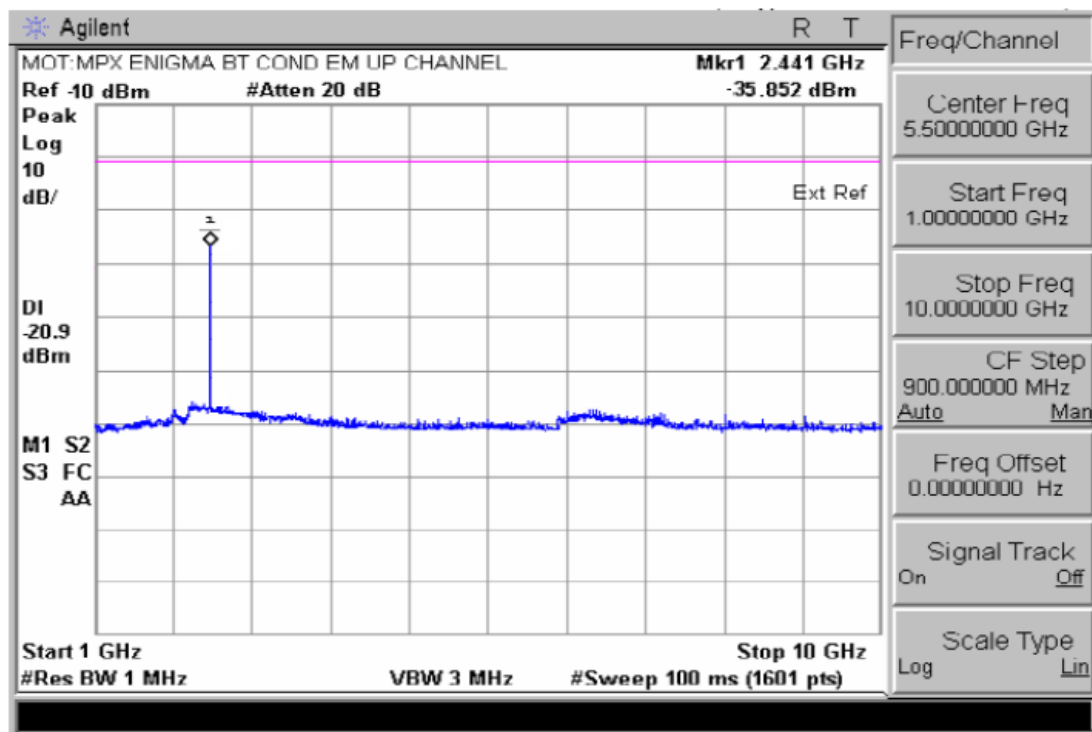

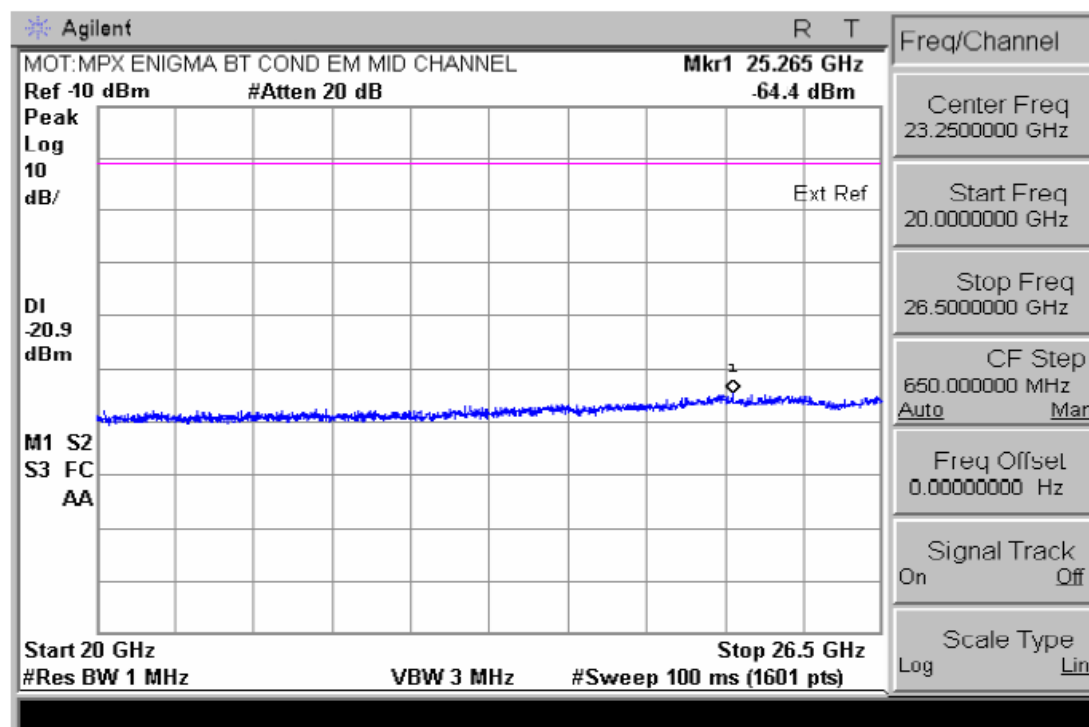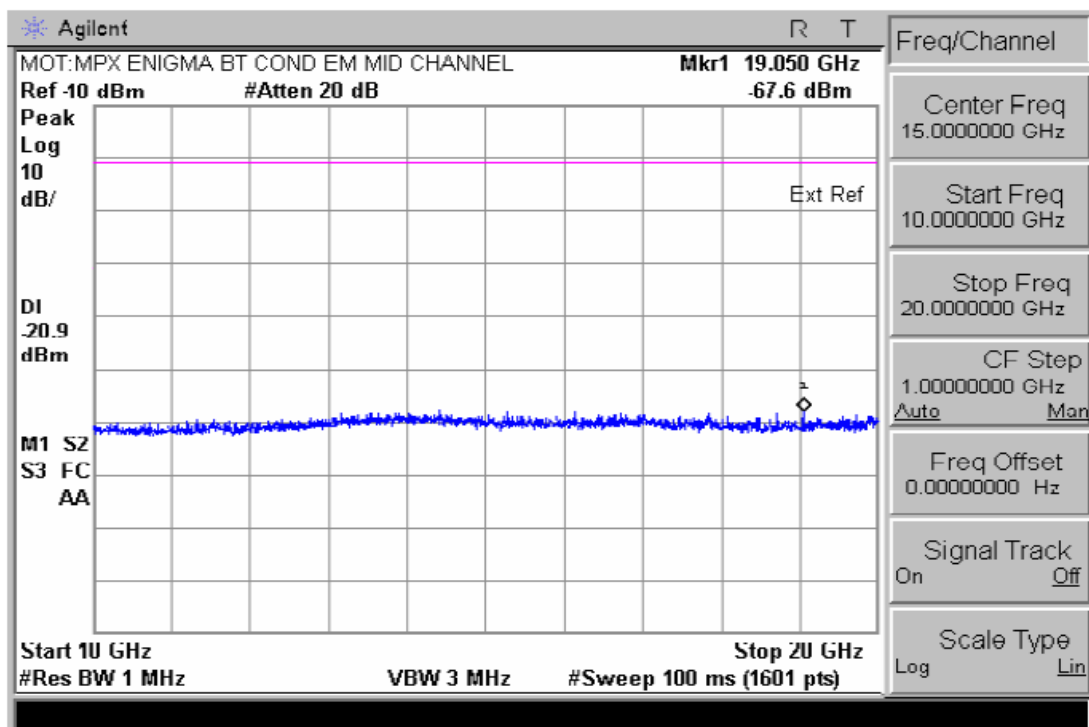

Channel 77 :

