



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n

FCC ID: TFJPIXIE

APPLICANT: Uniform Industrial Corp.

Application Type: Certification

Product: Mobile POS Terminal

Model No.: PIXIE-WH1WD1

Brand Name: UIC

FCC Classification: (DTS) Digital Transmission System

FCC Rule Part(s): Part 15.247

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02

Received Date: November 5, 2019

Test Date: November 5 ~ 21, 2019

Tested By : Peter Syu

(Peter Syu)

Reviewed By : Paddy Chen

(Paddy Chen)

Approved By : Chenz Ker

(Chenz Ker)



The test results only relate to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v05r02. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1911TW5401-U1	1.0	Original Report	2019-12-20	

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Working Frequencies for this Report	8
2.3. Test Mode	8
2.4. Test Software	8
2.5. Test Configuration	9
2.6. EMI Suppression Device(s)/Modifications	9
2.7. Labeling Requirements	9
3. DESCRIPTION of TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY	14
7. TEST RESULT	15
7.1. Summary.....	15
7.2. 6dB Bandwidth Measurement	16
7.2.1. Test Limit	16
7.2.2. Test Procedure used	16
7.2.3. Test Setting	16
7.2.4. Test Setup	16
7.2.5. Test Result	17
7.3. Output Power Measurement.....	20
7.3.1. Test Limit	20
7.3.2. Test Procedure Used	20
7.3.3. Test Setting	20
7.3.4. Test Setup	20
7.3.5. Test Result of Output Power	21
7.4. Power Spectral Density Measurement	22
7.4.1. Test Limit	22
7.4.2. Test Procedure Used	22
7.4.3. Test Setting	22
7.4.4. Test Setup	22
7.4.5. Test Result	23
7.5. Out-of-Band Spurious Emissions Emissions Measurement	26

7.5.1.	Test Limit	26
7.5.2.	Test Procedure Used	26
7.5.3.	Test Settintg	26
7.5.4.	Test Setup	26
7.5.5.	Test Result	27
7.6.	Radiated Spurious Emission Measurement.....	36
7.6.1.	Test Limit	36
7.6.2.	Test Procedure Used	36
7.6.3.	Test Setting	36
7.6.4.	Test Setup	38
7.6.5.	Test Result	40
7.7.	Radiated Restricted Band Edge Measurement.....	68
7.7.1.	Test Limit	68
7.7.2.	Test Procedure Used	68
7.7.3.	Test Setting	68
7.7.4.	Test Setup	70
7.7.5.	Test Result	71
7.8.	AC Conducted Emissions Measurement	101
7.8.1.	Test Limit	101
7.8.2.	Test Setup	101
7.8.3.	Test Result	102
8.	CONCLUSION	106

§2.1033 General Information

Applicant	Uniform Industrial Corp.
Applicant Address	47341 Bayside Parkway, Fremont, California 94538, United States
Manufacturer	Uniform Industrial Corp.
Manufacturer Address	47341 Bayside Parkway, Fremont, California 94538, United States
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247
Model No.	PIXIE-WH1WD1
Test Device Serial No.	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

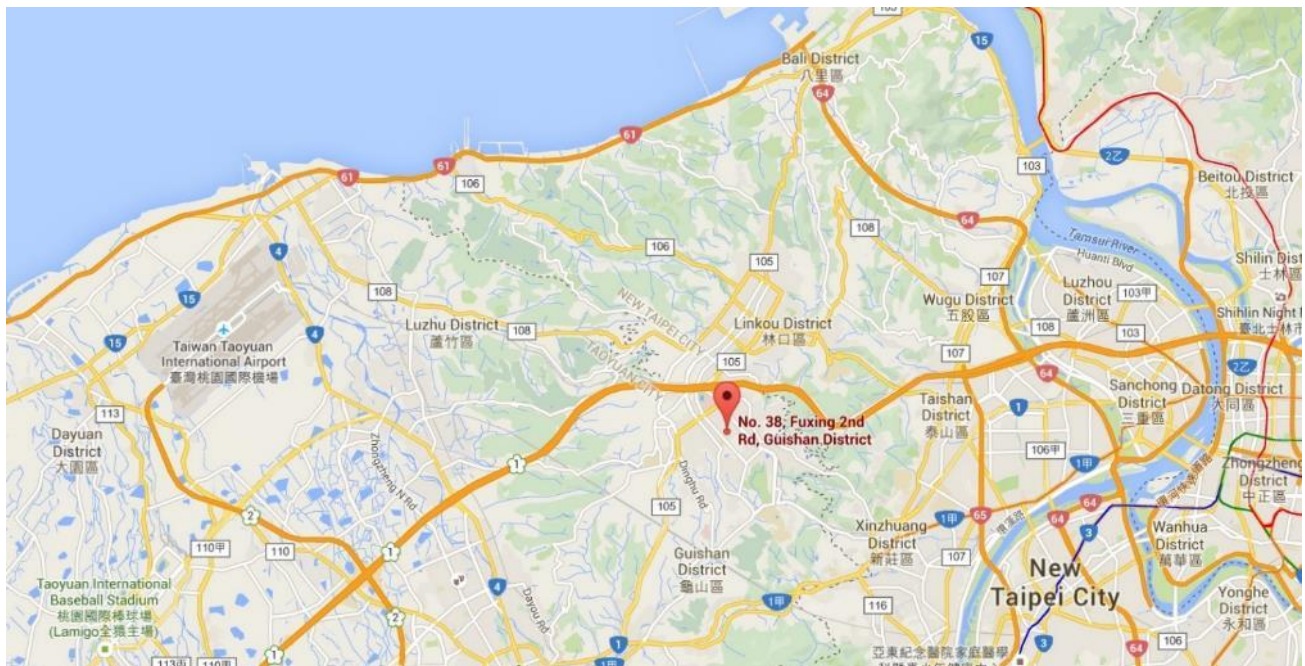

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Mobile POS Terminal
Model No.	PIXIE-WH1WD1
Brand Name	
Supports Radios Spec.	WLAN 2.4G: 802.11b/g/n-20/n-40 Bluetooth Mode: V4.0+EDR NFC 13.56MHz
Wi-Fi Specification	802.11b/g/n-20/n-40 (1T1R)
Frequency Range	<u>2.4GHz:</u> For 802.11b/g/n-HT20: 2412 ~ 2462 MHz For 802.11n-HT40: 2422 ~ 2452 MHz
2.4GHz Maximum Output Power	802.11b: 18.61dBm 802.11g: 22.05dBm 802.11n-HT20: 21.57dBm 802.11n-HT40: 21.16dBm
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n-20M/n-40M: OFDM, BPSK, QPSK, 16QAM, 64QAM
Accessories	
PIXIE Docking	MFR: UIC Model No: PIXIE
Adapter#1	MFR: BILLION ELECTRIC CO., LTD. Model No: BA048-090500MAX Input: AC 100-240V~1.5A, 50-60Hz Output: DC 9V, 5A
Adapter#2	MFR: Powertron Electronics Corp. Model No: PA150-090T1A500 Input: AC 100-240V~1.8A, 50-60Hz Output: DC 9V, 5A

2.2. Working Frequencies for this Report

802.11b/g/n-20M

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

Duty Cycle

Test Mode	Duty Cycle
802.11b	100%
802.11g	100%
802.11 n-HT20	100%
802.11 n-HT40	100%

2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-20M
	Mode 4: Transmit by 802.11n-40M

Note:

- Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

2.4. Test Software

The test utility software used during testing was “Tera Term”.

2.5. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05r02 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.6 & 7.7 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Mobile POS Terminal**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Master Wave Technology CO.,LTD	98P39MIPF018	PCB	2dBi

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2020/4/25
Cable	Rosnol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2020/6/18
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/3/25

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/6/4
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/3/25
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2020/4/29
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2020/4/22
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2020/4/23
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2020/4/24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2020/4/24
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2020/4/22
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2020/6/18

Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/7/11
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2020/3/26

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.53dB
Conducted Emission- Impedance Stabilization Network Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.96dB
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.92dB (Below 30M)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.25dB (30M~1G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.40dB (1G~18G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.45dB (18G~40G)
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: Mobile POS Terminal
FCC Classification: (DTS) Digital Transmission System
Data Rate(s) Tested: 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);
6.5/7.2Mbps ~ 65/72.2Mbps (n-20M);
13.5/15Mbps ~ 135/150Mbps (n-40M)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Out-of-Band Emissions	Conducted $\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	Pass	Section 7.6
15.205 15.209	Band Edge Measurement	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v05r02- Section 8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize


7.2.4. Test Setup

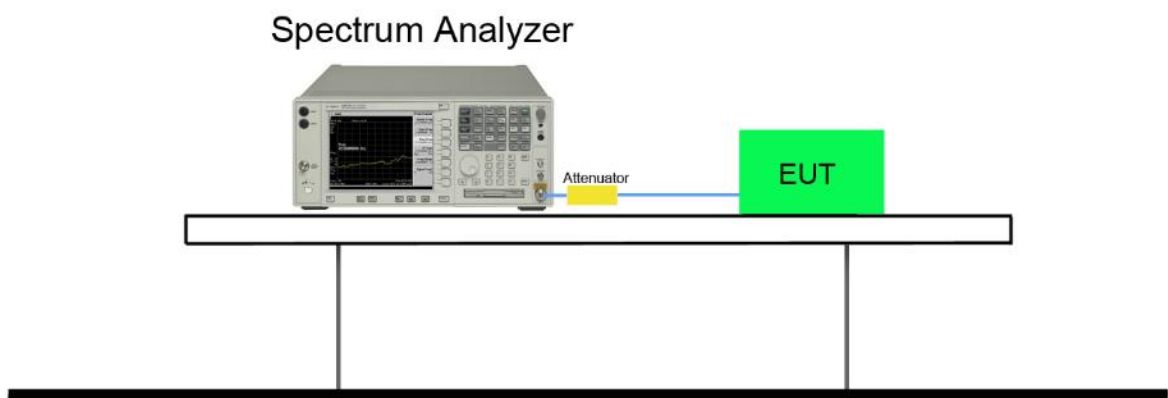


7.2.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
802.11b	01	2412	10.120	15.776	≥ 0.5	Pass
802.11b	06	2437	10.120	15.791	≥ 0.5	Pass
802.11b	11	2462	10.130	15.971	≥ 0.5	Pass
802.11g	01	2412	16.600	16.527	≥ 0.5	Pass
802.11g	06	2437	16.610	16.525	≥ 0.5	Pass
802.11g	11	2462	16.620	16.524	≥ 0.5	Pass
802.11n-20M	01	2412	17.850	17.748	≥ 0.5	Pass
802.11n-20M	06	2437	17.860	17.747	≥ 0.5	Pass
802.11n-20M	11	2462	17.850	17.737	≥ 0.5	Pass
802.11n-40M	03	2422	36.440	35.997	≥ 0.5	Pass
802.11n-40M	06	2437	36.440	35.984	≥ 0.5	Pass
802.11n-40M	09	2452	36.420	35.962	≥ 0.5	Pass


802.11 b CH01 (2412MHz)

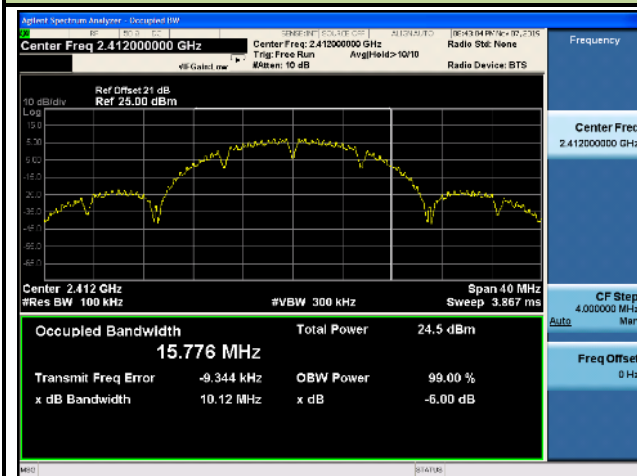


802.11 b CH06 (2437MHz)

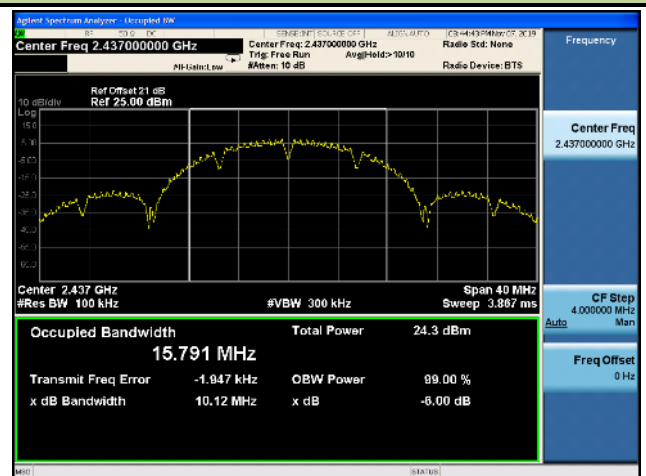


802.11 b CH11 (2462MHz)

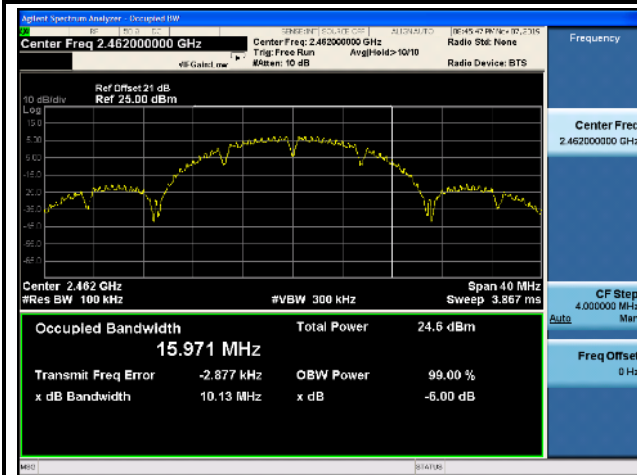


802.11 g CH01 (2412MHz)

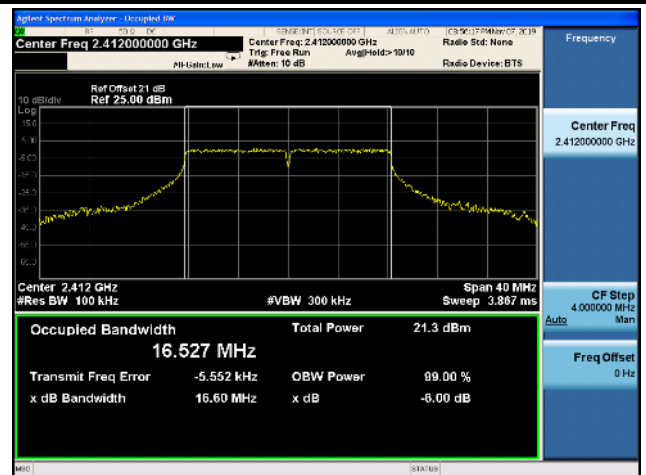


802.11 g CH06 (2437MHz)

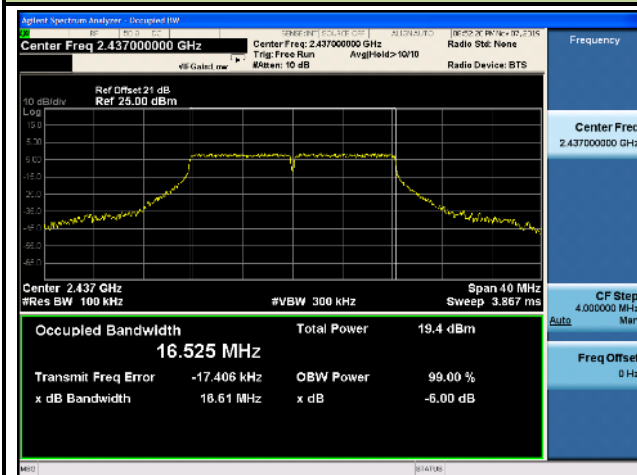


802.11 g CH11 (2462MHz)

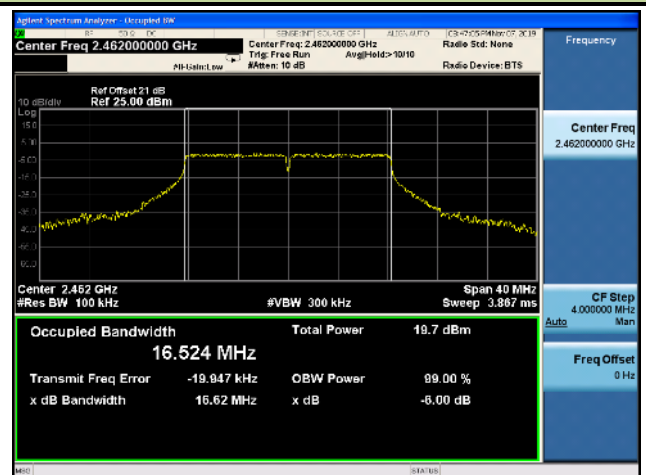


802.11 n-20M CH01 (2412MHz)

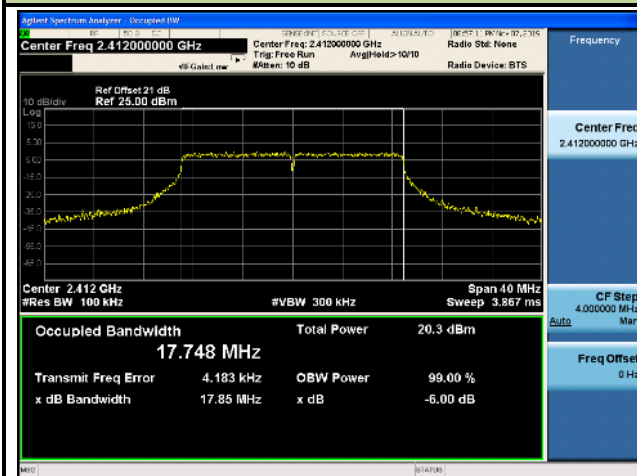


802.11 n-20M CH06 (2437MHz)

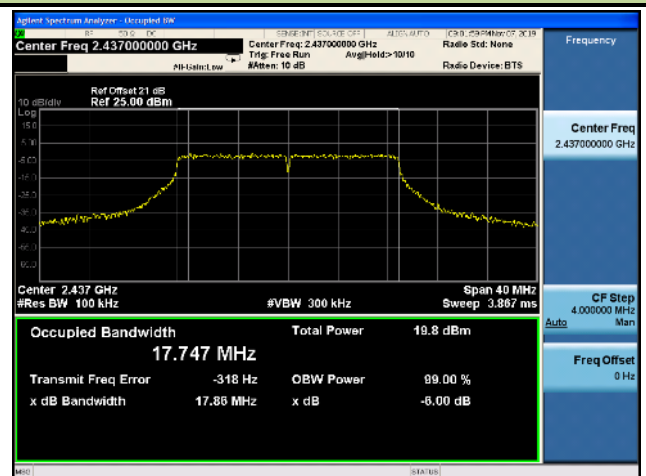


802.11 n-20M CH11 (2462MHz)

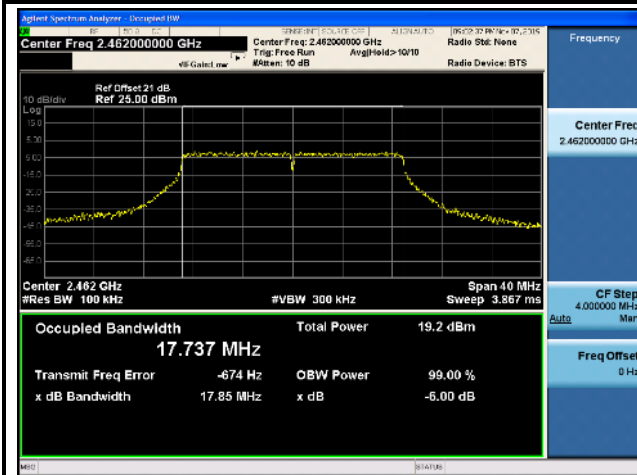


802.11 n-40M CH03 (2422MHz)

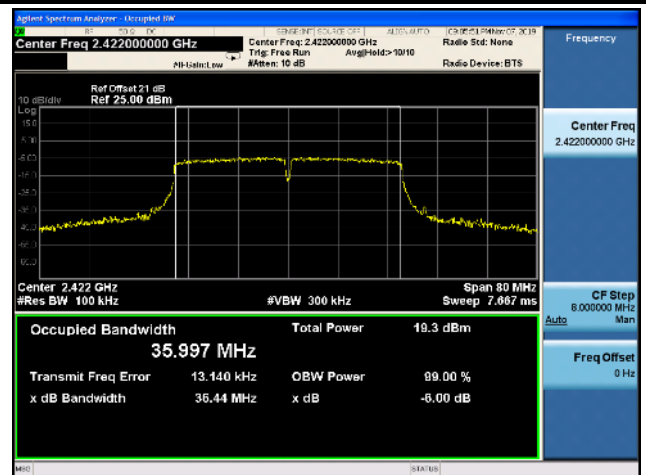

802.11 n-40M CH06 (2437MHz)

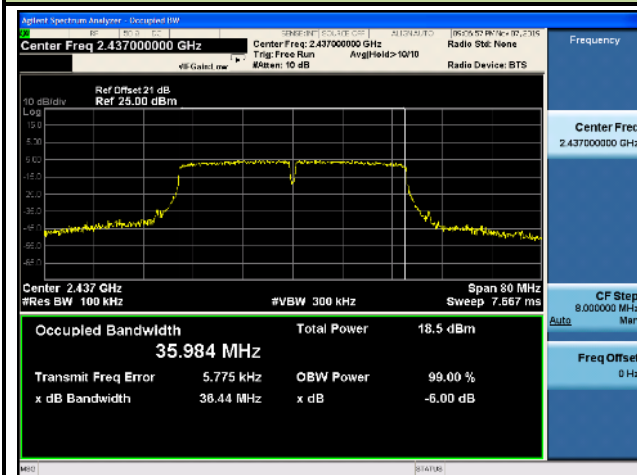

802.11 n-40M CH09 (2452MHz)

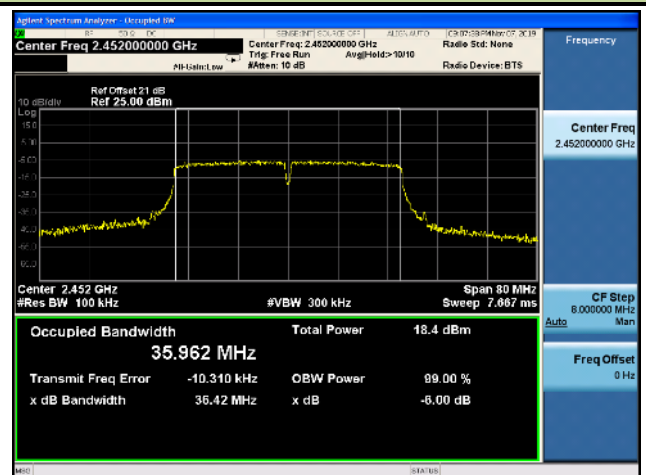

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

KDB 558074 D01v05r02 - Section 8.3.1.2 & 8.3.2.3

7.3.3. Test Setting


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

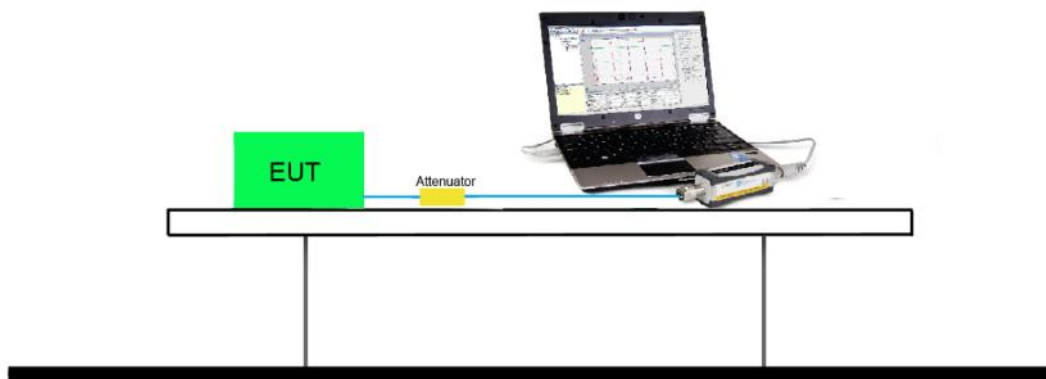

7.3.5. Test Result of Output Power

2.4GHz 802.11b RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit				
		1	2	5.5	11						
01	2412	16.80	--	--	--	18.61	1Watt= 30 dBm				
06	2437	16.68	16.61	16.56	16.53	18.46	1Watt= 30 dBm				
11	2462	16.79	--	--	--	18.54	1Watt= 30 dBm				
2.4GHz 802.11g RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		6	9	12	18	24	36	48	54		
01	2412	13.26	--	--	--	--	--	--	--	22.05	1Watt= 30 dBm
06	2437	12.69	12.68	12.67	12.66	12.65	12.64	12.62	12.61	21.63	1Watt= 30 dBm
11	2462	12.53	--	--	--	--	--	--	--	21.75	1Watt= 30 dBm
2.4GHz 802.11n-20M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
01	2412	13.16	--	--	--	--	--	--	--	21.57	1Watt= 30 dBm
06	2437	12.74	12.72	12.70	12.69	12.68	12.64	12.61	12.58	21.13	1Watt= 30 dBm
11	2462	12.41	--	--	--	--	--	--	--	21.01	1Watt= 30 dBm
2.4GHz 802.11n-40M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
03	2422	12.18	--	--	--	--	--	--	--	20.38	1Watt= 30 dBm
06	2437	11.77	11.75	11.74	11.72	11.69	11.64	11.58	11.54	21.16	1Watt= 30 dBm
09	2452	11.50	--	--	--	--	--	--	--	19.97	1Watt= 30 dBm

Note: Output power =Reading value on power meter + duty cycle factor + cable loss °

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


KDB 558074 D01v05r02 - Section 8.4 Method PKPSD

7.4.3. Test Setting

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

7.4.4. Test Setup

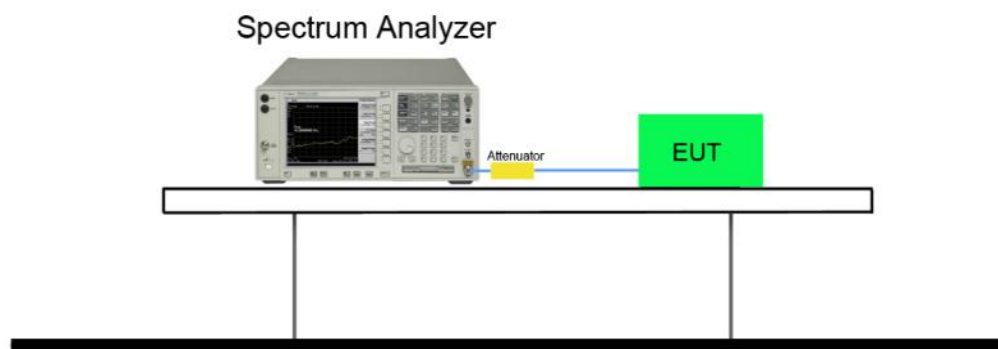

7.4.5. Test Result

Test Mode	Channel No.	Freq. (MHz)	PSD (dBm)	Limit (dBm)	Result
11b	1	2412	-12.428	≤ 8	Pass
11b	6	2437	-12.810	≤ 8	Pass
11b	11	2462	-12.496	≤ 8	Pass
11g	1	2412	-13.587	≤ 8	Pass
11g	6	2437	-15.081	≤ 8	Pass
11g	11	2462	-14.888	≤ 8	Pass
11n-20M	1	2412	-14.181	≤ 8	Pass
11n-20M	6	2437	-15.020	≤ 8	Pass
11n-20M	11	2462	-15.187	≤ 8	Pass
11n-40M	3	2422	-15.141	≤ 8	Pass
11n-40M	6	2437	-17.951	≤ 8	Pass
11n-40M	9	2452	-16.627	≤ 8	Pass

802.11 b CH01 (2412MHz)




802.11 b CH06 (2437MHz)




802.11 b CH11 (2462MHz)




802.11 g CH01 (2412MHz)

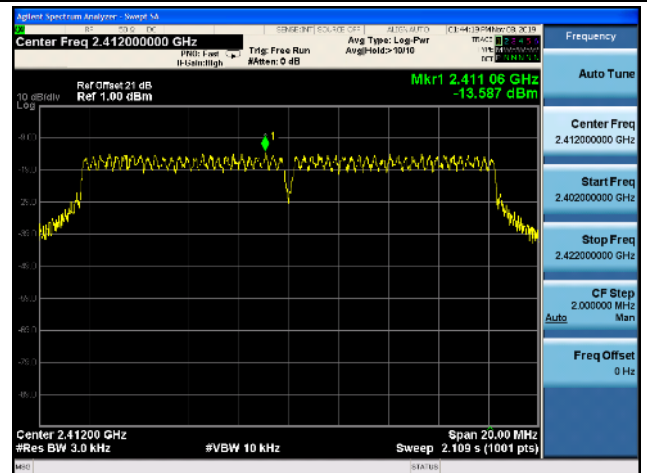


802.11 g CH06 (2437MHz)

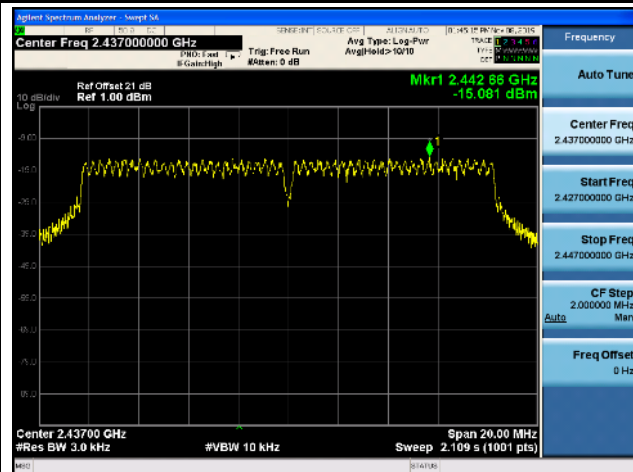


802.11 g CH11 (2462MHz)

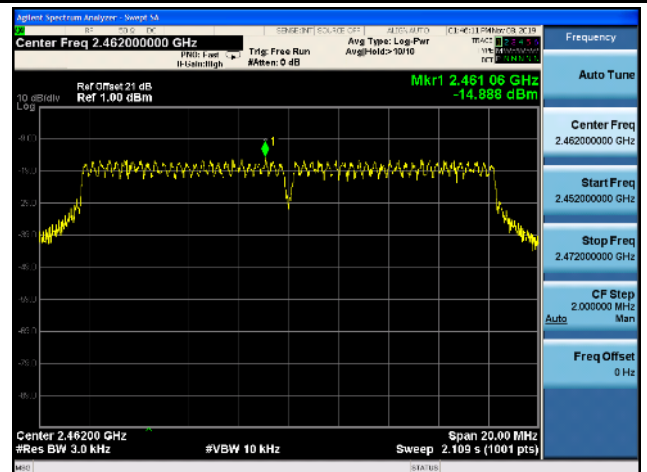


802.11 n-20M CH01 (2412MHz)

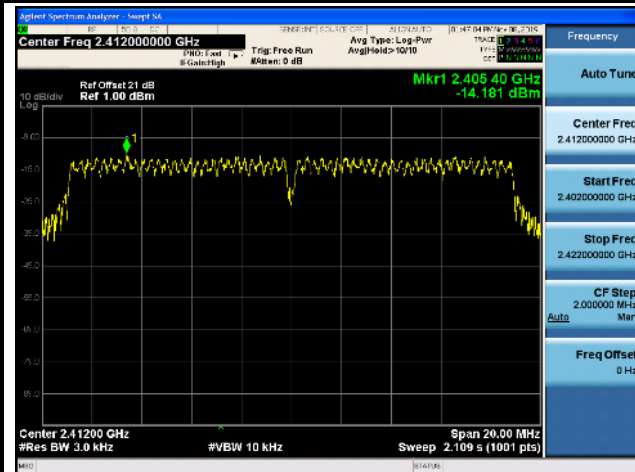


802.11 n-20M CH06 (2437MHz)

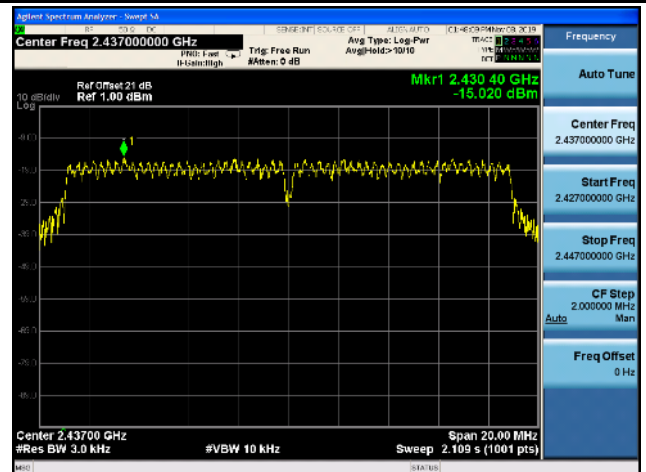


802.11 n-20M CH11 (2462MHz)

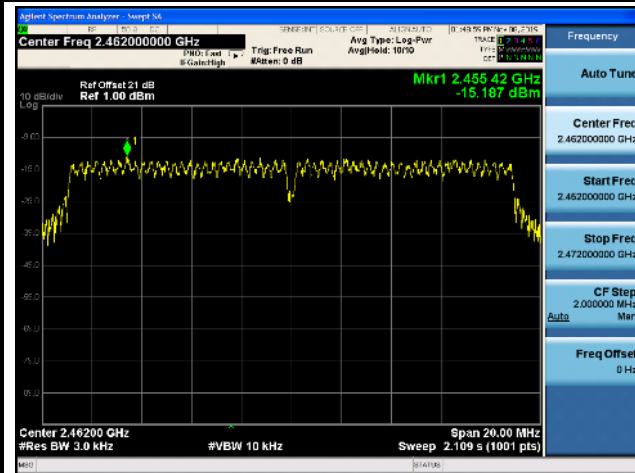


802.11 n-40M CH03 (2422MHz)

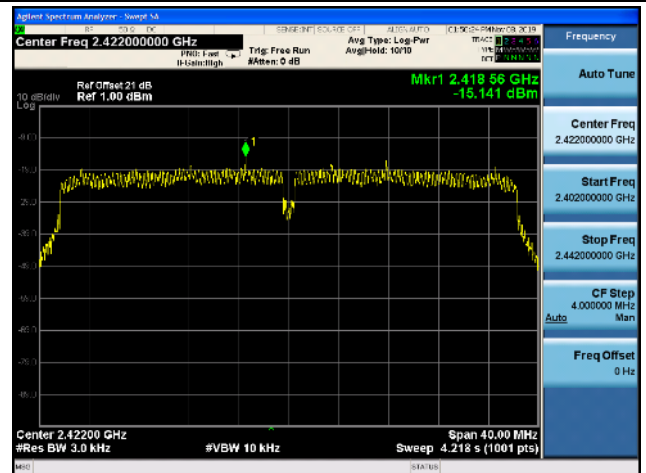

802.11 n-40M CH06 (2437MHz)

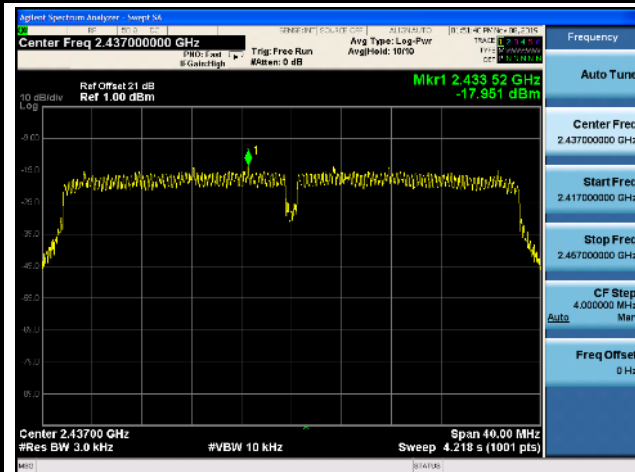

802.11 n-40M CH09 (2452MHz)

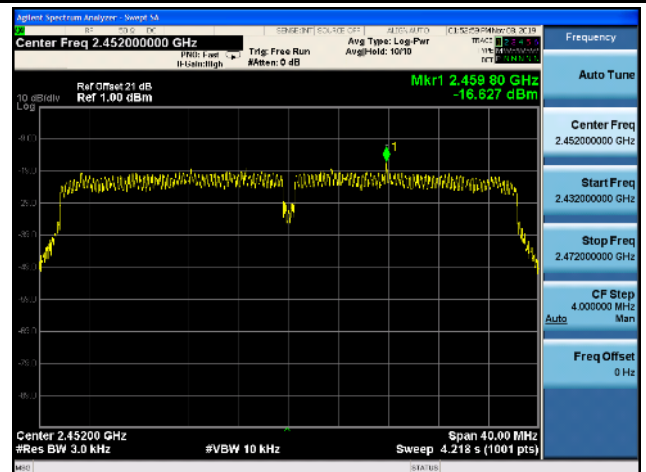

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

KDB 558074 D01v05r02- Section 11.1 & 11.2

7.5.3. Test Settintg

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

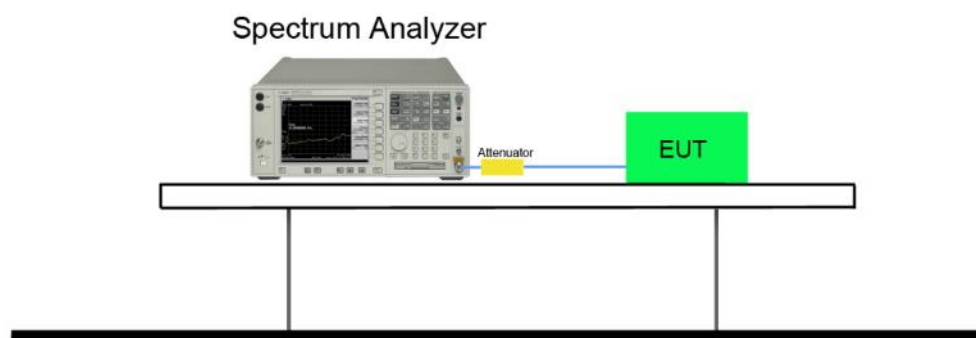


7.5.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit	Result
802.11b	01	2412	20dBc	Pass
802.11b	06	2437	20dBc	Pass
802.11b	11	2462	20dBc	Pass
802.11g	01	2412	20dBc	Pass
802.11g	06	2437	20dBc	Pass
802.11g	11	2462	20dBc	Pass
802.11n-20M	01	2412	20dBc	Pass
802.11n-20M	06	2437	20dBc	Pass
802.11n-20M	11	2462	20dBc	Pass
802.11n-40M	03	2422	20dBc	Pass
802.11n-40M	06	2437	20dBc	Pass
802.11n-40M	09	2452	20dBc	Pass


802.11b CH01 (2412MHz)




802.11b CH01 (2412MHz)

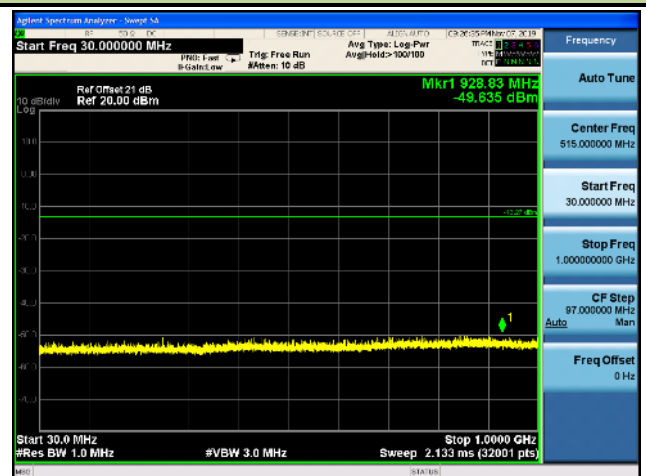

802.11b CH01 (2412MHz)

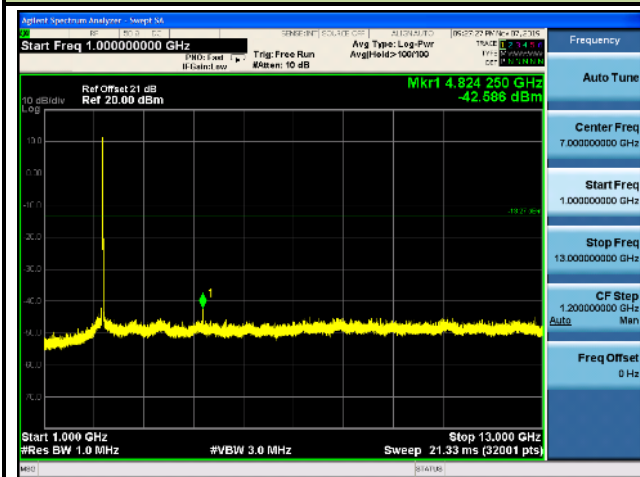


802.11b CH01 (2412MHz)

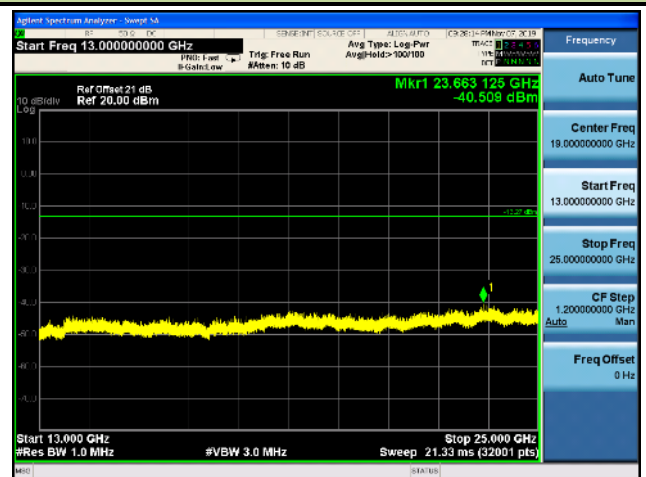


802.11b CH06 (2437MHz)




802.11b CH06 (2437MHz)

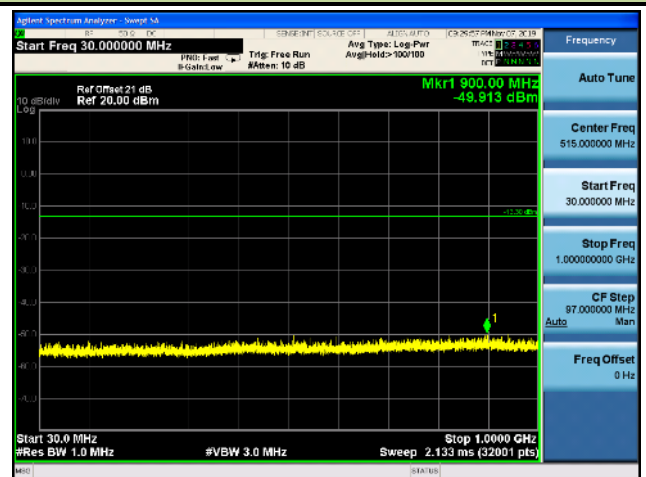

802.11b CH06 (2437MHz)

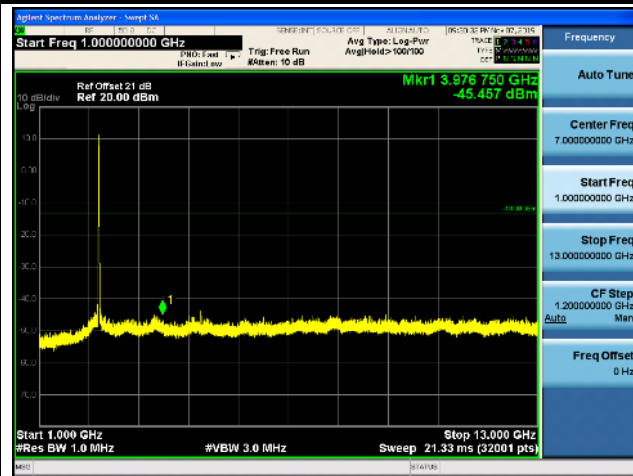


802.11b CH06 (2437MHz)

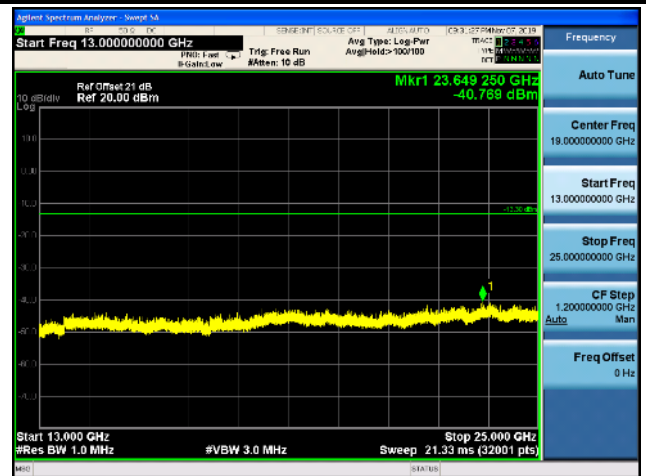


802.11b CH011 (2462MHz)




802.11b CH011 (2462MHz)

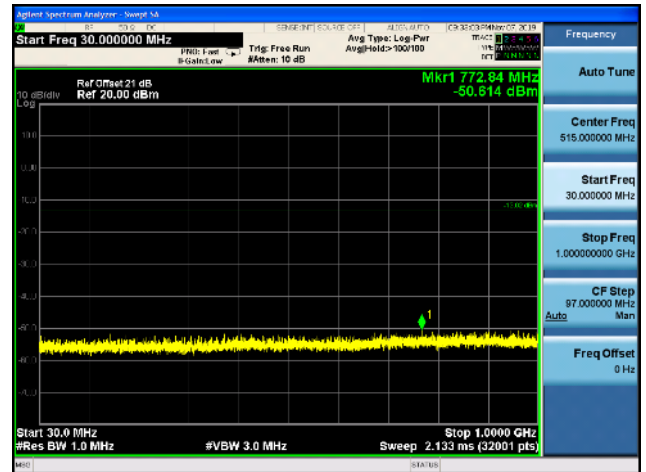


802.11b CH011 (2462MHz)

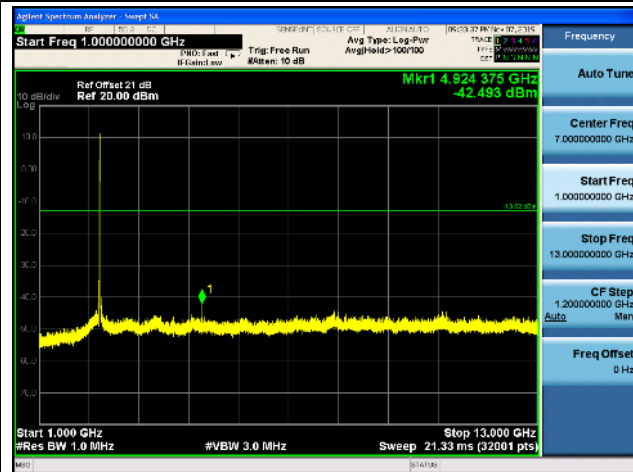


802.11b CH011 (2462MHz)

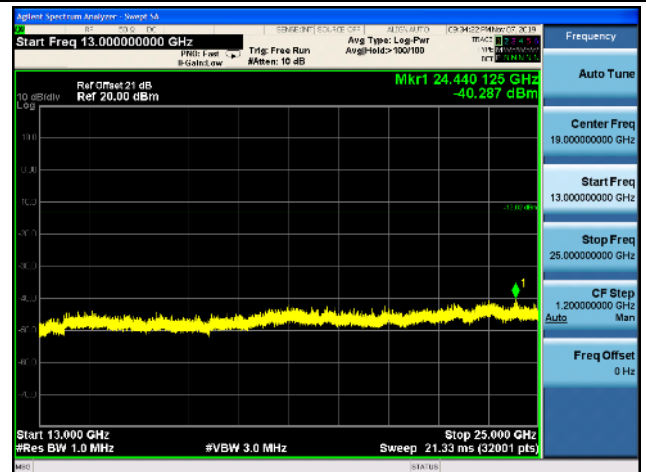


802.11g CH01 (2412MHz)

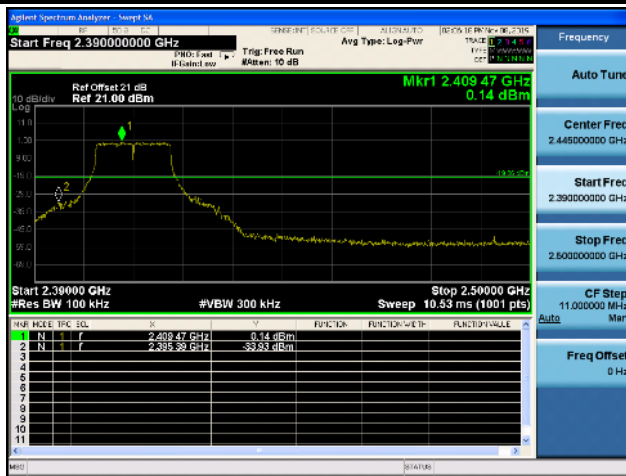


802.11g CH01 (2412MHz)

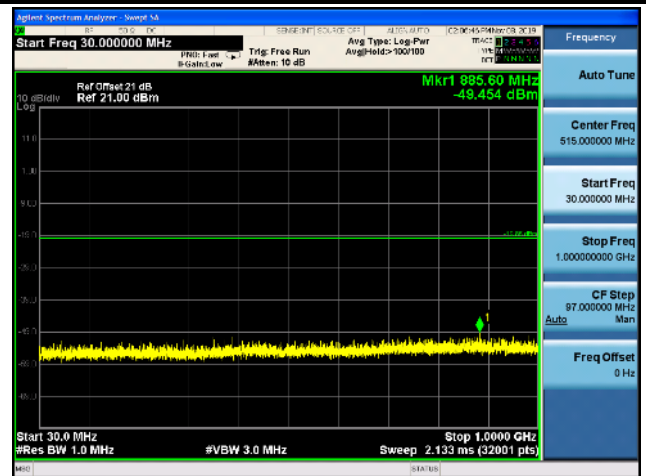


802.11g CH01 (2412MHz)

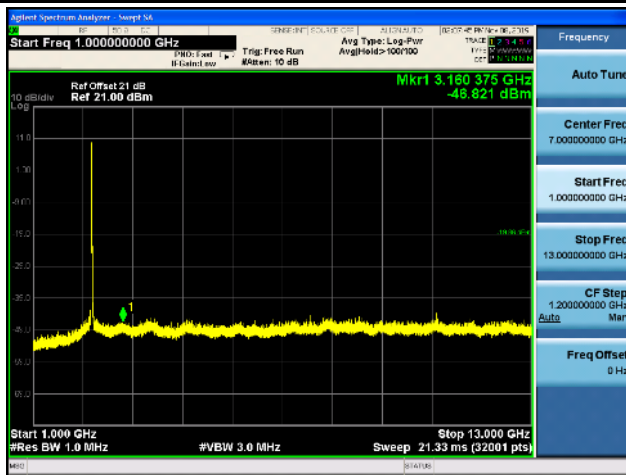


802.11g CH01 (2412MHz)

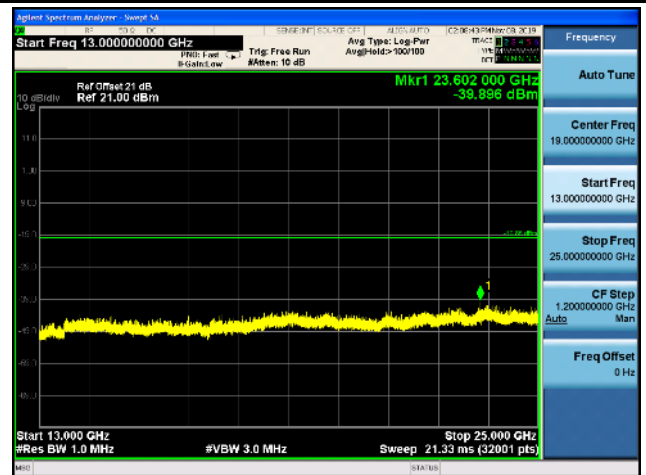


802.11g CH06 (2437MHz)

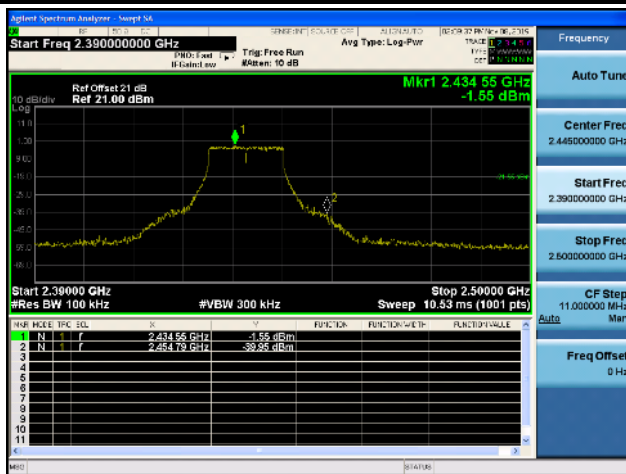


802.11g CH06 (2437MHz)

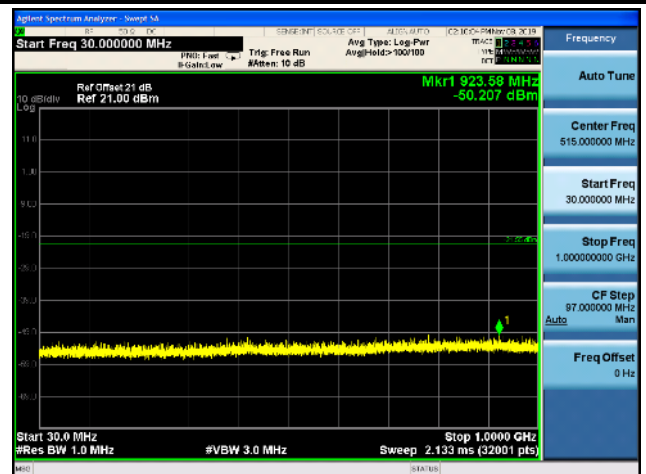


802.11g CH06 (2437MHz)

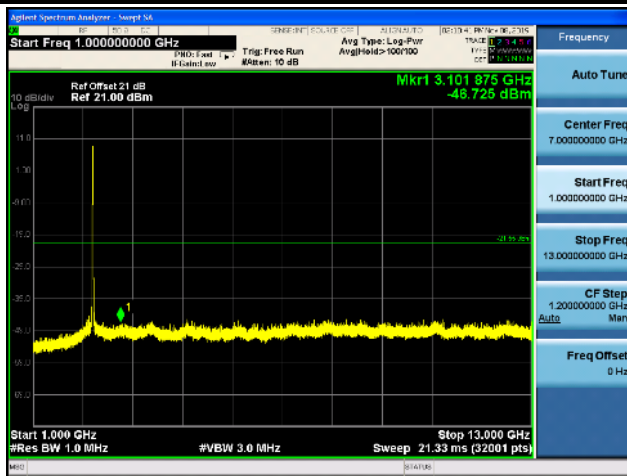


802.11g CH06 (2437MHz)

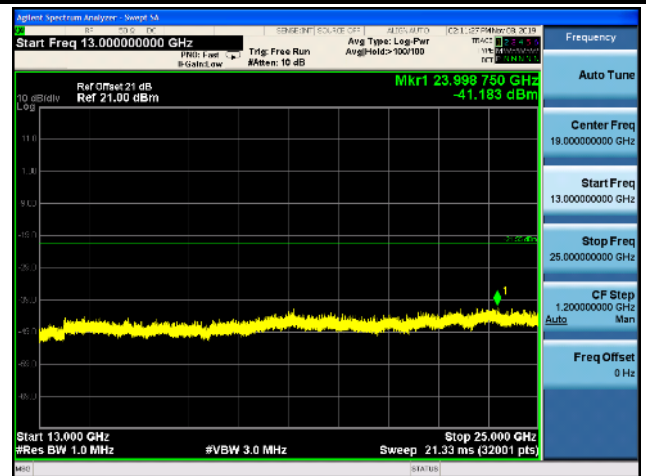


802.11g CH011 (2462MHz)

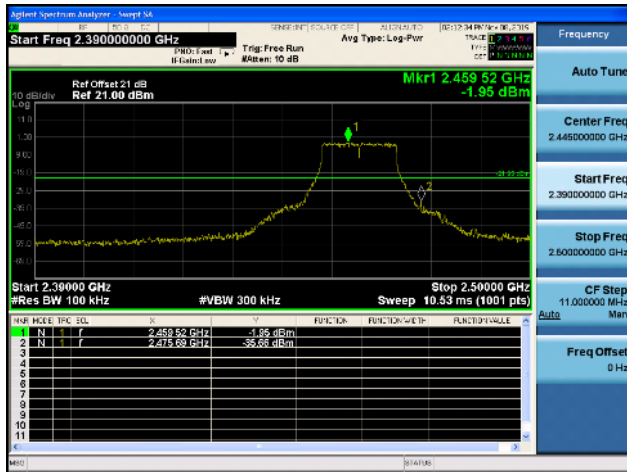


802.11g CH011 (2462MHz)

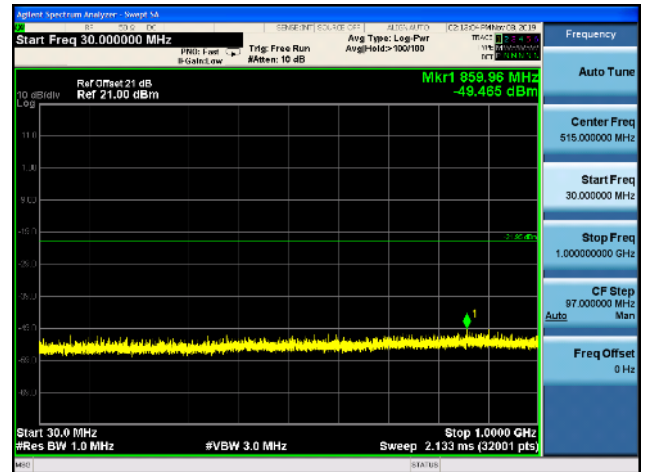


802.11g CH011 (2462MHz)

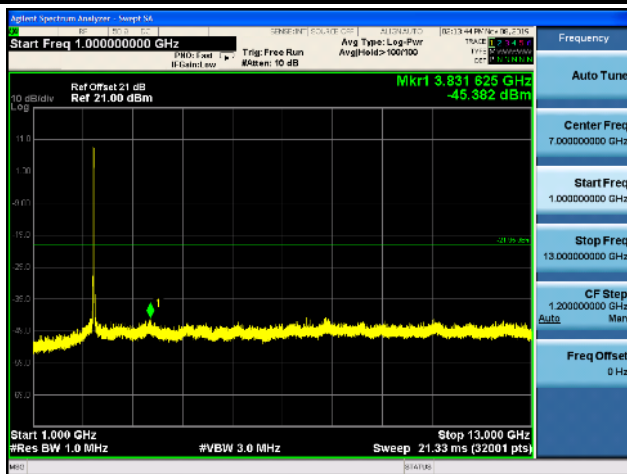


802.11g CH011 (2462MHz)

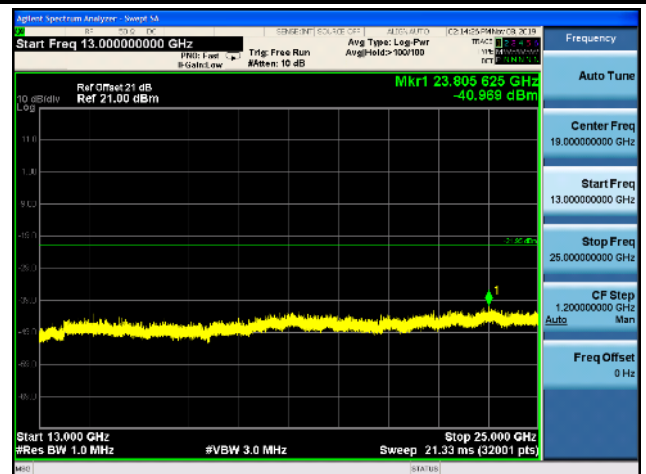


802.11n-20M CH01 (2412MHz)

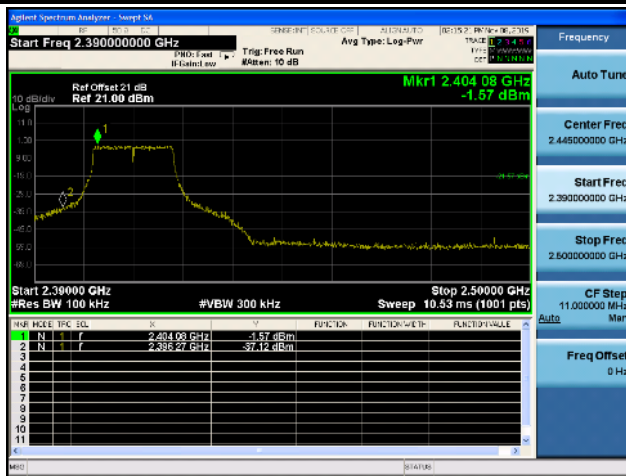


802.11n-20M CH01 (2412MHz)

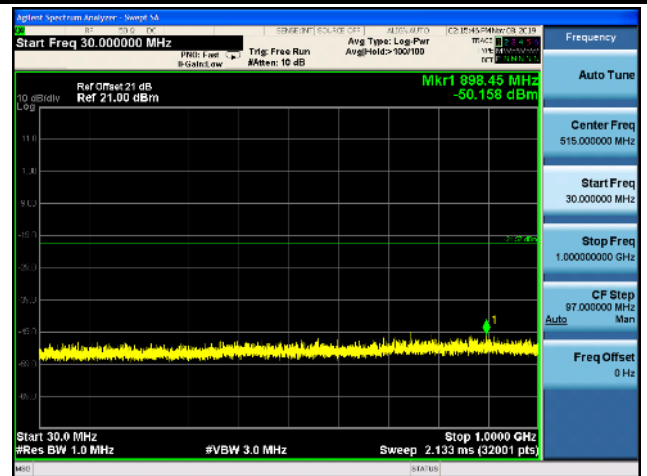


802.11n-20M CH01 (2412MHz)

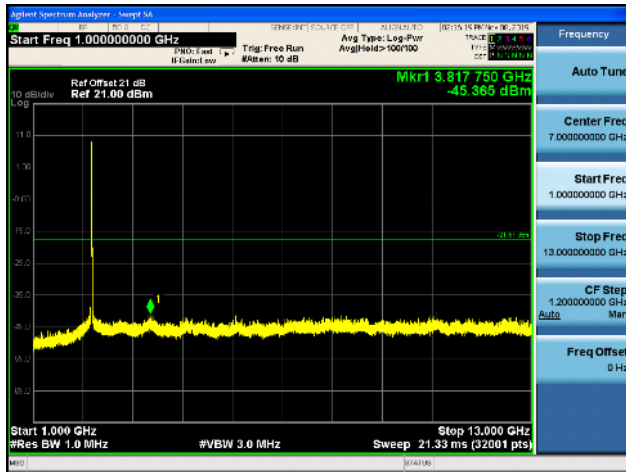


802.11n-20M CH01 (2412MHz)

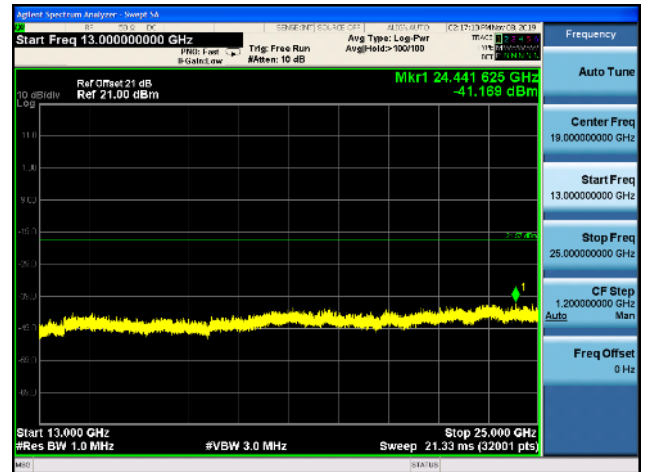


802.11n-20M CH06 (2437MHz)

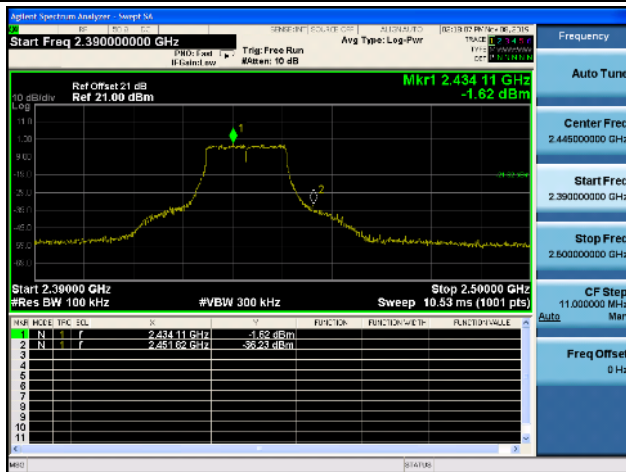


802.11n-20M CH06 (2437MHz)

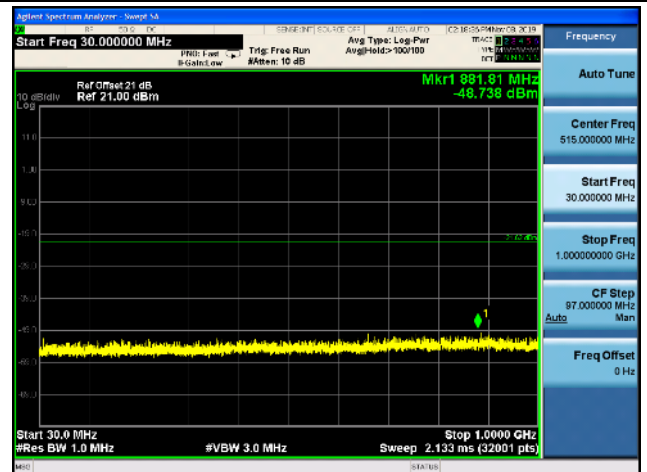


802.11n-20M CH06 (2437MHz)

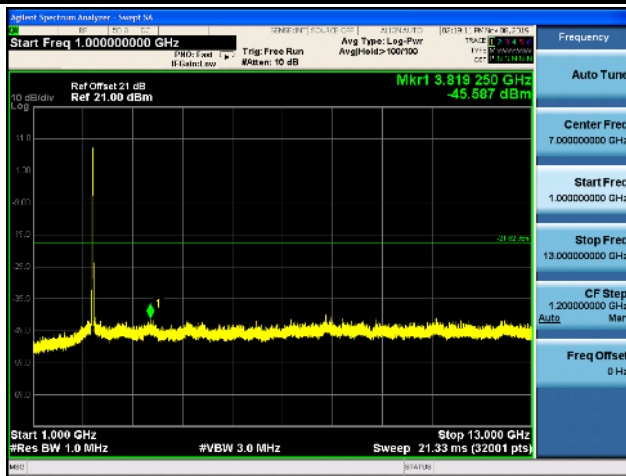


802.11n-20M CH06 (2437MHz)

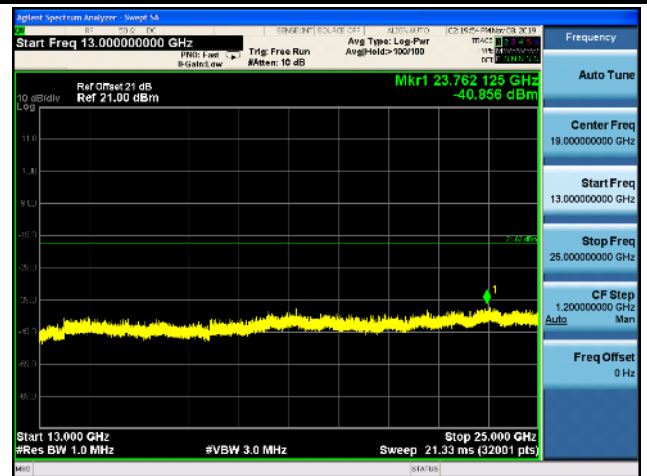


802.11n-20M CH011 (2462MHz)

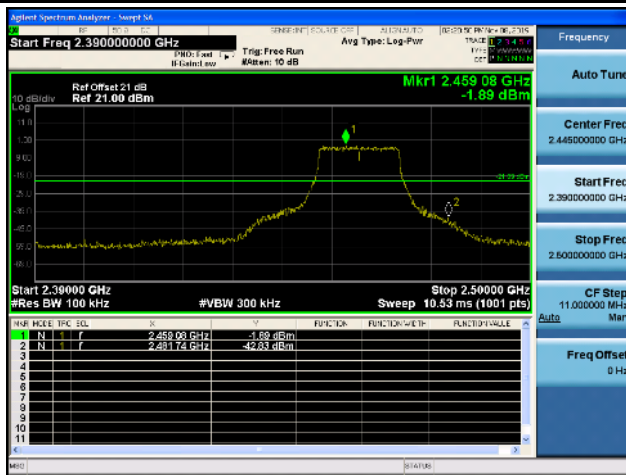


802.11n-20M CH011 (2462MHz)

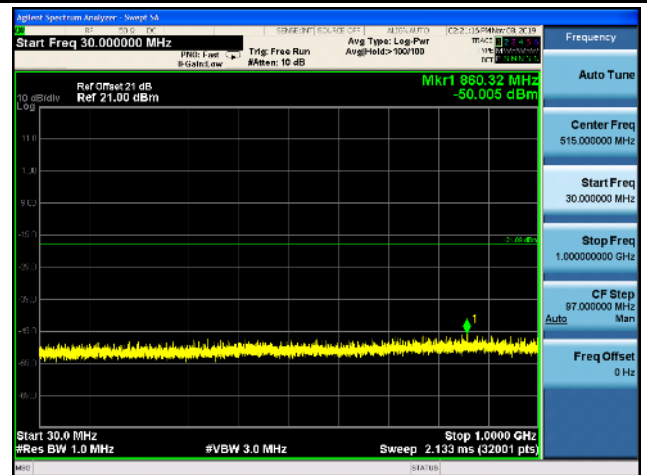


802.11n-20M CH011 (2462MHz)

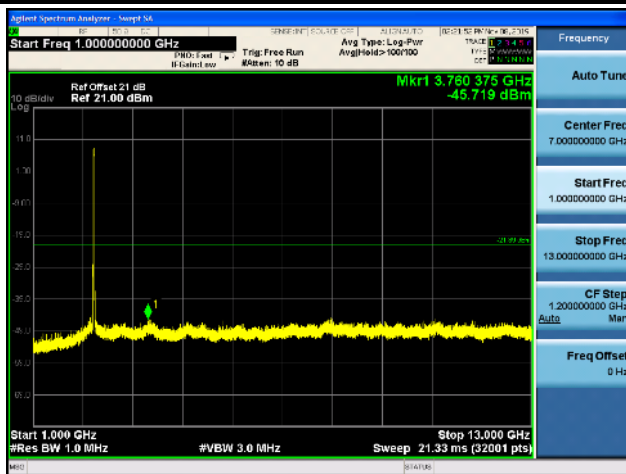


802.11n-20M CH011 (2462MHz)

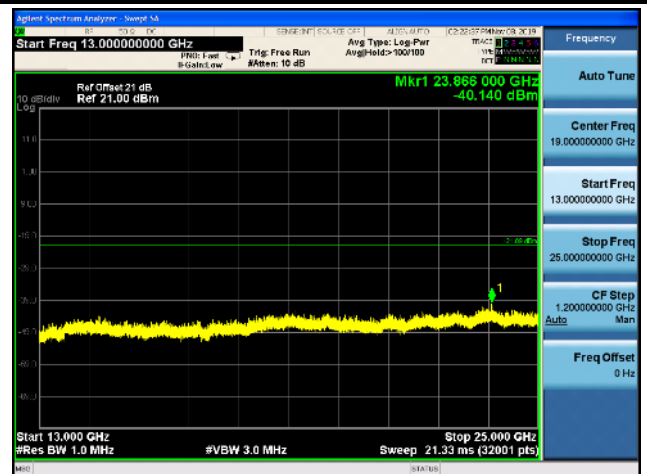


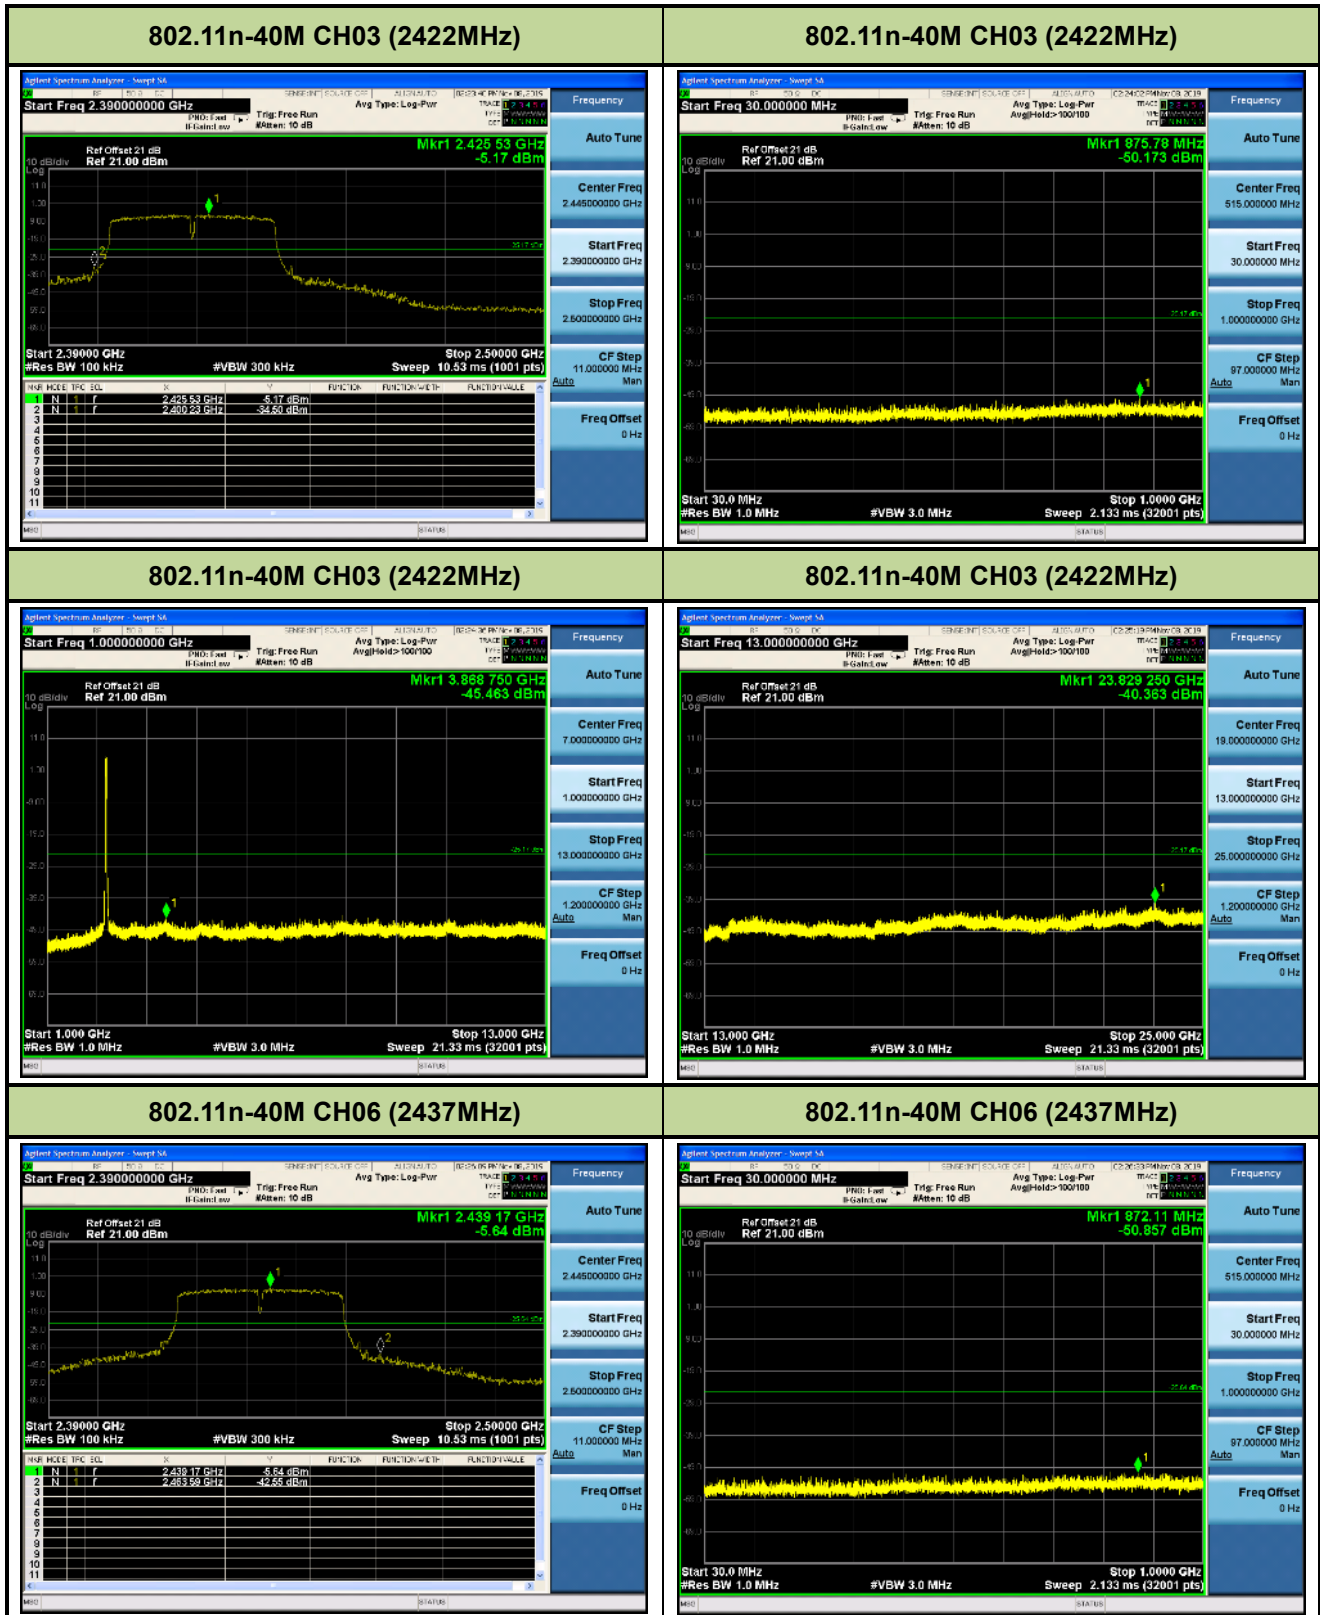


802.11n-40M CH06 (2437MHz)

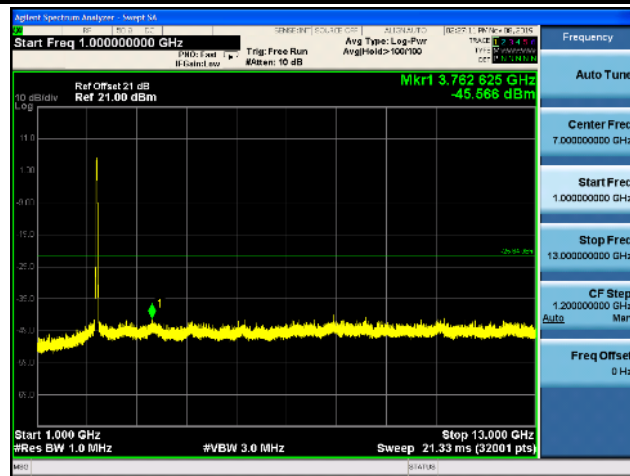


802.11n-40M CH06 (2437MHz)

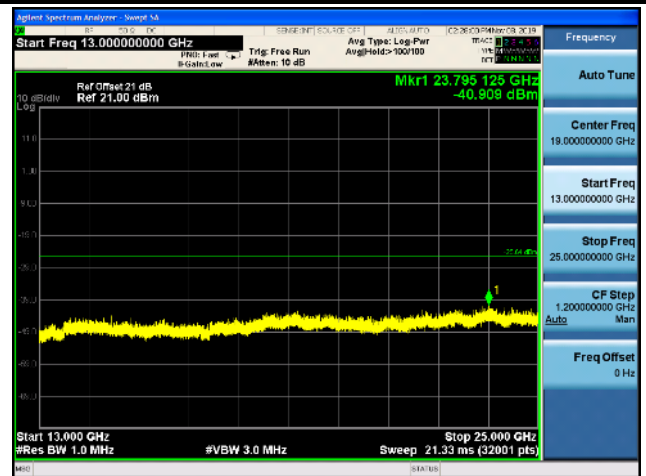


802.11n-40M CH09 (2452MHz)

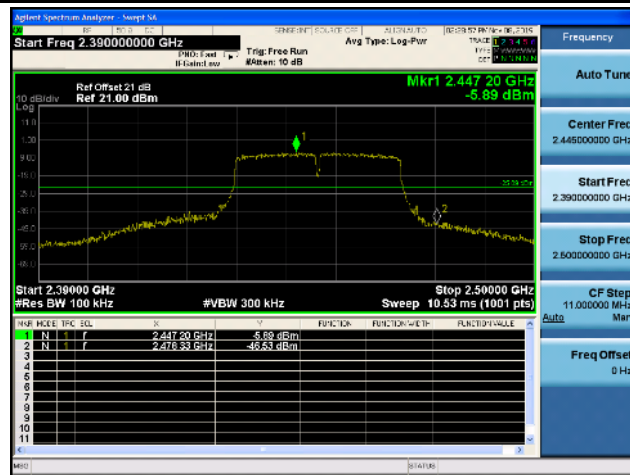


802.11n-40M CH09 (2452MHz)

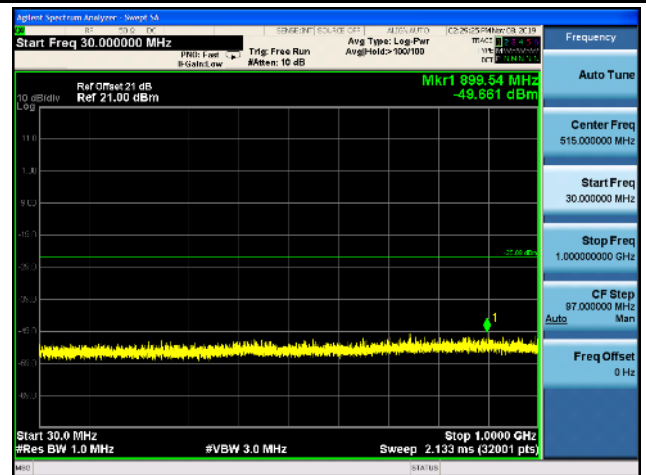

802.11n-40M CH09 (2452MHz)

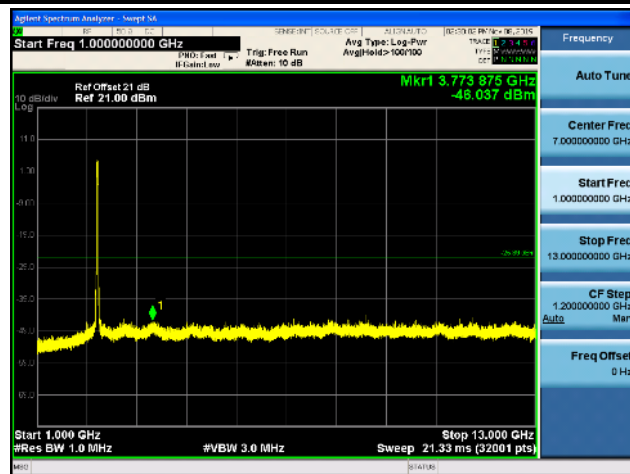

802.11n-40M CH09 (2452MHz)

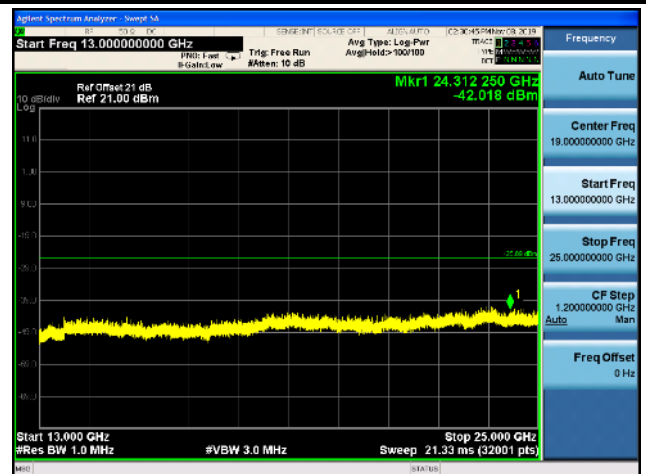

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10- Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10- Section 11.12.2.4 (peak power measurements)

ANSI C63.10- Section 11.12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW $\geq 1/T$

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold


8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

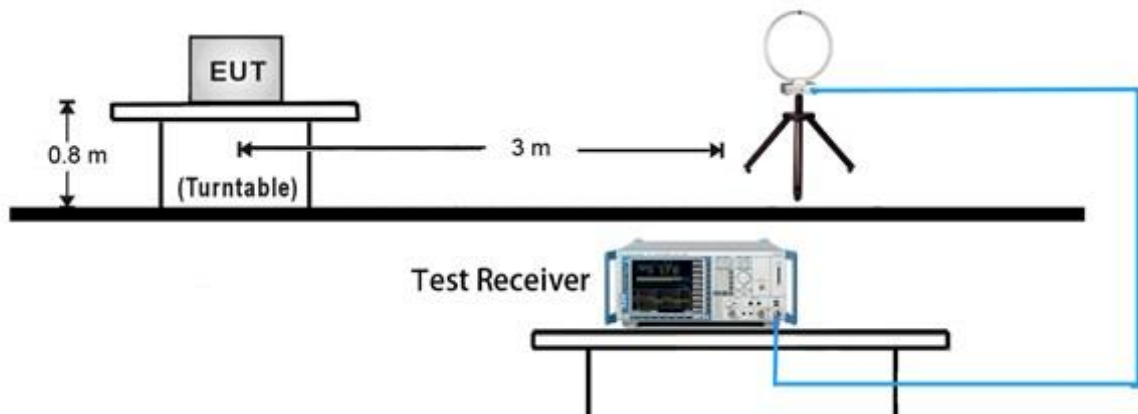


30MHz ~ 1GHz Test Setup:

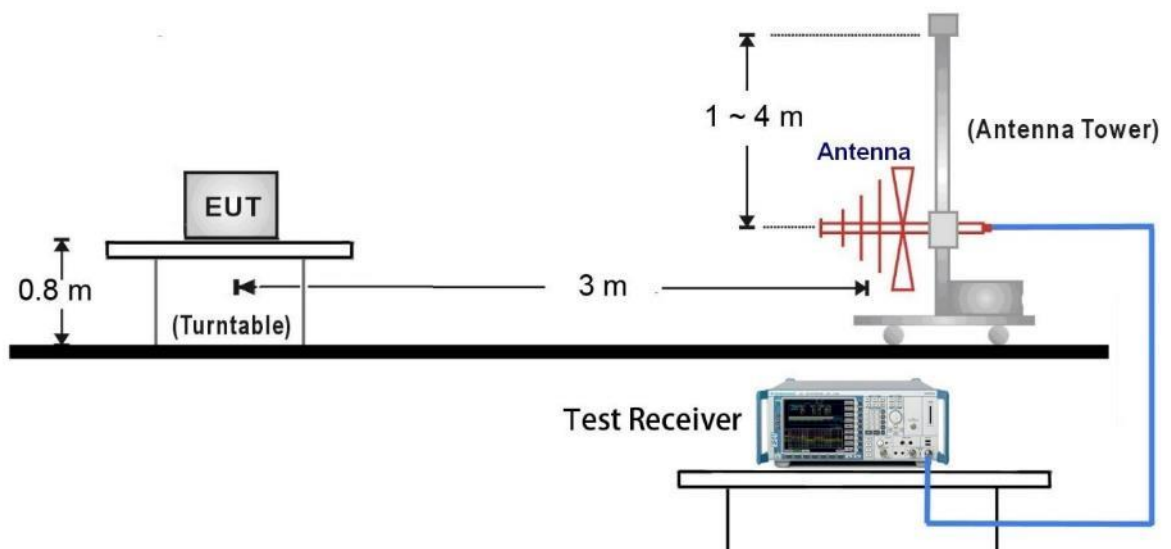

1GHz ~ 18GHz Test Setup:

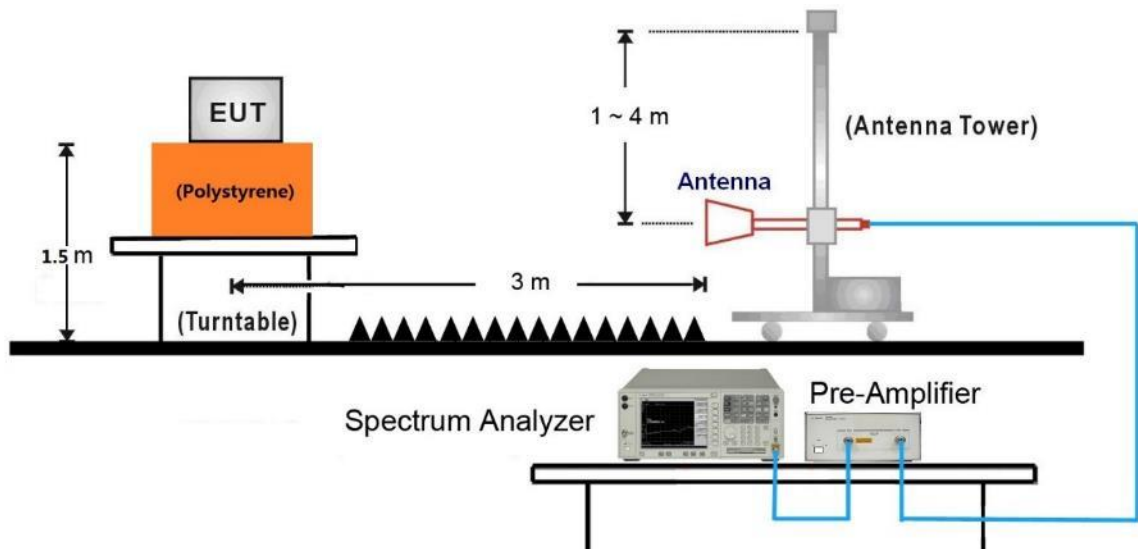


18GHz ~25GHz Test Setup:

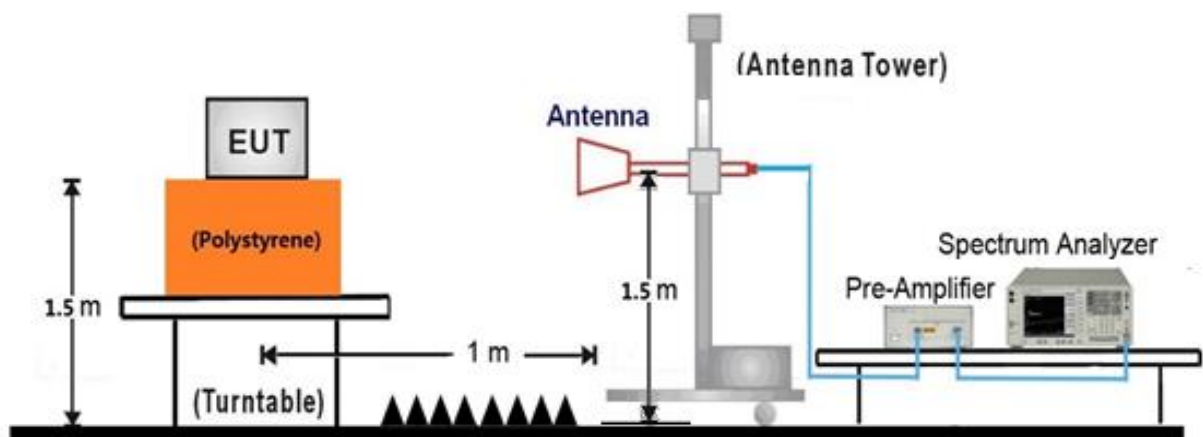

7.6.5. Test Result


EUT	Mobile POS Terminal	Date of Test	2019-11-19
Factor	VULB 9162	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 6 (Adapter: BA048-090500MAX)	Test Voltage	AC 120V/60Hz

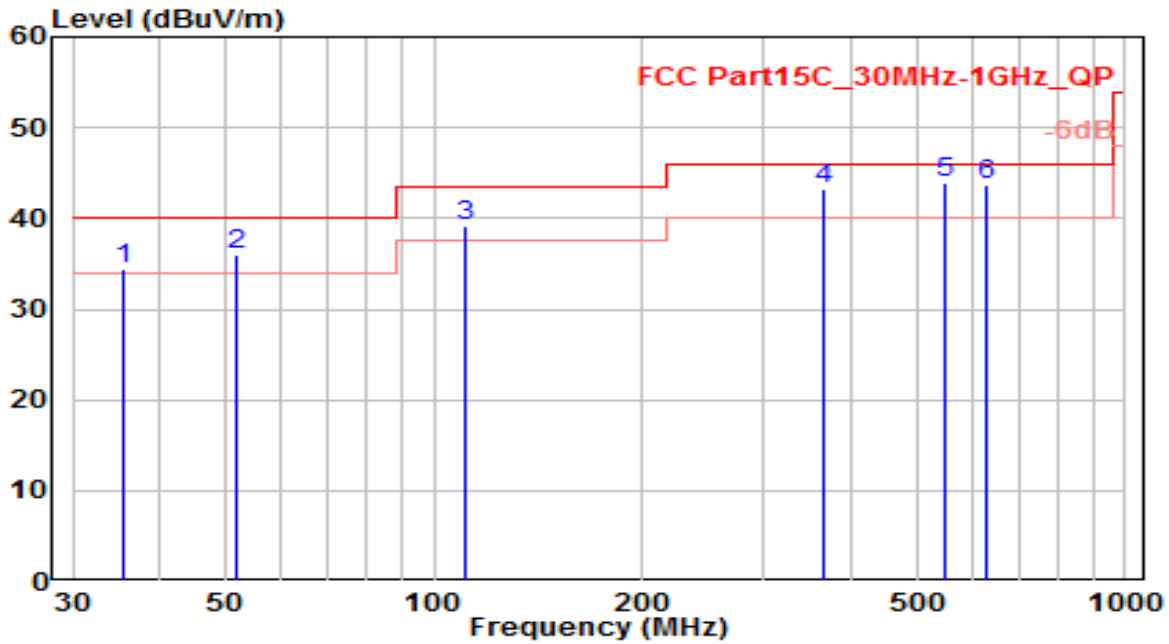

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-19
Factor	VULB 9162	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 6 (Adapter: BA048-090500MAX)	Test Voltage	AC 120V/60Hz

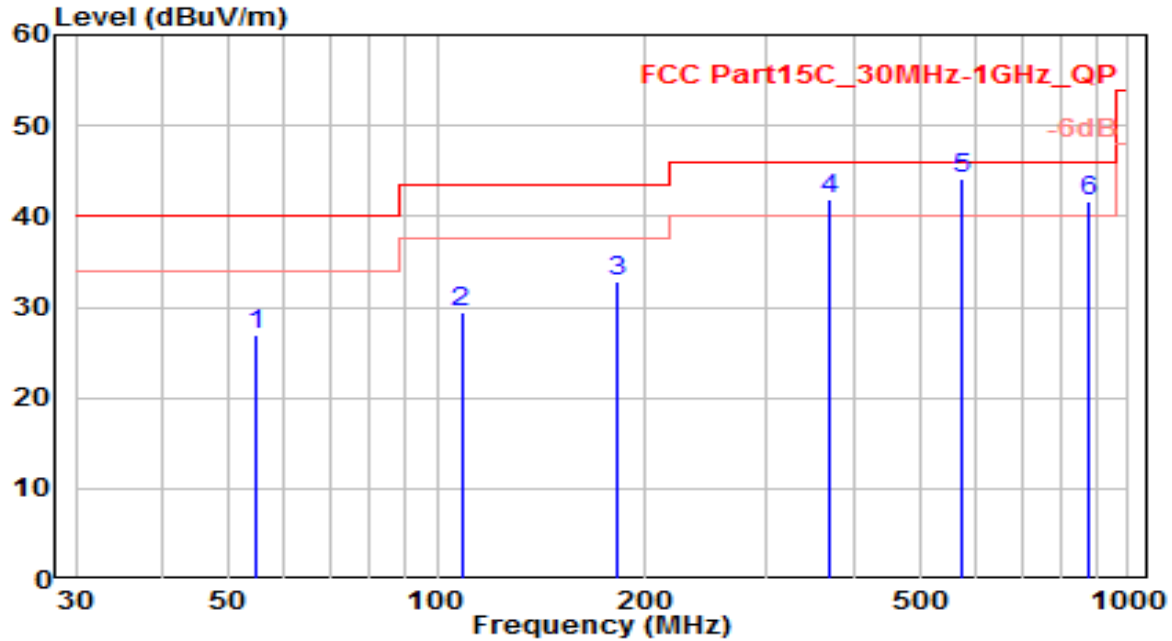


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	54.800	5.93	20.91	26.84	-13.16	40.00	120	145	QP
2	108.450	10.50	18.86	29.36	-14.14	43.50	110	265	QP
3	182.360	15.25	17.62	32.87	-10.63	43.50	100	180	QP
4	368.600	18.10	23.70	41.80	-4.20	46.00	145	220	QP
5	* 572.350	17.10	27.01	44.11	-1.89	46.00	130	290	QP
6	879.630	10.25	31.39	41.64	-4.36	46.00	105	180	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-19
Factor	VULB 9162	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 6 (Adapter: BA048-090500MAX)	Test Voltage	AC 120V/60Hz

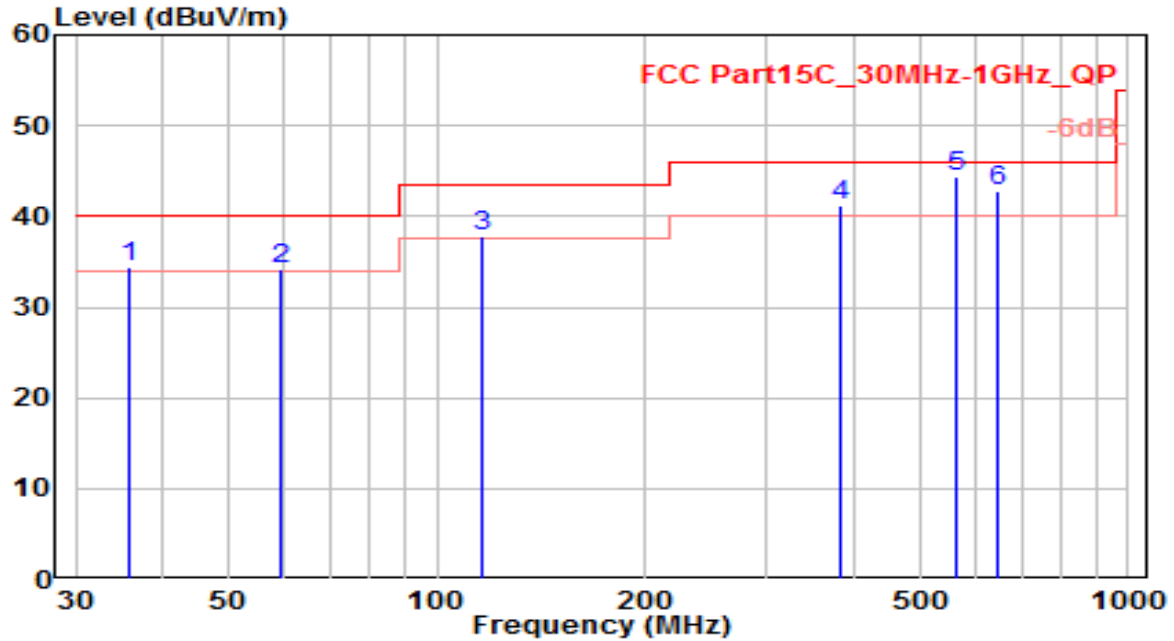


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	35.800	15.10	19.28	34.38	-5.62	40.00	140	160	QP
2	59.630	14.10	20.17	34.27	-5.73	40.00	110	250	QP
3	115.850	20.15	17.67	37.82	-5.68	43.50	125	85	QP
4	382.600	17.20	23.91	41.11	-4.89	46.00	140	245	QP
5	* 562.850	17.65	26.84	44.49	-1.51	46.00	145	275	QP
6	645.850	14.48	28.24	42.72	-3.28	46.00	125	210	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-19
Factor	VULB 9162	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 6 (Adapter: BA048-090500MAX)	Test Voltage	AC 120V/60Hz

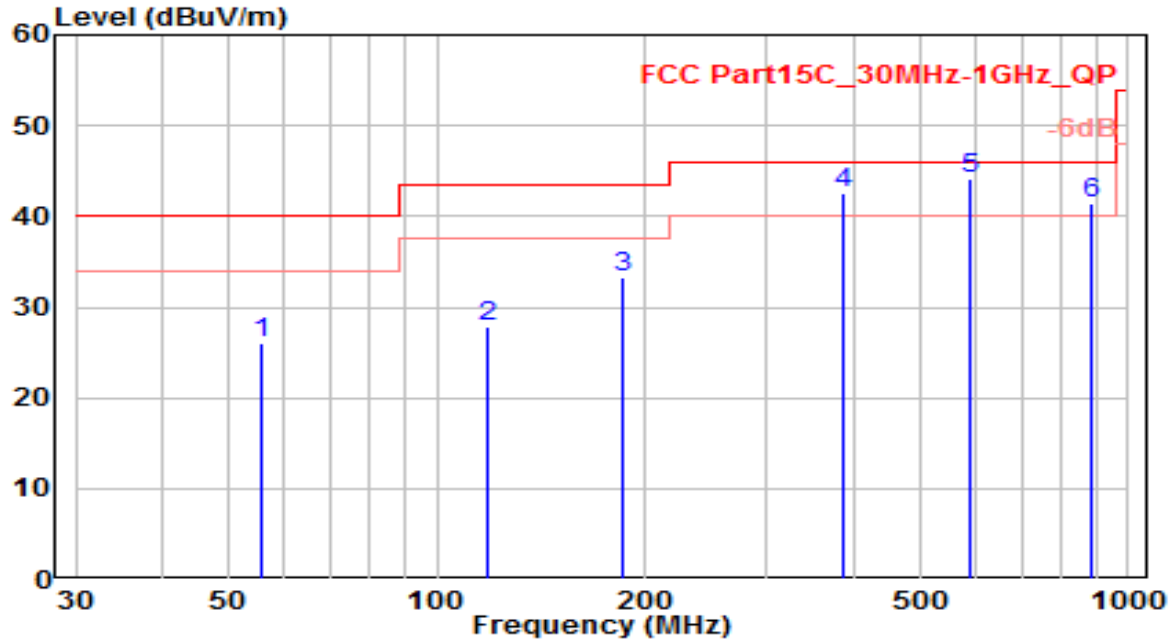


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	55.680	5.23	20.78	26.01	-13.99	40.00	145	300	QP
2	118.600	10.60	17.19	27.79	-15.71	43.50	125	305	QP
3	185.360	15.20	18.05	33.25	-10.25	43.50	110	265	QP
4	386.200	18.60	23.96	42.56	-3.44	46.00	105	340	QP
5	* 592.650	16.70	27.37	44.07	-1.93	46.00	125	295	QP
6	887.300	10.10	31.42	41.52	-4.48	46.00	115	185	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

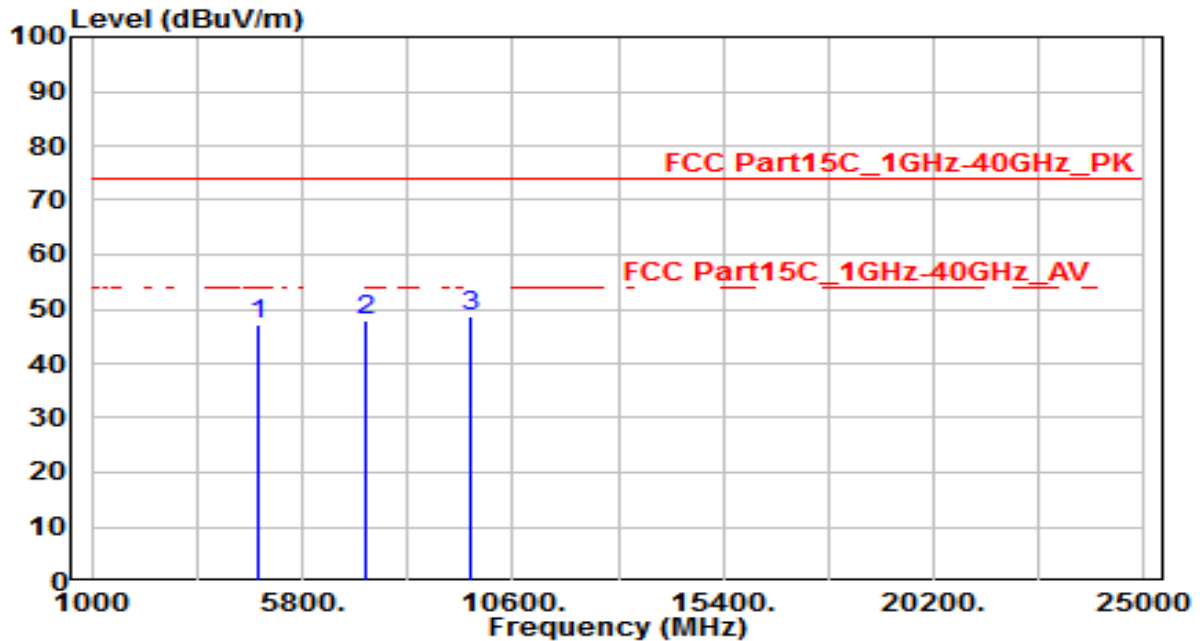


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	43.92	3.20	47.12	-26.88	74.00	150	400	Peak
2	7236.000	36.88	11.13	48.01	-25.99	74.00	150	400	Peak
3	* 9648.000	34.42	14.11	48.53	-25.47	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

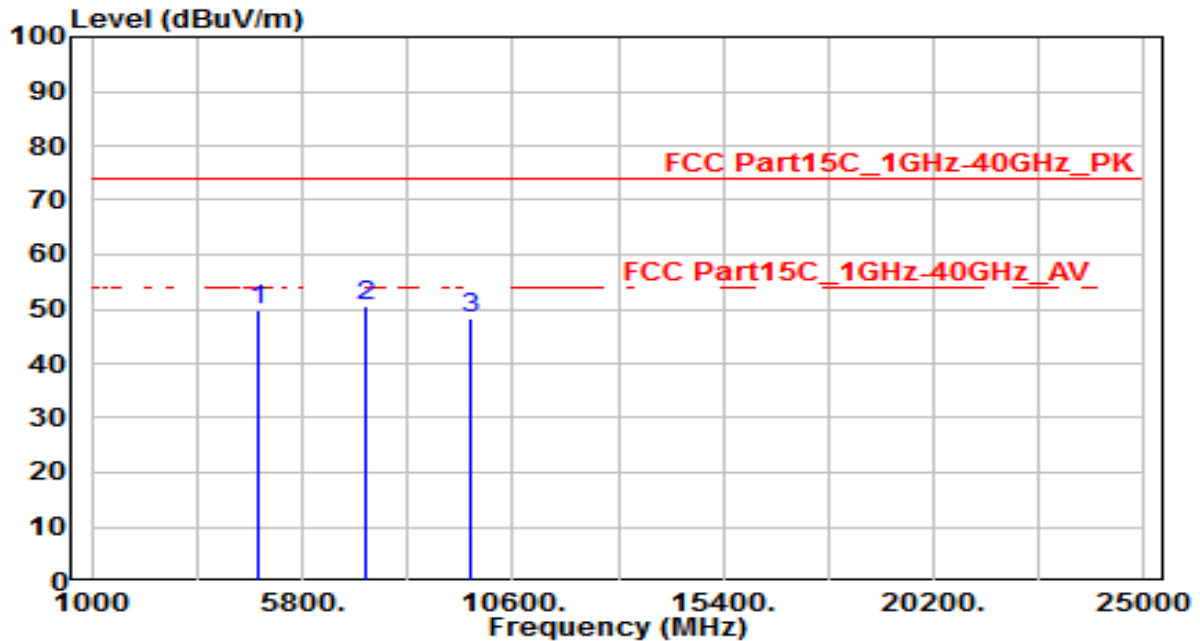


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	46.76	3.20	49.96	-24.04	74.00	150	400	Peak
2	* 7236.000	39.52	11.13	50.65	-23.35	74.00	150	400	Peak
3	9648.000	34.03	14.11	48.14	-25.86	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

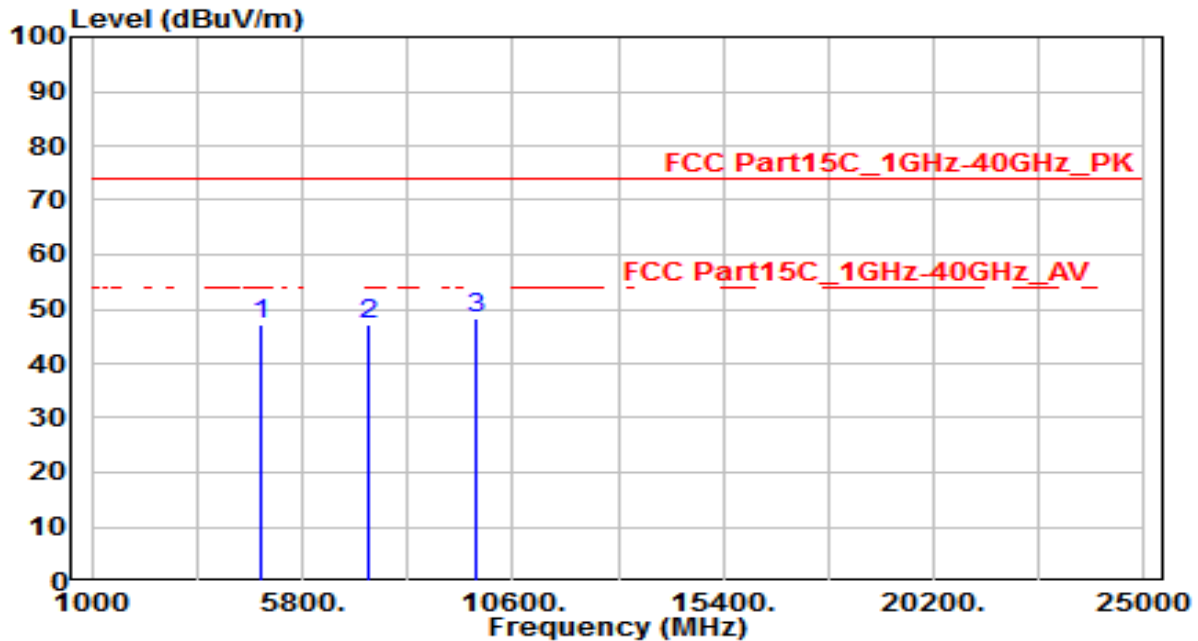


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	43.93	3.30	47.23	-26.77	74.00	150	400	Peak
2	7311.000	35.98	11.29	47.27	-26.73	74.00	150	400	Peak
3	* 9748.000	33.77	14.43	48.20	-25.80	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

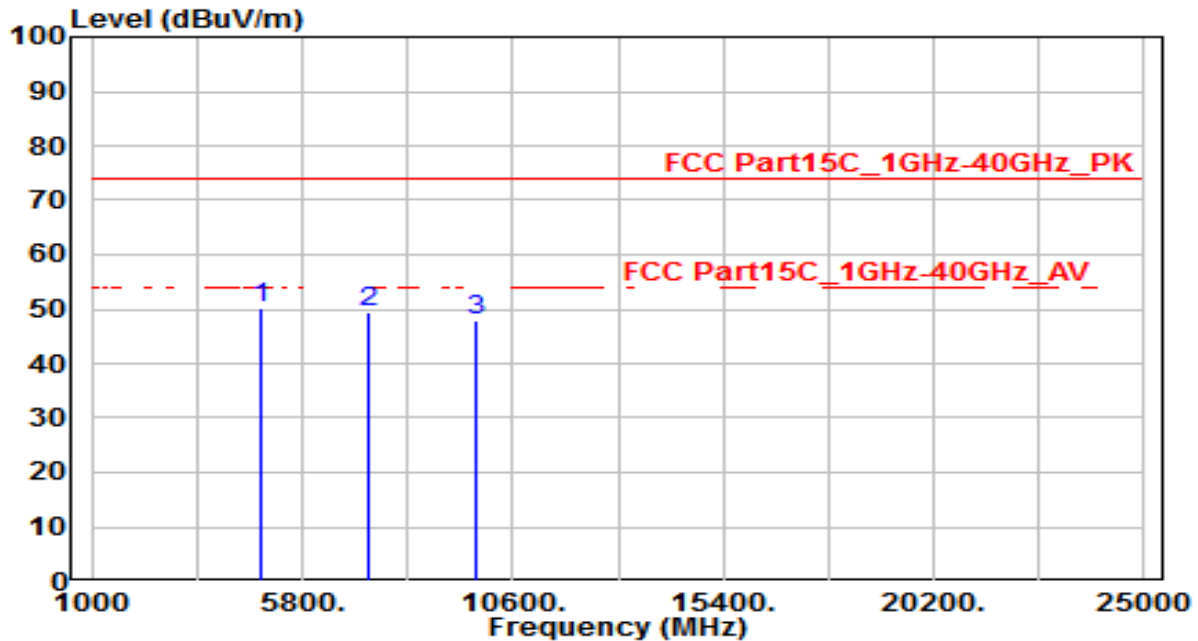


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	46.83	3.30	50.13	-23.87	74.00	150	400	Peak
2		7311.000	38.21	11.29	49.50	-24.50	74.00	150	400	Peak
3		9748.000	33.57	14.43	48.00	-26.00	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

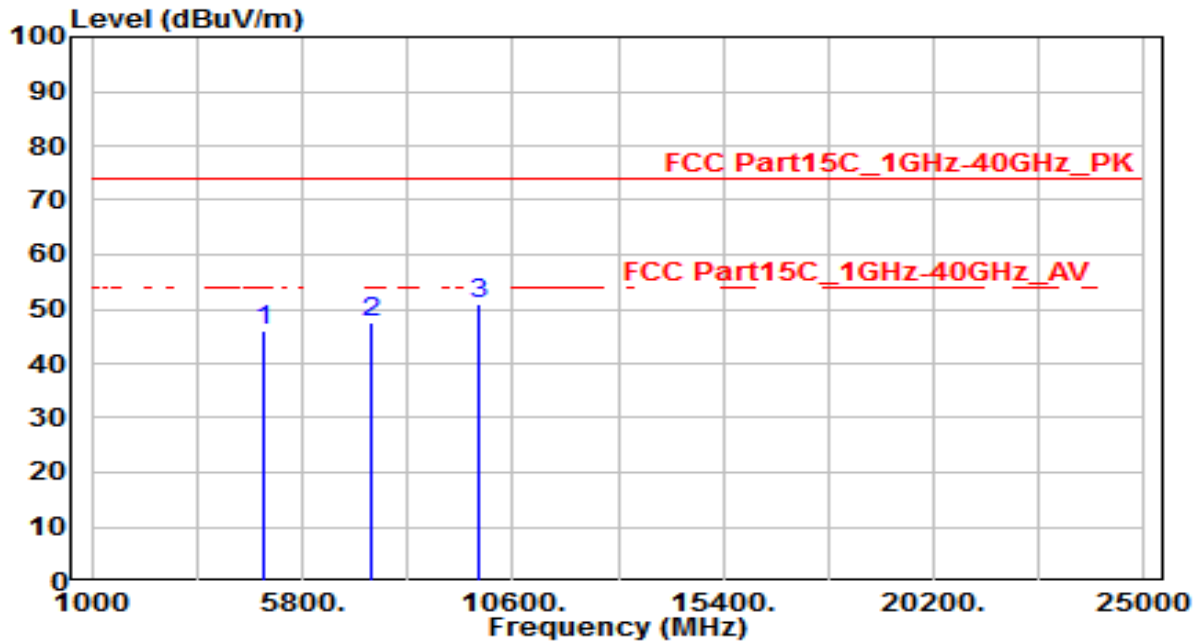


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.67	3.40	46.07	-27.93	74.00	150	400	Peak
2	7386.000	36.23	11.46	47.69	-26.31	74.00	150	400	Peak
3	* 9848.000	36.11	14.76	50.87	-23.13	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

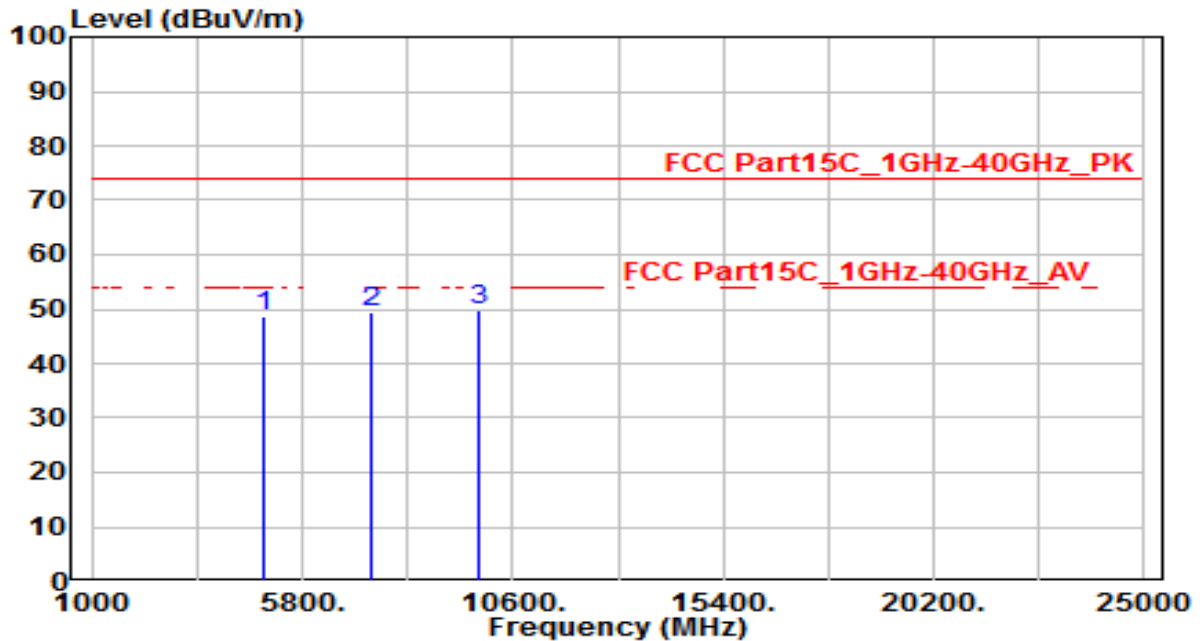


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	45.34	3.40	48.74	-25.26	74.00	150	400	Peak
2	7386.000	37.87	11.46	49.33	-24.67	74.00	150	400	Peak
3	* 9848.000	35.12	14.76	49.88	-24.12	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

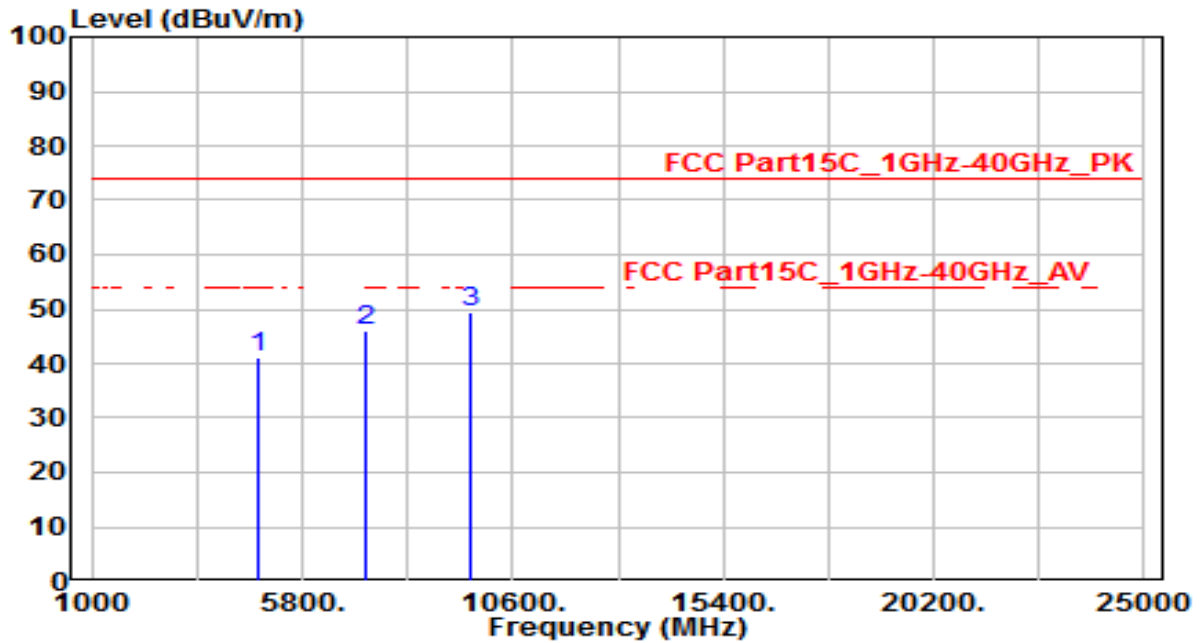


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.02	3.20	41.22	-32.78	74.00	150	400	Peak
2	7236.000	35.07	11.13	46.20	-27.80	74.00	150	400	Peak
3	* 9648.000	35.23	14.11	49.34	-24.66	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

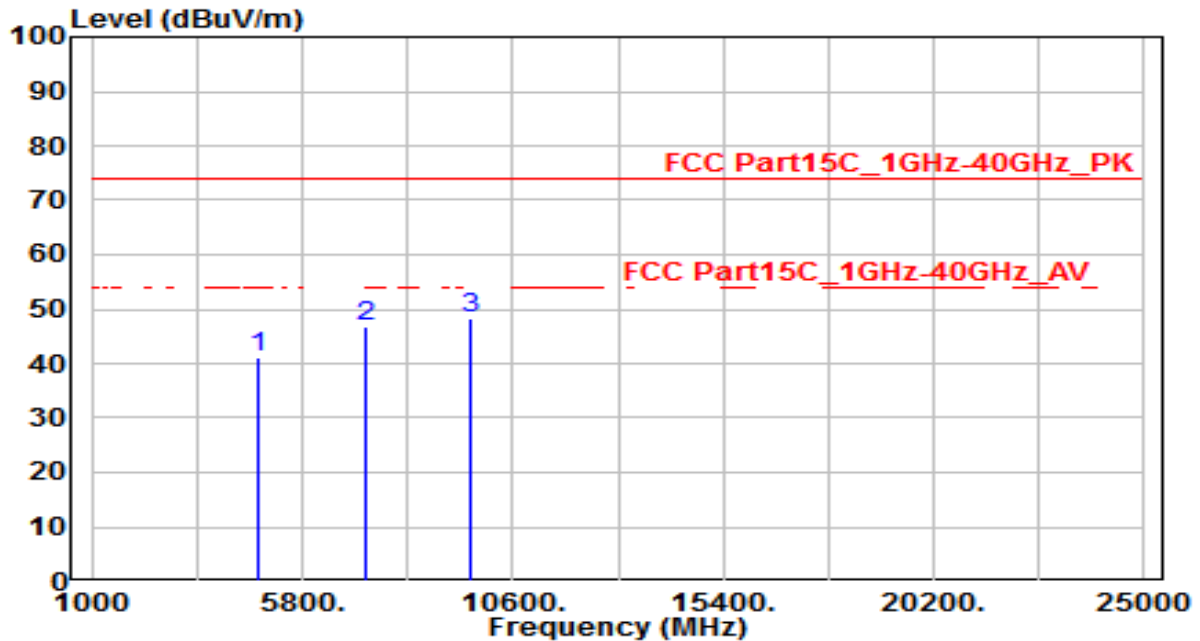


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.84	3.20	41.04	-32.96	74.00	150	400	Peak
2	7236.000	35.58	11.13	46.71	-27.29	74.00	150	400	Peak
3	* 9648.000	34.23	14.11	48.34	-25.66	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

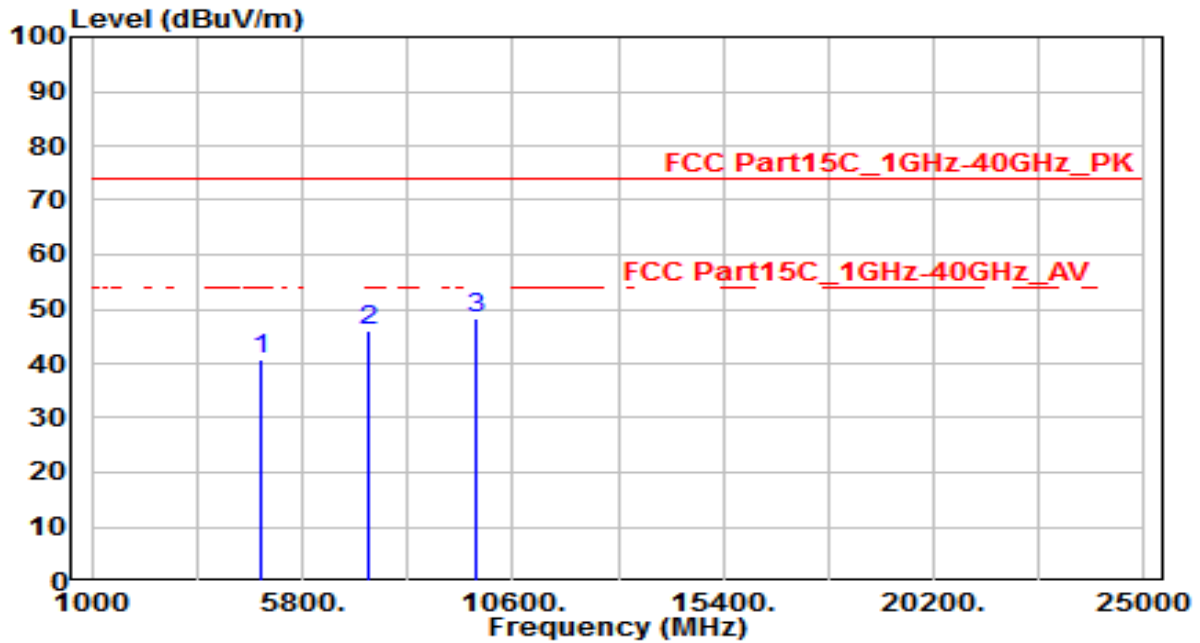


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.50	3.30	40.80	-33.20	74.00	150	400	Peak
2	7311.000	34.86	11.29	46.15	-27.85	74.00	150	400	Peak
3	* 9748.000	33.69	14.43	48.12	-25.88	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

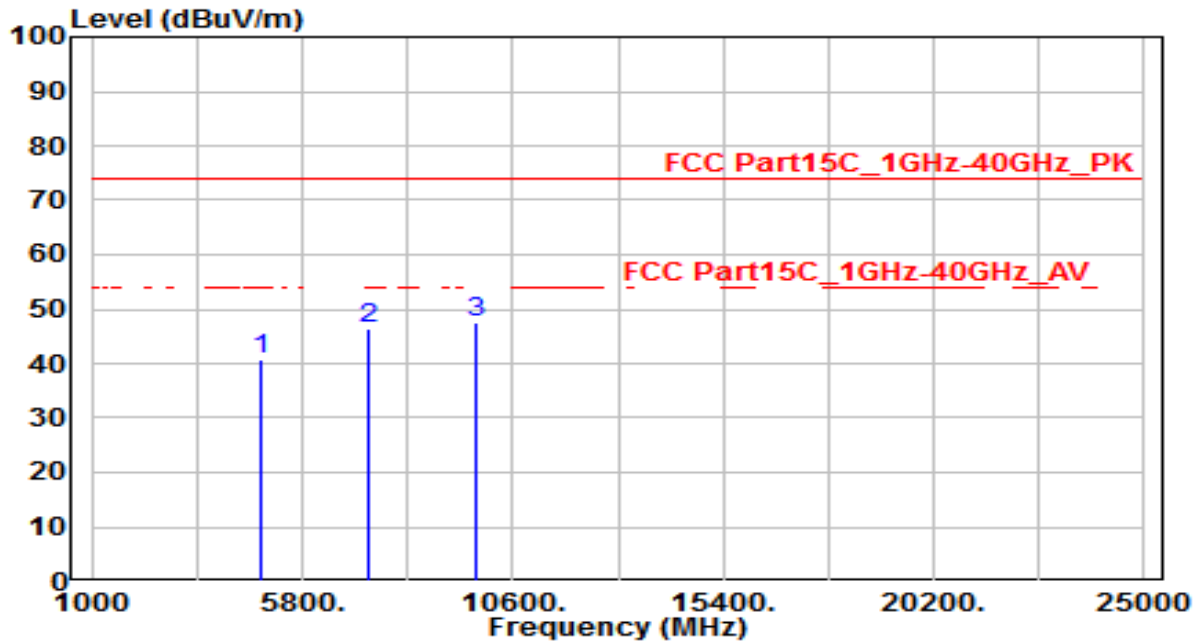


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.53	3.30	40.83	-33.17	74.00	150	400	Peak
2	7311.000	34.95	11.29	46.24	-27.76	74.00	150	400	Peak
3	* 9748.000	33.26	14.43	47.69	-26.31	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

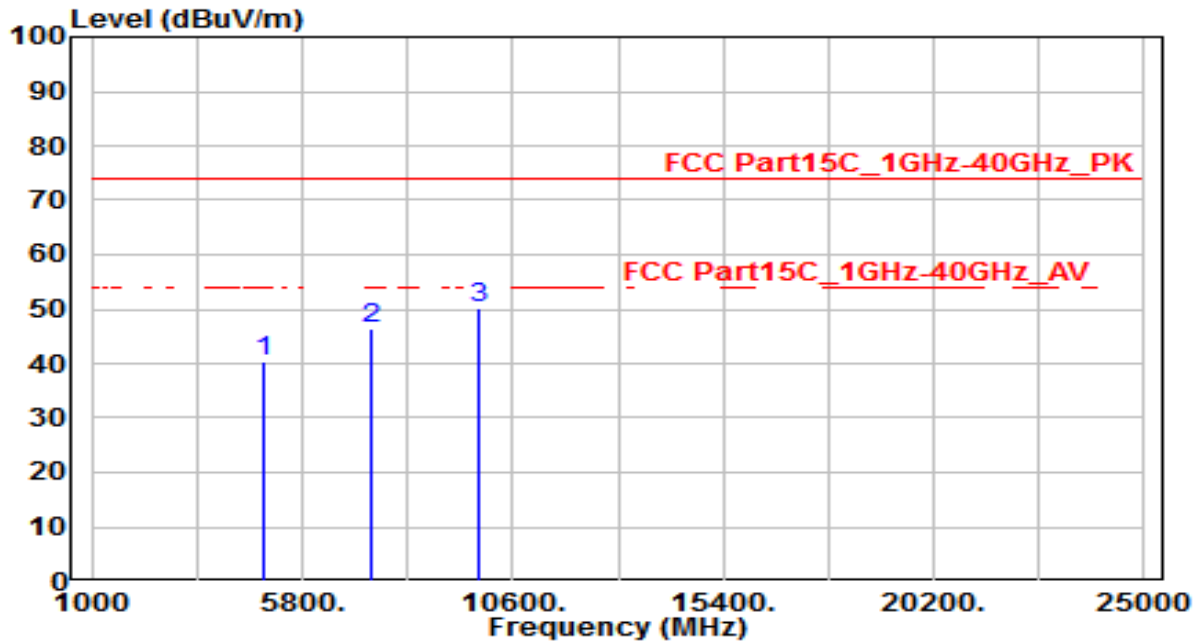


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.02	3.40	40.42	-33.58	74.00	150	400	Peak
2	7386.000	34.98	11.46	46.44	-27.56	74.00	150	400	Peak
3	* 9848.000	35.43	14.76	50.19	-23.81	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

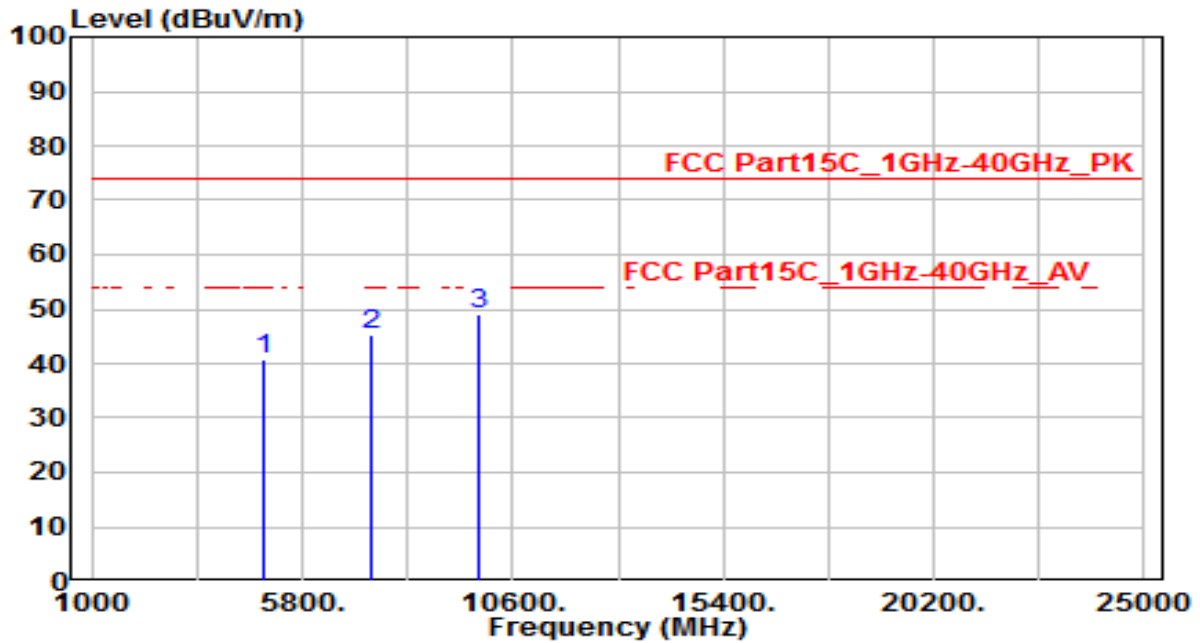


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.35	3.40	40.75	-33.25	74.00	150	400	Peak
2	7386.000	33.98	11.46	45.44	-28.56	74.00	150	400	Peak
3	* 9848.000	34.47	14.76	49.23	-24.77	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

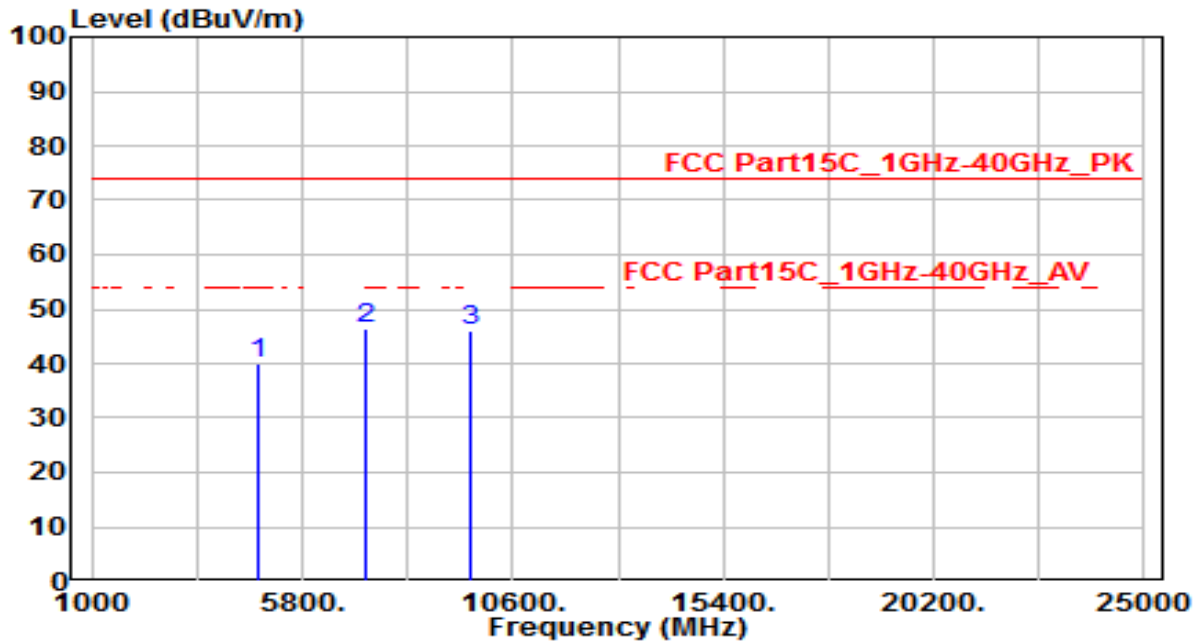


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.95	3.20	40.15	-33.85	74.00	150	400	Peak
2	* 7236.000	35.26	11.13	46.39	-27.61	74.00	150	400	Peak
3	9648.000	32.03	14.11	46.14	-27.86	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

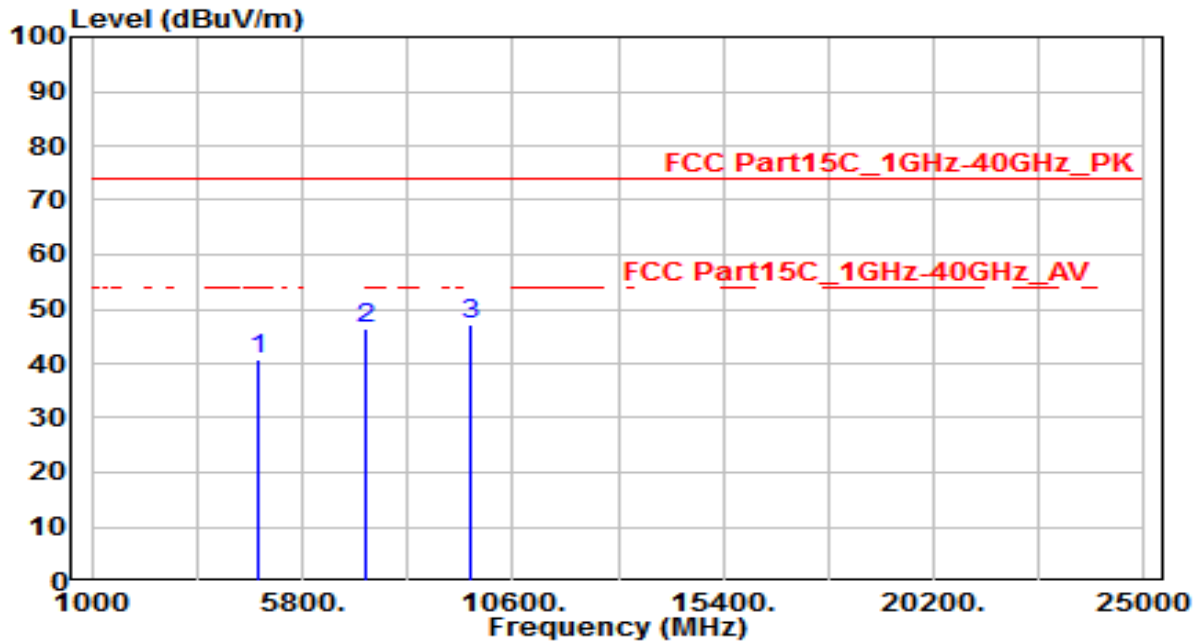


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.60	3.20	40.80	-33.20	74.00	150	400	Peak
2	7236.000	35.26	11.13	46.39	-27.61	74.00	150	400	Peak
3	* 9648.000	33.03	14.11	47.14	-26.86	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

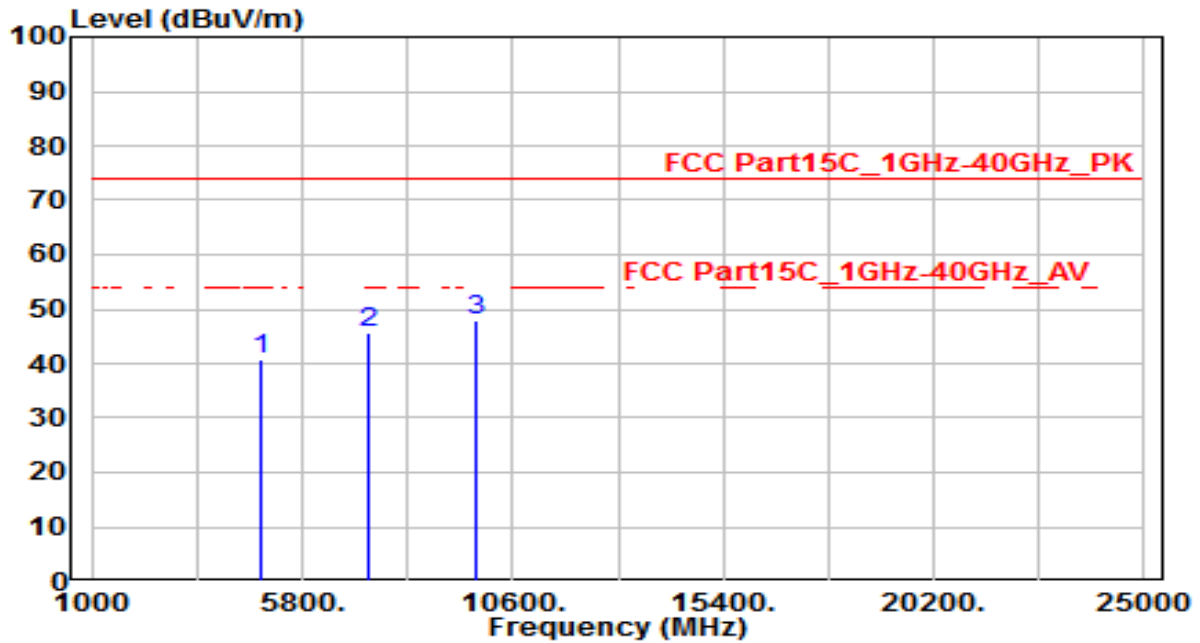


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.62	3.30	40.92	-33.08	74.00	150	400	Peak
2	7311.000	34.51	11.29	45.80	-28.20	74.00	150	400	Peak
3	* 9748.000	33.54	14.43	47.97	-26.03	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

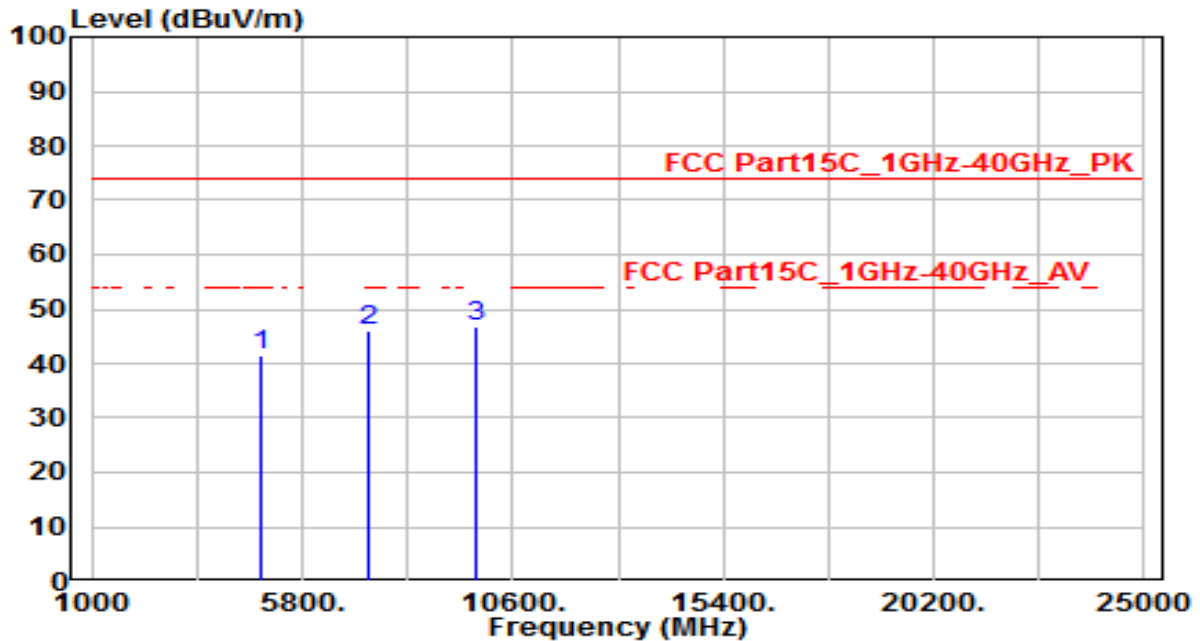


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.33	3.30	41.63	-32.37	74.00	150	400	Peak
2	7311.000	34.62	11.29	45.91	-28.09	74.00	150	400	Peak
3	* 9748.000	32.36	14.43	46.79	-27.21	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

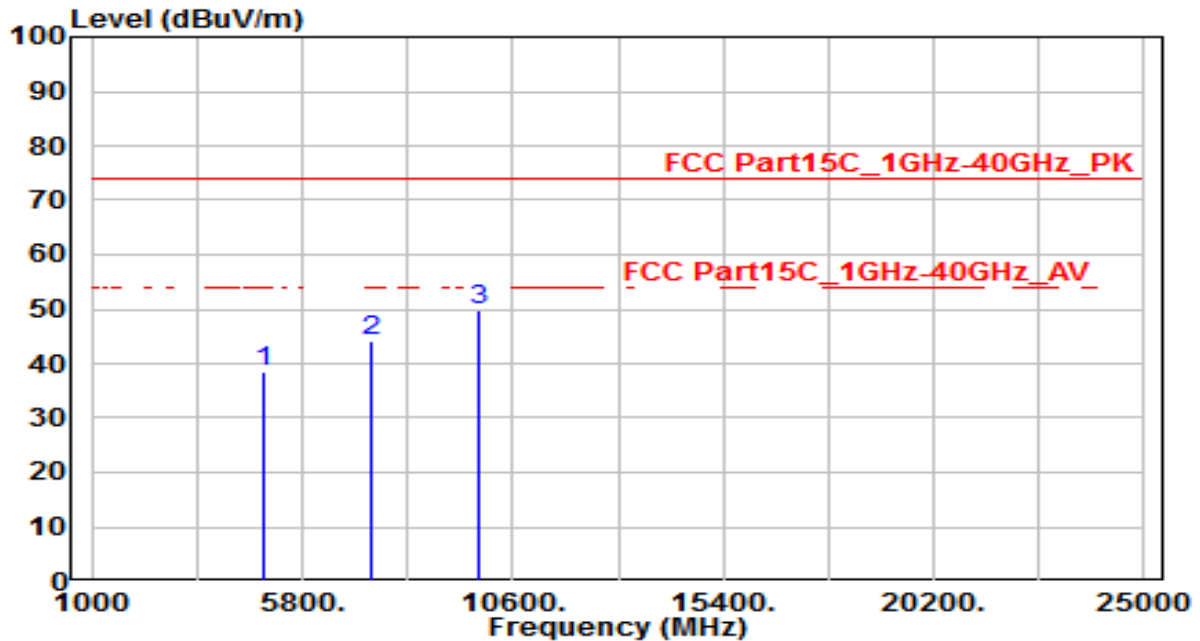


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.22	3.40	38.62	-35.38	74.00	150	400	Peak
2	7386.000	32.60	11.46	44.06	-29.94	74.00	150	400	Peak
3	* 9848.000	35.02	14.76	49.78	-24.22	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

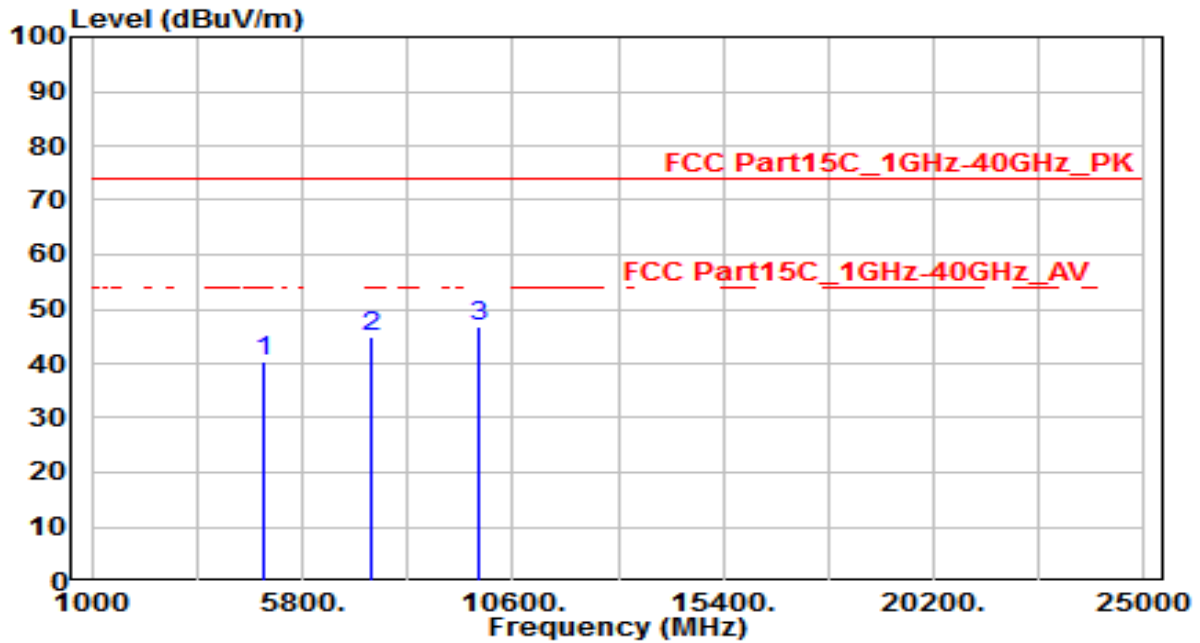


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.88	3.40	40.28	-33.72	74.00	150	400	Peak
2	7386.000	33.61	11.46	45.07	-28.93	74.00	150	400	Peak
3	* 9848.000	32.05	14.76	46.81	-27.19	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

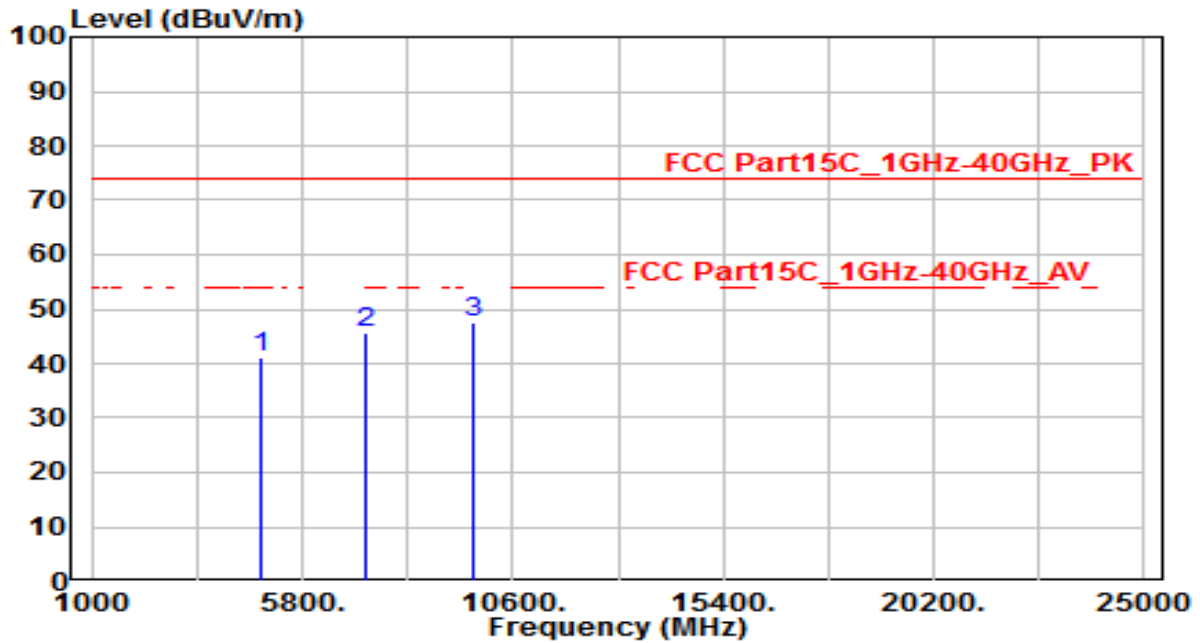


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	37.75	3.24	40.99	-33.01	74.00	150	400	Peak
2	7266.000	34.65	11.19	45.84	-28.16	74.00	150	400	Peak
3	* 9688.000	33.45	14.24	47.69	-26.31	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

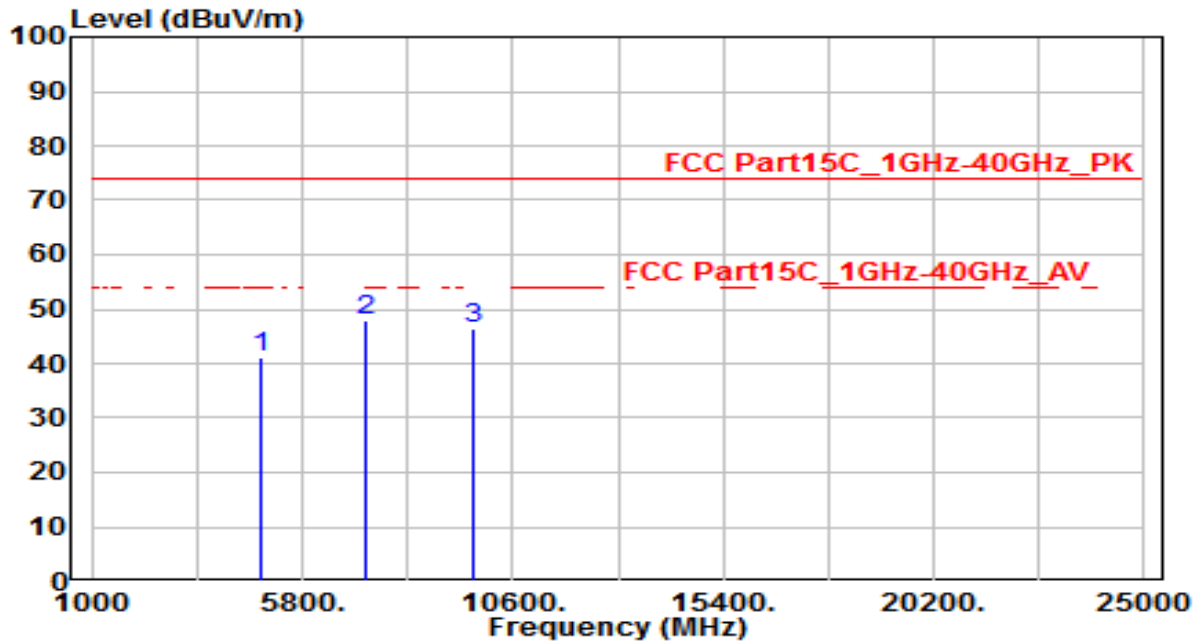


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	37.74	3.24	40.98	-33.02	74.00	150	400	Peak
2	* 7266.000	36.85	11.19	48.04	-25.96	74.00	150	400	Peak
3	9688.000	32.36	14.24	46.60	-27.40	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

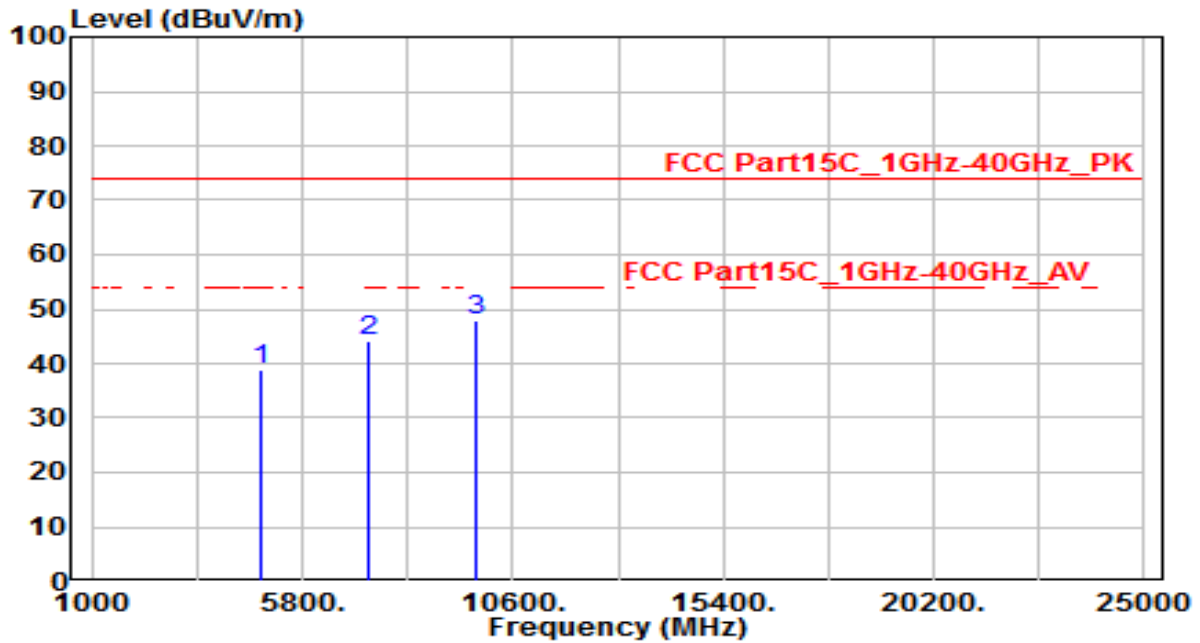


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.63	3.30	38.93	-35.07	74.00	150	400	Peak
2	7311.000	32.95	11.29	44.24	-29.76	74.00	150	400	Peak
3	* 9748.000	33.45	14.43	47.88	-26.12	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

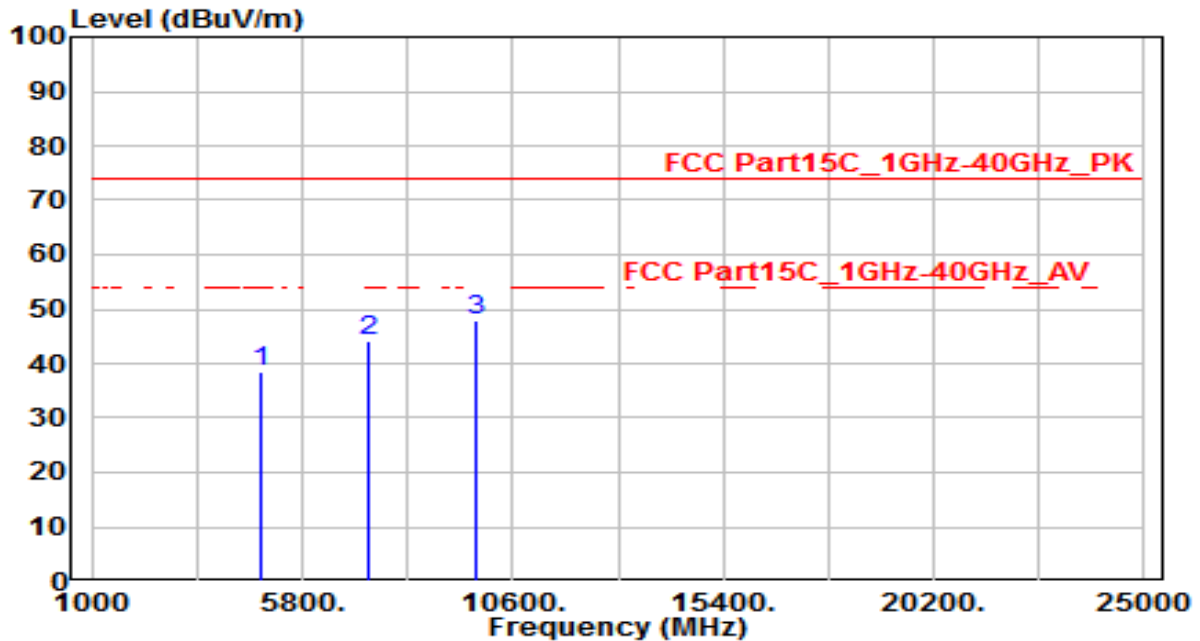


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.23	3.30	38.53	-35.47	74.00	150	400	Peak
2	7311.000	32.74	11.29	44.03	-29.97	74.00	150	400	Peak
3	* 9748.000	33.64	14.43	48.07	-25.93	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

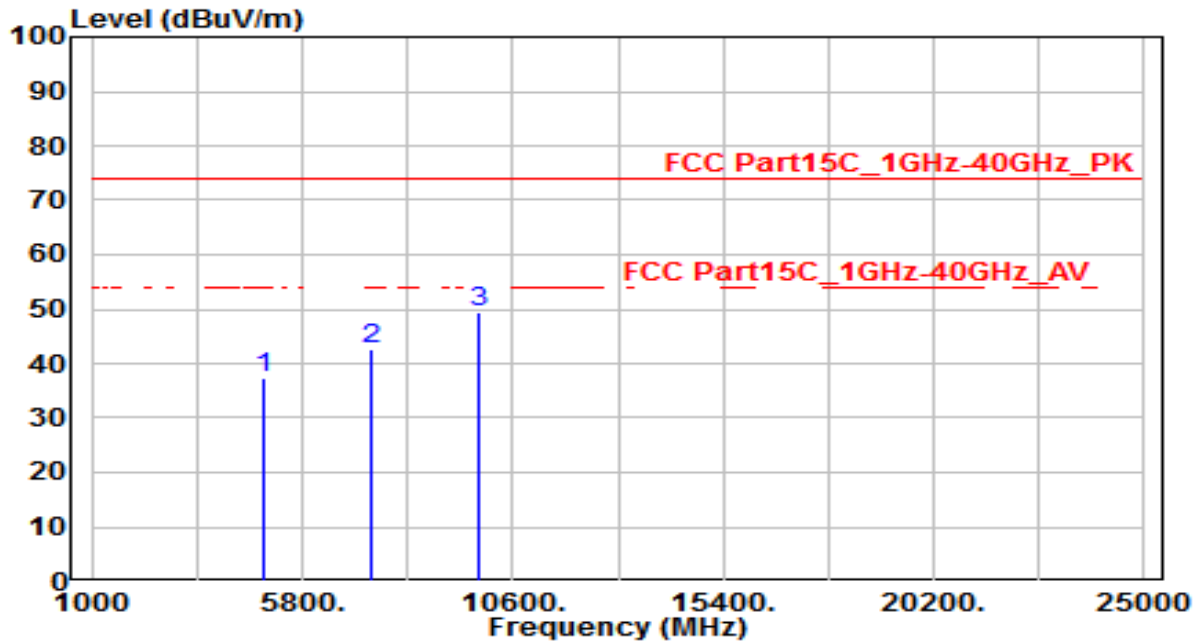


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.05	3.36	37.41	-36.59	74.00	150	400	Peak
2	7356.000	31.34	11.39	42.73	-31.27	74.00	150	400	Peak
3	* 9808.000	34.81	14.63	49.44	-24.56	74.00	150	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

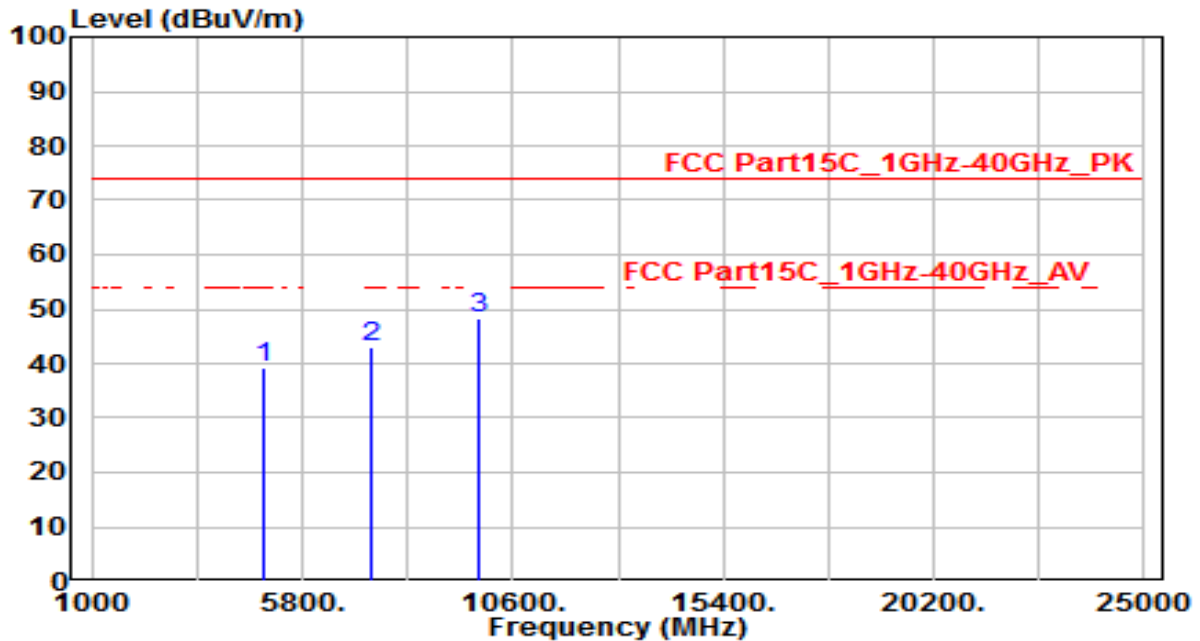

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	35.85	3.36	39.21	-34.79	74.00	150	400	Peak
2	7356.000	31.57	11.39	42.96	-31.04	74.00	150	400	Peak
3	* 9808.000	33.69	14.63	48.32	-25.68	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10- Section 11.13

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

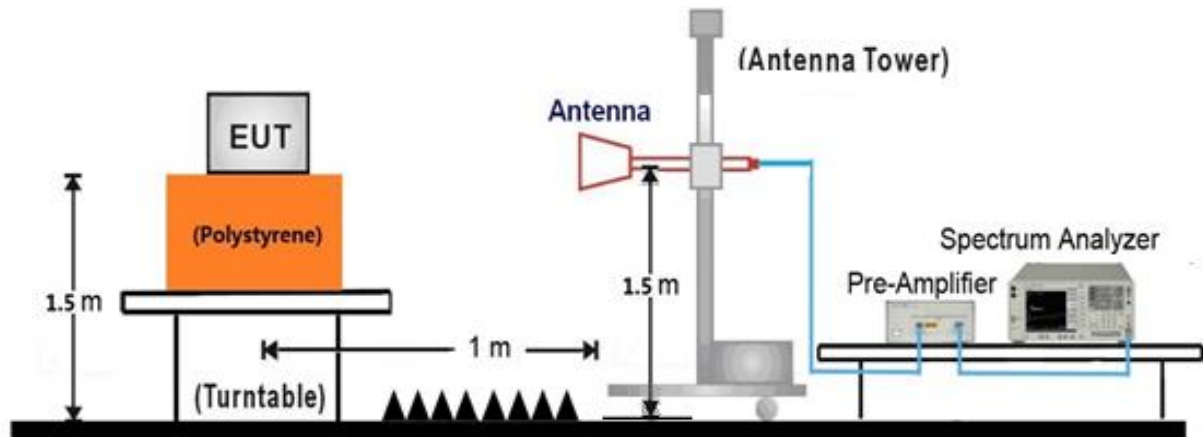

7.7.5. Test Result

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

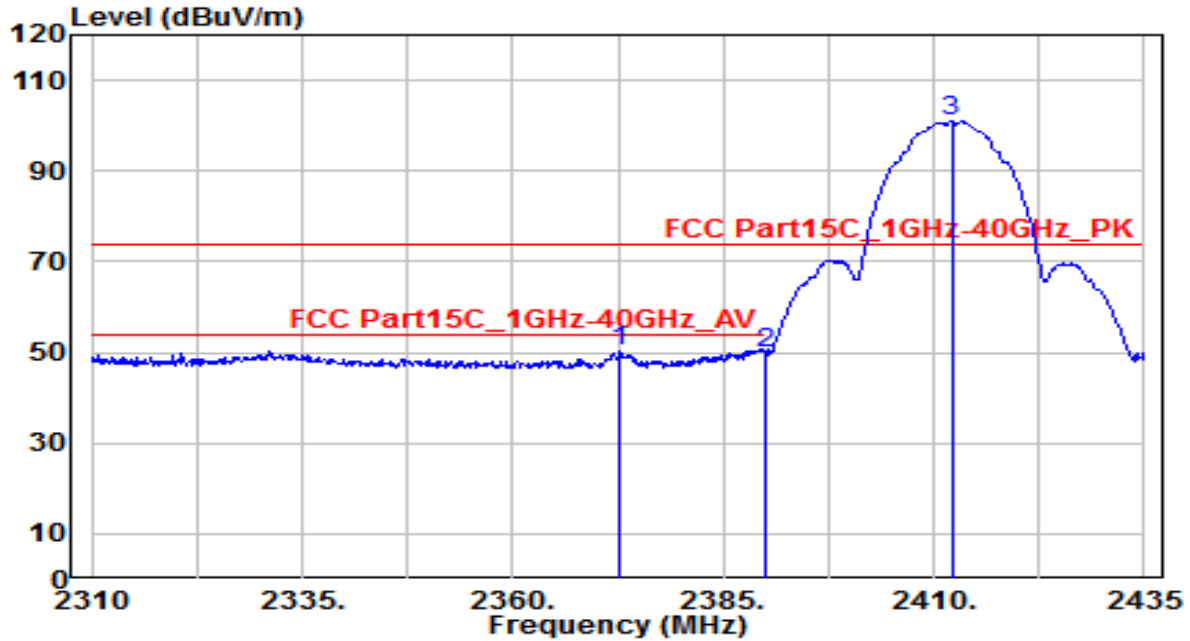


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2372.750	52.89	-2.81	50.08	-23.92	74.00	125	85	Peak
2	2390.000	52.60	-2.73	49.87	-24.13	74.00	125	85	Peak
3	2412.125	103.63	-2.62	101.01	N/A	N/A	125	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

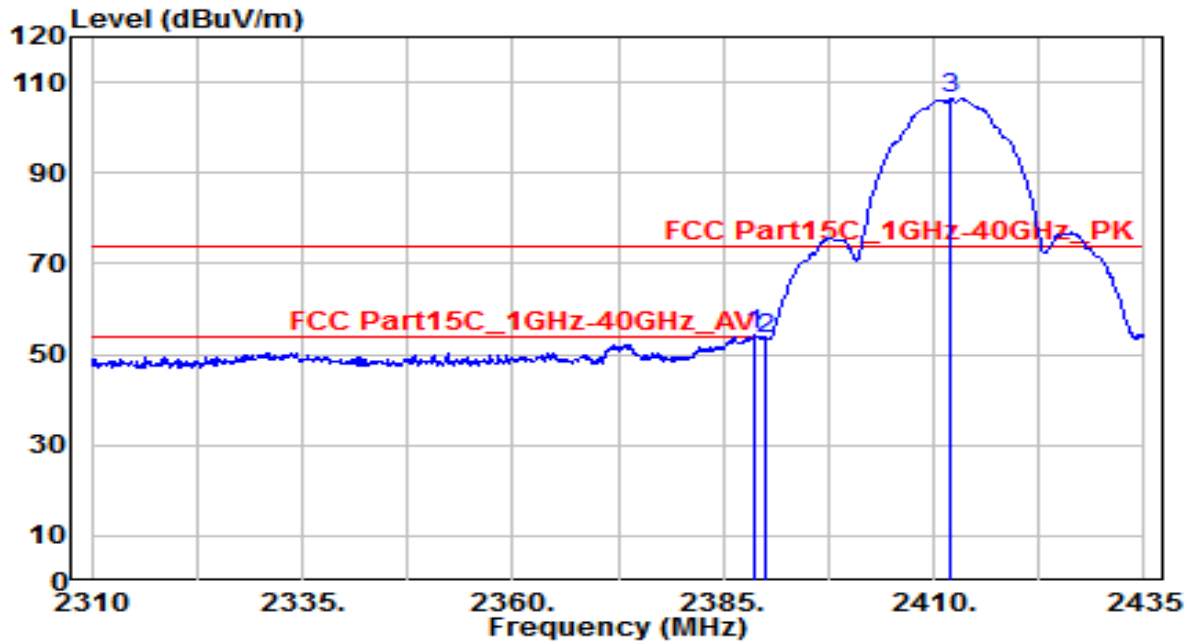


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.750	56.96	-2.73	54.23	-19.77	74.00	165	75	Peak
2	2390.000	56.30	-2.73	53.57	-20.43	74.00	165	75	Peak
3	2412.000	109.01	-2.62	106.39	N/A	N/A	165	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

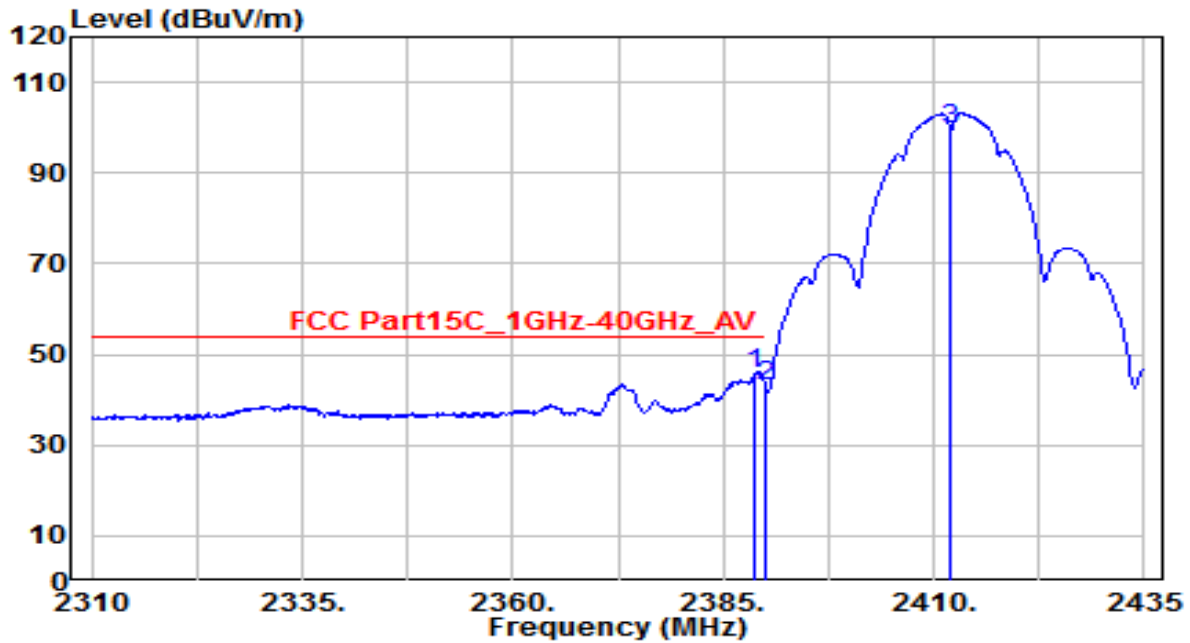


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.750	48.29	-2.73	45.56	-8.44	54.00	165	75	Average
2	2390.000	45.82	-2.73	43.10	-10.90	54.00	165	75	Average
3	2412.000	102.42	-2.62	99.80	N/A	N/A	165	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

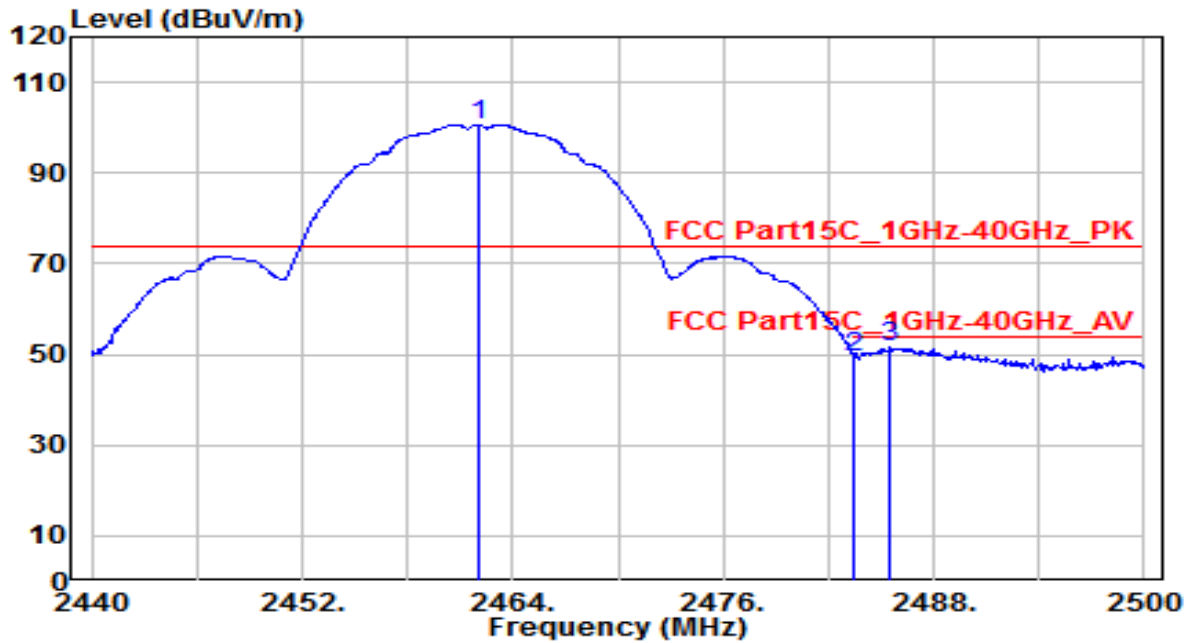


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.020	103.13	-2.39	100.73	N/A	N/A	155	340	Peak
2	2483.500	51.61	-2.30	49.31	-24.69	74.00	155	340	Peak
3	* 2485.540	53.91	-2.29	51.63	-22.37	74.00	155	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

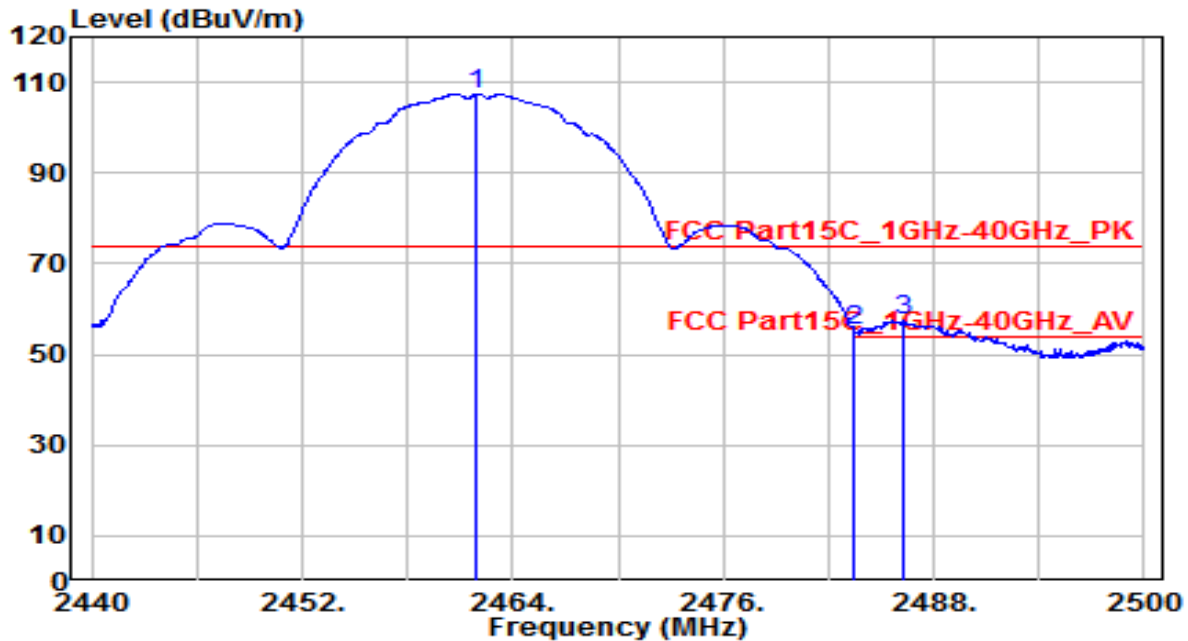


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	109.79	-2.39	107.40	N/A	N/A	160	85	Peak
2	2483.500	57.65	-2.30	55.35	-18.65	74.00	160	85	Peak
3	* 2486.320	59.60	-2.28	57.32	-16.68	74.00	160	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

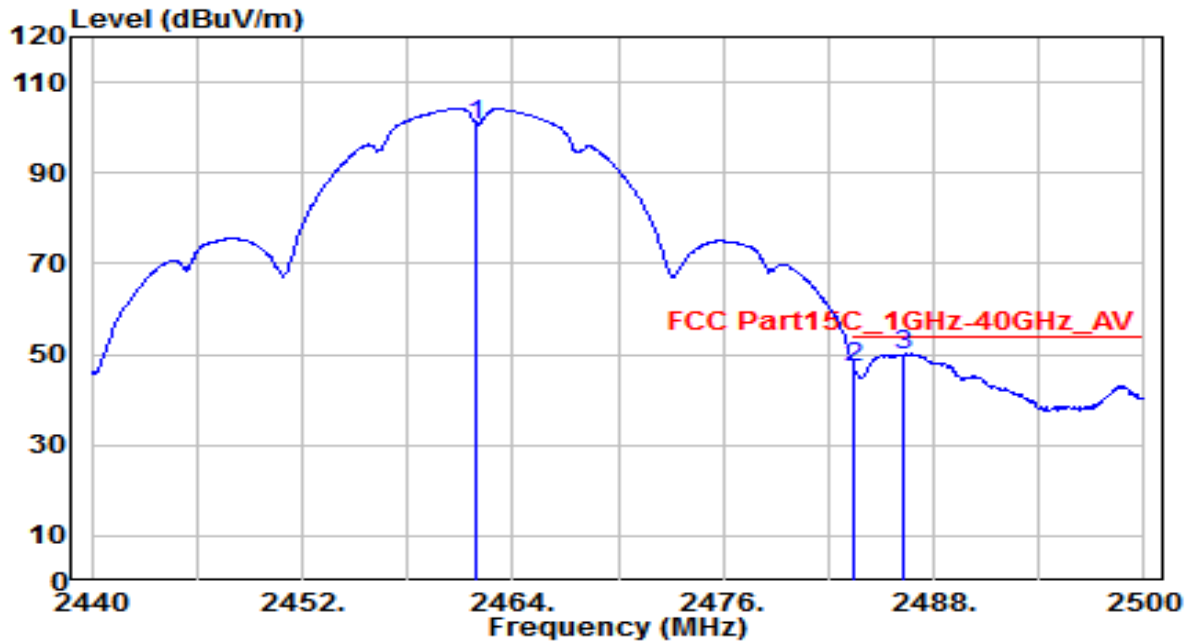


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	103.11	-2.39	100.71	N/A	N/A	160	85	Average
2	2483.500	49.31	-2.30	47.01	-6.99	54.00	160	85	Average
3	* 2486.320	52.16	-2.28	49.88	-4.12	54.00	160	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

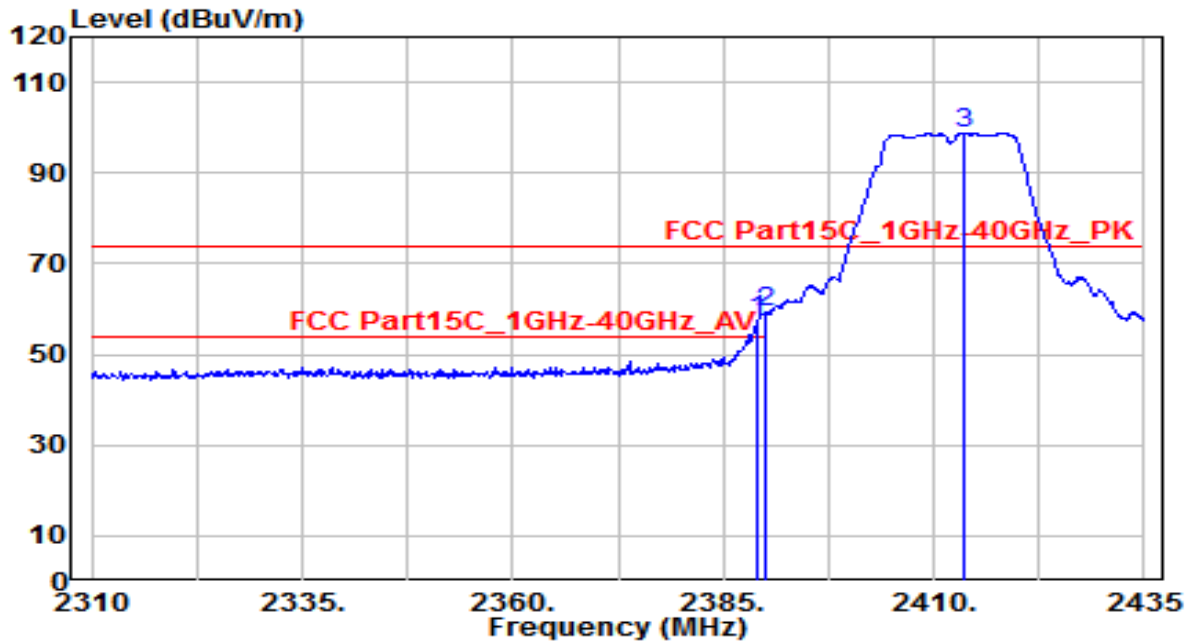


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	60.38	-2.73	57.64	-16.36	74.00	110	345	Peak
2	* 2390.000	61.82	-2.73	59.10	-14.90	74.00	110	345	Peak
3	2413.625	101.53	-2.62	98.91	N/A	N/A	110	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

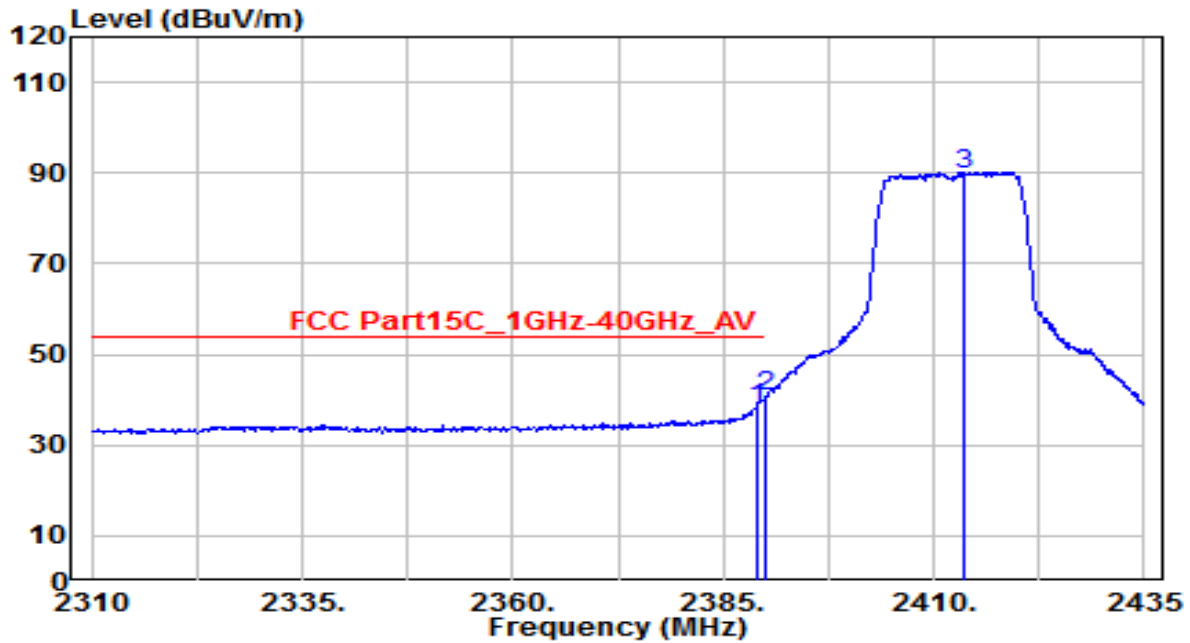


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	40.83	-2.73	38.10	-15.90	54.00	110	345	Average
2	* 2390.000	43.27	-2.73	40.55	-13.45	54.00	110	345	Average
3	2413.625	92.40	-2.62	89.78	N/A	N/A	110	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

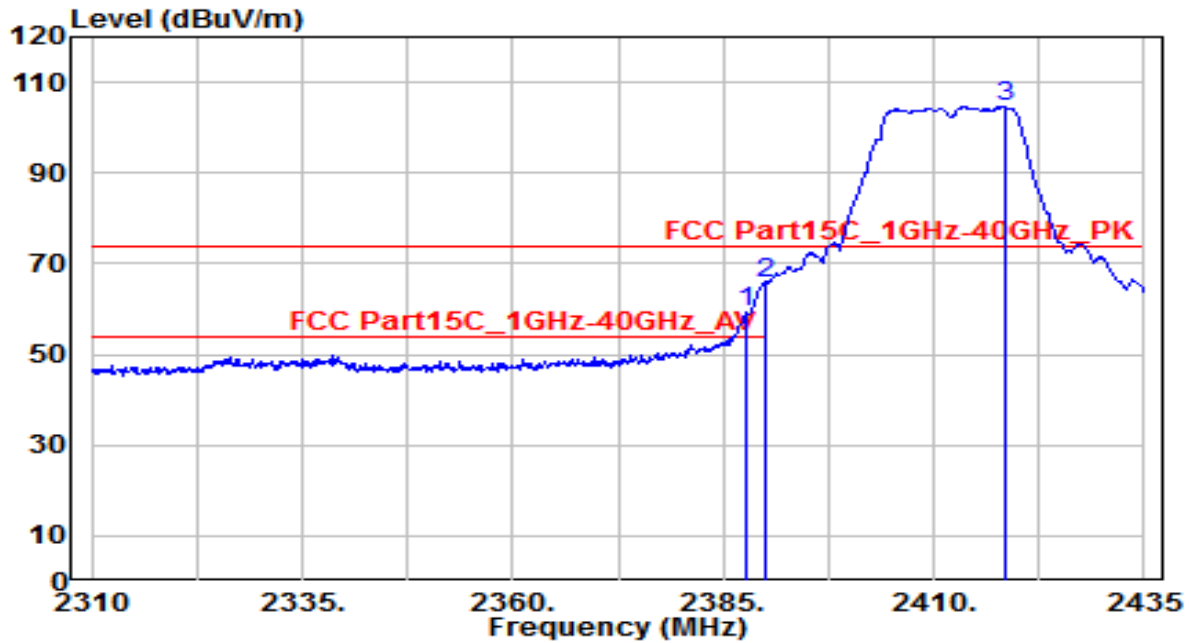


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.625	61.88	-2.74	59.15	-14.85	74.00	110	45	Peak
2	* 2390.000	68.60	-2.73	65.87	-8.13	74.00	110	45	Peak
3	2418.500	107.30	-2.59	104.71	N/A	N/A	110	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

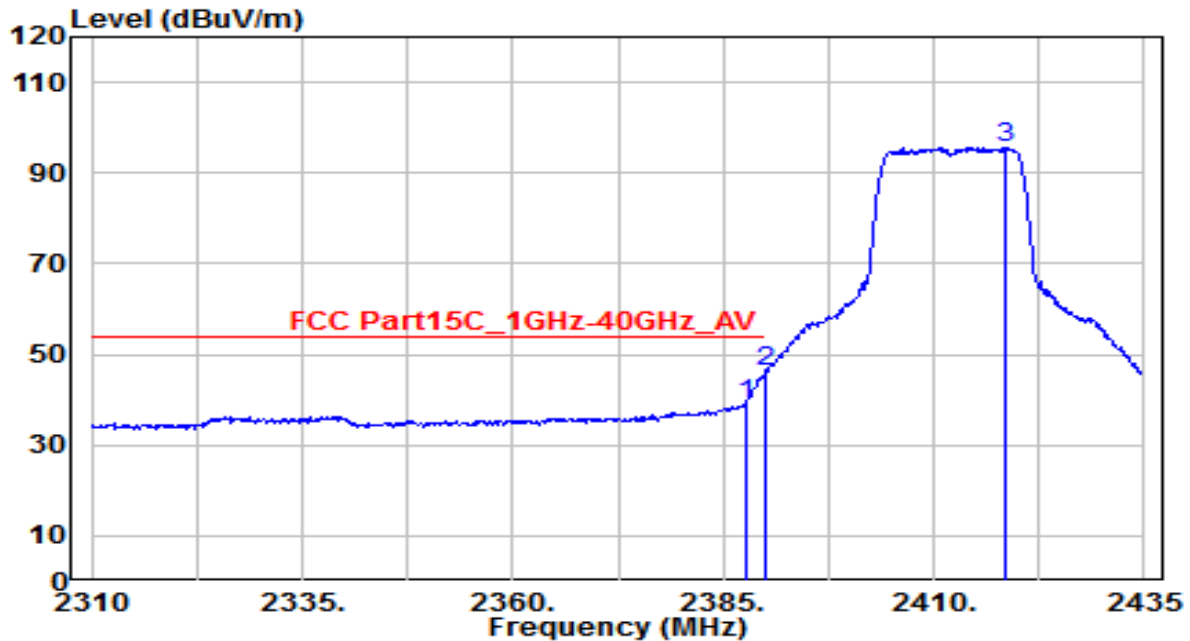


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.625	41.74	-2.74	39.00	-15.00	54.00	110	45	Average
2	* 2390.000	49.00	-2.73	46.27	-7.73	54.00	110	45	Average
3	2418.500	98.01	-2.59	95.41	N/A	N/A	110	45	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

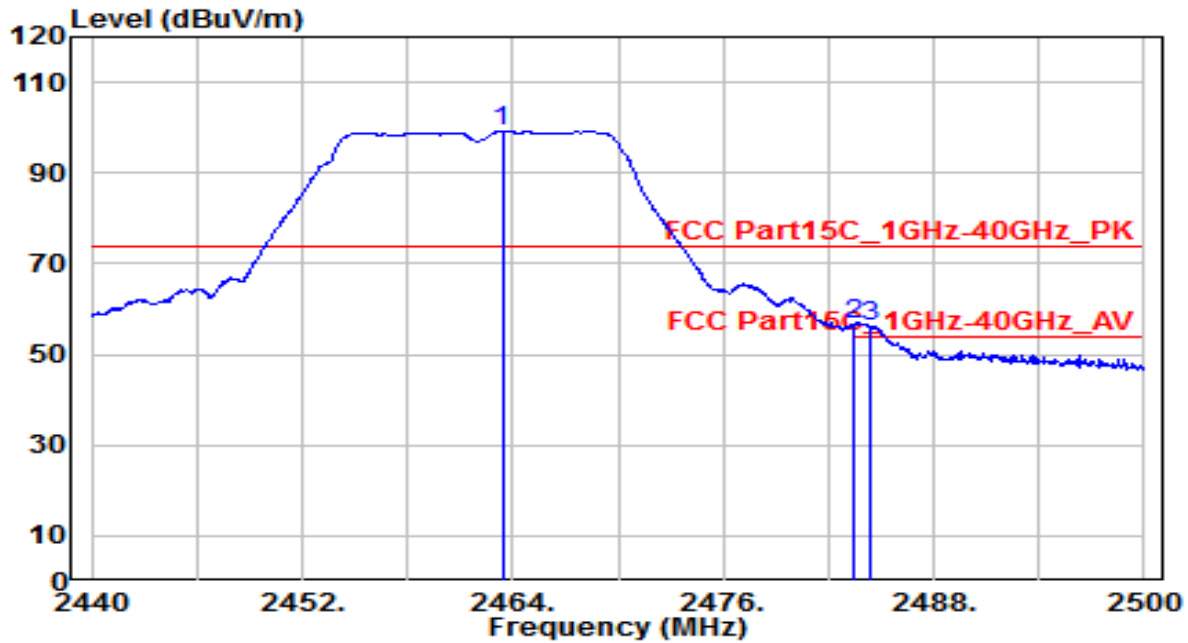


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.400	101.66	-2.39	99.27	N/A	N/A	110	340	Peak
2	* 2483.500	58.78	-2.30	56.49	-17.51	74.00	110	340	Peak
3	2484.340	58.66	-2.29	56.37	-17.63	74.00	110	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

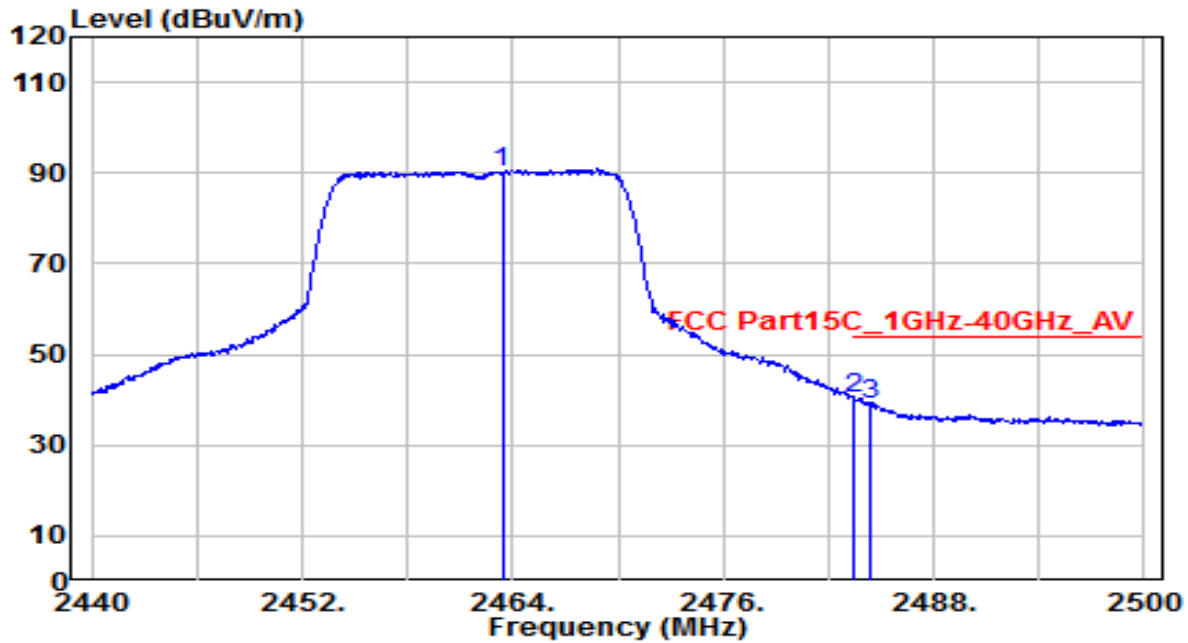


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.400	92.71	-2.39	90.32	N/A	N/A	110	340	Average
2	* 2483.500	42.80	-2.30	40.50	-13.50	54.00	110	340	Average
3	2484.340	41.20	-2.29	38.91	-15.09	54.00	110	340	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

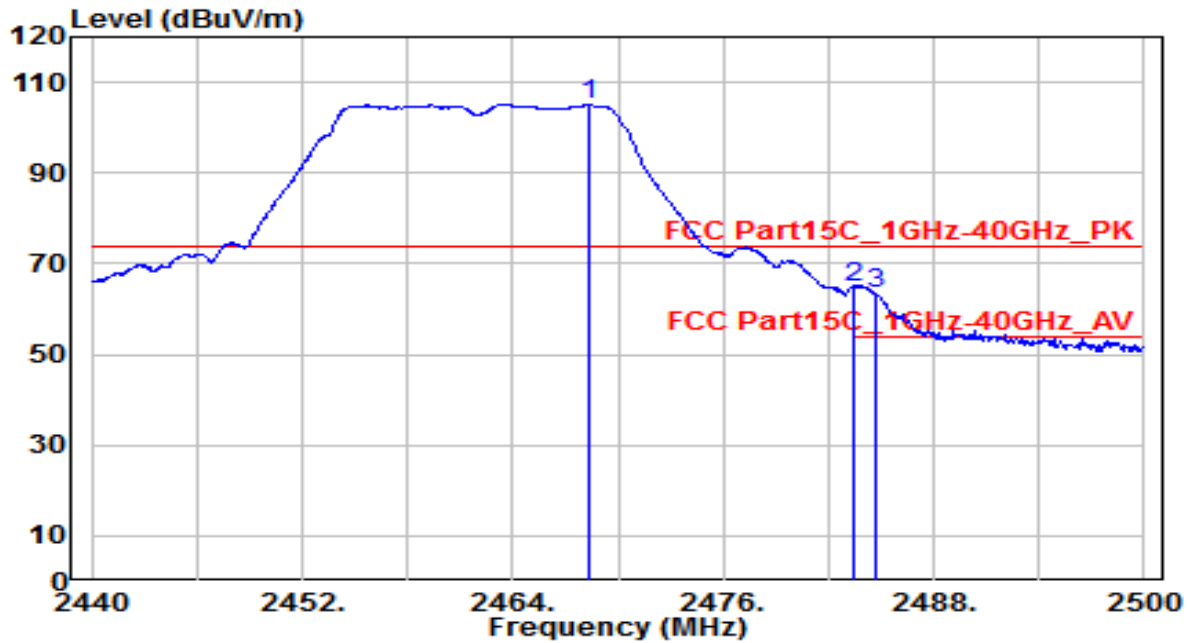


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.380	107.43	-2.37	105.07	N/A	N/A	130	85	Peak
2	* 2483.500	67.21	-2.30	64.92	-9.08	74.00	130	85	Peak
3	2484.700	65.87	-2.29	63.58	-10.42	74.00	130	85	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

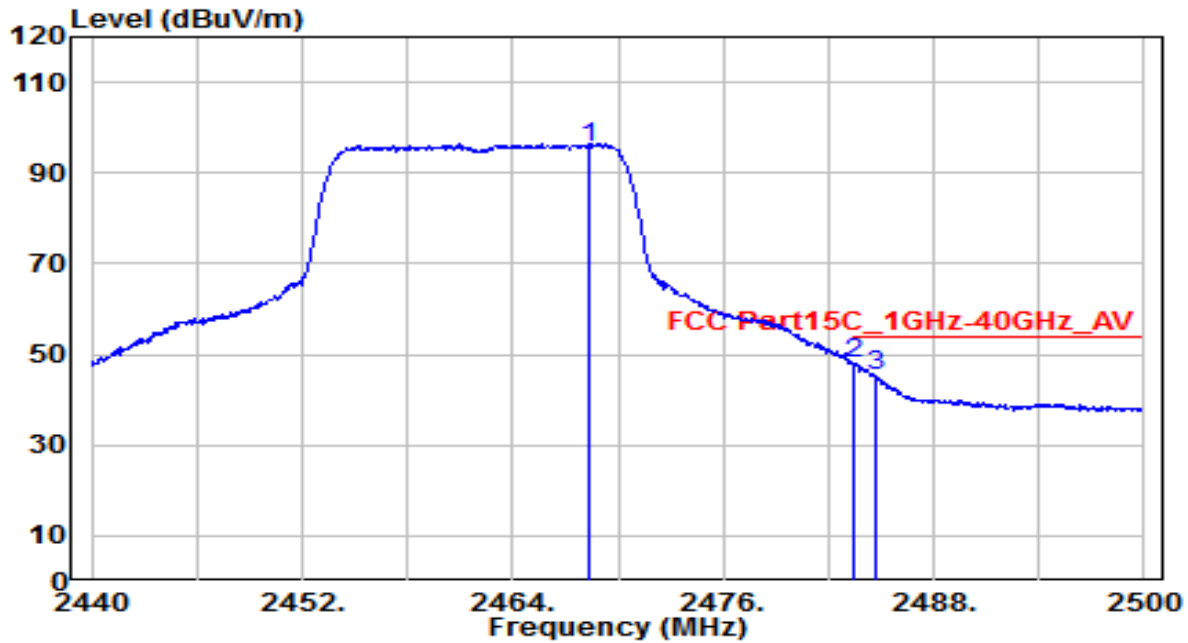


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.380	97.94	-2.37	95.58	N/A	N/A	130	85	Average
2	* 2483.500	50.10	-2.30	47.81	-6.19	54.00	130	85	Average
3	2484.700	47.48	-2.29	45.19	-8.81	54.00	130	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

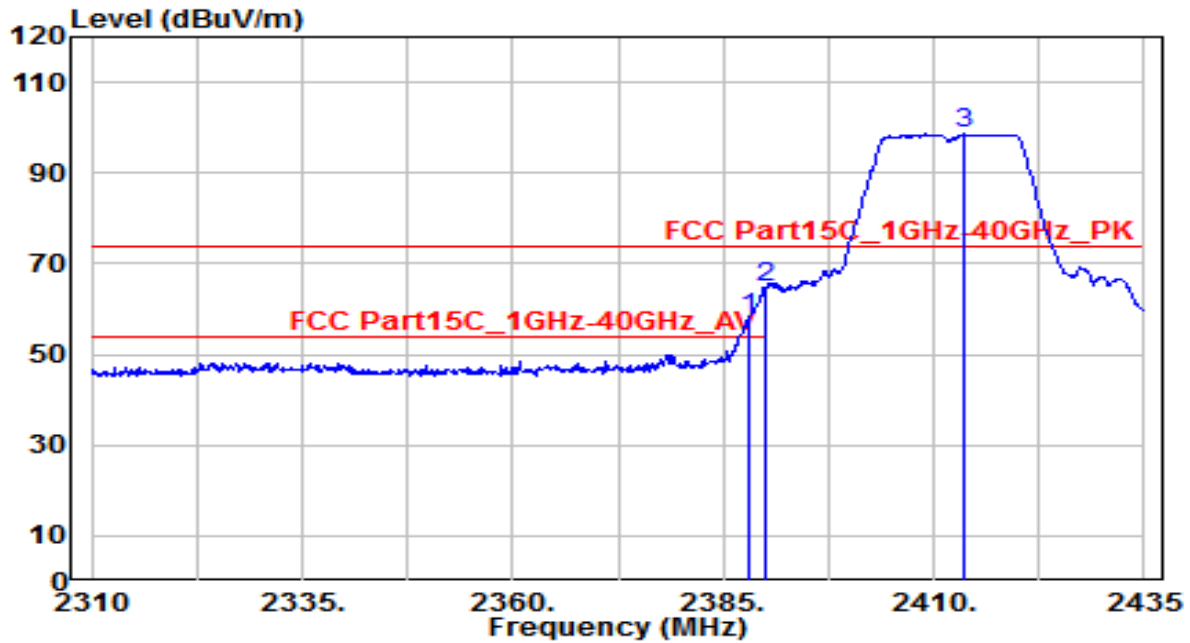


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	60.68	-2.74	57.95	-16.05	74.00	110	345	Peak
2	* 2390.000	67.31	-2.73	64.58	-9.42	74.00	110	345	Peak
3	2413.500	101.15	-2.62	98.53	N/A	N/A	110	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

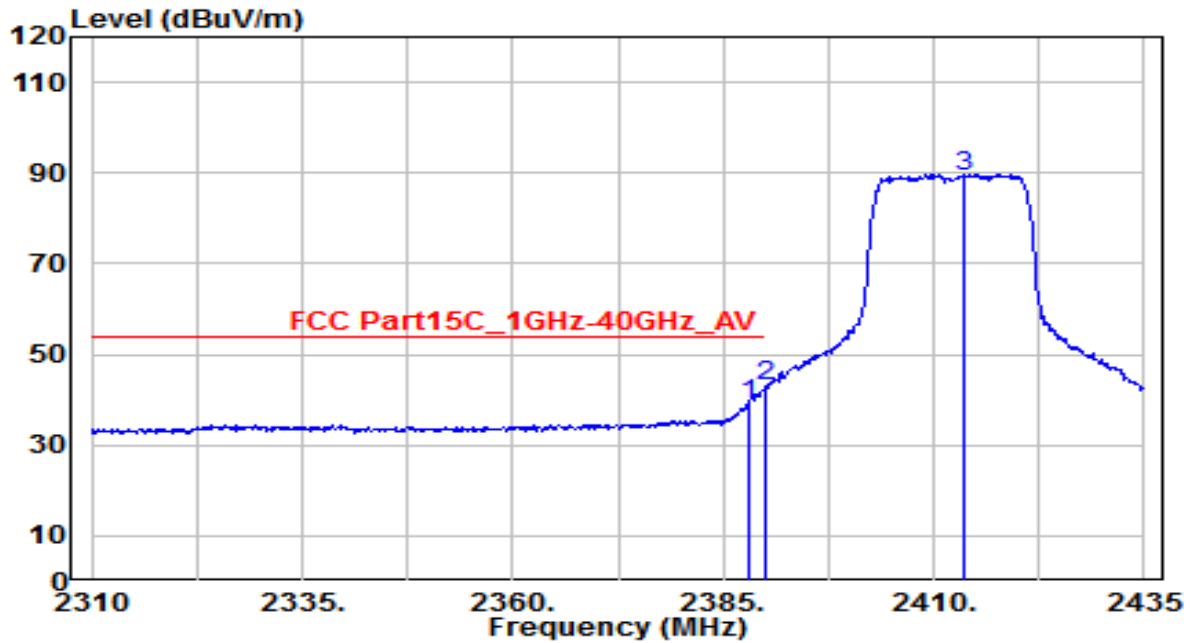


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	41.69	-2.74	38.95	-15.05	54.00	110	345	Average
2	* 2390.000	45.54	-2.73	42.81	-11.19	54.00	110	345	Average
3	2413.500	91.79	-2.62	89.18	N/A	N/A	110	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

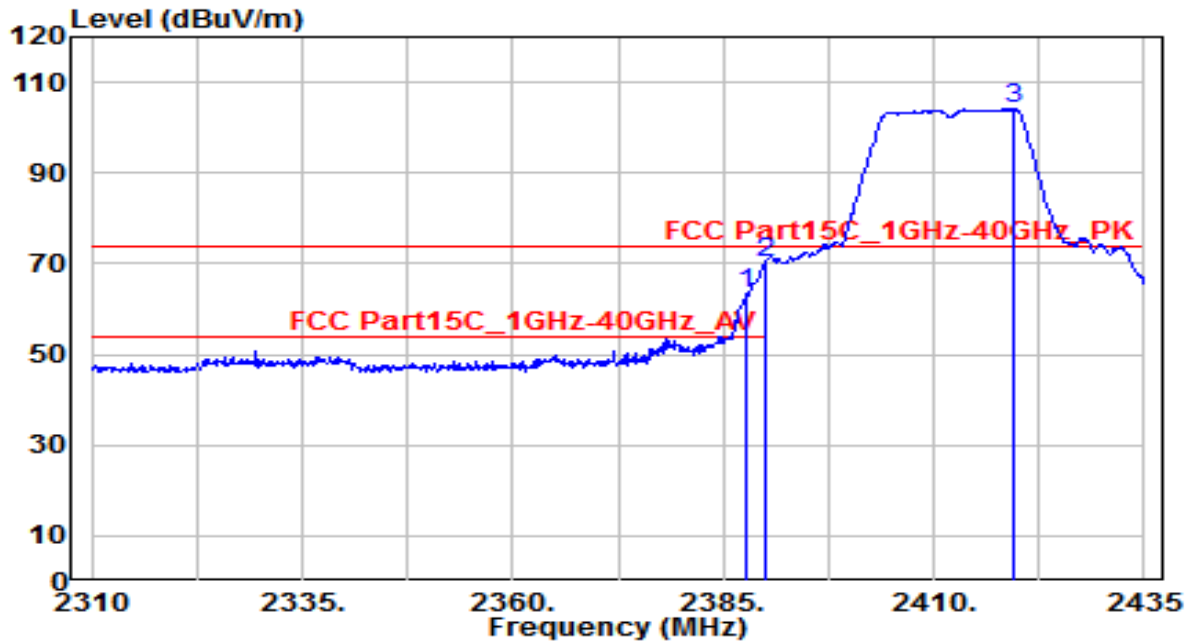


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	66.32	-2.74	63.59	-10.41	74.00	110	45	Peak
2	* 2390.000	73.13	-2.73	70.40	-3.60	74.00	110	45	Peak
3	2419.375	106.70	-2.59	104.11	N/A	N/A	110	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

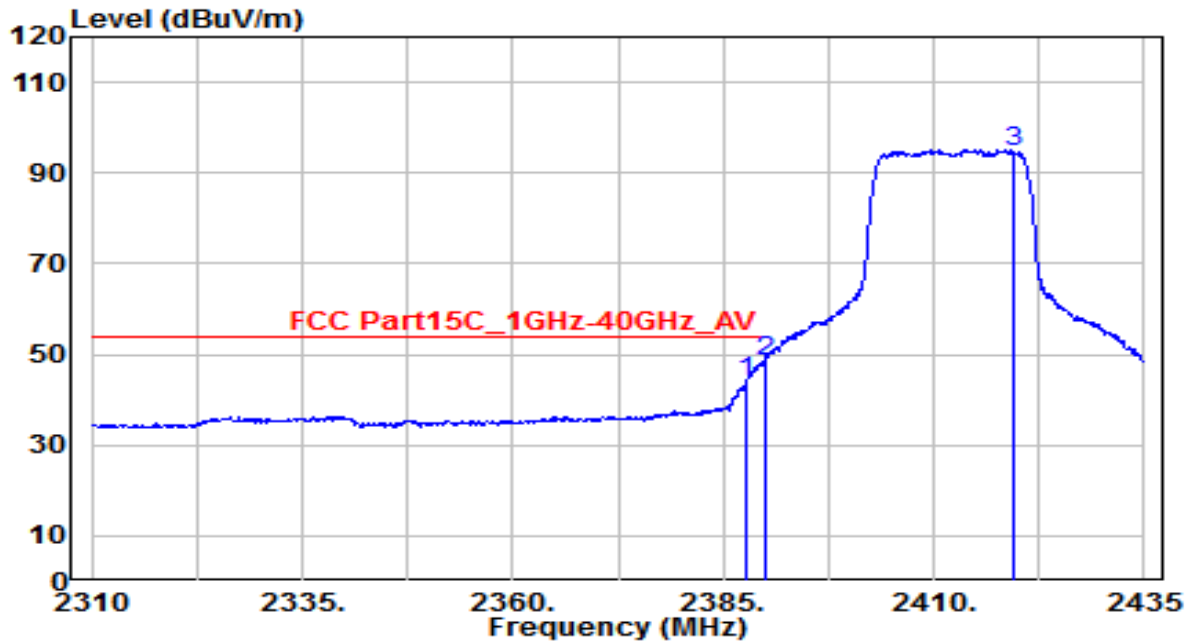


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	46.80	-2.74	44.07	-9.93	54.00	110	45	Average
2	* 2390.000	51.34	-2.73	48.62	-5.38	54.00	110	45	Average
3	2419.375	97.44	-2.59	94.85	N/A	N/A	110	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

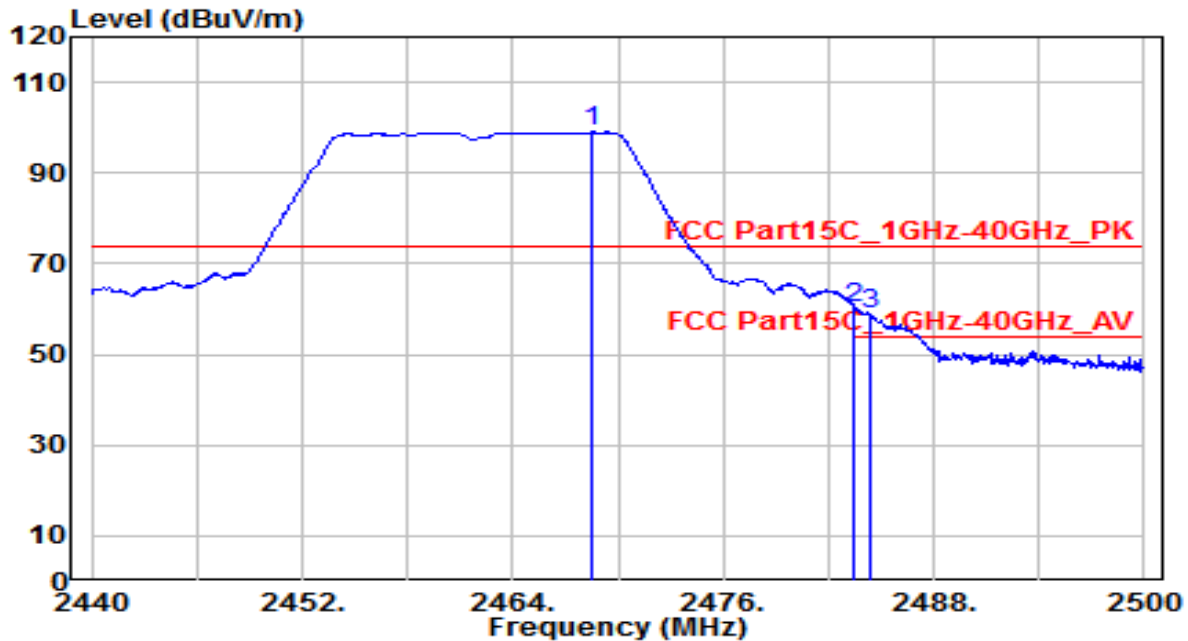


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.560	101.33	-2.36	98.96	N/A	N/A	110	340	Peak
2	* 2483.500	62.56	-2.30	60.26	-13.74	74.00	110	340	Peak
3	2484.460	61.16	-2.29	58.86	-15.14	74.00	110	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

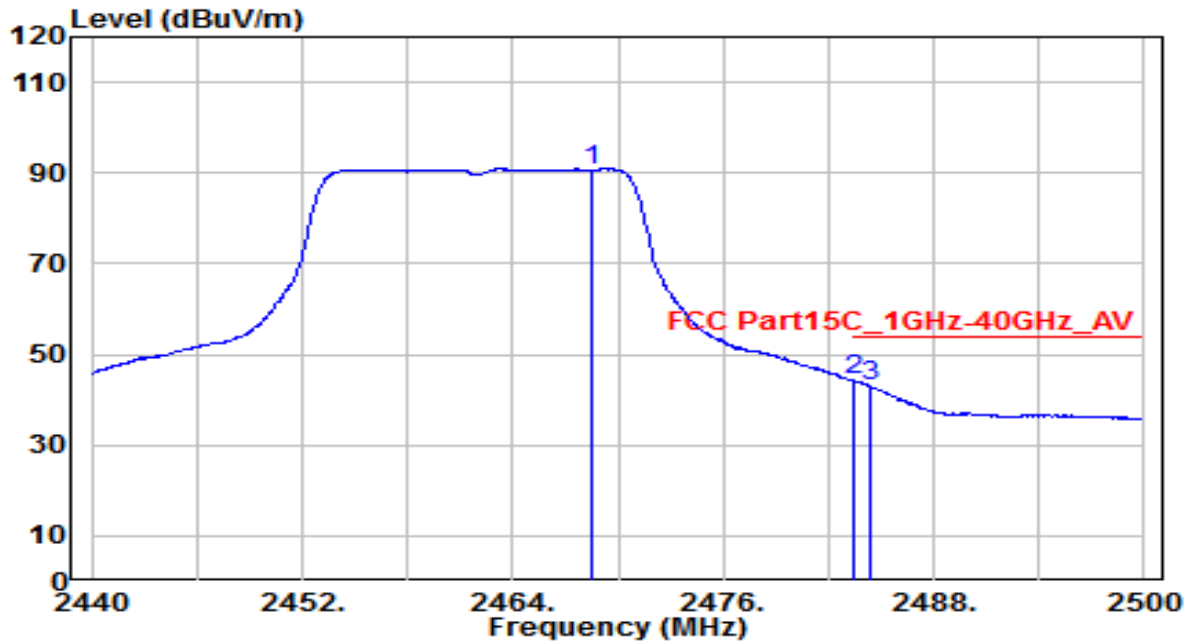


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2468.560	93.11	-2.36	90.74	N/A	N/A	110	340	Average
2	* 2483.500	46.59	-2.30	44.29	-9.71	54.00	110	340	Average
3	2484.460	45.11	-2.29	42.82	-11.18	54.00	110	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

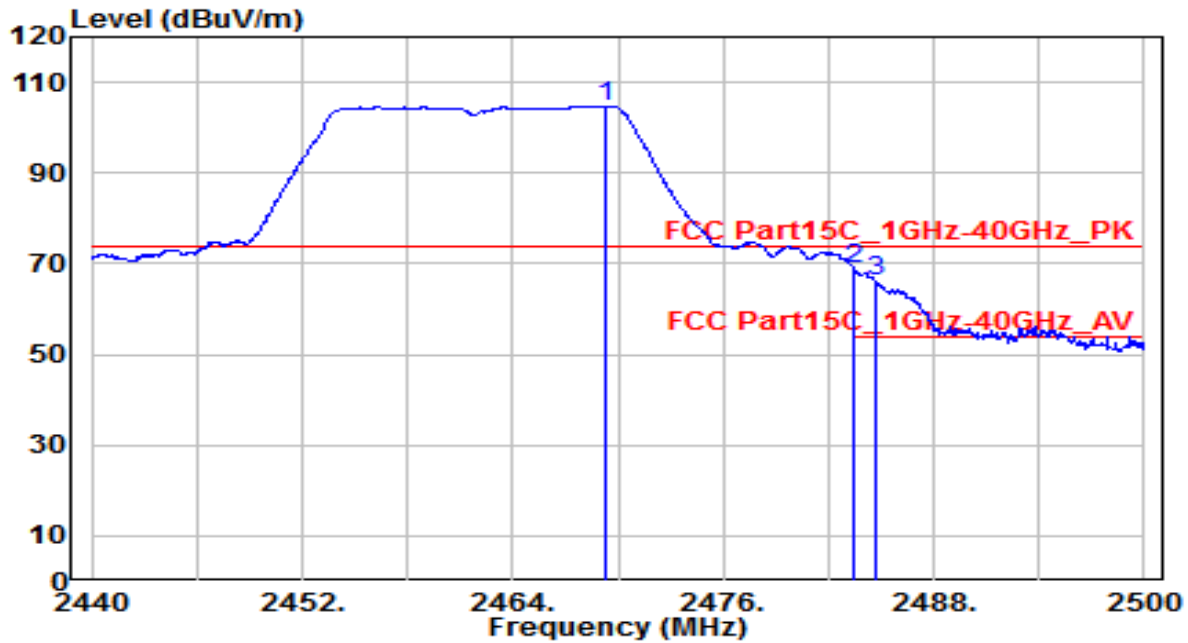


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.340	107.10	-2.36	104.74	N/A	N/A	130	85	Peak
2	* 2483.500	71.11	-2.30	68.82	-5.18	74.00	130	85	Peak
3	2484.640	68.49	-2.29	66.20	-7.80	74.00	130	85	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n20_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

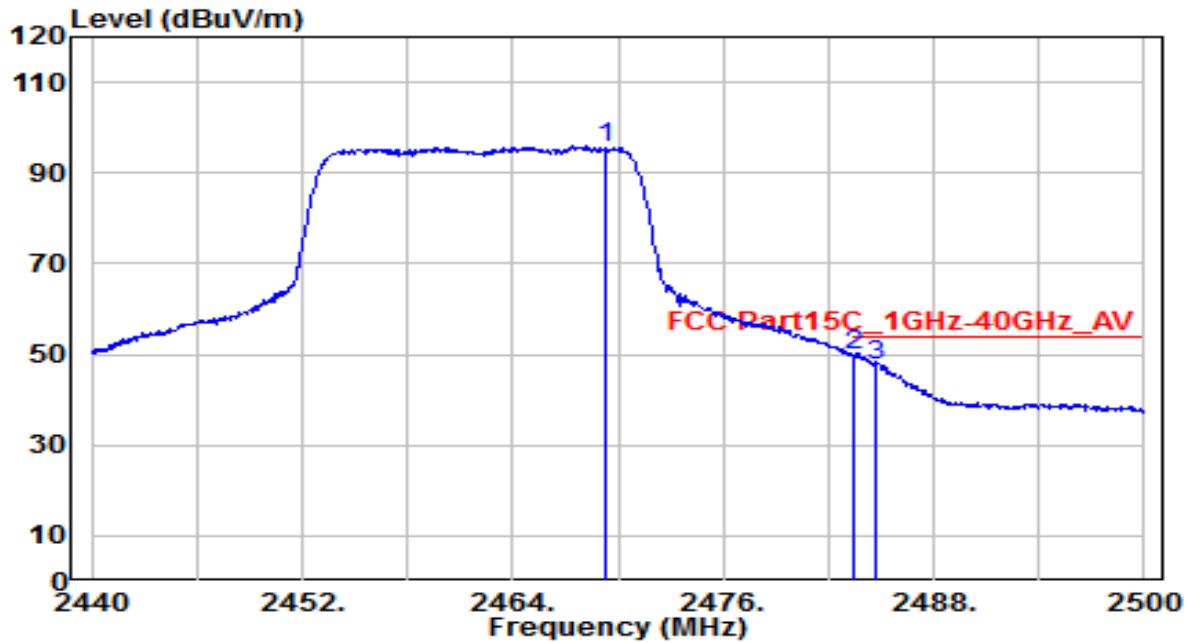


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2469.340	97.79	-2.36	95.43	N/A	N/A	130	85	Average
2	* 2483.500	52.07	-2.30	49.77	-4.23	54.00	130	85	Average
3	2484.640	50.06	-2.29	47.77	-6.23	54.00	130	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

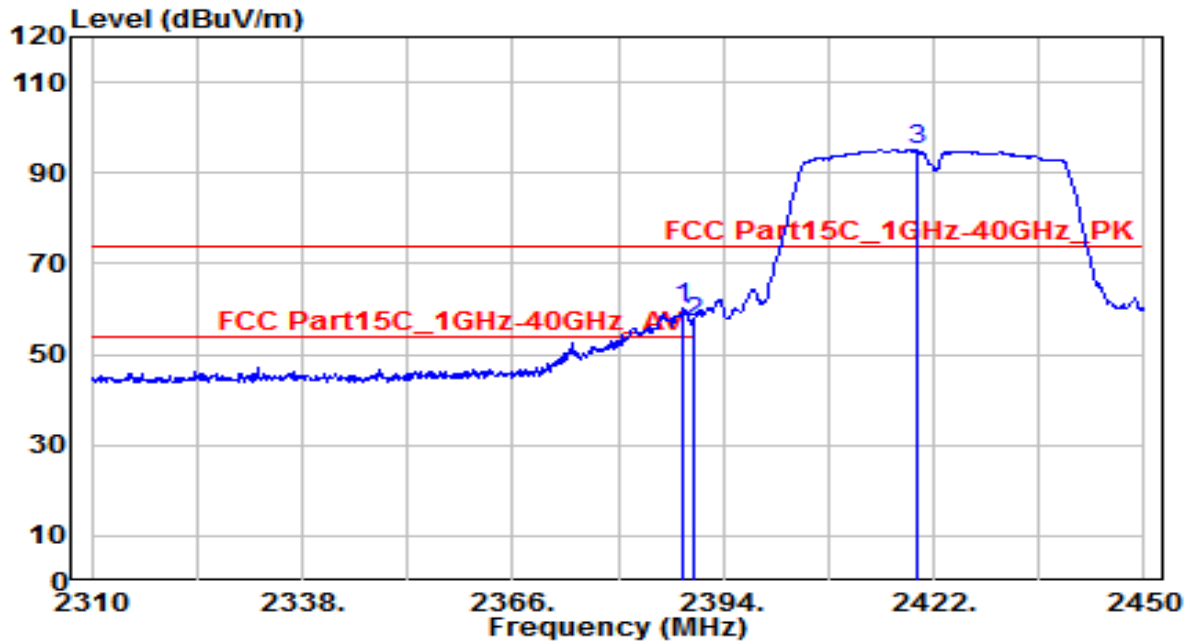


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.680	62.93	-2.73	60.20	-13.80	74.00	110	345	Peak
2		2389.940	59.60	-2.73	56.87	-17.13	74.00	110	345	Peak
3		2419.760	97.78	-2.59	95.19	N/A	N/A	110	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

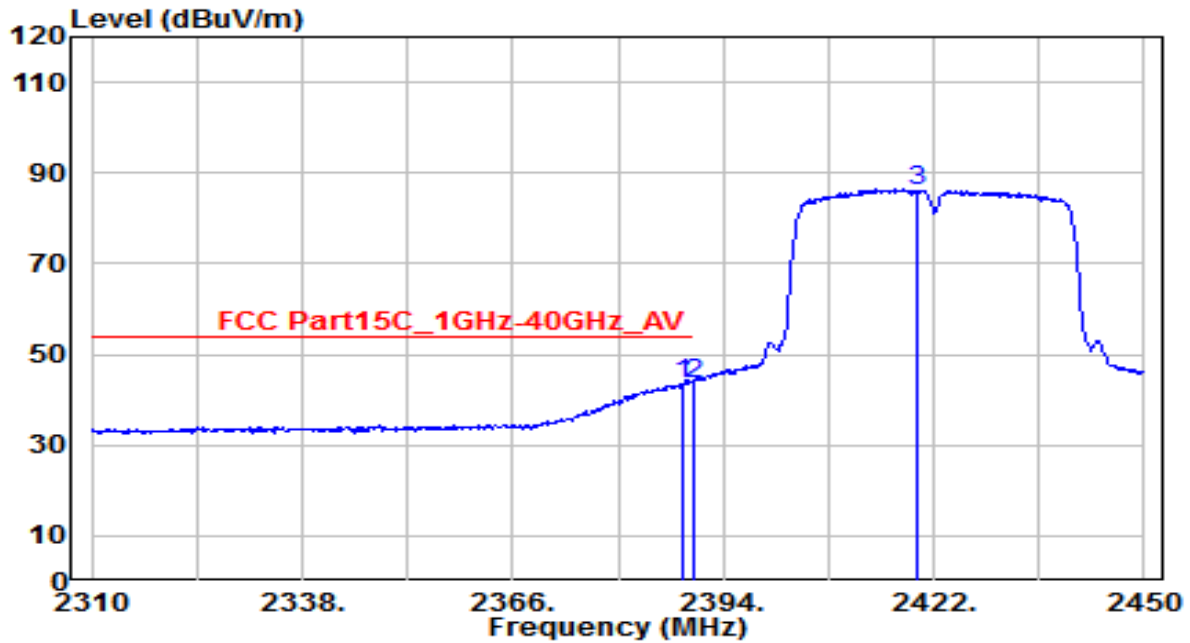


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.680	46.04	-2.73	43.31	-10.69	54.00	110	345	Average
2	* 2389.940	46.37	-2.73	43.64	-10.36	54.00	110	345	Average
3	2419.760	88.73	-2.59	86.14	N/A	N/A	110	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

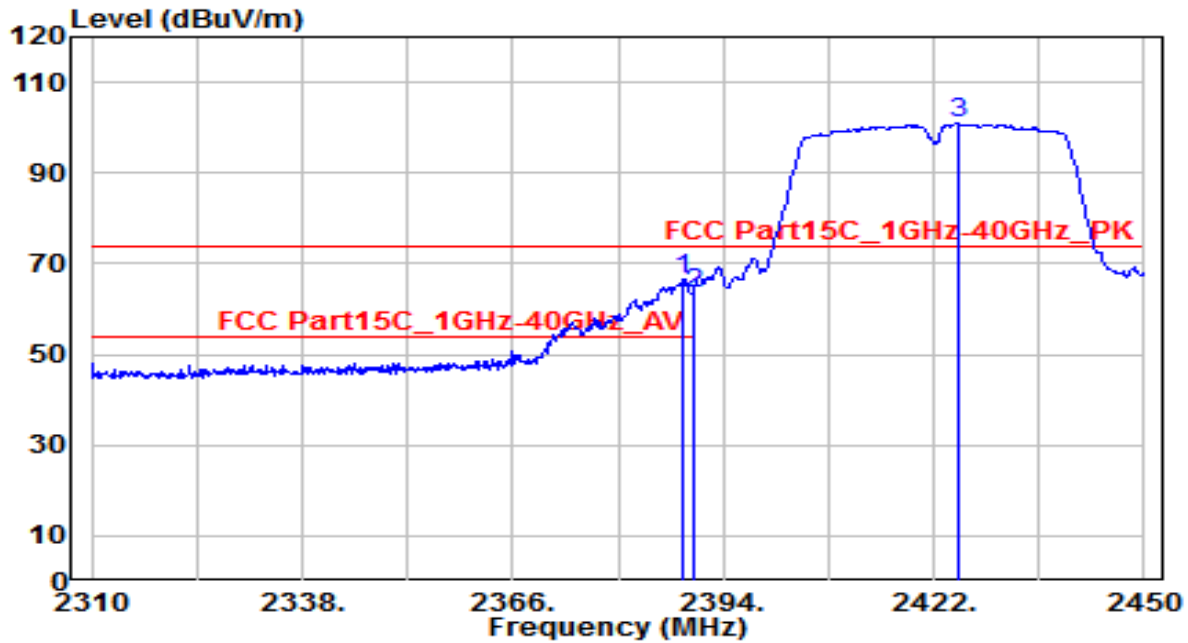


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.680	69.21	-2.73	66.48	-7.52	74.00	110	45	Peak
2	2390.000	66.12	-2.73	63.39	-10.61	74.00	110	45	Peak
3	2425.220	103.36	-2.56	100.80	N/A	N/A	110	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

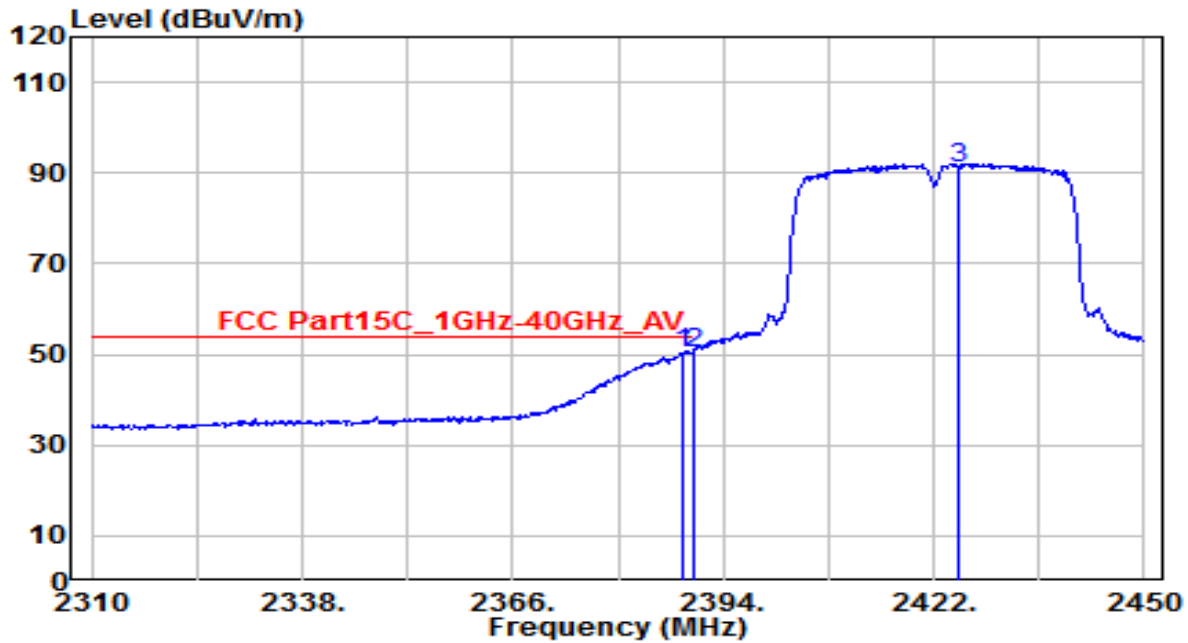


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.680	53.17	-2.73	50.43	-3.57	54.00	110	45	Average
2		2390.000	52.98	-2.73	50.25	-3.75	54.00	110	45	Average
3		2425.220	93.62	-2.56	91.06	N/A	N/A	110	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

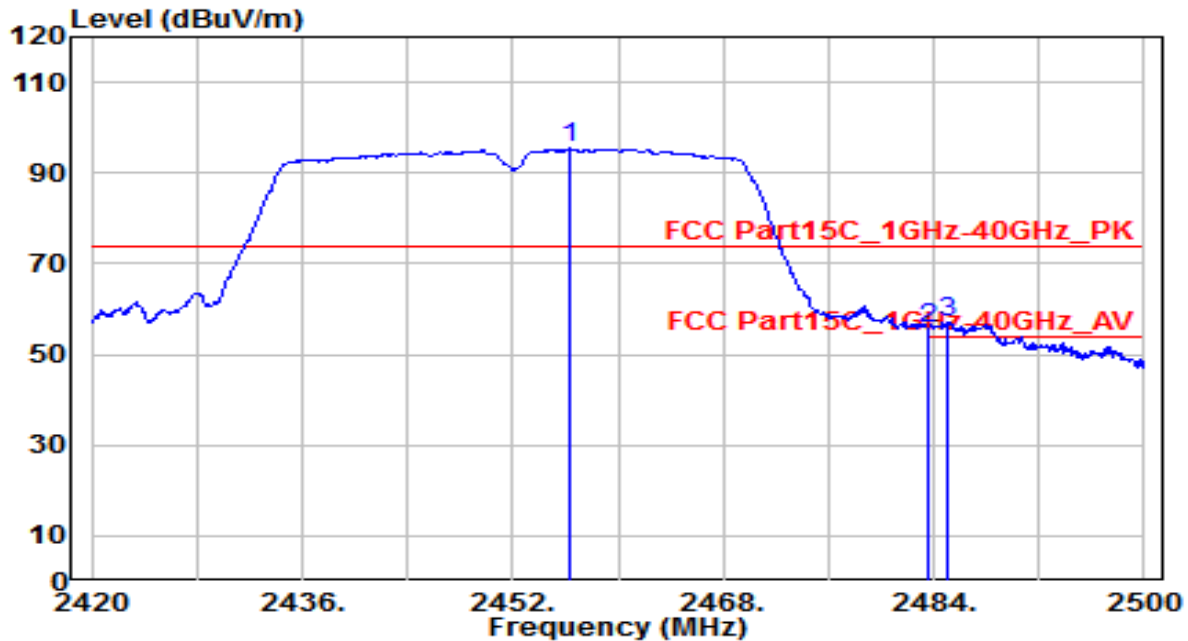


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.400	97.78	-2.42	95.36	N/A	N/A	110	340	Peak
2	2483.500	58.12	-2.30	55.82	-18.18	74.00	110	340	Peak
3	* 2485.040	59.45	-2.29	57.16	-16.84	74.00	110	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

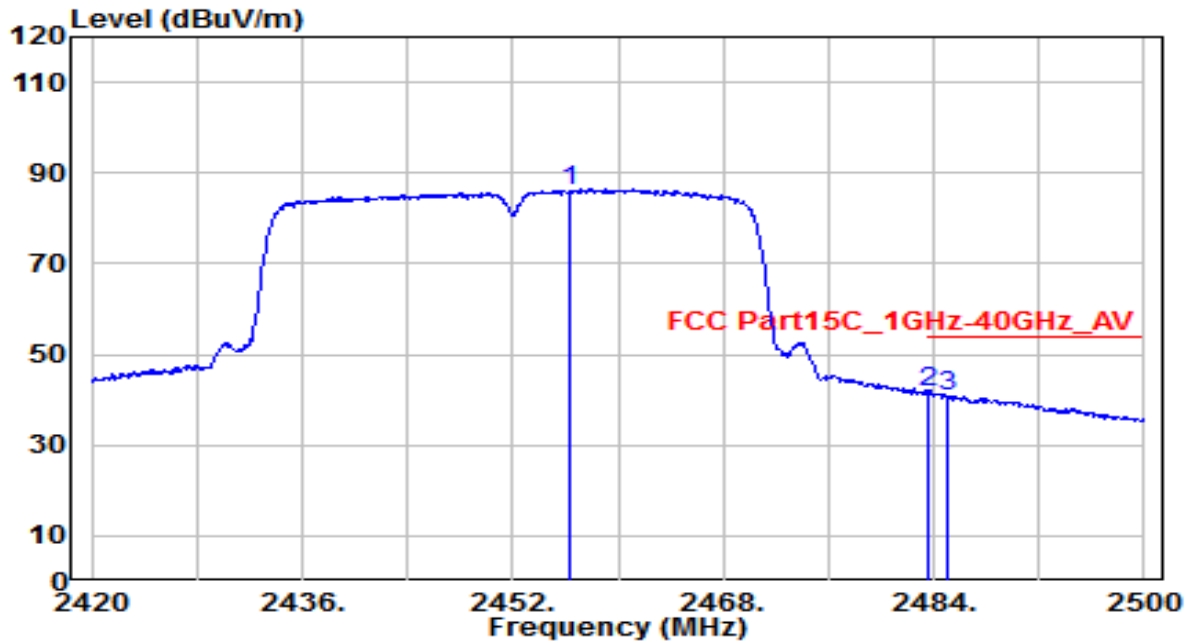


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.400	88.53	-2.42	86.11	N/A	N/A	110	340	Average
2	* 2483.500	43.88	-2.30	41.59	-12.41	54.00	110	340	Average
3	2485.040	43.15	-2.29	40.86	-13.14	54.00	110	340	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

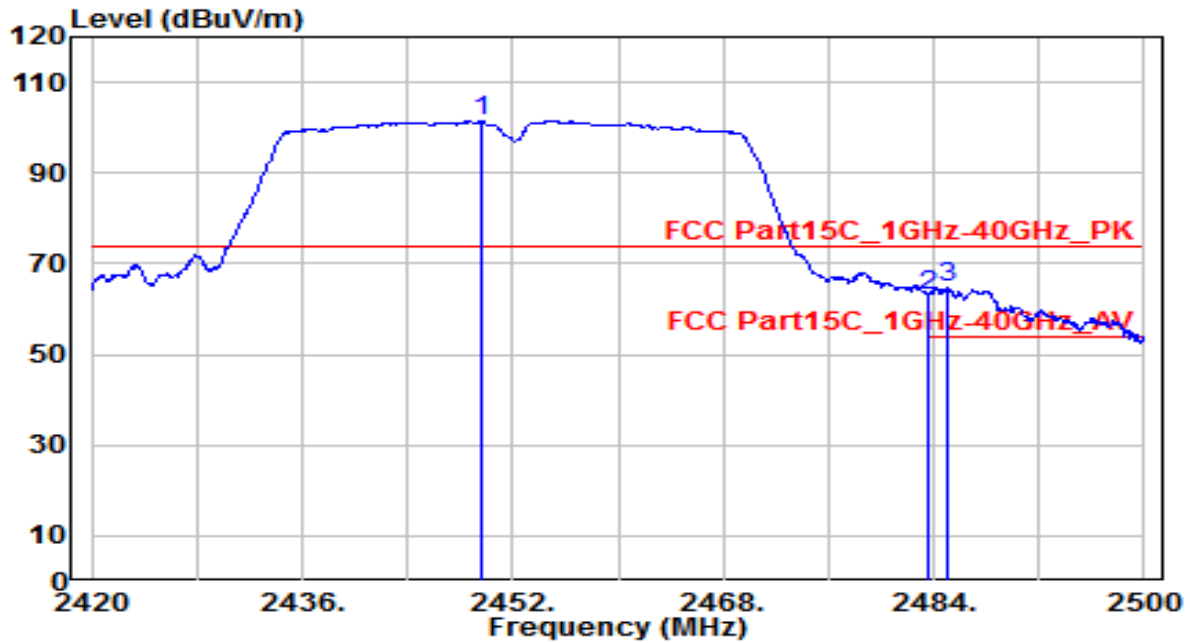


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.680	103.95	-2.45	101.50	N/A	N/A	130	85	Peak
2	2483.500	65.43	-2.30	63.13	-10.87	74.00	130	85	Peak
3	* 2485.120	67.14	-2.29	64.85	-9.15	74.00	130	85	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile POS Terminal	Date of Test	2019-11-05
Factor	BBHA 9120D	Temp. / Humidity	25°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n40_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

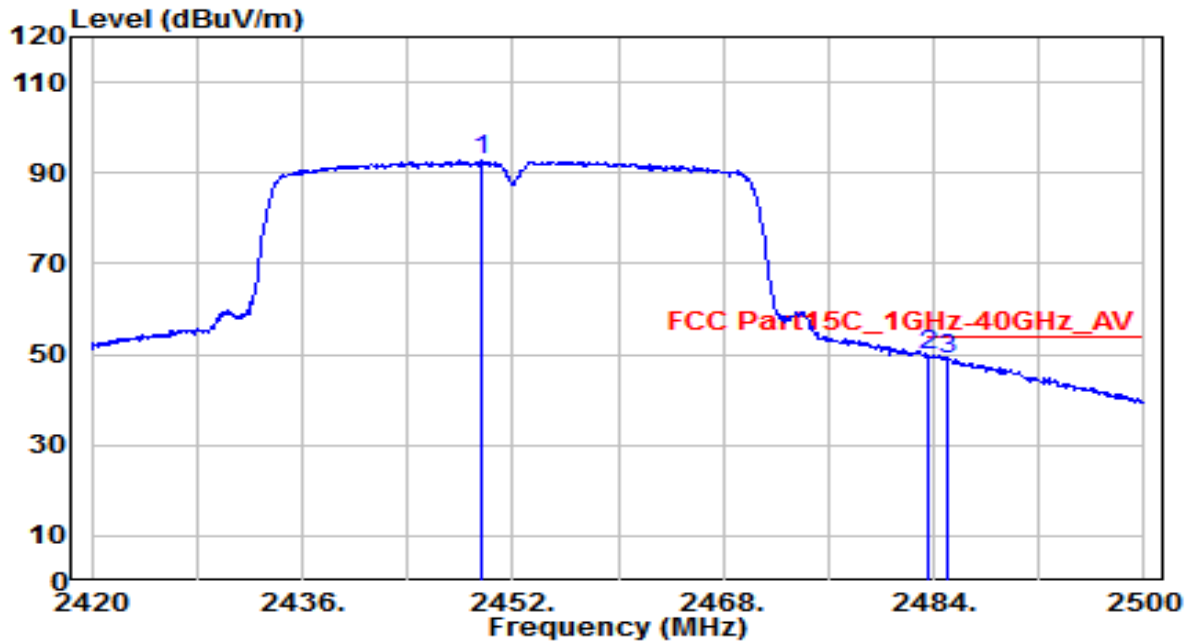

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.680	95.10	-2.45	92.65	N/A	N/A	130	85	Average
2	* 2483.500	52.02	-2.30	49.72	-4.28	54.00	130	85	Average
3	2485.120	51.38	-2.29	49.09	-4.91	54.00	130	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dBμV)	Average (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

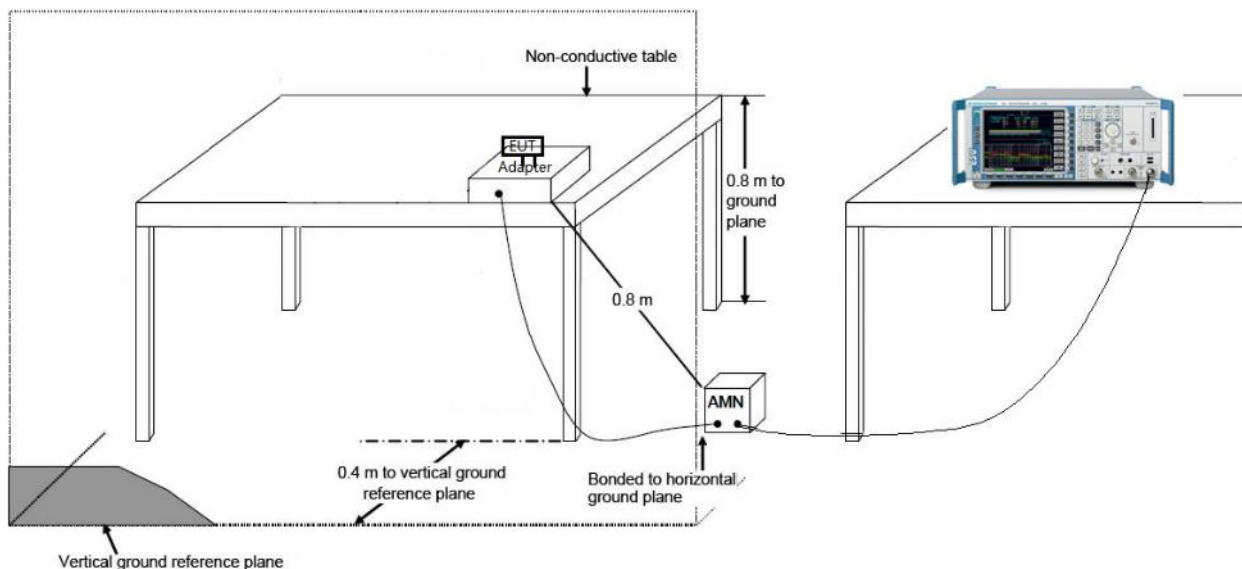

7.8.3. Test Result

EUT	PIXIE-WR1WD1	Date of Test	2019-11-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Fran
Test Mode	802.11n20_TX_CH 6 (Adapter: BA048-090500MAX)	Test Voltage	AC 120V/60Hz

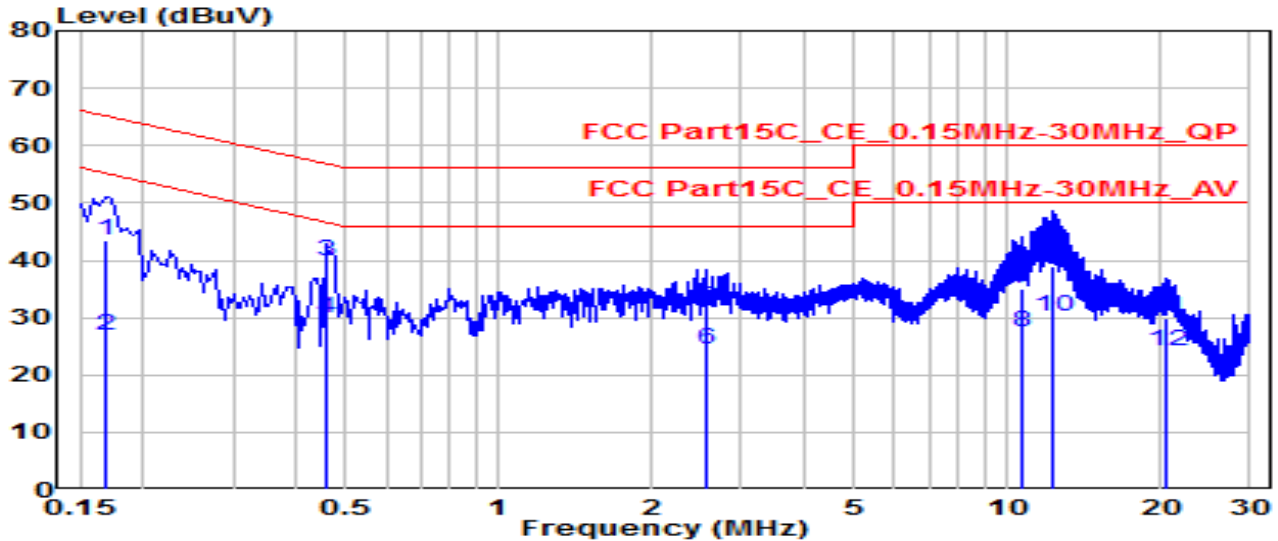


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.168	33.92	9.58	43.50	-21.56	65.06	QP
2	0.168	17.36	9.58	26.94	-28.12	55.06	Average
3	* 0.456	30.27	9.60	39.87	-16.90	56.77	QP
4	* 0.456	20.30	9.60	29.90	-16.86	46.77	Average
5	2.553	22.12	9.70	31.82	-24.18	56.00	QP
6	2.553	14.78	9.70	24.48	-21.52	46.00	Average
7	10.701	25.28	9.88	35.16	-24.84	60.00	QP
8	10.701	17.60	9.88	27.48	-22.52	50.00	Average
9	12.213	29.01	9.90	38.91	-21.09	60.00	QP
10	12.213	20.36	9.90	30.26	-19.74	50.00	Average
11	20.411	20.05	9.98	30.03	-29.97	60.00	QP
12	20.411	14.12	9.98	24.10	-25.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	PIXIE-WR1WD1	Date of Test	2019-11-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Fran
Test Mode	802.11n20_TX_CH 6 (Adapter: BA048-090500MAX)	Test Voltage	AC 120V/60Hz

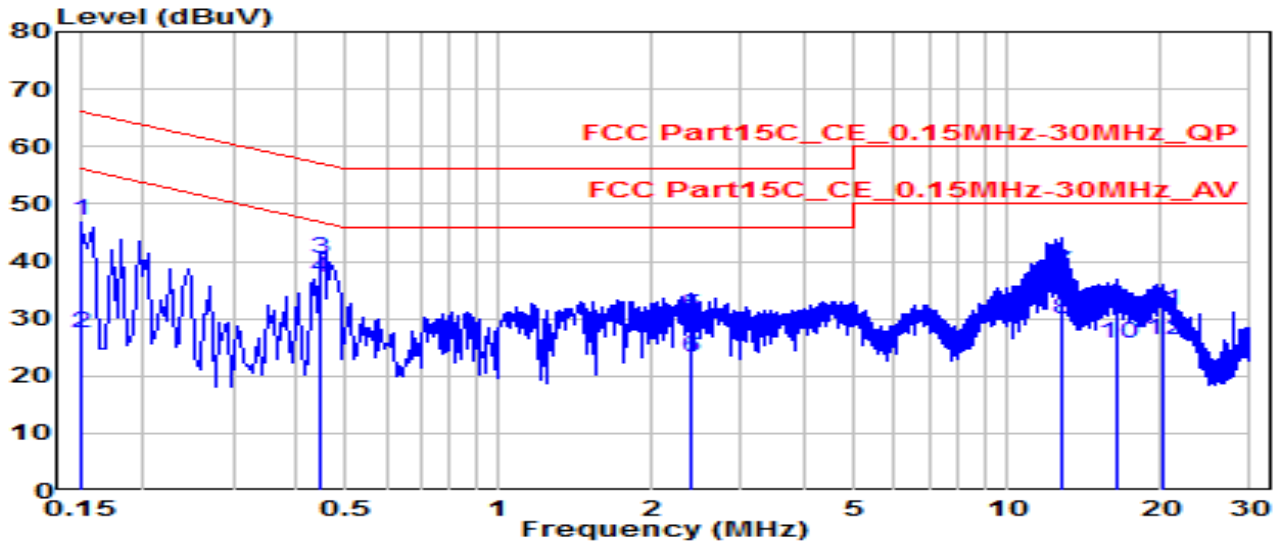


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.150	37.38	9.62	47.00	-19.00	66.00	QP
2	0.150	17.98	9.62	27.60	-28.40	56.00	Average
3	* 0.447	30.93	9.61	40.54	-16.39	56.93	QP
4	* 0.447	27.67	9.61	37.28	-9.65	46.93	Average
5	2.386	20.72	9.69	30.41	-25.59	56.00	QP
6	2.386	13.60	9.69	23.29	-22.71	46.00	Average
7	12.731	28.24	9.93	38.17	-21.83	60.00	QP
8	12.731	20.07	9.93	30.01	-19.99	50.00	Average
9	16.461	21.75	9.99	31.74	-28.26	60.00	QP
10	16.461	15.64	9.99	25.64	-24.36	50.00	Average
11	20.123	21.24	10.05	31.29	-28.71	60.00	QP
12	20.123	16.07	10.05	26.12	-23.88	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile POS Terminal	Date of Test	2019-11-08
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25°C /59%
Polarity	Line1	Site / Test Engineer	SR2 / Eric
Test Mode	802.11n20_TX_CH 6 (Adapter: PA150-090T1A500)	Test Voltage	AC 120V/60Hz

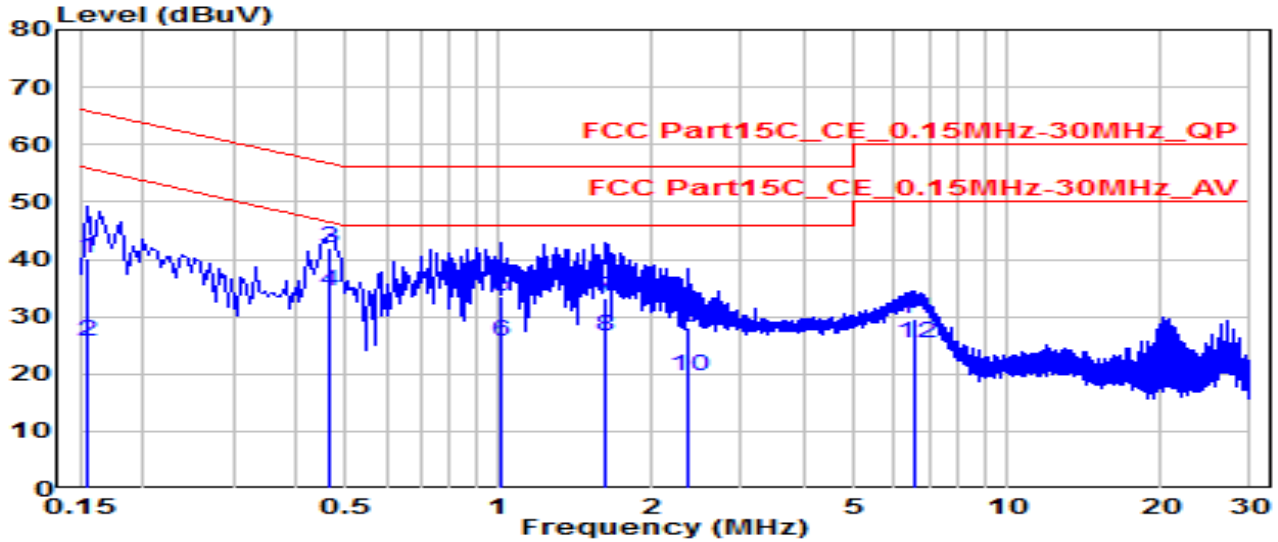


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.154	30.54	9.60	40.15	-25.61	65.75	QP
2	0.154	15.99	9.60	25.59	-30.17	55.75	Average
3	* 0.465	32.44	9.60	42.04	-14.56	56.60	QP
4	* 0.465	24.81	9.60	34.41	-12.19	46.60	Average
5	1.005	23.72	9.66	33.38	-22.62	56.00	QP
6	1.005	16.03	9.66	25.69	-20.31	46.00	Average
7	1.612	23.61	9.68	33.29	-22.71	56.00	QP
8	1.612	16.93	9.68	26.61	-19.39	46.00	Average
9	2.341	18.49	9.69	28.18	-27.82	56.00	QP
10	2.341	9.95	9.69	19.65	-26.35	46.00	Average
11	6.580	19.86	9.78	29.65	-30.35	60.00	QP
12	6.580	15.69	9.78	25.47	-24.53	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile POS Terminal	Date of Test	2019-11-08
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25°C /59%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric
Test Mode	802.11n20_TX_CH 6 (Adapter: PA150-090T1A500)	Test Voltage	AC 120V/60Hz

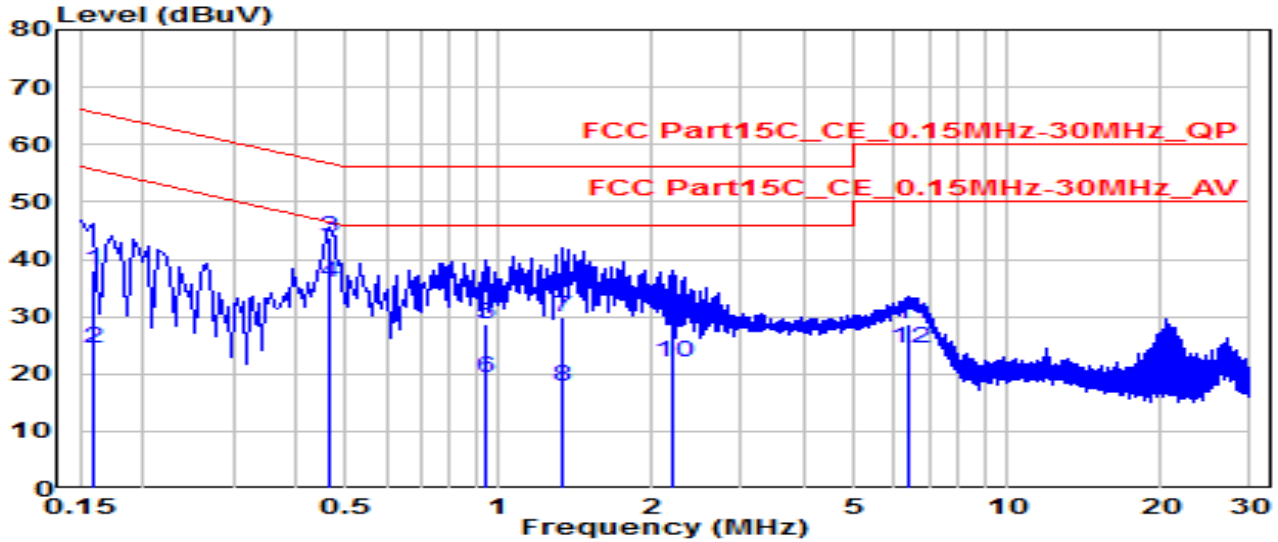

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.159	28.51	9.61	38.13	-27.39	65.52	QP
2	0.159	14.71	9.61	24.32	-31.20	55.52	Average
3	* 0.465	34.18	9.61	43.79	-12.81	56.60	QP
4	* 0.465	26.34	9.61	35.95	-10.65	46.60	Average
5	0.942	19.03	9.65	28.68	-27.32	56.00	QP
6	0.942	9.55	9.65	19.21	-26.79	46.00	Average
7	1.333	20.37	9.67	30.04	-25.96	56.00	QP
8	1.333	8.18	9.67	17.85	-28.15	46.00	Average
9	2.188	18.89	9.69	28.58	-27.42	56.00	QP
10	2.188	12.24	9.69	21.92	-24.08	46.00	Average
11	6.422	18.90	9.78	28.67	-31.33	60.00	QP
12	6.422	14.64	9.78	24.41	-25.59	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile POS Terminal** is in compliance with Part 15C of the FCC Rules.

_____ The End _____