

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 1 von 16
Page 1 of 16

Auftraggeber:
Client: Coligen Corp.
No. 1 bldg. ,Guantang Ind. Park,
Jingding Zhuhai, Guangdong Province,
P.R. China

Gegenstand der Prüfung: Controller Part of Wireless Parking Sensor System
Test item:

Bezeichnung: FWO48R41 **FCC ID:** TFKFWO48R41
Identification: FCC ID

Wareneingangs-Nr.: 173017482 **Eingangsdatum:** 22.09.2005
Receipt No.: Date of receipt:

Prüfört: Shenzhen Bureau of Quality Technical
Testing location: Supervision Shenzhen Academy of
Metrology and Quality Inspection
Bldg, of Shenzhen Academy of Metrology
and Quality Inspection, Longzhu Road,
Nanshan, Shenzhen,
P.R. China
Listed test laboratory
according to FCC rules
section 2.948 for
measuring devices under
Parts 15

Prüfgrundlage: ANSI C63.4: 2001
Test specification:
Radiated Emissions with limits described at FCC Part 18 Subpart C section
18.305
Radiated Emissions with limits described at FCC Part 15 Subpart C section
15.209 and 15.249

Prüfergebnis: Der vorstehend beschriebene Prüfgegenstand wurde geprüft und
Test Result: entspricht oben genannter Prüfgrundlage.
The a. m. test item passed the test specification.

Prüflaboratorium: TÜV Rheinland (Guangdong) Ltd.
Testing Laboratory:

geprüft/tested by: **kontrolliert/ reviewed by:**

21. Dec. 2005	Ricky Liu	Ricky Liu	21. Dec. 2005	Dave Xie	Dave Xie
Datum	Name	Unterschrift	Datum	Name	Unterschrift
Date	Name	Signature	Date	Name	Signature

Sonstiges/ Other Aspects:

Abkürzungen: ok / P = entspricht Prüfgrundlage
fail / F = entspricht nicht Prüfgrundlage
n.a. / N = nicht anwendbar

Abbreviations: ok / P = passed
fail / F = failed
n.a. / N = not applicable

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 2 von 16
Page 2 of 16

TEST SUMMARY

5.1 RADIATED EMISSION FOR FCC PART 18 PER SECTION 18.305(A)

RESULT: *ok*

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A)

RESULT: *ok*

5.3 FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A)

RESULT: *ok*

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	6
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS	8
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	10
5.1	RADIATED EMISSION FOR FCC PART 18 PER SECTION 18.305(A).....	10
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A).....	11
5.3	FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A).....	12
6	PHOTOGRAPHS OF THE TEST SET-UP	13
7	LIST OF TABLES.....	16
8	LIST OF PHOTOGRAPHS.....	16

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 4 von 16
Page 4 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 5 von 16
Page 5 of 16

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
BilogAntenna	Chase	CBL6112B	2591	29.01.2006
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2006
Antenna	Schwarzbeck	VUBA9117	SB3174	29.01.2007
3m Semi-anechoic chamber	Albatross Projects	9X6X6	----	29.01.2006
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	29.01.2006
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2006
Communications Test Set	HP	HP8920A	3438A05187	29.01.2006
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	29.01.2006
AMN	Rohde & Schwarz	ESH3-Z5	100002	29.01.2006

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 6 von 16
Page 6 of 16

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 General Product Information

Brief description of the test sample:

This product is the controller part of a parking sensor system, which is designed with ultrasonic technology to assist the driver to parking or reversing the vehicle. It would be operated with the display part of the parking sensor system.

It is a 900MHz FSK half-duplex transceiver with 3 channels available. Distance is detected by the ultrasonic sensor and sent to the display part via RF link. The antenna type is integrated.

Prüfbericht - Nr.: 16005529 001

Test Report No.:

Seite 7 von 16

Page 7 of 16

3.1 Product Function and Intended Use

For details, refer to technical document and the user manual.

3.2 Ratings and System Details

RF Frequency range	:	915.11MHz, 915.85 MHz, 916.58 MHz
Modulation Type	:	2FSK
Ultrasonic Frequency range:		40KHz±2KHz
Number of channels	:	3 channels
Type of antenna	:	Integral antenna
FCC ID	:	TFKFWO48R41
Power supply	:	DC power of vehicle
Ports	:	12/24V DC input
RF Power level		<50 mV/m
Protection Class	:	III

Refer to the technical document for further information

3.3 Independent Operation Modes

The basic operation modes are:

Transceiving, Ultrasonic sensor working

For further information refer to User Manual

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 8 von 16
Page 8 of 16

3.4 Submitted Documents

Block Diagram
Circuit Diagram
Components List
PCB layout
FCC label
User Manual
Photo document

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with 12V DC lead-acid battery.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 9 von 16
Page 9 of 16

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Radiated Emission


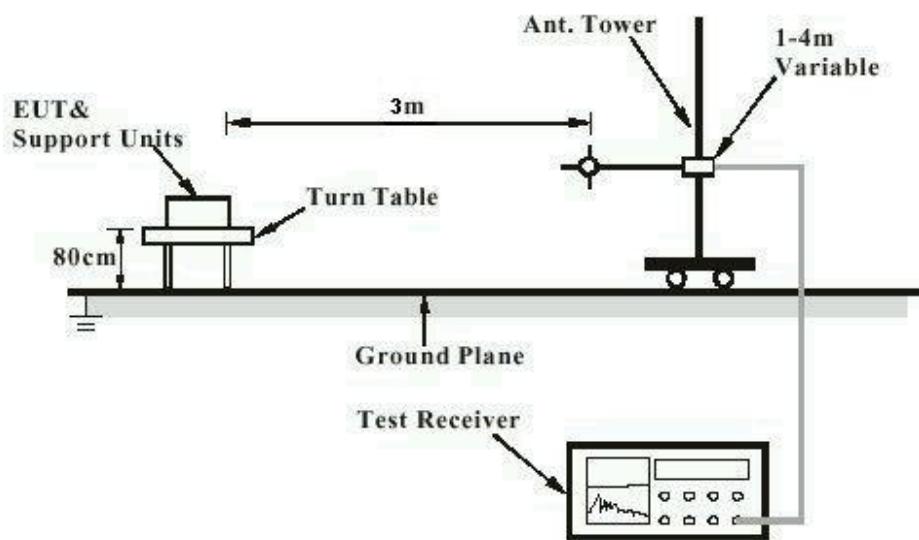


Diagram 2 of Equipment Configuration for Testing Radiated Emission

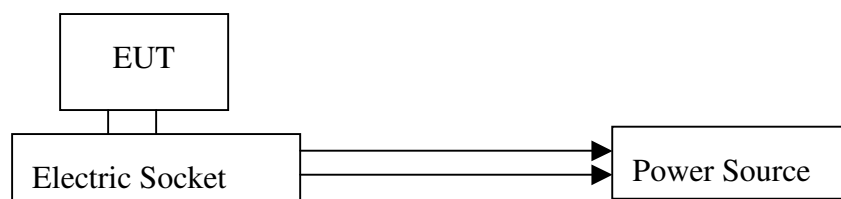

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 10 von 16
Page 10 of 16

5 Test Results EMISSION

5.1 Radiated Emission for FCC Part 18 Per Section 18.305(a)

RESULT:

ok

Date of testing : 18.11.2005
Test specification : FCC Part 18 Per Section 18.305(b)
Limits : FCC Part 18 Per Section 18.305(b)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Ultrasonic sensor working
Temperature : 25°C
Humidity : 68%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 2: Radiated Emission below 30MHz

Frequency [MHz]	QP [dB μ V/m]	AV [dB μ V/m]	Polarity	Limit [dB μ V/m]
---	*			

*) The disturbance measured is far below the limit and therefore, no final measurement was performed.

Refer to Clause 5.2 for measurement of Radiated Emission above 30MHz.

Prüfbericht - Nr.: 16005529 001

Test Report No.:

Seite 11 von 16

Page 11 of 16

5.2 Radiated Emission for FCC Part 15 Per Section 15.209(a)

RESULT:

ok

Date of testing : 27.09.2005
Test specification : FCC Part 15 Per Section 15.209(a)
Limits : FCC Part 15 Per Section 15.209(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transceiving at channel 1 with ultrasonic sensor working
Temperature : 24°C
Humidity : 65%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 3: Radiated Emission above 30MHz

Frequency [MHz]	QP [dB μ V/m]	AV [dB μ V/m]	Polarity	Limit [dB μ V/m]
37.270	22.7	---	V	40

Prüfbericht - Nr.: 16005529 001

Test Report No.:

Seite 12 von 16

Page 12 of 16

5.3 Fundamental and harmonics Radiated Emission for FCC Part 15 Per Section 15.249(a)

RESULT:

ok

Date of testing : 27.09.2005
Test specification : FCC Part 15 Per Section 15.249(a)
Limits : FCC Part 15 Per Section 15.249(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transceiving at channel 1
Temperature : 24°C
Humidity : 65%

Test conditions		Fundamental Frequency		2nd Harmonics		3rd Harmonics	
		Channel 1 (915MHz)		Channel 1 (1830MHz)		Channel 1 (2732MHz)	
T _{nom} (22°C)	Unit	(dBµV/m)	(mV/m)	(dBµV/m)	(µV/m)	(dBµV/m)	(µV/m)
	Horizontal	88.1	25.4	39.1	98.8	24.7	17.2
	Vertical	78.2	8.1	39.1	98.8	27.5	23.7
limit		93.979	50	53.979	500	53.979	500

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 13 von 16
Page 13 of 16

6 Photographs of the Test Set-Up


Photograph 1: Set-up for Radiation Measurement Below 30MHz



Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 14 von 16
Page 14 of 16


Photograph 2: Set-up for Radiation Measurement Below 1GHz

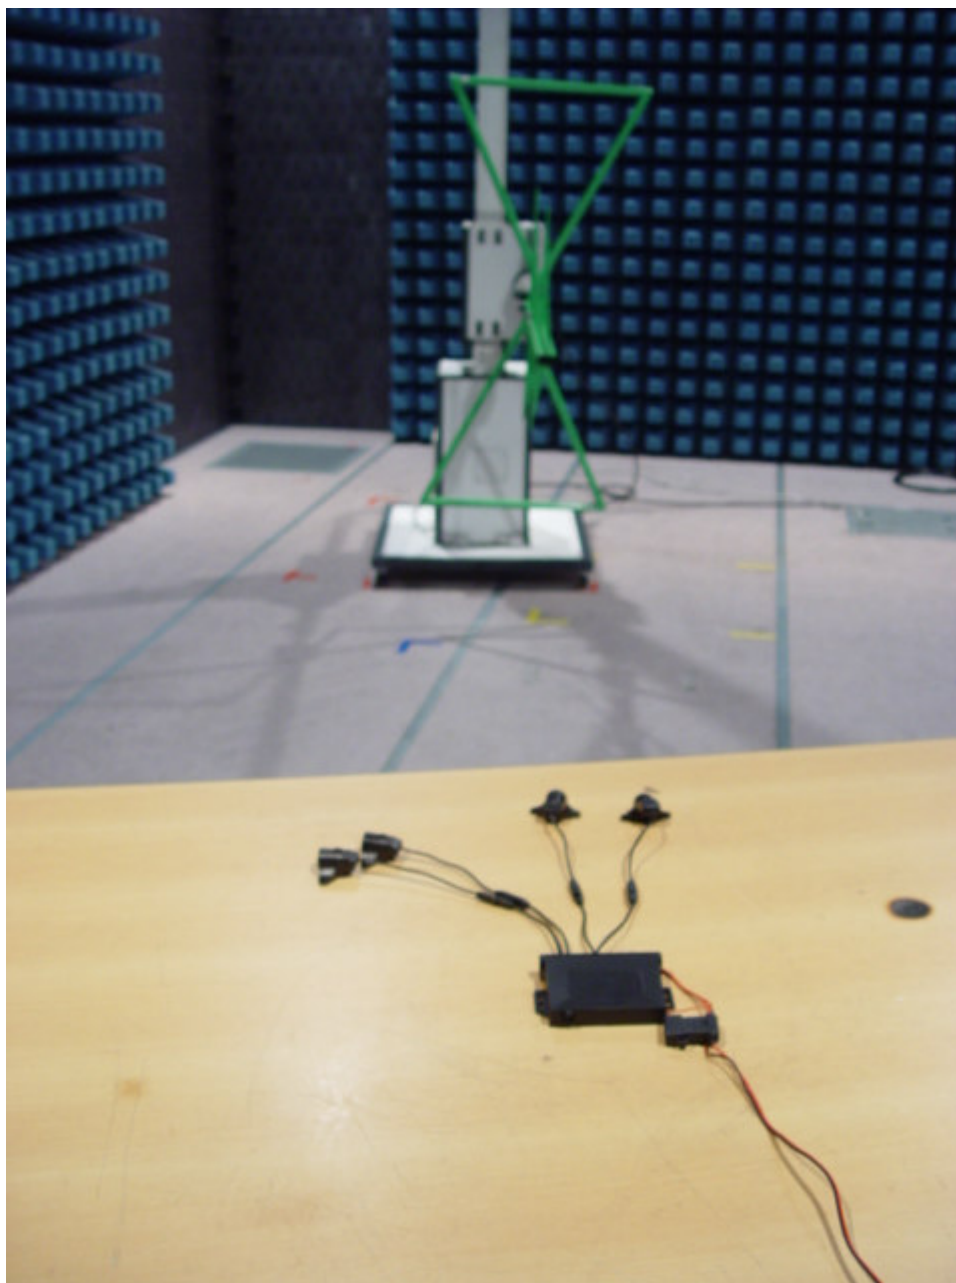

Prüfbericht - Nr.: 16005529 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

Photograph 3: Set-up for Radiation Measurement Above 1GHz

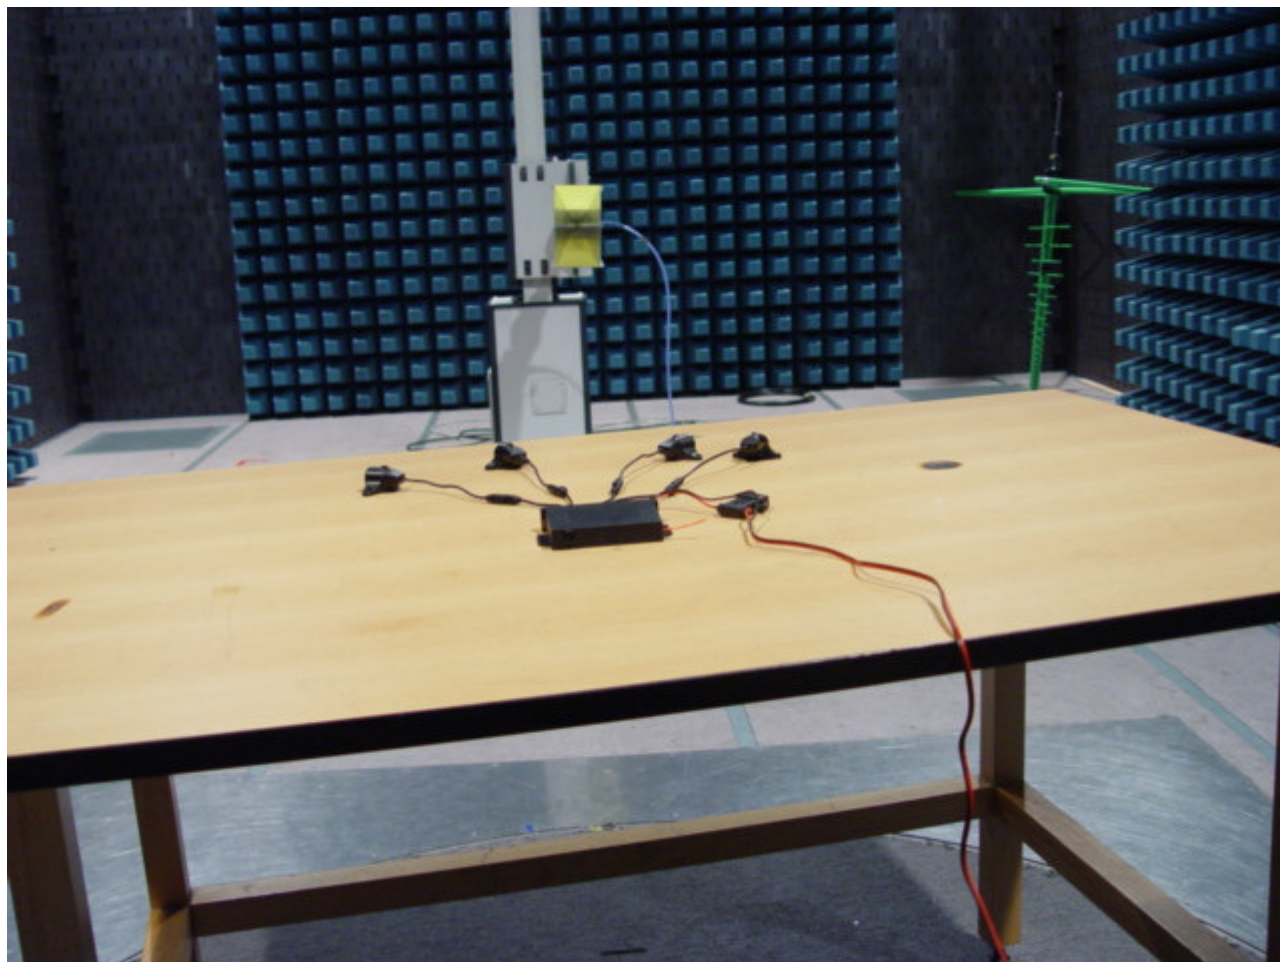

7 List of Tables

Table 1: List of Test and Measurement Equipment5
Table 2: Radiated Emission below 30MHz10
Table 3: Radiated Emission above 30MHz11

8 List of Photographs

Photograph 1: Set-up for Radiation Measurement Below 30MHz13
Photograph 2: Set-up for Radiation Measurement Below 1GHz14
Photograph 3: Set-up for Radiation Measurement Above 1GHz.....15

Prüfbericht - Nr.: 16005529 001


Test Report No.:

Seite 1 von 4

Page 1 of 4

radiated emission

EUT: Car Radar (Sensor) M/N: FW048R41
Manufacturer: Coligen
Operating Condition:
Test Site: SMD LAB
Operator:
Test Specification: FCC Part 18
Comment:
Start of Test:

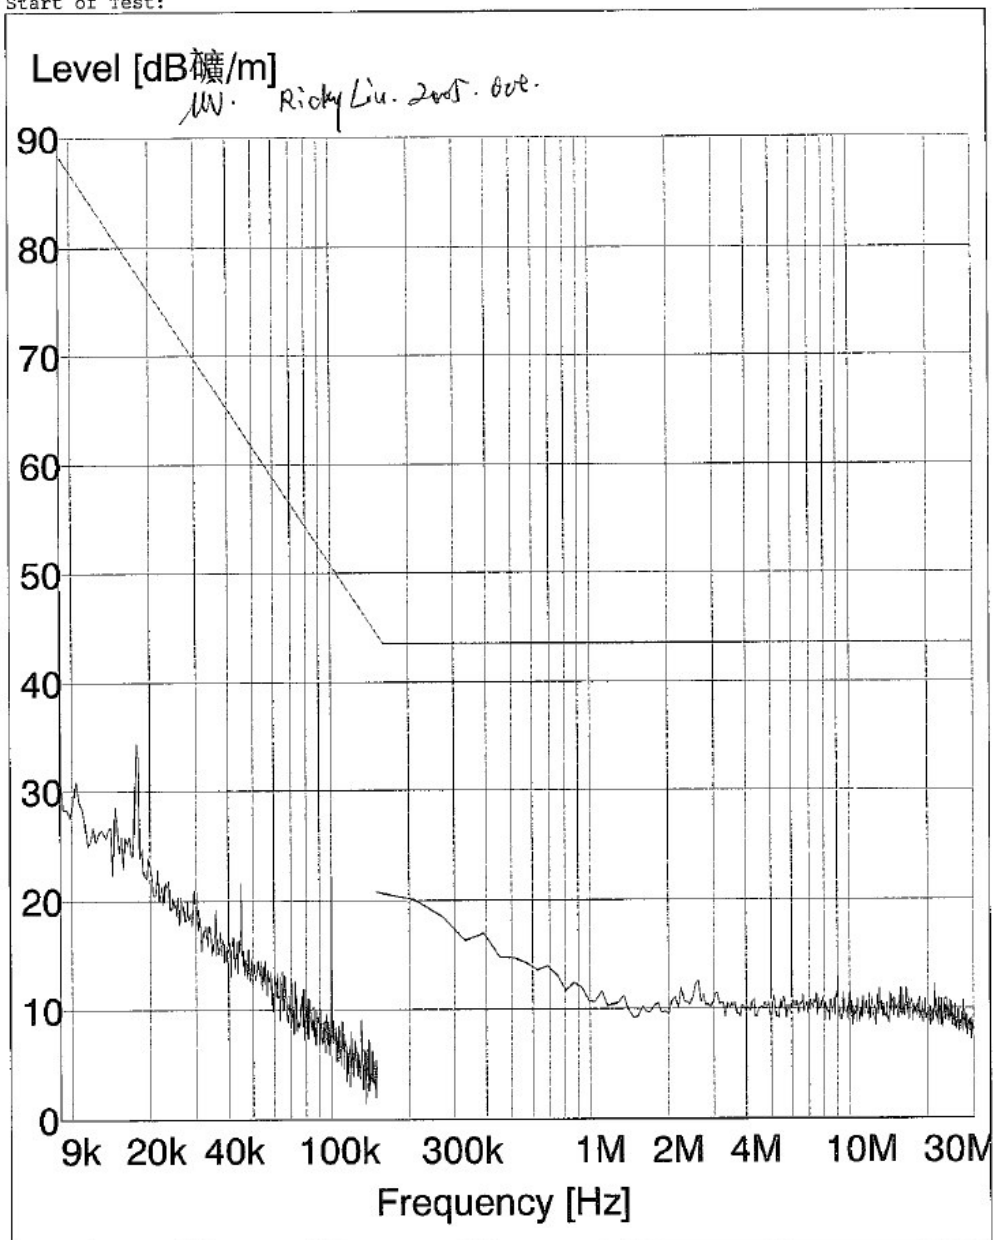

Prüfbericht - Nr.: 16005529 001

Test Report No.:


Seite 2 von 4

Page 2 of 4

Radiated Disturbance

FCC Part15

EUT: M/N:expcER04
Manufacturer:
Operating Condition: Sensor (TX)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical & Horizontal
Comment: DC 12V
:

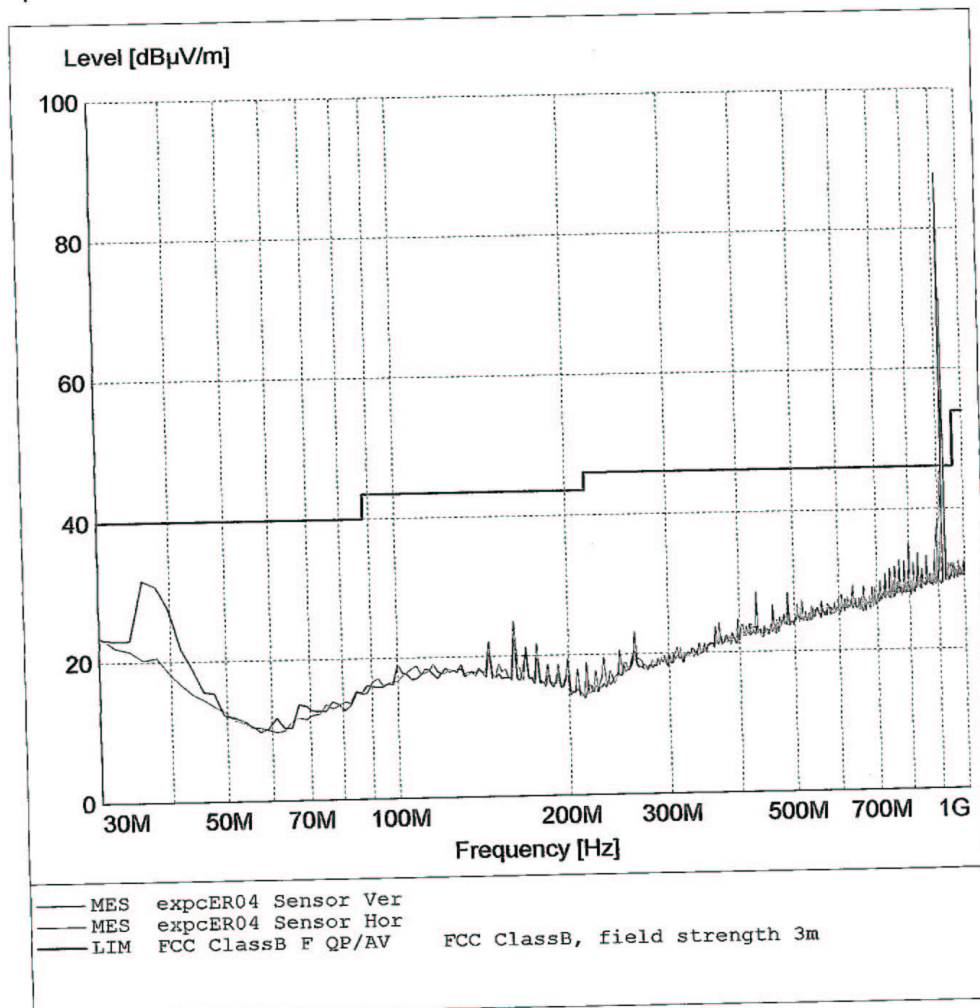

NOTE: expcER04 is the temporary system model name of the Parking Sensor System in this report.

Prüfbericht - Nr.: 16005529 001

Test Report No.:


Seite 3 von 4

Page 3 of 4

Radiated Disturbance

FCC Part15

EUT: M/N:expcER04
Manufacturer:
Operating Condition: Sensor
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical & Horizontal
Comment: DC 12V
:

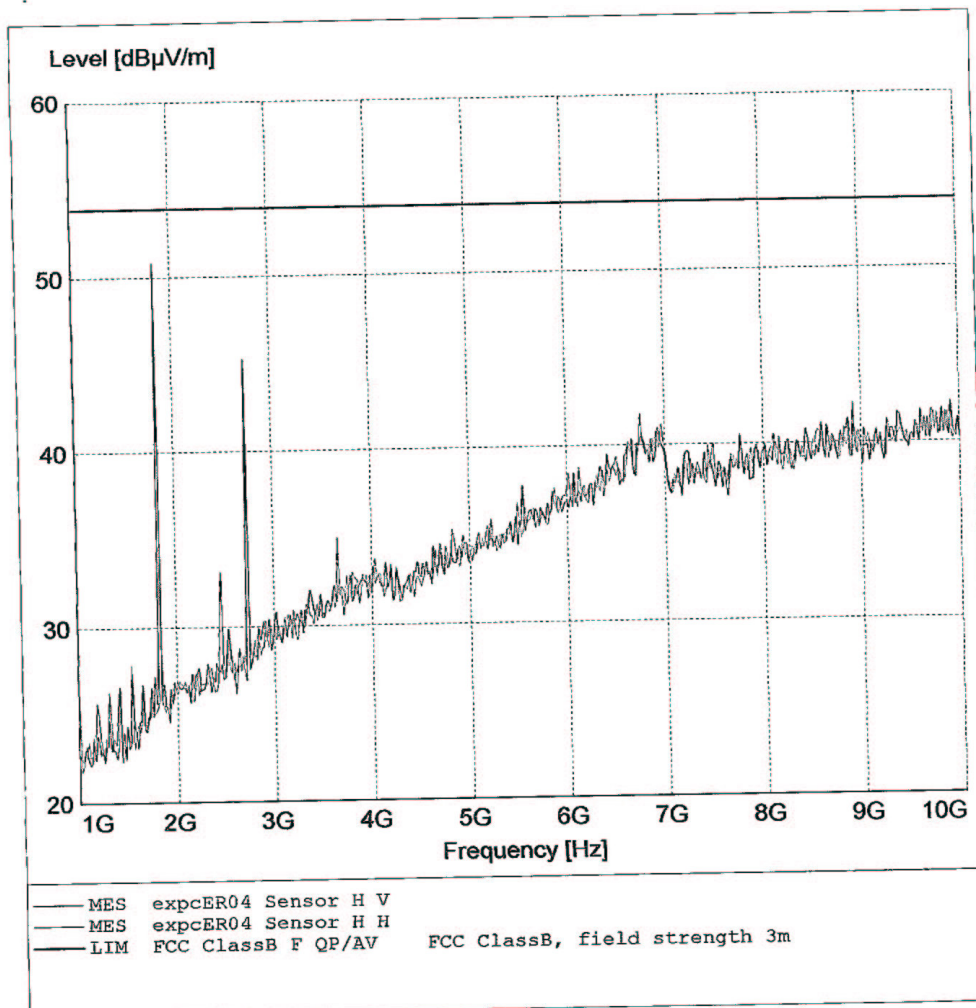

NOTE: expcER04 is the temporary system model name of the Parking Sensor System in this report.

Prüfbericht - Nr.: 16005529 001

Test Report No.:


Seite 4 von 4

Page 4 of 4

-26dB Bandwidth:



Ref Lvl	Marker 1 [T1]	RBW	20 kHz	RF Att	10 dB
87 dBμV	60.79 dBμV	VBW	20 kHz		
	915.10070140 MHz	SWT	7.5 ms	Unit	dBμV

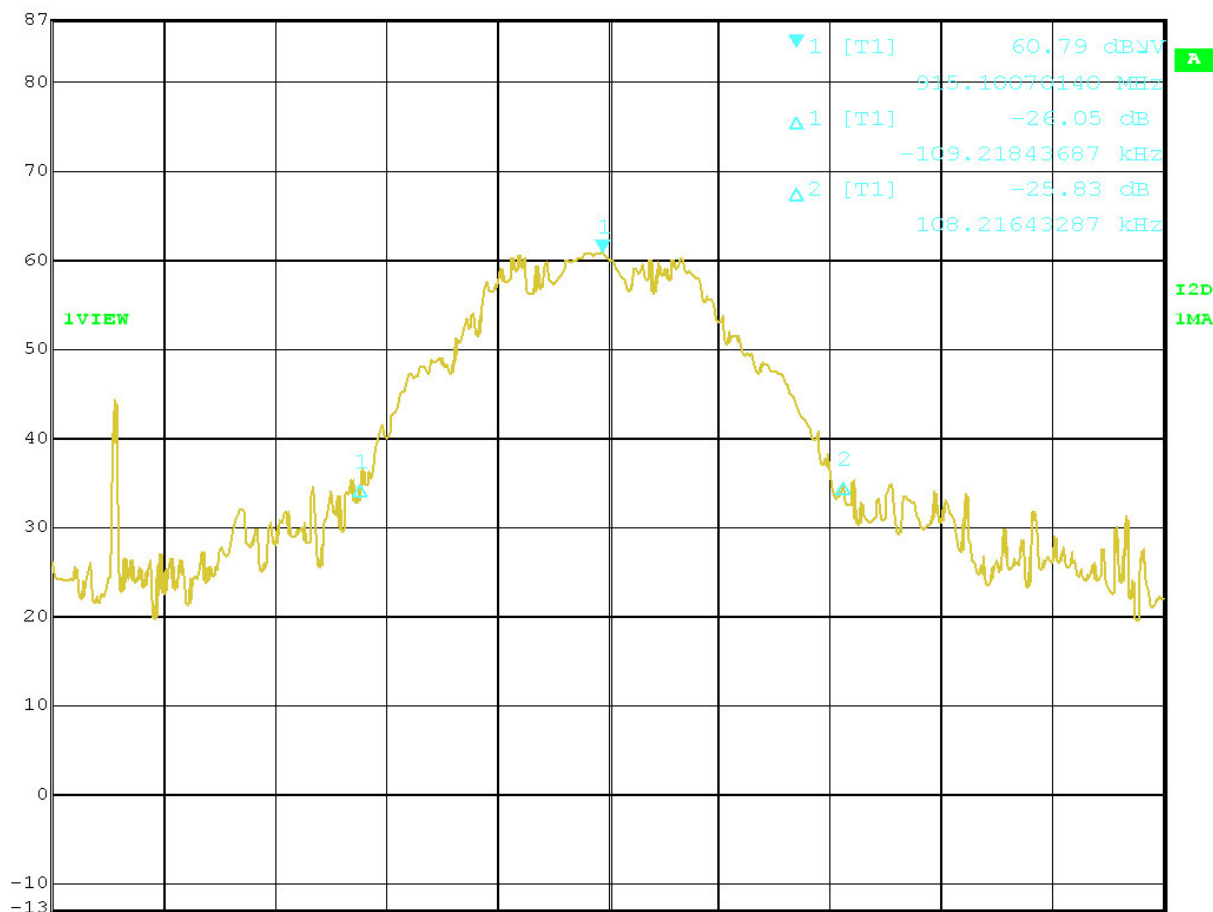

Center 915.1032064 MHz

50 kHz/

Span 500 kHz

Date: 18.NOV.2005 14:47:42