


Prüfbericht - Nr.: 16008029 001		Seite 1 von 15 Page 1 of 15	
Test Report No.:			
Auftraggeber: Client:	Coligen Corp. No. 1 bldg. ,Guantang Ind. Park, Jingding Zhuhai, Guangdong Province, P.R. China		
Gegenstand der Prüfung: Display Part of Wireless Parking Sensor System Test item:			
Bezeichnung: Identification:	RFDP8807	FCC ID: FCC ID	TFKRFP8807
Wareneingangs-Nr.: Receipt No.:	173022104	Eingangsdatum: Date of receipt:	22.04.2006
Prüfart: Testing location:	Shenzhen Bureau of Quality Technical Supervision Shenzhen Academy of Metrology and Quality Inspection Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R. China		Listed test laboratory according to FCC rules section 2.948 for measuring devices under Parts 15
Prüfgrundlage: Test specification:	ANSI C63.4: 2001 Radiated Emissions with limits described at FCC Part 15 Subpart B section 15.109 Radiated Emissions with limits described at FCC Part 15 Subpart C section 15.209 and 15.249		
Prüfresultat: Test Result:	Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The a. m. test item passed the test specification.		
Prüflaboratorium: Testing Laboratory:	TÜV Rheinland (Guangdong) Ltd.		
geprüft/tested by:		kontrolliert/ checked by:	
21 July 2006	Frank Du	21. Jul. 2006	Dave Xie
Datum	Name	Datum	Name
Date	Name	Date	Name
			
	Unterschrift		Unterschrift
	Signature		Signature
Sonstiges/ Other Aspects:			
Abkürzungen: ok / P = entspricht Prüfgrundlage fail / F = entspricht nicht Prüfgrundlage n.a. / N = nicht anwendbar Abbreviations: ok / P = passed fail / F = failed n.a. / N = not applicable			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.			

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 2 von 15
Page 2 of 15

TEST SUMMARY

5.1 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A)

RESULT: ok

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A)

RESULT: ok

5.3 FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A)

RESULT: ok

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 3 von 15
Page 3 of 15

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY.....	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	6
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS	7
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	10
5.1	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A).....	10
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A).....	11
5.3	FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A).....	12
6	PHOTOGRAPHS OF THE TEST SET-UP	13
7	LIST OF TABLES.....	15
8	LIST OF PHOTOGRAPHS.....	15

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 4 von 15
Page 4 of 15

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg. of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 5 von 15
Page 5 of 15

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
BilogAntenna	Chase	CBL6112B	2591	29.01.2007
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2007
3m Semi-anechoic chamber	Albatross Projects	9X6X6	----	29.01.2007
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	29.01.2007
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2007
Communications Test Set	HP	HP8920A	3438A05187	29.01.2007
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	29.01.2007
AMN	Rohde & Schwarz	ESH3-Z5	100002	29.01.2007

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16008029 001

Test Report No.:

Seite 6 von 15

Page 6 of 15

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, whose registration number is 97379.

3 General Product Information

Brief description of the test sample:

This product is the display part of a wireless parking sensor system, which is designed with ultrasonic technology to assist the driver to park or reverse the vehicle. It would be operated with the controller part and the transmitter part of the wireless parking sensor system.

It is a 900MHz FSK half-duplex transceiver with 2 channels available. Distance message is received from the controller part of the same system via RF link. The antenna type is integrated.

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 7 von 15
Page 7 of 15

3.1 Product Function and Intended Use

For details, refer to technical document and the user manual.

3.2 Ratings and System Details

Frequency range	:	915.11MHz, 916.58 MHz
Modulation Type		2FSK
Number of channels	:	2 channels
Type of antenna	:	Integral antenna
FCC ID	:	TFKRFD8807
Power supply	:	DC power of vehicle
Ports	:	12V DC input
RF Power level		<50 mV/m
Protection Class	:	III

Note: The product operates in 2 frequencies only, 915.11MHz and 916.58 MHz, but manufacture defines these 2 frequencies as Channel 1 and Channel 3, Channel 2 is unavailable.

Refer to the technical document for further information.

3.3 Independent Operation Modes

The basic operation modes are:

Receiving, Transmitting.

For further information refer to User Manual.

3.4 Submitted Documents

Block Diagram
Circuit Diagram
PCB layout
Components List
FCC label
User Manual
Photo document

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 8 von 15
Page 8 of 15

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with 12V DC lead-acid battery.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 9 von 15
Page 9 of 15

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Radiated Emission

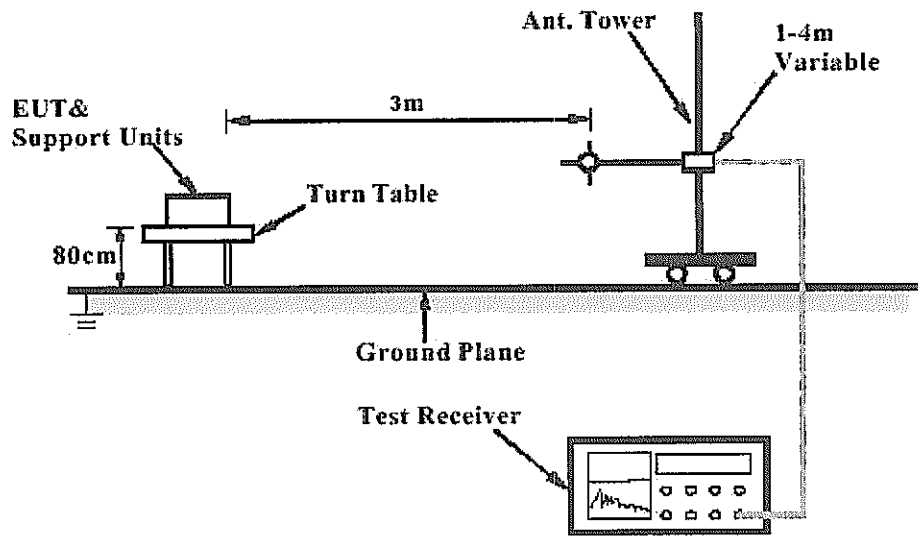


Diagram 2 of Equipment Configuration for Testing Radiated Emission



Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 10 von 15
Page 10 of 15

5 Test Results EMISSION

5.1 Radiated Emission for FCC Part 15 Per Section 15.109(a)

RESULT:

ok

Date of testing : 21.06.2006
Test specification : FCC Part 15 Per Section 15.109(a)
Limit : FCC Part 15 Per Section 15.109(a)
Operation mode: Receiving (transmitting function is off)
Deviations from Standard Test procedures : None
Test procedure Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Temperature : 25°C
Humidity : 62%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

Refer to appendix 1 for test result. The spectrum diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 2: Radiated Emission

Frequency [MHz]	QP [dBµV/m]	AV [dBµV/m]	Polarity	Limit [dBµV/m]
*	---			

*) The disturbance measured is far below the limit and therefore, no final measurement was performed

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 11 von 15
Page 11 of 15

5.2 Radiated Emission for FCC Part 15 Per Section 15.209(a)

RESULT:

ok

Date of testing : 15.05.2006
Test specification : FCC Part 15 Per Section 15.209(a)
Limits : FCC Part 15 Per Section 15.209(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transmitting at channel 1 and channel 3
Temperature : 25°C
Humidity : 62%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

Refer to appendix 1 for test result. The spectrum diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 3: Radiated Emission above 30MHz

Frequency [MHz]	QP [dBµV/m]	AV [dBµV/m]	Polarity	Limit [dBµV/m]
---*				

*) The disturbance measured is far below the limit and therefore, no final measurement was performed

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 12 von 15
Page 12 of 15

5.3 Fundamental and harmonics Radiated Emission for FCC Part 15 Per Section 15.249(a)

RESULT:

ok

Date of testing : 15.05.2006
Test specification : FCC Part 15 Per Section 15.249(a)
Limits : FCC Part 15 Per Section 15.249(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transmitting at channel 1 and channel 3
Temperature : 25°C
Humidity : 62%

Note: The test was performed under 3 orthogonal planes, and the maximum value was recorded in following tables:

Channel 1:

Test conditions		Fundamental Frequency		2nd Harmonics		3rd Harmonics	
		(915MHz)		(1830MHz)		(2731MHz)	
T _{nom} (22°C)	Unit	(dBμV/m)	(mV/m)	(dBμV/m)	(μV/m)	(dBμV/m)	(μV/m)
	Horizontal	75.8	6.2	*	*	*	*
	Vertical	69.3	2.9	*	*	*	*
limit		93.979	50	53.979	500	53.979	500

Channel 3:

Test conditions		Fundamental Frequency		2nd Harmonics		3rd Harmonics	
		(916.6MHz)		(1833.1MHz)		---	
T _{nom} (22°C)	Unit	(dBμV/m)	(mV/m)	(dBμV/m)	(μV/m)	(dBμV/m)	(μV/m)
	Horizontal	73.7	4.8	*	*	*	*
	Vertical	69.2	2.9	*	*	*	*
limit		93.979	50	53.979	500	53.979	500

*) Far below the limit.

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.


Refer to appendix 1 for test result. The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 13 von 15
Page 13 of 15

6 Photographs of the Test Set-Up


Photograph 1: Set-up for Radiation Measurement Below 1GHz

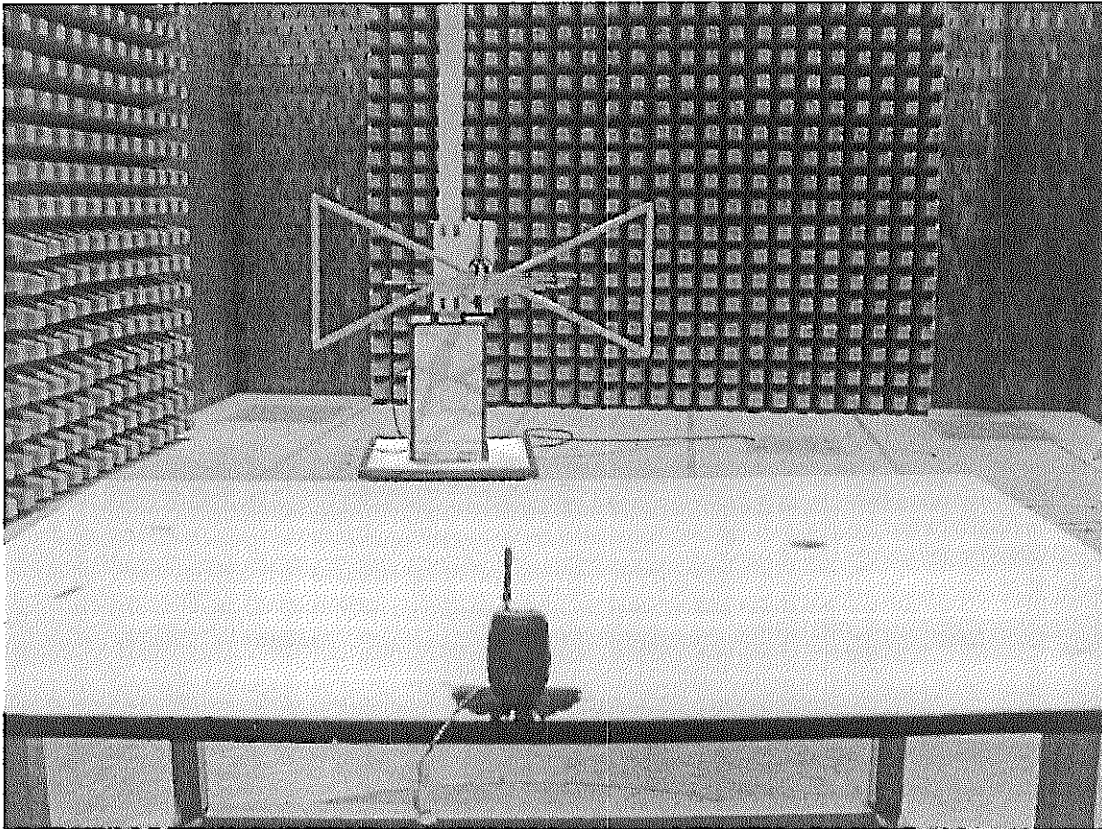

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 14 von 15
Page 14 of 15

Photograph 2: Set-up for Radiation Measurement Above 1GHz

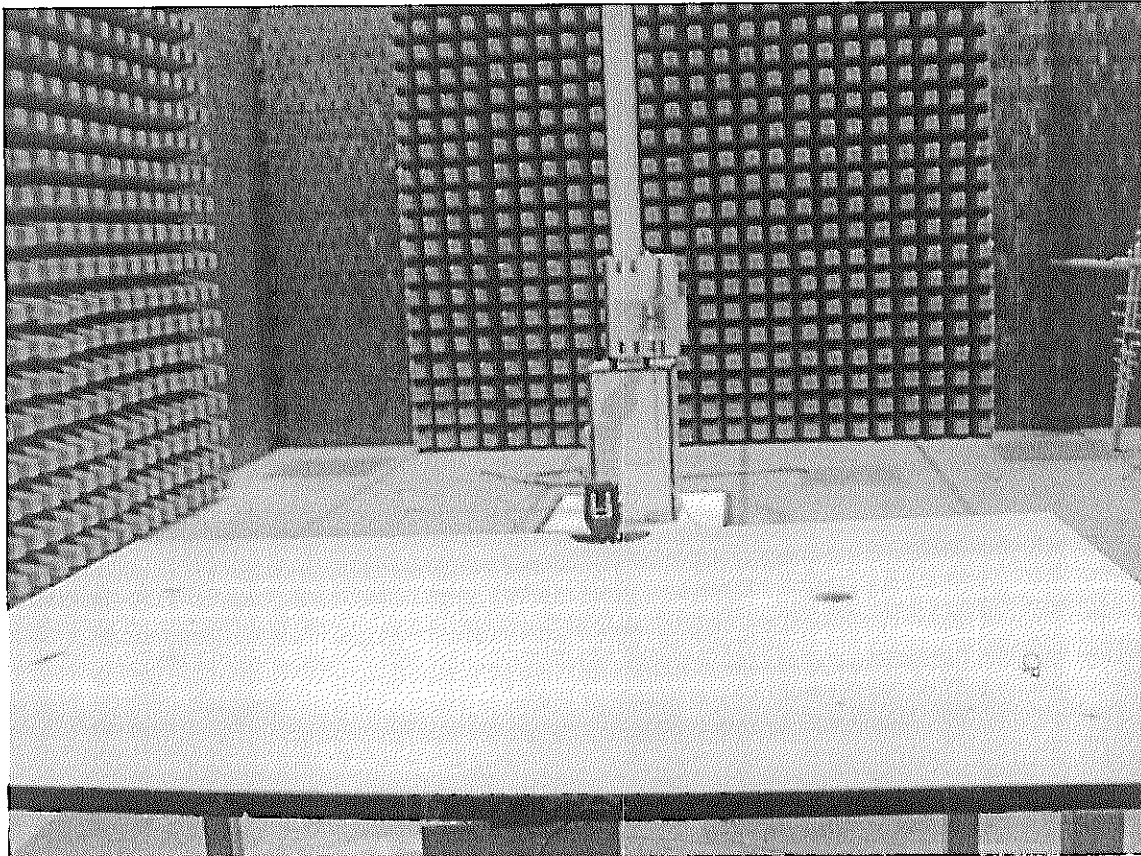

Prüfbericht - Nr.: 16008029 001
Test Report No.:

Seite 15 von 15
Page 15 of 15

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Radiated Emission	10
Table 3: Radiated Emission above 30MHz	11

8 List of Photographs

Photograph 1: Set-up for Radiation Measurement Below 1GHz.....	13
Photograph 2: Set-up for Radiation Measurement Above 1GHz.....	14