



Report No.: 60.870.13.020.03F
Date: 2013-12-31

TEST REPORT

Applicant: Cycle Parts GmbH
Le Quartier Hornbach 13, Neustadt D-67433, Germany

Description of Samples: Model name: Wireless Cycle Computer (Cadence Transmitter)
Brand name: VDO
Model no.: D3 CAD
FCCID: TFO-13012

Date Samples Received: 2013-12-04

Date Tested: 2013-12-04 to 2013-12-30

Investigation Requested: FCC Part 15, Section 15.209

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----

Checked by: Approved by:-

Ray Cheung
Project Engineer
Wireless & Telecom department

Jeff Pong
Operation Manager
Wireless & Telecom department



Report No.: 60.870.13.020.03F
Date: 2013-12-31

CONTENT:

Cover	Page 1 of 16
Content	Page 2 of 16
<u>1.0 General Details</u>	
1.1 Test Laboratory	Page 3 of 16
1.2 Applicant Details	Page 3 of 16
1.3 Equipment Under Test [EUT]	Page 4 of 16
1.4 Equipment Modification	Page 4 of 16
1.5 Related Submittal(s) Grants	Page 4 of 16
<u>2.0 Technical Details</u>	
2.1 Investigations Requested	Page 5 of 16
2.2 Test Standards and Results Summary	Page 5 of 16
<u>3.0 Test Methodology</u>	
3.1 Radiated Emission	Page 6 of 16
3.2 Field Strength Calculation	Page 6 of 16
3.3 Conducted Emission	Page 6 of 16
<u>4.0 Test Results</u>	
4.1 Field Strength of Fundamental and Harmonics	Page 7-8 of 16
4.2 Spurious Radiated Emission	Page 9-12 of 16
4.3 Bandwidth Measurement	Page 13-14 of 16
4.4 Conducted Emission	Page 15 of 16
<u>5.0 List of Measurement Equipments</u>	Page 16 of 16
<u>Appendix A</u>	
Photos of Test Setup	
<u>Appendix B</u>	
External EUT Photos	
<u>Appendix C</u>	
Internal EUT Photos	



Report No.: 60.870.13.020.03F

Date: 2013-12-31

1.0 General Details

1.1 Test Laboratory

Global United Technology Services Co., Ltd.
1st Floor, Block No.2, Laodong Industrial Zone, Xixiang
road Baoan District, Shenzhen, China
Registration Number: 600491
File Number: 9079A-1
Tested by:

A blue ink signature of the name "John Zhi".

John Zhi

1.2 Applicant Details

Applicant

Cycle Parts GmbH
Le Quartier Hornbach 13, Neustadt D-67433, Germany

Manufacturer

Sigma-Elektro (Hong Kong) Ltd
Room 2010, 20/F, No.1 Hung To Road, Kwun Tong,
Kowloon, Hong Kong



Report No.: 60.870.13.020.03F

Date: 2013-12-31

1.3 Equipment Under Test [EUT]

Description of EUT

Model Name:	Wireless Cycle Computer (Cadence Transmitter)
Brand Name:	VDO
Model Number:	D3 CAD
FCCID:	TFO-13012
Rating:	DC 3.0V (CR 2032 battery)
Antenna Type:	Integral
Operated Frequency:	112 kHz
No. of Channel:	1
Accessories and Auxiliary Equipment:	None
EUT Exercising Software:	None

General Operation of EUT

The Equipment Under Test (EUT) is a Cadence function transmitter of Cycle Computer operated at 112 kHz.

1.4 Equipment Modification

No modification was made to the tested unit by TÜV SÜD Hong Kong Ltd.

1.5 Related Submittal(s) Grants

This is a single application of certification for this transmitter.



Report No.: 60.870.13.020.03F
Date: 2013-12-31

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with
CFR 47, Part 15 and ANSI C63.4: 2003.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary			
Test Condition	Test Requirement	Test Result	
		Pass	N/A
Field Strength of Fundamental and Harmonics	Part 15.209 (a)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Radiated Emission	Part 15.209 (a), Part 15.205	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Bandwidth Measurement	Part 15.215 (c)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Conducted Emission	Part 15.207	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Note: N/A - Not Applicable



Report No.: 60.870.13.020.03F

Date: 2013-12-31

3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

FS = R + System Factor

System Factor = AF + CF + FA – PA

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The EUT was placed on a non-metallic table 0.8m above the horizontal metal reference place and 0.4m from a vertical ground plane which is connected to the horizontal metal ground plane. Meanwhile, the AC main of EUT was connected to the distance of 0.8m line impedance stabilization network (LISN) during measurement.

Initial measurements were performed in quasi-peak and average detection modes by the test receiver, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.



Report No.: 60.870.13.020.03F


Date: 2013-12-31

4.0 Test Results

4.1 Field Strength of Fundamental and Harmonics

Test Requirement:	FCC part 15 section 15.209 (a) RSS-210 Issue 8 Section 2.2, 2.5 RSS-Gen Issue 3 Section 4.8
Test Method:	ANSI C63.4:2003
Test Date:	2013-12-30
Mode of Operation:	Transmitting mode.
Detector Function:	Average and Peak
Measurement BW:	200 Hz (RBW)

Test Setup:

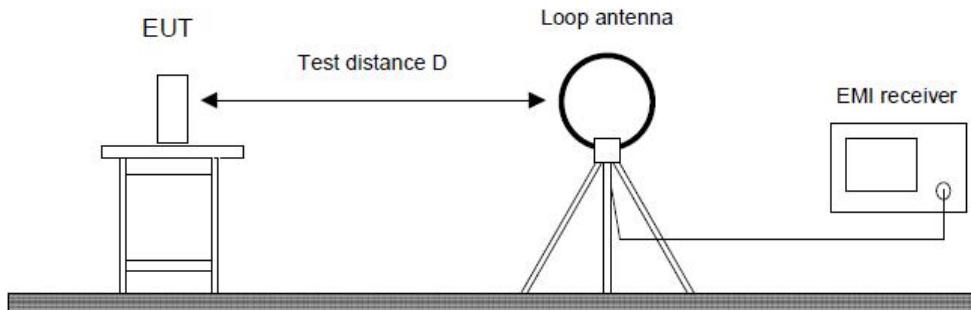



Report No.: 60.870.13.020.03F
Date: 2013-12-31

Results: PASS

Field Strength of Fundamental and Harmonics					
Value	Emissions Frequency kHz	Field Strength (at 3m) dB μ V/m	Limit Line (at 3m) dB μ V/m	Delta to Limit dB μ V/m	Remarks
PK	112.00	49.42	106.61	-57.19	Fund.

Remark : - (*) Radiated emissions which fall in the restricted bands as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2.

- Calculated measurement uncertainty: $\pm 5.0\text{dB}$

Limit for Radiated Emission [Part 15 Section 15.209, RSS-Gen Section 7.2.5]:

Frequency (MHz)	Field Strength [μ V/m]	Measurement Distance (Meter)
0.009 – 0.490	2400/F (kHz)	300
0.049 – 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Note :

- Emission Level (dB μ V/m) = 20 log Emission Level (μ V/m)
- Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- Limit line = specific limit (dB μ V) + distance extrapolation factor.

Radiated emissions, which fall in the restricted bands, as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2, must also comply with the radiated emission limits as above.



Report No.: 60.870.13.020.03F

Date: 2013-12-31

4.2 Spurious Radiated Emission

Test Requirement:

FCC part 15 section 15.209 (a)
RSS-210 Issue 8 Section 2.2, 2.5
RSS-Gen Issue 3 Section 4.8

Test Method:

ANSI C63.4:2003

Test Date:

2013-12-30

Mode of Operation:

Transmitting Mode

Detector Function:

Quasi-peak, Average and Peak

Measurement BW:


200 Hz (Below 150 kHz)

9 kHz (150kHz to 30 MHz)

120 kHz (30MHz to 1000 MHz)

1 MHz (Above 1000 MHz)

Test Setup:

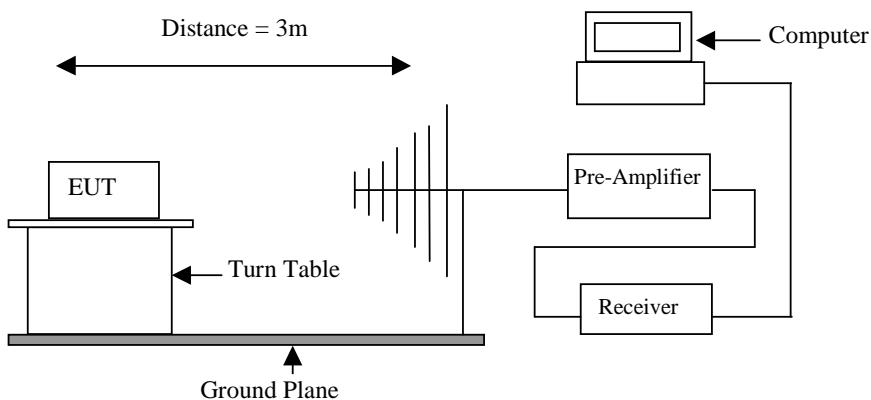



Report No.: 60.870.13.020.03F
Date: 2013-12-31

Results: PASS

Spurious Radiated Emissions (Below 30MHz)				
Value	Emissions Frequency	Field Strength (at 3m)	Limit Line (at 3m)	Delta to Limit
	MHz	dB μ V/m	dB μ V/m	dB μ V/m
QP	0.02	40.28	69.54	-29.26
QP	0.03	36.15	69.54	-33.39

Spurious Radiated Emissions (Above 30MHz)							
Value	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field Strength at 3m	Limit	Delta to Limit
	MHz		dB μ V/m	dB	dB μ V/m	dB μ V/m	dB μ V/m
QP	47.00	V	36.77	-15.81	20.96	40.00	-19.04
QP	59.23	V	37.73	-16.35	21.38	40.00	-18.62
QP	95.76	V	37.32	-15.68	21.64	43.50	-21.86
QP	155.91	V	40.47	-19.89	20.58	43.50	-22.92
QP	243.38	V	38.27	-15.99	22.28	46.00	-23.72
QP	975.75	V	36.94	-2.50	34.44	54.00	-19.56
QP	45.54	H	36.46	-15.76	20.70	40.00	-19.30
QP	102.36	H	35.70	-15.64	20.06	43.50	-23.44
QP	287.99	H	37.22	-15.03	22.19	46.00	-23.81
QP	406.09	H	36.66	-11.81	24.85	46.00	-21.15
QP	714.17	H	36.81	-6.07	30.74	46.00	-15.26
QP	972.34	H	36.40	-2.55	33.85	54.00	-20.15

Note: - No further spurious emissions found between 150 kHz and lowest internal used / generated frequency.
- Result data graph is shown at the following pages for reference.

Remark : - (*) Radiated emissions which fall in the restricted bands as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2.
- Calculated measurement uncertainty: $\pm 5.0\text{dB}$.



Report No.: 60.870.13.020.03F

Date: 2013-12-31

Limit for Radiated Emission [Part 15 Section 15.209, RSS-Gen Section 7.2.5]:

Frequency (MHz)	Field Strength [μ V/m]	Measurement Distance (Meter)
0.009 – 0.490	2400/F (kHz)	300
0.049 – 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Note :

- Emission Level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission Level ($\mu\text{V/m}$)
- Distance extrapolation factor = $40 \log$ (specific distance / test distance) (dB)
- Limit line = specific limit ($\text{dB}\mu\text{V}$) + distance extrapolation factor.


Radiated emissions, which fall in the restricted bands, as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2, must also comply with the radiated emission limits as above.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.




Report No.: 60.870.13.020.03F
Date: 2013-12-31

Vertical (30 to 1000MHz)

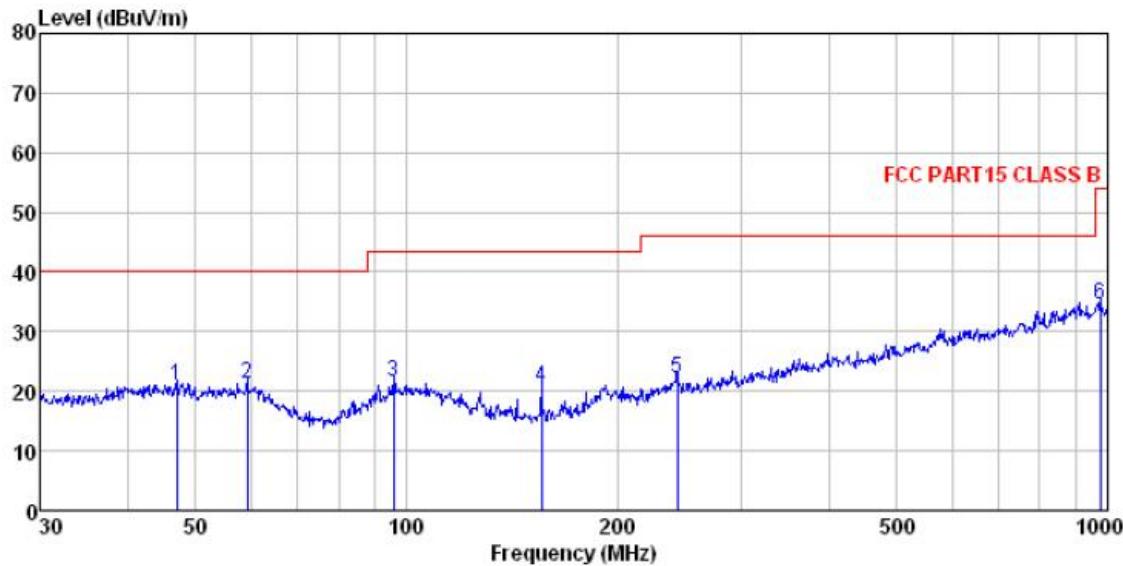

Remark: Only background noise was measured above 1GHz.

Horizontal (30 to 1000MHz)

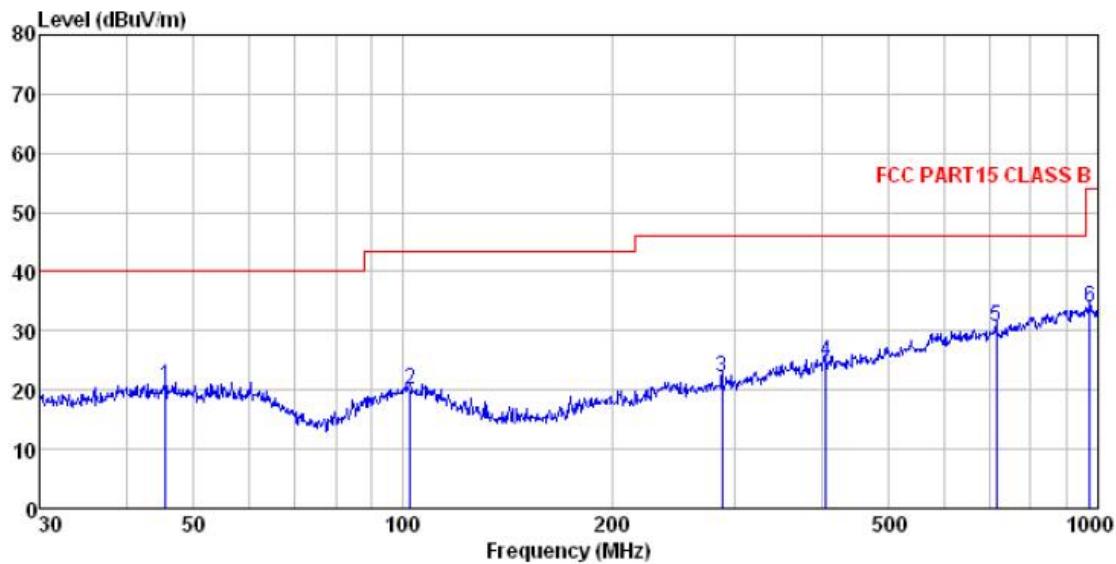

Remark: Only background noise was measured above 1GHz.



Report No.: 60.870.13.020.03F

Date: 2013-12-31

4.3 Bandwidth Measurement

Test Requirement: FCC part 15 section 15.215 (c)
RSS-Gen Issue 3 Section 4.6
Test Method: ANSI C63.4:2003
Test Date: 2013-12-30
Mode of Operation: Transmitting mode.
Detector Function: Peak

Results: PASS

20 dB BW	99% OBW	Test Result
334.438 Hz	283.430 Hz	Complies

Remarks: Result data graph is shown at the following pages for reference.


Limit for Bandwidth

The 20dB bandwidth of the emission shall be within the frequency band designated in the rule section under which the equipment is operated.



Report No.: 60.870.13.020.03F
Date: 2013-12-31

Bandwidth

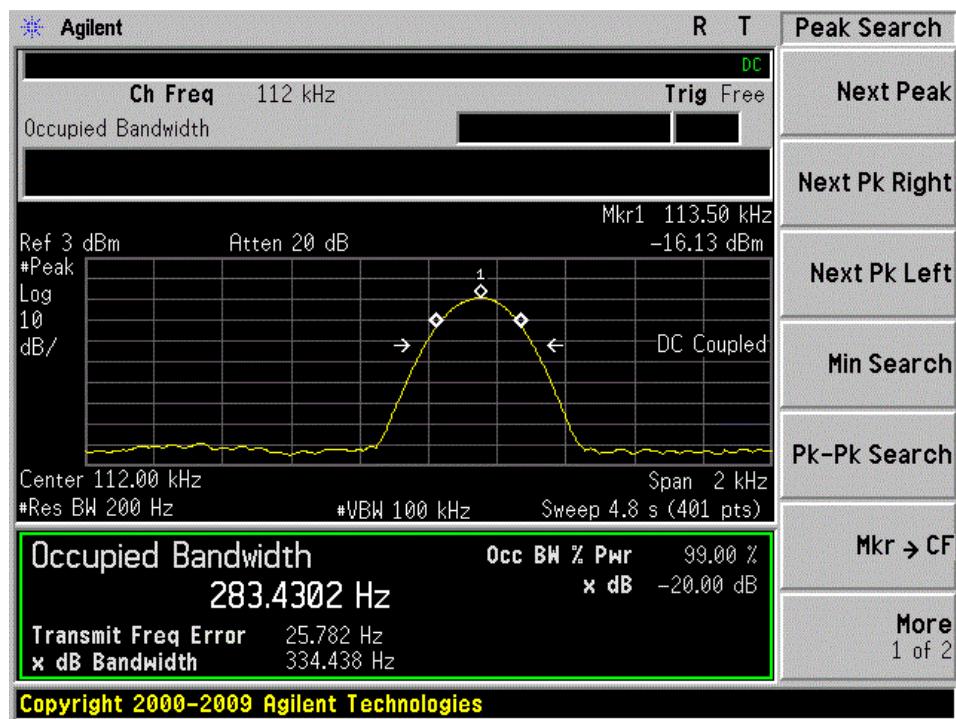



Report No.: 60.870.13.020.03F

Date: 2013-12-31

4.4 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC part 15 Section 15.207 Class B
	RSS-Gen Issue 3 Section 7.2.4
Test Method:	ANSI C63.4:2003
Test Date:	---
Mode of Operation:	---
Detector Function:	---
Measurement BW:	---

Result : N/A

Note : This testing is not applicable for the battery operated EUT.

Limits for Conducted Emission [FCC Part 15.207 and RSS-Gen table 2]:

Frequency Range [MHz]	Quasi-Peak Limit [dB μ V]	Average Limit [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.



Report No.: 60.870.13.020.03F

Date: 2013-12-31

5.0 List of Measurement Equipment

Radiated Emission and Out of Band Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
3m Semi-Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)*6.0(H)	GTS250	29 Mar 2014
ESU EMI Test Receiver	R&S	ESU26	GTS203	06 Jul 2014
BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	09 Mar 2014
Double-ridged waveguide horn	SCHWARZBECK	9120D	GTS208	09 Mar 2014
RF Amplifier	HP	8347A	GTS204	06 Jul 2014
Preamplifier	HP	8349B	GTS206	06 Jul 2014

Remarks:

CM Corrective Maintenance

N/A Not Applicable or Not Available