

## FCC - TEST REPORT

|                                  |   |               |                            |
|----------------------------------|---|---------------|----------------------------|
| Report Number                    | : <b>60.790.22.041.01R02</b>  | Date of Issue | : <u>September 3, 2022</u> |
| Model                            | : <b>R4 GPS</b>   |               |                            |
| Product Type                     | : <b>GPS Bike Computer</b>  |               |                            |
| Applicant                        | : <u>Sigma-Elektro GmbH</u>   |               |                            |
| Address                          | : <u>Dr. Julius Leber Strasse.15, Neustadt 67433, Germany</u>                     |               |                            |
| Production Facility              | : <u>Sigma-Elektro (Hong Kong) Ltd.</u>   |               |                            |
| Address                          | : <u>Room 2010, 20/F, No.1 Hung To Road, Kwun Tong, Kowloon, HK.</u>              |               |                            |
| Test Result                      | : <b><input checked="" type="radio"/> Positive <input type="radio"/> Negative</b> |               |                            |
| Total pages including Appendices | : <u>22</u>   |               |                            |

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

## 1 Table of Contents

|  |    |
|--|----|
| 1 Table of Contents.....                               | 2  |
| 2 Description of Equipment Under Test .....            | 3  |
| 3 Summary of Test Standards .....                      | 4  |
| 4 Details about the Test Laboratory.....               | 5  |
| 4.1 Test Equipment Site List.....                      | 6  |
| 4.2 Measurement System Uncertainty .....               | 7  |
| 5 Summary of Test Results.....                         | 8  |
| 6 General Remarks.....                                 | 9  |
| 7 Test Setups.....                                     | 10 |
| 7.1 Radiated test setups Below 1GHz.....               | 10 |
| 7.2 Radiated test setups Above 1GHz .....              | 10 |
| 7.3 AC Power Line Conducted Emission test setups ..... | 11 |
| 7.4 Conducted RF test setups.....                      | 11 |
| 8 Emission Test Results .....                          | 12 |
| 8.1 Radiated Emission.....                             | 12 |
| 8.2 20dB & 99% Bandwidth .....                         | 14 |
| 8.3 Conducted Emission at AC Power line.....           | 15 |
| 8.4 Antenna Requirement.....                           | 17 |
| 9 Test setup procedure .....                           | 18 |
| 10 Appendix A - General Product Information .....      | 22 |

## 2 Description of Equipment Under Test

### Description of the Equipment Under Test

Product: GPS Bike Computer  
 Model no.: R4 GPS  
 FCC ID: TFOR4GPS  
 Rating: 3.7 VDC, 350 mAh (Li-poly rechargeable battery)  
           5.0 VDC 1000mA (USB Port for Charging)  
 Frequency: ANT+  
               2457MH  
 Antenna gain: 5.54 dBi  
 Number of operated channel: 1  
 Modulation: GFSK

### Auxiliary Equipment and Software Used during Test:

| DESCRIPTION   | MANUFACTURER | MODEL NO. | S/N     |
|---------------|--------------|-----------|---------|
| Computer      | Lenovo       | X220      | 0A72168 |
| AC/DC adapter | Apple        | A1537     | /       |

### Auxiliary Software Used during Test:

| DESCRIPTION           | SOFTWARE NAME | VERSION | REMARK                |
|-----------------------|---------------|---------|-----------------------|
| RF Test Mode Software | nRFgo         | 1.16    | Provided by applicant |

### 3 Summary of Test Standards

#### Test Standards

FCC Part 15 Subpart C 10-1-20 Edition

Federal Communications Commission, PART 15 — Radio Frequency Devices,  
Subpart C — Intentional Radiators

All the tests were performed using the procedures from ANSI C63.4(2014) and ANSI C63.10 (2013).

## 4 Details about the Test Laboratory

### Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
 Building 12&13 Zhiheng Wisdomland Business Park,  
 Nantou Checkpoint Road 2, Nanshan District,  
 Shenzhen 518052, P.R.China  
 FCC Registration Number: 514049  
 ISED test site number: 10320A

| Emission Tests  |           |
|---|-----------|
| Test Item   | Test Site |
| <b>FCC Part 15 Subpart C</b>                                  |           |
| FCC Title 47 Part 15.205, 15.209 & 15.249 & Radiated Emission | Site 1    |
| FCC Title 47 Part 15.207 Conduct Emission                     | Site 1    |
| FCC Title 47 Part 15.215 20dB & 99% Bandwidth                 | Site 1    |
| FCC Title 47 Part 15.203 Antenna Requirement                  | Site 1    |

## 4.1 Test Equipment Site List

### Radiated emission Test – Site 1

| DESCRIPTION                         | MANUFACTURER    | MODEL NO.         | SERIAL NO.      | CAL. DUE DATE |
|-------------------------------------|-----------------|-------------------|-----------------|---------------|
| EMI Test Receiver                   | Rohde & Schwarz | ESR 26            | 101269          | 2023-5-28     |
| Signal Analyzer                     | Rohde & Schwarz | FSV40             | 101031          | 2023-5-27     |
| Loop Antenna                        | Rohde & Schwarz | HFH2-Z2           | 100398          | 2023-8-17     |
| Trilog Super Broadband Test Antenna | Schwarzbeck     | VULB 9163         | 707             | 2023-7-12     |
| Horn Antenna                        | Rohde & Schwarz | HF907             | 102294          | 2023-6-19     |
| Wideband Horn Antenna               | Q-PAR           | QWH-SL-18-40-K-SG | 12827           | 2023-7-12     |
| Pre-amplifier                       | Rohde & Schwarz | SCU 18            | 102230          | 2023-5-28     |
| Pre-amplifier                       | Rohde & Schwarz | SCU 40A           | 100432          | 2023-7-27     |
| Attenuator                          | Mini-circuits   | UNAT-6+           | 15542           | 2023-5-27     |
| 3m Semi-anechoic chamber            | TDK             | 9X6X6             | ----            | 2023-5-28     |
| Test software                       | Rohde & Schwarz | EMC32             | Version 9.15.00 | N/A           |

### Conducted Emission Test – Site 1

| DESCRIPTION        | MANUFACTURER      | MODEL NO.      | SERIAL NO.     | CAL. DUE DATE |
|--------------------|-------------------|----------------|----------------|---------------|
| EMI Test Receiver  | Rohde & Schwarz   | ESR 3          | 101782         | 2023-5-27     |
| LISN               | Rohde & Schwarz   | ENV4200        | 100249         | 2023-5-27     |
| LISN               | Rohde & Schwarz   | ENV432         | 101318         | 2023-5-27     |
| LISN               | Rohde & Schwarz   | ENV216         | 100326         | 2023-5-27     |
| LISN               | Rohde & Schwarz   | ENV216         | 102472         | 2023-5-27     |
| ISN                | Rohde & Schwarz   | ENY81          | 100177         | 2023-5-27     |
| ISN                | Rohde & Schwarz   | ENY81-CA6      | 101664         | 2023-5-27     |
| High Voltage Probe | Schwarzbeck       | TK9420(VT9420) | 9420-584       | 2023-5-31     |
| RF Current Probe   | Rohde & Schwarz   | EZ-17          | 100816         | 2023-5-27     |
| Attenuator         | Shanghai Huaxiang | TS2-26-3       | 080928189      | 2023-5-27     |
| Test software      | Rohde & Schwarz   | EMC32          | Version9.15.00 | N/A           |
| Shielding Room     | TDK               | CSR #1         | ----           | 2023-5-27     |

### 20dB & 99% Bandwidth, Peak Output Power, Spurious Emissions at Antenna Terminals, 100kHz Bandwidth of band edges, Power Spectral Density – Site 1

| DESCRIPTION      | MANUFACTURER    | MODEL NO.       | SERIAL NO.    | CAL. DUE DATE |
|------------------|-----------------|-----------------|---------------|---------------|
| Signal Analyzer  | Rohde & Schwarz | FSV40           | 101030        | 2023-5-27     |
| RF Switch Module | Rohde & Schwarz | OSP120/OSP-B157 | 101226/100851 | 2023-5-27     |

## 4.2 Measurement System Uncertainty

### Measurement System Uncertainty Emissions

| System Measurement Uncertainty                                      |  |
|---|--|
| Items   | Extended Uncertainty                     |
| Uncertainty for Radiated Emission in 3m chamber<br>9kHz-30MHz       | 4.76dB                                   |
| Uncertainty for Radiated Emission in 3m chamber<br>30MHz-1000MHz    | Horizontal: 5.12dB;<br>Vertical: 5.10dB; |
| Uncertainty for Radiated Emission in 3m chamber<br>1000MHz-25000MHz | Horizontal: 5.01dB;<br>Vertical: 5.00dB; |
| Uncertainty for Conducted Emission at AC Power Line<br>150kHz-30MHz | 3.21dB                                   |
| Uncertainty for conducted power test                                | 1.16dB                                   |
| Uncertainty for frequency test                                      | $0.6 \times 10^{-7}$                     |

### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.

## 5 Summary of Test Results

| Emission Tests   |       |                                     |                          |
|--|-------|-------------------------------------|--------------------------|
| FCC Part 15 Subpart C                                      |       | Pages                               | Test Result              |
| Test Condition   | Pass  |                                     |                          |
| FCC Title 47 Part 15.205,15.209 & 15.249 Radiated Emission | 12-13 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.215 20dB & 99% Bandwidth              | 14    | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.207 Conduct Emission                  | 15-16 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.203 Antenna Requirement               | 17    | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

Remark:

## 6 General Remarks

### Remarks

All tests were performed on model: R4 GPS.

All data packet type modes have been tested, only the worst case is shown on the report.

This submittal(s) (test report) is intended for **FCC ID: TFOR4GPS**, complies with Section 15.203, 15.205, 15.207, 15.209, 15.249 of the FCC Part 15, Subpart C rules.

The TX and RX range is 2457MHz.

### SUMMARY:

- All tests according to the regulations cited on page 8 were

- Performed

- **Not** Performed

- The Equipment Under Test

- **Fulfils** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: July 27, 2022

Testing Start Date: July 27, 2022

Testing End Date: August 30, 2022

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:



Eric LI  
Section Manager





Hosea CHAN  
EMC Project Engineer




Louise Liu  
EMC Test Engineer

## 7 Test Setups


### 7.1 Radiated test setups Below 1GHz

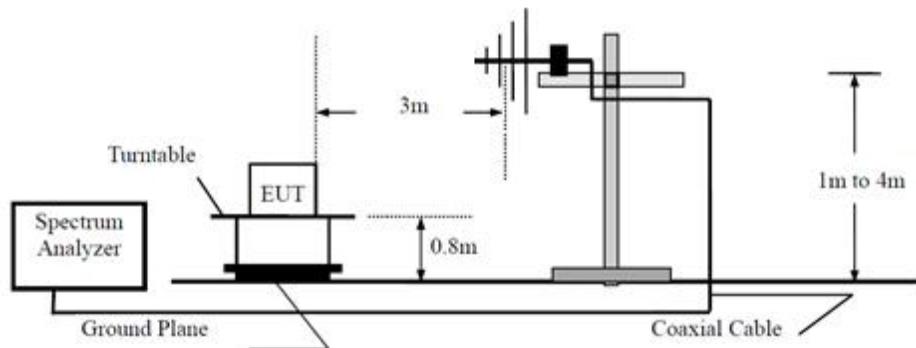


### 7.2 Radiated test setups Above 1GHz

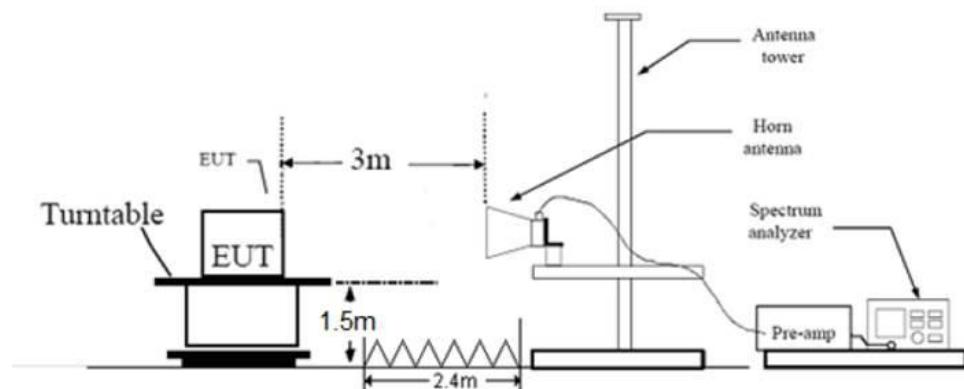

### 7.3 AC Power Line Conducted Emission test setups

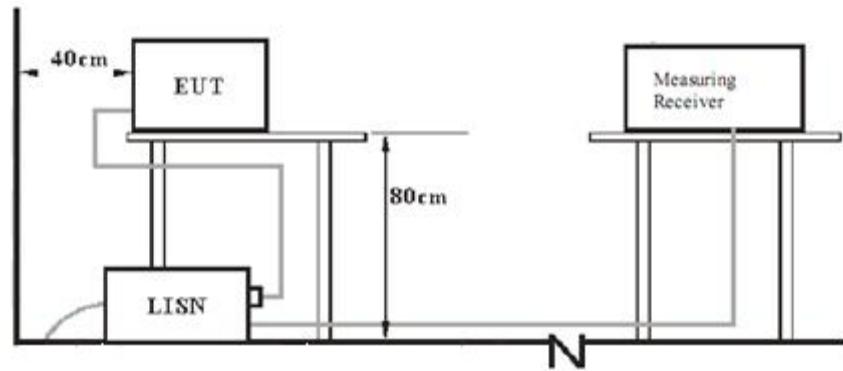

### 7.4 Conducted RF test setups

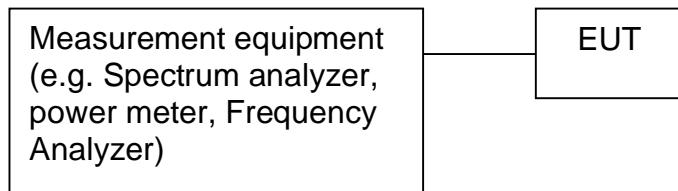

## 8 Emission Test Results

### 8.1 Radiated Emission

EUT: R4 GPS  
 Op Condition: Operated, TX Mode (2457MHz)  
 Test Specification: FCC15.249 & 15.209, Antenna: Horizontal  
 Comment: 3.7 VDC  
 Remark: Measurement range up to 25GHz

Test Result  
 Passed  
 Not Passed

| Frequency<br>MHz   | Result<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Detector<br>PK/QP/AV | Corr.<br>(dB) | RSE. or Fund.      |
|--------------------|------------------------|-----------------------|--------------|----------------------|---------------|--------------------|
| 47.884375          | 19.59                  | 40.00                 | 20.41        | Quasi Peak           | 20.72         | Spurious emission  |
| 104.568750         | 18.17                  | 43.50                 | 25.33        | Quasi Peak           | 19.29         | Spurious emission  |
| 270.741875         | 21.41                  | 46.00                 | 24.59        | Quasi Peak           | 20.90         | Spurious emission  |
| 354.828750         | 23.73                  | 46.00                 | 22.27        | Quasi Peak           | 23.63         | Spurious emission  |
| 514.393750         | 26.81                  | 46.00                 | 19.19        | Quasi Peak           | 26.35         | Spurious emission  |
| 944.467500         | 34.59                  | 46.00                 | 11.41        | Quasi Peak           | 32.76         | Spurious emission  |
| <b>2457.000000</b> | <b>86.75</b>           | <b>114.00</b>         | <b>27.25</b> | <b>Peak</b>          | <b>-2.73</b>  | <b>Fundamental</b> |
| <b>2457.000000</b> | <b>66.75</b>           | <b>94.00</b>          | <b>27.25</b> | <b>AV</b>            | <b>-2.73</b>  | <b>Fundamental</b> |
| 5007.000000        | 48.04                  | 74.00                 | 25.96        | Peak                 | 3.84          | Spurious emission  |
| 12644.000000       | 48.64                  | 74.00                 | 25.36        | Peak                 | 16.74         | Spurious emission  |

#### Remark:

- According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
- Consequence Level=Reading Level + Correction Factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss  
 (The Reading Level is recorded by software which is not shown in the sheet)
- No signification emissions were detected above 18 GHz.

## Radiated Emission

EUT: R4 GPS  
 Op Condition: Operated, TX Mode (2457MHz)  
 Test Specification: FCC15.249 & 15.209, Antenna: Vertical  
 Comment: 3.7 VDC  
 Remark: Measurement range up to 25GHz

**Test Result**  
 Passed  
 Not Passed

| Frequency<br>MHz   | Result<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Detector<br>PK/QP/AV | Corr.<br>(dB) | RSE. or Fund.      |
|--------------------|------------------------|-----------------------|--------------|----------------------|---------------|--------------------|
| 30.485000          | 26.91                  | 40.00                 | 13.09        | Quasi Peak           | 17.32         | Spurious emission  |
| 56.371875          | 20.73                  | 40.00                 | 19.27        | Quasi Peak           | 20.51         | Spurious emission  |
| 96.081250          | 18.03                  | 43.50                 | 25.47        | Quasi Peak           | 18.41         | Spurious emission  |
| 296.143750         | 21.88                  | 46.00                 | 24.12        | Quasi Peak           | 21.67         | Spurious emission  |
| 446.190625         | 25.50                  | 46.00                 | 20.50        | Quasi Peak           | 25.19         | Spurious emission  |
| 889.177500         | 34.00                  | 46.00                 | 12.00        | Quasi Peak           | 32.23         | Spurious emission  |
| <b>2457.000000</b> | <b>83.04</b>           | <b>114.00</b>         | <b>30.96</b> | <b>Peak</b>          | <b>-2.73</b>  | <b>Fundamental</b> |
| <b>2457.000000</b> | <b>63.04</b>           | <b>94.00</b>          | <b>30.96</b> | <b>Peak</b>          | <b>-2.73</b>  | <b>Fundamental</b> |
| 3081.000000        | 44.31                  | 74.00                 | 29.69        | Peak                 | -0.53         | Spurious emission  |
| 5291.000000        | 49.17                  | 74.00                 | 24.83        | Peak                 | 4.71          | Spurious emission  |



### Remark:

1. According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
2. Consequence Level=Reading Level + Correction Factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss  
 (The Reading Level is recorded by software which is not shown in the sheet)
3. No signification emissions were detected above 18 GHz.

## 8.2 20dB & 99% Bandwidth

EUT: R4 GPS  
 Op Condition: Operated, TX Mode (2457MHz)  
 Test Specification: FCC15.215  
 Comment: 3.7 VDC

**Test Result**  
 Passed  
 Not Passed

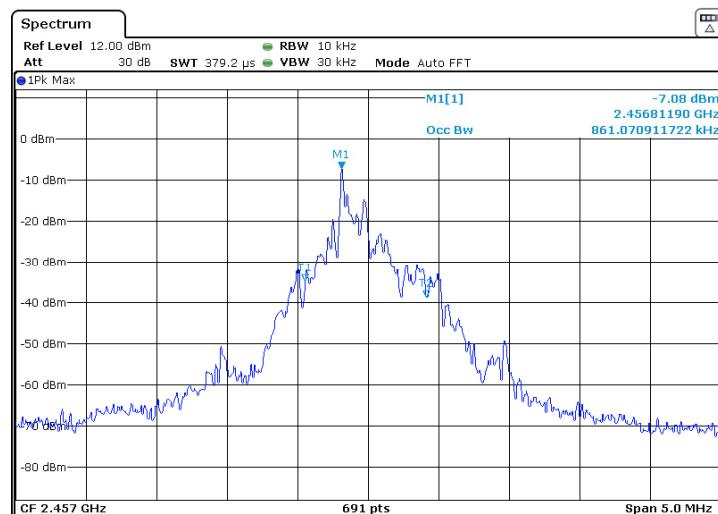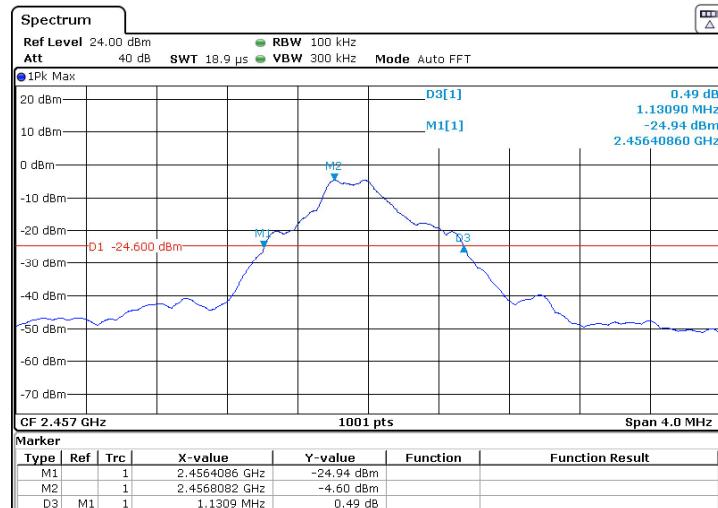


| Bandwidth      | Measured Value |
|----------------|----------------|
| 20dB bandwidth | 1.131 MHz      |
| 99% OCB        | 0.861 MHz      |

## 8.3 Conducted Emission at AC Power line

EUT: R4 GPS  
 Op Condition: Charging + ANT+ Mode  
 Test Specification: FCC15.207  
 Comment: 120V AC 60Hz, L Line

**Test Result**  
 Passed  
 Not Passed

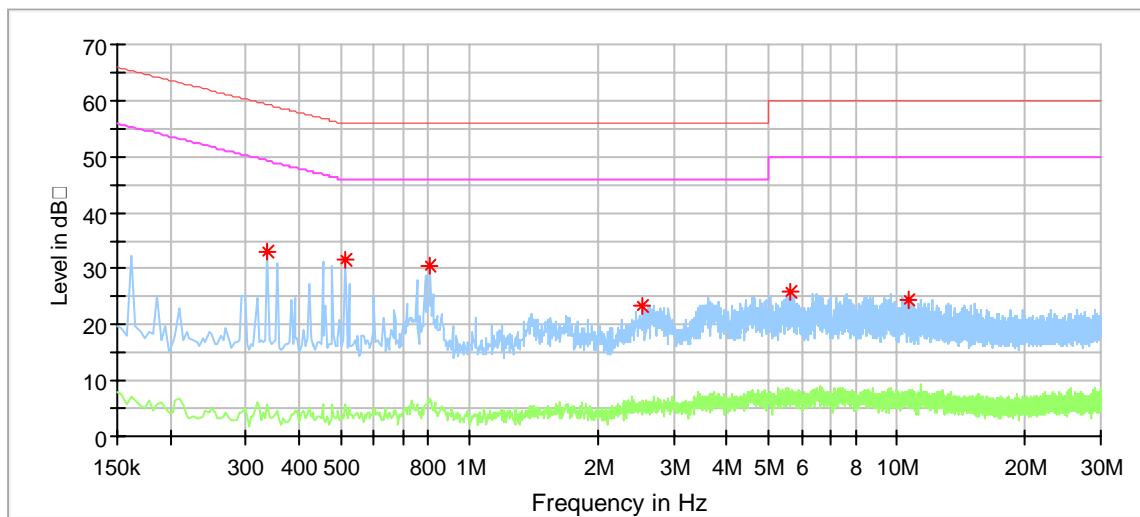


| Frequency (MHz) | MaxPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------|----------------|--------------|-------------|
| 0.338000        | 32.98          | ---            | 59.25        | 26.27       |
| 0.514000        | 31.58          | ---            | 56.00        | 24.42       |
| 0.810000        | 30.60          | ---            | 56.00        | 25.40       |
| 2.546000        | 23.25          | ---            | 56.00        | 32.75       |
| 5.650000        | 26.01          | ---            | 60.00        | 33.99       |
| 10.614000       | 24.52          | ---            | 60.00        | 35.48       |

## Conducted Emission at AC Power Line

EUT: R4 GPS  
 Op Condition: Charging + ANT+ Mode  
 Test Specification: FCC15.207  
 Comment: 120V AC 60Hz, N Line

**Test Result**  
 Passed  
 Not Passed

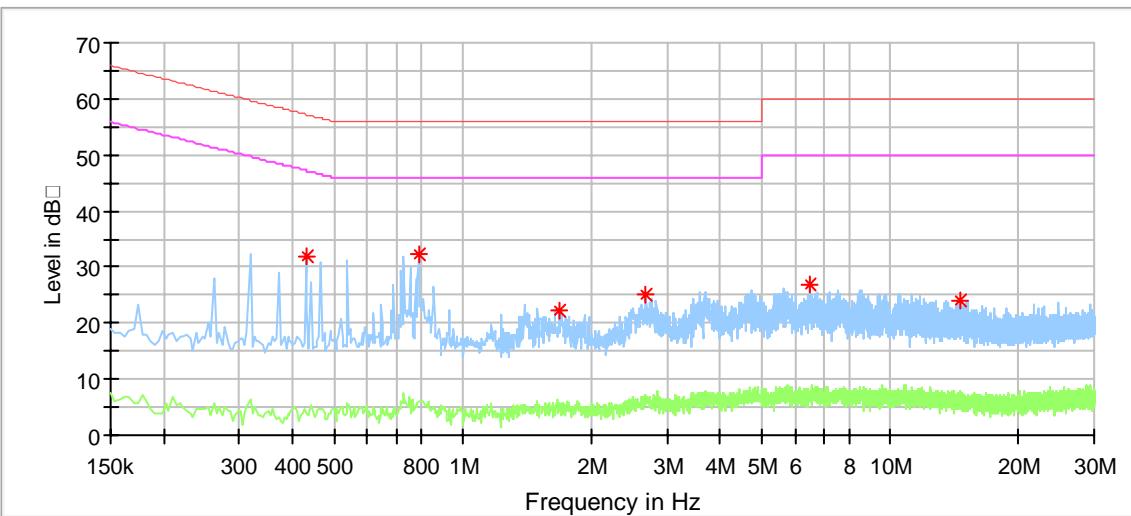

| Frequency (MHz) | MaxPeak (dB $\mu$ V) | Average (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) |
|-----------------|----------------------|----------------------|--------------------|-------------|
| 0.430000        | 32.01                | ---                  | 57.25              | 25.25       |
| 0.790000        | 32.46                | ---                  | 56.00              | 23.54       |
| 1.678000        | 22.34                | ---                  | 56.00              | 33.66       |
| 2.686000        | 25.03                | ---                  | 56.00              | 30.97       |
| 6.470000        | 26.98                | ---                  | 60.00              | 33.02       |
| 14.606000       | 24.00                | ---                  | 60.00              | 36.00       |

## 8.4 Antenna Requirement

EUT: R4 GPS  
Op Condition: Operated, TX Mode  
Test Specification: FCC15.203 (b)  
Comment: 3.7 VDC

Test Result  
 Passed  
 Not Passed

### Limit

For intentional device, according to FCC Title 47 Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Connector Construction

The antenna used in this product is a chip antenna, which in accordance to section 15.203, is considered sufficient to comply with the antenna requirement.

## 9 Test setup procedure

### 9.1 Field strength of emissions and Restricted bands

#### Test Method

- 1: The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

#### For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak and average,  
Trace = max hold.

#### For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 120KHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = QP,  
Trace = max hold.

## Field strength of emissions and Restricted bands

### Limits

According to §15.249 (a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--|--|
| 902–928 MHz           | 50   | 500  |
| 2400–2483.5 MHz       | 50   | 500  |
| 5725–5875 MHz         | 50   | 500  |
| 24.0–24.25 GHz        | 250  | 2500   |

According to §15.249 (c), Field strength limits are specified at a distance of 3 meters.

According to §15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to §15.205 Unwanted emissions falling into restricted bands in §15.205 (a) shall comply with the limits specified in §15.209.

| Frequency<br>MHz | Field Strength<br>uV/m | Field Strength<br>dB $\mu$ V/m | Detector |
|------------------|------------------------|--------------------------------|----------|
| 30-88            | 100                    | 40                             | QP       |
| 88-216           | 150                    | 43.5                           | QP       |
| 216-960          | 200                    | 46                             | QP       |
| 960-1000         | 500                    | 54                             | QP       |
| Above 1000       | 500                    | 54                             | AV       |
| Above 1000       | 5000                   | 74                             | PK       |

## 9.2 Conducted Emission at AC Power line

### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

### Limit

| Frequency<br>MHz | QP Limit<br>dB $\mu$ V | AV Limit<br>dB $\mu$ V |
|------------------|------------------------|------------------------|
| 0.150-0.500      | 66-56*                 | 56-46*                 |
| 0.500-5          | 56                     | 46                     |
| 5-30             | 60                     | 50                     |

\*Decreasing linearly with logarithm of the frequency.

## 9.3 20dB & 99% Bandwidth

### Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to spectrum analyser. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.

### Limits:

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

## 10 Appendix A - General Product Information

### Radiofrequency radiation exposure evaluation

This exposure evaluation is intended for **FCC ID: TFOR4GPS**

According to KDB 447498 D01v06 section 4.3.1, For frequencies between 100 MHz to 6GHz and test separation distances  $\leq$  50 mm, the Numeric threshold is determined as:

Step a)

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR

>> The fundamental frequency of the EUT is 2457MHz,  
the test separation distance is  $\leq$  50mm.

(Manufacturer specified the separation distance is: 5mm)  
(5mm is the worst case according to the KDB)

Step b)

>> Numeric threshold (2457MHz), mW / 5mm \*  $\sqrt{2.457\text{GHz}}$   $\leq$  3.0  
Numeric threshold (2457MHz)  $\leq$  9.569mW

>> The power (calculated power + tune up tolerance) of EUT at 2457MHz is: 0.14mW  
Which is smaller than the Numeric threshold.  
Therefore, the device is exempt from stand-alone SAR test requirements.


Power calculation (According to C63.10 chapter 9.5)

|  | Value | Unit                     |
|--|-------|--------------------------|
| Field Strength Measured (E)                              | 86.75 | $\text{dB}\mu\text{V/m}$ |
| Measurement Distance (D)                                 | 3     | m                        |
| Equivalent Isotropically Radiated Power (E.I.R.P in dBm) | -8.41 | dBm                      |
| Equivalent Isotropically Radiated Power (E.I.R.P in mW)  | 0.14  | mW                       |

Remark: EIRP = E + 20log(D) -104.7

(EIRP is in dBm, E is in  $\text{dB}\mu\text{V/m}$ , D is in metres)

Reviewed by:

  
Eric LI  
Section Manager

Prepared by:

  
Hosea CHAN  
EMC Project Engineer