

F C C -

TEST REPORT

REPORT NO.: 42469A/5/400F

FCC – Test Report

Date: 2005-07-05

No. 42469A/5/400F

Page 2 of 12

FCC listed testlab
acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of
ANSI C63.4 - 2001

Product : Wireless Headphone Radio -
Transmitter

Product Class : Low Power Communication
Device Transmitter

Brand Name : -

Model : L-31

Additional Model : BT-100, XD-6

Applicant : BEST TEAM INDUSTRIES
LIMITED

FCC – Test Report

No. 42469A/5/400F

Date: 2005-07-05

Page 3 of 12

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure (> 30MHz)
8. Radiated Emission Testprocedure (9kHz-30MHz)
9. Interference Radiation (Datasheet)
10. Notes for Radiation Measurement (acc. to ANSI C63.4 - 2001)
11. Measurement of Emissions within Band Edges (Band Edges Plot)
12. Notes for Measurement of Emissions within Band Edges

FCC – Test Report

Date: 2005-07-05

No. 42469A/5/400F

Page 4 of 12

LABORATORY - REPORT

APPLICANT: BEST TEAM INDUSTRIES LIMITED
ADDRESS: Rm 1407 Wealth Commercial Centre
48 Kwong Wa Street
MongKok, Kowloon
HONG KONG

DATE OF SAMPLE RECEIVED: 2005-06-03

DATE OF TESTING: 2005-06-30 to 2005-07-04

DESCRIPTION OF SAMPLE:

Product: Wireless Headphone Radio - Transmitter
Product class: Low Power Communication Device Transmitter
Model number: L-31
Additional model number: BT-100, XD-6
Rating: DC 3V ('AAA' Size Battery x 2)

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations
Part 15 Subpart C - Intentional Radiators

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature

Remark: 1. Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests.
2. The conducted emissions test (if applicable) has considered the limits in Sections 15.107 and 15.207 adopted under FCC 02-157 (ETDocket 98-80). The product may be marketed after July 11, 2005, and is not affected by the 15.37(j) transition provisions.

FCC – Test Report

No. 42469A/5/400F

Date: 2005-07-05

Page 5 of 12

Summary of Test Results

Interference Radiation:

Test result: O.K.
Test data: See attached data sheet


Interference Voltage:

Test result: N.A.
Test data: N.A.

Measurement of Emissions within Band Edges

Test result: O.K.
Test data: See attached data sheet

PHOTOGRAPH OF THE SAMPLE

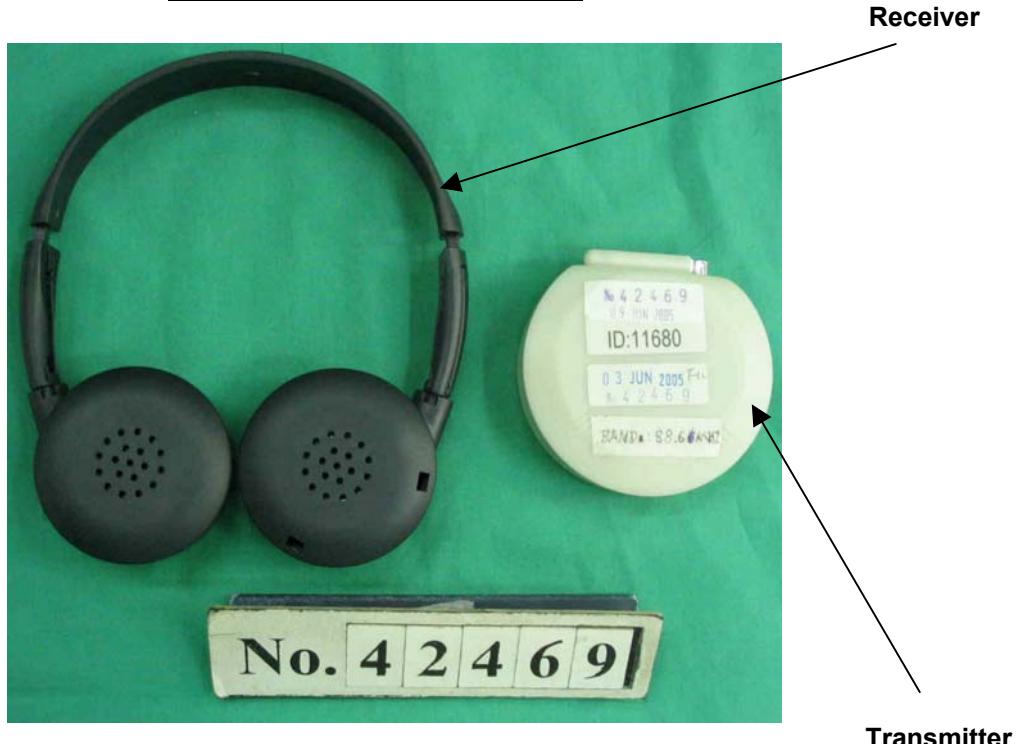

FCC – Test Report

Date: 2005-07-05

No. 42469A/5/400F

Page 6 of 12

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	150KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	9KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,000 MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,000 MHz
Test Receiver	Rohde & Schwarz	ESHS30	839667/002	9KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVS30	828525/006	25MHz – 1000MHz
Spectrum Analyzer with Q. Peak	Advantest	R3132	140101852	9KHz – 3GHz
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	0.15MHz – 1000MHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	--
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	--
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127312	2 x 10A, 50Ω, 50µH 9KHz-30MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127309	2 x 10A, 50Ω, 50µH 9KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	9KHz-30MHz
Turntable with Controller	Drehtisch	DT312	--	Ø120 cm


FCC – Test Report

No. 42469A/5/400F

Date: 2005-07-05

Page 7 of 12

Radiated Emission Test Procedure (> 30MHz)

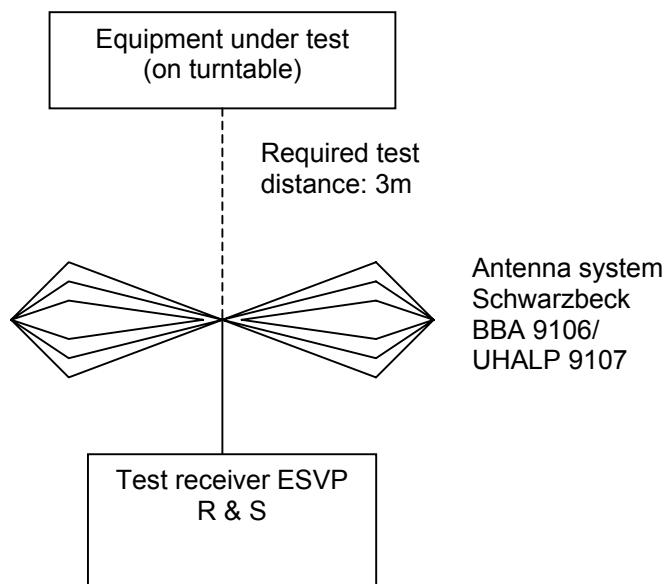


FCC – Test Report

No. 42469A/5/400F

Date: 2005-07-05

Page 8 of 12

Radiated Emission Test Procedure (9kHz – 30MHz)

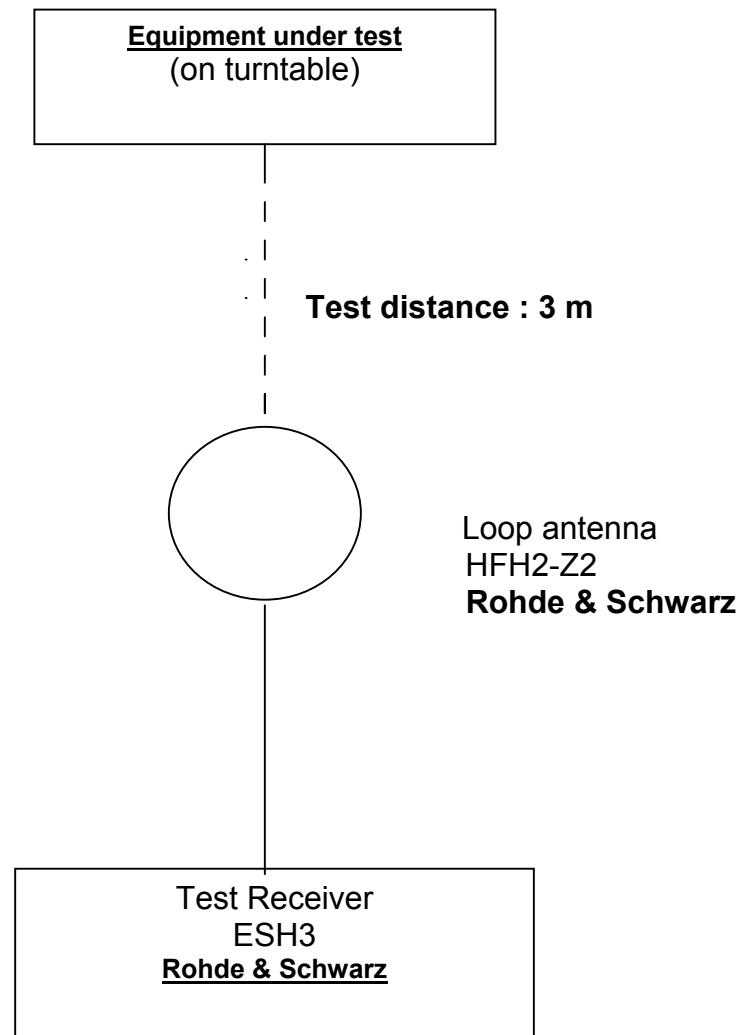

Intentional Radiators

Date: 2005-07-05

Page 9 of 12

Measurement of Radiated Emissions (30MHz-1000MHz)
Acc: FCC Part 15 Subpart C (15.239)

IECC Ref:	42469A/5/400F	Test Equipment
Model:	L-31	Receiver: ESDP Rohde & Schwarz
Applicant:	BEST TEAM INDUSTRIES LIMITED	Antenna: Schwarzbeck BBA 9106 and UHALP 9107
Sample No.:	1	
Set under test:	Wireless Headphone Radio	
Connected sets:	-	
Operating mode:	Operate	

Radiation Measurement

a. Fundamental Frequency

Frequency (MHz)	Maximum Test Result (dB(μV/m))		FCC Limit (dB(μV/m))	
	Peak	Average	Peak	Average
88.6	64.0	44.0	68	48

b. Other Frequencies

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
30	< 16	< 16	18.4	< 34.4	< 34.4	40.0
177.2	21	19	16.0	37.0	35.0	43.5
265.8	< 16	< 16	18.2	< 34.2	< 34.2	46.0
354.4	< 16	< 16	17.5	< 33.5	< 33.5	46.0
443	< 16	< 16	18.9	< 34.9	< 34.9	46.0
531.6	< 16	< 16	20.0	< 36.0	< 36.0	46.0
620.6	< 16	< 16	21.2	< 37.2	< 37.2	46.0
708.8	< 16	< 16	22.5	< 38.5	< 38.5	46.0
797.4	< 16	< 16	23.7	< 39.7	< 39.7	46.0
886	< 16	< 16	24.8	< 40.8	< 40.8	46.0
974.6	< 16	< 16	26.1	< 42.1	< 42.1	54.0
1000	< 16	< 16	26.5	< 42.5	< 42.5	54.0

Remark:

All frequencies in the required range have been scanned and only those significant and representative readings are reported above.
All emissions not reported above are all well below the limit.

The measurement is conducted with the sample placed on the turntable in 3 orthogonal planes.

FCC – Test Report

Date: 2005-07-05

No. 42469A/5/400F

Page 10 of 12

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instruments:

Rohde & Schwarz E5032B Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

In the frequency range above 1000 MHz Spectrum Analyzer FMSM26 and Analyzer Display Unit FSA-D are used, bandwidth set at 100 kHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

In the frequency range above 1 GHz horn-antenna RGA 50/60 is used.

5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions. To find the maximum emission (30MHz – 1000MHz), the antenna was raised from 1 to 4 meters and was stopped at the maximum emission point.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-2001 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.


FCC – Test Report

Date: 2005-07-05

No. 42469A/5/400F

Page 11 of 12

Measurement Data of Emissions within Band Edges

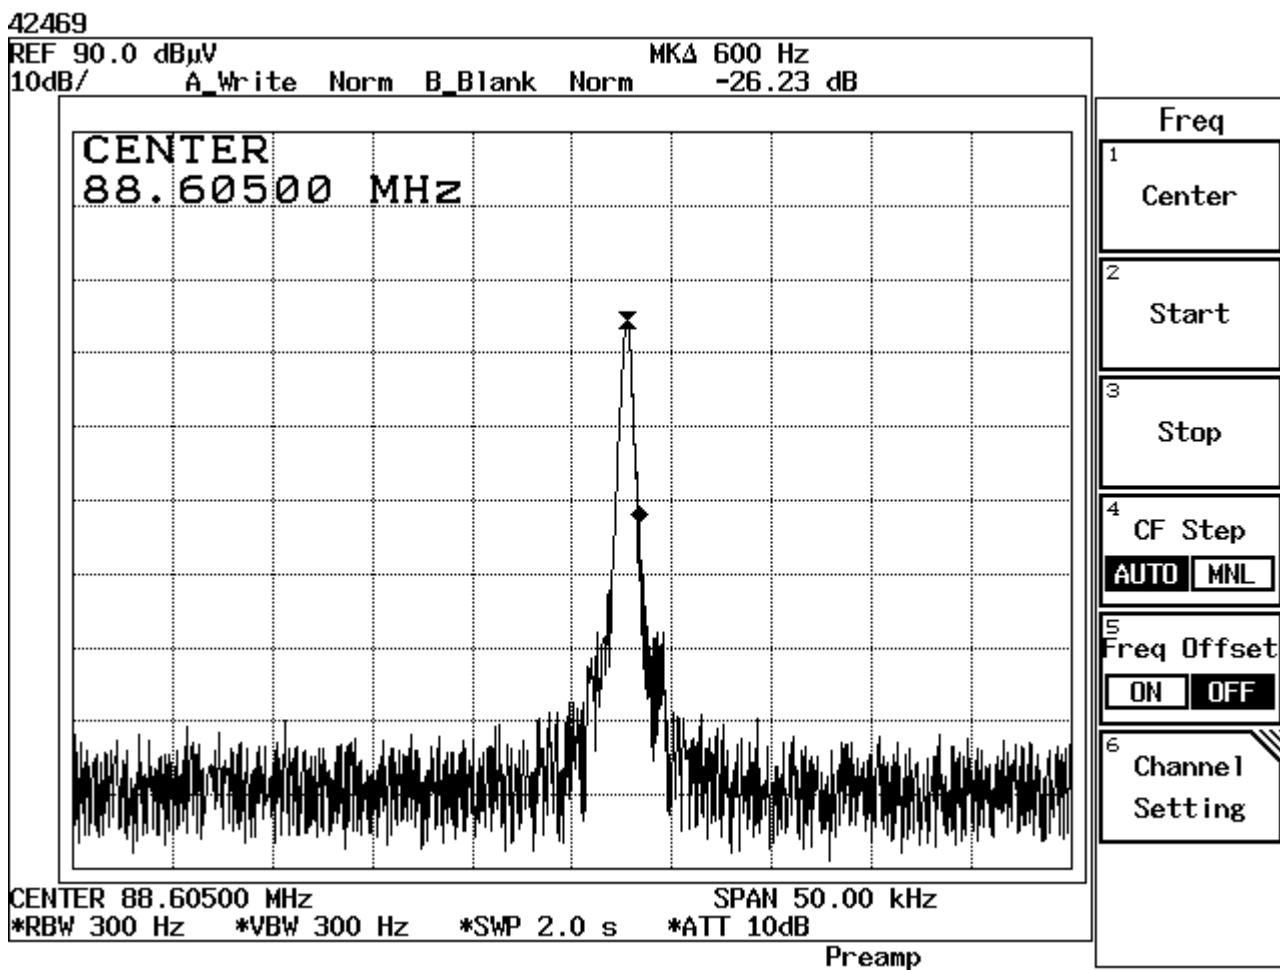

Result : The field strength of any emission within the operation band did not exceed 48 dB(μ V/m) for average value or 68 dB(μ V/m) for peak value. Refer to page 9 for the recorded value for the emission at the fundamental frequency.

FCC – Test Report

Date: 2005-07-05

No. 42469A/5/400F

Page 12 of 12

Notes for Measurement of Emissions within Band Edges

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Measuring instrumentations:

Spectrum Analyzer: Advantest R3132

3. Frequency range scanned:

The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.

4. Arrangement of EUT:

During the test, the sample was operated.

5. Measuring Procedure:

In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 2001 'Methods of Measurement od Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.