

# TEST REPORT

**Application No.:** GZCR2305000478HS  
**Applicant:** FKA Distributing Co., LLC  
**Address of Applicant:** 3000 N. Pontiac Trail, Commerce Township, Michigan, 48390, United States  
**Manufacturer:** FKA Distributing Co., LLC  
**Address of Manufacturer:** 3000 N. Pontiac Trail, Commerce Township, Michigan, 48390, United States  
**Factory:** Electrical Appliance Branch of Zhangzhou Easepal Industrial Corporation  
**Address of Factory:** No.36 Longkun Road, Hongjian Village, Jiaomei Town, Zhangzhou Taiwanese Investment Zone, Fujian

**Equipment Under Test (EUT):**  
**EUT Name:** Sandscape  
**Model No.:** ST-200, ST-200-CE, ST-200XX-XXXX (Where X can be any letter A-Z or number 0-9) ♣

♣ Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.

**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2023-05-19  
**Date of Test:** 2023-05-29 to 2023-06-15  
**Date of Issue:** 2023-07-13

|                     |              |
|---------------------|--------------|
| <b>Test Result:</b> | <b>Pass*</b> |
|---------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.

*Ricky Liu*

Ricky Liu  
Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:** To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kexhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
 Guangzhou Branch Testing Center EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| Revision Record |                  |            |          |
|-----------------|------------------|------------|----------|
| Version         | Report No.       | Date       | Remark   |
| 01              | GZCR230500047802 | 2023-07-13 | Original |
|                 |                  |            |          |
|                 |                  |            |          |

|                         |  |                            |  |
|-------------------------|--|----------------------------|--|
| Authorized for issue by |  |                            |  |
|                         |  | Pank Feng                  |  |
|                         |  | Pank Feng/Project Engineer |  |
|                         |  | Vico Cui                   |  |
|                         |  | Vico Cui/Reviewer          |  |

## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                                 |        |
|--------------------------------------|----------------------------------|--------|-------------------------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                                     | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                      |                                           |        |
|-------------------------------------------------------|----------------------------------|--------------------------------------|-------------------------------------------|--------|
| Item                                                  | Standard                         | Method                               | Requirement                               | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2       | 47 CFR Part 15, Subpart C 15.207          | Pass   |
| Conducted Peak Output Power                           |                                  | ANSI C63.10 (2013) Section 11.9.2    | 47 CFR Part 15, Subpart C 15.247(b)(3)    | Pass   |
| Minimum 6dB Bandwidth                                 |                                  | ANSI C63.10 (2013) Section 11.8.1    | 47 CFR Part 15, Subpart C 15.247a(2)      | Pass   |
| Power Spectrum Density                                |                                  | ANSI C63.10 (2013) Section 11.10.2   | 47 CFR Part 15, Subpart C 15.247(e)       | Pass   |
| Conducted Band Edges Measurement                      |                                  | ANSI C63.10 (2013) Section 11.13.3.2 | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Conducted Spurious Emissions                          |                                  | ANSI C63.10 (2013) Section 11.11     | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Emissions which fall in the restricted bands |                                  | ANSI C63.10 (2013) Section 11.12     | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions Below 1GHz                |                                  | ANSI C63.10 (2013) Section 6.4,6.5   | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions Above 1GHz                |                                  | ANSI C63.10 (2013) Section 6.6       | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |

### Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

### ✦ Declaration of EUT Family Grouping:

Model No.: ST-200, ST-200-CE, ST-200XX-XXXX (Where X can be any letter A-Z or number 0-9)

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on model name, appearance and colour.

Therefore only one model ST-200 was tested in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 3 Contents

|                                                               | Page |
|---------------------------------------------------------------|------|
| 1 Cover Page .....                                            | 1    |
| 2 Test Summary.....                                           | 3    |
| 3 Contents .....                                              | 4    |
| 4 General Information.....                                    | 6    |
| 4.1 Details of E.U.T. ....                                    | 6    |
| 4.2 Description of Support Units.....                         | 6    |
| 4.3 Measurement Uncertainty .....                             | 7    |
| 4.4 Test Location .....                                       | 7    |
| 4.5 Test Facility.....                                        | 8    |
| 4.6 Deviation from Standards.....                             | 8    |
| 4.7 Abnormalities from Standard Conditions.....               | 8    |
| 5 Equipment List .....                                        | 9    |
| 6 Radio Spectrum Technical Requirement.....                   | 12   |
| 6.1 Antenna Requirement .....                                 | 12   |
| 6.1.1 Test Requirement: .....                                 | 12   |
| 6.1.2 Conclusion .....                                        | 12   |
| 7 Radio Spectrum Matter Test Results.....                     | 13   |
| 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz) ..... | 13   |
| 7.1.1 E.U.T. Operation .....                                  | 13   |
| 7.1.2 Test Mode Description .....                             | 13   |
| 7.1.3 Test Setup Diagram .....                                | 14   |
| 7.1.4 Measurement Procedure and Data.....                     | 14   |
| 7.2 Conducted Peak Output Power .....                         | 17   |
| 7.2.1 E.U.T. Operation.....                                   | 17   |
| 7.2.2 Test Mode Description .....                             | 17   |
| 7.2.3 Test Setup Diagram .....                                | 18   |
| 7.2.4 Measurement Procedure and Data.....                     | 18   |
| 7.3 Minimum 6dB Bandwidth.....                                | 19   |
| 7.3.1 E.U.T. Operation.....                                   | 19   |
| 7.3.2 Test Mode Description .....                             | 19   |
| 7.3.3 Test Setup Diagram .....                                | 19   |
| 7.3.4 Measurement Procedure and Data.....                     | 19   |
| 7.4 Power Spectrum Density.....                               | 20   |
| 7.4.1 E.U.T. Operation.....                                   | 20   |
| 7.4.2 Test Mode Description .....                             | 20   |
| 7.4.3 Test Setup Diagram .....                                | 20   |
| 7.4.4 Measurement Procedure and Data.....                     | 20   |
| 7.5 Conducted Band Edges Measurement .....                    | 21   |
| 7.5.1 E.U.T. Operation.....                                   | 21   |
| 7.5.2 Test Mode Description .....                             | 21   |
| 7.5.3 Test Setup Diagram .....                                | 22   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

|       |                                                            |    |
|-------|------------------------------------------------------------|----|
| 7.5.4 | Measurement Procedure and Data.....                        | 22 |
| 7.6   | Conducted Spurious Emissions.....                          | 23 |
| 7.6.1 | E.U.T. Operation.....                                      | 23 |
| 7.6.2 | Test Mode Description.....                                 | 23 |
| 7.6.3 | Test Setup Diagram.....                                    | 24 |
| 7.6.4 | Measurement Procedure and Data.....                        | 24 |
| 7.7   | Radiated Emissions which fall in the restricted bands..... | 25 |
| 7.7.1 | E.U.T. Operation.....                                      | 25 |
| 7.7.2 | Test Mode Description.....                                 | 25 |
| 7.7.3 | Test Setup Diagram.....                                    | 26 |
| 7.7.4 | Measurement Procedure and Data.....                        | 26 |
| 7.8   | Radiated Spurious Emissions Below 1GHz.....                | 47 |
| 7.8.1 | E.U.T. Operation.....                                      | 47 |
| 7.8.2 | Test Mode Description.....                                 | 47 |
| 7.8.3 | Test Setup Diagram.....                                    | 48 |
| 7.8.4 | Measurement Procedure and Data.....                        | 48 |
| 7.9   | Radiated Spurious Emissions Above 1GHz.....                | 51 |
| 7.9.1 | E.U.T. Operation.....                                      | 51 |
| 7.9.2 | Test Mode Description.....                                 | 51 |
| 7.9.3 | Test Setup Diagram.....                                    | 51 |
| 7.9.4 | Measurement Procedure and Data.....                        | 52 |
| 8     | Test Setup Photo.....                                      | 83 |
| 9     | EUT Constructional Details (EUT Photos).....               | 84 |
| 10    | Appendix.....                                              | 85 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch Testing Center EEC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



## 4 General Information

### 4.1 Details of E.U.T.

Power supply: Power supply by adaptor:  
Model: HP36A-1203000-AI  
Input: AC100-240V 50/60Hz 1.0A  
Output: DC 12V 3.0A 36W

Test Voltage: AC 120 V 60Hz

Antenna Type: Integral Antenna

Antenna Gain: 3.37 dBi

Test Software Version: ESP32-S3-WROOM-1

Antenna Number: 1

For BLE

Operation Frequency: 2402MHz to 2480MHz

Bluetooth Version: 5.0

Modulation Type: GFSK

Number of Channels: 40

Channel Spacing: 2MHz

Power Setting: 4(-13dBm)

For Wi-Fi

Operation Frequency: 802.11b/g/n(HT20): 2412MHz to 2462MHz; 802.11n(HT40): 2422MHz to 2452MHz

Modulation Type: 802.11b: DSSS (CCK, DQPSK, DBPSK); 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Number of Channels: 802.11b/g/n(HT20): 11; 802.11n(HT40): 7

Channel Spacing: 5MHz

Power Setting: 40(-16dBm)

### 4.2 Description of Support Units

| Description     | Manufacturer | Model No.               | Serial No.    |
|-----------------|--------------|-------------------------|---------------|
| Wireless Router | TP-LINK      | TL-WDR5620              | 120B531012491 |
| Mobile Phone    | APPLE        | iPhone 12 mini          | F71DP3NG0GQY  |
| Note Book PC    | LENOVO       | Lenovo Xiaoxinchao 5000 | PF0TNMG8      |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 4.3 Measurement Uncertainty

| Test Item                                             | Measurement Uncertainty                                                                                             |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | ±2.76dB                                                                                                             |
| Conducted Peak Output Power                           | ± 0.75dB                                                                                                            |
| Minimum 6dB Bandwidth                                 | ± 3%                                                                                                                |
| Power Spectrum Density                                | ± 2.84dB                                                                                                            |
| Conducted Band Edges Measurement                      | ± 0.75dB                                                                                                            |
| Conducted Spurious Emissions                          | ± 0.75dB                                                                                                            |
| Radiated Emissions which fall in the restricted bands | ±5.00dB (30MHz-1GHz; 3m);±4.38dB (30MHz-1GHz; 10m);± 5.12dB (1GHz-6GHz); ±5.38dB (6GHz-18GHz); ±5.61dB(18GHz-40GHz) |
| Radiated Spurious Emissions Below 1GHz                | ±5.00dB (3m); ±4.38dB (10m)                                                                                         |
| Radiated Spurious Emissions Above 1GHz                | ±5.12dB (1GHz-6GHz); ±5.38dB (6GHz-18GHz); ±5.61dB(18GHz-40GHz)                                                     |

### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555

Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### ● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

#### ● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

#### ● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

#### ● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

#### ● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

#### ● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

### 4.6 Deviation from Standards

None

### 4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn  
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



## 5 Equipment List

| Conducted Emissions at AC Power Line (150kHz-30MHz) |                   |                |               |            |              |
|-----------------------------------------------------|-------------------|----------------|---------------|------------|--------------|
| Equipment                                           | Manufacturer      | Model No.      | Inventory No. | Cal Date   | Cal Due Date |
| Coaxial Cable                                       | HangTianXing      | 2m             | EMC0107       | 2022-08-24 | 2023-08-23   |
| Shielding Room                                      | ChangZhou ZhongYu | 8m x 3m x 3.8m | EMC0306       | 2022-10-16 | 2025-10-15   |
| Two-Line V-Network-GZ                               | Rohde & Schwarz   | ENV216         | EMC2135       | 2022-09-09 | 2023-09-08   |
| EMI Test Receiver (9kHz-3.6GHz)                     | Rohde & Schwarz   | ESR3           | EMC2221       | 2023-05-19 | 2024-05-18   |
| Test Software E3r                                   | Audix             | Ver.6.11812    | GZE100-77     | N/A        | N/A          |

| Conducted Peak Output Power      |              |           |               |            |              |
|----------------------------------|--------------|-----------|---------------|------------|--------------|
| Equipment                        | Manufacturer | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MI CABLE                         | SGS-EMC      | 0.8M      | EMC2137       | 2021-11-02 | 2023-11-01   |
| EXA Signal Analyzer (10Hz-44GHz) | Keysight     | N9010A    | EMC2138       | 2022-09-08 | 2023-09-07   |
| 4X4 Power sensor Unit            | TST          | TSPS2023R | EMC2226       | 2022-08-24 | 2023-08-23   |
| Test Software                    | TST          | V2.0      | GZE100-78     | N/A        | N/A          |

| Minimum 6dB Bandwidth            |              |           |               |            |              |
|----------------------------------|--------------|-----------|---------------|------------|--------------|
| Equipment                        | Manufacturer | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MI CABLE                         | SGS-EMC      | 0.8M      | EMC2137       | 2021-11-02 | 2023-11-01   |
| EXA Signal Analyzer (10Hz-44GHz) | Keysight     | N9010A    | EMC2138       | 2022-09-08 | 2023-09-07   |
| 4X4 Power sensor Unit            | TST          | TSPS2023R | EMC2226       | 2022-08-24 | 2023-08-23   |
| Test Software                    | TST          | V2.0      | GZE100-78     | N/A        | N/A          |

| Power Spectrum Density           |              |           |               |            |              |
|----------------------------------|--------------|-----------|---------------|------------|--------------|
| Equipment                        | Manufacturer | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MI CABLE                         | SGS-EMC      | 0.8M      | EMC2137       | 2021-11-02 | 2023-11-01   |
| EXA Signal Analyzer (10Hz-44GHz) | Keysight     | N9010A    | EMC2138       | 2022-09-08 | 2023-09-07   |
| 4X4 Power sensor Unit            | TST          | TSPS2023R | EMC2226       | 2022-08-24 | 2023-08-23   |
| Test Software                    | TST          | V2.0      | GZE100-78     | N/A        | N/A          |



| Conducted Band Edges Measurement |              |           |               |            |              |
|----------------------------------|--------------|-----------|---------------|------------|--------------|
| Equipment                        | Manufacturer | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MI CABLE                         | SGS-EMC      | 0.8M      | EMC2137       | 2021-11-02 | 2023-11-01   |
| EXA Signal Analyzer (10Hz-44GHz) | Keysight     | N9010A    | EMC2138       | 2022-09-08 | 2023-09-07   |
| 4X4 Power sensor Unit            | TST          | TSPS2023R | EMC2226       | 2022-08-24 | 2023-08-23   |
| Test Software                    | TST          | V2.0      | GZE100-78     | N/A        | N/A          |

| Conducted Spurious Emissions     |              |           |               |            |              |
|----------------------------------|--------------|-----------|---------------|------------|--------------|
| Equipment                        | Manufacturer | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MI CABLE                         | SGS-EMC      | 0.8M      | EMC2137       | 2021-11-02 | 2023-11-01   |
| EXA Signal Analyzer (10Hz-44GHz) | Keysight     | N9010A    | EMC2138       | 2022-09-08 | 2023-09-07   |
| 4X4 Power sensor Unit            | TST          | TSPS2023R | EMC2226       | 2022-08-24 | 2023-08-23   |
| Test Software                    | TST          | V2.0      | GZE100-78     | N/A        | N/A          |

| Radiated Emissions which fall in the restricted bands |                             |               |               |            |              |
|-------------------------------------------------------|-----------------------------|---------------|---------------|------------|--------------|
| Equipment                                             | Manufacturer                | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 1GHz-26.5 GHz Pre-Amplifier                           | Agilent                     | 8449B         | EMC0521       | 2022-12-16 | 2023-12-15   |
| EMI Test Receiver (10Hz-26.5GHz)                      | Rohde & Schwarz             | ESIB26        | EMC0522       | 2022-12-16 | 2023-12-15   |
| Chamber cable (Above 1GHz)                            | Scoflex                     | KMKM-8.0m     | EMC0545       | 2022-08-24 | 2024-08-23   |
| Horn Antenna (1GHz-18GHz)                             | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D    | EMC2026       | 2022-09-23 | 2025-09-22   |
| Horn Antenna (14-40GHz)                               | SCHWARZBECK                 | BBHA 9170     | EMC2041       | 2020-06-28 | 2023-06-27   |
| EXA Signal Analyzer (10Hz-44GHz)                      | Keysight                    | N9010A        | EMC2138       | 2022-09-08 | 2023-09-07   |
| MXE EMI Receiver (10Hz-8.4GHz)                        | Keysight                    | N9038A        | EMC2139       | 2022-10-21 | 2023-10-20   |
| 966 Anechoic Chamber                                  | C.R.T                       | 9m x 6m x 6m  | EMC2142       | 2020-12-20 | 2023-12-19   |
| Test Software E3                                      | Audix                       | Ver.6.120110a | GZE100-61     | N/A        | N/A          |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

| Radiated Spurious Emissions Below 1GHz |                             |               |               |            |              |
|----------------------------------------|-----------------------------|---------------|---------------|------------|--------------|
| Equipment                              | Manufacturer                | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 10m Semi-Anechoic Chamber              | ETS                         | N/A           | EMC0530       | 2022-10-16 | 2025-10-15   |
| Chamber cable                          | HangTianXing                | N/A           | EMC0542       | 2022-08-24 | 2023-08-23   |
| Amplifier (9kHz-1.3GHz)                | HP                          | 8447F         | EMC2065       | 2022-06-21 | 2023-06-20   |
| Active Loop Antenna-RED                | ETS-Lindgren                | 6502          | EMC2190       | 2022-04-06 | 2024-04-05   |
| EMI Test Receiver (1Hz-8GHz)           | Rohde & Schwarz             | ESW8          | EMC2220       | 2023-05-19 | 2024-05-18   |
| Test Software E3                       | Audix                       | Ver.6.120110a | GZE100-61     | N/A        | N/A          |
| Trilog Broadband Antenna (25MHz-1GHz)  | SCHWARZBECK MESS-ELEKTRONIK | VULB 9168     | EMC2174       | 2022-06-19 | 2025-06-18   |

| Radiated Spurious Emissions Above 1GHz |                             |               |               |            |              |
|----------------------------------------|-----------------------------|---------------|---------------|------------|--------------|
| Equipment                              | Manufacturer                | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 1GHz-26.5 GHz Pre-Amplifier            | Agilent                     | 8449B         | EMC0521       | 2022-12-16 | 2023-12-15   |
| EMI Test Receiver (10Hz-26.5GHz)       | Rohde & Schwarz             | ESIB26        | EMC0522       | 2022-12-16 | 2023-12-15   |
| Chamber cable (Above 1GHz)             | Scoflex                     | KMKM-8.0m     | EMC0545       | 2022-08-24 | 2024-08-23   |
| Horn Antenna (1GHz-18GHz)              | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D    | EMC2026       | 2022-09-23 | 2025-09-22   |
| Horn Antenna (14-40GHz)                | SCHWARZBECK                 | BBHA 9170     | EMC2041       | 2020-06-28 | 2023-06-27   |
| 2.4GHz Filter                          | Micro-Tronics               | BRM 50702     | EMC2069       | 2022-12-16 | 2023-12-15   |
| EXA Signal Analyzer (10Hz-44GHz)       | Keysight                    | N9010A        | EMC2138       | 2022-09-08 | 2023-09-07   |
| MXE EMI Receiver (10Hz-8.4GHz)         | Keysight                    | N9038A        | EMC2139       | 2022-10-21 | 2023-10-20   |
| 966 Anechoic Chamber                   | C.R.T                       | 9m x 6m x 6m  | EMC2142       | 2020-12-20 | 2023-12-19   |
| Test Software E3                       | Audix                       | Ver.6.120110a | GZE100-61     | N/A        | N/A          |

| General used equipment |              |          |              |            |              |
|------------------------|--------------|----------|--------------|------------|--------------|
| Equipment              | Manufacturer | Model No | Inventory No | Cal Date   | Cal Due Date |
| DMM                    | Fluke        | 73       | EMC0006      | 2022-06-24 | 2023-06-23   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch Testing & Calibration Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.37 dBi.

Antenna location: Refer to internal photo.



## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission<br>(MHz)                                         | Conducted limit (dBμV) |           |
|------------------------------------------------------------------------|------------------------|-----------|
|                                                                        | Quasi-peak             | Average   |
| 0.15-0.5                                                               | 66 to 56*              | 56 to 46* |
| 0.5-5                                                                  | 56                     | 46        |
| 5-30                                                                   | 60                     | 50        |
| *Decreases with the logarithm of the frequency.                        |                        |           |
| Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz |                        |           |

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.2 °C

Humidity: 55.3 % RH


Atmospheric Pressure: 1008 mbar

#### 7.1.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pre-scan                 | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



### 7.1.3 Test Setup Diagram

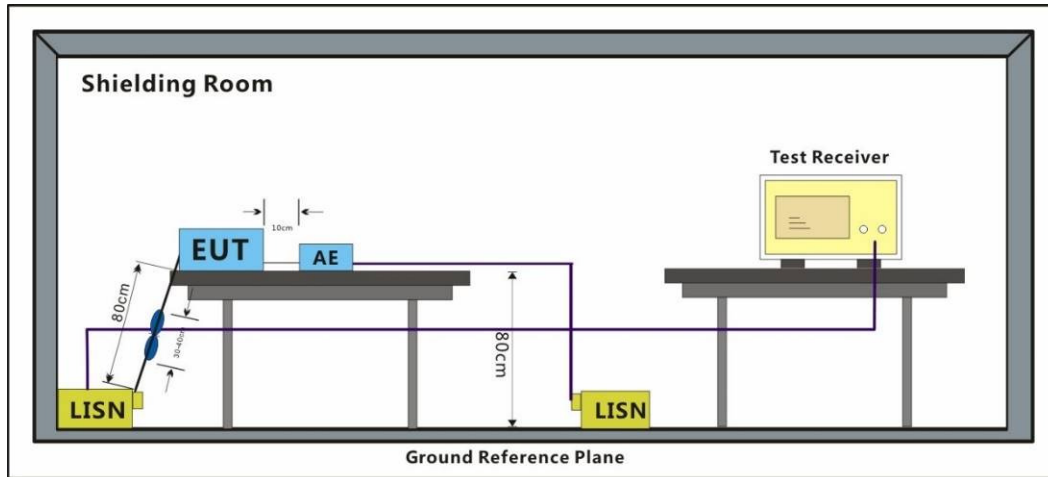


### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 02; Line: Live line

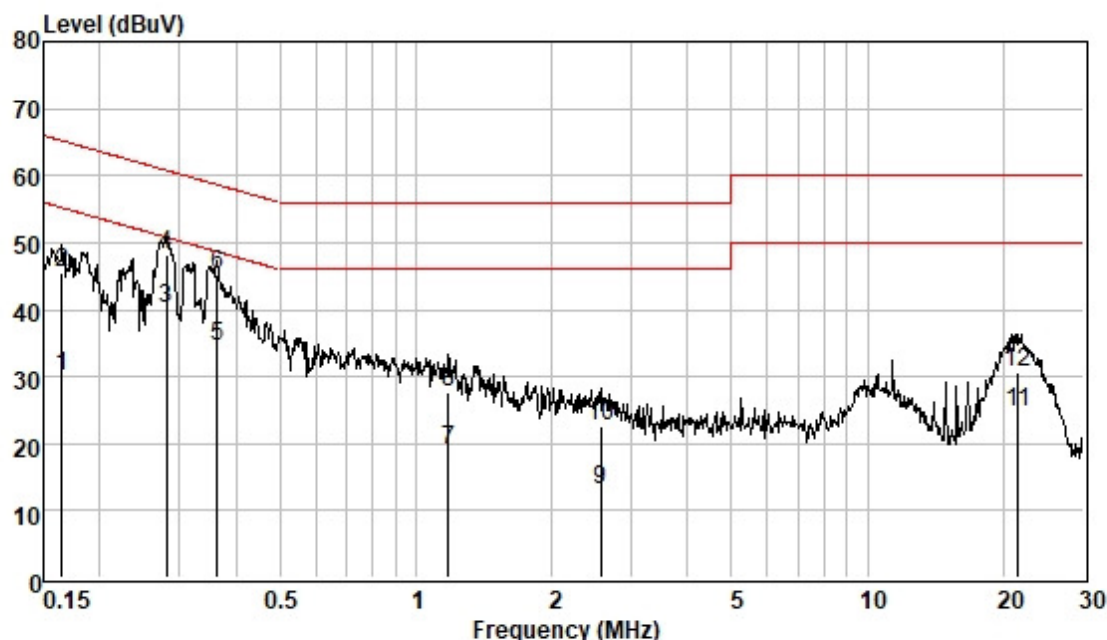


Pol :LINE  
Mode :  
Model :  
Power :

|    | Freque | Read  | Cable | LISN   | Measured | Limit | Over   | Remark  |
|----|--------|-------|-------|--------|----------|-------|--------|---------|
|    | nc     | Level | Loss  | Factor | Level    | Line  | Limit  |         |
|    | MHz    | dBuV  | dB    | dB     | dBuV     | dBuV  | dB     |         |
| 1  | 0.165  | 20.39 | 0.06  | 9.61   | 30.06    | 55.21 | -25.15 | Average |
| 2  | 0.165  | 35.80 | 0.06  | 9.61   | 45.47    | 65.21 | -19.74 | QP      |
| 3  | 0.280  | 30.43 | 0.06  | 9.62   | 40.11    | 50.81 | -10.70 | Average |
| 4  | 0.280  | 38.47 | 0.06  | 9.62   | 48.15    | 60.81 | -12.66 | QP      |
| 5  | 0.363  | 24.77 | 0.06  | 9.60   | 34.43    | 48.65 | -14.22 | Average |
| 6  | 0.363  | 35.42 | 0.06  | 9.60   | 45.08    | 58.65 | -13.57 | QP      |
| 7  | 1.178  | 9.25  | 0.08  | 9.60   | 18.93    | 46.00 | -27.07 | Average |
| 8  | 1.178  | 18.07 | 0.08  | 9.60   | 27.75    | 56.00 | -28.25 | QP      |
| 9  | 2.567  | 3.25  | 0.13  | 9.62   | 13.00    | 46.00 | -33.00 | Average |
| 10 | 2.567  | 12.77 | 0.13  | 9.62   | 22.52    | 56.00 | -33.48 | QP      |
| 11 | 21.486 | 14.55 | 0.36  | 9.67   | 24.58    | 50.00 | -25.42 | Average |
| 12 | 21.486 | 20.63 | 0.36  | 9.67   | 30.66    | 60.00 | -29.34 | QP      |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 02; Line: Neutral Line

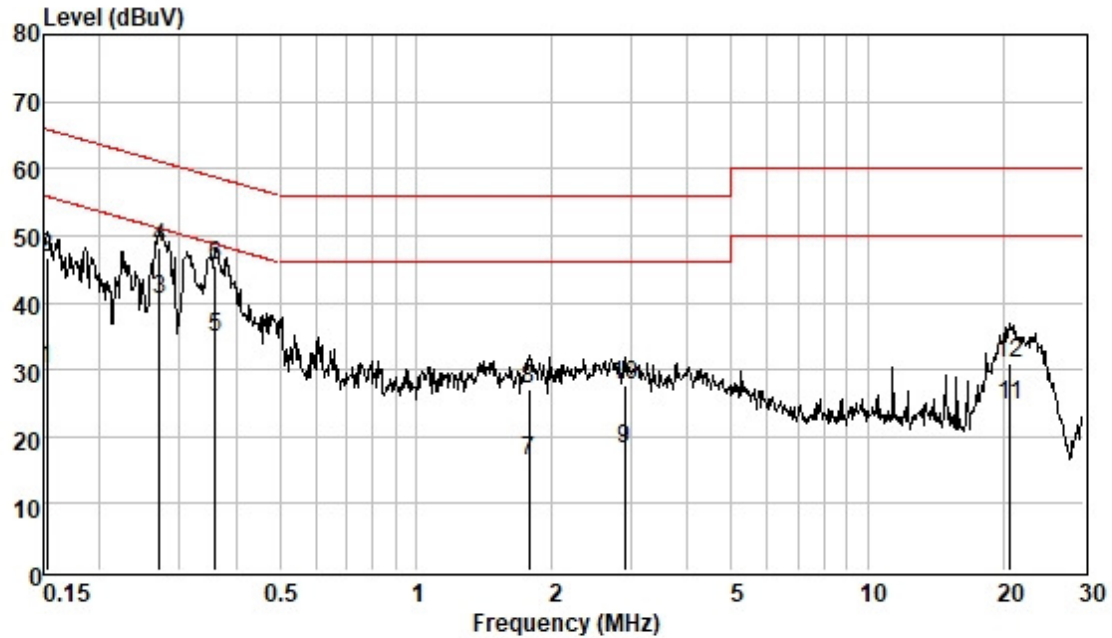

Pol : NEUTRAL  
Mode :  
Model :  
Power :

|    | Frequency<br>MHz | Read<br>Level<br>dBuV | Cable<br>Loss<br>dB | LISN<br>Factor<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV | Over<br>Limit<br>dB | Remark  |
|----|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 1  | 0.152            | 20.21                 | 0.06                | 9.63                 | 29.90                     | 55.87                 | -25.97              | Average |
| 2  | 0.152            | 36.89                 | 0.06                | 9.63                 | 46.58                     | 65.87                 | -19.29              | QP      |
| 3  | 0.272            | 30.82                 | 0.06                | 9.60                 | 40.48                     | 51.07                 | -10.59              | Average |
| 4  | 0.272            | 38.60                 | 0.06                | 9.60                 | 48.26                     | 61.07                 | -12.81              | QP      |
| 5  | 0.360            | 25.15                 | 0.06                | 9.62                 | 34.83                     | 48.74                 | -13.91              | Average |
| 6  | 0.360            | 35.80                 | 0.06                | 9.62                 | 45.48                     | 58.74                 | -13.26              | QP      |
| 7  | 1.781            | 6.54                  | 0.11                | 9.61                 | 16.26                     | 46.00                 | -29.74              | Average |
| 8  | 1.781            | 17.28                 | 0.11                | 9.61                 | 27.00                     | 56.00                 | -29.00              | QP      |
| 9  | 2.900            | 8.24                  | 0.14                | 9.63                 | 18.01                     | 46.00                 | -27.99              | Average |
| 10 | 2.900            | 17.80                 | 0.14                | 9.63                 | 27.57                     | 56.00                 | -28.43              | QP      |
| 11 | 20.704           | 14.62                 | 0.35                | 9.85                 | 24.82                     | 50.00                 | -25.18              | Average |
| 12 | 20.704           | 20.75                 | 0.35                | 9.85                 | 30.95                     | 60.00                 | -29.05              | QP      |



### 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--------------------------------------------------------|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $25 \leq$ hopping channels $< 50$             |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |

#### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.2 °C

Humidity: 56.9 % RH


Atmospheric Pressure: 1000 mbar

#### 7.2.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



### 7.2.3 Test Setup Diagram

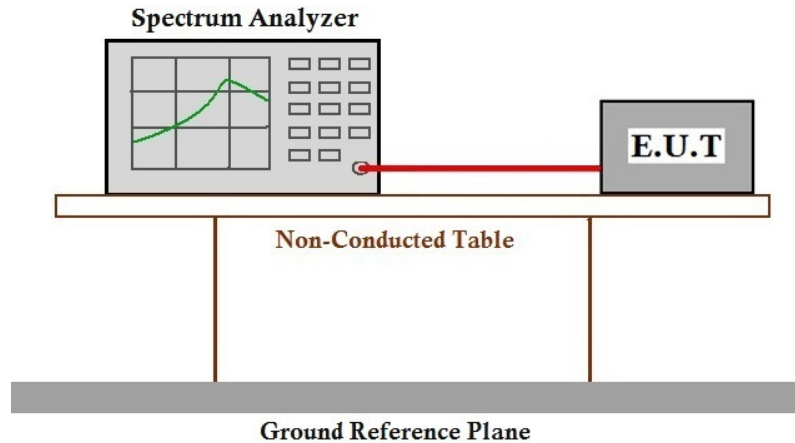

### 7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

### 7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)  
 Test Method: ANSI C63.10 (2013) Section 11.8.1  
 Limit:  $\geq 500$  kHz

#### 7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 25.2 °C Humidity: 56.9 % RH Atmospheric Pressure: 1000 mbar

#### 7.3.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

#### 7.3.3 Test Setup Diagram

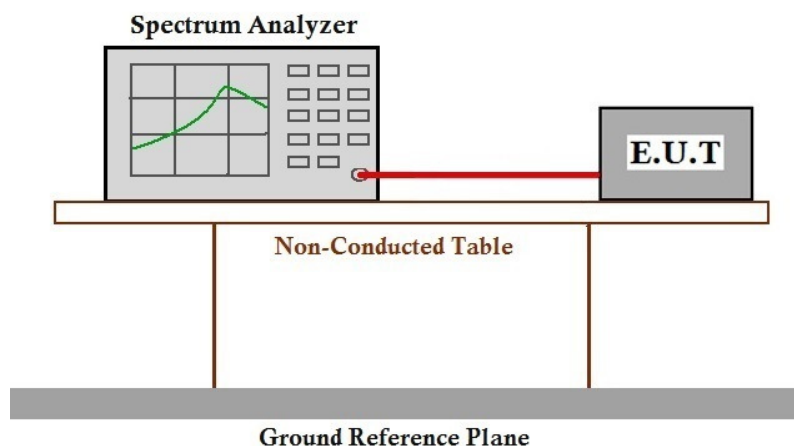

#### 7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
 Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

### 7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)  
 Test Method: ANSI C63.10 (2013) Section 11.10.2  
 Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission


#### 7.4.1 E.U.T. Operation

Operating Environment:  
 Temperature: 25.2 °C Humidity: 56.9 % RH Atmospheric Pressure: 1000 mbar

#### 7.4.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

#### 7.4.3 Test Setup Diagram

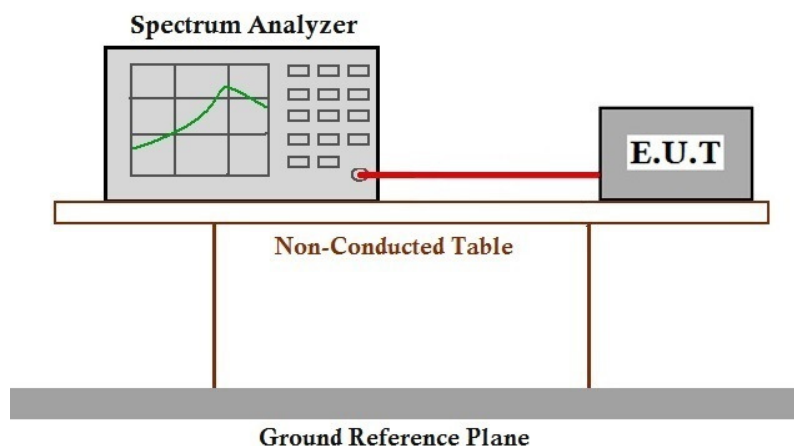

#### 7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.2 °C Humidity: 56.9 % RH Atmospheric Pressure: 1000 mbar

#### 7.5.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch EMC Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



### 7.5.3 Test Setup Diagram

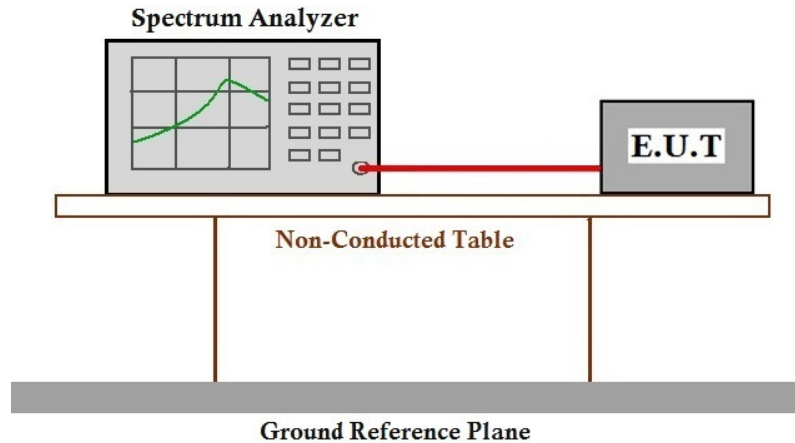

### 7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.2 °C

Humidity: 56.9 % RH

Atmospheric Pressure: 1000 mbar

#### 7.6.2 Test Mode Description


| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 7.6.3 Test Setup Diagram

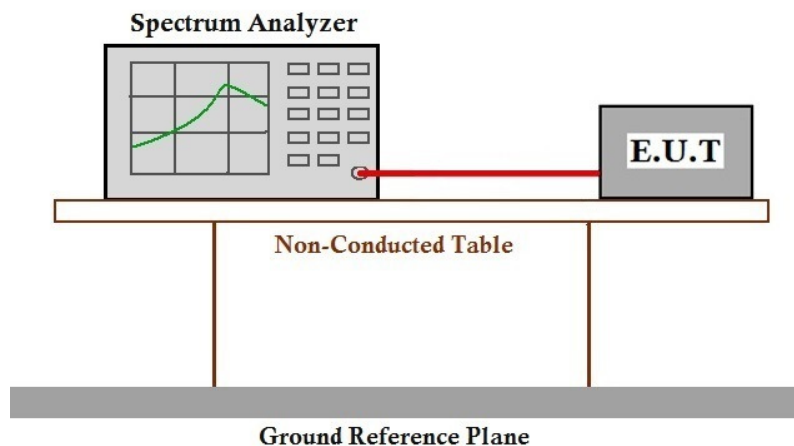

### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 11.12

Limit:

Test Distance: 3 m

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance(meters) |
|-----------------|-----------------------------------|------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                          |
| 0.490-1.705     | 24000/F(kHz)                      | 30                           |
| 1.705-30.0      | 30                                | 30                           |
| 30-88           | 100                               | 3                            |
| 88-216          | 150                               | 3                            |
| 216-960         | 200                               | 3                            |
| Above 960       | 500                               | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.9 °C

Humidity: 57.2 % RH

Atmospheric Pressure: 1000 mbar

#### 7.7.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pre-scan                 | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



### 7.7.3 Test Setup Diagram

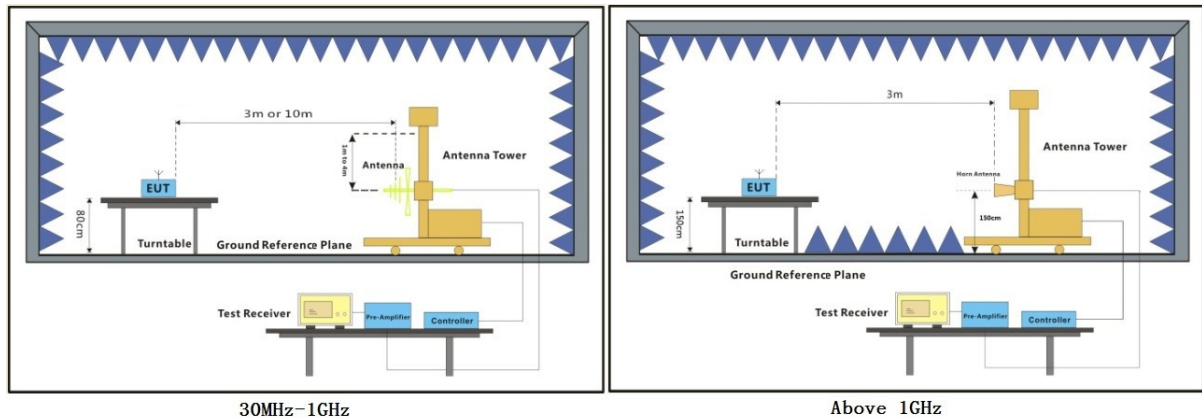


### 7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

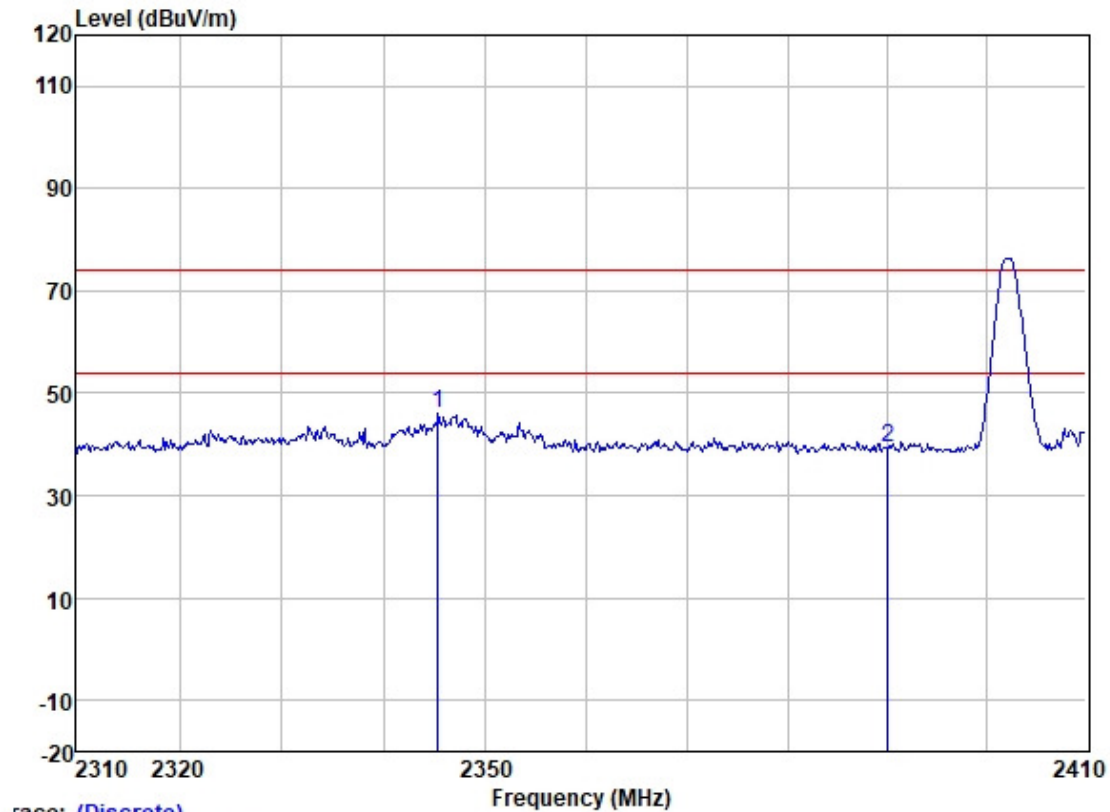

Trace: (Discrete)


|   | Freq     | ReadAntenna<br>Level | Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase | Remark |
|---|----------|----------------------|--------|---------------|------------------|--------|---------------|---------------|-----------|--------|
|   | MHz      | dBuV                 | dB/m   | dB            | dB               | dBuV/m | dBuV/m        | dB            |           |        |
| 1 | 2345.314 | 51.53                | 27.59  | 4.60          | 37.78            | 45.94  | 74.00         | -28.06        | VERTICAL  | Peak   |
| 2 | 2390.000 | 45.28                | 27.68  | 4.22          | 37.76            | 39.42  | 74.00         | -34.58        | VERTICAL  | Peak   |

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

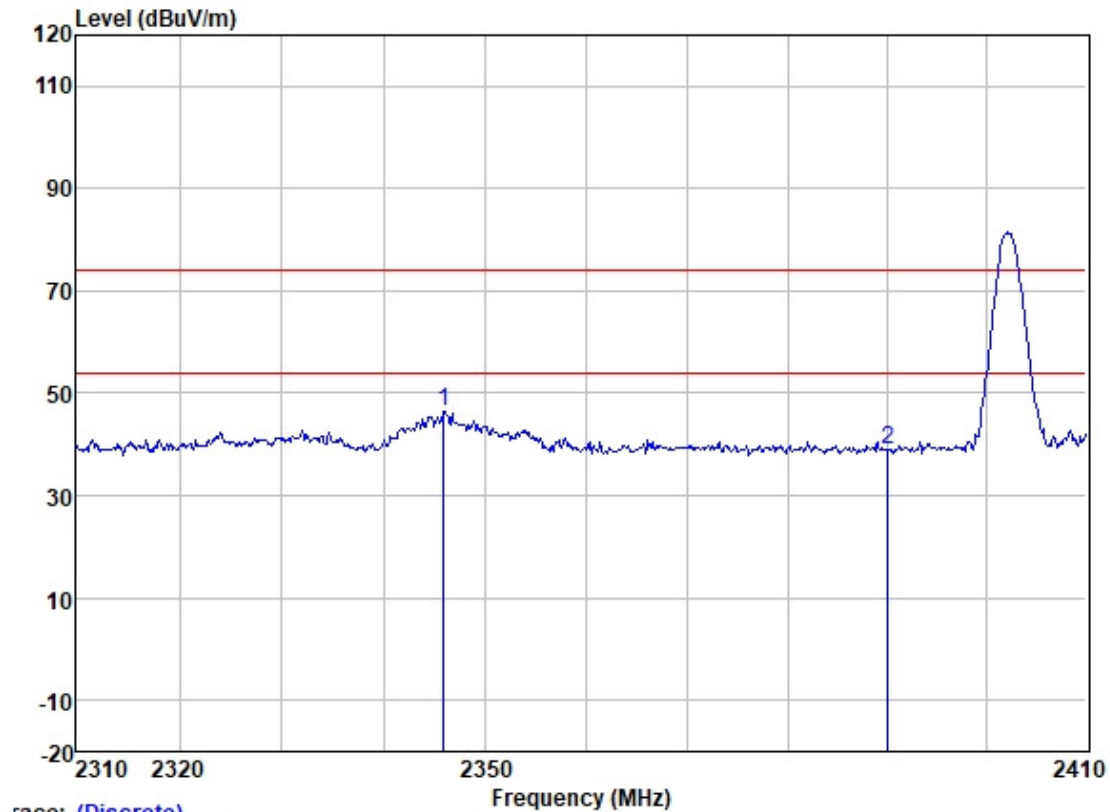

|      | Read     | Antenna | Cable | Preamp |        | Limit  | Over  |           |                 |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level    | Factor  | Loss  | Factor | Level  | Line   | Limit | Pol/Phase | Remark          |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB    |           |                 |
| 1    | 2345.910 | 52.18   | 27.59 | 4.60   | 37.78  | 46.59  | 74.00 | -27.41    | HORIZONTAL Peak |
| 2    | 2390.000 | 44.72   | 27.68 | 4.22   | 37.76  | 38.86  | 74.00 | -35.14    | HORIZONTAL Peak |

Test Mode: 00; Polarity: Vertical; Modulation: GFSK; Channel: High

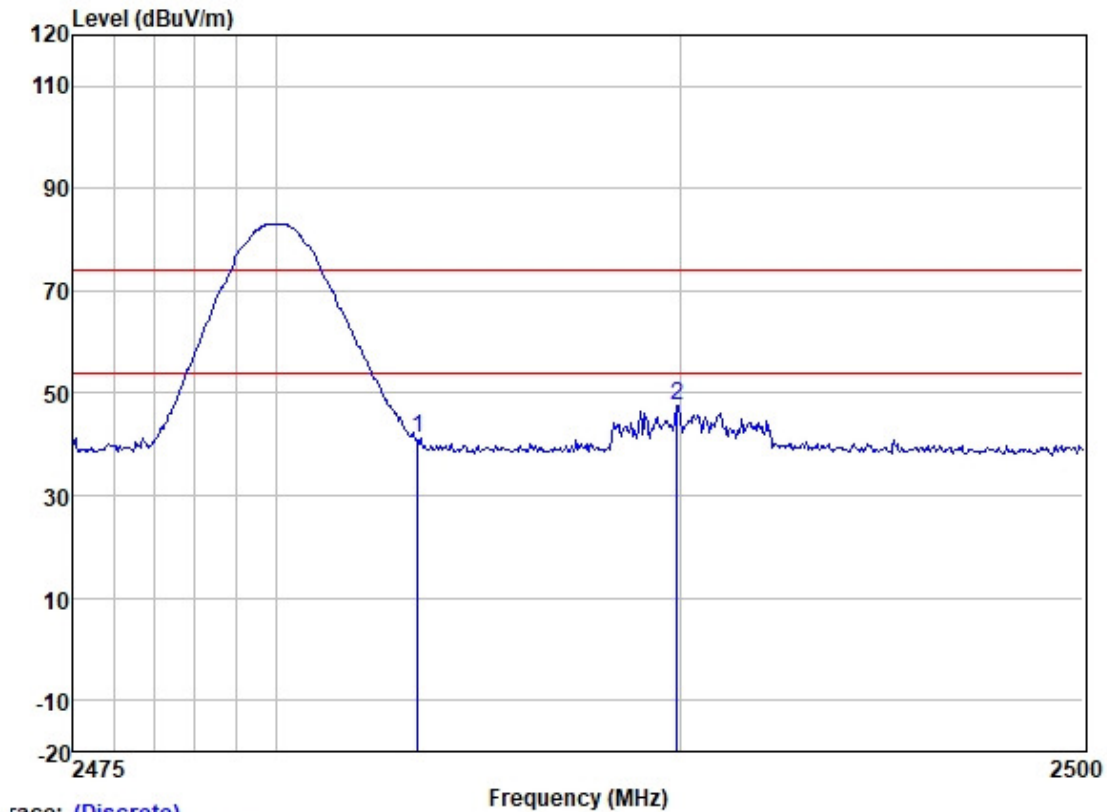


Trace: (Discrete)

|            | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |        |
|------------|-------|---------|-------|--------|--------|--------|--------|-----------|--------|
| Freq       | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
| MHz        | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 2483.500 | 47.51 | 27.85   | 3.42  | 37.73  | 41.05  | 74.00  | -32.95 | VERTICAL  | Peak   |
| 2 2489.920 | 54.00 | 27.86   | 3.33  | 37.73  | 47.46  | 74.00  | -26.54 | VERTICAL  | Peak   |




Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

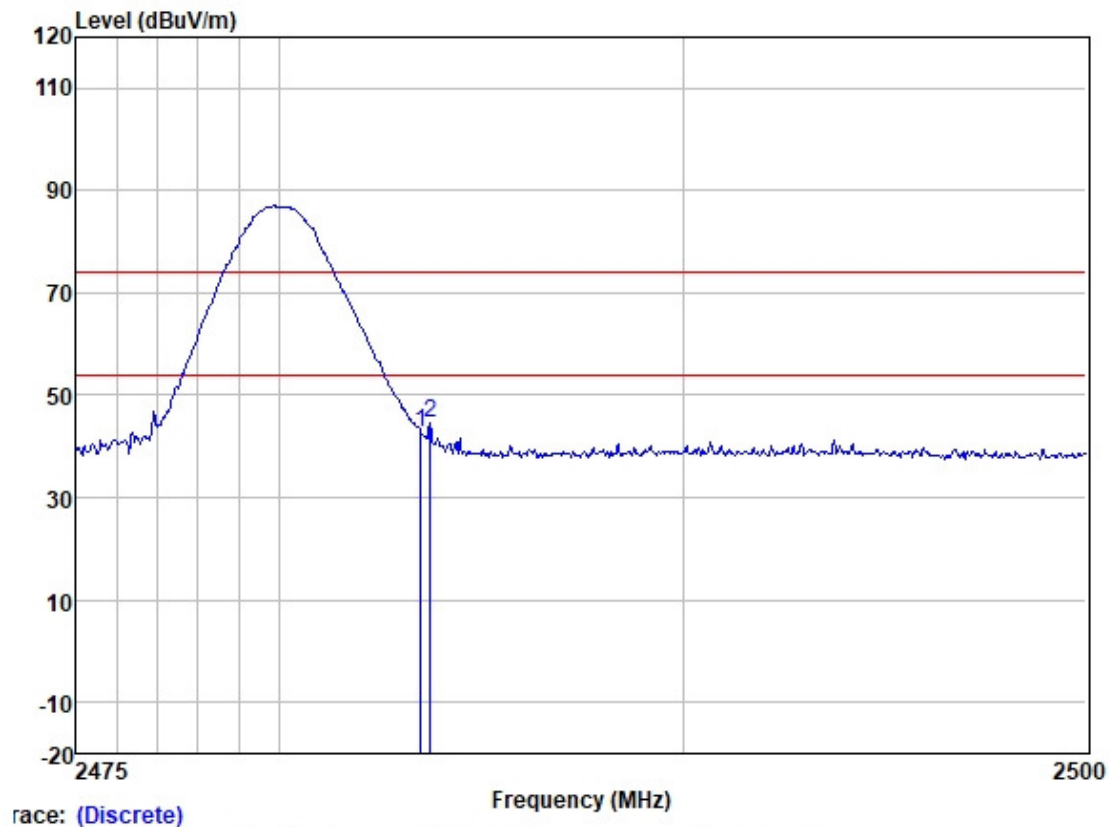

Trace: (Discrete)

|   | Freq     | ReadAntenna<br>Level | Antenna<br>Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase  | Remark |
|---|----------|----------------------|-------------------|---------------|------------------|--------|---------------|---------------|------------|--------|
|   | MHz      | dBuV                 | dB/m              | dB            | dB               | dBuV/m | dBuV/m        | dB            |            |        |
| 1 | 2483.500 | 49.02                | 27.85             | 3.42          | 37.73            | 42.56  | 74.00         | -31.44        | HORIZONTAL | Peak   |
| 2 | 2483.721 | 51.02                | 27.85             | 3.42          | 37.73            | 44.56  | 74.00         | -29.44        | HORIZONTAL | Peak   |


Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

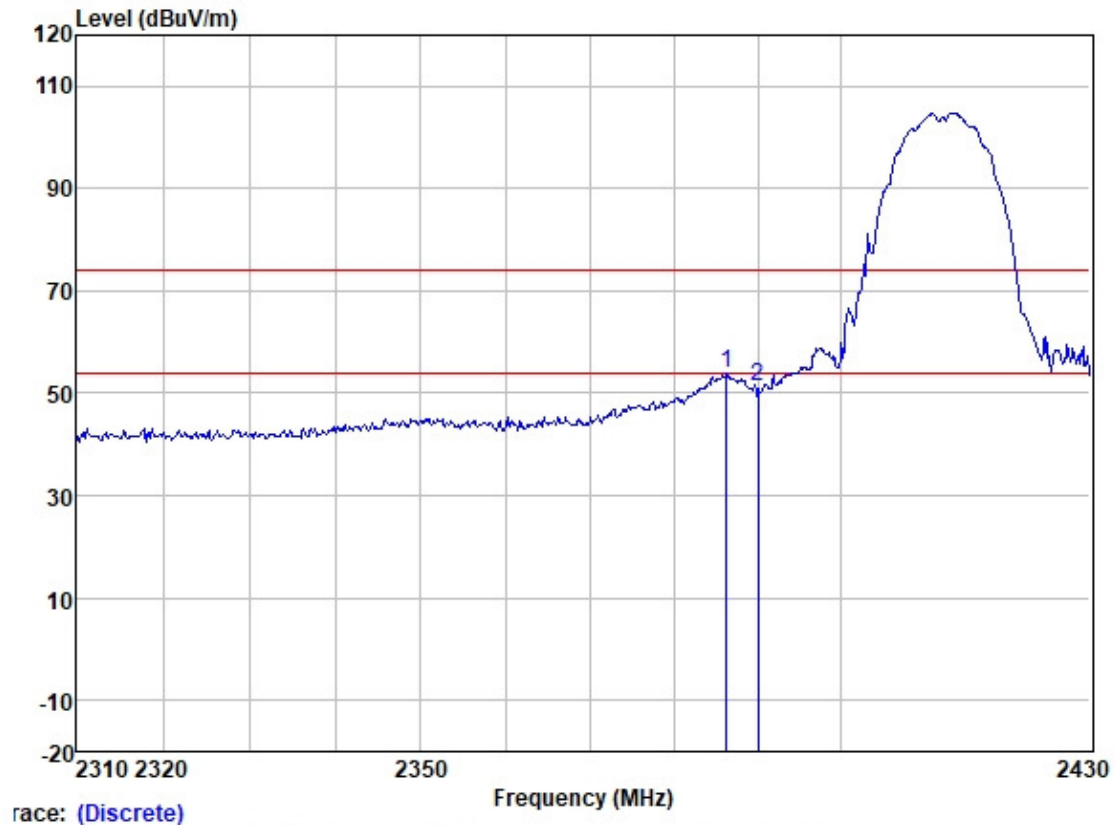

Trace: (Discrete)

|      | Read     | Antenna | Cable | Preamp |        | Limit  | Over  |           |               |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level    | Factor  | Loss  | Factor | Level  | Line   | Limit | Pol/Phase | Remark        |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB    |           |               |
| 1    | 2386.219 | 59.73   | 27.68 | 4.22   | 37.77  | 53.86  | 74.00 | -20.14    | VERTICAL Peak |
| 2    | 2390.000 | 57.02   | 27.68 | 4.22   | 37.76  | 51.16  | 74.00 | -22.84    | VERTICAL Peak |


Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

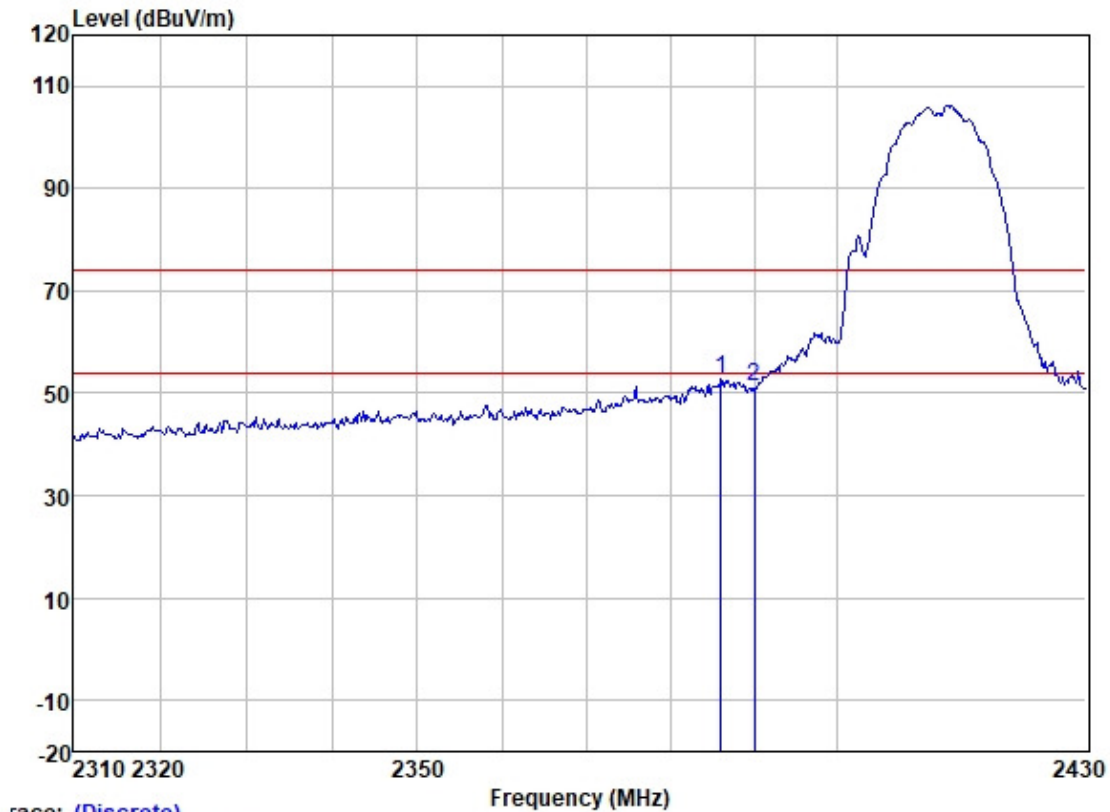

Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |                 |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark          |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |                 |
| 1    | 2385.978    | 58.69  | 27.68  | 4.22   | 37.77  | 52.82  | 74.00 | -21.18    | HORIZONTAL Peak |
| 2    | 2390.000    | 56.99  | 27.68  | 4.22   | 37.76  | 51.13  | 74.00 | -22.87    | HORIZONTAL Peak |

Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

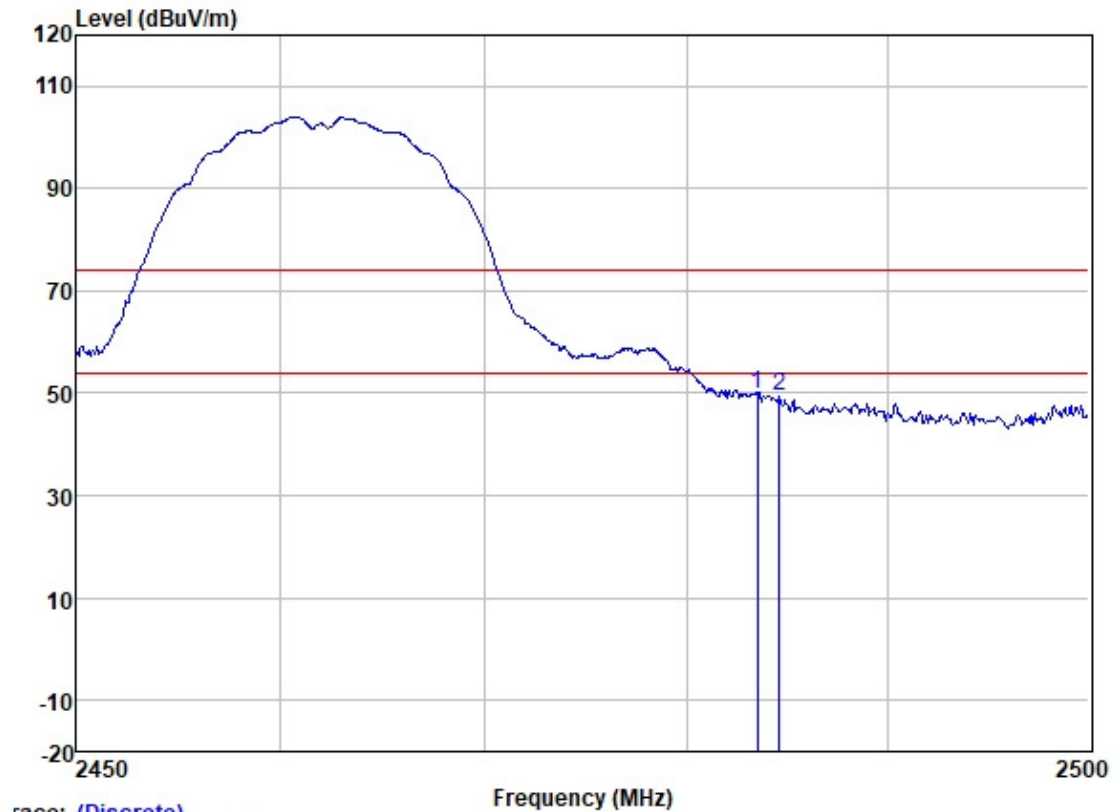


Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |          |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|----------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark   |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |          |
| 1    | 2483.500    | 56.09  | 27.85  | 3.42   | 37.73  | 49.63  | 74.00 | -24.37    | VERTICAL |
| 2    | 2484.593    | 56.06  | 27.85  | 3.42   | 37.73  | 49.60  | 74.00 | -24.40    | VERTICAL |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

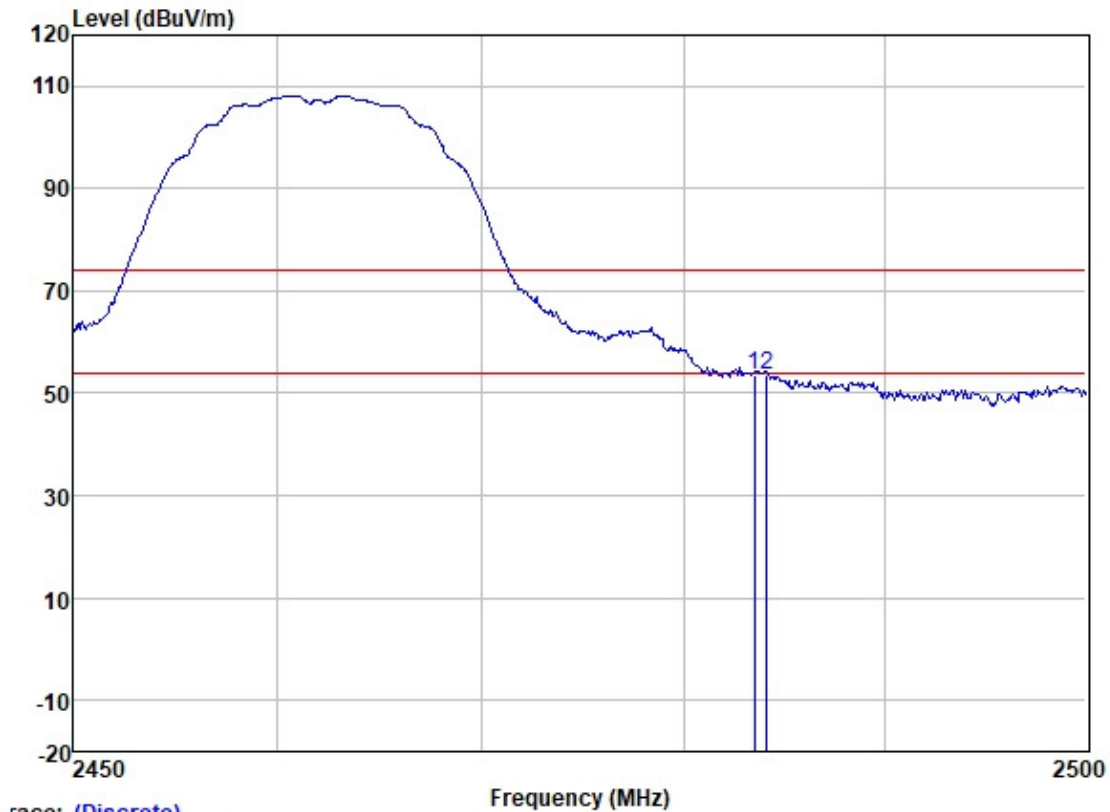

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |                 |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase       |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |                 |
| 1 | 2483.500 | 60.09       | 27.85  | 3.42   | 37.73  | 53.63  | 74.00  | -20.37 | HORIZONTAL Peak |
| 2 | 2484.091 | 59.92       | 27.85  | 3.42   | 37.73  | 53.46  | 74.00  | -20.54 | HORIZONTAL Peak |


Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

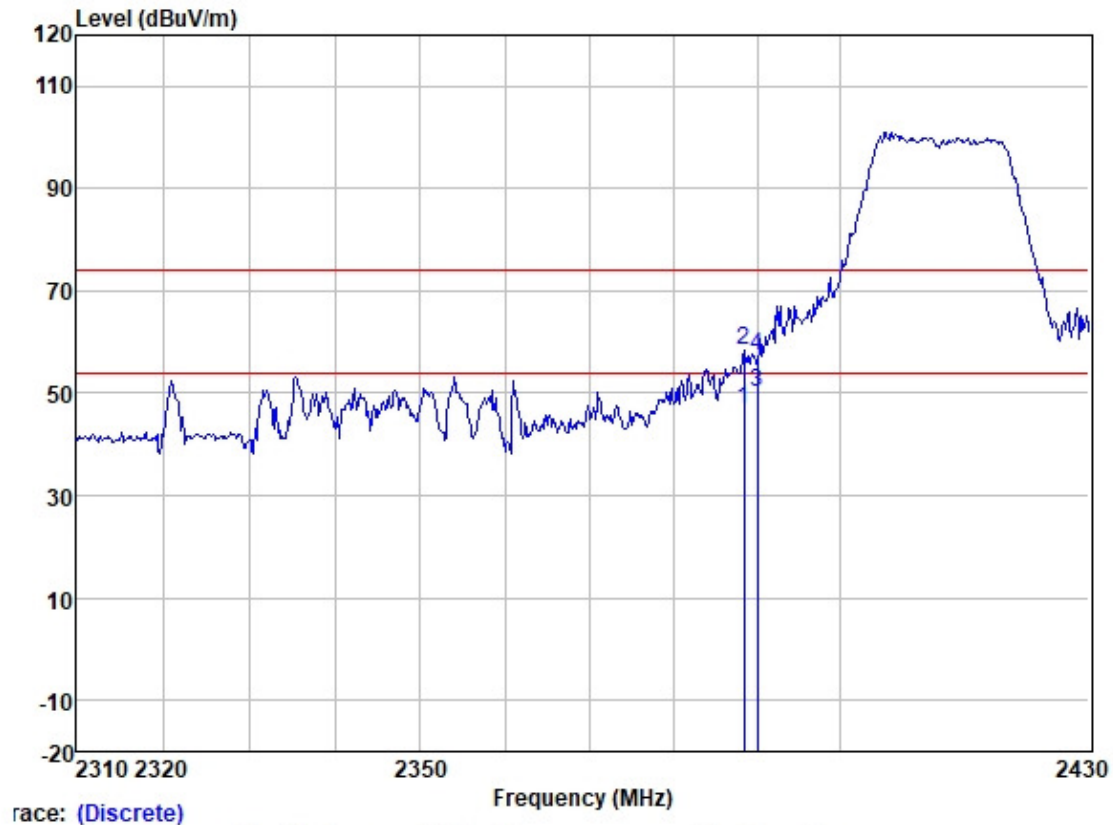

Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |          |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|----------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark   |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |          |
| 1    | 2388.395    | 52.70  | 27.68  | 4.22   | 37.77  | 46.83  | 54.00 | -7.17     | VERTICAL |
| 2    | 2388.395    | 64.27  | 27.68  | 4.22   | 37.77  | 58.40  | 74.00 | -15.60    | VERTICAL |
| 3    | 2390.000    | 55.92  | 27.68  | 4.22   | 37.76  | 50.06  | 54.00 | -3.94     | VERTICAL |
| 4    | 2390.000    | 63.10  | 27.68  | 4.22   | 37.76  | 57.24  | 74.00 | -16.76    | VERTICAL |


Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

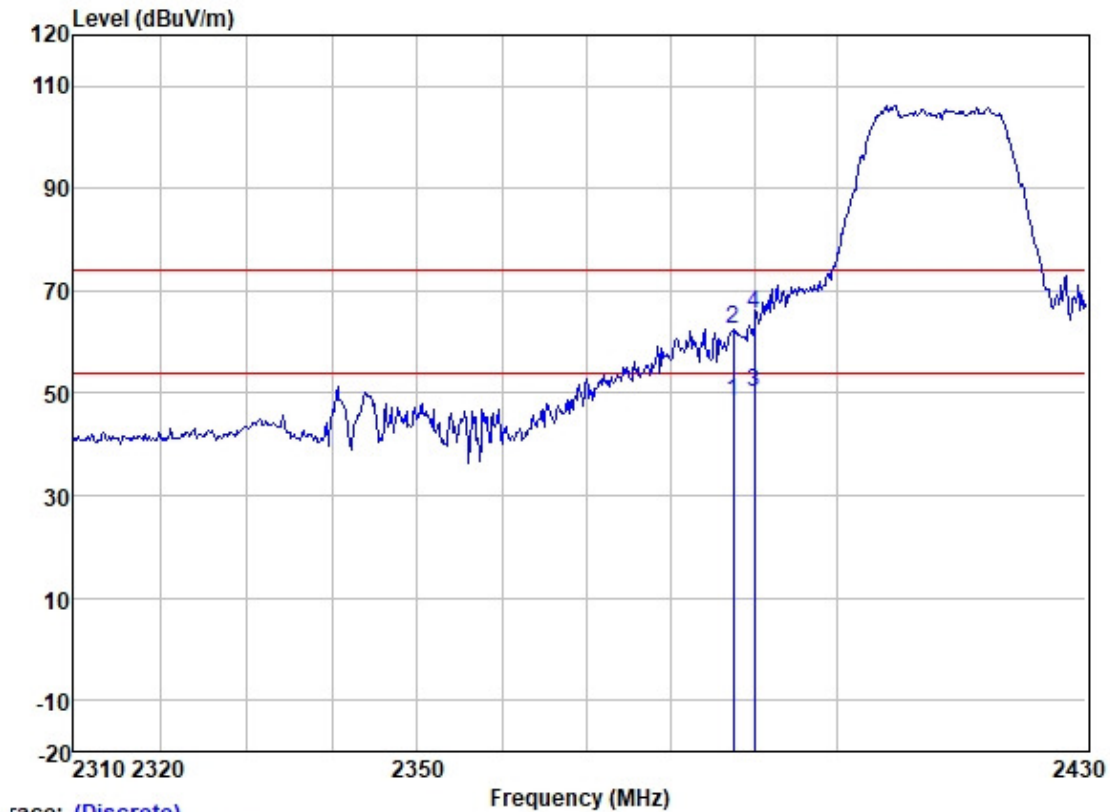

Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |                    |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|--------------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |                    |
| 1    | 2387.428    | 54.02  | 27.68  | 4.22   | 37.77  | 48.15  | 54.00 | -5.85     | HORIZONTAL Average |
| 2    | 2387.428    | 68.50  | 27.68  | 4.22   | 37.77  | 62.63  | 74.00 | -11.37    | HORIZONTAL Peak    |
| 3    | 2390.000    | 56.15  | 27.68  | 4.22   | 37.76  | 50.29  | 54.00 | -3.71     | HORIZONTAL Average |
| 4    | 2390.000    | 71.41  | 27.68  | 4.22   | 37.76  | 65.55  | 74.00 | -8.45     | HORIZONTAL Peak    |

Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

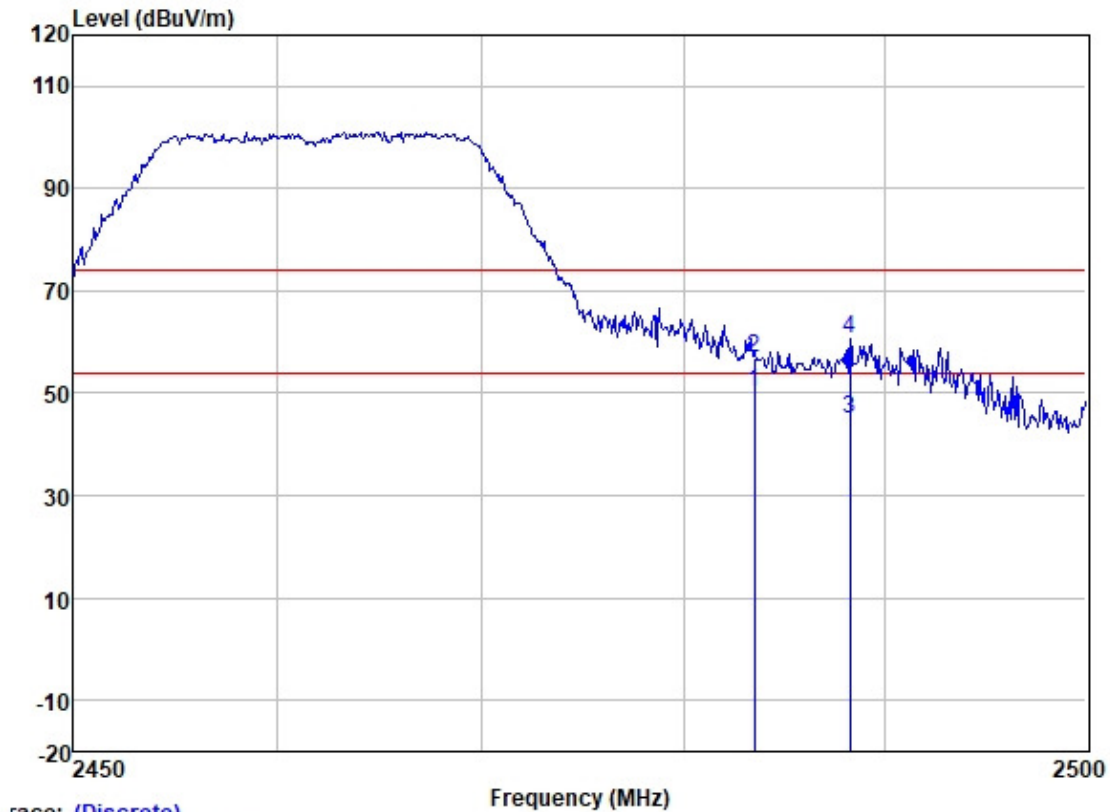


Trace: (Discrete)

|   |          | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |           |         |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|---------|
|   | Freq     | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark  |
|   | MHz      | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |           |         |
| 1 | 2483.500 | 56.59       | 27.85  | 3.42  | 37.73  | 50.13  | 54.00  | -3.87  | VERTICAL  | Average |
| 2 | 2483.500 | 63.41       | 27.85  | 3.42  | 37.73  | 56.95  | 74.00  | -17.05 | VERTICAL  | Peak    |
| 3 | 2488.260 | 51.38       | 27.85  | 3.42  | 37.73  | 44.92  | 54.00  | -9.08  | VERTICAL  | Average |
| 4 | 2488.260 | 67.26       | 27.85  | 3.42  | 37.73  | 60.80  | 74.00  | -13.20 | VERTICAL  | Peak    |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

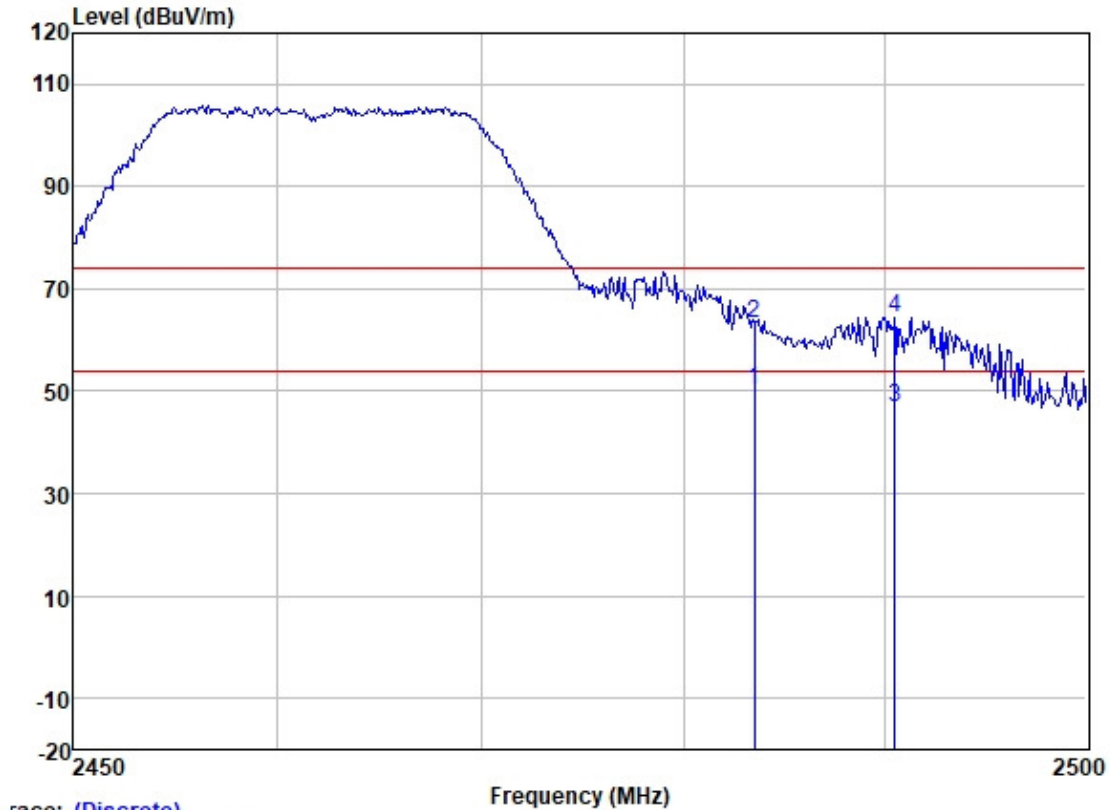

Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |                    |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|--------------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |                    |
| 1    | 2483.500    | 56.82  | 27.85  | 3.42   | 37.73  | 50.36  | 54.00 | -3.64     | HORIZONTAL Average |
| 2    | 2483.500    | 69.57  | 27.85  | 3.42   | 37.73  | 63.11  | 74.00 | -10.89    | HORIZONTAL Peak    |
| 3    | 2490.472    | 53.46  | 27.86  | 3.33   | 37.73  | 46.92  | 54.00 | -7.08     | HORIZONTAL Average |
| 4    | 2490.472    | 71.06  | 27.86  | 3.33   | 37.73  | 64.52  | 74.00 | -9.48     | HORIZONTAL Peak    |


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

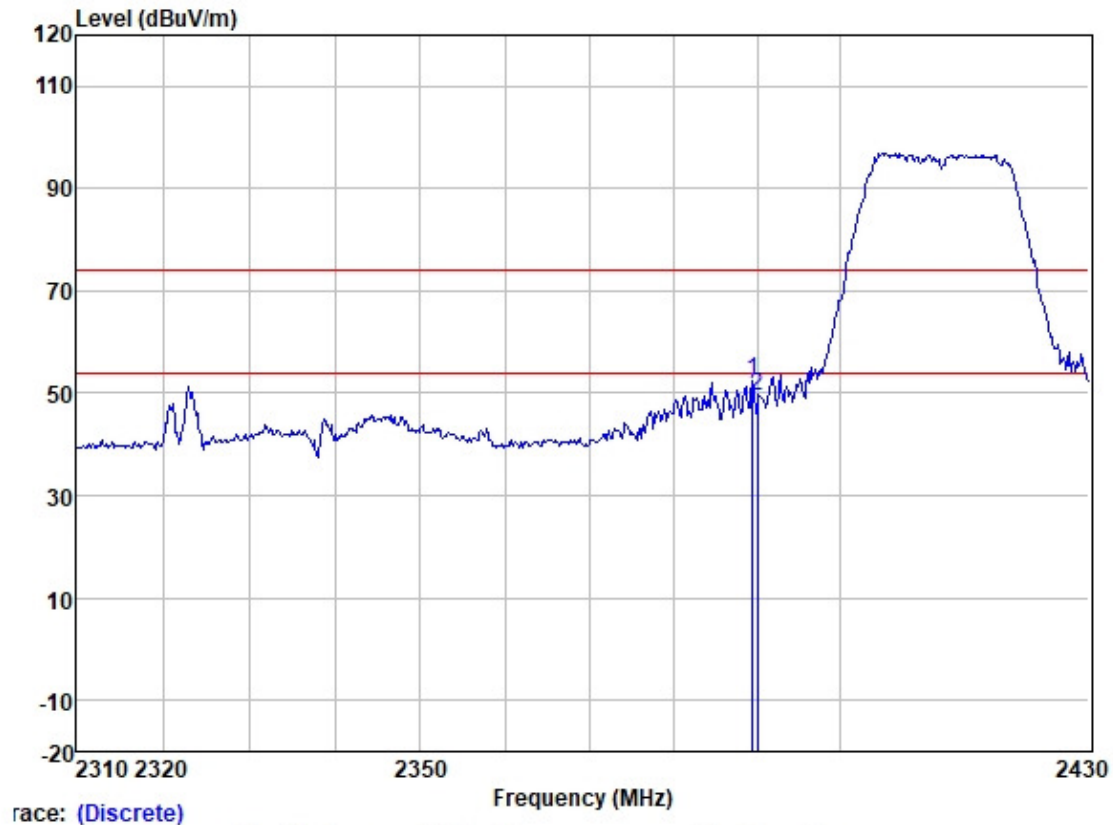

Trace: (Discrete)


|      | Read     | Antenna | Cable | Preamp |        | Limit  | Over  |           |               |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level    | Factor  | Loss  | Factor | Level  | Line   | Limit | Pol/Phase | Remark        |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB    |           |               |
| 1    | 2389.363 | 58.35   | 27.68 | 4.22   | 37.77  | 52.48  | 74.00 | -21.52    | VERTICAL Peak |
| 2    | 2390.000 | 55.42   | 27.68 | 4.22   | 37.76  | 49.56  | 74.00 | -24.44    | VERTICAL Peak |

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

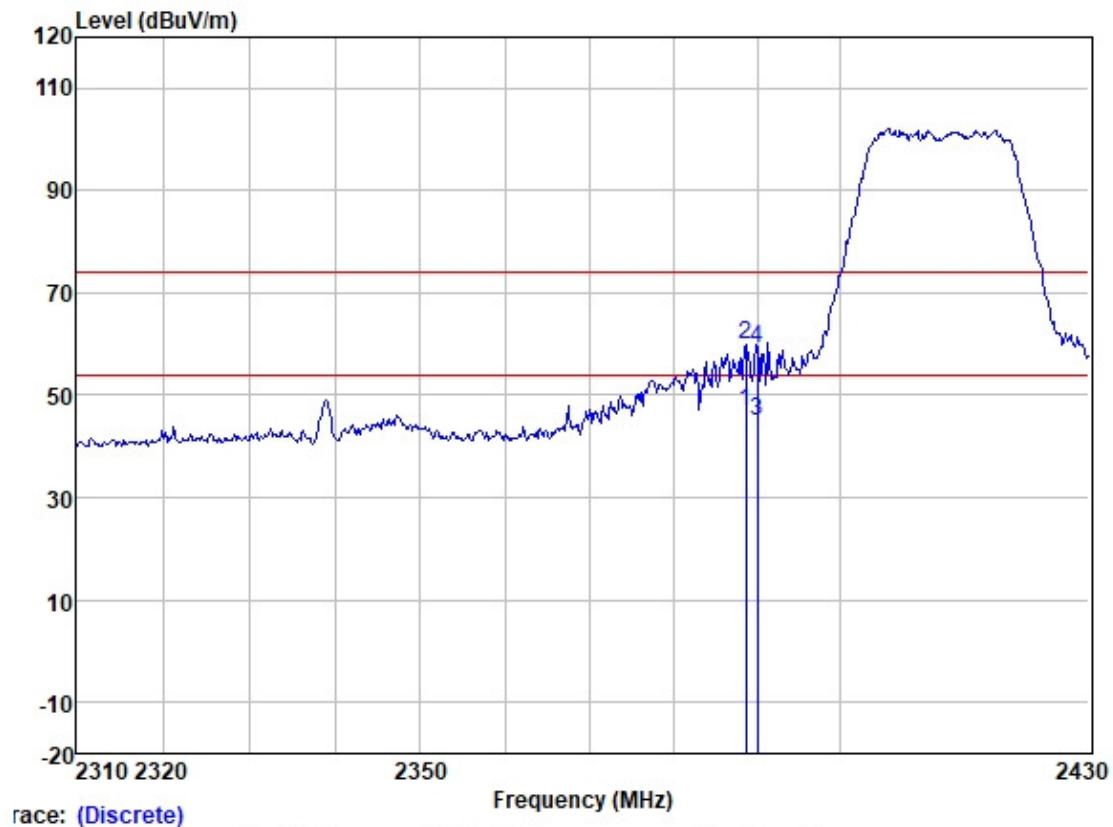

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |                    |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|--------------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |                    |
| 1    | 2388.637    | 52.77  | 27.68  | 4.22   | 37.77  | 46.90  | 54.00 | -7.10     | HORIZONTAL Average |
| 2    | 2388.637    | 65.84  | 27.68  | 4.22   | 37.77  | 59.97  | 74.00 | -14.03    | HORIZONTAL Peak    |
| 3    | 2390.000    | 50.90  | 27.68  | 4.22   | 37.76  | 45.04  | 54.00 | -8.96     | HORIZONTAL Average |
| 4    | 2390.000    | 64.83  | 27.68  | 4.22   | 37.76  | 58.97  | 74.00 | -15.03    | HORIZONTAL Peak    |


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

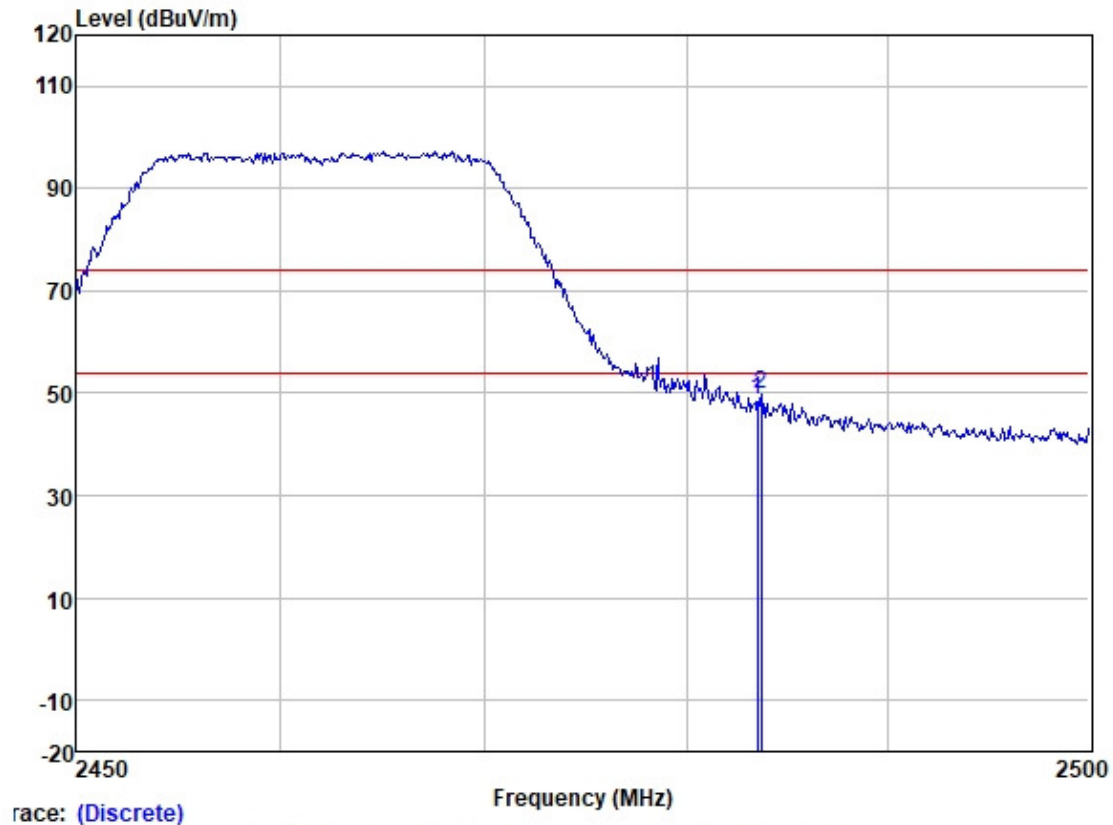

|            | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|------------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
| Freq       | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
| MHz        | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 2483.500 | 55.02       | 27.85  | 3.42   | 37.73  | 48.56  | 74.00  | -25.44 | VERTICAL  | Peak   |
| 2 2483.689 | 56.20       | 27.85  | 3.42   | 37.73  | 49.74  | 74.00  | -24.26 | VERTICAL  | Peak   |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

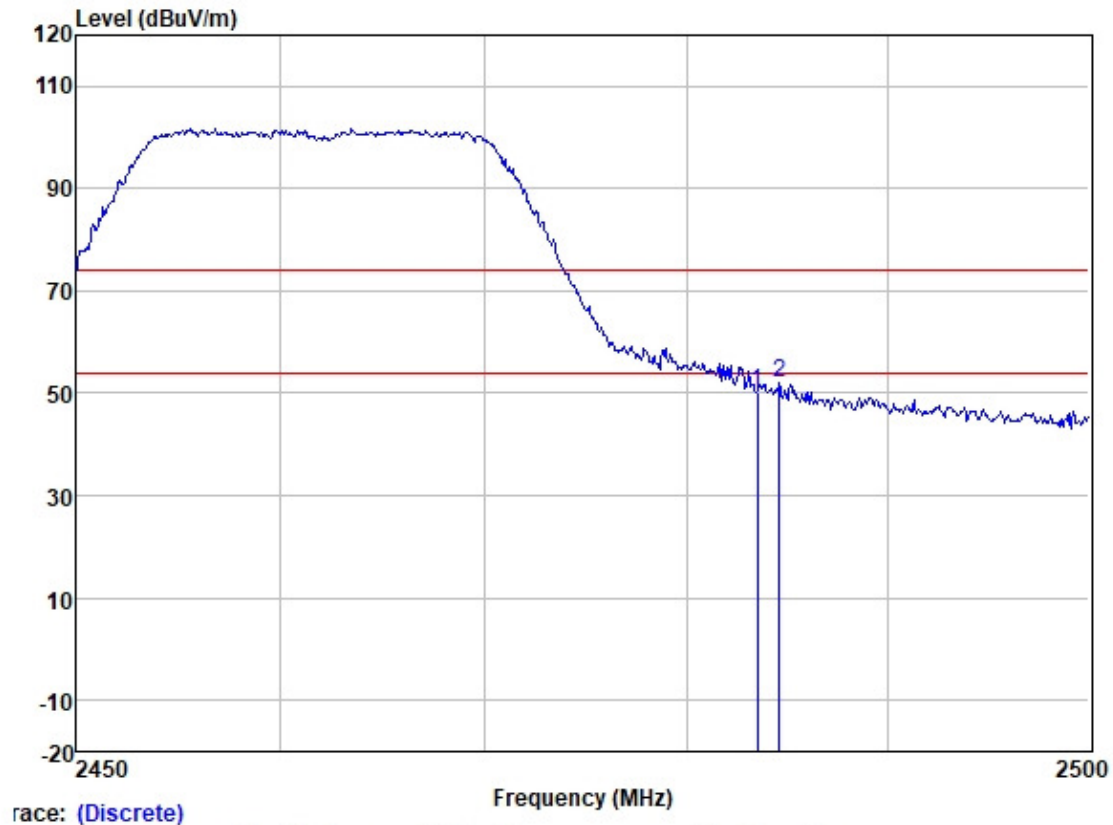

Trace: (Discrete)

|      | Read     | Antenna | Cable | Preamp |        | Limit  | Over  |           |                 |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level    | Factor  | Loss  | Factor | Level  | Line   | Limit | Pol/Phase | Remark          |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB    |           |                 |
| 1    | 2483.500 | 56.60   | 27.85 | 3.42   | 37.73  | 50.14  | 74.00 | -23.86    | HORIZONTAL Peak |
| 2    | 2484.593 | 58.50   | 27.85 | 3.42   | 37.73  | 52.04  | 74.00 | -21.96    | HORIZONTAL Peak |


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

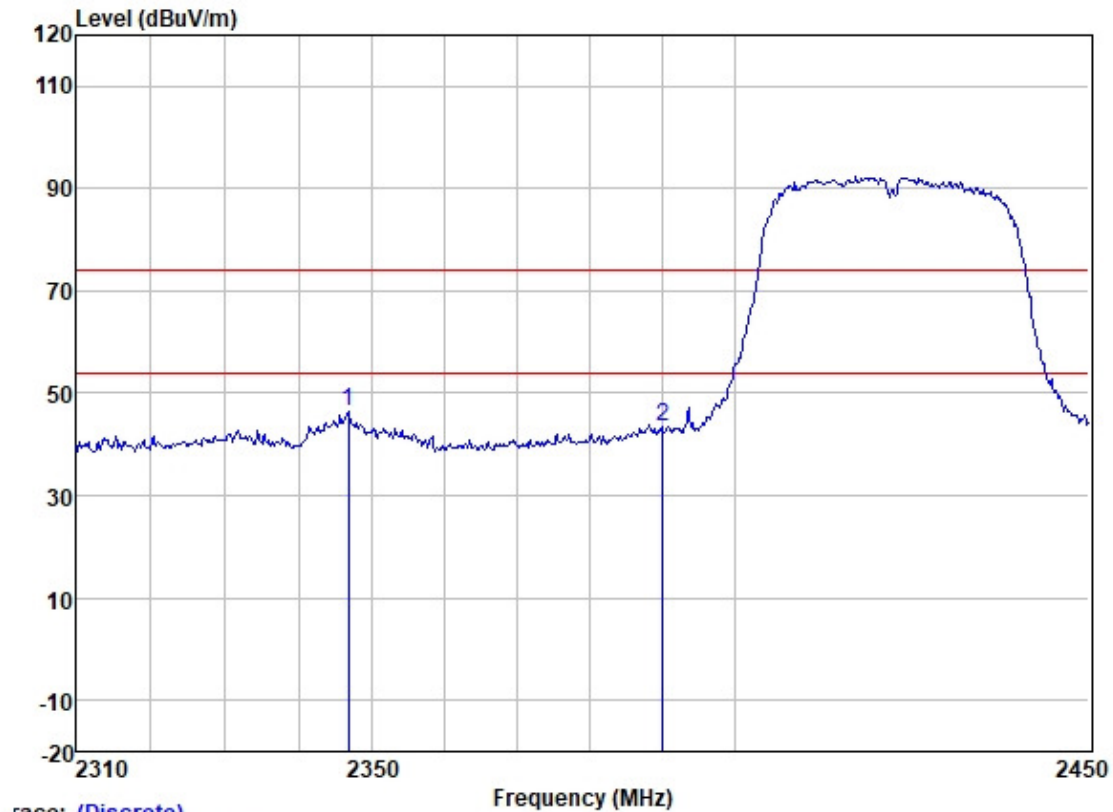

Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |               |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark        |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |               |
| 1    | 2346.716    | 52.11  | 27.59  | 4.60   | 37.78  | 46.52  | 74.00 | -27.48    | VERTICAL Peak |
| 2    | 2390.000    | 49.29  | 27.68  | 4.22   | 37.76  | 43.43  | 74.00 | -30.57    | VERTICAL Peak |


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

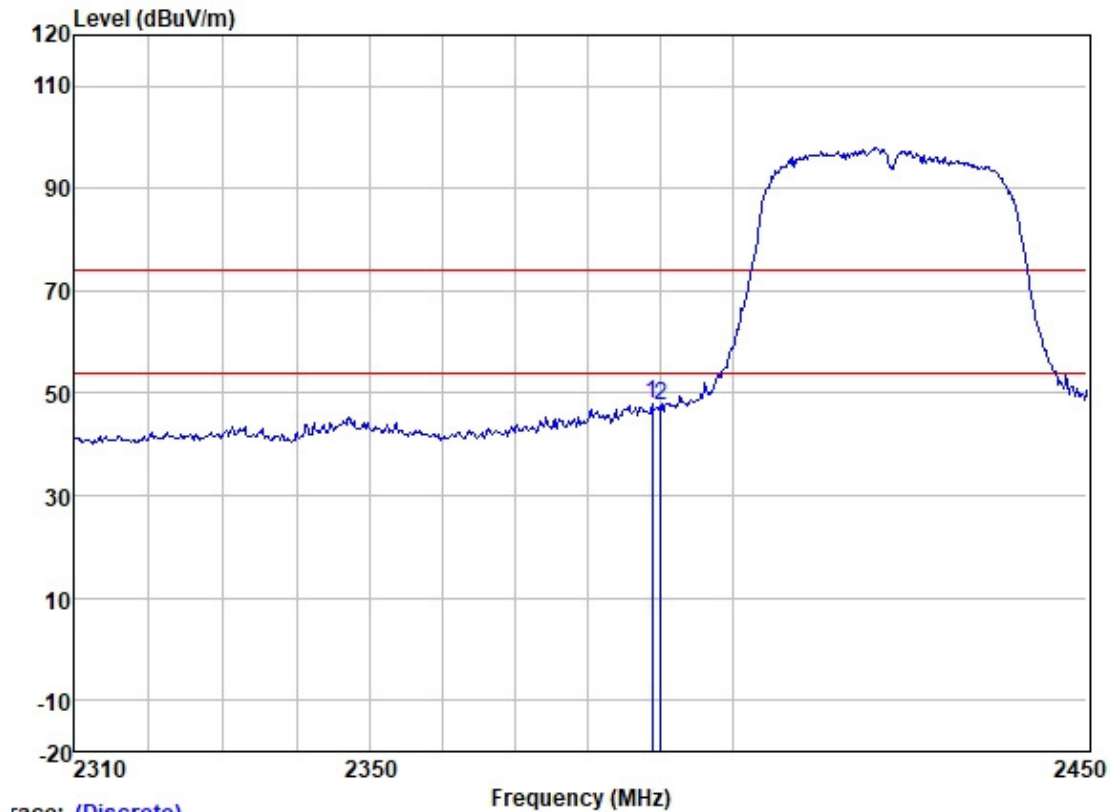

Trace: (Discrete)

|   | Freq     | ReadAntenna<br>Level | Antenna<br>Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase  | Remark |
|---|----------|----------------------|-------------------|---------------|------------------|--------|---------------|---------------|------------|--------|
|   | MHz      | dBuV                 | dB/m              | dB            | dB               | dBuV/m | dBuV/m        | dB            |            |        |
| 1 | 2388.789 | 53.93                | 27.68             | 4.22          | 37.77            | 48.06  | 74.00         | -25.94        | HORIZONTAL | Peak   |
| 2 | 2390.000 | 53.40                | 27.68             | 4.22          | 37.76            | 47.54  | 74.00         | -26.46        | HORIZONTAL | Peak   |

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

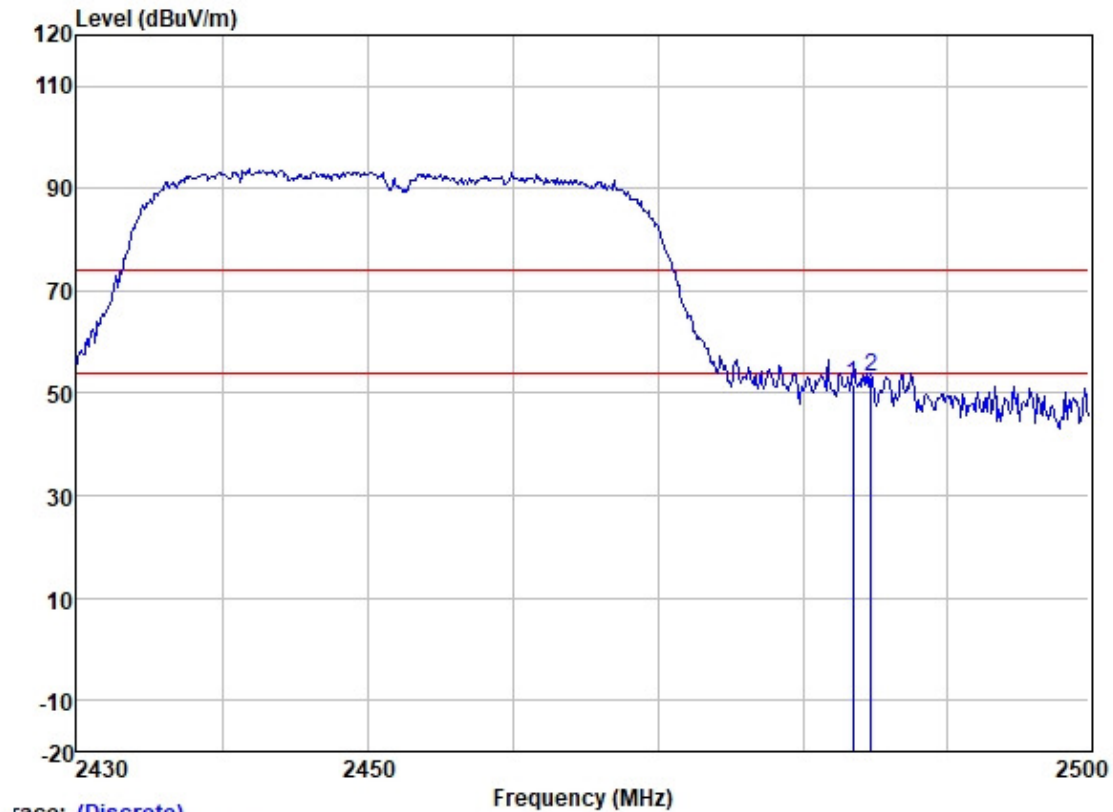


Trace: (Discrete)

|      | Read     | Antenna | Cable | Preamp |        | Limit  | Over  |           |               |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level    | Factor  | Loss  | Factor | Level  | Line   | Limit | Pol/Phase | Remark        |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB    |           |               |
| 1    | 2483.500 | 58.27   | 27.85 | 3.42   | 37.73  | 51.81  | 74.00 | -22.19    | VERTICAL Peak |
| 2    | 2484.711 | 59.55   | 27.85 | 3.42   | 37.73  | 53.09  | 74.00 | -20.91    | VERTICAL Peak |



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

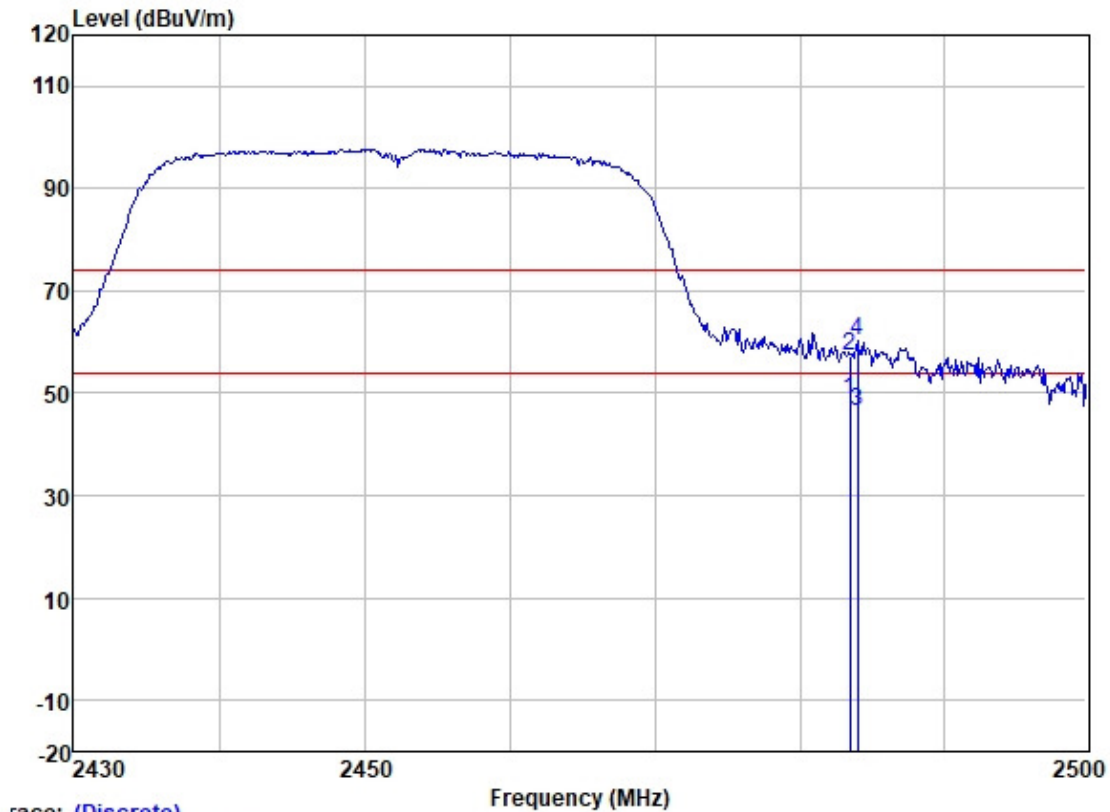

Trace: (Discrete)

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |                    |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|--------------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark             |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |                    |
| 1    | 2483.500    | 54.98  | 27.85  | 3.42   | 37.73  | 48.52  | 54.00 | -5.48     | HORIZONTAL Average |
| 2    | 2483.500    | 63.68  | 27.85  | 3.42   | 37.73  | 57.22  | 74.00 | -16.78    | HORIZONTAL Peak    |
| 3    | 2484.006    | 52.76  | 27.85  | 3.42   | 37.73  | 46.30  | 54.00 | -7.70     | HORIZONTAL Average |
| 4    | 2484.006    | 66.59  | 27.85  | 3.42   | 37.73  | 60.13  | 74.00 | -13.87    | HORIZONTAL Peak    |

### 7.8 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Test Distance: 3 m

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance(meters) |
|-----------------|-----------------------------------|------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                          |
| 0.490-1.705     | 24000/F(kHz)                      | 30                           |
| 1.705-30.0      | 30                                | 30                           |
| 30-88           | 100                               | 3                            |
| 88-216          | 150                               | 3                            |
| 216-960         | 200                               | 3                            |
| 960-1000        | 500                               | 3                            |

#### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.2 °C

Humidity: 54.7 % RH

Atmospheric Pressure: 1008 mbar

#### 7.8.2 Test Mode Description


| Pre-scan / Final test | Mode Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan              | 00        | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pre-scan              | 01        | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test            | 02        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 7.8.3 Test Setup Diagram

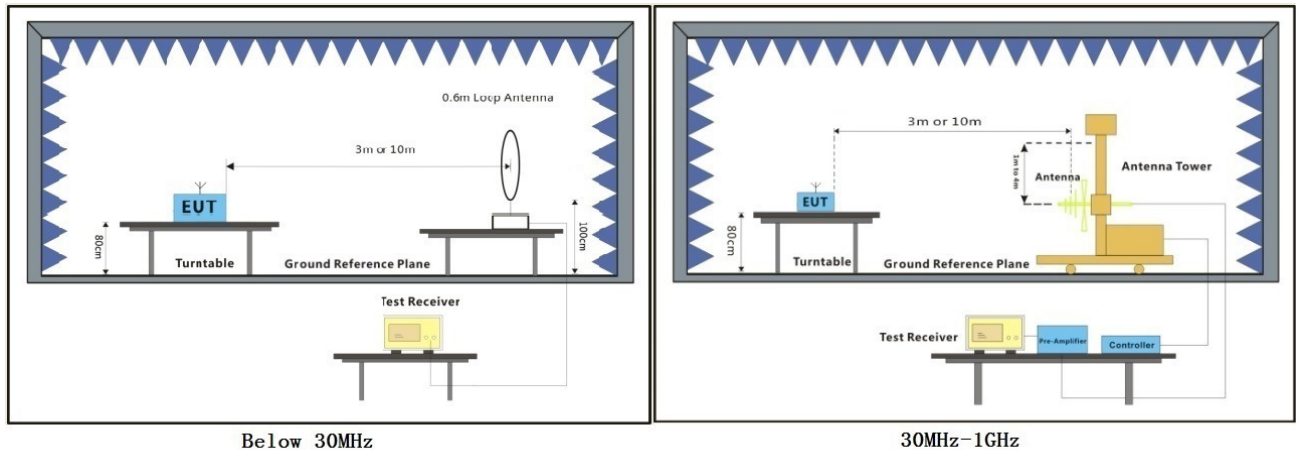

### 7.8.4 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Test Mode: 02; Polarity: Horizontal

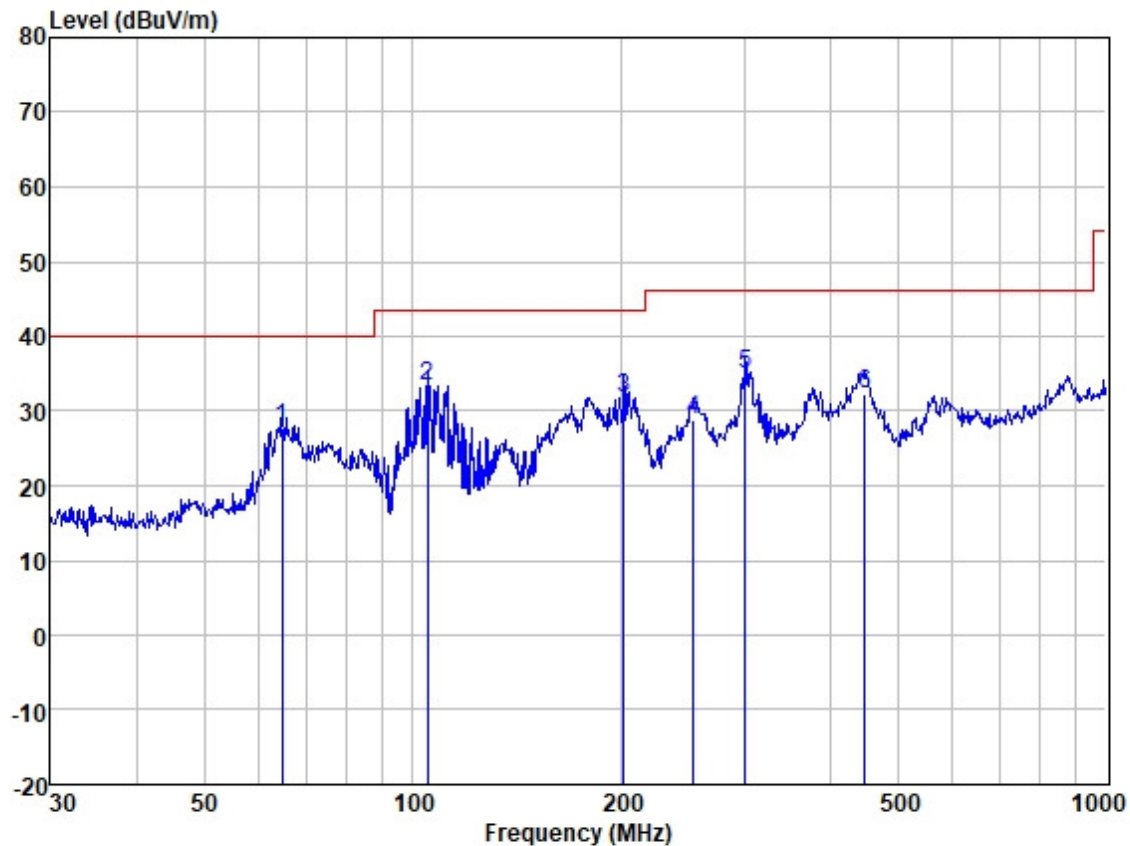

Site : SGS  
Job :  
Model :  
Power :  
Test Mode :

|   | Freq    | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase  | Remark |
|---|---------|------------|----------------|------------|---------------------|----------------|------------|------------|------------|--------|
|   | MHz     | dBuV       | dB/m           | dB         | dB                  | dBuV/m         | dBuV/m     | dB         |            |        |
| 1 | 64.659  | 41.48      | 12.59          | 1.33       | 27.60               | 27.80          | 40.00      | -12.20     | HORIZONTAL | QP     |
| 2 | 104.903 | 49.64      | 9.68           | 1.72       | 27.59               | 33.45          | 43.50      | -10.05     | HORIZONTAL | QP     |
| 3 | 201.393 | 46.33      | 10.05          | 2.53       | 27.30               | 31.61          | 43.50      | -11.89     | HORIZONTAL | QP     |
| 4 | 253.837 | 41.05      | 11.93          | 2.98       | 27.23               | 28.73          | 46.00      | -17.27     | HORIZONTAL | QP     |
| 5 | 301.422 | 45.51      | 13.47          | 3.24       | 27.21               | 35.01          | 46.00      | -10.99     | HORIZONTAL | QP     |
| 6 | 447.982 | 39.42      | 16.95          | 4.18       | 28.32               | 32.23          | 46.00      | -13.77     | HORIZONTAL | QP     |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch

No. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



Test Mode: 02; Polarity: Vertical

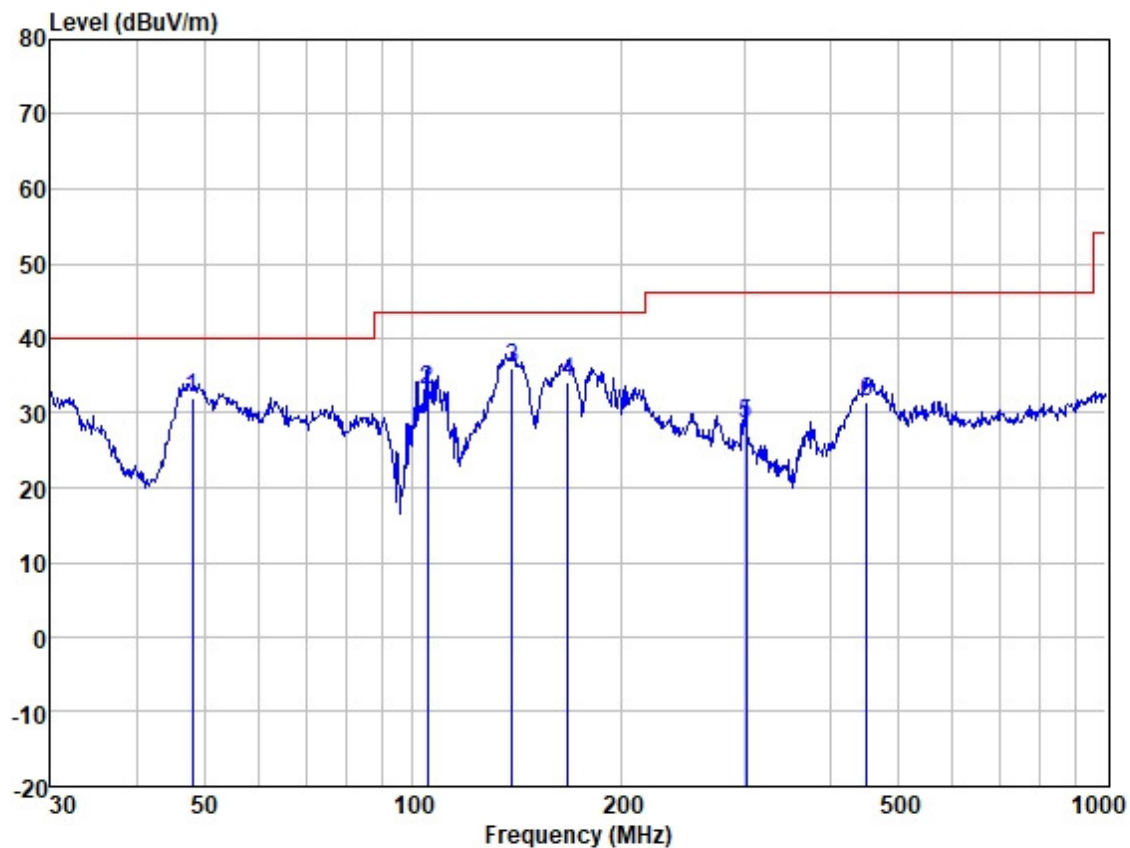

Site : SGS  
Job :  
Model :  
Power :  
Test Mode :

|   | Freq    | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|---------|------------|----------------|------------|---------------------|----------------|------------|------------|-----------|--------|
|   | MHz     | dBuV       | dB/m           | dB         | dB                  | dBuV/m         | dBuV/m     | dB         |           |        |
| 1 | 47.994  | 44.47      | 13.97          | 1.12       | 27.60               | 31.96          | 40.00      | -8.04      | VERTICAL  | QP     |
| 2 | 104.903 | 49.25      | 9.68           | 1.72       | 27.59               | 33.06          | 43.50      | -10.44     | VERTICAL  | QP     |
| 3 | 138.874 | 48.45      | 12.96          | 2.05       | 27.48               | 35.98          | 43.50      | -7.52      | VERTICAL  | QP     |
| 4 | 167.237 | 45.59      | 13.38          | 2.37       | 27.34               | 34.00          | 43.50      | -9.50      | VERTICAL  | QP     |
| 5 | 302.481 | 39.12      | 13.50          | 3.24       | 27.21               | 28.65          | 46.00      | -17.35     | VERTICAL  | QP     |
| 6 | 451.135 | 38.61      | 17.00          | 4.18       | 28.36               | 31.43          | 46.00      | -14.57     | VERTICAL  | QP     |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn  
Guangzhou branch Technical Services Co., Ltd. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

### 7.9 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance(meters) |
|-----------------|-----------------------------------|------------------------------|
| Above 1000      | 500                               | 3                            |

#### 7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 24.9 °C Humidity: 57.2 % RH Atmospheric Pressure: 1000 mbar

#### 7.9.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 00           | TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pre-scan                 | 01           | TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Final test               | 02           | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

#### 7.9.3 Test Setup Diagram

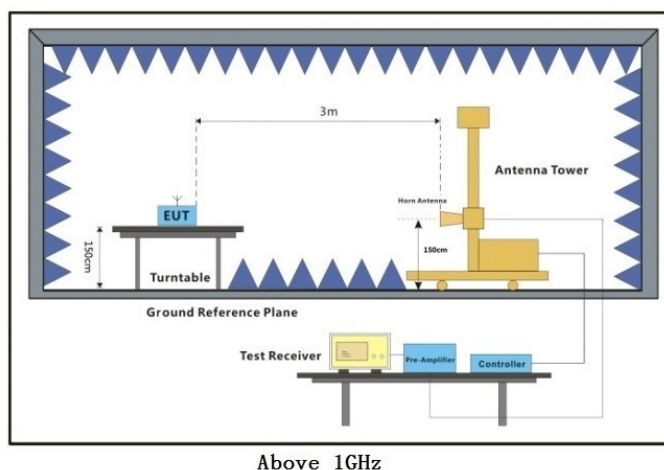

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 7.9.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch EMC Laboratory

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com



Test Mode: 00; Polarity: Vertical; Modulation: GFSK; Channel: Low

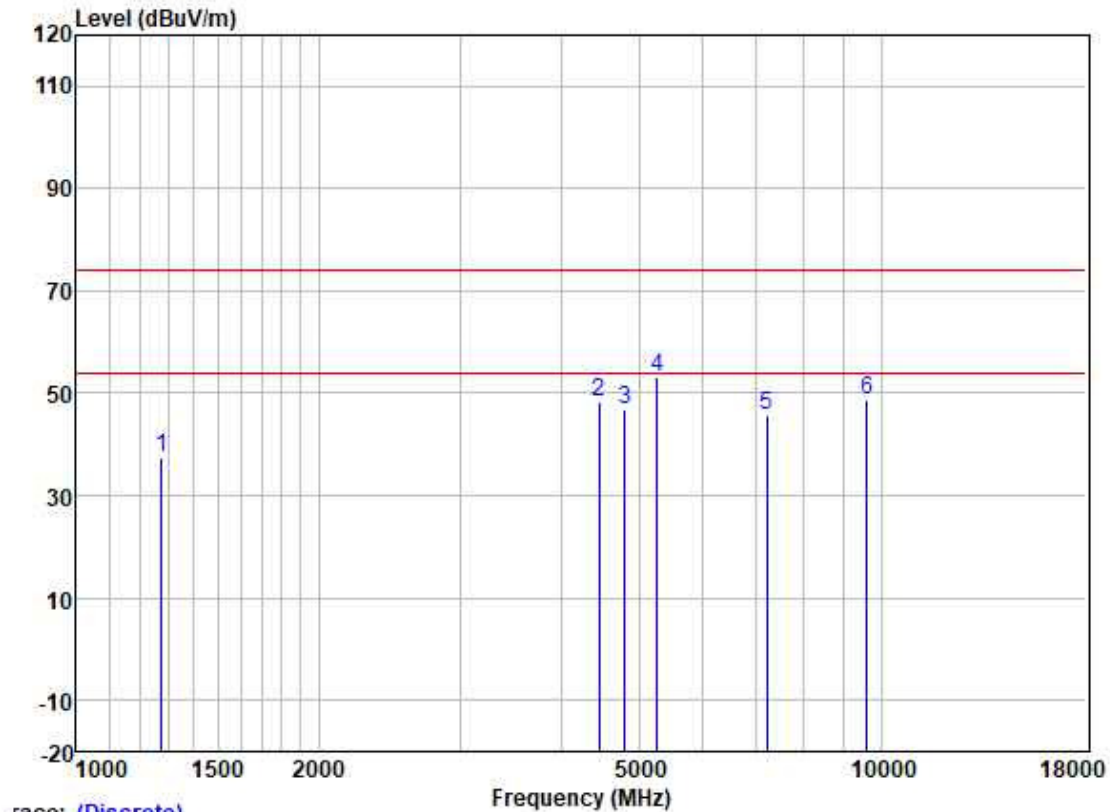


Trace: (Discrete)

|   | Freq     | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |           |        |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1274.802 | 49.01       | 23.85  | 2.64  | 37.98  | 37.52  | 74.00  | -36.48 | VERTICAL  | peak   |
| 2 | 4456.315 | 45.62       | 34.00  | 5.35  | 36.83  | 48.14  | 74.00  | -25.86 | VERTICAL  | peak   |
| 3 | 4804.000 | 44.10       | 34.16  | 5.46  | 36.86  | 46.86  | 74.00  | -27.14 | VERTICAL  | peak   |
| 4 | 5269.649 | 51.42       | 33.30  | 5.42  | 36.94  | 53.20  | 74.00  | -20.80 | VERTICAL  | peak   |
| 5 | 7206.000 | 41.03       | 35.63  | 6.36  | 37.13  | 45.89  | 74.00  | -28.11 | VERTICAL  | peak   |
| 6 | 9608.000 | 38.89       | 38.68  | 7.99  | 37.02  | 48.54  | 74.00  | -25.46 | VERTICAL  | peak   |




Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

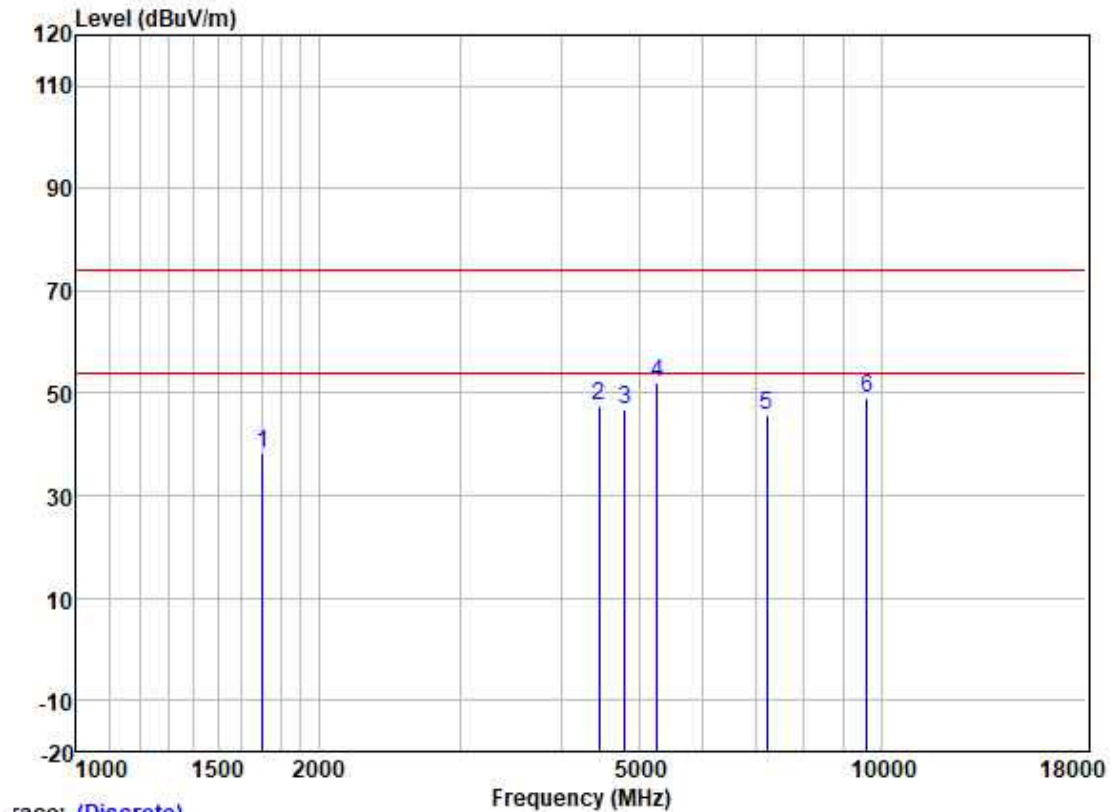

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |                 |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase       |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |                 |
| 1 | 1702.042 | 47.81       | 25.15  | 3.36   | 37.92  | 38.40  | 74.00  | -35.60 | HORIZONTAL peak |
| 2 | 4456.315 | 45.03       | 34.00  | 5.35   | 36.83  | 47.55  | 74.00  | -26.45 | HORIZONTAL peak |
| 3 | 4804.000 | 43.92       | 34.16  | 5.46   | 36.86  | 46.68  | 74.00  | -27.32 | HORIZONTAL peak |
| 4 | 5269.649 | 50.31       | 33.30  | 5.42   | 36.94  | 52.09  | 74.00  | -21.91 | HORIZONTAL peak |
| 5 | 7206.000 | 40.96       | 35.63  | 6.36   | 37.13  | 45.82  | 74.00  | -28.18 | HORIZONTAL peak |
| 6 | 9608.000 | 39.48       | 38.68  | 7.99   | 37.02  | 49.13  | 74.00  | -24.87 | HORIZONTAL peak |


Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

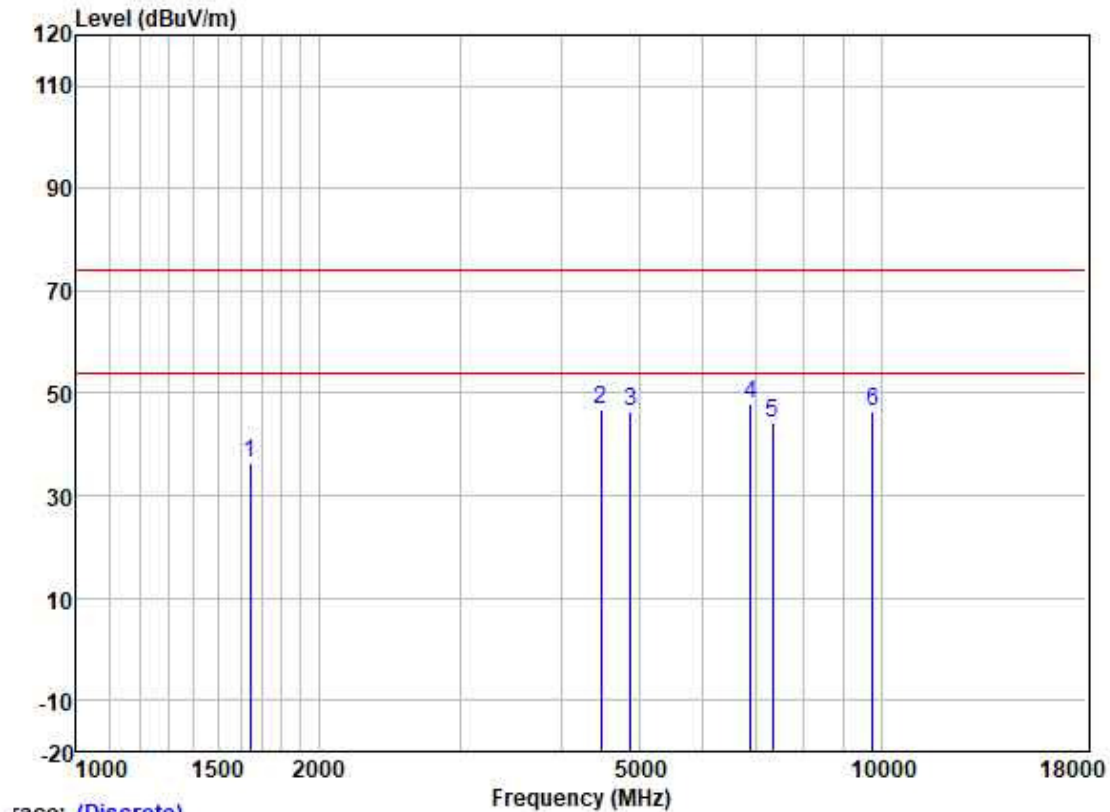

Trace: (Discrete)

|   | Freq     | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |           |        |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1644.019 | 46.53       | 24.84  | 3.11  | 37.93  | 36.55  | 74.00  | -37.45 | VERTICAL  | peak   |
| 2 | 4482.150 | 44.09       | 34.12  | 5.34  | 36.83  | 46.72  | 74.00  | -27.28 | VERTICAL  | peak   |
| 3 | 4880.000 | 43.52       | 34.15  | 5.49  | 36.87  | 46.29  | 74.00  | -27.71 | VERTICAL  | peak   |
| 4 | 6874.906 | 43.66       | 34.88  | 6.37  | 37.07  | 47.84  | 74.00  | -26.16 | VERTICAL  | peak   |
| 5 | 7320.000 | 38.91       | 36.07  | 6.32  | 37.15  | 44.15  | 74.00  | -29.85 | VERTICAL  | peak   |
| 6 | 9760.000 | 37.11       | 38.81  | 7.43  | 37.01  | 46.34  | 74.00  | -27.66 | VERTICAL  | peak   |

Test Mode: 00; Polarity: Horizontal; Modulation: GFSK; Channel: middle

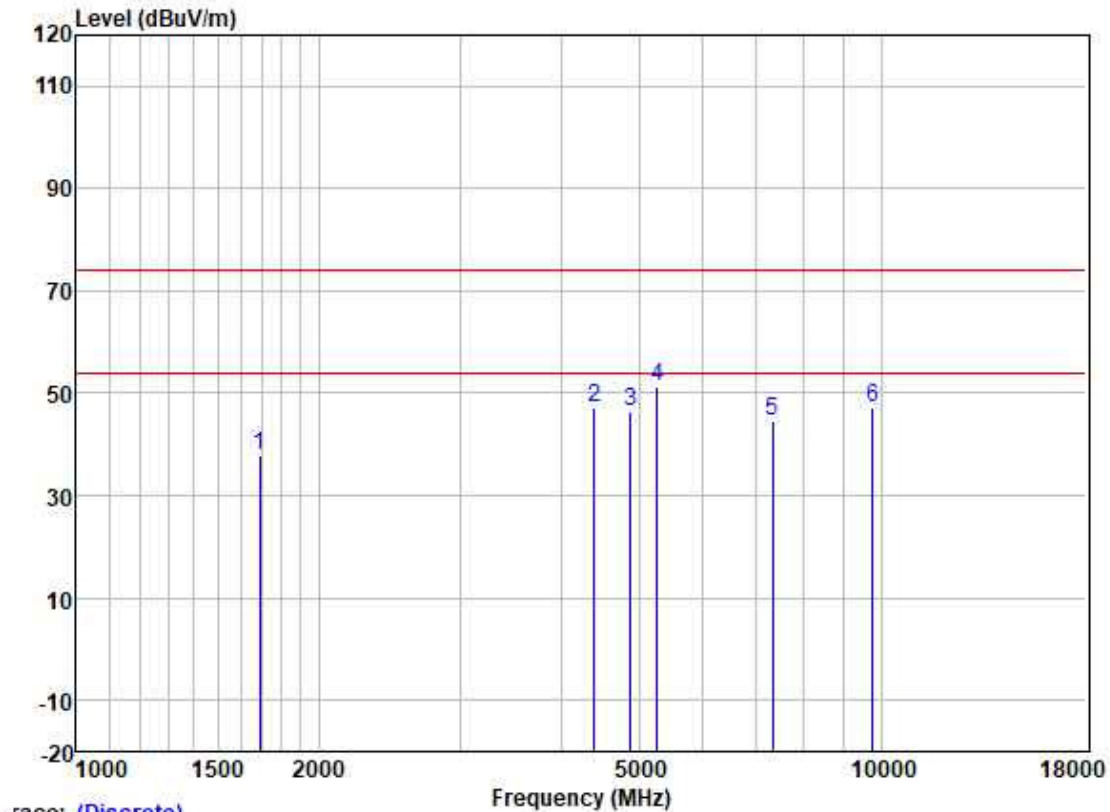


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1692.231 | 47.32       | 25.09  | 3.30   | 37.93  | 37.78  | 74.00  | -36.22 | HORIZONTAL | peak   |
| 2 | 4405.090 | 44.86       | 33.74  | 5.37   | 36.82  | 47.15  | 74.00  | -26.85 | HORIZONTAL | peak   |
| 3 | 4880.000 | 43.59       | 34.15  | 5.49   | 36.87  | 46.36  | 74.00  | -27.64 | HORIZONTAL | peak   |
| 4 | 5269.649 | 49.68       | 33.30  | 5.42   | 36.94  | 51.46  | 74.00  | -22.54 | HORIZONTAL | peak   |
| 5 | 7320.000 | 39.53       | 36.07  | 6.32   | 37.15  | 44.77  | 74.00  | -29.23 | HORIZONTAL | peak   |
| 6 | 9760.000 | 37.98       | 38.81  | 7.43   | 37.01  | 47.21  | 74.00  | -26.79 | HORIZONTAL | peak   |



Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

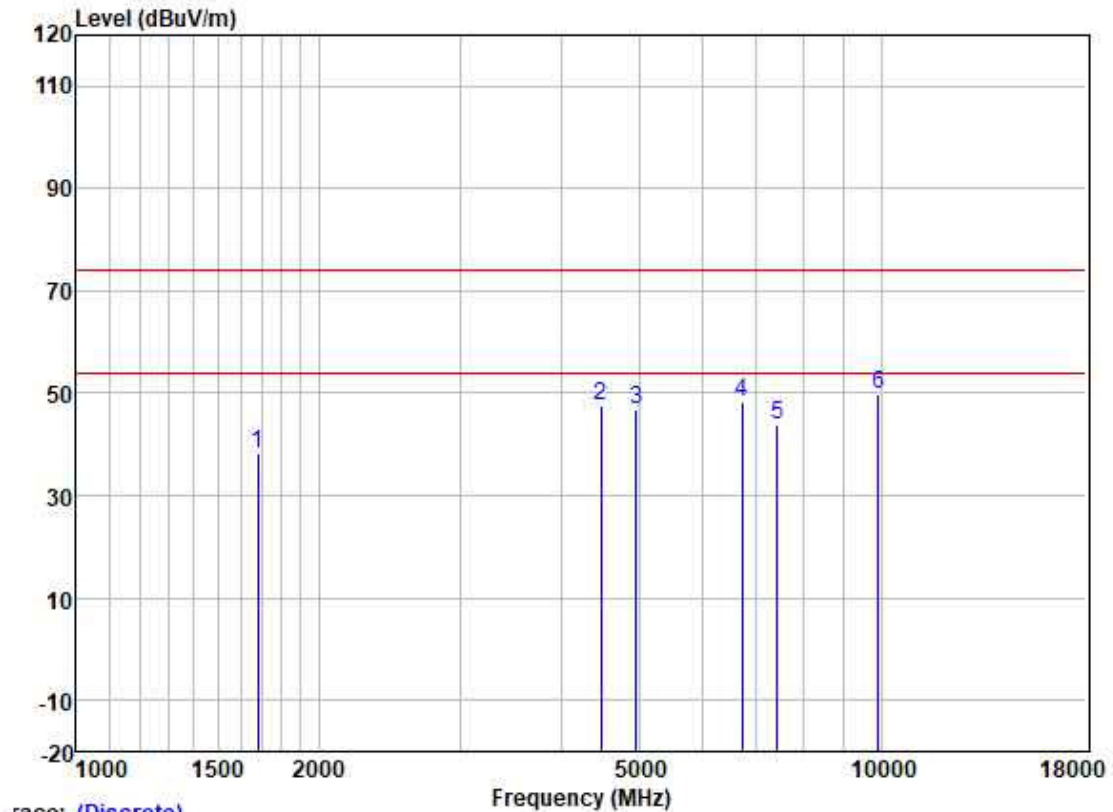


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable | Preamp |       | Limit  | Over   |           |               |
|---|----------|-------------|-------|--------|-------|--------|--------|-----------|---------------|
|   | MHz      | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |               |
| 1 | 1682.477 | 48.07       | 25.03 | 3.25   | 37.93 | 38.42  | 74.00  | -35.58    | VERTICAL peak |
| 2 | 4482.150 | 44.97       | 34.12 | 5.34   | 36.83 | 47.60  | 74.00  | -26.40    | VERTICAL peak |
| 3 | 4960.000 | 43.98       | 34.15 | 5.53   | 36.89 | 46.77  | 74.00  | -27.23    | VERTICAL peak |
| 4 | 6717.762 | 44.51       | 34.42 | 6.29   | 37.05 | 48.17  | 74.00  | -25.83    | VERTICAL peak |
| 5 | 7440.000 | 38.28       | 36.33 | 6.29   | 37.16 | 43.74  | 74.00  | -30.26    | VERTICAL peak |
| 6 | 9920.000 | 40.93       | 38.95 | 6.77   | 37.00 | 49.65  | 74.00  | -24.35    | VERTICAL peak |




Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

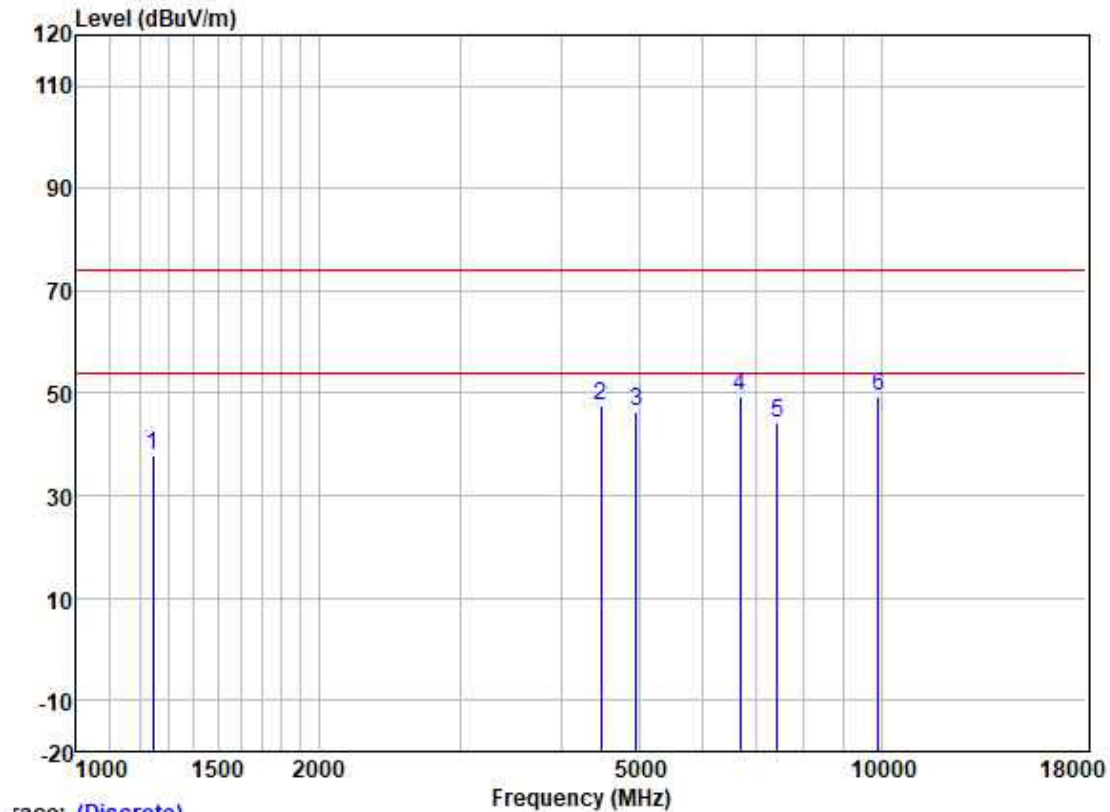

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1245.663 | 49.55       | 23.65  | 2.61   | 37.98  | 37.83  | 74.00  | -36.17 | HORIZONTAL | peak   |
| 2 | 4482.150 | 44.82       | 34.12  | 5.34   | 36.83  | 47.45  | 74.00  | -26.55 | HORIZONTAL | peak   |
| 3 | 4960.000 | 43.83       | 34.15  | 5.53   | 36.89  | 46.62  | 74.00  | -27.38 | HORIZONTAL | peak   |
| 4 | 6679.040 | 46.12       | 34.28  | 6.27   | 37.05  | 49.62  | 74.00  | -24.38 | HORIZONTAL | peak   |
| 5 | 7440.000 | 38.88       | 36.33  | 6.29   | 37.16  | 44.34  | 74.00  | -29.66 | HORIZONTAL | peak   |
| 6 | 9920.000 | 40.76       | 38.95  | 6.77   | 37.00  | 49.48  | 74.00  | -24.52 | HORIZONTAL | peak   |


Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

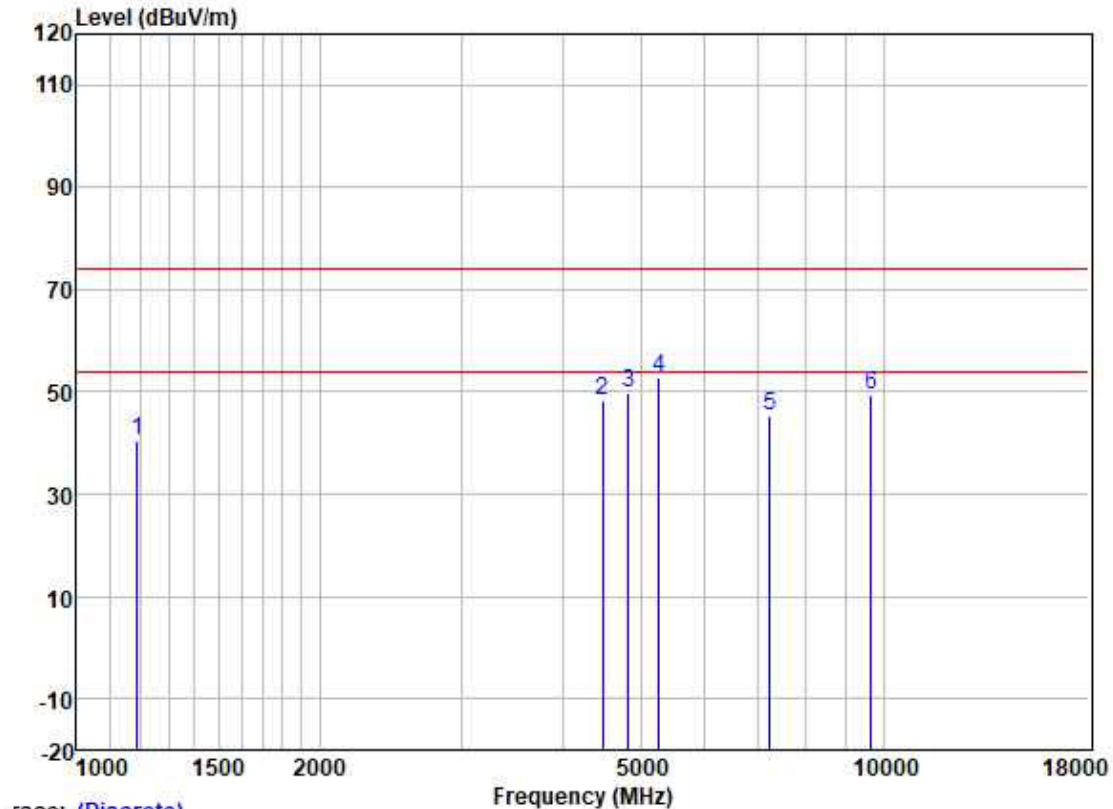

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp | Level  | Limit  | Over   |           |               |
|---|----------|-------------|--------|--------|--------|--------|--------|-----------|---------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1189.368 | 52.86       | 23.09  | 2.57   | 37.99  | 40.53  | 74.00  | -33.47    | VERTICAL peak |
| 2 | 4482.150 | 45.73       | 34.12  | 5.34   | 36.83  | 48.36  | 74.00  | -25.64    | VERTICAL peak |
| 3 | 4824.000 | 47.19       | 34.16  | 5.46   | 36.87  | 49.94  | 74.00  | -24.06    | VERTICAL peak |
| 4 | 5269.649 | 50.94       | 33.30  | 5.42   | 36.94  | 52.72  | 74.00  | -21.28    | VERTICAL peak |
| 5 | 7236.000 | 40.16       | 35.78  | 6.35   | 37.14  | 45.15  | 74.00  | -28.85    | VERTICAL peak |
| 6 | 9648.000 | 39.81       | 38.70  | 7.89   | 37.02  | 49.38  | 74.00  | -24.62    | VERTICAL peak |

Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

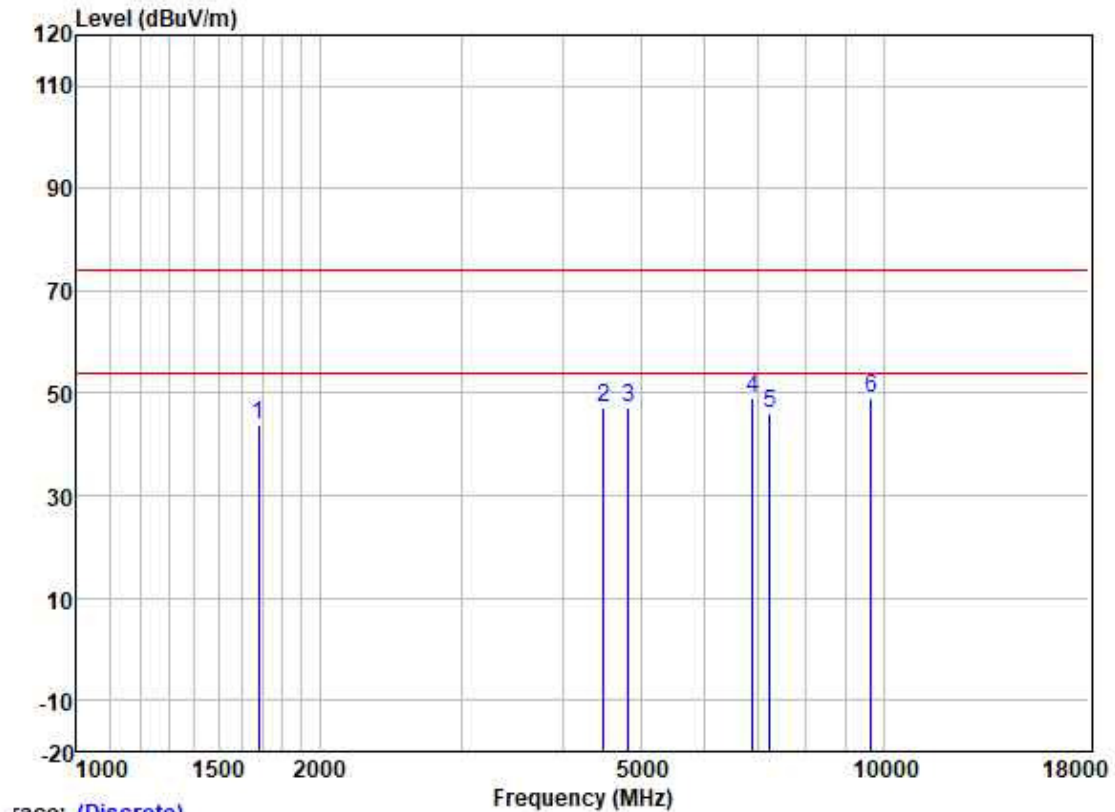


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1682.477 | 53.51       | 25.03  | 3.25   | 37.93  | 43.86  | 74.00  | -30.14 | HORIZONTAL | peak   |
| 2 | 4495.125 | 44.70       | 34.17  | 5.33   | 36.83  | 47.37  | 74.00  | -26.63 | HORIZONTAL | peak   |
| 3 | 4824.000 | 44.44       | 34.16  | 5.46   | 36.87  | 47.19  | 74.00  | -26.81 | HORIZONTAL | peak   |
| 4 | 6874.906 | 45.05       | 34.88  | 6.37   | 37.07  | 49.23  | 74.00  | -24.77 | HORIZONTAL | peak   |
| 5 | 7236.000 | 41.17       | 35.78  | 6.35   | 37.14  | 46.16  | 74.00  | -27.84 | HORIZONTAL | peak   |
| 6 | 9648.000 | 39.63       | 38.70  | 7.89   | 37.02  | 49.20  | 74.00  | -24.80 | HORIZONTAL | peak   |



Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

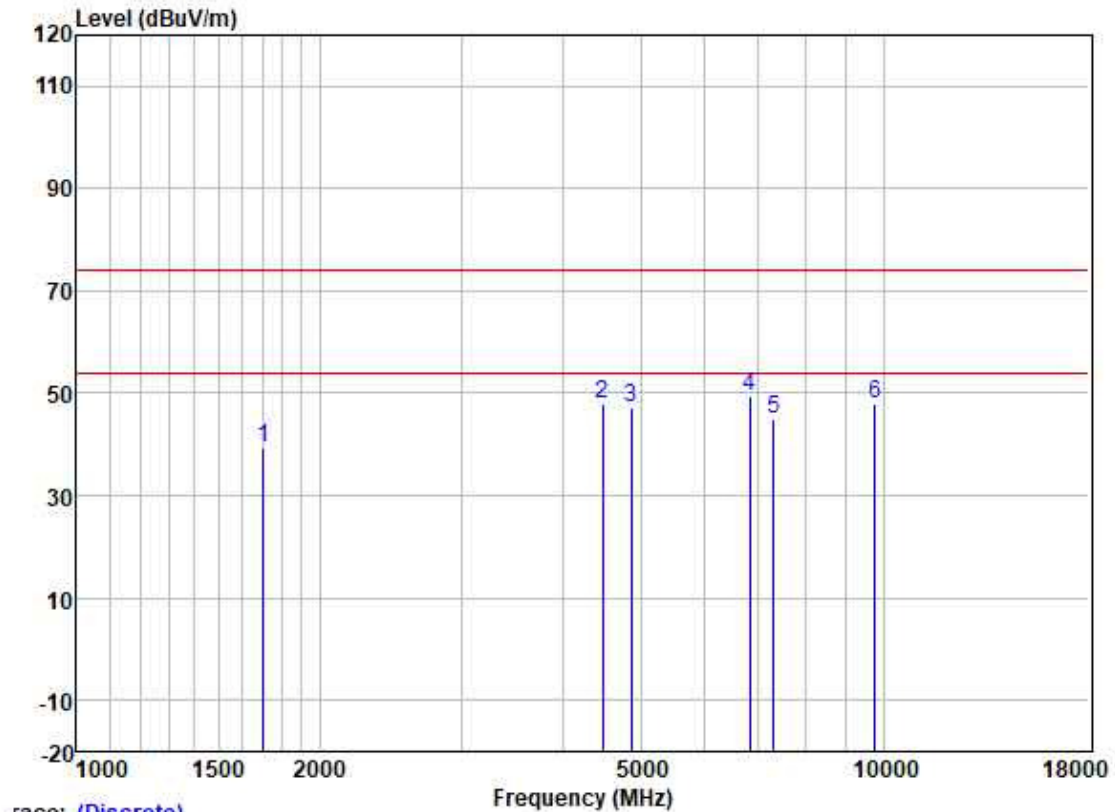


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1702.042 | 48.77       | 25.15  | 3.36   | 37.92  | 39.36  | 74.00  | -34.64 | VERTICAL  | peak   |
| 2 | 4482.150 | 45.33       | 34.12  | 5.34   | 36.83  | 47.96  | 74.00  | -26.04 | VERTICAL  | peak   |
| 3 | 4874.000 | 44.26       | 34.15  | 5.49   | 36.87  | 47.03  | 74.00  | -26.97 | VERTICAL  | peak   |
| 4 | 6835.278 | 45.36       | 34.79  | 6.36   | 37.07  | 49.44  | 74.00  | -24.56 | VERTICAL  | peak   |
| 5 | 7311.000 | 39.84       | 36.00  | 6.32   | 37.15  | 45.01  | 74.00  | -28.99 | VERTICAL  | peak   |
| 6 | 9748.000 | 38.81       | 38.81  | 7.43   | 37.01  | 48.04  | 74.00  | -25.96 | VERTICAL  | peak   |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

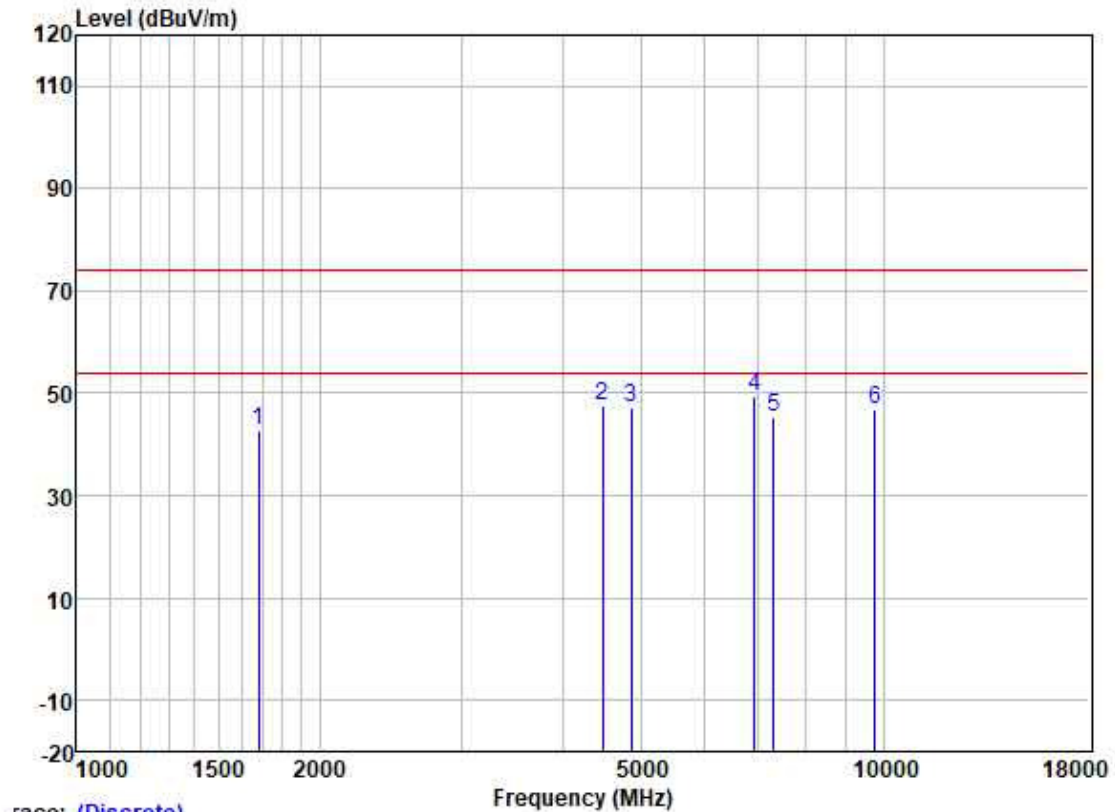

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preampl |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|---------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss    | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB      | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1682.477 | 52.38       | 25.03  | 3.25    | 37.93  | 42.73  | 74.00  | -31.27 | HORIZONTAL | peak   |
| 2 | 4482.150 | 44.87       | 34.12  | 5.34    | 36.83  | 47.50  | 74.00  | -26.50 | HORIZONTAL | peak   |
| 3 | 4874.000 | 44.57       | 34.15  | 5.49    | 36.87  | 47.34  | 74.00  | -26.66 | HORIZONTAL | peak   |
| 4 | 6914.763 | 45.28       | 34.97  | 6.39    | 37.08  | 49.56  | 74.00  | -24.44 | HORIZONTAL | peak   |
| 5 | 7311.000 | 39.99       | 36.00  | 6.32    | 37.15  | 45.16  | 74.00  | -28.84 | HORIZONTAL | peak   |
| 6 | 9748.000 | 37.52       | 38.81  | 7.43    | 37.01  | 46.75  | 74.00  | -27.25 | HORIZONTAL | peak   |


Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

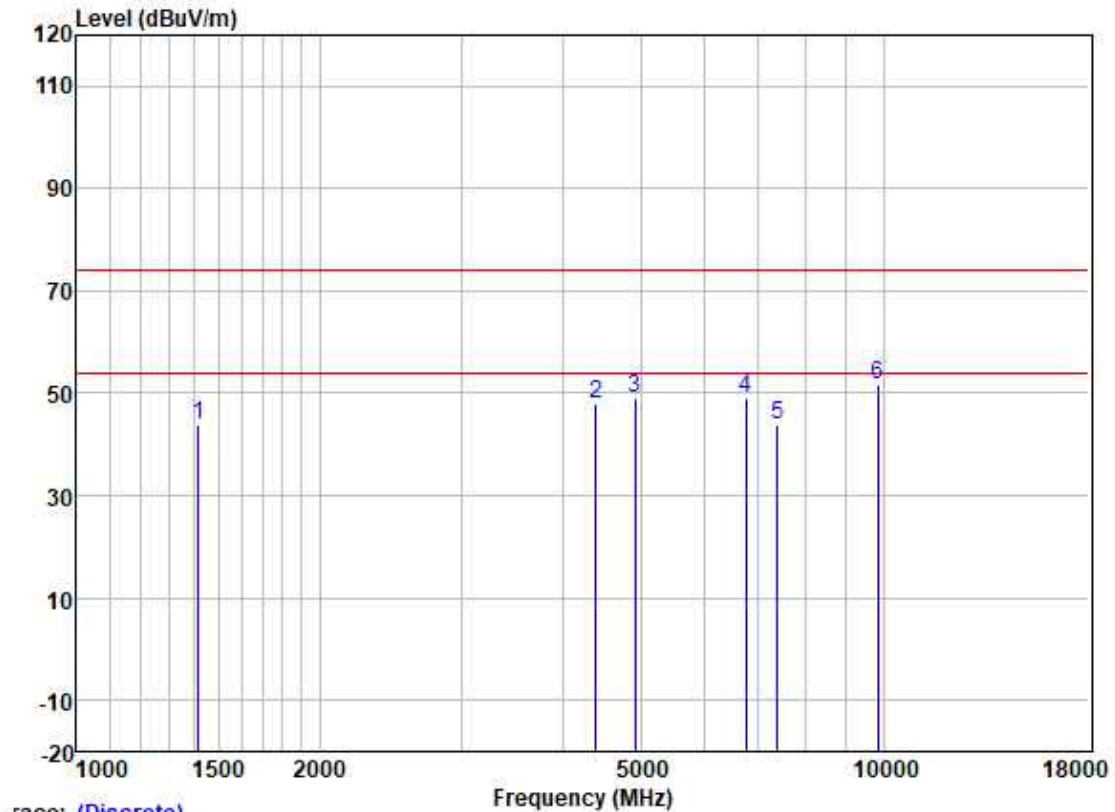

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1414.597 | 54.63       | 24.29  | 2.78   | 37.97  | 43.73  | 74.00  | -30.27 | VERTICAL  | peak   |
| 2 | 4405.090 | 45.61       | 33.74  | 5.37   | 36.82  | 47.90  | 74.00  | -26.10 | VERTICAL  | peak   |
| 3 | 4924.000 | 46.40       | 34.15  | 5.51   | 36.88  | 49.18  | 74.00  | -24.82 | VERTICAL  | peak   |
| 4 | 6756.708 | 45.09       | 34.56  | 6.32   | 37.06  | 48.91  | 74.00  | -25.09 | VERTICAL  | peak   |
| 5 | 7386.000 | 38.56       | 36.23  | 6.30   | 37.16  | 43.93  | 74.00  | -30.07 | VERTICAL  | peak   |
| 6 | 9848.000 | 42.69       | 38.88  | 7.06   | 37.01  | 51.62  | 74.00  | -22.38 | VERTICAL  | peak   |

Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

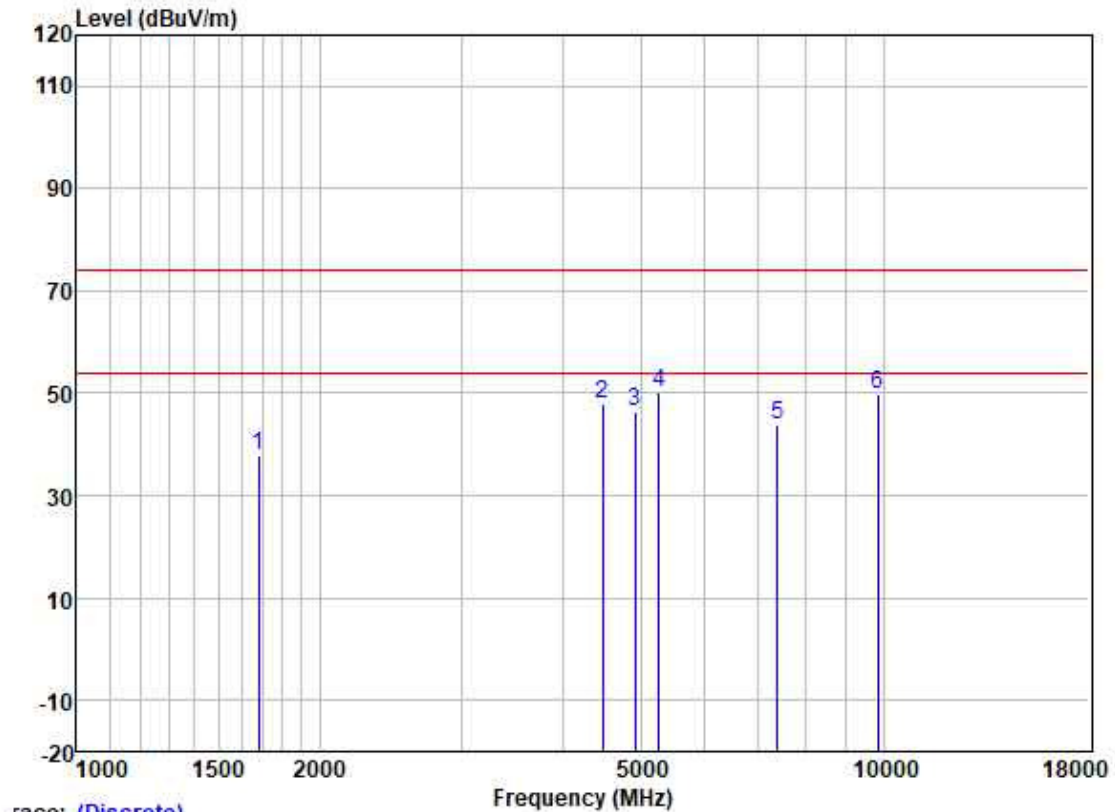


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1682.477 | 47.38       | 25.03  | 3.25   | 37.93  | 37.73  | 74.00  | -36.27 | HORIZONTAL | peak   |
| 2 | 4482.150 | 45.29       | 34.12  | 5.34   | 36.83  | 47.92  | 74.00  | -26.08 | HORIZONTAL | peak   |
| 3 | 4924.000 | 43.57       | 34.15  | 5.51   | 36.88  | 46.35  | 74.00  | -27.65 | HORIZONTAL | peak   |
| 4 | 5269.649 | 48.39       | 33.30  | 5.42   | 36.94  | 50.17  | 74.00  | -23.83 | HORIZONTAL | peak   |
| 5 | 7386.000 | 38.65       | 36.23  | 6.30   | 37.16  | 44.02  | 74.00  | -29.98 | HORIZONTAL | peak   |
| 6 | 9848.000 | 40.81       | 38.88  | 7.06   | 37.01  | 49.74  | 74.00  | -24.26 | HORIZONTAL | peak   |



Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

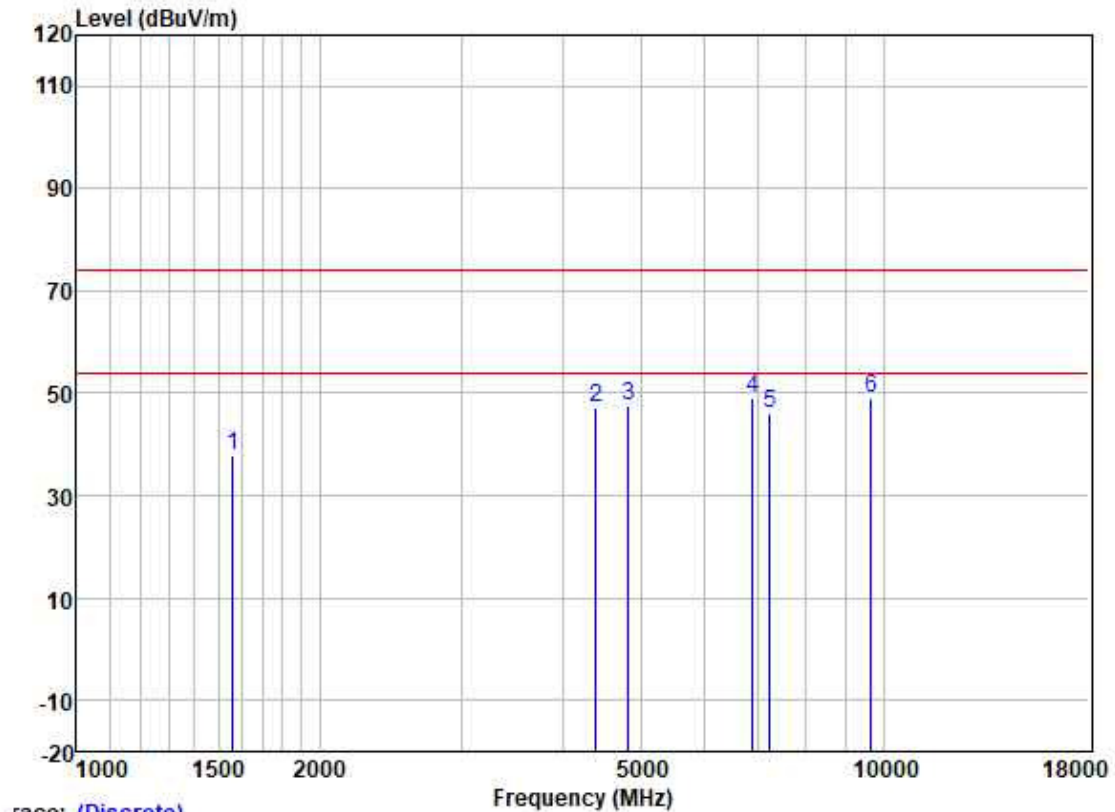


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1560.673 | 48.07       | 24.57  | 2.98   | 37.94  | 37.68  | 74.00  | -36.32 | VERTICAL  | peak   |
| 2 | 4405.090 | 44.92       | 33.74  | 5.37   | 36.82  | 47.21  | 74.00  | -26.79 | VERTICAL  | peak   |
| 3 | 4824.000 | 44.66       | 34.16  | 5.46   | 36.87  | 47.41  | 74.00  | -26.59 | VERTICAL  | peak   |
| 4 | 6874.906 | 44.76       | 34.88  | 6.37   | 37.07  | 48.94  | 74.00  | -25.06 | VERTICAL  | peak   |
| 5 | 7236.000 | 40.92       | 35.78  | 6.35   | 37.14  | 45.91  | 74.00  | -28.09 | VERTICAL  | peak   |
| 6 | 9648.000 | 39.34       | 38.70  | 7.89   | 37.02  | 48.91  | 74.00  | -25.09 | VERTICAL  | peak   |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

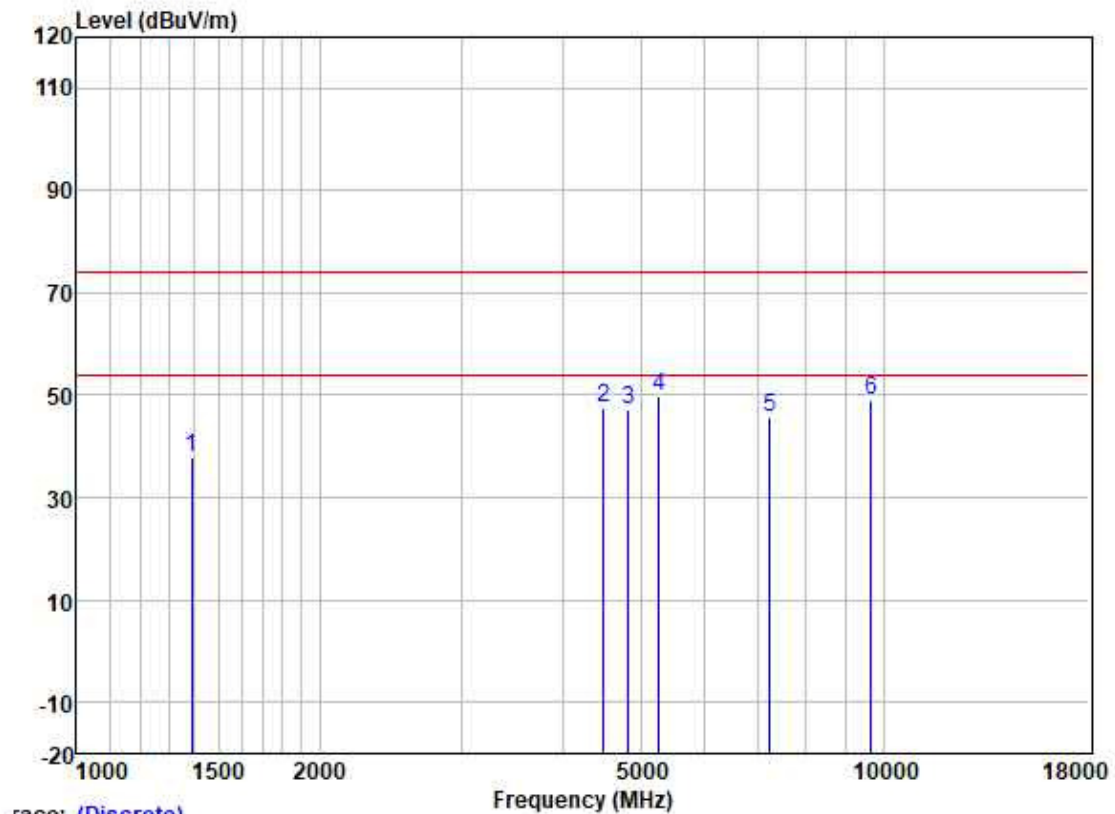

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1390.276 | 48.95       | 24.24  | 2.77   | 37.97  | 37.99  | 74.00  | -36.01 | HORIZONTAL | peak   |
| 2 | 4495.125 | 44.87       | 34.17  | 5.33   | 36.83  | 47.54  | 74.00  | -26.46 | HORIZONTAL | peak   |
| 3 | 4824.000 | 44.49       | 34.16  | 5.46   | 36.87  | 47.24  | 74.00  | -26.76 | HORIZONTAL | peak   |
| 4 | 5269.649 | 48.03       | 33.30  | 5.42   | 36.94  | 49.81  | 74.00  | -24.19 | HORIZONTAL | peak   |
| 5 | 7236.000 | 40.82       | 35.78  | 6.35   | 37.14  | 45.81  | 74.00  | -28.19 | HORIZONTAL | peak   |
| 6 | 9648.000 | 39.49       | 38.70  | 7.89   | 37.02  | 49.06  | 74.00  | -24.94 | HORIZONTAL | peak   |


Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

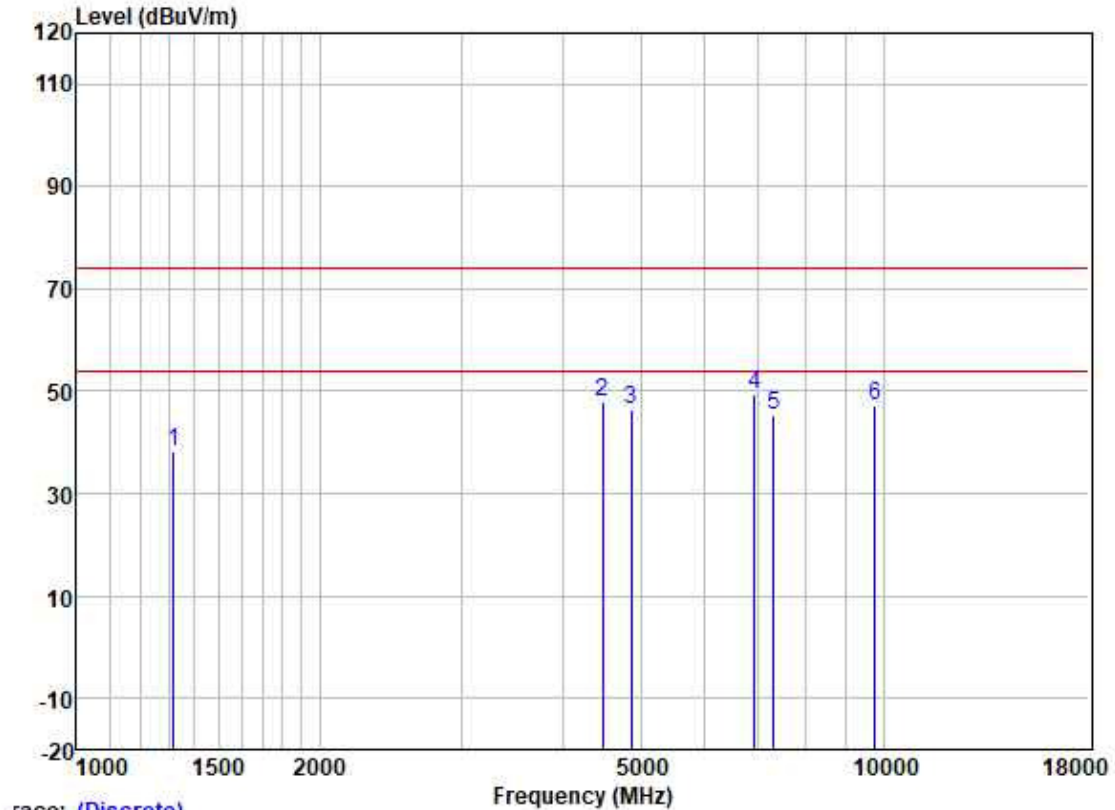

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1319.794 | 49.29       | 24.04  | 2.71   | 37.97  | 38.07  | 74.00  | -35.93 | VERTICAL  | peak   |
| 2 | 4482.150 | 45.30       | 34.12  | 5.34   | 36.83  | 47.93  | 74.00  | -26.07 | VERTICAL  | peak   |
| 3 | 4874.000 | 43.77       | 34.15  | 5.49   | 36.87  | 46.54  | 74.00  | -27.46 | VERTICAL  | peak   |
| 4 | 6914.763 | 45.27       | 34.97  | 6.39   | 37.08  | 49.55  | 74.00  | -24.45 | VERTICAL  | peak   |
| 5 | 7311.000 | 40.24       | 36.00  | 6.32   | 37.15  | 45.41  | 74.00  | -28.59 | VERTICAL  | peak   |
| 6 | 9748.000 | 37.88       | 38.81  | 7.43   | 37.01  | 47.11  | 74.00  | -26.89 | VERTICAL  | peak   |

Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

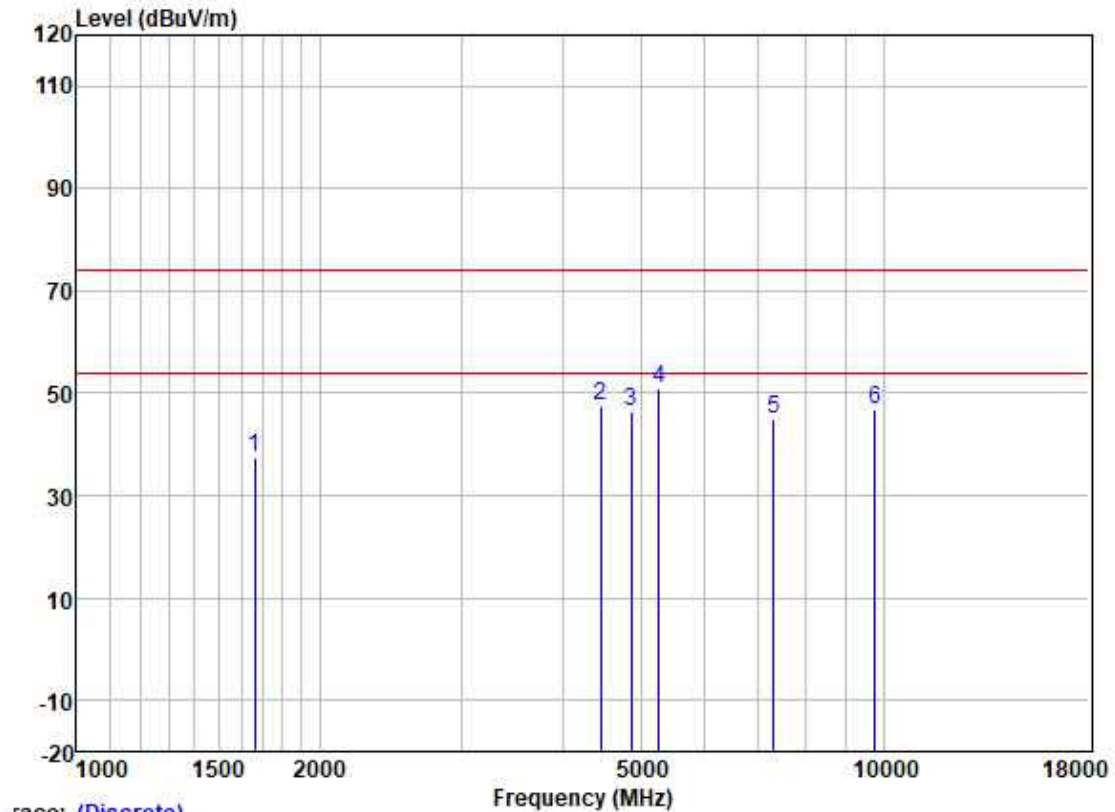


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1663.137 | 47.25       | 24.93  | 3.18   | 37.93  | 37.43  | 74.00  | -36.57 | HORIZONTAL | peak   |
| 2 | 4456.315 | 45.20       | 34.00  | 5.35   | 36.83  | 47.72  | 74.00  | -26.28 | HORIZONTAL | peak   |
| 3 | 4874.000 | 43.53       | 34.15  | 5.49   | 36.87  | 46.30  | 74.00  | -27.70 | HORIZONTAL | peak   |
| 4 | 5269.649 | 49.06       | 33.30  | 5.42   | 36.94  | 50.84  | 74.00  | -23.16 | HORIZONTAL | peak   |
| 5 | 7311.000 | 39.93       | 36.00  | 6.32   | 37.15  | 45.10  | 74.00  | -28.90 | HORIZONTAL | peak   |
| 6 | 9748.000 | 37.63       | 38.81  | 7.43   | 37.01  | 46.86  | 74.00  | -27.14 | HORIZONTAL | peak   |



Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

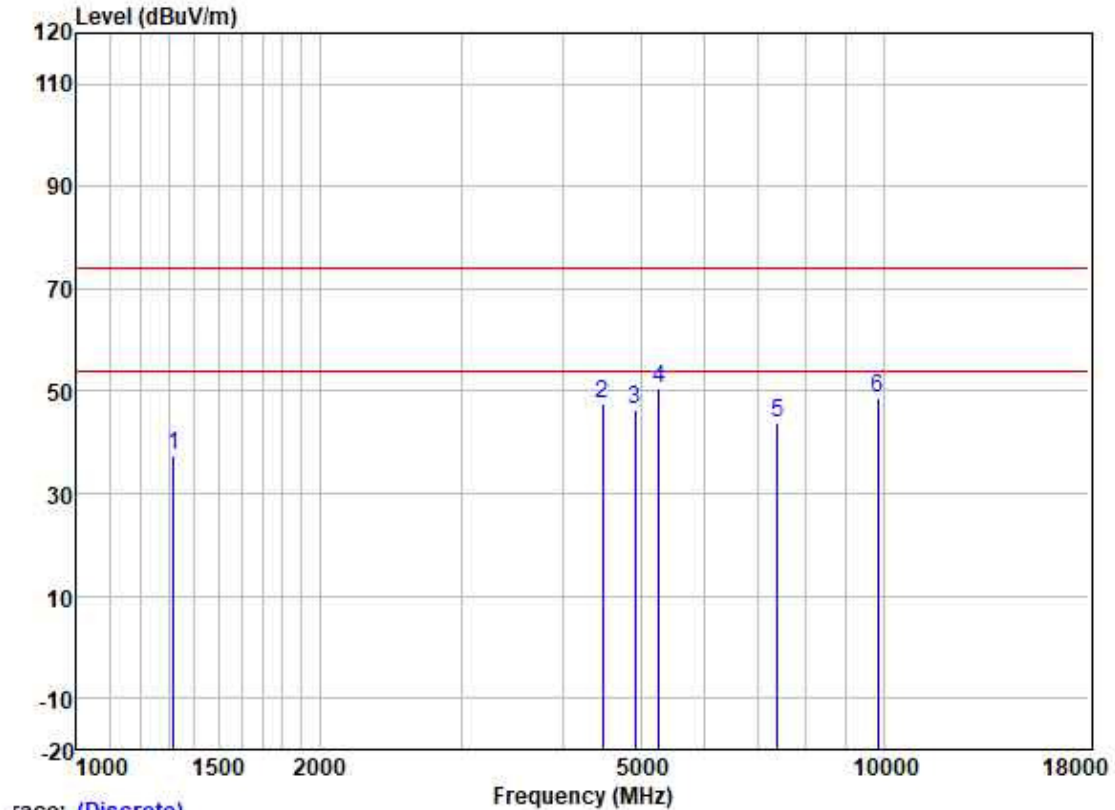


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1319.794 | 48.78       | 24.04  | 2.71   | 37.97  | 37.56  | 74.00  | -36.44 | VERTICAL  | peak   |
| 2 | 4482.150 | 45.05       | 34.12  | 5.34   | 36.83  | 47.68  | 74.00  | -26.32 | VERTICAL  | peak   |
| 3 | 4924.000 | 43.60       | 34.15  | 5.51   | 36.88  | 46.38  | 74.00  | -27.62 | VERTICAL  | peak   |
| 4 | 5269.649 | 48.94       | 33.30  | 5.42   | 36.94  | 50.72  | 74.00  | -23.28 | VERTICAL  | peak   |
| 5 | 7386.000 | 38.35       | 36.23  | 6.30   | 37.16  | 43.72  | 74.00  | -30.28 | VERTICAL  | peak   |
| 6 | 9848.000 | 39.86       | 38.88  | 7.06   | 37.01  | 48.79  | 74.00  | -25.21 | VERTICAL  | peak   |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

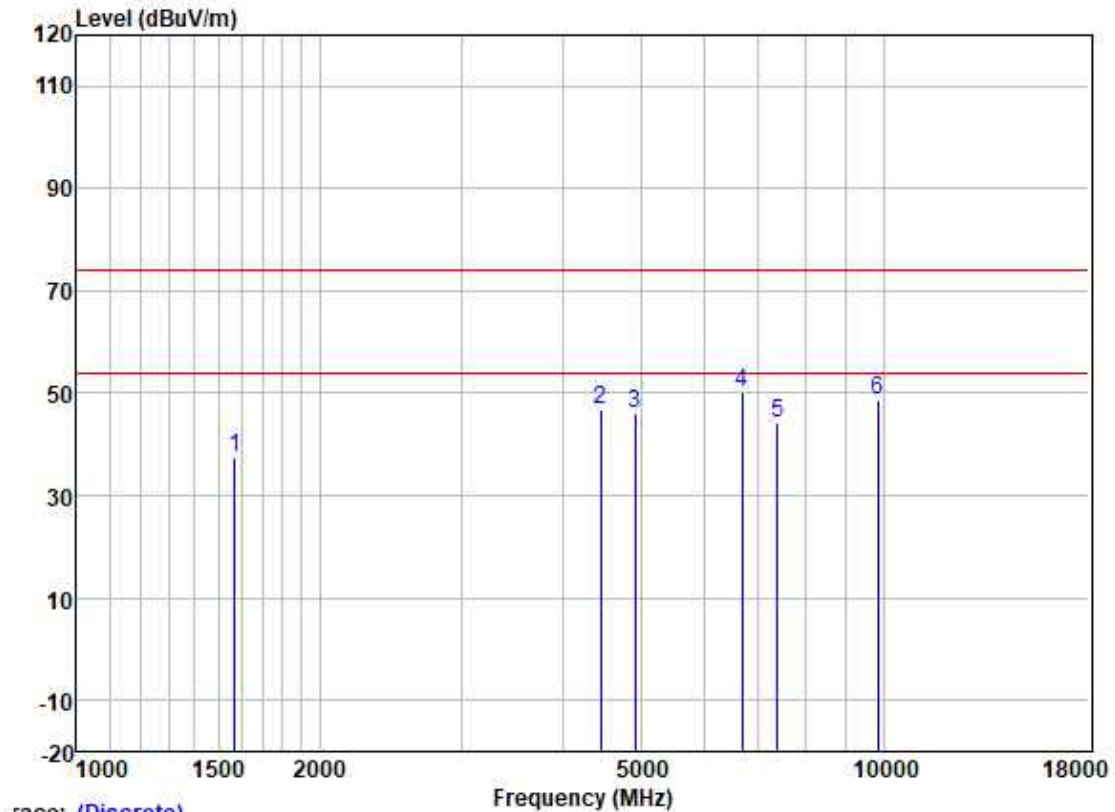

Trace: (Discrete)


|   | Freq     | ReadAntenna | Cable | Preamp |       | Limit  | Over   |           |                 |
|---|----------|-------------|-------|--------|-------|--------|--------|-----------|-----------------|
|   |          | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz      | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1569.721 | 47.86       | 24.60 | 2.99   | 37.94 | 37.51  | 74.00  | -36.49    | HORIZONTAL peak |
| 2 | 4456.315 | 44.47       | 34.00 | 5.35   | 36.83 | 46.99  | 74.00  | -27.01    | HORIZONTAL peak |
| 3 | 4924.000 | 43.45       | 34.15 | 5.51   | 36.88 | 46.23  | 74.00  | -27.77    | HORIZONTAL peak |
| 4 | 6679.040 | 46.57       | 34.28 | 6.27   | 37.05 | 50.07  | 74.00  | -23.93    | HORIZONTAL peak |
| 5 | 7386.000 | 38.73       | 36.23 | 6.30   | 37.16 | 44.10  | 74.00  | -29.90    | HORIZONTAL peak |
| 6 | 9848.000 | 39.85       | 38.88 | 7.06   | 37.01 | 48.78  | 74.00  | -25.22    | HORIZONTAL peak |

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

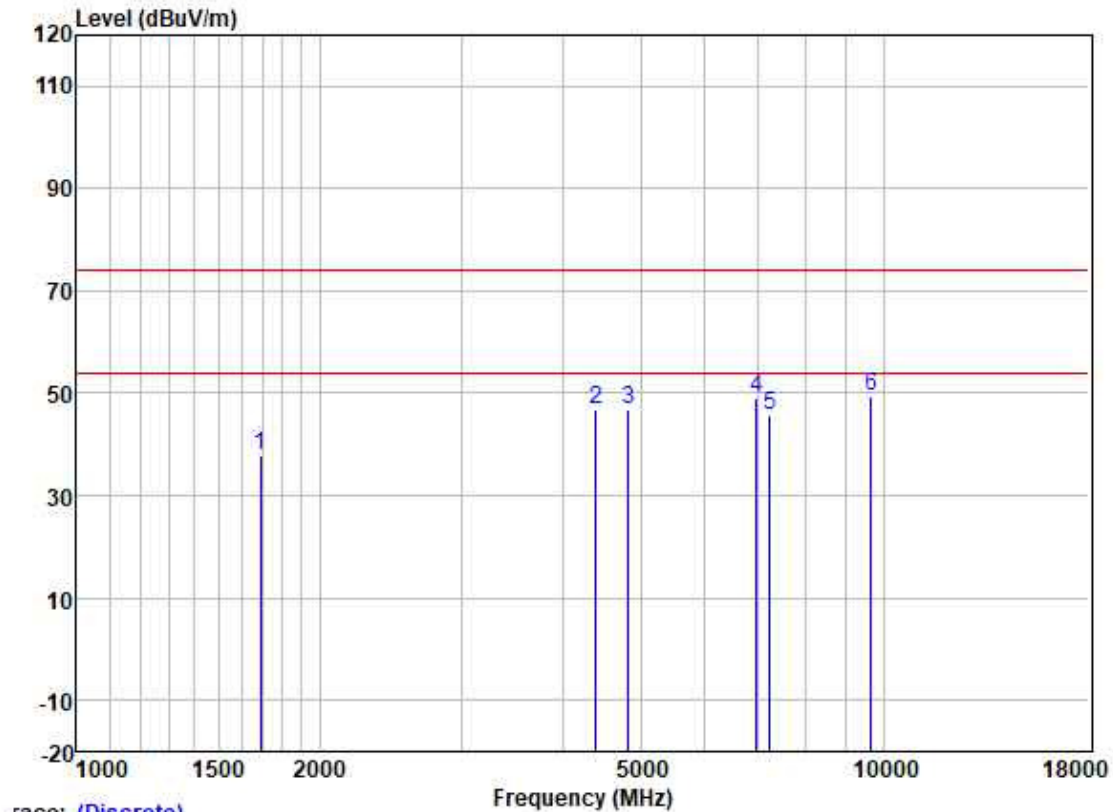

|   | Freq     | ReadAntenna | Cable  | Preamp | Level  | Limit  | Over   |           |               |
|---|----------|-------------|--------|--------|--------|--------|--------|-----------|---------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1692.231 | 47.52       | 25.09  | 3.30   | 37.93  | 37.98  | 74.00  | -36.02    | VERTICAL peak |
| 2 | 4405.090 | 44.61       | 33.74  | 5.37   | 36.82  | 46.90  | 74.00  | -27.10    | VERTICAL peak |
| 3 | 4824.000 | 43.93       | 34.16  | 5.46   | 36.87  | 46.68  | 74.00  | -27.32    | VERTICAL peak |
| 4 | 6954.852 | 44.58       | 35.04  | 6.40   | 37.09  | 48.93  | 74.00  | -25.07    | VERTICAL peak |
| 5 | 7236.000 | 40.66       | 35.78  | 6.35   | 37.14  | 45.65  | 74.00  | -28.35    | VERTICAL peak |
| 6 | 9648.000 | 39.94       | 38.70  | 7.89   | 37.02  | 49.51  | 74.00  | -24.49    | VERTICAL peak |


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

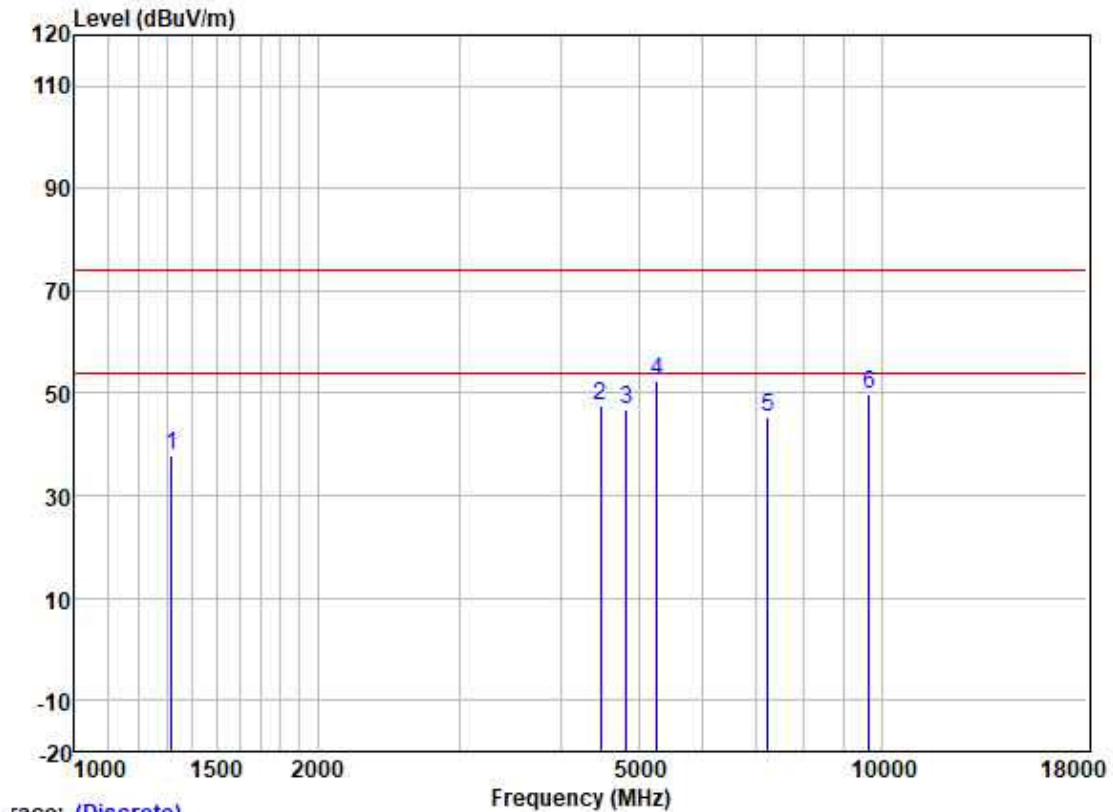

|   | Freq     | ReadAntenna | Cable | Preamp |       | Limit  | Over   |           |                 |
|---|----------|-------------|-------|--------|-------|--------|--------|-----------|-----------------|
|   | MHz      | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz      | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1319.794 | 49.04       | 24.04 | 2.71   | 37.97 | 37.82  | 74.00  | -36.18    | HORIZONTAL peak |
| 2 | 4482.150 | 45.05       | 34.12 | 5.34   | 36.83 | 47.68  | 74.00  | -26.32    | HORIZONTAL peak |
| 3 | 4824.000 | 44.02       | 34.16 | 5.46   | 36.87 | 46.77  | 74.00  | -27.23    | HORIZONTAL peak |
| 4 | 5269.649 | 50.56       | 33.30 | 5.42   | 36.94 | 52.34  | 74.00  | -21.66    | HORIZONTAL peak |
| 5 | 7236.000 | 40.43       | 35.78 | 6.35   | 37.14 | 45.42  | 74.00  | -28.58    | HORIZONTAL peak |
| 6 | 9648.000 | 40.32       | 38.70 | 7.89   | 37.02 | 49.89  | 74.00  | -24.11    | HORIZONTAL peak |



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

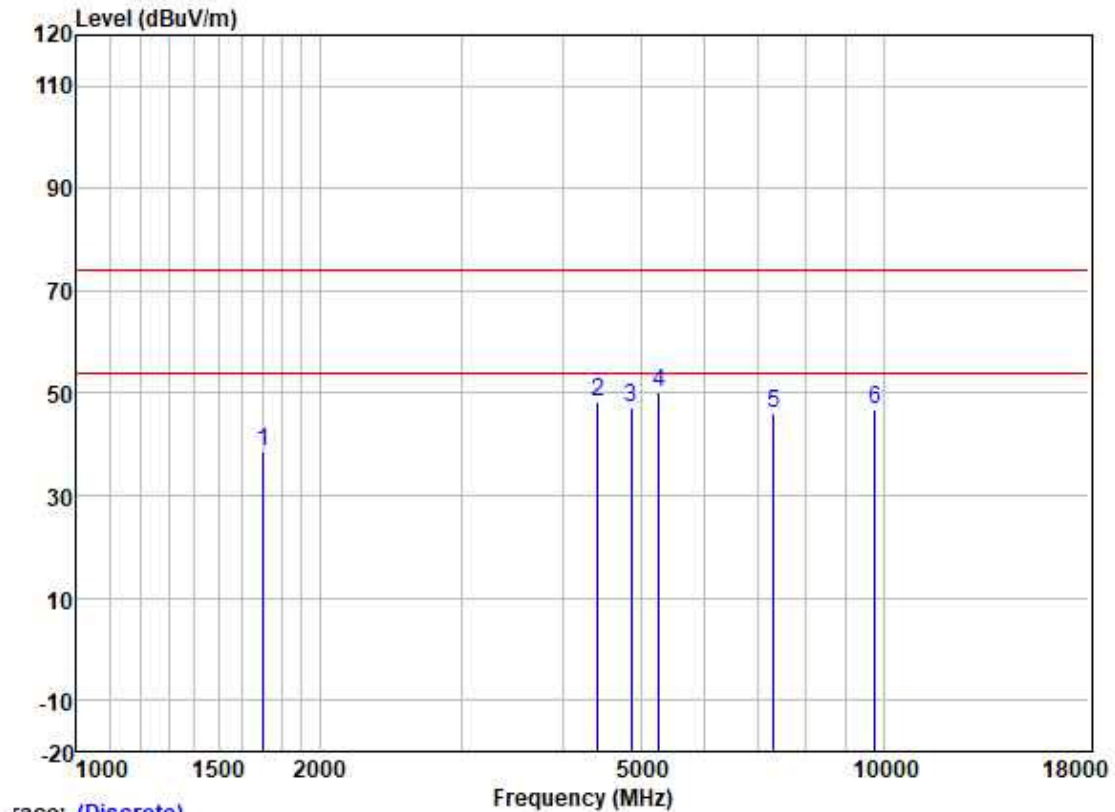


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp | Level  | Limit  | Over   |           |               |
|---|----------|-------------|--------|--------|--------|--------|--------|-----------|---------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1702.042 | 47.94       | 25.15  | 3.36   | 37.92  | 38.53  | 74.00  | -35.47    | VERTICAL peak |
| 2 | 4430.628 | 45.80       | 33.87  | 5.36   | 36.83  | 48.20  | 74.00  | -25.80    | VERTICAL peak |
| 3 | 4874.000 | 44.33       | 34.15  | 5.49   | 36.87  | 47.10  | 74.00  | -26.90    | VERTICAL peak |
| 4 | 5269.649 | 48.39       | 33.30  | 5.42   | 36.94  | 50.17  | 74.00  | -23.83    | VERTICAL peak |
| 5 | 7311.000 | 40.91       | 36.00  | 6.32   | 37.15  | 46.08  | 74.00  | -27.92    | VERTICAL peak |
| 6 | 9748.000 | 37.51       | 38.81  | 7.43   | 37.01  | 46.74  | 74.00  | -27.26    | VERTICAL peak |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

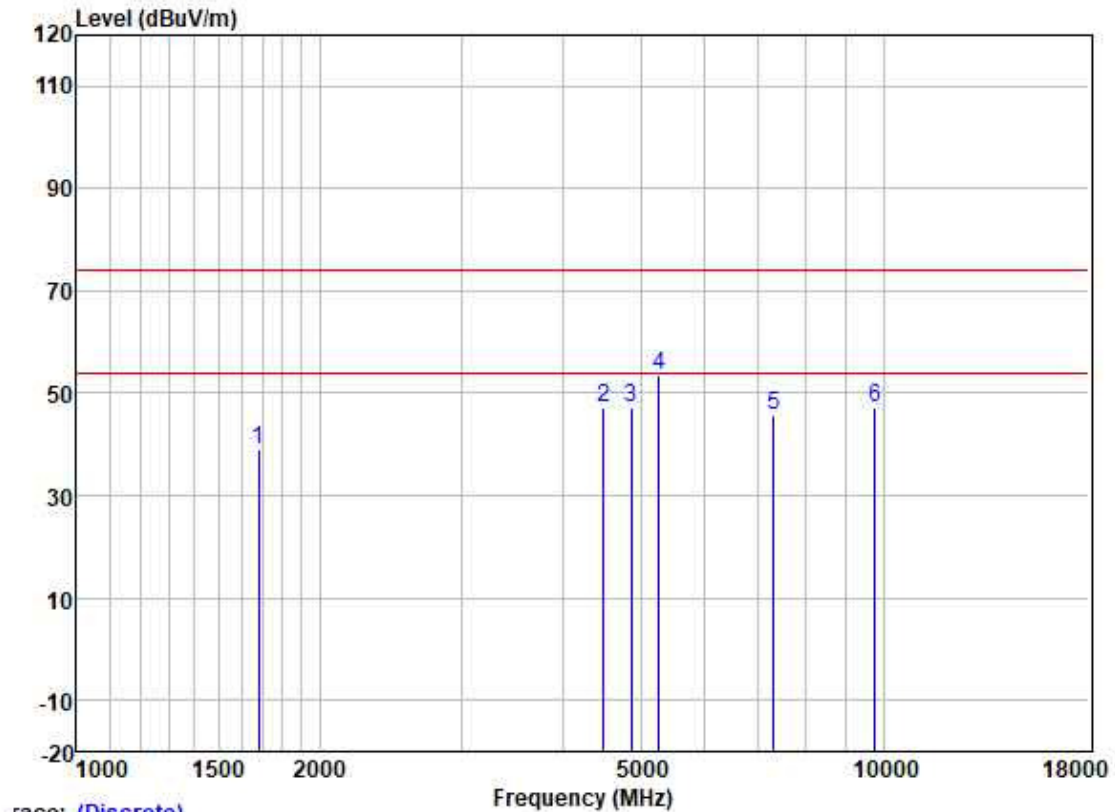

|      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |       |           |                 |
|------|-------------|--------|--------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level       | Factor | Loss   | Factor | Level  | Line   | Limit | Pol/Phase | Remark          |
| MHz  | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB    |           |                 |
| 1    | 1682.477    | 48.58  | 25.03  | 3.25   | 37.93  | 38.93  | 74.00 | -35.07    | HORIZONTAL peak |
| 2    | 4495.125    | 44.52  | 34.17  | 5.33   | 36.83  | 47.19  | 74.00 | -26.81    | HORIZONTAL peak |
| 3    | 4874.000    | 44.35  | 34.15  | 5.49   | 36.87  | 47.12  | 74.00 | -26.88    | HORIZONTAL peak |
| 4    | 5269.649    | 51.70  | 33.30  | 5.42   | 36.94  | 53.48  | 74.00 | -20.52    | HORIZONTAL peak |
| 5    | 7311.000    | 40.36  | 36.00  | 6.32   | 37.15  | 45.53  | 74.00 | -28.47    | HORIZONTAL peak |
| 6    | 9748.000    | 37.99  | 38.81  | 7.43   | 37.01  | 47.22  | 74.00 | -26.78    | HORIZONTAL peak |


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

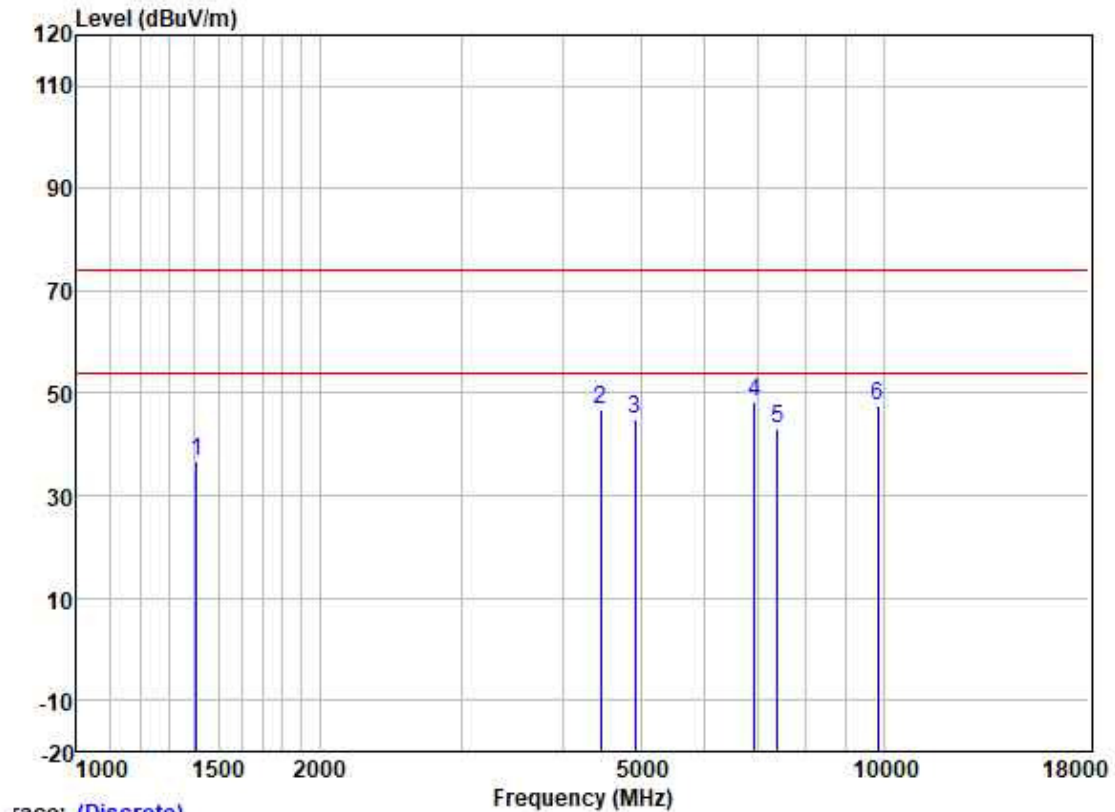

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1406.443 | 47.74       | 24.27  | 2.78   | 37.97  | 36.82  | 74.00  | -37.18 | VERTICAL  | peak   |
| 2 | 4456.315 | 44.20       | 34.00  | 5.35   | 36.83  | 46.72  | 74.00  | -27.28 | VERTICAL  | peak   |
| 3 | 4924.000 | 42.03       | 34.15  | 5.51   | 36.88  | 44.81  | 74.00  | -29.19 | VERTICAL  | peak   |
| 4 | 6914.763 | 44.04       | 34.97  | 6.39   | 37.08  | 48.32  | 74.00  | -25.68 | VERTICAL  | peak   |
| 5 | 7386.000 | 37.88       | 36.23  | 6.30   | 37.16  | 43.25  | 74.00  | -30.75 | VERTICAL  | peak   |
| 6 | 9848.000 | 38.74       | 38.88  | 7.06   | 37.01  | 47.67  | 74.00  | -26.33 | VERTICAL  | peak   |

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

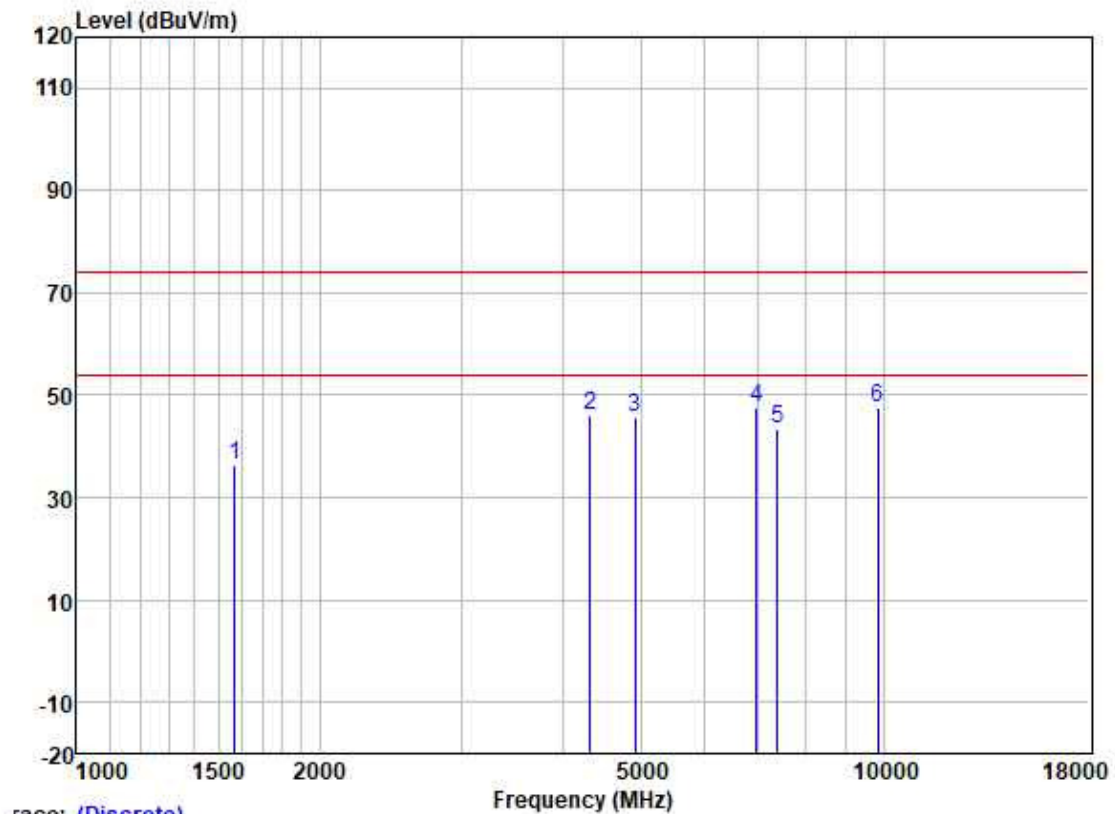


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1569.721 | 46.67       | 24.60  | 2.99   | 37.94  | 36.32  | 74.00  | -37.68 | HORIZONTAL | peak   |
| 2 | 4329.354 | 44.26       | 33.25  | 5.31   | 36.82  | 46.00  | 74.00  | -28.00 | HORIZONTAL | peak   |
| 3 | 4924.000 | 42.98       | 34.15  | 5.51   | 36.88  | 45.76  | 74.00  | -28.24 | HORIZONTAL | peak   |
| 4 | 6954.852 | 43.17       | 35.04  | 6.40   | 37.09  | 47.52  | 74.00  | -26.48 | HORIZONTAL | peak   |
| 5 | 7386.000 | 38.22       | 36.23  | 6.30   | 37.16  | 43.59  | 74.00  | -30.41 | HORIZONTAL | peak   |
| 6 | 9848.000 | 38.77       | 38.88  | 7.06   | 37.01  | 47.70  | 74.00  | -26.30 | HORIZONTAL | peak   |



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

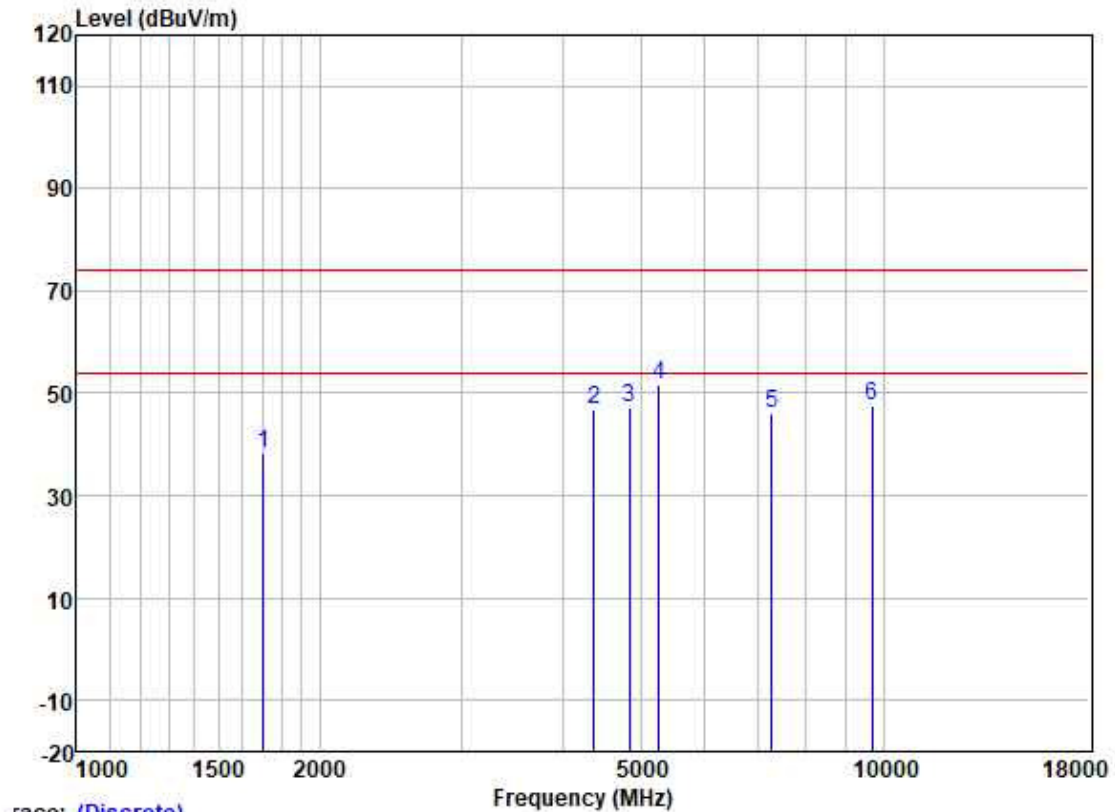


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable | Preamp |       | Limit  | Over   |           |               |
|---|----------|-------------|-------|--------|-------|--------|--------|-----------|---------------|
|   |          | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |               |
| 1 | 1702.042 | 47.61       | 25.15 | 3.36   | 37.92 | 38.20  | 74.00  | -35.80    | VERTICAL peak |
| 2 | 4379.699 | 44.86       | 33.59 | 5.35   | 36.82 | 46.98  | 74.00  | -27.02    | VERTICAL peak |
| 3 | 4844.000 | 44.46       | 34.15 | 5.47   | 36.87 | 47.21  | 74.00  | -26.79    | VERTICAL peak |
| 4 | 5269.649 | 49.85       | 33.30 | 5.42   | 36.94 | 51.63  | 74.00  | -22.37    | VERTICAL peak |
| 5 | 7266.000 | 40.91       | 35.86 | 6.34   | 37.14 | 45.97  | 74.00  | -28.03    | VERTICAL peak |
| 6 | 9688.000 | 38.31       | 38.75 | 7.68   | 37.02 | 47.72  | 74.00  | -26.28    | VERTICAL peak |




Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

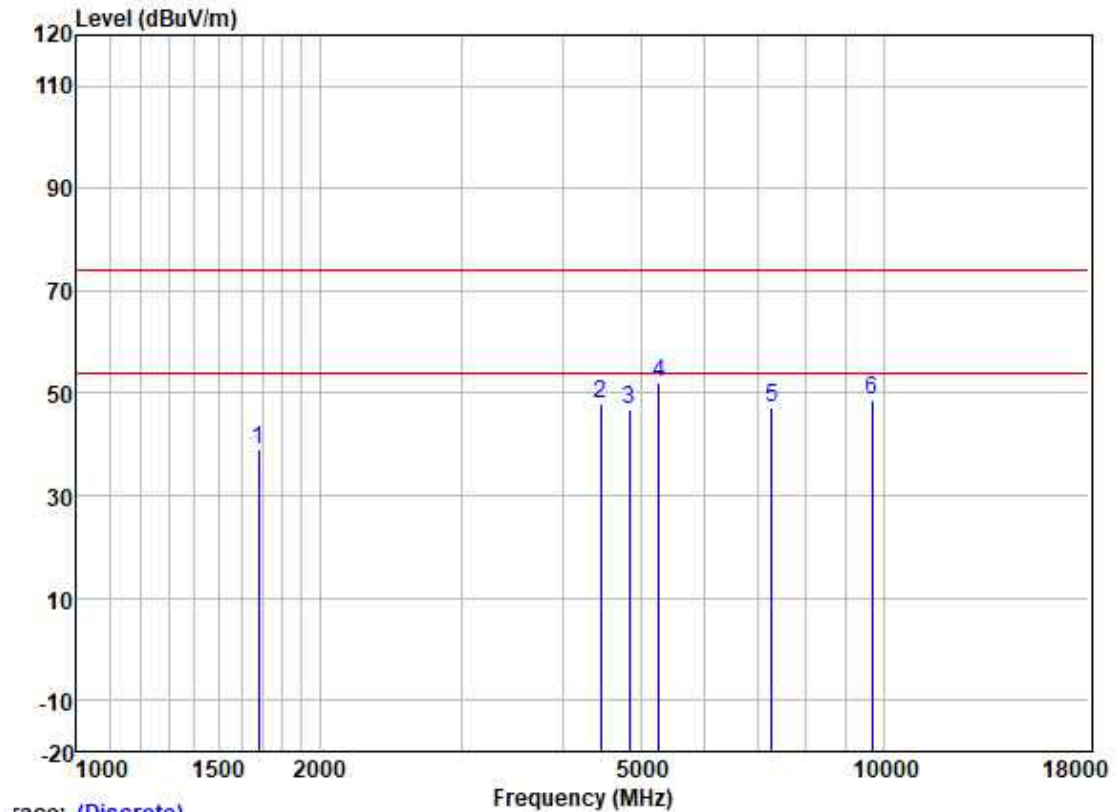

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |                 |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase       |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |                 |
| 1 | 1682.477 | 48.62       | 25.03  | 3.25   | 37.93  | 38.97  | 74.00  | -35.03 | HORIZONTAL peak |
| 2 | 4456.315 | 45.29       | 34.00  | 5.35   | 36.83  | 47.81  | 74.00  | -26.19 | HORIZONTAL peak |
| 3 | 4844.000 | 44.22       | 34.15  | 5.47   | 36.87  | 46.97  | 74.00  | -27.03 | HORIZONTAL peak |
| 4 | 5269.649 | 50.38       | 33.30  | 5.42   | 36.94  | 52.16  | 74.00  | -21.84 | HORIZONTAL peak |
| 5 | 7266.000 | 42.03       | 35.86  | 6.34   | 37.14  | 47.09  | 74.00  | -26.91 | HORIZONTAL peak |
| 6 | 9688.000 | 39.12       | 38.75  | 7.68   | 37.02  | 48.53  | 74.00  | -25.47 | HORIZONTAL peak |


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

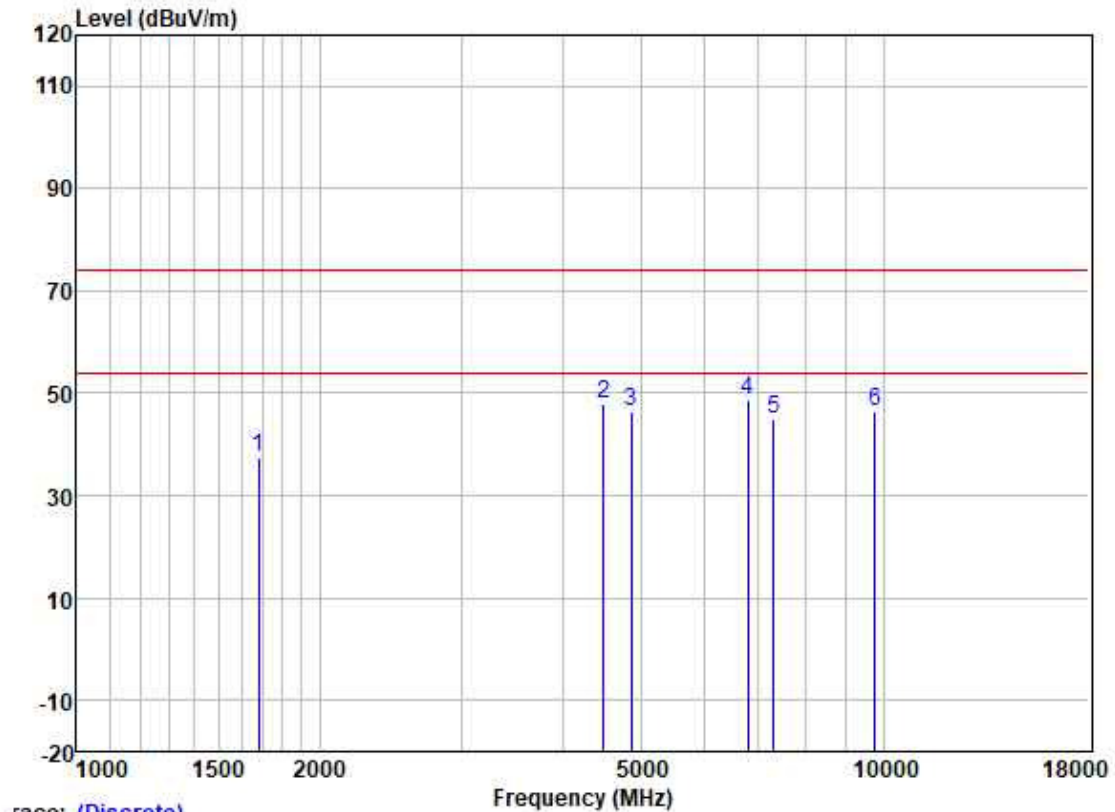

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable | Preamp |       | Limit  | Over   |           |               |
|---|----------|-------------|-------|--------|-------|--------|--------|-----------|---------------|
|   | MHz      | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |               |
| 1 | 1682.477 | 47.26       | 25.03 | 3.25   | 37.93 | 37.61  | 74.00  | -36.39    | VERTICAL peak |
| 2 | 4495.125 | 45.24       | 34.17 | 5.33   | 36.83 | 47.91  | 74.00  | -26.09    | VERTICAL peak |
| 3 | 4874.000 | 43.78       | 34.15 | 5.49   | 36.87 | 46.55  | 74.00  | -27.45    | VERTICAL peak |
| 4 | 6795.879 | 44.67       | 34.69 | 6.34   | 37.06 | 48.64  | 74.00  | -25.36    | VERTICAL peak |
| 5 | 7311.000 | 39.89       | 36.00 | 6.32   | 37.15 | 45.06  | 74.00  | -28.94    | VERTICAL peak |
| 6 | 9748.000 | 37.26       | 38.81 | 7.43   | 37.01 | 46.49  | 74.00  | -27.51    | VERTICAL peak |

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

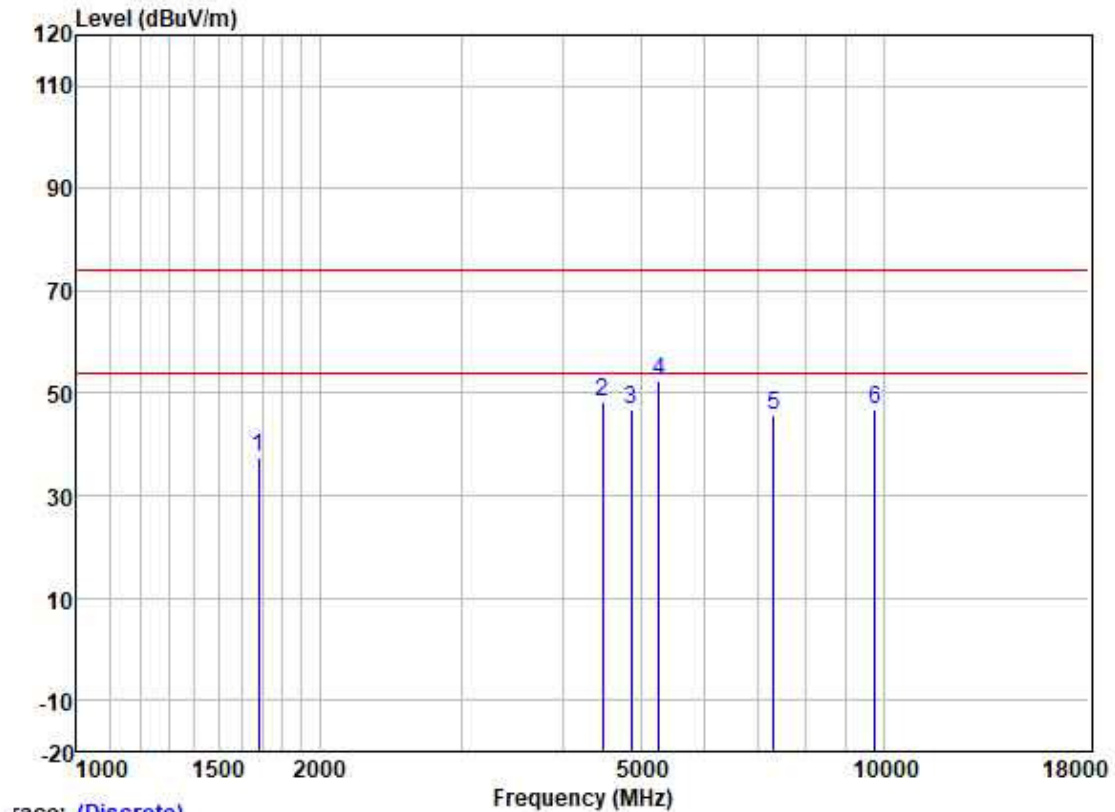


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable | Preamp |       | Limit  | Over   |           |                 |
|---|----------|-------------|-------|--------|-------|--------|--------|-----------|-----------------|
|   | MHz      | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz      | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1682.477 | 47.15       | 25.03 | 3.25   | 37.93 | 37.50  | 74.00  | -36.50    | HORIZONTAL peak |
| 2 | 4482.150 | 45.52       | 34.12 | 5.34   | 36.83 | 48.15  | 74.00  | -25.85    | HORIZONTAL peak |
| 3 | 4874.000 | 43.96       | 34.15 | 5.49   | 36.87 | 46.73  | 74.00  | -27.27    | HORIZONTAL peak |
| 4 | 5269.649 | 50.56       | 33.30 | 5.42   | 36.94 | 52.34  | 74.00  | -21.66    | HORIZONTAL peak |
| 5 | 7311.000 | 40.65       | 36.00 | 6.32   | 37.15 | 45.82  | 74.00  | -28.18    | HORIZONTAL peak |
| 6 | 9748.000 | 37.58       | 38.81 | 7.43   | 37.01 | 46.81  | 74.00  | -27.19    | HORIZONTAL peak |



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

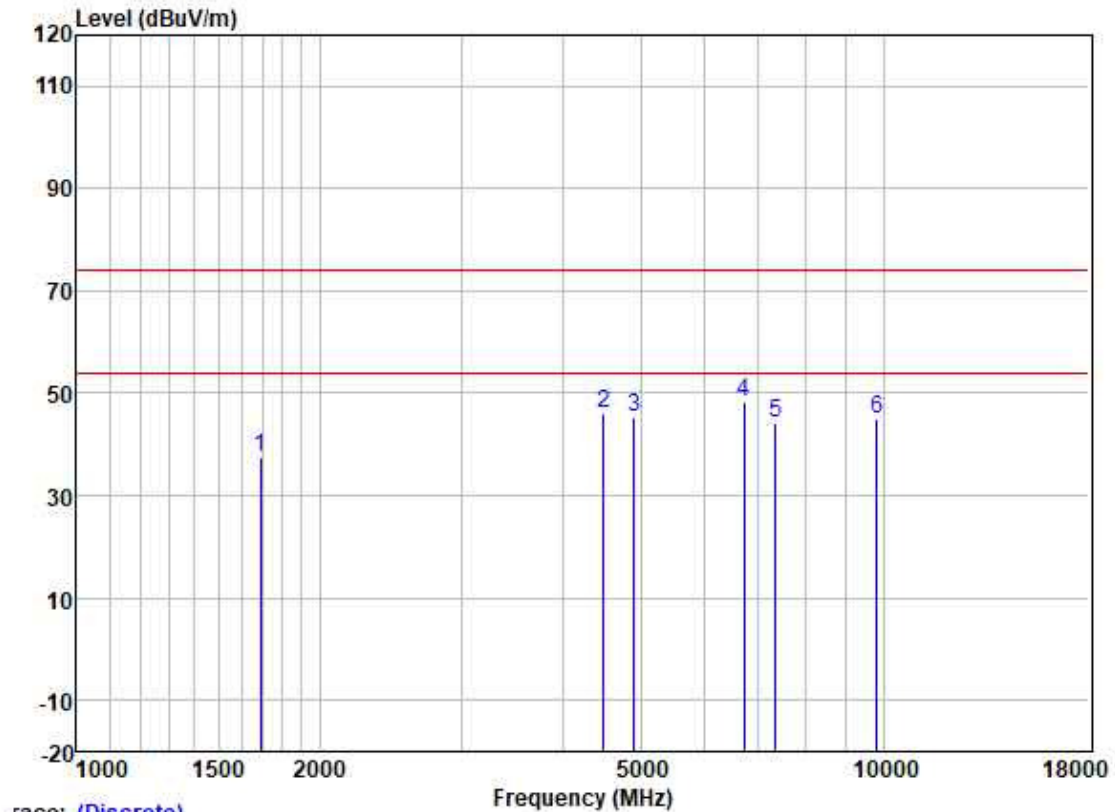


Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1692.231 | 46.97       | 25.09  | 3.30   | 37.93  | 37.43  | 74.00  | -36.57 | VERTICAL  | peak   |
| 2 | 4495.125 | 43.28       | 34.17  | 5.33   | 36.83  | 45.95  | 74.00  | -28.05 | VERTICAL  | peak   |
| 3 | 4904.000 | 42.44       | 34.15  | 5.50   | 36.88  | 45.21  | 74.00  | -28.79 | VERTICAL  | peak   |
| 4 | 6717.762 | 44.62       | 34.42  | 6.29   | 37.05  | 48.28  | 74.00  | -25.72 | VERTICAL  | peak   |
| 5 | 7356.000 | 38.89       | 36.12  | 6.31   | 37.15  | 44.17  | 74.00  | -29.83 | VERTICAL  | peak   |
| 6 | 9808.000 | 36.10       | 38.86  | 7.17   | 37.01  | 45.12  | 74.00  | -28.88 | VERTICAL  | peak   |



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

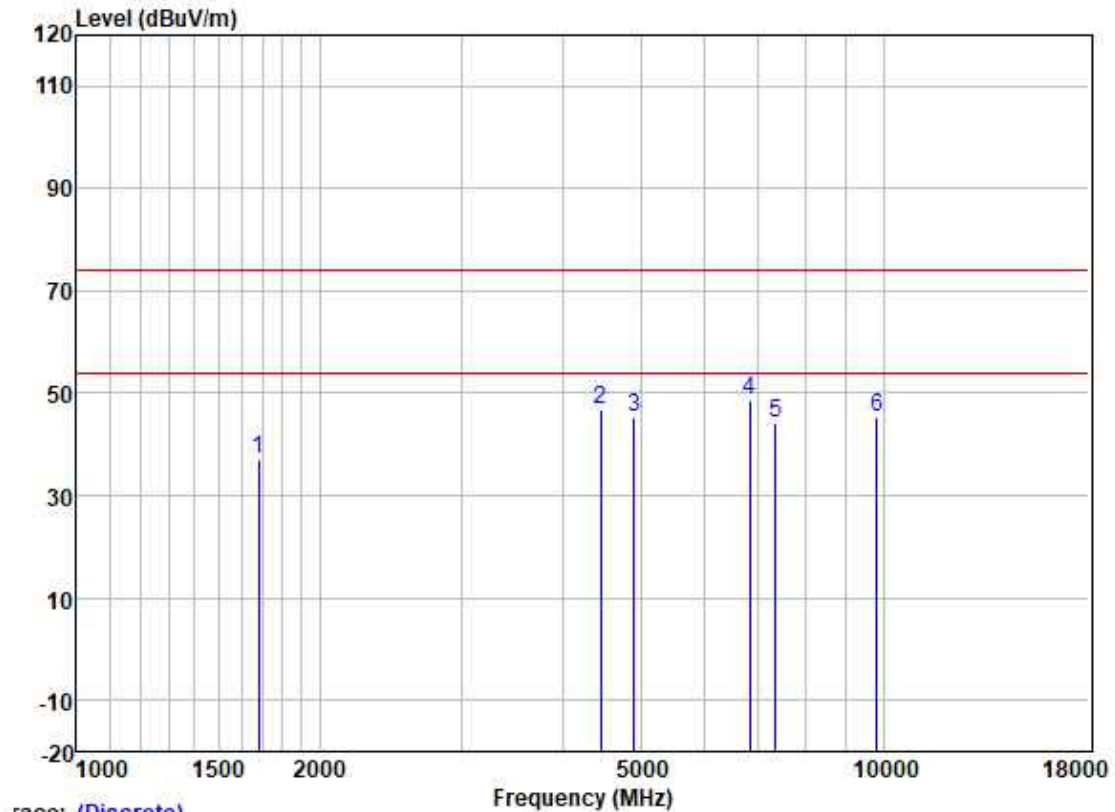

Trace: (Discrete)

|   | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |                 |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------------|
|   | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase       |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |                 |
| 1 | 1682.477 | 46.74       | 25.03  | 3.25   | 37.93  | 37.09  | 74.00  | -36.91 | HORIZONTAL peak |
| 2 | 4456.315 | 44.18       | 34.00  | 5.35   | 36.83  | 46.70  | 74.00  | -27.30 | HORIZONTAL peak |
| 3 | 4904.000 | 42.48       | 34.15  | 5.50   | 36.88  | 45.25  | 74.00  | -28.75 | HORIZONTAL peak |
| 4 | 6835.278 | 44.48       | 34.79  | 6.36   | 37.07  | 48.56  | 74.00  | -25.44 | HORIZONTAL peak |
| 5 | 7356.000 | 39.05       | 36.12  | 6.31   | 37.15  | 44.33  | 74.00  | -29.67 | HORIZONTAL peak |
| 6 | 9808.000 | 36.43       | 38.86  | 7.17   | 37.01  | 45.45  | 74.00  | -28.55 | HORIZONTAL peak |

## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR230500047802



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

## 9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2305000478HS