

FCC PART 15.235

EMI MEASUREMENT AND TEST REPORT


For

SHANTOU CITY HUASHENGDA ELECTRONICS CO., LTD.

HUASHENGDA BUILDING, CHENDIAN INDUSTRIAL ZONE, CHAONAN DISTRICT, SHANTOU CITY,
GUANGDONG, CHINA

FCC ID: TG52960

January 6, 2006

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: WIRELESS HEADPHONE
Test Engineer: Kamn Hu	
Report No.: RSZ05122603	
Test Date: December 28, 2005-January 5, 2006	
Reviewed By: Chris Zeng	
Prepared By: Bay Area Compliance Lab Corp. (ShenZhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China Tel: 86-755-33320018 Fax: 86-755-33320008	

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of Bay Area Compliance Lab
Corp. (ShenZhen). This report **must not** be used by the client to claim product certification,
approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
§15.203 - ANTENNA REQUIREMENT.....	8
STANDARD APPLICABLE	8
§15.207(A) - CONDUCTED EMISSION.....	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP	9
EMI TEST RECEIVER SETUP	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE	10
TEST RESULTS SUMMARY	10
TEST DATA	11
PLOT(S) OF TEST DATA	11
§15.209(A) §15.235(A) - RADIATED EMISSION.....	14
MEASUREMENT UNCERTAINTY	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	16
PLOT(S) OF TEST DATA	16
§15.235(B) - BAND EDGES TESTING	19
STANDARD APPLICABLE	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The SHANTOU CITY HUASHENGDA ELECTRONICS CO., LTD. 's product, model number: HP-WH2960 or the "EUT" as referred to in this report is a transmitter of WIRELESS HEADPHONE. The EUT is measured approximately 12.5cm L x 8.5cm W x 5.0cm H, rated input voltage: DC 12 V adapter and 9 V battery.

AC/DC Adapter Manufacturer: CLASS 2 POWER SUPPLY

Model: TL12200D-08

Input: 120V AC 60Hz

Output: 12V DC 200mA.

** The test data gathered are from production sample, serial number: 0512039, provided by the manufacturer, we receive the EUT on 2005-12-26.*

Objective

This Type approval report is prepared on behalf of SHANTOU CITY HUASHENGDA ELECTRONICS CO., LTD. in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, section 15.203, 15.205, 15.209 and 15.235 rules.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
NANYAN	Audio Generator	NY2201	019601	DoC

External I/O Cable

Cable Description	Length (M)	From/Port	To
Unshielded detachable DC Power Cable	1.6	EUT	AC/DC Adapter
Unshielded detachable Audio Cable	0.6	EUT	Audio Generator

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.


Special Accessories

N/A.


Equipment Modifications

Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

Configuration of Test Setup

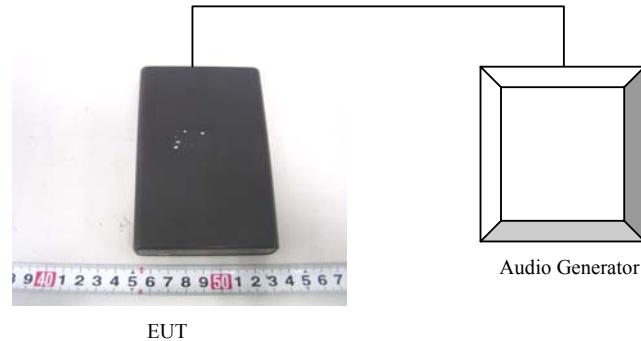

Block Diagram of Test Setup

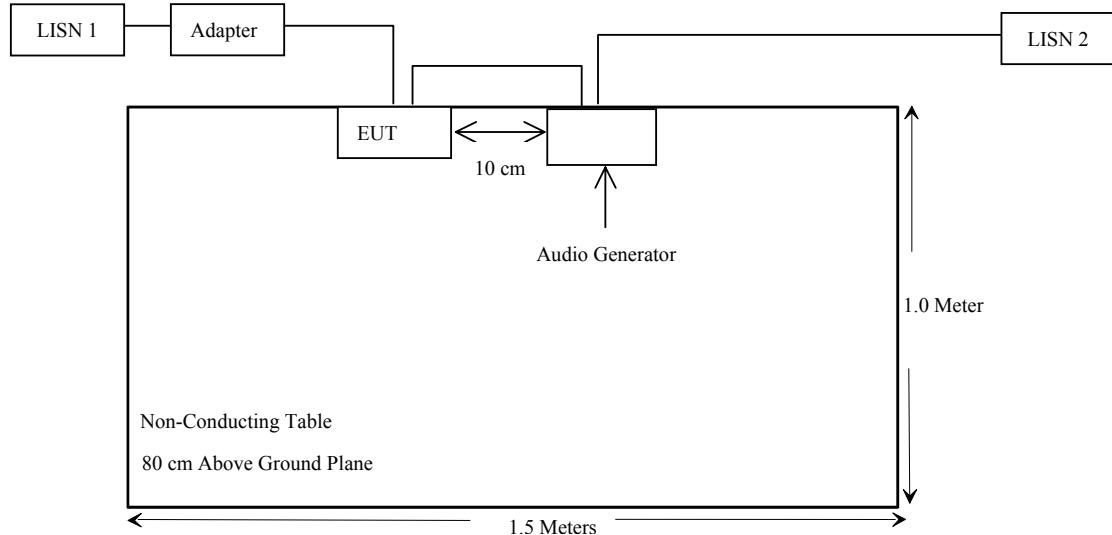

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna requirement	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a) §15.235(a)	Radiated Emission	Compliant
§15.235(b)	Band Edges Testing	Compliant

Note: The highest clocks of the EUT was 49.85 MHz.

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a permanent antenna, fulfill the requirement of this section.

Test Result: Pass


§15.207(a) - CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 2.4 dB.

EUT Setup

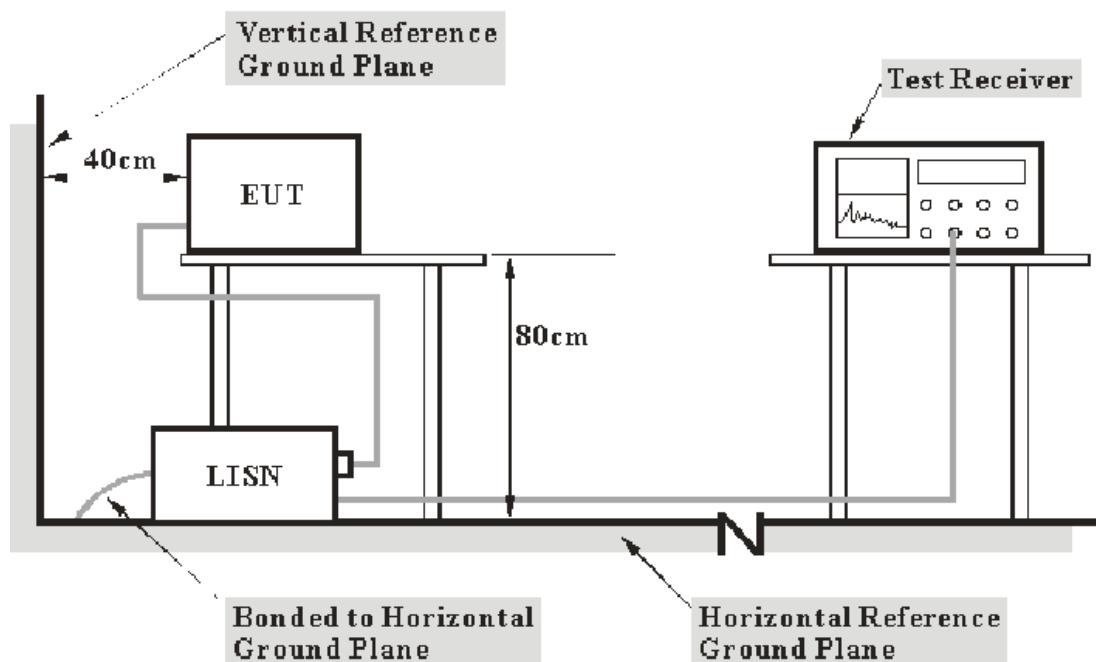

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IFBW</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12008	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2005-1-26	2006-1-26
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2005-2-28	2006-2-28

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN, and all other support equipment power cords were connected to the outlet of the second LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15 .207, with the worst margin reading of:

-20.25 dB at 0.354 MHz in the **Neutral** conductor mode.

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	55%
ATM Pressure:	1000mbar


The testing was performed by Kamn Hu on 2006-1-4~2006-1-5.

Test Mode: Transmitting

Frequency MHz	Amplitude dB μ V	LINE CONDUCTED EMISSIONS		FCC PART 15.207	
		Detector QP/AV	Phase Line/Neutral	Limit dB μ V	Margin dB
0.354	38.62	QP	Neutral	58.87	-20.25
0.360	38.03	QP	Line	58.73	-20.70
0.354	27.08	AV	Neutral	48.87	-21.79
0.150	43.80	QP	Line	66.00	-22.20
0.706	30.81	QP	Neutral	56.00	-25.19
0.706	20.77	AV	Neutral	46.00	-25.23
0.166	39.91	QP	Neutral	65.16	-25.25
0.360	22.98	AV	Line	48.73	-25.75
0.980	26.98	QP	Line	56.00	-29.02
0.166	25.50	AV	Neutral	55.16	-29.66
0.150	25.40	AV	Line	56.00	-30.60
3.960	25.29	QP	Line	56.00	-30.71
1.200	25.08	QP	Line	56.00	-30.92
1.230	23.28	QP	Neutral	56.00	-32.72
1.200	13.11	AV	Line	46.00	-32.89
3.960	11.90	AV	Line	46.00	-34.10
0.980	11.62	AV	Line	46.00	-34.38
11.790	25.60	QP	Line	60.00	-34.40
1.230	10.59	AV	Neutral	46.00	-35.41
4.690	19.82	QP	Neutral	56.00	-36.18
4.690	7.39	AV	Neutral	46.00	-38.61
5.220	20.10	QP	Neutral	60.00	-39.90
11.790	9.63	AV	Line	50.00	-40.37
5.220	8.78	AV	Neutral	50.00	-41.22


Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

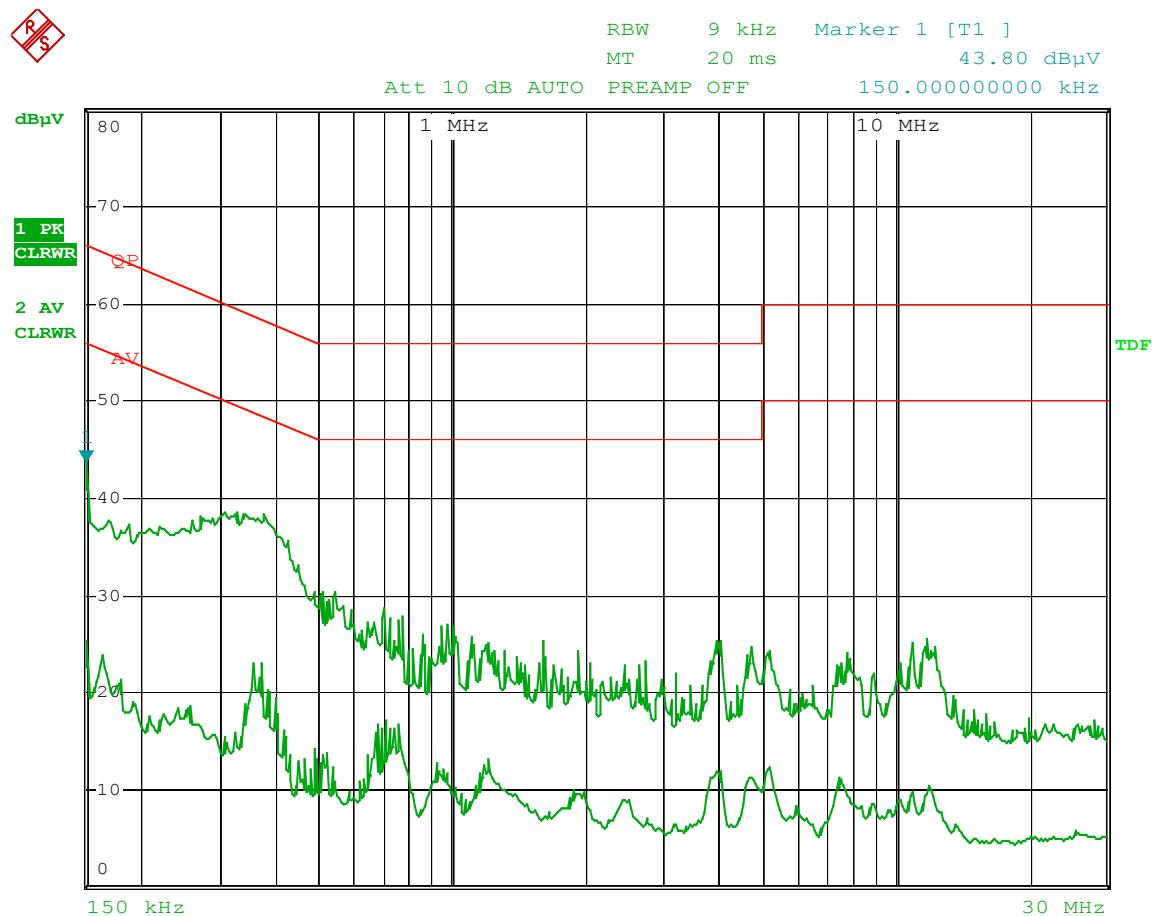

huashengda HP-WH2960 120V/60HZ L

Date: 4.JAN.2006 11:12:36

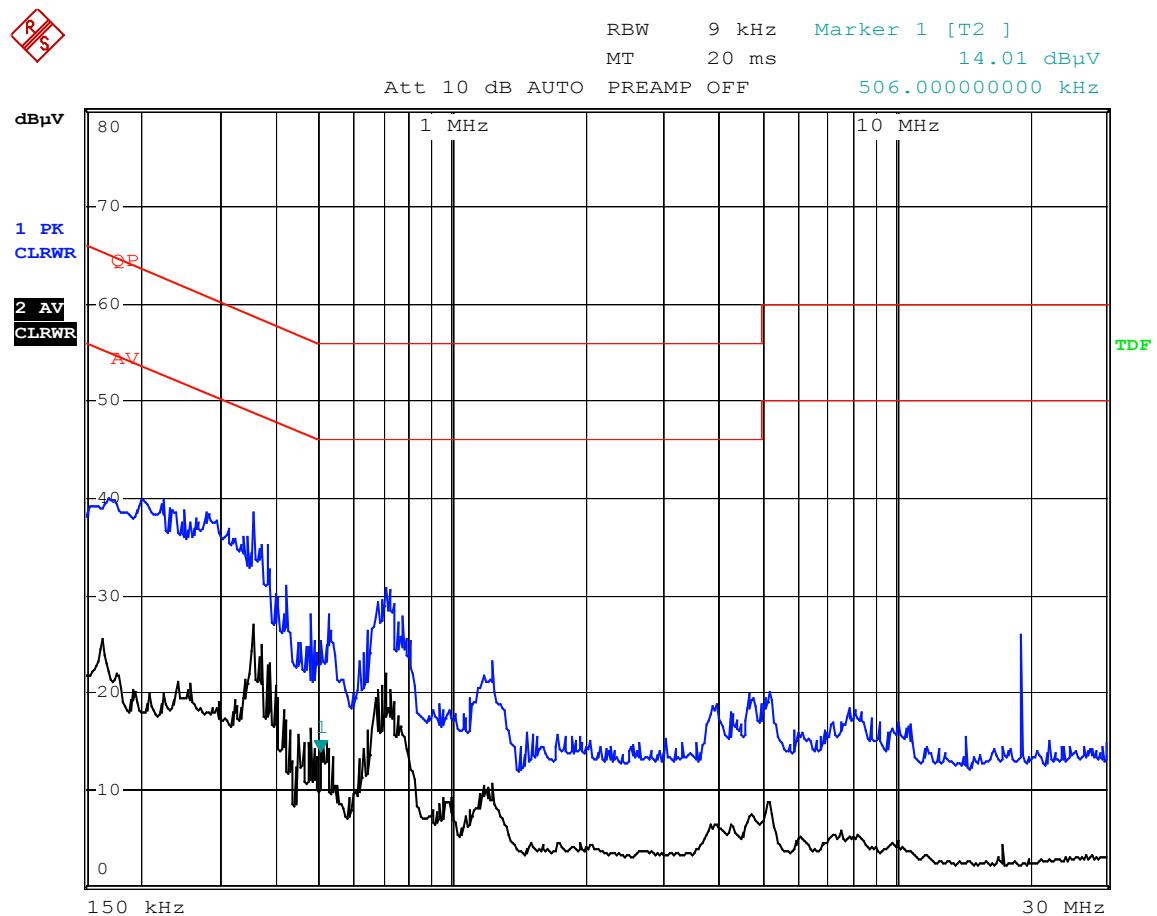


huashengda hp-wh2960 120v60hz N

Date: 5.JAN.2006 10:02:29

§15.209(a) §15.235(a) - RADIATED EMISSION**Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 4.0 dB.

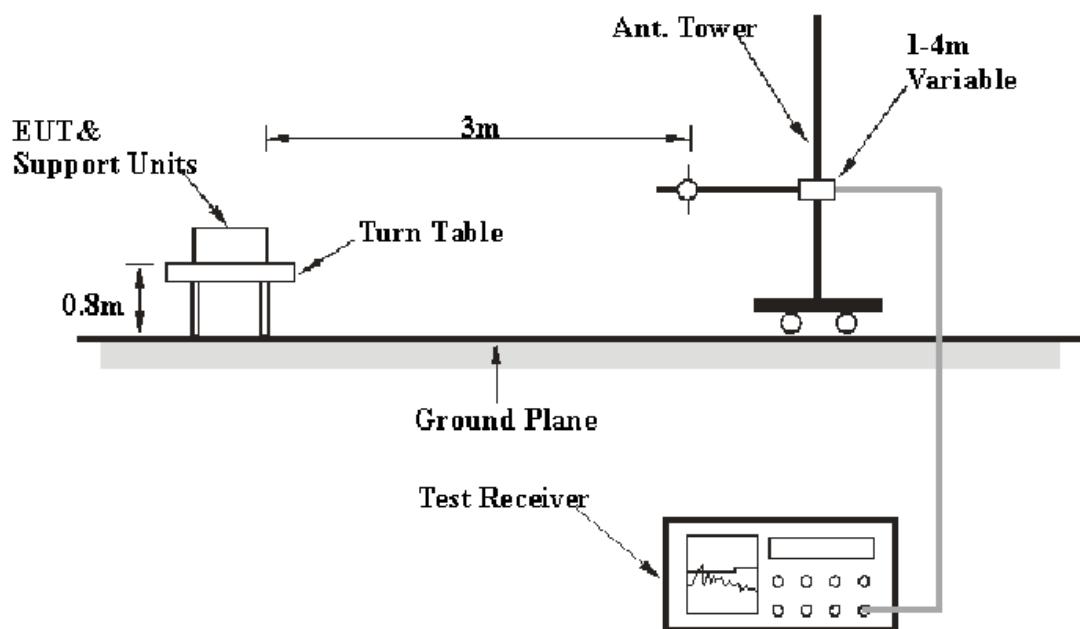EUT Setup

The radiated emission tests were performed in the chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and 15.235 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	R B/W	Video B/W	IF B/W
30 – 1000 MHz	100 kHz	300 kHz	120 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2005-8-17	2006-8-17
HP	Amplifier	HP8447D	2944A09795	2005-8-17	2006-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2005-4-28	2006-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.235, with the worst margin reading of:

-4.0 dB at 49.85 MHz in the Vertical polarization.

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	1003mbar

The testing was performed by Kamn Hu on 2005-12-28.


Test Mode: Transmitting

Frequency	Meter Reading	Meter		Antenna Height	Cable Loss	Amplifier Gain	Corr. Ampl.	FCC PART 15.209&15.235			Remark
		Direction	Polar								
MHz	dBuV/m	Degree	Meter	H / V	dB	dB	dB	dBuV/m	Limit dBuV/m	Margin dB	Remark
49.85	93.4	60	1.0	V	10.8	0.6	28.8	76.0	80.0	-4.0	Fundamental (AV)
30.63	38.0	45	1.0	V	24.1	0.6	28.8	33.9	40.0	-6.1	Spurious (PK)
38.61	40.8	180	1.0	V	17.7	0.6	28.8	30.3	40.0	-9.7	Spurious (PK)
31.07	33.2	45	1.0	H	24.1	0.6	28.8	29.1	40.0	-10.9	Spurious (PK)
199.40	46.7	120	1.5	V	12.0	1.3	28.0	32.0	43.5	-11.5	Harmonic (PK)
46.34	42.6	180	1.5	H	10.8	0.6	28.8	25.2	40.0	-14.8	Spurious (PK)
199.28	42.0	45	1.2	H	12.0	1.3	28.0	27.3	43.5	-16.2	Harmonic (PK)
586.84	35.8	90	1.0	V	19.1	2.7	28.6	29.0	46.0	-17.1	Spurious (PK)
299.10	40.3	60	1.0	V	13.8	1.6	27.6	28.1	46.0	-17.9	Harmonic (PK)
299.10	39.9	360	1.2	H	13.8	1.6	27.6	27.7	46.0	-18.3	Harmonic (PK)
70.58	37.6	270	1.0	H	8.6	0.8	28.7	18.3	40.0	-21.7	Spurious (PK)
49.85	75.3	270	1.2	H	10.8	0.6	28.8	57.9	80.0	-22.1	Fundamental (AV)
49.85	94.7	60	1.0	V	10.8	0.6	28.8	77.3	100.0	-22.7	Fundamental (PK)
49.85	76.4	270	1.2	H	10.8	0.6	28.8	59.0	100.0	-41.0	Fundamental (PK)

Plot(s) of Test Data


Plot(s) of Test Data is presented hereinafter as reference.

RS

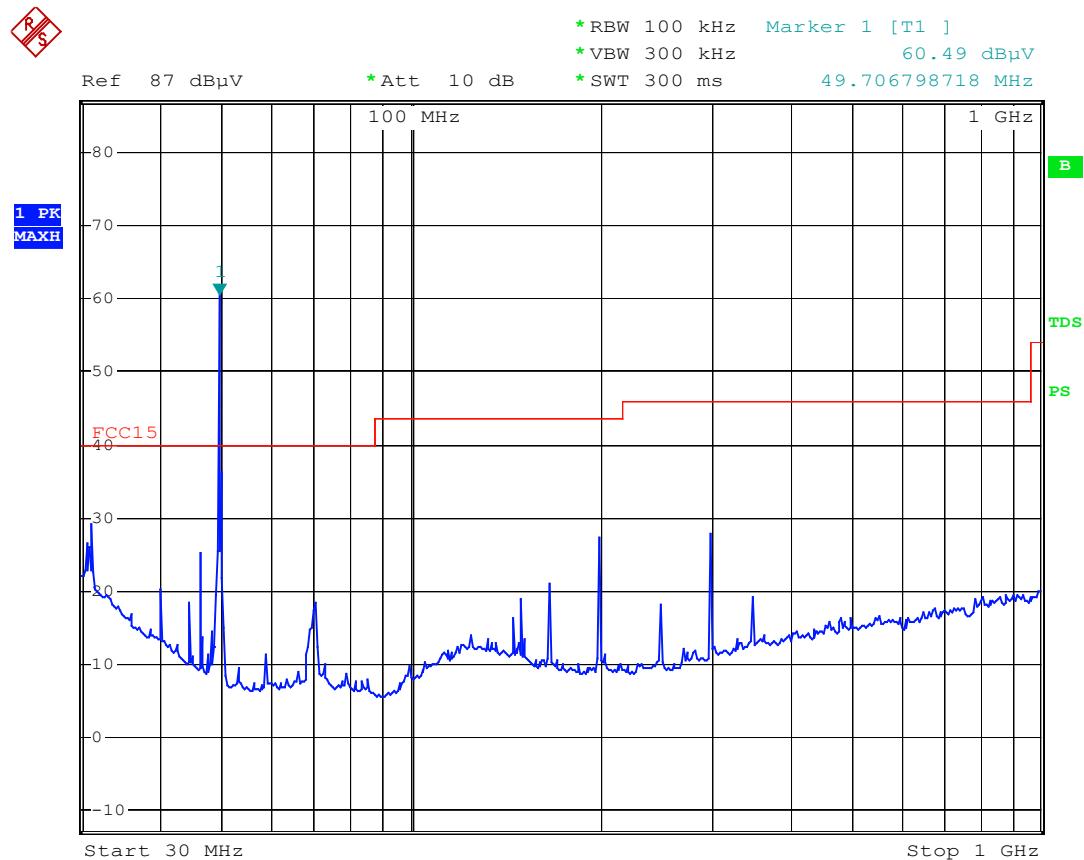

Huashengda wireless headphone HP-WH2960 transmitting horizon
tal
Date: 28.DEC.2005 13:35:17

RS

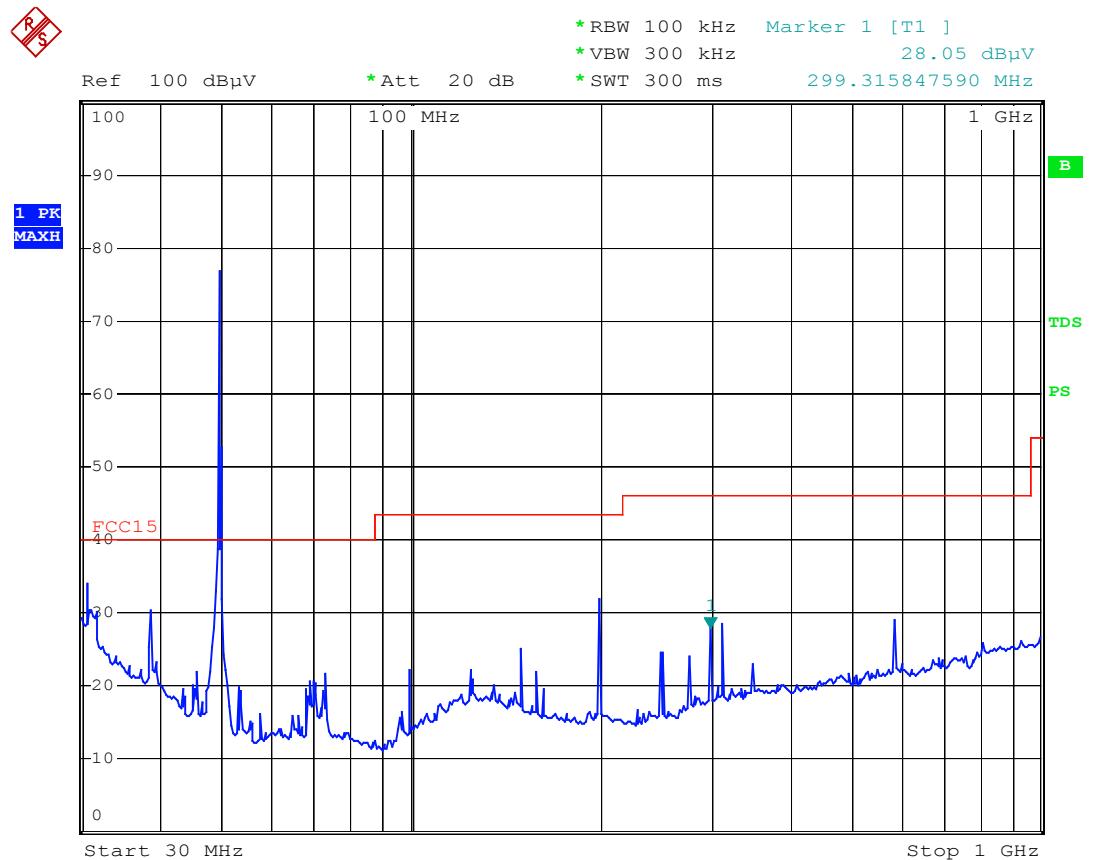

Huashengda wireless headphone HP-WH2960 transmitting vertica

1

Date: 28.DEC.2005 13:47:17

§15.235(b) - BAND EDGES TESTING

Standard Applicable

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the test receiver setup with the START and STOP frequencies set to the EUT's operation band.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2005-8-17	2006-8-17
HP	Amplifier	HP8447D	2944A09795	2005-8-17	2006-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2005-4-28	2006-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data


Environmental Conditions

Temperature:	20 °C
Relative Humidity:	55%
ATM Pressure:	1000mbar

The result has been complied with the 15.235(b), please see the following plot:

Frequency MHz	Emission dB μ V/m	Limit dB μ V/m	Margin dB
49.81	34.50	40.0	-5.50
49.91	27.12	40.0	-12.88


49.81 MHz:

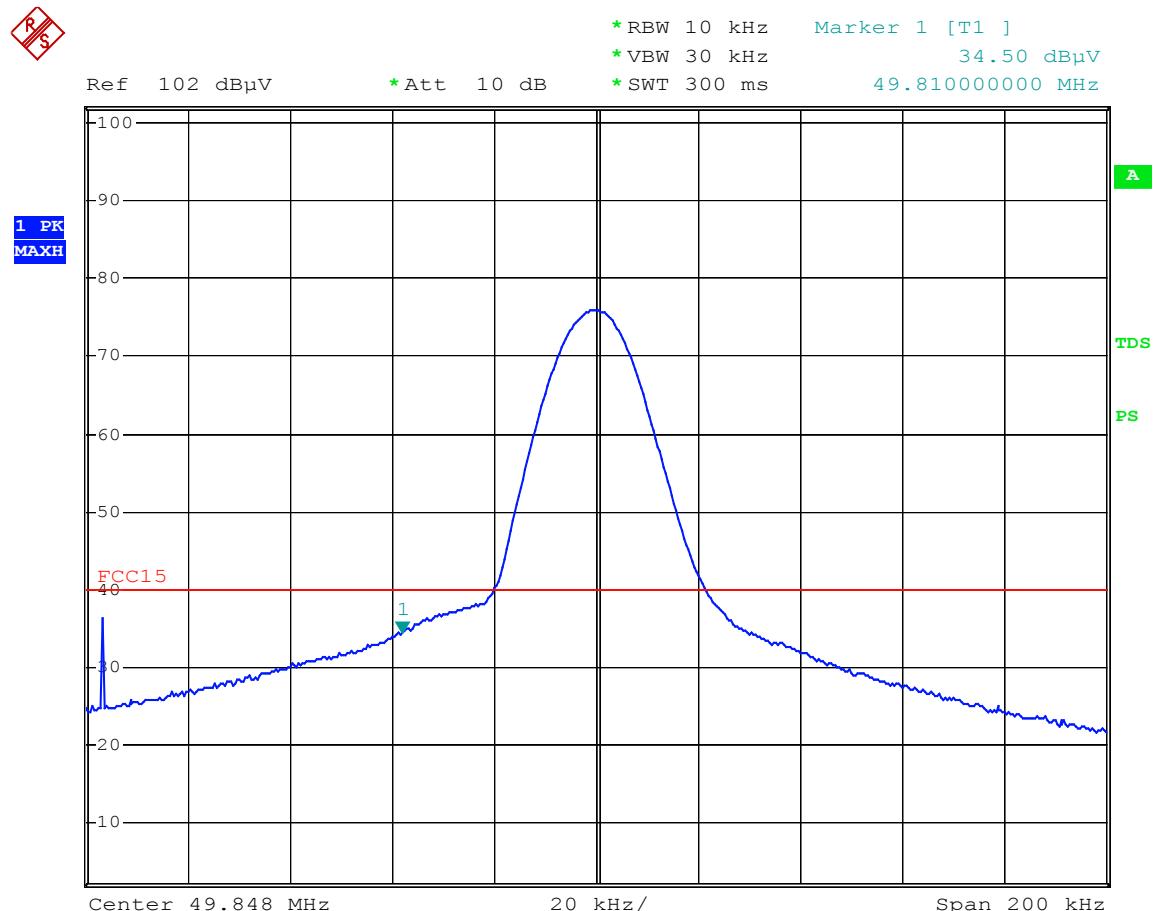

Huashengda wireless headphone HP-WH2960 bandedge 49.81MHz

Date: 28.DEC.2005 14:38:52

49.91 MHz:

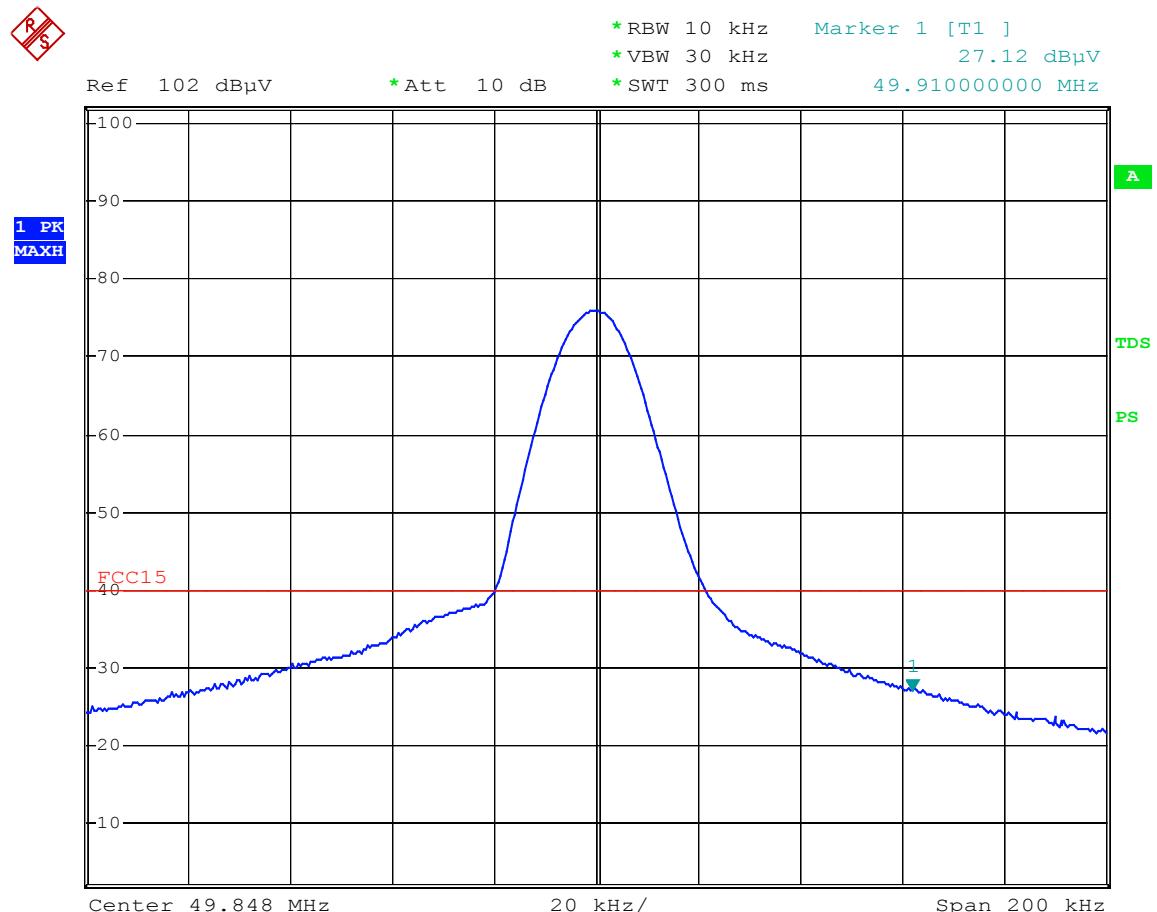

Huashengda wireless headphone HP-WH2960 bandedge 49.91MHz

Date: 28.DEC.2005 14:37:46