


1X

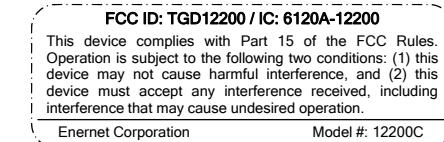

2.2" x 0.75"

2X

FCC ID: TGD12200 / IC: 6120A-12200
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1) this
device may not cause harmful interference, and (2) this
device must accept any interference received, including
interference that may cause undesired operation.

Enernet Corporation Model #: 12200C

GENERAL NOTE:

Place label on back of PCB with top edge of label just below the J1 and J2 pin headers.

NOTES:

White face stock.

High performance solvent-based acrylic adhesive.

Service Temp. Range: -65°F to +302°F (-40° C to +150° C).

Sans Serif Font 5.5 points.

Black Ink.

E N E R N E T C O R P O R A T I O N
307 DEWITTSHIRE ROAD
SYRACUSE, NEW YORK 13214
(315) 449-0839 VOICE (315) 449-3056 FAX

T9000 P/N 12200C FCC/IC Label

SCALE:	1X = 1:1 / 2X = 2:1	DRAWING NO.:	12206C-01
DATE:	07-10-15	DRAWN BY:	B.J. Hesse
DESIGN BY:	B.J. Hesse	C:\...\Drawings\Mechanical Design\MSPUB	