

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : **KIMIN ELECTRONIC CO., LTD.**

Date of Issue : March 11, 2008

293-4, Gongdan 2-Dong, Gumi-City,
Gyeongsangbuk-Do, 730-906, Korea

Test Report No. : GETEC-E3-08-008

Attn : Mr. Se-bong Jang, General Manager

Test Site : Gumi College EMC Center
(Registration No.: 100749)

FCC ID.: TGEPT32U44K

Applicant.: KIMIN ELECTRONIC CO., LTD.

Rule Part(s) : FCC Part 15 Subpart B

Equipment Class : Class B computing device peripheral (JBP)

EUT Type : PDP TV


Type of Authority : Certification

Model No. : PT32U44K

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

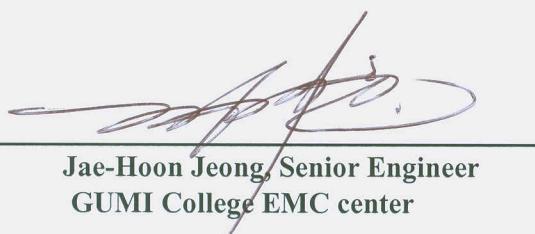

Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center

Reviewed by,



Tae-Sig Park, Technical Manager
GUMI College EMC center

CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	8
4. DESCRIPTION OF TESTS	9
4.1 TEST CONDITION.....	9
4.2 CONDUCTED EMISSION	10
4.3 RADIATED EMISSION	11
5. CONDUCTED EMISSION.....	12
5.1 OPERATING ENVIRONMENT	12
5.2 TEST SET-UP.....	12
5.3 MEASUREMENT UNCERTAINTY	12
5.4 LIMIT	13
5.5 TEST EQUIPMENT USED	13
5.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION	14
6. RADIATED EMISSION	17
6.1 OPERATING ENVIRONMENT	17
6.2 TEST SET-UP.....	17
6.3 MEASUREMENT UNCERTAINTY	17
6.4 LIMIT	18
6.5 TEST EQUIPMENT USED	18
6.6 TEST DATA FOR RADIATED EMISSION	19
7. SAMPLE CALCULATIONS.....	21
7.1 EXAMPLE 1 :	21
7.2 EXAMPLE 2 :	21
8. RECOMMENDATION & CONCLUSION.....	22
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – PLOTS OF CONDUCTED EMISSIONS	
APPENDIX C – ID SAMPLE LABEL & LOCATION	
APPENDIX D – BLOCK DIAGRAM	
APPENDIX E – TEST SET-UP PHOTOGRAPHS	
APPENDIX F – EXTERNAL PHOTOGRAPHS	
APPENDIX G –INTERNAL PHOTOGRAPHS	
APPENDIX H – USER’S MANUAL	

Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: KIMIN ELECTRONIC CO., LTD.

Applicant Address: 293-4, Gongdan 2-dong, Gumi-city, Gyeongsangbuk-do, Korea

Manufacturer: KIMIN ELECTRONIC CO., LTD.

Manufacturer Address: 293-4, Gongdan 2-dong, Gumi-city, Gyeongsangbuk-do, Korea

Contact Person: Mr. Se-bong Jang, General Manager

Tel No.: +82-54-462-0100

Fax No.: +82-54-462-7500

- **FCC ID** TGEPT32U44K
- **EUT Type** PDP TV
- **Model No.** PT32U44K
- **Serial No.** Proto type
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** March 3 ~ 7, 2008
- **Place of Test** Gumi College EMC Center (FCC Registration No.: 100749)
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea
- **Test Report No.** GETEC-E3-08-008
- **Dates of Issue** March 11, 2008


2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **KIMIN ELECTRONIC CO., LTD. PDP TV (Model No.: PT32U44K)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daege city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

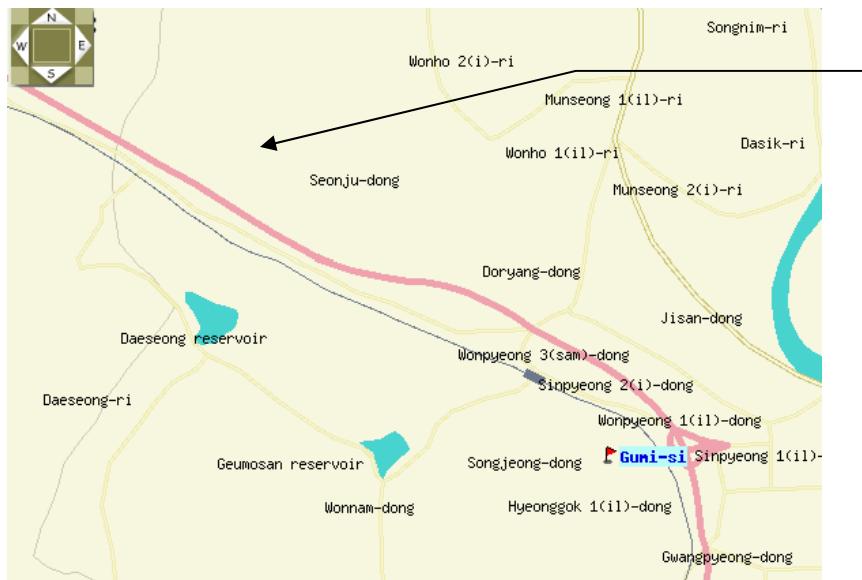

GUMI COLLEGE EMC CENTER
407, Bugok-Dong, Gumi-si,
Gyeongsangbuk-Do 730-711, Korea
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.

3. Product Information

3.1 Description of EUT

The Equipment Under Test (EUT) is the **KIMIN ELECTRONIC CO., LTD. PDP TV (Model No.: PT32U44K)**
FCC ID.: TGEPT32U44K

Model		PT32U44H
Dimension	Horizontal	918.0 mm
	Height	698.0 mm
	Thickness	296.0 mm
Weight		21.5 kg
Contrast Ration		1,800:1 (25/100 White Window)
Brightness		500 cd/m ²
Panel Resolution		852 (H) x 480 (V)
Display Color		16.7M colors
Audio Output		10W + 10W
Consumption		160W
External Port		<ul style="list-style-type: none"> • HDMI / DVI1 IN • HDMI2 IN • RGB IN(PC) • VIDEO1 IN • S-VIDEO IN • COMPONENT1 VIDEO IN • COMPONENT2 VIDEO IN • COMPONENT1 AUDIO IN • COMPONENT2 AUDIO IN • VIDEO1 AUDIO IN • AUDIO IN (RGB / DVI) • SPDIF OUT • ANTENNA IN

3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model No.	S/N & FCC ID
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID: DoC
Serial Mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID: JNZ211443
Key-board	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID: DoC
Joystick	Microsoft	X05-92626	S/N: 9262600296169 FCC ID: DoC
DVD player	KIMIN ELECTRONIC CO., LTD.	LC-954	S/N: 3850R-Z674K FCC ID: DoC
Digital TV pattern generator	PI International	TPG430B	S/N: 93.01.20.05.09.00.00.02 FCC ID: DoC




See "Appendix E – Test Setup Photographs" for actual system test set-up

3.2.2 Used Cable(s)

Cable No.	Condition	Description
Power cable	Connected to the EUT	1.8m unshielded
Video in(D-sub)cable	Connected to the EUT and PC	1.8m shielded with two ferrite cores.
PC sound cable	Connected to the EUT and PC	1.8m shielded with one turn two ferrite cores.
Video (HDMI) cable	Connected to the EUT and DVD player	1.8m shielded with two ferrite cores.
Component cable	Connected to the EUT and DVD player	3.0m shielded
Component sound cable	Connected to the EUT and DVD player	3.0m shielded with two ferrite cores.
AV input cable	Connected to the EUT and DVD player	3.0m shielded with two ferrite cores.
S-VHS cable	Connected to the EUT and DVD player	1.8m shielded with two ferrite cores.
ANT cable	Connected to the EUT and signal Generator	10m shielded
SPDIF out cable	Open	1.8m shielded with one turn two ferrite cores.

3.3 Modification Item(s)

Items	Description
#1	Added a gasket on the analog port.
#2	Added a gasket on the power jack shield.
#3	Attached a copper tape on the down shield of the EUT
#4	Attached three gaskets tape on the LVDS cable & Speaker cable & down shield.

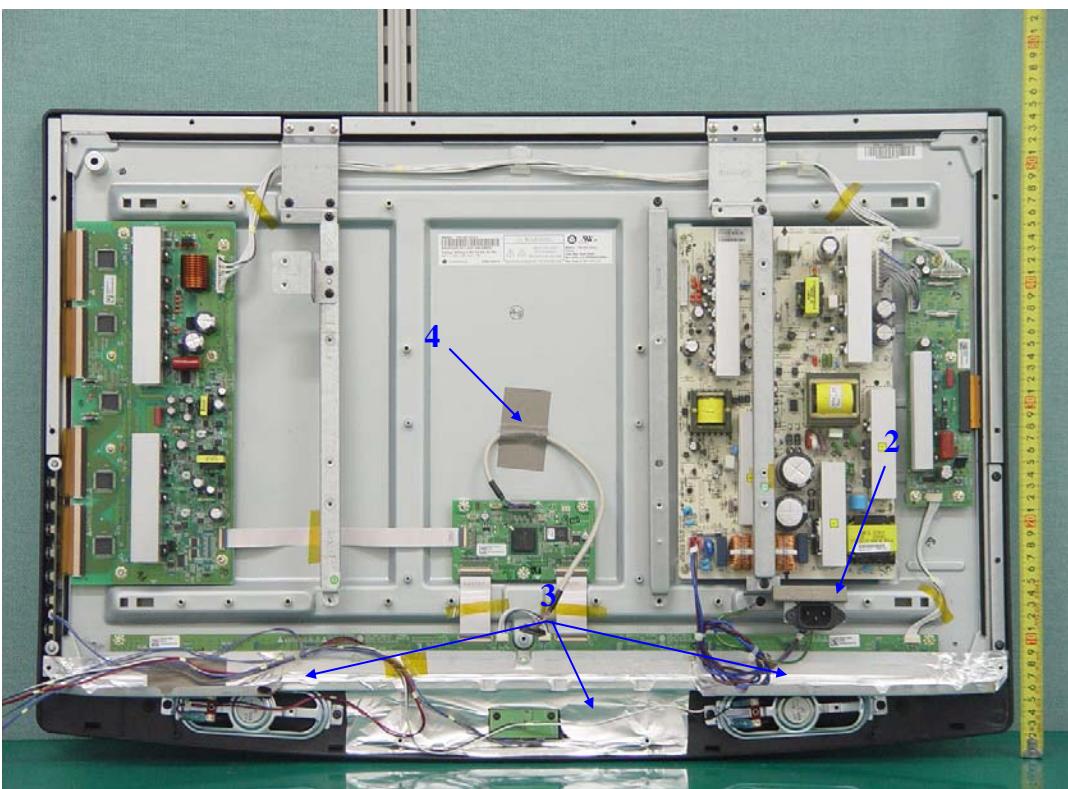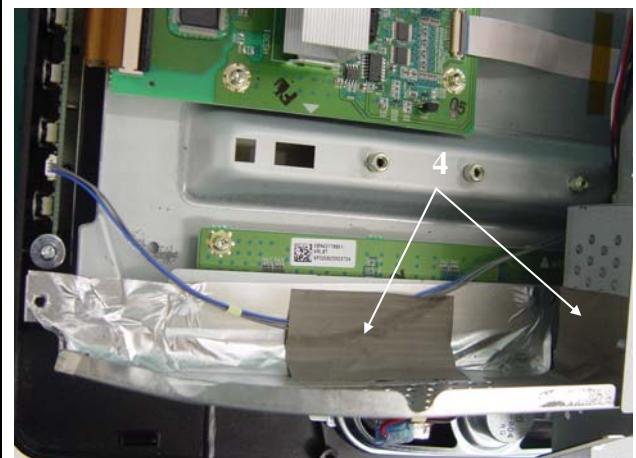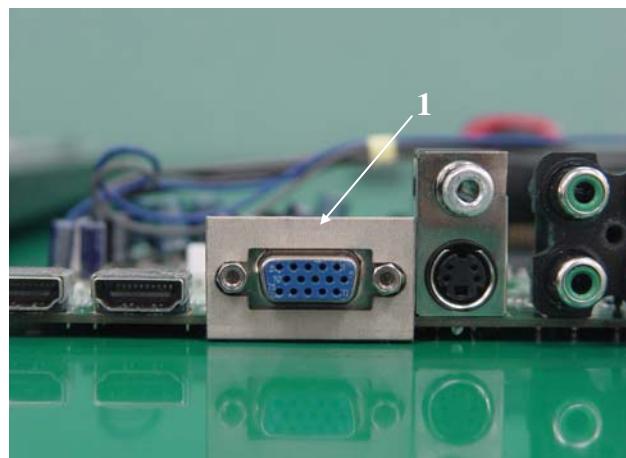

4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120V / 60Hz
- Test Mode(s)
 - . Monitor mode
 - . Radiated emission : 1024*768/ 60Hz (Analog)
 - . Conducted emission: 1024*768/ 60Hz (Analog)
800*600/ 60Hz (Analog), 640*480/ 60Hz (Analog)
- Operating test pattern
 - . “H” character scrolling mode (Font size: 10)
 - . Black background white character
 - . Brightness and contrast was adjusted as maximum level
 - . 1 kHz sound tone with winamp player
- TV & AV portion of this equipment will be applied the “Verification” procedure.

4.2 Conducted Emission

The Line conducted emission test facility is inside a $4 \times 8 \times 2.5$ meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

Each EME reported was calibrated using the R/S signal generator

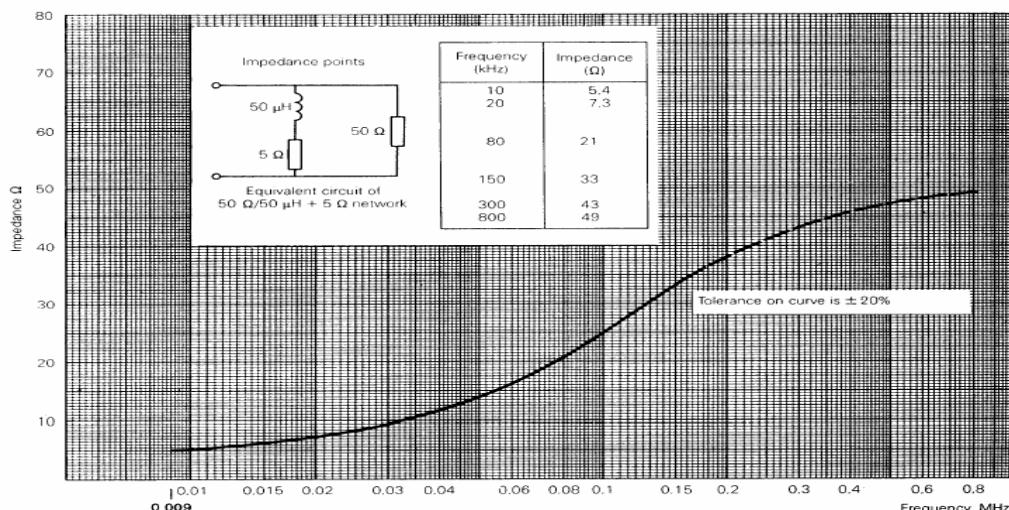


Fig 2. Impedance of LISN

4.3 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VULB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 3m/10m-test range.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

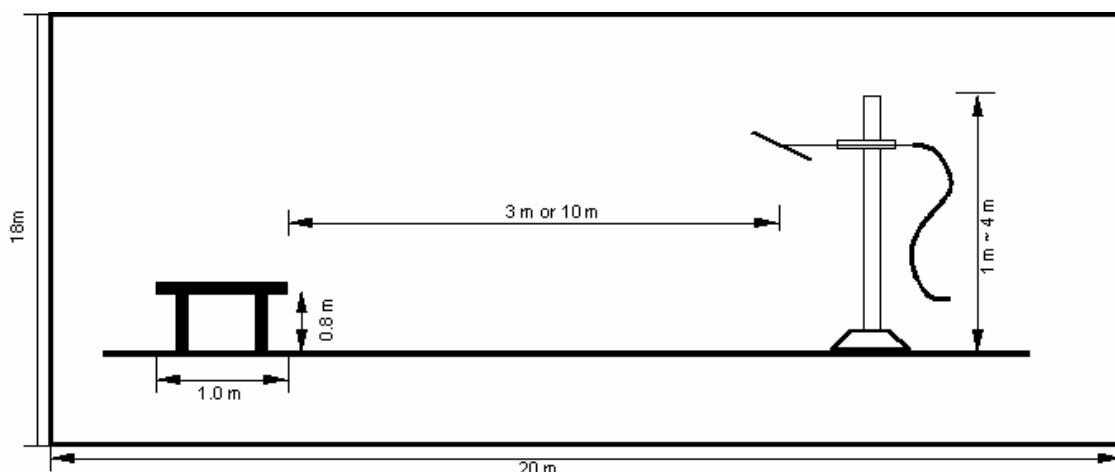


Fig 3. Dimensions of Open Site Test Area

5. Conducted Emission

5.1 Operating environment

Temperature : 21 °C
 Relative humidity : 47 %

5.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (±dB)	
		Power Port	Communication port
Receiver specification	Rectangular	0.50	0.50
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch			
LISN VRC : $\Gamma_l = 0.20$	U-shaped	0.05	0.05
ISN VRC : $\Gamma_l = 0.20$		-0.05	-0.05
ATT VRC(IN) : $\Gamma_g = 0.03$			
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
Mismatch			
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.09	0.09
ATT VRC : $\Gamma_g = 0.11$		-0.09	-0.09
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
System repeatability	Std Deviation	0.55	0.55
Cable and input attenuator calibration	Normal (k=2)	0.08	0.08
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	1.07 -1.07	1.07 -1.07
Extended uncertainty U	Normal (k=2)	2.15 -2.15	2.15 -2.15

5.4 Limit

RFI Conducted		FCC Limit(dB) Class B	
Freq. Range		Quasi-Peak	Average
150kHz – 0.5MHz		66 – 56*	56 – 46*
0.5MHz – 5MHz		56	46
5MHz – 30MHz		60	50

*Limits decreases linearly with the logarithm of frequency.

5.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ - ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 13. 2008
■ - ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 13. 2008

5.6 Test data for power line conducted emission

- Test Date : March 5, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz

◆ Test resolution: 1024*768/60Hz (Analog)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.206	0.11	-0.23	N	63.37	41.2	41.08	53.37	30.5	30.38	22.28	22.98
0.268	0.11	-0.19	N	61.18	44.1	44.02	51.18	29.0	28.92	17.16	22.26
0.314	0.13	-0.17	L1	59.86	45.5	45.46	49.86	33.3	33.26	14.40	16.60
0.422	0.13	-0.13	L1	57.41	32.0	32.00	47.41	27.3	27.30	25.41	20.11
0.482	0.12	-0.17	N	56.30	28.8	28.75	46.30	17.6	17.55	27.55	28.75
0.614	0.14	-0.23	L1	56.00	35.9	35.81	46.00	19.7	19.61	20.19	26.39
0.626	0.14	-0.23	L1	56.00	41.0	40.91	46.00	31.6	31.51	15.09	14.49
1.054	0.14	-0.23	L1	56.00	37.2	37.11	46.00	26.3	26.21	18.89	19.79
2.062	0.15	-0.31	L1	56.00	45.8	45.64	46.00	30.3	30.14	10.36	15.86
2.526	0.16	-0.23	L1	56.00	40.6	40.53	46.00	30.6	30.53	15.47	15.47
3.294	0.17	-0.14	L1	56.00	36.4	36.43	46.00	21.9	21.93	19.57	24.07
7.374	0.22	-0.06	L1	60.00	35.2	35.36	50.00	28.8	28.96	24.64	21.04

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

◆ Test resolution: 800*600/60Hz (Analog)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.178	0.12	-0.19	L1	64.58	50.3	50.23	54.58	34.8	34.73	14.35	19.85
0.214	0.12	-0.22	L1	63.05	46.9	46.80	53.05	35.6	35.50	16.25	17.55
0.366	0.12	-0.14	N	58.59	37.9	37.88	48.59	26.6	26.58	20.71	22.01
0.466	0.14	-0.16	L1	56.58	28.2	28.18	46.58	17.3	17.28	28.40	29.30
0.614	0.13	-0.23	N	56.00	30.2	30.10	46.00	25.8	25.70	25.90	20.30
1.042	0.13	-0.23	N	56.00	32.2	32.09	46.00	15.6	15.49	23.91	30.51
1.458	0.11	-0.27	N	56.00	33.7	33.54	46.00	16.9	16.74	22.46	29.26
1.686	0.10	-0.29	N	56.00	33.5	33.31	46.00	17.2	17.01	22.69	28.99
2.106	0.09	-0.30	N	56.00	36.3	36.09	46.00	20.3	20.09	19.91	25.91
3.314	0.09	-0.14	N	56.00	33.4	33.35	46.00	17.4	17.35	22.65	28.65
7.262	0.22	-0.07	L1	60.00	34.8	34.95	50.00	25.8	25.95	25.05	24.05
7.354	0.22	-0.06	L1	60.00	33.1	33.26	50.00	24.9	25.06	26.74	24.94
21.606	0.83	0.10	L1	60.00	22.0	22.94	50.00	21.6	22.54	37.06	27.46

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

◆ Test resolution: 640*480/60Hz (Analog)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.210	0.12	-0.22	L1	63.21	46.9	46.80	53.21	35.9	35.80	16.41	17.41
0.362	0.12	-0.14	N	58.68	38.7	38.67	48.68	26.1	26.07	20.01	22.61
0.486	0.14	-0.17	L1	56.24	27.8	27.77	46.24	16.8	16.77	28.46	29.46
0.614	0.14	-0.23	L1	56.00	30.3	30.21	46.00	23.7	23.61	25.79	22.39
0.834	0.13	-0.23	N	56.00	28.2	28.10	46.00	16.0	15.90	27.90	30.10
1.042	0.14	-0.23	L1	56.00	28.0	27.91	46.00	13.5	13.41	28.09	32.59
1.458	0.11	-0.27	N	56.00	34.2	34.04	46.00	16.5	16.34	21.96	29.66
1.646	0.15	-0.29	L1	56.00	33.0	32.86	46.00	17.6	17.46	23.14	28.54
2.062	0.09	-0.31	N	56.00	37.5	37.28	46.00	20.2	19.98	18.72	26.02
2.478	0.09	-0.23	N	56.00	39.3	39.16	46.00	22.5	22.36	16.84	23.64
2.934	0.09	-0.15	N	56.00	40.4	40.34	46.00	24.2	24.14	15.66	21.86
7.254	0.22	-0.07	L1	60.00	34.9	35.05	50.00	25.7	25.85	24.95	24.15
7.362	0.22	-0.06	L1	60.00	34.3	34.46	50.00	25.3	25.46	25.54	24.54

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

6. Radiated Emission

6.1 Operating environment

Temperature : 6 °C
 Relative humidity : 45 %

6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 3m/10m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	0.50	0.50	0.50	0.50
Receiver specification	Rectangular	0.50	0.50	0.50	0.50
Antenna directivity	Rectangular	0.25	0.00	1.50	0.25
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	-2.00	-2.40	2.50	2.40
Mismatch					
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.33	0.33	0.18	0.18
Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)		-0.35	-0.35	-0.18	-0.18
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$					
System repeatability	Std Deviation	0.82	0.82	0.79	0.79
Cable loss calibration	Normal (k=2)	0.09	0.09	0.09	0.09
Combined standard uncertainty $U_c(y)$	Normal	1.54 -1.54	1.70 -1.70	2.03 -2.03	1.68 -1.68
Extended uncertainty U	Normal (k=2)	3.09 -3.09	3.39 -3.40	4.05 -4.05	3.36 -3.36

6.4 Limit

Frequency (MHz)	FCC Limit @ 3m. dB μ V/m	CISPR Limit @ 10m. dB μ V/m
30 – 88	40.0	30.0
88 – 216	43.5	30.0
216 – 230	46.0	30.0
230 – 960	46.0	37.0
960 – 1000	54.0	37.0
> 1000	54.0	No Specified limit

6.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCI	Rohde & Schwarz	EMI test receiver	100237	12. 14. 2008
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ - HK116	Rohde & Schwarz	Biconical ANT	826861/018	12. 11. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	12. 11. 2009
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - BBHA9120D	Schwarzbeck	Horn ANT	597	04. 01. 2008
■ - AFS44-00101800- 25-10P-44	MITEQ	Preamplifier	1258943	N/A


6.6 Test data for radiated emission

- Test Date : March 7, 2008
- Resolution bandwidth : 120 kHz / 1MHz
- Frequency range : 30MHz ~ 2000MHz
- Measurement distance : 3m

◆ Operating Condition: 1024*768/60Hz (Analog)

Detector mode: Quasi- peak detector mode

Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (deg)
	Value(dBuV)	Factor(dB)	Loss(dB)	(dBuV/m)					
30.05	19.4	13.92	1.60	35.0	40.0	5.1	V	105	101
35.64	25.3	12.00	1.80	39.1	40.0	0.9	V	110	165
42.76	22.8	10.39	1.86	35.1	40.0	4.9	V	103	152
66.64	21.8	7.83	2.17	31.8	40.0	8.2	V	100	340
135.32	17.8	11.73	3.17	32.7	43.5	10.9	H	185	33
235.14	22.0	15.37	4.32	41.6	46.0	4.4	H	156	180
250.03	18.5	15.80	4.50	38.8	46.0	7.2	H	123	266
308.55	20.9	13.15	5.19	39.2	46.0	6.8	H	112	20
479.95	20.7	17.16	6.50	44.3	46.0	1.7	H	108	288
743.12	2.2	21.06	8.16	31.5	46.0	14.6	V	199	354

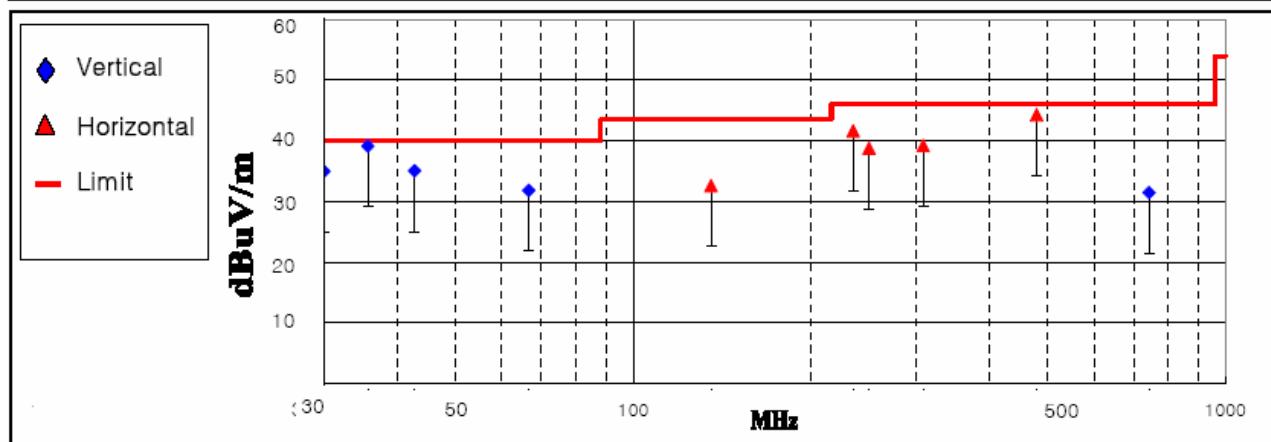


< Fig 4. Radiated emission result (30MHz ~ 1000MHz)>

♦ Operating Condition: 1024*768/60Hz (Analog)

Detector mode: Peak detector mode / Average detector mode

Frequency (MHz)	Measurement Level						Limit (dBuV/m)		Margin (dBuV/m)		Positioning System				
	Reading Value (dBuV/m)		AF	AMP / CL	Test Result (dBuV/m)				Peak	Average	Peak	Average	Pol.	Height (cm)	Angle (deg)
	Peak	Average	(dB)	(dB)	Peak	Average	Peak	Average	Peak	Average	Peak	Average	(H/V)		
1188.01	65.0	59.7	25.2	-40.7	49.5	44.2	74.0	54.0	24.5	9.8	V	200	27		
1484.01	59.2	43.5	25.7	-39.8	45.1	29.4	74.0	54.0	28.9	24.6	V	168	20		
1782.02	59.8	54.8	26.0	-39.1	46.7	41.7	74.0	54.0	27.3	12.3	V	117	25		

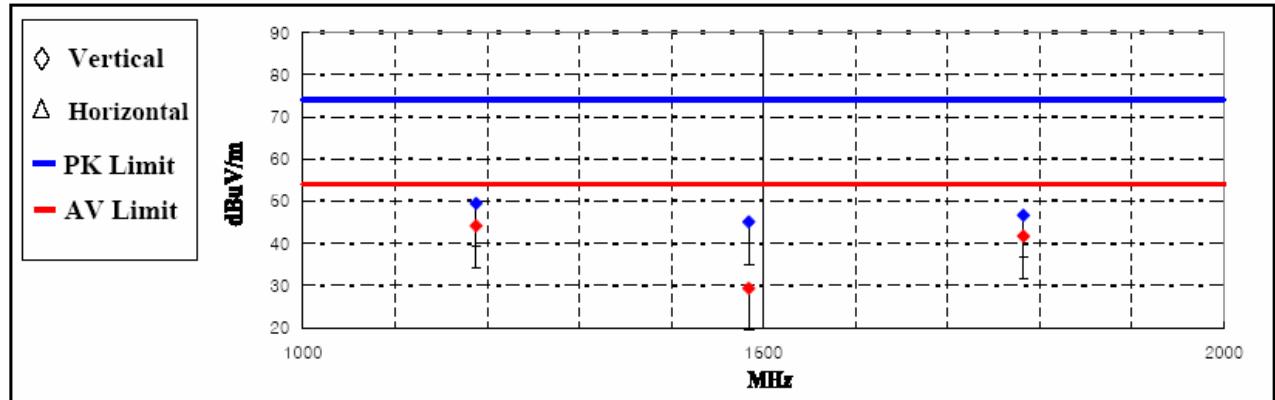

*Command :AMP/CL : Cable loss + AMP gain

< Fig 5. Radiated emission result (1000MHz ~ 2000MHz)>

7. Sample Calculations

$$dB\mu V = 20 \log_{10}(\mu V/m)$$

$$dB\mu V = dBm + 107$$

$$\mu V = 10^{(dB\mu V/20)}$$

7.1 Example 1 :

■ 20.3 MHz

$$\begin{aligned} \text{Class B Limit} &= 250 \mu V &= 48 dB\mu V \\ \text{Reading} &= -67.8 dBm \text{(Calibrated level)} \\ \text{Convert to } dB\mu V &= -67.8 dBm + 107 = 39.2 dB\mu V \\ 10^{(39.2 dB\mu V/20)} &= 91.2 \mu V \\ \text{Margin} &= 39.2 - 48 = -8.8 \\ &= 8.8 \text{ dB below Limit} \end{aligned}$$

7.2 Example 2 :

■ 66.7 MHz

$$\begin{aligned} \text{Class B Limit} &= 100 \mu V/m &= 40.0 dB\mu V/m \\ \text{Reading} &= -76.0 dBm \text{(Calibrated level)} \\ \text{Convert to } dB\mu V/m &= -76.0 dBm + 107 = 31.0 dB\mu V/m \\ \text{Antenna Factor + Cable Loss} &= 5.8 \text{ dB} \\ \text{Total} &= 36.8 dB\mu V/m \\ \text{Margin} &= 36.8 - 40.0 = -3.2 \\ &= 3.2 \text{ dB below Limit} \end{aligned}$$

8. Recommendation & conclusion

The data collected shows that the **KIMIN ELECTRONIC CO., LTD. PDP TV (Model No.: PT32U44K)** was complies with §15.107 and 15.109 of the FCC Rules.