

FCC TEST REPORT

FCC ID : TGQCLSP277K

Applicant : **Coulomb Electronics Ltd.**
Room208, Hope Sea Ind.C.,26 Lam Hing St., Kowloon Bay, KLN

Equipment Under Test (EUT) :


Product Name : REMOTE CONTROL SKATEBOARD

Model No. : CLSP-8001-XX, CLSP-7501-XX,
CLSP-9001-XX,CLSP-X24-XX (XX:01-99 is to distinguish the board's
size and pattern).

Standards : FCC Part 15B, Paragraph 15.107, Paragraph 15.109, Paragraph 15.209,
Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

Date of Test : July 28, 2005

Test Engineer : Tiger Su

Reviewed By : 

PERPARED BY:
Shenzhen Huatongwei International Inspection Co., Ltd
Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

FCC Registration Number: 662850

2 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (9KHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY.....	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 DETAILS OF E.U.T.	4
4.4 DESCRIPTION OF SUPPORT UNITS	4
4.5 STANDARDS APPLICABLE FOR TESTING.....	4
4.6 TEST FACILITY.....	5
4.7 TEST LOCATION.....	5
5 EQUIPMENT USED DURING TEST	6
6 CONDUCTED EMISSION TEST	7
6.1 TEST EQUIPMENT.....	7
6.2 TEST PROCEDURE	7
6.3 CONDUCTED TEST SETUP	8
6.4 EUT OPERATING CONDITION	8
6.5 CONDUCTED EMISSION LIMITS	9
6.6 CONDUCTED EMISSION TEST RESULT	9
7 RADIATION EMISSION TEST.....	10
7.1 TEST EQUIPMENT.....	10
7.2 MEASUREMENT UNCERTAINTY.....	10
7.3 TEST PROCEDURE	10
7.4 RADIATED TEST SETUP.....	11
7.5 SPECTRUM ANALYZER SETUP.....	11
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	12
7.7 SUMMARY OF TEST RESULTS.....	12
7.8 RADIATED EMISSIONS LIMITS.....	13
7.9 RADIATED EMISSIONS TEST RESULT	13
7.9.1 Test Data:.....	13
8 OCCUPIED BANDWIDTH	14
8.1 TEST PROCEDURE	14
8.2 PHOTOGRAPHS - TEST SETUP.....	15
8.2.1 Radiated Emissions Test View.....	15
9 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	16
9.1 EUT – FRONT VIEW	16
9.2 EUT - BACK VIEW.....	16
9.3 Tx PCB - COMPONENT VIEW(1)	17
9.4 Tx PCB - COMPONENT VIEW (2).....	17
10 FCC LABEL	18

4 General Information

4.1 Client Information

Applicant: **Coulomb Electronics Ltd.**
Address of Applicant: Room208, Hope Sea Ind.C.,26 Lam Hing St., Kowloon Bay,
KLN

4.2 General Description of E.U.T.

Product description: REMOTE CONTROL SKATEBOARD
Model No.: CLSP-8001-XX, CLSP-7501-XX,
CLSP-9001-XX,CLSP-X24-XX(XX:01-99 is to distinguish the
board's size and pattern).

4.3 Details of E.U.T.

Power Supply: 9V DC Battery

4.4 Description of Support Units

The EUT has been tested as an independent device unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a REMOTE CONTROL SKATEBOARD. The standard used was FCC Part 15 B, Paragraph 15.109, Paragraph 15.107, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

4.7 Test Location

All Emissions tests were performed at:-Shenzhen Huatongwei International Inspection Co., Ltd. at Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China.

5 Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCS30	100038	05-11-2004	04-11-2005
2	Artificial Mains	Rohde&schwarz	ESH2-Z5	100028	05-11-2004	04-11-2005
3	Pulse Limiter	Rohde&schwarz	ESHSZ2	100044	05-11-2004	04-11-2005
4	EMI Test Software	Rohde&schwarz	ESK1	N/A	N/A	N/A
Radiated Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	3m Semi- Anechoic Chamber	Frankonia	N/A	N/A	05-11-2004	04-11-2005
2	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100085	05-11-2004	04-11-2005
3	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
4	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	05-11-2004	04-11-2005
5	LOOP ANTENNA	ROHDE & SCHWARZ	6108	5242	05-11-2004	04-11-2005
Common Used Equipment						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Due date
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	05-11-2004	04-11-2005
2	DMM	FLUKE	73	70681569 or 70671122	05-11-2004	04-11-2005

6 Conducted Emission Test

Product:	REMOTE CONTROL SKATEBOARD
Test Requirement:	FCC Part15 Paragraph 15.107
Test Method:	ANSI C63.4: 2003
Test Date:	July 28, 2005
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.107 limits.

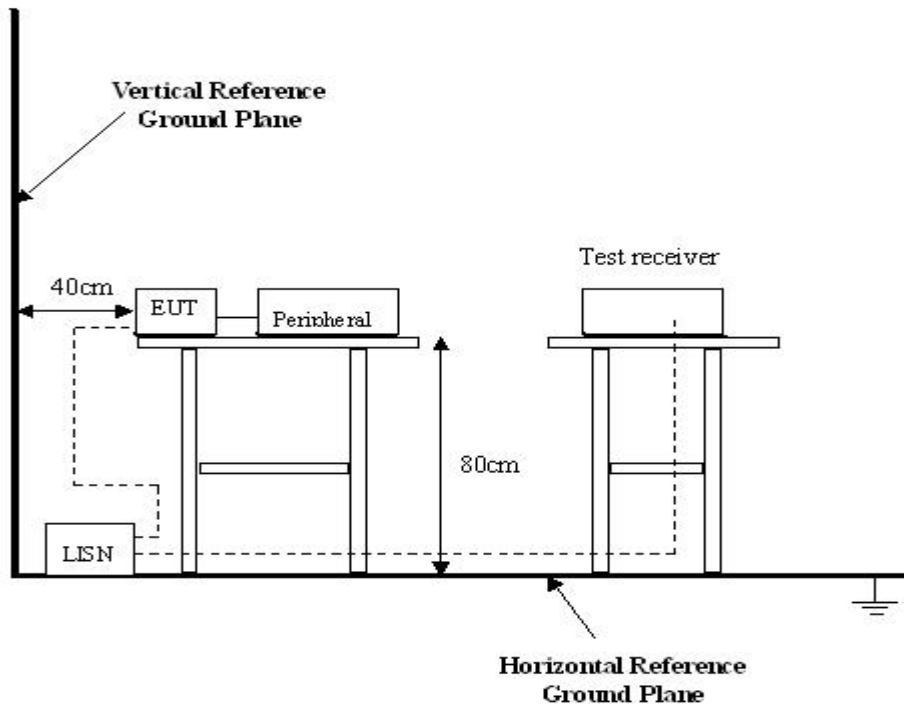

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

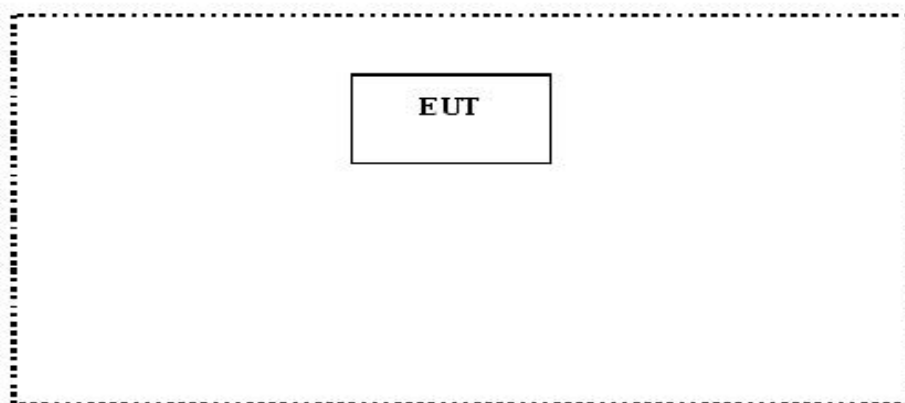

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz

56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed .

7 Radiation Emission Test

Product:	REMOTE CONTROL SKATEBOARD
Test Requirement:	FCC Part 15.109& Part 15.209
Test Method:	ANSI C63.4: 2003
Test Date:	July 28, 2005
Test mode:	Tx On
Frequency Range:	9KHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SZHTW is +4.0 dB.

7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part 15.109 and Part 15.209 limits.

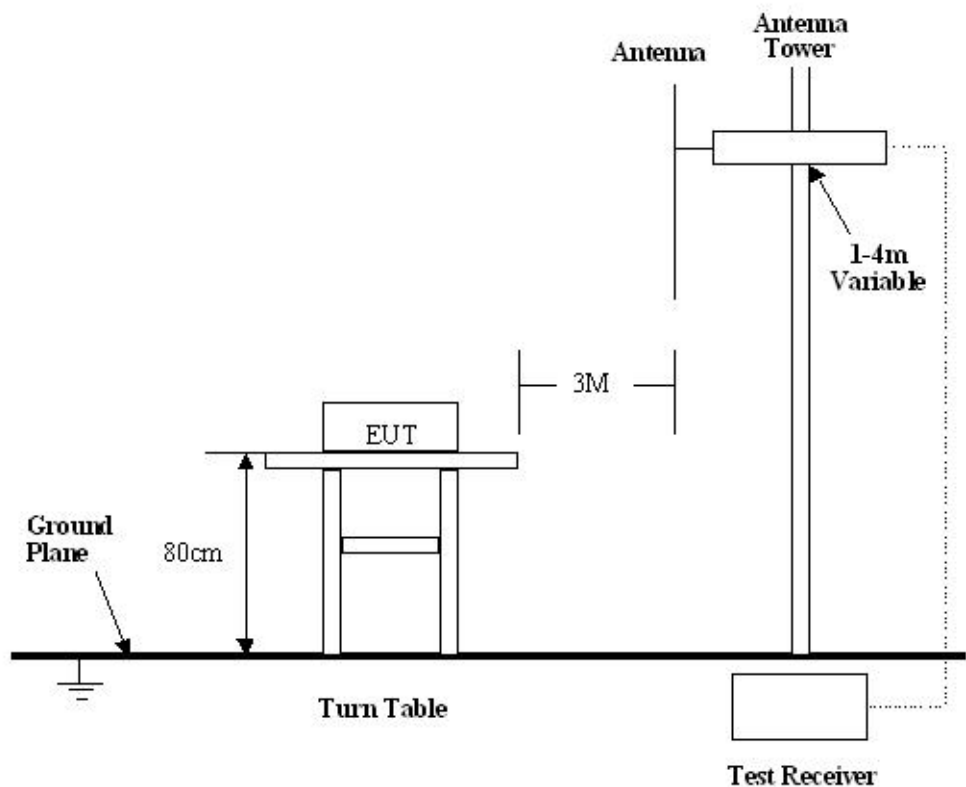

7.5 Spectrum Analyzer Setup

According to FCC Part 15.109 &Part 15.209 Rules, the system was tested to 1000 MHz.

Start Frequency	9 KHz
Stop Frequency	1000 MHz
Sweep Speed	Auto
IF Bandwidth	1MHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth	1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.8, the EUT complied with the FCC Part 15.109 & FCC Part 15.209 standards.

7.8 Radiated Emissions Limits

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Measurement	
	Field strength (microvolts/meter)	distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F(kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

7.9 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB.The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

7.9.1 Test Data:

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
0.277	Vertical	62.7	99.24	36.54	1.5	100
0.277	Horizontal	61.5	99.24	37.74	1.5	320


8 Occupied Bandwidth

Test Requirement:	FCC Part15
Test Method:	Based on FCC Part15 Paragraph 15.209
Test Date:	July 28, 2005
Test mode:	Tx On
Temperature:	24 °C
Humidity:	52%RH

8.1 Test Procedure

1. The field strength of any emissions which appear outside of the band shall not exceed the general radiated emission limits in section 15.209.
2. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

The graph as below.

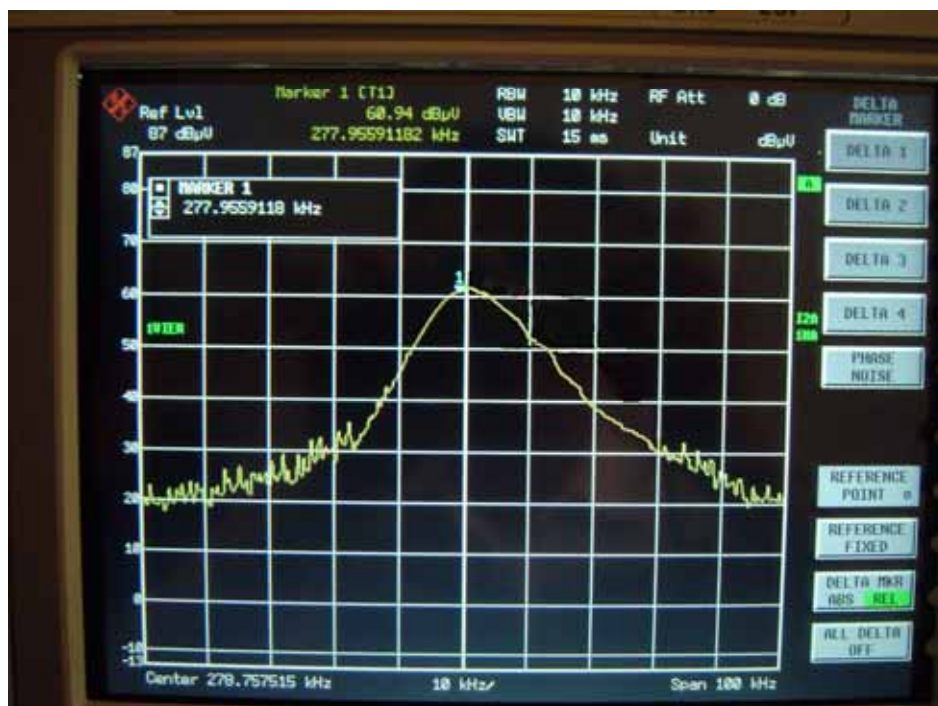

8.2 Photographs - Test Setup

8.2.1 Radiated Emissions Test View



9 Photographs - Constructional Details


9.1 EUT – Front View




9.2 EUT - Back View



9.3 Tx PCB - Component View(1)

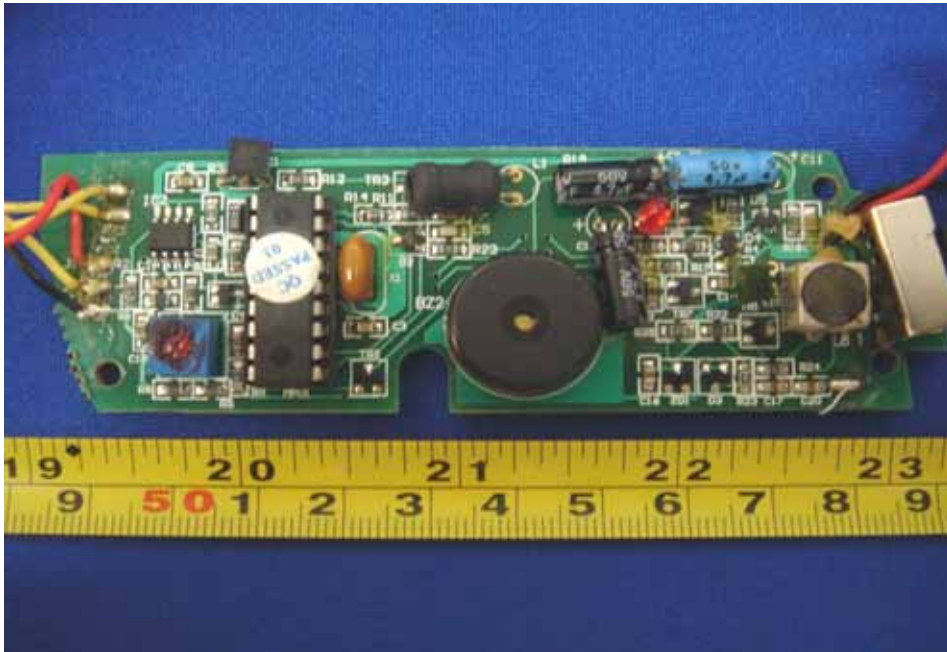

9.4 Tx PCB - Component View (2)

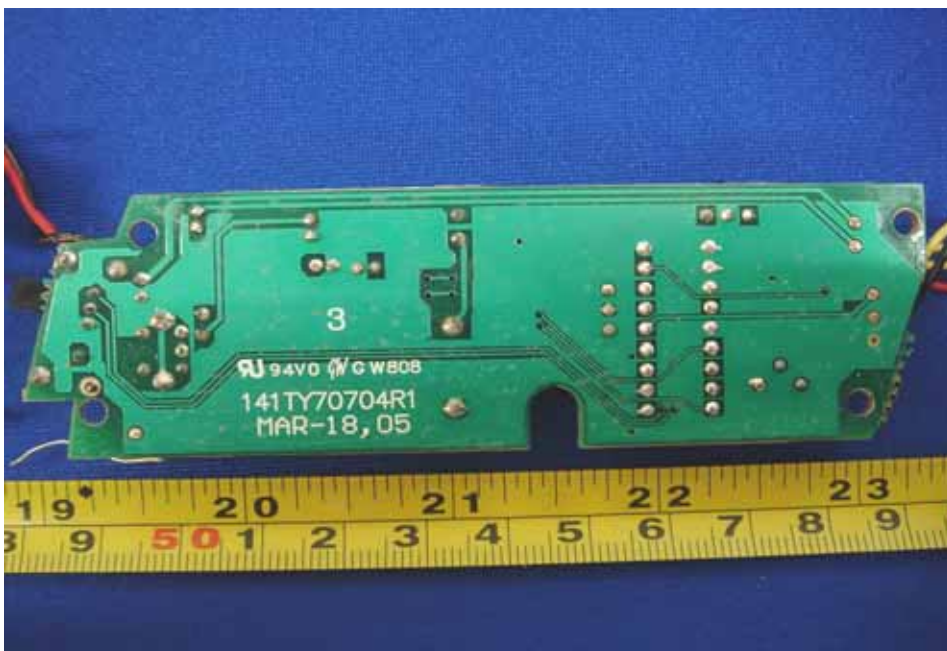

10 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Top View/ proposed FCC Mark Location

