

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E07OR-001
AGR No : A06OA-108
Applicant : Dadam Micro Inc.
Address : #719 Keumkang Hitech Valley, 133-1 Sangdaewon1-dong, Jungwon-gu, Sungnam, 462-807, Korea
Manufacturer : Dadam Micro Inc.
Address : #719 Keumkang Hitech Valley, 133-1 Sangdaewon1-dong, Jungwon-gu, Sungnam, 462-807, Korea
Type of Equipment : Remote Controller of Adjustable Bed Controller
FCC ID. : TH7-ABC-220HC
Model Name : ABC-220HC-020
Serial number : None
Total page of Report : 15 pages (including this page)
Date of Incoming : June 13, 2007
Date of issue : October 01, 2007


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.231**.

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 PURPOSE OF THE TEST	4
2.5 TEST METHODOLOGY.....	4
2.6 TEST FACILITY.....	5
3. SYSTEM TEST CONFIGURATION	6
3.1 JUSTIFICATION.....	6
3.2 PERIPHERAL EQUIPMENT.....	6
3.3 MODE OF OPERATION DURING THE TEST.....	6
3.4. EUT MODIFICATIONS.....	6
3.5 CONFIGURATION OF TEST SYSTEM	6
3.6 ANTENNA REQUIREMENT	7
4. PRELIMINARY TEST	7
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	7
4.2 GENERAL RADIATED EMISSIONS TESTS.....	7
5. FINAL RESULT OF MEASUREMENT	8
5.1 FIELD STRENGTH OF THE CARRIER TEST	8
5.2 MAXIMUM MODULATION PERCENTAGE (MMP).....	8
5.3 SPURIOUS EMISSION TEST	11
5.4 BANDWIDTH OF THE OPERATING FREQUENCY	12
6. FIELD STRENGTH CALCULATION	14
7. LIST OF TEST EQUIPMENT	15

1. VERIFICATION OF COMPLIANCE

APPLICANT : Dadam Micro Inc.
ADDRESS : #719 Keumkang Hitech Valley, 133-1 Sangdaewon1-dong, Jungwon-gu, Sungnam, 462-807, Korea
CONTACT PERSON : Mr. Iksoo, Jun / President
TELEPHONE NO : +82-31-777-5432
FCC ID : TH7-ABC-220HC
MODEL NAME : ABC-220HC-020
BRAND NAME : N/A
SERIAL NUMBER : N/A
DATE : October 01, 2007

EQUIPMENT CLASS	DSC - Part 15, Security/Remote Control Transmitter
KIND OF EQUIPMENT	Remote Controller of Adjustable Bed Controller
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The Dadam Micro Inc., Model: ABC-220HC-020 (referred to as the EUT in this report) is a Remote Controller of Adjustable Bed Controller. It controls the vibration motors for massage as well as the head and foot actuators. Various massage operation such as single, dual massage, and wave massage can be achieved with wireless hand control. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Portable Device
OPERATING FREQUENCY	315 MHz
DATA TRANSFER RATE	578bps
ANTENNA	Inserted into the main board (Pattern Antenna)
CHANNEL	1 Channel
MODULATION	ASK
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	8 MHz
NUMBER OF LAYER	2 Layers
POWER REQUIREMENT	DC 3V from a battery
EXTERNAL CONNECTOR	None

2.2 Model Differences

- None

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-080, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 30, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Dadam	ABC-220HC-020 REV.A2	N/A

3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

3.3 Mode of operation during the test

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal.

To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

3.4. EUT MODIFICATIONS

- None

3.5 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 60kHz/division frequency span, 10 kHz resolution bandwidth and 10dB/division logarithmic display from an 8568B spectrum analyzer.

3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.	

4.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

5. FINAL RESULT OF MEASUREMENT

5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>49 %</u>	Temperature: <u>25 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -9.24 dB with Peak detector</u>	

EUT	: Remote Controller of Adjustable Bed Controller	Date: September 10, 2007
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
315.08	56.10	Peak	H	15.13	3.92	-8.76	66.39	75.63	-9.24
	41.20	Peak	V	15.13	3.92	-8.76	51.49	75.63	-24.14

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.”: Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization


5.2 Maximum Modulation Percentage (MMP)

In order to determine possible Maximum Modulation Percentage from the EUT, we measured the duty cycle according to the clause H4.(j) in ANSI C63.4: 2003.

The pulse train from the EUT was consisting of long and short pulse. The measured values are as follows.


Long Pulse (LP)	Short Pulse (SP)	Total sum of LP	Total sum of SP	Pulse Width
1.57ms	0.70ms	8	26	84.33
Duty Cycle		$(8 \times 1.57 + 26 \times 0.70) / 84.33 = 0.3648$		
Maximum Modulation Percentage(MMP)		Duty Cycle X 100 % = 36.48%		
Average Level Factor		-8.76 dB		


Remark: Please refer to Photo Data for MMP.



Tested by: Ki-Hong, Nam / Test Engineer

Photo Data for MMP

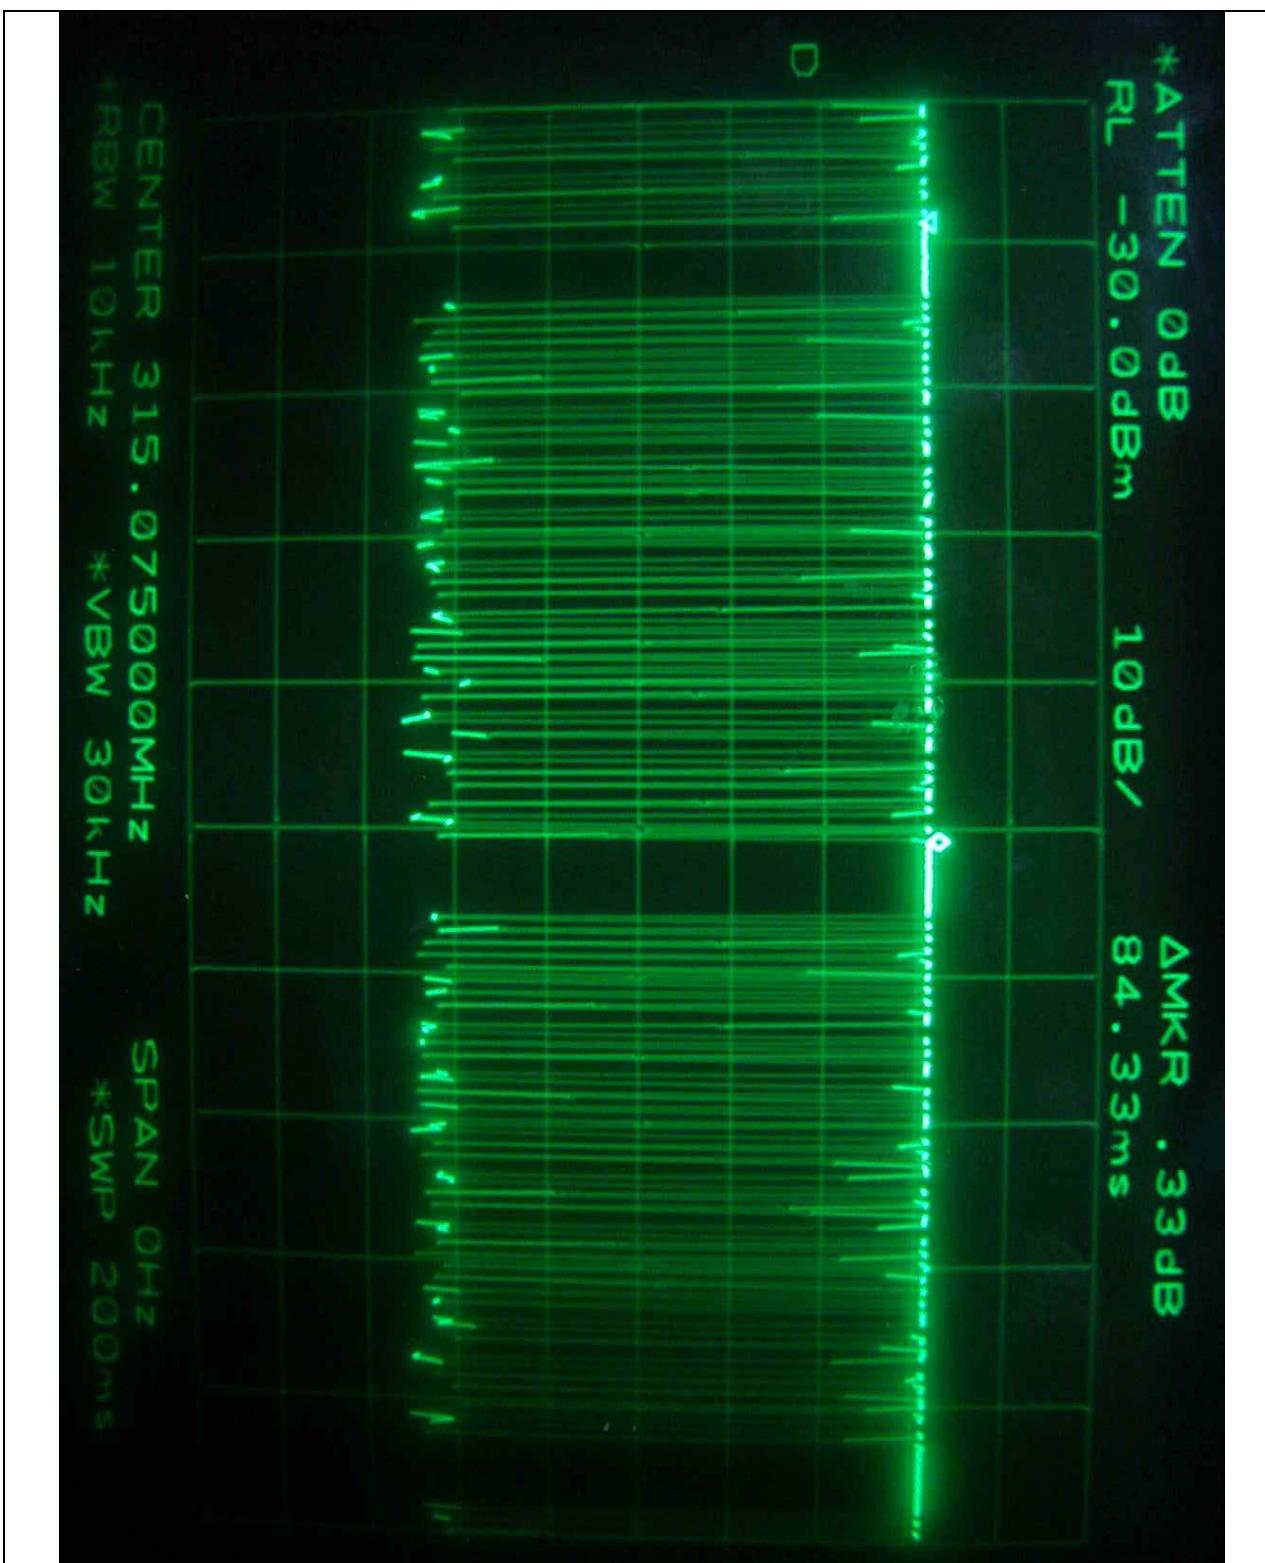

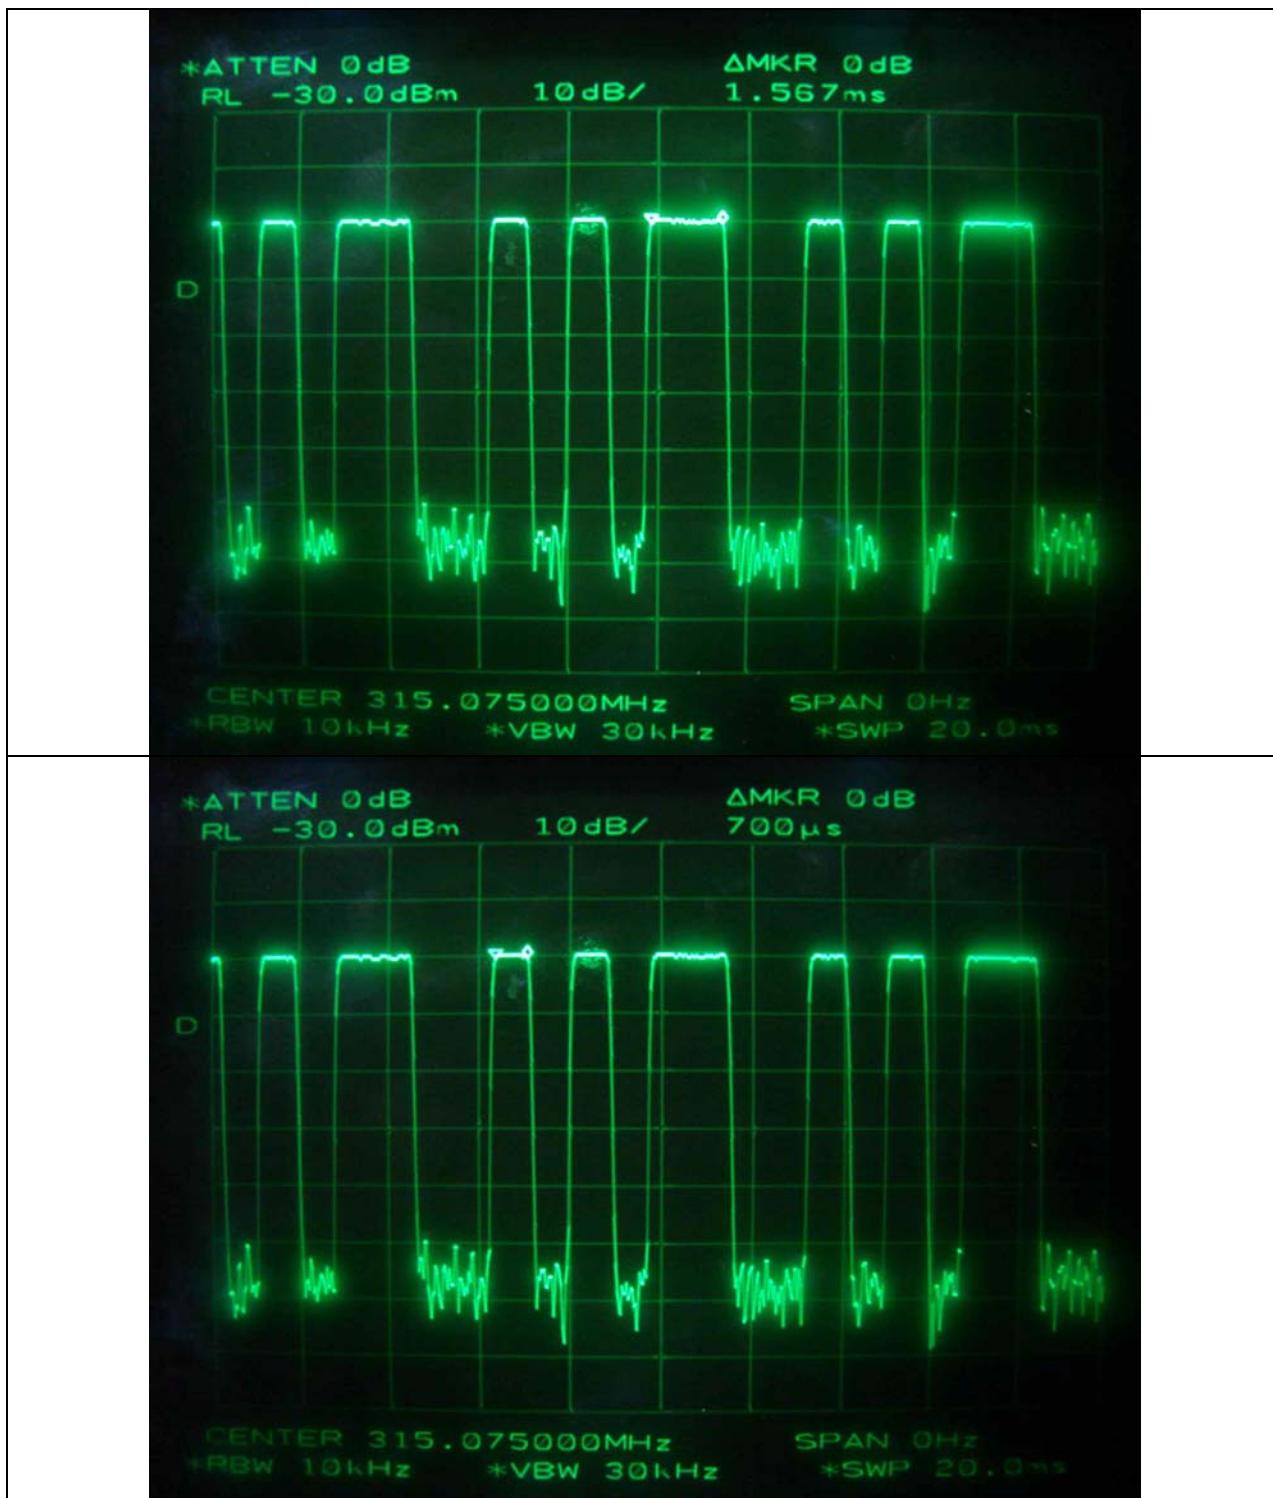

5.3 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: 49 %	Temperature: <u>25 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -2.88dB at 630.15 MHz</u>	

EUT	: Remote Controller of Adjustable Bed Controller	Date: September 10, 2007
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
630.15	33.60	Peak	H	20.81	7.10	-8.76	52.75	55.63	-2.88
	26.00	Peak	V				45.15	55.63	-10.48
945.23	21.80	Peak	H	23.48	8.09	-8.76	44.61	55.63	-11.02
	19.50	Peak	V				42.31	55.63	-13.32
1260.30	19.00	Peak	H	31.49	9.50	-8.76	51.23	55.63	-4.40
	17.50	Peak	V				49.73	55.63	-5.90

Other spurious frequencies were not found up to 5 GHz.

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.” : Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization

✓ 7/16

Tested by: Ki-Hong, Nam / Test Engineer


5.4 Bandwidth of the operating frequency

Humidity Level : 49 % Temperature: 25 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (c)
 Type of Test : INTENTIONAL RADIATOR
 Result : PASSED

EUT : Remote Controller of Adjustable Bed Controller Date: September 10, 2007
 Operating Condition : TX mode
 Minimum Resolution Bandwidth : 10 kHz


Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
317.075	41.3	792.69	<u>The point 20dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.



Tested by: Ki-Hong, Nam / Test Engineer

Plotted Data for bandwidth

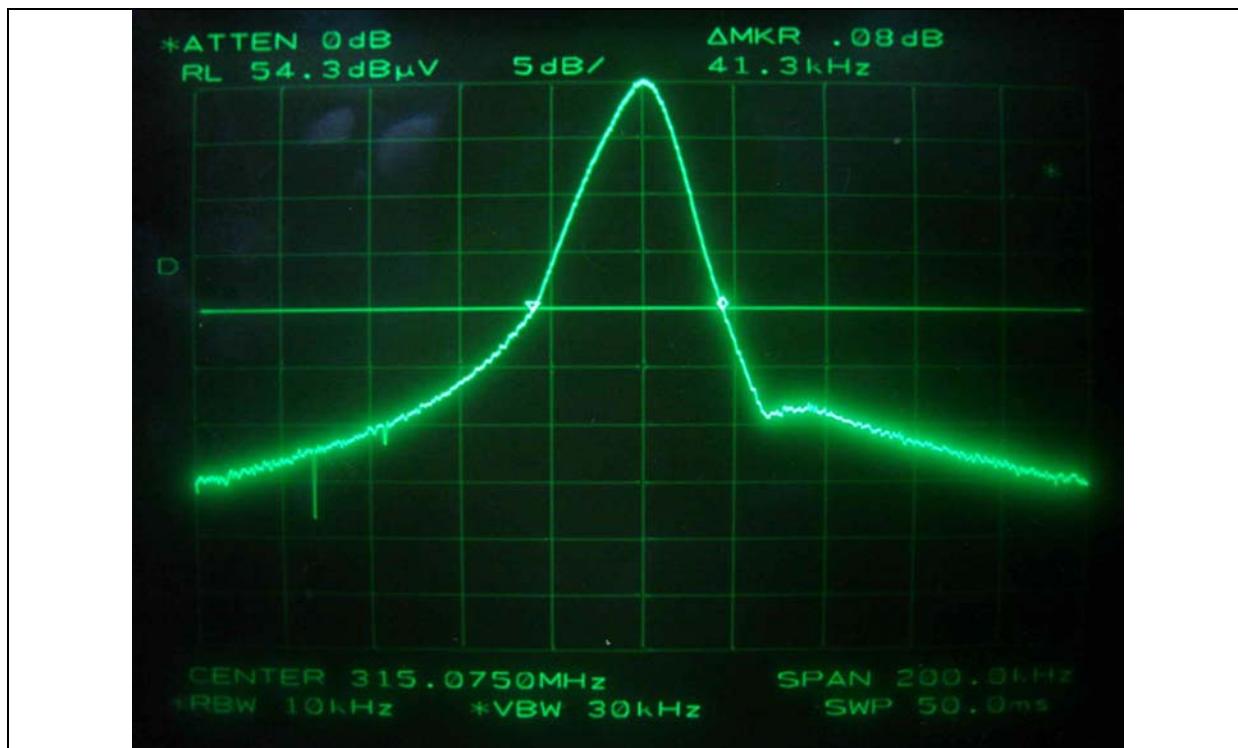

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE	
1.	Test receiver	R/S	ESVS10	827864/005	DEC/06	12MONTH		
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/07	12MONTH	■	
3.	Spectrum analyzer	HP	8566B	2516A01677	JUN/07	12MONTH	■	
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 202	AUG/06	24MONTH		
5.	Biconical antenna		EMCO	3110	9003-1121	JUN/07	12MONTH	
			Schwarzbeck	VHA9103	91031852	FEB/07		
6.	Log Periodic antenna	Schwarzbeck	9108-A(494)	62281001	FEB/07	12MONTH		
7.	LISN	EMCO	3825/2	9109-1867	JUN/07	12MONTH		
				9109-1869	JUN/07			
		Schwarzbeck	NSLK 8126	8126-404	JUL/07		■	
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■	
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■	
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■	
11.	RF Amplifier	HP	8447D	2727A04987	JUN/07	12MONTH	■	
12.	Horn Antenna	Schwarzbeck	BBHA9120D	BBHA9120D294	JUL/06	24MONTH	■	
13.	Spectrum Analyzer	HP	8564E	3650A00756	JUN/07	12MONTH	■	
14.	Position Controller	HD	HD100	100/788	N/A	N/A	■	
15.	Turn Table	HD	DS420S	N/A	N/A	N/A	■	
16.	Antenna Master	HD	HD240	N/A	N/A	N/A	■	
17.	Isolation Transformer	Digitek Power	DPT	DPF-22027	N/A	N/A	■	
18.	Isolation Transformer	Digitek Power	DPT	DPF-22028	N/A	N/A	■	
19.	Frequency Converter	Digitek Power	VFS/DEFC	N/A	N/A	N/A	■	