


APPENDIX D – MODIFICATION LIST

1) Inverter shield cover




EMI form gasket
20(W)*10(H)*100(L)mm
(2 positions)

2) Main chassis frame

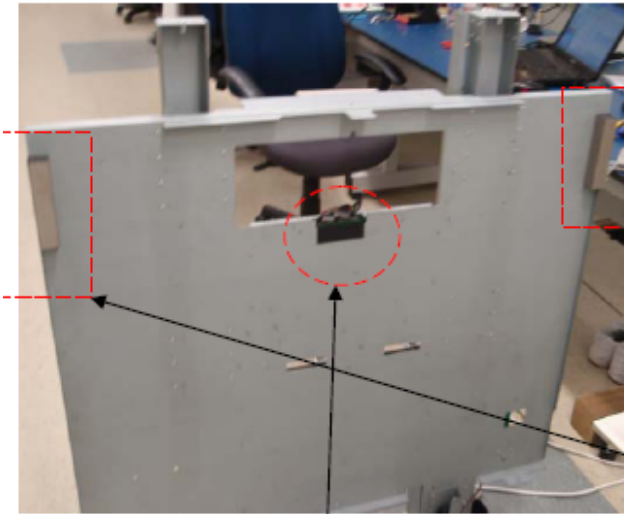


EMI form gasket
27(W)*30(H)*135(L)mm
(2 positions)

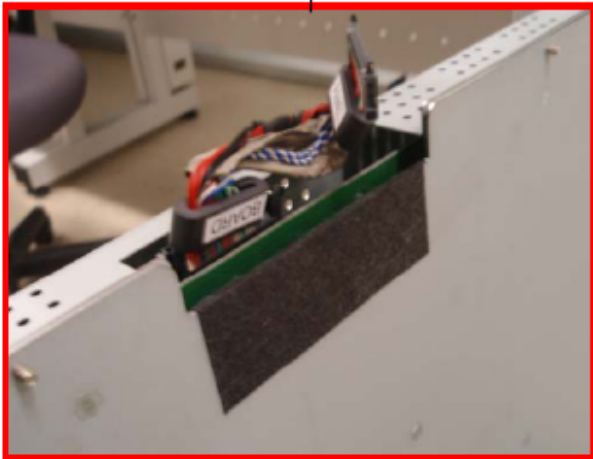

Felt tape 85*85mm
(2 positions)
: In order to prevent contact this point and LVDS cable

3) AC power input

Divide 2 AC input cable like this, don't bind with clamp.

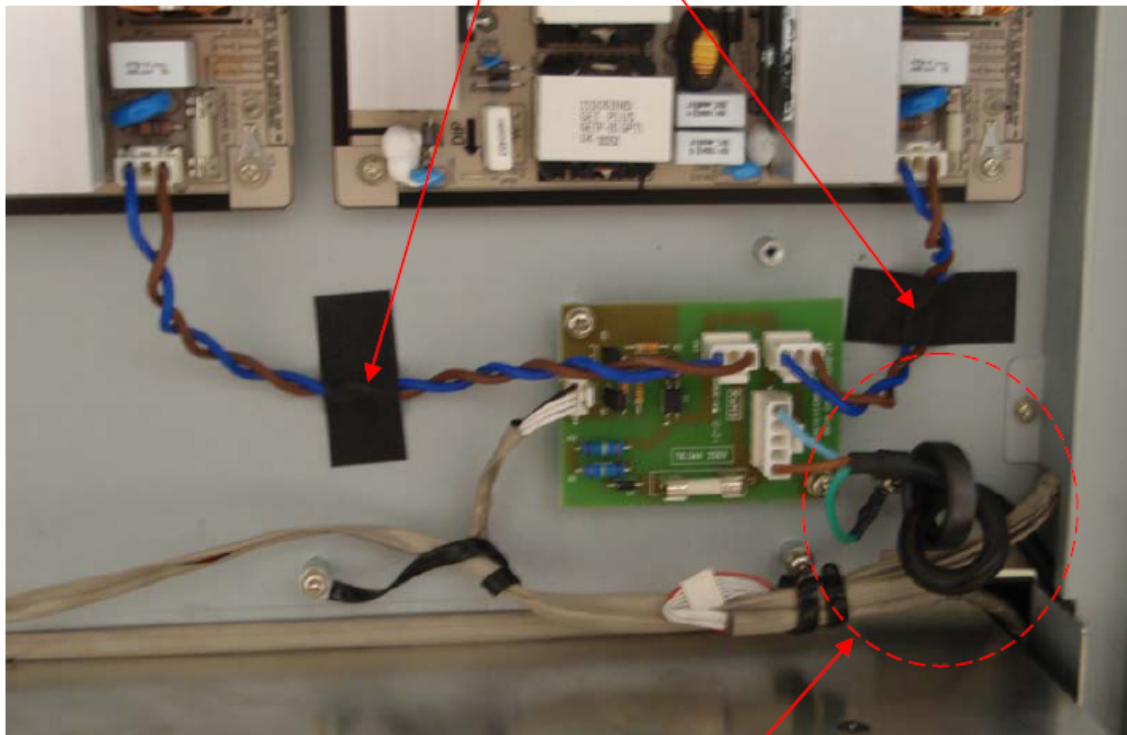

Add EMI ferrite core on the AC Input.

And we need to consider how to fasten this core without rattling sound.