

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR PCS SIGNAL REPEATER

Test Report No. : E074R-014

AGR No. : A073A-162

Applicant : Wireless Data Communication Co., Ltd.
Address : 2nd Floor Jinyoung B/D 469-35, Weolgye-dong, Nowon-gu, Seoul, Korea

Manufacturer : Wireless Data Communication Co., Ltd.
Address : 2nd Floor Jinyoung B/D 469-35, Weolgye-dong, Nowon-gu, Seoul, Korea

Type of Equipment : PCS CDMA Repeater

FCC ID. : THPWDCTCER300

Model Name : TCER300

Serial number : N/A

Total page of Report : 51 pages (including this page)

Date of Incoming : March 16, 2007


Date of issue : April 06, 2007


SUMMARY

The equipment complies with the regulation; **FCC Part 24 Subpart E.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE.....	4
2. TEST SUMMARY.....	5
2.1 TEST ITEMS AND RESULTS.....	5
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 PURPOSE OF THE TEST	5
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	5
3. GENERAL INFORMATION.....	6
3.1 PRODUCT DESCRIPTION.....	6
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	6
4. EUT MODIFICATIONS	6
5. SYSTEM TEST CONFIGURATION.....	7
5.1 JUSTIFICATION	7
5.2 PERIPHERAL EQUIPMENT.....	7
5.3 MODE OF OPERATION DURING THE TEST.....	7
5.4 MODULATION CHARACTERISTICS.....	7
6. RF POWER OUTPUT AT ANTENNA TERMINAL.....	8
6.1 OPERATING ENVIRONMENT	8
6.2 TEST SET-UP	8
6.3 TEST EQUIPMENT USED	8
6.4 TEST DATA.....	9
7. OCCUPIED BANDWIDTH AND BAND EDGE TEST.....	10
7.1 OPERATING ENVIRONMENT	10
7.2 TEST SET-UP	10
7.3 TEST EQUIPMENT USED	10
7.4 TEST DATA.....	11
8. INTERMODULATION TEST	22
8.1 OPERATING ENVIRONMENT	22
8.2 TEST SET-UP	22
8.3 TEST EQUIPMENT USED	22
8.4 TEST DATA.....	22

9. SPURIOUS EMISSION AT ANTENNA TERMINAL.....	29
9.1 OPERATING ENVIRONMENT	29
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	29
9.3 TEST EQUIPMENT USED	29
9.4 TEST DATA	30
10. FIELD STRENGTH OF SPURIOUS RADIATION	37
10.1 OPERATING ENVIRONMENT	37
10.2 TEST SET-UP	37
10.3 TEST EQUIPMENT USED	37
10.4. TEST DATA FOR RADIATED EMISSION	38
10.4.1. TEST DATA FOR UPLINK MODE	38
10.4.2. TEST DATA FOR DOWNLINK MODE	40
11. MAXIMUM PERMISSIBLE EXPOSURE.....	42
11.1 RF EXPOSURE CALCULATION	42
11.2 CALCULATED MPE SAFE DISTANCE.....	42
12. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	43
12.1 OPERATING ENVIRONMENT	43
12.2 TEST SET-UP	43
12.3 TEST EQUIPMENT USED	43
12.4 TEST DATA	44
13. FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	45
13.1 OPERATING ENVIRONMENT	45
13.2 TEST SET-UP	45
13.3 TEST EQUIPMENT USED	45
13.4 TEST DATA	46
14. CONDUCTED EMISSION TEST	47
14.1 OPERATING ENVIRONMENT	47
14.2 TEST SET-UP	47
14.3 TEST EQUIPMENT USED	47
14.4 TEST DATA	48
14.4.1 TEST DATA FOR DOWNLINK MODE	48
14.4.2TEST DATA FOR UPLINK MODE	50

1. VERIFICATION OF COMPLIANCE

APPLICANT : Wireless Data Communication Co., Ltd.
ADDRESS : 2nd Floor Jinyoung B/D 469-35, Weolgye-dong, Nowon-gu, Seoul, Korea
CONTACT PERSON : Mr. J. I. Shim / Vice President/COO
TELEPHONE NO : +82-2-912-9986
FCC ID : THPWDCTCER300
MODEL NAME : TCER300
SERIAL NUMBER : N/A
DATE : April 06, 2007

EQUIPMENT CLASS	PCB-PCS Licensed Transmitter
EQUIPMENT DESCRIPTION	PCS CDMA Repeater
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003, ANSI/TIA-603-B
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	PART 24 Subpart E
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
2.1046, 24.232	RF Power Output at Antenna Terminals	Met the Limit / PASS
2.1049, 24.238	Occupied Bandwidth, Bandwidth Limitation	Met the Limit / PASS
2.1051, 24.238 (a)	Spurious Emissions at Antenna Terminals	Met the Limit / PASS
2.1053, 24.238 (a)	Field strength of Spurious Radiation	Met the Limit / PASS
2.1049	Band Edge	Met the Limit / PASS
2.1047	Modulation Characteristics	Met the requirement / PASS
2.1055(a)(1), 24.235	Frequency Stability with Temperature variation	Met the requirement / PASS
2.1055(d), 24.235	Frequency stability with primary voltage variation	Met the requirement / PASS
2.1093	RF Exposure	Met the Limit / PASS
15.207 and 15.107	Conducted Limits	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 / ANSI/TIA-603-B. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-080, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 30, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. GENERAL INFORMATION

3.1 Product Description

The Wireless Data Communication Co., Ltd., Model TCER300 (referred to as the EUT in this report) is a PCS Repeater, which is s an exclusive CDMA repeater in the US PCS band, performing on relaying the received signal from the Base Station and outputting to the mobile terminal (forward), relaying the received signal from the mobile terminal and outputting to the Base Station (Backward). The Repeater system is for the relaying system that can supply the services Uplink: 1850~1910MHZ, Downlink: 1930~1990MHZ by one equipment. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE		PCS CDMA Repeater
EMISSION DESIGNATOR		F9W
OPERATING FREQUENCY	Uplink Frequency	1850~1910 MHz
	Downlink Frequency.	1930~1990 MHz
OUTPUT POWER		Uplink: 63.09mW (18dBm) Downlink: 2.00mW (3dBm)
AMPLIFIER GAIN		60dB
ANTENNA	Pattern	Directional
	Gain	7dBi
	Impedance	50 Ohm
LIST OF EACH OSC. ORCRY. FREQ.(FREQ.>=1MHz)		16 MHz and 10 MHz
NUMBER OF LAYER		Main Board: 6 Layers
POWER REQUIREMENT		DC 7.5V, 2.4A from AC/DC Adapter
EXTERNAL CONNECTOR		Adapter Input Port

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Wireless Data Communication Co., Ltd.	N/A	N/A
LCD Board	Wireless Data Communication Co., Ltd.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
TCER300	Wireless Data Communication Co., Ltd.	THPWDCTCER300	PCS CDMA Repeater (EUT)	-
PW118KA0702B51	Ault Inc.	N/A	AC/DC Adapter	EUT
PP01L	DELL Computer Corp.	DoC	Notebook PC	EUT
E4432B	Agilent	N/A	Signal Generator	EUT

5.3 Mode of operation during the test

The EUT was connected to a RS232C port on the laptop PC and a signal generator. The software control RF level by attenuator setting. The attenuator level shall be controlled from zero to 255 by the software, because the EUT has AGC (Auto Gain Control) function.

For downlink mode testing, the uplink port of the EUT was connected to the signal generator and the attenuator level was set to zero by the software and the downlink port on the EUT was connected to the input of the spectrum analyzer. Otherwise the uplink port of the EUT was connected to the spectrum analyzer and downlink port was connected to the signal generator for measuring uplink mode.

5.4 Modulation Characteristics

The EUT is an amplifier, so the EUT dose not has modulating circuit.

6. RF POWER OUTPUT at ANTENNA TERMINAL

6.1 Operating environment

Temperature : 15 °C

Relative humidity : 45 %

6.2 Test set-up

The RF output port (uplink port or downlink port) of the EUT was connected to the input of the power meter. The software for RF control on the notebook PC was set to zero and signal generator level was tuned for getting 8dBm. The test was performed at three frequencies (low, middle, and high channels) and downlink/uplink mode with modulation type CDMA only.



6.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	437B	HP	Power Meter	3125U25121	June 22, 2006
■ -	8481A	HP	Power Sensor	1550A14928	Dec. 18, 2006
■ -	E4432B	HP	Signal Generator	US38440950	June 22, 2006


All test equipment used is calibrated on a regular basis.

6.4 Test data

-. Test Date : March 28, 2007

-. Test Result : Pass

Mode	Modulation	Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)
Uplink	CDMA	Low	1851.25	-51.70	18.00	0.063100	2.00
		Middle	1877.50	-51.50	18.00		
		High	1908.75	-45.00	18.00		
Downlink	CDMA	Low	1931.25	-72.00	3.00	0.001995	
		Middle	1957.50	-72.50	3.00		
		High	1988.75	-69.70	3.00		

**Tested by: Ki-Hong, Nam / Test Engineer**

7. OCCUPIED BANDWIDTH and BAND EDGE TEST

7.1 Operating environment

Temperature : 15 °C
Relative humidity : 45 %

7.2 Test set-up

For downlink mode testing, the Uplink port of the EUT was connected to the signal generator and the downlink port on the EUT was connected to the input of the spectrum analyzer. Otherwise the uplink port of the EUT was connected to the spectrum analyzer and downlink port was connected to the signal generator for measuring uplink mode. The resolution bandwidth, 30 kHz and video bandwidth, 100 kHz of the spectrum analyzer was set as following and the software for RF control on the notebook PC was set to zero.



7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006
■ - E4432B	HP	Signal Generator	US38440950	June 22, 2006

All test equipment used is calibrated on a regular basis.

7.4 Test data


-. Test Date : March 28, 2007


-. Test Result : Pass

Mode	Modulation	Channel	Occupied Bandwidth (kHz)
Uplink	CDMA	Low	1425
		Middle	1433
		High	1425
Downlink	CDMA	Low	1433
		Middle	1425
		High	1417


Remark: According to above result, the carrier frequency shall be within the frequency block edges.

Please refer to following test data form pages 12 through 19.


**Tested by: Ki-Hong, Nam / Test Engineer**

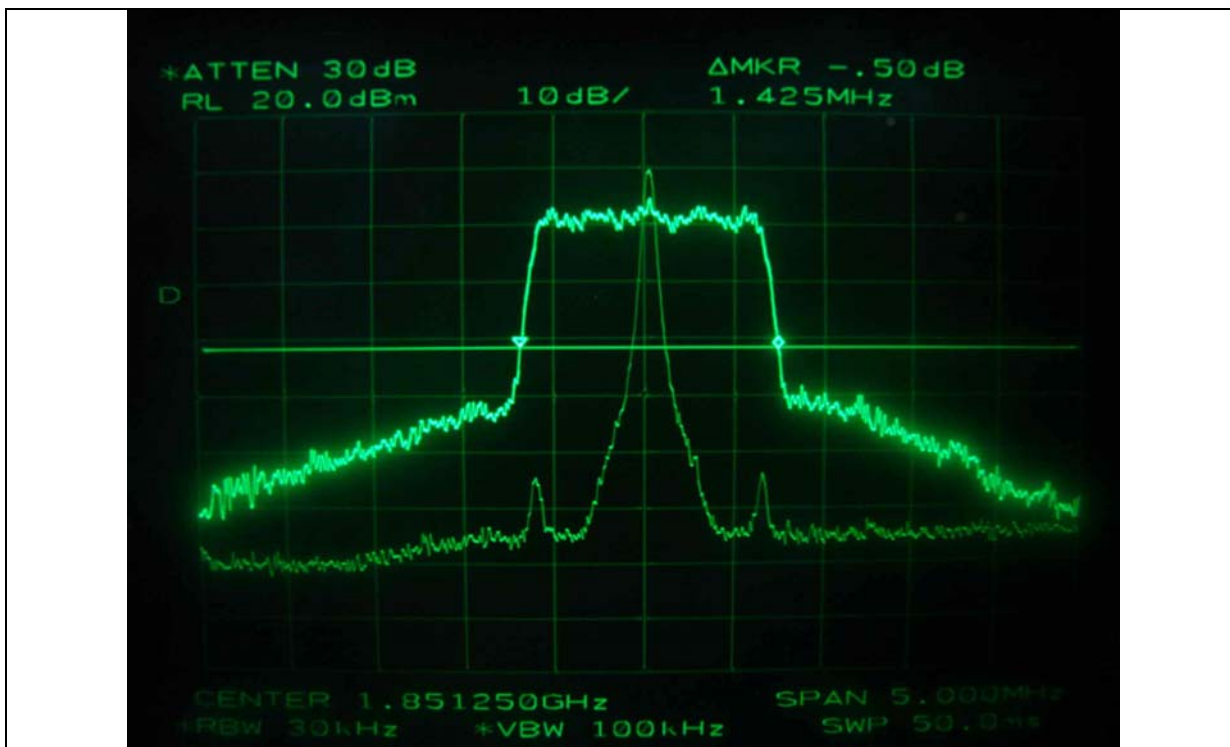


Uplink-Low Channel

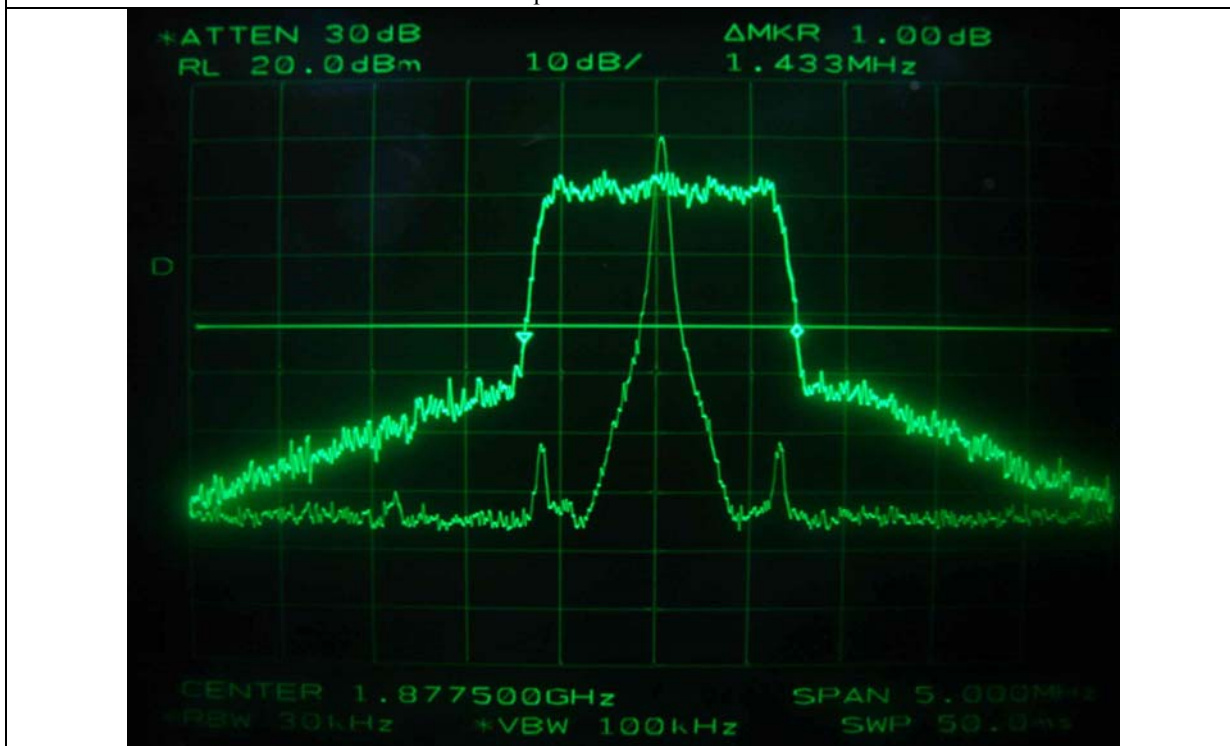


Uplink-Middle Channel

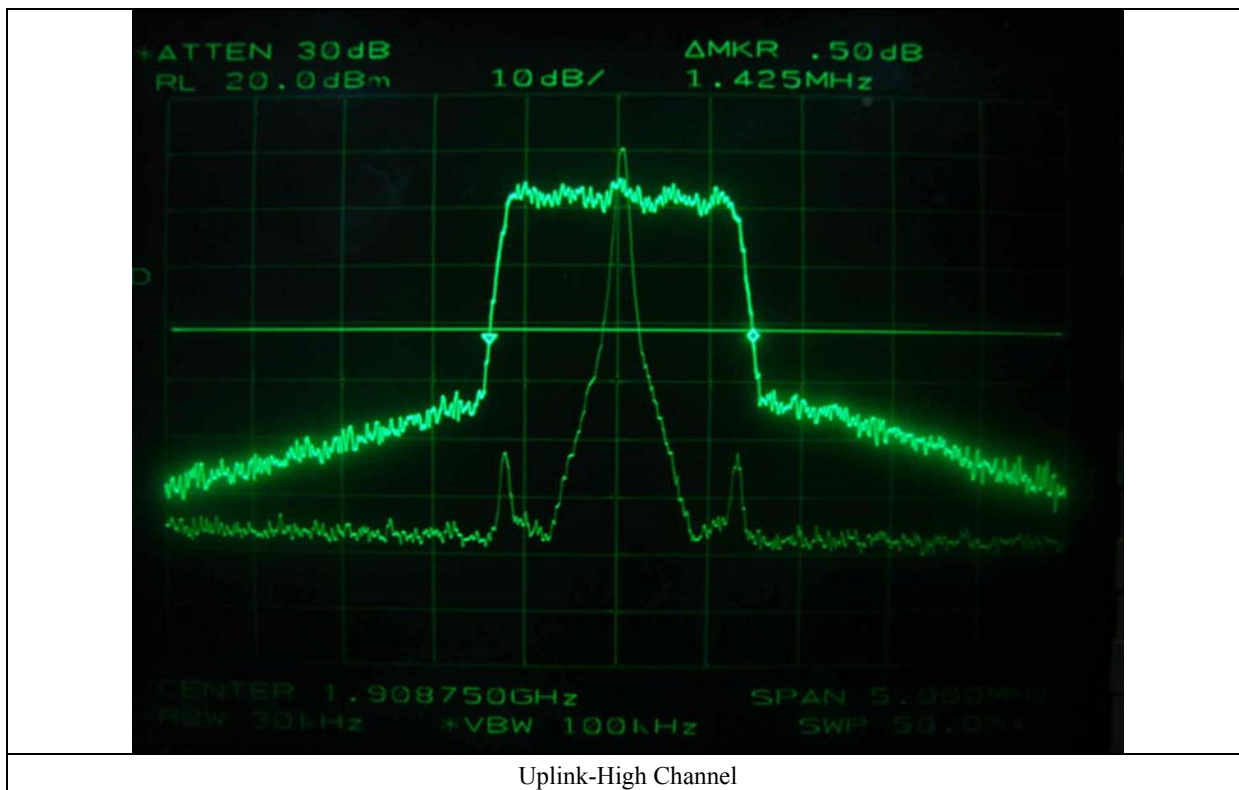


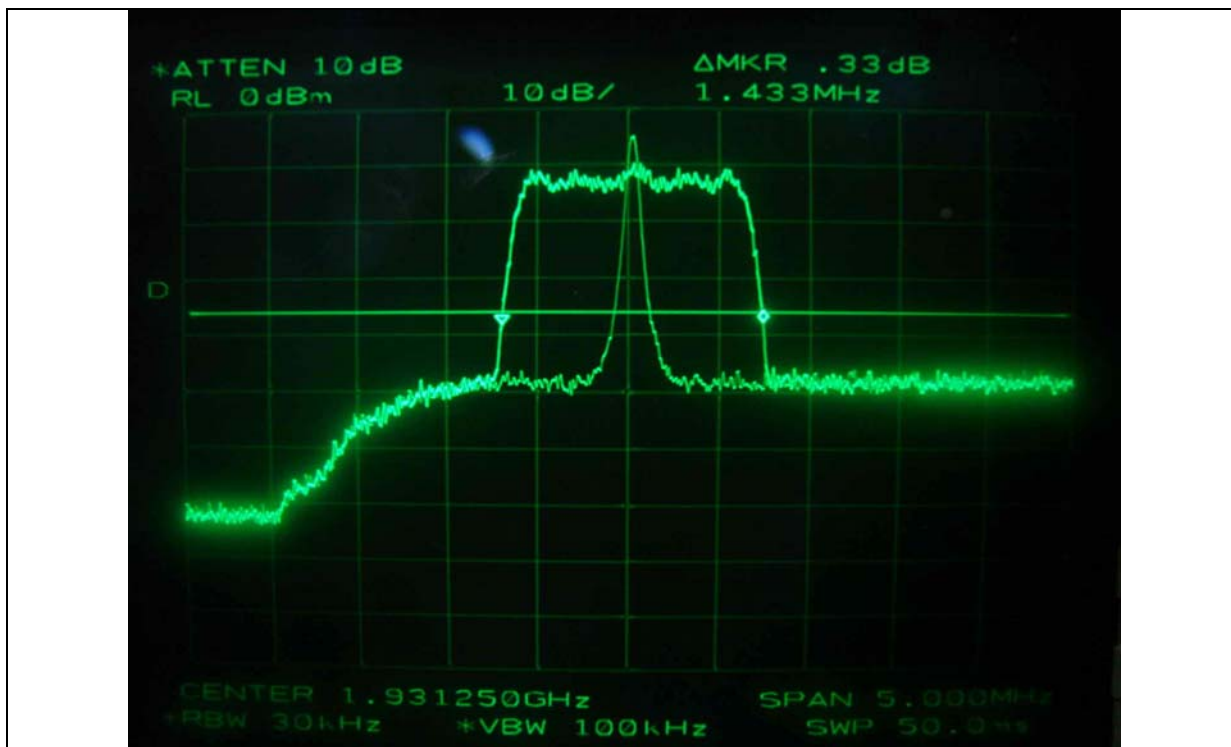


Downlink-Low Channel

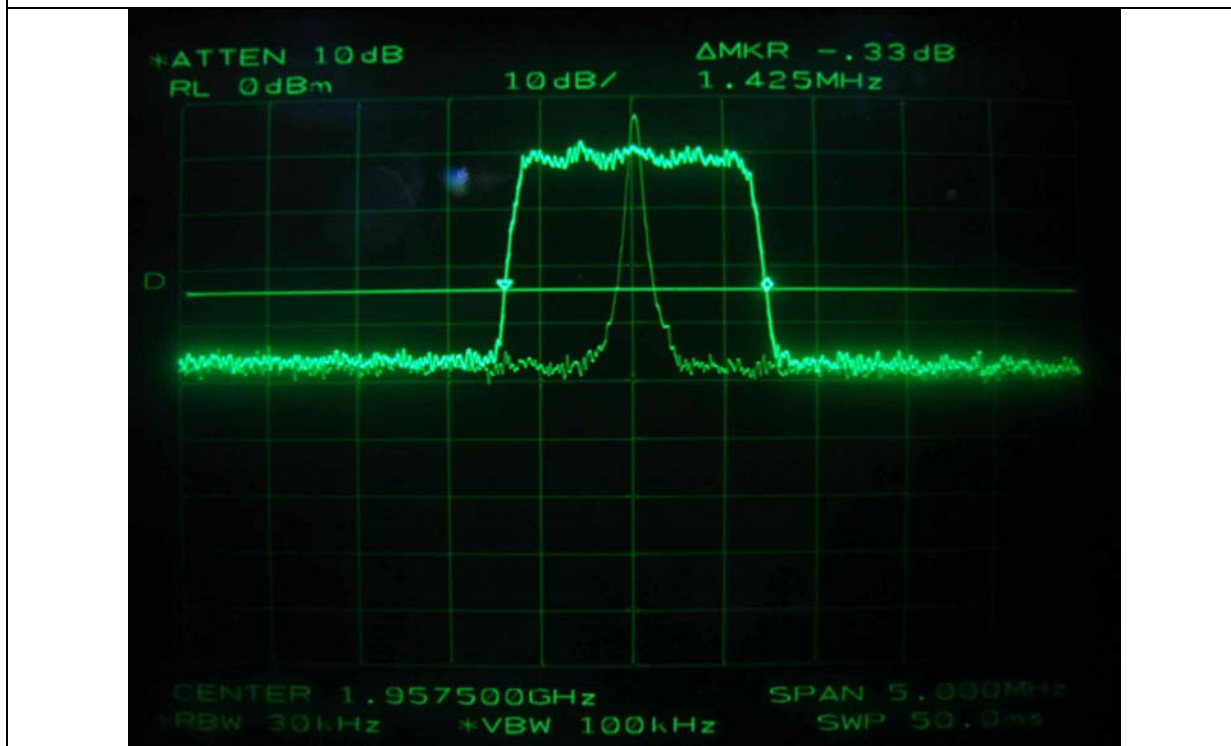

Downlink-Middle Channel

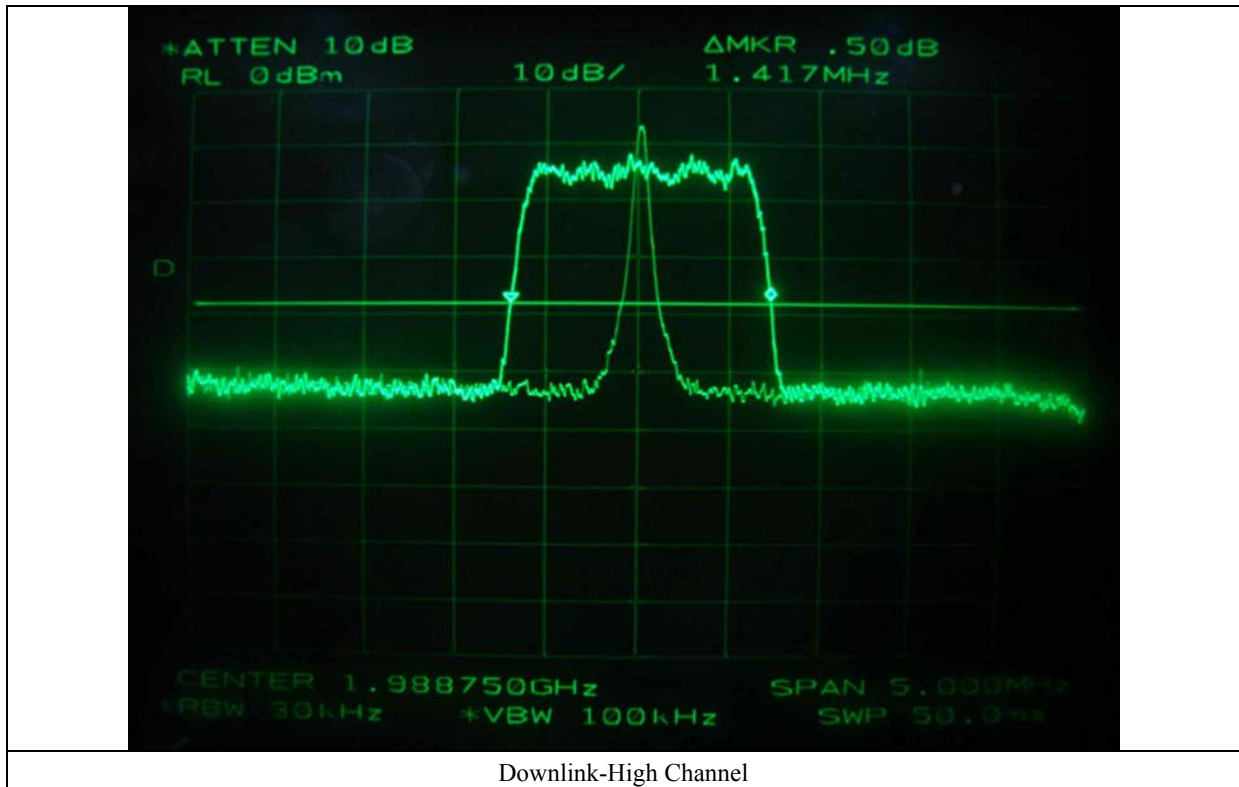


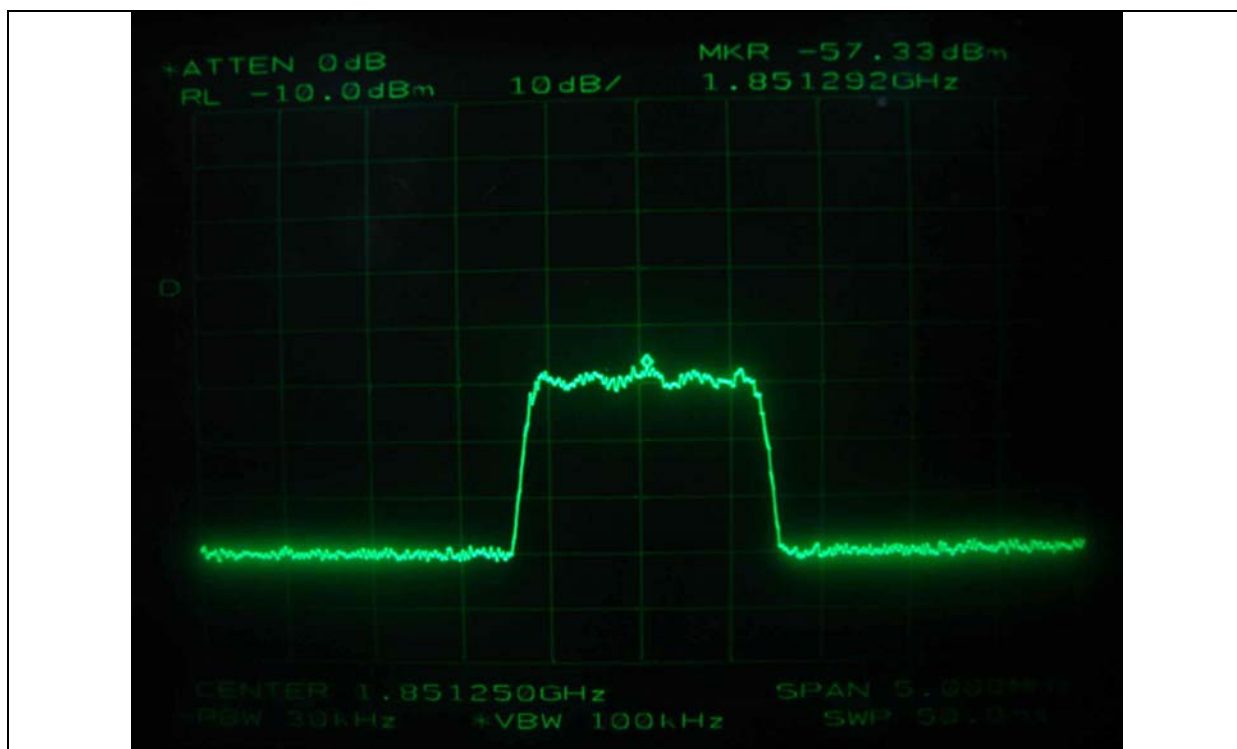

CDMA-Uplink-Input-Low Channel




CDMA-Uplink-Input-Middle Channel

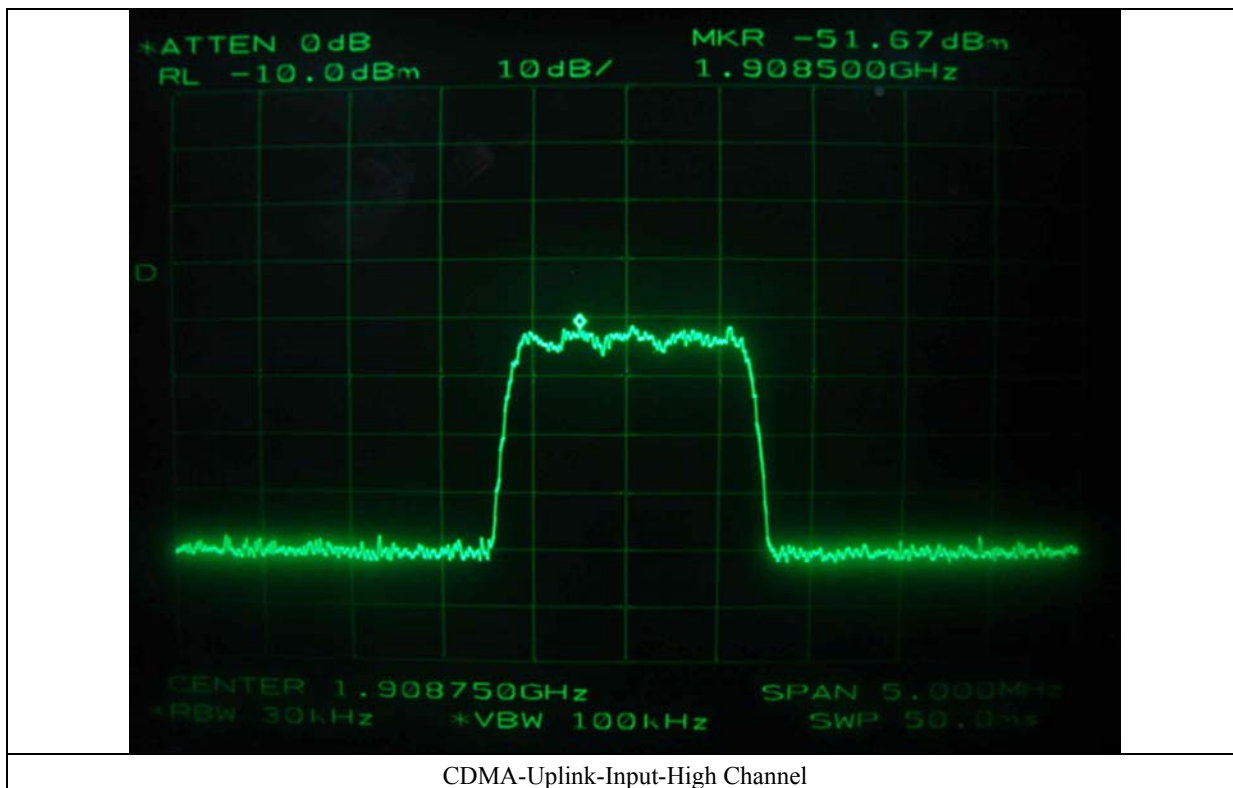





CDMA-Downlink-Low Channel

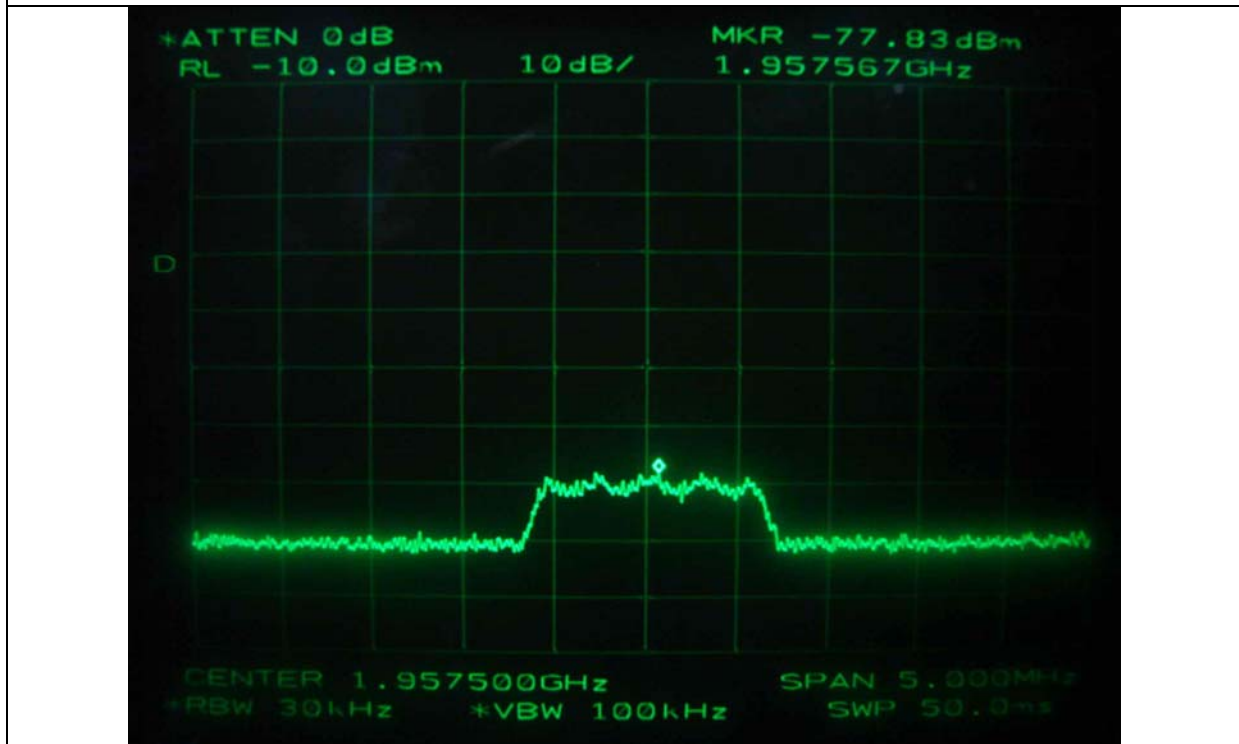

CDMA-Downlink-Middle Channel

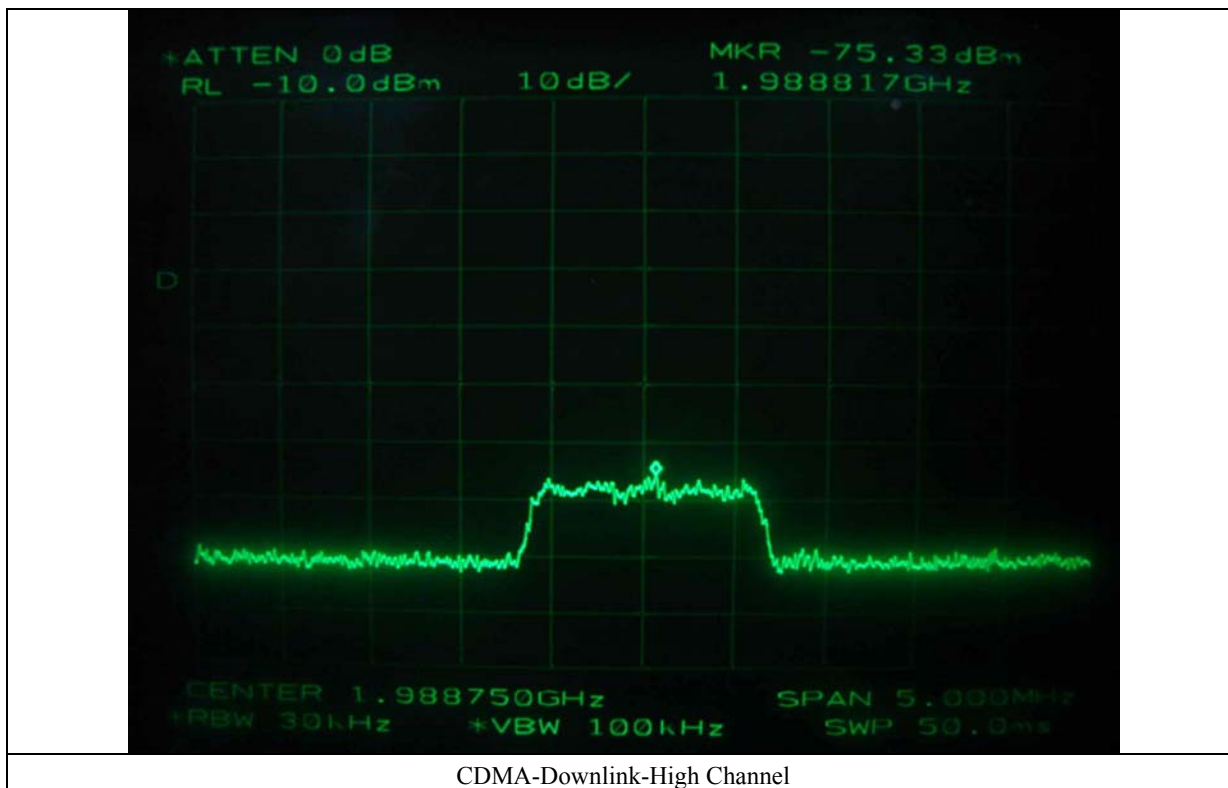


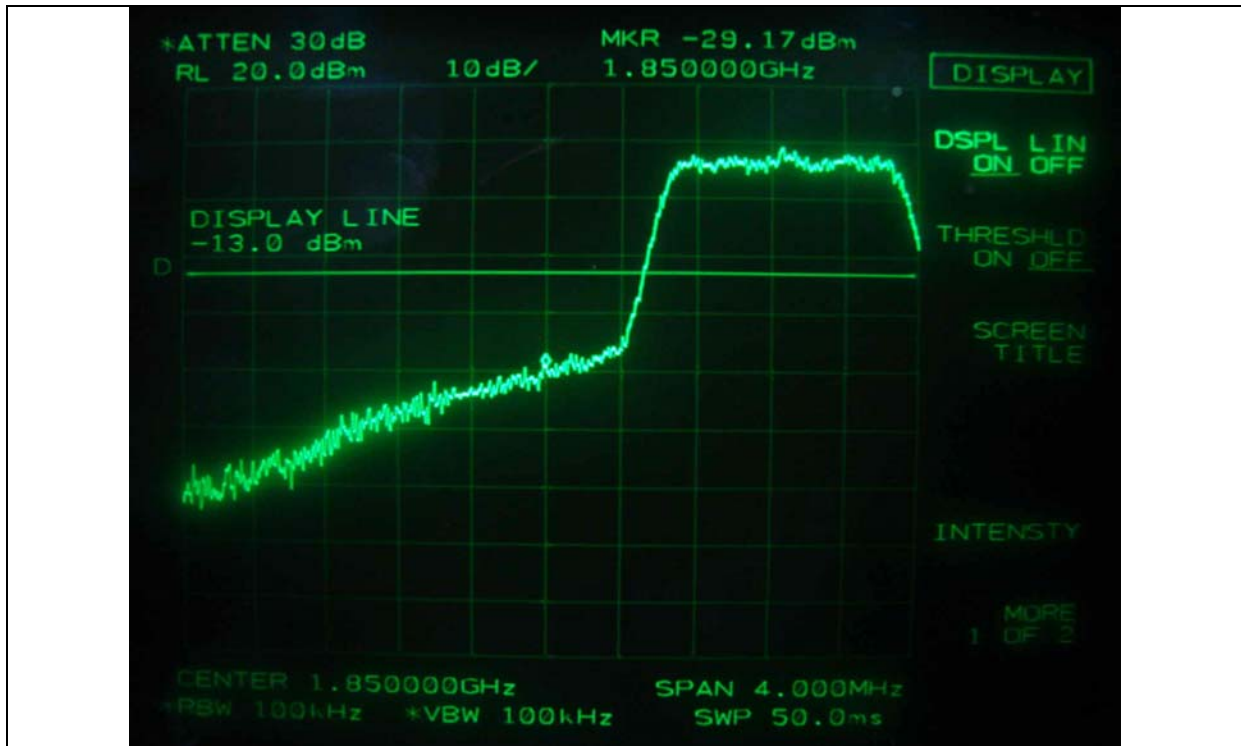


CDMA-Uplink_Band Edge-Low Channel



CDMA-Uplink_Bandedge-High Channel

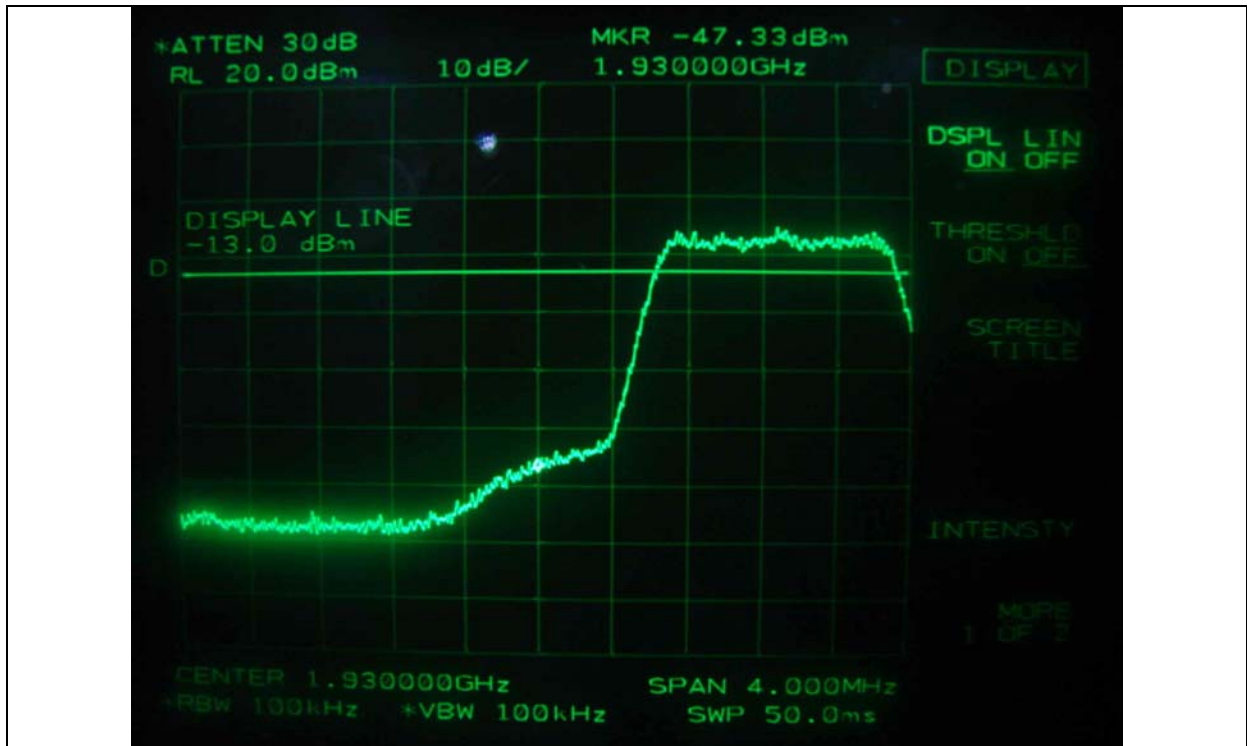

CDMA-Downlink_Bandedge-Low Channel

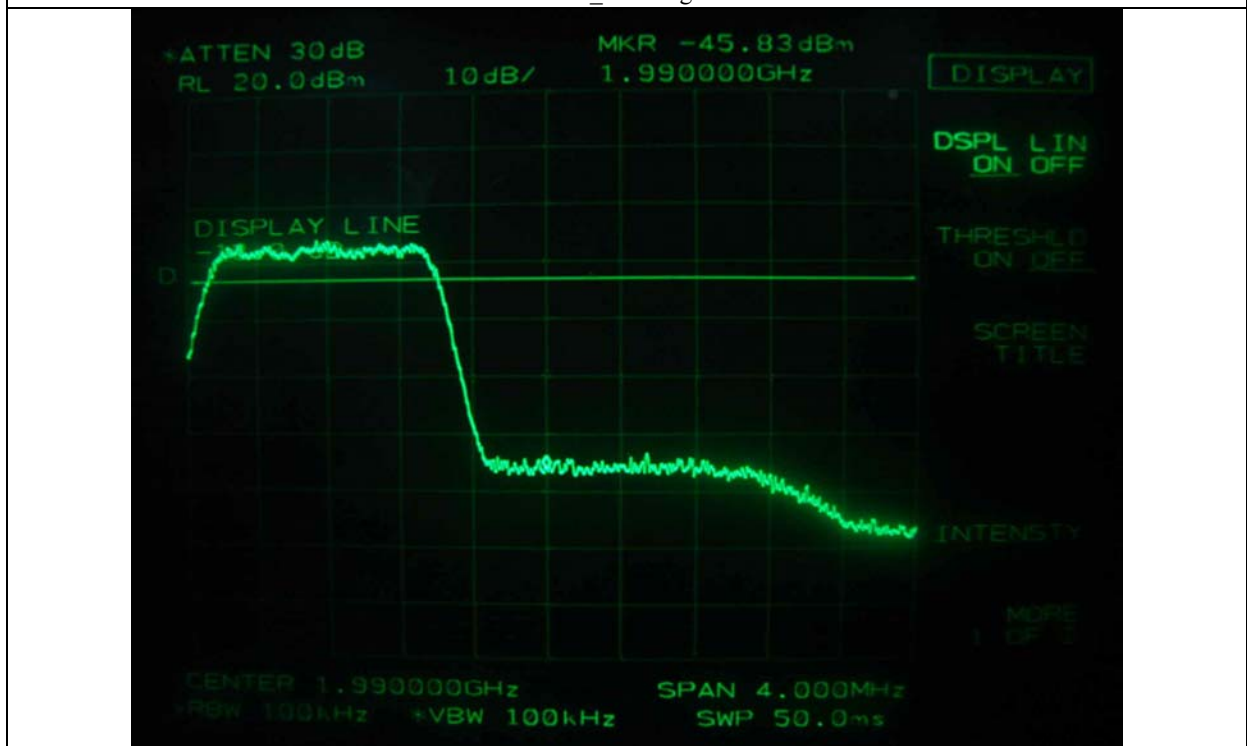

CDMA-Downlink_Bandedge-High Channel

8. INTERMODULATION TEST

8.1 Operating environment

Temperature : 15 °C

Relative humidity : 43 %

8.2 Test set-up

For downlink mode testing, the Uplink port of the EUT was connected to the signal generator and the downlink port on the EUT was connected to the input of the spectrum analyzer. Otherwise the uplink port of the EUT was connected to the spectrum analyzer and downlink port was connected to the signal generator for measuring uplink mode. The resolution bandwidth, 100 kHz and video bandwidth, 100 kHz of the spectrum analyzer was set and sufficient scans were taken to show any out of band emissions up to 10th harmonic. The attenuator of the EUT was set to zero by the software for RF control on the notebook PC. Two input signals are equal in level and were sent to the input of the EUT.



8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006
■ -	E4432B	HP	Signal Generator	US38440950	June 22, 2006

All test equipment used is calibrated on a regular basis.


8.4 Test data

- Test Date : March 28, 2007


- Test Result : Pass

Mode	Modulation	Channel	Measured
Uplink	CDMA	Low	< -13dBm
		High	< -13dBm
Downlink	CDMA	Low	< -13dBm
		High	< -13dBm


Remark. Intermodulation products must be attenuated below the rated power of the EUT at least 43 + 10log (Pw), equivalent to -13dBm. Please refer to test data hereinafter.

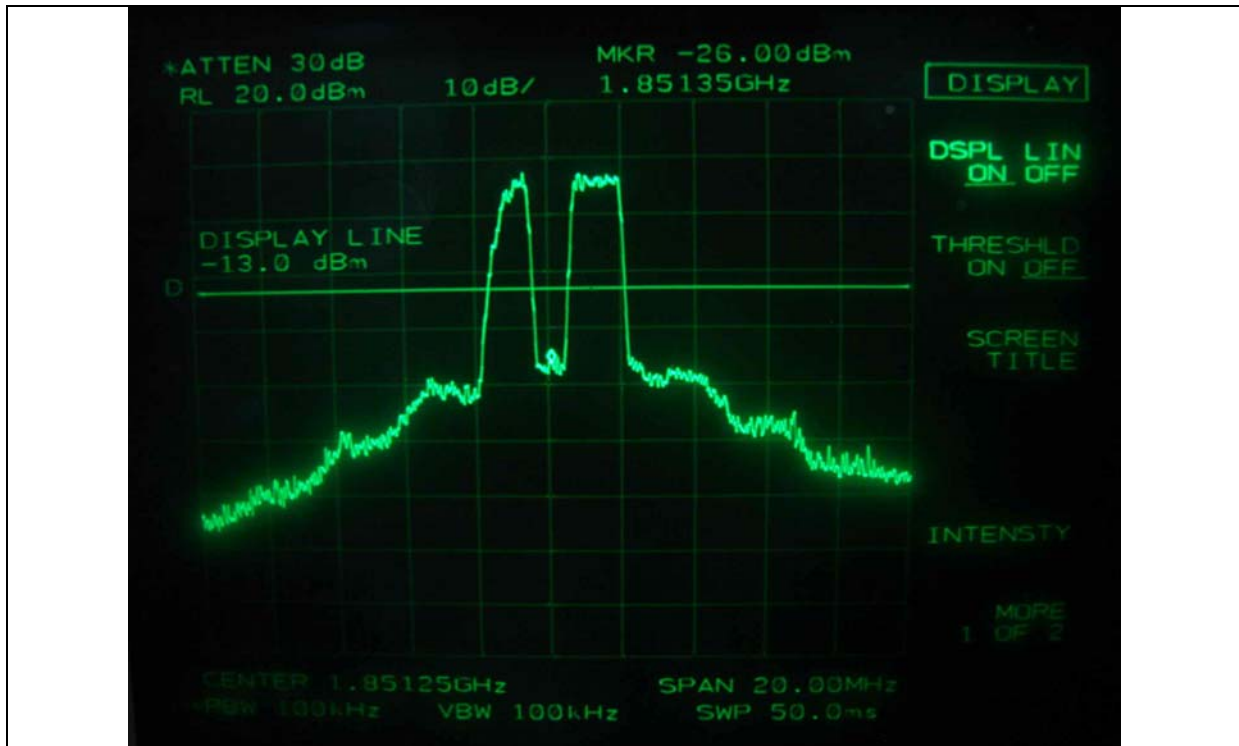

CDMA-Uplink-Low Channel

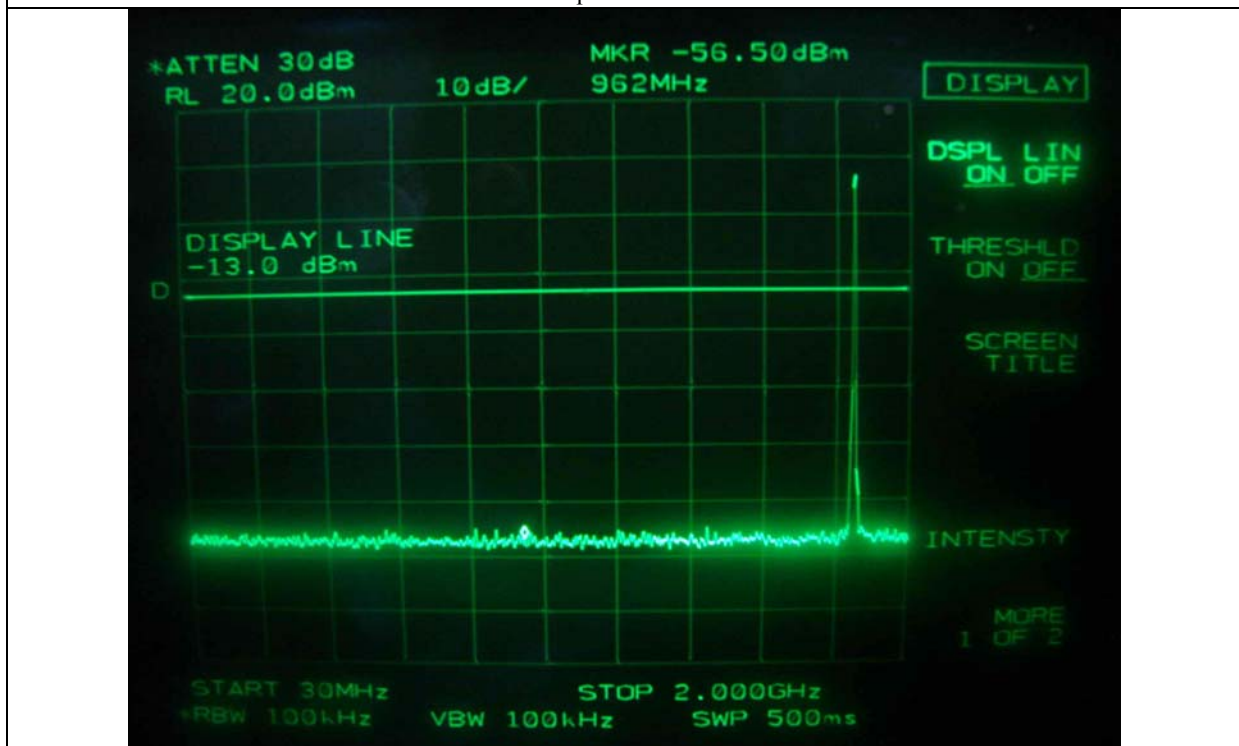

CDMA-Uplink-Low Channel

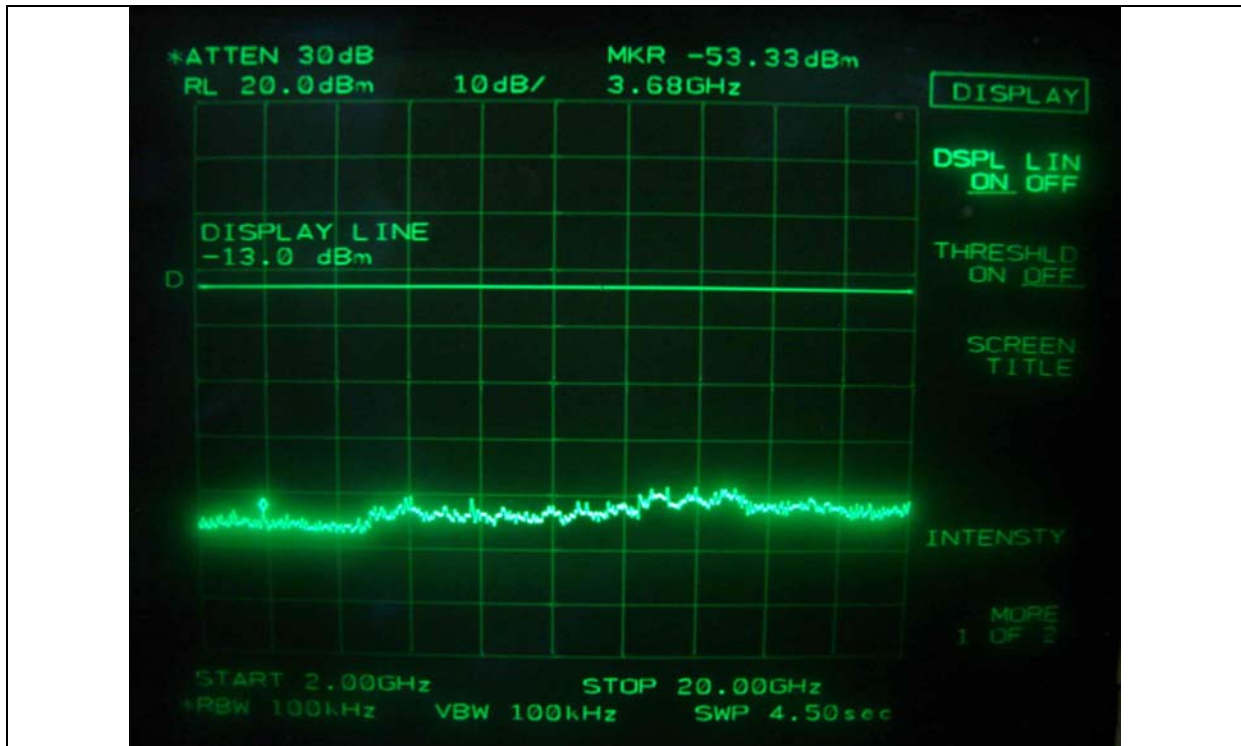

CDMA-Uplink-Low Channel




CDMA-Uplink-High Channel



CDMA-Uplink-High Channel




CDMA-Uplink-High Channel

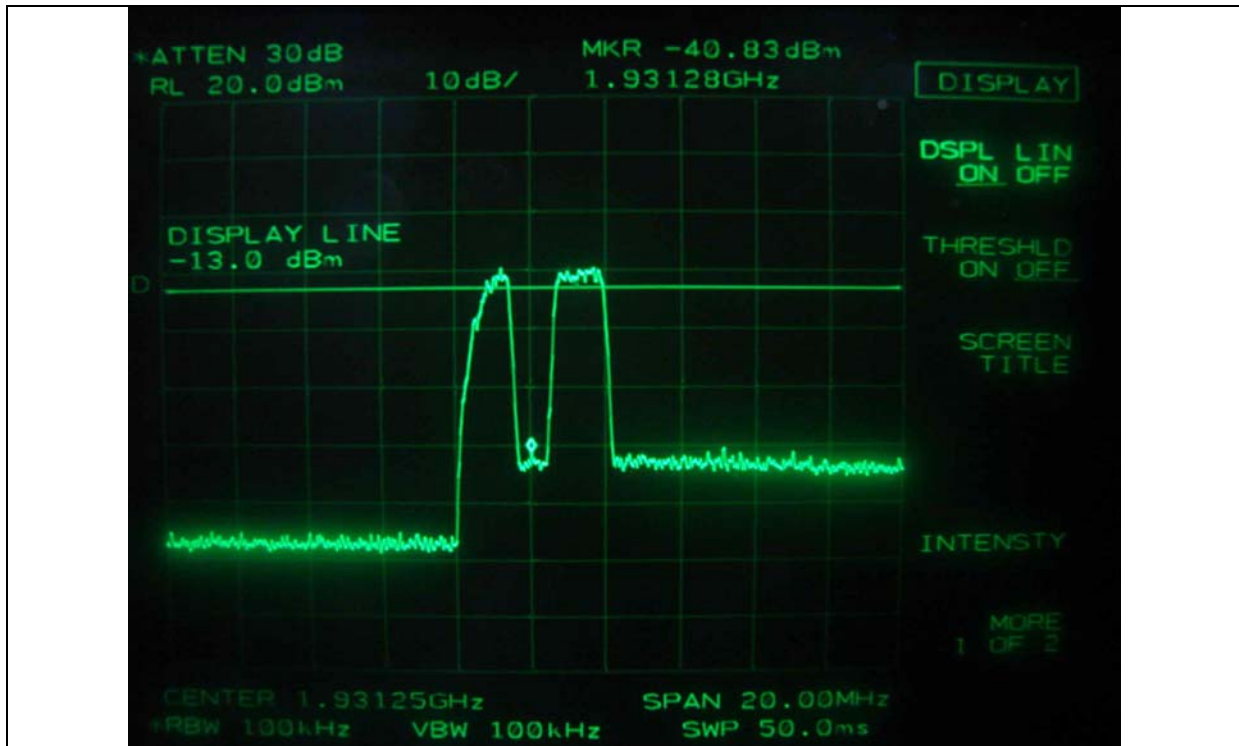


CDMA-Downlink-Low Channel



CDMA-Downlink-Low Channel

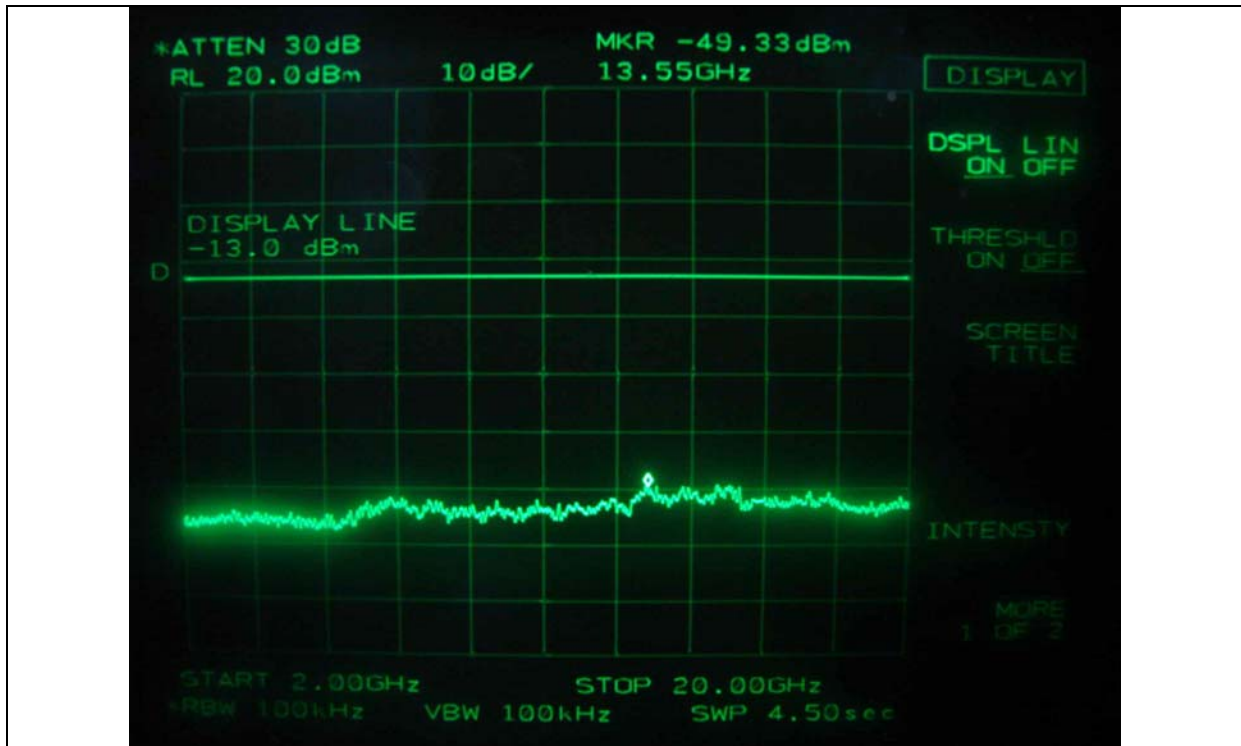


CDMA-Downlink-Low Channel

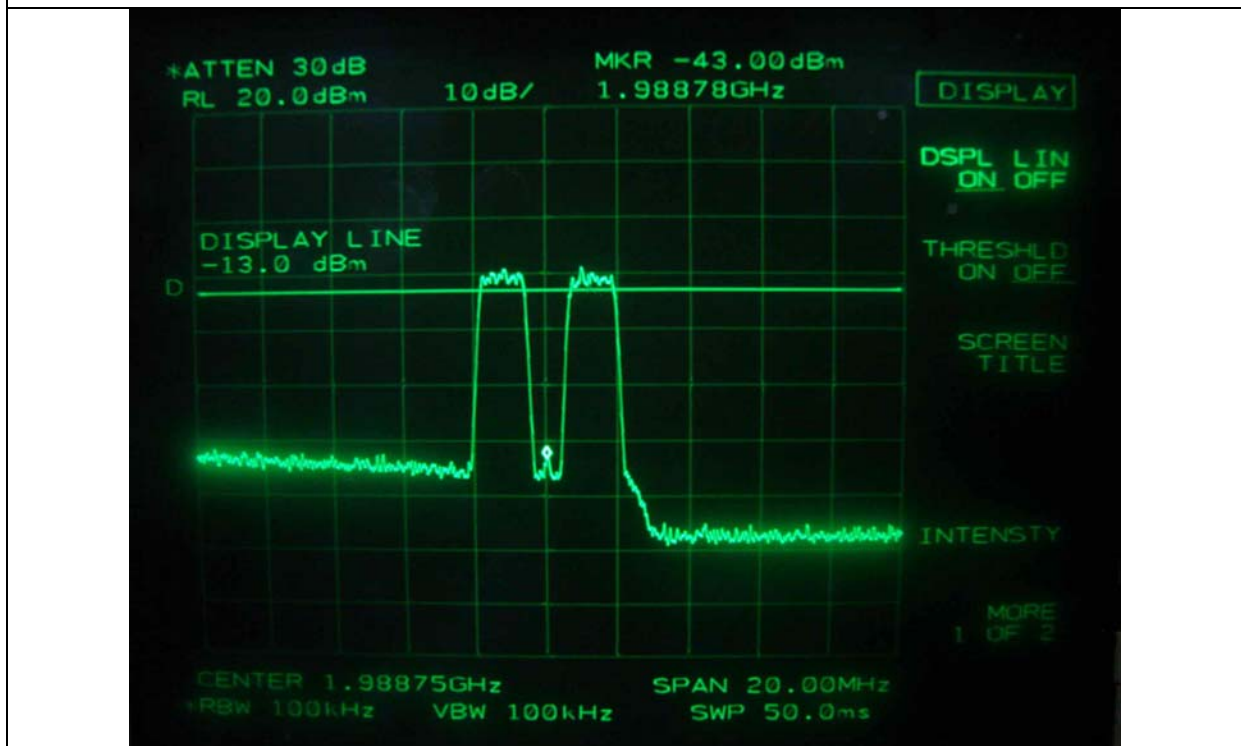

CDMA-Downlink-High Channel



CDMA-Downlink-High Channel

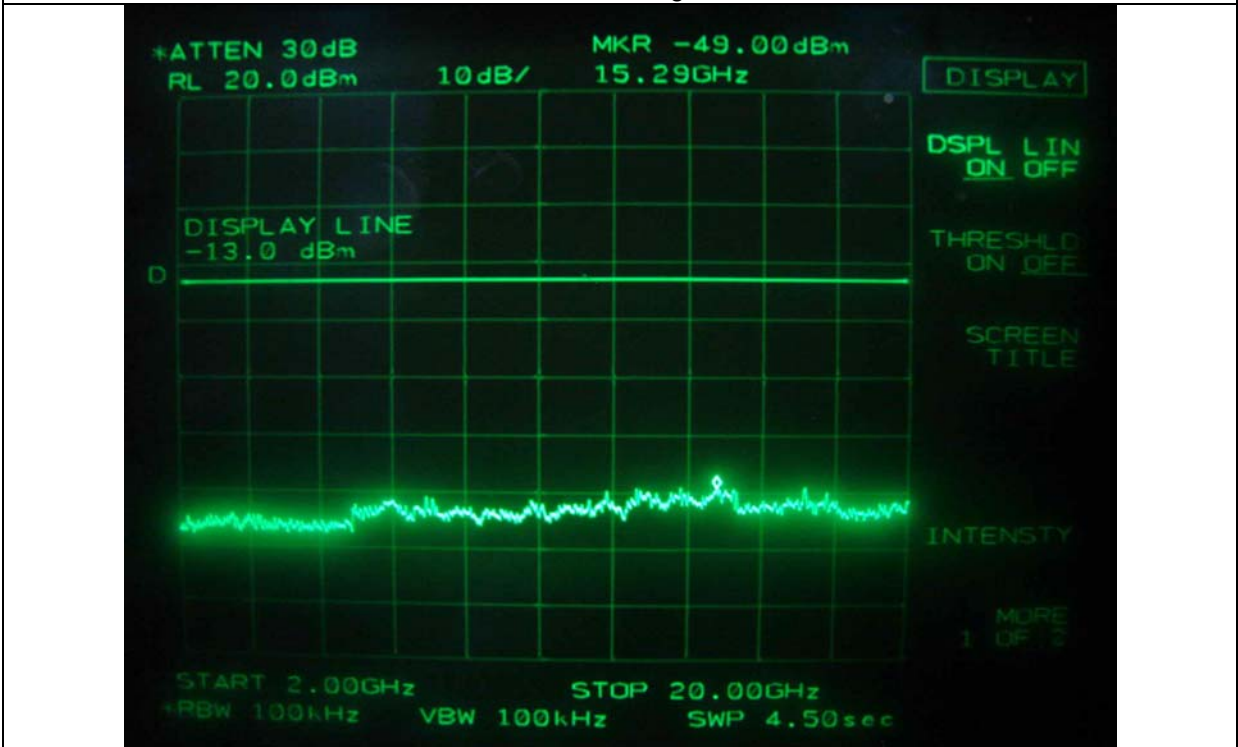

CDMA-Downlink-High Channel

9. SPURIOUS EMISSION AT ANTENNA TERMINAL

9.1 Operating environment

Temperature : 15 °C

Relative humidity : 45 %

9.2 Test set-up for conducted measurement

For downlink mode testing, the Uplink port of the EUT was connected to the signal generator and the downlink port on the EUT was connected to the input of the spectrum analyzer. Otherwise the uplink port of the EUT was connected to the spectrum analyzer and downlink port was connected to the signal generator for measuring uplink mode. The resolution bandwidth and video bandwidth of the spectrum analyzer was set at 1 MHz and sufficient scans were taken to show any out of band emissions up to 20 GHz. The software for RF control on the notebook PC was set to zero



9.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 22, 2006
■ -	E4432B	HP	Signal Generator	US38440950	June 22, 2006


All test equipment used is calibrated on a regular basis.

9.4 Test data


- Test Date : March 28, 2007
- Frequency range : 30 MHz ~ 20 GHz
- Result : PASSED BY -22.14 dB at High Channel of Uplink Mode

Mode	Modulation	Harmonic Frequency (MHz)		Measured Value (dBm)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Uplink	CDMA	Low	3680.00	-38.67	1.46	-37.21	-13.0	-24.21
		Middle	3740.00	-43.50	1.49	-42.01		-29.01
		High	3800.00	-36.67	1.53	-35.14		-22.14
Downlink	CDMA	Low	1747.00	-40.33	1.16	-39.17	-13.0	-26.17
		Middle	1767.00	-43.00	1.23	-41.77		-28.77
		High	1790.00	-44.17	1.31	-42.86		-29.86


According to Part 24E, out of band emission shall be attenuated by $43 + 10 \log (P)$ dBc, equates to -13.0dBm.




Tested by: Ki-Hong, Nam / Test Engineer

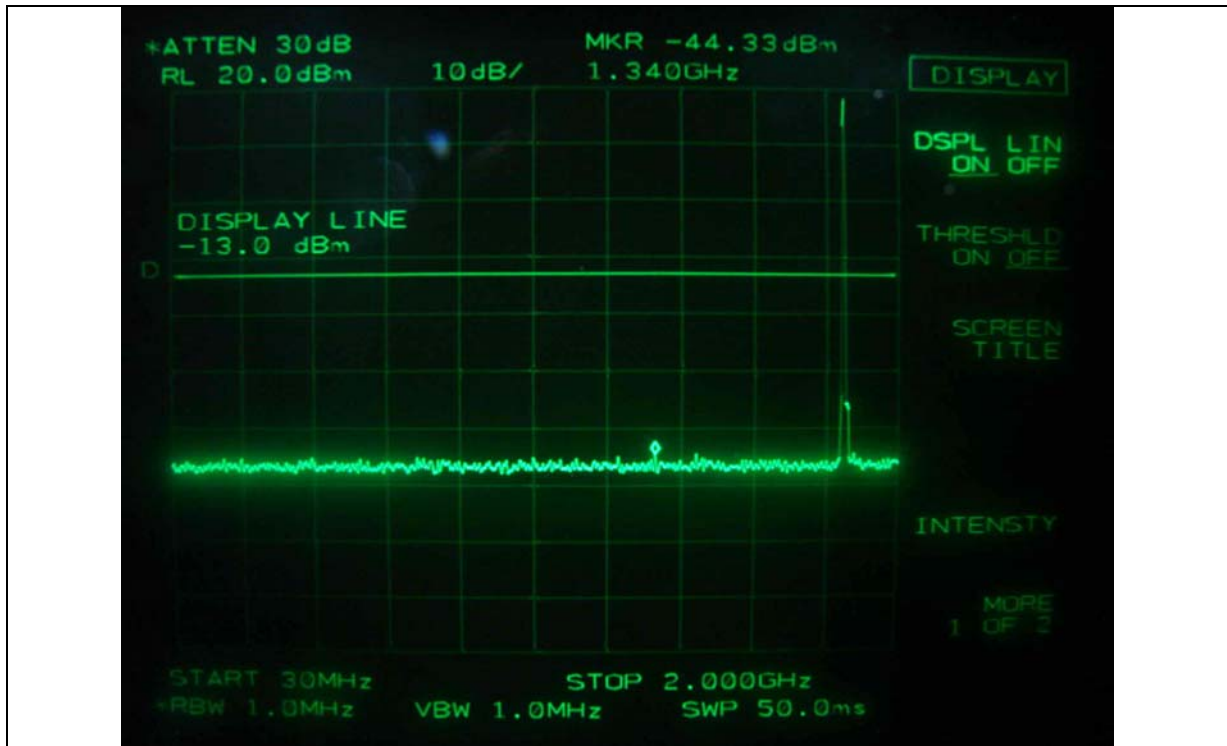


CDMA-Uplink-Low Channel

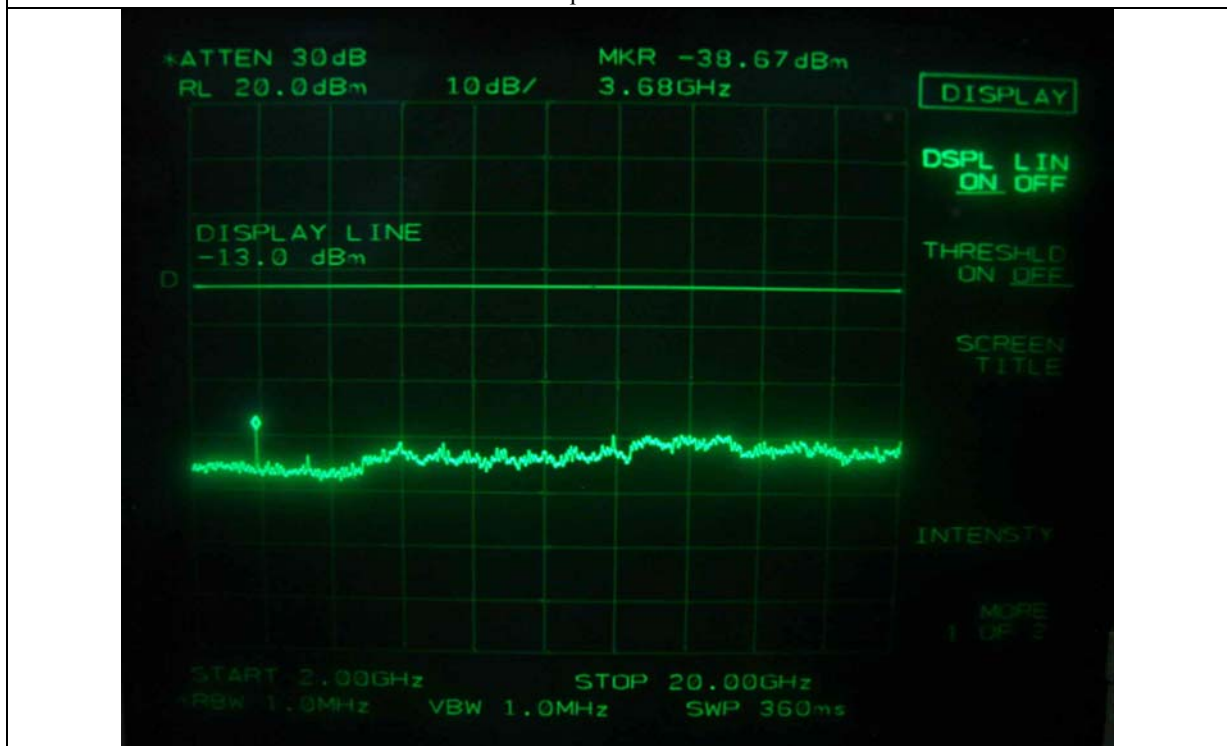


CDMA-Uplink-Low Channel

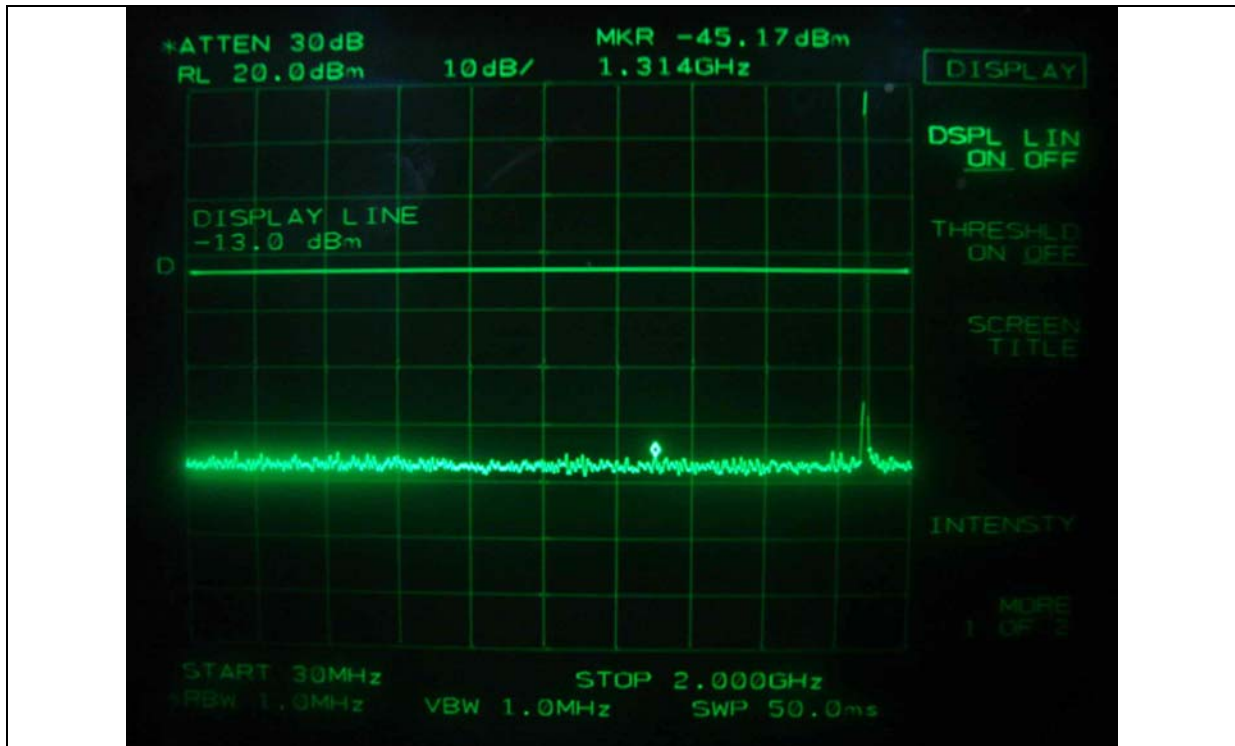


CDMA-Uplink-Middle Channel

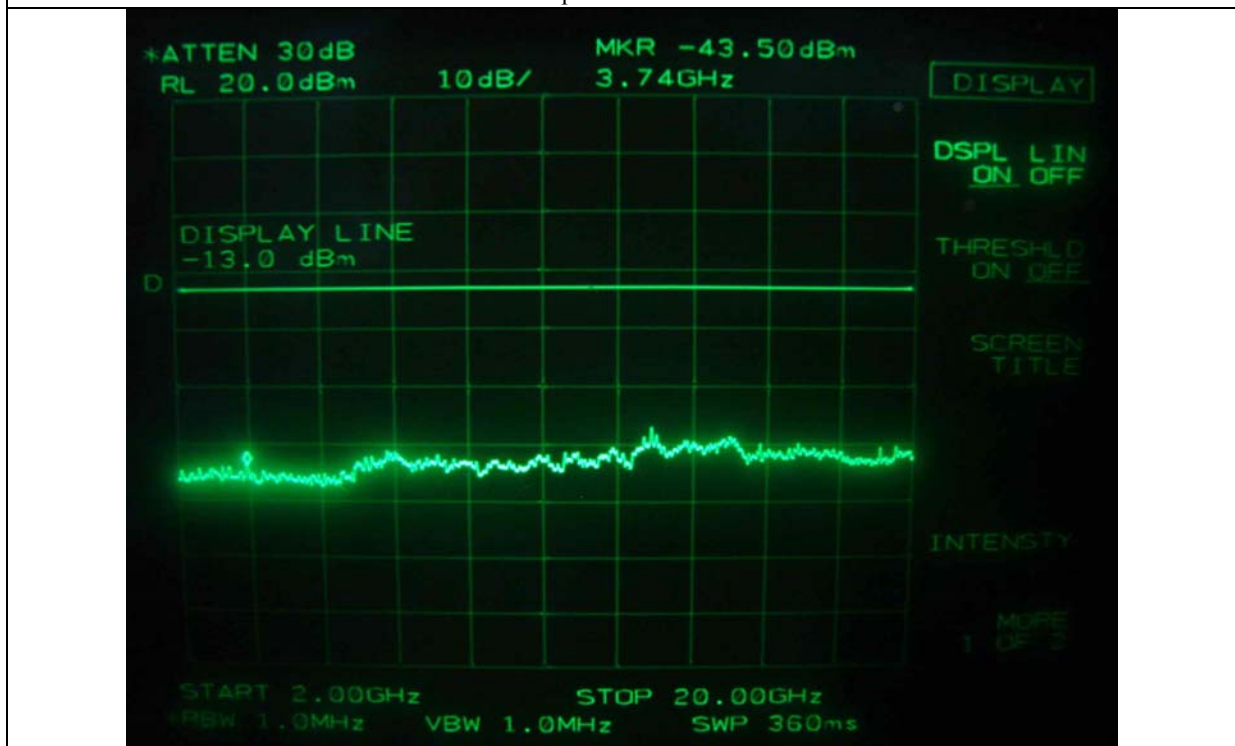


CDMA-Uplink-Middle Channel

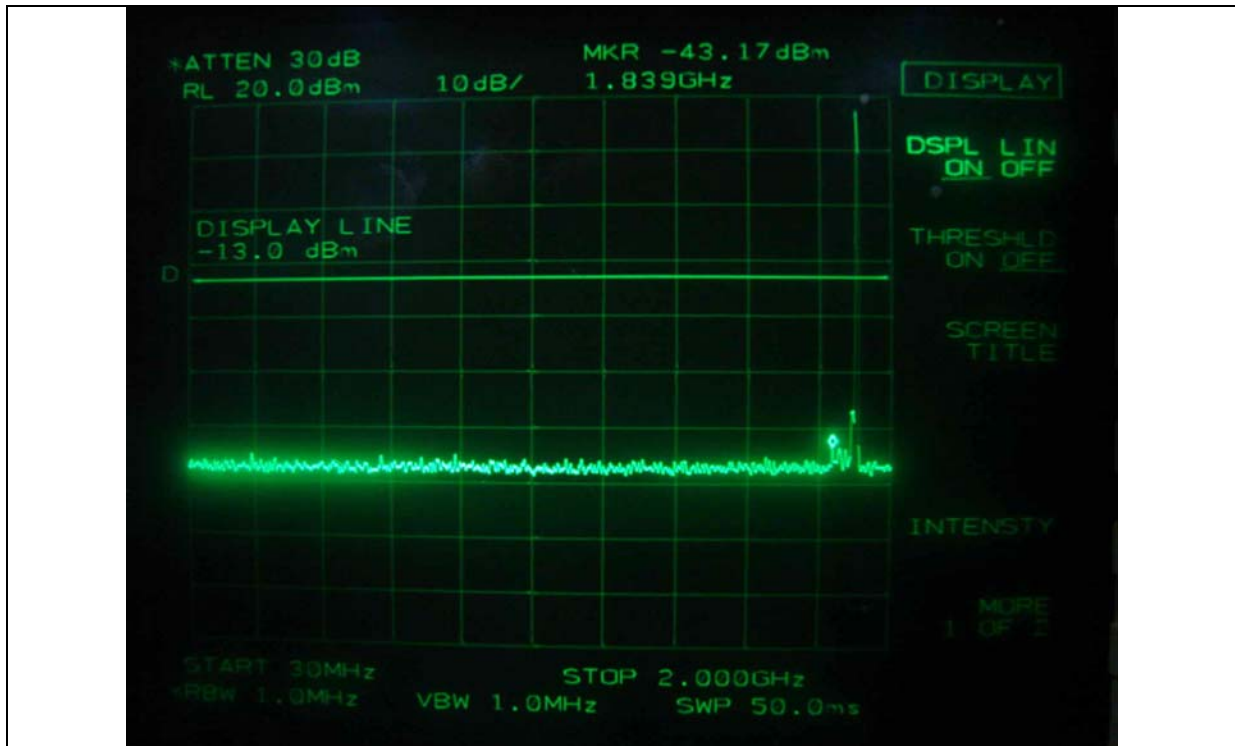


CDMA-Uplink-High Channel

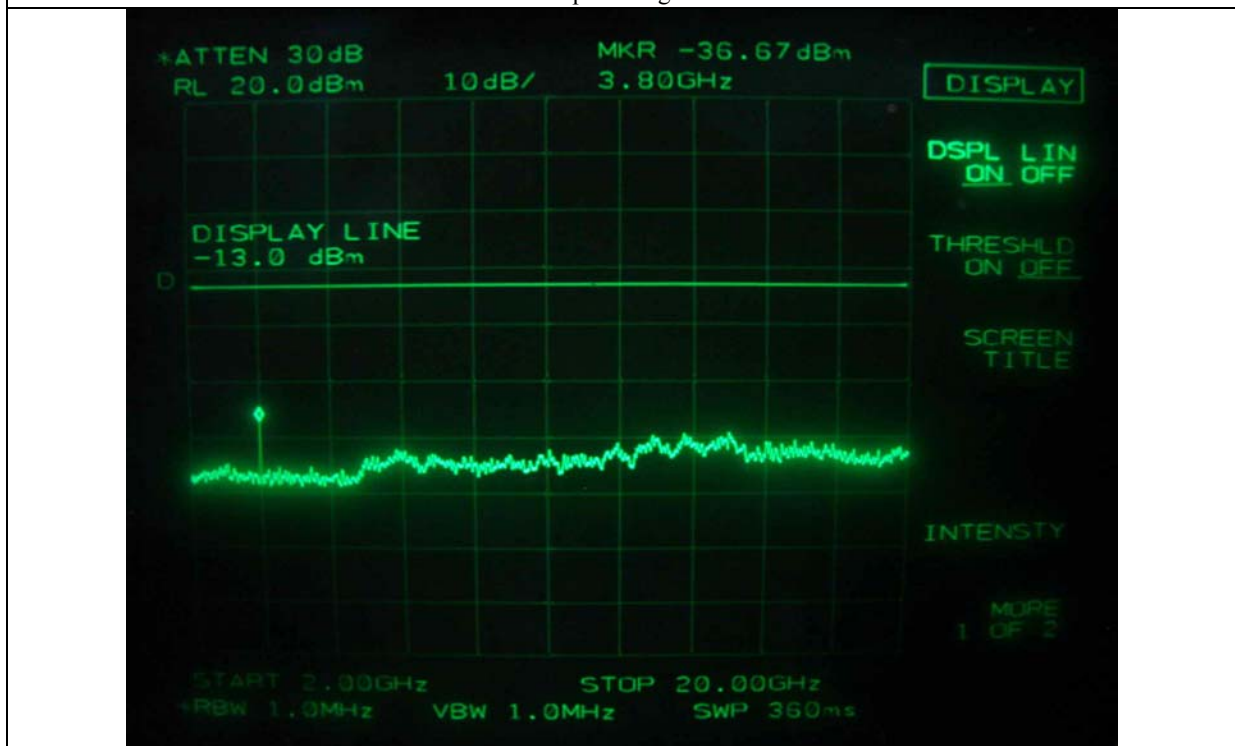


CDMA-Uplink-High Channel

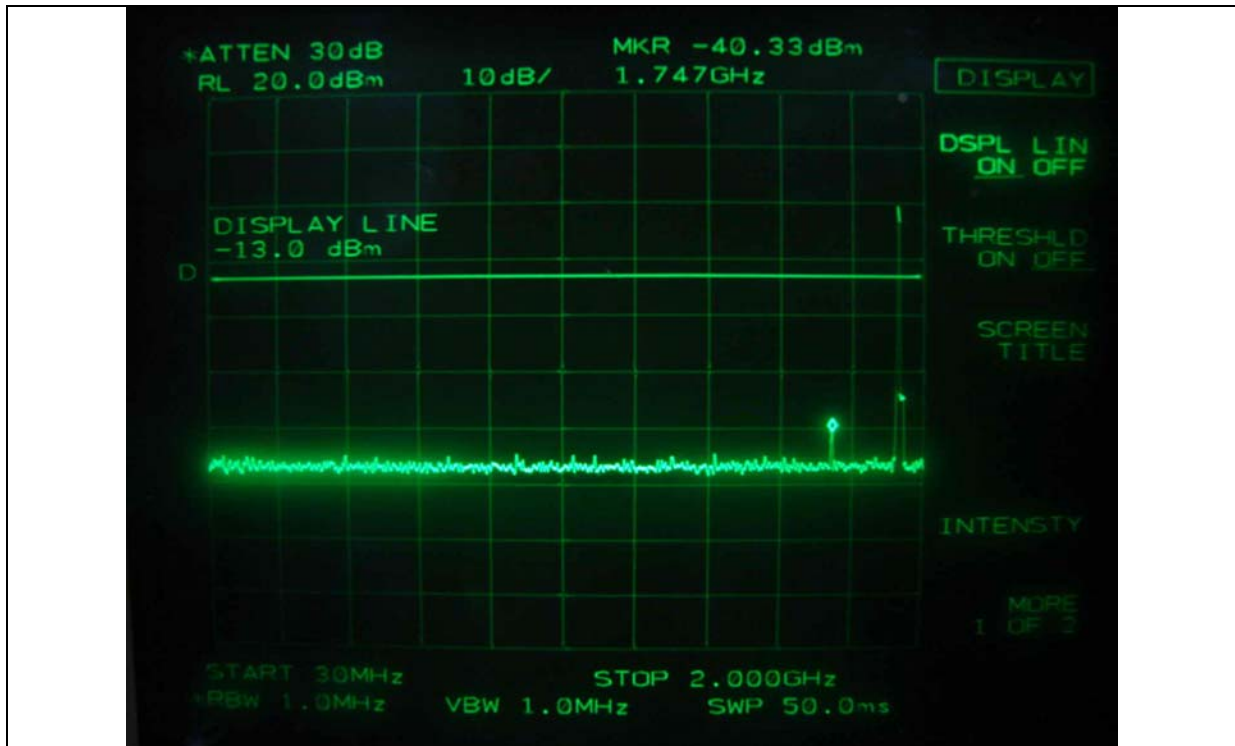


CDMA-Downlink-Low Channel

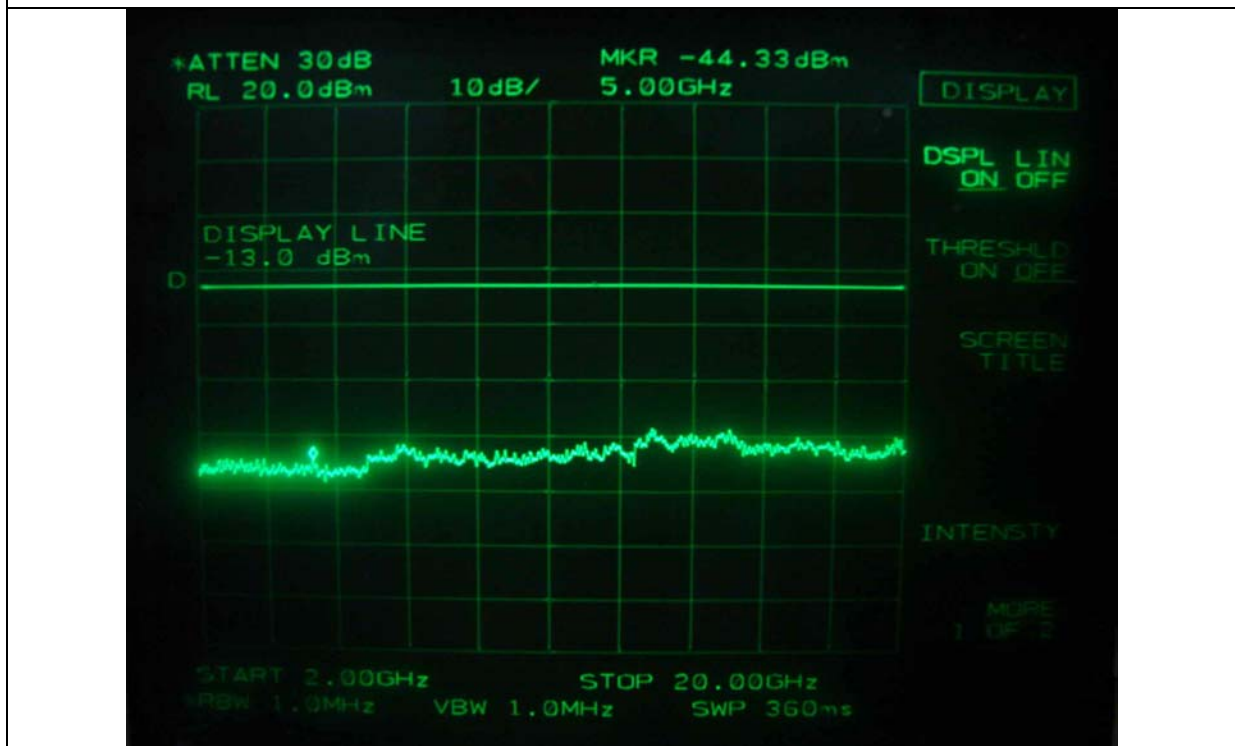


CDMA-Downlink-Low Channel

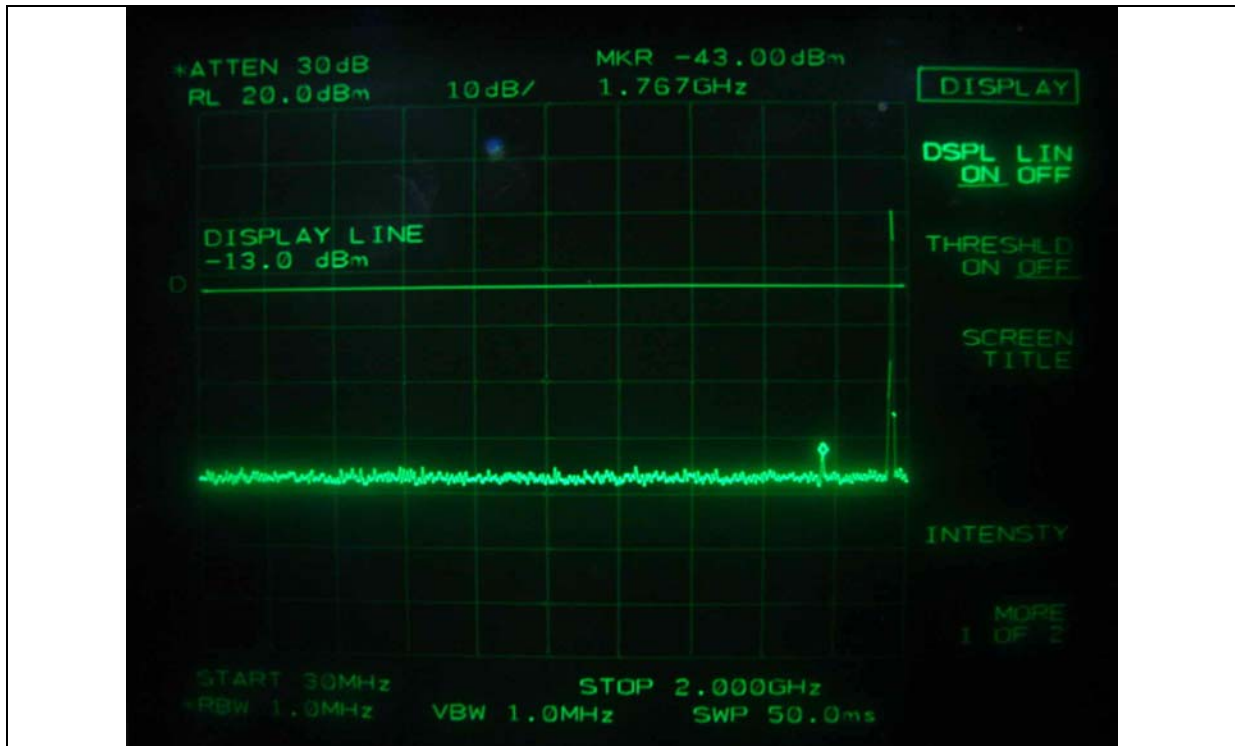


CDMA-Downlink-Middle Channel

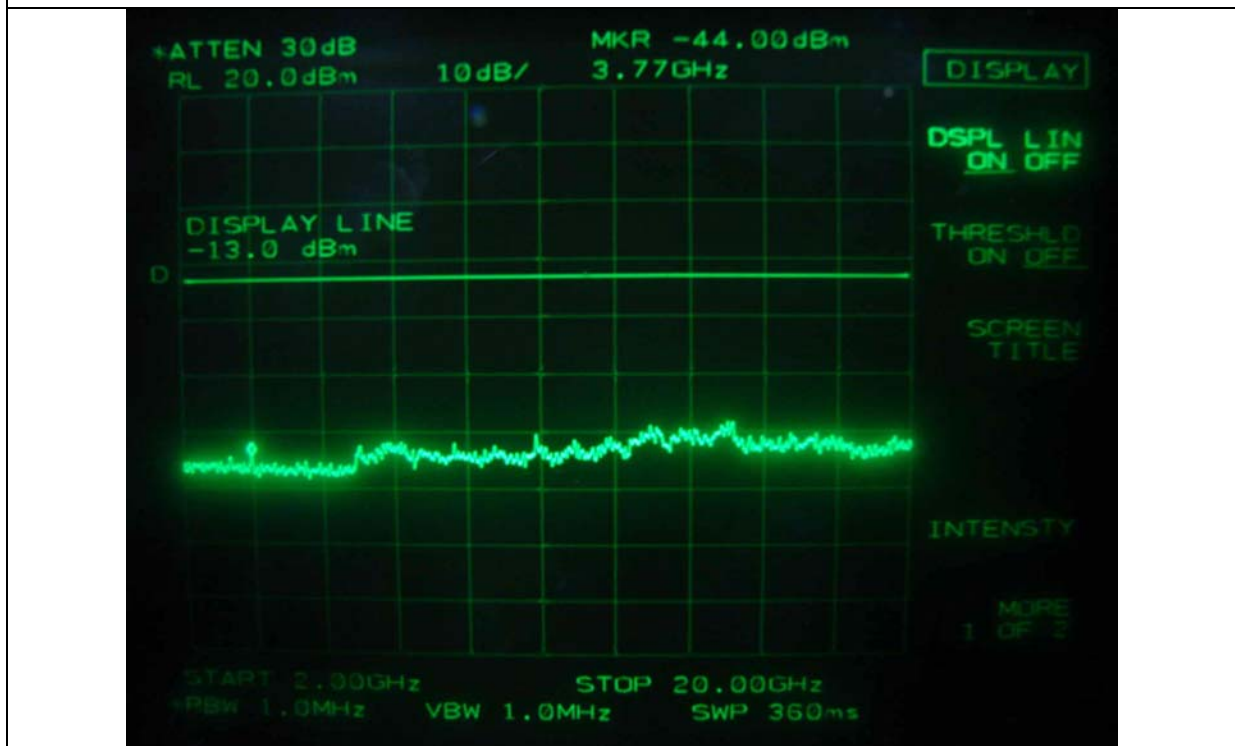

CDMA-Downlink-Middle Channel

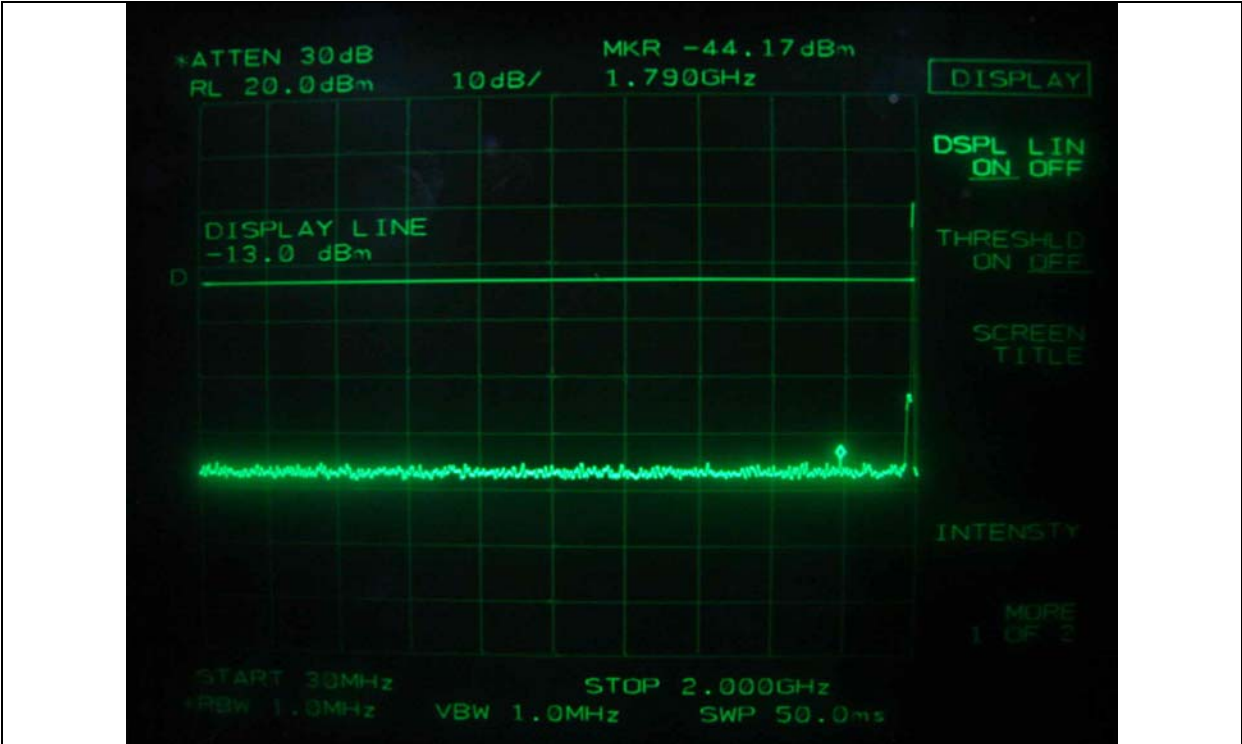

CDMA-Downlink-High Channel

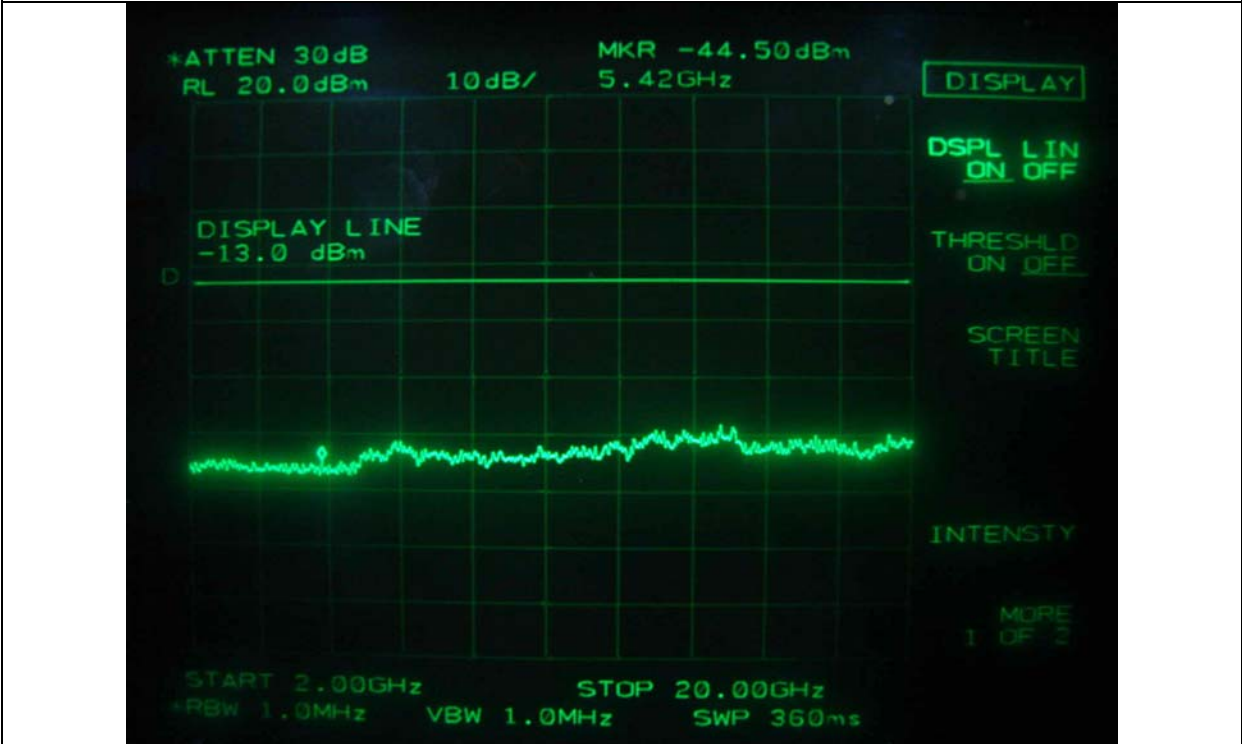

CDMA-Downlink-High Channel

10. FIELD STRENGTH OF SPURIOUS RADIATION

10.1 Operating environment

Temperature : 15 °C
Relative humidity : 45 %

10.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to up to 10th harmonic of the fundamental frequency was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. The test was performed by placing the EUT on 3-orthogonal axis. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

The maximum radiated emission was recorded and used as reference for the effective radiated power measurement. The EUT was then replaced by a tuned dipole antenna or Horn antenna and was oriented for vertical polarization and then the length was adjusted to correspond to the frequency of the transmitter. The substitution antenna was connected to a signal generator with a coaxial cable. The receiving antenna height was raised and lowered again through the specified range of height until maximum signal level is detected by the measuring receiver. The signal to the substitution antenna was adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the EUT radiated power measured, corrected for the change of input attenuation setting of the measuring receiver. The signal generator level was recorded and corrected by the power loss in the cable between the signal generator and substitution antenna and further corrected for the gain of the dipole antenna or horn antenna used relative to an ideal tuned dipole antenna. The measurement was repeated with the test antenna and the substitution antenna oriented for horizontal polarization. The measure of the effective radiated power is the larger of the two levels recorded.

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Dec. 21, 2006
■ - 85650A	Hewlett Packard	Quasi-Peak Adapter	3107A01542	June 20, 2006
■ - 8568B	Hewlett-Packard	Spectrum Analyzer	3109A05456	June 20, 2006
■ - 85685A	Hewlett-Packard	RF Preselector	3107A01264	June 20, 2006
■ - 8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 22, 2006
■ - 83051A	Agilent	Preamplifier	3950M00201	June 23, 2006
■ - 8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 22, 2006
■ - E4432B	Hewlett-Packard	Signal Generator	US38440950	June 22, 2006
■ - 83650L	Hewlett-Packard	Signal Generator	3844A00415	June 22, 2006
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	July 03, 2006
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	July 04, 2006

All test equipment used is calibrated on a regular basis.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-705, Korea
(Tel: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-860, Korea. (Tel: +82-31-765-8289, FAX: +82-31-766-2904)

10.4. Test data for radiated emission

10.4.1. Test data for Uplink Mode

- Test Date : March 30, 2007
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Operating Modulation : CDMA signal Transmitting Mode
- Measurement distance : 3m
- Result : PASSED BY -35.28 dB at Low Channel


Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Gain (dBi)	Ant. Pol. (H/V)	Dipole Gain (dB)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel									
1851.25	77.50	3.83	9.69	H	26.1	1.00	6.98		
	86.83	16.33		V			19.48		
3702.50	44.17	-56.60	11.66	H		1.50	-52.95	-13.00	-39.95
	47.00	-51.93		V			-48.28	-13.00	-35.28
Test Data for Middle Channel									
1877.50	76.84	3.51	9.80	H	26.1	1.00	6.66		
	87.00	16.00		V			19.15		
3755.00	42.83	-56.44	11.73	H		1.50	-52.79	-13.00	-39.79
	45.17	-53.60		V			-49.95	-13.00	-36.95
Test Data for High Channel									
1908.75	76.00	3.67	9.93	H	26.1	1.00	6.82		
	87.80	15.80		V			18.95		
3817.50	41.33	-57.77	11.82	H		1.50	-54.12	-13.00	-41.12
	42.83	-55.60		V			-51.95	-13.00	-38.95

Tabulated test data for Restricted Band

- Test Date : March 29, 2007
- Resolution bandwidth : 100 kHz
- Video bandwidth : 300 kHz
- Frequency range : 30MHz ~ 1000MHz
- Measurement distance : 3m

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
117.50	14.80	V	12.65	2.65	30.10	43.52	-13.42
125.00	13.50	V	13.35	2.65	29.50	43.52	-14.02
248.80	12.90	H	17.55	3.31	33.76	46.02	-12.26
335.60	15.40	H	15.46	4.17	35.03	46.02	-10.99
412.30	14.92	H	17.90	4.75	37.57	46.02	-8.45
661.00	10.50	H	21.41	6.17	38.08	46.02	-7.94

Tabulated test data for Radiated Electromagnetic Field



Tested by: Ki-Hong, Nam / Test Engineer

10.4.2. Test data for Downlink Mode

- Test Date : March 30, 2007
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Operating Modulation : CDMA Mode
- Measurement distance : 3m
- Result : PASSED BY -34.85 dB at Low Channel

Frequency (MHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Gain (dBi)	Ant. Pol. (H/V)	Dipole Gain (dB)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel									
1931.25	75.17	2.05	10.03	H	26.10	1.00	5.20		
	67.33	-3.64		V			-0.49		
3862.50	43.17	-57.88	11.88	H		1.50	-54.23	-13.00	-41.23
	47.50	-51.50		V			-47.85	-13.00	-34.85
Test Data for Middle Channel									
1957.50	76.30	2.63	10.14	H	26.10	1.00	5.78		
	67.50	-3.83		V			-0.68		
3915.00	42.38	-58.22	11.95	H		1.50	-54.57	-13.00	-41.57
	44.83	-53.17		V			-49.52	-13.00	-36.52
Test Data for High Channel									
1988.75	74.00	1.16	10.27	H	26.10	1.00	4.31		
	67.33	-4.50		V			-1.35		
3977.50	40.17	-62.01	12.04	H		1.50	-58.36	-13.00	-45.36
	42.00	-56.02		V			-52.37	-13.00	-39.37

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical,


Total = Generator Reading + Antenna Gain – Dipole Gain – Cable Loss

Margin = Total – Limit

- Test Date : March 29, 2007
- Resolution bandwidth : 100 kHz
- Video bandwidth : 300 kHz
- Frequency range : 30MHz ~ 1000MHz
- Measurement distance : 3m

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
117.00	14.50	V	12.59	2.64	29.73	43.52	-13.79
125.00	13.60	V	13.35	2.65	29.60	43.52	-13.92
248.80	13.00	H	17.55	3.31	33.86	46.02	-12.16
335.60	15.50	H	15.46	4.17	35.13	46.02	-10.89
412.30	14.83	H	17.90	4.75	37.48	46.02	-8.54
661.00	10.33	H	21.41	6.17	37.91	46.02	-8.11

Tabulated test data for Radiated Electromagnetic Field



Tested by: Ki-Hong, Nam / Test Engineer

11. MAXIMUM PERMISSIBLE EXPOSURE

11.1 RF Exposure Calculation

According to the FCC rule 1.1310 table 1B, the limit for the maximum permissible RF exposure for an uncontrolled environment is 1mW/cm².

The electric field generated for a 1mW/cm² exposure is calculated as follows:

$$E = \sqrt{(30 * P * G) / d}, \text{ and } S = E^2 / Z = E^2 / 377, \text{ because } 1\text{mW} / \text{cm}^2 = 10\text{W} / \text{m}^2$$

Where

S = Power density in mW/cm², Z = Impedance of free space, 377Ω

E = Electric field strength in Volts/m, G = Numeric antenna gain, and d = distance in meter

Combining equations and rearranging the terms to express the distance as a function of the remaining variable

$$d = \sqrt{(30 * P * G) / (377 * S)}$$

Changing to units of mW and cm, using P (mW) = P (W) / 1000, d (cm) = 100 * d (m)

$$d = 0.282 * \sqrt{(P * G) / S}$$

Where

d = distance in cm, P = Power in mW, G = Numeric antenna gain, and S = Power density in mW/cm²

11.2 Calculated MPE Safe Distance

According to above equation, the following result was obtained.

Peak Output Power		Antenna Gain		Safe Distance	Power Density (mW/cm ²)	FCC Limit
(dBm)	(mW)	Log	Linear	(cm)	@ 20cm Separation	(mW/cm ²)
18.0	63.09	7	5.01	5.01	0.018	1

According to above table, safe separation distance, $D = 0.282 * \sqrt{63.09 * 5.01} = 5.01 \text{ cm}$.

For getting power density in above table, following formula was used.

$$S = P * G / (4\pi * R^2)$$

Where:

S = Power Density,

P = Power input to the external antenna (Output power from the EUT antenna port (dBm) – cable loss (dB)),

G = Gain of Transmit Antenna (linear gain), R = Distance from Transmitting Antenna

12. FREQUENCY STABILITY WITH TEMPERATURE VARIATION

12.1 Operating environment

Temperature : 15 °C

Relative humidity : 45 %

12.2 Test set-up

The uplink side of the EUT was connected to a signal generator and the downlink side of the EUT was connected to a frequency counter. The signal generator was set to 1851.23MHz with an unmodulated signal. The downlink side of the EUT was connected to a signal generator and the uplink side of the EUT was connected to a frequency counter. The signal generator was set to 1931.23MHz with an unmodulated signal.

Turn EUT off and set chamber temperature to -30°C and then allow sufficient time (approximately 20 to 30 minutes after chamber reach the assigned temperature) for EUT to stabilize. Turn ON EUT and measure the EUT operating frequency and then turn off the EUT after the measurement. The temperature in the chamber was raised 10°C step from -30°C to +50°C. Repeat above method for frequency measurements every 10°C step and then record all measured frequencies on each temperature step.

12.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	July 22, 2006
■ - 53152A	HP	Frequency Counter	US39270295	Dec. 18, 2006
■ - EY-101	Tabai ESPEC Corp.	Chamber	5104390	N/A


All test equipment used is calibrated on a regular basis.

12.4 Test data

- Test Date : March 28, 2007

- Result : PASSED

Temperature (°C)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
-30	1851250000	1851249978	-0.0119	Within the Authorized Frequency block
-20		1851249979	-0.0113	
-10		1851249981	-0.0103	
0		1851249980	-0.0108	
10		1851249978	-0.0119	
20		1851249980	-0.0108	
30		1851249982	-0.0097	
40		1851249983	-0.0092	
50		1851249980	-0.0108	
-30	1931250000	1931249976	-0.0124	Within the Authorized Frequency block
-20		1931249978	-0.0114	
-10		1931249980	-0.0104	
0		1931249981	-0.0098	
10		1931249982	-0.0093	
20		1931249981	-0.0098	
30		1931249983	-0.0088	
40		1931249980	-0.0104	
50		1931249979	-0.0109	



Tested by: Ki-Hong, Nam / Test Engineer

13. FREQUENCY STABILITY WITH VOLTAGE VARIATION

13.1 Operating environment

Temperature : 15 °C

Relative humidity : 45 %

13.2 Test set-up

An external variable AC power supply was connected to the AC/DC Adapter of the EUT. The uplink side of the EUT was connected to a signal generator and the downlink side of the EUT was connected to a frequency counter. The signal generator was set to 1851.23MHz with an unmodulated signal. The downlink side of the EUT was connected to a signal generator and the uplink side of the EUT was connected to a frequency counter. The signal generator was set to 1931.23MHz with an unmodulated signal. The voltage of EUT set to 115% of the nominal value and then was reduced to 85% of nominal voltage. The output frequency was recorded at each step.

13.3 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	July 22, 2006
■ -	53152A	HP	Frequency Counter	US39270295	Dec. 18, 2006
■ -	2350A	HP	30 dB Attenuator Assembly	2350A03133	July 22, 2006
■ -	3033B	B&J TMI	DC Power Supply	2056036	N/A

All test equipment used is calibrated on a regular basis.

13.4 Test data

- Test Date : July 29, 2005
- Rated Supply Voltage : 110 Vac
- Result : PASSED BY 0.70 PPM at 93.5Vac on 1851.23MHz

Voltage (Vac)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
126.5(115%)	1851250000	1851249980	-0.0108	Within the Authorized Frequency block
110(100%)		1851249981	-0.0103	
93.5(85%)		1851249980	-0.0108	
126.5(115%)	1931250000	1931249981	-0.0098	
110(100%)		1931249980	-0.0104	
93.5(85%)		1931249979	-0.0109	



Tested by: Ki-Hong, Nam / Test Engineer

14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : 24 °C

Relative humidity : 35 %

14.2 Test set-up

The EUT was placed on a wooden table, 0.8 meters height above the floor. The EUT was connected to adaptor and the power line of adaptor was fed through a 50 ohm/ 50 uH + 5ohm Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

14.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	May 15, 2006
■ - NSLK 8126	Schwarzbeck	AMN	8126-404	July. 04, 2006
■ - 3825/2	EMCO	AMN	9109-1867	June 23, 2006

All test equipment used is calibrated on a regular basis.

14.4 Test data

14.4.1 Test data for Downlink Mode

- Test Date : March 30, 2007
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz
- Operating Mode : CDMA Downlink Mode
- Result : PASSED BY -6.80 dB at 0.59 MHz under Average Detector

Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.19	N	53.56	P	63.82	-10.26	42.86	53.82	-10.96
0.26	N	47.96	P	61.27	-13.31	39.72	51.27	-11.55
0.33	N	42.70	P	59.45	-16.75	35.55	49.45	-13.90
0.59	N	40.67	P	56.00	-15.33	39.20	46.00	-6.80
2.77	N	44.23	P	56.00	-11.77	37.54	46.00	-8.46
21.88	H	38.57	P	60.00	-21.43	36.42	50.00	-13.58


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector.


See next page for an overview sweep performed with peak and average detector.

기홍

Tested by: Ki-Hong, Nam / Test Engineer

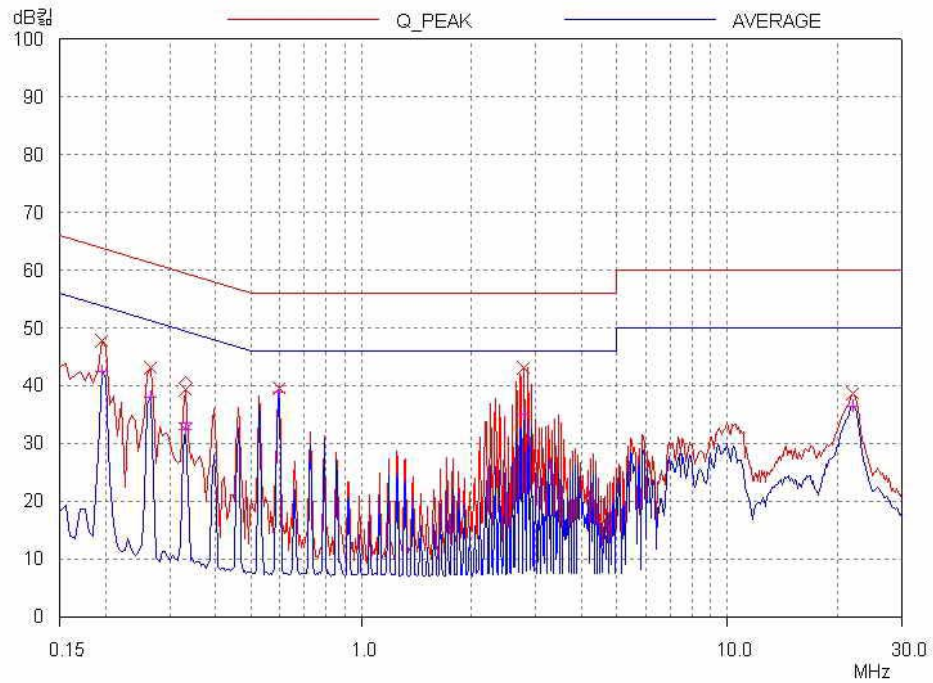

HOT LINE

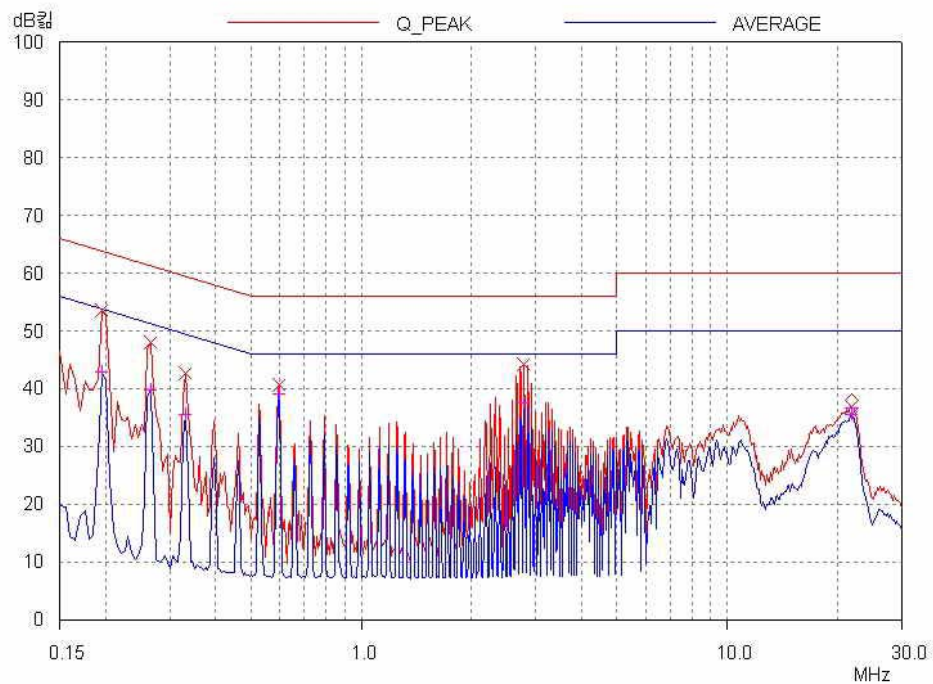

NEUTRAL LINE

14.4.2 Test data for Uplink Mode

- Test Date : March 30, 2007
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz
- Operating Mode : CDMA Uplink Mode
- Result : PASSED BY -6.80dB at 0.59MHz under Average Detector

Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.19	N	53.66	P	63.82	-10.16	42.69	53.82	-11.13
0.26	N	48.14	P	61.27	-13.13	40.34	51.27	-10.93
0.33	N	42.26	P	59.45	-17.19	34.77	49.45	-14.68
0.59	N	40.65	P	56.00	-15.35	39.20	46.00	-6.80
2.77	N	44.29	P	56.00	-11.71	37.14	46.00	-8.86
21.88	H	38.29	P	60.00	-21.71	36.48	50.00	-13.52


Line Conducted Emissions Tabulated Data

Remark : “H”: Hot Line, “N”: Neutral line, “P”: Peak detector.


See next page for an overview sweep performed with peak and average detector.

기홍

Tested by: Ki-Hong, Nam / Test Engineer

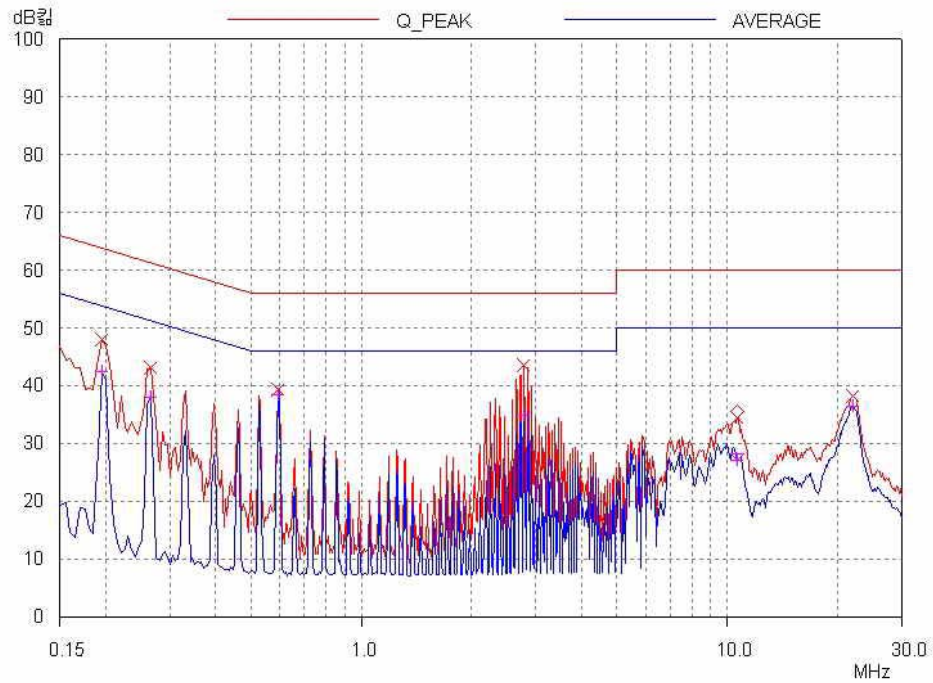

HOT LINE

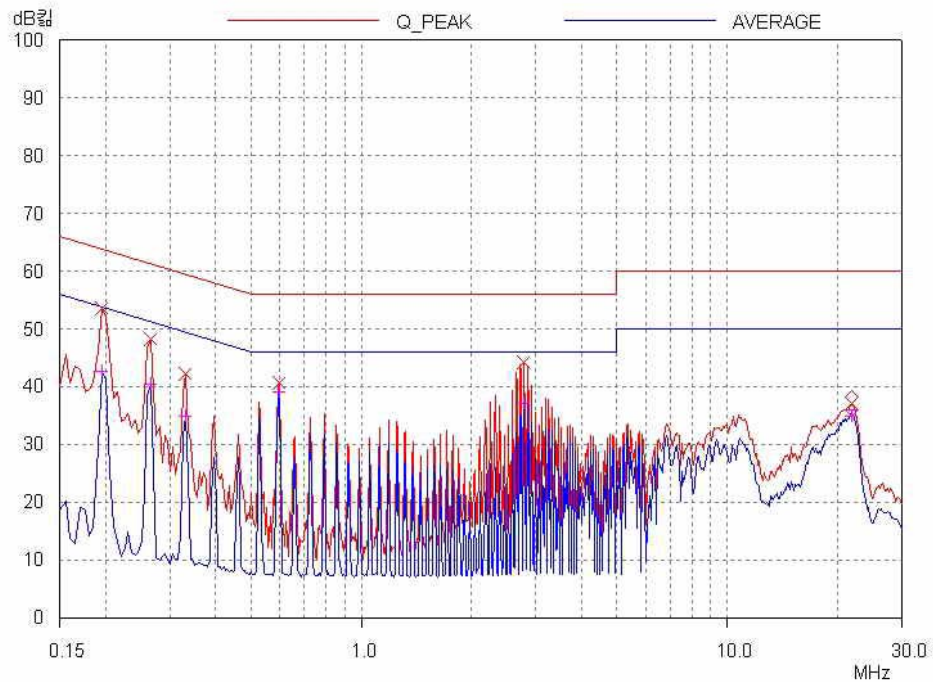

NEUTRAL LINE