


*FCC PART 15, SUBPART B and C
TEST REPORT**for*

ShootingPartner Pro

MODEL: PRO9160100

Prepared for
SHOOTING PARTNER, INC.
18525 NW ST. HELENS RD.
PORTLAND, OREGON 97231Prepared by: 

KYLE FUJIMOTO

Approved by: 

JAMES ROSS

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: SEPTEMBER 6, 2005

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	14	2	2	2	12	11	43

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. DESCRIPTION OF TEST CONFIGURATION	8
4.1 Description Of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. TEST PROCEDURES	13
7.1 Radiated Emissions (Spurious and Harmonics) Test	13
8. CONCLUSIONS	14

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of 3 Meter Radiated Test Site

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: ShootingPartner Pro
Model: PRO9160100
S/N: N/A

Product Description: See Expository Statement

Modifications: The EUT was modified in order to meet the specifications. Please see the list located in Appendix B of this test report.

Manufacturer: Shooting Partner, Inc.
18525 NW St. Helens Rd.
Portland, Oregon 97231

Test Dates: August 25 and 26, 2005

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.209 and 15.249

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.
2	Radiated RF Emissions, 10 kHz – 9.214 GHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.249.

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the ShootingPartner Pro Model: PRO9160100. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Shooting Partner, Inc.

Brian Montgomery President

Compatible Electronics, Inc.

Benigno Chavez Test Engineer

James Ross Test Engineer

Kyle Fujimoto Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to the initial test date of August 25, 2005.

2.5 Disposition of the Test Sample

The sample has not yet been returned to Shooting Partner, Inc. as of the date of this report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Model
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
TX	Transmit
RX	Receive
PCB	Printed Circuit Board

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The ShootingPartner Pro Model: PRO9160100 (EUT) was tested as a stand-alone device. The EUT was tested while it was continuously transmitting and in three orthogonal axis. The EUT has an antenna that is soldered to its PCB.

The final radiated data was taken in the mode above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

The EUT has no external cables.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID
ShootingPartner Pro (EUT)	SHOOTING PARTNER, INC.	PRO9160100	N/A	THZ-PRO9160100

5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Radiate Emissions Data Capture Program	Compatible Electronics	2.0	N/A	N/A	N/A
Spectrum Analyzer – Main Section	Hewlett Packard	8566B	3638A08784	June 10, 2005	1 Year
Spectrum Analyzer – Display Section	Hewlett Packard	85662A	3701A22279	June 10, 2005	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00424	June 11, 2005	1 Year
EMI Receiver	Rohde & Schwarz	ESIB40	100172	October 28, 2004	1 Year
Preamplifier	Com-Power	PA-103	1582	February 3, 2005	1 Year
Microwave Preamplifier	Com-Power	PA-122	25195	February 25, 2005	1 Year
Loop Antenna	Com-Power	AL-130	17089	September 3, 2004	1 Year
Biconical Antenna	Com Power	AB-900	15250	March 11, 2005	1 Year
Log Periodic Antenna	Com Power	AL-100	16247	August 22, 2005	1 Year
Horn Antenna	Antenna Research	DRG-118/A	1053	January 16, 2004	2 Year
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
Antenna Mast	EMCO	2090	9609-1176	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A
Computer	Hewlett Packard	D5251A 888	US74458128	N/A	N/A
Monitor	Hewlett Packard	D5258A	DK74889705	N/A	N/A

6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT is battery powered and was not grounded.

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com-Power Active Loop Antenna Model: AL-130 was used for frequencies from 9 kHz to 30 MHz, the Com-Power Preamplifier Model: PA-103 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies from 1 GHz to 9.214 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 9.214 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data. The final qualification data sheets are located in Appendix E.

8. CONCLUSIONS

The ShootingPartner Pro Model: PRO9160100 meets all of the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.249.



APPENDIX A***LABORATORY RECOGNITIONS***

LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.249 or FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

Modifications:

1. Change R10's position so it is from pin 2 of U7 to ground and also change R10's value to 18000 ohms.
2. Add a 1000 pF capacitor (C22) between pins 1 and 2 of U7.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

ShootingPartner Pro
Model: PRO9160100
S/N: N/A


There are no additional models covered under this report.



APPENDIX D***DIAGRAMS, CHARTS, AND PHOTOS***

FIGURE 1: PLOT MAP AND LAYOUT OF 3 METER RADIATED TEST SITE

OPEN LAND > 15 METERS

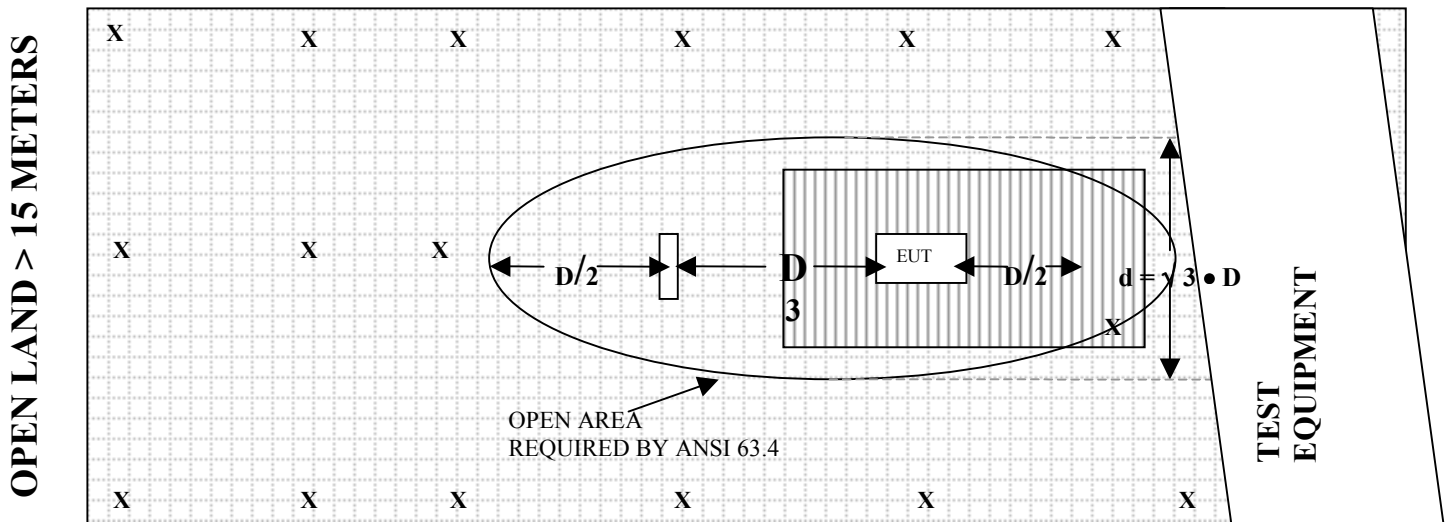

OPEN LAND > 15 METERS

X	= GROUND RODS		= GROUND SCREEN
D	= TEST DISTANCE (meters)		= WOOD COVER

COM-POWER AL-130**LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: SEPTEMBER 3, 2004

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-40.8	10.7
0.01	-40.9	10.6
0.02	-41.8	9.7
0.05	-42.0	9.5
0.07	-41.5	10.0
0.1	-41.7	9.8
0.2	-44.1	7.4
0.3	-41.6	9.9
0.5	-41.5	10.0
0.7	-41.4	10.1
1	-41.0	10.5
2	-40.6	10.9
3	-40.8	10.7
4	-41.0	10.5
5	-40.4	11.1
10	-40.7	10.8
15	-41.6	9.9
20	-41.3	10.2
25	-43.0	8.5
30	-42.6	8.9

COM-POWER AB-900

BICONICAL ANTENNA

S/N: 15250

CALIBRATION DATE: MARCH 11, 2005

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	10.90	120	13.10
35	10.90	125	12.40
40	10.90	140	11.90
45	10.30	150	11.80
50	11.40	160	13.30
60	10.40	175	15.40
70	7.40	180	14.60
80	6.20	200	15.70
90	8.20	250	16.50
100	10.10	300	19.20

COM-POWER AL-100

LOG PERIODIC ANTENNA

S/N: 16247

CALIBRATION DATE: AUGUST 22, 2005

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	12.70	700	19.72
400	13.19	800	20.59
500	14.99	900	21.10
600	15.95	1000	24.35

ANTENNA RESEARCH DRG-118/A**HORN ANTENNA**

S/N: 1053

CALIBRATION DATE: JANUARY 16, 2004

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.4	10.0	38.7
1.5	25.2	10.5	39.0
2.0	28.2	11.0	38.9
2.5	28.5	11.5	41.3
3.0	30.1	12.0	40.5
3.5	31.0	12.5	40.0
4.0	31.2	13.0	40.2
4.5	31.9	13.5	40.5
5.0	33.2	14.0	41.6
5.5	33.7	14.5	44.8
6.0	34.3	15.0	41.4
6.5	35.0	15.5	39.2
7.0	36.7	16.0	39.4
7.5	37.3	16.5	40.9
8.0	37.1	17.0	42.6
8.5	37.3	17.5	45.1
9.0	37.7	18.0	41.7
9.5	38.6		

COM-POWER PA-103**PREAMPLIFIER**

S/N: 1582

CALIBRATION DATE: FEBRUARY 3, 2005

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	33.2	300	33.0
40	33.0	350	32.8
50	33.1	400	32.8
60	33.0	450	32.8
70	33.2	500	32.5
80	33.2	550	32.5
90	33.1	600	32.4
100	33.2	650	32.4
125	33.1	700	32.3
150	33.0	750	32.2
175	33.0	800	32.2
200	33.0	850	32.4
225	33.0	900	31.8
250	33.0	950	32.3
275	32.9	1000	32.0

COM-POWER PA-122

MICROWAVE PREAMPLIFIER

S/N: 25195

CALIBRATION DATE: FEBRUARY 25, 2005

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	31.45	6.0	31.35
1.1	31.34	6.5	31.10
1.2	31.29	7.0	30.54
1.3	31.28	7.5	29.72
1.4	31.25	8.0	29.22
1.5	31.21	8.5	28.75
1.6	31.14	9.0	28.67
1.7	31.07	9.5	29.14
1.8	31.12	10.0	30.12
1.9	31.04	11.0	29.30
2.0	31.20	12.0	29.86
2.5	31.56	13.0	30.57
3.0	32.17	14.0	29.90
3.5	32.56	15.0	30.14
4.0	32.51	16.0	31.13
4.5	32.52	17.0	29.97
5.0	32.33	18.0	28.77
5.5	31.60		



FRONT VIEW

SHOOTING PARTNER, INC.

ShootingPartner Pro

Model: PRO9160100

FCC SUBPART B AND C – RADIATED EMISSIONS – 08-25-05

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

SHOOTING PARTNER, INC.

ShootingPartner Pro

Model: PRO9160100

FCC SUBPART B AND C – RADIATED EMISSIONS – 08-25-05

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



FRONT VIEW

SHOOTING PARTNER, INC.

ShootingPartner Pro

Model: PRO9160100

FCC SUBPART B AND C - RADIATED EMISSIONS – 08-25-05 and 08-26-05

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

SHOOTING PARTNER, INC.

ShootingPartner Pro

Model: PRO9160100

FCC SUBPART B AND C - RADIATED EMISSIONS – 08-25-05 and 08-26-05

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E

DATA SHEETS

RADIATED EMISSIONS

DATA SHEETS

FCC 15.249

Shooting Partner, Inc.
ShootingPartner Pro
Model: PRO9160100

Date: 08/25/05
Lab: A
Tested By: Kyle Fujimoto

R10 = 18000 Ohms

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
916.54	94.50	H	114	-19.5	Peak	2	90	Y-Axis
916.54	93.65	H	94	-0.35	QP	2	90	Horizontal
916.54	94.20	H	114	-19.8	Peak	1	90	X-Axis
916.54	93.22	H	94	-0.78	QP	1	90	Horizontal
916.54	88.50	H	114	-25.5	Peak	1	225	Z-Axis
916.54	87.55	H	94	-6.45	QP	1	225	Horizontal
916.54	88.40	V	114	-25.6	Peak	1	90	Y-Axis
916.54	87.63	V	94	-6.37	QP	1	90	Vertical
916.54	86.30	V	114	-27.7	Peak	1.25	90	X-Axis
916.54	84.37	V	94	-9.63	QP	1.25	90	Vertical
916.54	93.20	V	114	-20.8	Peak	1	90	Z-Axis
916.54	91.90	V	94	-2.1	QP	1	90	Vertical

FCC 15.249

Shooting Partner, Inc.
ShootingPartner Pro
Model: PRO9160100

Date: 08/25/05
Lab: B
Tested By: Kyle Fujimoto

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1833.08	46.22	H	74	-27.78	Peak	3.34	225	With R10
1833.08	44.92	H	54	-9.08	Avg	3.34	225	at 18000 ohms - Y-Axis
2749.62	47.17	H	74	-26.83	Peak	1.53	45	With R10
2749.62	45.87	H	54	-8.13	Avg	1.53	45	at 18000 ohms - Y-Axis
3666.16	52.55	H	74	-21.45	Peak	2.09	225	With R10
3666.16	51.25	H	54	-2.75	Avg	2.09	225	at 18000 ohms - Y-Axis
4582.7	47.62	H	74	-26.38	Peak	2.74	315	With R10
4582.7	46.32	H	54	-7.68	Avg	2.74	315	at 18000 ohms - Y-Axis
5499.24		H	74		Peak			No Emissions
5499.24		H	54		Avg			Detected
6415.78		H	74		Peak			No Emissions
6415.78		H	54		Avg			Detected
7332.32		H	74		Peak			No Emissions
7332.32		H	54		Avg			Detected
8248.86		H	74		Peak			No Emissions
8248.86		H	54		Avg			Detected
9165.4		H	74		Peak			No Emissions
9165.4		H	54		Avg			Detected

Y = EUT standing up long ways

FCC 15.249

Shooting Partner, Inc.
 ShootingPartner Pro
 Model: PRO9160100

Date: 08/25/05
 Lab: B
 Tested By: Kyle Fujimoto

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1833.08	53.52	V	74	-20.48	Peak	1.63	90	With R10
1833.08	52.22	V	54	-1.78	Avg	1.63	90	at 18000 ohms - Y-Axis
2749.62	50.00	V	74	-24	Peak	1.99	90	With R10
2749.62	48.70	V	54	-5.3	Avg	1.99	90	at 18000 ohms - Y-Axis
3666.16	54.92	V	74	-19.08	Peak	1.24	180	With R10
3666.16	53.62	V	54	-0.38	Avg	1.24	180	at 18000 ohms - Y-Axis
4582.7	47.40	V	74	-26.6	Peak	2.22	90	With R10
4582.7	46.10	V	54	-7.9	Avg	2.22	90	at 18000 ohms - Y-Axis
5499.24		V	74		Peak			No Emissions
5499.24		V	54		Avg			Detected
6415.78		V	74		Peak			No Emissions
6415.78		V	54		Avg			Detected
7332.32		V	74		Peak			No Emissions
7332.32		V	54		Avg			Detected
8248.86		V	74		Peak			No Emissions
8248.86		V	54		Avg			Detected
9165.4		V	74		Peak			No Emissions
9165.4		V	54		Avg			Detected

Y = EUT standing up long ways

FCC 15.249

Shooting Partner, Inc.
ShootingPartner Pro
Model: PRO9160100

Date: 08/25/05
Lab: B
Tested By: Kyle Fujimoto

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1833.08	50.66	H	74	-23.34	Peak	1.33	270	With R10
1833.08	49.36	H	54	-4.64	Avg	1.33	270	at 18000 ohms - X-Axis
2749.62	45.55	H	74	-28.45	Peak	1.31	225	With R10
2749.62	44.25	H	54	-9.75	Avg	1.31	225	at 18000 ohms - X-Axis
3666.16	45.89	H	74	-28.11	Peak	2.73	225	With R10
3666.16	44.59	H	54	-9.41	Avg	2.73	225	at 18000 ohms - X-Axis
4582.7	44.13	H	74	-29.87	Peak	1.57	225	With R10
4582.7	42.83	H	54	-11.17	Avg	1.57	225	at 18000 ohms - X-Axis
5499.24		H	74		Peak			No Emissions
5499.24		H	54		Avg			Detected
6415.78		H	74		Peak			No Emissions
6415.78		H	54		Avg			Detected
7332.32		H	74		Peak			No Emissions
7332.32		H	54		Avg			Detected
8248.86		H	74		Peak			No Emissions
8248.86		H	54		Avg			Detected
9165.4		H	74		Peak			No Emissions
9165.4		H	54		Avg			Detected

X = EUT laying flat on its back

FCC 15.249

Shooting Partner, Inc.
 ShootingPartner Pro
 Model: PRO9160100

Date: 08/25/05
 Lab: B
 Tested By: Kyle Fujimoto

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1833.08	49.69	V	74	-24.31	Peak	1.25	90	With R10
1833.08	48.39	V	54	-5.61	Avg	1.25	90	at 18000 ohms - X-Axis
2749.62	48.03	V	74	-25.97	Peak	2.44	90	With R10
2749.62	46.73	V	54	-7.27	Avg	2.44	90	at 18000 ohms - X-Axis
3666.16	49.71	V	74	-24.29	Peak	2.26	225	With R10
3666.16	48.41	V	54	-5.59	Avg	2.26	225	at 18000 ohms - X-Axis
4582.7	45.68	V	74	-28.32	Peak	1.29	45	With R10
4582.7	44.38	V	54	-9.62	Avg	1.29	45	at 18000 ohms - X-Axis
5499.24		V	74		Peak			No Emissions
5499.24		V	54		Avg			Detected
6415.78		V	74		Peak			No Emissions
6415.78		V	54		Avg			Detected
7332.32		V	74		Peak			No Emissions
7332.32		V	54		Avg			Detected
8248.86		V	74		Peak			No Emissions
8248.86		V	54		Avg			Detected
9165.4		V	74		Peak			No Emissions
9165.4		V	54		Avg			Detected

X = EUT laying flat on its back

FCC 15.249

Shooting Partner, Inc.
 ShootingPartner Pro
 Model: PRO9160100

Date: 08/25/05
 Lab: B
 Tested By: Kyle Fujimoto

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1833.08	51.71	H	74	-22.29	Peak	2.34	225	With R10
1833.08	50.41	H	54	-3.59	Avg	2.34	225	at 18000 ohms - Z-Axis
2749.62	48.12	H	74	-25.88	Peak	2.69	45	With R10
2749.62	46.82	H	54	-7.18	Avg	2.69	45	at 18000 ohms - Z-Axis
3666.16	48.66	H	74	-25.34	Peak	2.87	315	With R10
3666.16	47.36	H	54	-6.64	Avg	2.87	315	at 18000 ohms - Z-Axis
4582.7	45.58	H	74	-28.42	Peak	2.66	45	With R10
4582.7	44.28	H	54	-9.72	Avg	2.66	45	at 18000 ohms - Z-Axis
5499.24		H	74		Peak			No Emissions
5499.24		H	54		Avg			Detected
6415.78		H	74		Peak			No Emissions
6415.78		H	54		Avg			Detected
7332.32		H	74		Peak			No Emissions
7332.32		H	54		Avg			Detected
8248.86		H	74		Peak			No Emissions
8248.86		H	54		Avg			Detected
9165.4		H	74		Peak			No Emissions
9165.4		H	54		Avg			Detected

Z = EUT standing up on its wide end

FCC 15.249

Shooting Partner, Inc.
ShootingPartner Pro
Model: PRO9160100

Date: 08/25/05
Lab: B
Tested By: Kyle Fujimoto

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1833.08	48.81	V	74	-25.19	Peak	3.03	135	With R10
1833.08	47.51	V	54	-6.49	Avg	3.03	135	at 18000 ohms - Z-Axis
2749.62	45.00	V	74	-29	Peak	2.34	135	With R10
2749.62	43.70	V	54	-10.3	Avg	2.34	135	at 18000 ohms - Z-Axis
3666.16	51.16	V	74	-22.84	Peak	2.09	180	With R10
3666.16	49.86	V	54	-4.14	Avg	2.09	180	at 18000 ohms - Z-Axis
4582.7	46.10	V	74	-27.9	Peak	2.38	135	With R10
4582.7	44.80	V	54	-9.2	Avg	2.38	135	at 18000 ohms - Z-Axis
5499.24		V	74		Peak			No Emissions
5499.24		V	54		Avg			Detected
6415.78		V	74		Peak			No Emissions
6415.78		V	54		Avg			Detected
7332.32		V	74		Peak			No Emissions
7332.32		V	54		Avg			Detected
8248.86		V	74		Peak			No Emissions
8248.86		V	54		Avg			Detected
9165.4		V	74		Peak			No Emissions
9165.4		V	54		Avg			Detected

Z = EUT standing up on its wide end

Test Location : Compatible Electronics
Customer : Shooting Partner, Inc.
Manufacturer : Shooting Partner, Inc.
Eut name : ShootingPartner Pro
Model # : PRO9160100
Serial # : N/A
Specification : FCC B
Distance correction factor ($20 * \log(\text{test}/\text{spec})$) : 0.00
Test Mode : Qualification Scan - Spurious Emissions
Test Frequency Range: 10 kHz to 1 GHz
Vertical and Horizontal Antenna Polarizations
Test Engineer: James Ross

Page : 1/1
Date : 8/26/2005
Time : 9:56:35
Lab : A
Test Distance 3 Meters

Pol	Freq	Rdng	Cable	Ant	Amp	Cor'd	Limit	Delta
	MHz	dBuV	loss	factor	gain	rdg = R	= L	R-L
			dB	dB	dB	dBuV	dBuV/m	dB

No spurious emissions were detected in the above noted frequency range.
