



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands

Part 15, Subpart C, Section 15.249

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: Classroom Response System - Renaissance Responder  
Kind of Equipment: IEEE 802.15.4 transceiver  
Test Configuration: Tested at 3 vdc  
Model Number(s): RES-1001  
Model(s) Tested: RES-1001  
Serial Number(s): RES-1001.00002  
Date of Tests: September 6, 2005  
Test Conducted For: Renaissance Learning, Inc.  
2911 Peach Street  
Wisconsin Rapids, Wisconsin 54494

**NOTICE:** "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report. This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

SIGNATURE PAGE

Report By:

Aron C. Rowe  
Test Engineer  
EMC-001375-NE

Reviewed By:

William Stumpf  
OATS Manager

Approved By:

Brian Mattson  
General Manager

Company Official:

Renaissance Learning, Inc.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

## TABLE OF CONTENTS



i.	Cover Page .....	1
ii.	Signature Page .....	2
iii.	Table of Contents .....	3
iv.	NVLAP Certificate of Accreditation .....	4
v.	NVLAP Scope of Accreditation .....	5
1.0	Summary of Test Report .....	17
2.0	Introduction .....	17
3.0	Object .....	17
4.0	Test Set-Up .....	18
5.0	Test Equipment .....	19
6.0	Ambient Measurements .....	20
7.0	Description of Test Sample .....	21
8.0	Additional Description of Test Sample .....	22
9.0	Photo Information and Test Set-Up .....	23
10.0	Radiated Photos Taken During Testing .....	24
11.0	Results of Tests .....	27
12.0	Conclusion .....	27
	TABLE 1 – EQUIPMENT LIST .....	28
	Appendix A – Electric Field Radiated Emissions Test .....	30
1.0	Conducted Emission Measurements .....	31
2.0	Band Edge and Restrict Band Compliance .....	32
2.0	Data and Graph(s) taken showing the Band Edge and Restrict Band Compliance .....	33
3.0	Field Strength of Spurious Emission Measurements .....	38
3.0	Radiated Data and Graph(s) taken for Fundamental Emission Measurements .....	40
3.0	Radiated Data and Graph(s) taken for Field Strength Spurious Emission Measurements .....	44



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

United States Department of Commerce  
National Institute of Standards and Technology

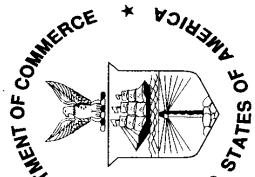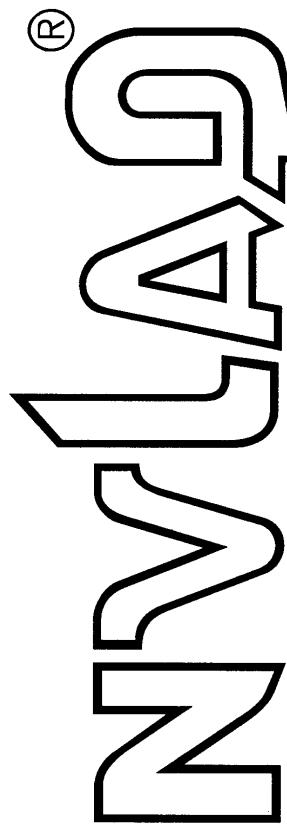

Certificate of Accreditation

ISO/IEC 17025:1999  
ISO 9002:1994

D.L.S. ELECTRONIC SYSTEMS, INC.  
WHEELING, IL

is recognized by the National Voluntary Laboratory Accreditation Program  
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,  
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.  
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

September 30, 2005

Effective through

For the National Institute of Standards and Technology  
NVLAP Lab Code: 100276-0

NVLAP-01C (06-01)



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

<p>National Institute of Standards and Technology</p> <p><b>NVLAP</b><sup>®</sup></p> <p>National Voluntary Laboratory Accreditation Program</p> <hr/> <p>ISO/IEC 17025:1999 ISO 9002:1994</p> <h2>Scope of Accreditation</h2> <hr/>									
<p><b>ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS</b></p> <p><b>NVLAP LAB CODE 100276-0</b></p> <p><b>D.L.S. ELECTRONIC SYSTEMS, INC.</b> 1250 Peterson Drive Wheeling, IL 60090-6454 Mr. Brian J. Mattson Phone: 847-537-6400 Fax: 847-537-6488 E-Mail: bmattson@dlsemc.com URL: <a href="http://www.dlsemc.com">http://www.dlsemc.com</a></p> <p><b>NVLAP Code Designation / Description</b></p> <p><b>Emissions Test Methods:</b></p> <table><tbody><tr><td>12/160D21</td><td>RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy</td></tr><tr><td>12/300220a</td><td>EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods</td></tr><tr><td>12/300386a</td><td>EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements</td></tr><tr><td>12/C63.17</td><td>ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices</td></tr></tbody></table> <p><i>[Signature]</i></p> <p>September 30, 2005</p> <hr/> <p>Effective through</p> <hr/> <p>For the National Institute of Standards and Technology</p>		12/160D21	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy	12/300220a	EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods	12/300386a	EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements	12/C63.17	ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
12/160D21	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy								
12/300220a	EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods								
12/300386a	EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements								
12/C63.17	ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices								


NVLAP-01S (06-01)



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology

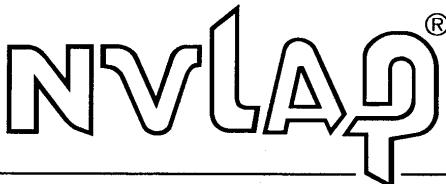

National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 2 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

**NVLAP Code      Designation / Description**

12/C6317a	ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
12/CIS11	IEC/CISPR 11 + A1 (1997), EN 55011 (1998), AS/NZS CISPR 11 (2002), and CNS 13803 (1997): Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific, and Medical Radio-Frequency Equipment
12/CIS13	IEC/CISPR 13 (2001-04), EN 55013 (2001), AS/NZS CISPR 13 (2003), and CNS 13439 (2001): Sound and television broadcast receivers and associated equipment - Radio disturbance characteristics - Limits and methods of measurement
12/CIS14	CISPR 14-1 (March 30, 2000): Limits and Methods of Measurement of Radio interference Characteristics of Household Electrical Appliances, Portable Tools and Similar Electrical Apparatus - Part 1: Emissions
12/CIS14a	EN 55014-1 (1993), A1 (1997), A2 (1999):
12/CIS14d	IEC/CISPR 14-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emissions
12/CIS14e	EN 55014-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission

September 30, 2005

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

<i>National Institute of Standards and Technology</i>	<b>NVLAP</b> <sup>®</sup>	<i>National Voluntary Laboratory Accreditation Program</i>
<b>Scope of Accreditation</b>		 Page: 3 of 12
<b>ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS</b>		<b>NVLAP LAB CODE 100276-0</b>
<b>D.L.S. ELECTRONIC SYSTEMS, INC.</b>		
<b>NVLAP Code      Designation / Description</b>		
12/CIS14f	AS/NZS 1044 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission	
12/CIS14g	CNS 13783-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission	
12/CIS15	IEC/CISPR 15 (2000) + A1 (2001): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment	
12/CIS15a	AS/NZS CISPR 15 (2002): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment	
12/CIS15b	CNS 13439 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment	
12/CIS15c	EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment	
12/CIS22	IEC/CISPR 22 (1997) & EN 55022 (1998) + A1(2000): Limits and methods of measurement of radio disturbance characteristics of information technology equipment	
12/CIS22a	IEC/CISPR 22 (1993) and EN 55022 (1994): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)	
September 30, 2005		
Effective through		<i>For the National Institute of Standards and Technology</i>


NVLAP-01S (06-01)



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology

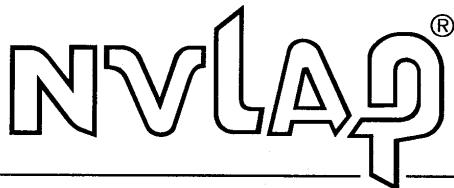

National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 4 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

#### D.L.S. ELECTRONIC SYSTEMS, INC.

##### NVLAP Code Designation / Description

12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A)
12/EM03	IEC 61000-3-3(1995); EN 61000-3-3(1995); AS/NZS 2279.3(1995): EMC - Part 3: Limits - Section 3. Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current up to 16A
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)
12/FCC15b	ANSI C63.4 (2001) with FCC Method 47 CFR Part 15, Subpart B: Unintentional Radiators
12/FCC15c	ANSI C63.4 (2001) with FCC Method 47 CFR Part 15, Subpart C: Intentional Radiators
12/FCC15d	ANSI C63.4(2001) with FCC Method 47 CFR Part 15, Subpart D: Unlicensed Personal Communications Service Devices

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 5 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

#### NVLAP Code Designation / Description

12/FCC15e	ANSI C63.4 (2001) with FCC Method 47 CFR Part 15, Subpart E: Unlicensed National Information Infrastructure Service Devices
12/T51	AS/NZS CISPR 22 (2002) and AS/NZS 3548 (1997): Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment
12/VCCIa	Agreement of Voluntary Control Council for Interference by Information Technology Equipment - Technical Requirements: V-3/02.04

#### Immunity Test Methods:

12/1089a	GR-1089-CORE, Issue 3, October 2002: Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment (sections 2, 3.3, and 3.5)
12/160D16	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 16 - Power Input
12/160D17	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 17 - Voltage Spike
12/160D18	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 18 - Audio Frequency Conducted Susceptibility - Power Inputs

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 6 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

**NVLAP Code      Designation / Description**

12/160D19	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 19 - Induced Signal Susceptibility
12/160D20	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 20 - Radio Frequency Susceptibility (Radiated and Conducted)
12/160D22	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 22 - Lightning Induced Transient Susceptibility
12/160D25	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 25 - Electrostatic Discharge (ESD)
12/I01	IEC 61000-4-2, Ed. 2.1 (2001), A1, A2; EN 61000-4-2: Electrostatic Discharge Immunity Test
12/I02	IEC 61000-4-3, Ed. 2.0 (2002-03); EN 61000-4-3 (2002): Radiated Radio-Frequency Electromagnetic Field Immunity Test
12/I03	IEC 61000-4-4(1995), A1(2000), A2(2001); EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical Fast Transient/Burst Immunity Test
12/I04	IEC 61000-4-5, Ed. 1.1 (2001-04); EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test

September 30, 2005

Effective through

For the National Institute of Standards and Technology

NVLAP-01S (06-01)



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 7 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

#### NVLAP Code Designation / Description

12/I05	IEC 61000-4-6, Ed. 2.0 (2003-05); EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields
12/I06	IEC 61000-4-8, Ed. 1.1 (2001); EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test
12/I07	IEC 61000-4-11, Ed. 1.1 (2001-03); EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests
12/J111324	SAE J1113/24: Immunity to radiated electromagnetic fields; 10 kHz to 200 MHz - Crawford TEM cell and 10 kHz to 5 GHz - Wideband TEM cell
12/J111341	SAE J1113/41 (1995-07): Limits and methods of measurement of radio disturbance characteristics of components and modules for the protection of receivers used on board vehicles

#### Radio Test Methods

12/RSS119	RSS-119, Issue 6 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
12/RSS123	RSS-123, Issue 1, Rev. 2 (November 6, 1999): Low Power Licensed Radiocommunication Devices

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60009

<p><b>National Institute of Standards and Technology</b></p> <p><b>NVLAP</b><sup>®</sup></p> <p><b>National Voluntary Laboratory Accreditation Program</b></p>	
<p>ISO/IEC 17025:1999 ISO 9002:1994</p>	<p><b>Scope of Accreditation</b></p>
<p> Page: 8 of 12</p>	
<p><b>ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS</b></p>	
<p><b>D.L.S. ELECTRONIC SYSTEMS, INC.</b></p>	
<p><b>NVLAP Code      Designation / Description</b></p>	
<p>12/RSS125      RSS-125 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 1.705 to 50.0 MHz, Primarily Amplitude Modulated</p>	
<p>12/RSS131      RSS-131, Issue 2 (July 2003): Zone Enhancers for the Land Mobile Service</p>	
<p>12/RSS132      RSS-132, Issue 1 (August 2002): 800 MHz Cellular Telephones Employing New Technologies</p>	
<p>12/RSS133      RSS-133, Issue 2, Rev. 1 (November 6, 1999): 2GHz Personal Communications Services</p>	
<p>12/RSS134      RSS-134, Issue 1, Rev. 1 (March 25, 2000): 900 MHz Narrowband Personal Communication Service</p>	
<p>12/RSS135      RSS-135, Issue 1 (October 26, 1996): Digital Scanner Receivers</p>	
<p>12/RSS136      RSS-136, Issue 5 (October 2002): Land and Mobile Station Radiotelephone Transmitters and Receivers Operating in the 26.960 - 27.410 MHz General Radio Service Band</p>	
<p>12/RSS137      RSS-137, Issue 1, Rev. 1 (September 25, 1999): Location and Monitoring Service (902 - 928 MHz)</p>	
<p>12/RSS139      RSS-139, Issue 1 (February 5, 2000): Licensed Radiocommunications Devices in the Band 2400 - 2483.5 MHz</p>	
<p>September 30, 2005</p>	
<p>Effective through</p>	
<p>For the National Institute of Standards and Technology</p>	

NVLAP-01S (06-01)



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

<p>National Institute of Standards and Technology <b>NVLAP</b><sup>®</sup> National Voluntary Laboratory Accreditation Program</p> <hr/>																	
ISO/IEC 17025:1999 ISO 9002:1994	<b>Scope of Accreditation</b>																
<hr/> <p>ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS</p> <p>D.L.S. ELECTRONIC SYSTEMS, INC.</p> <p><b>NVLAP Code      Designation / Description</b></p> <table><tbody><tr><td>12/RSS141</td><td>RSS-141, Issue 1 (July 2003): Aeronautical Radiocommunication Equipment in the Frequency Band 117.975 - 137 MHz</td></tr><tr><td>12/RSS142</td><td>RSS-142, Issue 2 (August 2002): Narrowband Multipoint Communication Systems in the 1,427 - 1,430 MHz and 1,493.5 - 1,496.5 MHz Bands</td></tr><tr><td>12/RSS170</td><td>RSS-170, Issue 1, Rev. 1 (November 6, 1999): Satellite Mobile Earth Stations</td></tr><tr><td>12/RSS191</td><td>RSS-191, Issue 2 (August 2002): Local Multipoint Communication Systems in the 28 GHz Band; Point-to-Point and Point-to-Multipoint Broadband Communication Systems in the 24 GHz and 38 GHz Bands</td></tr><tr><td>12/RSS192</td><td>RSS-192, Issue 1 (November 6, 1999): Fixed Wireless Access Systems in the Band 3400 - 3700 MHz</td></tr><tr><td>12/RSS193</td><td>RSS-193, Issue 1 (July 2003): Multipoint and Point-to-Point Communication Systems (MCS) in the Fixed Service Operating in the 2,150 - 2,160 MHz, 2,500 - 2,596 MHz and 2,686 - 2,690 MHz Bands</td></tr><tr><td>12/RSS210</td><td>RSS-210, Issue 5 (November 2001): Low Power Licence-Exempt Radiocommunication Devices</td></tr><tr><td>12/RSS212</td><td>RSS-212, Issue 1 (February 27, 1999): Test Facilities and Test Methods for Radio Equipment</td></tr></tbody></table> <p><b>N. R. M. L.</b></p> <hr/> <p>September 30, 2005</p> <p>Effective through</p> <p>For the National Institute of Standards and Technology</p> <hr/> <p>NVLAP-01S (06-01)</p>		12/RSS141	RSS-141, Issue 1 (July 2003): Aeronautical Radiocommunication Equipment in the Frequency Band 117.975 - 137 MHz	12/RSS142	RSS-142, Issue 2 (August 2002): Narrowband Multipoint Communication Systems in the 1,427 - 1,430 MHz and 1,493.5 - 1,496.5 MHz Bands	12/RSS170	RSS-170, Issue 1, Rev. 1 (November 6, 1999): Satellite Mobile Earth Stations	12/RSS191	RSS-191, Issue 2 (August 2002): Local Multipoint Communication Systems in the 28 GHz Band; Point-to-Point and Point-to-Multipoint Broadband Communication Systems in the 24 GHz and 38 GHz Bands	12/RSS192	RSS-192, Issue 1 (November 6, 1999): Fixed Wireless Access Systems in the Band 3400 - 3700 MHz	12/RSS193	RSS-193, Issue 1 (July 2003): Multipoint and Point-to-Point Communication Systems (MCS) in the Fixed Service Operating in the 2,150 - 2,160 MHz, 2,500 - 2,596 MHz and 2,686 - 2,690 MHz Bands	12/RSS210	RSS-210, Issue 5 (November 2001): Low Power Licence-Exempt Radiocommunication Devices	12/RSS212	RSS-212, Issue 1 (February 27, 1999): Test Facilities and Test Methods for Radio Equipment
12/RSS141	RSS-141, Issue 1 (July 2003): Aeronautical Radiocommunication Equipment in the Frequency Band 117.975 - 137 MHz																
12/RSS142	RSS-142, Issue 2 (August 2002): Narrowband Multipoint Communication Systems in the 1,427 - 1,430 MHz and 1,493.5 - 1,496.5 MHz Bands																
12/RSS170	RSS-170, Issue 1, Rev. 1 (November 6, 1999): Satellite Mobile Earth Stations																
12/RSS191	RSS-191, Issue 2 (August 2002): Local Multipoint Communication Systems in the 28 GHz Band; Point-to-Point and Point-to-Multipoint Broadband Communication Systems in the 24 GHz and 38 GHz Bands																
12/RSS192	RSS-192, Issue 1 (November 6, 1999): Fixed Wireless Access Systems in the Band 3400 - 3700 MHz																
12/RSS193	RSS-193, Issue 1 (July 2003): Multipoint and Point-to-Point Communication Systems (MCS) in the Fixed Service Operating in the 2,150 - 2,160 MHz, 2,500 - 2,596 MHz and 2,686 - 2,690 MHz Bands																
12/RSS210	RSS-210, Issue 5 (November 2001): Low Power Licence-Exempt Radiocommunication Devices																
12/RSS212	RSS-212, Issue 1 (February 27, 1999): Test Facilities and Test Methods for Radio Equipment																



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 10 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

#### NVLAP Code Designation / Description

12/RSS213 RSS-213, Issue 1 (April 24, 1999): 2 GHz Licence-Exempt Personal Communications Service Devices (PCS)

12/RSS215 RSS-215, Issue 1 (November 6, 1999): Analogue Scanner Receivers

#### Telecommunications Test Methods:

12/FCC2a2 TIA/EIA 603A (2001) with 47 CFR Part 2: Public Mobile Services in 47 CFR Part 22

12/FCC2b2 TIA/EIA 603A (2001) with 47 CFR Part 2: Private Land Mobile Radio Services in 47 CFR Part 90

12/FCC2d1 TIA/EIA 603A (2001) with 47 CFR Part 2: Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services in 47 CFR Part 74

12/FCC2e1 TIA/EIA 603A (2001) with 47 CFR Part 2: International Fixed Public Radiocommunication Services in 47 CFR Part 23

12/CIS15c EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

National Institute  
of Standards and Technology



National Voluntary  
Laboratory Accreditation Program

ISO/IEC 17025:1999  
ISO 9002:1994

## Scope of Accreditation



Page: 11 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

#### NVLAP Code Designation / Description

##### MIL-STD-462 : Conducted Emissions:

- 12/A13 MIL-STD-462 Version D Method CE101
- 12/A14 MIL-STD-462 Version D Method CE102
- 12/A16 MIL-STD-461 Version E Method CE101
- 12/A17 MIL-STD-461 Version E Method CE102
- 12/A18 MIL-STD-461 Version E Method CE106

##### MIL-STD-462 : Conducted Susceptibility:

- 12/B12 MIL-STD-462 Version D Method CS101
- 12/B13 MIL-STD-462 Version D Method CS103
- 12/B25 MIL-STD-461 Version E Method CS114
- 12/B26 MIL-STD-461 Version E Method CS115
- 12/B27 MIL-STD-461 Version E Method CS116

September 30, 2005

Effective through


For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

ISO/IEC 17025:1999  
ISO 9002:1994

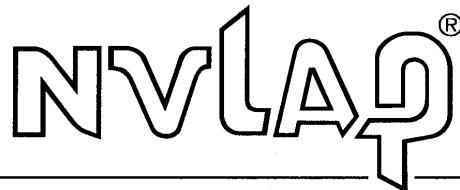

National Voluntary  
Laboratory Accreditation Program

## Scope of Accreditation



Page: 12 of 12

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

D.L.S. ELECTRONIC SYSTEMS, INC.

#### NVLAP Code Designation / Description

##### MIL-STD-462 : Radiated Emissions:

12/D04	MIL-STD-462 Version D Method RE101
12/D05	MIL-STD-462 Version D Method RE102
12/D06	MIL-STD-462 Version D Method RE103

##### MIL-STD-462 : Radiated Susceptibility:

12/E08	MIL-STD-462 Version D Method RS101
12/E09	MIL-STD-462 Version D Method RS103

September 30, 2005

Effective through

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

## 1.0 SUMMARY OF TEST REPORT

It was found that the Classroom Response System - Renaissance Responder, Model Number(s) RES-1001, "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Classroom Response System - Renaissance Responder is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.

This test report relates only to the items tested and contains the following number of pages.

Text: 68

## 2.0 INTRODUCTION

On September 6, 2005, a series of radio frequency interference measurements was performed on Classroom Response System - Renaissance Responder, Model Number(s) RES-1001, Serial Number: RES-1001.00002. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

## 3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.35(b), 15.37(d), 15.209 & 15.249 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24-24.25 GHz.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

#### 4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b). The conducted tests were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the American National Standards Institute, ANSI C63.4-2003, Section 4, (Figure 2).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

## 5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

## 6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 6009

## 7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

### 7.1 Description:

The device will be used in a classroom environment as a "Student Response System". In essence, it will act like a remote control and will send responses to a host and receive questions from the host. The device uses an IEEE 802.15.4 radio (CC2420, manufactured by Chipcon - [www.chipcon.com](http://www.chipcon.com)).

### 7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

RES-1001: Length: 15 cm x Width: 6.6 cm x Height: 2 cm

### 7.3 LINE FILTER USED:

NA

### 7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

NA

Clock Frequencies:

RES-1001: 0.032768, 16 MHz

### 7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. Responder PCB

PN: PCB-0001 Rev. 6



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:  
(See also Paragraph 7.0)

1: There were no changes made at D.L.S. Electronic Systems, Inc.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: \_\_\_\_\_  
Signature

\_\_\_\_\_

Title

For: \_\_\_\_\_  
Company

\_\_\_\_\_

Date



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

**1250 Peterson Dr., Wheeling, IL 60090**

#### **9.0 PHOTO INFORMATION AND TEST SET-UP**

Item 0 Classroom Response System - Renaissance Responder  
Model Number: RES-1001 Serial Number: RES-1001.00002



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

#### 10.0 RADIATED PHOTOS TAKEN DURING TESTING





Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

#### 10.0 RADIATED PHOTOS TAKEN DURING TESTING: (CON'T)






Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

#### 10.0 RADIATED PHOTOS TAKEN DURING TESTING: (CON'T)

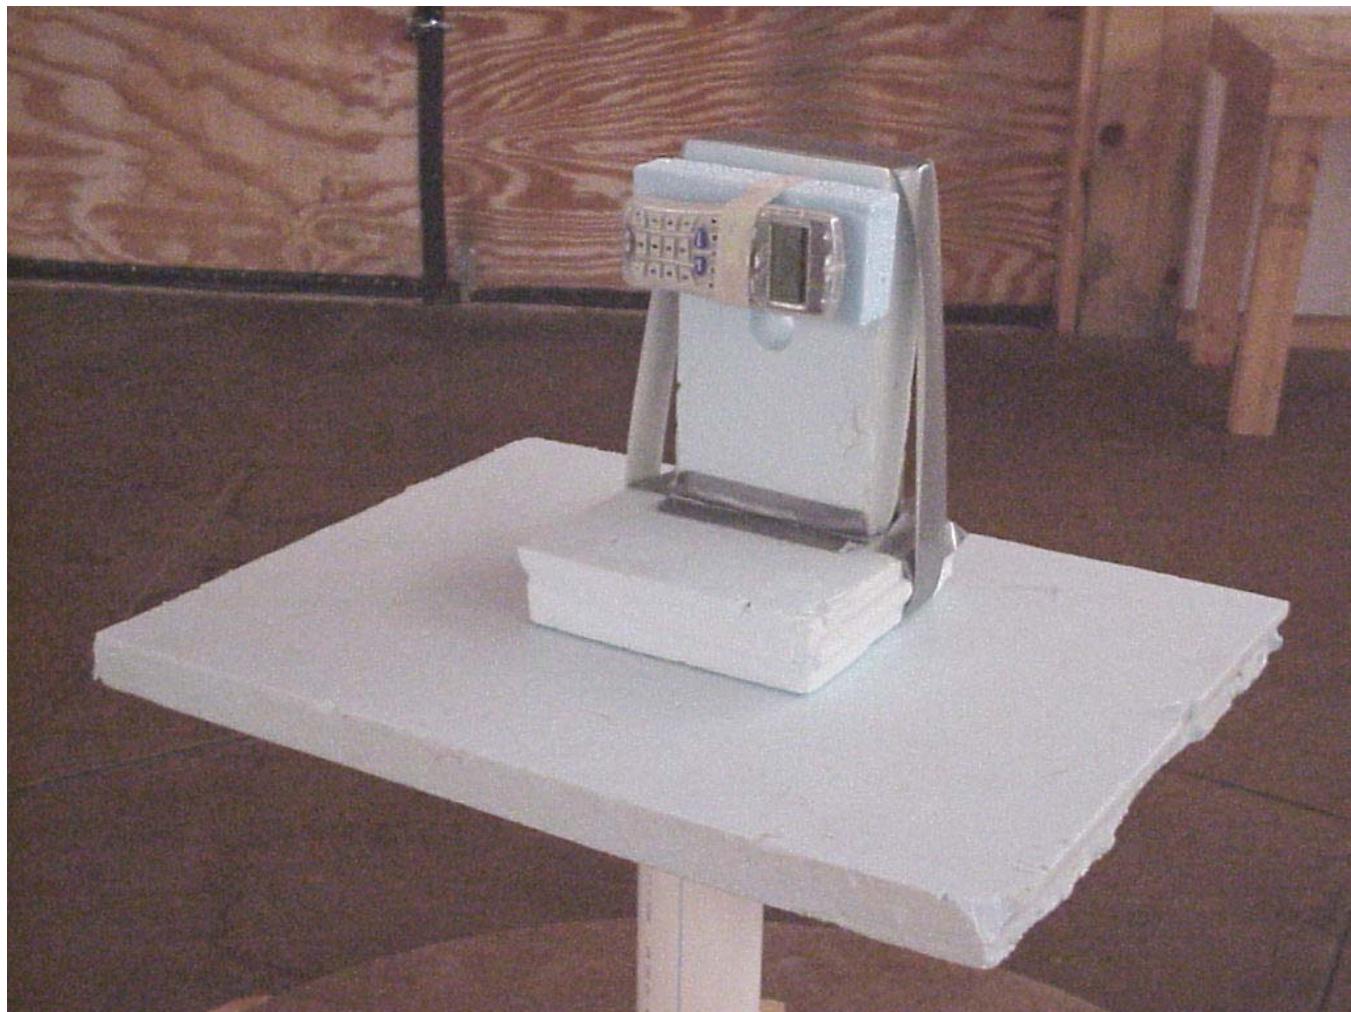



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

## 11.0 RESULTS OF TESTS

The radio interference emission charts results can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report. Points on the emission charts shown with a yellow mark are background frequencies that were verified during testing.

## 12.0 CONCLUSION

It was found that the Classroom Response System - Renaissance Responder, Model Number(s) RES-1001 "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Classroom Response System - Renaissance Responder is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/05
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/05
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/05
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/06
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/06
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/06
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/06
Antenna	EMCO	3115	2479	1 GHz – 18 GHz	8/06
Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	4/06
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/06
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/06
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/06
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/05
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/05
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

## TEST PROCEDURE

### Part 15, Subpart C, Section 15.249a-e

OPERATION WITHIN THE BANDS 902-928 MHz,  
2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz MHz



Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 1.0 CONDUCTED EMISSION MEASUREMENTS

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to connected to the public utility (AC) power line shall not exceed 250 uV (47.96 dBuV) from 150 kHz to 30 MHz

#### **NOTE:**

This test was not run because the device is battery operated.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 2.0 BAND EDGE AND RESTRICT BAND COMPLIANCE

The field strength of any emissions appearing outside the 902 to 928 MHz band shall not exceed the general radiated emissions limits as stated Section 15.209. The fundamental from the Classroom Response System - Renaissance Responder transmitter shall not be inside the restrict band 960 to 1240 MHz.

As stated in Section 15.205a, the fundamental emission from the Classroom Response System - Renaissance Responder shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

#### NOTE:

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.

See the following page (s) for the graph (s) made showing compliance for Band Edge and Restrict Band: Also see the table of measurements made for the Fundamental and Spurious emissions in paragraph 3 of this section.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

# DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE AND RESTRICT BAND COMPLIANCE

PART 15.249




Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 09-06-2005  
Company: Renaissance Learning  
EUT: RES-1001  
Test: Low Band-Edge Compliance - Radiated  
Operator: Craig Brandt  
Comment: **Low Channel:** Frequency – 2.405 GHz  
Worst Case Orientation - Horizontal  
Band-Edge Frequency - 2.400 GHz  
**Peak** Radiated Peak Out of Band Limit = 74 dB $\mu$ V/m @ 3 Meters

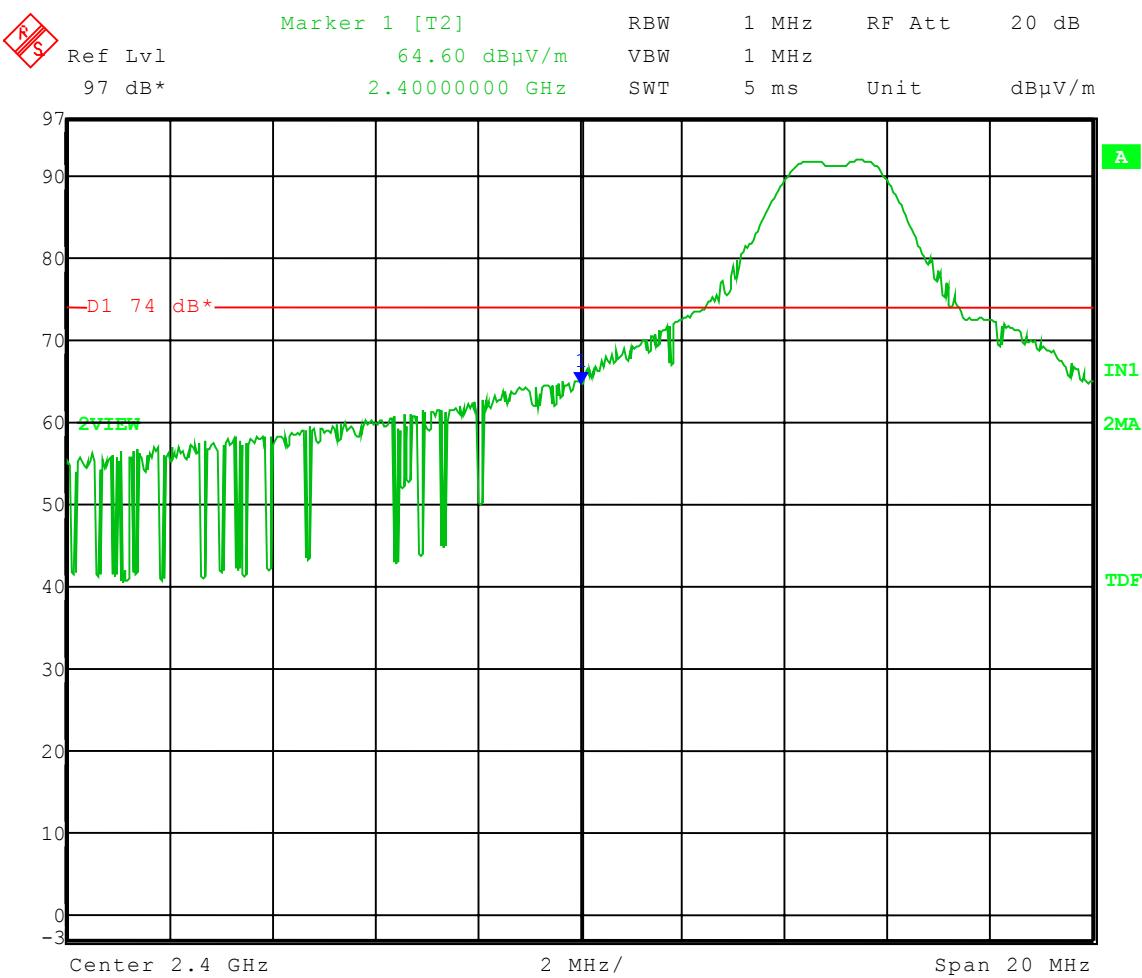

Date: 6.SEP.2005 11:01:46




Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 09-06-2005  
Company: Renaissance Learning  
EUT: RES-1001  
Test: Low Band-Edge Compliance - Radiated  
Operator: Craig Brandt  
Comment: **Low Channel:** Frequency – 2.405 GHz  
Worst Case Orientation - Horizontal  
Band-Edge Frequency - 2.400 GHz  
**Average Radiated Peak Out of Band Limit = 54 dB $\mu$ V/m @ 3 Meters**

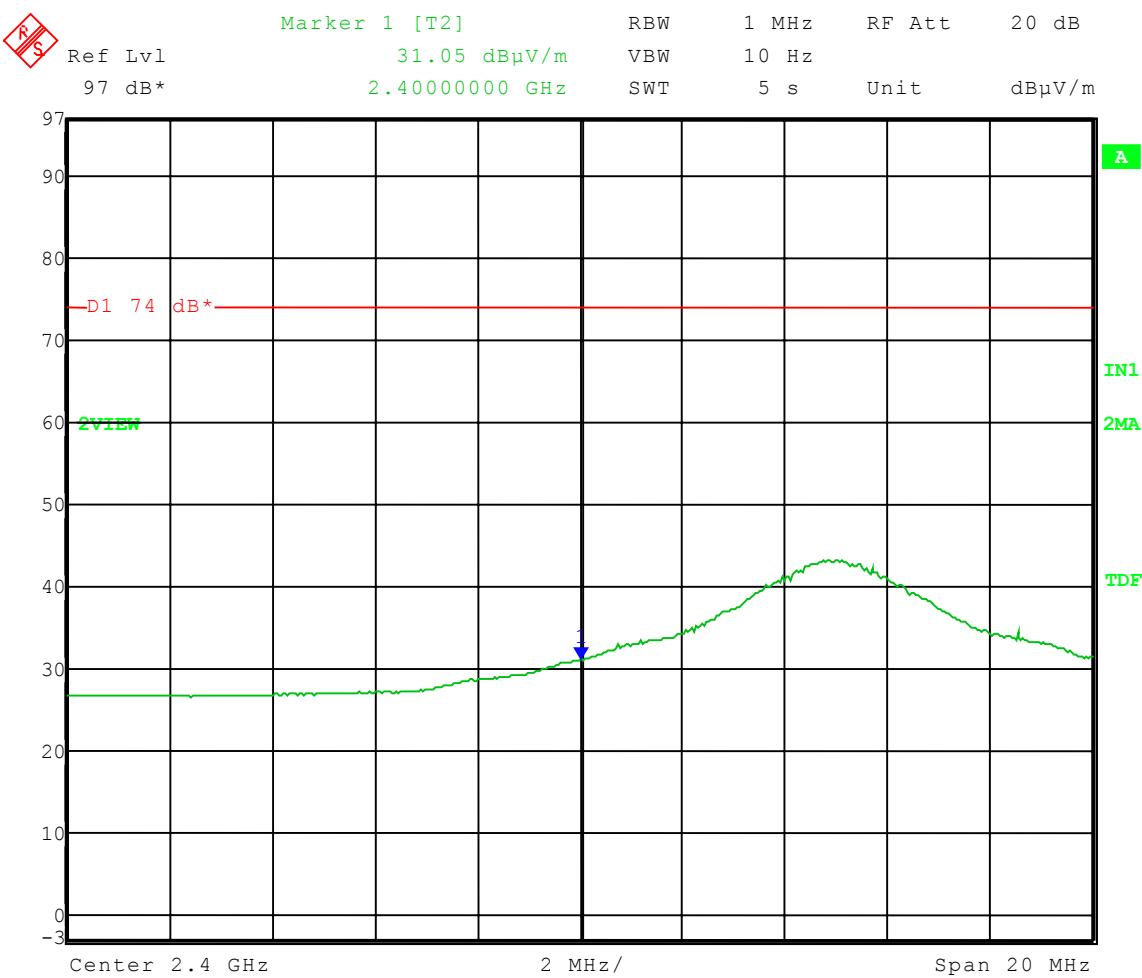




Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 09-06-2005  
Company: Renaissance Learning  
EUT: RES-1001  
Test: Upper Band-Edge Compliance - Radiated  
Operator: Craig Brandt  
Comment: **High Channel:** Frequency – 2.480 GHz  
Worst Case Orientation - Horizontal  
Band-Edge Frequency - 2.4835 GHz  
**Peak** Radiated Peak Out of Band Limit = 74 dB $\mu$ V/m @ 3 Meters

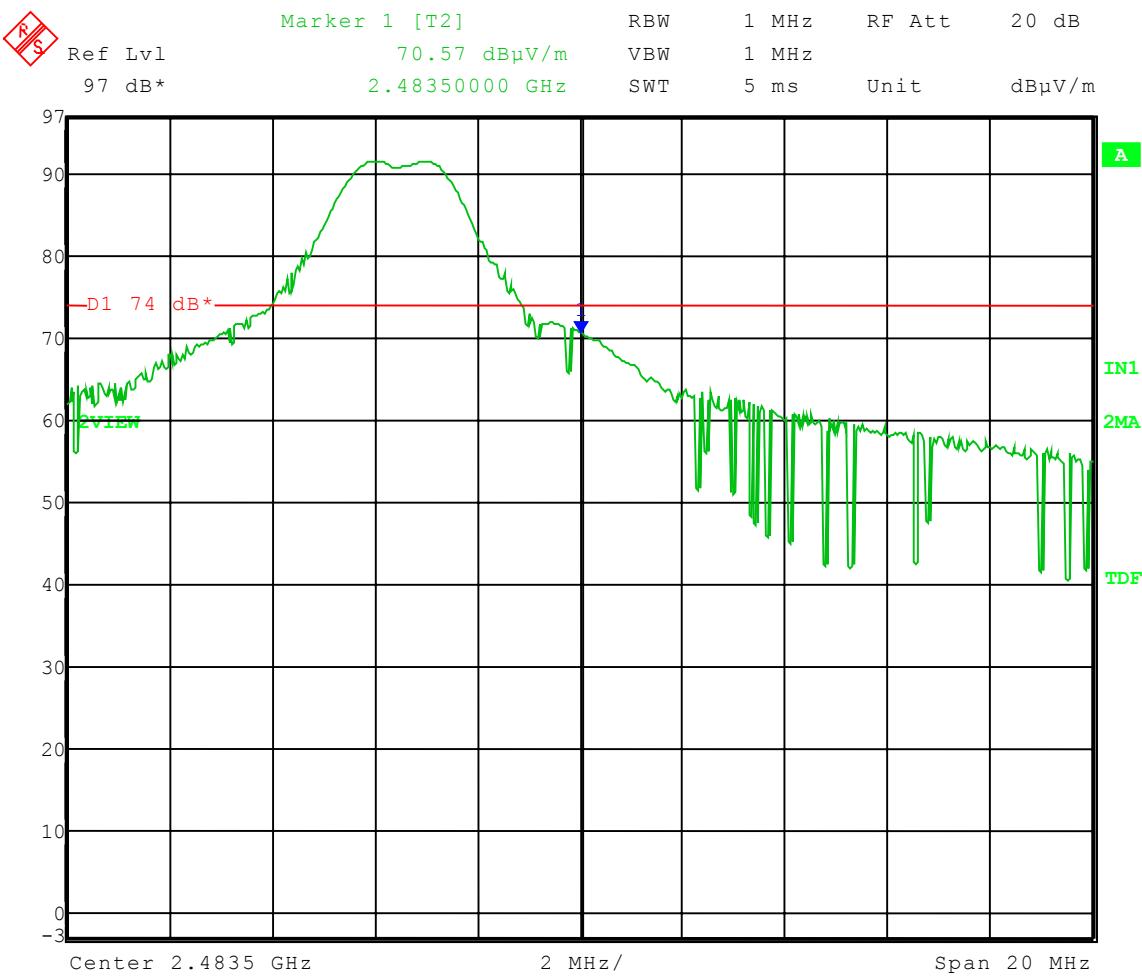




Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 09-06-2005  
Company: Renaissance Learning  
EUT: RES-1001  
Test: Upper Band-Edge Compliance - Radiated  
Operator: Craig Brandt  
Comment: **High Channel:** Frequency – 2.480 GHz  
Worst Case Orientation - Horizontal  
Band-Edge Frequency - 2.4835 GHz  
**Average Radiated Peak Out of Band Limit = 54 dB $\mu$ V/m @ 3 Meters**

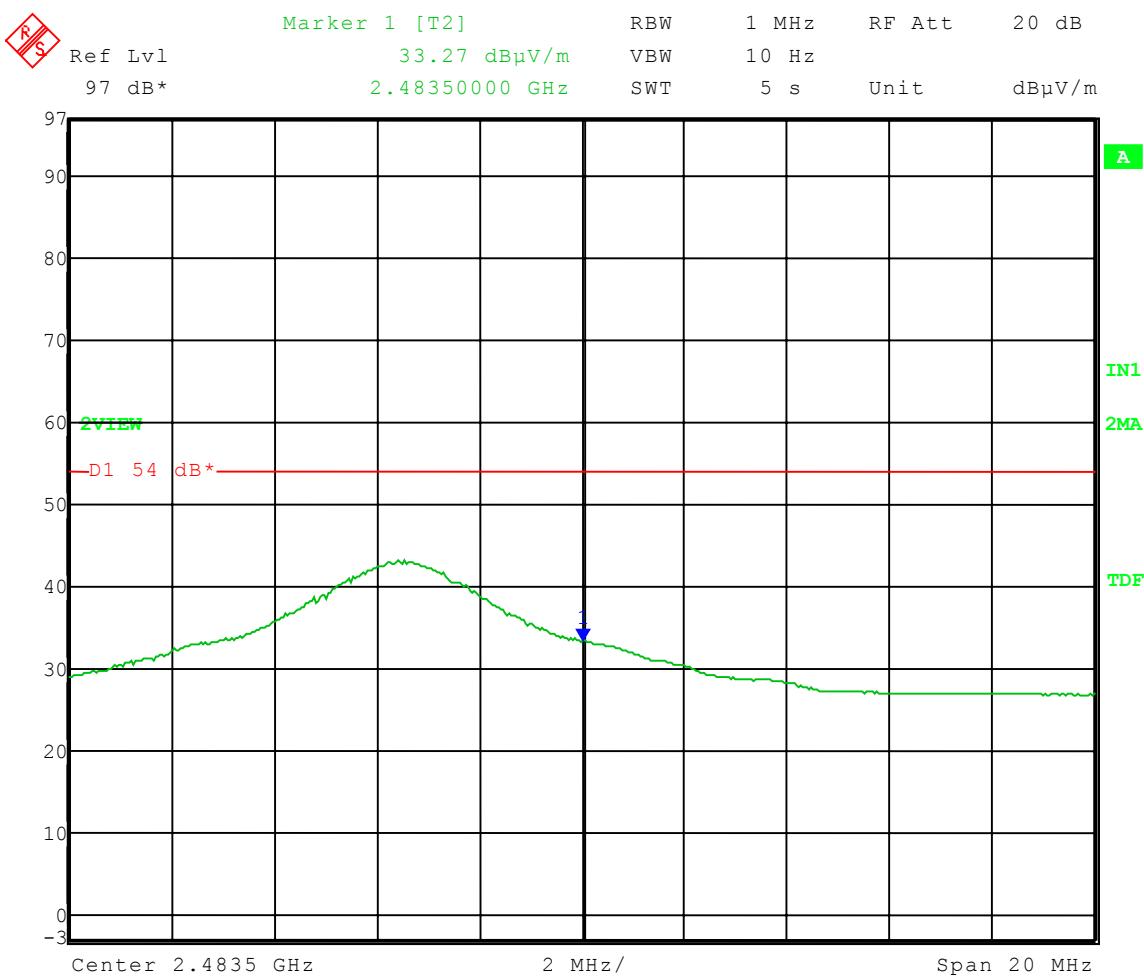



Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (SECTION 15.249a-d)

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the Classroom Response System - Renaissance Responder, Model Number: RES-1001, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the Classroom Response System - Renaissance Responder were made up to 13000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of 2480 MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.249 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, levels were extrapolated from 10 meters to 3 meters using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 10 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2003, Clauses 6 & 8. Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)

For operation in the bands 902 to 928 MHz, 2400 to 2483.5 MHz, 5725 to 5875 MHz, and 24.0 to 24.25 GHz the field strength of any emissions within this band shall not exceed the field strength levels specified in the following table as stated in FCC, Part 15, Section 15.249(a).

Frequency range in MHz	Field Strength of Fundamental millivolts/meter	Field Strength of Fundamental dBuV/meter	Field Strength of Harmonics microvolts/meter	Field Strength of Harmonics dBuV/meter
902 to 928	50	93.98	500	53.98
2400 to 2483.5	50	93.98	500	53.98
5725 to 5875	50	93.98	500	53.98
24000 to 24250	250	107.96	2500	67.96

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

#### **NOTE:**

All radiated emissions measurements were made at a test room temperature of 75°F at 46% relative humidity.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1000  
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

**RADIATED DATA TAKEN FOR  
FUNDAMENTAL, HARMONIC &  
RESTRICTED BAND  
EMISSION MEASUREMENTS**

**PART 15.249**



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

**1250 Peterson Dr., Wheeling, IL 60090**

## APPENDIX A

## Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

Tested at a 3 Meter Distance

**EUT:** RES-1001  
**Manufacturer:** Renaissance Learning  
**Operating Condition:** 73 deg F; 54% R.H.  
**Test Site:** Site 3  
**Operator:** Craig Brandt  
**Test Specification:** FCC Part 15.249 and FCC Part 15.205  
**Comment:** Continuous Transmit – **Low Channel (11)**  
**Date:** 09/06/2005

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.  
(2) All other emissions at least 20 dB under the limit.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

**1250 Peterson Dr., Wheeling, IL 60090**

## APPENDIX A

## Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

### Tested at a 3 Meter Distance

**EUT:** RES-1001  
**Manufacturer:** Renaissance Learning  
**Operating Condition:** 73 deg F; 54% R.H.  
**Test Site:** Site 3  
**Operator:** Craig Brandt  
**Test Specification:** FCC Part 15.249 and FCC Part 15.205  
**Comment:** Continuous Transmit – **Middle Channel (18)**  
**Date:** 09/06/2005

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.  
(2) All other emissions at least 20 dB under the limit.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

**1250 Peterson Dr., Wheeling, IL 60090**

## APPENDIX A

## Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

## Tested at a 3 Meter Distance

**EUT:** RES-1001  
**Manufacturer:** Renaissance Learning  
**Operating Condition:** 73 deg F; 54% R.H.  
**Test Site:** Site 3  
**Operator:** Craig Brandt  
**Test Specification:** FCC Part 15.249 and FCC Part 15.205  
**Comment:** Continuous Transmit – High Channel (26)  
**Date:** 09/06/2005

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.  
(2) All other emissions at least 20 dB under the limit.



Company: Renaissance Learning, Inc.  
Model Tested: RES-1001  
Report Number: 11675

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

RADIATED DATA AND GRAPH(S) TAKEN FOR

FIELD STRENGTH

SPURIOUS EMISSION MEASUREMENTS

PART 15.209

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Worst case Transmit and Receive modes  
Date: 09-06-2005

**TEXT: "Site 3 MidV 3M"**


Short Description: Test Set-up Vert30-1000MHz  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010

Antennas ---  
Biconical -- EMCO 3104C SN: 9701-4785  
Log Periodic -- EMCO 3146 SN: 9702-4895

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/005

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarisation

Level [dB $\mu$ V/m]

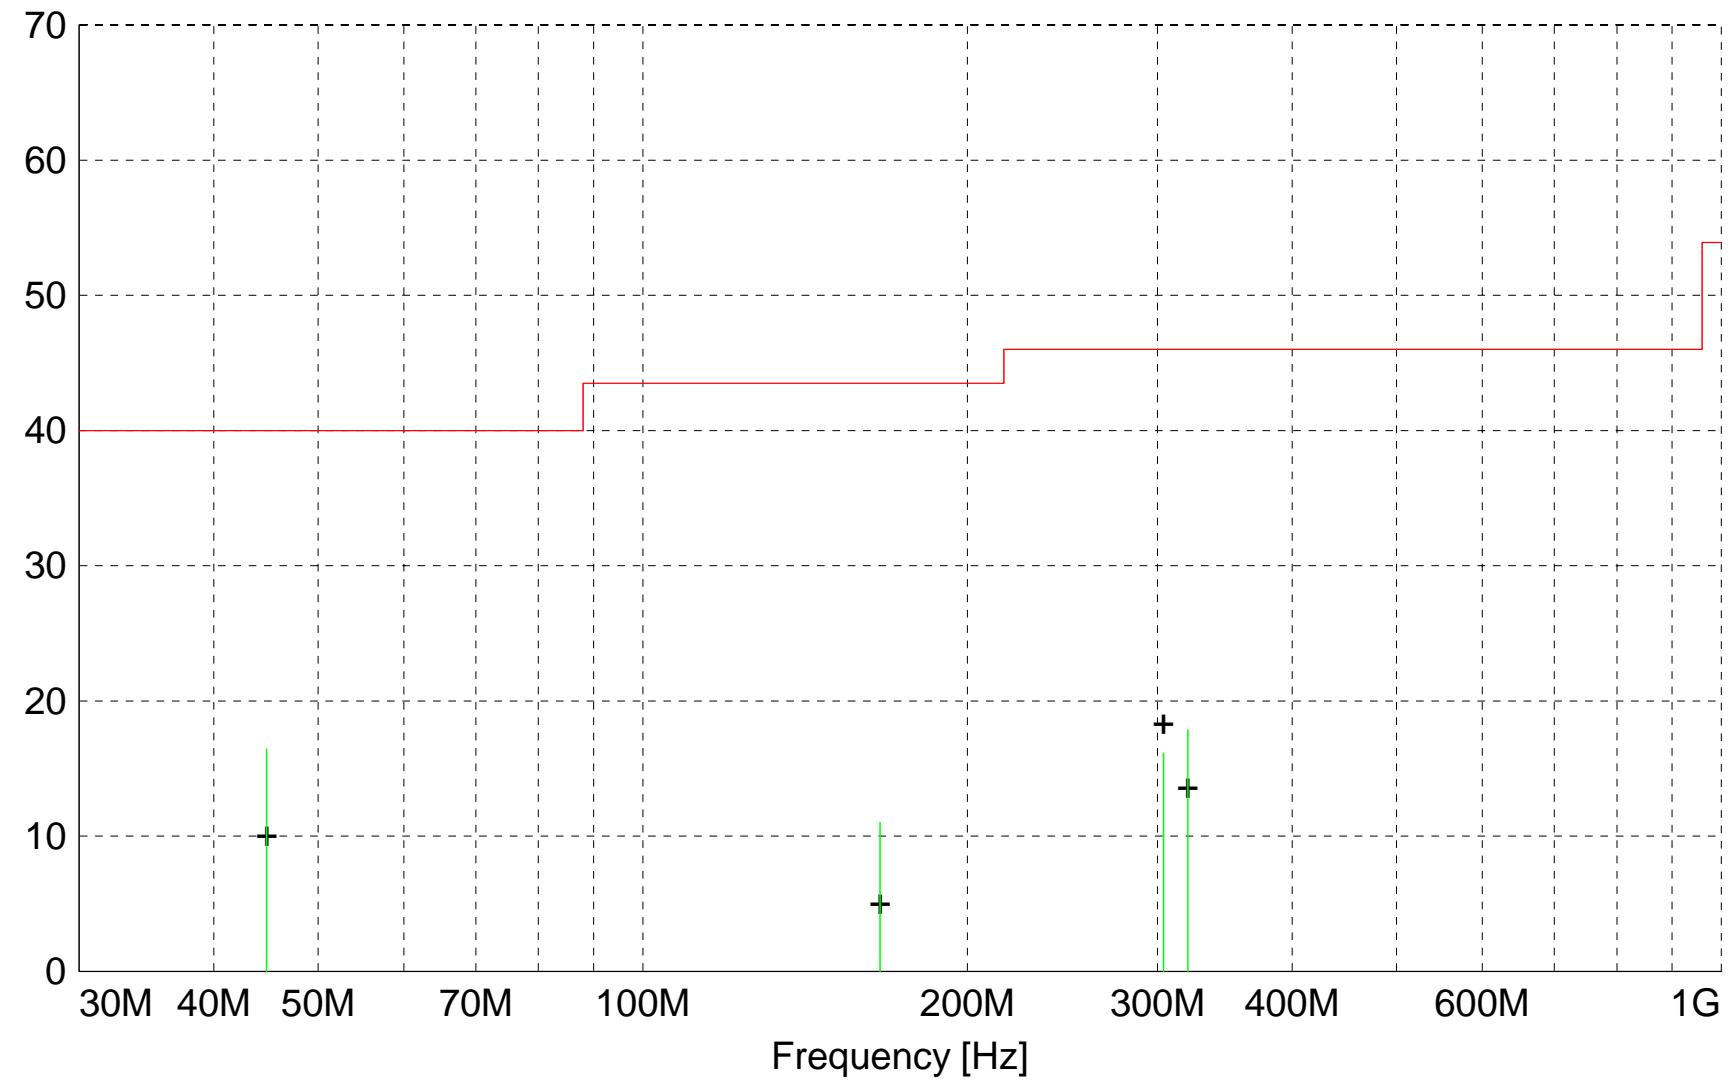

||||| MES A977\_F1V\_Quasi-Peak  
+ + - MES A977\_F1V\_Peak\_List

— LIM FCC Class B F QP/AV

**MEASUREMENT RESULT: "A977\_F1V\_Final"**

9/6/2005 1:54PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height m	EuT Ant. Angle deg	Final Detector	Comment
44.785000	28.92	11.85	-24.3	16.5	40.0	23.5	1.00	0	QUASI-PEAK	Noise Floor
319.990000	24.30	15.38	-21.8	17.9	46.0	28.1	1.00	225	QUASI-PEAK	None
303.990000	22.14	15.90	-21.9	16.1	46.0	29.9	1.40	225	QUASI-PEAK	None
165.955000	20.17	13.78	-22.9	11.0	43.5	32.5	1.00	0	QUASI-PEAK	Noise Floor

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Worst case Transmit and Receive modes  
Date: 09-06-2005

**TEXT: "Site 3 MidH 3M"**


Short Description: Test Set-up Horz30-1000MHz  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010

Antennas ---  
Biconical -- EMCO 3104C SN: 9701-4785  
Log Periodic -- EMCO 3146 SN: 9702-4895

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/005

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

Level [dB $\mu$ V/m]

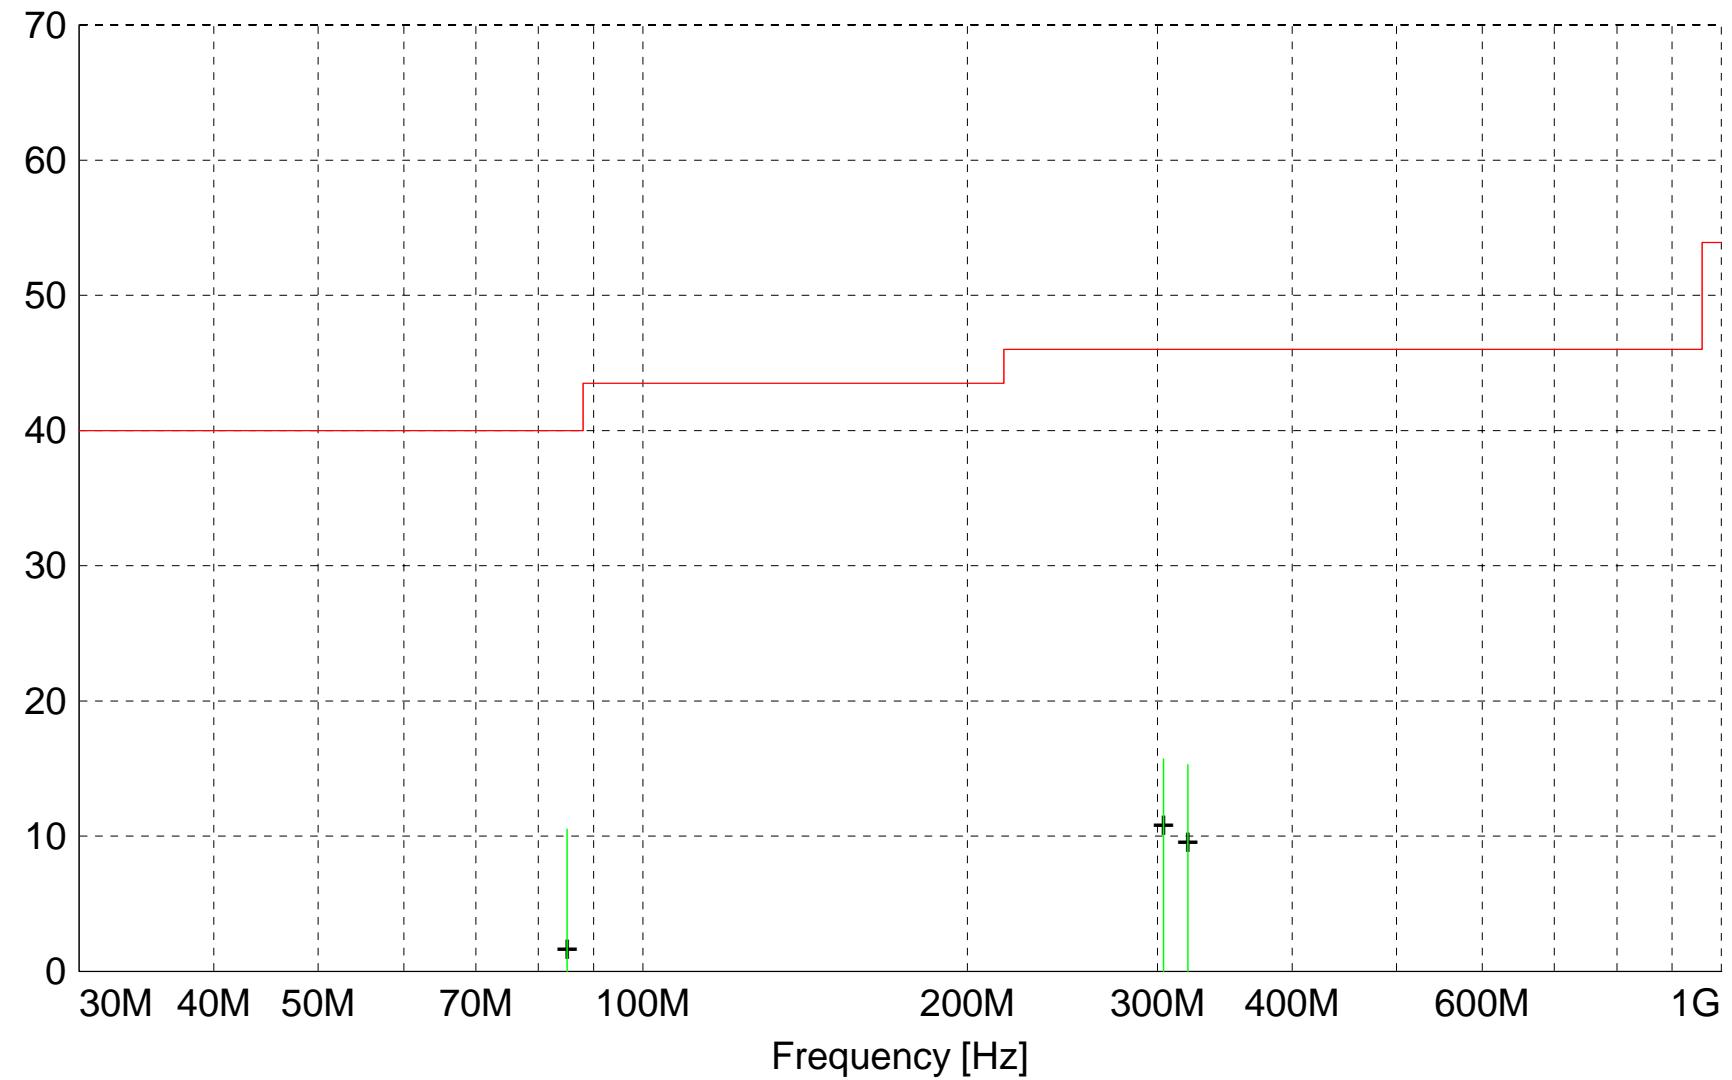

||||| MES A977\_F1H\_Quasi-Peak  
+ + - MES A977\_F1H\_Peak\_List  
— LIM FCC Class B F QP/AV

Field Strength FCC Class B 3m

**MEASUREMENT RESULT: "A977\_F1H\_Final"**

9/6/2005 1:55PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height m	EuT Ant.	Final Angle deg	Detector	Comment
85.055000	26.31	8.01	-23.8	10.5	40.0	29.5	2.00	0	QUASI-PEAK	Noise	Floor
304.000000	21.74	15.90	-21.9	15.7	46.0	30.3	1.00	135	QUASI-PEAK	None	
319.990000	21.74	15.38	-21.8	15.3	46.0	30.7	1.00	45	QUASI-PEAK	None	

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Continuous Receive; Ch 11  
Date: 09-06-2005

**TEXT: "Site 3 6204&184 V3M"**

Short Description: Test Set-up Vert1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006


Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---

1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 682425  
10 - 18 GHz -- Miteq AMF-6F-100200-50-10P SN: 668382

TEST SET-UP: Eut Measured at 3 Meters with VERTICAL Antenna Polarisation

Level [dB $\mu$ V/m]

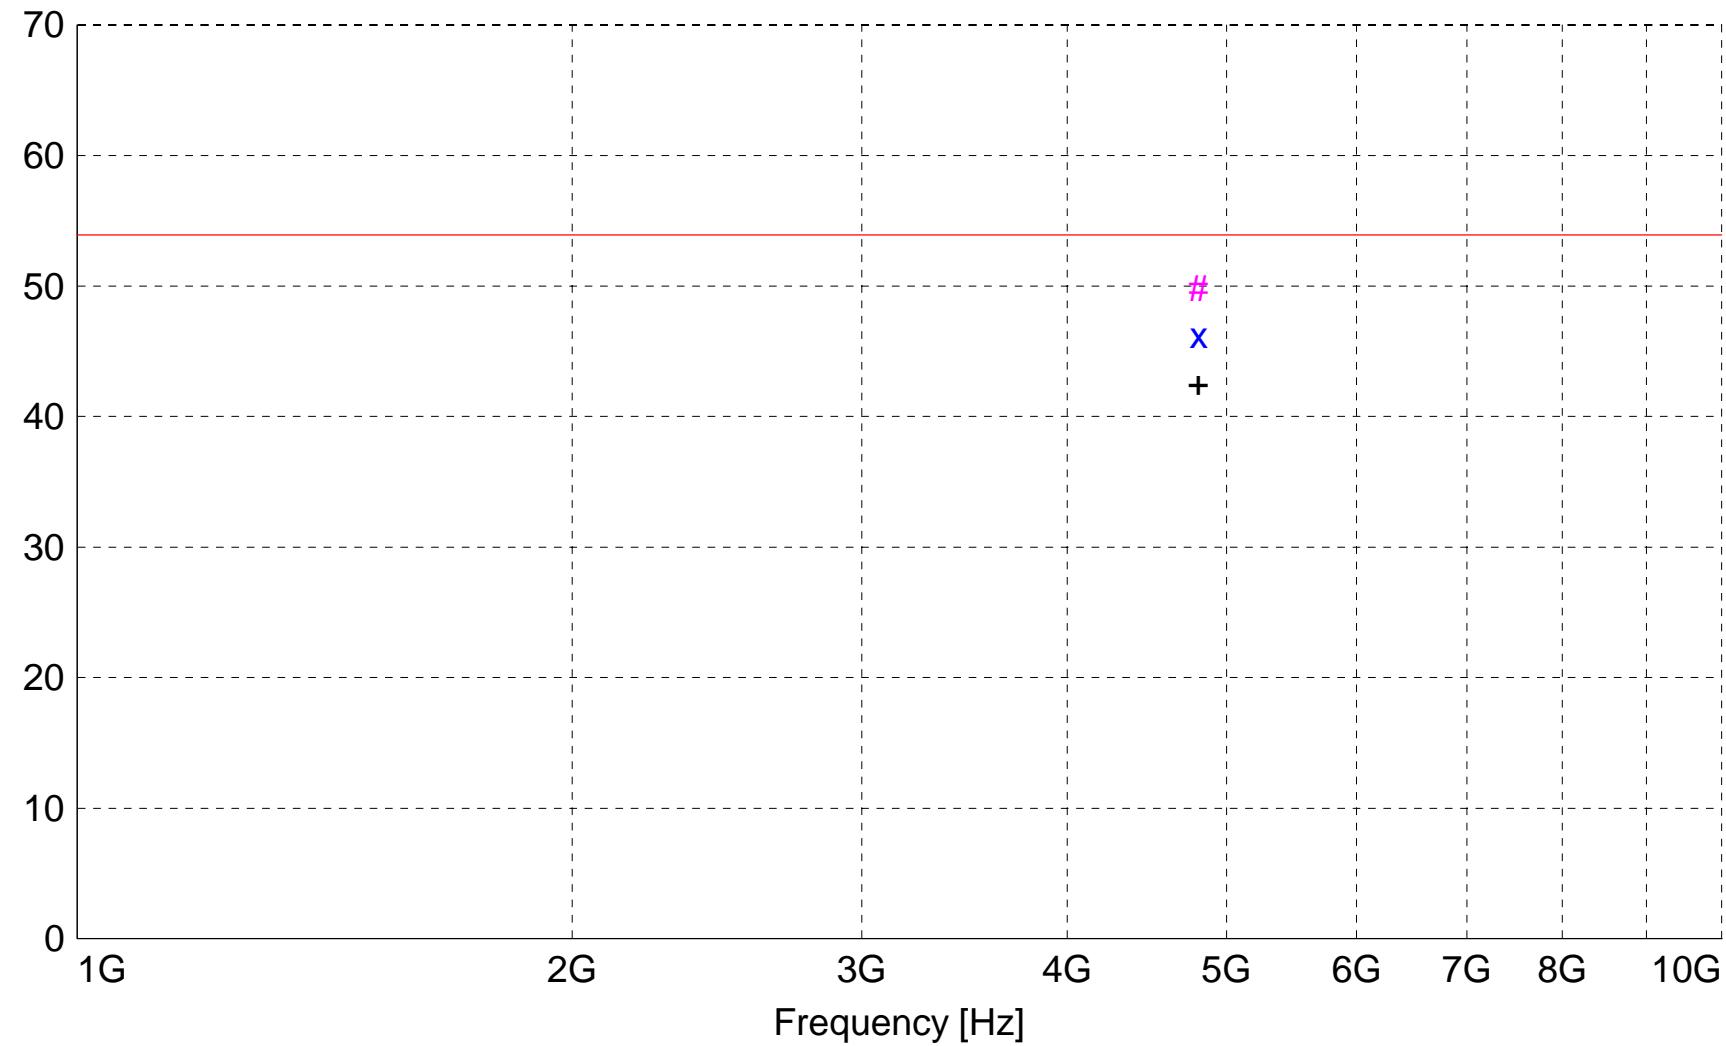

x x : MES A974\_sv\_Average  
# # : MES A974\_sv\_Peak  
+ + : MES A974\_sv\_Peak\_List  
— LIM FCC ClassB F QP/AV Field Strength FCC Class B 3m

**MEASUREMENT RESULT: "A974\_sv\_Final"**

9/6/2005 12:26PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height m	EuT Ant. Angle deg	Final Detector	Comment
4805.960000	54.69	32.95	-37.9	49.8	53.9	4.1	1.00	90	MAX PEAK	None
4805.960000	51.17	32.95	-37.9	46.2	53.9	7.7	1.00	90	AVERAGE	None

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Continuous Receive; Ch 11  
Date: 09-06-2005

**TEXT: "Site 3 6204&184 H3M"**


Short Description: Test Set-up Horz1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---  
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 682425  
10 - 18 GHz -- Miteq AMF-6F-100200-50-10P SN: 668382

TEST SET-UP: Eut Measured at 3 Meters with HORIZONTAL Antenna Polarisation

Level [dB $\mu$ V/m]

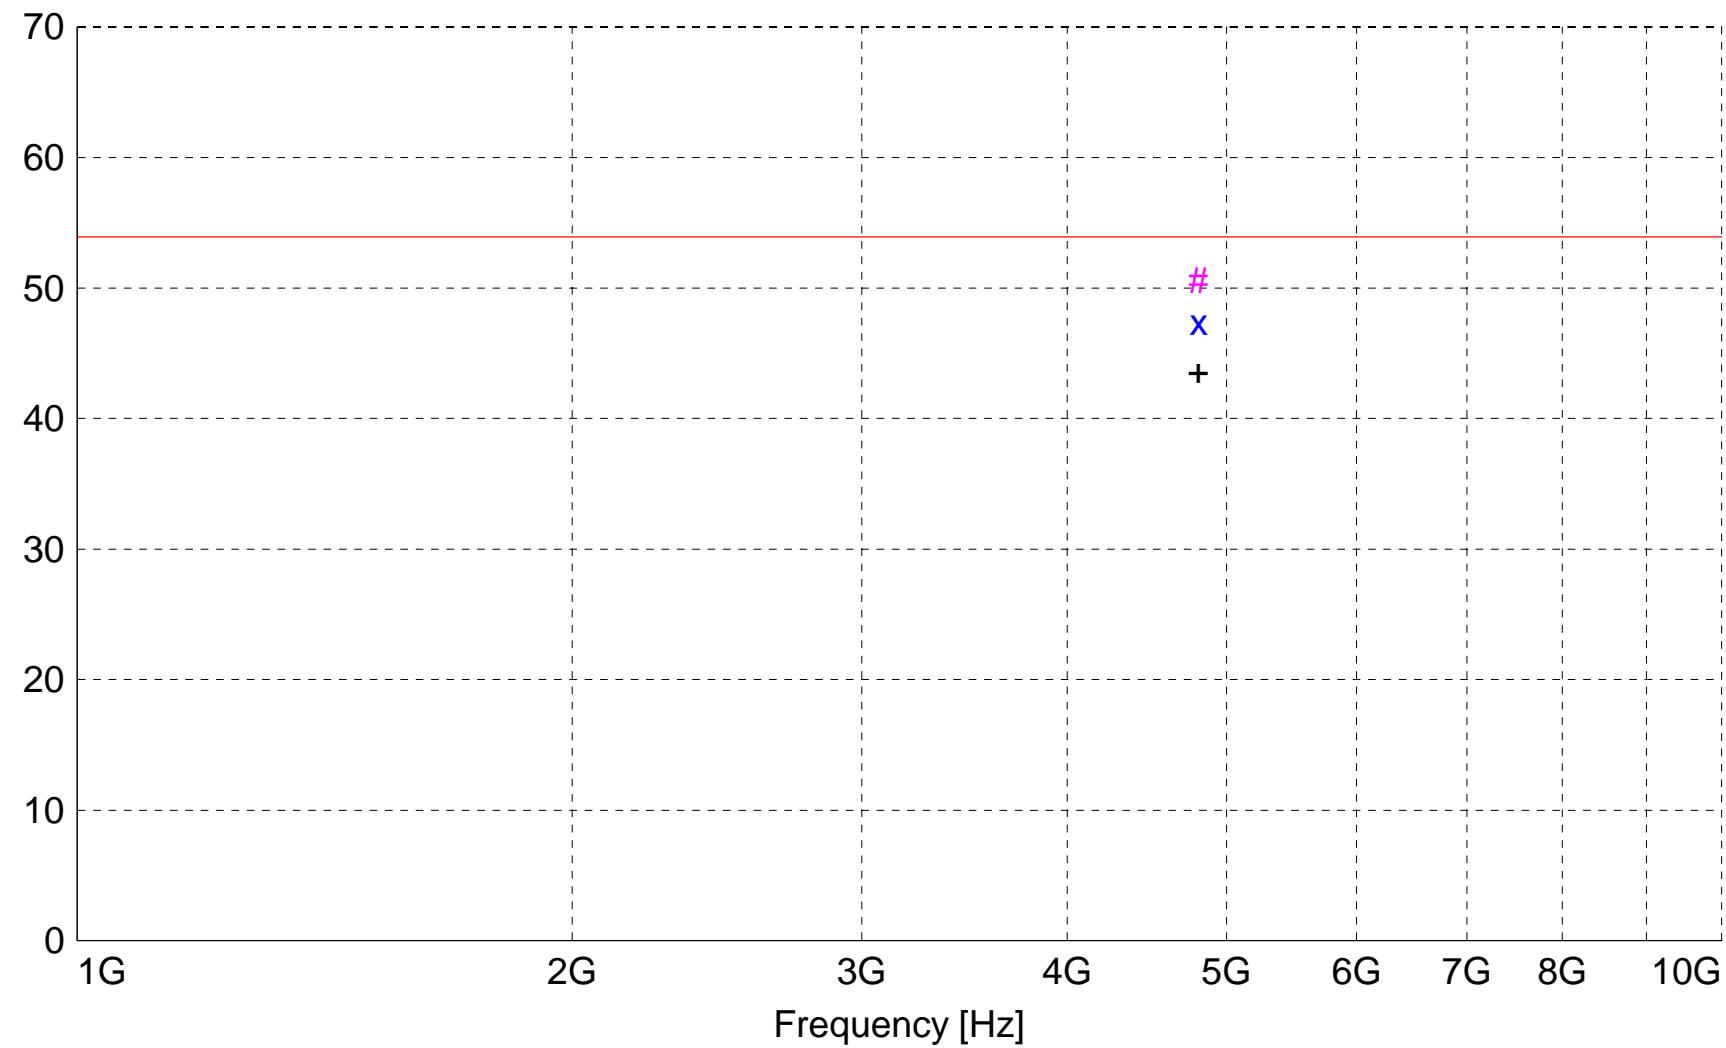

x x : MES A974\_sh\_Average  
# # : MES A974\_sh\_Peak  
+ + : MES A974\_sh\_Peak\_List  
— LIM FCC ClassB F QP/AV

Field Strength FCC Class B 3m

**MEASUREMENT RESULT: "A974\_sh\_Final"**

9/6/2005 12:22PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
4805.940000	55.51	32.95	-37.9	50.6	53.9	3.3	1.10	290	MAX PEAK	None
4805.940000	52.27	32.95	-37.9	47.3	53.9	6.6	1.10	290	AVERAGE	None

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Continuous Receive; Ch 18  
Date: 09-06-2005

**TEXT: "Site 3 6204&184 V3M"**

Short Description: Test Set-up Vert1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006


Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---

1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 682425  
10 - 18 GHz -- Miteq AMF-6F-100200-50-10P SN: 668382

TEST SET-UP: Eut Measured at 3 Meters with VERTICAL Antenna Polarisation

Level [dB $\mu$ V/m]

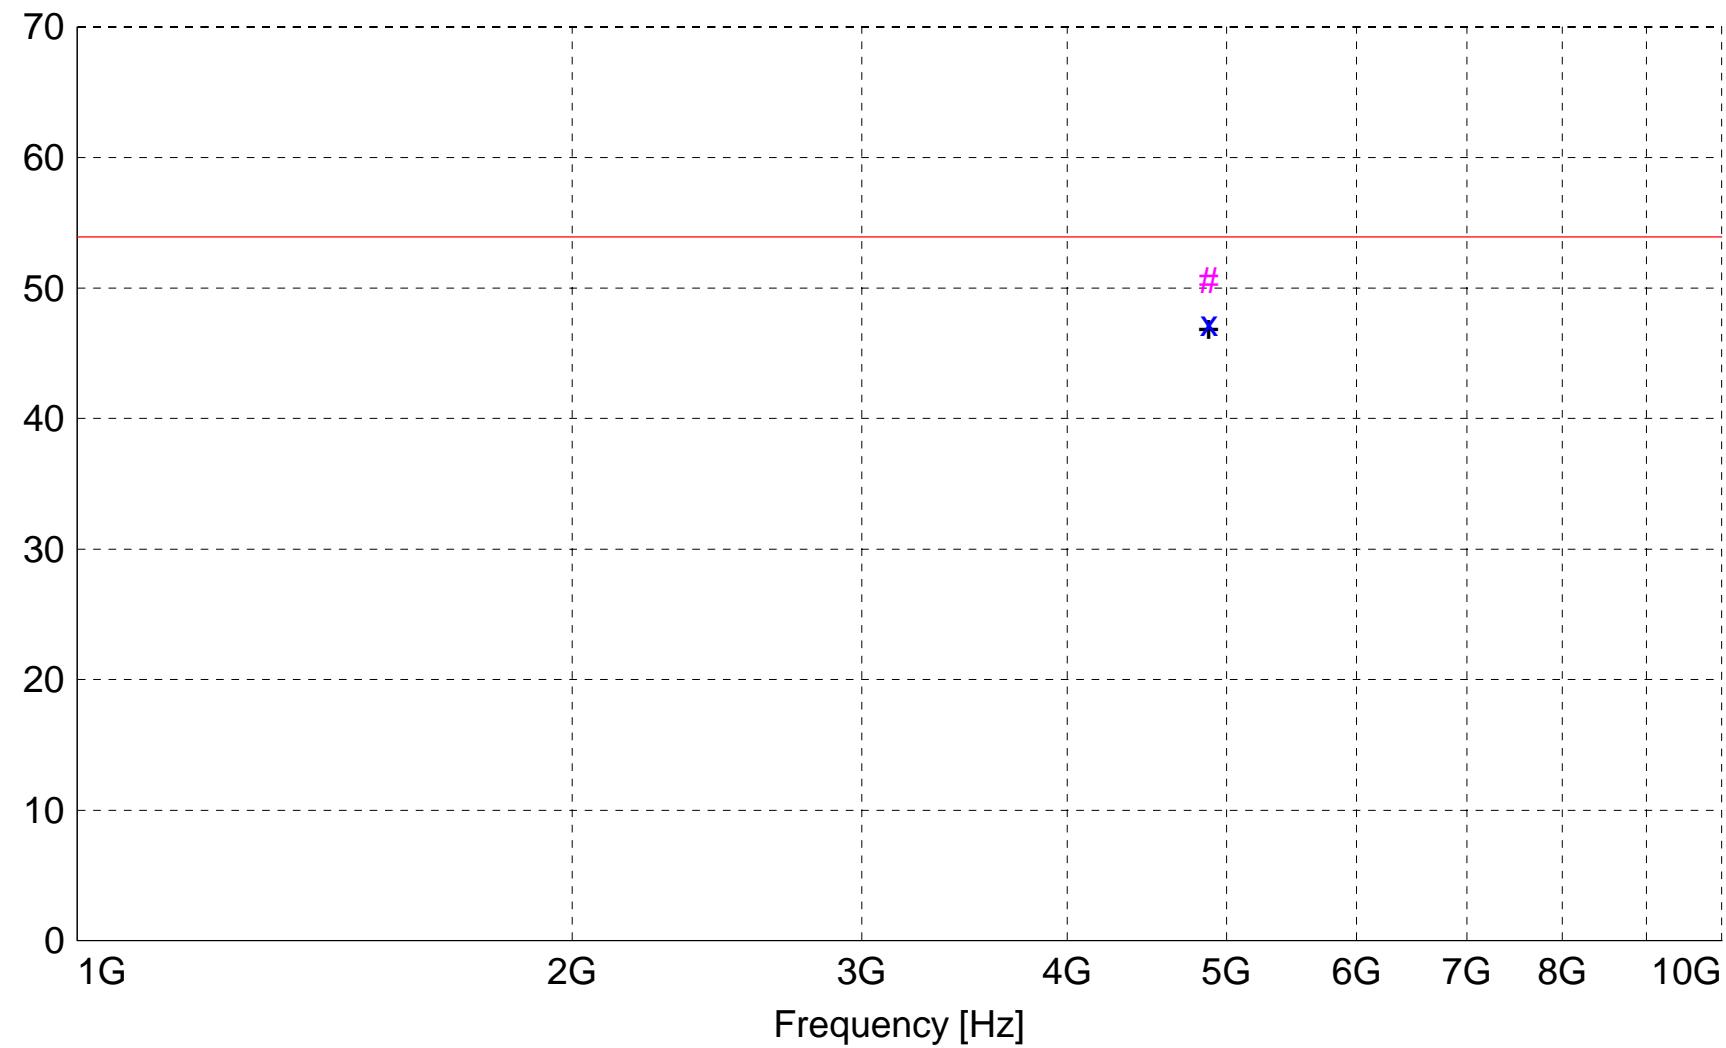

x x : MES A975\_sv\_Average  
# # : MES A975\_sv\_Peak  
+ + : MES A975\_sv\_Peak\_List  
— LIM FCC Class B 3m

**MEASUREMENT RESULT: "A975\_sv\_Final"**

9/6/2005 12:35PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
4875.960000	55.24	33.09	-37.8	50.6	53.9	3.3	1.00	90	MAX PEAK	None
4875.960000	51.93	33.09	-37.8	47.2	53.9	6.7	1.00	90	AVERAGE	None

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Continuous Receive; Ch 18  
Date: 09-06-2005

**TEXT: "Site 3 6204&184 H3M"**


Short Description: Test Set-up Horz1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---  
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 682425  
10 - 18 GHz -- Miteq AMF-6F-100200-50-10P SN: 668382

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

Level [dB $\mu$ V/m]

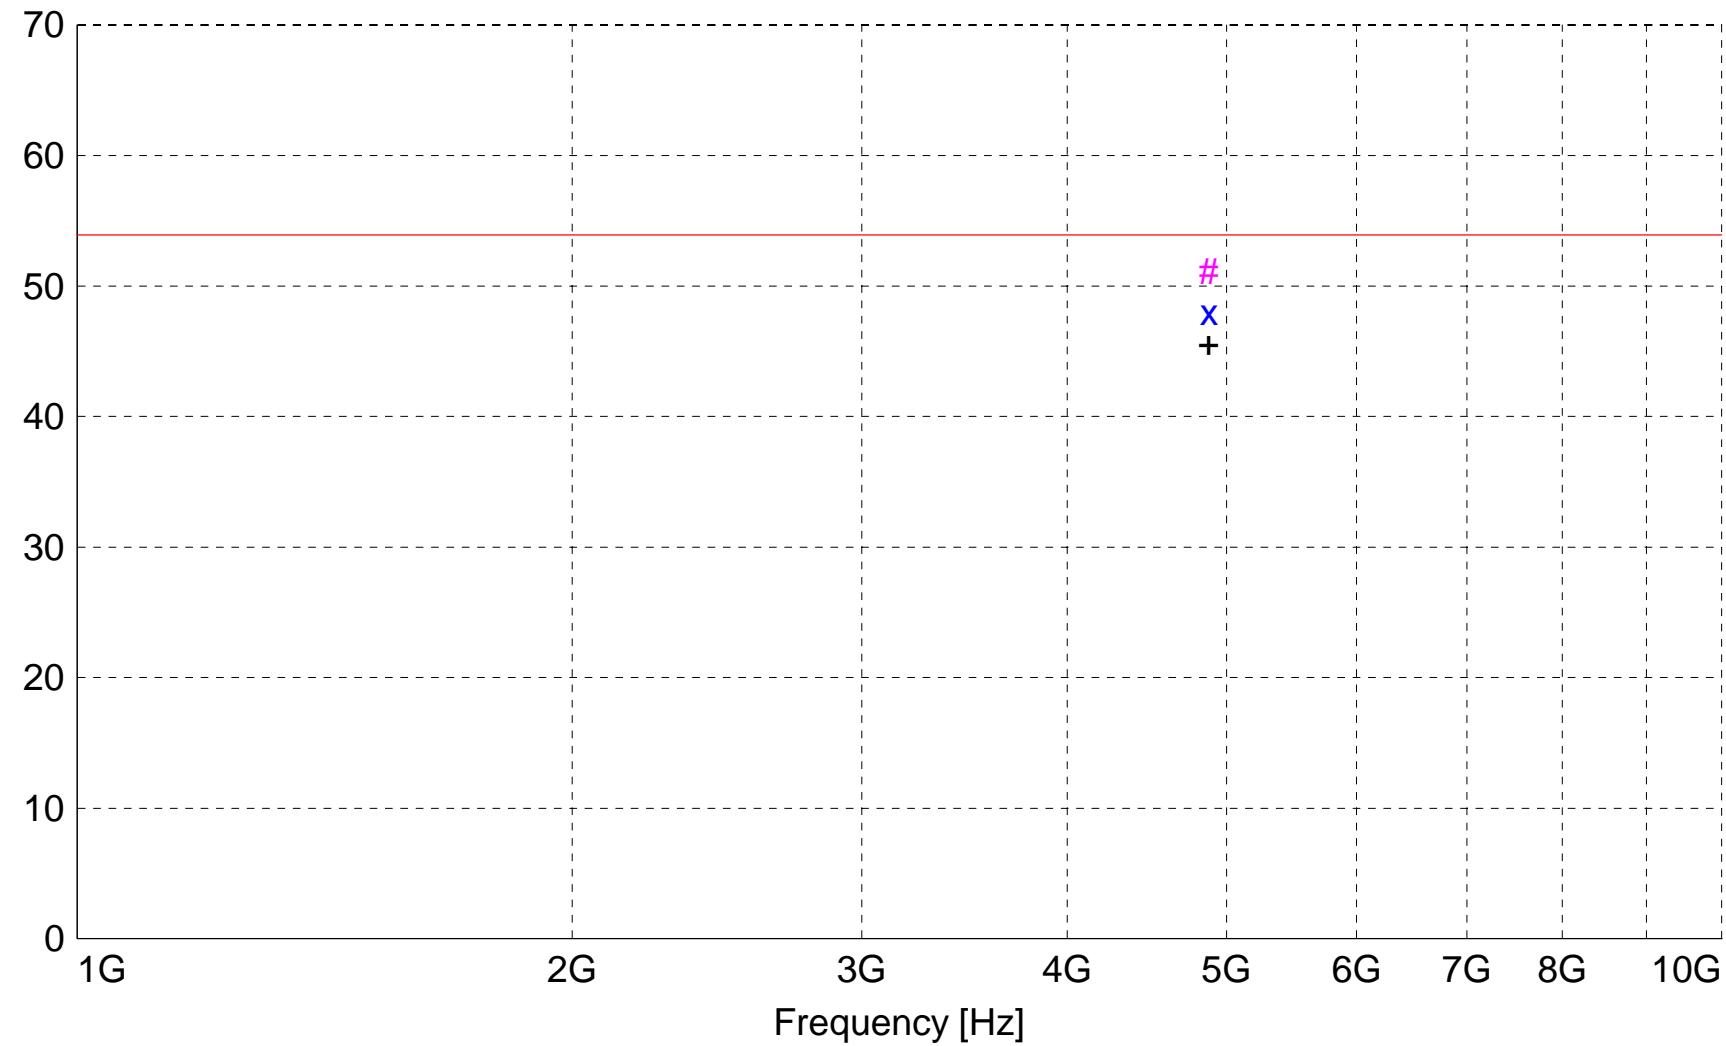

x x : MES A975\_sh\_Average  
# # : MES A975\_sh\_Peak  
+ + : MES A975\_sh\_Peak\_List  
— LIM FCC ClassB F QP/AV

Field Strength FCC Class B 3m

**MEASUREMENT RESULT: "A975\_sh\_Final"**

9/6/2005 12:37PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
4875.940000	55.78	33.09	-37.8	51.1	53.9	2.8	1.10	80	MAX PEAK	None
4875.940000	52.64	33.09	-37.8	47.9	53.9	6.0	1.10	80	AVERAGE	None

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Continuous Receive; Ch 26  
Date: 09-06-2005

**TEXT: "Site 3 6204&184 V3M"**

Short Description: Test Set-up Vert1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006


Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---

1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 682425  
10 - 18 GHz -- Miteq AMF-6F-100200-50-10P SN: 668382

TEST SET-UP: Eut Measured at 3 Meters with VERTICAL Antenna Polarisation

Level [dB $\mu$ V/m]

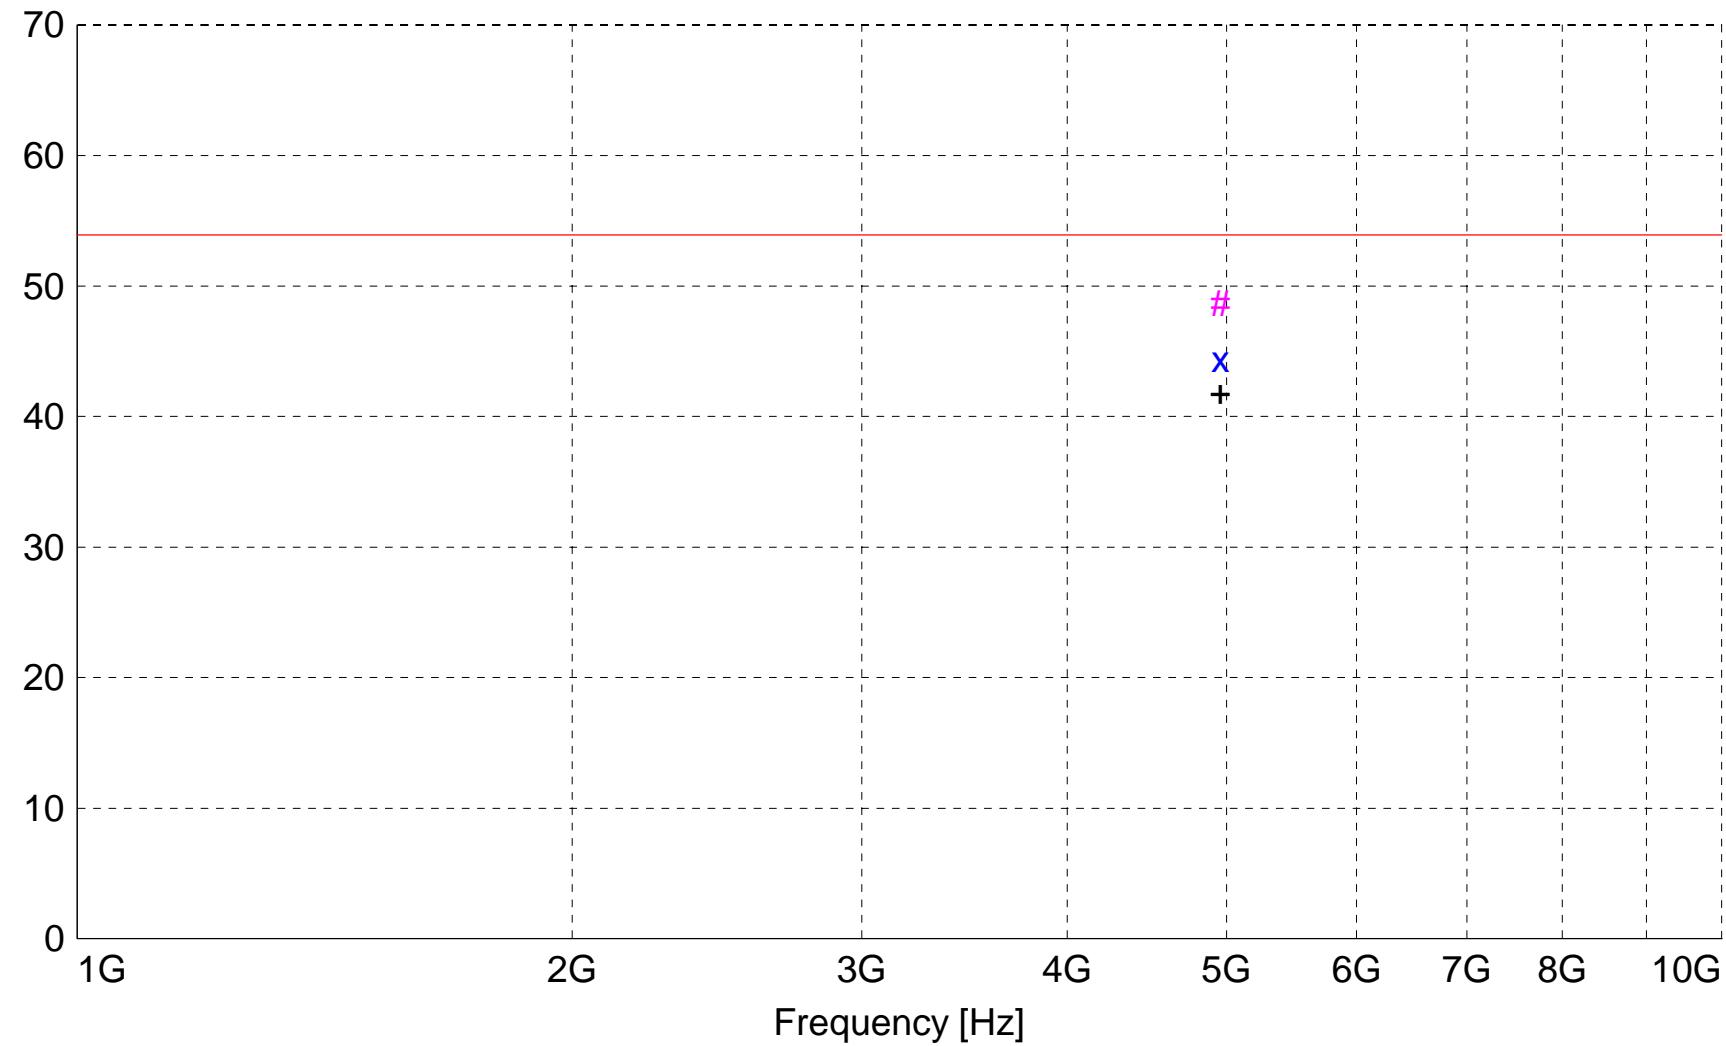

x x : MES A976\_sv\_Average  
# # : MES A976\_sv\_Peak  
+ + : MES A976\_sv\_Peak\_List  
— LIM FCC Class B F QP/AV

Field Strength FCC Class B 3m

**MEASUREMENT RESULT: "A976\_sv\_Final"**

9/6/2005 12:53PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
4955.960000	53.10	33.26	-37.7	48.7	53.9	5.2	1.00	135	MAX PEAK	None
4955.960000	48.82	33.26	-37.7	44.4	53.9	9.5	1.00	135	AVERAGE	None

**FCC Part 15 Class B**

**Electric Field Strength**

EUT: RES-1001  
Manufacturer: Renaissance Learning, Inc.  
Operating Condition: 75 deg. F; 46% R.H.  
Test Site: DLS OF Site 3  
Operator: Craig Brandt  
Test Specification:  
Comment: Continuous Receive; Ch 26  
Date: 09-06-2005

**TEXT: "Site 3 6204&184 H3M"**

Short Description: Test Set-up Horz1GHz-  
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006


Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---

1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 682425  
10 - 18 GHz -- Miteq AMF-6F-100200-50-10P SN: 668382

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarisation

Level [dB $\mu$ V/m]

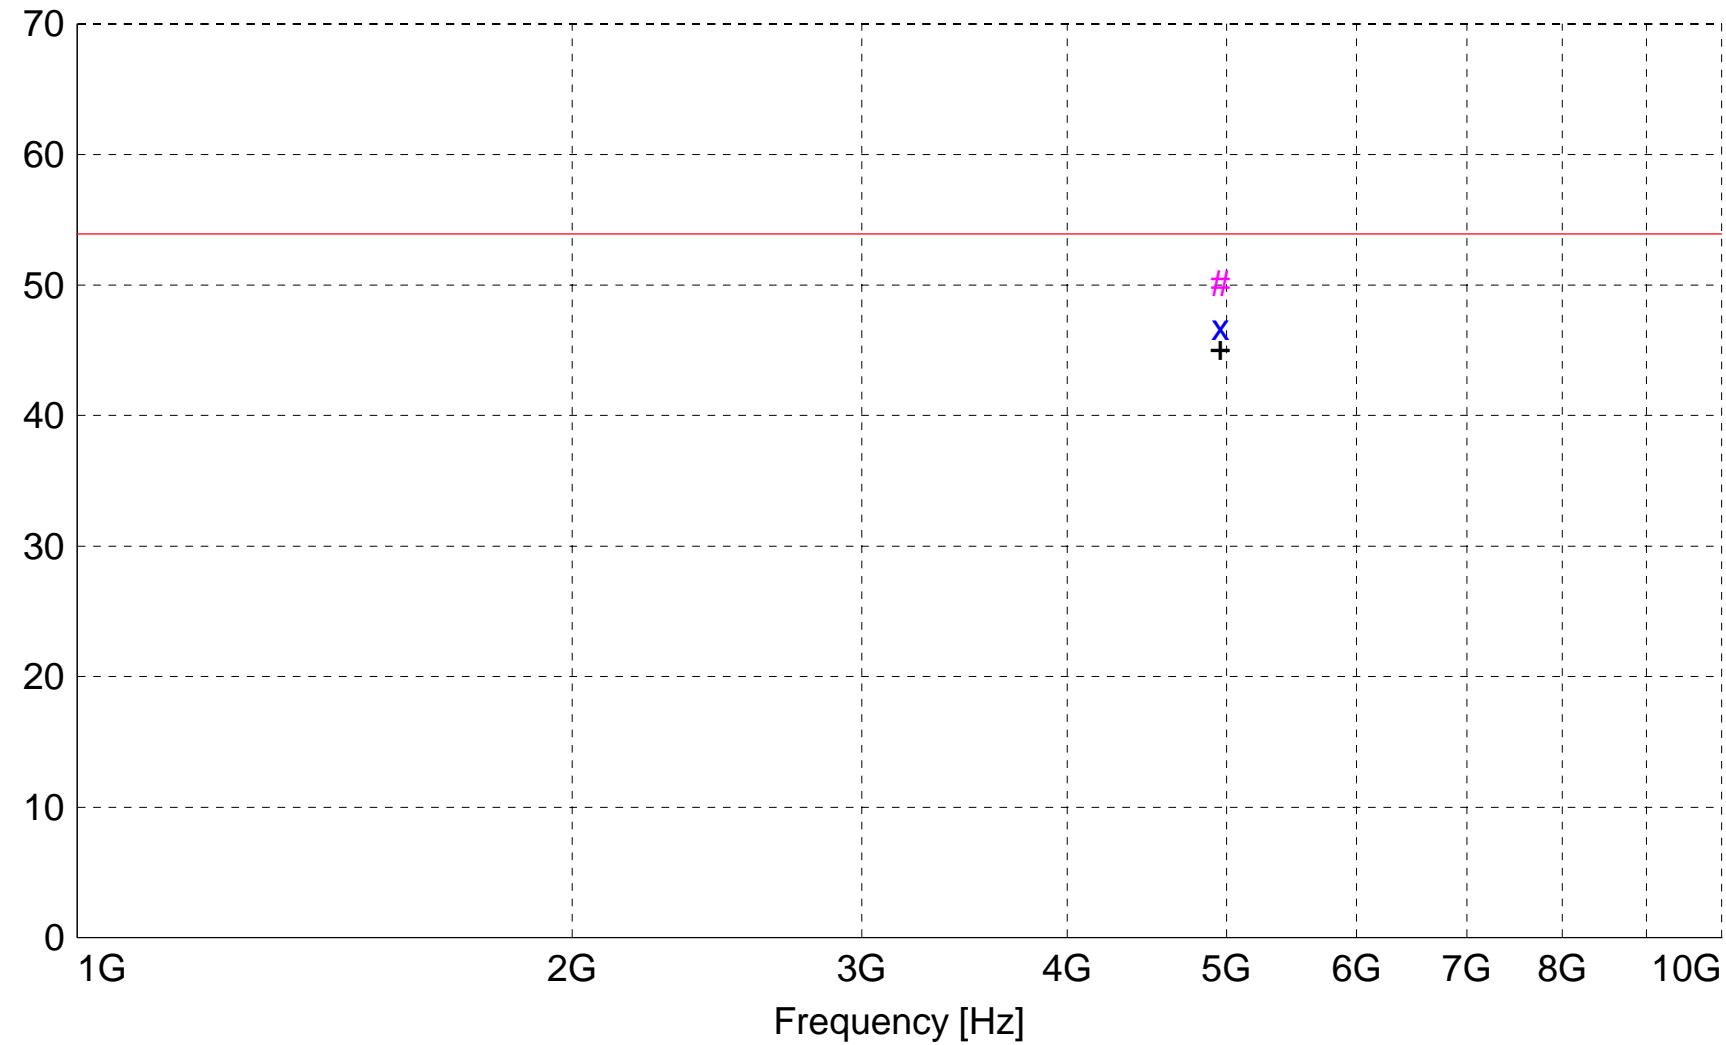

x x : MES A976\_sh\_Average  
# # : MES A976\_sh\_Peak  
+ + : MES A976\_sh\_Peak\_List  
— LIM FCC Class B F QP/AV

Field Strength FCC Class B 3m

**MEASUREMENT RESULT: "A976\_sh\_Final"**

9/6/2005 12:57PM

Frequency MHz	Level dB $\mu$ V	Antenna Factor dB $\mu$ V/m	System Loss dB	Total Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height Ant. m	EuT Angle deg	Final Detector	Comment
4955.960000	54.56	33.26	-37.7	50.1	53.9	3.8	1.30	90	MAX PEAK	None
4955.960000	51.15	33.26	-37.7	46.7	53.9	7.2	1.30	90	AVERAGE	None