



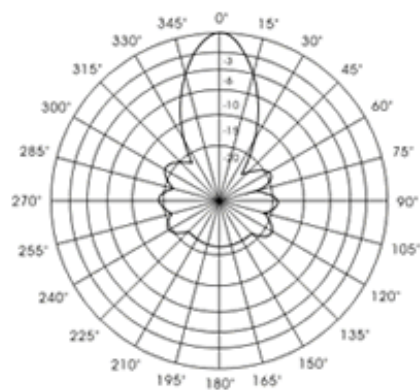


Horizontal Pattern

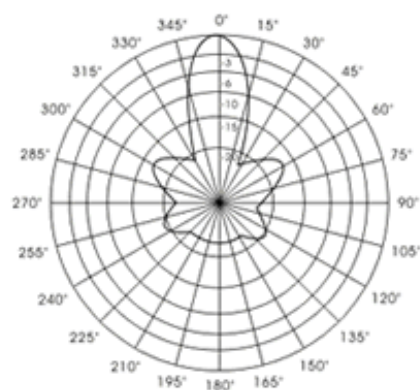


Vertical Pattern

Antenna of KW6918

Frequency Range	2400-2500MHz
Gain	17 dBi
VSWR	1.3:1 max
Impedance	50 Ohm
Polarization	Linear Vertical
HPBW/horizontal	23°
HPBW/vertical	18°
Front to Back Ratio	24 dB
Power Handling	50 Watts (CW)
Connector	N Female
Survival Wind Speed	180 Km/hr
Temperature	-40°C to +80°C
Humidity	100%@25°C
Radome Material	ABS, Zinc Casting, Stainless

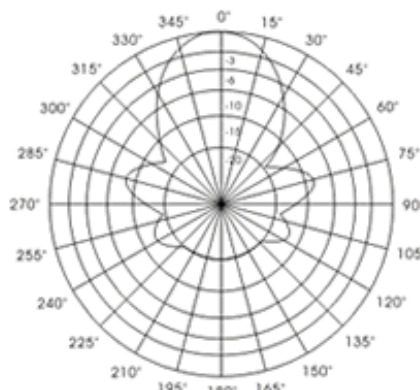

Horizontal Pattern

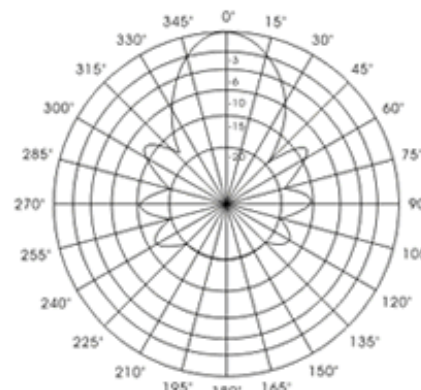

Vertical Pattern

Antenna of KW6920

Frequency Range	2400-2500MHz
Gain	14 dBi
VSWR	1.3:1 max
Impedance	50 Ohm
Polarization	Linear Vertical
HPBW/horizontal	40°
HPBW/vertical	36°
Front to Back Ratio	20 dB
Power Handling	50 Watts (CW)
Connector	N Female
Survival Wind Speed	180 Km/hr
Temperature	-40°C to +80°C
Humidity	100%@25°C
Radome Material	ABS, Zinc Casting, Stainless