

FCC Part 15

EMI TEST REPORT

of

E.U.T. : 2.4GHz RF Module
Model : KWS7S3
FCC ID : TJI-KWS7S3

for

APPLICANT : KINGWAVE TECHNOLOGY CO., LTD
ADDRESS : 18F-3, No. 186, Jian-Yi Road, Chung-Ho City,
235, Taipei, Taiwan

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU, LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052 Fax:(02)26010910
<http://www/etc.org.tw> ; e-mail : emc@etc.org.tw

Report Number : 12-04-RBF-190-01

TEST REPORT CERTIFICATION

Applicant : KINGWAVE TECHNOLOGY CO., LTD
 18F-3, No. 186, Jian-Yi Road, Chung-Ho City, 235, Taipei, Taiwan

Manufacture : KINGWAVE TECHNOLOGY CO., LTD
 18F-3, No. 186, Jian-Yi Road, Chung-Ho City, 235, Taipei, Taiwan
 LB TECHNOLOGY CO., LTD
 No.5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town,
 Zhongshan City, Guangdong, China

Description of Device :
 a) Type of EUT : 2.4GHz RF Module
 b) Trade Name : KINGWAVE
 c) Model No. : KWS7S3
 d) Power Supply : DC 5V

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
 2. The testing report shall not be reproduced except in full, without the written approval of ETC.

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Hopping Channel Separation	Pass
Number of Hopping frequencies used	Pass
Hopping Channel Bandwidth	Pass
Dwell Time of each frequency	Pass
Output Power Requirement	Pass
100 kHz Bandwidth of Frequency Band Edges Requirement	Pass
Out-of-Band Conducted Emission Requirement	Pass

Date Test Item Received : *Apr 30, 2012*
Date Test Campaign Completed : *May 11, 2012*
Date of Issue : *May. 17, 2012*

Test Engineer : *Vincent Chang*
(Vincent Chang, Engineer)

Approve & Authorized Signer : *S. S. Liou*
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Test Methodology	1
1.3 Test Facility.....	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	6
2.5 User Information	6
3 SYSTEM TEST CONFIGURATION	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation.....	20
4.6 Photos of Radiation Measuring Setup.....	21
5 CONDUCTED EMISSION MEASUREMENT	23
5.1 Standard Applicable	23
5.2 Measurement Procedure.....	23
5.3 Conducted Emission Data	24
5.4 Result Data Calculation.....	28
5.5 Conducted Measurement Equipment	28
5.6 Photos of Conduction Measuring Setup.....	29
6 ANTENNA REQUIREMENT	31
6.1 Standard Applicable	31
6.2 Antenna Construction.....	31
7 HOPPING CHANNEL SEPARATION.....	32
7.1 Standard Applicable	32
7.2 Measurement Procedure.....	32
7.3 Measurement Equipment	33
7.4 Measurement Data	33

8 NUMBER OF HOPPING FREQUENCY USED	37
8.1 Standard Applicable	37
8.2 Measurement Procedure	37
8.3 Measurement Equipment	37
8.4 Measurement Data	38
9 CHANNEL BANDWIDTH.....	42
9.1 Standard Applicable	42
9.2 Measurement Procedure.....	42
9.3 Measurement Equipment	43
9.4 Measurement Data	43
10 DWELL TIME ON EACH CHANNEL.....	47
10.1 Standard Applicable	47
10.2 Measurement Procedure.....	47
10.3 Measurement Equipment	47
10.4 Measurement Data	48
11 OUTPUT POWER MEASUREMENT.....	51
11.1 Standard Applicable	51
11.2 Measurement Procedure.....	51
11.3 Measurement Equipment	51
11.4 Measurement Data	52
12 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT.....	56
12.1 Standard Applicable	56
12.2 Measurement Procedure.....	56
12.3 Measurement Equipment	57
12.4 Measurement Data	57
13 CONDUCTED SPURIOUS EMISSION MEASUREMENT	62
13.1 Standard Applicable	62
13.2 Measurement Procedure.....	62
13.3 Measurement Equipment	63
13.4 Measurement Data	63

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : 2.4GHz RF Module
- b) Trade Name : KINGWAVE
- c) Model No. : KWS7S3
- d) Power Supply : DC 5V

1.2 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

There are four antennas listed with this RF module, three of them are dipole antenna and the other one is patch antenna. For radiated emission test, the highest gain of each antenna type was chosen to be tested.

There are three types of modulation in the module: 16QAM, QPSK and BPSK. Pretests have been performed with these modulations. The 16QAM mode was found the worst case so it was chosen for the final test and the test data was recorded in the test report.

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO. 34. LIN 5. DINGFU, LINKOU DIST., NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Jan. 11, 2011.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Hopping Channel Separation

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

(5) Number of Hopping frequencies used

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

(6) Hopping Channel Bandwidth

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

(7) Dwell Time of each frequency

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400–2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(8) Output Power Requirement

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

(9) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the

transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

(10) Out-of-Band Conducted Emission Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3 SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT (if applicable) to maximize the emission from EUT.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
2.4GHz RF Module *	KINGWAVE TECHNOLOGY CO., LTD	KWS7S3 / TJI-KWS7S3	----

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


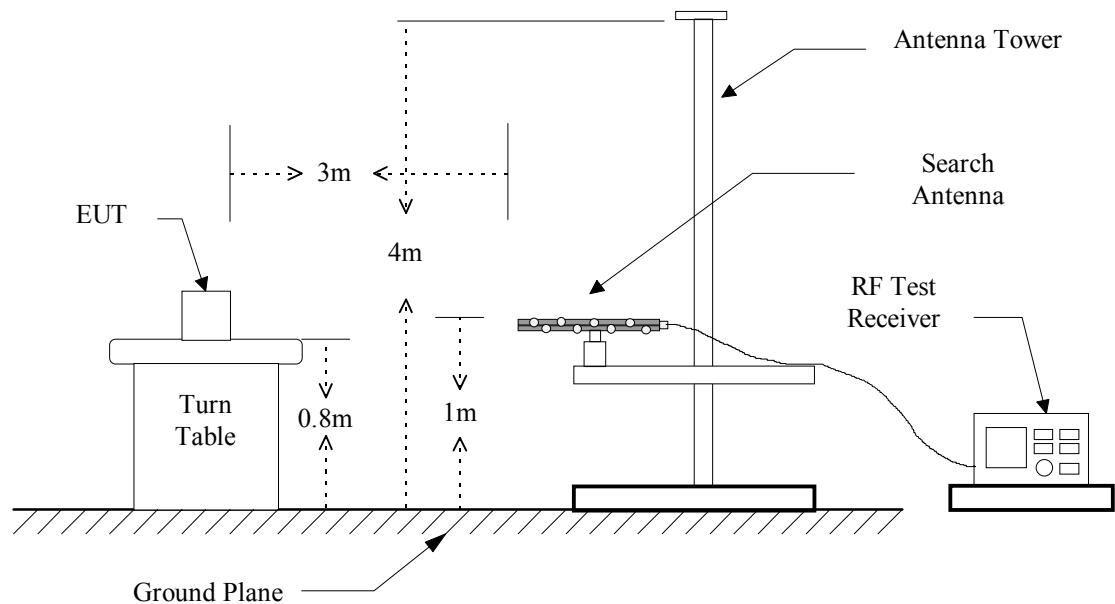


Figure 2 : Frequencies measured above 1 GHz configuration

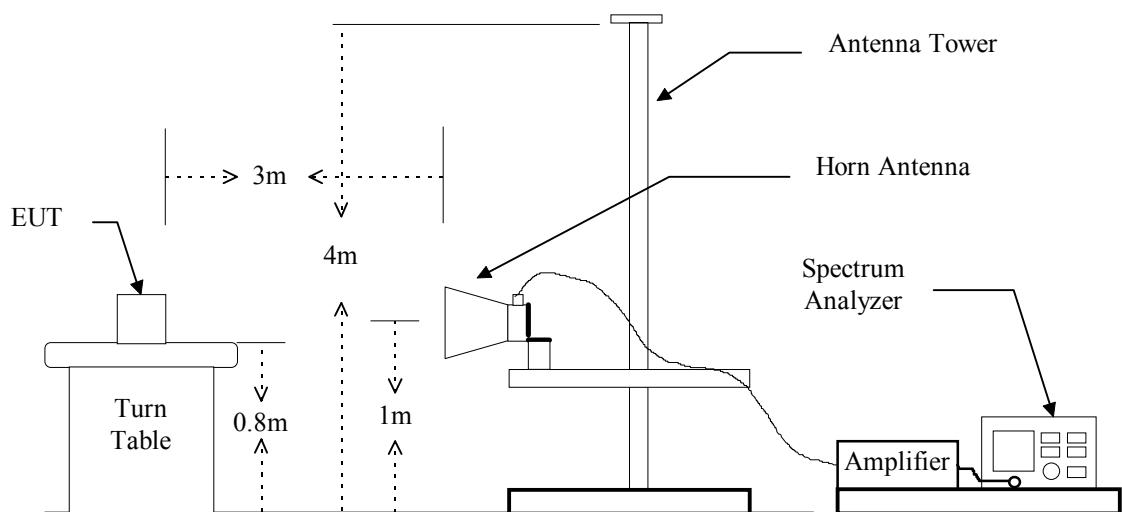

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2011/05/14	2012/05/13
Spectrum	Advantest	R3162	2012/03/05	2013/03/08
Bi-Log Antenna	Schaffner	CBL 6111	2011/06/07	2012/06/06
Log-periodic Antenna	EMCO	3146	2011/11/04	2012/11/03
Biconical Antenna	EMCO	3110B	2011/11/18	2012/11/17
Double Ridged Antenna	EMCO	3115	2011/05/30	2012/05/29
Amplifier	HP	8449B	2011/12/28	2012/12/27
Amplifier	HP	83051A	2011/05/31	2012/05/30
Amplifier	HP	8447D	2011/05/27	2012/05/26
Spectrum	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Double Ridged Antenna	EMCO	3116	2011/10/24	2012/10/23

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

4.4 Radiated Emission Data

4.4.1 Harmonics radiated emission

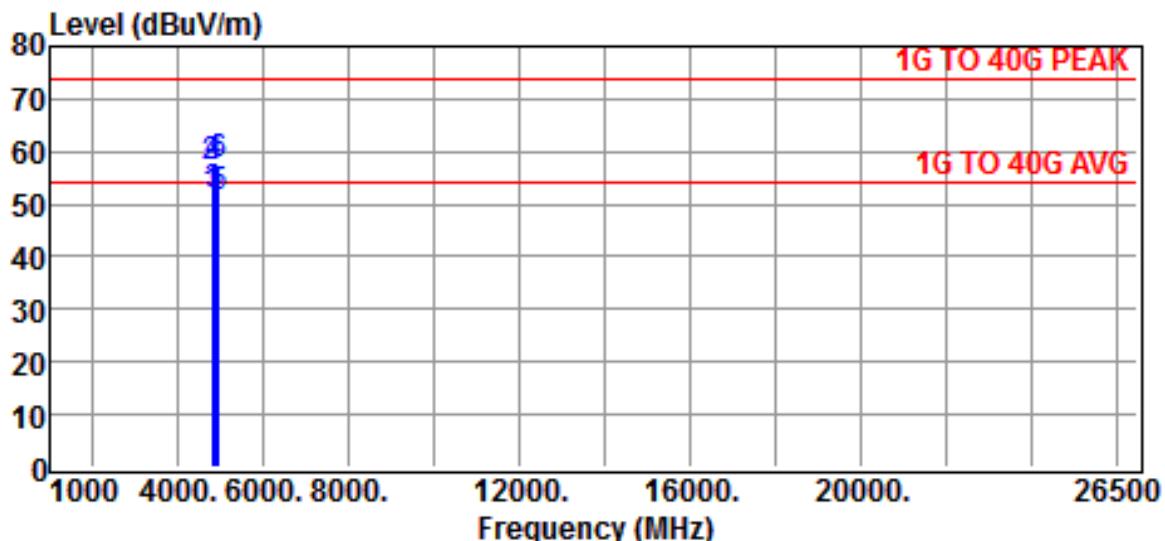


Site :chamber #2 Date :2012-05-15
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :2.4GHz Temp. :26
 Power Rating :DC 5V Humi. :65
 Model : KWS7S3 Engineer. :VC
 Memo : 9dBi Antenna
 Memo : CH Low:2403MHz / Mid:2442MHz / High:2478MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4806.0000	50.7	0.6	51.3	54.0	-2.7	Average
4806.0000	56.6	0.6	57.2	74.0	-16.8	Peak
4884.0000	50.8	0.7	51.5	54.0	-2.5	Average
4884.0000	56.8	0.7	57.5	74.0	-16.5	Peak
4956.0000	50.3	1.0	51.3	54.0	-2.7	Average
4956.0000	56.4	1.0	57.4	74.0	-16.6	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

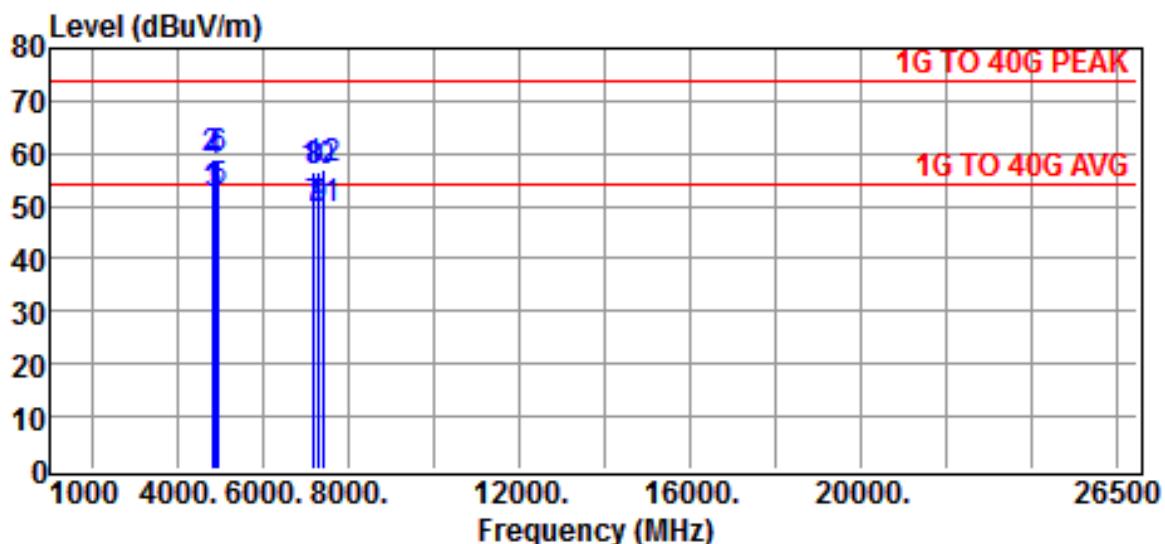


Site : chamber #2
 Date : 2012-05-15
 Limit : 1G TO 40G PEAK
 Ant. Pol. : VERTICAL
 EUT : 2.4GHz
 Temp. : 26
 Power Rating : DC 5V
 Humi. : 65
 Model : KWS7S3
 Engineer. : VC
 Memo : 9dBi Antenna
 Memo : CH Low:2403MHz / Mid:2442MHz / High:2478MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4806.0000	51.7	0.6	52.3	54.0	-1.7	Average
4806.0000	58.2	0.6	58.8	74.0	-15.2	Peak
4884.0000	51.5	0.7	52.2	54.0	-1.8	Average
4884.0000	57.6	0.7	58.3	74.0	-15.7	Peak
4956.0000	51.6	1.0	52.6	54.0	-1.4	Average
4956.0000	57.8	1.0	58.8	74.0	-15.2	Peak
7209.0000	44.4	4.9	49.3	54.0	-4.7	Average
7209.0000	51.5	4.9	56.4	74.0	-17.6	Peak
7326.0000	44.2	5.1	49.3	54.0	-4.7	Average
7326.0000	51.2	5.1	56.3	74.0	-17.7	Peak
7434.0000	43.8	5.4	49.2	54.0	-4.8	Average
7434.0000	51.4	5.4	56.8	74.0	-17.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit – Result

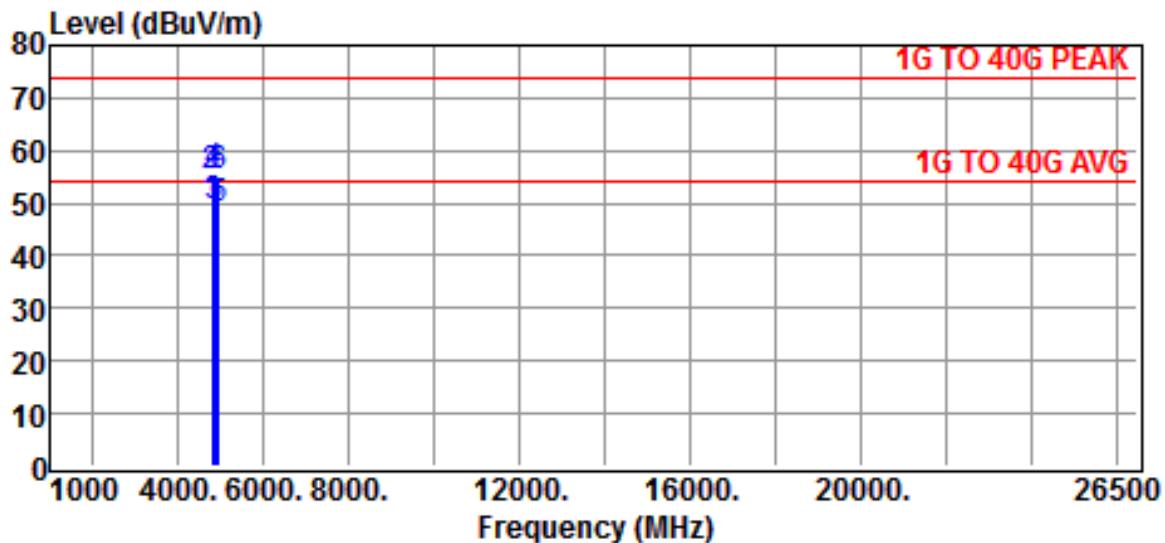


Site : chamber #2 Date : 2012-05-15
 Limit : 1G TO 40G PEAK Ant. Pol. : HORIZONTAL
 EUT : 2.4GHz Temp. : 26
 Power Rating : DC 5V Humi. : 65
 Model : KWS7S3 Engineer. : VC
 Memo : 6dBi Antenna
 Memo : CH Low:2403MHz / Mid:2442MHz / High:2478MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4806.0000	48.7	0.6	49.3	54.0	-4.7	Average
4806.0000	54.7	0.6	55.3	74.0	-18.7	Peak
4884.0000	48.6	0.7	49.3	54.0	-4.7	Average
4884.0000	55.0	0.7	55.7	74.0	-18.3	Peak
4956.0000	48.0	1.0	49.0	54.0	-5.0	Average
4956.0000	54.1	1.0	55.1	74.0	-18.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

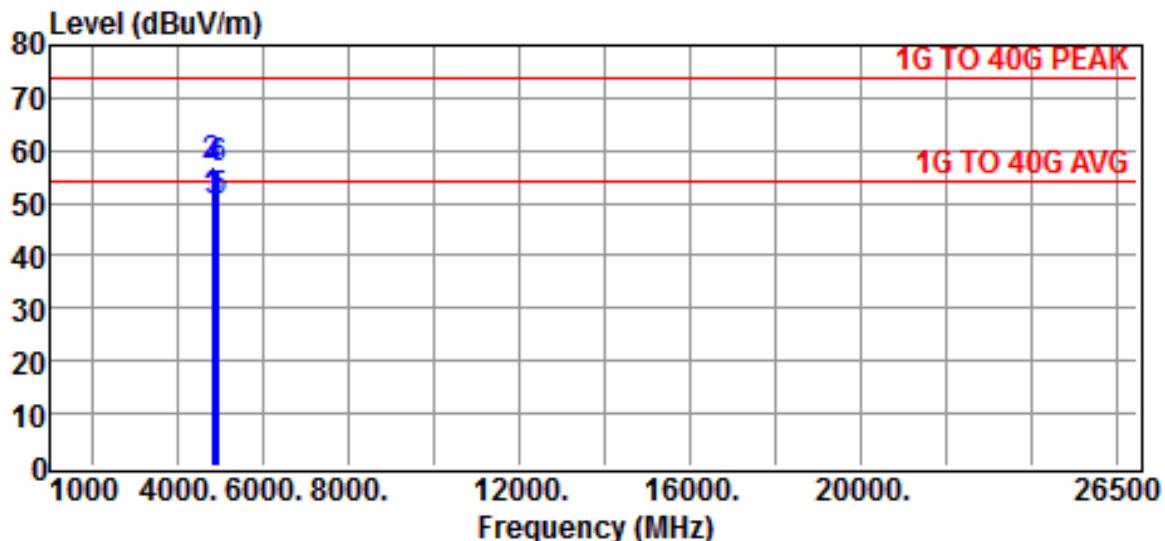


Site : chamber #2
 Limit : 1G TO 40G PEAK
 EUT : 2.4GHz
 Power Rating : DC 5V
 Model : KWS7S3
 Memo : 6dBi Antenna
 Memo : CH Low:2403MHz / Mid:2442MHz / High:2478MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4806.0000	49.5	0.6	50.1	54.0	-3.9	Average
4806.0000	56.2	0.6	56.8	74.0	-17.2	Peak
4884.0000	49.6	0.7	50.3	54.0	-3.7	Average
4884.0000	55.8	0.7	56.5	74.0	-17.5	Peak
4956.0000	49.4	1.0	50.4	54.0	-3.6	Average
4956.0000	55.7	1.0	56.7	74.0	-17.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

4.4.2 Radiated Emissions in Restricted Bands

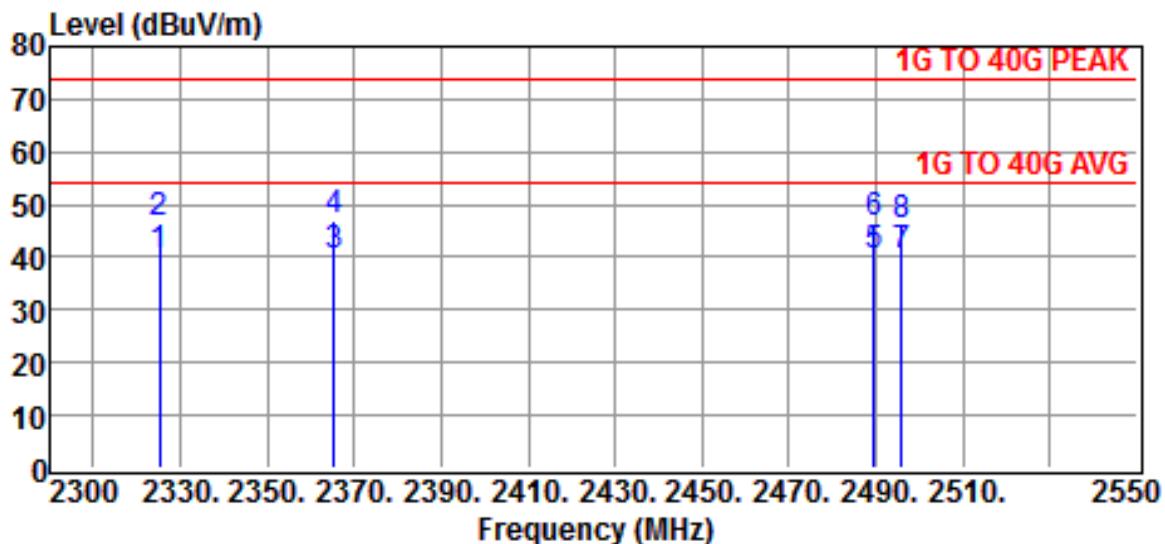


Site :chamber #2 Date :2012-05-15
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :2.4GHz Temp. :26
 Power Rating :DC 5V Humi. :65
 Model : KWS7S3 Engineer. :VC
 Memo : 9dBi Antenna
 Memo :CH Low & High - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2325.2500	46.5	-6.4	40.1	54.0	-13.9	Average
2325.2500	52.9	-6.4	46.5	74.0	-27.5	Peak
2365.4500	46.5	-6.3	40.2	54.0	-13.8	Average
2365.4500	53.1	-6.3	46.8	74.0	-27.2	Peak
2489.5500	46.2	-5.9	40.3	54.0	-13.7	Average
2489.5500	52.2	-5.9	46.3	74.0	-27.7	Peak
2495.7500	46.3	-5.9	40.4	54.0	-13.6	Average
2495.7500	52.1	-5.9	46.2	74.0	-27.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

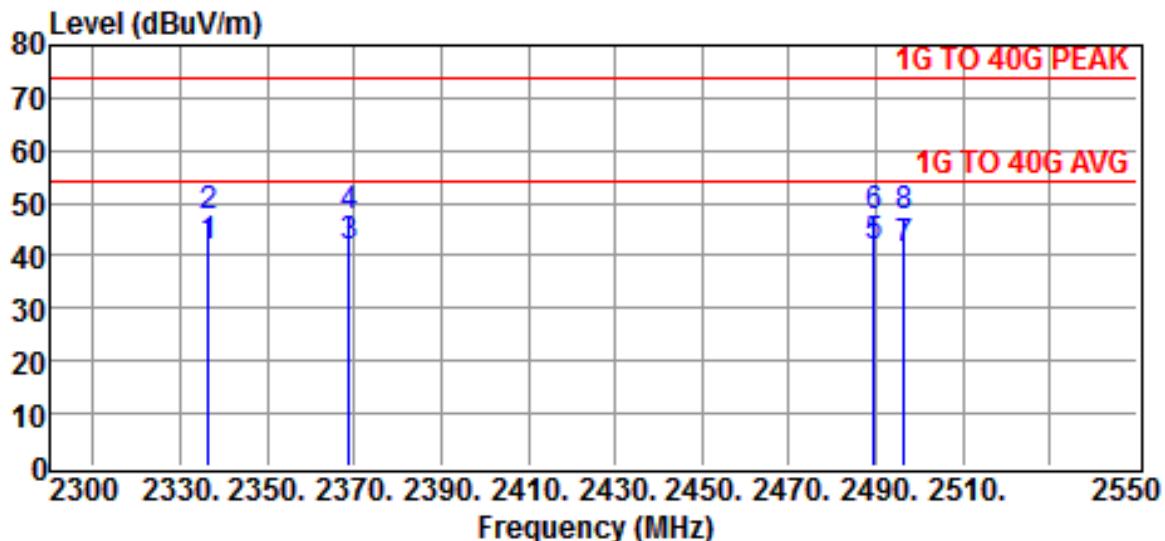


Site :chamber #2 Date :2012-05-15
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :2.4GHz Temp. :26
 Power Rating :DC 5V Humi. :65
 Model : KWS7S3 Engineer. :VC
 Memo : 9dBi Antenna
 Memo :CH Low & High - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2336.5100	47.9	-6.3	41.6	54.0	-12.4	Average
2336.5100	53.9	-6.3	47.6	74.0	-26.4	Peak
2368.9100	47.8	-6.3	41.5	54.0	-12.5	Average
2368.9100	53.6	-6.3	47.3	74.0	-26.7	Peak
2489.5500	47.6	-5.9	41.7	54.0	-12.3	Average
2489.5500	53.2	-5.9	47.3	74.0	-26.7	Peak
2496.3500	47.2	-5.9	41.3	54.0	-12.7	Average
2496.3500	53.2	-5.9	47.3	74.0	-26.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

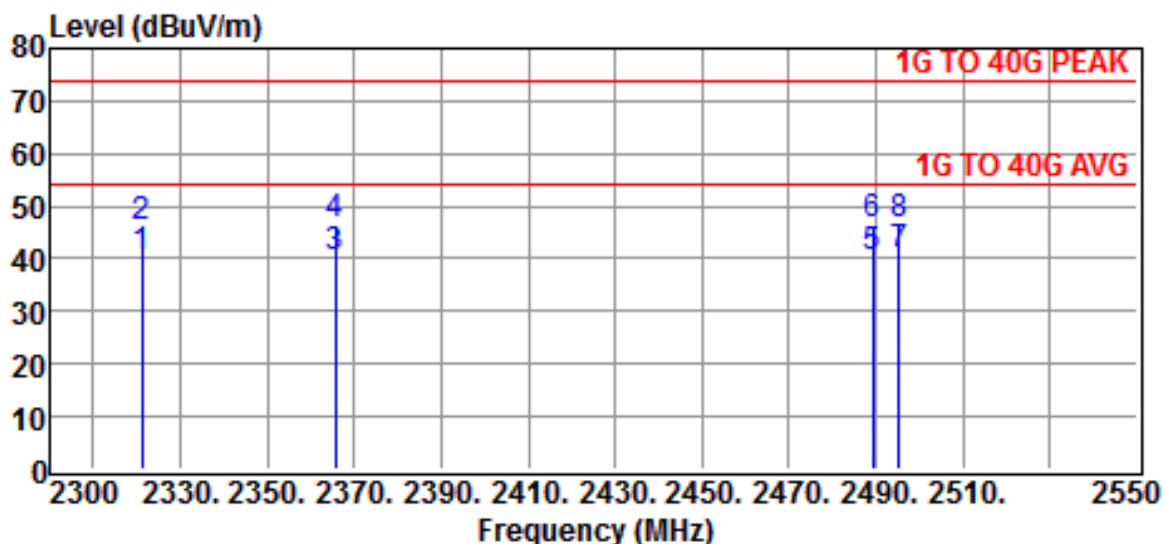


Site :chamber #2 Date :2012-05-15
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :2.4GHz Temp. :26
 Power Rating :DC 5V Humi. :65
 Model : KWS7S3 Engineer. :VC
 Memo : 6dBi Antenna
 Memo :CH Low & High - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2321.2500	46.7	-6.4	40.3	54.0	-13.7	Average
2321.2500	52.6	-6.4	46.2	74.0	-27.8	Peak
2365.5400	46.6	-6.3	40.3	54.0	-13.7	Average
2365.5400	52.7	-6.3	46.4	74.0	-27.6	Peak
2489.3500	46.2	-5.9	40.3	54.0	-13.7	Average
2489.3500	52.4	-5.9	46.5	74.0	-27.5	Peak
2495.4100	46.5	-5.9	40.6	54.0	-13.4	Average
2495.4100	52.2	-5.9	46.3	74.0	-27.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

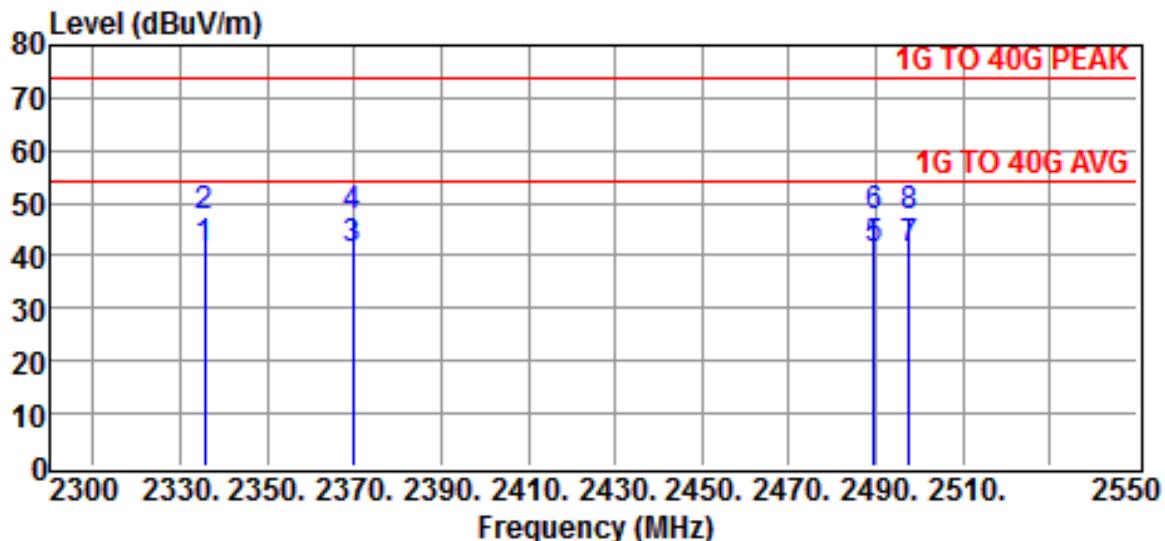

Site :chamber #2 Date :2012-05-15
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :2.4GHz Temp. :26
 Power Rating :DC 5V Humi. :65
 Model : KWS7S3 Engineer. :VC
 Memo : 6dBi Antenna
 Memo :CH Low & High - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2335.5500	47.5	-6.3	41.2	54.0	-12.8	Average
2335.5500	53.8	-6.3	47.5	74.0	-26.5	Peak
2369.8500	47.6	-6.3	41.3	54.0	-12.7	Average
2369.8500	53.6	-6.3	47.3	74.0	-26.7	Peak
2489.6500	47.2	-5.9	41.3	54.0	-12.7	Average
2489.6500	53.5	-5.9	47.6	74.0	-26.4	Peak
2497.5100	47.1	-5.9	41.2	54.0	-12.8	Average
2497.5100	53.4	-5.9	47.5	74.0	-26.5	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

4.4.3 Other Spurious Emissions

a) Emission frequencies below 1 GHz

Operation Mode : 9dBi Antenna

Test Date : Apr. 19, 2012 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
43.50	V	25.6	12.9	38.5	40.0	-1.5	178	1.0
53.49	V	26.2	11.5	37.7	40.0	-2.3	192	1.0
152.85	V	20.4	14.1	34.5	43.5	-9.0	188	1.0
207.93	V	19.1	17.7	36.8	43.5	-6.7	175	1.0
360.20	V	25.1	18.0	43.1	46.0	-2.9	188	1.0
598.90	V	19.2	23.0	42.2	46.0	-3.8	192	1.0

Operation Mode : 6dBi Antenna

Test Date : Apr. 19, 2012 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
43.50	V	25.4	12.9	38.3	40.0	-1.7	177	1.0
152.85	V	20.3	14.1	34.4	43.5	-9.1	182	1.0
260.58	V	20.0	21.2	41.2	46.0	-4.8	184	1.0
360.20	V	25.1	18.0	43.1	46.0	-2.9	179	1.0
598.90	V	19.2	23.0	42.2	46.0	-3.8	182	1.0
719.30	V	18.1	25.4	43.5	46.0	-2.5	180	1.0

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

Test Mode: Ant 9dBi



Test Mode: Ant 6dBi



5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively .


5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then records the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

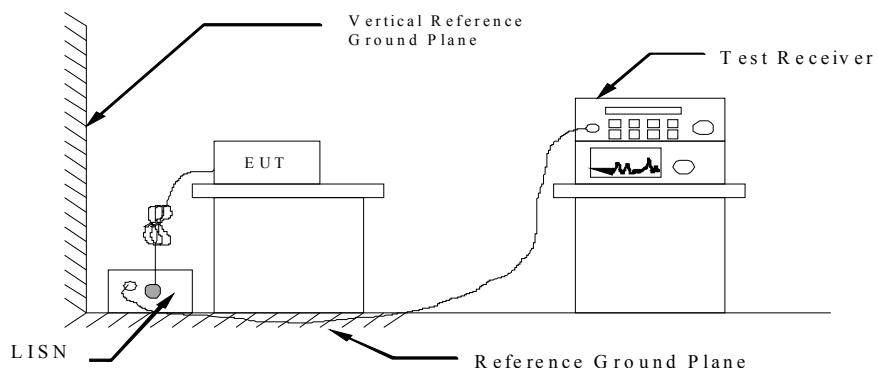

5.3 Conducted Emission Data

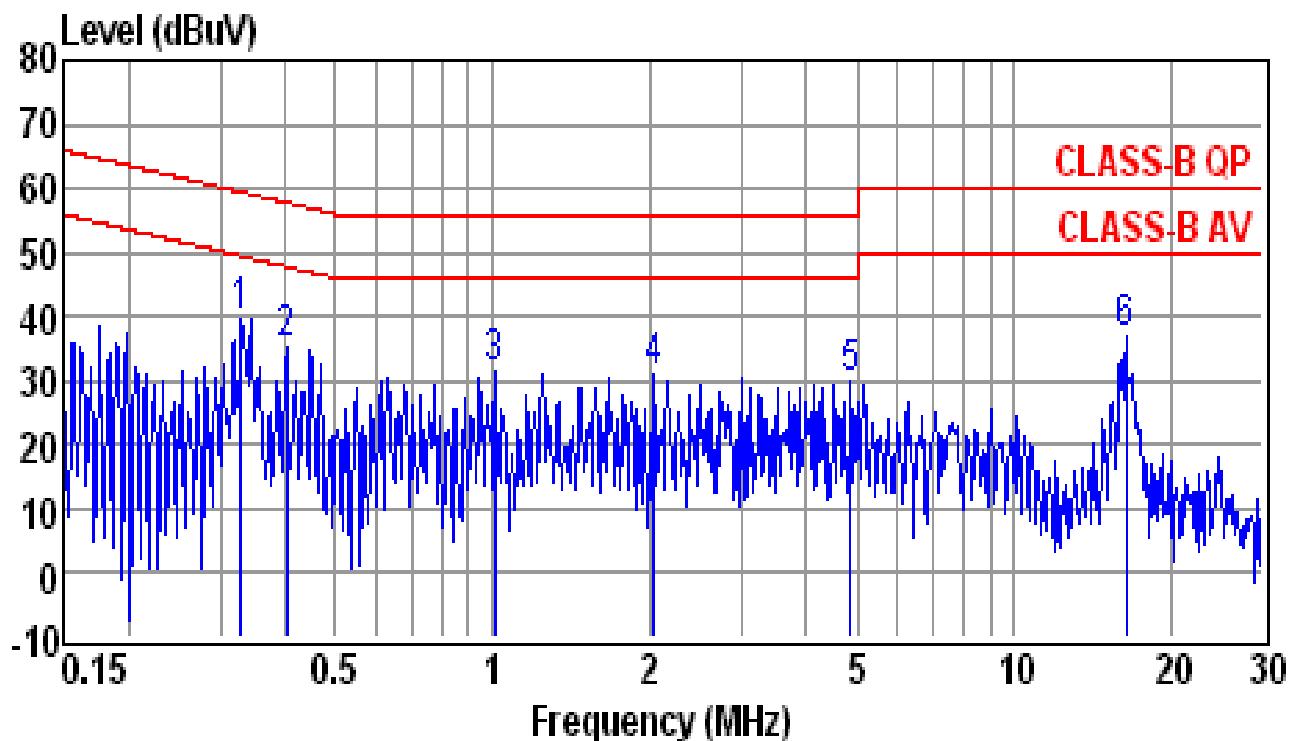


Site : conducted #1 Date : 05-17-2012
 Condition : CLASS-B QP LISN : NEUTRAL
 Tem / Hum : 25 °C / 65%
 Test Mode : 9dBi Antenna
 EUT : KWS7S3 Power Rating : 120VAC/60Hz

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.3286	39.4	0.1	39.5	59.5	-20.0	QP
0.4019	34.9	0.2	35.1	57.8	-22.7	QP
1.0100	31.1	0.2	31.3	56.0	-24.7	QP
2.0440	30.7	0.3	31.0	56.0	-25.0	QP
4.8740	29.4	0.4	29.8	56.0	-26.2	QP
16.3980	36.2	0.7	36.9	60.0	-23.1	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

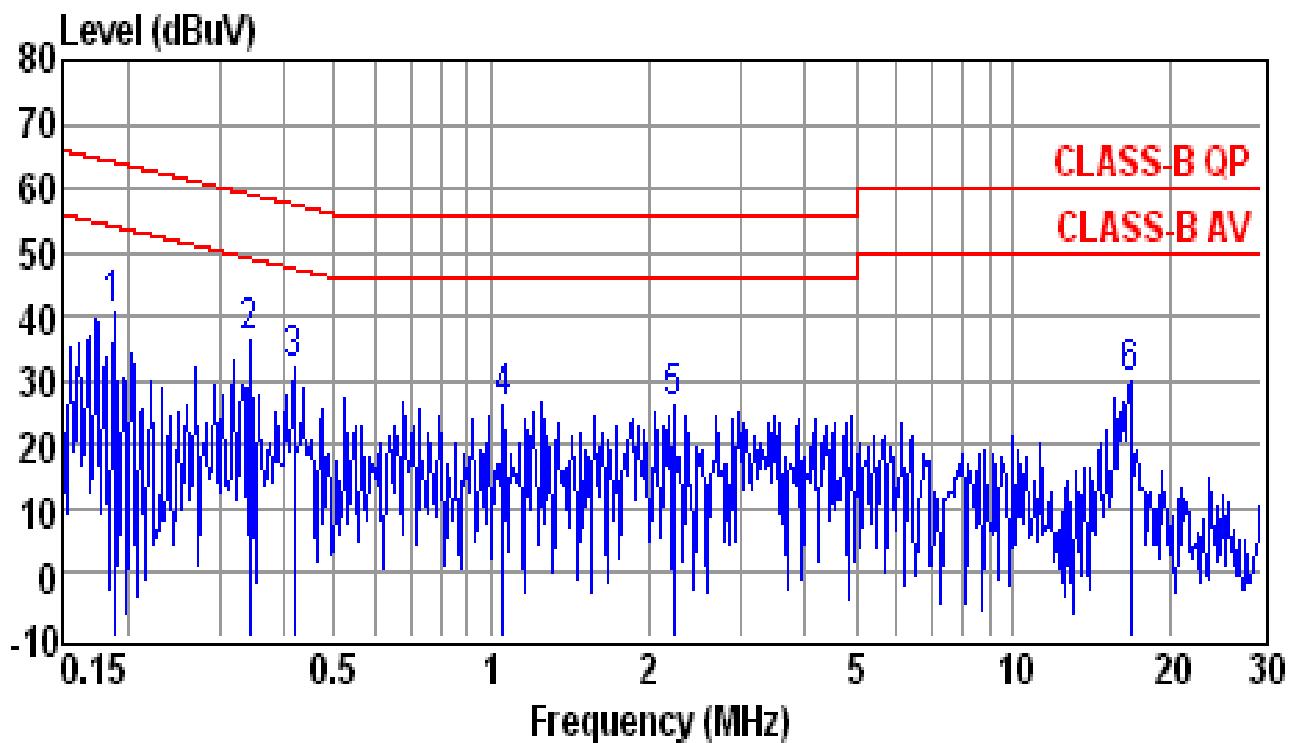


Site : conducted #1 Date : 05-17-2012
 Condition : CLASS-B QP LISN : LINE
 Tem / Hum : 25 °C / 65%
 Test Mode : 9dBi Antenna
 EUT : KWS7S3 Power Rating : 120VAC/60Hz

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1884	40.6	0.1	40.7	64.1	-23.4	QP
0.3428	36.2	0.1	36.3	59.1	-22.8	QP
0.4171	31.7	0.2	31.9	57.5	-25.6	QP
1.0540	26.1	0.2	26.3	56.0	-29.7	QP
2.2370	25.9	0.3	26.2	56.0	-29.8	QP
16.8390	29.1	0.7	29.8	60.0	-30.2	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

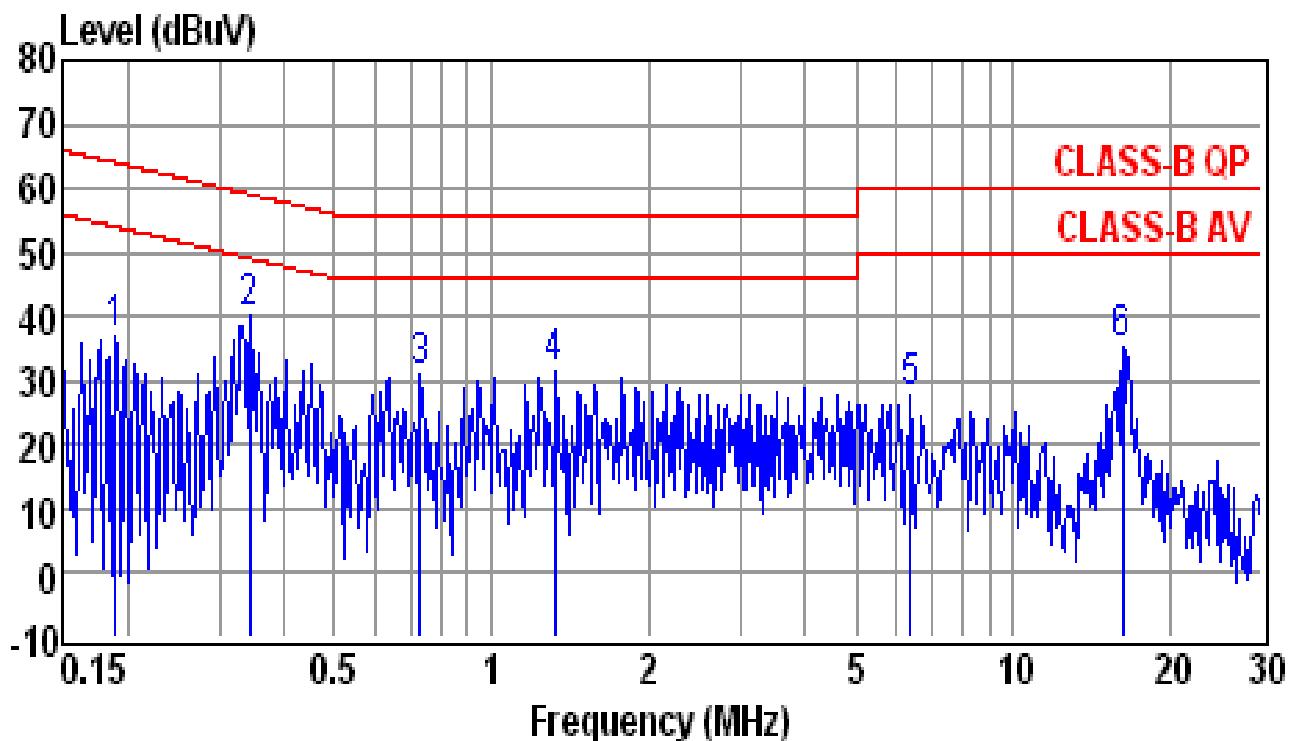


Site : conducted #1 Date : 05-17-2012
 Condition : CLASS-B QP LISN : NEUTRAL
 Tem / Hum : 25 °C / 65%
 Test Mode : 6dBi Antenna
 EUT : KWS7S3 Power Rating : 120VAC/60Hz

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1904	36.7	0.1	36.8	64.0	-27.2	QP
0.3428	40.2	0.1	40.3	59.1	-18.8	QP
0.7274	30.5	0.2	30.7	56.0	-25.3	QP
1.3240	31.4	0.2	31.6	56.0	-24.4	QP
6.3520	27.3	0.4	27.7	60.0	-32.3	QP
16.2260	34.3	0.7	35.0	60.0	-25.0	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

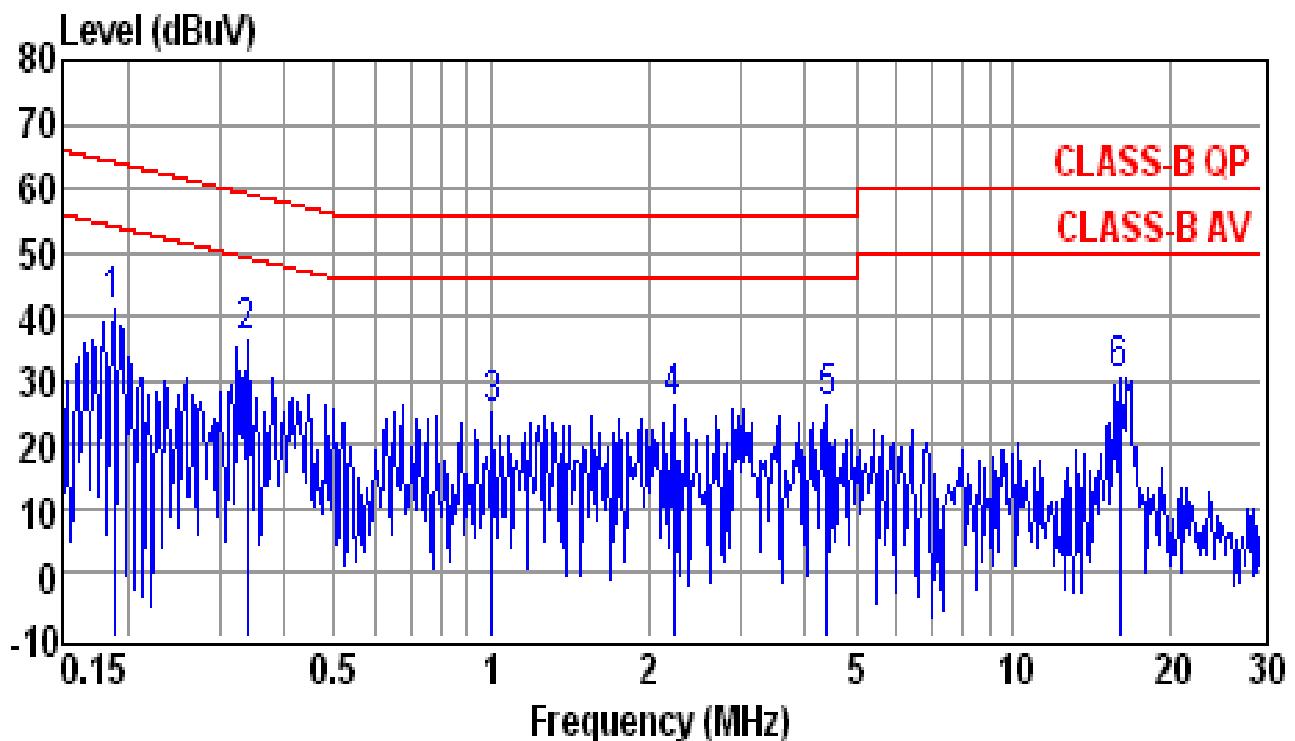

Site : conducted #1 Date : 05-17-2012
 Condition : CLASS-B QP LISN : LINE
 Tem / Hum : 25 °C / 65%
 Test Mode : 6dBi Antenna
 EUT : KWS7S3 Power Rating : 120VAC/60Hz

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1884	41.0	0.1	41.1	64.1	-23.0	QP
0.3392	36.4	0.1	36.5	59.2	-22.7	QP
0.9997	24.9	0.2	25.1	56.0	-30.9	QP
2.2370	25.7	0.3	26.0	56.0	-30.0	QP
4.4070	25.7	0.4	26.1	56.0	-29.9	QP
16.0550	29.9	0.7	30.6	60.0	-29.4	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \text{ } \mu \text{ V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2012/05/08	2013/05/08
LISN	EMCO	3825/2	2011/10/27	2012/10/26
LISN	Rohde & Schwarz	ESH2-Z5	2011/08/24	2012/08/23

5.6 Photos of Conduction Measuring Setup

Test Mode: Ant 9dBi



Test Mode: Ant 6dBi



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

There are 4 antenna listed with this module.

Antenna Type	Specifications	Connector Type	Antenna Gain
Dipole	AN2400-5901RS 2.4 GHz Antenna	RP-SMA	9dBi
Dipole	WSS006 2.4GHz Antenna	RP-SMA	3dBi
Dipole	WSS001 Dual Band Dipole Antenna	RP-SMA	2dBi
Patch	2.4GHz High Gain Patch Antenna	RP-SMA	6dBi

Note: The standard antenna jack or electrical connector is prohibited.

Please see antenna specifications submitted in Exhibits.

7 HOPPING CHANNEL SEPARATION


7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



7.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A


7.4 Measurement Data


Test Date : May 11, 2012 Temperature : 25 °C Humidity : 65 %

- a) Channel Low : Adjacent Hopping Channel Separation is 3.020 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 3.020 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 3.020 MHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

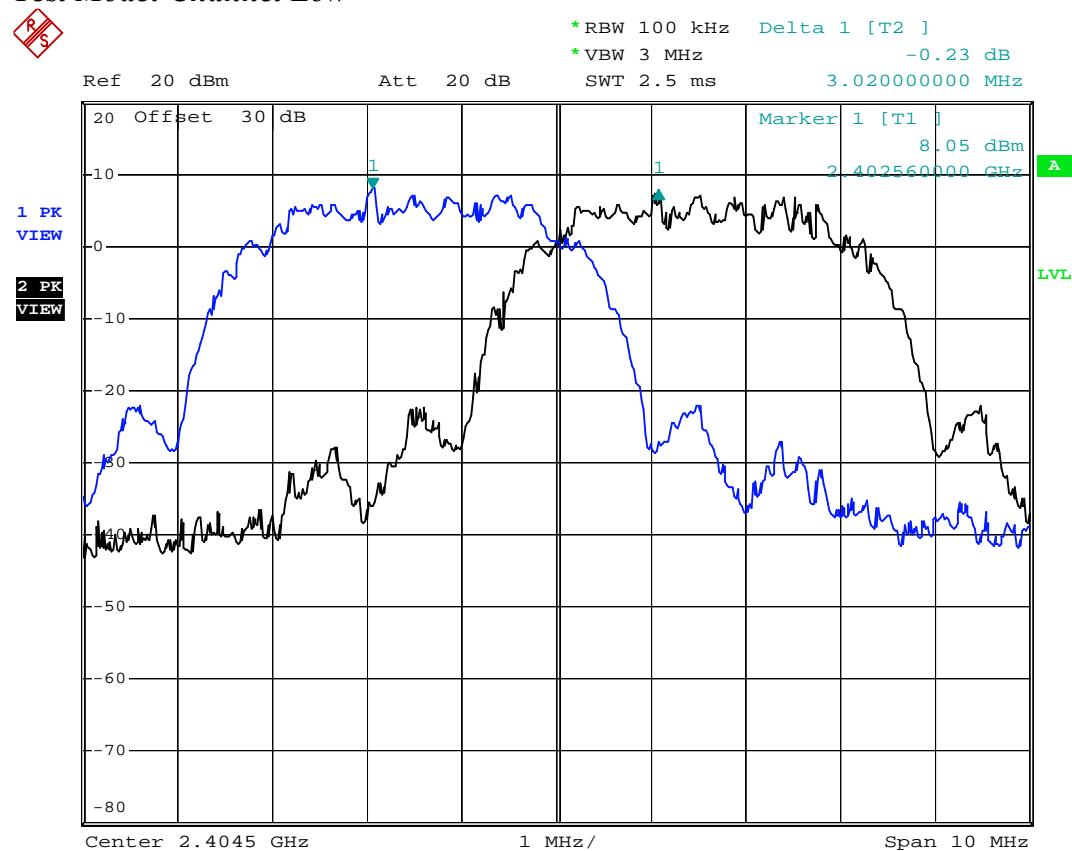Test Mode: Channel Low

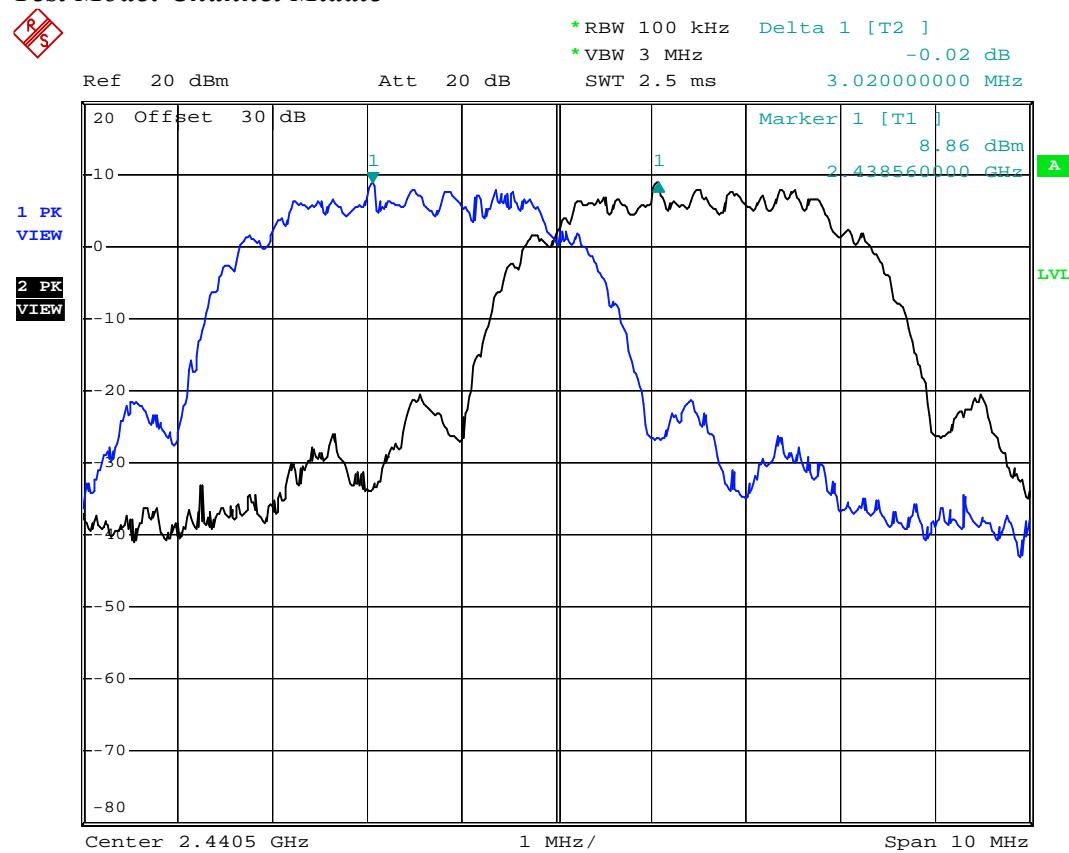Test Mode: Channel Middle

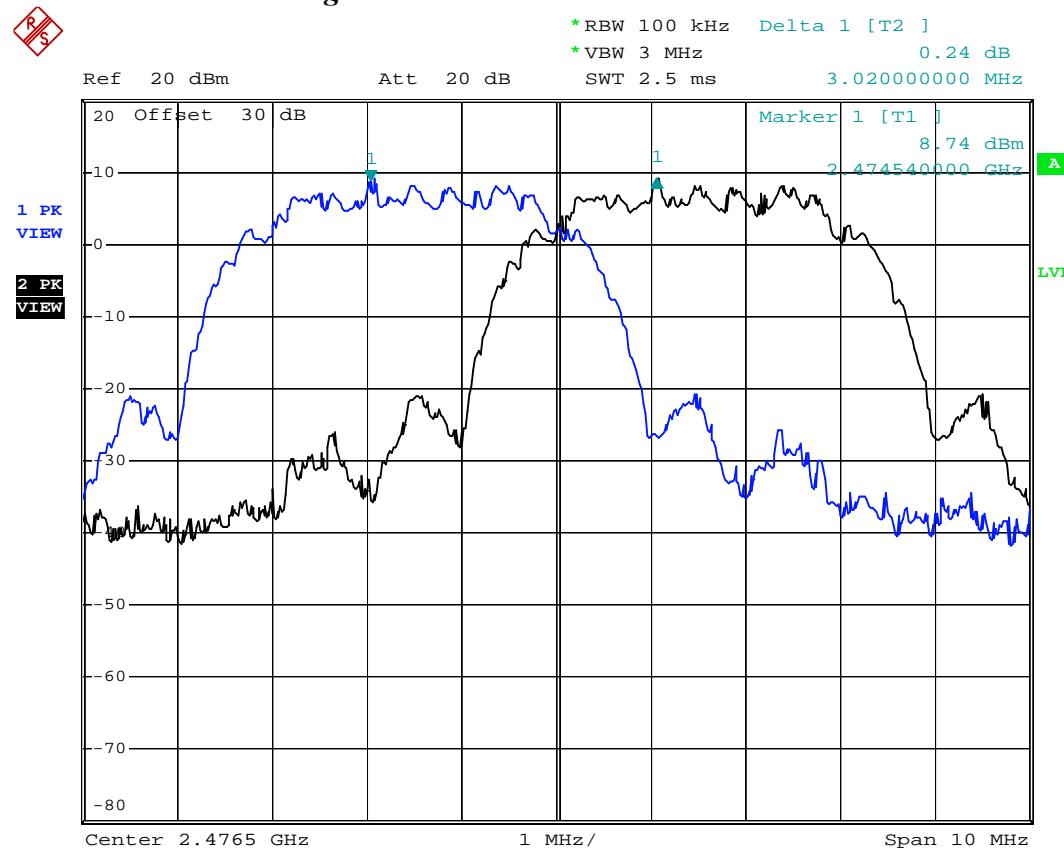Test Mode: Channel High**RS**

8 NUMBER OF HOPPING FREQUENCY USED

8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW \geq 1% of the span
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A


8.4 Measurement Data


Test Date : May 11, 2012 Temperature : 25 °C Humidity : 65 %

There are 26 hopping frequencies used.

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

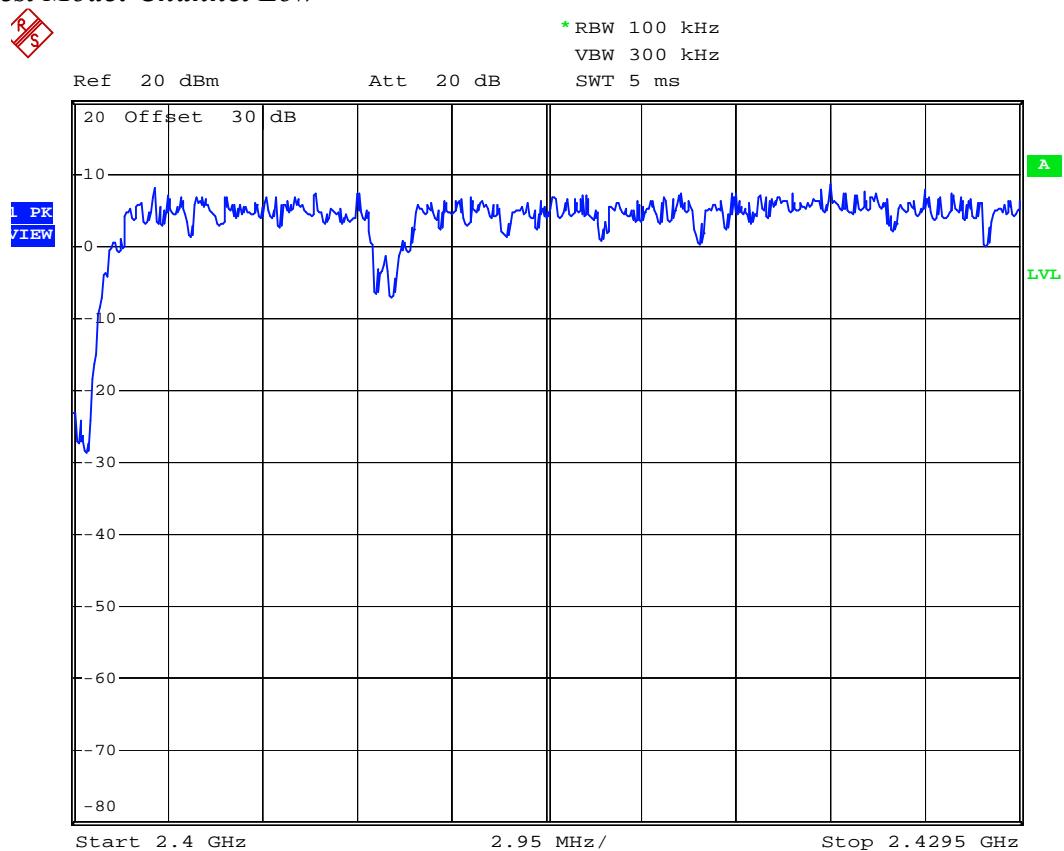Test Mode: Channel Low

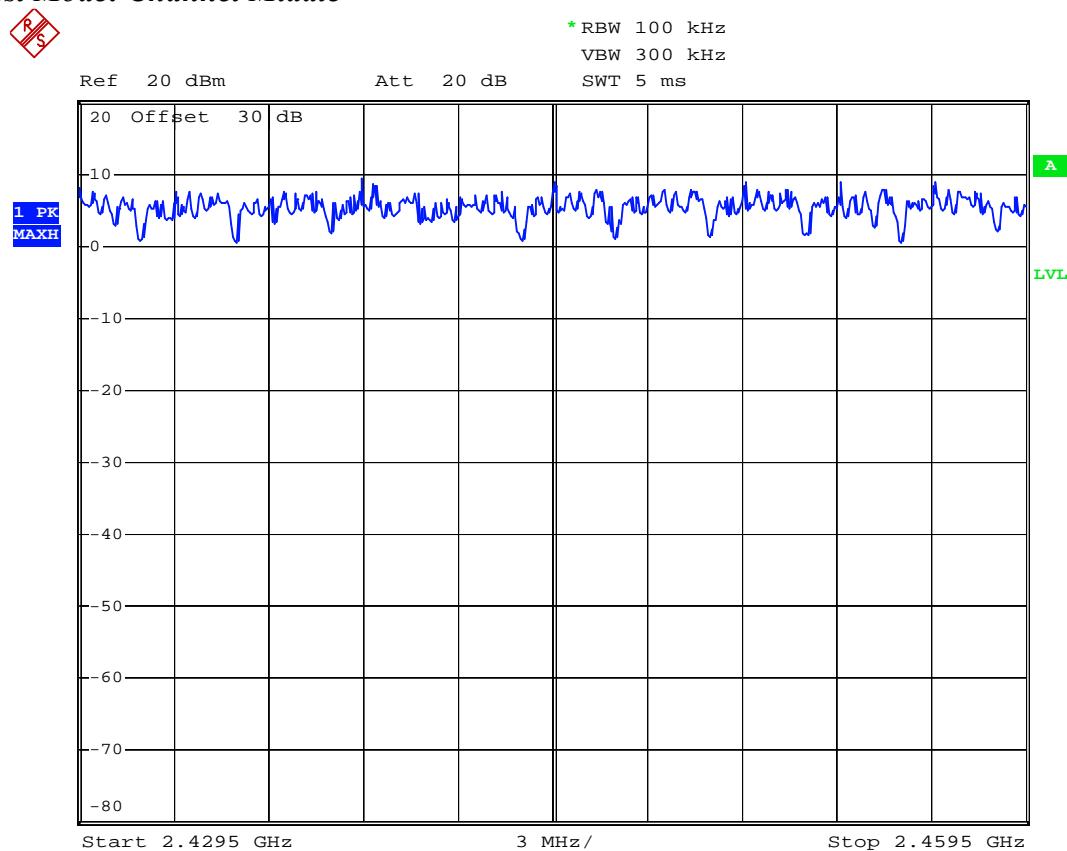Test Mode: Channel Middle

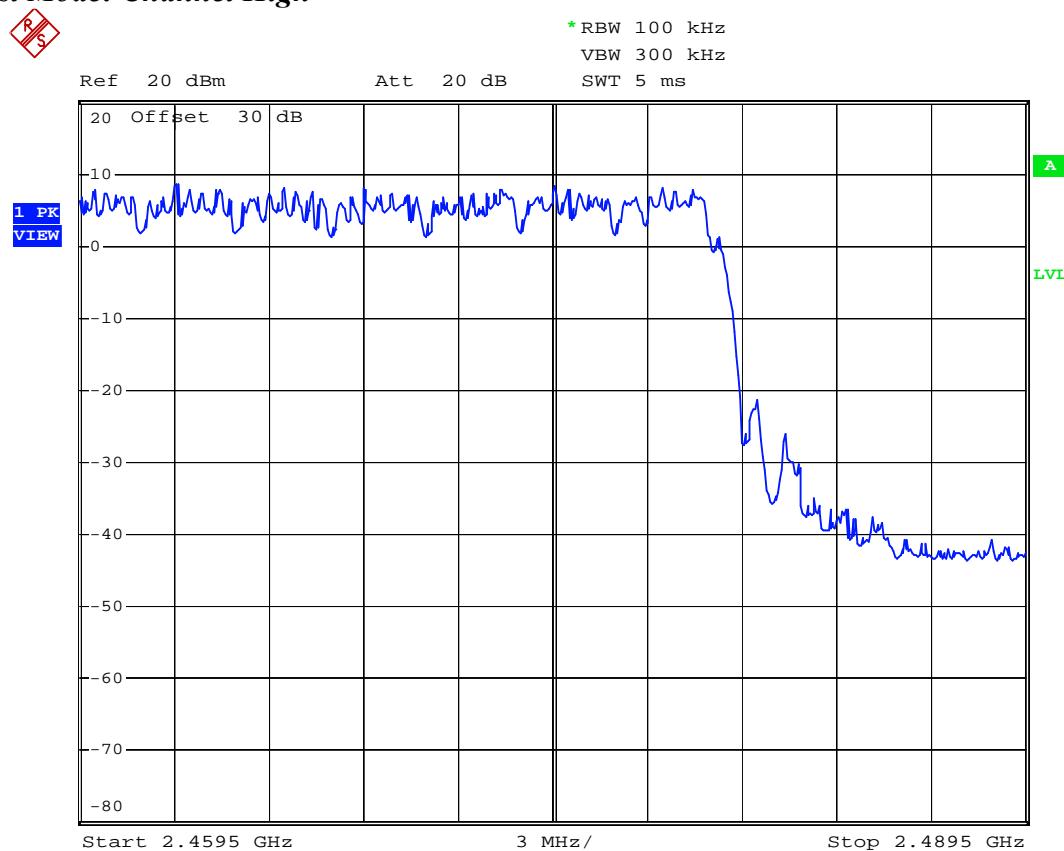Test Mode: Channel High

9 CHANNEL BANDWIDTH

9.1 Standard Applicable

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

9.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A


9.4 Measurement Data


Test Date : May. 11, 2012 Temperature : 25 °C Humidity : 65 %

- a) Channel Low : Channel Bandwidth is 4.480 MHz
- b) Channel Middle : Channel Bandwidth is 4.440 MHz
- c) Channel High : Channel Bandwidth is 4.460 MHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

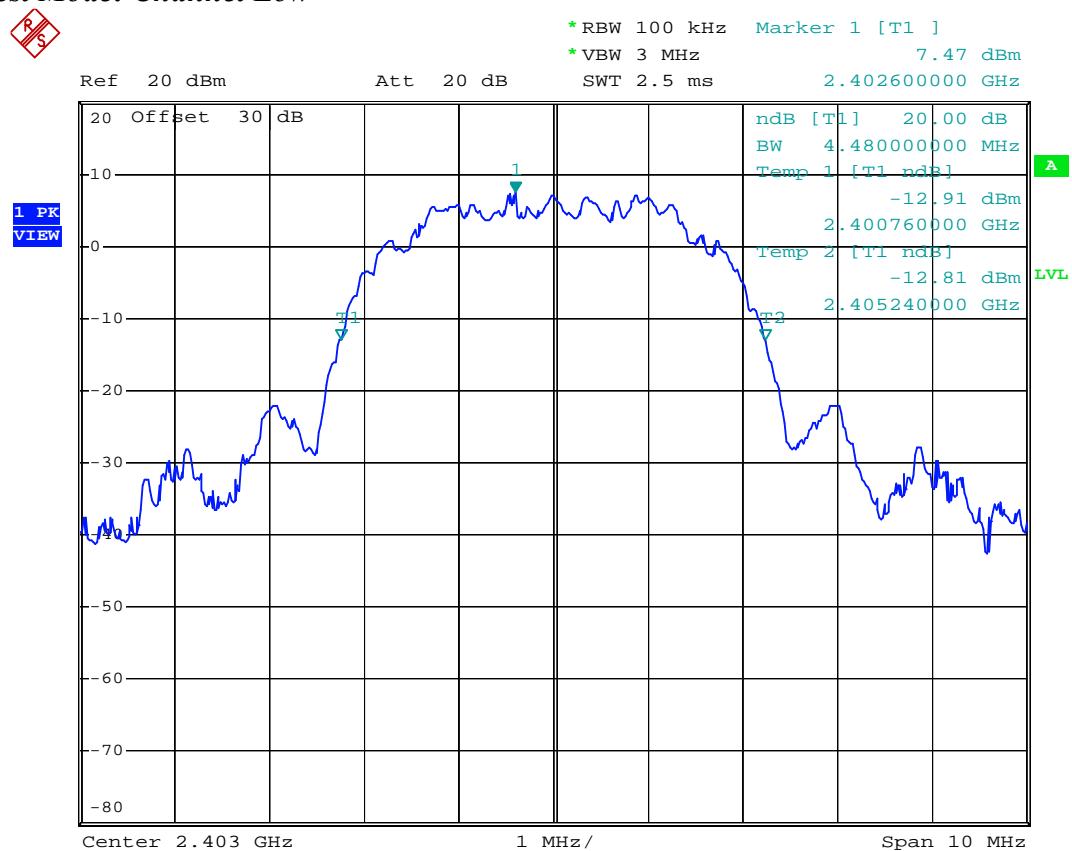Test Mode: Channel Low

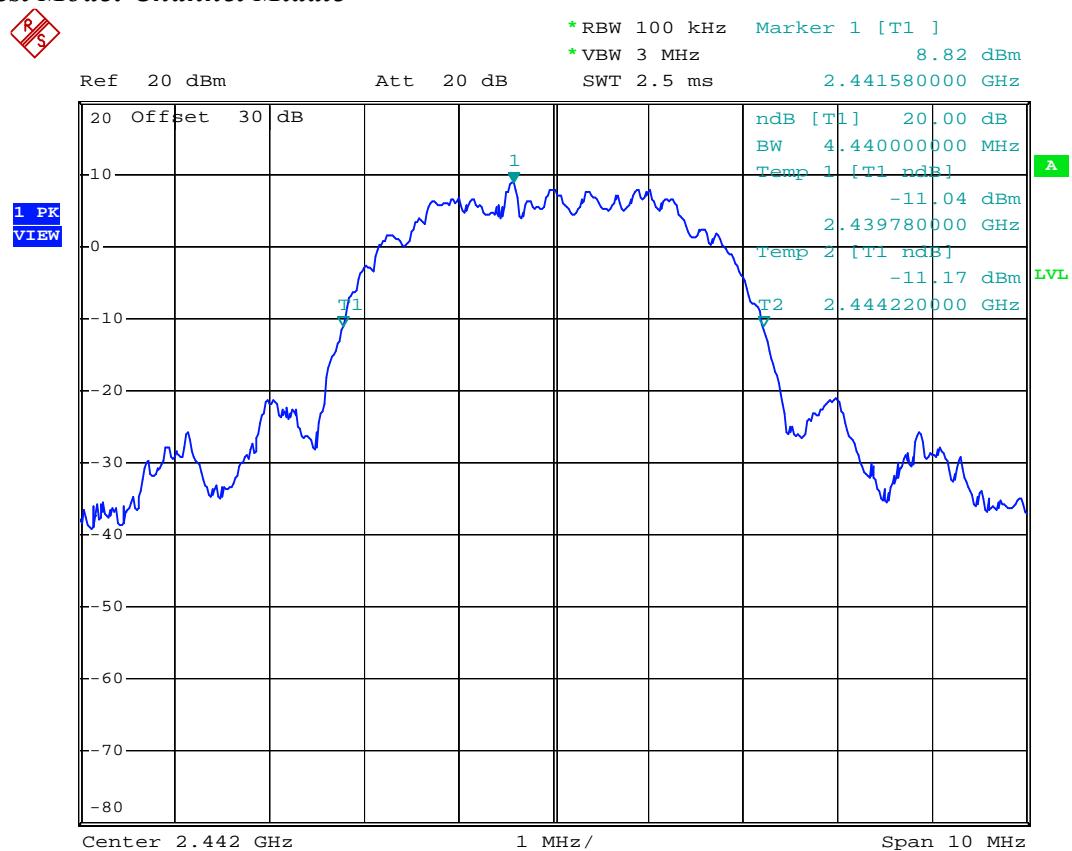Test Mode: Channel Middle

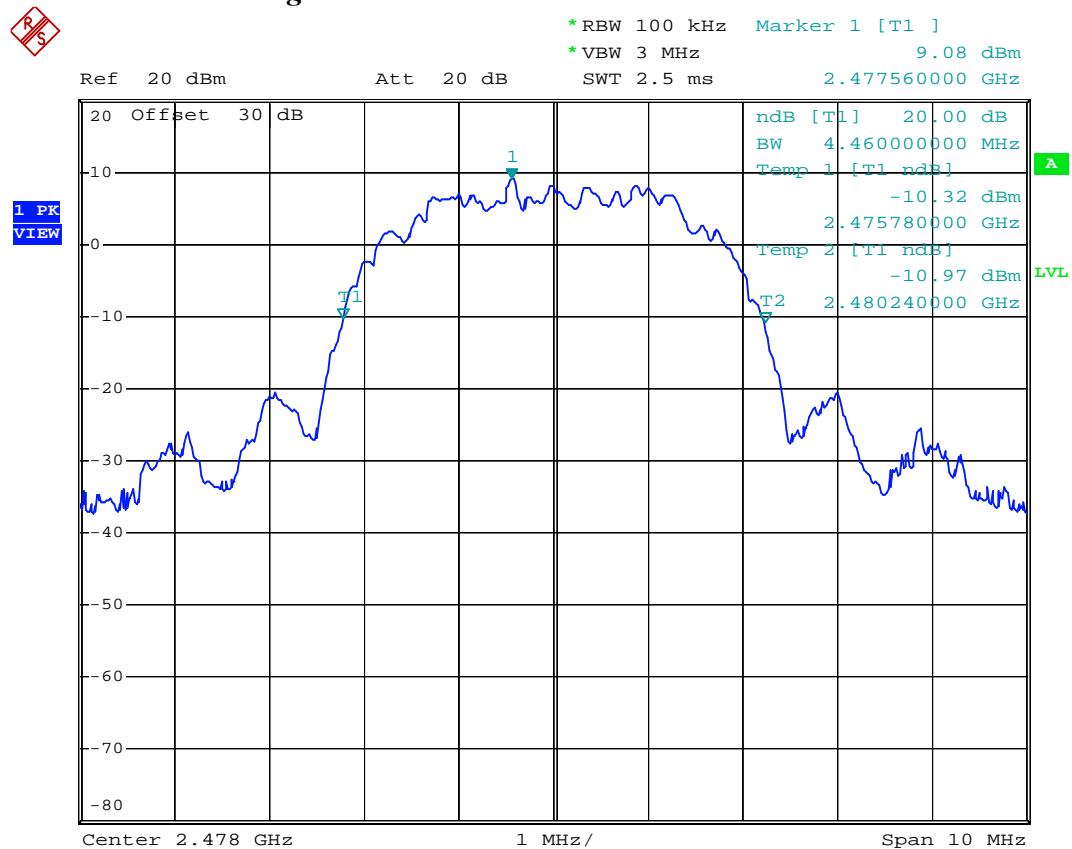Test Mode: Channel High

10 DWELL TIME ON EACH CHANNEL

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel
RBW = 1 MHz
VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel
Detector function = peak
Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

10.4 Measurement Data

Test Date : May 11, 2012 Temperature : 25 °C Humidity : 65 %


Period = 0.4(seconds) x 26(channels) = 10.4 seconds


a) Channel low :

The maximum time of occupancy = 0.80 ms x 22 = 17.600 ms

The maximum time of occupancy for a particular channel is 17.6.0ms in any 10.4 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

Note : The expanded uncertainty 1 μs.

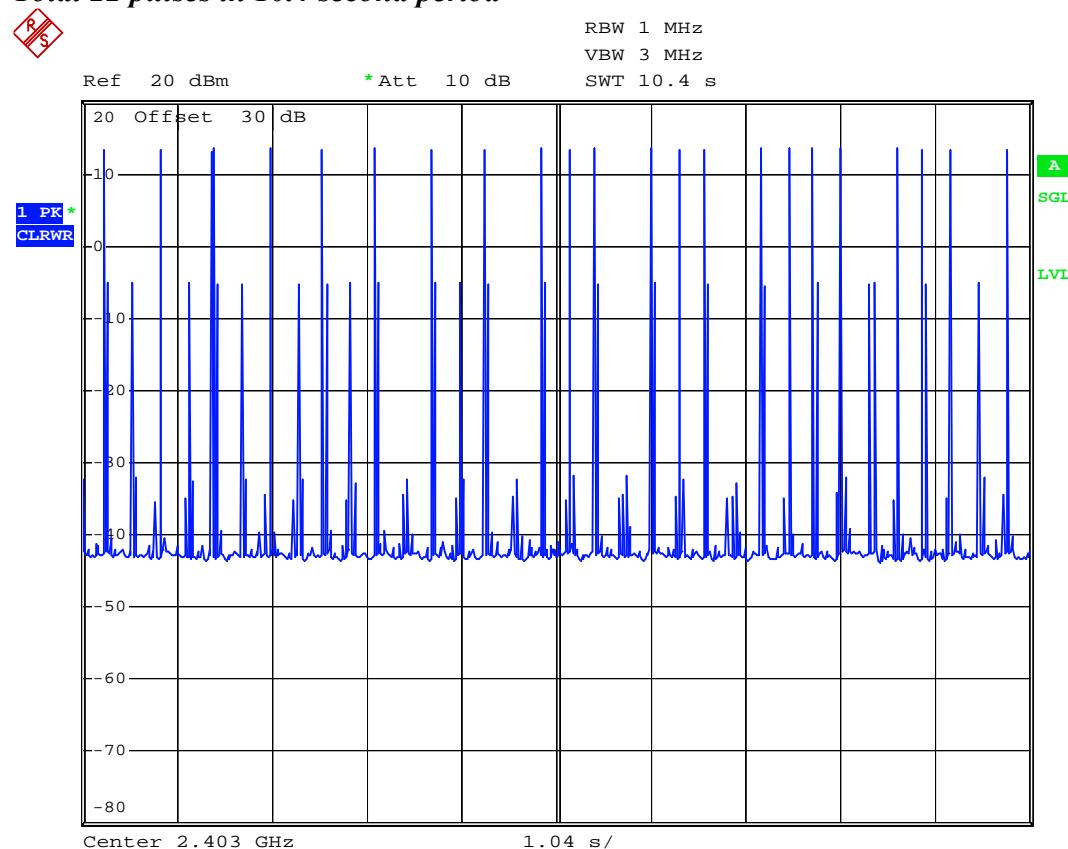Test Mode: Channel Low**Total 22 pulses in 10.4 second period**

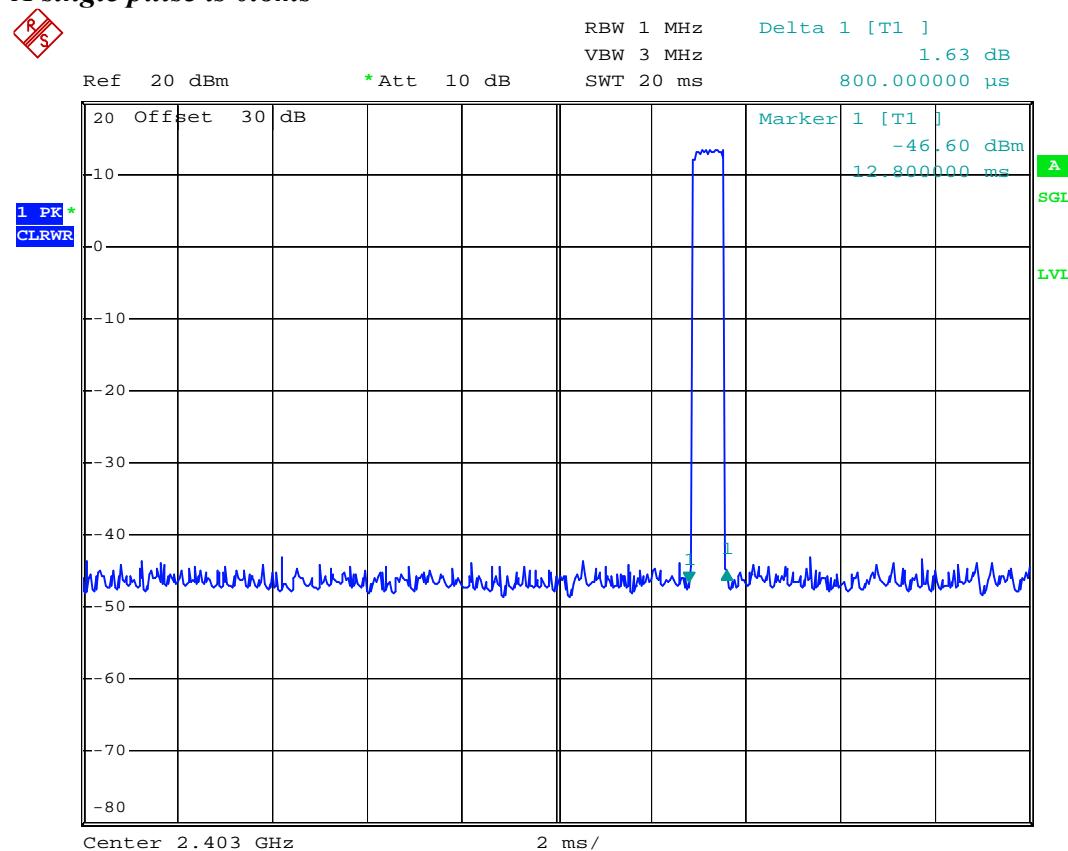Test Mode: Channel Low**A single pulse is 0.8ms**

11 OUTPUT POWER MEASUREMENT

11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - RBW > the 20 dB bandwidth of the emission being measured
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

11.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A


11.4 Measurement Data


Test Date : May. 11, 2012 Temperature : 25 °C Humidity : 65 %

- a) Channel Low : Output Peak Power is 15.55 dBm = **35.892** mW
- b) Channel Middle : Output Peak Power is 16.46 dBm = **44.259** mW
- c) Channel High : Output Peak Power is 16.74 dBm = **47.206** mW

Note : The expanded uncertainty: 2dB.

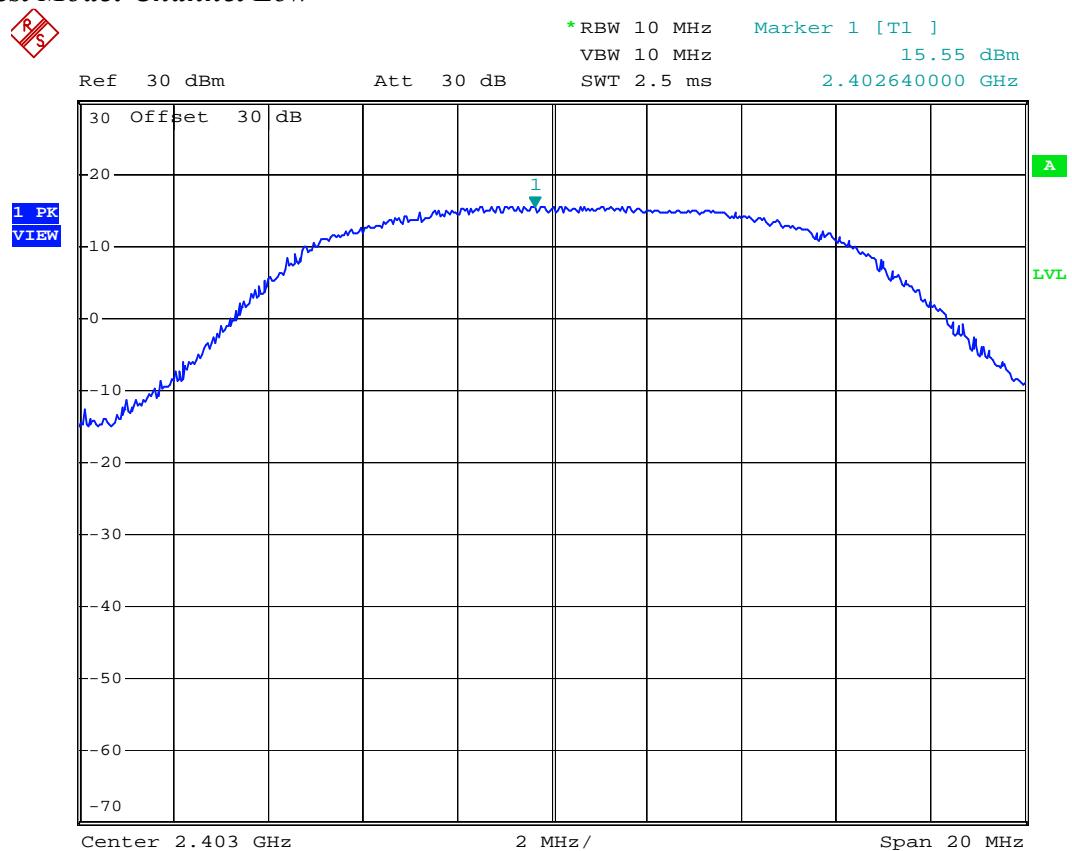Test Mode: Channel Low

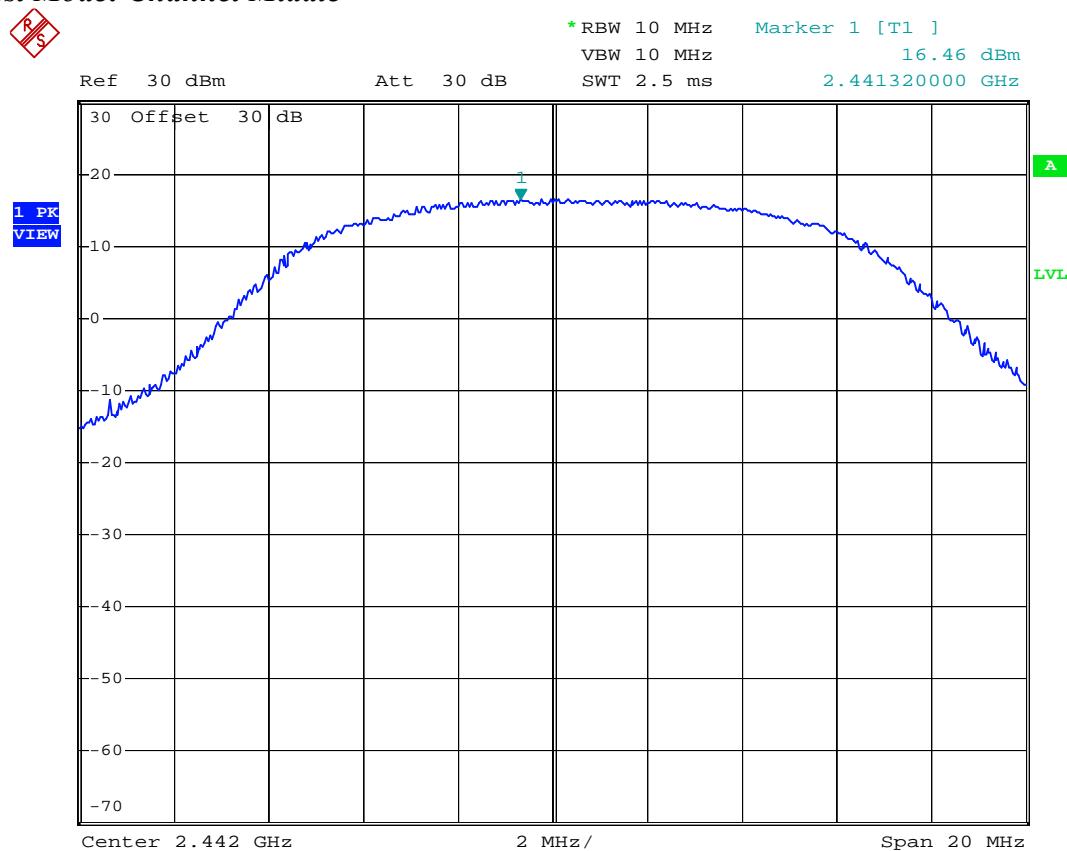Test Mode: Channel Middle

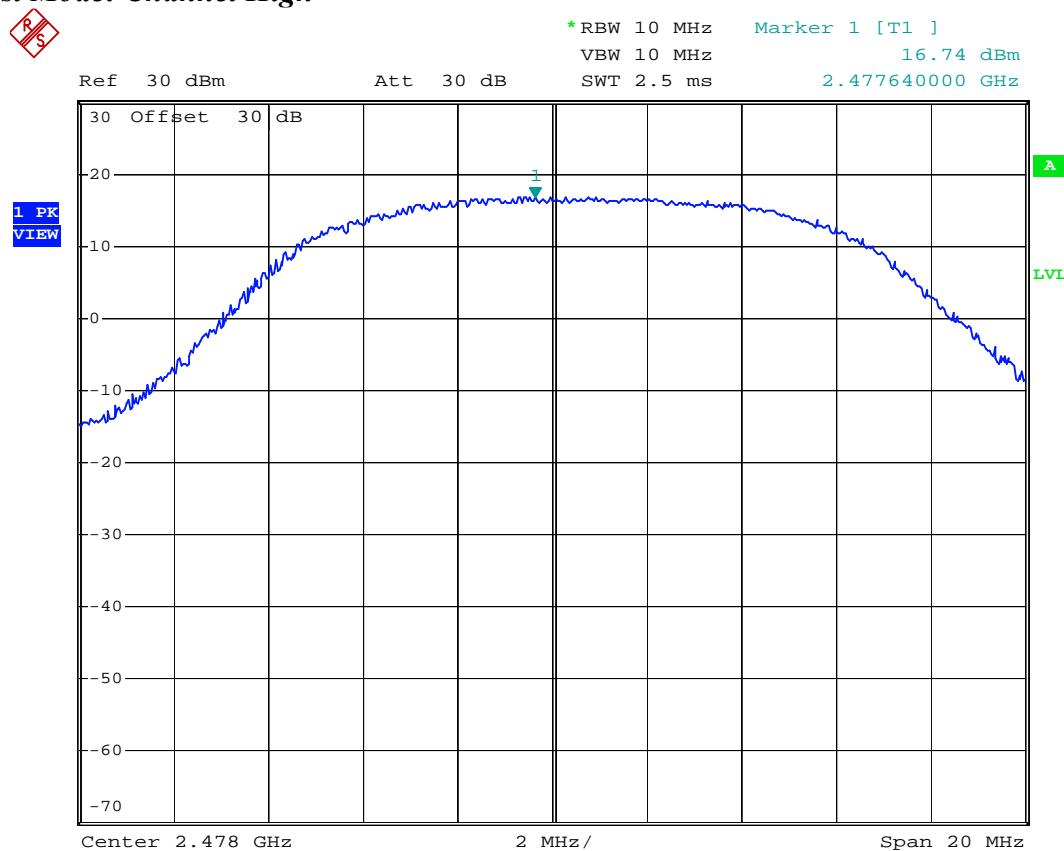Test Mode: Channel High

12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

12.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

12.4 Measurement Data


Test Date : May. 11, 2012 Temperature : 25 °C Humidity : 65 %

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.


Lower Band Edge (Hopping off)

65

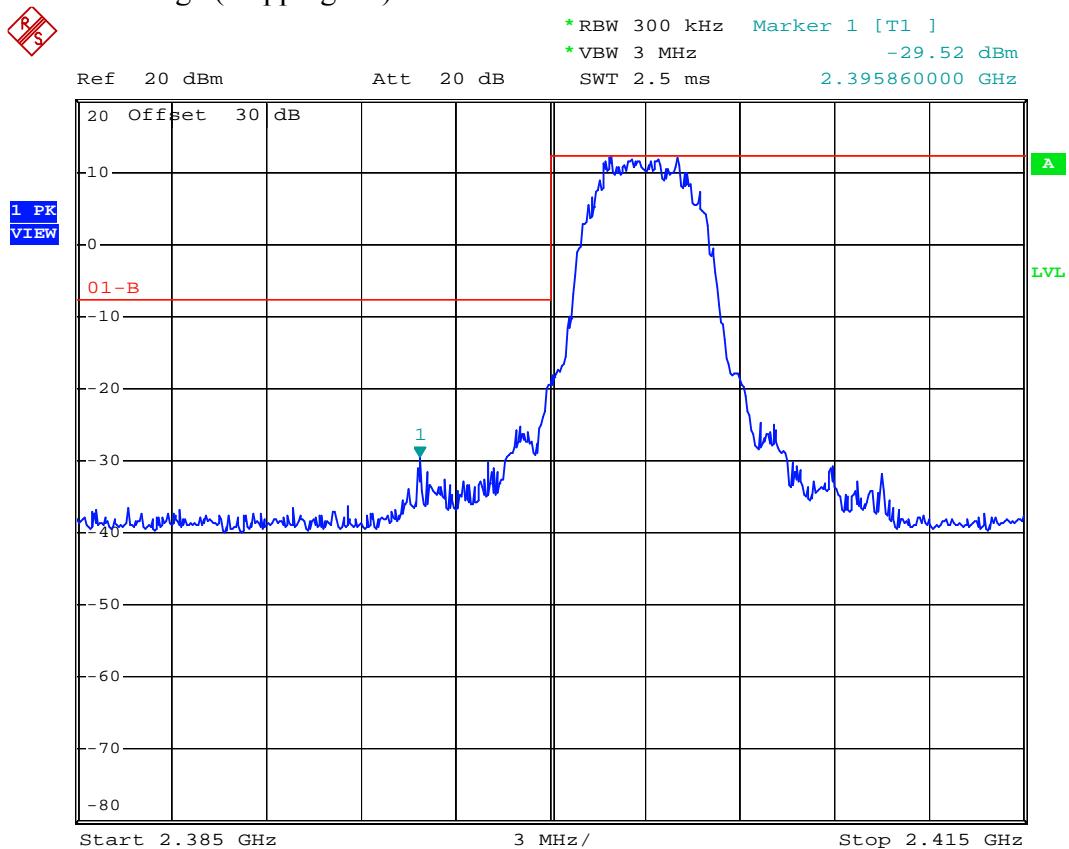


Upper Band Edge (Hopping off)

65

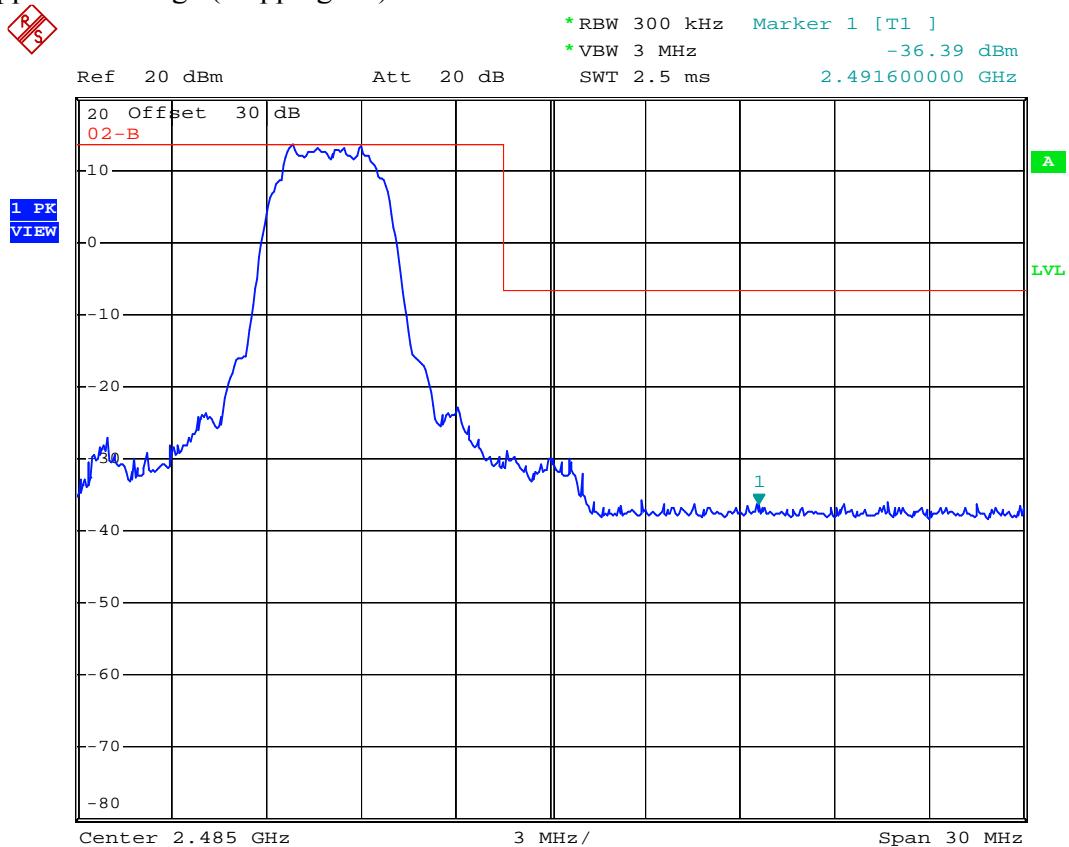


Lower Band Edge (Hopping on)

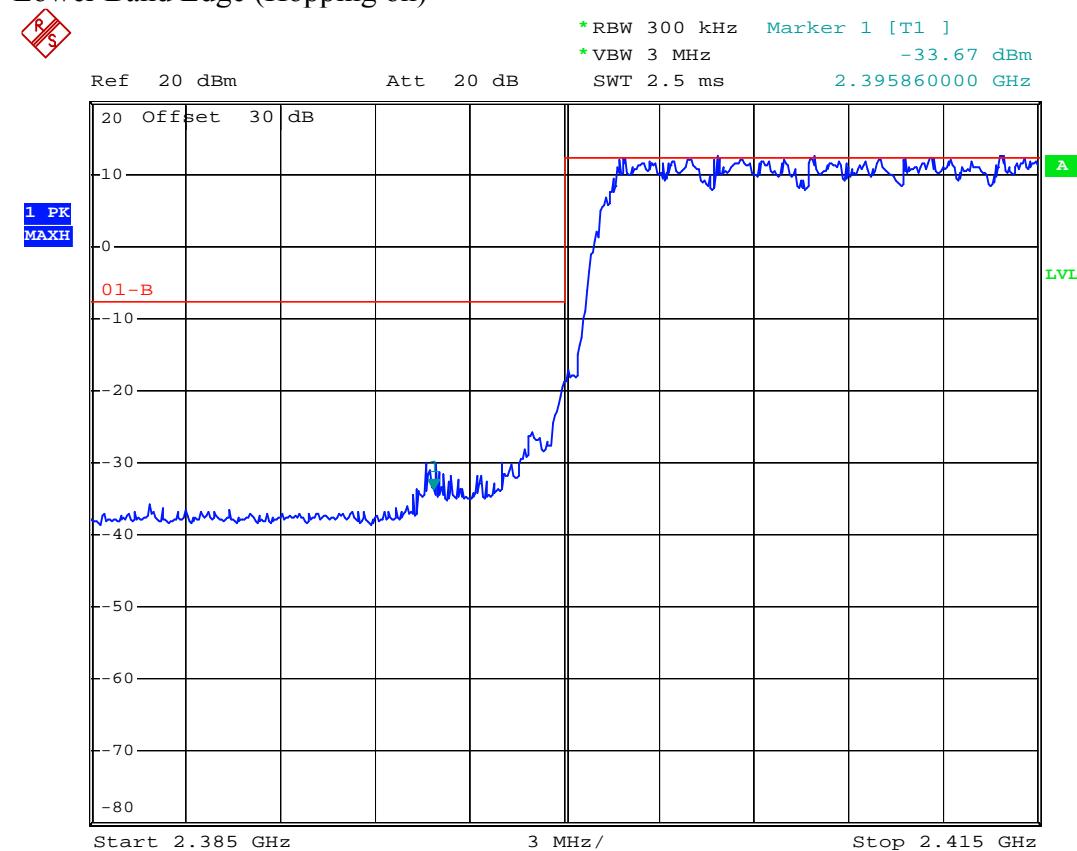

Upper Band Edge (Hopping on)

R/S

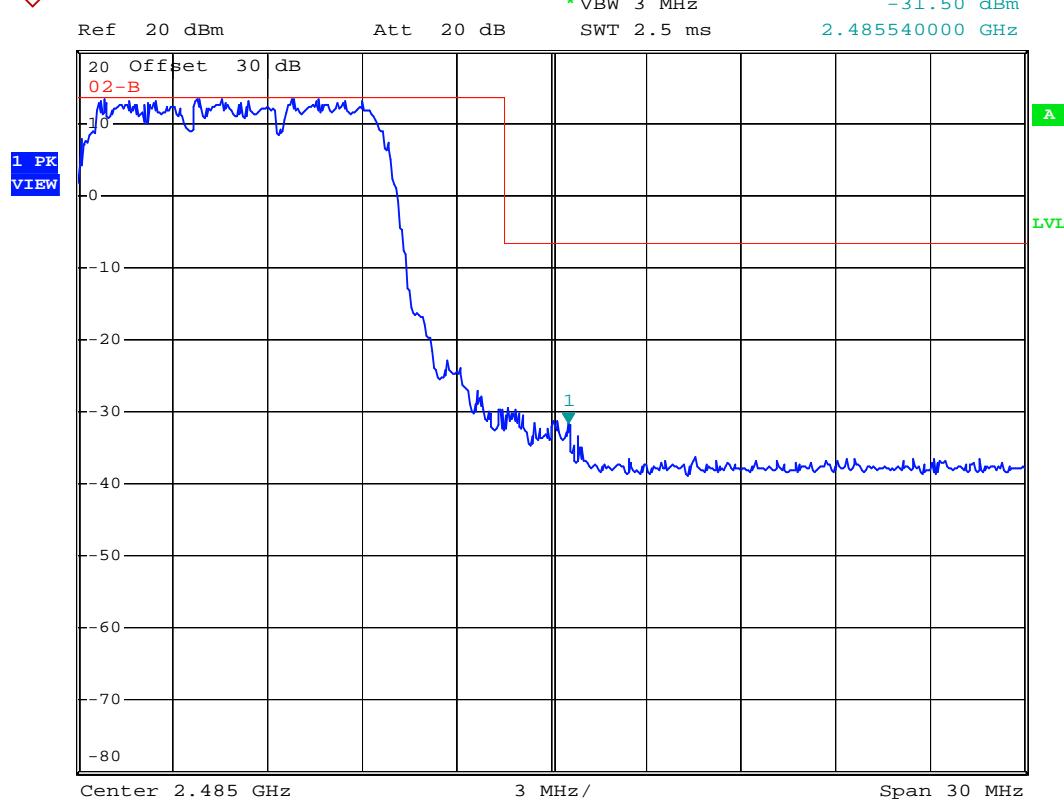

13 CONDUCTED SPURIOUS EMISSION MEASUREMENT

13.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

13.4 Measurement Data

Test Date : May. 11, 2012 Temperature : 25 °C Humidity : 65 %

Mode : Low Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.


Mode : Mid Channel


- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.


Mode : Hi Channel


- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.


Note : *The expanded uncertainty: 2dB.*

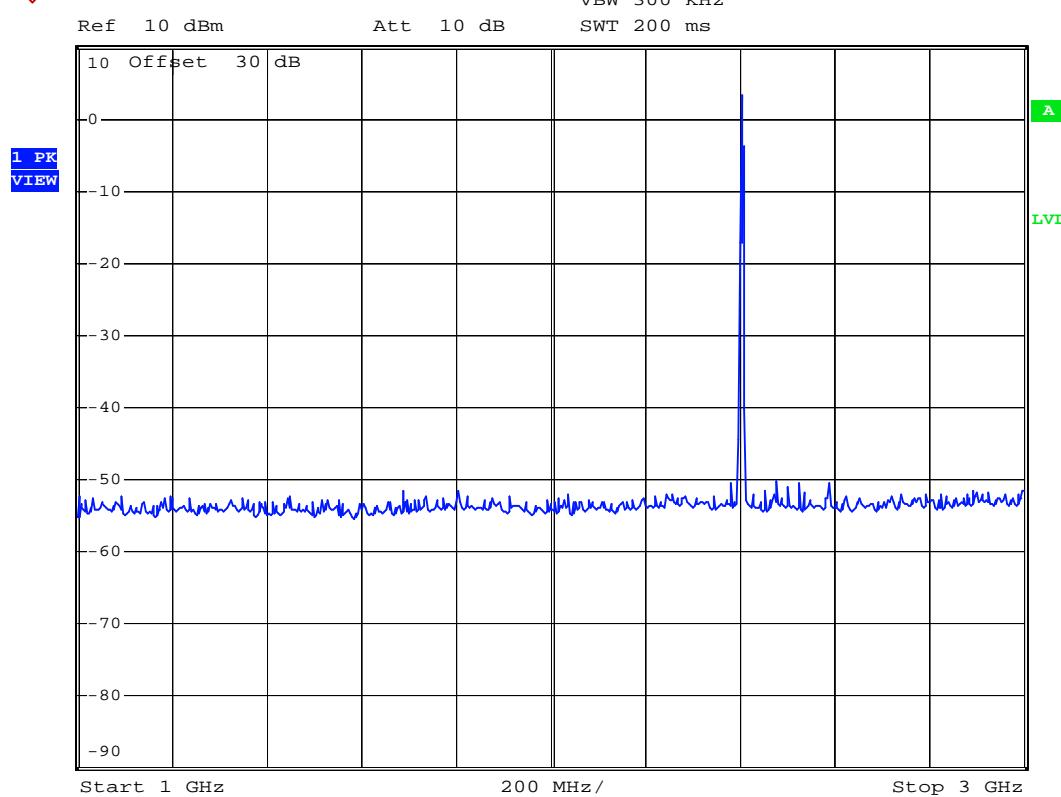Mode: Channel Low

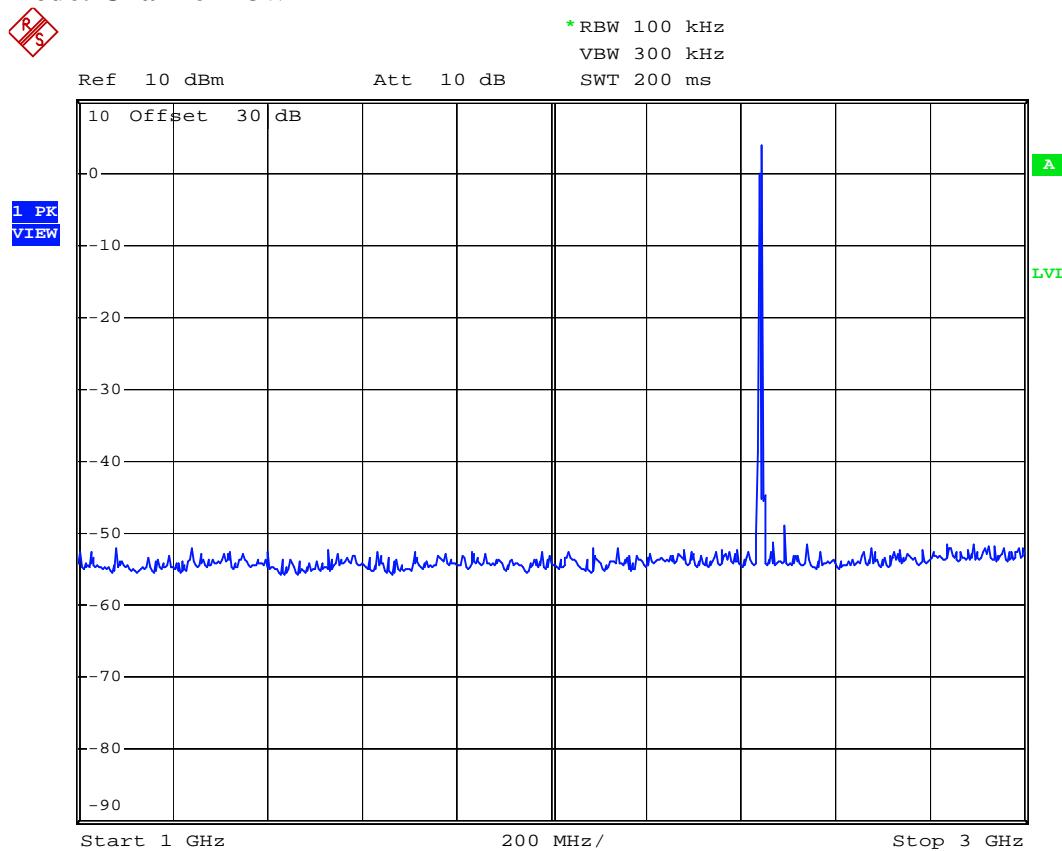Mode: Channel Low

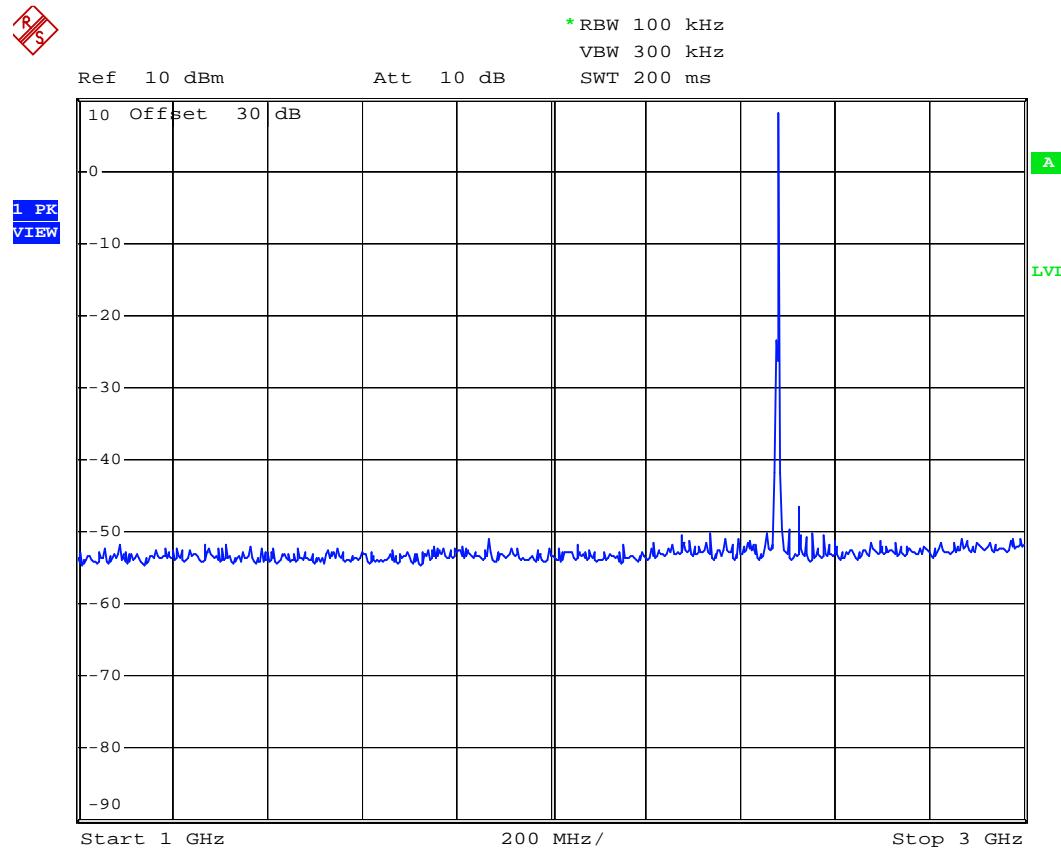Mode: Channel Middle

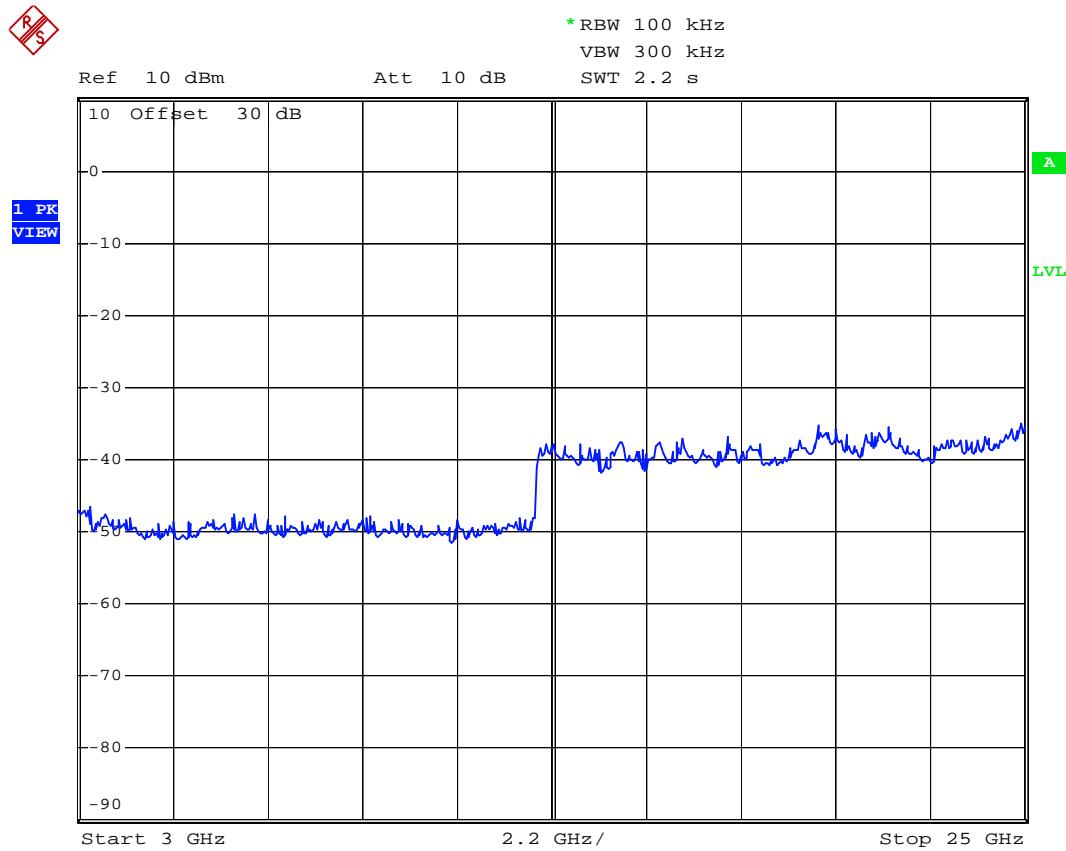Mode: Channel Middle

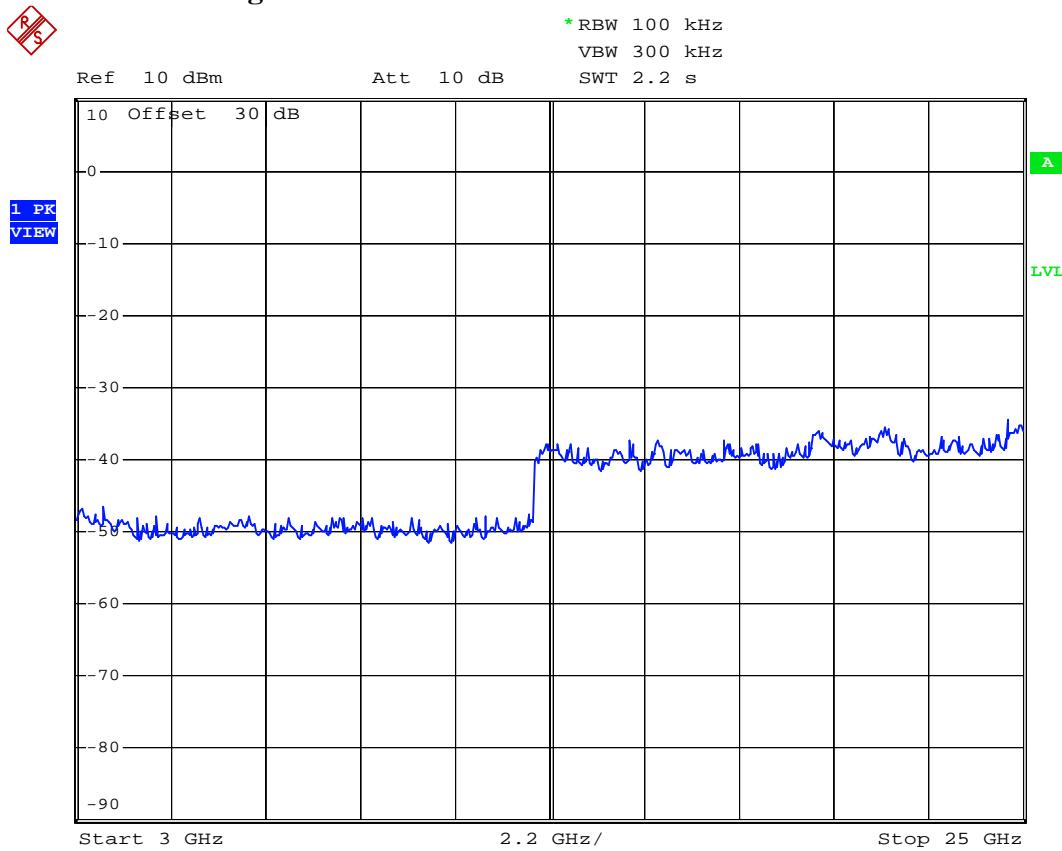Mode: Channel High

Mode: Channel High

RS

