




ELECTRONIC TESTING CENTER, TAIWAN

No.34 Lin5,Ding Fu Tsun, Linkou Hsiang,

Taipei Hsien, Taiwan, R. O. C.,

TEL:886-2-26023052 FAX:886-2-26010910

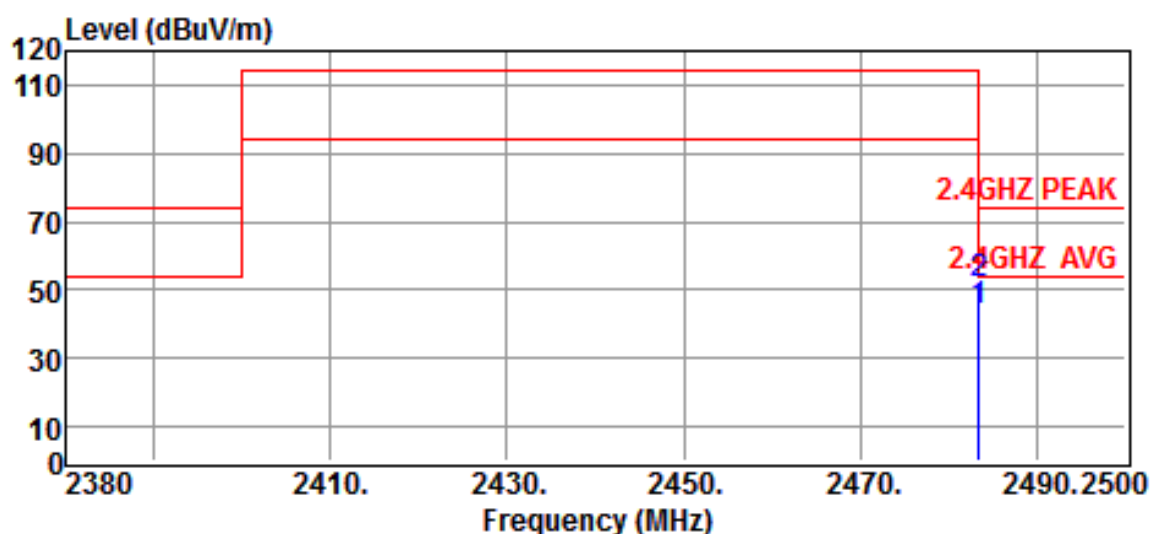

Site	:chamber #2	Date	:2012-05-25
Limit	:2.4GHZ PEAK	Ant. Pol.	:VERTICAL
EUT	:2.4GHz	Temp.	:28
Power Rating	:120V 60Hz	Humi.	:65
Model	:	Engineer.	:VC
Memo	:		
Memo	:BandEdge		

Freq	Reading	Correction	Result	Limits	Over limit	Detector
MHz	dBuV	Factor		dBuV/m	dB	
2483.5000	49.8	-5.9	43.9	54.0	-10.1	Average
2483.5000	57.7	-5.9	51.8	74.0	-22.2	Peak


Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit – Result



ELECTRONIC TESTING CENTER, TAIWAN

No.34 Lin5,Ding Fu Tsun, Linkou Hsiang,
Taipei Hsien, Taiwan, R. O. C.,
TEL:886-2-26023052 FAX:886-2-26010910

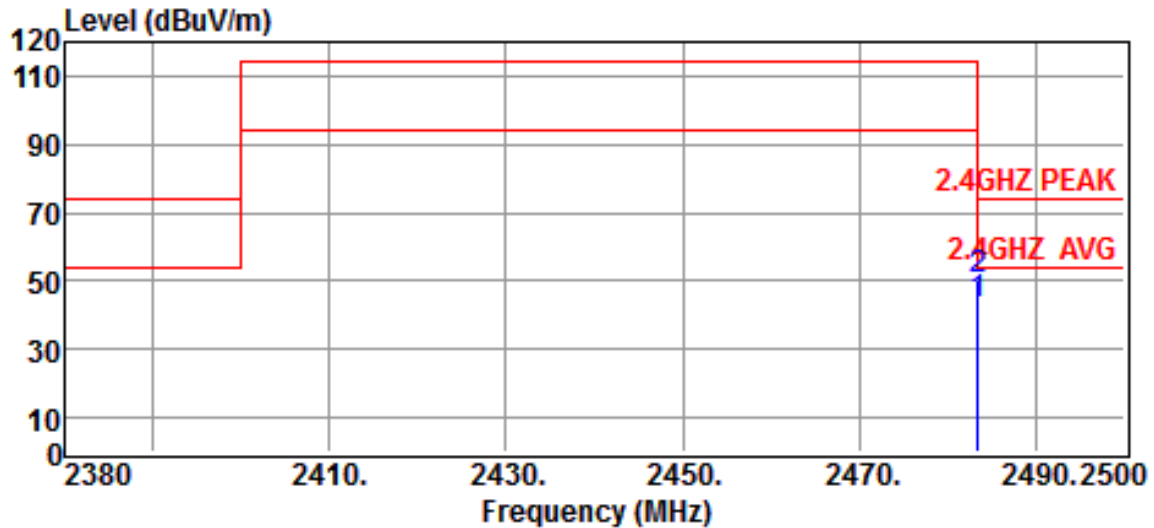

Site	:chamber #2	Date	:2012-05-25
Limit	:2.4GHZ PEAK	Ant. Pol.	:HORIZONTAL
EUT	:2.4GHz	Temp.	:28
Power Rating	:120V 60Hz	Humi.	:65
Model	:	Engineer.	:VC
Memo	:		
Memo	:BandEdge		

Freq	Reading	Correction	Result	Limits	Over limit	Detector
MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	
2483.5000	49.2	-5.9	43.3	54.0	-10.7	Average
2483.5000	56.4	-5.9	50.5	74.0	-23.5	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The marg