


Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

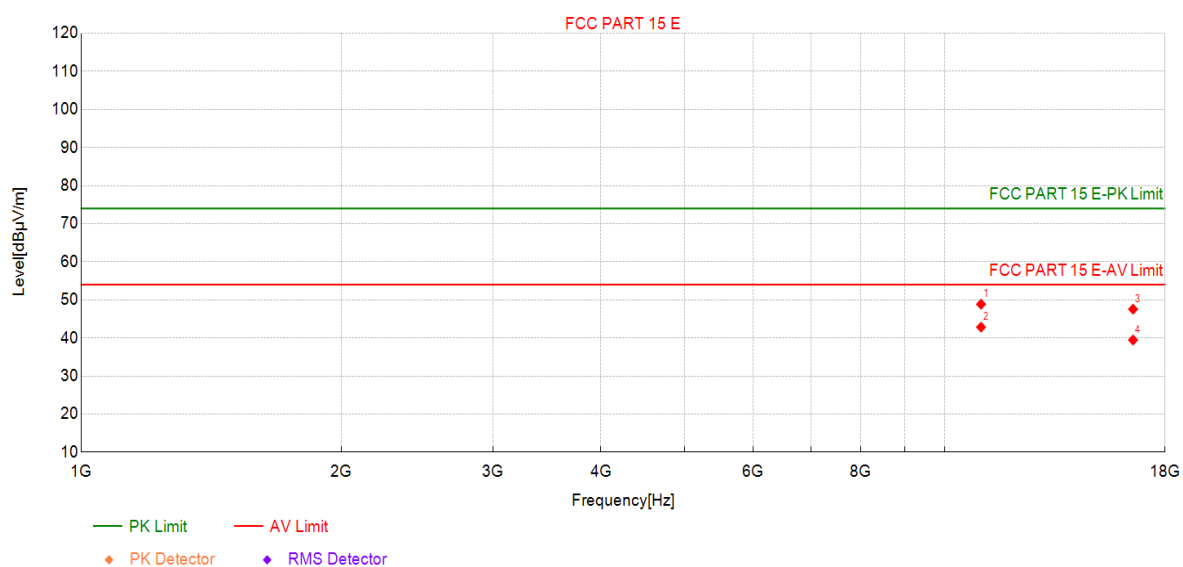

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	41.61	48.86	7.25	74.00	25.14	PK	Vertic	PASS
2	11020	35.58	42.83	7.25	54.00	11.17	AV	Vertic	PASS
3	16530	32.55	47.56	15.01	74.00	26.44	PK	Vertic	PASS
4	16530	24.45	39.46	15.01	54.00	14.54	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5550MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

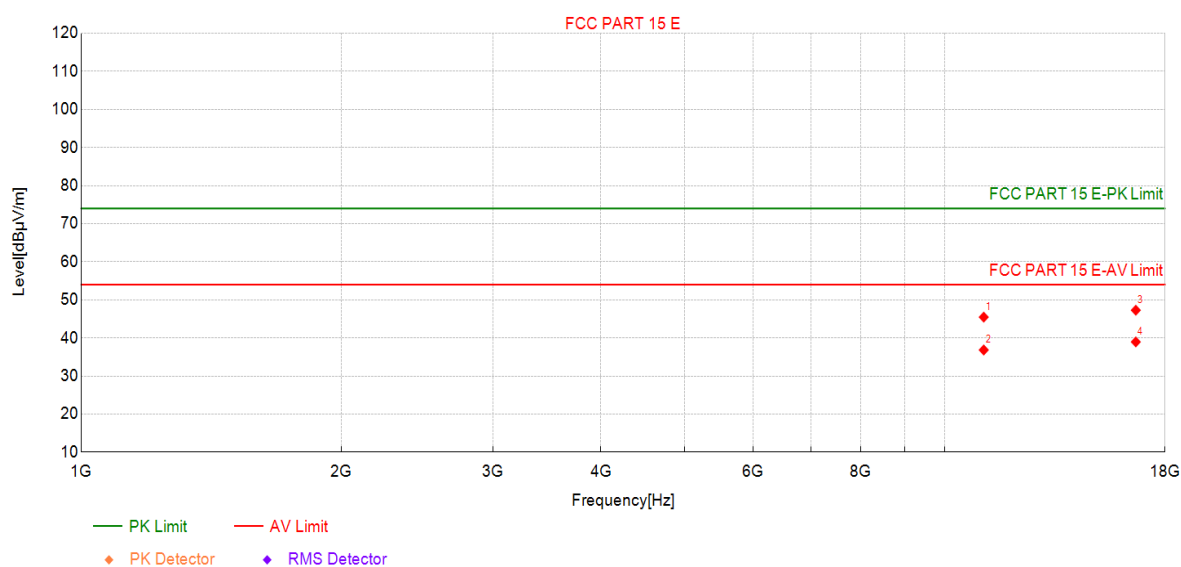

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	38.81	45.47	6.66	74.00	28.53	PK	Horizo	PASS
2	11100	30.18	36.84	6.66	54.00	17.16	AV	Horizo	PASS
3	16650	32.59	47.28	14.69	74.00	26.72	PK	Horizo	PASS
4	16650	24.27	38.96	14.69	54.00	15.04	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5550MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

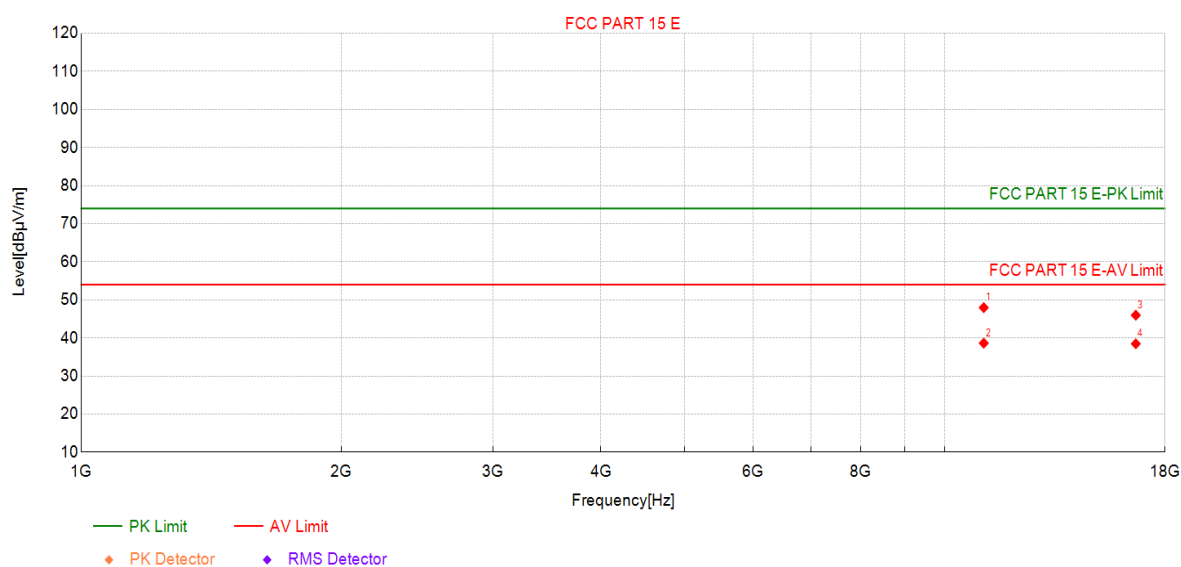

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	41.30	47.96	6.66	74.00	26.04	PK	Vertic	PASS
2	11100	31.97	38.63	6.66	54.00	15.37	AV	Vertic	PASS
3	16650	31.28	45.97	14.69	74.00	28.03	PK	Vertic	PASS
4	16650	23.78	38.47	14.69	54.00	15.53	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5670MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

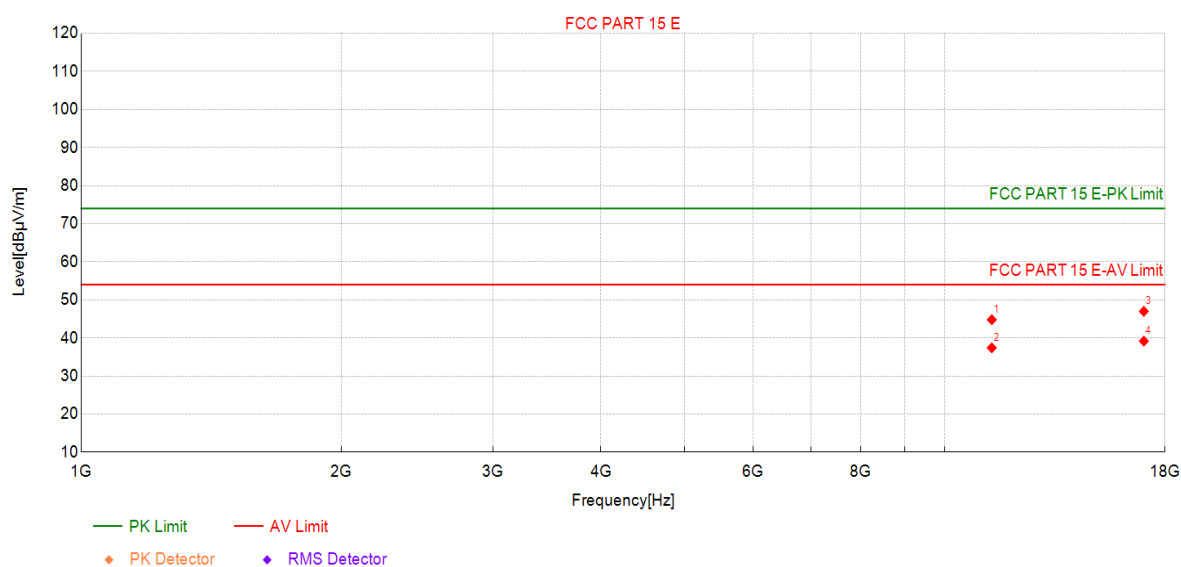

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	36.93	44.79	7.86	74.00	29.21	PK	Horizo	PASS
2	11340	29.54	37.40	7.86	54.00	16.60	AV	Horizo	PASS
3	17010	30.95	46.99	16.04	74.00	27.01	PK	Horizo	PASS
4	17010	23.12	39.16	16.04	54.00	14.84	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5670MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

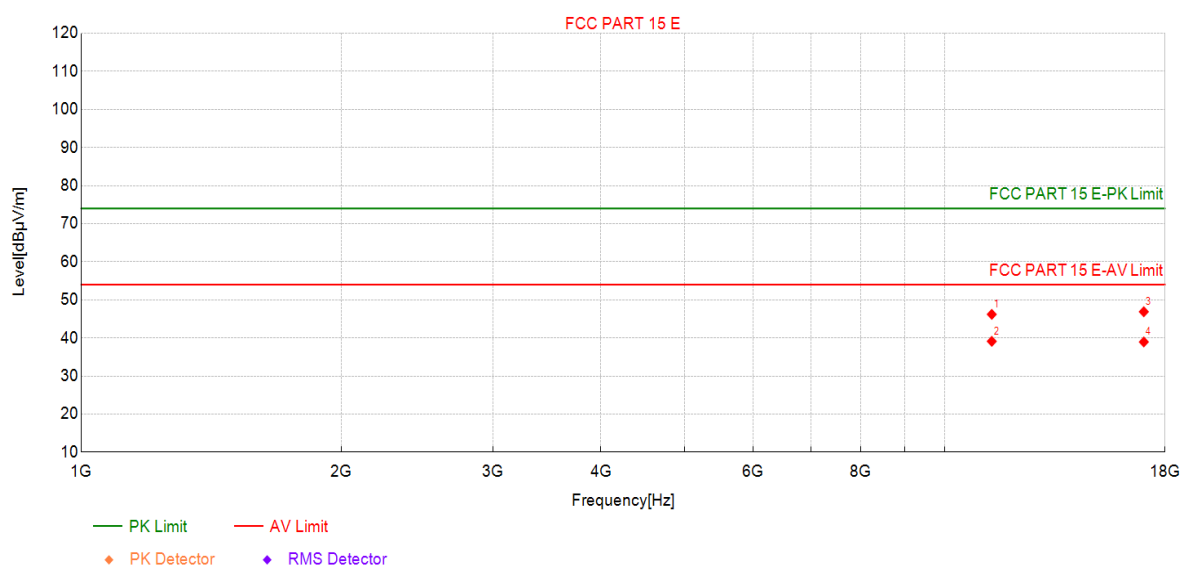

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	38.34	46.20	7.86	74.00	27.80	PK	Vertic	PASS
2	11340	31.25	39.11	7.86	54.00	14.89	AV	Vertic	PASS
3	17010	30.84	46.88	16.04	74.00	27.12	PK	Vertic	PASS
4	17010	22.91	38.95	16.04	54.00	15.05	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

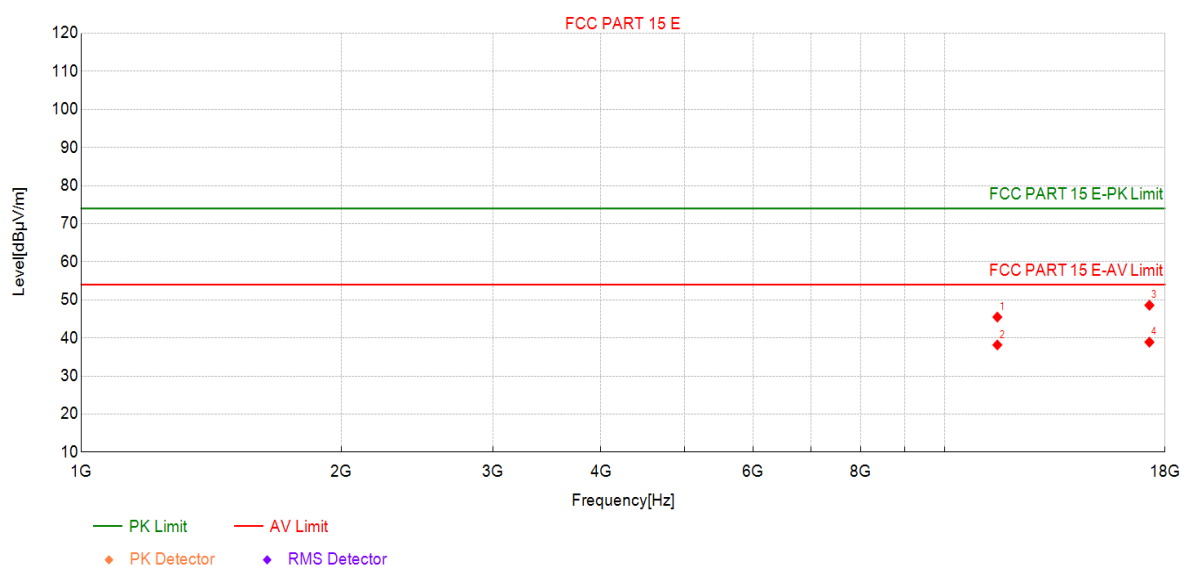

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	37.00	45.48	8.48	74.00	28.52	PK	Horizo	PASS
2	11510	29.68	38.16	8.48	54.00	15.84	AV	Horizo	PASS
3	17265	33.07	48.58	15.51	74.00	25.42	PK	Horizo	PASS
4	17265	23.39	38.90	15.51	54.00	15.10	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

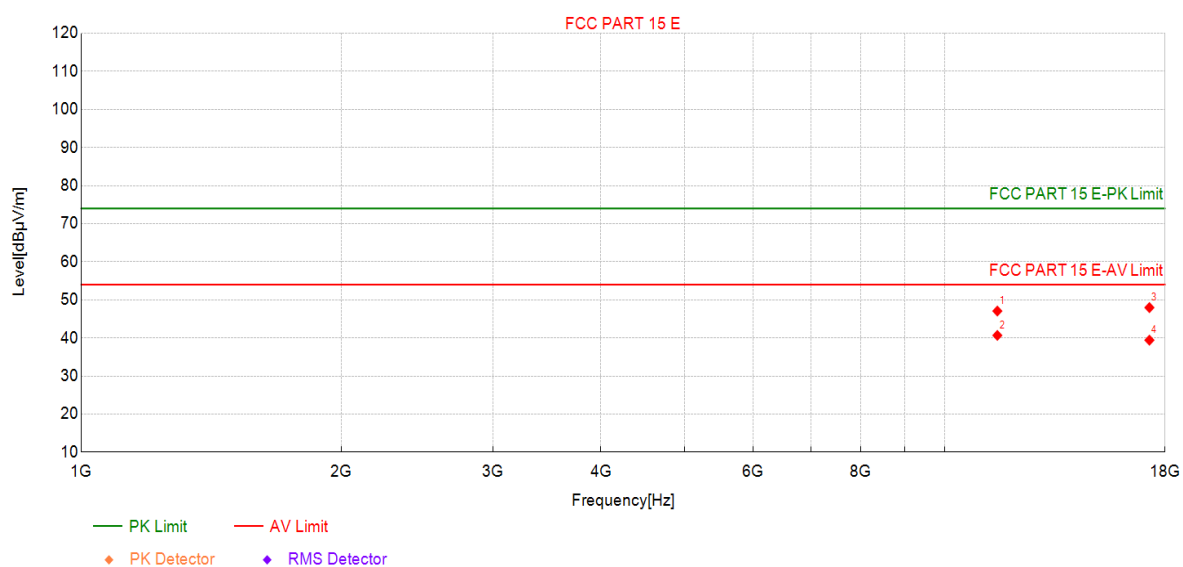

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	38.58	47.06	8.48	74.00	26.94	PK	Vertic	PASS
2	11510	32.19	40.67	8.48	54.00	13.33	AV	Vertic	PASS
3	17265	32.47	47.98	15.51	74.00	26.02	PK	Vertic	PASS
4	17265	23.91	39.42	15.51	54.00	14.58	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

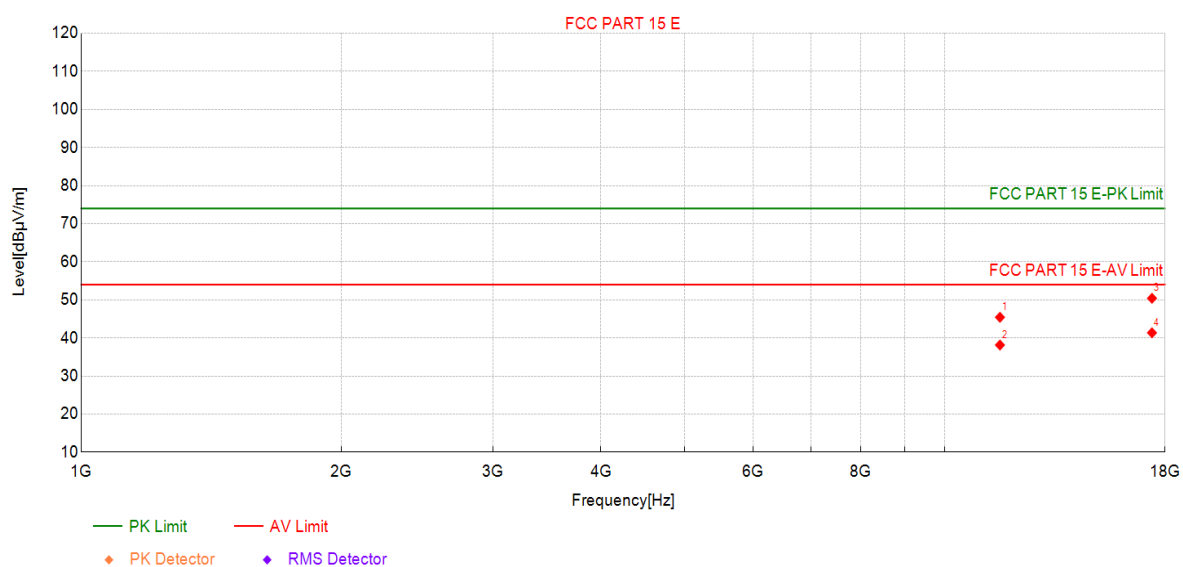

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	36.69	45.43	8.74	74.00	28.57	PK	Horizo	PASS
2	11590	29.39	38.13	8.74	54.00	15.87	AV	Horizo	PASS
3	17385	33.84	50.42	16.58	74.00	23.58	PK	Horizo	PASS
4	17385	24.77	41.35	16.58	54.00	12.65	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

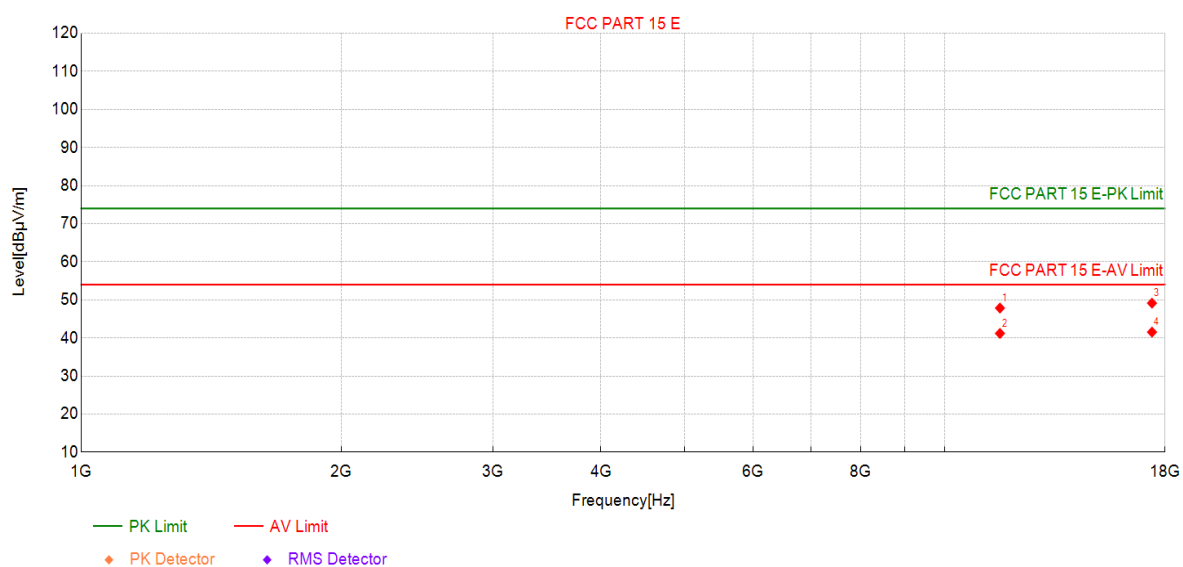

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	39.11	47.85	8.74	74.00	26.15	PK	Vertic	PASS
2	11590	32.45	41.19	8.74	54.00	12.81	AV	Vertic	PASS
3	17385	32.55	49.13	16.58	74.00	24.87	PK	Vertic	PASS
4	17385	24.96	41.54	16.58	54.00	12.46	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

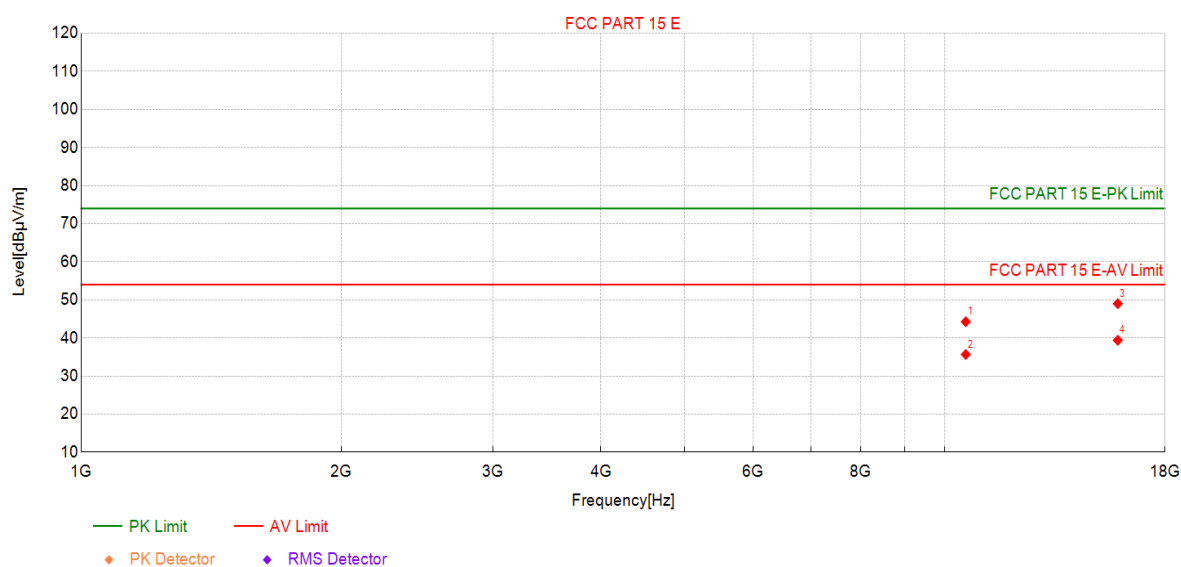

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	37.49	44.26	6.77	74.00	29.74	PK	Horizo	PASS
2	10580	28.88	35.65	6.77	54.00	18.35	AV	Horizo	PASS
3	15870	34.91	49.00	14.09	74.00	25.00	PK	Horizo	PASS
4	15870	25.30	39.39	14.09	54.00	14.61	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

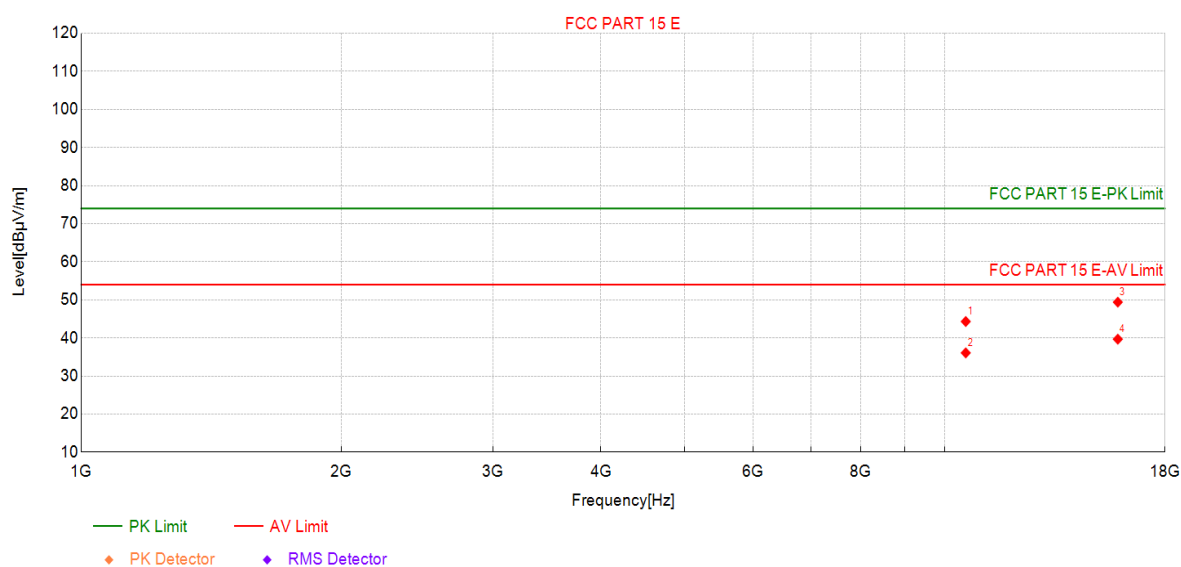

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	37.54	44.31	6.77	74.00	29.69	PK	Vertic	PASS
2	10580	29.30	36.07	6.77	54.00	17.93	AV	Vertic	PASS
3	15870	35.31	49.40	14.09	74.00	24.60	PK	Vertic	PASS
4	15870	25.58	39.67	14.09	54.00	14.33	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

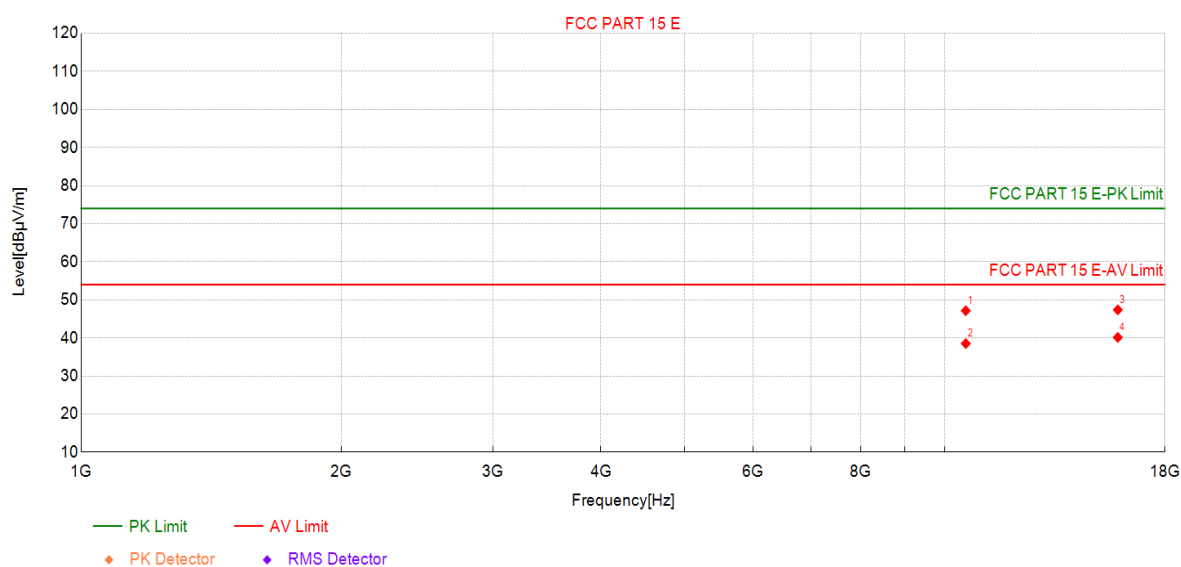

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	40.39	47.16	6.77	74.00	26.84	PK	Horizo	PASS
2	10580	31.75	38.52	6.77	54.00	15.48	AV	Horizo	PASS
3	15870	33.30	47.39	14.09	74.00	26.61	PK	Horizo	PASS
4	15870	26.04	40.13	14.09	54.00	13.87	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

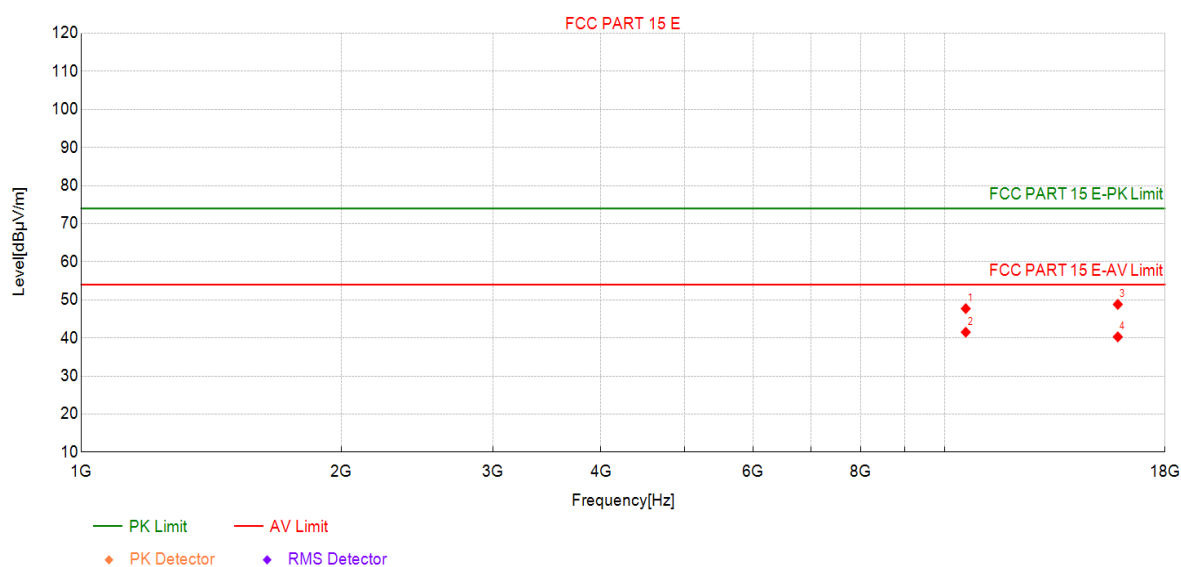

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	40.93	47.70	6.77	74.00	26.30	PK	Vertic	PASS
2	10580	34.74	41.51	6.77	54.00	12.49	AV	Vertic	PASS
3	15870	34.72	48.81	14.09	74.00	25.19	PK	Vertic	PASS
4	15870	26.19	40.28	14.09	54.00	13.72	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

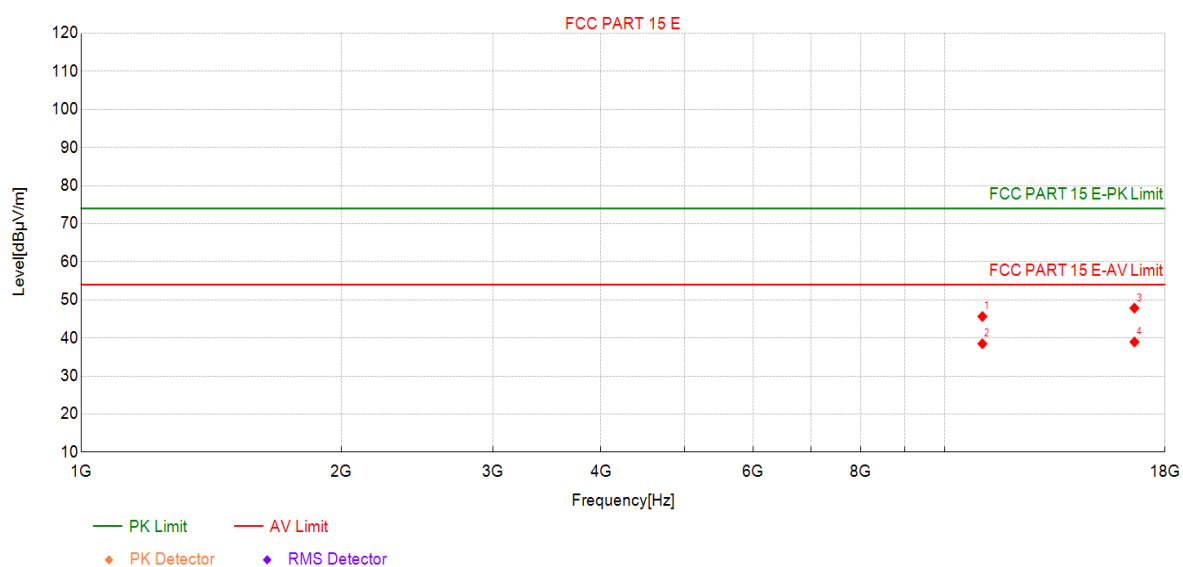

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	38.67	45.63	6.96	74.00	28.37	PK	Horizo	PASS
2	11060	31.51	38.47	6.96	54.00	15.53	AV	Horizo	PASS
3	16590	33.03	47.83	14.80	74.00	26.17	PK	Horizo	PASS
4	16590	24.14	38.94	14.80	54.00	15.06	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

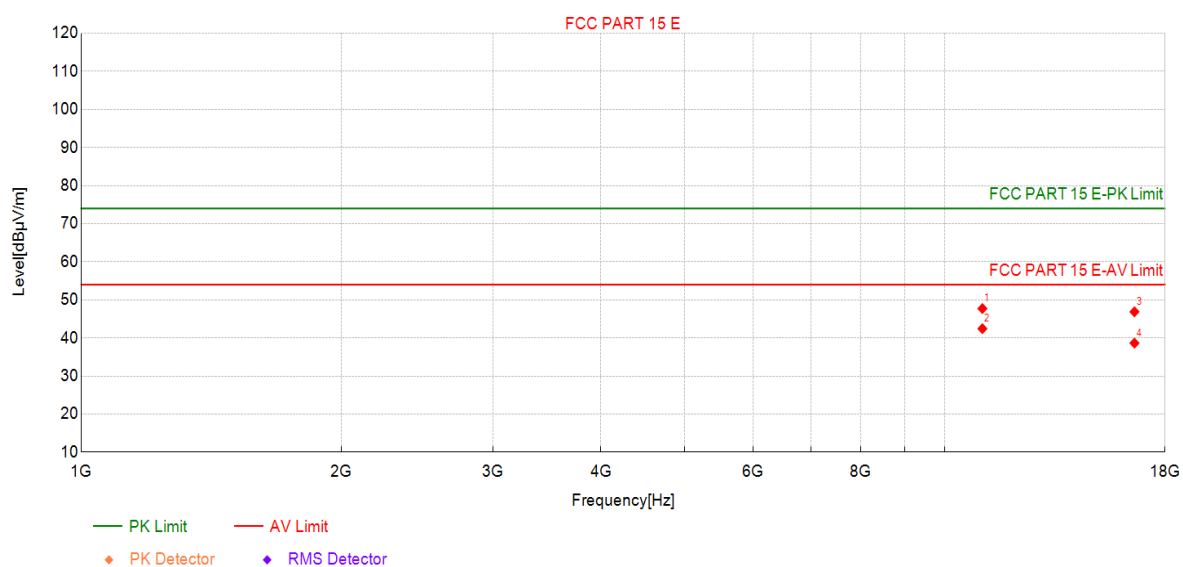

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	40.75	47.71	6.96	74.00	26.29	PK	Vertic	PASS
2	11060	35.48	42.44	6.96	54.00	11.56	AV	Vertic	PASS
3	16590	32.07	46.87	14.80	74.00	27.13	PK	Vertic	PASS
4	16590	23.85	38.65	14.80	54.00	15.35	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5610MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

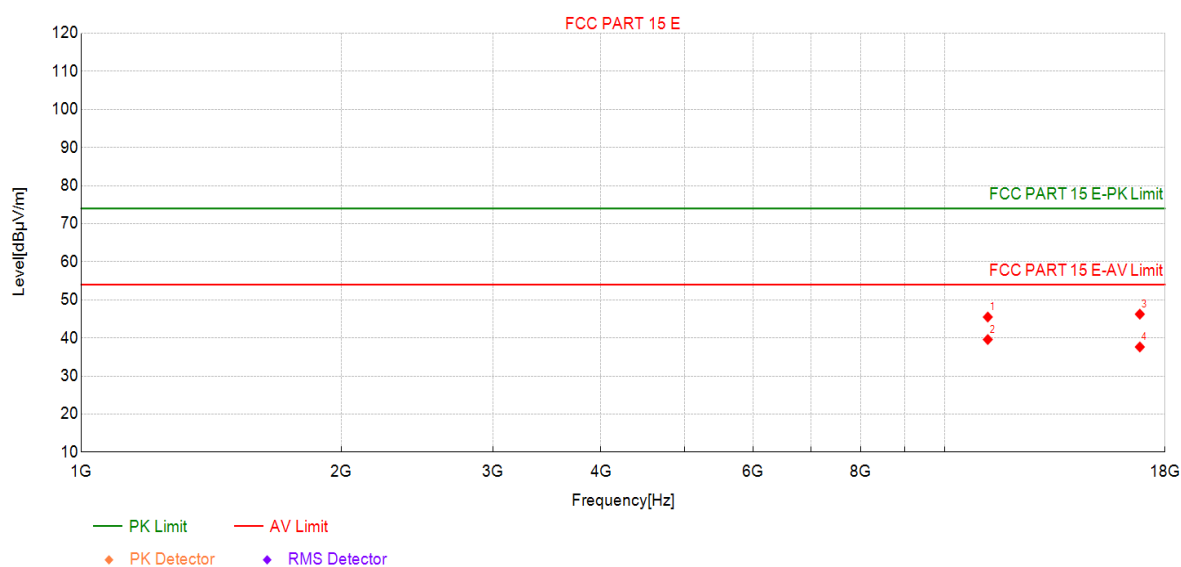

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	37.76	45.49	7.73	74.00	28.51	PK	Horizo	PASS
2	11220	31.85	39.58	7.73	54.00	14.42	AV	Horizo	PASS
3	16830	31.32	46.24	14.92	74.00	27.76	PK	Horizo	PASS
4	16830	22.71	37.63	14.92	54.00	16.37	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5610MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

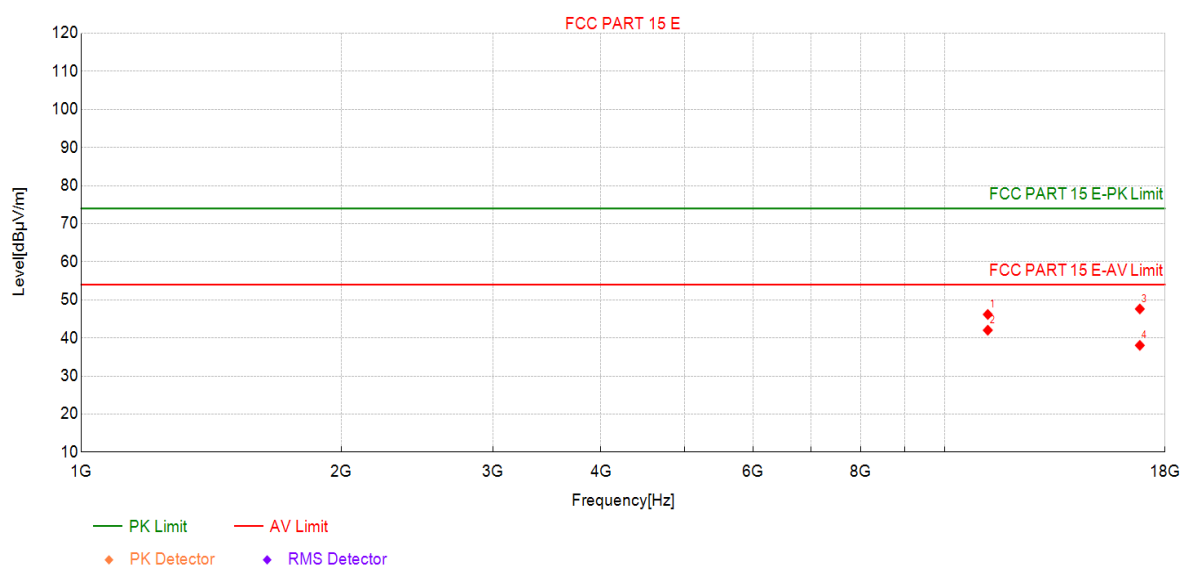

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	38.44	46.17	7.73	74.00	27.83	PK	Vertic	PASS
2	11220	34.30	42.03	7.73	54.00	11.97	AV	Vertic	PASS
3	16830	32.70	47.62	14.92	74.00	26.38	PK	Vertic	PASS
4	16830	23.13	38.05	14.92	54.00	15.95	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

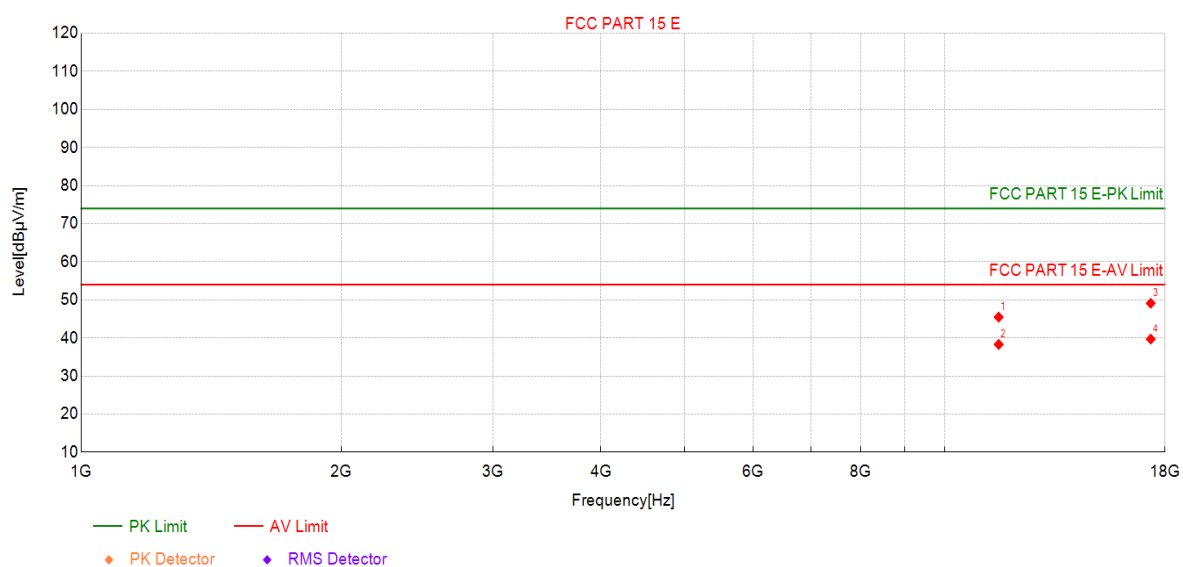

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	36.86	45.47	8.61	74.00	28.53	PK	Horizo	PASS
2	11550	29.68	38.29	8.61	54.00	15.71	AV	Horizo	PASS
3	17325	33.24	49.11	15.87	74.00	24.89	PK	Horizo	PASS
4	17325	23.83	39.70	15.87	54.00	14.30	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

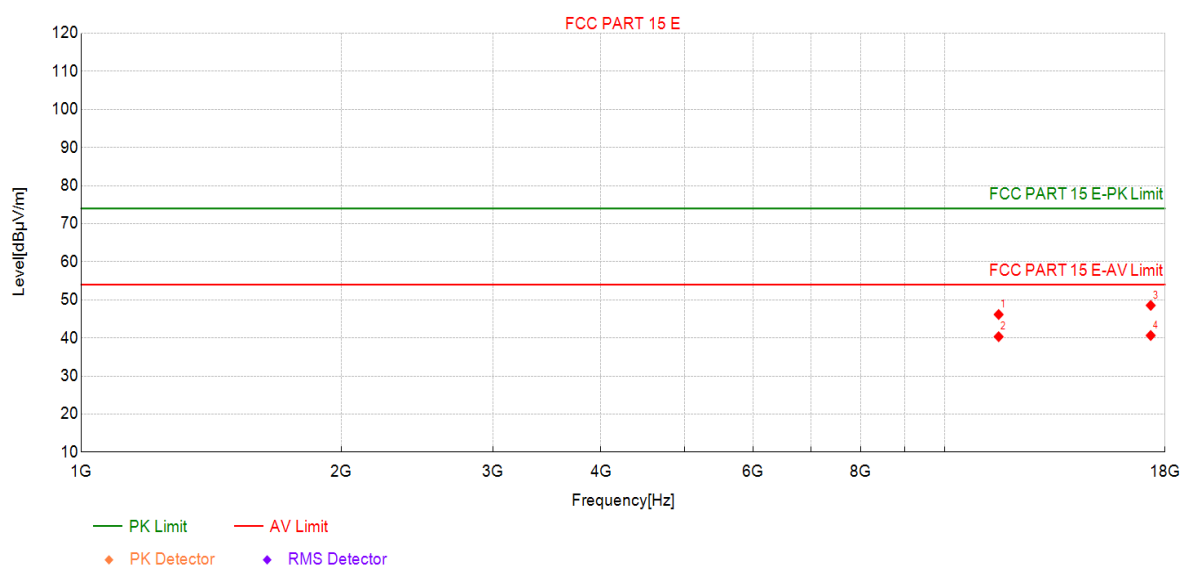

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	37.54	46.15	8.61	74.00	27.85	PK	Vertic	PASS
2	11550	31.72	40.33	8.61	54.00	13.67	AV	Vertic	PASS
3	17325	32.67	48.54	15.87	74.00	25.46	PK	Vertic	PASS
4	17325	24.77	40.64	15.87	54.00	13.36	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

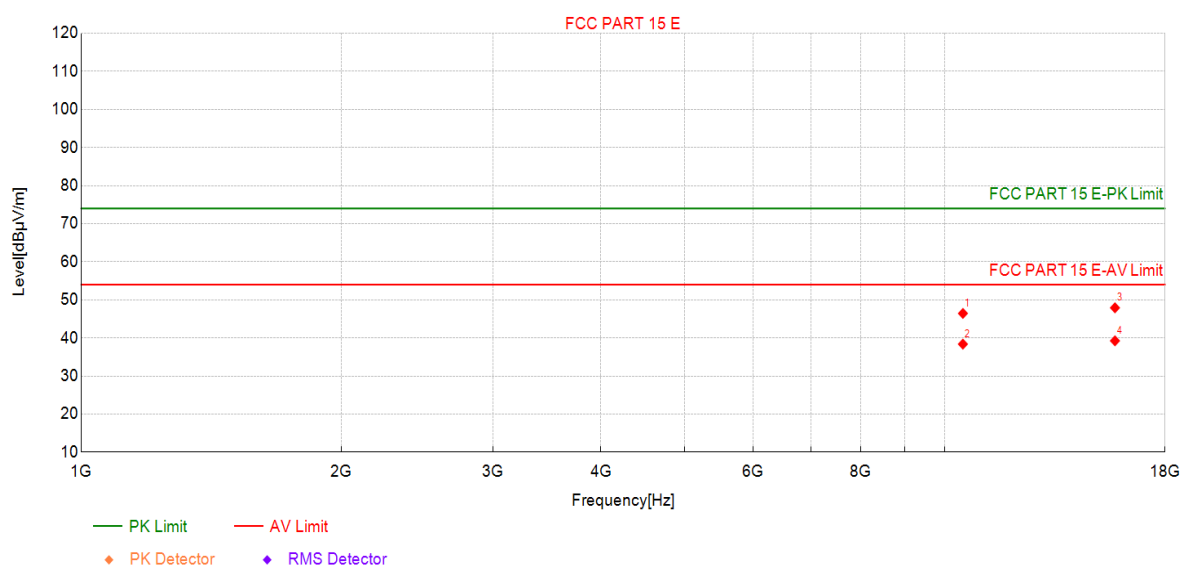

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	39.69	46.44	6.75	74.00	27.56	PK	Horizo	PASS
2	10500	31.63	38.38	6.75	54.00	15.62	AV	Horizo	PASS
3	15750	33.67	47.91	14.24	74.00	26.09	PK	Horizo	PASS
4	15750	25.00	39.24	14.24	54.00	14.76	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

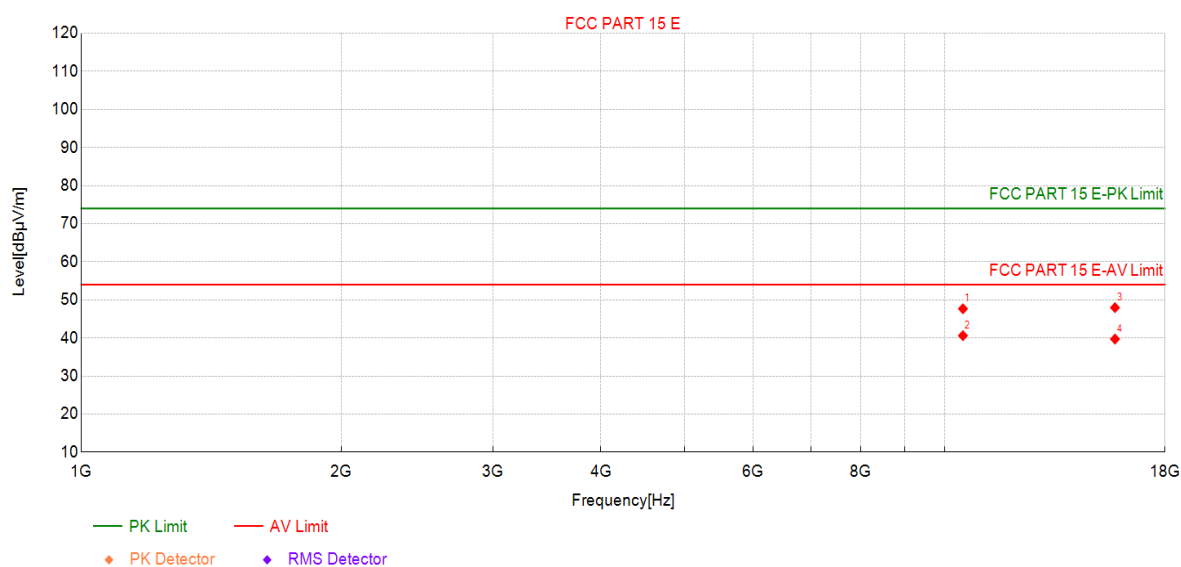

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	40.92	47.67	6.75	74.00	26.33	PK	Vertic	PASS
2	10500	33.85	40.60	6.75	54.00	13.40	AV	Vertic	PASS
3	15750	33.72	47.96	14.24	74.00	26.04	PK	Vertic	PASS
4	15750	25.47	39.71	14.24	54.00	14.29	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5570MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

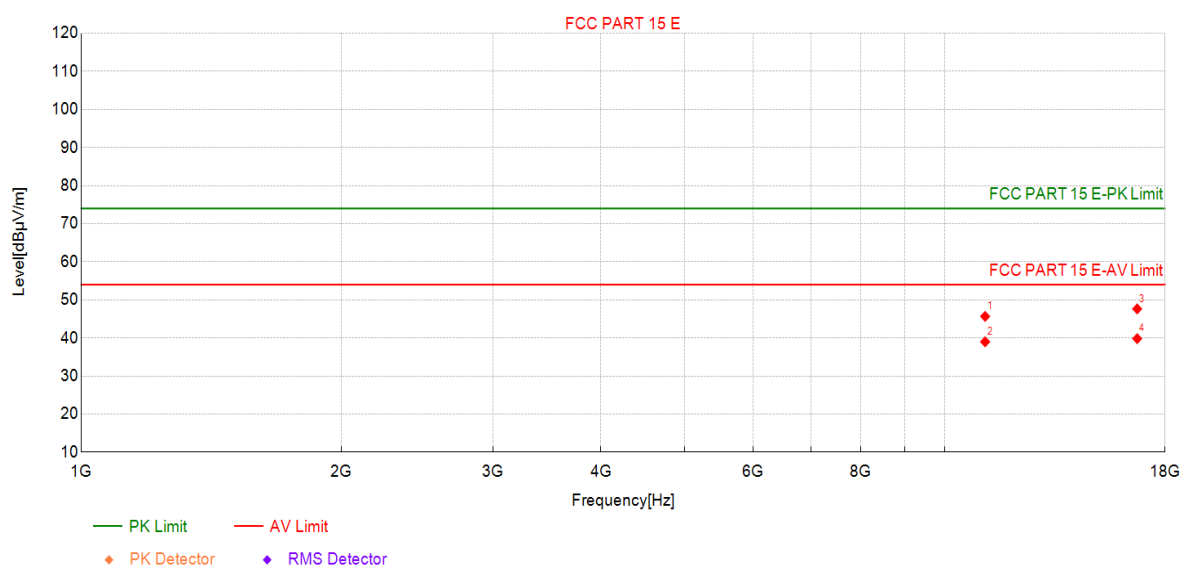

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	38.58	45.66	7.08	74.00	28.34	PK	Horizo	PASS
2	11140	31.91	38.99	7.08	54.00	15.01	AV	Horizo	PASS
3	16710	33.01	47.63	14.62	74.00	26.37	PK	Horizo	PASS
4	16710	25.20	39.82	14.62	54.00	14.18	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5570MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

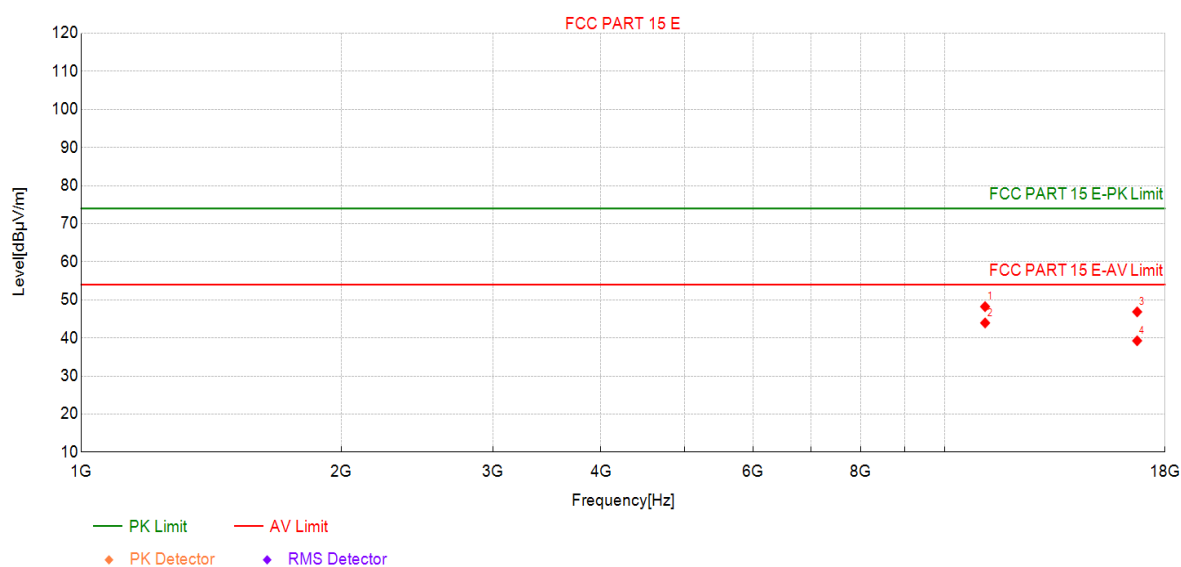

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	41.14	48.22	7.08	74.00	25.78	PK	Vertic	PASS
2	11140	36.86	43.94	7.08	54.00	10.06	AV	Vertic	PASS
3	16710	32.23	46.85	14.62	74.00	27.15	PK	Vertic	PASS
4	16710	24.63	39.25	14.62	54.00	14.75	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5180MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

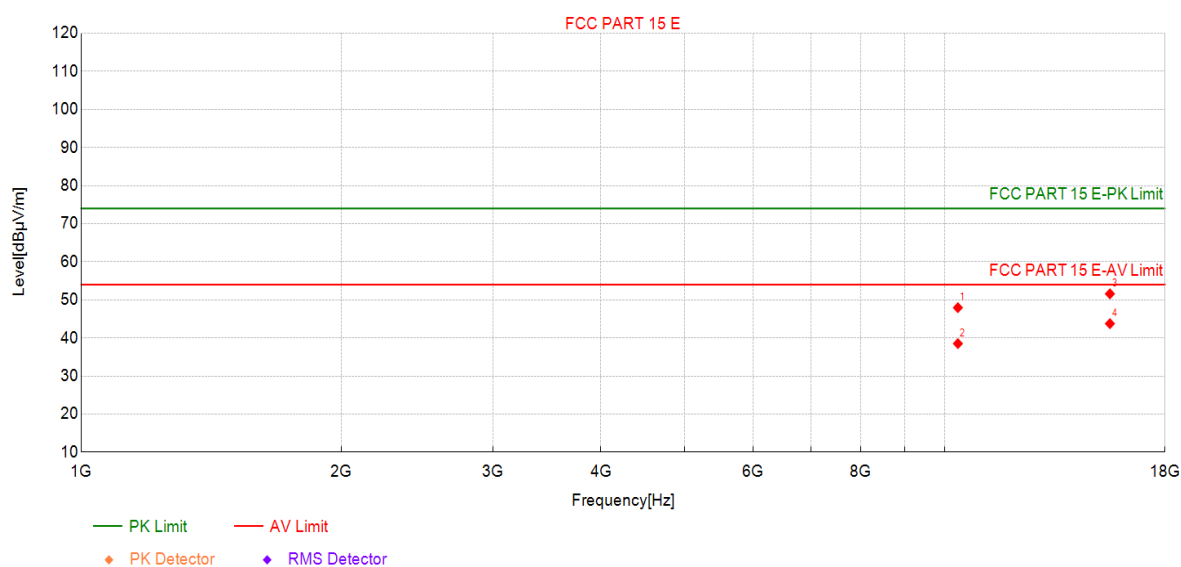

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	41.37	47.95	6.58	74.00	26.05	PK	Horizo	PASS
2	10360	31.94	38.52	6.58	54.00	15.48	AV	Horizo	PASS
3	15540	37.69	51.59	13.90	74.00	22.41	PK	Horizo	PASS
4	15540	29.86	43.76	13.90	54.00	10.24	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5180MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

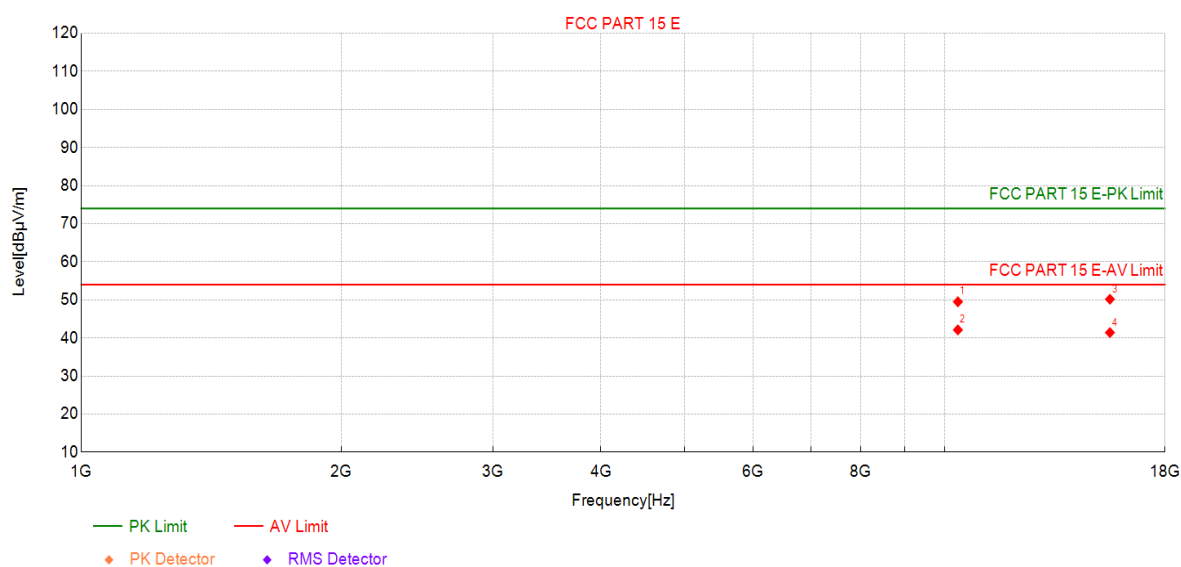

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	42.92	49.50	6.58	74.00	24.50	PK	Vertic	PASS
2	10360	35.54	42.12	6.58	54.00	11.88	AV	Vertic	PASS
3	15540	36.26	50.16	13.90	74.00	23.84	PK	Vertic	PASS
4	15540	27.51	41.41	13.90	54.00	12.59	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5220MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

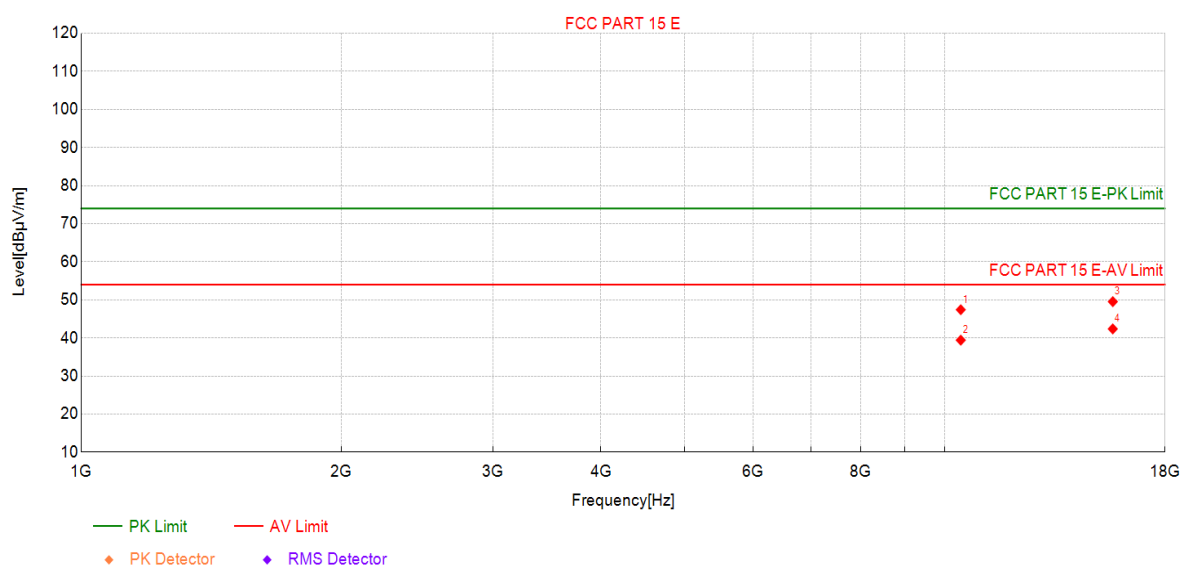

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	40.77	47.41	6.64	74.00	26.59	PK	Horizo	PASS
2	10440	32.78	39.42	6.64	54.00	14.58	AV	Horizo	PASS
3	15660	35.44	49.53	14.09	74.00	24.47	PK	Horizo	PASS
4	15660	28.28	42.37	14.09	54.00	11.63	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5220MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

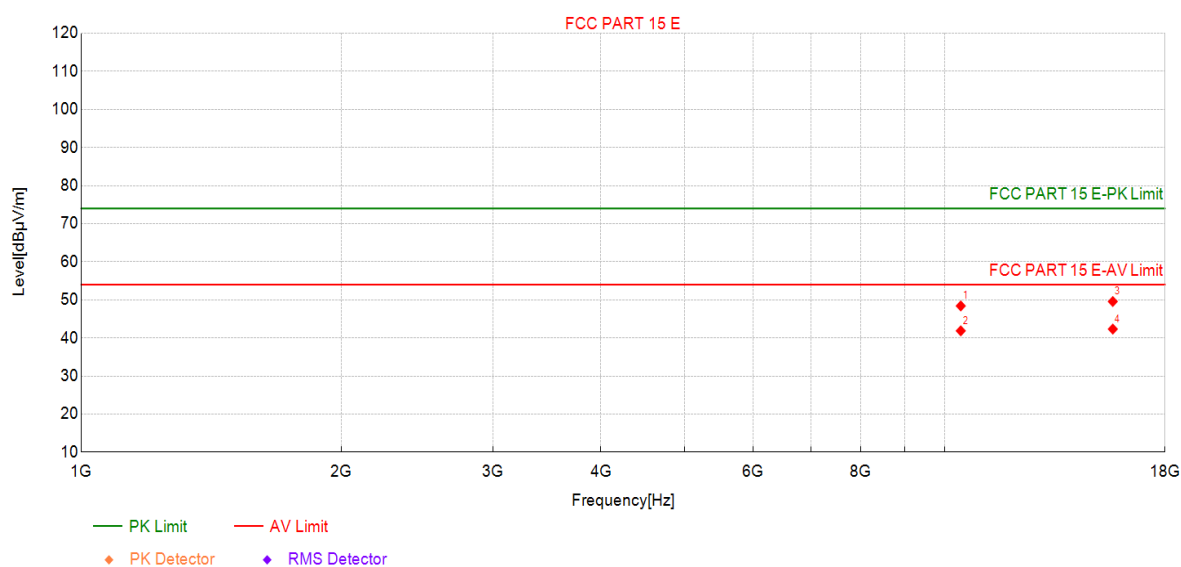

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	41.77	48.41	6.64	74.00	25.59	PK	Vertic	PASS
2	10440	35.22	41.86	6.64	54.00	12.14	AV	Vertic	PASS
3	15660	35.48	49.57	14.09	74.00	24.43	PK	Vertic	PASS
4	15660	28.24	42.33	14.09	54.00	11.67	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5240MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

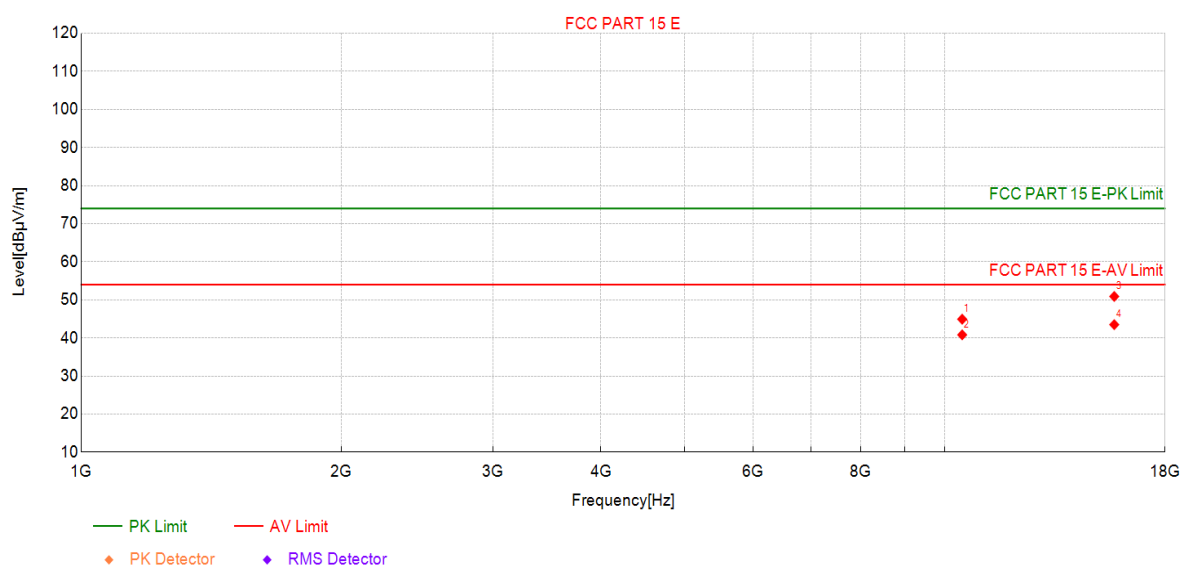

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	38.21	44.92	6.71	74.00	29.08	PK	Horizo	PASS
2	10480	34.10	40.81	6.71	54.00	13.19	AV	Horizo	PASS
3	15720	36.49	50.90	14.41	74.00	23.10	PK	Horizo	PASS
4	15720	29.09	43.50	14.41	54.00	10.50	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5240MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

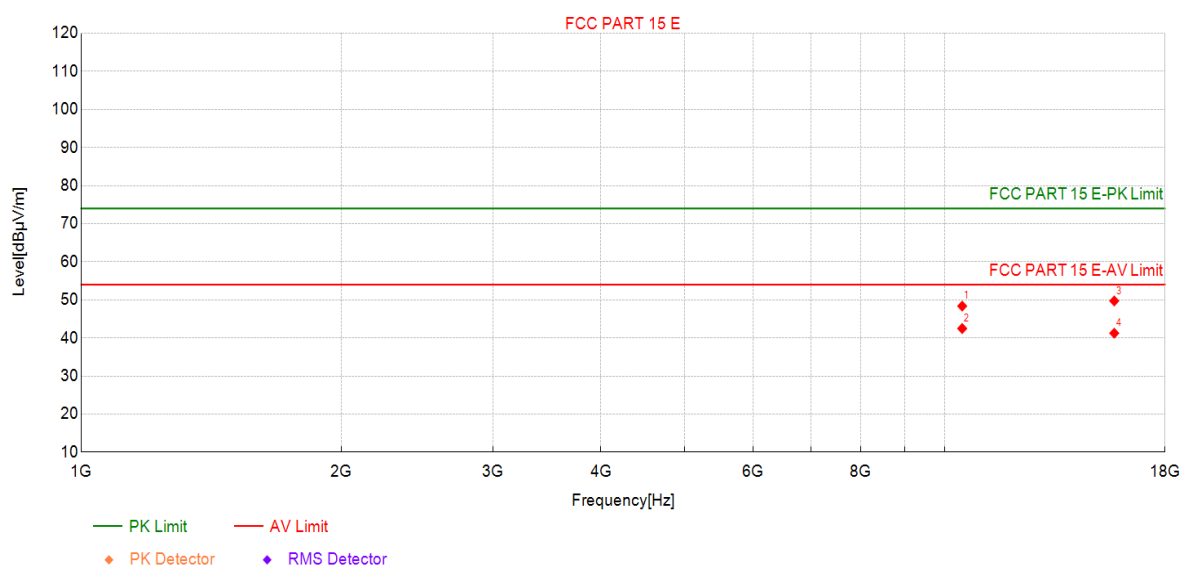

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	41.66	48.37	6.71	74.00	25.63	PK	Vertic	PASS
2	10480	35.76	42.47	6.71	54.00	11.53	AV	Vertic	PASS
3	15720	35.31	49.72	14.41	74.00	24.28	PK	Vertic	PASS
4	15720	26.83	41.24	14.41	54.00	12.76	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5260MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

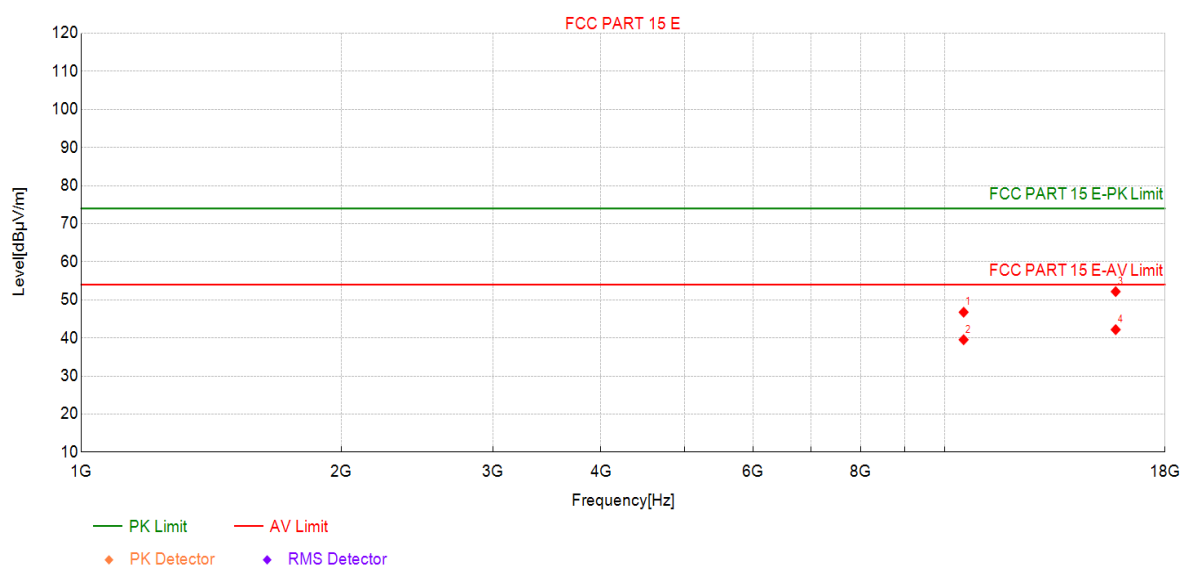

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	40.00	46.76	6.76	74.00	27.24	PK	Horizo	PASS
2	10520	32.77	39.53	6.76	54.00	14.47	AV	Horizo	PASS
3	15780	38.07	52.16	14.09	74.00	21.84	PK	Horizo	PASS
4	15780	28.09	42.18	14.09	54.00	11.82	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5260MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

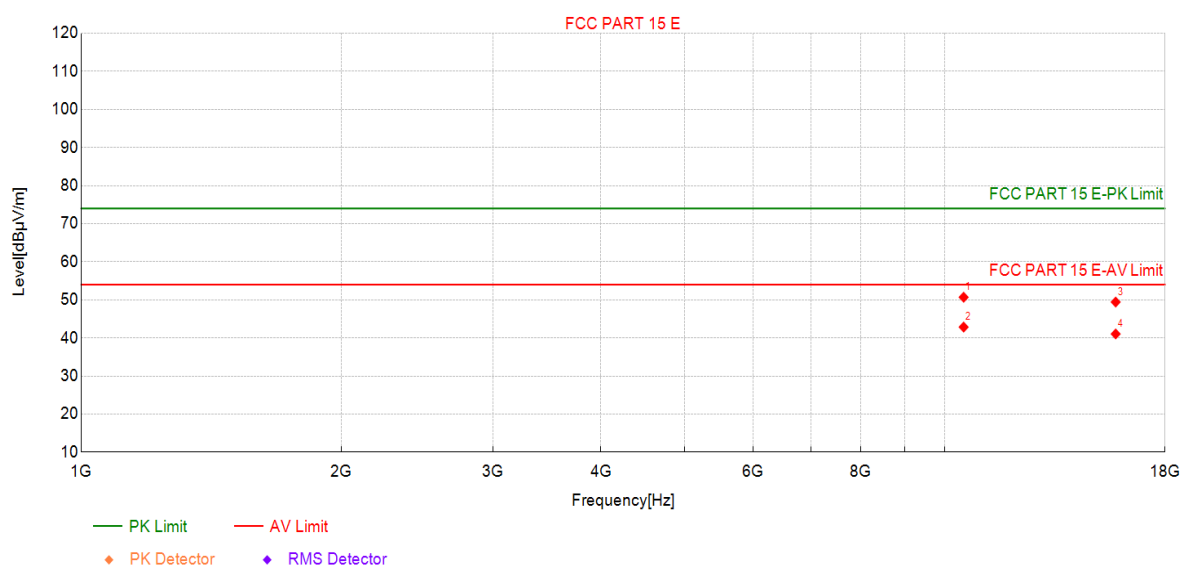

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	43.93	50.69	6.76	74.00	23.31	PK	Vertic	PASS
2	10520	36.09	42.85	6.76	54.00	11.15	AV	Vertic	PASS
3	15780	35.34	49.43	14.09	74.00	24.57	PK	Vertic	PASS
4	15780	26.96	41.05	14.09	54.00	12.95	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5300MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

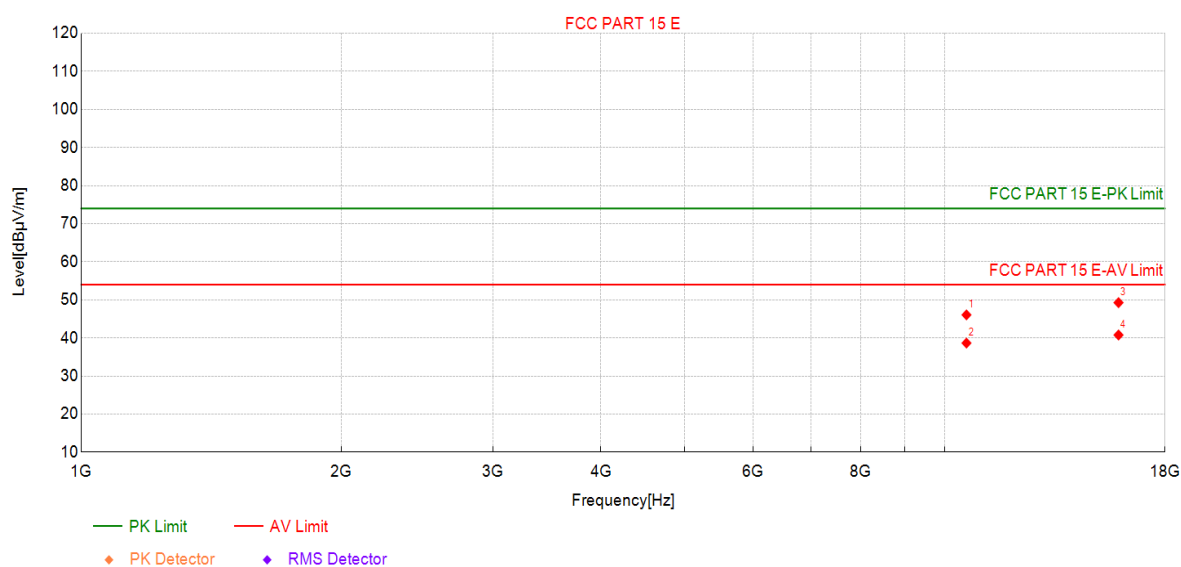

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	39.28	46.06	6.78	74.00	27.94	PK	Horizo	PASS
2	10600	31.88	38.66	6.78	54.00	15.34	AV	Horizo	PASS
3	15900	35.15	49.27	14.12	74.00	24.73	PK	Horizo	PASS
4	15900	26.65	40.77	14.12	54.00	13.23	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5300MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

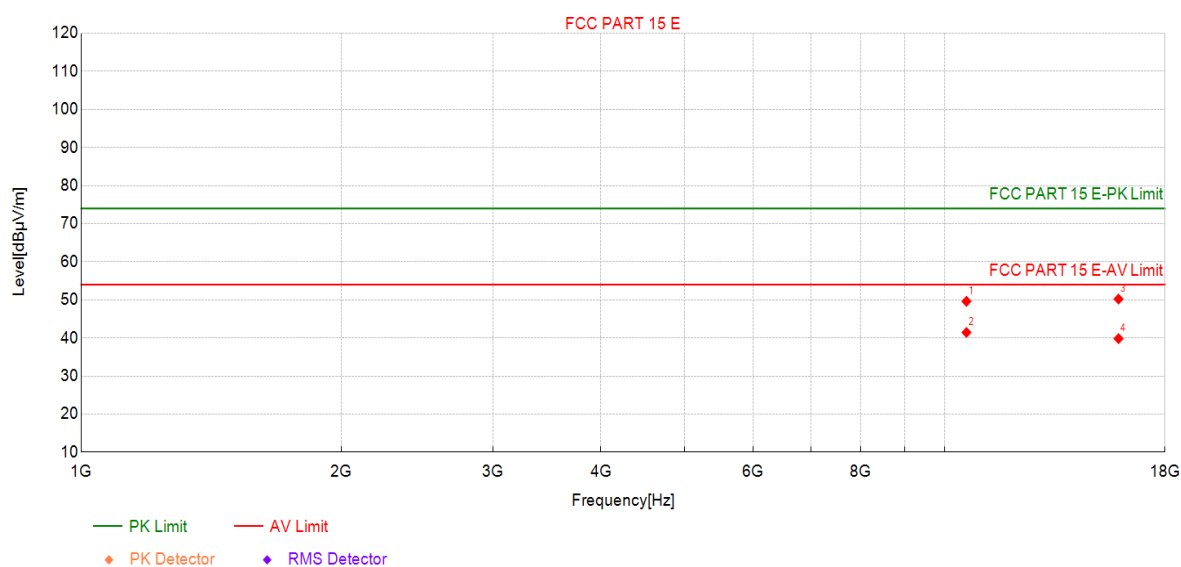

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	42.83	49.61	6.78	74.00	24.39	PK	Vertic	PASS
2	10600	34.67	41.45	6.78	54.00	12.55	AV	Vertic	PASS
3	15900	36.09	50.21	14.12	74.00	23.79	PK	Vertic	PASS
4	15900	25.70	39.82	14.12	54.00	14.18	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5320MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

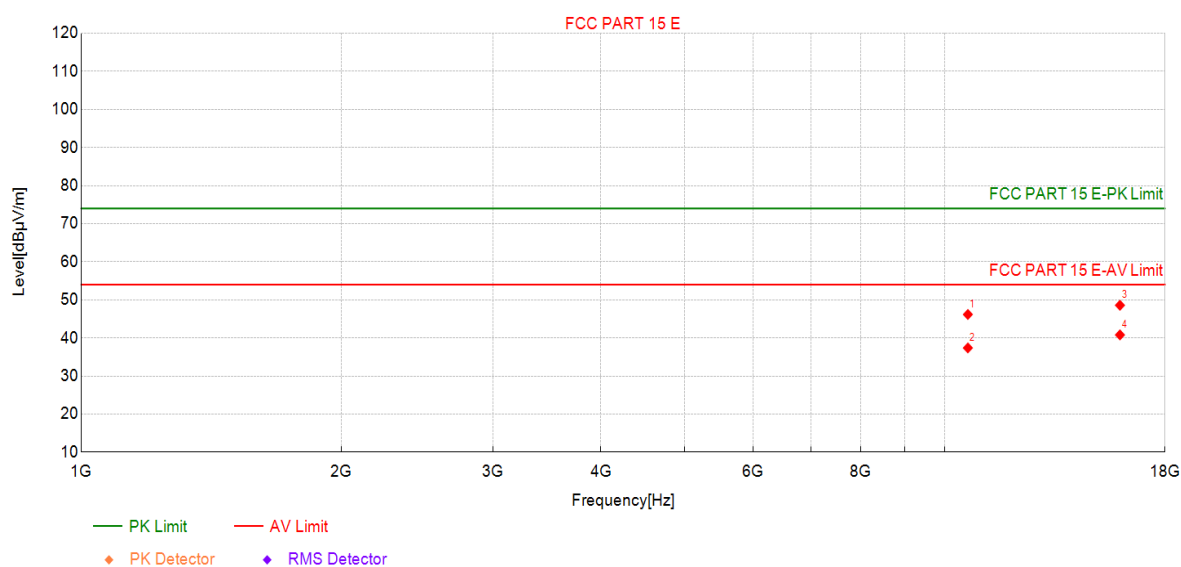

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	39.37	46.17	6.80	74.00	27.83	PK	Horizo	PASS
2	10640	30.58	37.38	6.80	54.00	16.62	AV	Horizo	PASS
3	15960	33.95	48.58	14.63	74.00	25.42	PK	Horizo	PASS
4	15960	26.17	40.80	14.63	54.00	13.20	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5320MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

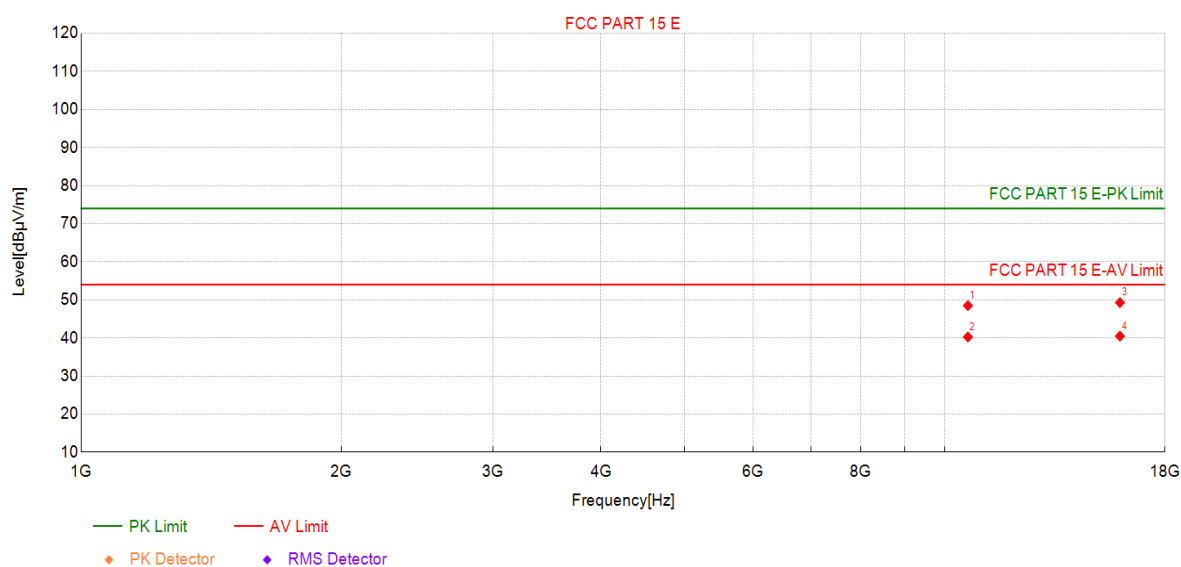

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	41.69	48.49	6.80	74.00	25.51	PK	Vertic	PASS
2	10640	33.45	40.25	6.80	54.00	13.75	AV	Vertic	PASS
3	15960	34.65	49.28	14.63	74.00	24.72	PK	Vertic	PASS
4	15960	25.85	40.48	14.63	54.00	13.52	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5500MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

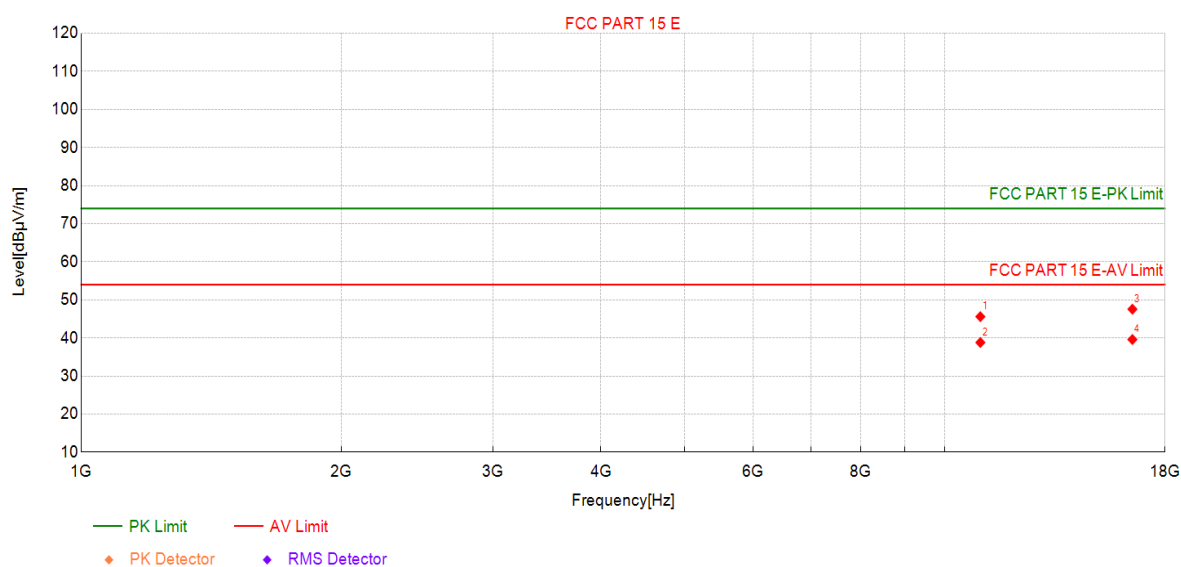

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	38.19	45.59	7.40	74.00	28.41	PK	Horizo	PASS
2	11000	31.40	38.80	7.40	54.00	15.20	AV	Horizo	PASS
3	16500	32.44	47.55	15.11	74.00	26.45	PK	Horizo	PASS
4	16500	24.48	39.59	15.11	54.00	14.41	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5500MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

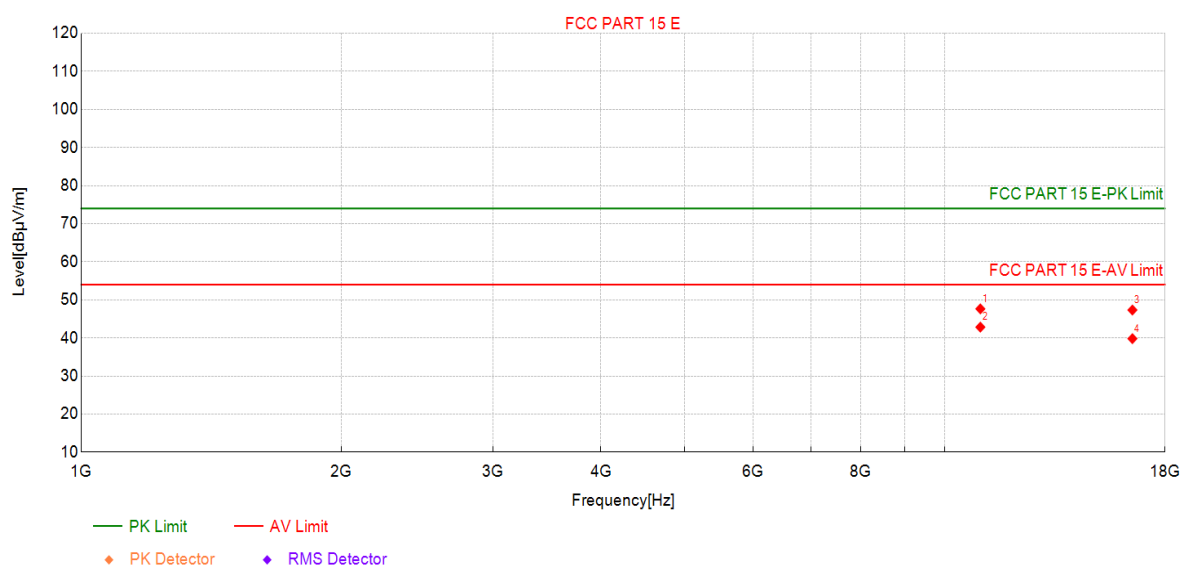

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	40.24	47.64	7.40	74.00	26.36	PK	Vertic	PASS
2	11000	35.44	42.84	7.40	54.00	11.16	AV	Vertic	PASS
3	16500	32.22	47.33	15.11	74.00	26.67	PK	Vertic	PASS
4	16500	24.70	39.81	15.11	54.00	14.19	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5580MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

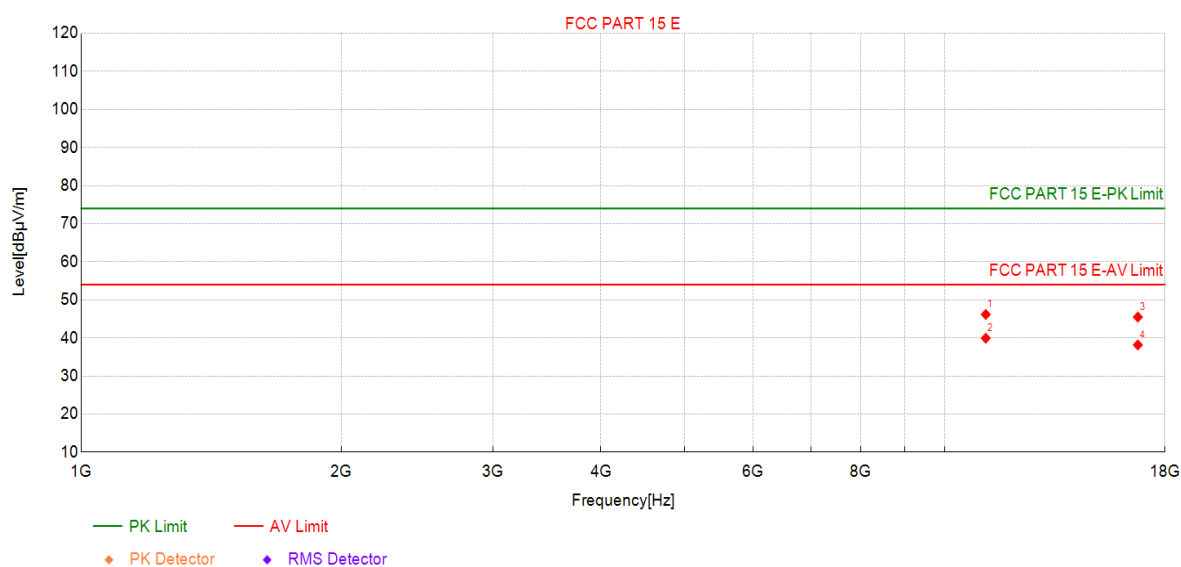

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	38.88	46.17	7.29	74.00	27.83	PK	Horizo	PASS
2	11160	32.64	39.93	7.29	54.00	14.07	AV	Horizo	PASS
3	16740	30.86	45.48	14.62	74.00	28.52	PK	Horizo	PASS
4	16740	23.54	38.16	14.62	54.00	15.84	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5580MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

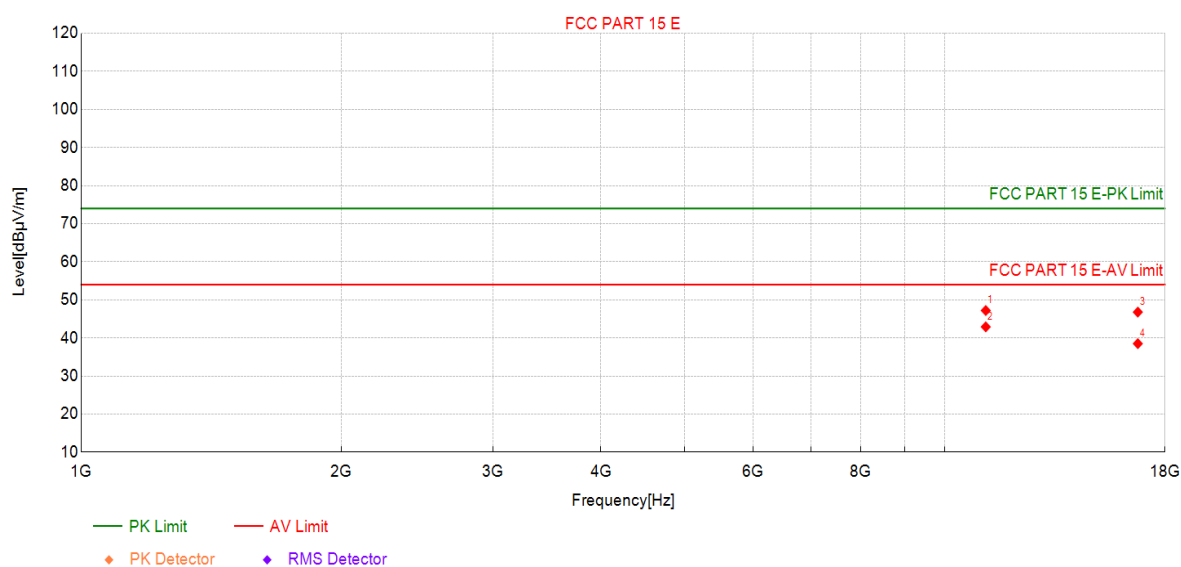

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	39.91	47.20	7.29	74.00	26.80	PK	Vertic	PASS
2	11160	35.62	42.91	7.29	54.00	11.09	AV	Vertic	PASS
3	16740	32.17	46.79	14.62	74.00	27.21	PK	Vertic	PASS
4	16740	23.88	38.50	14.62	54.00	15.50	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5700MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

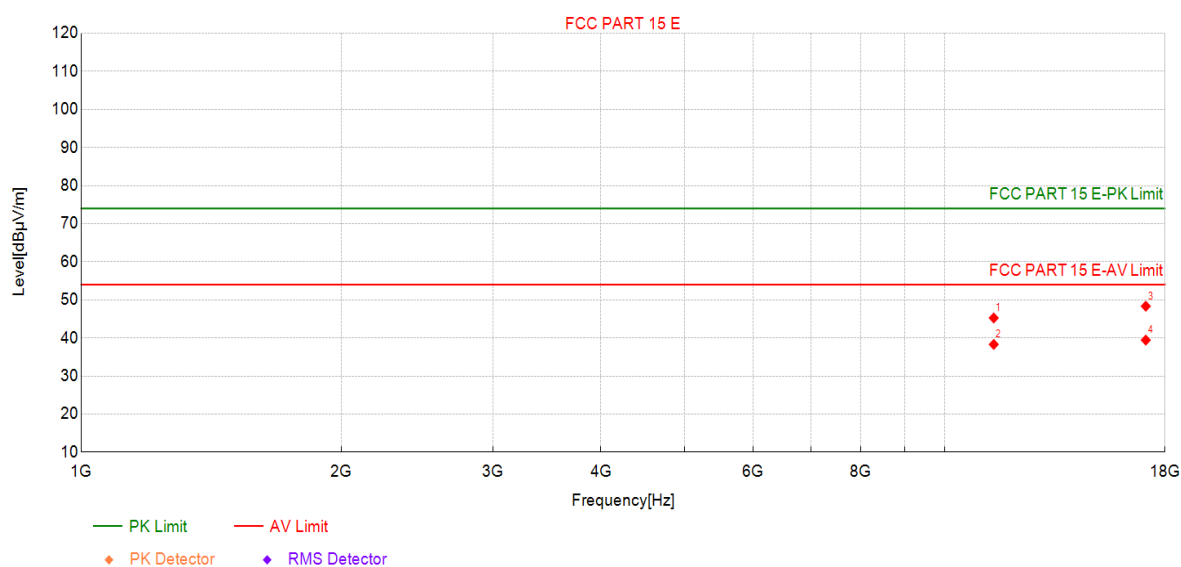Test Graph**Suspected Data List**

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	37.42	45.25	7.83	74.00	28.75	PK	Horizo	PASS
2	11400	30.47	38.30	7.83	54.00	15.70	AV	Horizo	PASS
3	17100	32.51	48.33	15.82	74.00	25.67	PK	Horizo	PASS
4	17100	23.61	39.43	15.82	54.00	14.57	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5700MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

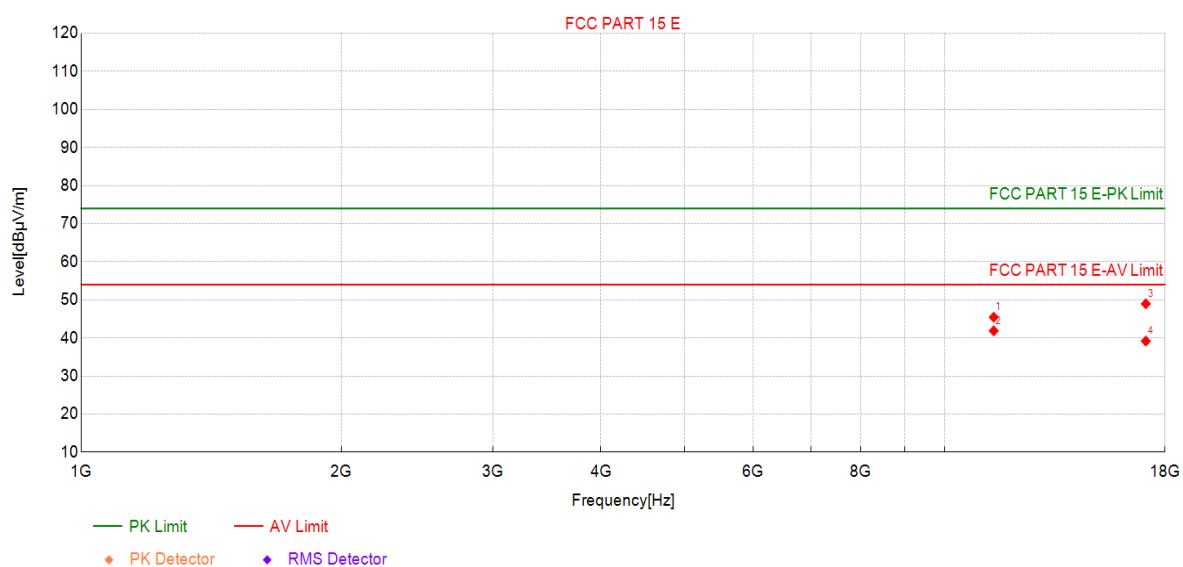

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	37.62	45.45	7.83	74.00	28.55	PK	Vertic	PASS
2	11400	34.03	41.86	7.83	54.00	12.14	AV	Vertic	PASS
3	17100	33.15	48.97	15.82	74.00	25.03	PK	Vertic	PASS
4	17100	23.35	39.17	15.82	54.00	14.83	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5745MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

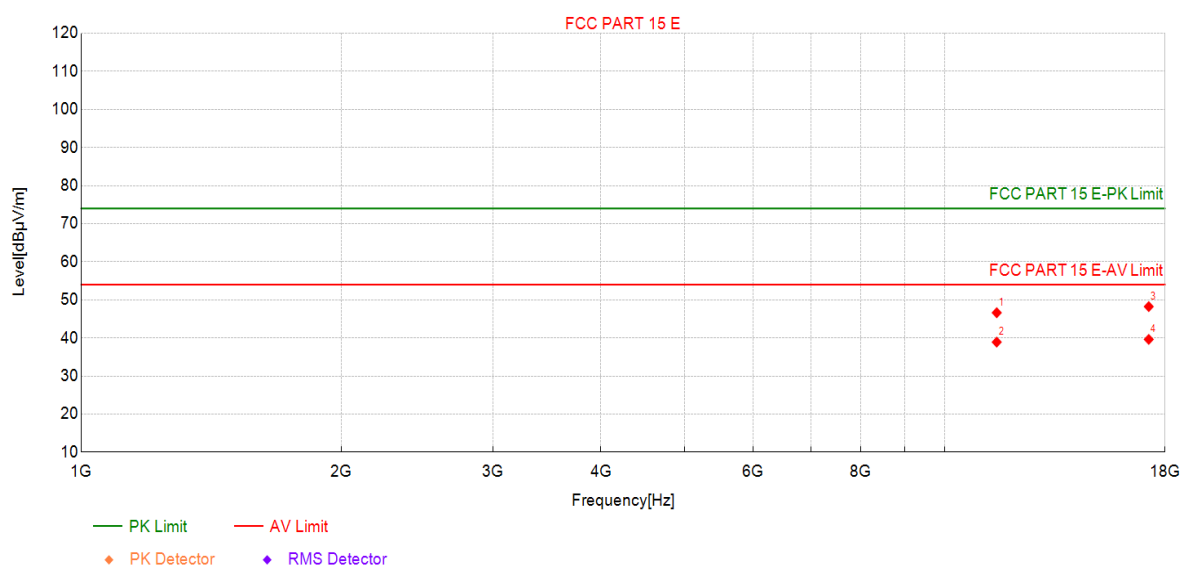

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	38.24	46.62	8.38	74.00	27.38	PK	Horizo	PASS
2	11490	30.52	38.90	8.38	54.00	15.10	AV	Horizo	PASS
3	17235	32.77	48.23	15.46	74.00	25.77	PK	Horizo	PASS
4	17235	24.16	39.62	15.46	54.00	14.38	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5745MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

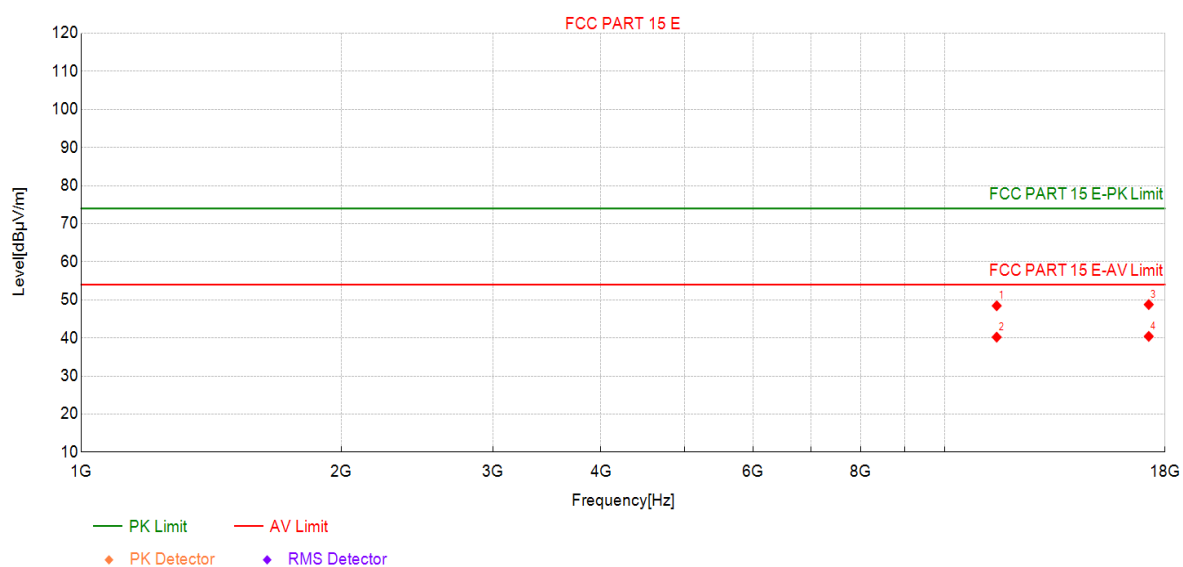

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	40.06	48.44	8.38	74.00	25.56	PK	Vertic	PASS
2	11490	31.83	40.21	8.38	54.00	13.79	AV	Vertic	PASS
3	17235	33.30	48.76	15.46	74.00	25.24	PK	Vertic	PASS
4	17235	24.95	40.41	15.46	54.00	13.59	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5785MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

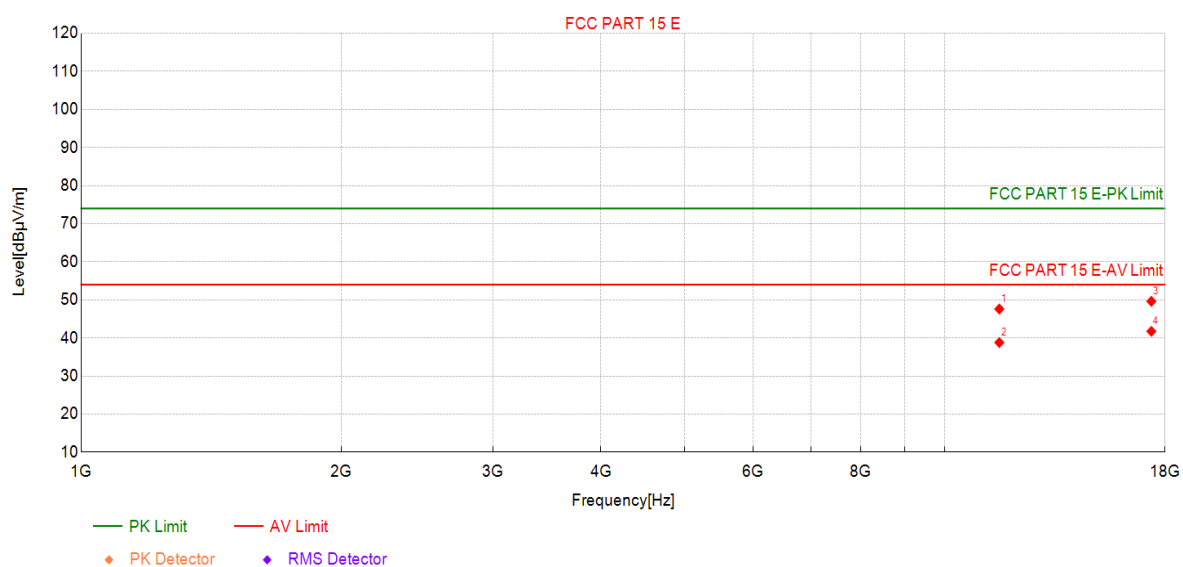

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	38.92	47.60	8.68	74.00	26.40	PK	Horizo	PASS
2	11570	30.11	38.79	8.68	54.00	15.21	AV	Horizo	PASS
3	17355	33.39	49.61	16.22	74.00	24.39	PK	Horizo	PASS
4	17355	25.52	41.74	16.22	54.00	12.26	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5785MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

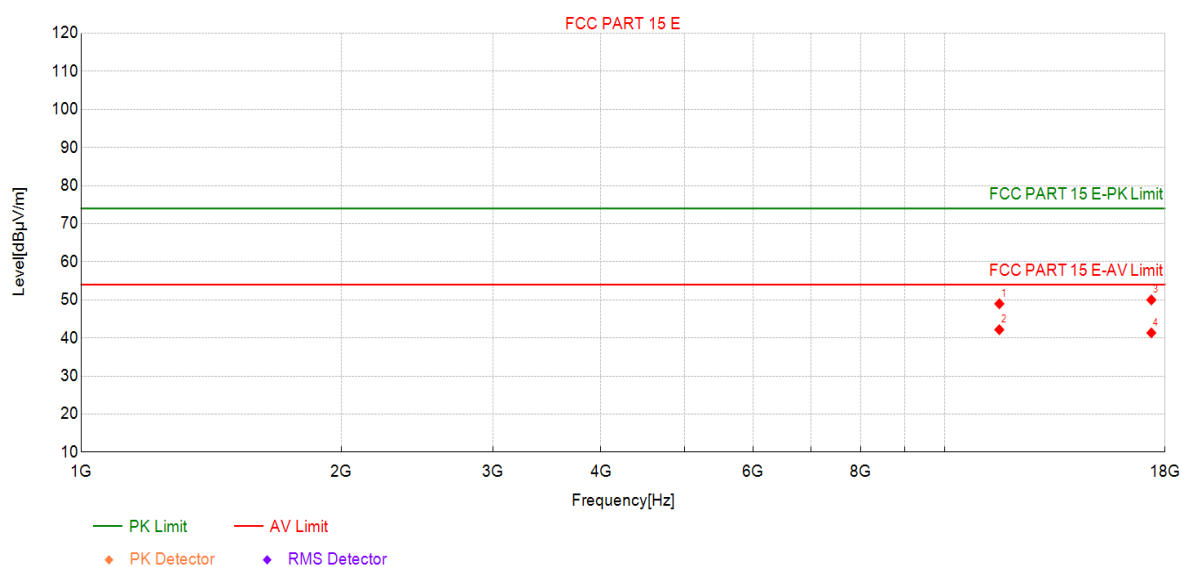

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	40.29	48.97	8.68	74.00	25.03	PK	Vertic	PASS
2	11570	33.48	42.16	8.68	54.00	11.84	AV	Vertic	PASS
3	17355	33.77	49.99	16.22	74.00	24.01	PK	Vertic	PASS
4	17355	25.11	41.33	16.22	54.00	12.67	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5825MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

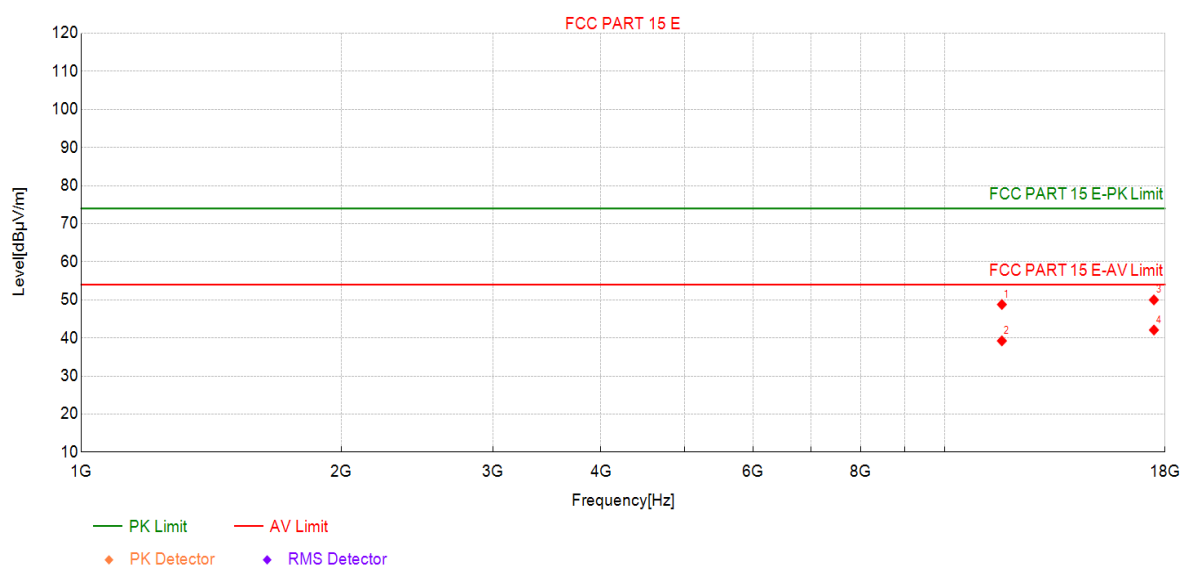

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	40.04	48.78	8.74	74.00	25.22	PK	Horizo	PASS
2	11650	30.49	39.23	8.74	54.00	14.77	AV	Horizo	PASS
3	17475	32.92	49.99	17.07	74.00	24.01	PK	Horizo	PASS
4	17475	25.01	42.08	17.07	54.00	11.92	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5825MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

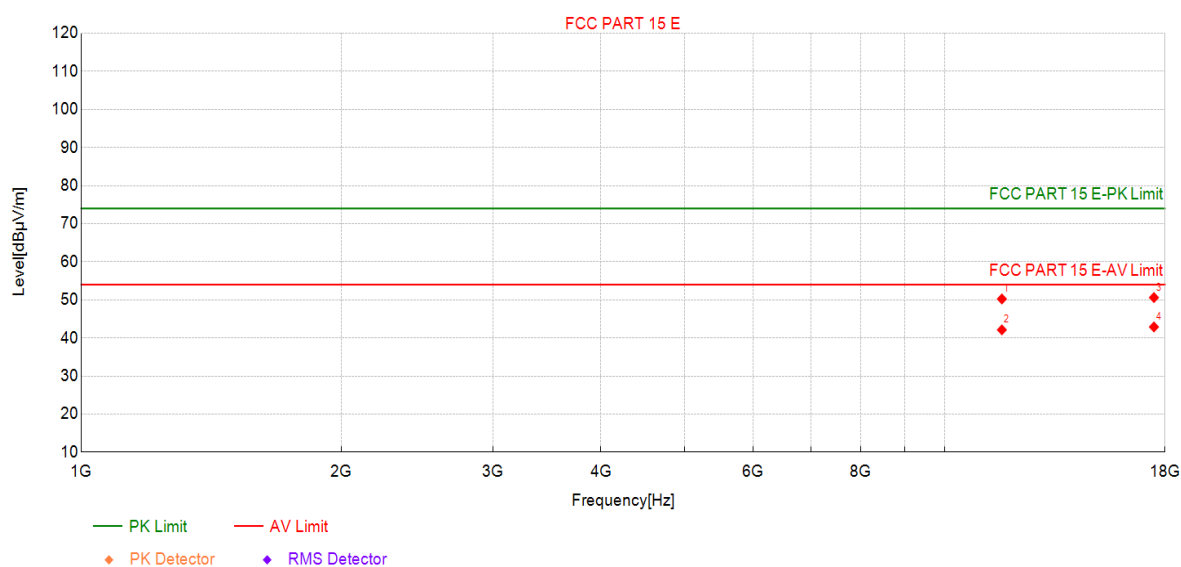

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	41.49	50.23	8.74	74.00	23.77	PK	Vertic	PASS
2	11650	33.39	42.13	8.74	54.00	11.87	AV	Vertic	PASS
3	17475	33.54	50.61	17.07	74.00	23.39	PK	Vertic	PASS
4	17475	25.82	42.89	17.07	54.00	11.11	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5190MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

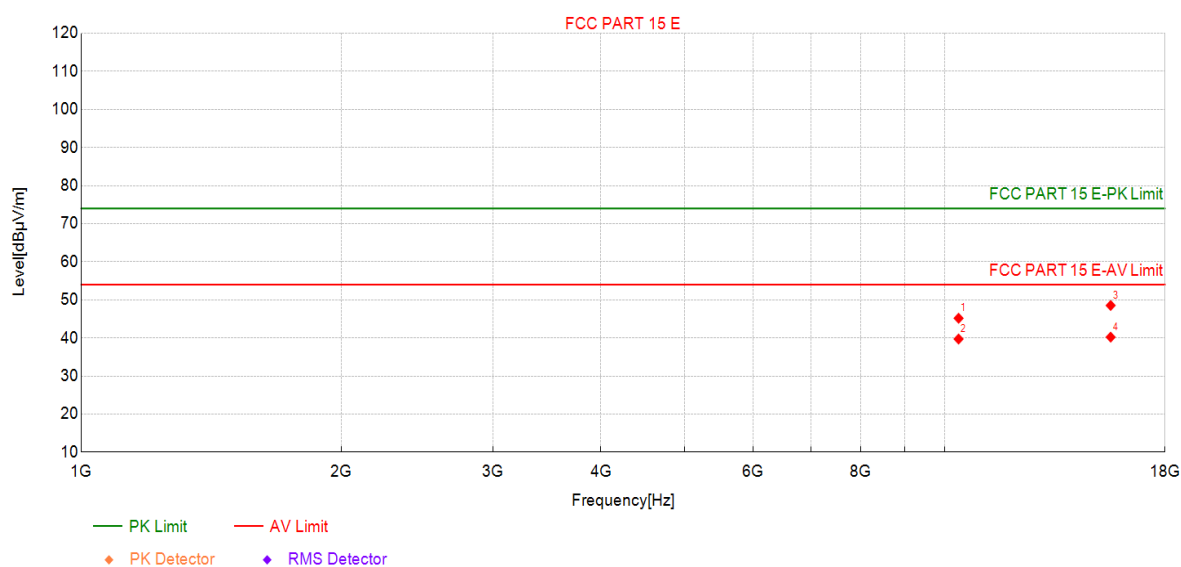

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	38.60	45.17	6.57	74.00	28.83	PK	Horizo	PASS
2	10380	33.15	39.72	6.57	54.00	14.28	AV	Horizo	PASS
3	15570	34.84	48.53	13.69	74.00	25.47	PK	Horizo	PASS
4	15570	26.53	40.22	13.69	54.00	13.78	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5190MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

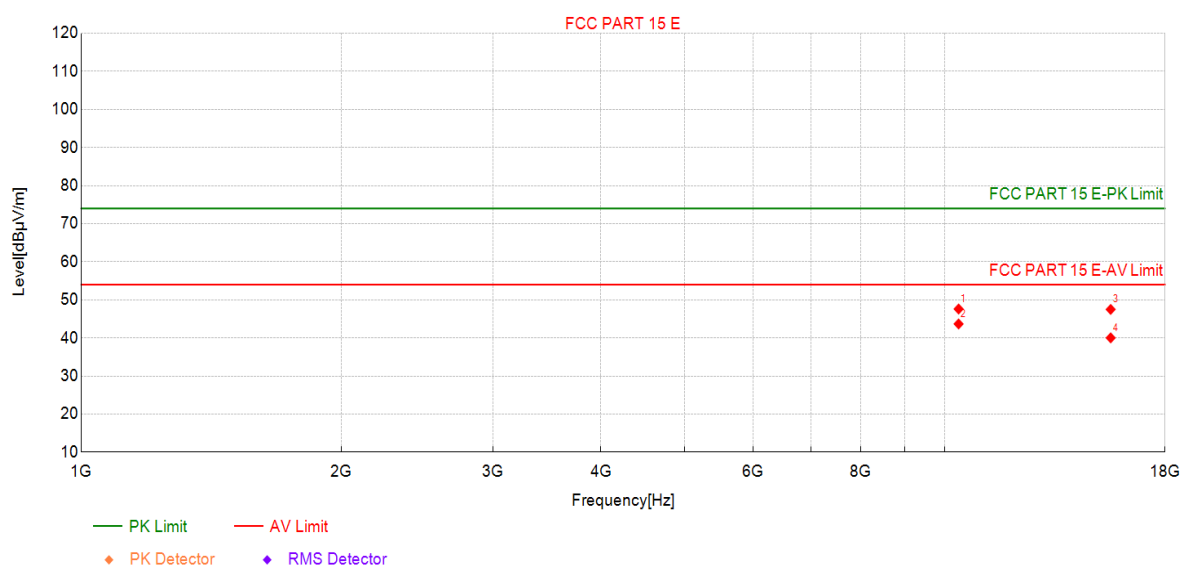

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	41.03	47.60	6.57	74.00	26.40	PK	Vertic	PASS
2	10380	37.10	43.67	6.57	54.00	10.33	AV	Vertic	PASS
3	15570	33.80	47.49	13.69	74.00	26.51	PK	Vertic	PASS
4	15570	26.33	40.02	13.69	54.00	13.98	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5230MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

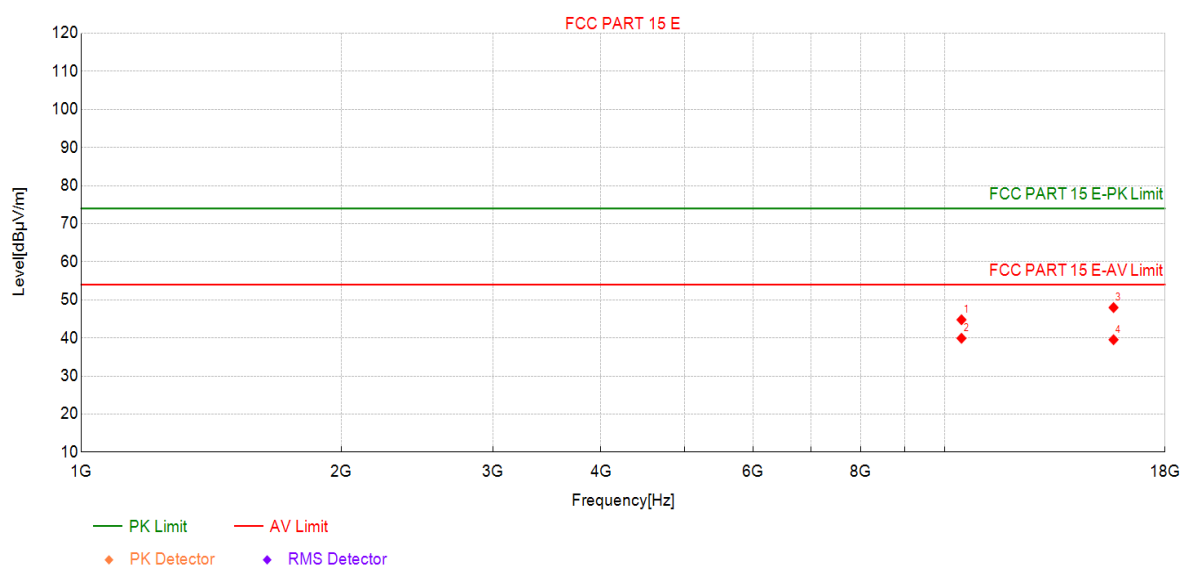

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	38.11	44.78	6.67	74.00	29.22	PK	Horizo	PASS
2	10460	33.23	39.90	6.67	54.00	14.10	AV	Horizo	PASS
3	15690	33.57	47.98	14.41	74.00	26.02	PK	Horizo	PASS
4	15690	25.12	39.53	14.41	54.00	14.47	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5230MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

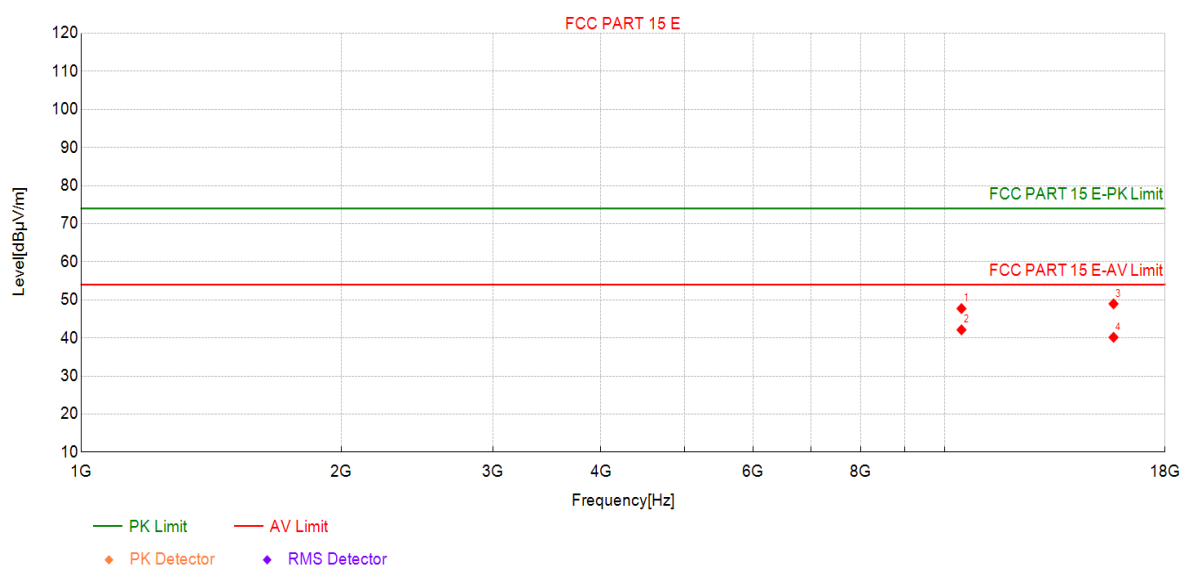

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	41.04	47.71	6.67	74.00	26.29	PK	Vertic	PASS
2	10460	35.45	42.12	6.67	54.00	11.88	AV	Vertic	PASS
3	15690	34.54	48.95	14.41	74.00	25.05	PK	Vertic	PASS
4	15690	25.76	40.17	14.41	54.00	13.83	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5270MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

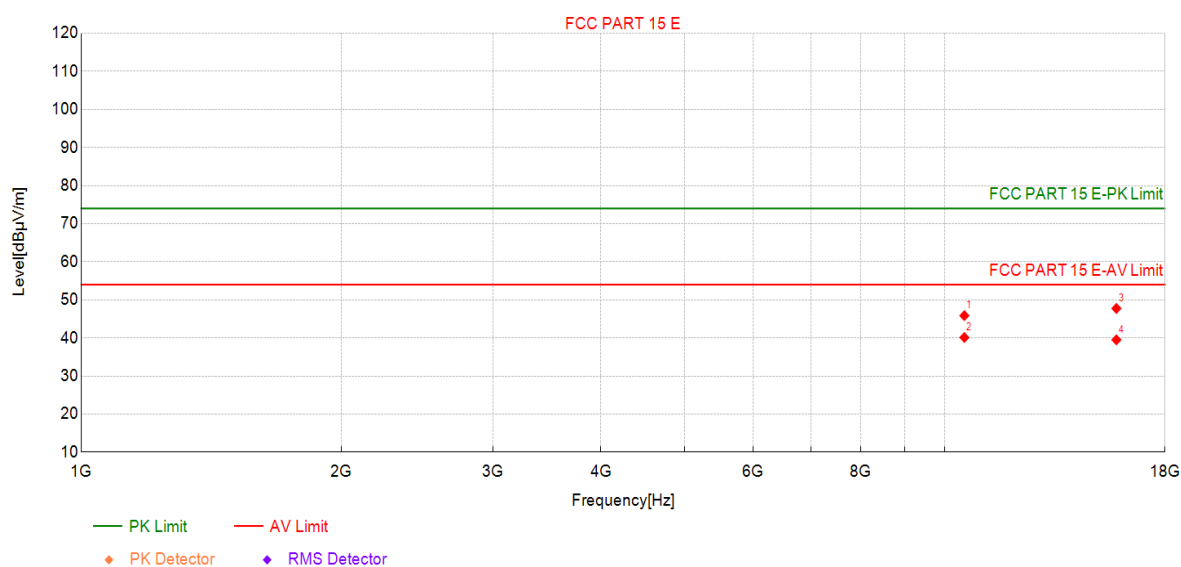

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	39.10	45.86	6.76	74.00	28.14	PK	Horizo	PASS
2	10540	33.36	40.12	6.76	54.00	13.88	AV	Horizo	PASS
3	15810	33.73	47.74	14.01	74.00	26.26	PK	Horizo	PASS
4	15810	25.50	39.51	14.01	54.00	14.49	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5270MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

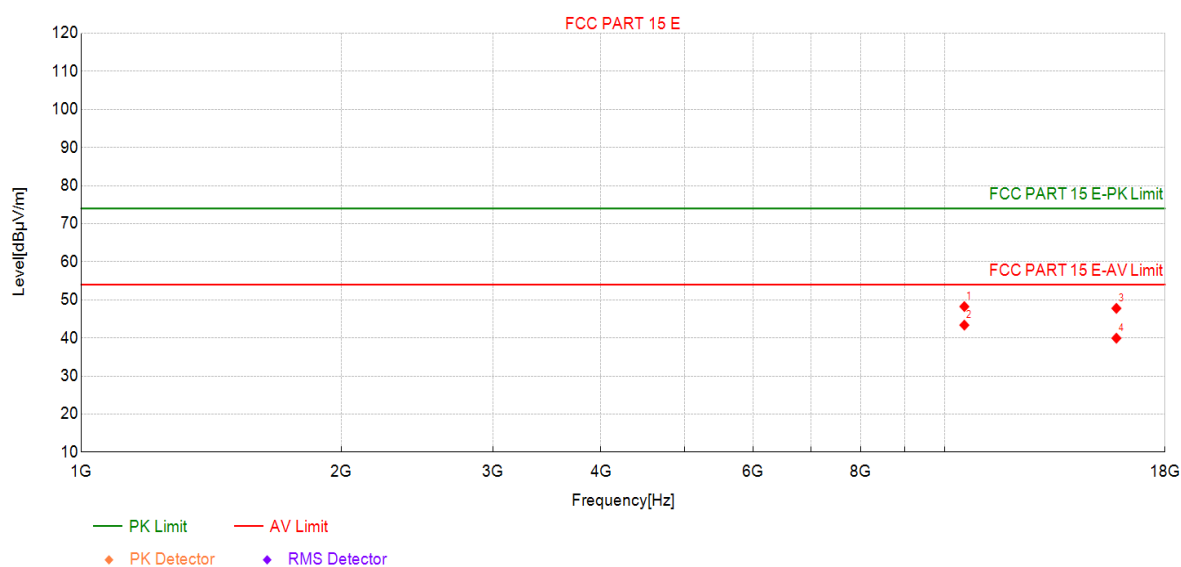

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	41.48	48.24	6.76	74.00	25.76	PK	Vertic	PASS
2	10540	36.61	43.37	6.76	54.00	10.63	AV	Vertic	PASS
3	15810	33.76	47.77	14.01	74.00	26.23	PK	Vertic	PASS
4	15810	25.93	39.94	14.01	54.00	14.06	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5310MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

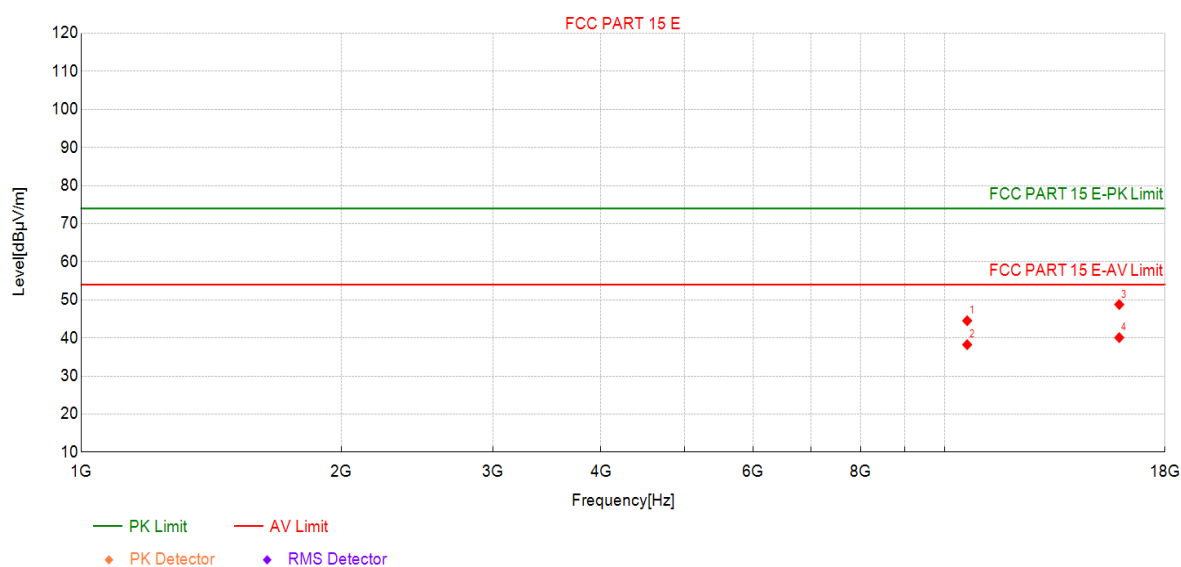

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	37.73	44.52	6.79	74.00	29.48	PK	Horizo	PASS
2	10620	31.44	38.23	6.79	54.00	15.77	AV	Horizo	PASS
3	15930	34.40	48.77	14.37	74.00	25.23	PK	Horizo	PASS
4	15930	25.72	40.09	14.37	54.00	13.91	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5310MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

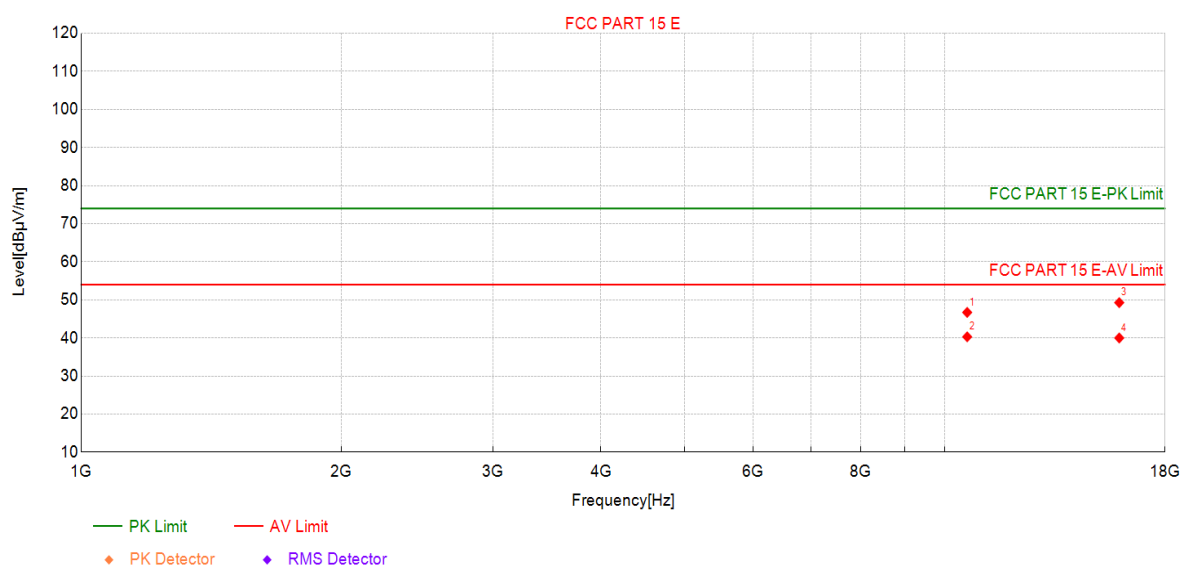

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	39.91	46.70	6.79	74.00	27.30	PK	Vertic	PASS
2	10620	33.50	40.29	6.79	54.00	13.71	AV	Vertic	PASS
3	15930	34.90	49.27	14.37	74.00	24.73	PK	Vertic	PASS
4	15930	25.62	39.99	14.37	54.00	14.01	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5510MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

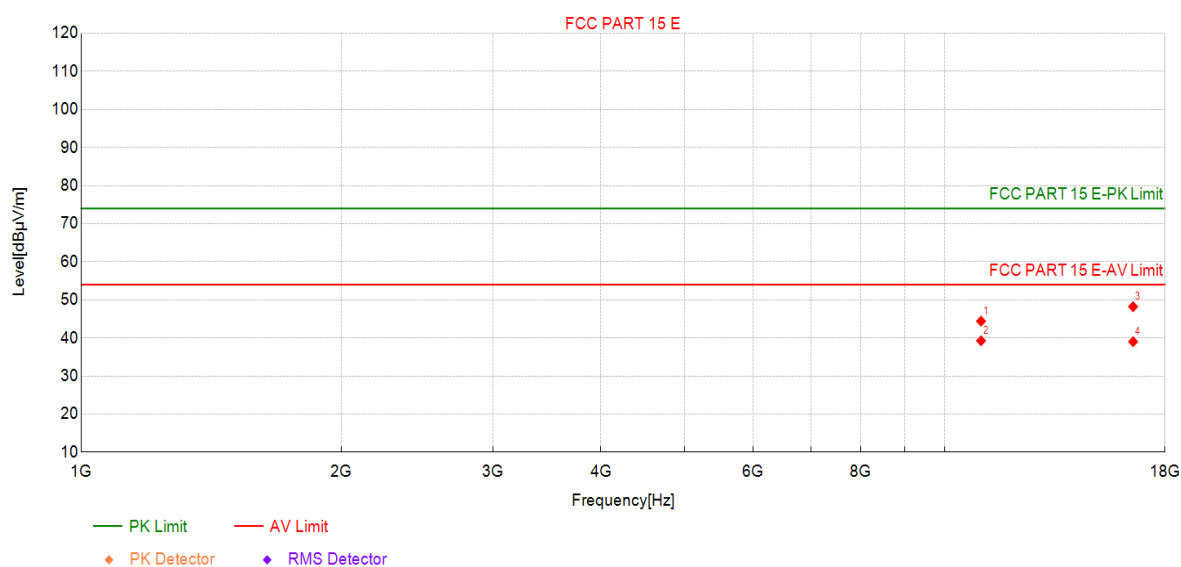

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	37.15	44.40	7.25	74.00	29.60	PK	Horizo	PASS
2	11020	32.01	39.26	7.25	54.00	14.74	AV	Horizo	PASS
3	16530	33.20	48.21	15.01	74.00	25.79	PK	Horizo	PASS
4	16530	24.01	39.02	15.01	54.00	14.98	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5510MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

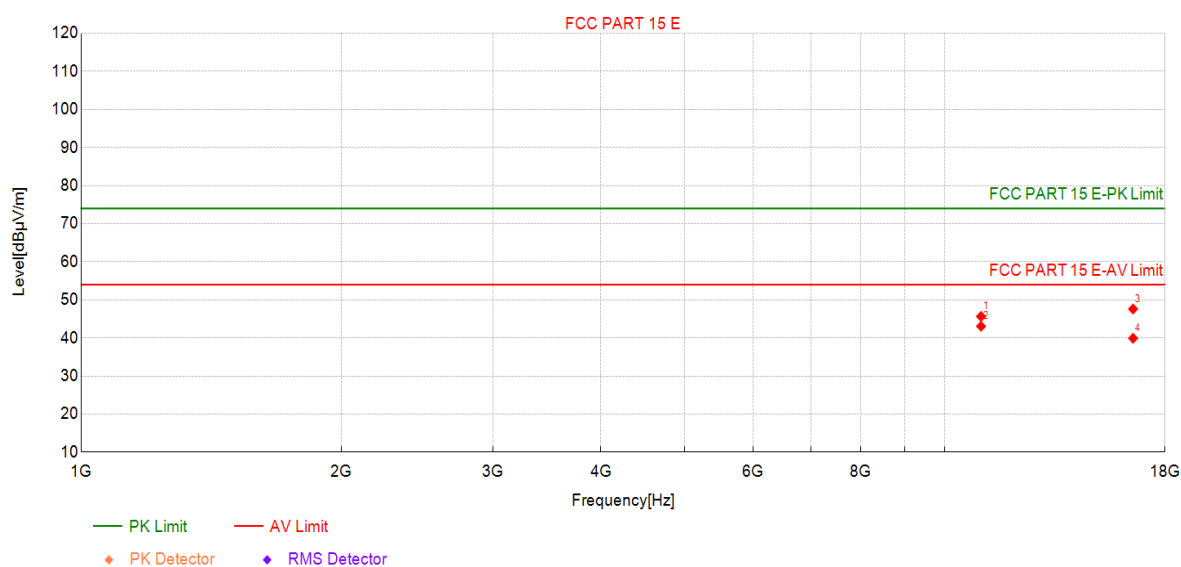

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	38.39	45.64	7.25	74.00	28.36	PK	Vertic	PASS
2	11020	35.81	43.06	7.25	54.00	10.94	AV	Vertic	PASS
3	16530	32.60	47.61	15.01	74.00	26.39	PK	Vertic	PASS
4	16530	24.89	39.90	15.01	54.00	14.10	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5550MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

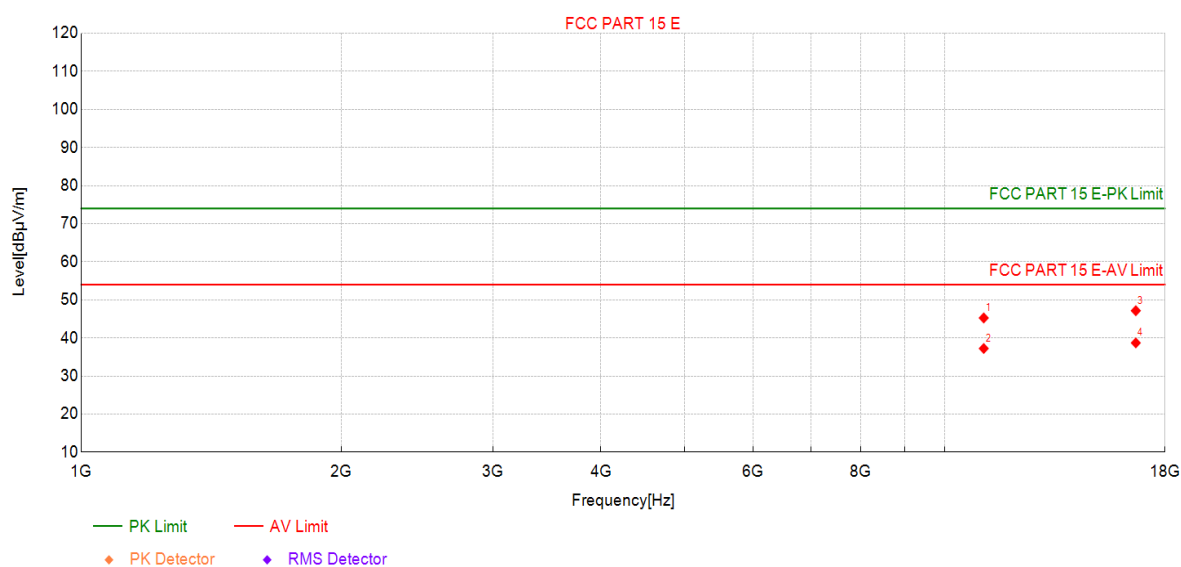

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	38.59	45.25	6.66	74.00	28.75	PK	Horizo	PASS
2	11100	30.56	37.22	6.66	54.00	16.78	AV	Horizo	PASS
3	16650	32.46	47.15	14.69	74.00	26.85	PK	Horizo	PASS
4	16650	24.01	38.70	14.69	54.00	15.30	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5550MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

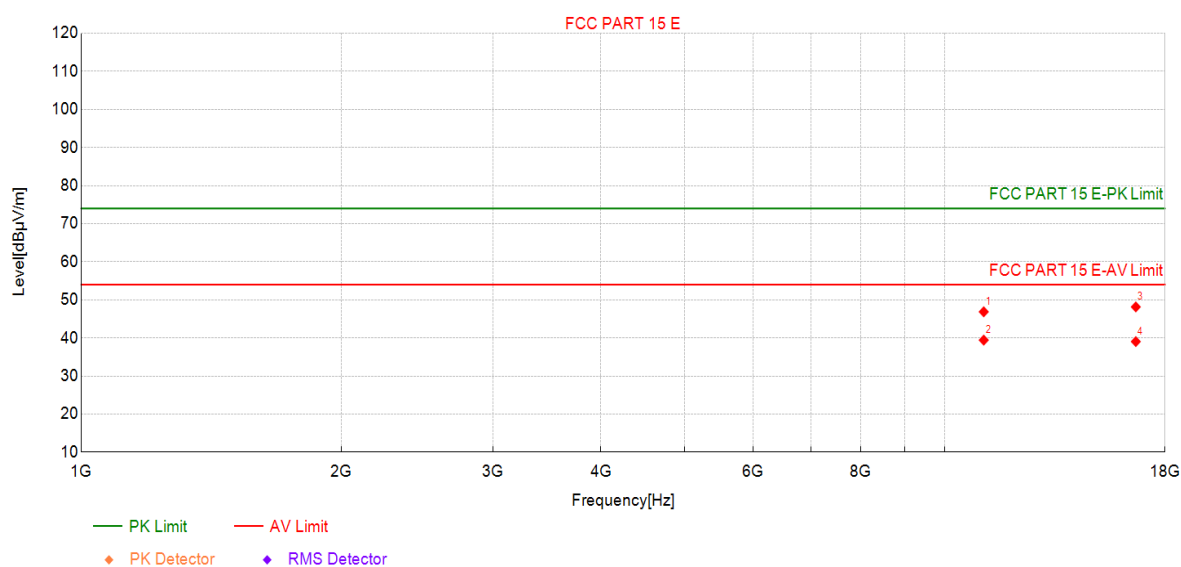

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	40.21	46.87	6.66	74.00	27.13	PK	Vertic	PASS
2	11100	32.77	39.43	6.66	54.00	14.57	AV	Vertic	PASS
3	16650	33.46	48.15	14.69	74.00	25.85	PK	Vertic	PASS
4	16650	24.35	39.04	14.69	54.00	14.96	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5670MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

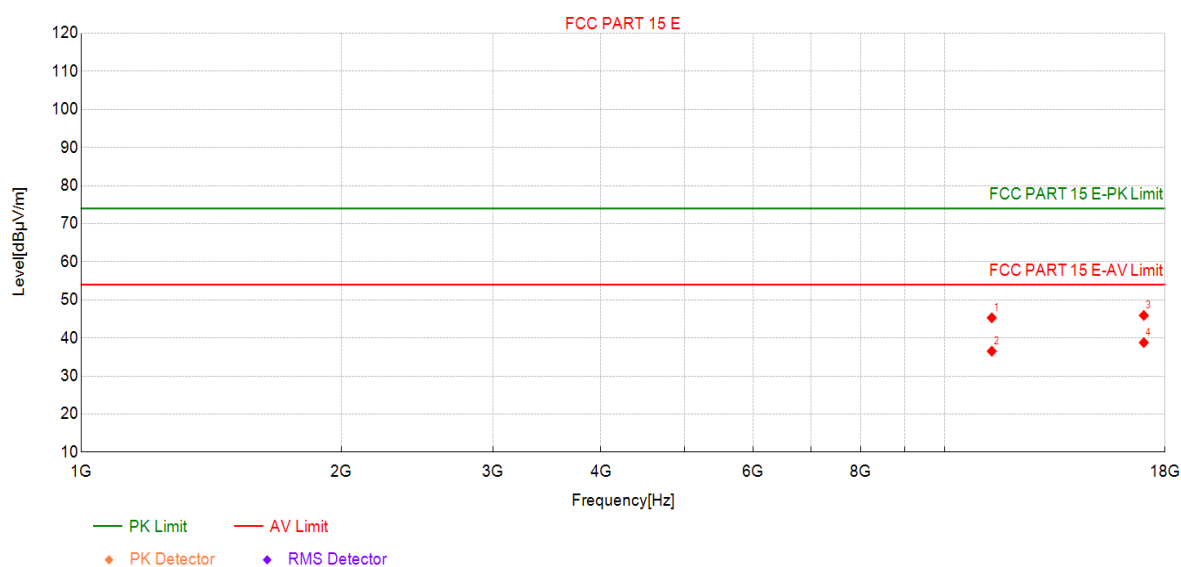

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	37.43	45.29	7.86	74.00	28.71	PK	Horizo	PASS
2	11340	28.66	36.52	7.86	54.00	17.48	AV	Horizo	PASS
3	17010	29.87	45.91	16.04	74.00	28.09	PK	Horizo	PASS
4	17010	22.74	38.78	16.04	54.00	15.22	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5670MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

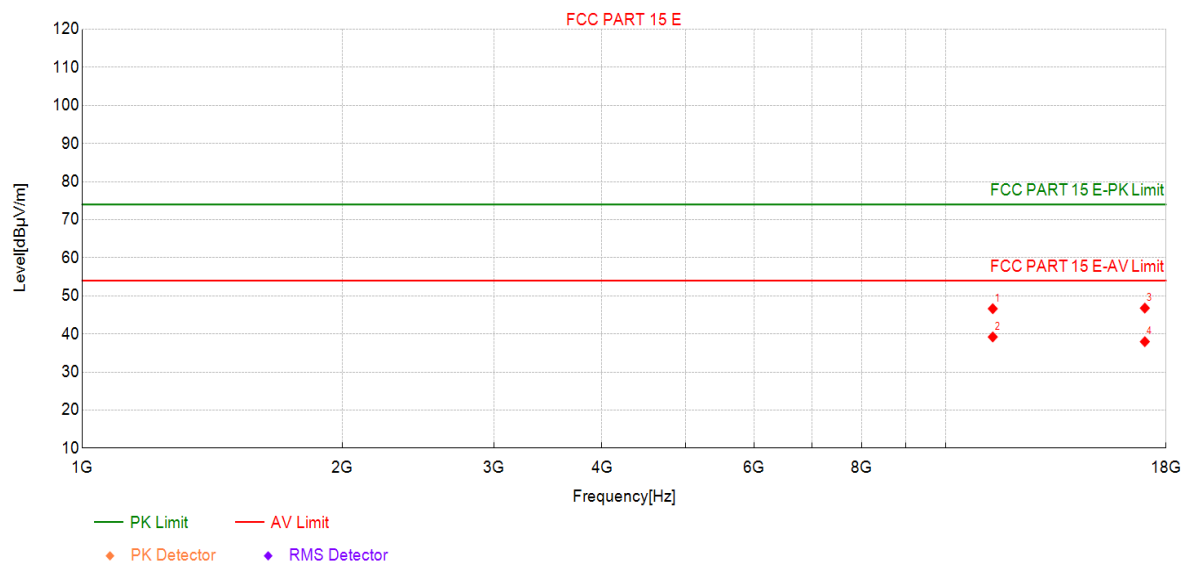

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	38.77	46.63	7.86	74.00	27.37	PK	Vertic	PASS
2	11340	31.35	39.21	7.86	54.00	14.79	AV	Vertic	PASS
3	17010	30.75	46.79	16.04	74.00	27.21	PK	Vertic	PASS
4	17010	21.93	37.97	16.04	54.00	16.03	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5755MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

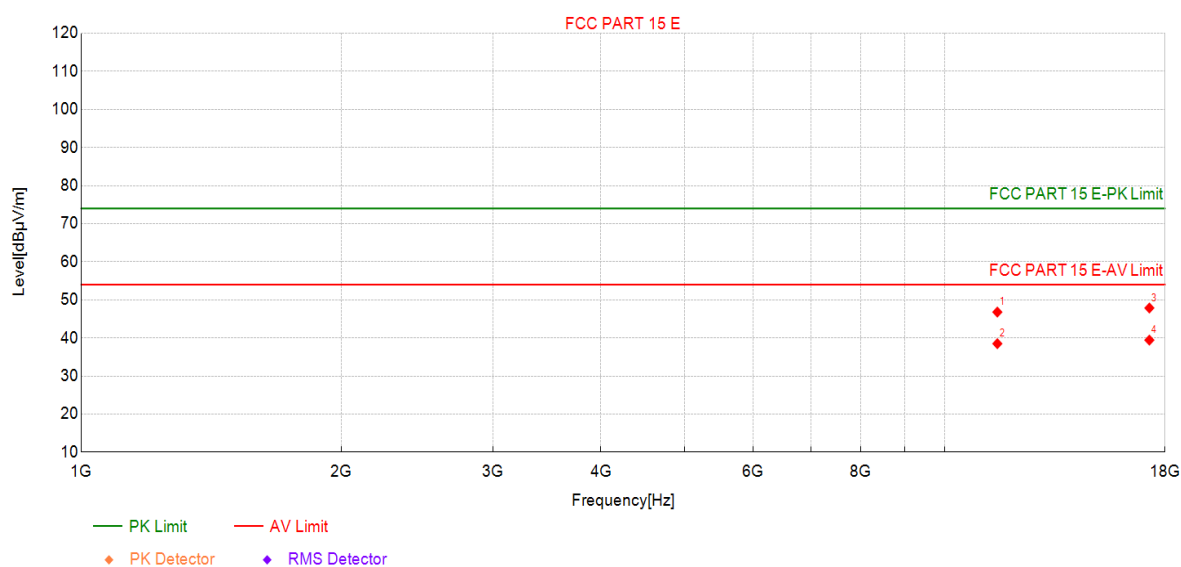

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	38.32	46.80	8.48	74.00	27.20	PK	Horizo	PASS
2	11510	30.02	38.50	8.48	54.00	15.50	AV	Horizo	PASS
3	17265	32.36	47.87	15.51	74.00	26.13	PK	Horizo	PASS
4	17265	23.92	39.43	15.51	54.00	14.57	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5755MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

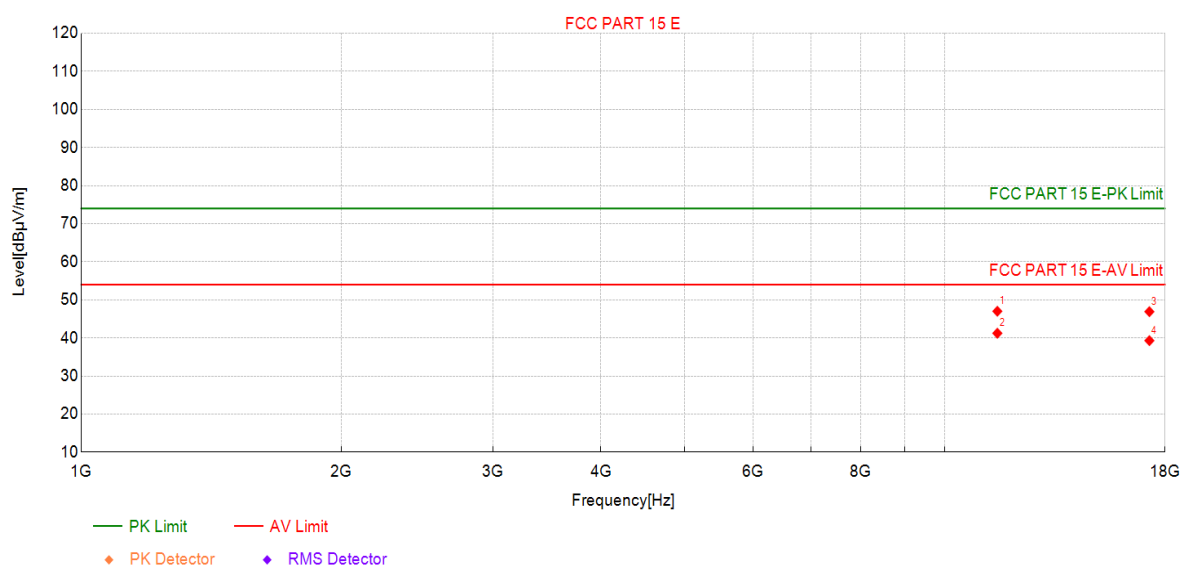

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	38.53	47.01	8.48	74.00	26.99	PK	Vertic	PASS
2	11510	32.75	41.23	8.48	54.00	12.77	AV	Vertic	PASS
3	17265	31.39	46.90	15.51	74.00	27.10	PK	Vertic	PASS
4	17265	23.78	39.29	15.51	54.00	14.71	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5795MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

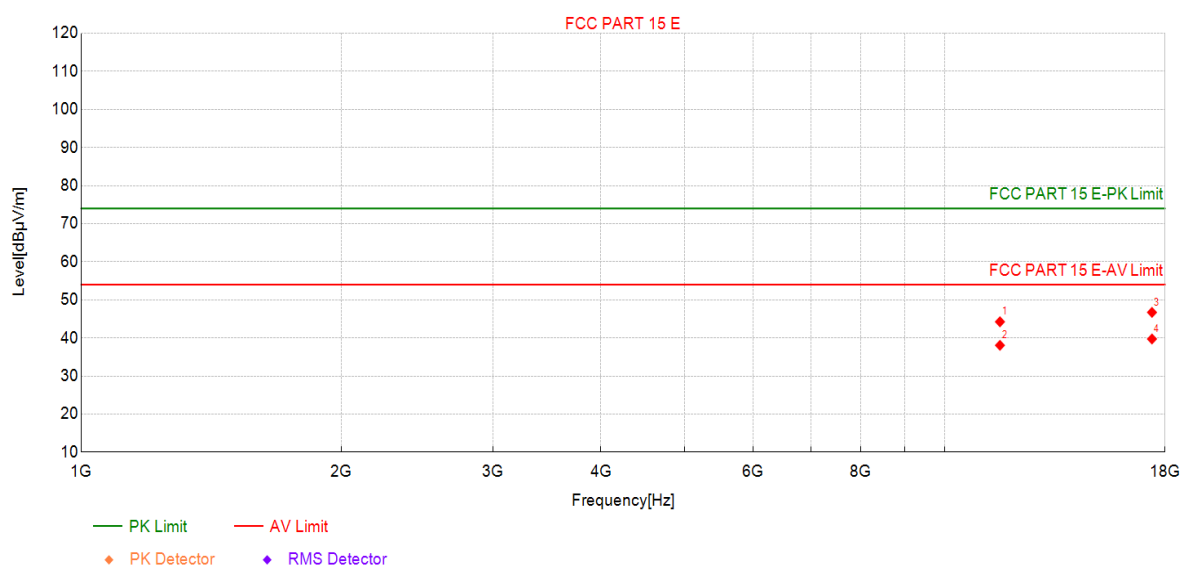

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	35.50	44.24	8.74	74.00	29.76	PK	Horizo	PASS
2	11590	29.32	38.06	8.74	54.00	15.94	AV	Horizo	PASS
3	17385	30.13	46.71	16.58	74.00	27.29	PK	Horizo	PASS
4	17385	23.15	39.73	16.58	54.00	14.27	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5795MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

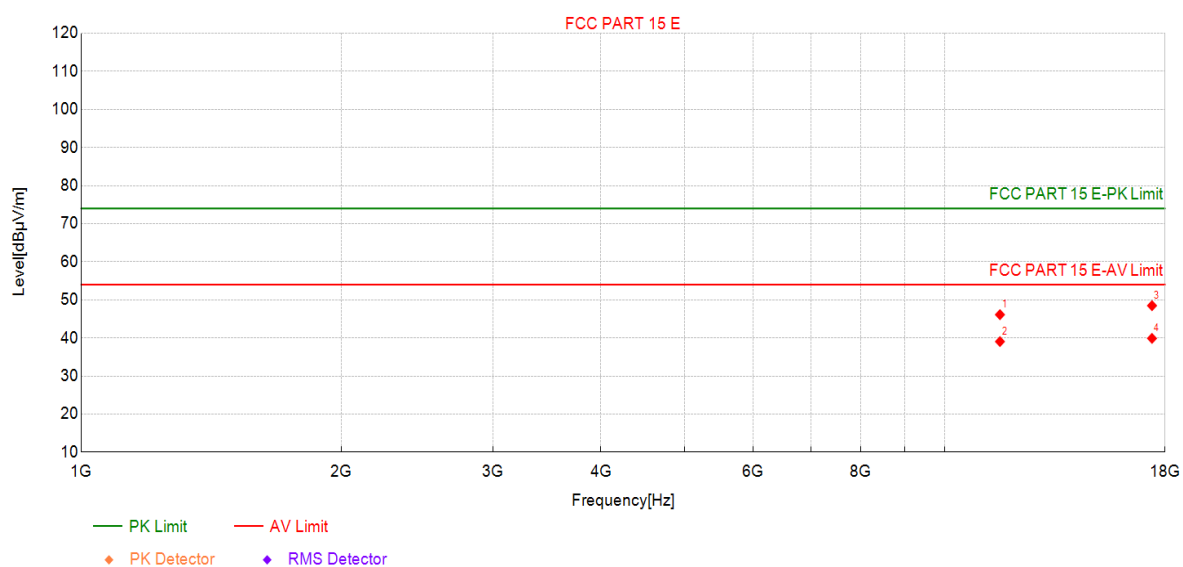

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	37.37	46.11	8.74	74.00	27.89	PK	Vertic	PASS
2	11590	30.30	39.04	8.74	54.00	14.96	AV	Vertic	PASS
3	17385	31.90	48.48	16.58	74.00	25.52	PK	Vertic	PASS
4	17385	23.30	39.88	16.58	54.00	14.12	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

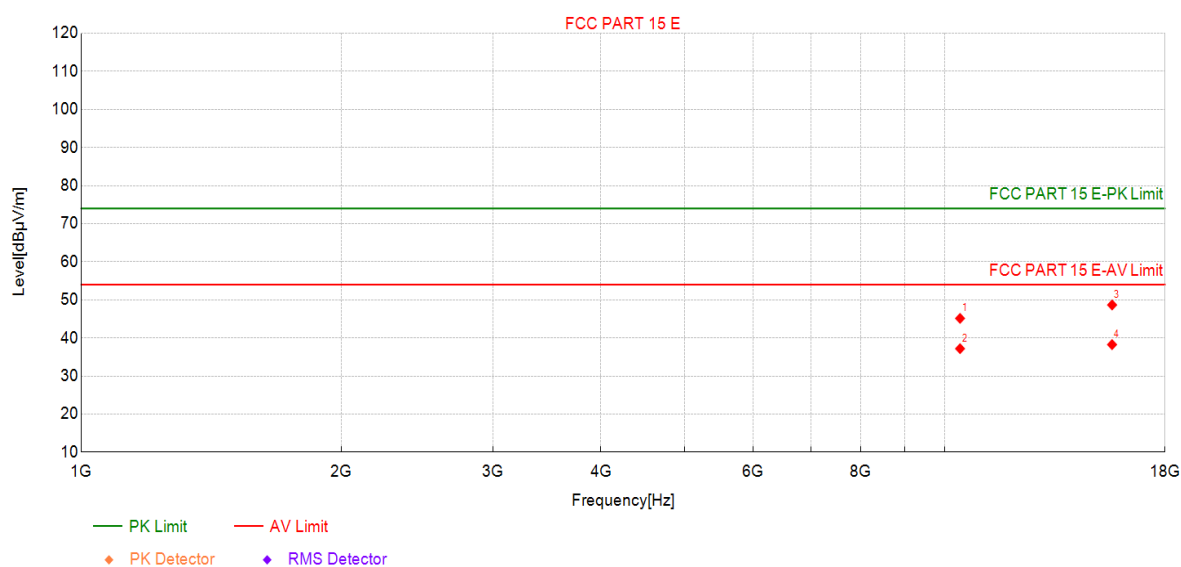

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	38.54	45.14	6.60	74.00	28.86	PK	Horizo	PASS
2	10420	30.59	37.19	6.60	54.00	16.81	AV	Horizo	PASS
3	15630	34.89	48.67	13.78	74.00	25.33	PK	Horizo	PASS
4	15630	24.47	38.25	13.78	54.00	15.75	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

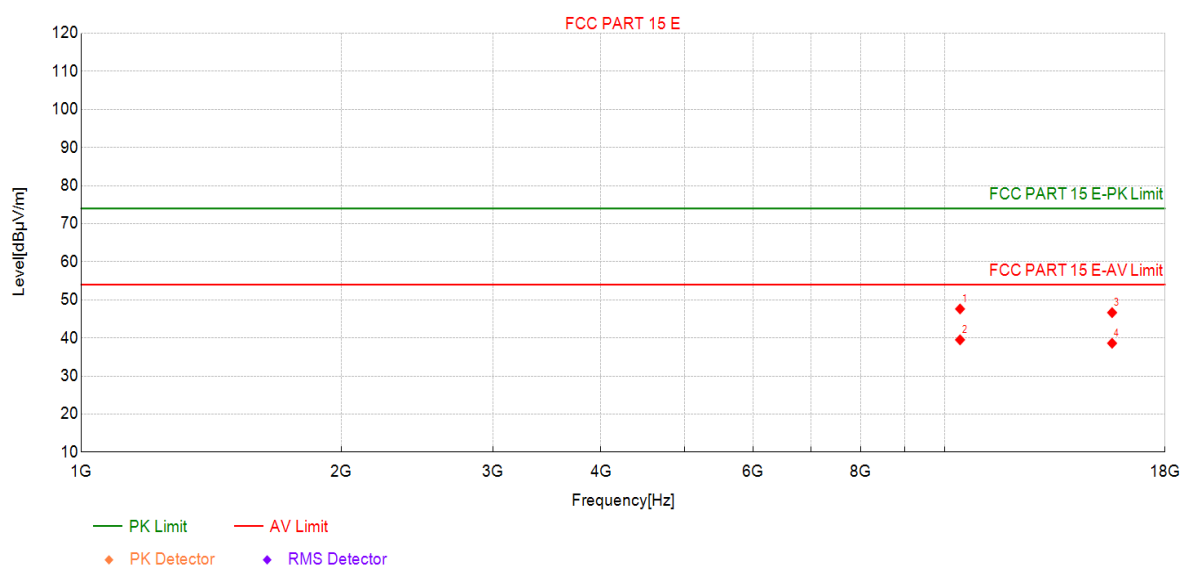

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	41.02	47.62	6.60	74.00	26.38	PK	Vertic	PASS
2	10420	32.90	39.50	6.60	54.00	14.50	AV	Vertic	PASS
3	15630	32.87	46.65	13.78	74.00	27.35	PK	Vertic	PASS
4	15630	24.82	38.60	13.78	54.00	15.40	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

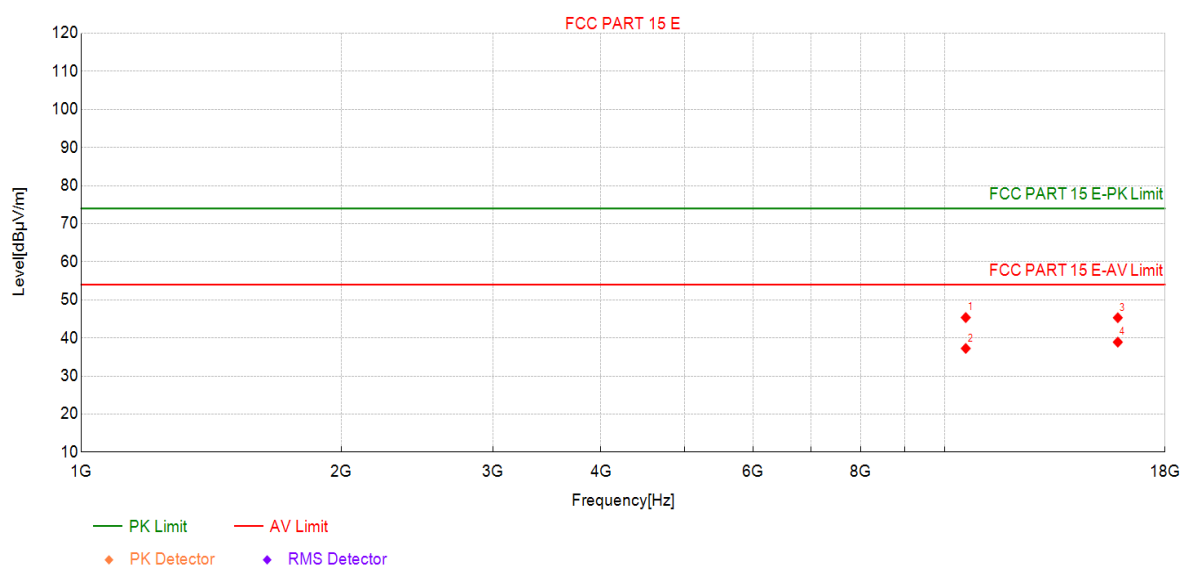

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	38.58	45.35	6.77	74.00	28.65	PK	Horizo	PASS
2	10580	30.47	37.24	6.77	54.00	16.76	AV	Horizo	PASS
3	15870	31.22	45.31	14.09	74.00	28.69	PK	Horizo	PASS
4	15870	24.81	38.90	14.09	54.00	15.10	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

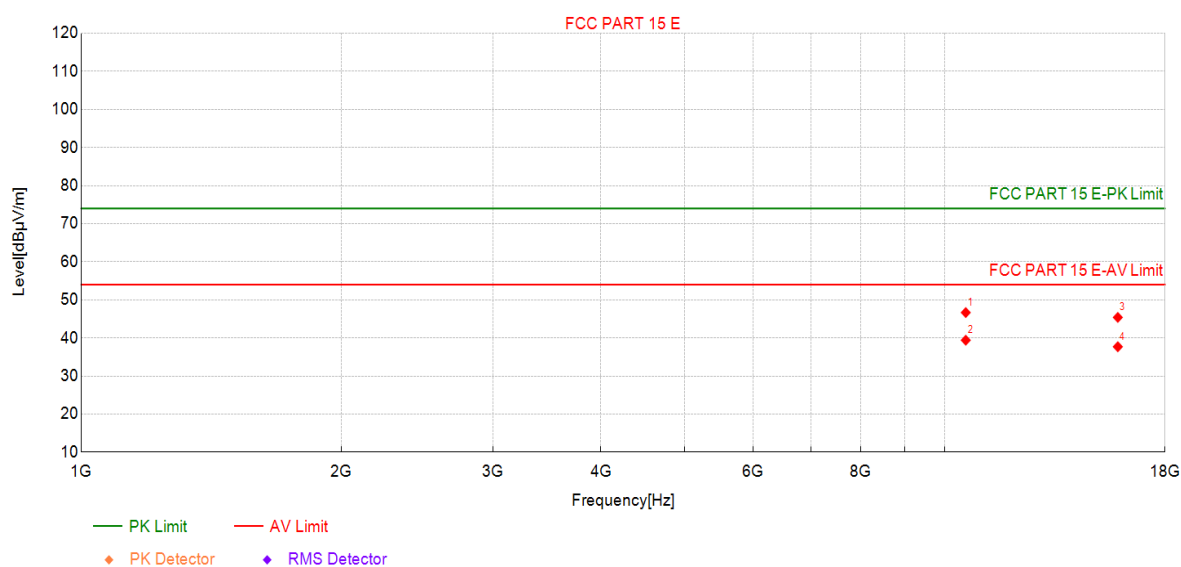

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	39.89	46.66	6.77	74.00	27.34	PK	Vertic	PASS
2	10580	32.63	39.40	6.77	54.00	14.60	AV	Vertic	PASS
3	15870	31.31	45.40	14.09	74.00	28.60	PK	Vertic	PASS
4	15870	23.60	37.69	14.09	54.00	16.31	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5530MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

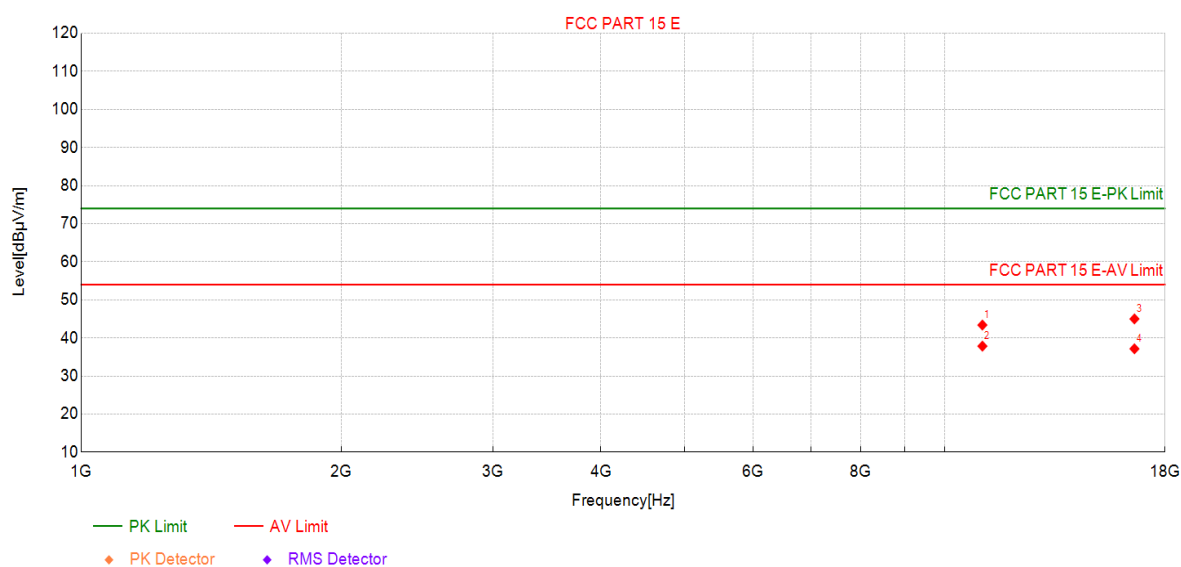

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	36.43	43.39	6.96	74.00	30.61	PK	Horizo	PASS
2	11060	30.89	37.85	6.96	54.00	16.15	AV	Horizo	PASS
3	16590	30.20	45.00	14.80	74.00	29.00	PK	Horizo	PASS
4	16590	22.35	37.15	14.80	54.00	16.85	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5530MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

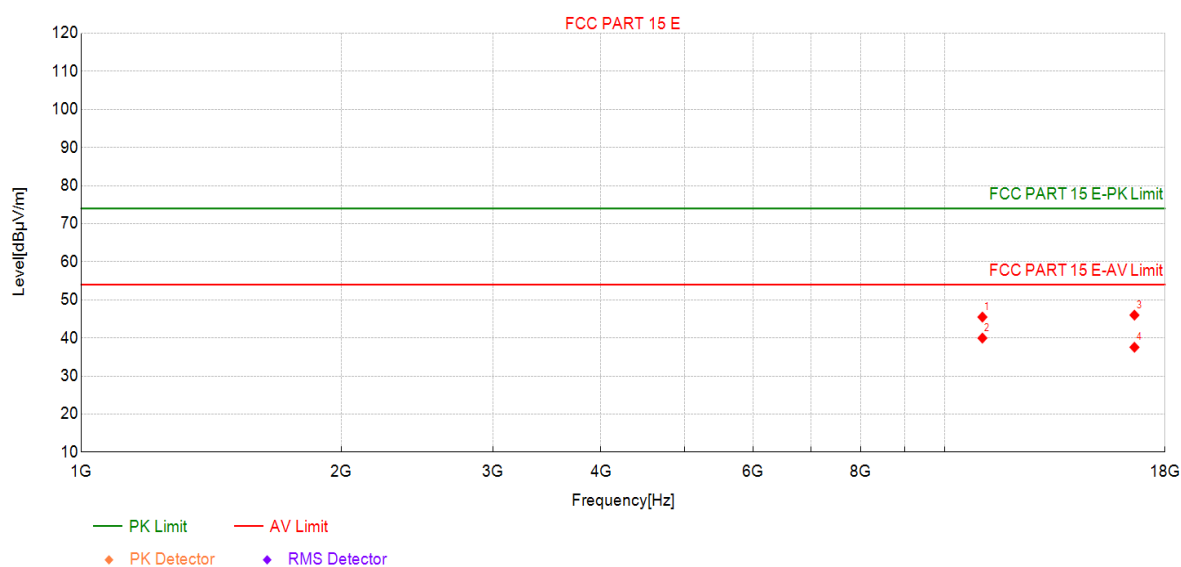

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	38.52	45.48	6.96	74.00	28.52	PK	Vertic	PASS
2	11060	33.00	39.96	6.96	54.00	14.04	AV	Vertic	PASS
3	16590	31.19	45.99	14.80	74.00	28.01	PK	Vertic	PASS
4	16590	22.75	37.55	14.80	54.00	16.45	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5610MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

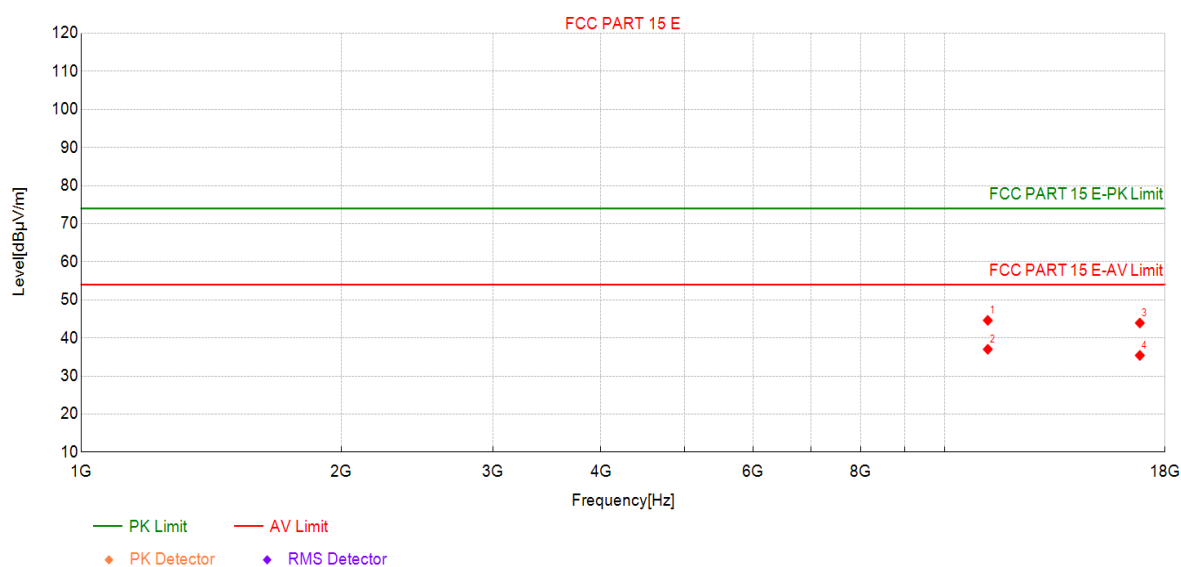

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	36.88	44.61	7.73	74.00	29.39	PK	Horizo	PASS
2	11220	29.29	37.02	7.73	54.00	16.98	AV	Horizo	PASS
3	16830	29.01	43.93	14.92	74.00	30.07	PK	Horizo	PASS
4	16830	20.49	35.41	14.92	54.00	18.59	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5610MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

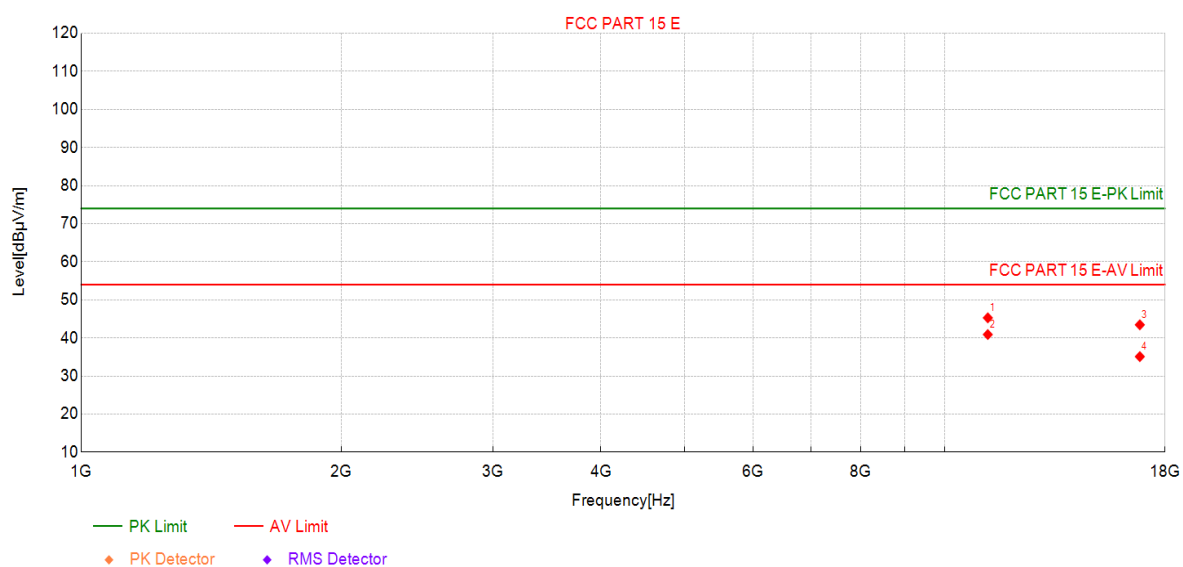

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	37.55	45.28	7.73	74.00	28.72	PK	Vertic	PASS
2	11220	33.16	40.89	7.73	54.00	13.11	AV	Vertic	PASS
3	16830	28.53	43.45	14.92	74.00	30.55	PK	Vertic	PASS
4	16830	20.17	35.09	14.92	54.00	18.91	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5775MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

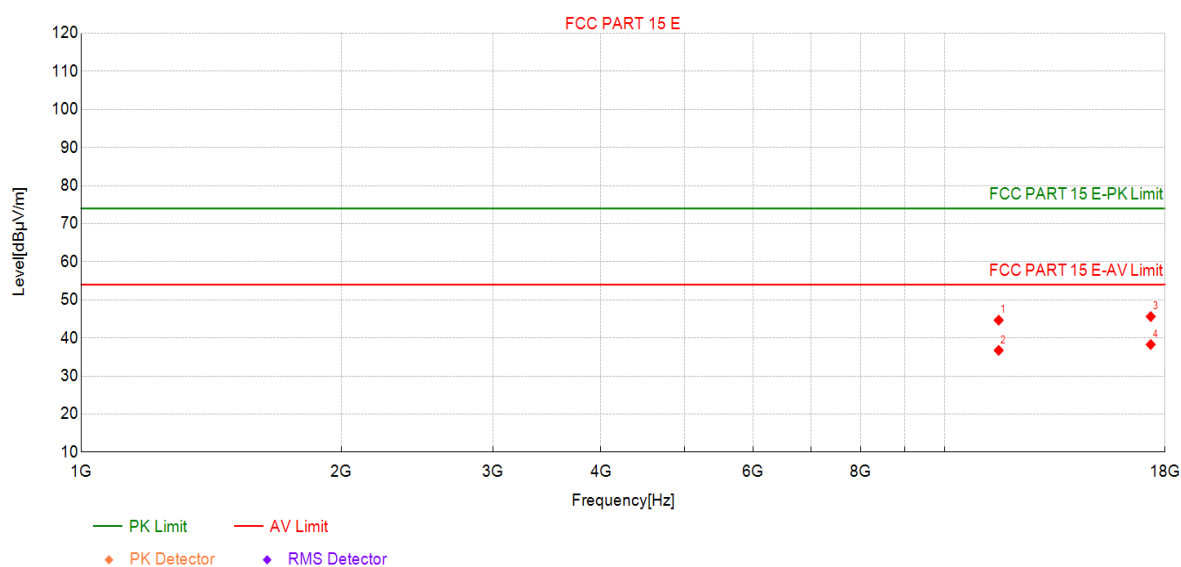

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	36.05	44.66	8.61	74.00	29.34	PK	Horizo	PASS
2	11550	28.13	36.74	8.61	54.00	17.26	AV	Horizo	PASS
3	17325	29.74	45.61	15.87	74.00	28.39	PK	Horizo	PASS
4	17325	22.40	38.27	15.87	54.00	15.73	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5775MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

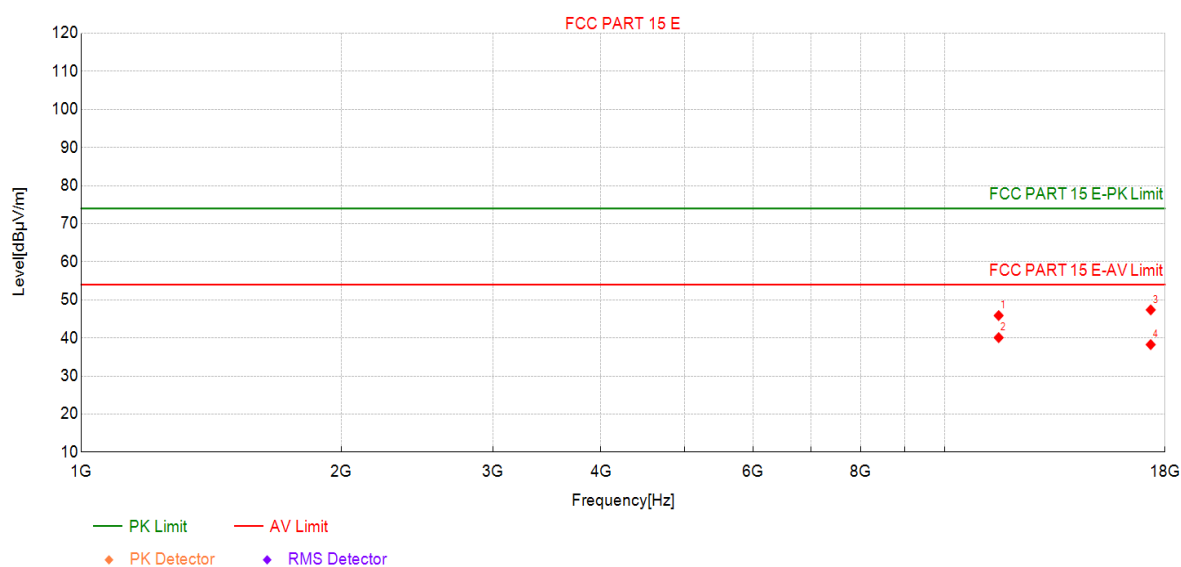

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	37.27	45.88	8.61	74.00	28.12	PK	Vertic	PASS
2	11550	31.47	40.08	8.61	54.00	13.92	AV	Vertic	PASS
3	17325	31.50	47.37	15.87	74.00	26.63	PK	Vertic	PASS
4	17325	22.38	38.25	15.87	54.00	15.75	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

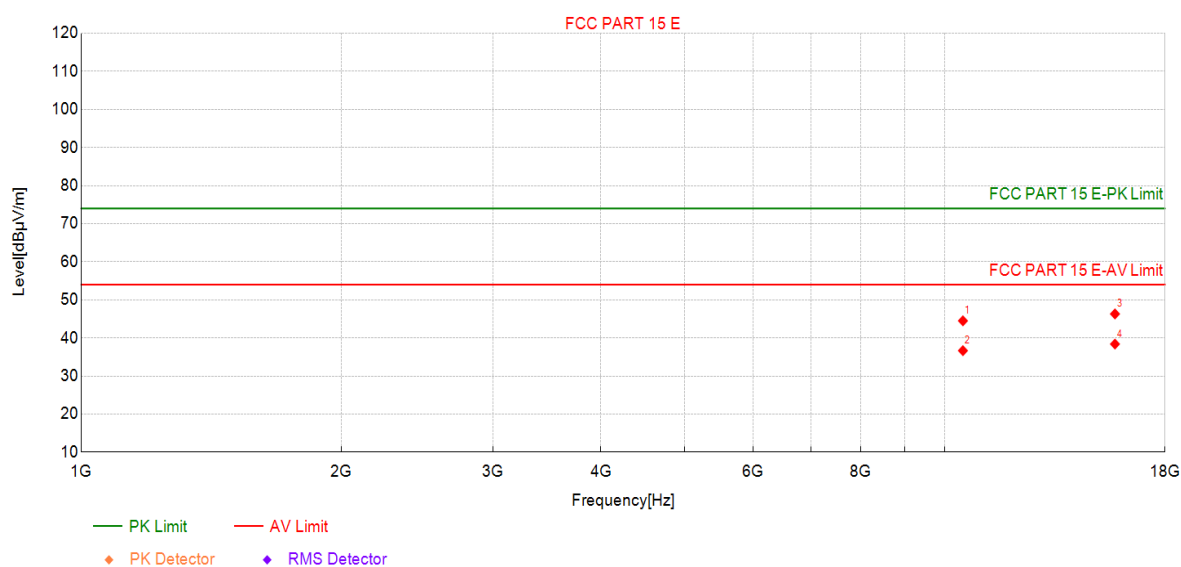

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	37.75	44.50	6.75	74.00	29.50	PK	Horizo	PASS
2	10500	29.91	36.66	6.75	54.00	17.34	AV	Horizo	PASS
3	15750	32.06	46.30	14.24	74.00	27.70	PK	Horizo	PASS
4	15750	24.16	38.40	14.24	54.00	15.60	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

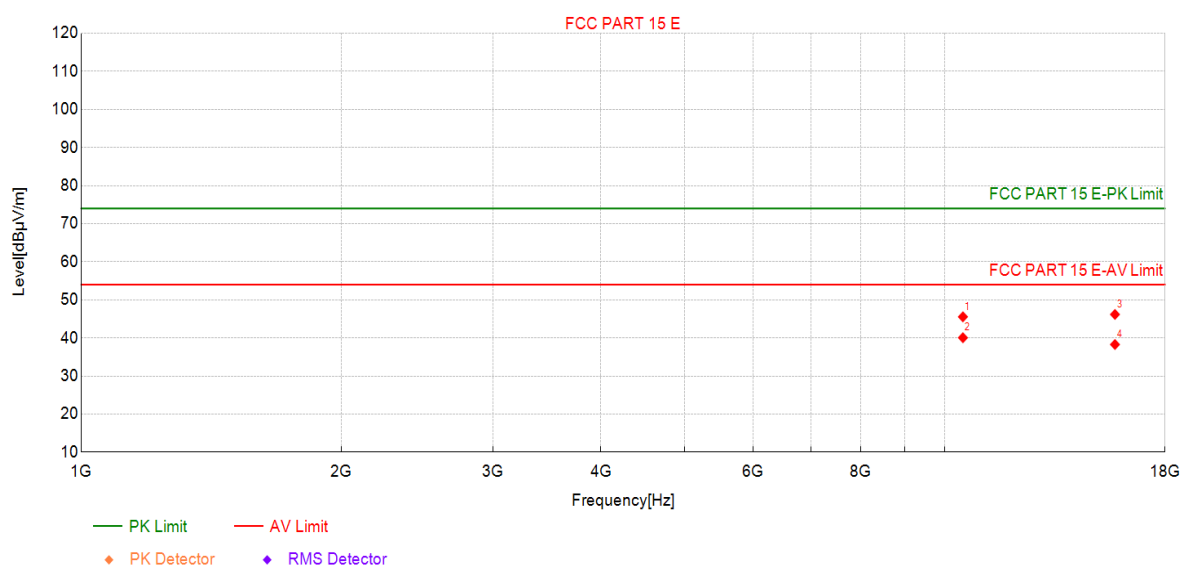

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	38.80	45.55	6.75	74.00	28.45	PK	Vertic	PASS
2	10500	33.31	40.06	6.75	54.00	13.94	AV	Vertic	PASS
3	15750	31.94	46.18	14.24	74.00	27.82	PK	Vertic	PASS
4	15750	24.04	38.28	14.24	54.00	15.72	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5570MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

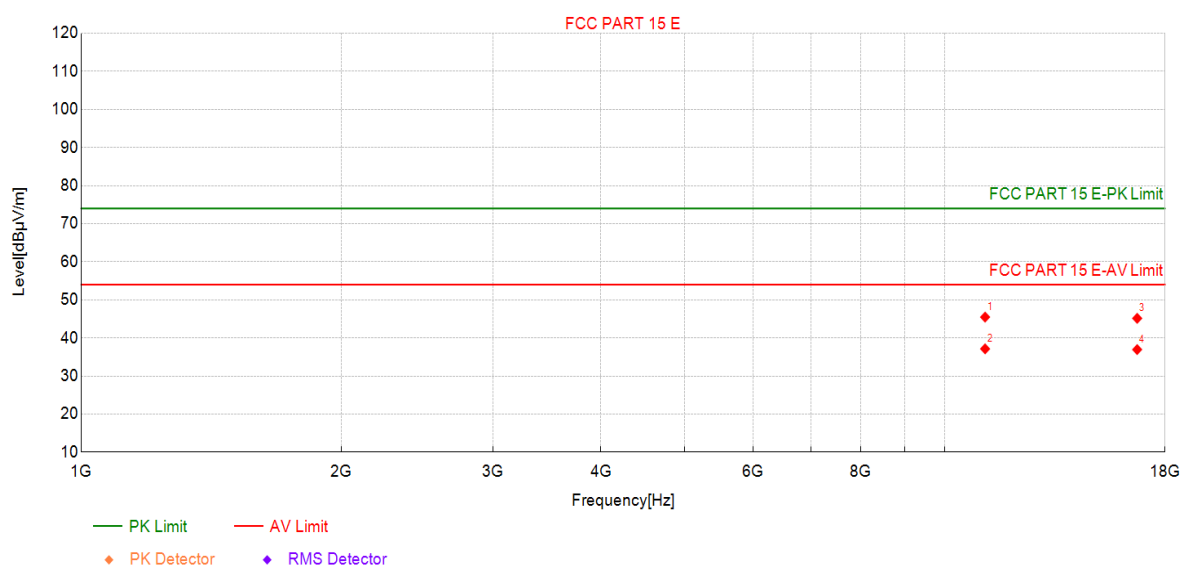

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	38.40	45.48	7.08	74.00	28.52	PK	Horizo	PASS
2	11140	30.05	37.13	7.08	54.00	16.87	AV	Horizo	PASS
3	16710	30.53	45.15	14.62	74.00	28.85	PK	Horizo	PASS
4	16710	22.33	36.95	14.62	54.00	17.05	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5570MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

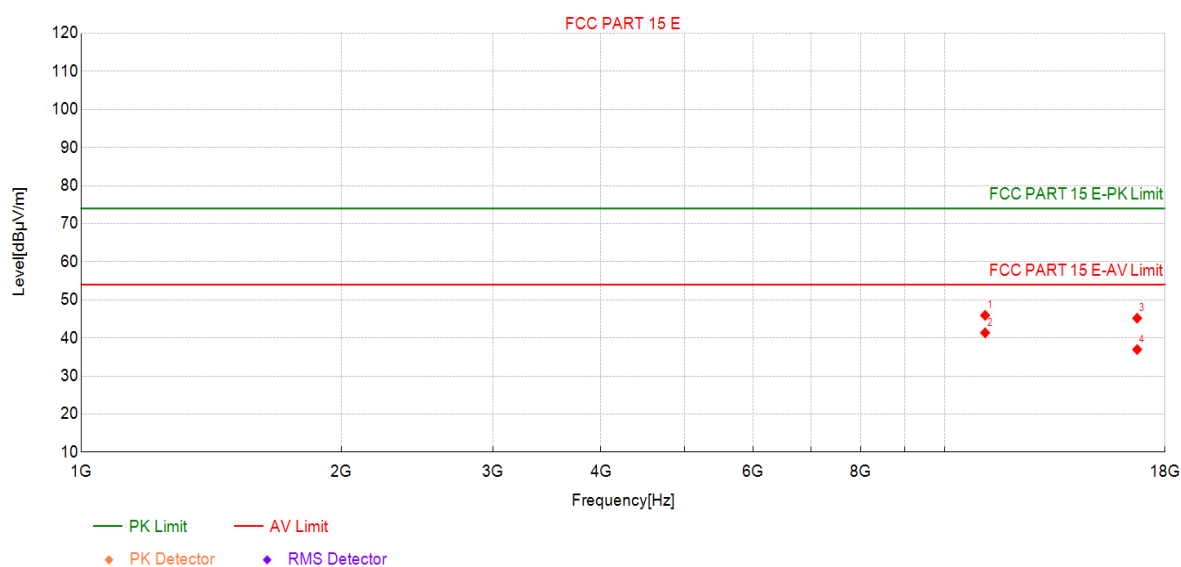


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	38.86	45.94	7.08	74.00	28.06	PK	Vertic	PASS
2	11140	34.26	41.34	7.08	54.00	12.66	AV	Vertic	PASS
3	16710	30.57	45.19	14.62	74.00	28.81	PK	Vertic	PASS
4	16710	22.33	36.95	14.62	54.00	17.05	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

CDD:

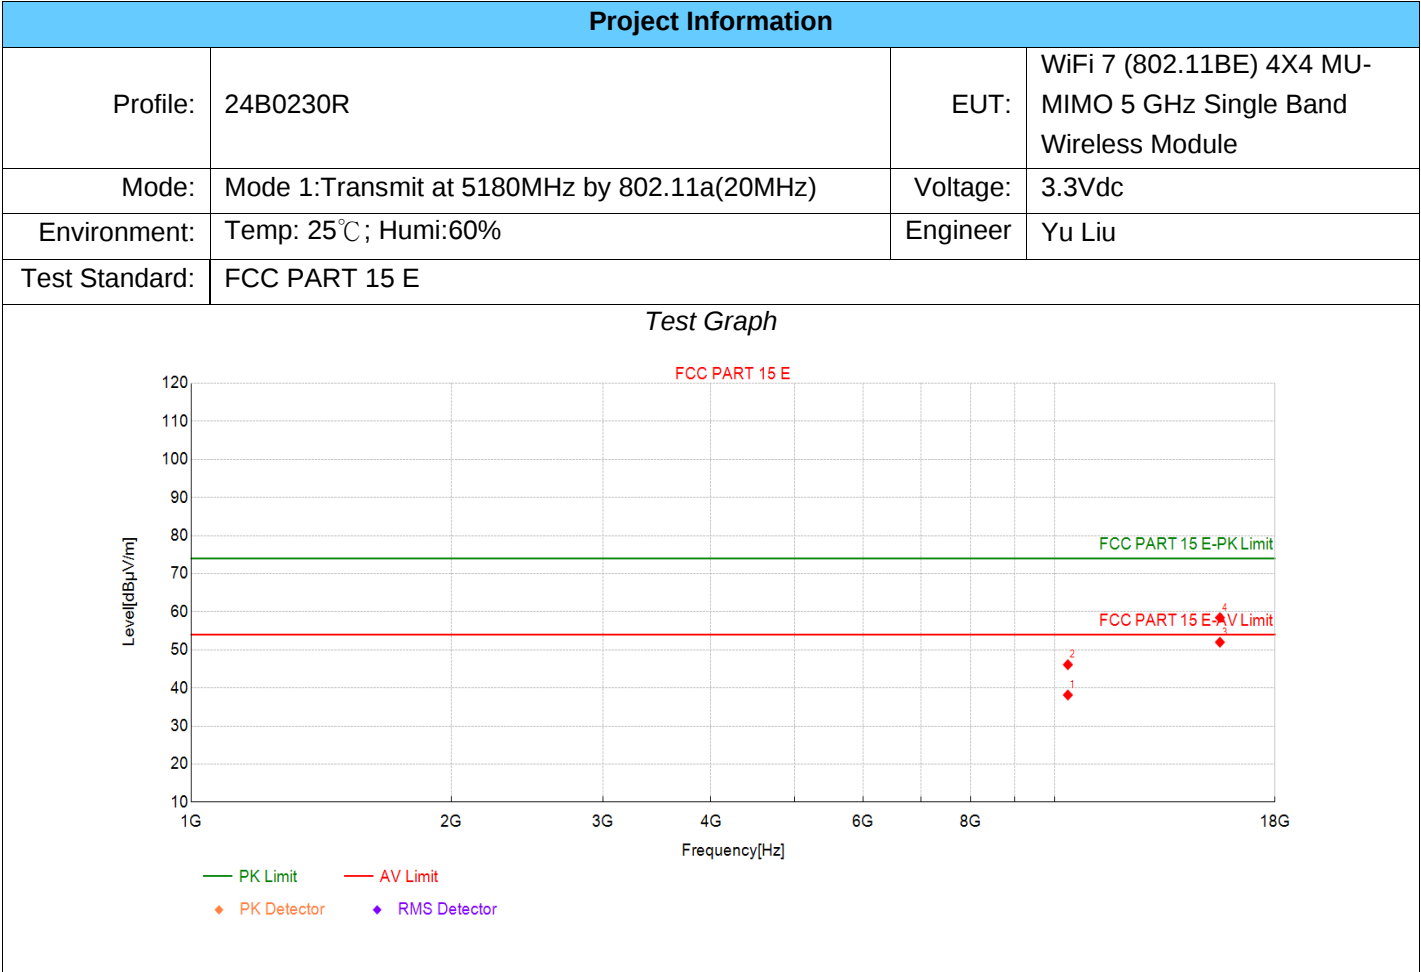


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	31.56	38.14	6.58	54.00	15.86	AV	Horizo	PASS
2	10360	39.53	46.11	6.58	74.00	27.89	PK	Horizo	PASS
3	15540	38.11	52.01	13.90	54.00	1.99	AV	Horizo	PASS
4	15540	44.57	58.47	13.90	74.00	15.53	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5180MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

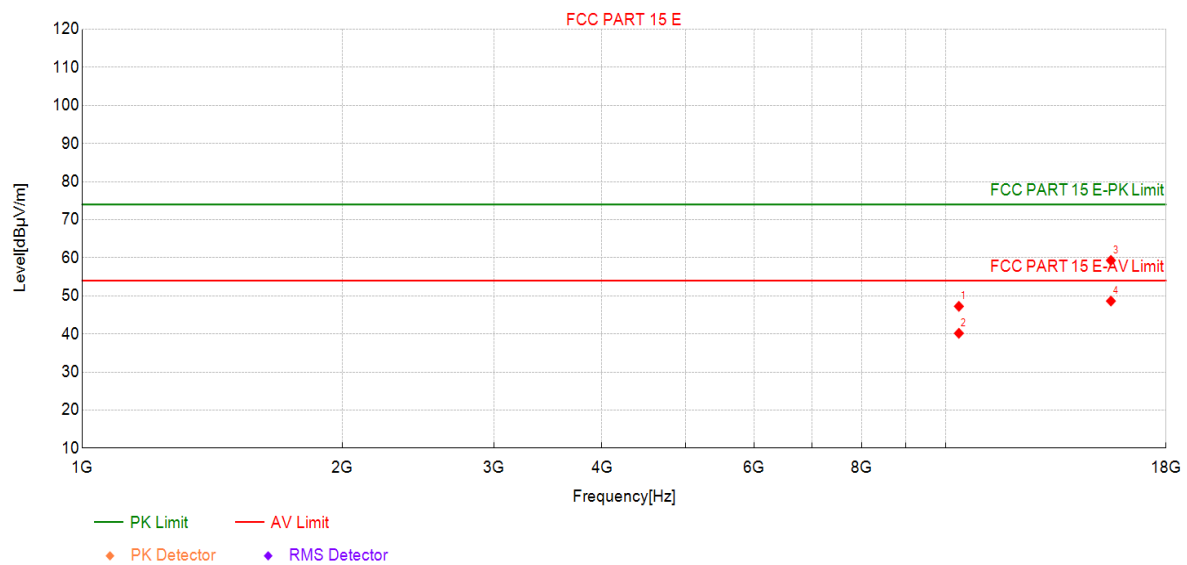

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	40.67	47.25	6.58	74.00	26.75	PK	Vertic	PASS
2	10360	33.59	40.17	6.58	54.00	13.83	AV	Vertic	PASS
3	15540	45.41	59.31	13.90	74.00	14.69	PK	Vertic	PASS
4	15540	34.74	48.64	13.90	54.00	5.36	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5220MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

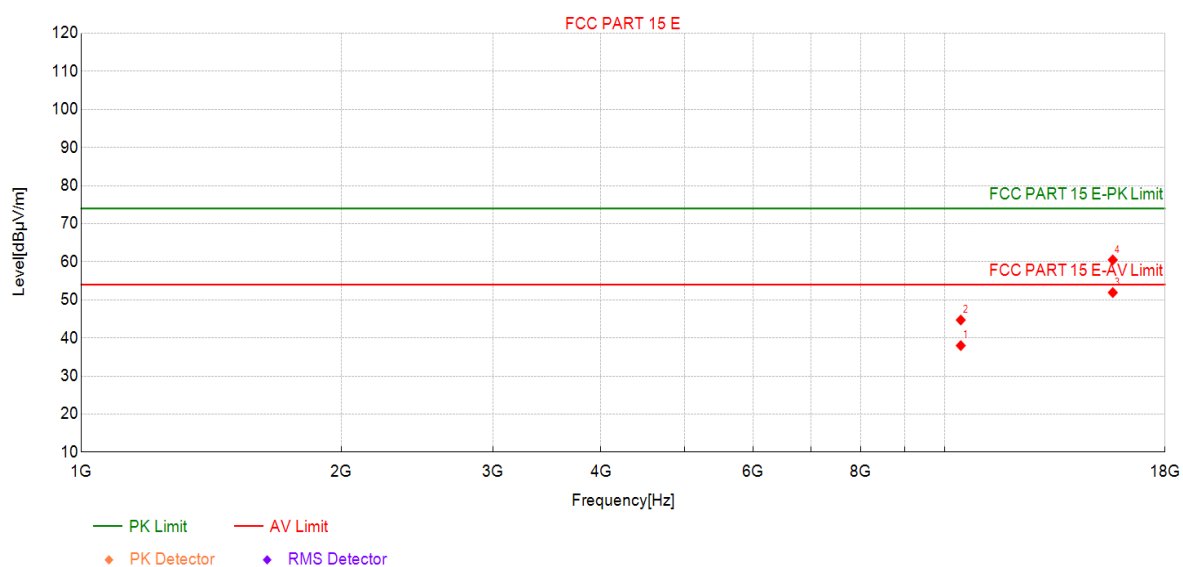

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	31.35	37.99	6.64	54.00	16.01	AV	Horizo	PASS
2	10440	38.07	44.71	6.64	74.00	29.29	PK	Horizo	PASS
3	15660	37.82	51.91	14.09	54.00	2.09	AV	Horizo	PASS
4	15660	46.41	60.50	14.09	74.00	13.50	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5220MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

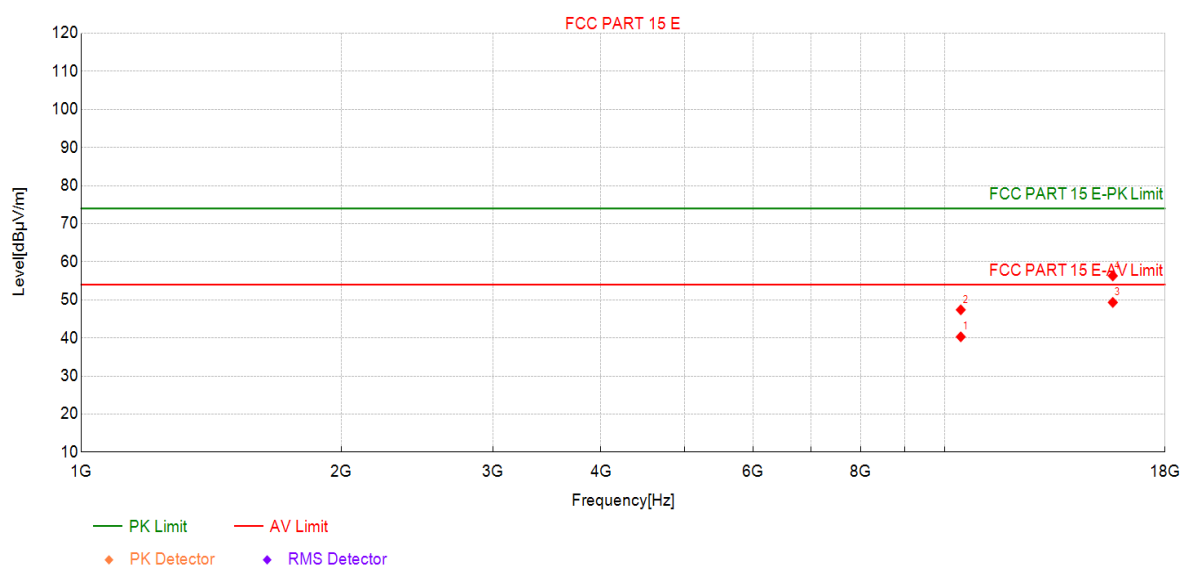

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	33.66	40.30	6.64	54.00	13.70	AV	Vertic	PASS
2	10440	40.75	47.39	6.64	74.00	26.61	PK	Vertic	PASS
3	15660	35.24	49.33	14.09	54.00	4.67	AV	Vertic	PASS
4	15660	42.21	56.30	14.09	74.00	17.70	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5240MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

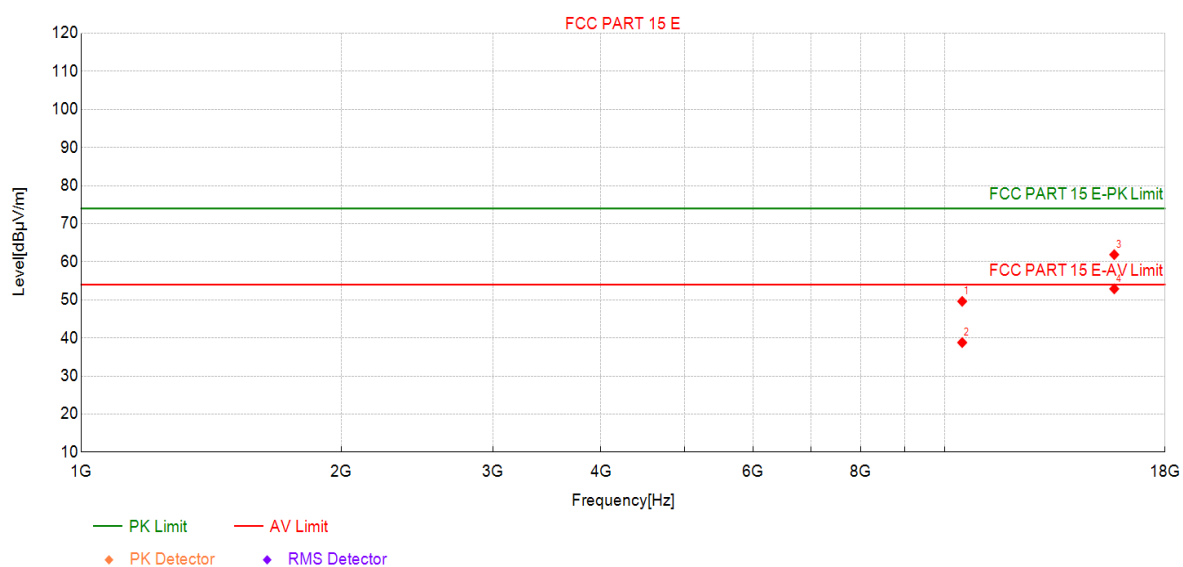

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	42.89	49.60	6.71	74.00	24.40	PK	Horizo	PASS
2	10480	32.07	38.78	6.71	54.00	15.22	AV	Horizo	PASS
3	15720	47.47	61.88	14.41	74.00	12.12	PK	Horizo	PASS
4	15720	38.48	52.89	14.41	54.00	1.11	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5240MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

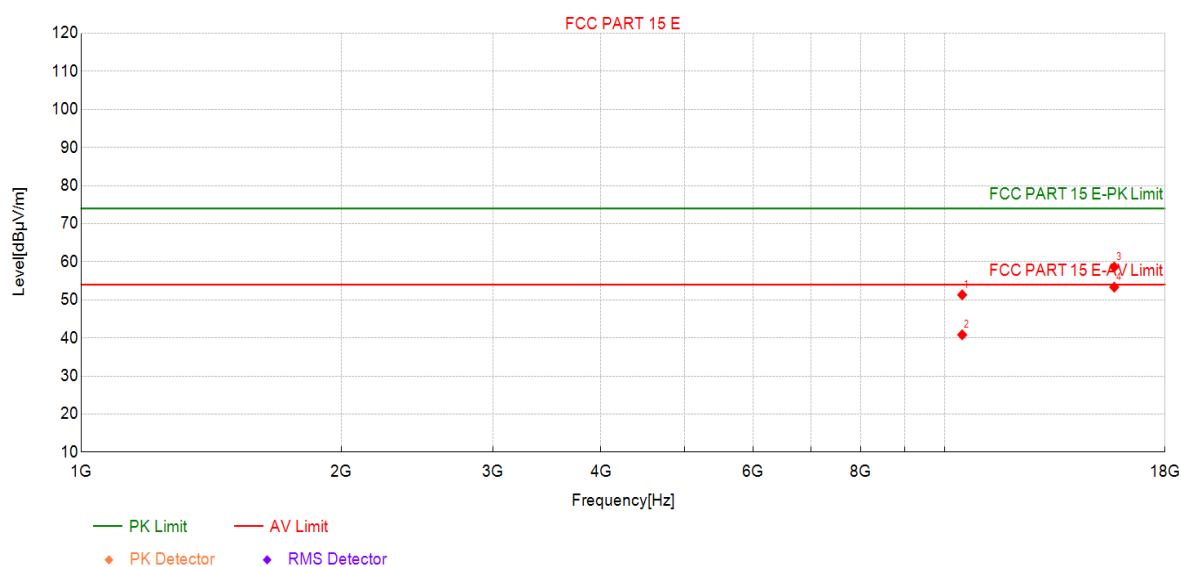

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	44.60	51.31	6.71	74.00	22.69	PK	Vertic	PASS
2	10480	34.12	40.83	6.71	54.00	13.17	AV	Vertic	PASS
3	15720	44.23	58.64	14.41	74.00	15.36	PK	Vertic	PASS
4	15720	38.93	53.34	14.41	54.00	0.66	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5260MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

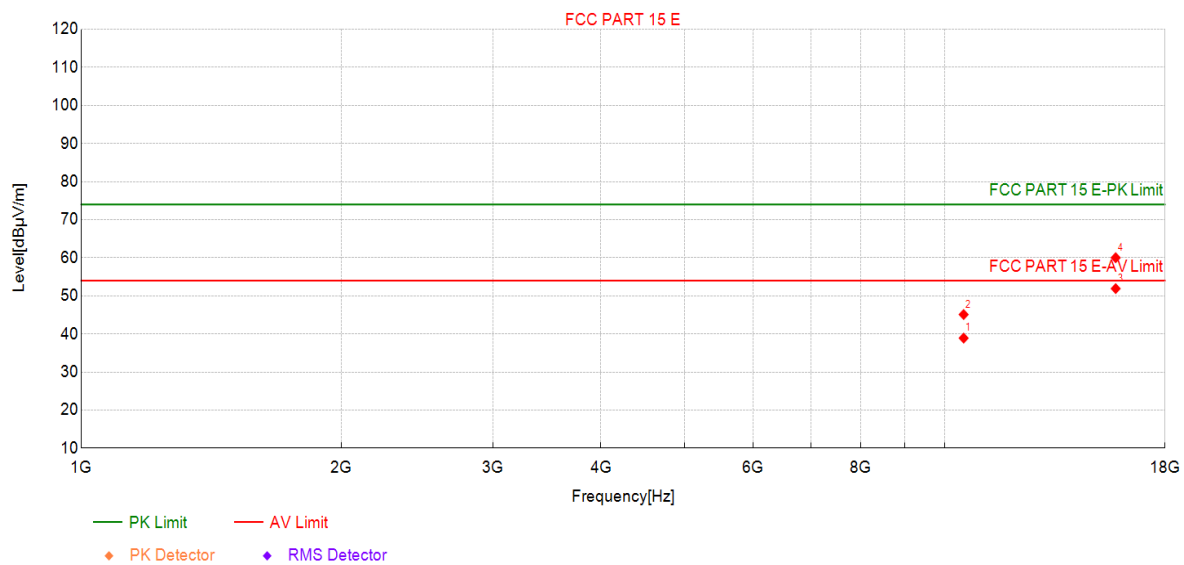

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	32.15	38.91	6.76	54.00	15.09	AV	Horizo	PASS
2	10520	38.34	45.10	6.76	74.00	28.90	PK	Horizo	PASS
3	15780	37.82	51.91	14.09	54.00	2.09	AV	Horizo	PASS
4	15780	45.93	60.02	14.09	74.00	13.98	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5260MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

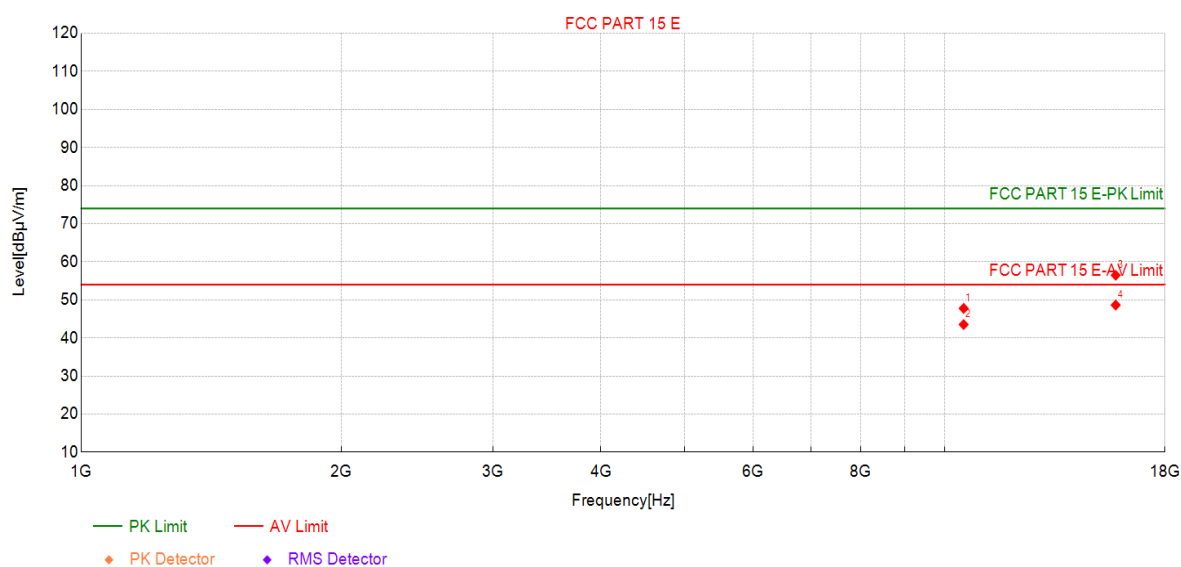

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	41.00	47.76	6.76	74.00	26.24	PK	Vertic	PASS
2	10520	36.76	43.52	6.76	54.00	10.48	AV	Vertic	PASS
3	15780	42.37	56.46	14.09	74.00	17.54	PK	Vertic	PASS
4	15780	34.55	48.64	14.09	54.00	5.36	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5300MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

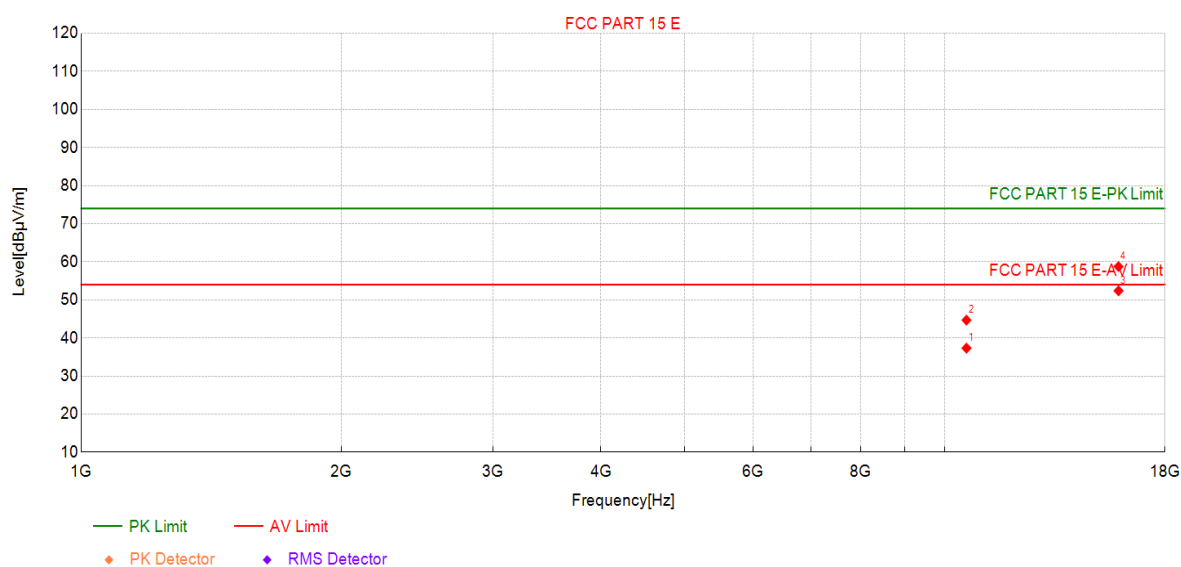

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	30.53	37.31	6.78	54.00	16.69	AV	Horizo	PASS
2	10600	37.90	44.68	6.78	74.00	29.32	PK	Horizo	PASS
3	15900	38.27	52.39	14.12	54.00	1.61	AV	Horizo	PASS
4	15900	44.62	58.74	14.12	74.00	15.26	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5300MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

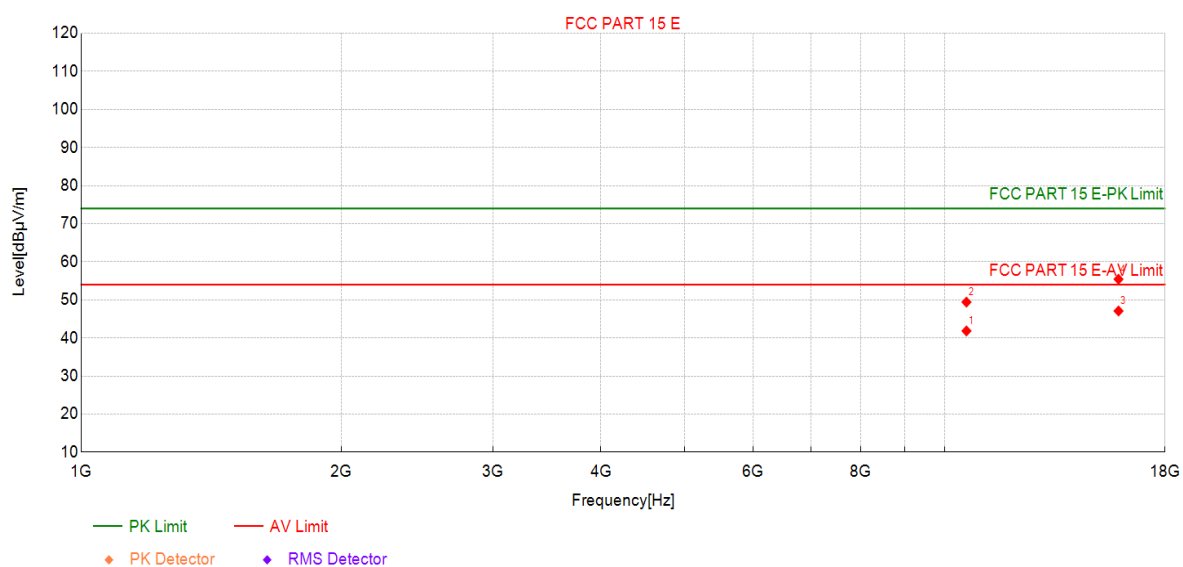

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	35.05	41.83	6.78	54.00	12.17	AV	Vertic	PASS
2	10600	42.64	49.42	6.78	74.00	24.58	PK	Vertic	PASS
3	15900	32.96	47.08	14.12	54.00	6.92	AV	Vertic	PASS
4	15900	41.31	55.43	14.12	74.00	18.57	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5320MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

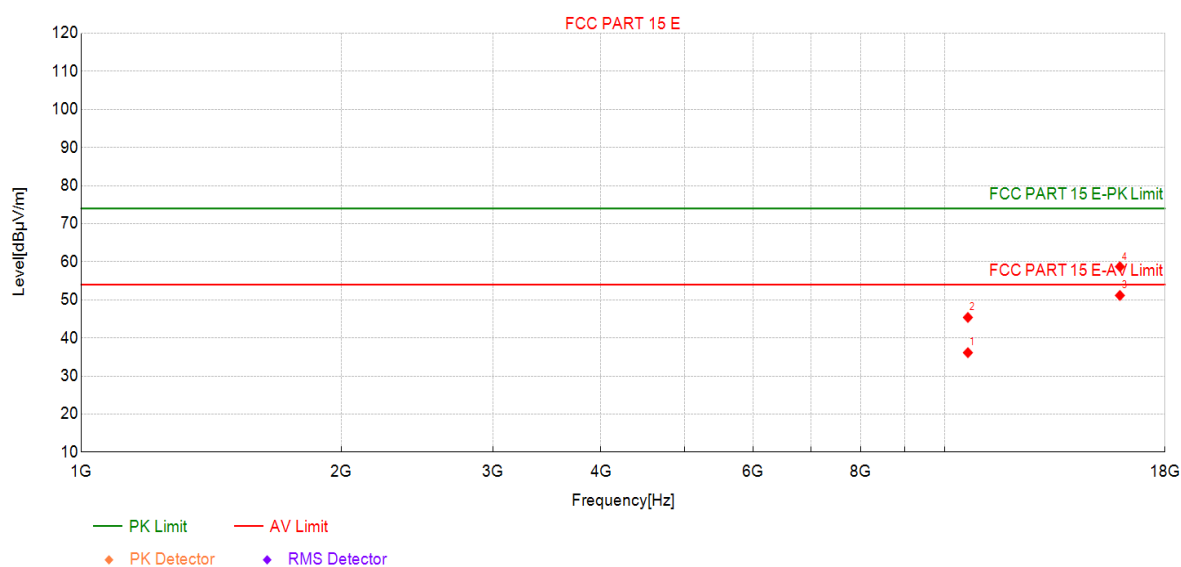

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	29.33	36.13	6.80	54.00	17.87	AV	Horizo	PASS
2	10640	38.58	45.38	6.80	74.00	28.62	PK	Horizo	PASS
3	15960	36.53	51.16	14.63	54.00	2.84	AV	Horizo	PASS
4	15960	44.08	58.71	14.63	74.00	15.29	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5320MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

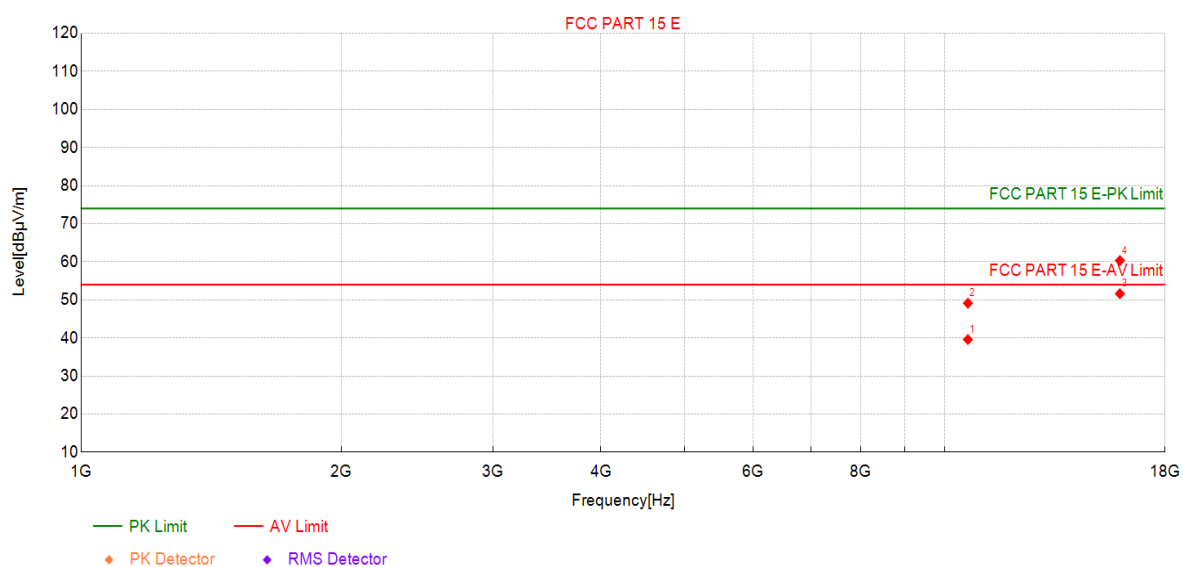

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	32.78	39.58	6.80	54.00	14.42	AV	Vertic	PASS
2	10640	42.33	49.13	6.80	74.00	24.87	PK	Vertic	PASS
3	15960	36.99	51.62	14.63	54.00	2.38	AV	Vertic	PASS
4	15960	45.69	60.32	14.63	74.00	13.68	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5500MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

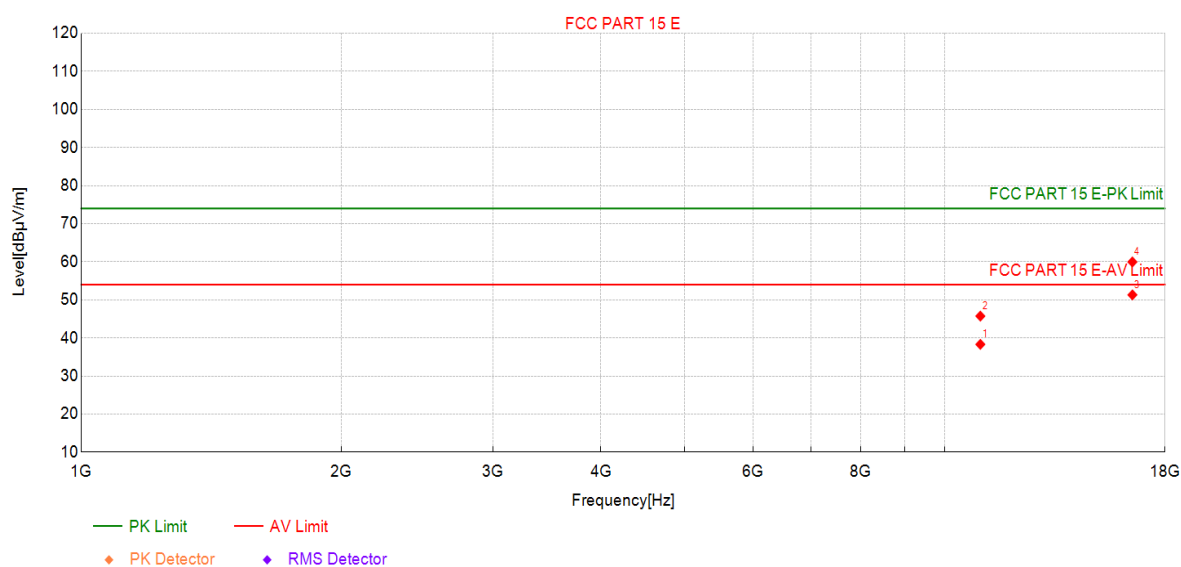

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	30.91	38.31	7.40	54.00	15.69	AV	Horizo	PASS
2	11000	38.33	45.73	7.40	74.00	28.27	PK	Horizo	PASS
3	16500	36.20	51.31	15.11	54.00	2.69	AV	Horizo	PASS
4	16500	44.85	59.96	15.11	74.00	14.04	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5500MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

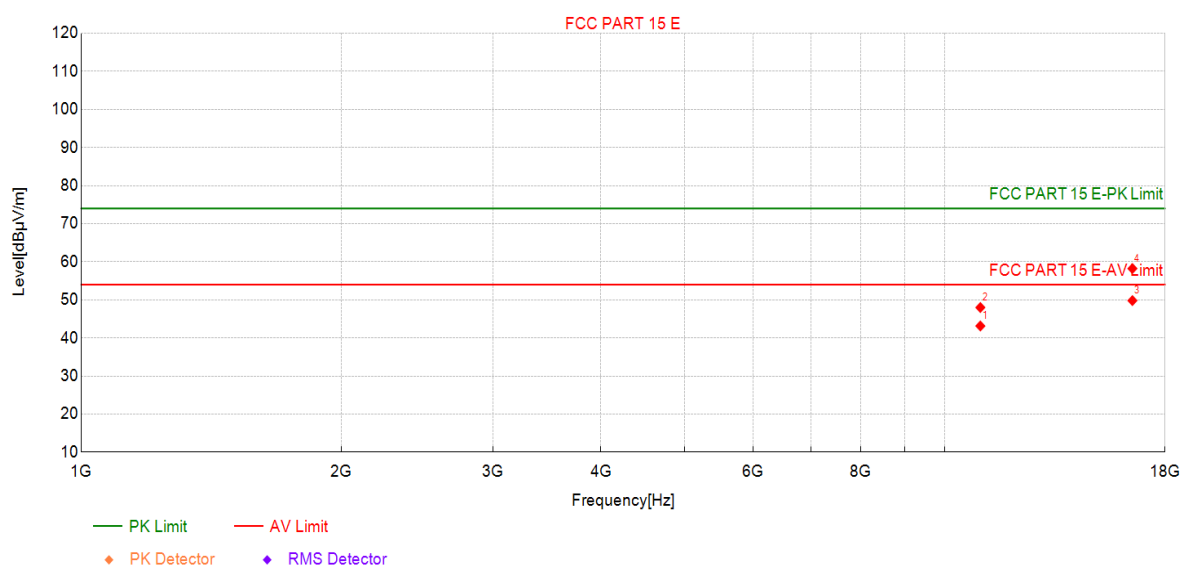

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	35.74	43.14	7.40	54.00	10.86	AV	Vertic	PASS
2	11000	40.60	48.00	7.40	74.00	26.00	PK	Vertic	PASS
3	16500	34.70	49.81	15.11	54.00	4.19	AV	Vertic	PASS
4	16500	43.12	58.23	15.11	74.00	15.77	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5580MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

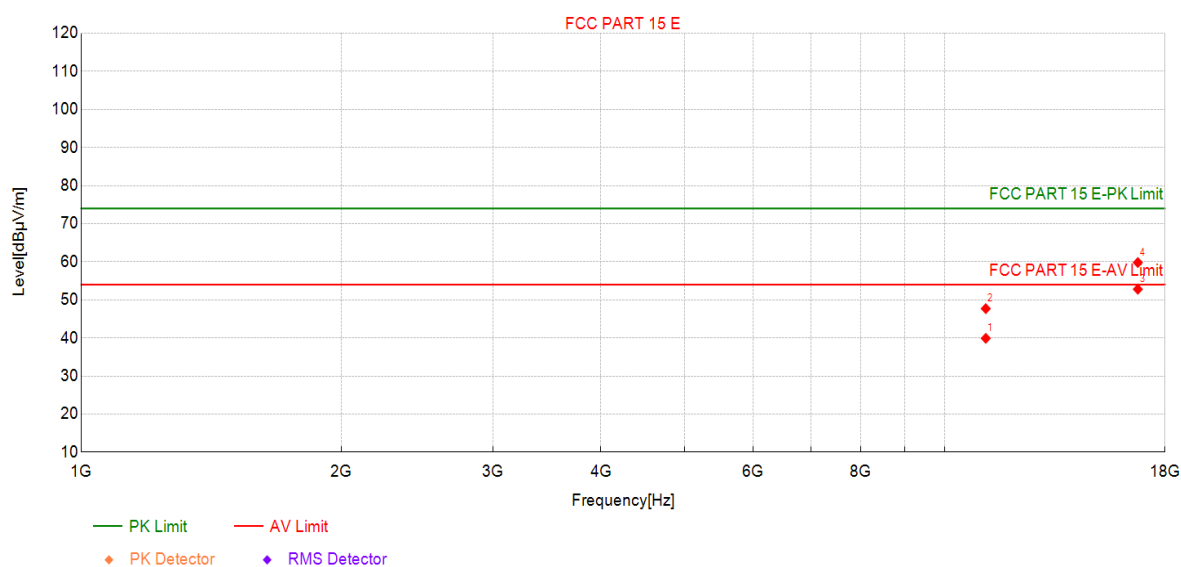

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	32.61	39.90	7.29	54.00	14.10	AV	Horizo	PASS
2	11160	40.40	47.69	7.29	74.00	26.31	PK	Horizo	PASS
3	16740	38.17	52.79	14.62	54.00	1.21	AV	Horizo	PASS
4	16740	45.19	59.81	14.62	74.00	14.19	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5580MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

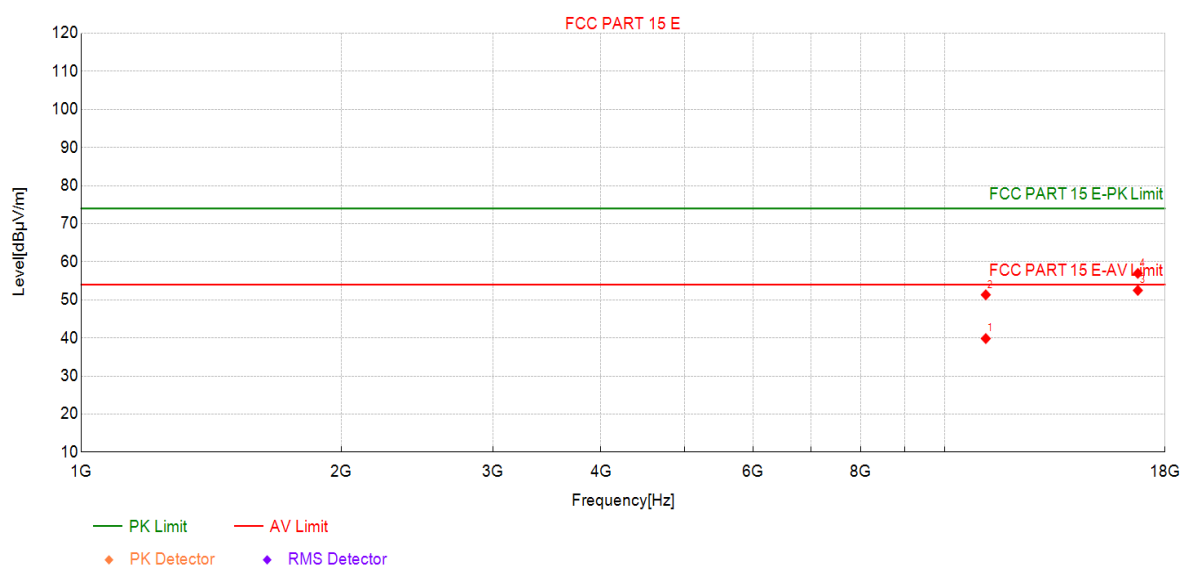

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	32.55	39.84	7.29	54.00	14.16	AV	Vertic	PASS
2	11160	44.04	51.33	7.29	74.00	22.67	PK	Vertic	PASS
3	16740	37.87	52.49	14.62	54.00	1.51	AV	Vertic	PASS
4	16740	42.34	56.96	14.62	74.00	17.04	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5700MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

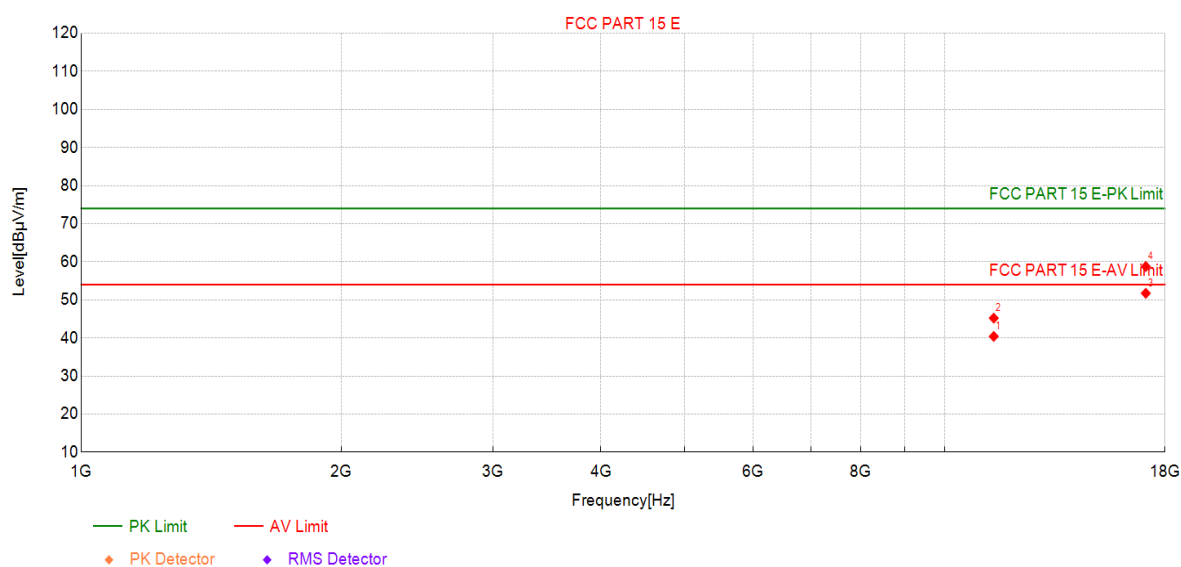

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	32.57	40.40	7.83	54.00	13.60	AV	Horizo	PASS
2	11400	37.37	45.20	7.83	74.00	28.80	PK	Horizo	PASS
3	17100	35.92	51.74	15.82	54.00	2.26	AV	Horizo	PASS
4	17100	42.95	58.77	15.82	74.00	15.23	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5700MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

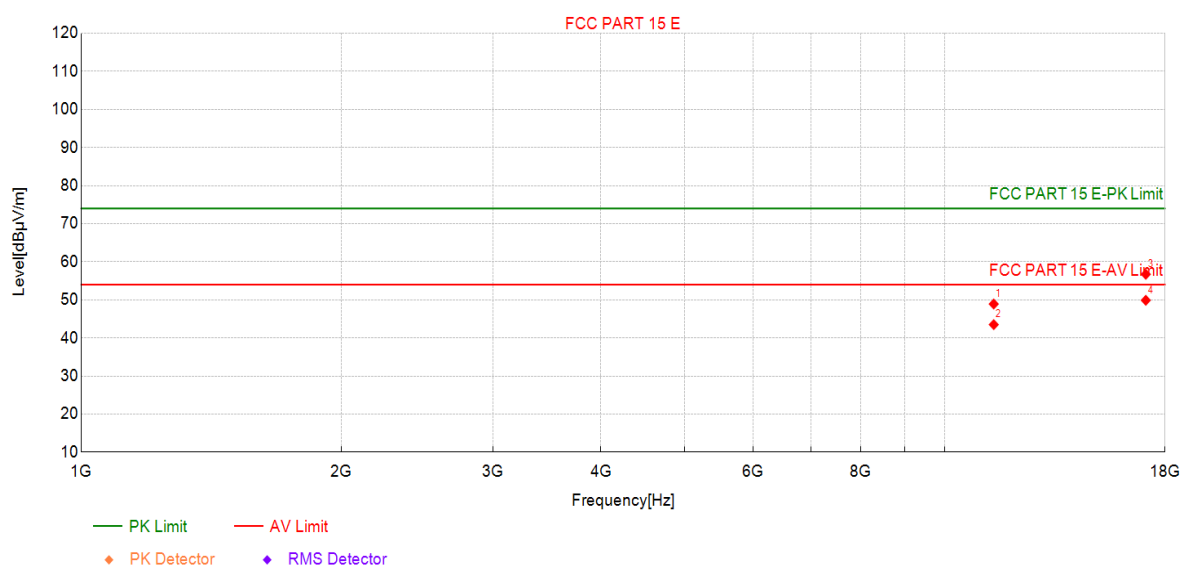

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	41.08	48.91	7.83	74.00	25.09	PK	Vertic	PASS
2	11400	35.67	43.50	7.83	54.00	10.50	AV	Vertic	PASS
3	17100	40.90	56.72	15.82	74.00	17.28	PK	Vertic	PASS
4	17100	34.07	49.89	15.82	54.00	4.11	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5745MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

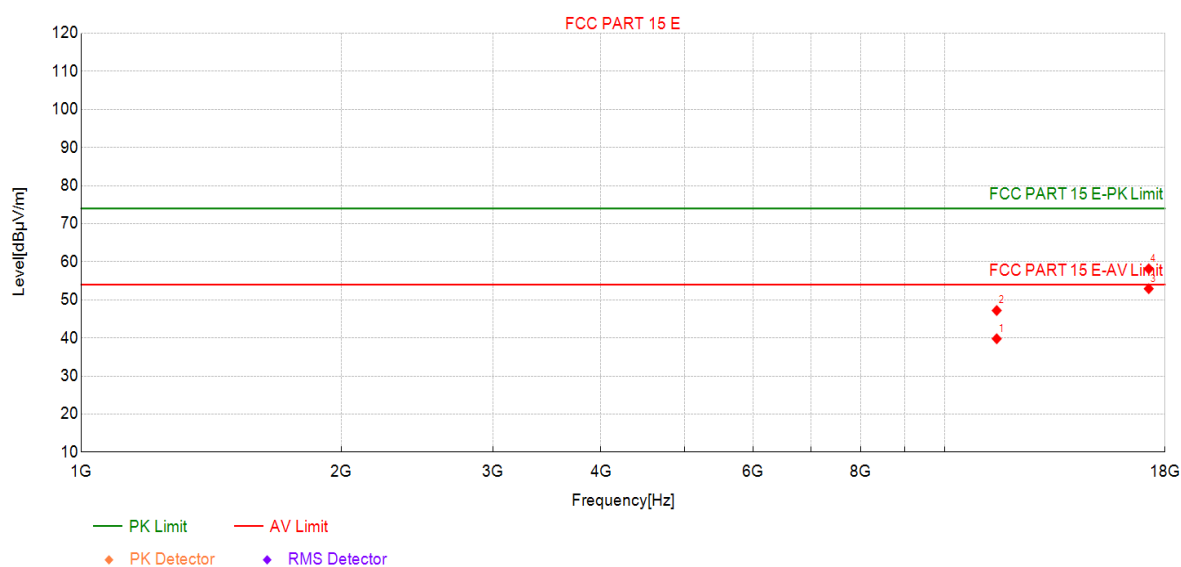

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	31.40	39.78	8.38	54.00	14.22	AV	Horizo	PASS
2	11490	38.82	47.20	8.38	74.00	26.80	PK	Horizo	PASS
3	17235	37.47	52.93	15.46	54.00	1.07	AV	Horizo	PASS
4	17235	42.70	58.16	15.46	74.00	15.84	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5745MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

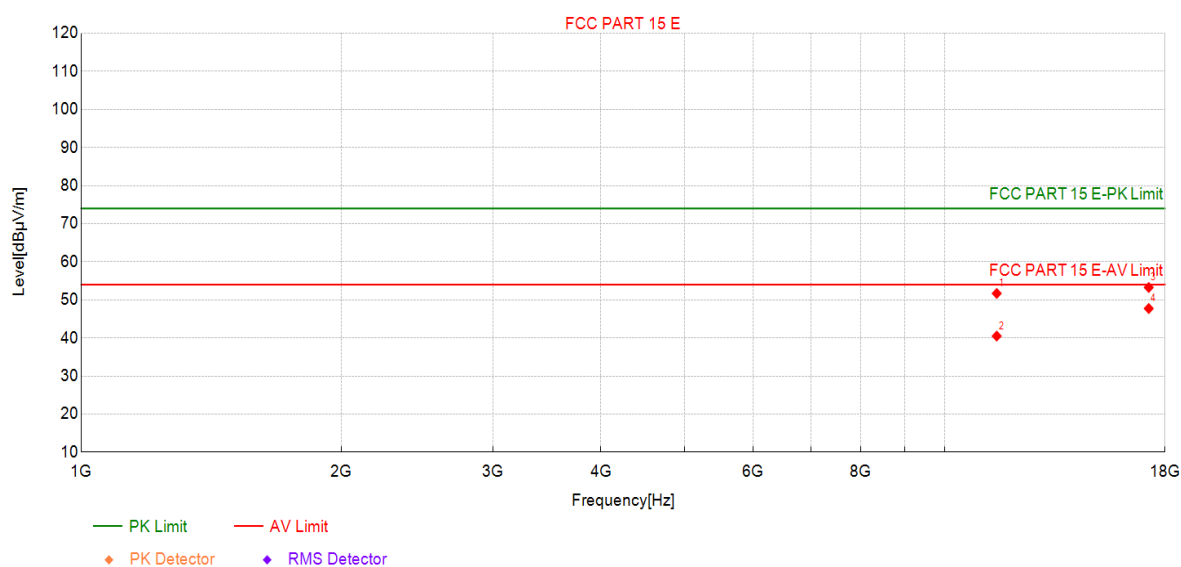

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	43.31	51.69	8.38	74.00	22.31	PK	Vertic	PASS
2	11490	32.11	40.49	8.38	54.00	13.51	AV	Vertic	PASS
3	17235	37.80	53.26	15.46	74.00	20.74	PK	Vertic	PASS
4	17235	32.27	47.73	15.46	54.00	6.27	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5785MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

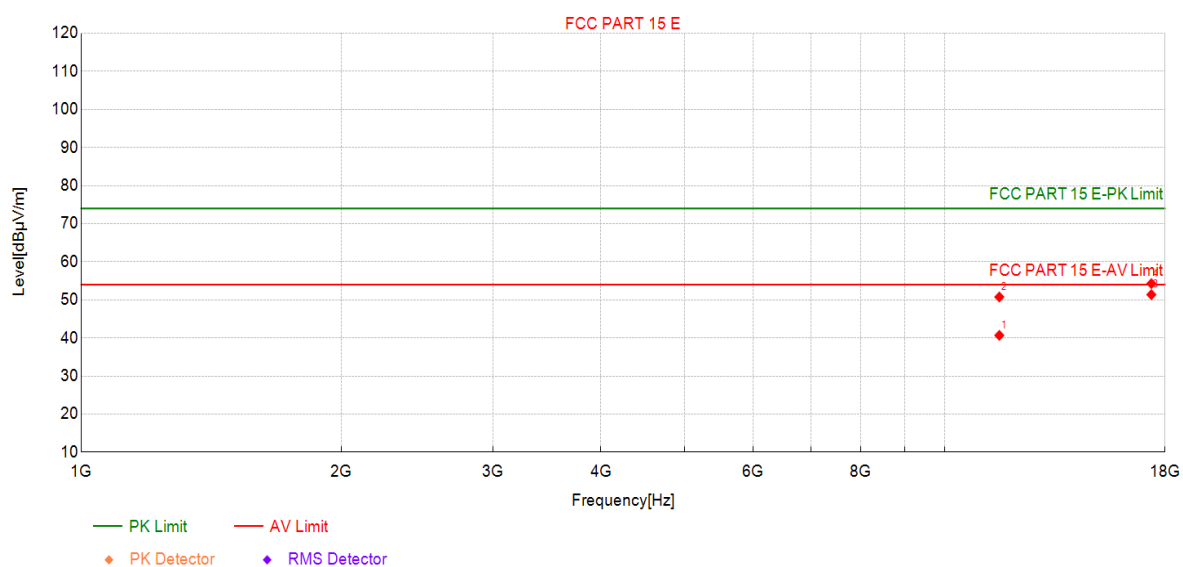

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	32.00	40.68	8.68	54.00	13.32	AV	Horizo	PASS
2	11570	42.08	50.76	8.68	74.00	23.24	PK	Horizo	PASS
3	17355	35.15	51.37	16.22	54.00	2.63	AV	Horizo	PASS
4	17355	38.05	54.27	16.22	74.00	19.73	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5785MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

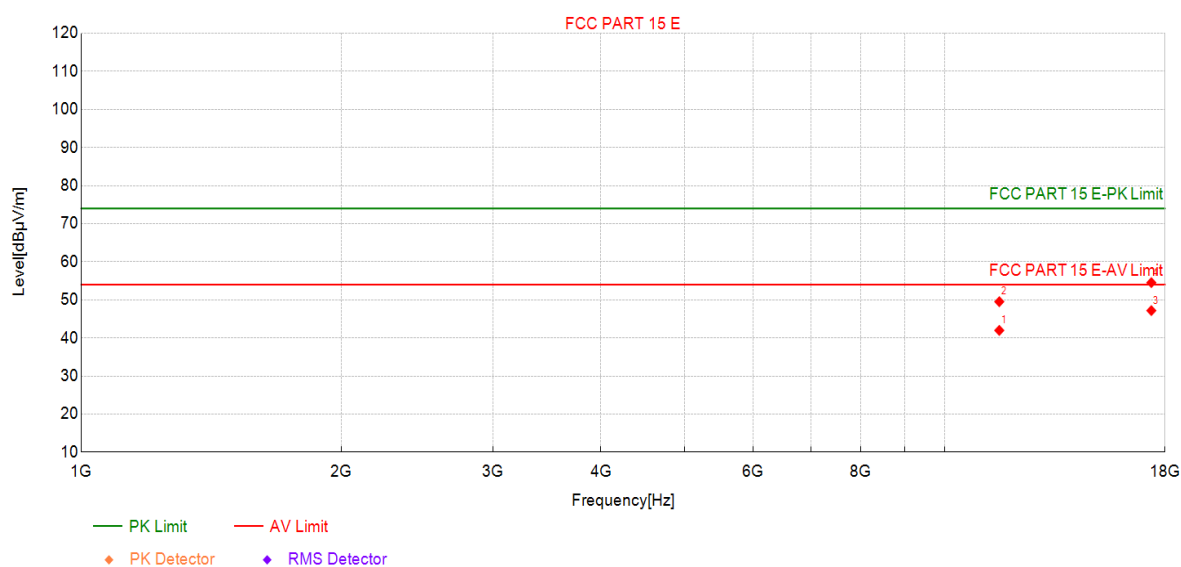

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	33.30	41.98	8.68	54.00	12.02	AV	Vertic	PASS
2	11570	40.84	49.52	8.68	74.00	24.48	PK	Vertic	PASS
3	17355	30.96	47.18	16.22	54.00	6.82	AV	Vertic	PASS
4	17355	38.31	54.53	16.22	74.00	19.47	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5825MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

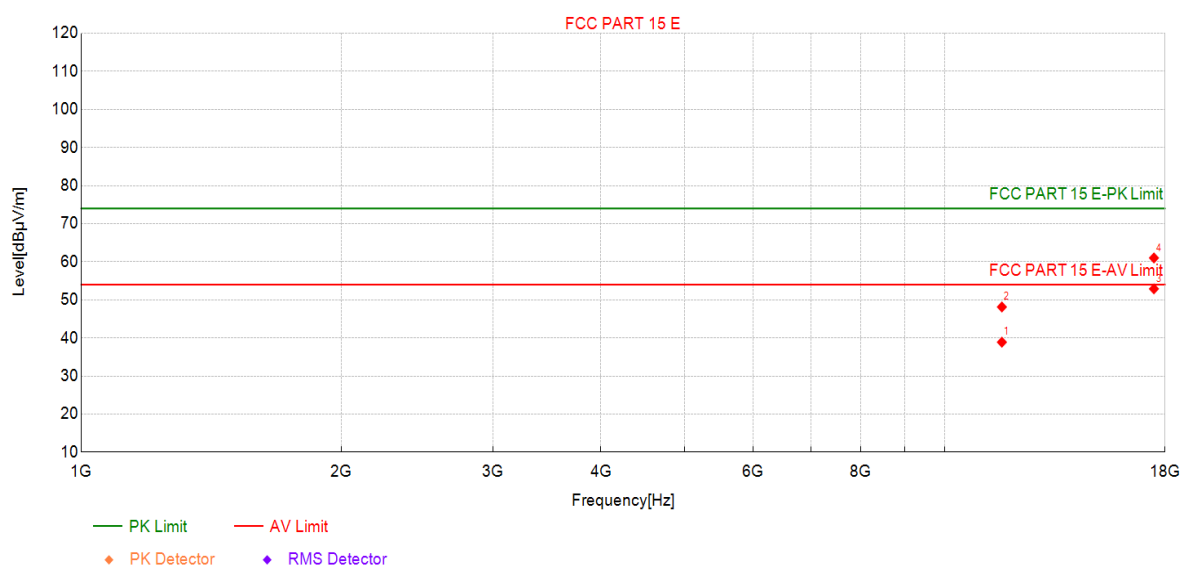

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	30.15	38.89	8.74	54.00	15.11	AV	Horizo	PASS
2	11650	39.40	48.14	8.74	74.00	25.86	PK	Horizo	PASS
3	17475	35.83	52.90	17.07	54.00	1.10	AV	Horizo	PASS
4	17475	43.94	61.01	17.07	74.00	12.99	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5825MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

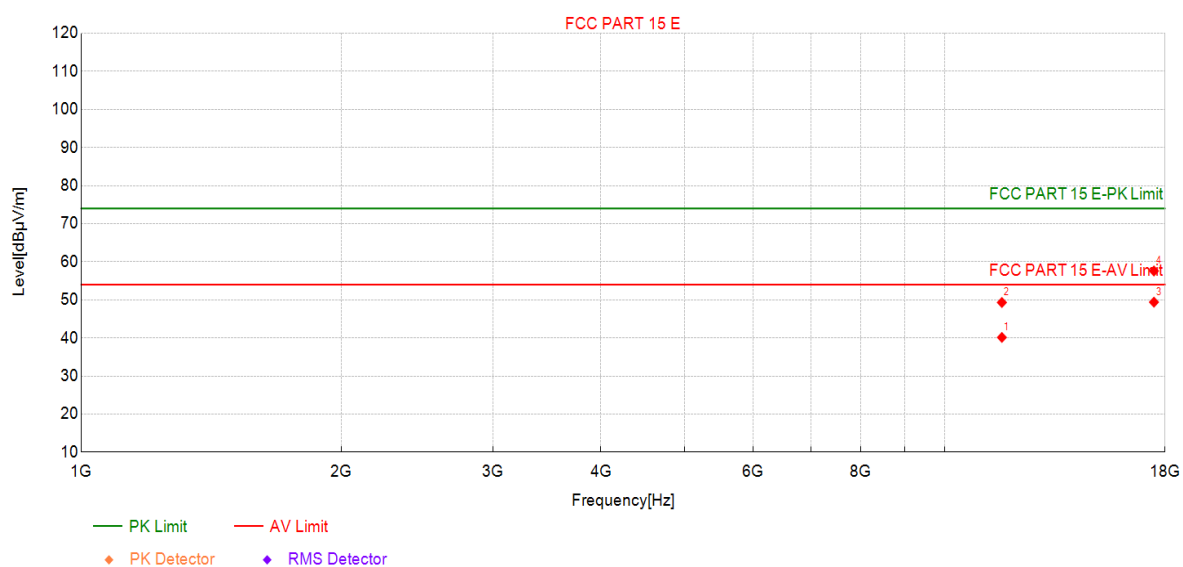

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	31.39	40.13	8.74	54.00	13.87	AV	Vertic	PASS
2	11650	40.57	49.31	8.74	74.00	24.69	PK	Vertic	PASS
3	17475	32.33	49.40	17.07	54.00	4.60	AV	Vertic	PASS
4	17475	40.52	57.59	17.07	74.00	16.41	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5180MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

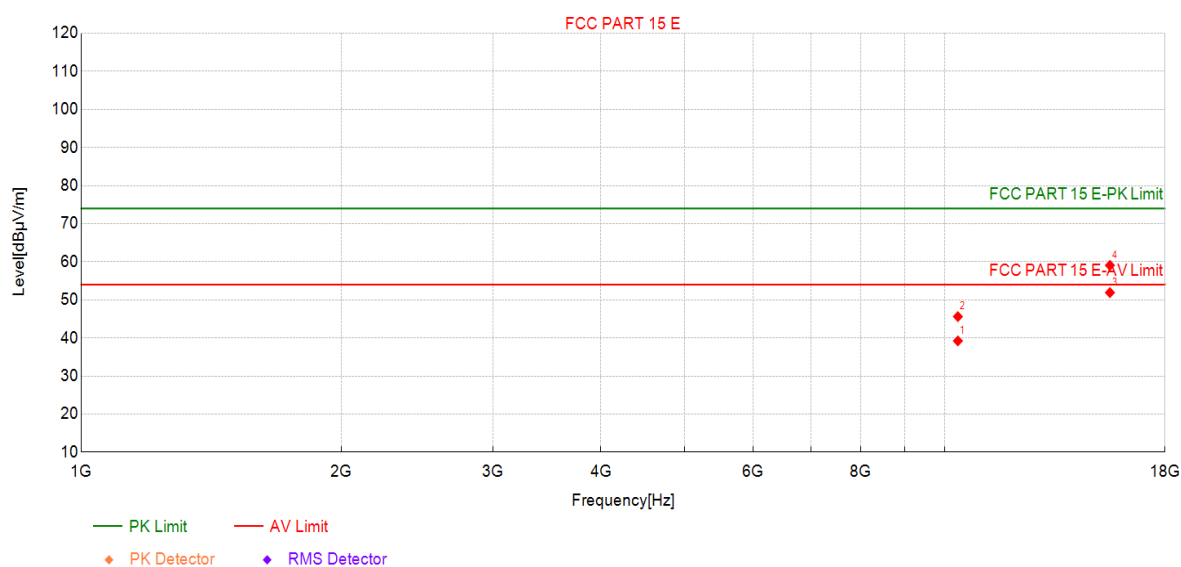

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	32.64	39.22	6.58	54.00	14.78	AV	Horizo	PASS
2	10360	39.02	45.60	6.58	74.00	28.40	PK	Horizo	PASS
3	15540	38.01	51.91	13.90	54.00	2.09	AV	Horizo	PASS
4	15540	45.17	59.07	13.90	74.00	14.93	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5180MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

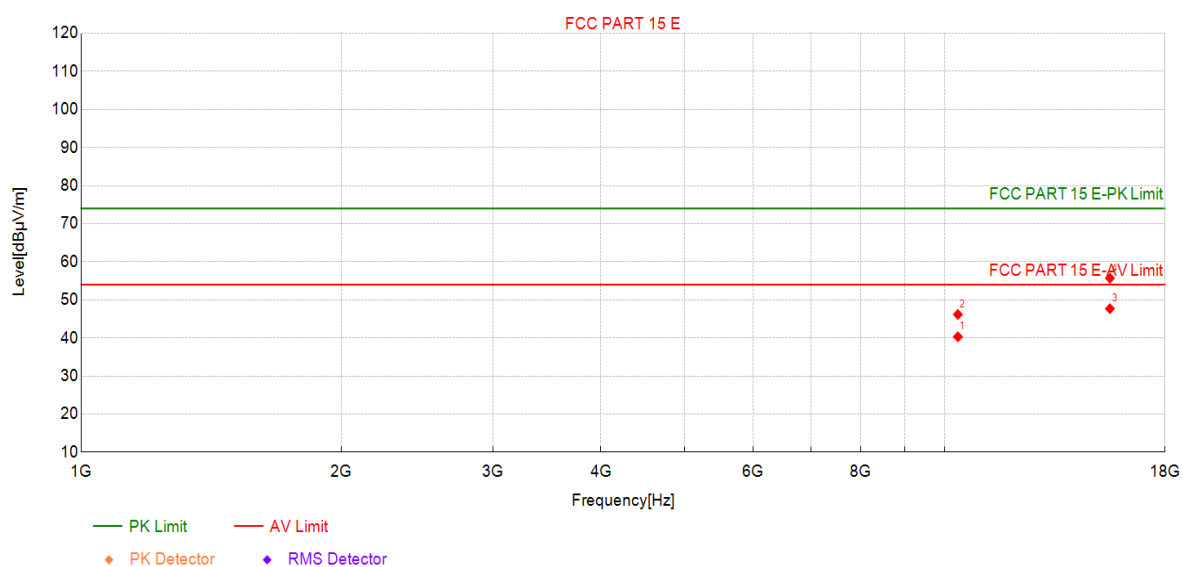

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	33.73	40.31	6.58	54.00	13.69	AV	Vertic	PASS
2	10360	39.57	46.15	6.58	74.00	27.85	PK	Vertic	PASS
3	15540	33.79	47.69	13.90	54.00	6.31	AV	Vertic	PASS
4	15540	41.80	55.70	13.90	74.00	18.30	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5220MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

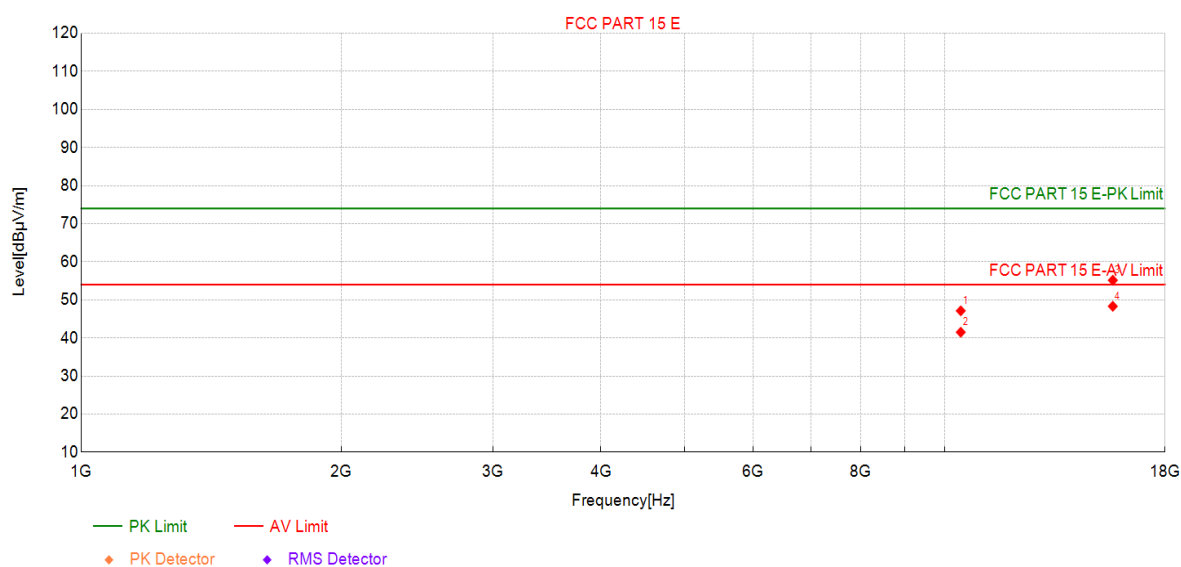

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	40.49	47.13	6.64	74.00	26.87	PK	Vertic	PASS
2	10440	34.87	41.51	6.64	54.00	12.49	AV	Vertic	PASS
3	15660	41.06	55.15	14.09	74.00	18.85	PK	Vertic	PASS
4	15660	34.22	48.31	14.09	54.00	5.69	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5220MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

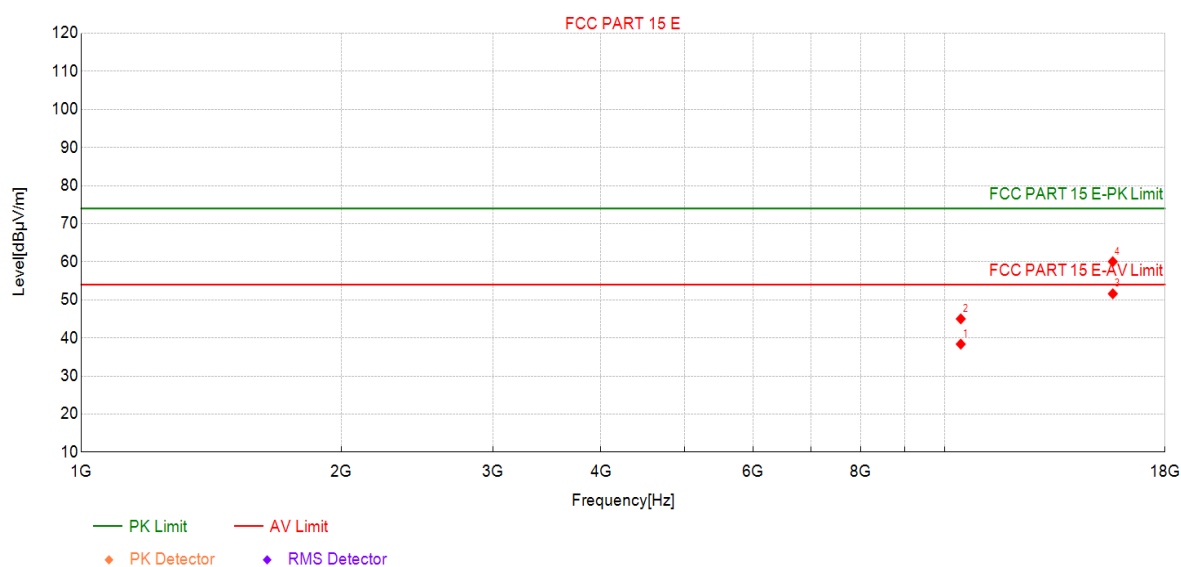

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	31.74	38.38	6.64	54.00	15.62	AV	Horizo	PASS
2	10440	38.36	45.00	6.64	74.00	29.00	PK	Horizo	PASS
3	15660	37.52	51.61	14.09	54.00	2.39	AV	Horizo	PASS
4	15660	45.95	60.04	14.09	74.00	13.96	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5240MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

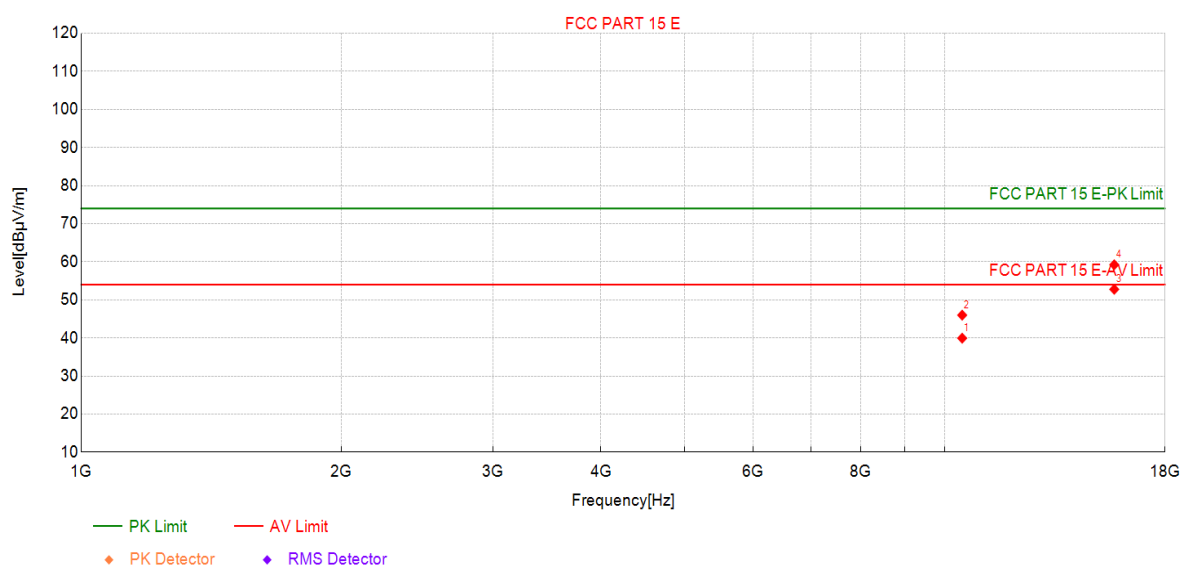

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	33.23	39.94	6.71	54.00	14.06	AV	Horizo	PASS
2	10480	39.28	45.99	6.71	74.00	28.01	PK	Horizo	PASS
3	15720	38.36	52.77	14.41	54.00	1.23	AV	Horizo	PASS
4	15720	44.82	59.23	14.41	74.00	14.77	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5240MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

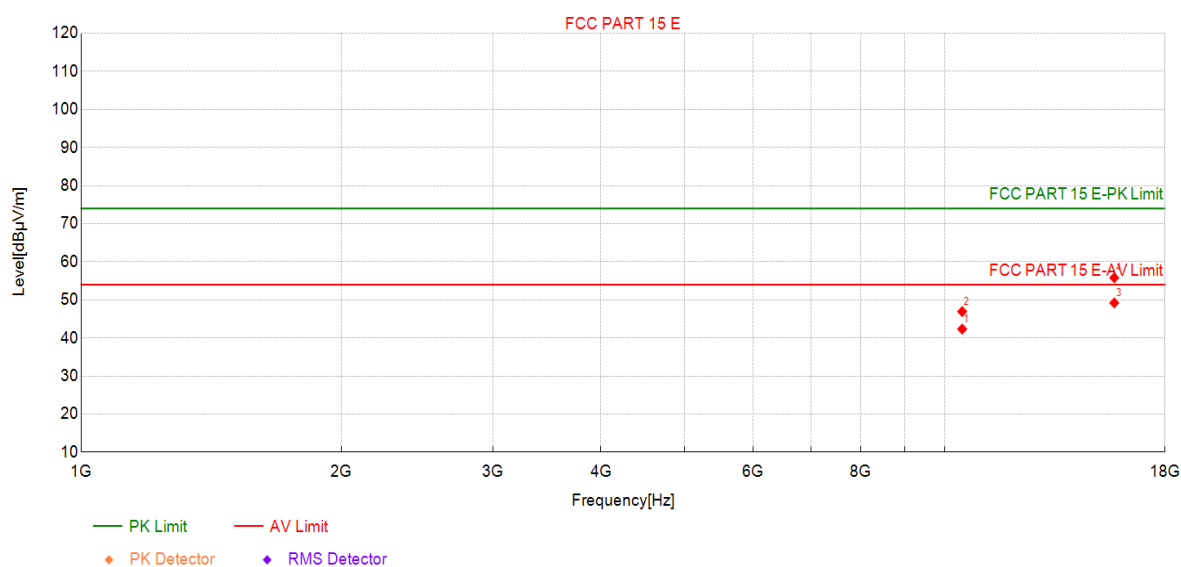

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	35.61	42.32	6.71	54.00	11.68	AV	Vertic	PASS
2	10480	40.23	46.94	6.71	74.00	27.06	PK	Vertic	PASS
3	15720	34.79	49.20	14.41	54.00	4.80	AV	Vertic	PASS
4	15720	41.39	55.80	14.41	74.00	18.20	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5260MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

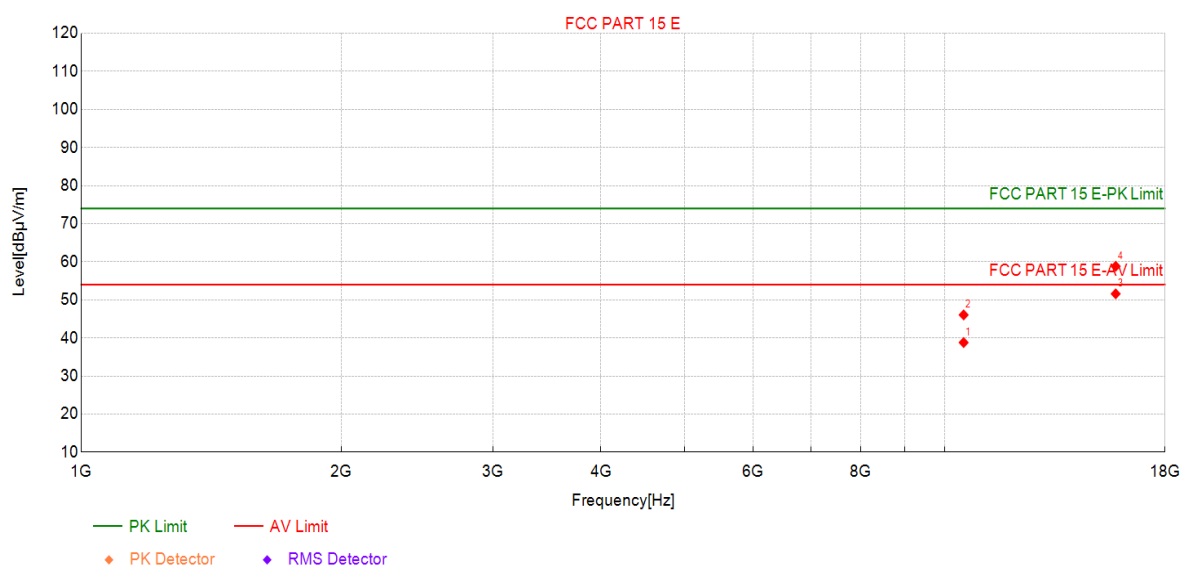

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	32.03	38.79	6.76	54.00	15.21	AV	Horizo	PASS
2	10520	39.29	46.05	6.76	74.00	27.95	PK	Horizo	PASS
3	15780	37.50	51.59	14.09	54.00	2.41	AV	Horizo	PASS
4	15780	44.74	58.83	14.09	74.00	15.17	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5260MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

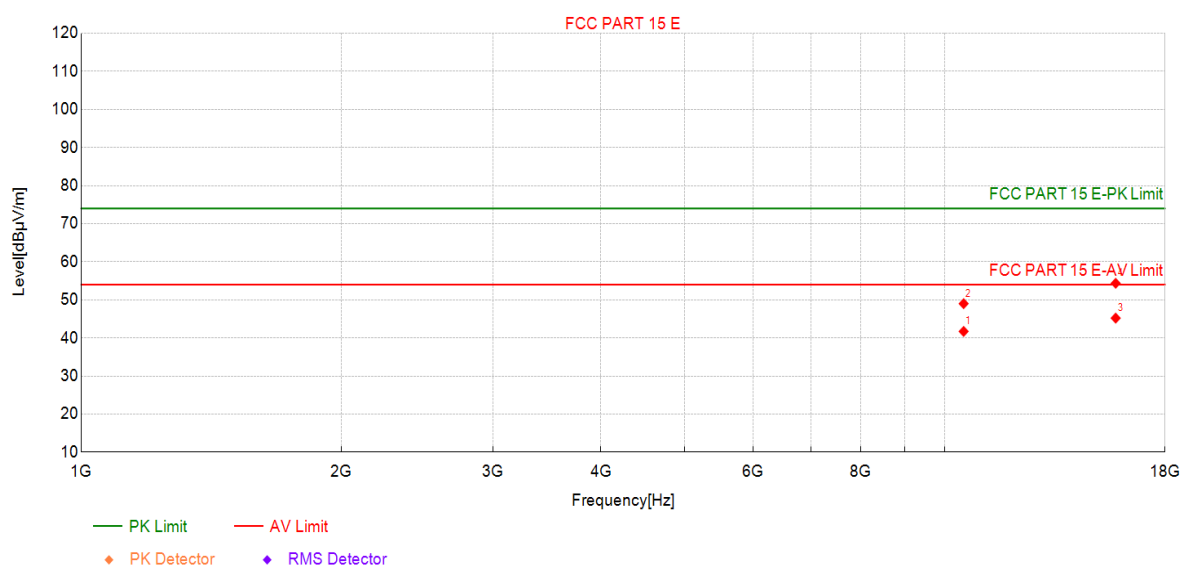

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	34.95	41.71	6.76	54.00	12.29	AV	Vertic	PASS
2	10520	42.24	49.00	6.76	74.00	25.00	PK	Vertic	PASS
3	15780	31.12	45.21	14.09	54.00	8.79	AV	Vertic	PASS
4	15780	40.27	54.36	14.09	74.00	19.64	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5300MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

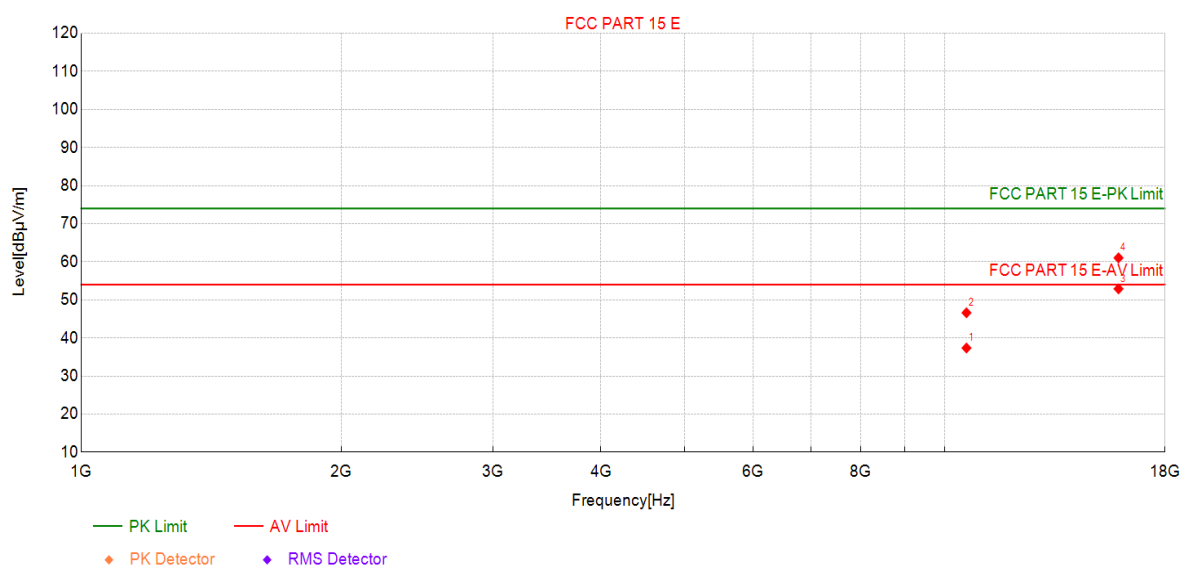

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	30.58	37.36	6.78	54.00	16.64	AV	Horizo	PASS
2	10600	39.83	46.61	6.78	74.00	27.39	PK	Horizo	PASS
3	15900	38.77	52.89	14.12	54.00	1.11	AV	Horizo	PASS
4	15900	46.91	61.03	14.12	74.00	12.97	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5300MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

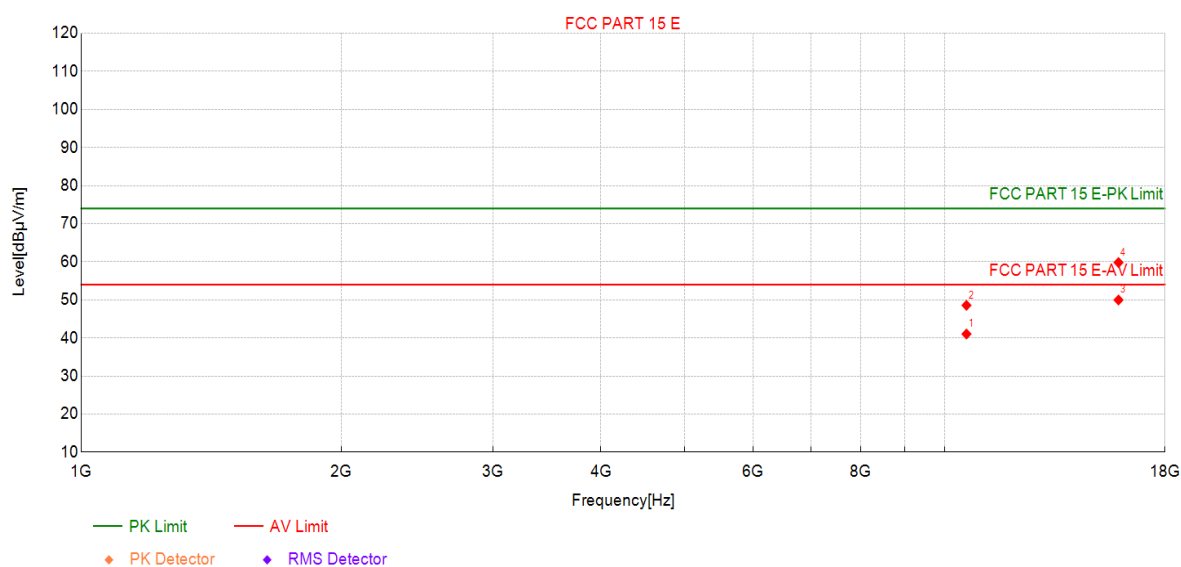

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	34.25	41.03	6.78	54.00	12.97	AV	Vertic	PASS
2	10600	41.78	48.56	6.78	74.00	25.44	PK	Vertic	PASS
3	15900	35.85	49.97	14.12	54.00	4.03	AV	Vertic	PASS
4	15900	45.69	59.81	14.12	74.00	14.19	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5320MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

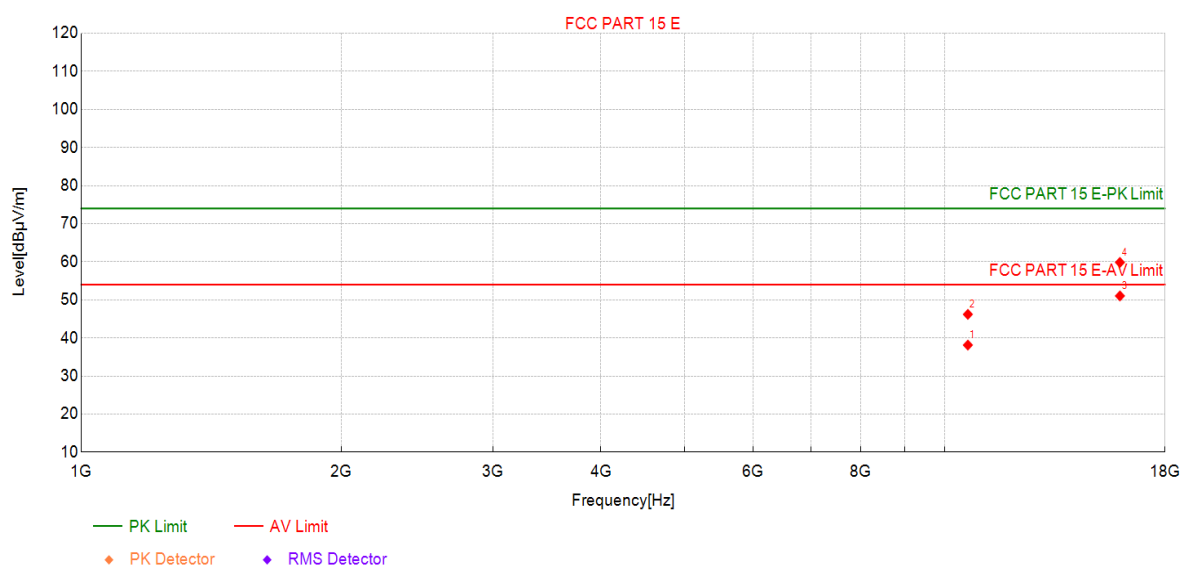

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	31.33	38.13	6.80	54.00	15.87	AV	Horizo	PASS
2	10640	39.40	46.20	6.80	74.00	27.80	PK	Horizo	PASS
3	15960	36.41	51.04	14.63	54.00	2.96	AV	Horizo	PASS
4	15960	45.21	59.84	14.63	74.00	14.16	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5320MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

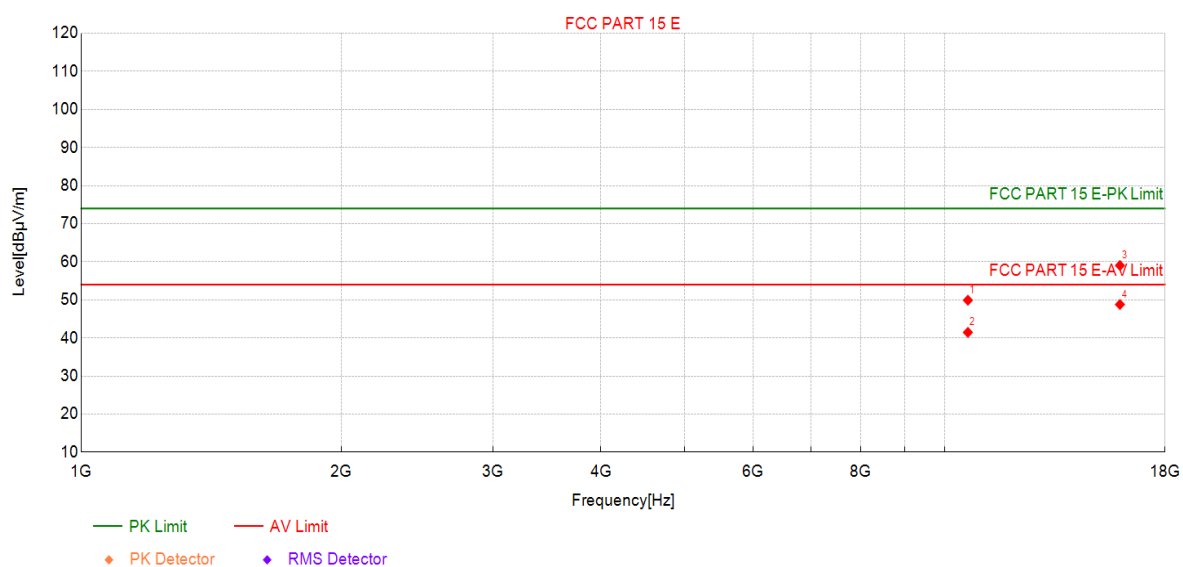

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	43.10	49.90	6.80	74.00	24.10	PK	Vertic	PASS
2	10640	34.66	41.46	6.80	54.00	12.54	AV	Vertic	PASS
3	15960	44.40	59.03	14.63	74.00	14.97	PK	Vertic	PASS
4	15960	34.16	48.79	14.63	54.00	5.21	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5500MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

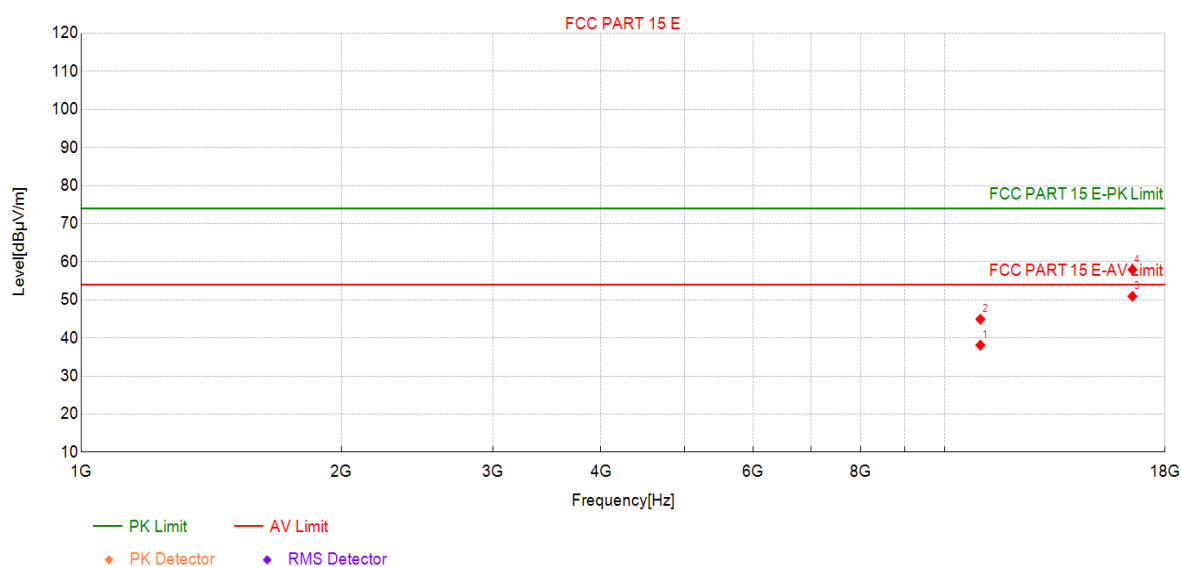

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	30.69	38.09	7.40	54.00	15.91	AV	Horizo	PASS
2	11000	37.51	44.91	7.40	74.00	29.09	PK	Horizo	PASS
3	16500	35.82	50.93	15.11	54.00	3.07	AV	Horizo	PASS
4	16500	42.82	57.93	15.11	74.00	16.07	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5500MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

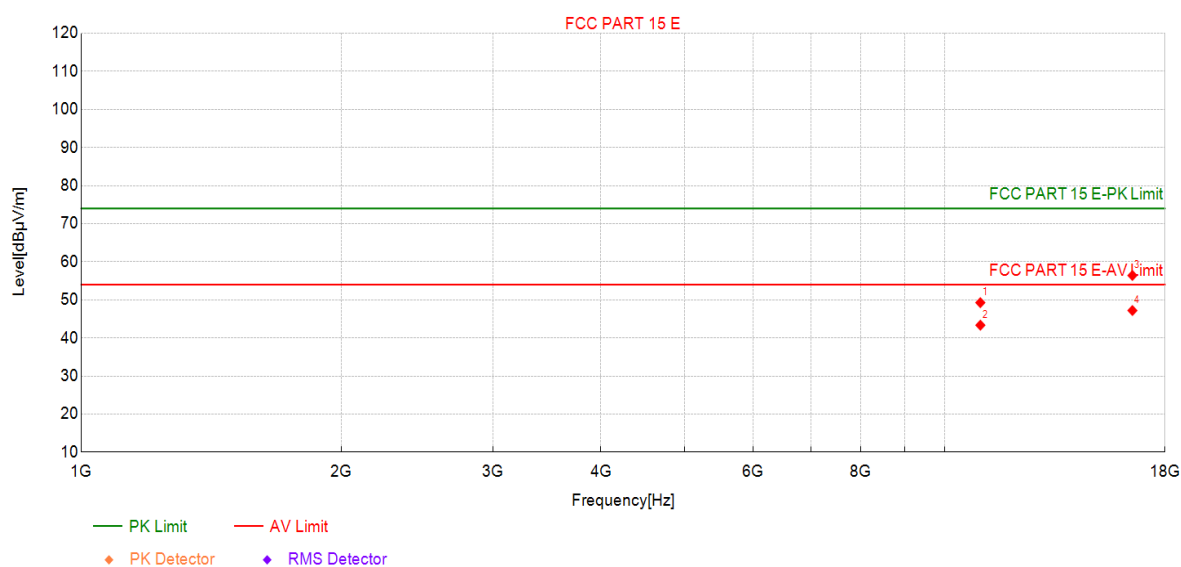

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	41.87	49.27	7.40	74.00	24.73	PK	Vertic	PASS
2	11000	35.95	43.35	7.40	54.00	10.65	AV	Vertic	PASS
3	16500	41.30	56.41	15.11	74.00	17.59	PK	Vertic	PASS
4	16500	32.09	47.20	15.11	54.00	6.80	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5580MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

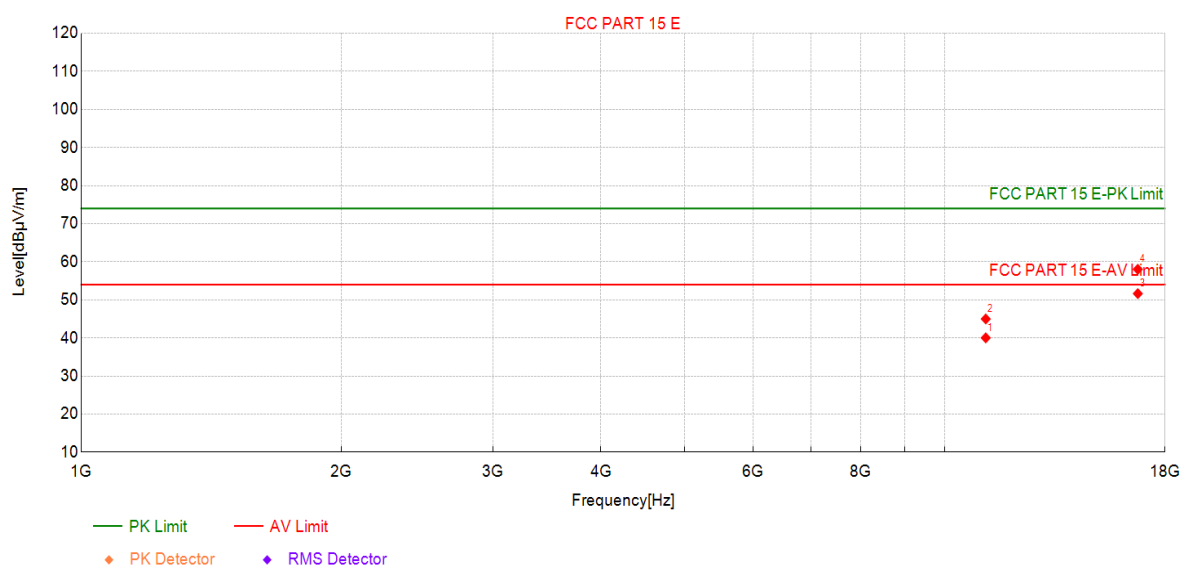

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	32.73	40.02	7.29	54.00	13.98	AV	Horizo	PASS
2	11160	37.69	44.98	7.29	74.00	29.02	PK	Horizo	PASS
3	16740	37.02	51.64	14.62	54.00	2.36	AV	Horizo	PASS
4	16740	43.41	58.03	14.62	74.00	15.97	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5580MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

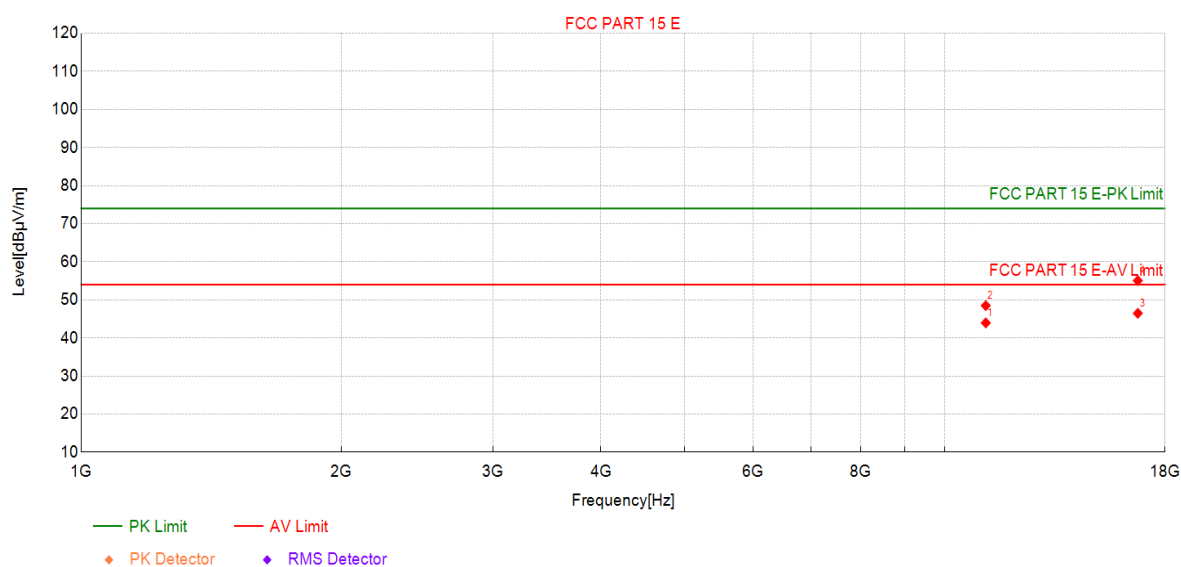

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	36.66	43.95	7.29	54.00	10.05	AV	Vertic	PASS
2	11160	41.20	48.49	7.29	74.00	25.51	PK	Vertic	PASS
3	16740	31.85	46.47	14.62	54.00	7.53	AV	Vertic	PASS
4	16740	40.44	55.06	14.62	74.00	18.94	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5700MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

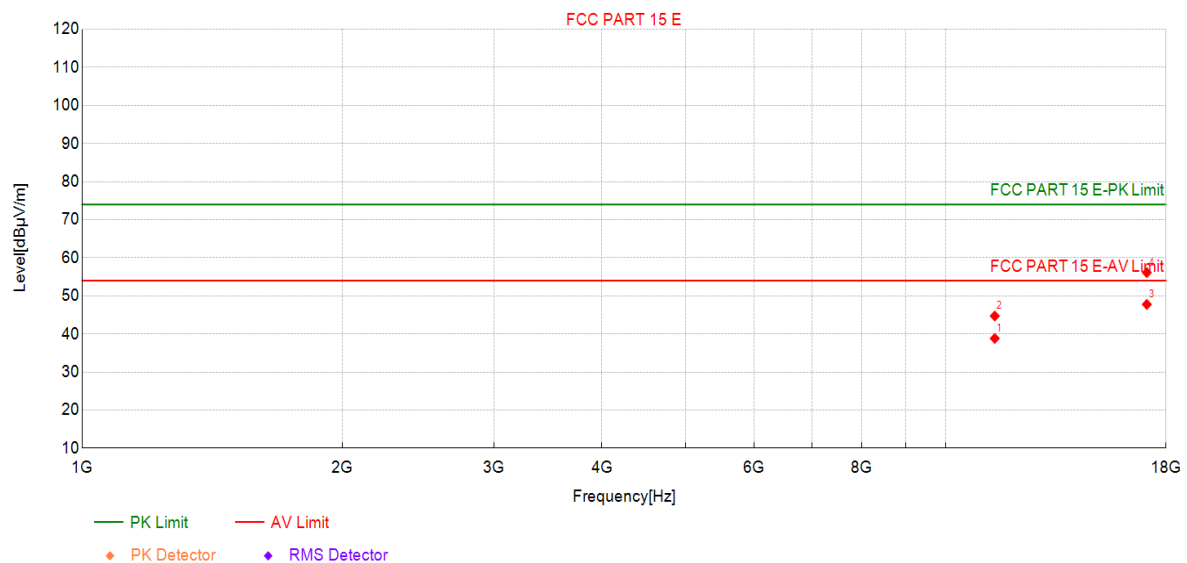

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	30.99	38.82	7.83	54.00	15.18	AV	Horizo	PASS
2	11400	36.88	44.71	7.83	74.00	29.29	PK	Horizo	PASS
3	17100	31.94	47.76	15.82	54.00	6.24	AV	Horizo	PASS
4	17100	40.29	56.11	15.82	74.00	17.89	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5700MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

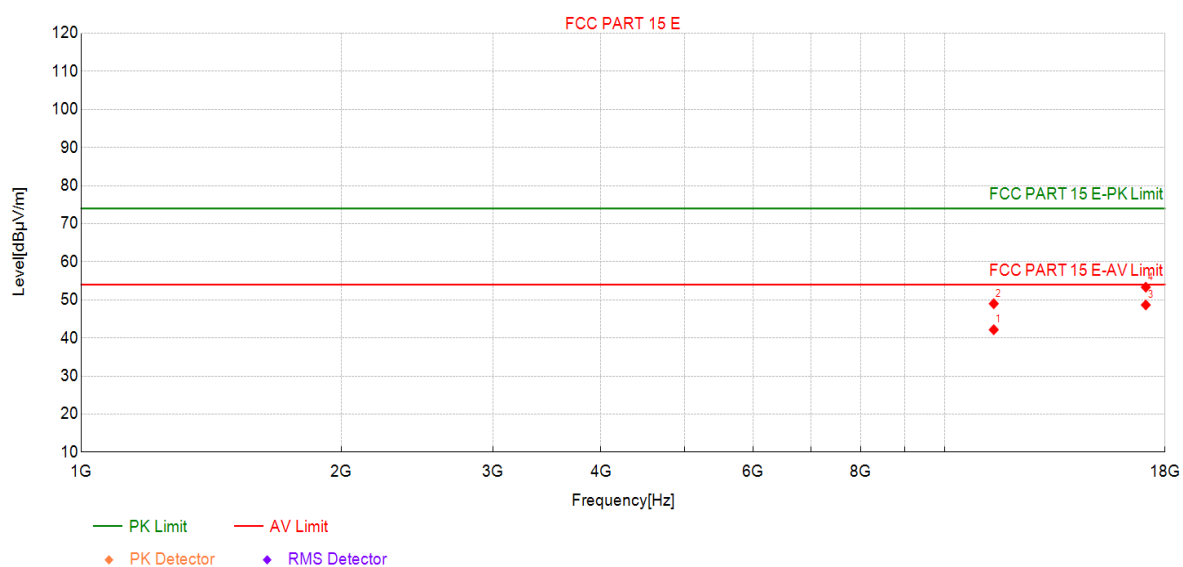

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	34.33	42.16	7.83	54.00	11.84	AV	Vertic	PASS
2	11400	41.16	48.99	7.83	74.00	25.01	PK	Vertic	PASS
3	17100	32.85	48.67	15.82	54.00	5.33	AV	Vertic	PASS
4	17100	37.51	53.33	15.82	74.00	20.67	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

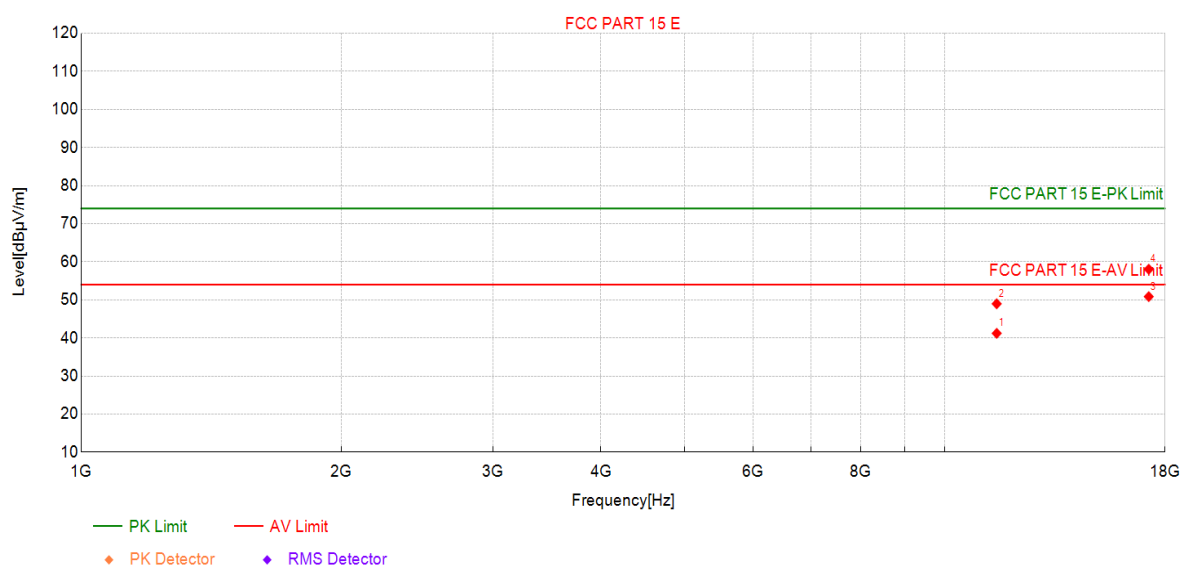

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	32.83	41.21	8.38	54.00	12.79	AV	Horizo	PASS
2	11490	40.59	48.97	8.38	74.00	25.03	PK	Horizo	PASS
3	17235	35.39	50.85	15.46	54.00	3.15	AV	Horizo	PASS
4	17235	42.58	58.04	15.46	74.00	15.96	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

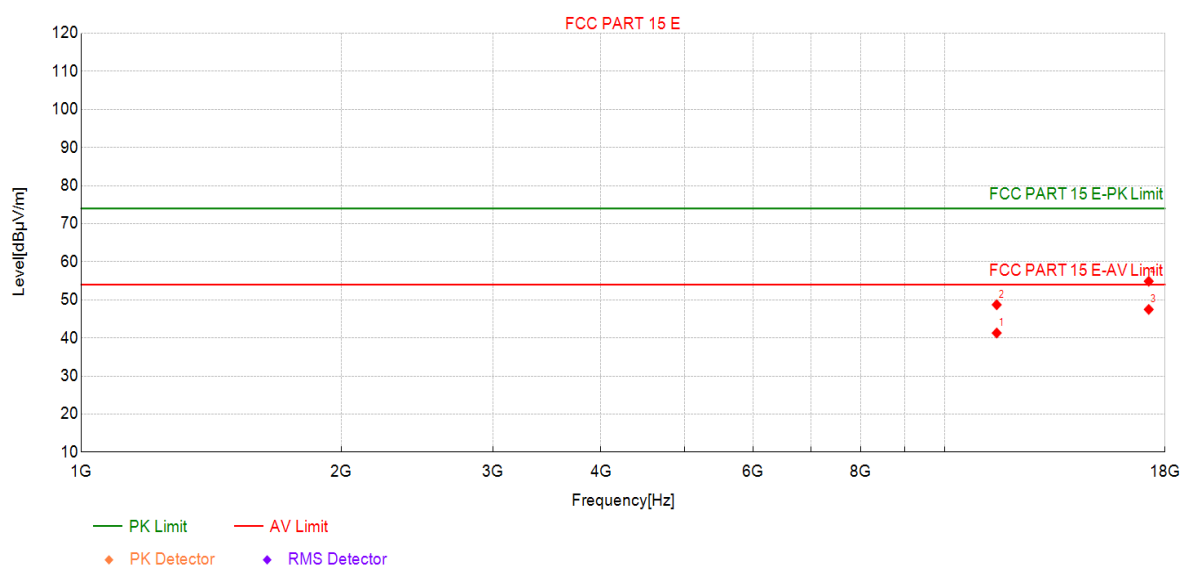

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	32.92	41.30	8.38	54.00	12.70	AV	Vertic	PASS
2	11490	40.34	48.72	8.38	74.00	25.28	PK	Vertic	PASS
3	17235	32.02	47.48	15.46	54.00	6.52	AV	Vertic	PASS
4	17235	39.43	54.89	15.46	74.00	19.11	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

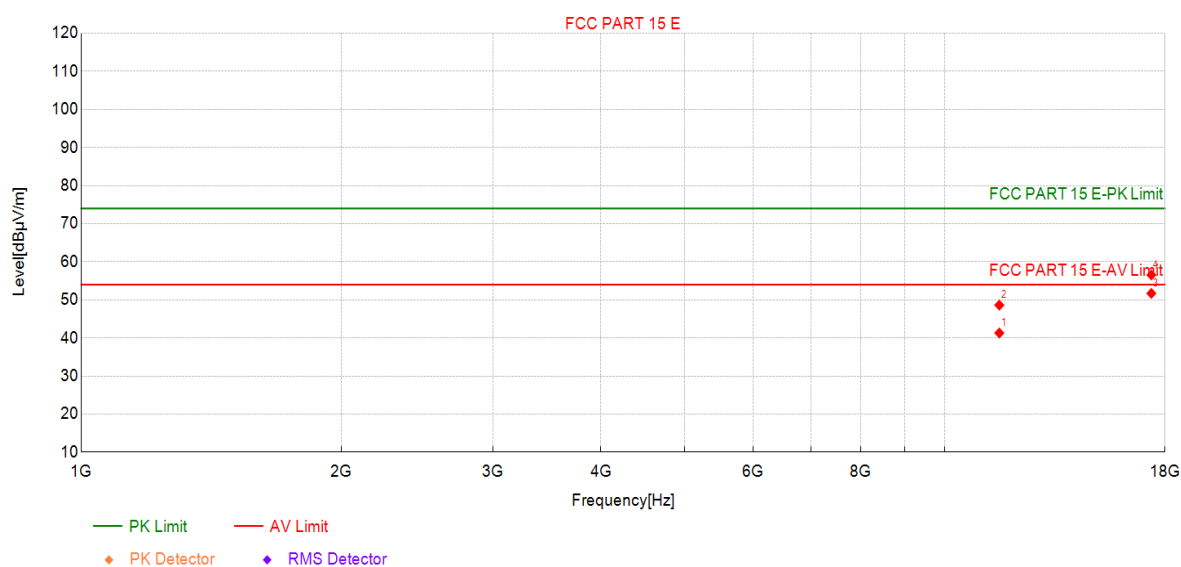

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	32.62	41.30	8.68	54.00	12.70	AV	Horizo	PASS
2	11570	39.94	48.62	8.68	74.00	25.38	PK	Horizo	PASS
3	17355	35.49	51.71	16.22	54.00	2.29	AV	Horizo	PASS
4	17355	40.33	56.55	16.22	74.00	17.45	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

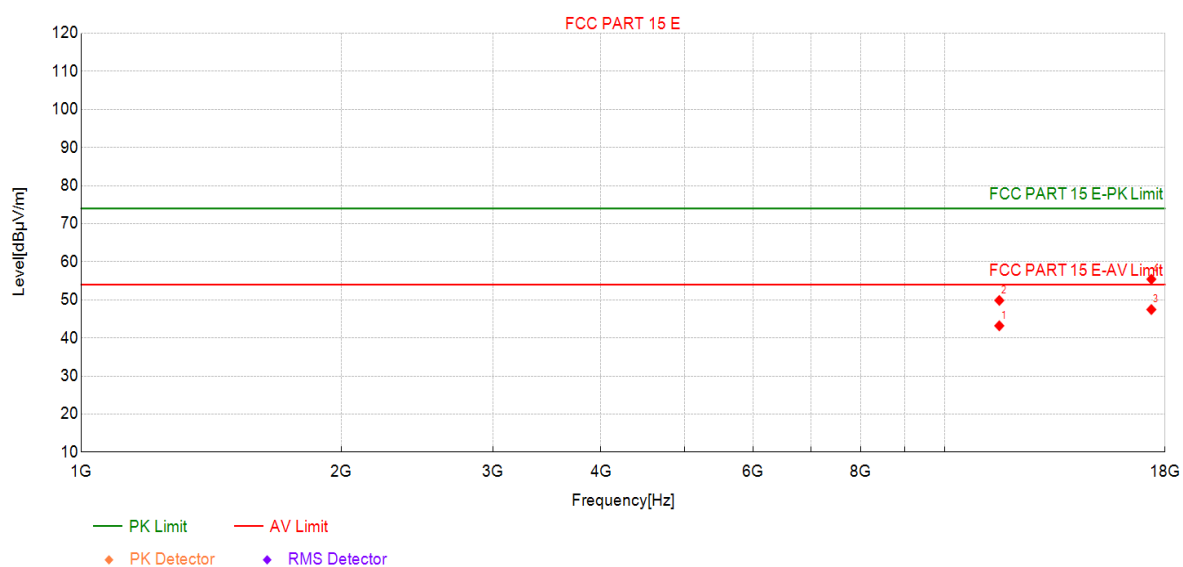

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	34.51	43.19	8.68	54.00	10.81	AV	Vertic	PASS
2	11570	41.17	49.85	8.68	74.00	24.15	PK	Vertic	PASS
3	17355	31.24	47.46	16.22	54.00	6.54	AV	Vertic	PASS
4	17355	39.20	55.42	16.22	74.00	18.58	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

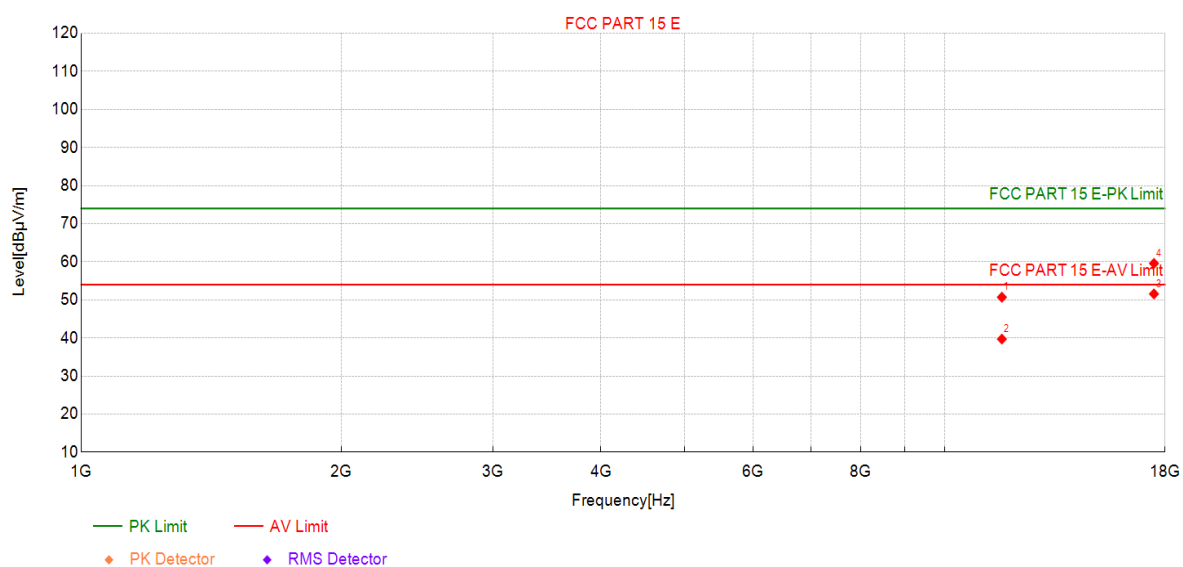

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	41.96	50.70	8.74	74.00	23.30	PK	Horizo	PASS
2	11650	30.96	39.70	8.74	54.00	14.30	AV	Horizo	PASS
3	17475	34.49	51.56	17.07	54.00	2.44	AV	Horizo	PASS
4	17475	42.50	59.57	17.07	74.00	14.43	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

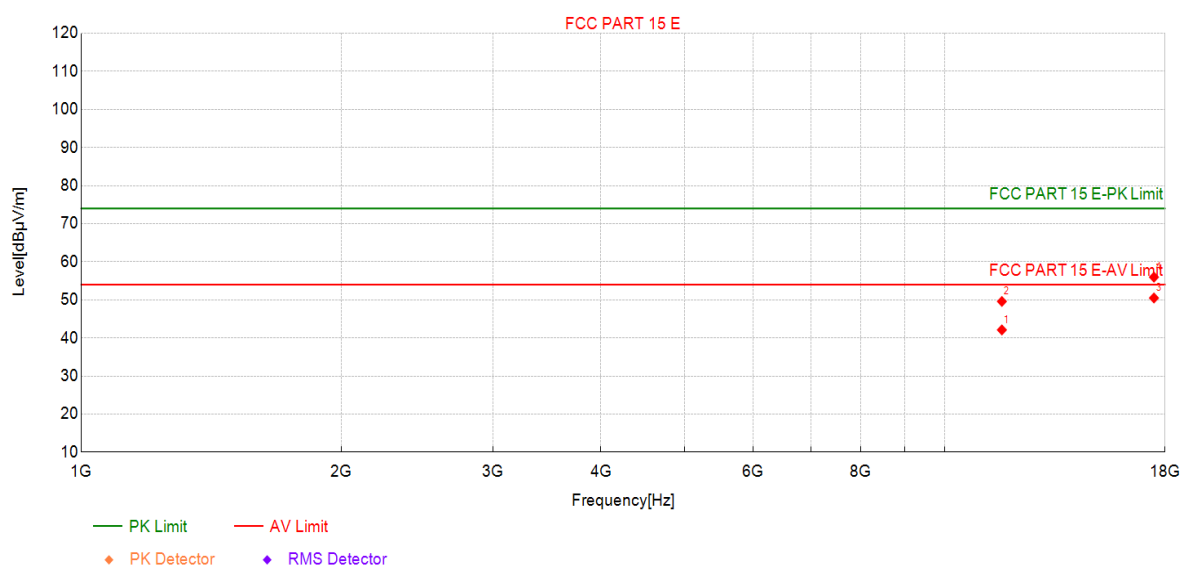

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	33.37	42.11	8.74	54.00	11.89	AV	Vertic	PASS
2	11650	40.85	49.59	8.74	74.00	24.41	PK	Vertic	PASS
3	17475	33.42	50.49	17.07	54.00	3.51	AV	Vertic	PASS
4	17475	38.90	55.97	17.07	74.00	18.03	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

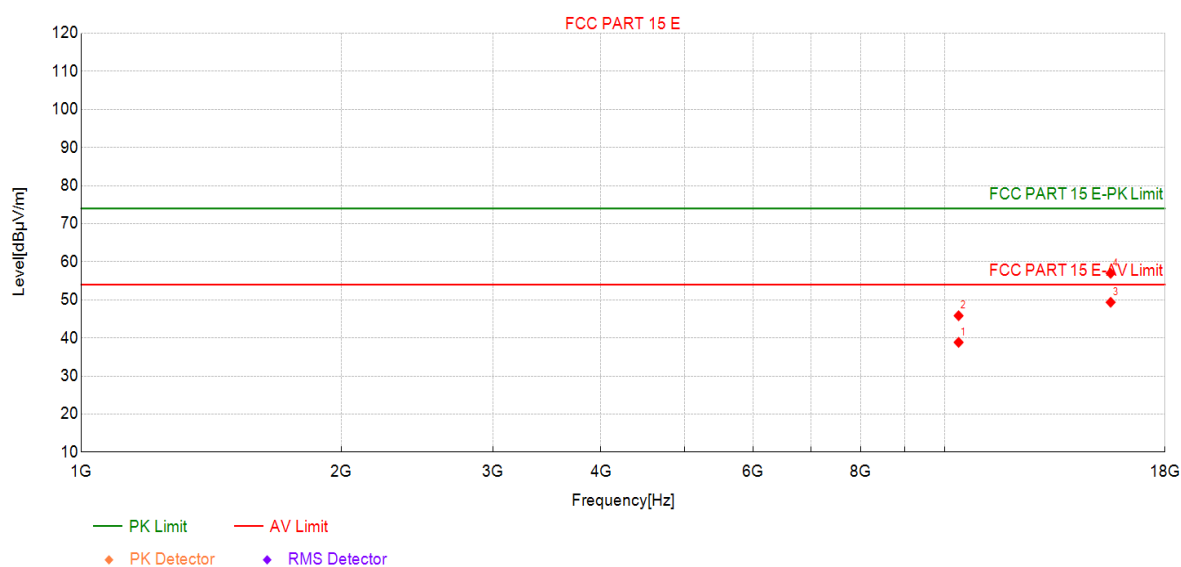

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	32.27	38.84	6.57	54.00	15.16	AV	Horizo	PASS
2	10380	39.26	45.83	6.57	74.00	28.17	PK	Horizo	PASS
3	15570	35.68	49.37	13.69	54.00	4.63	AV	Horizo	PASS
4	15570	43.29	56.98	13.69	74.00	17.02	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

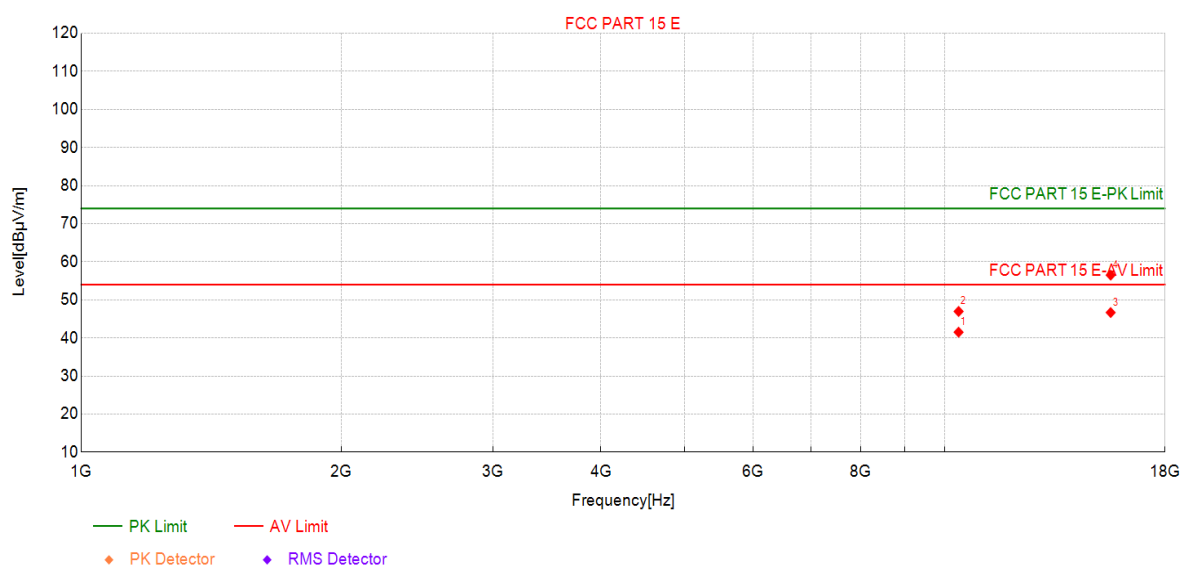

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	34.94	41.51	6.57	54.00	12.49	AV	Vertic	PASS
2	10380	40.39	46.96	6.57	74.00	27.04	PK	Vertic	PASS
3	15570	32.98	46.67	13.69	54.00	7.33	AV	Vertic	PASS
4	15570	42.81	56.50	13.69	74.00	17.50	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5230MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

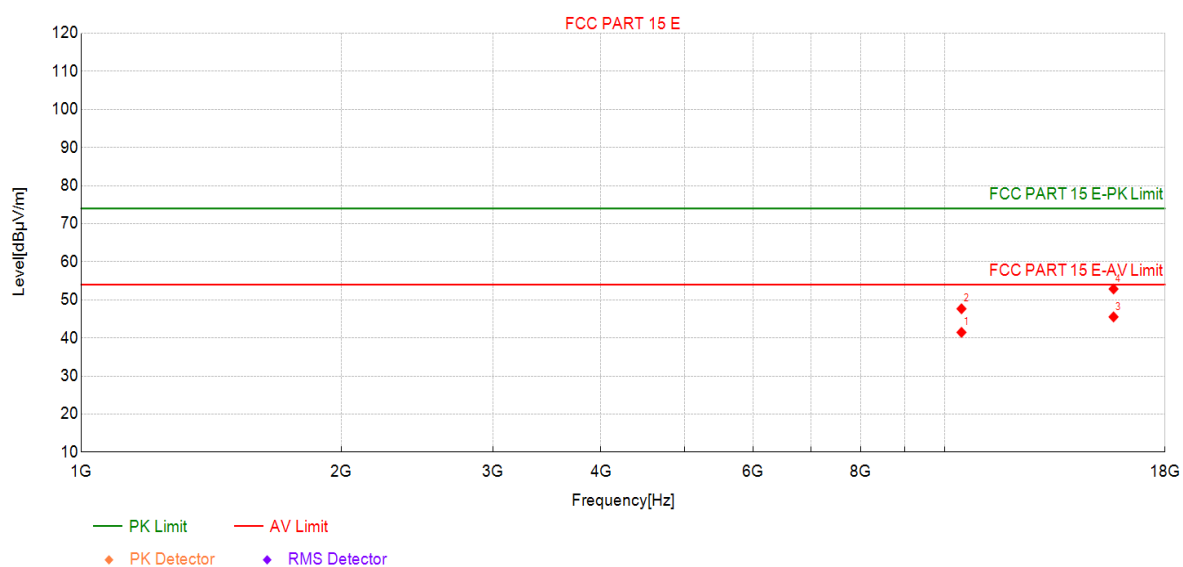

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	34.79	41.46	6.67	54.00	12.54	AV	Vertic	PASS
2	10460	40.99	47.66	6.67	74.00	26.34	PK	Vertic	PASS
3	15690	31.11	45.52	14.41	54.00	8.48	AV	Vertic	PASS
4	15690	38.45	52.86	14.41	74.00	21.14	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5230MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

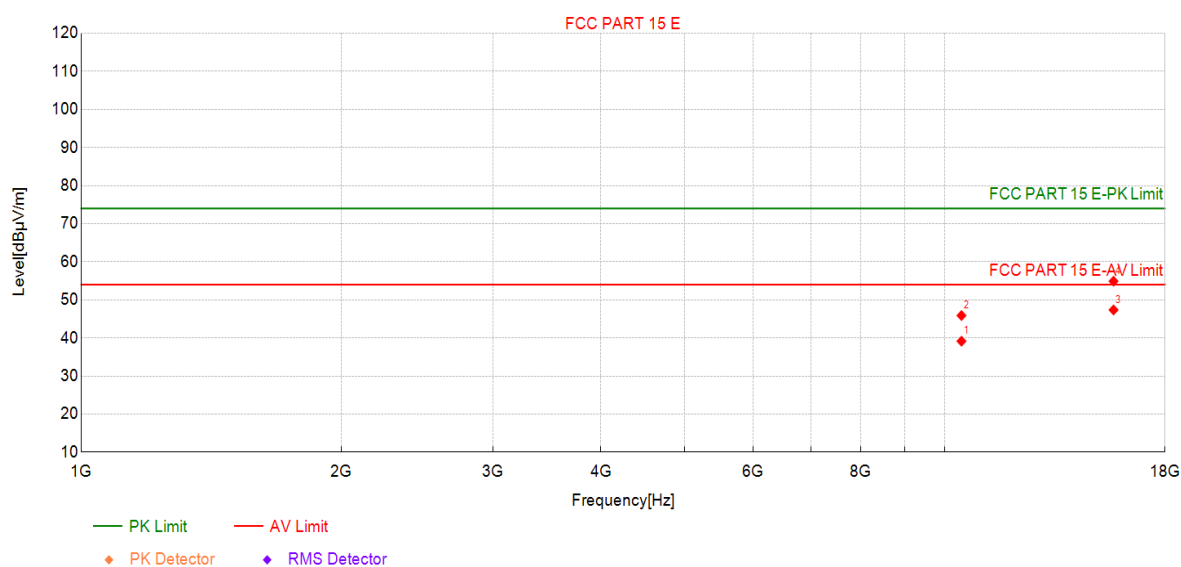

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	32.48	39.15	6.67	54.00	14.85	AV	Horizo	PASS
2	10460	39.21	45.88	6.67	74.00	28.12	PK	Horizo	PASS
3	15690	32.95	47.36	14.41	54.00	6.64	AV	Horizo	PASS
4	15690	40.49	54.90	14.41	74.00	19.10	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5270MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

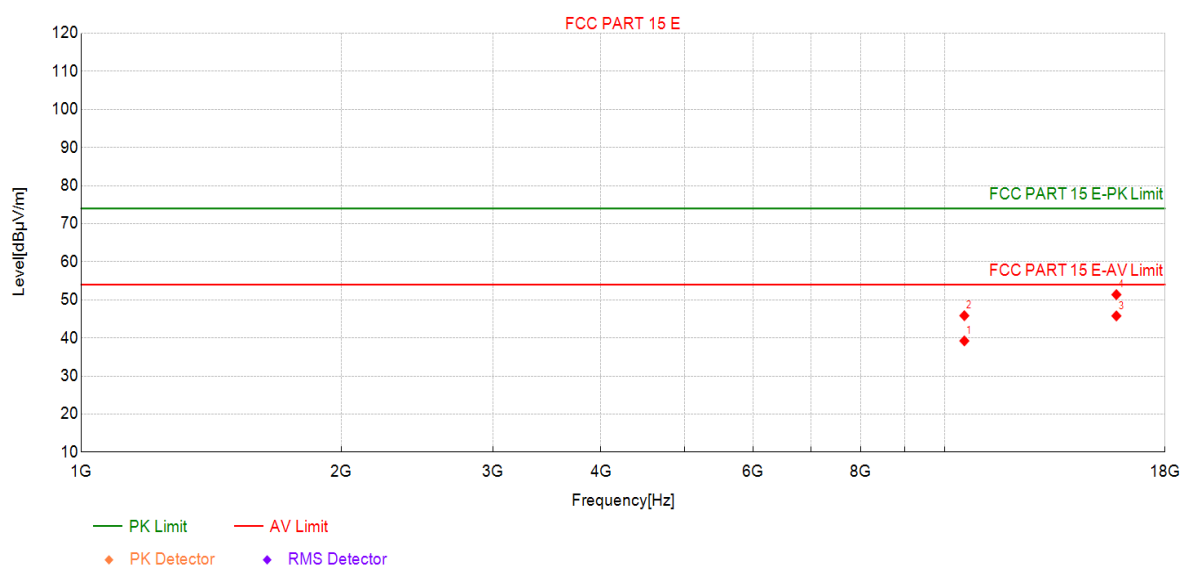

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	32.46	39.22	6.76	54.00	14.78	AV	Horizo	PASS
2	10540	39.09	45.85	6.76	74.00	28.15	PK	Horizo	PASS
3	15810	31.77	45.78	14.01	54.00	8.22	AV	Horizo	PASS
4	15810	37.37	51.38	14.01	74.00	22.62	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5270MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

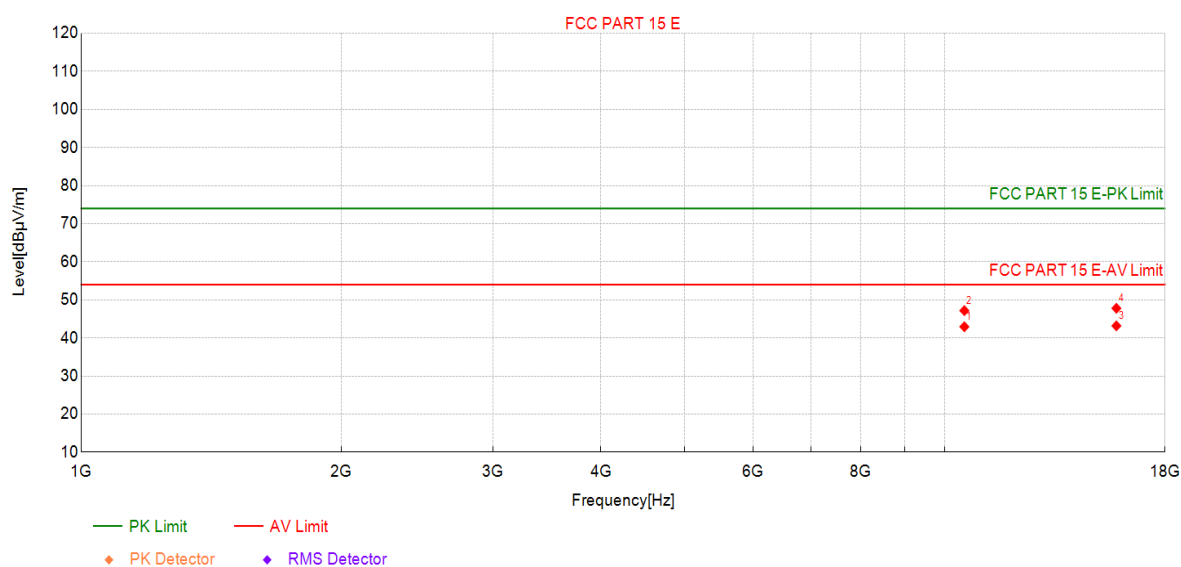

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	36.18	42.94	6.76	54.00	11.06	AV	Vertic	PASS
2	10540	40.42	47.18	6.76	74.00	26.82	PK	Vertic	PASS
3	15810	29.17	43.18	14.01	54.00	10.82	AV	Vertic	PASS
4	15810	33.78	47.79	14.01	74.00	26.21	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5310MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

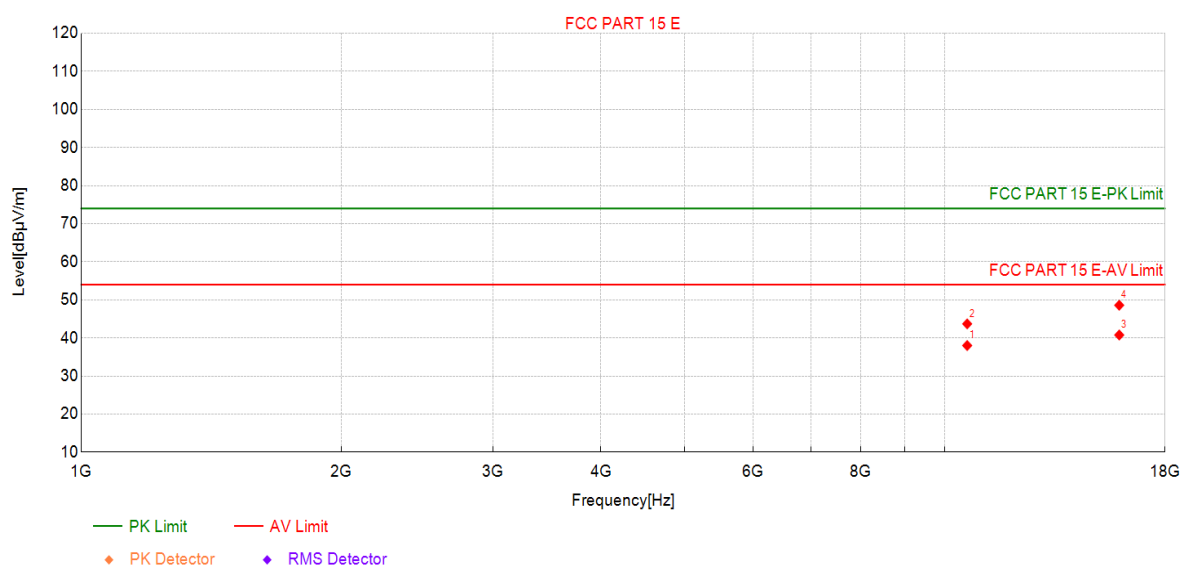

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	31.21	38.00	6.79	54.00	16.00	AV	Horizo	PASS
2	10620	36.91	43.70	6.79	74.00	30.30	PK	Horizo	PASS
3	15930	26.40	40.77	14.37	54.00	13.23	AV	Horizo	PASS
4	15930	34.22	48.59	14.37	74.00	25.41	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5310MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

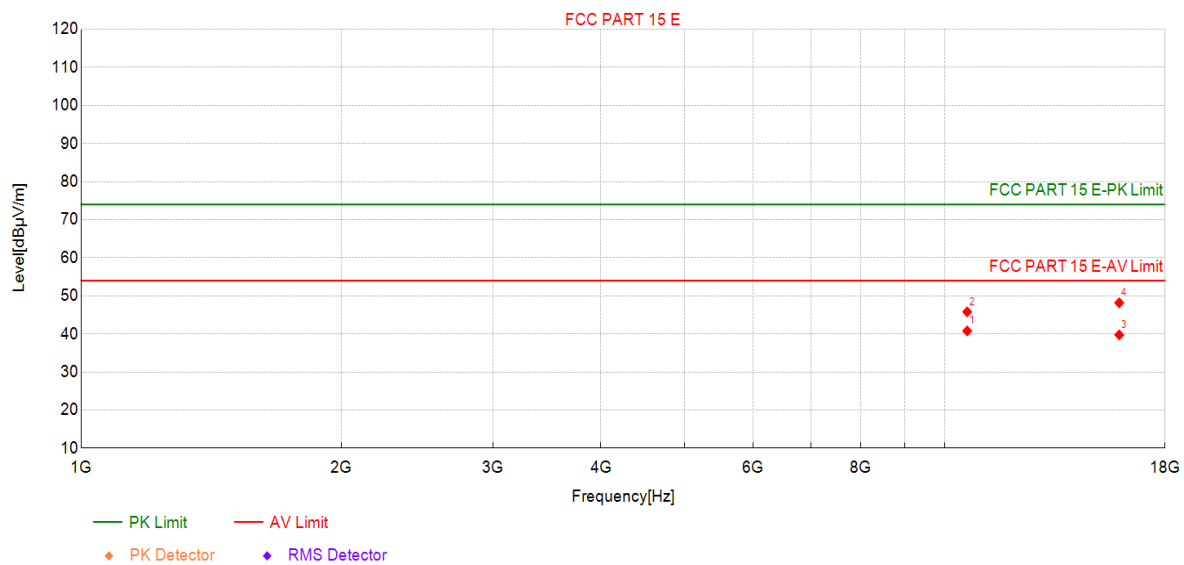

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	33.99	40.78	6.79	54.00	13.22	AV	Vertic	PASS
2	10620	39.01	45.80	6.79	74.00	28.20	PK	Vertic	PASS
3	15930	25.38	39.75	14.37	54.00	14.25	AV	Vertic	PASS
4	15930	33.80	48.17	14.37	74.00	25.83	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5510MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

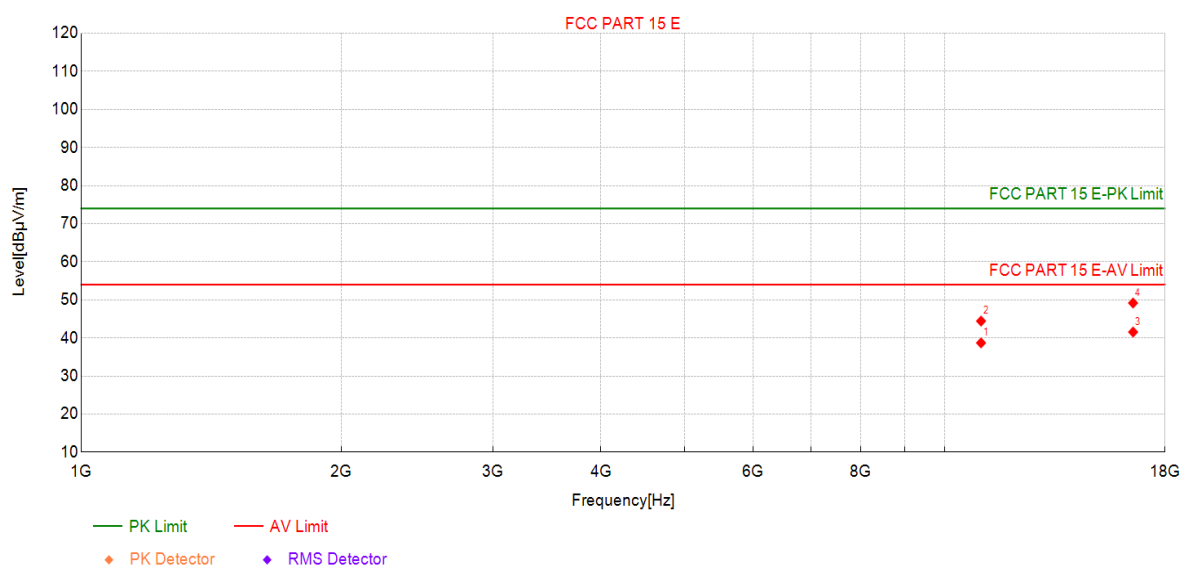

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	31.45	38.70	7.25	54.00	15.30	AV	Horizo	PASS
2	11020	37.18	44.43	7.25	74.00	29.57	PK	Horizo	PASS
3	16530	26.54	41.55	15.01	54.00	12.45	AV	Horizo	PASS
4	16530	34.16	49.17	15.01	74.00	24.83	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5510MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

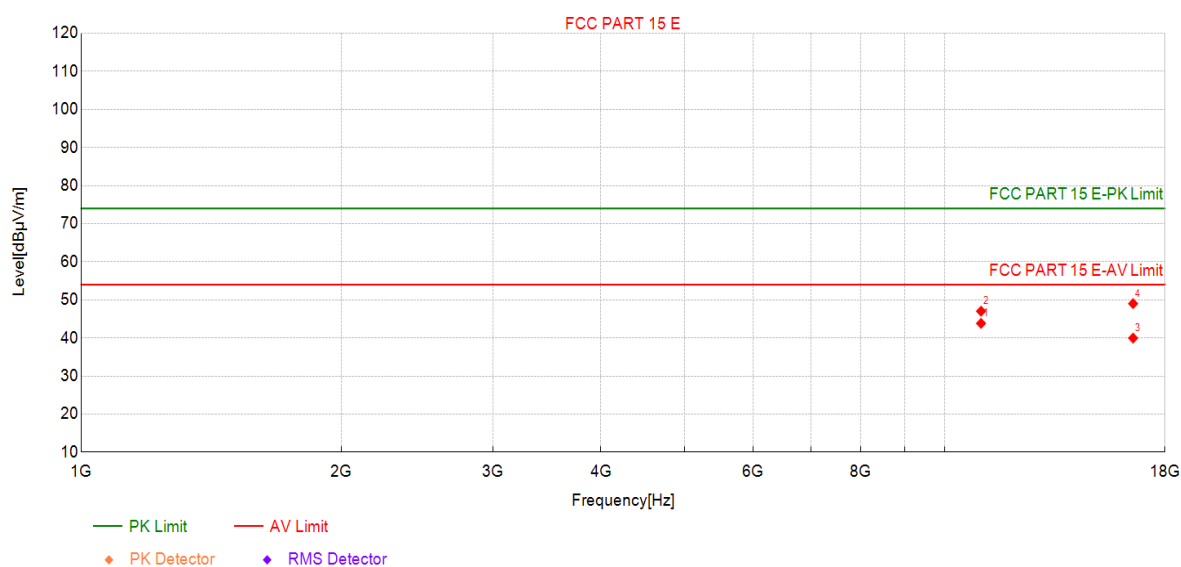

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	36.57	43.82	7.25	54.00	10.18	AV	Vertic	PASS
2	11020	39.77	47.02	7.25	74.00	26.98	PK	Vertic	PASS
3	16530	24.96	39.97	15.01	54.00	14.03	AV	Vertic	PASS
4	16530	34.00	49.01	15.01	74.00	24.99	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5550MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

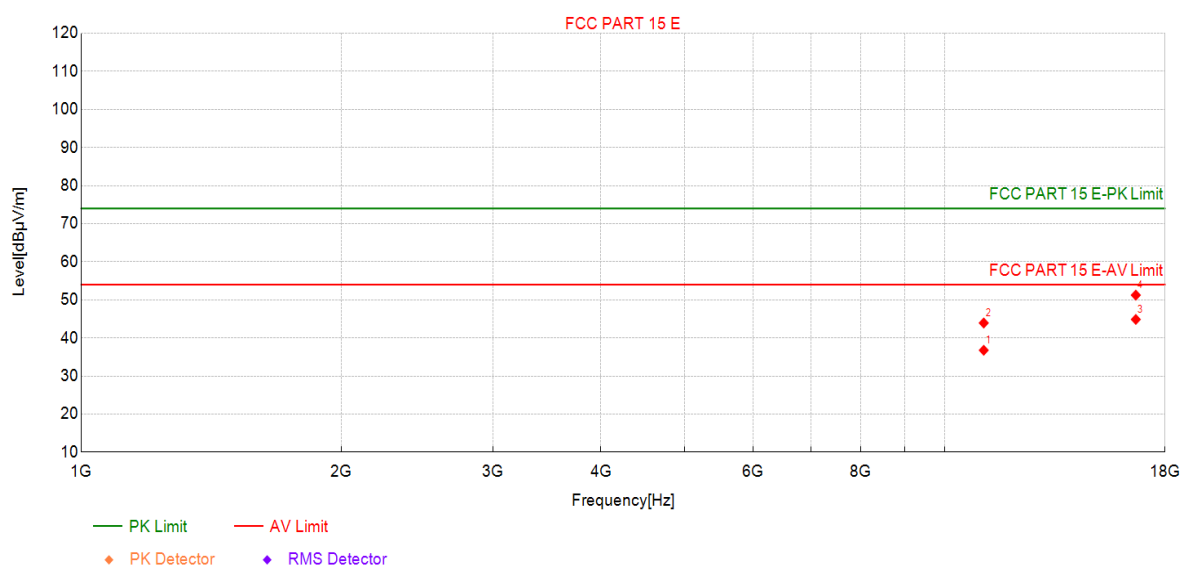

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	30.10	36.76	6.66	54.00	17.24	AV	Horizo	PASS
2	11100	37.26	43.92	6.66	74.00	30.08	PK	Horizo	PASS
3	16650	30.17	44.86	14.69	54.00	9.14	AV	Horizo	PASS
4	16650	36.56	51.25	14.69	74.00	22.75	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5550MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

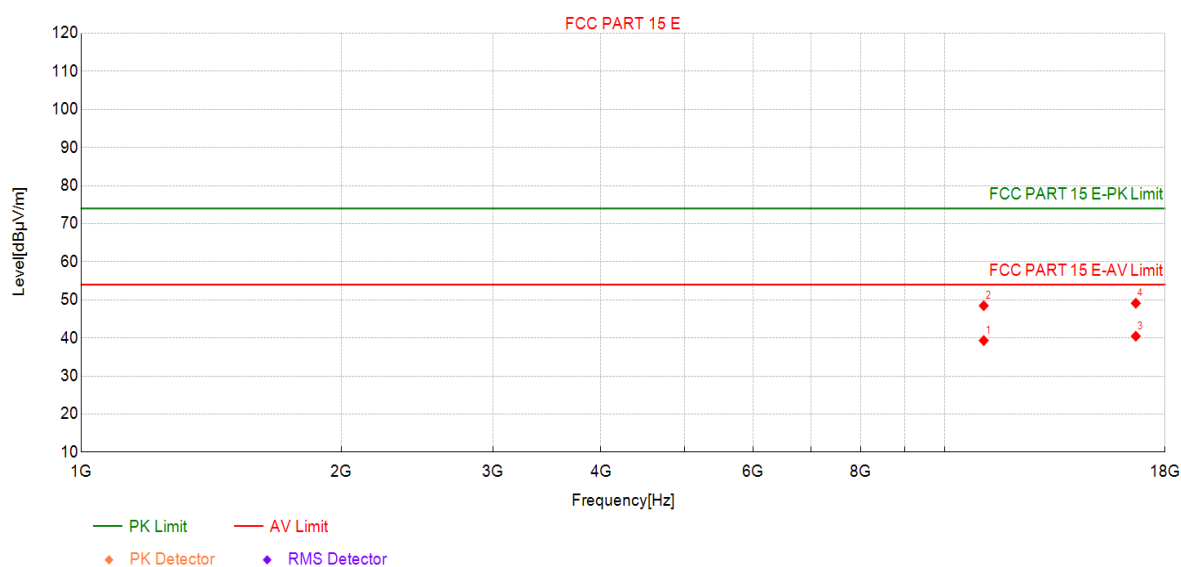

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	32.66	39.32	6.66	54.00	14.68	AV	Vertic	PASS
2	11100	41.81	48.47	6.66	74.00	25.53	PK	Vertic	PASS
3	16650	25.77	40.46	14.69	54.00	13.54	AV	Vertic	PASS
4	16650	34.42	49.11	14.69	74.00	24.89	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5670MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

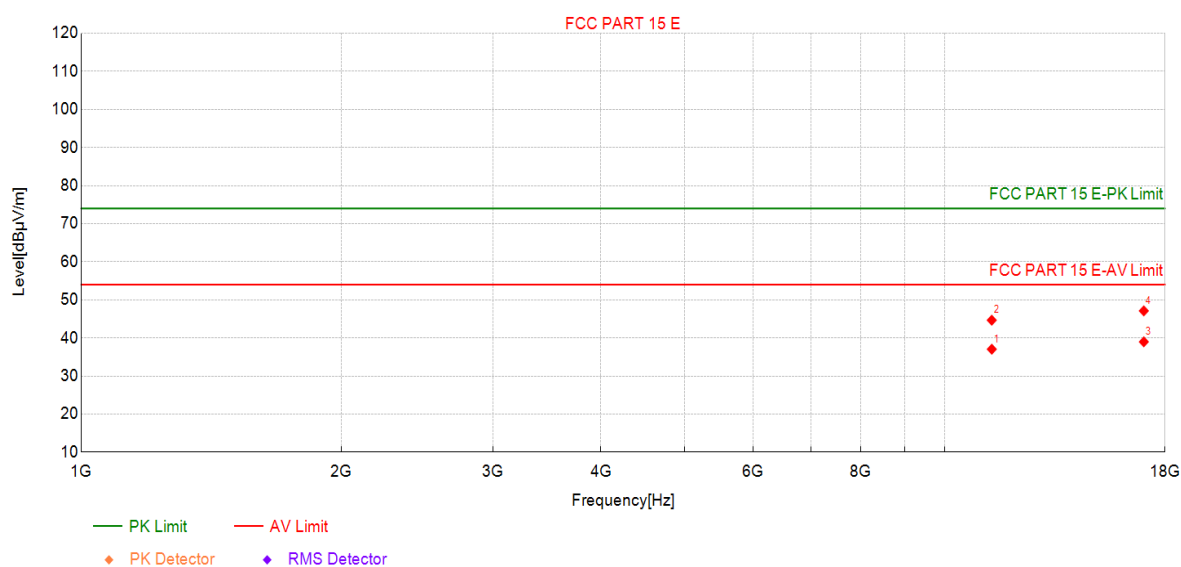

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	29.18	37.04	7.86	54.00	16.96	AV	Horizo	PASS
2	11340	36.80	44.66	7.86	74.00	29.34	PK	Horizo	PASS
3	17010	22.94	38.98	16.04	54.00	15.02	AV	Horizo	PASS
4	17010	31.07	47.11	16.04	74.00	26.89	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5670MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

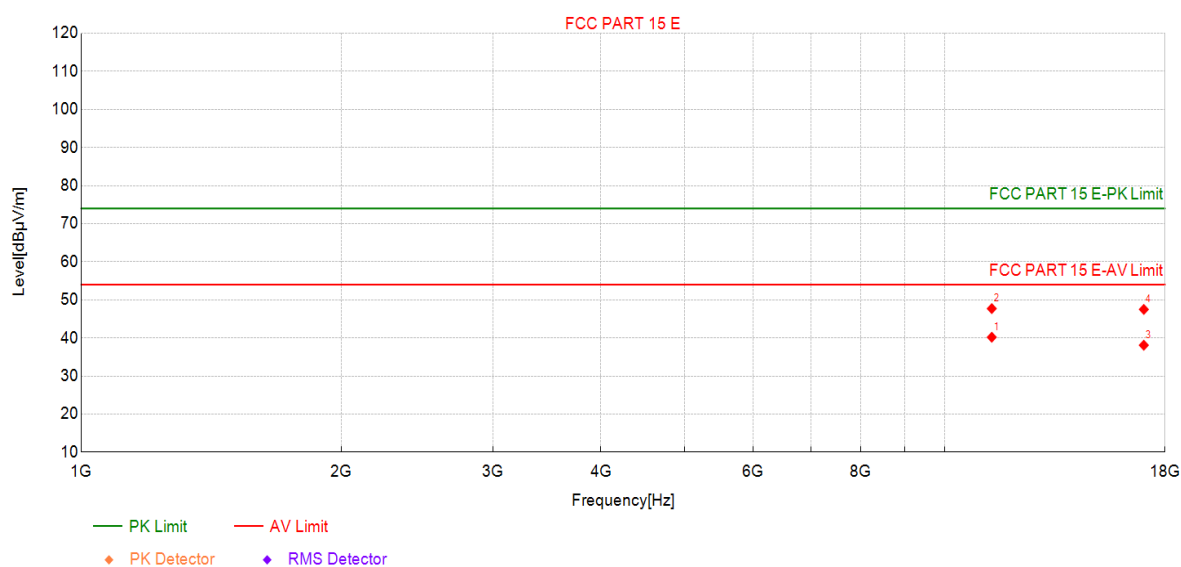

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	32.33	40.19	7.86	54.00	13.81	AV	Vertic	PASS
2	11340	39.85	47.71	7.86	74.00	26.29	PK	Vertic	PASS
3	17010	22.05	38.09	16.04	54.00	15.91	AV	Vertic	PASS
4	17010	31.45	47.49	16.04	74.00	26.51	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

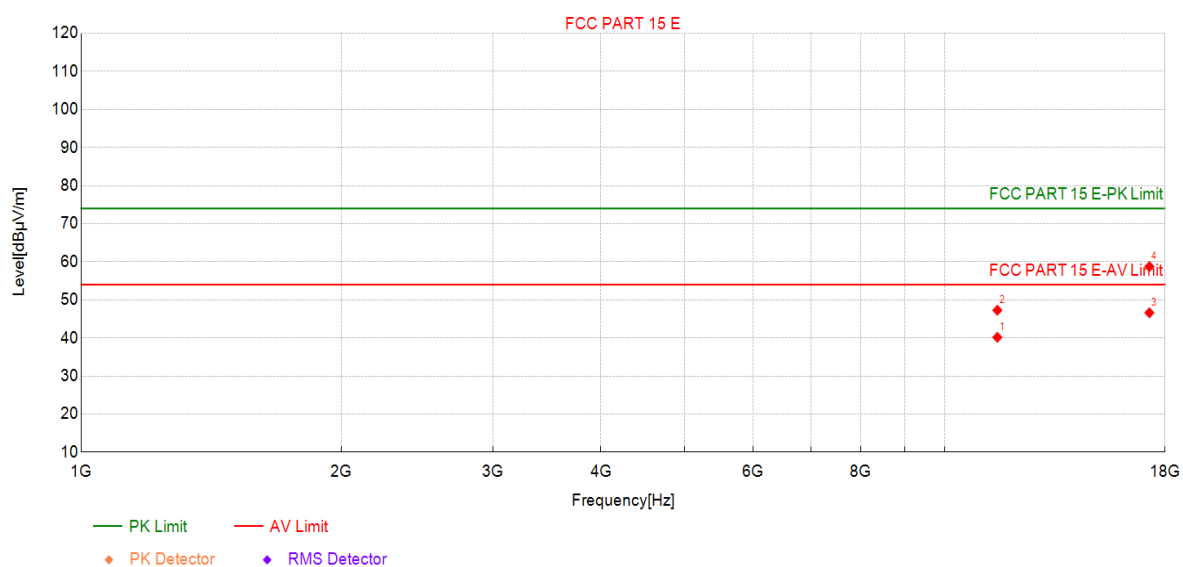

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	31.69	40.17	8.48	54.00	13.83	AV	Horizo	PASS
2	11510	38.81	47.29	8.48	74.00	26.71	PK	Horizo	PASS
3	17265	31.10	46.61	15.51	54.00	7.39	AV	Horizo	PASS
4	17265	43.24	58.75	15.51	74.00	15.25	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

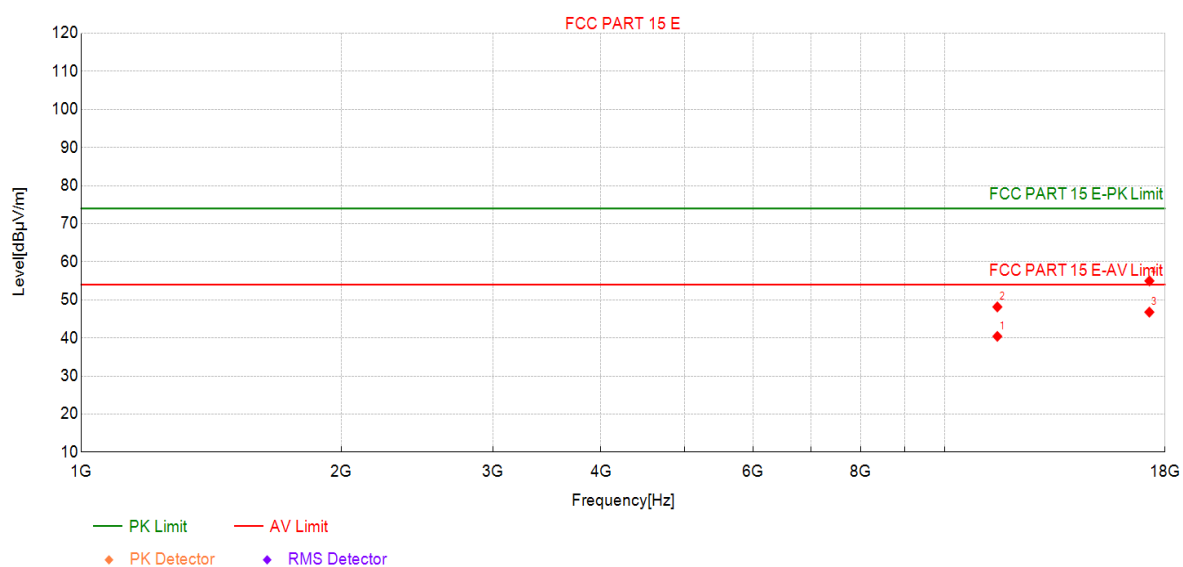

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	31.93	40.41	8.48	54.00	13.59	AV	Vertic	PASS
2	11510	39.67	48.15	8.48	74.00	25.85	PK	Vertic	PASS
3	17265	31.27	46.78	15.51	54.00	7.22	AV	Vertic	PASS
4	17265	39.46	54.97	15.51	74.00	19.03	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

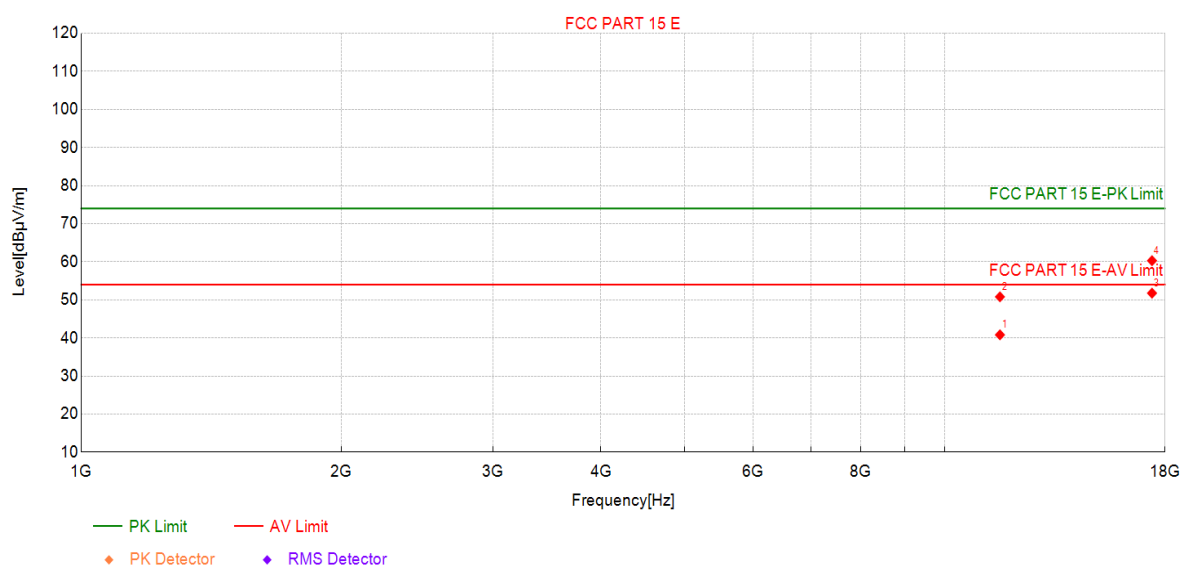

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	32.08	40.82	8.74	54.00	13.18	AV	Horizo	PASS
2	11590	42.06	50.80	8.74	74.00	23.20	PK	Horizo	PASS
3	17385	35.19	51.77	16.58	54.00	2.23	AV	Horizo	PASS
4	17385	43.72	60.30	16.58	74.00	13.70	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

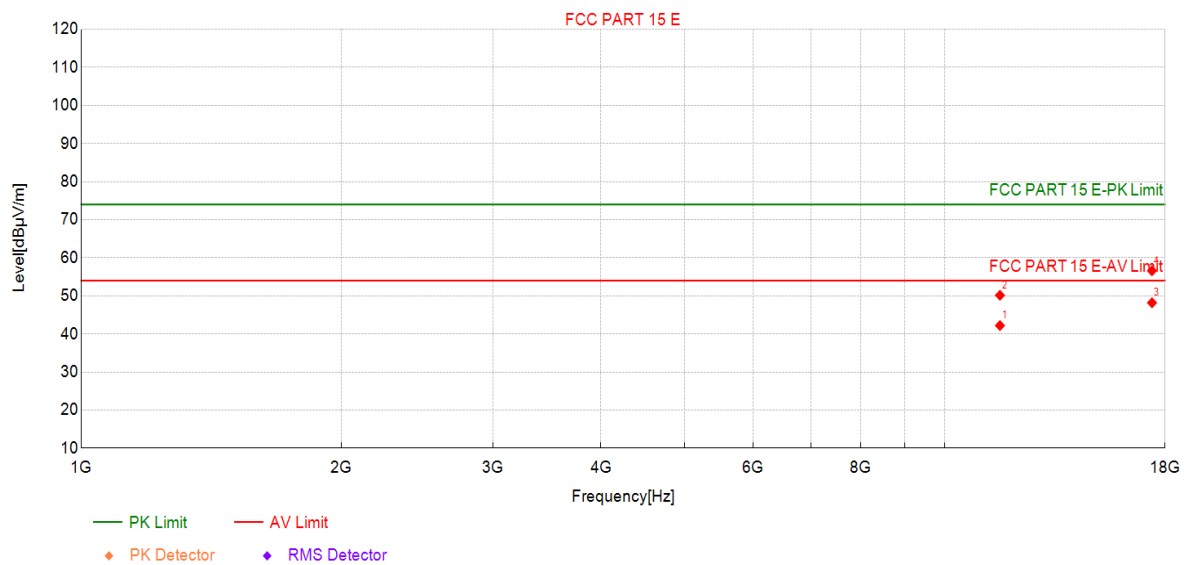

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	33.45	42.19	8.74	54.00	11.81	AV	Vertic	PASS
2	11590	41.41	50.15	8.74	74.00	23.85	PK	Vertic	PASS
3	17385	31.61	48.19	16.58	54.00	5.81	AV	Vertic	PASS
4	17385	40.01	56.59	16.58	74.00	17.41	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

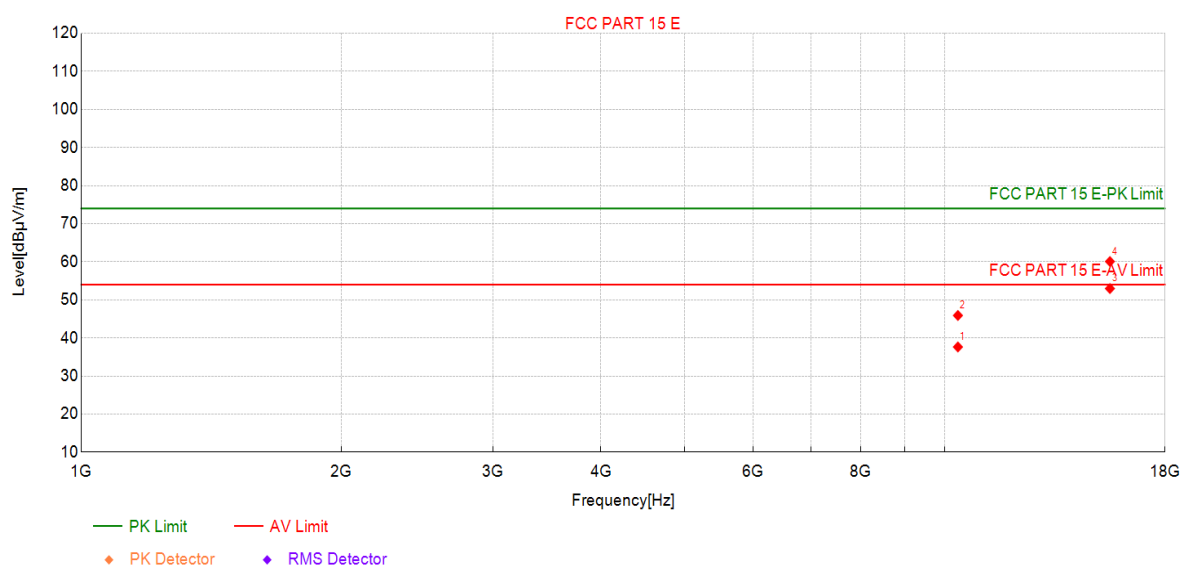

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	31.05	37.63	6.58	54.00	16.37	AV	Horizo	PASS
2	10360	39.32	45.90	6.58	74.00	28.10	PK	Horizo	PASS
3	15540	39.08	52.98	13.90	54.00	1.02	AV	Horizo	PASS
4	15540	46.17	60.07	13.90	74.00	13.93	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

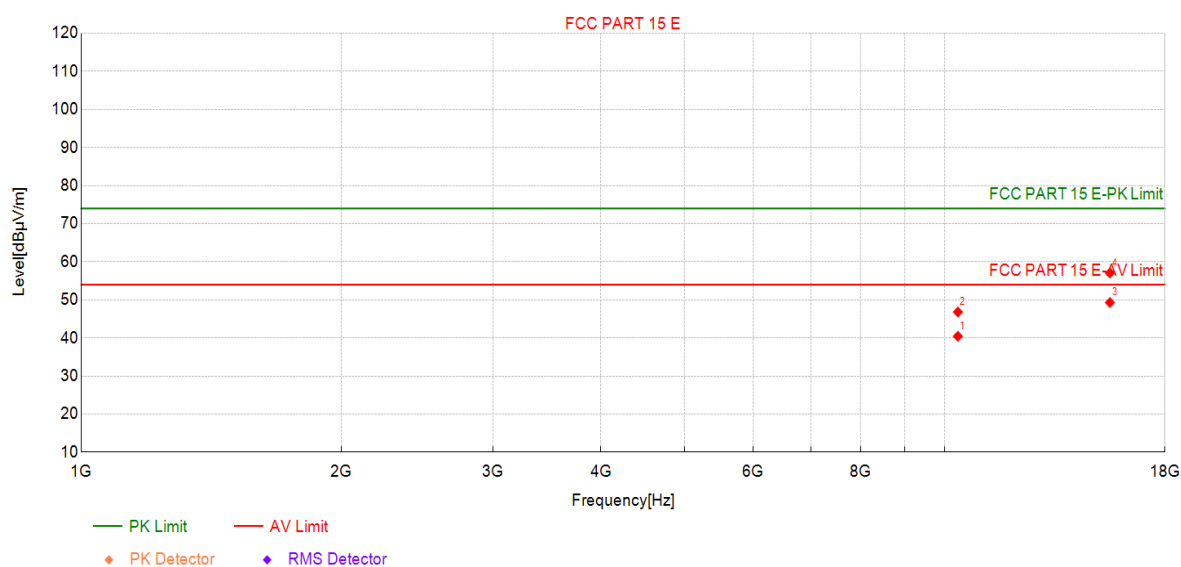

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	33.86	40.44	6.58	54.00	13.56	AV	Vertic	PASS
2	10360	40.23	46.81	6.58	74.00	27.19	PK	Vertic	PASS
3	15540	35.40	49.30	13.90	54.00	4.70	AV	Vertic	PASS
4	15540	43.16	57.06	13.90	74.00	16.94	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5220MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

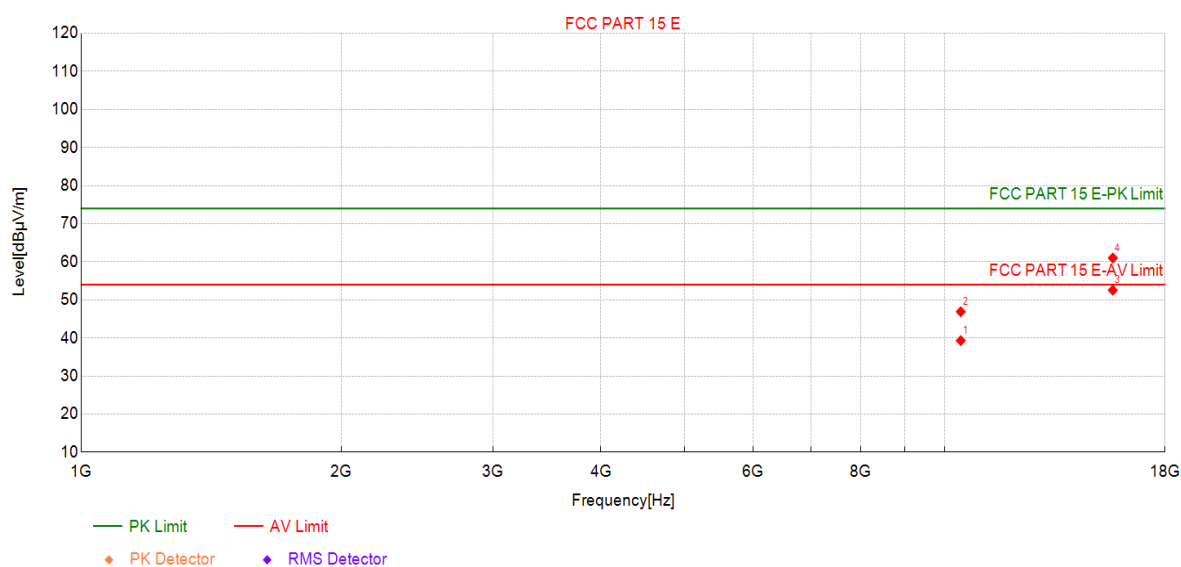

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	32.66	39.30	6.64	54.00	14.70	AV	Horizo	PASS
2	10440	40.25	46.89	6.64	74.00	27.11	PK	Horizo	PASS
3	15660	38.47	52.56	14.09	54.00	1.44	AV	Horizo	PASS
4	15660	46.91	61.00	14.09	74.00	13.00	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5220MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

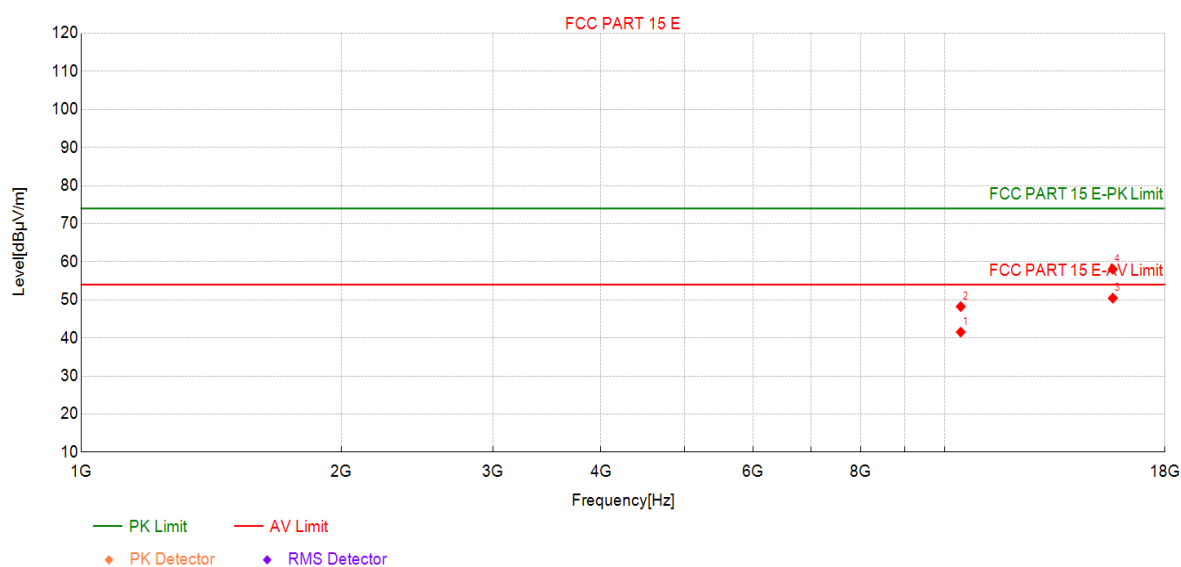

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	34.89	41.53	6.64	54.00	12.47	AV	Vertic	PASS
2	10440	41.60	48.24	6.64	74.00	25.76	PK	Vertic	PASS
3	15660	36.36	50.45	14.09	54.00	3.55	AV	Vertic	PASS
4	15660	43.96	58.05	14.09	74.00	15.95	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5240MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

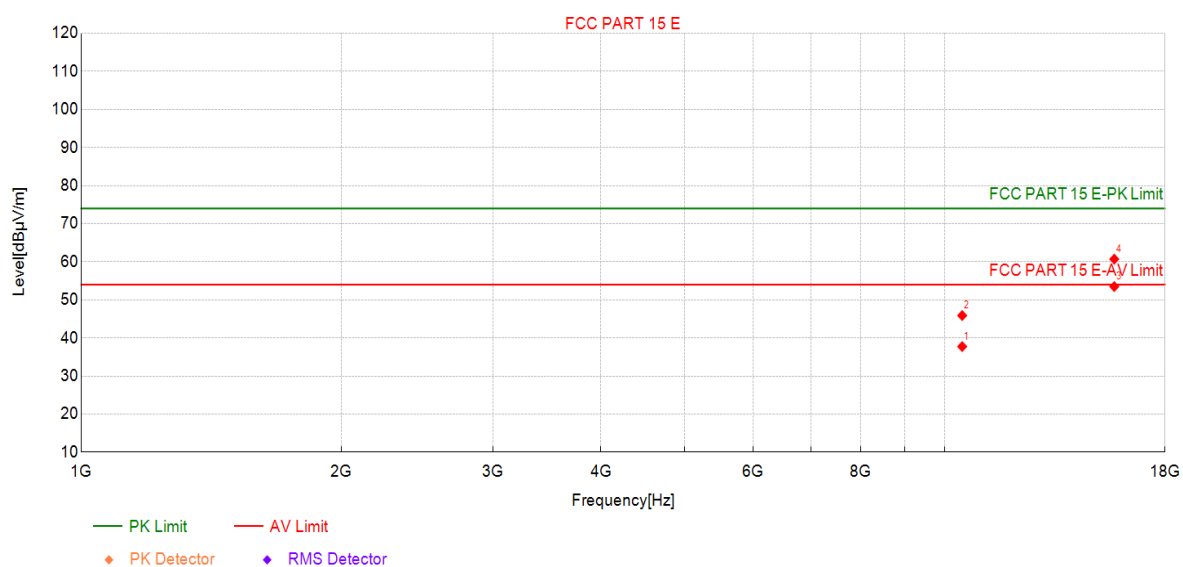

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	31.02	37.73	6.71	54.00	16.27	AV	Horizo	PASS
2	10480	39.17	45.88	6.71	74.00	28.12	PK	Horizo	PASS
3	15720	39.08	53.49	14.41	54.00	0.51	AV	Horizo	PASS
4	15720	46.28	60.69	14.41	74.00	13.31	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5240MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

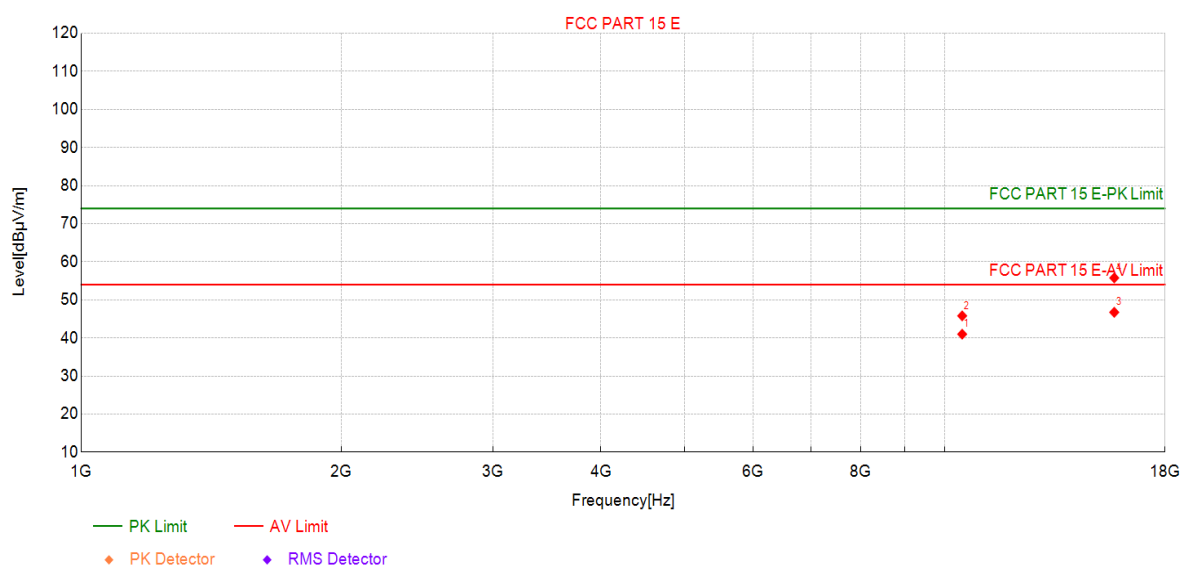

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	34.27	40.98	6.71	54.00	13.02	AV	Vertic	PASS
2	10480	39.09	45.80	6.71	74.00	28.20	PK	Vertic	PASS
3	15720	32.32	46.73	14.41	54.00	7.27	AV	Vertic	PASS
4	15720	41.36	55.77	14.41	74.00	18.23	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5260MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

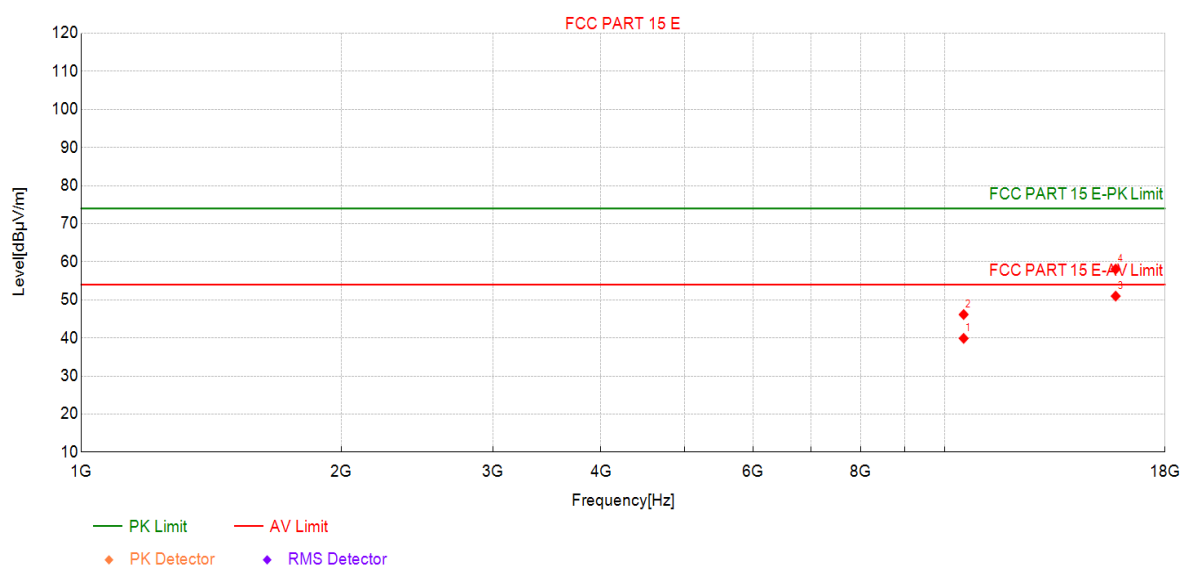

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	33.12	39.88	6.76	54.00	14.12	AV	Horizo	PASS
2	10520	39.39	46.15	6.76	74.00	27.85	PK	Horizo	PASS
3	15780	36.90	50.99	14.09	54.00	3.01	AV	Horizo	PASS
4	15780	44.00	58.09	14.09	74.00	15.91	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5260MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

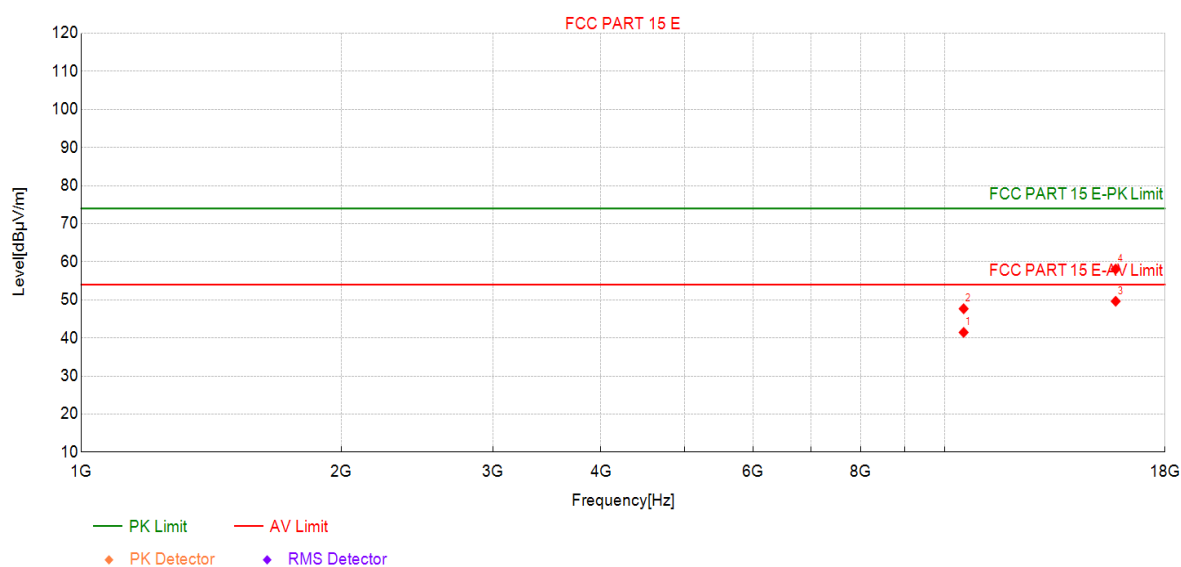

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	34.69	41.45	6.76	54.00	12.55	AV	Vertic	PASS
2	10520	40.90	47.66	6.76	74.00	26.34	PK	Vertic	PASS
3	15780	35.54	49.63	14.09	54.00	4.37	AV	Vertic	PASS
4	15780	44.00	58.09	14.09	74.00	15.91	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5300MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

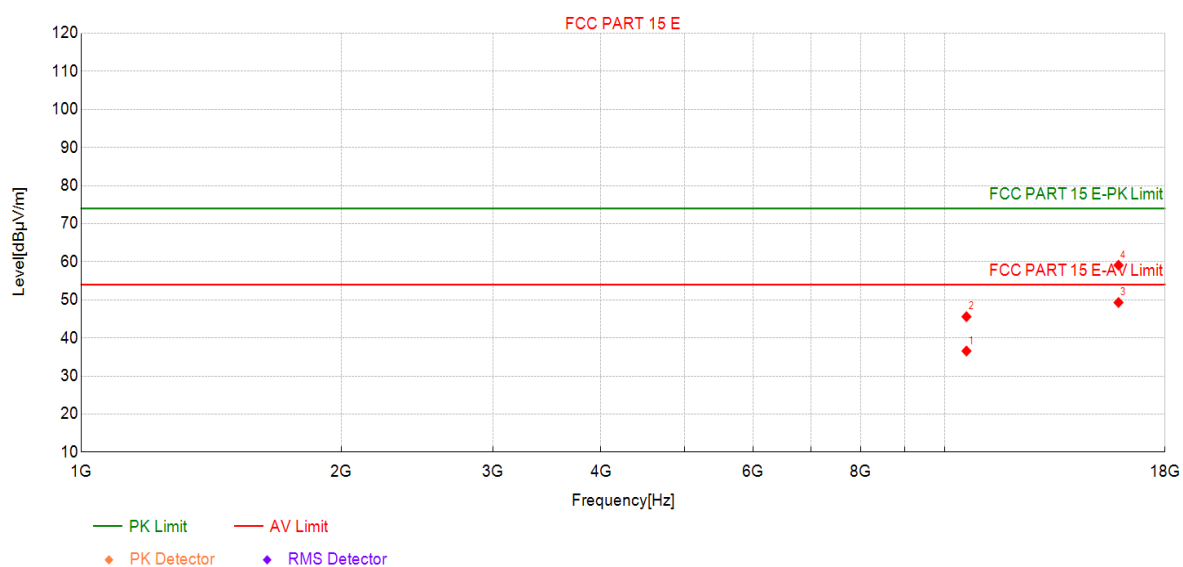

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	29.79	36.57	6.78	54.00	17.43	AV	Horizo	PASS
2	10600	38.81	45.59	6.78	74.00	28.41	PK	Horizo	PASS
3	15900	35.19	49.31	14.12	54.00	4.69	AV	Horizo	PASS
4	15900	44.97	59.09	14.12	74.00	14.91	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5300MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

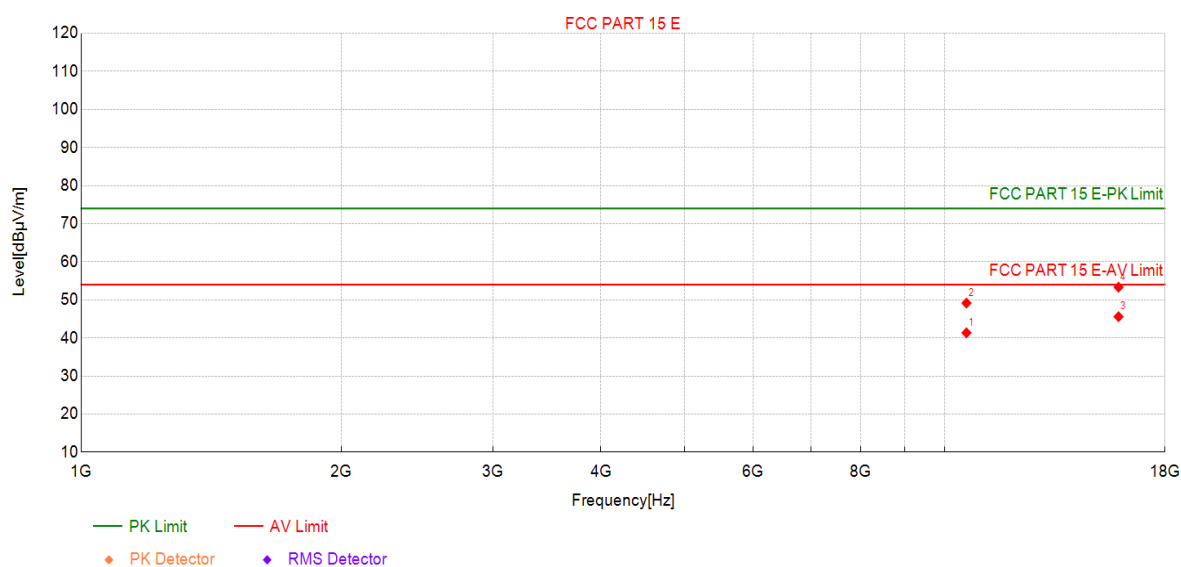

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	34.56	41.34	6.78	54.00	12.66	AV	Vertic	PASS
2	10600	42.37	49.15	6.78	74.00	24.85	PK	Vertic	PASS
3	15900	31.46	45.58	14.12	54.00	8.42	AV	Vertic	PASS
4	15900	39.21	53.33	14.12	74.00	20.67	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

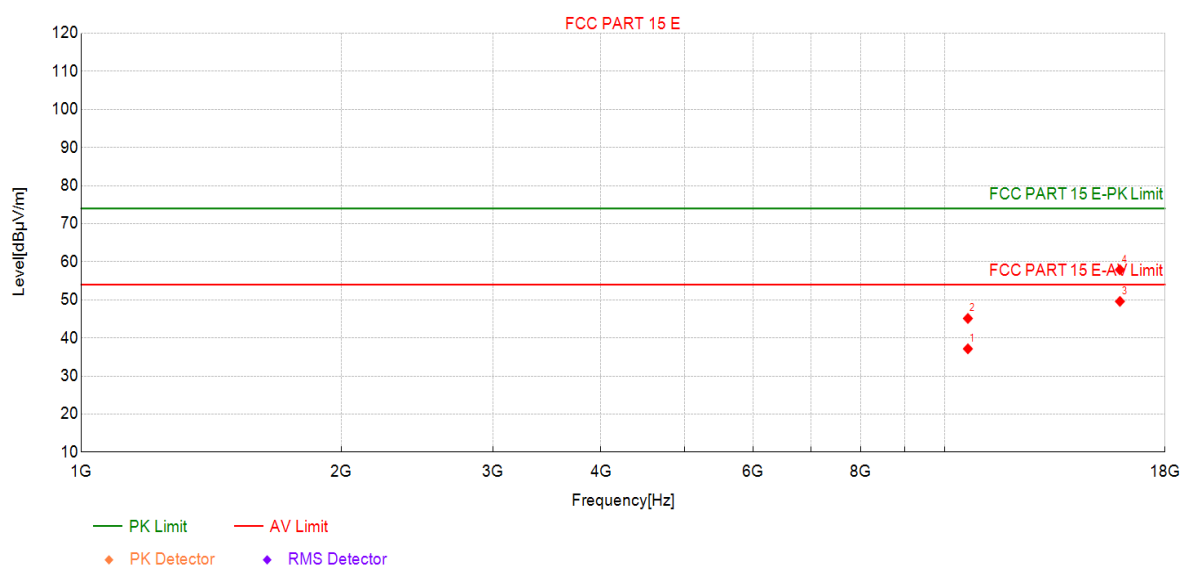

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	30.34	37.14	6.80	54.00	16.86	AV	Horizo	PASS
2	10640	38.32	45.12	6.80	74.00	28.88	PK	Horizo	PASS
3	15960	34.97	49.60	14.63	54.00	4.40	AV	Horizo	PASS
4	15960	43.27	57.90	14.63	74.00	16.10	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

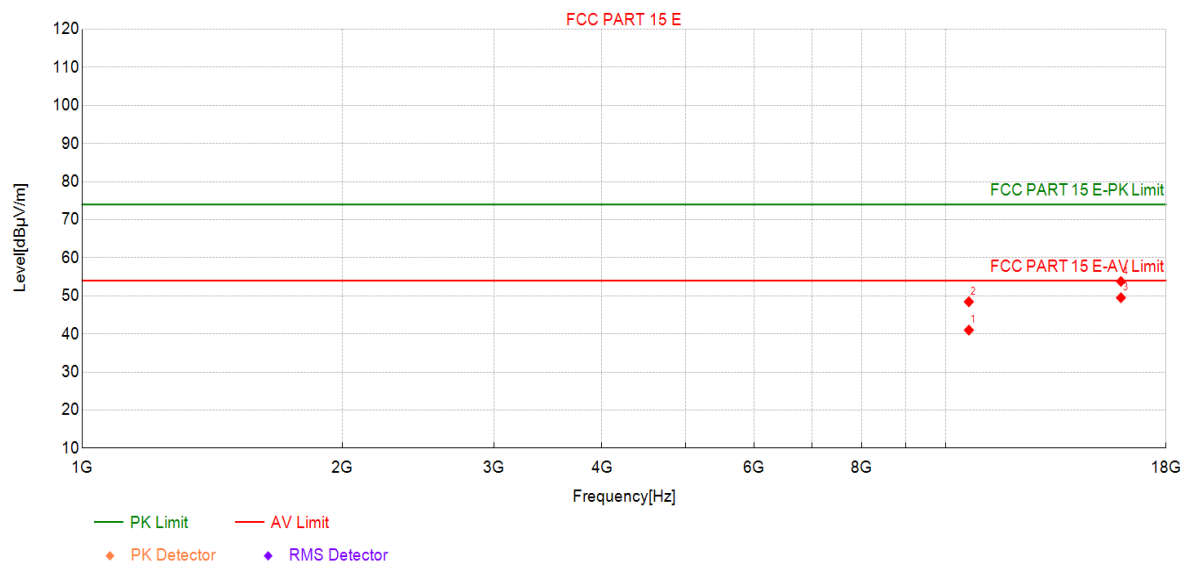

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	34.20	41.00	6.80	54.00	13.00	AV	Vertic	PASS
2	10640	41.65	48.45	6.80	74.00	25.55	PK	Vertic	PASS
3	15960	34.88	49.51	14.63	54.00	4.49	AV	Vertic	PASS
4	15960	39.16	53.79	14.63	74.00	20.21	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5500MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

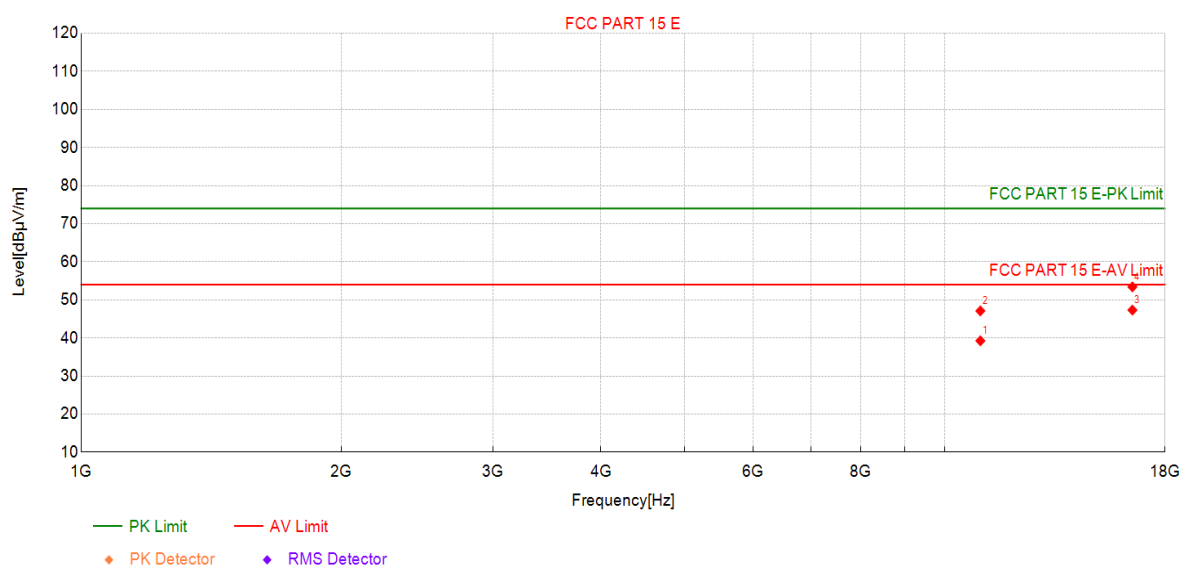

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	31.85	39.25	7.40	54.00	14.75	AV	Horizo	PASS
2	11000	39.70	47.10	7.40	74.00	26.90	PK	Horizo	PASS
3	16500	32.21	47.32	15.11	54.00	6.68	AV	Horizo	PASS
4	16500	38.30	53.41	15.11	74.00	20.59	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5500MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

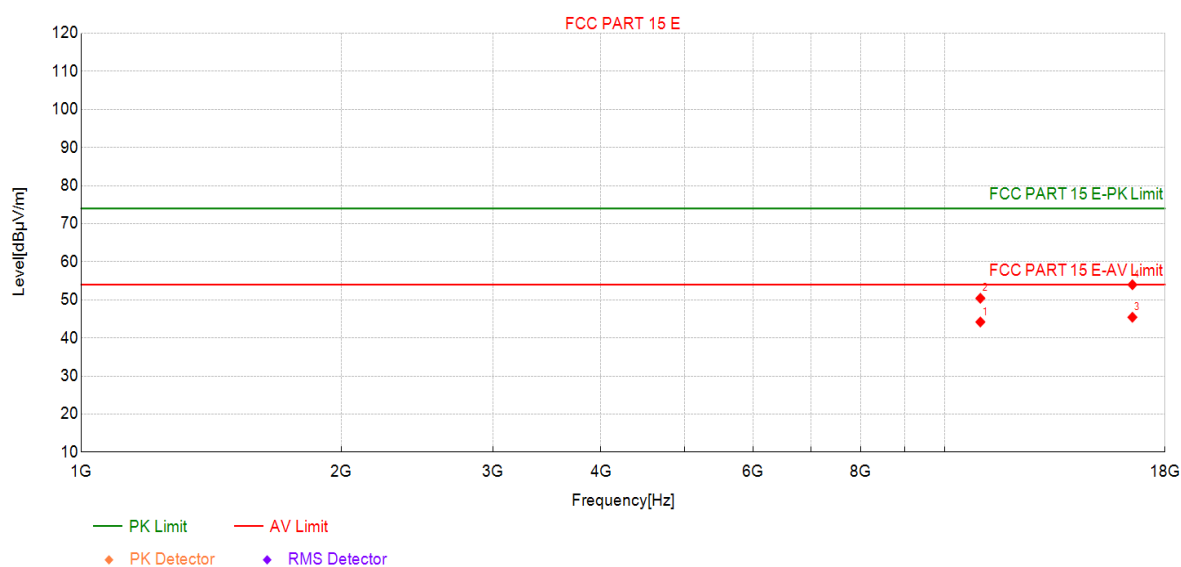

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	36.79	44.19	7.40	54.00	9.81	AV	Vertic	PASS
2	11000	43.02	50.42	7.40	74.00	23.58	PK	Vertic	PASS
3	16500	30.32	45.43	15.11	54.00	8.57	AV	Vertic	PASS
4	16500	38.86	53.97	15.11	74.00	20.03	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5580MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

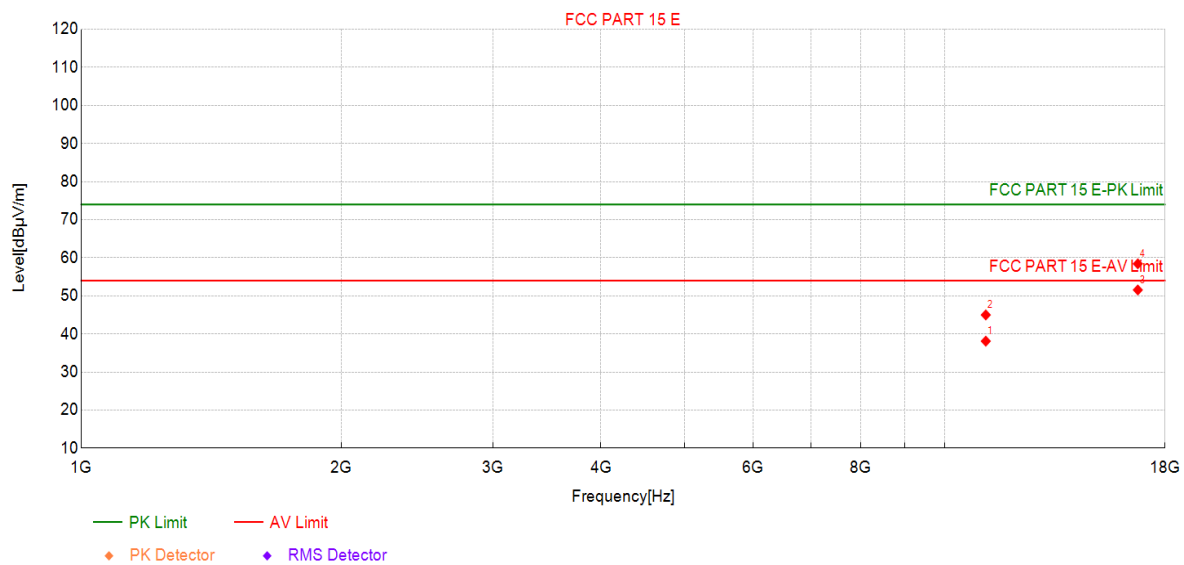

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	30.81	38.10	7.29	54.00	15.90	AV	Horizo	PASS
2	11160	37.70	44.99	7.29	74.00	29.01	PK	Horizo	PASS
3	16740	36.93	51.55	14.62	54.00	2.45	AV	Horizo	PASS
4	16740	43.81	58.43	14.62	74.00	15.57	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5580MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

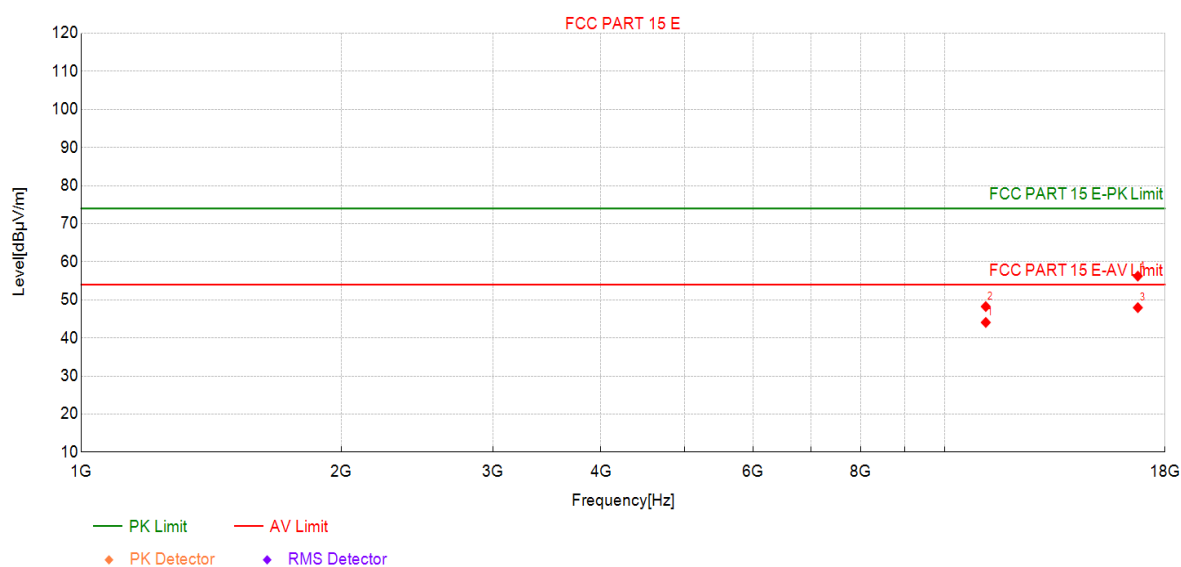

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	36.78	44.07	7.29	54.00	9.93	AV	Vertic	PASS
2	11160	40.95	48.24	7.29	74.00	25.76	PK	Vertic	PASS
3	16740	33.34	47.96	14.62	54.00	6.04	AV	Vertic	PASS
4	16740	41.62	56.24	14.62	74.00	17.76	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5700MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

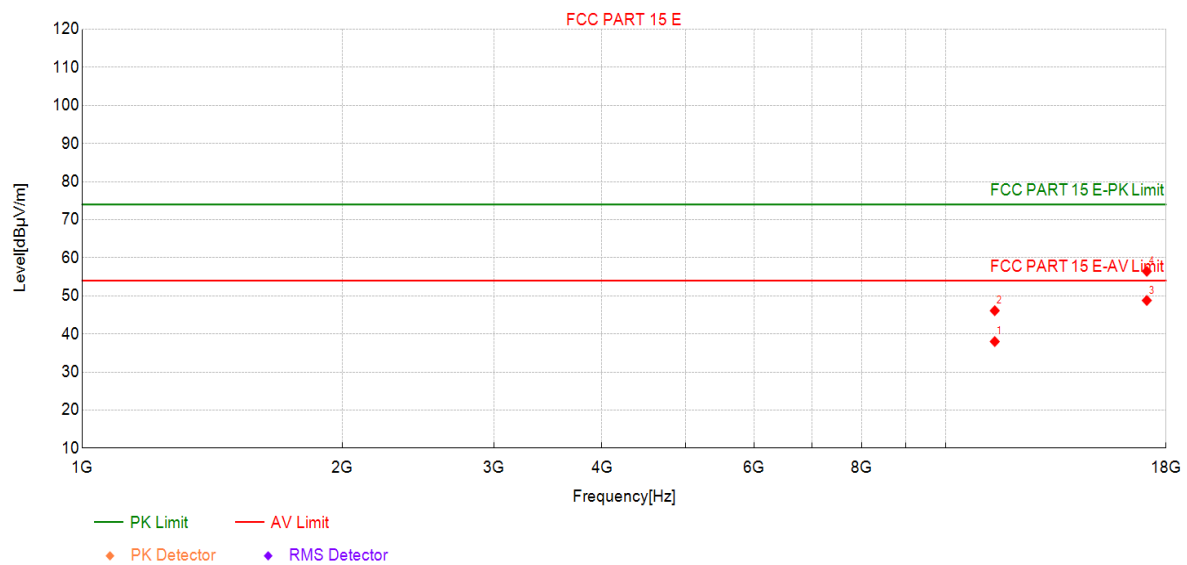

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	30.17	38.00	7.83	54.00	16.00	AV	Horizo	PASS
2	11400	38.28	46.11	7.83	74.00	27.89	PK	Horizo	PASS
3	17100	32.98	48.80	15.82	54.00	5.20	AV	Horizo	PASS
4	17100	40.63	56.45	15.82	74.00	17.55	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5700MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

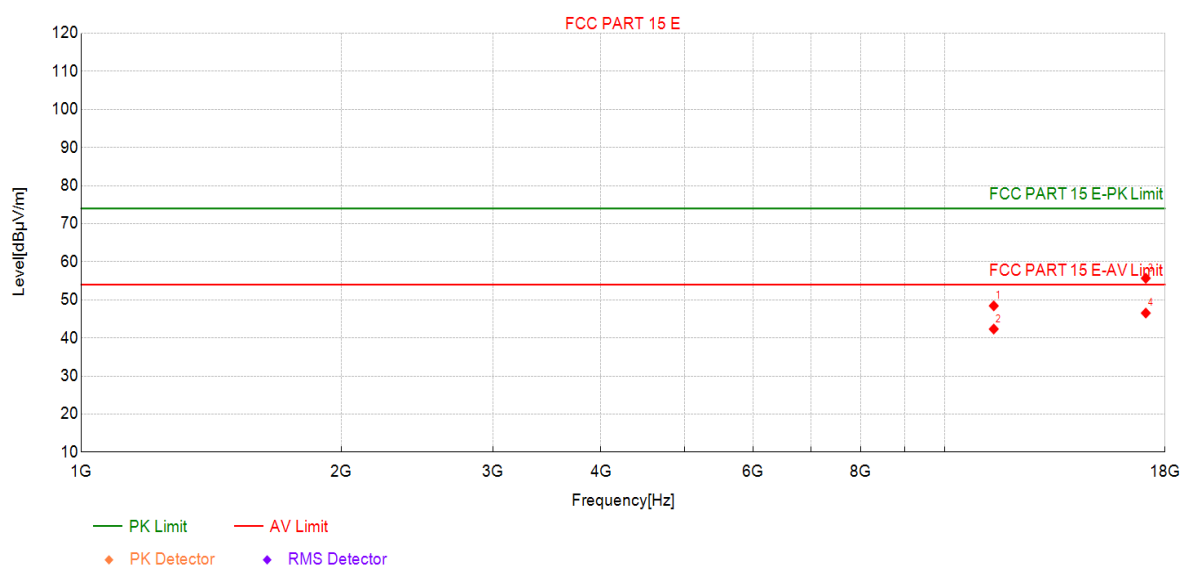

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	40.60	48.43	7.83	74.00	25.57	PK	Vertic	PASS
2	11400	34.50	42.33	7.83	54.00	11.67	AV	Vertic	PASS
3	17100	39.86	55.68	15.82	74.00	18.32	PK	Vertic	PASS
4	17100	30.71	46.53	15.82	54.00	7.47	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

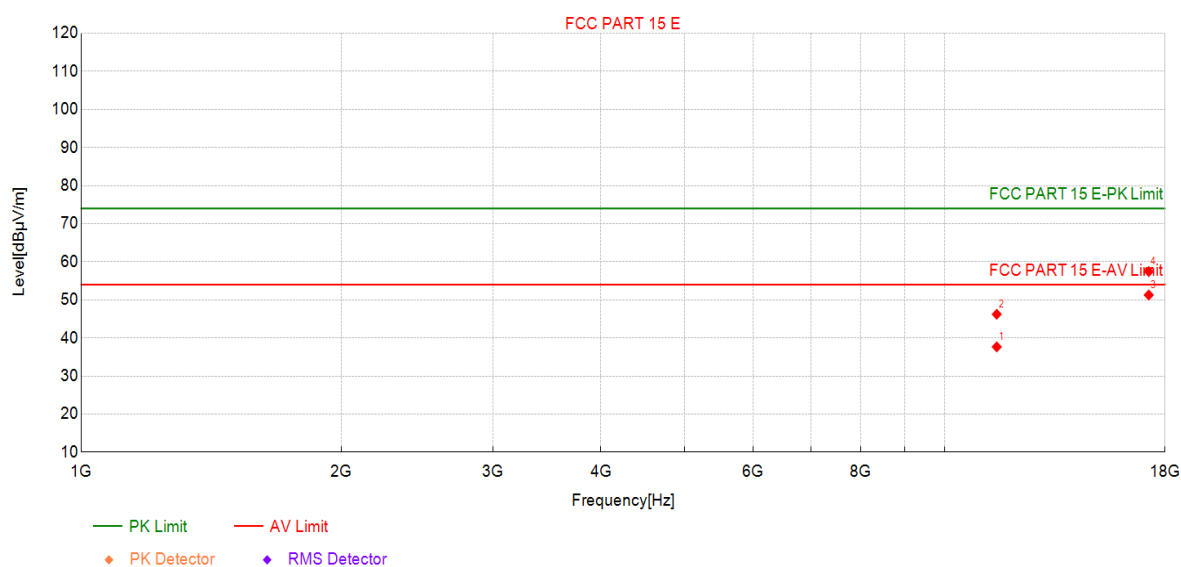

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	29.28	37.66	8.38	54.00	16.34	AV	Horizo	PASS
2	11490	37.84	46.22	8.38	74.00	27.78	PK	Horizo	PASS
3	17235	35.81	51.27	15.46	54.00	2.73	AV	Horizo	PASS
4	17235	41.98	57.44	15.46	74.00	16.56	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

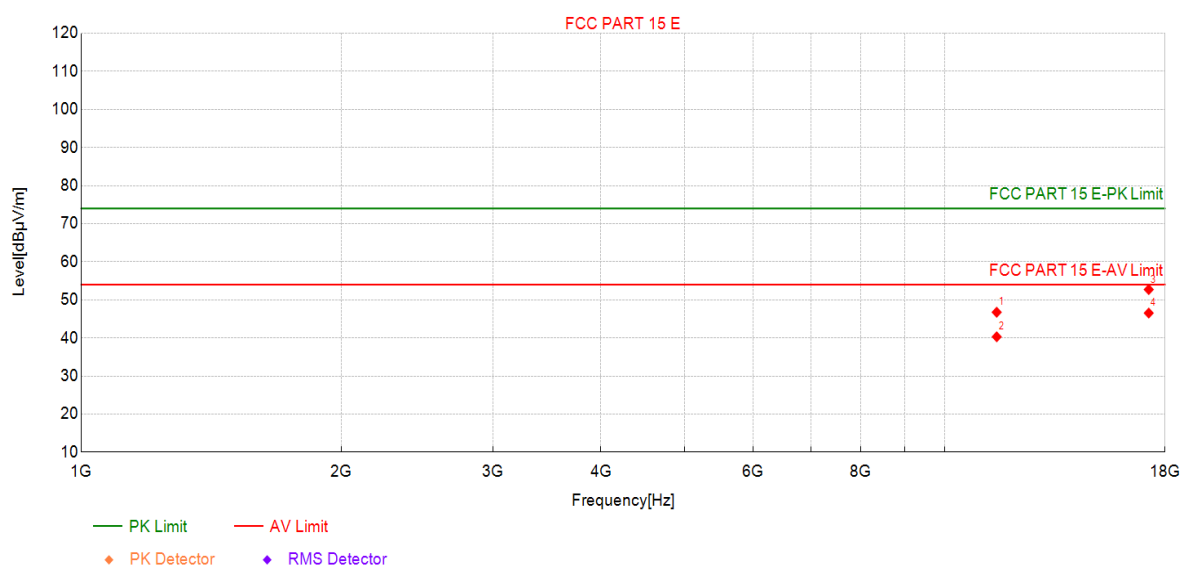

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	38.37	46.75	8.38	74.00	27.25	PK	Vertic	PASS
2	11490	31.92	40.30	8.38	54.00	13.70	AV	Vertic	PASS
3	17235	37.25	52.71	15.46	74.00	21.29	PK	Vertic	PASS
4	17235	31.08	46.54	15.46	54.00	7.46	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

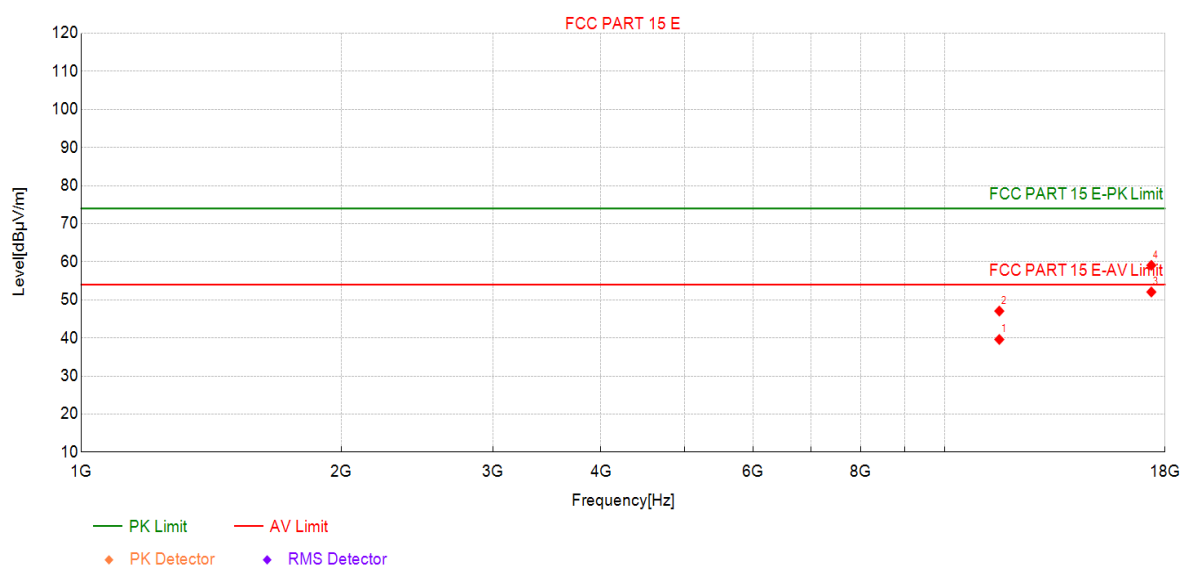

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	30.92	39.60	8.68	54.00	14.40	AV	Horizo	PASS
2	11570	38.38	47.06	8.68	74.00	26.94	PK	Horizo	PASS
3	17355	35.84	52.06	16.22	54.00	1.94	AV	Horizo	PASS
4	17355	42.85	59.07	16.22	74.00	14.93	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

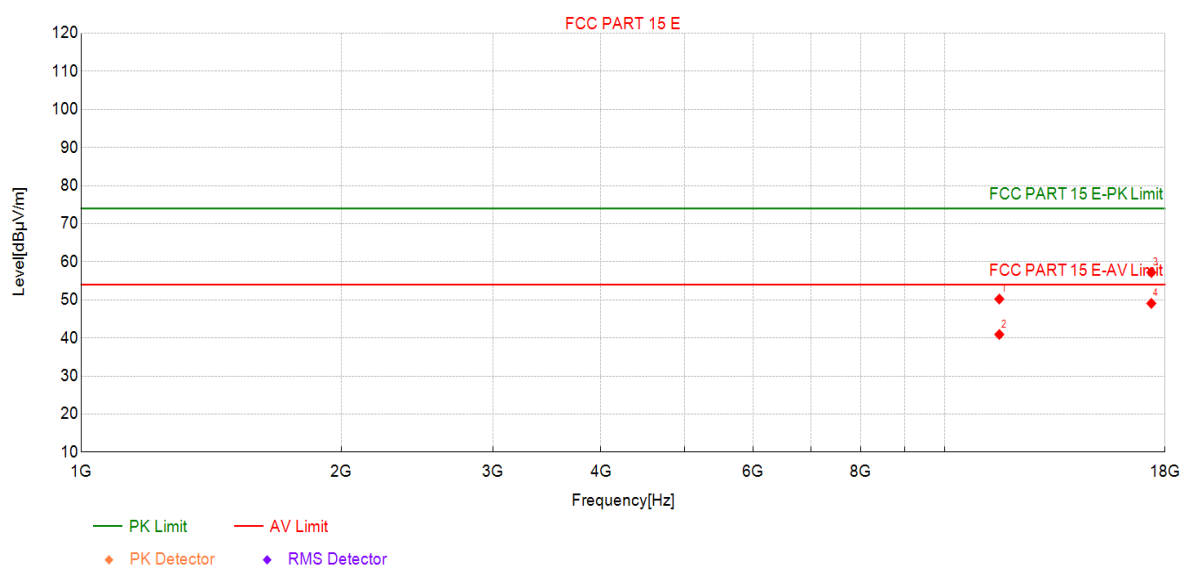

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	41.54	50.22	8.68	74.00	23.78	PK	Vertic	PASS
2	11570	32.23	40.91	8.68	54.00	13.09	AV	Vertic	PASS
3	17355	40.98	57.20	16.22	74.00	16.80	PK	Vertic	PASS
4	17355	32.85	49.07	16.22	54.00	4.93	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

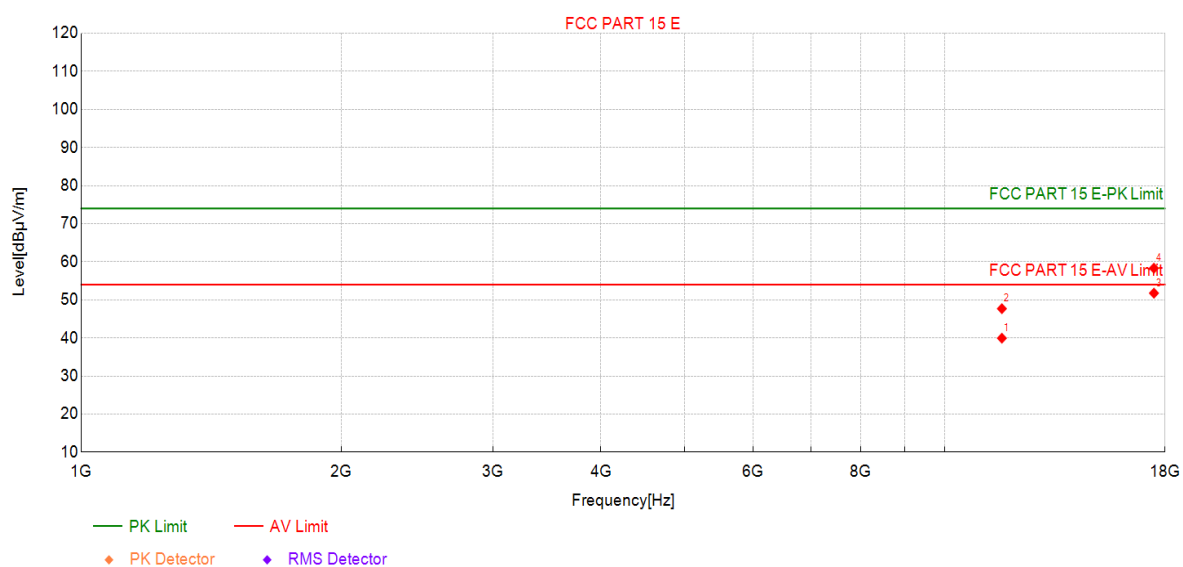

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	31.19	39.93	8.74	54.00	14.07	AV	Horizo	PASS
2	11650	38.95	47.69	8.74	74.00	26.31	PK	Horizo	PASS
3	17475	34.70	51.77	17.07	54.00	2.23	AV	Horizo	PASS
4	17475	41.25	58.32	17.07	74.00	15.68	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

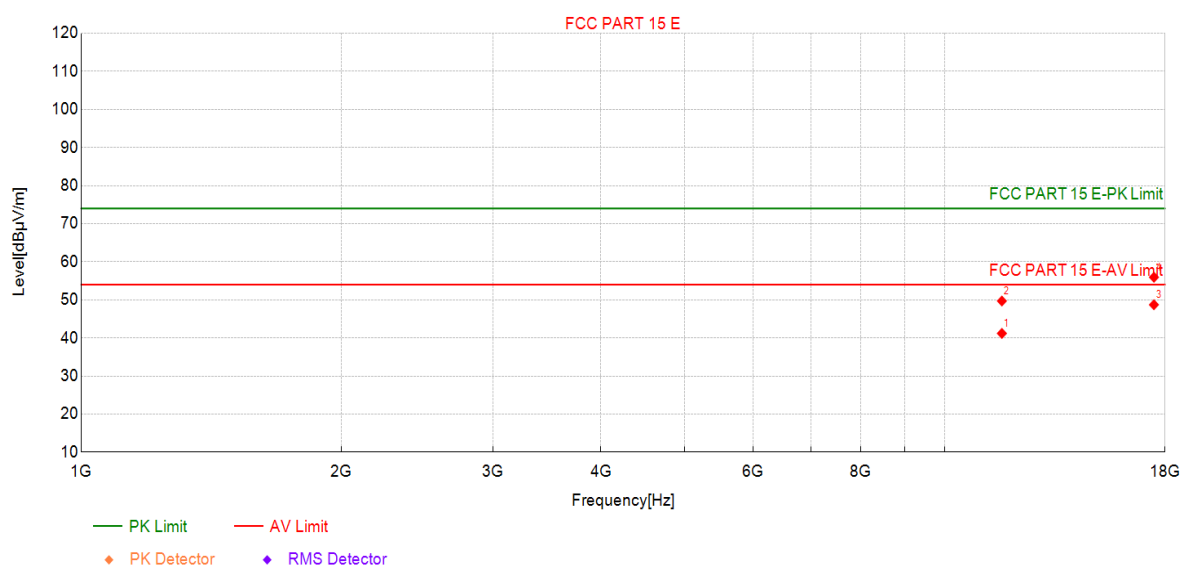

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	32.45	41.19	8.74	54.00	12.81	AV	Vertic	PASS
2	11650	40.97	49.71	8.74	74.00	24.29	PK	Vertic	PASS
3	17475	31.65	48.72	17.07	54.00	5.28	AV	Vertic	PASS
4	17475	38.87	55.94	17.07	74.00	18.06	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

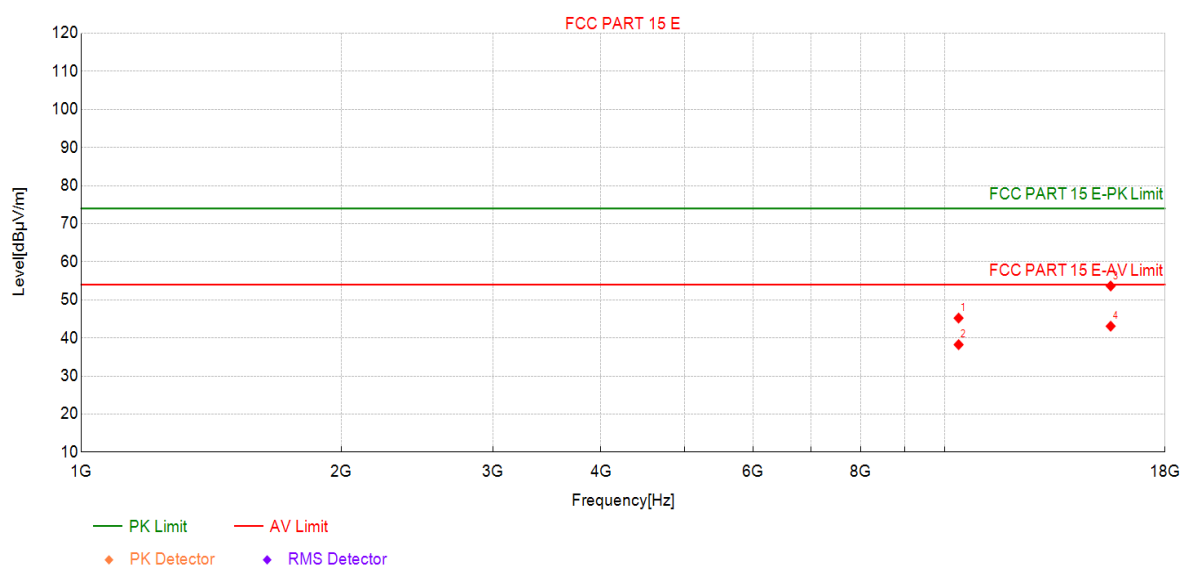

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	38.65	45.22	6.57	74.00	28.78	PK	Horizo	PASS
2	10380	31.67	38.24	6.57	54.00	15.76	AV	Horizo	PASS
3	15570	39.95	53.64	13.69	74.00	20.36	PK	Horizo	PASS
4	15570	29.39	43.08	13.69	54.00	10.92	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

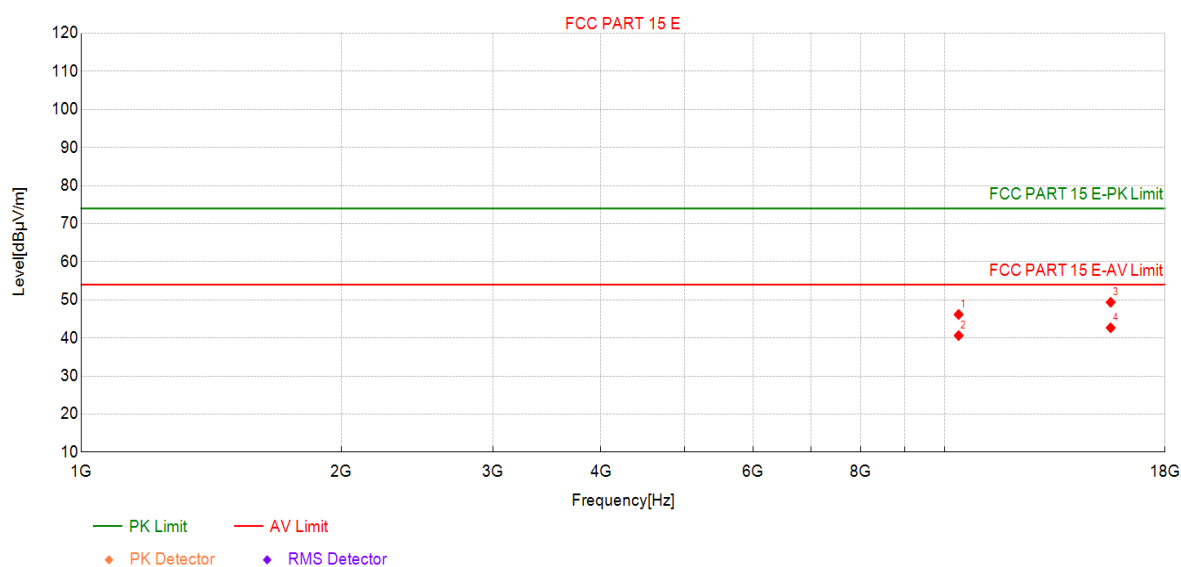

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	39.59	46.16	6.57	74.00	27.84	PK	Vertic	PASS
2	10380	34.05	40.62	6.57	54.00	13.38	AV	Vertic	PASS
3	15570	35.68	49.37	13.69	74.00	24.63	PK	Vertic	PASS
4	15570	28.98	42.67	13.69	54.00	11.33	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5230MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

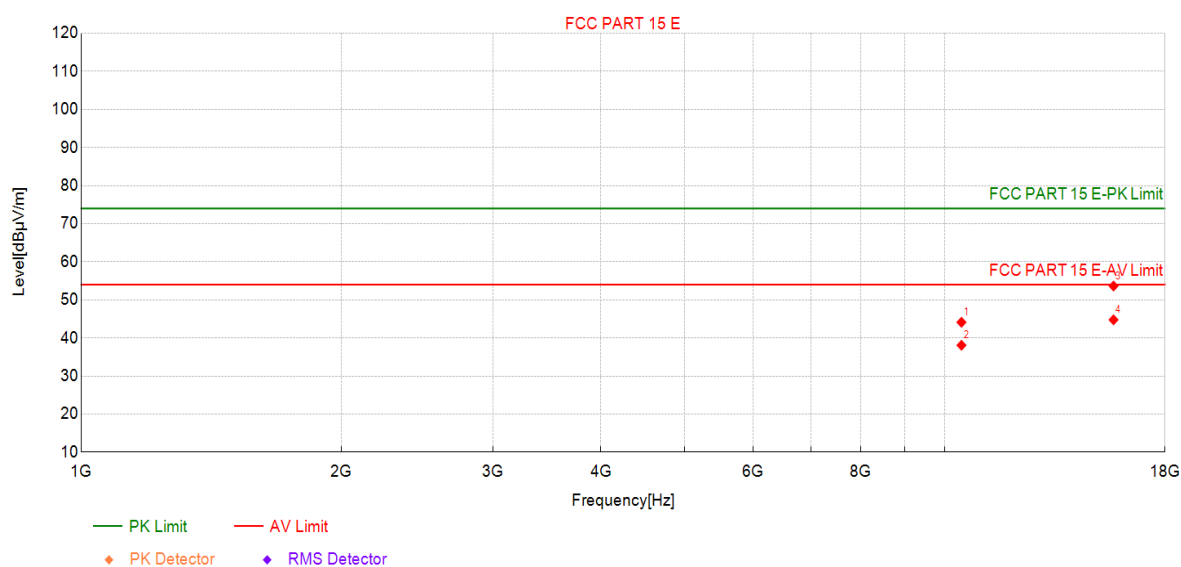

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	37.44	44.11	6.67	74.00	29.89	PK	Horizo	PASS
2	10460	31.41	38.08	6.67	54.00	15.92	AV	Horizo	PASS
3	15690	39.22	53.63	14.41	74.00	20.37	PK	Horizo	PASS
4	15690	30.35	44.76	14.41	54.00	9.24	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5230MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

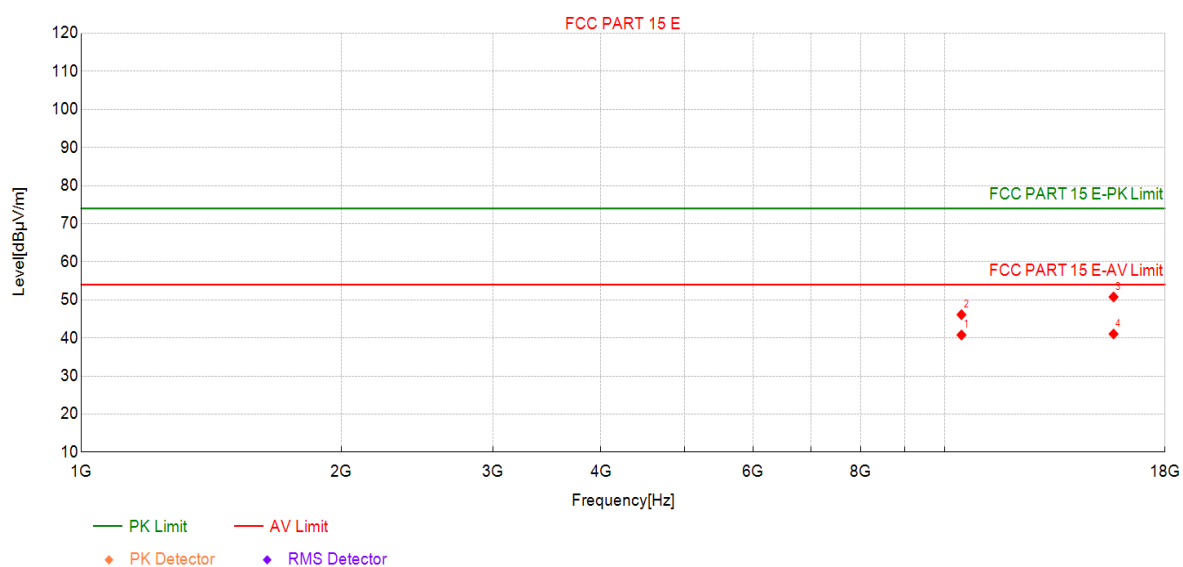

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	34.10	40.77	6.67	54.00	13.23	AV	Vertic	PASS
2	10460	39.44	46.11	6.67	74.00	27.89	PK	Vertic	PASS
3	15690	36.36	50.77	14.41	74.00	23.23	PK	Vertic	PASS
4	15690	26.64	41.05	14.41	54.00	12.95	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5270MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

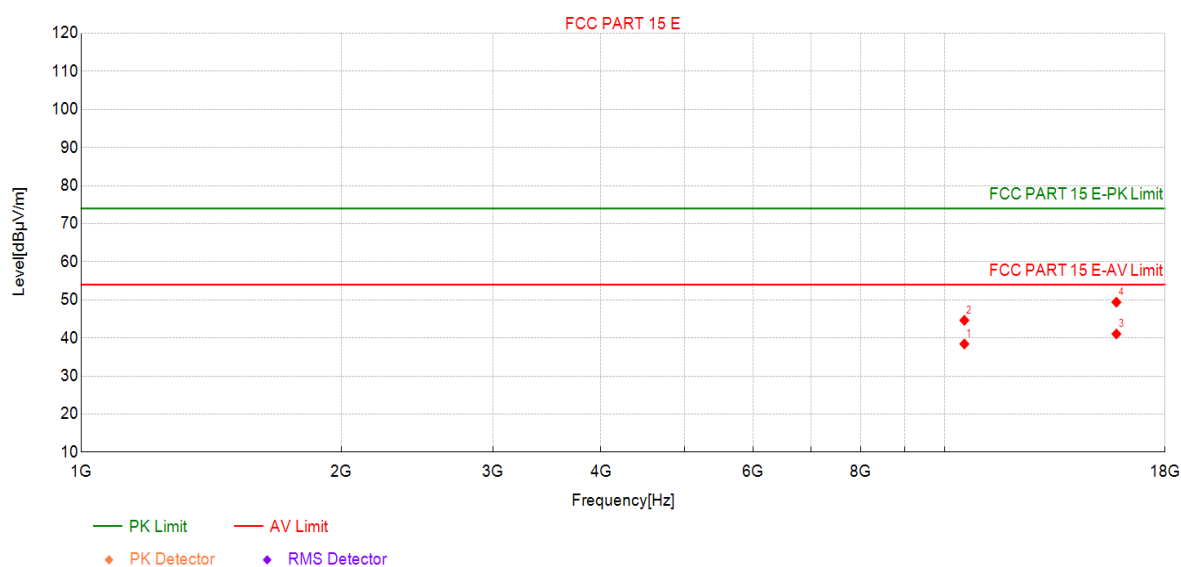

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	31.65	38.41	6.76	54.00	15.59	AV	Horizo	PASS
2	10540	37.86	44.62	6.76	74.00	29.38	PK	Horizo	PASS
3	15810	27.04	41.05	14.01	54.00	12.95	AV	Horizo	PASS
4	15810	35.37	49.38	14.01	74.00	24.62	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5270MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

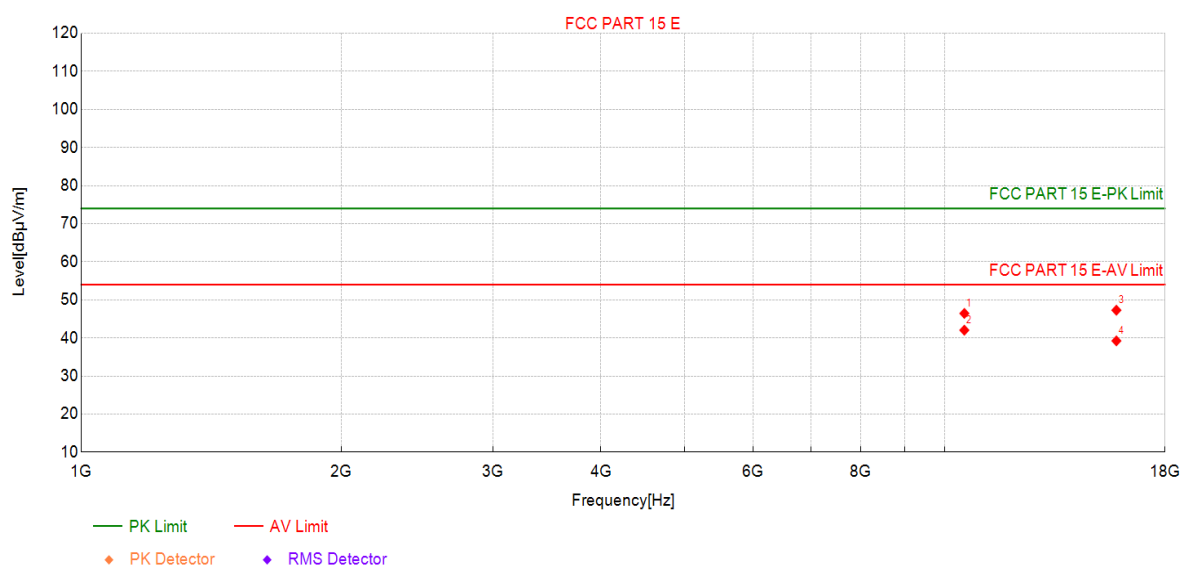

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	39.68	46.44	6.76	74.00	27.56	PK	Vertic	PASS
2	10540	35.28	42.04	6.76	54.00	11.96	AV	Vertic	PASS
3	15810	33.27	47.28	14.01	74.00	26.72	PK	Vertic	PASS
4	15810	25.22	39.23	14.01	54.00	14.77	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

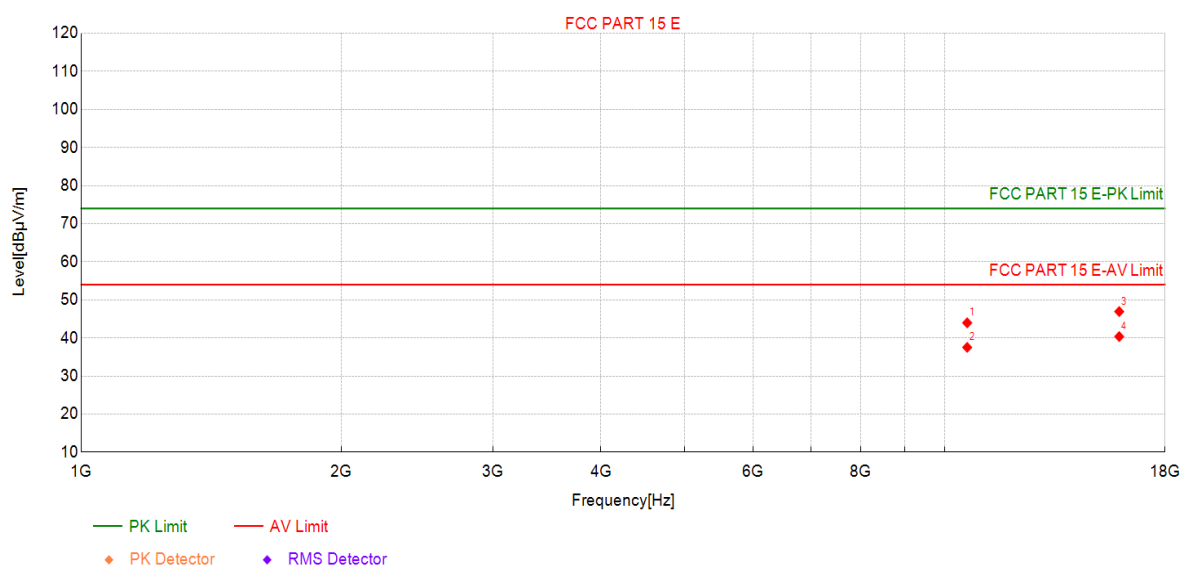

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	37.18	43.97	6.79	74.00	30.03	PK	Horizo	PASS
2	10620	30.74	37.53	6.79	54.00	16.47	AV	Horizo	PASS
3	15930	32.56	46.93	14.37	74.00	27.07	PK	Horizo	PASS
4	15930	25.99	40.36	14.37	54.00	13.64	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

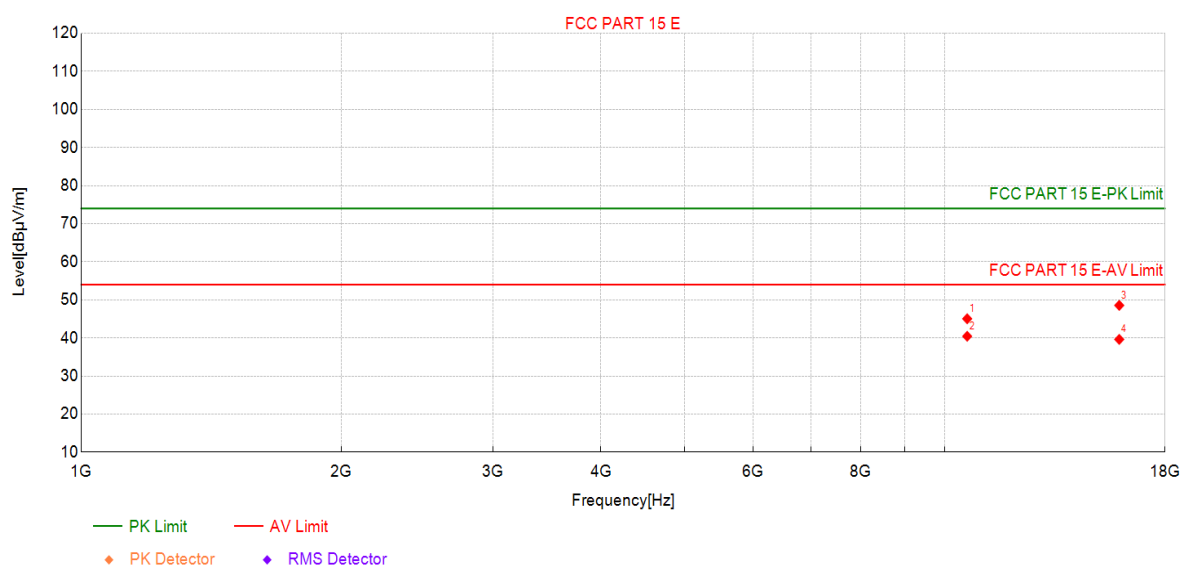

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	38.25	45.04	6.79	74.00	28.96	PK	Vertic	PASS
2	10620	33.65	40.44	6.79	54.00	13.56	AV	Vertic	PASS
3	15930	34.18	48.55	14.37	74.00	25.45	PK	Vertic	PASS
4	15930	25.25	39.62	14.37	54.00	14.38	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5510MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

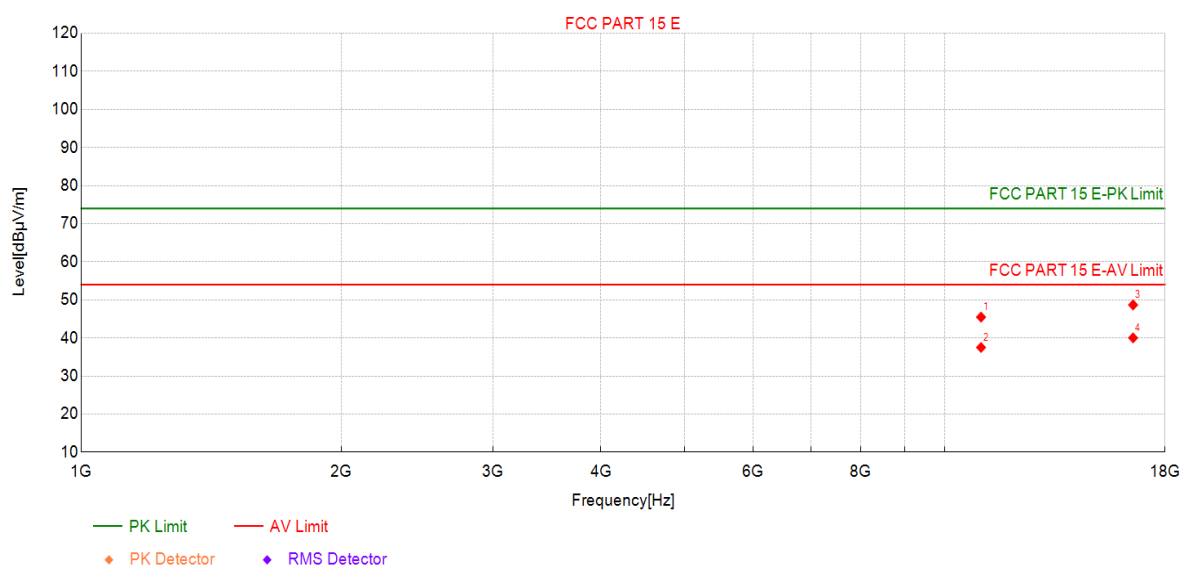

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	38.22	45.47	7.25	74.00	28.53	PK	Horizo	PASS
2	11020	30.25	37.50	7.25	54.00	16.50	AV	Horizo	PASS
3	16530	33.66	48.67	15.01	74.00	25.33	PK	Horizo	PASS
4	16530	25.00	40.01	15.01	54.00	13.99	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5510MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

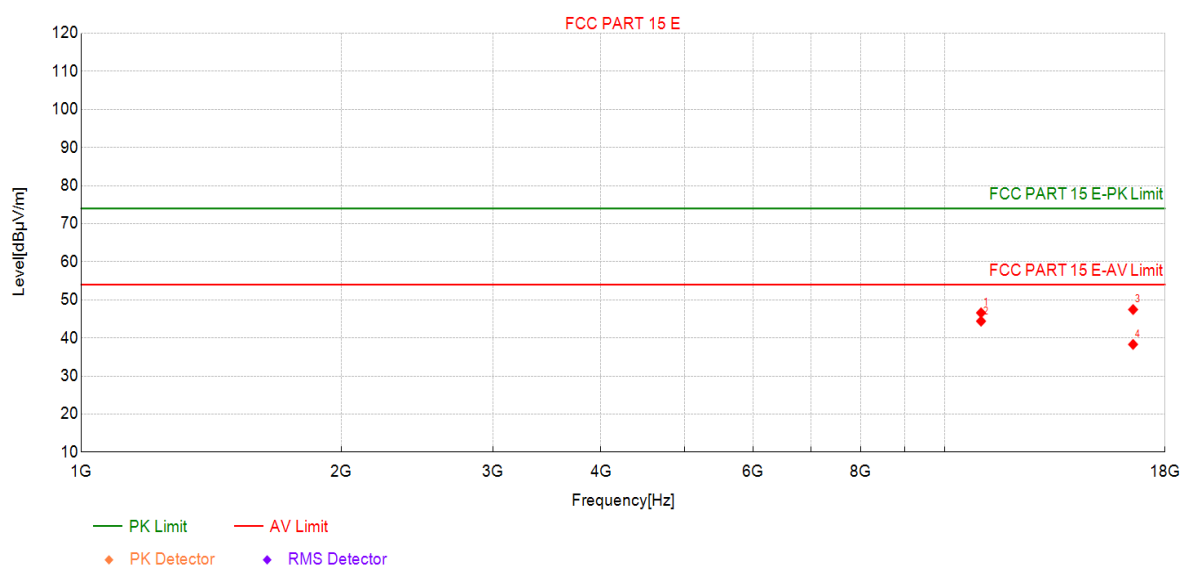

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	39.34	46.59	7.25	74.00	27.41	PK	Vertic	PASS
2	11020	37.15	44.40	7.25	54.00	9.60	AV	Vertic	PASS
3	16530	32.44	47.45	15.01	74.00	26.55	PK	Vertic	PASS
4	16530	23.29	38.30	15.01	54.00	15.70	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5550MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

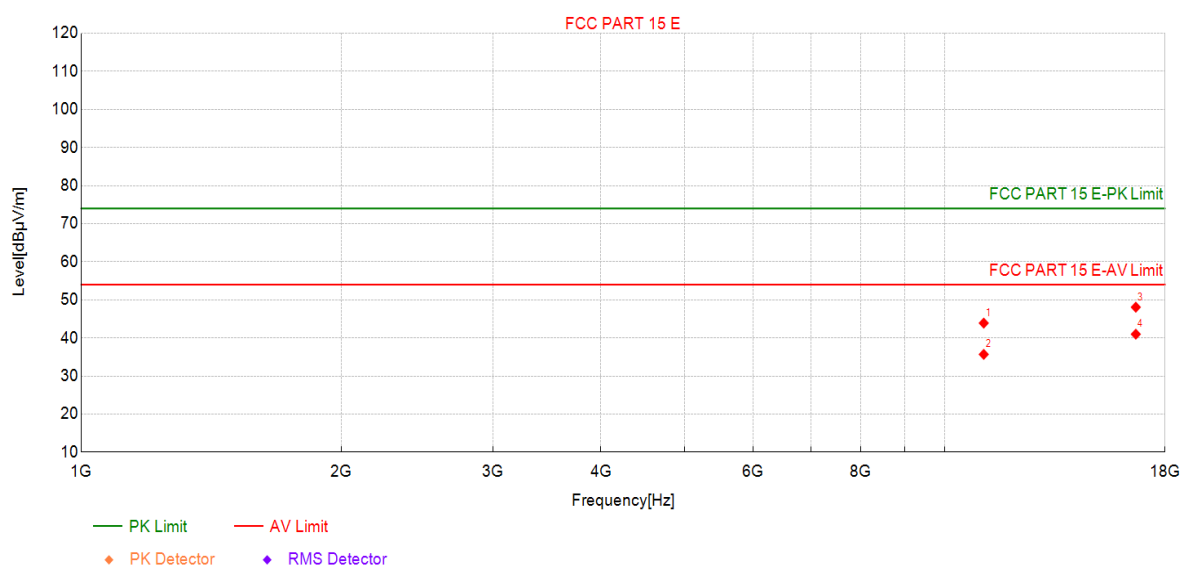

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	37.24	43.90	6.66	74.00	30.10	PK	Horizo	PASS
2	11100	29.02	35.68	6.66	54.00	18.32	AV	Horizo	PASS
3	16650	33.39	48.08	14.69	74.00	25.92	PK	Horizo	PASS
4	16650	26.29	40.98	14.69	54.00	13.02	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5550MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

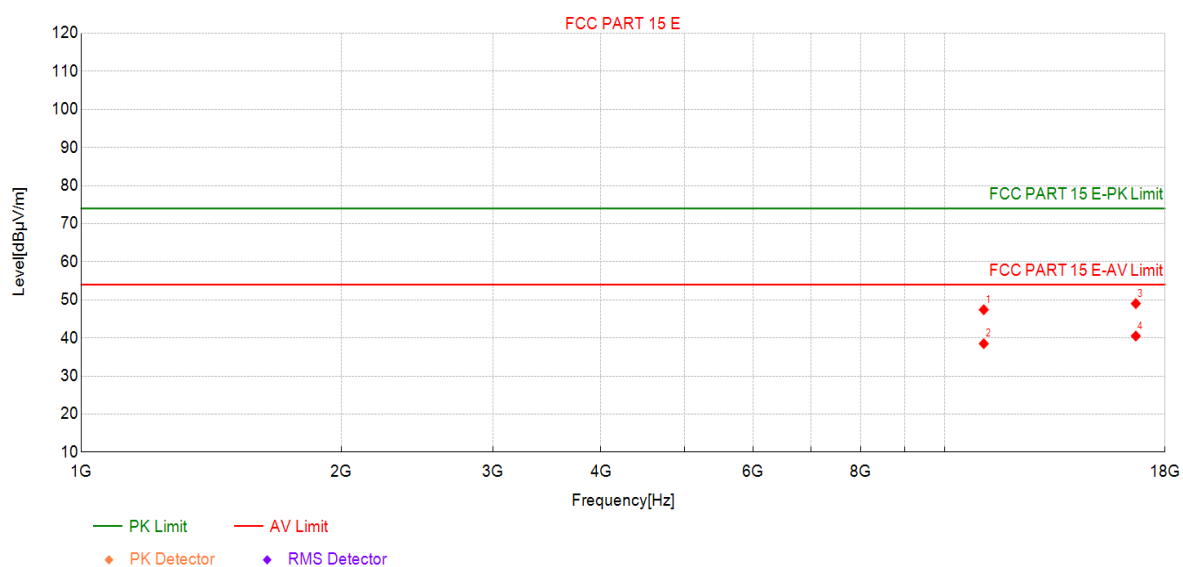

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	40.75	47.41	6.66	74.00	26.59	PK	Vertic	PASS
2	11100	31.83	38.49	6.66	54.00	15.51	AV	Vertic	PASS
3	16650	34.34	49.03	14.69	74.00	24.97	PK	Vertic	PASS
4	16650	25.80	40.49	14.69	54.00	13.51	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5670MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

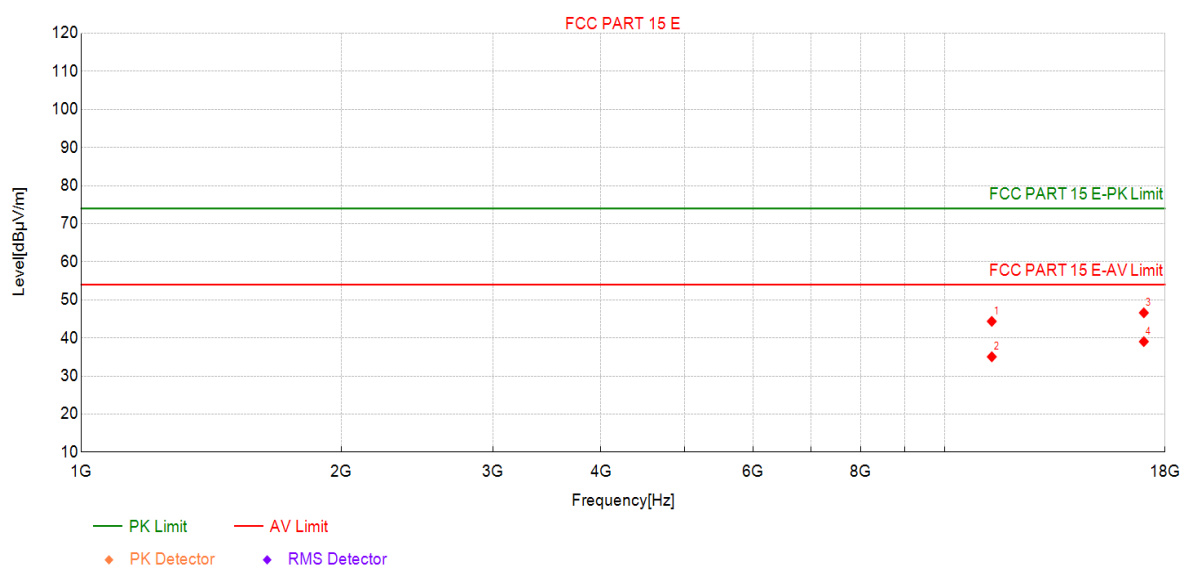

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	36.49	44.35	7.86	74.00	29.65	PK	Horizo	PASS
2	11340	27.19	35.05	7.86	54.00	18.95	AV	Horizo	PASS
3	17010	30.56	46.60	16.04	74.00	27.40	PK	Horizo	PASS
4	17010	23.00	39.04	16.04	54.00	14.96	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level