


Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5670MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

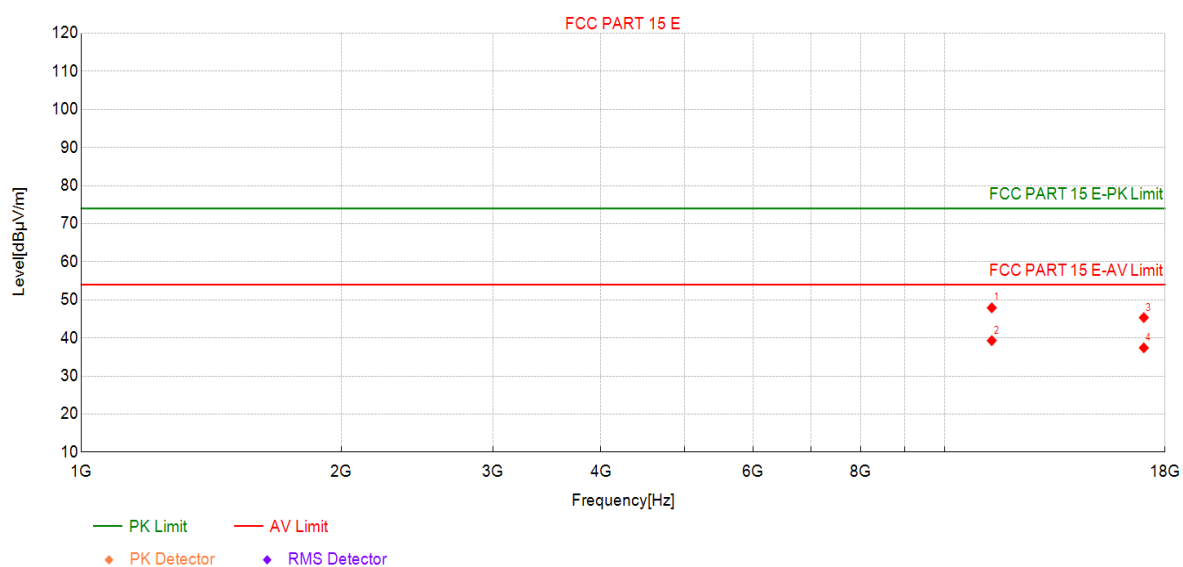

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	40.05	47.91	7.86	74.00	26.09	PK	Vertic	PASS
2	11340	31.43	39.29	7.86	54.00	14.71	AV	Vertic	PASS
3	17010	29.30	45.34	16.04	74.00	28.66	PK	Vertic	PASS
4	17010	21.37	37.41	16.04	54.00	16.59	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

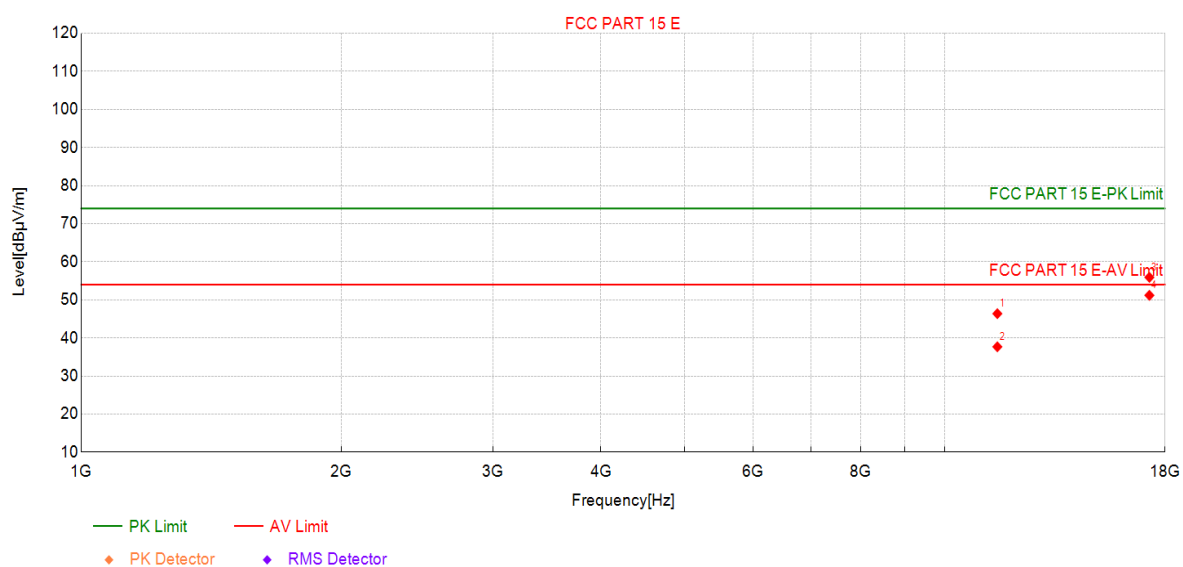

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	37.90	46.38	8.48	74.00	27.62	PK	Horizo	PASS
2	11510	29.19	37.67	8.48	54.00	16.33	AV	Horizo	PASS
3	17265	40.41	55.92	15.51	74.00	18.08	PK	Horizo	PASS
4	17265	35.68	51.19	15.51	54.00	2.81	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

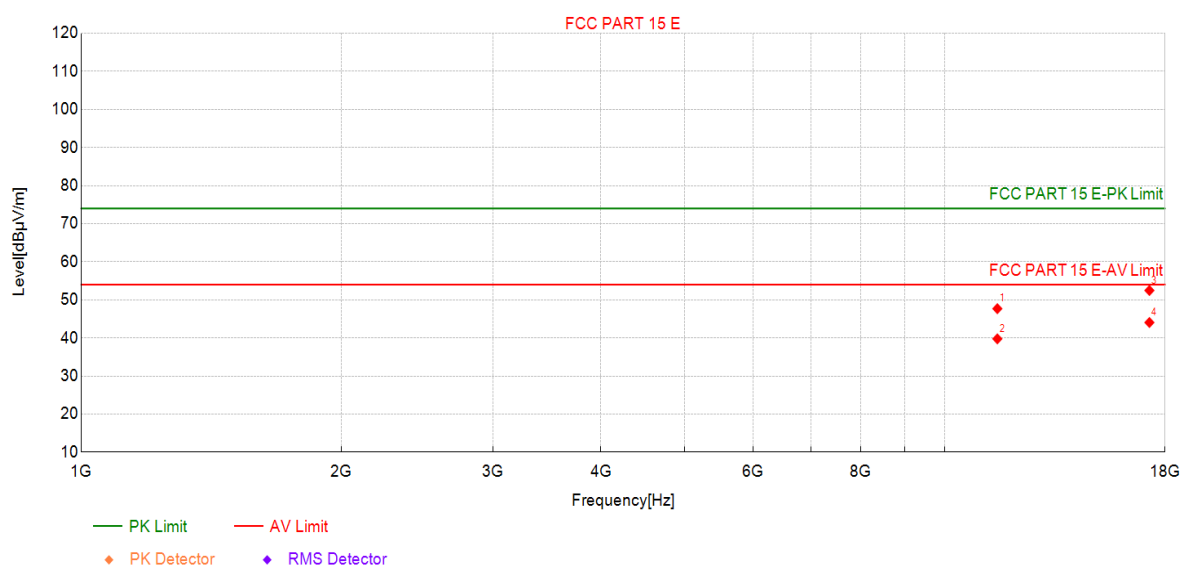

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	39.21	47.69	8.48	74.00	26.31	PK	Vertic	PASS
2	11510	31.28	39.76	8.48	54.00	14.24	AV	Vertic	PASS
3	17265	36.96	52.47	15.51	74.00	21.53	PK	Vertic	PASS
4	17265	28.55	44.06	15.51	54.00	9.94	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

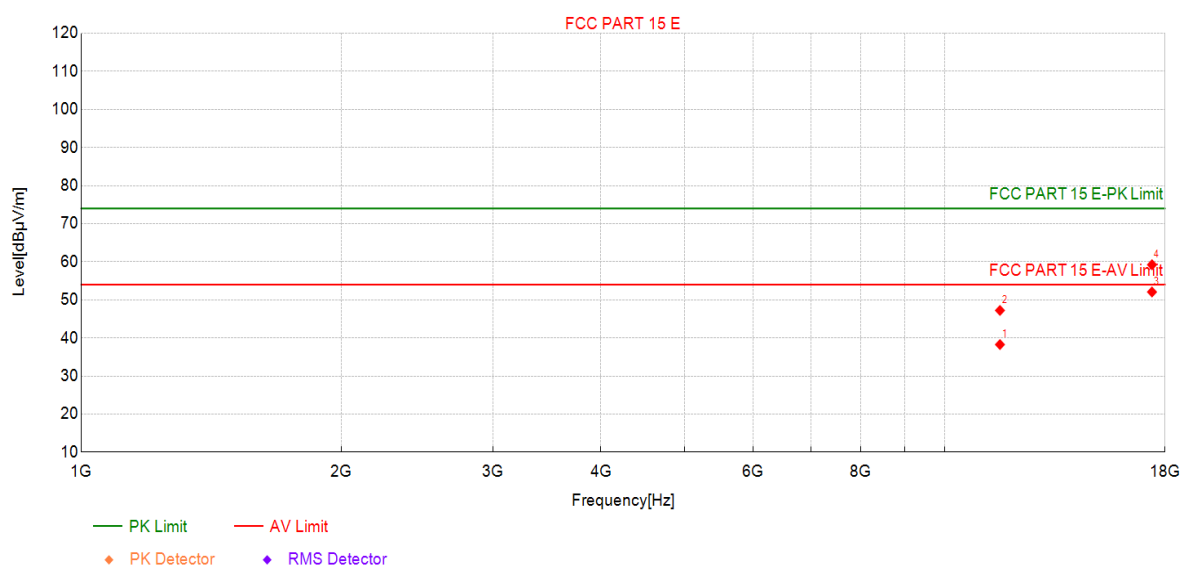

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	29.52	38.26	8.74	54.00	15.74	AV	Horizo	PASS
2	11590	38.49	47.23	8.74	74.00	26.77	PK	Horizo	PASS
3	17385	35.49	52.07	16.58	54.00	1.93	AV	Horizo	PASS
4	17385	42.64	59.22	16.58	74.00	14.78	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

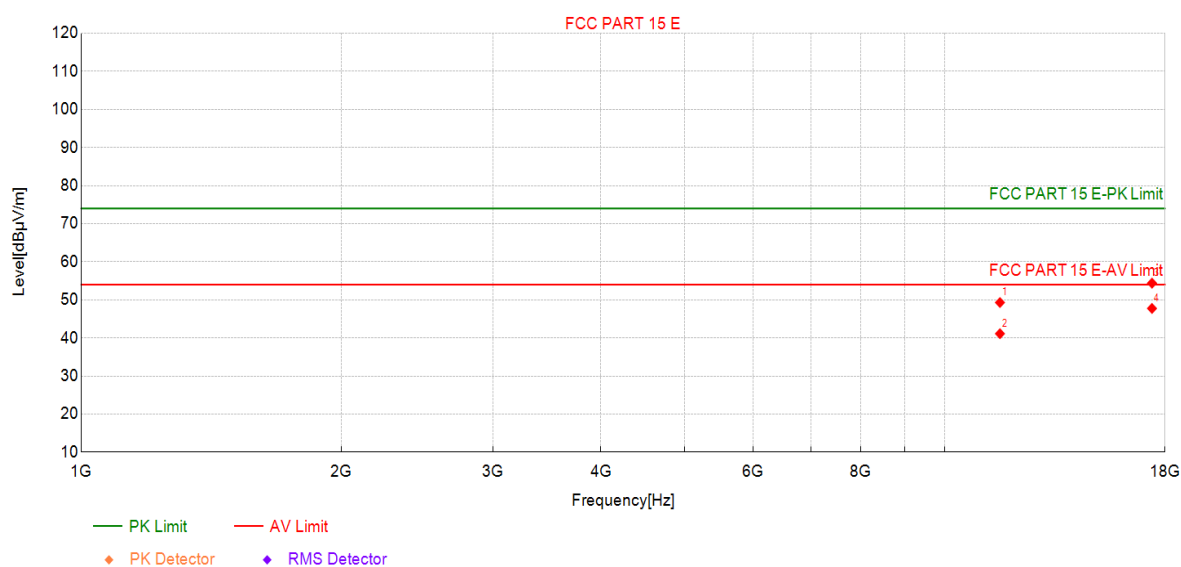

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	40.56	49.30	8.74	74.00	24.70	PK	Vertic	PASS
2	11590	32.38	41.12	8.74	54.00	12.88	AV	Vertic	PASS
3	17385	37.80	54.38	16.58	74.00	19.62	PK	Vertic	PASS
4	17385	31.17	47.75	16.58	54.00	6.25	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

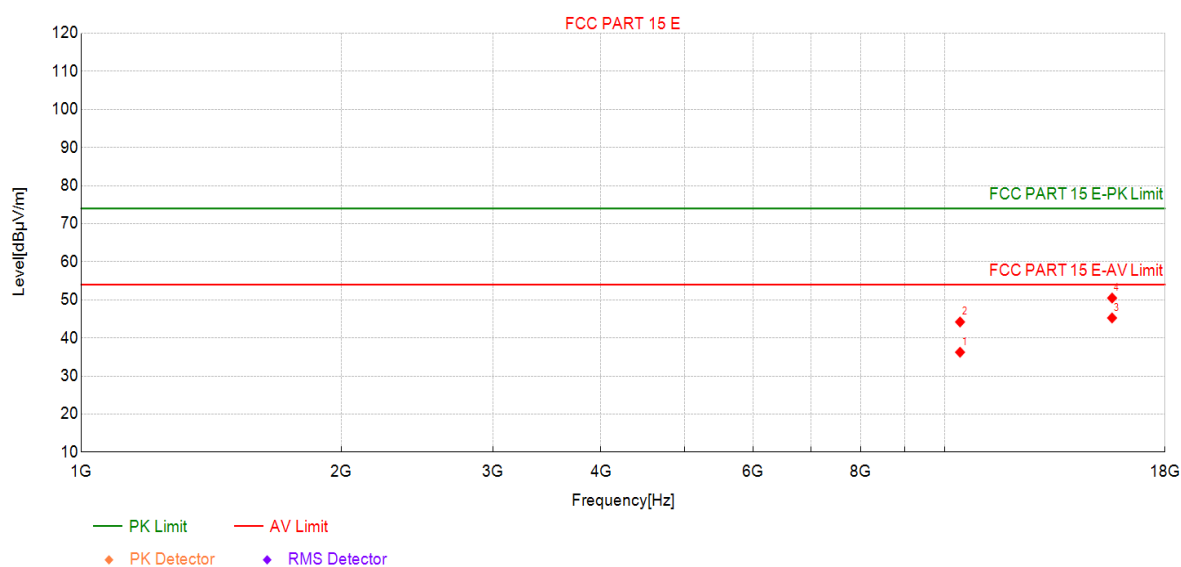

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	29.64	36.24	6.60	54.00	17.76	AV	Horizo	PASS
2	10420	37.60	44.20	6.60	74.00	29.80	PK	Horizo	PASS
3	15630	31.47	45.25	13.78	54.00	8.75	AV	Horizo	PASS
4	15630	36.70	50.48	13.78	74.00	23.52	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

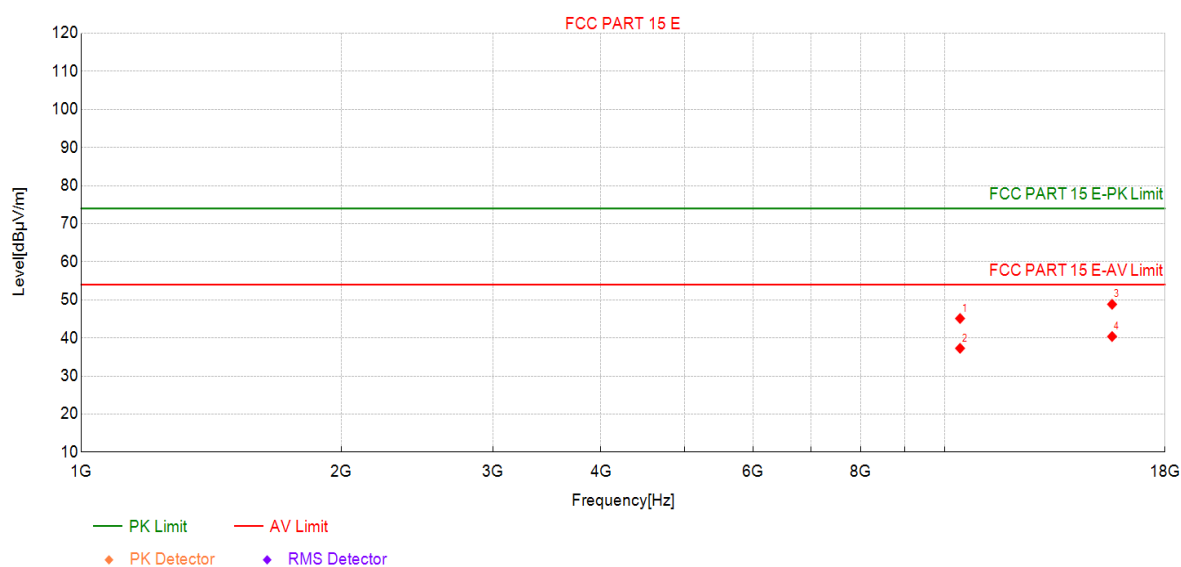

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	38.51	45.11	6.60	74.00	28.89	PK	Vertic	PASS
2	10420	30.67	37.27	6.60	54.00	16.73	AV	Vertic	PASS
3	15630	35.05	48.83	13.78	74.00	25.17	PK	Vertic	PASS
4	15630	26.60	40.38	13.78	54.00	13.62	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5290MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

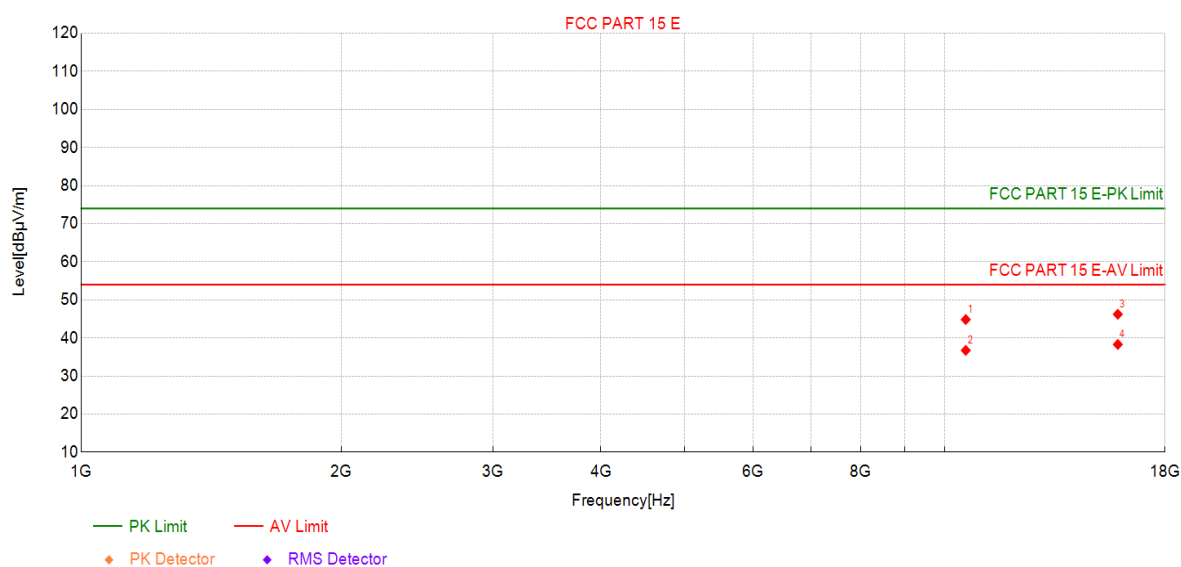

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	38.06	44.83	6.77	74.00	29.17	PK	Horizo	PASS
2	10580	29.96	36.73	6.77	54.00	17.27	AV	Horizo	PASS
3	15870	32.12	46.21	14.09	74.00	27.79	PK	Horizo	PASS
4	15870	24.20	38.29	14.09	54.00	15.71	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5290MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

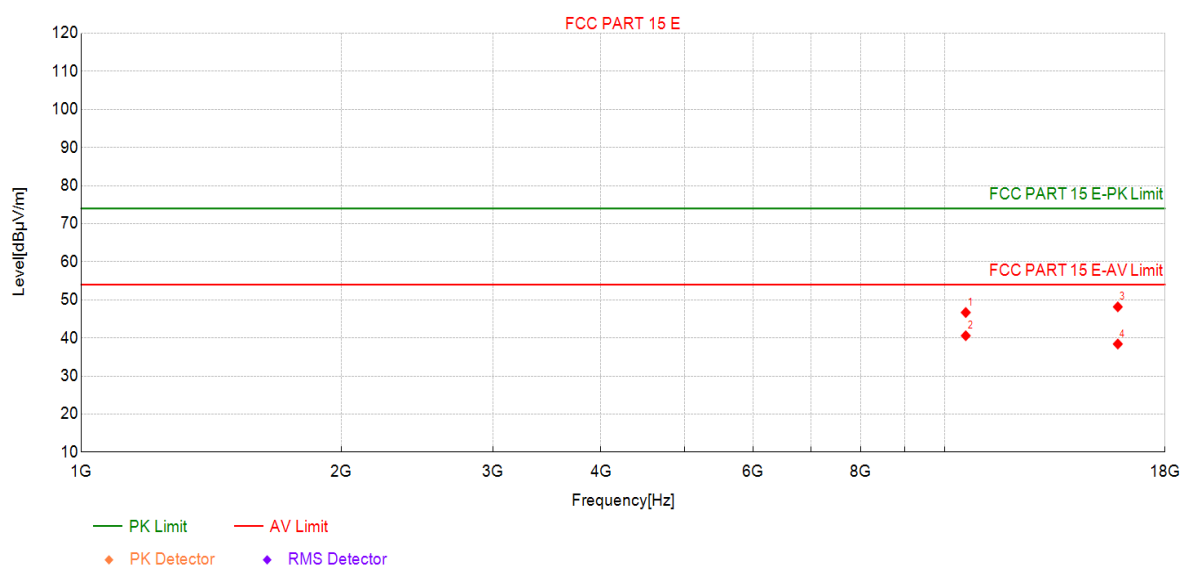

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	39.91	46.68	6.77	74.00	27.32	PK	Vertic	PASS
2	10580	33.82	40.59	6.77	54.00	13.41	AV	Vertic	PASS
3	15870	34.07	48.16	14.09	74.00	25.84	PK	Vertic	PASS
4	15870	24.32	38.41	14.09	54.00	15.59	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5530MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

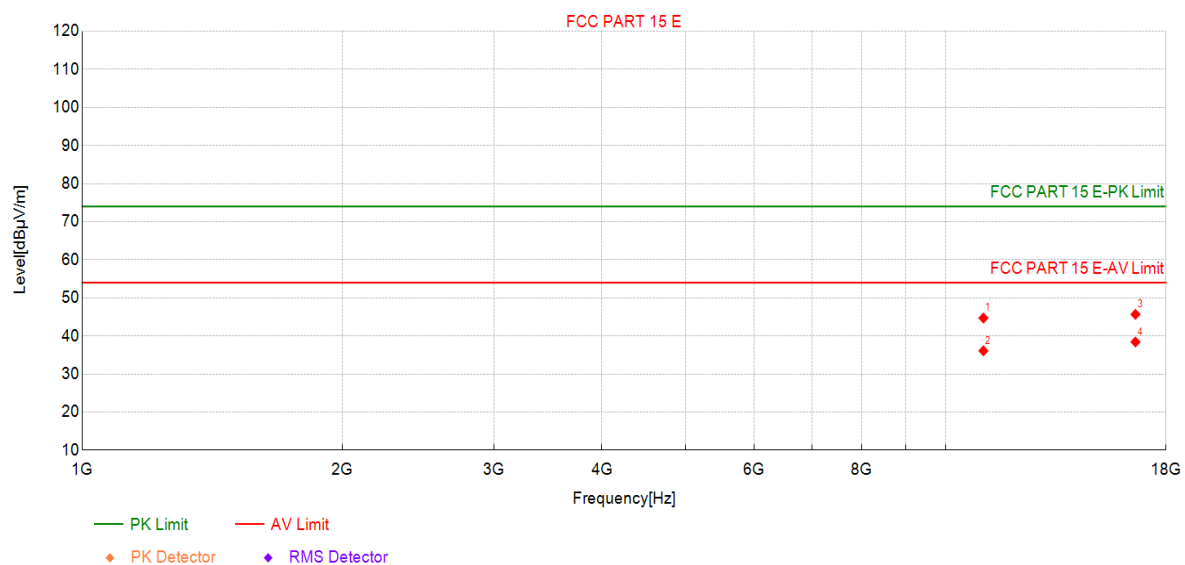

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	37.74	44.70	6.96	74.00	29.30	PK	Horizo	PASS
2	11060	29.12	36.08	6.96	54.00	17.92	AV	Horizo	PASS
3	16590	30.87	45.67	14.80	74.00	28.33	PK	Horizo	PASS
4	16590	23.62	38.42	14.80	54.00	15.58	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5530MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

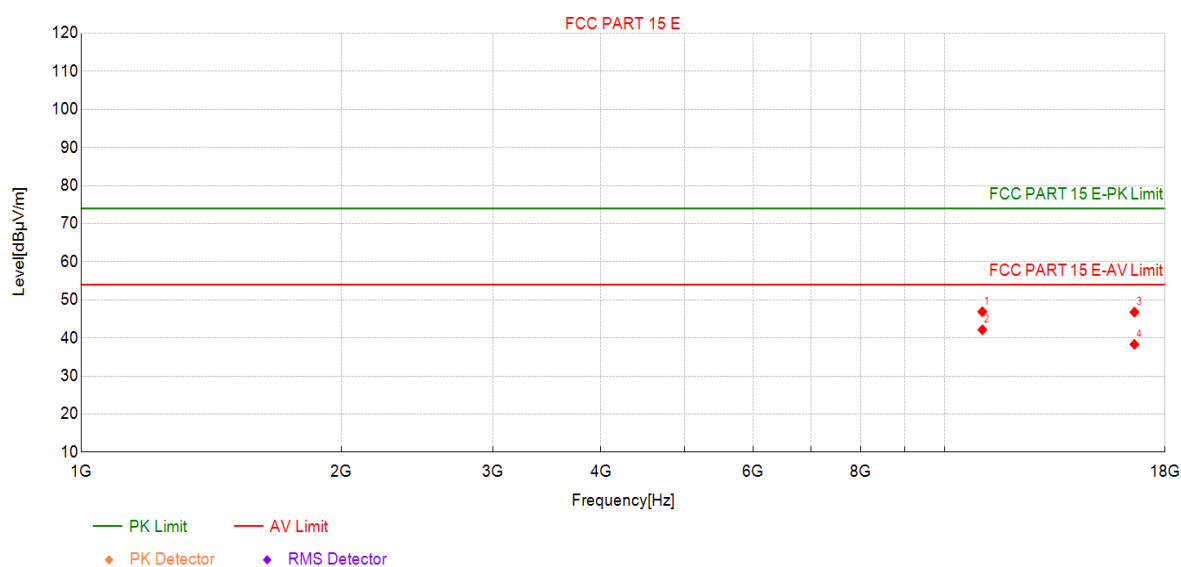

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	39.92	46.88	6.96	74.00	27.12	PK	Vertic	PASS
2	11060	35.19	42.15	6.96	54.00	11.85	AV	Vertic	PASS
3	16590	31.98	46.78	14.80	74.00	27.22	PK	Vertic	PASS
4	16590	23.50	38.30	14.80	54.00	15.70	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5610MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

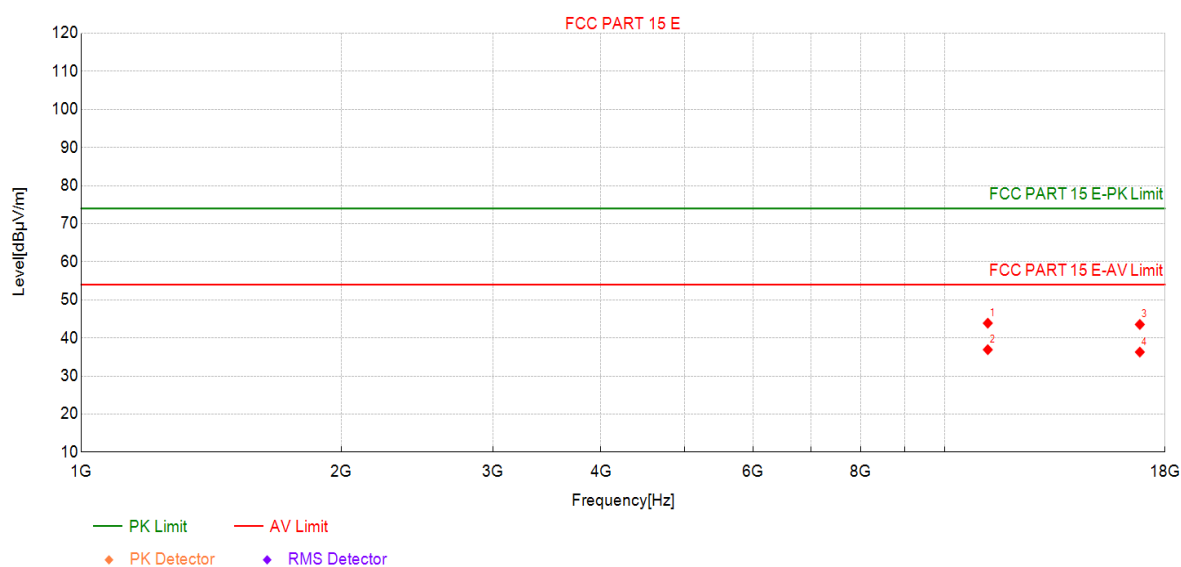

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	36.15	43.88	7.73	74.00	30.12	PK	Horizo	PASS
2	11220	29.19	36.92	7.73	54.00	17.08	AV	Horizo	PASS
3	16830	28.62	43.54	14.92	74.00	30.46	PK	Horizo	PASS
4	16830	21.37	36.29	14.92	54.00	17.71	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5610MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

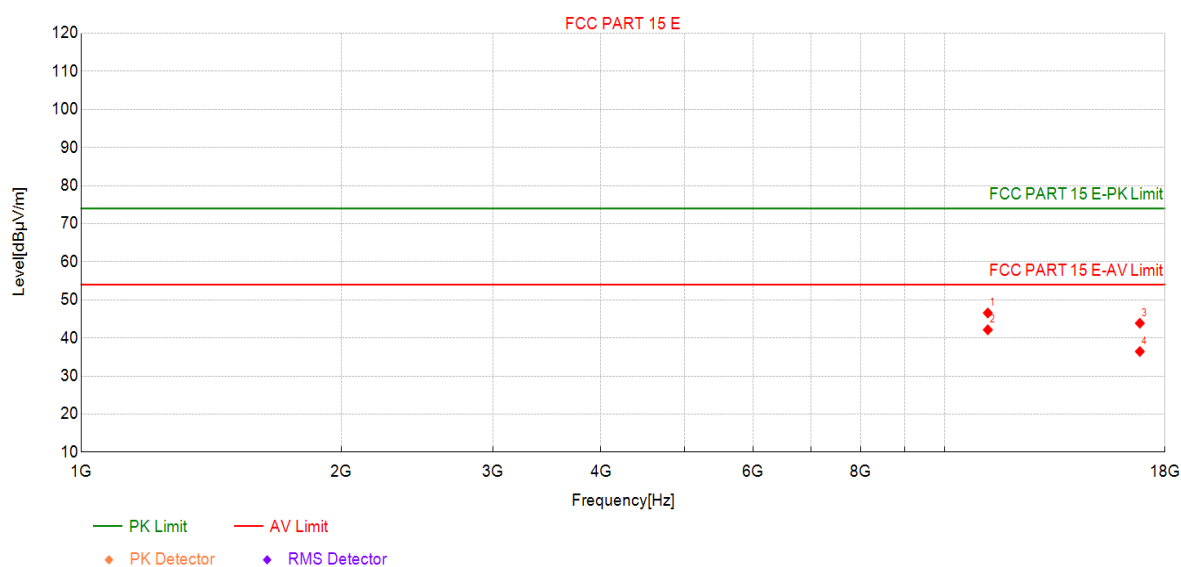

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	38.83	46.56	7.73	74.00	27.44	PK	Vertic	PASS
2	11220	34.41	42.14	7.73	54.00	11.86	AV	Vertic	PASS
3	16830	28.95	43.87	14.92	74.00	30.13	PK	Vertic	PASS
4	16830	21.52	36.44	14.92	54.00	17.56	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

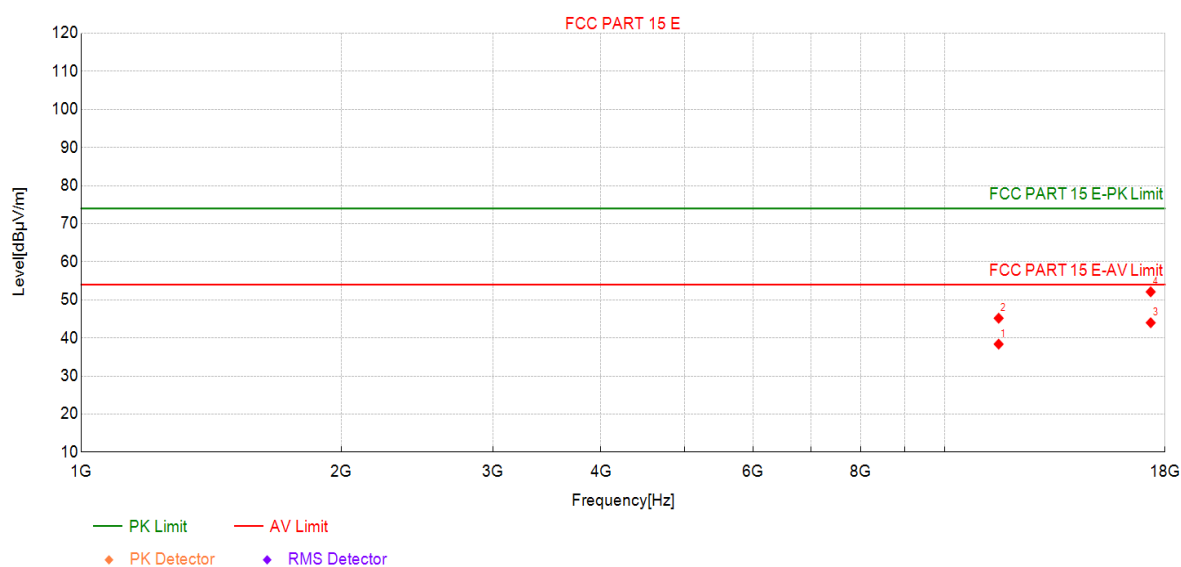

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	29.76	38.37	8.61	54.00	15.63	AV	Horizo	PASS
2	11550	36.57	45.18	8.61	74.00	28.82	PK	Horizo	PASS
3	17325	28.12	43.99	15.87	54.00	10.01	AV	Horizo	PASS
4	17325	36.24	52.11	15.87	74.00	21.89	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

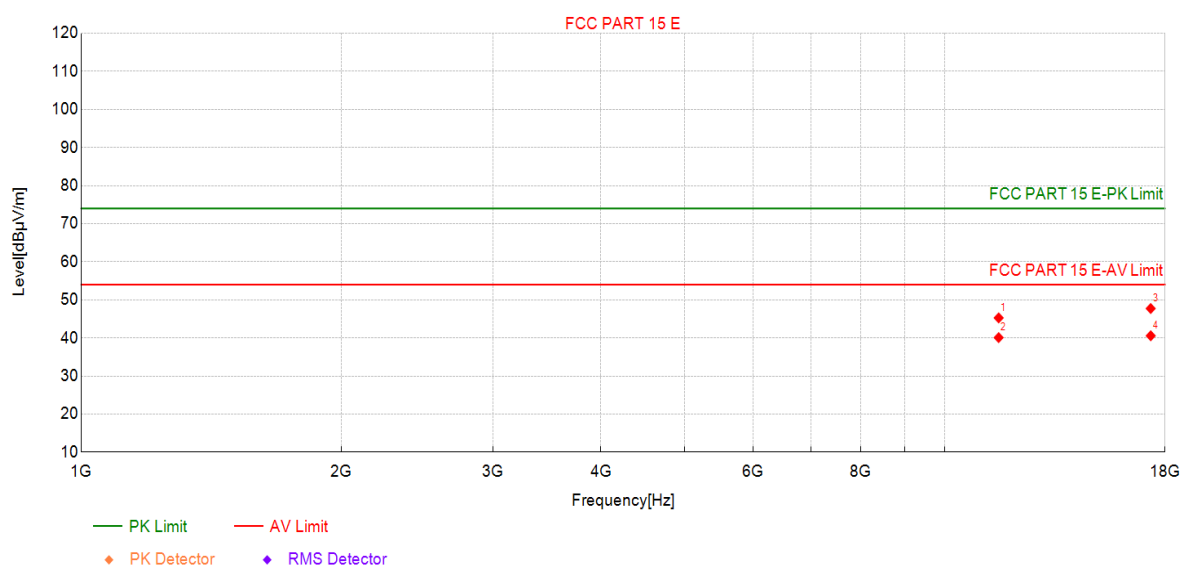

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	36.65	45.26	8.61	74.00	28.74	PK	Vertic	PASS
2	11550	31.48	40.09	8.61	54.00	13.91	AV	Vertic	PASS
3	17325	31.86	47.73	15.87	74.00	26.27	PK	Vertic	PASS
4	17325	24.70	40.57	15.87	54.00	13.43	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5250MHz by 802.11ac(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

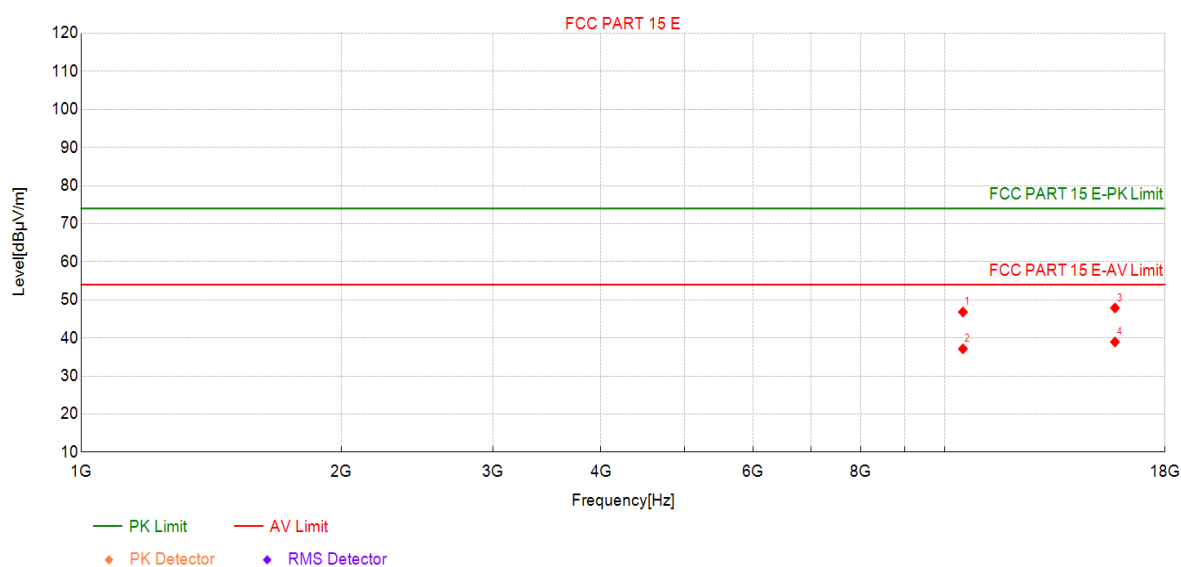

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	40.05	46.80	6.75	74.00	27.20	PK	Horizo	PASS
2	10500	30.38	37.13	6.75	54.00	16.87	AV	Horizo	PASS
3	15750	33.63	47.87	14.24	74.00	26.13	PK	Horizo	PASS
4	15750	24.70	38.94	14.24	54.00	15.06	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5250MHz by 802.11ac(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

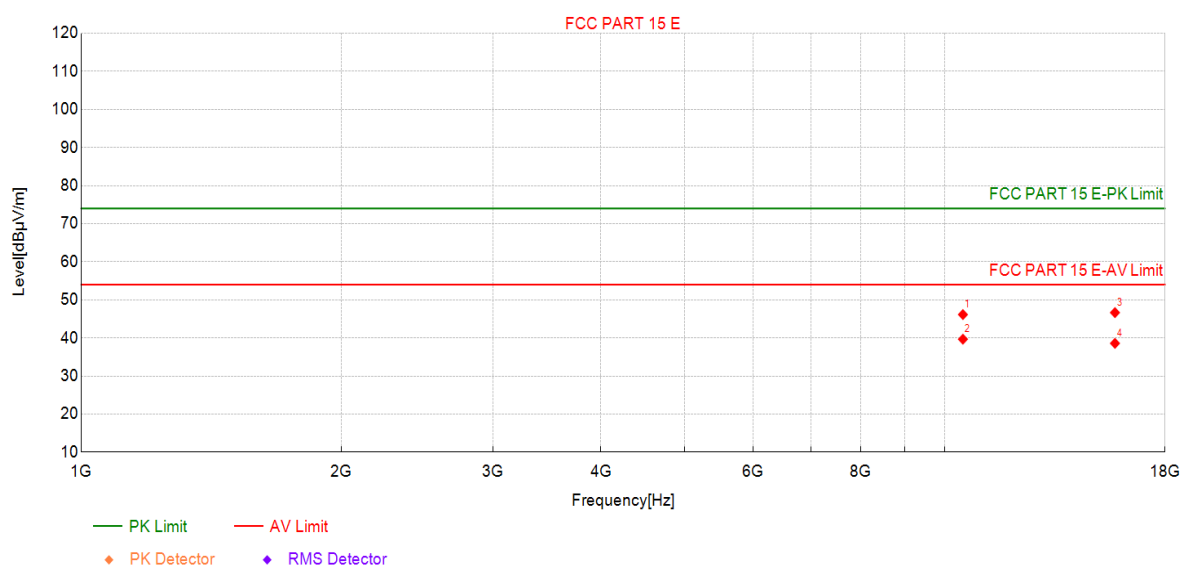

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	39.39	46.14	6.75	74.00	27.86	PK	Vertic	PASS
2	10500	32.92	39.67	6.75	54.00	14.33	AV	Vertic	PASS
3	15750	32.41	46.65	14.24	74.00	27.35	PK	Vertic	PASS
4	15750	24.34	38.58	14.24	54.00	15.42	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5570MHz by 802.11ac(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

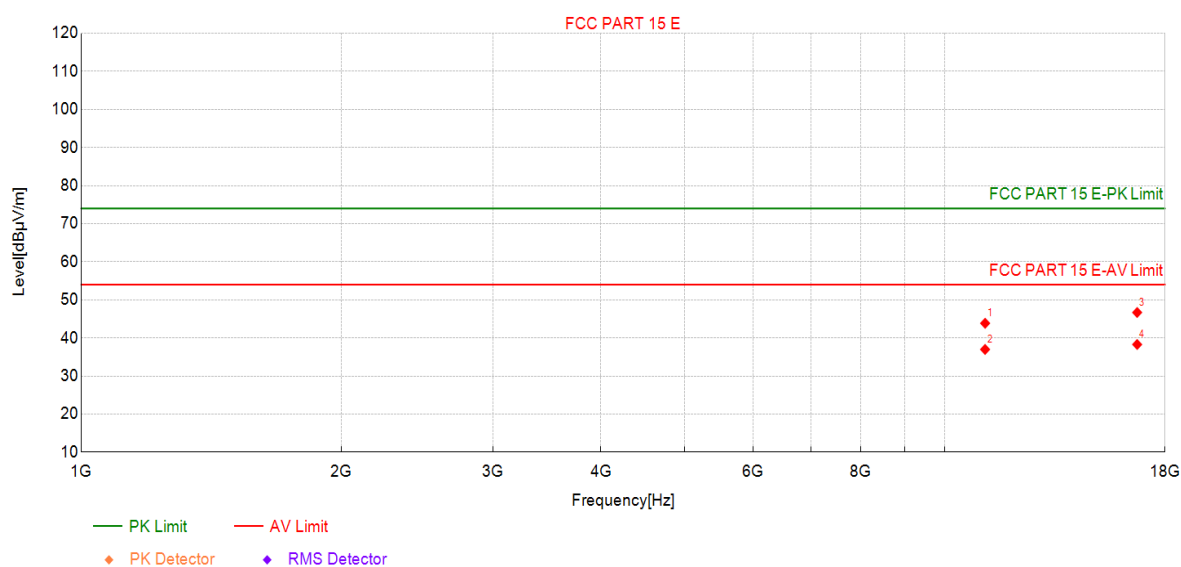

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	36.78	43.86	7.08	74.00	30.14	PK	Horizo	PASS
2	11140	29.90	36.98	7.08	54.00	17.02	AV	Horizo	PASS
3	16710	32.06	46.68	14.62	74.00	27.32	PK	Horizo	PASS
4	16710	23.67	38.29	14.62	54.00	15.71	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5570MHz by 802.11ac(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

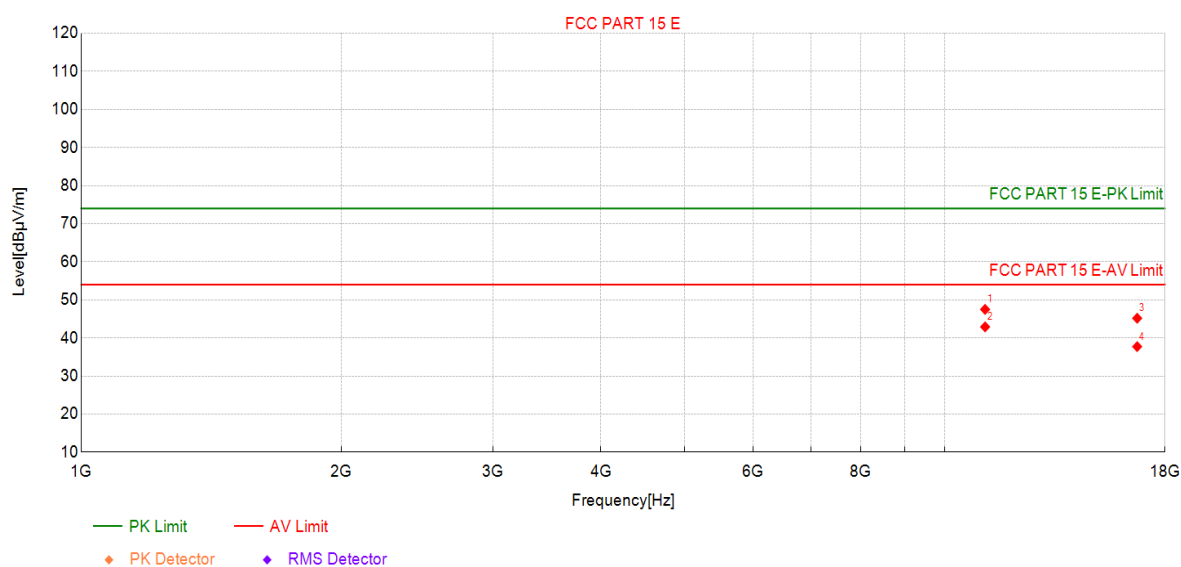

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	40.42	47.50	7.08	74.00	26.50	PK	Vertic	PASS
2	11140	35.82	42.90	7.08	54.00	11.10	AV	Vertic	PASS
3	16710	30.56	45.18	14.62	74.00	28.82	PK	Vertic	PASS
4	16710	23.10	37.72	14.62	54.00	16.28	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5180MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

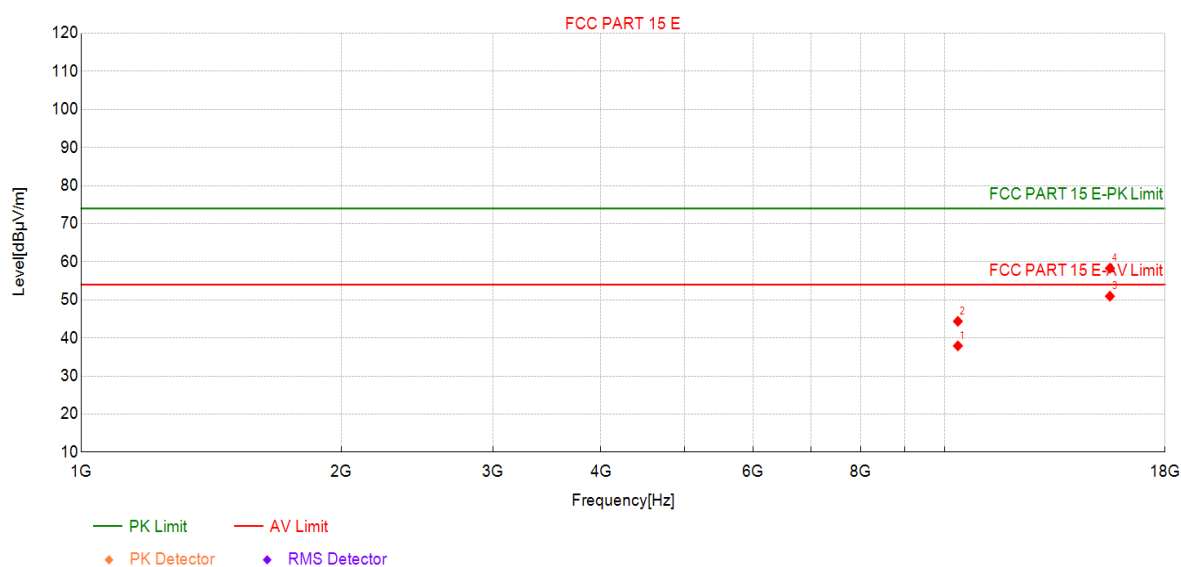

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	31.34	37.92	6.58	54.00	16.08	AV	Horizo	PASS
2	10360	37.79	44.37	6.58	74.00	29.63	PK	Horizo	PASS
3	15540	37.06	50.96	13.90	54.00	3.04	AV	Horizo	PASS
4	15540	44.40	58.30	13.90	74.00	15.70	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5180MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

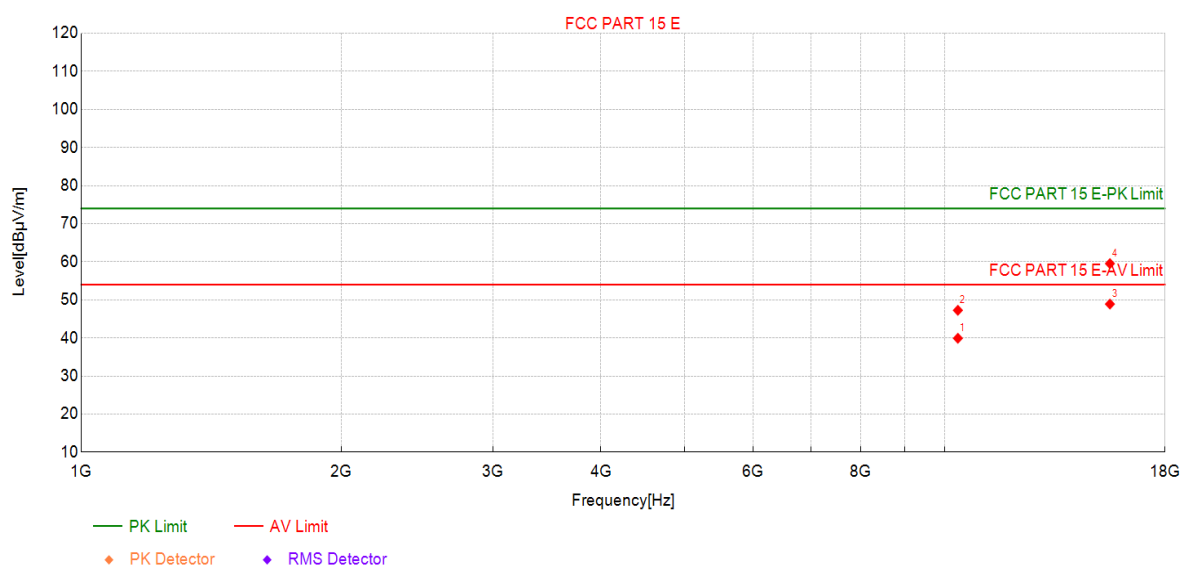

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	33.33	39.91	6.58	54.00	14.09	AV	Vertic	PASS
2	10360	40.68	47.26	6.58	74.00	26.74	PK	Vertic	PASS
3	15540	35.00	48.90	13.90	54.00	5.10	AV	Vertic	PASS
4	15540	45.63	59.53	13.90	74.00	14.47	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5220MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

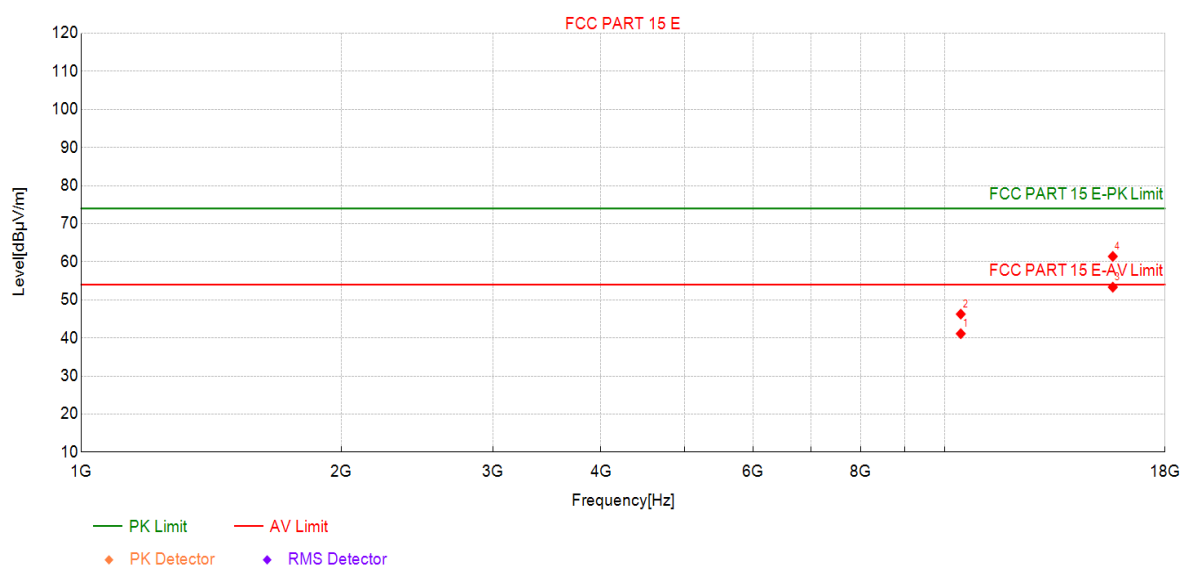

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	34.48	41.12	6.64	54.00	12.88	AV	Horizo	PASS
2	10440	39.62	46.26	6.64	74.00	27.74	PK	Horizo	PASS
3	15660	39.24	53.33	14.09	54.00	0.67	AV	Horizo	PASS
4	15660	47.32	61.41	14.09	74.00	12.59	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5220MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

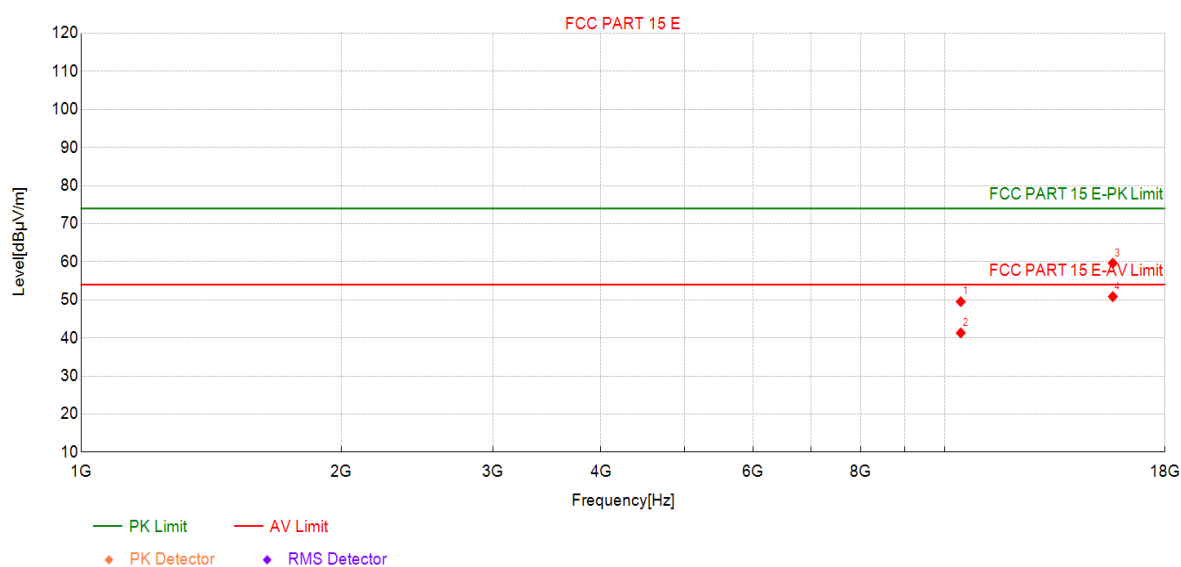

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	42.88	49.52	6.64	74.00	24.48	PK	Vertic	PASS
2	10440	34.68	41.32	6.64	54.00	12.68	AV	Vertic	PASS
3	15660	45.54	59.63	14.09	74.00	14.37	PK	Vertic	PASS
4	15660	36.76	50.85	14.09	54.00	3.15	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5240MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

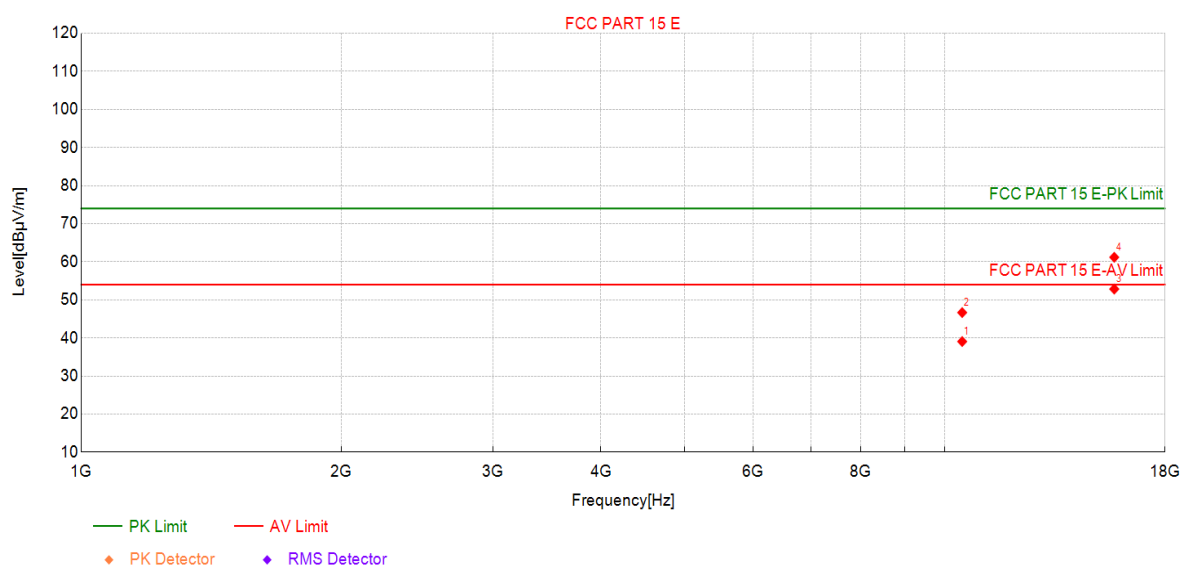

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	32.34	39.05	6.71	54.00	14.95	AV	Horizo	PASS
2	10480	39.95	46.66	6.71	74.00	27.34	PK	Horizo	PASS
3	15720	38.43	52.84	14.41	54.00	1.16	AV	Horizo	PASS
4	15720	46.78	61.19	14.41	74.00	12.81	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5240MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

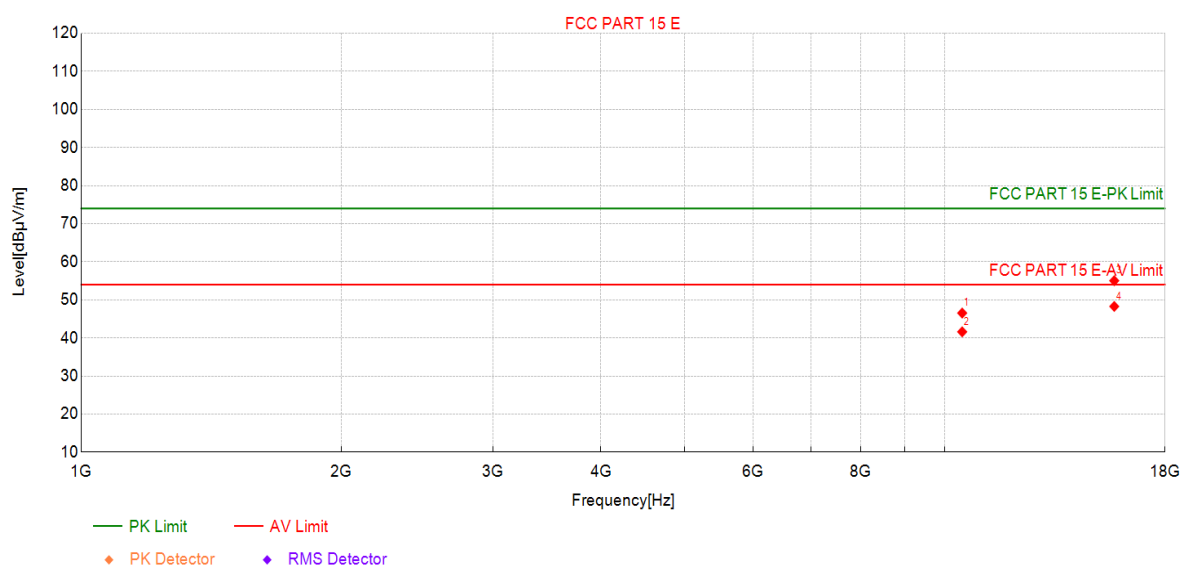

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	39.82	46.53	6.71	74.00	27.47	PK	Vertic	PASS
2	10480	34.89	41.60	6.71	54.00	12.40	AV	Vertic	PASS
3	15720	40.62	55.03	14.41	74.00	18.97	PK	Vertic	PASS
4	15720	33.86	48.27	14.41	54.00	5.73	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5260MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

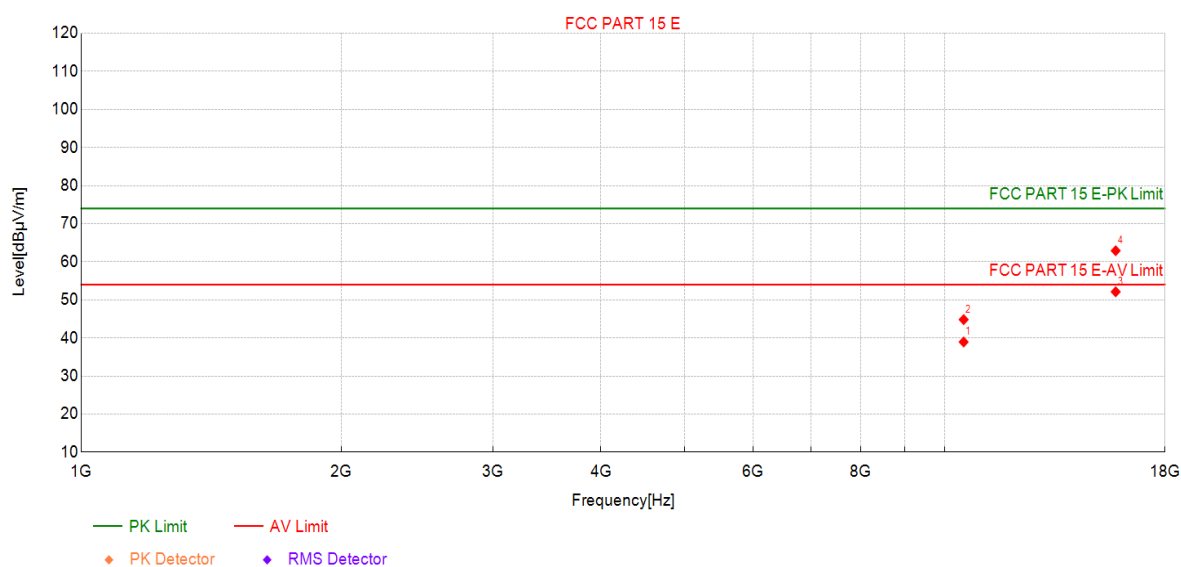

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	32.17	38.93	6.76	54.00	15.07	AV	Horizo	PASS
2	10520	38.06	44.82	6.76	74.00	29.18	PK	Horizo	PASS
3	15780	38.04	52.13	14.09	54.00	1.87	AV	Horizo	PASS
4	15780	48.82	62.91	14.09	74.00	11.09	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5260MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

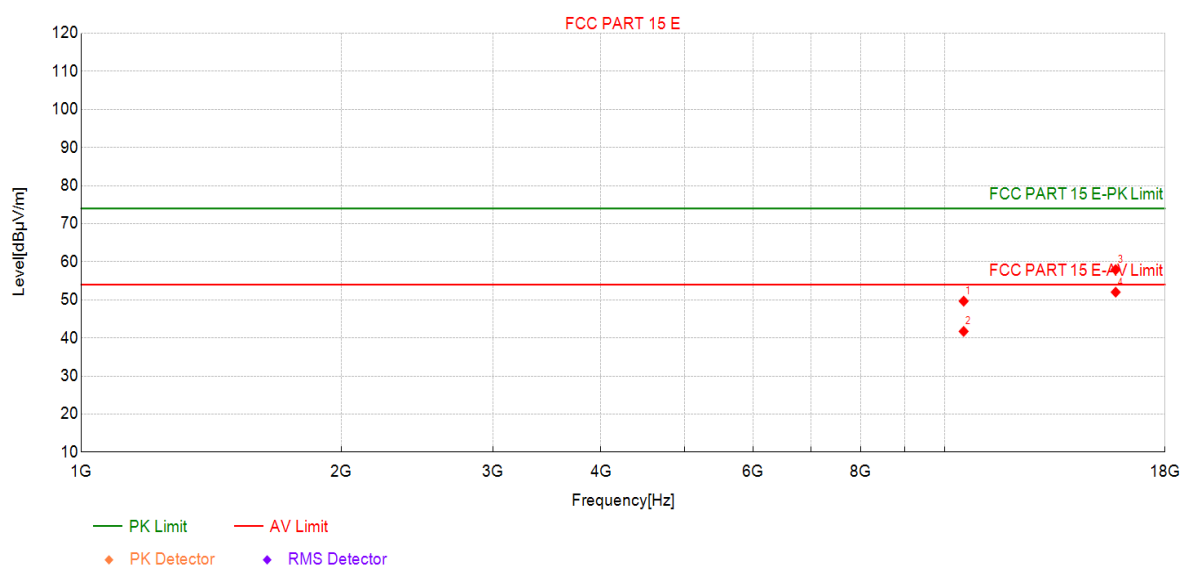

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	42.90	49.66	6.76	74.00	24.34	PK	Vertic	PASS
2	10520	34.95	41.71	6.76	54.00	12.29	AV	Vertic	PASS
3	15780	43.86	57.95	14.09	74.00	16.05	PK	Vertic	PASS
4	15780	37.93	52.02	14.09	54.00	1.98	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5300MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

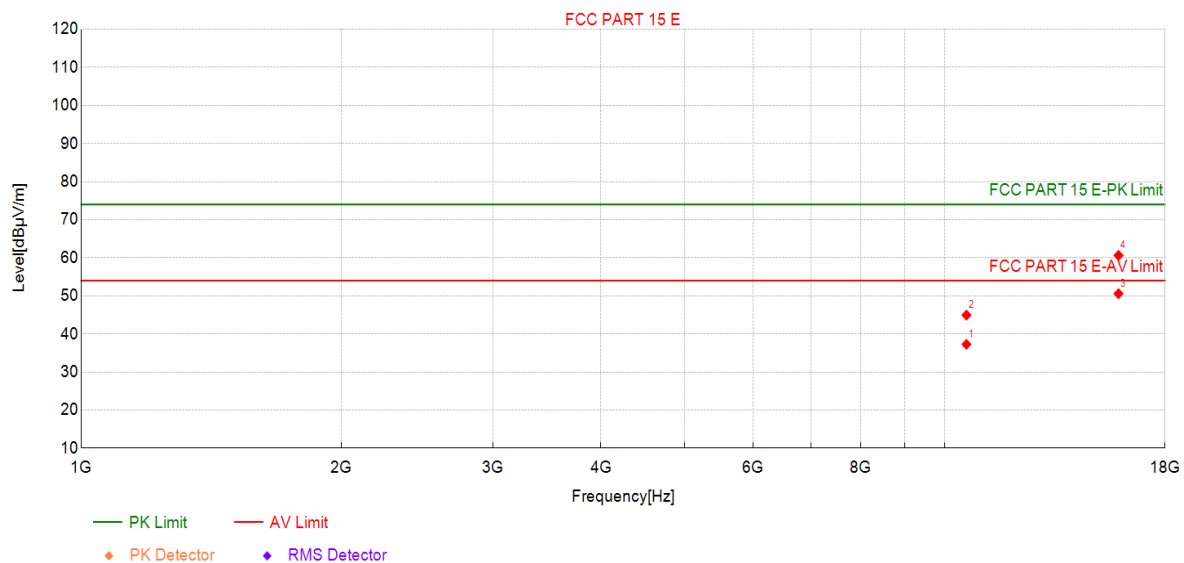

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	30.49	37.27	6.78	54.00	16.73	AV	Horizo	PASS
2	10600	38.17	44.95	6.78	74.00	29.05	PK	Horizo	PASS
3	15900	36.46	50.58	14.12	54.00	3.42	AV	Horizo	PASS
4	15900	46.50	60.62	14.12	74.00	13.38	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5300MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

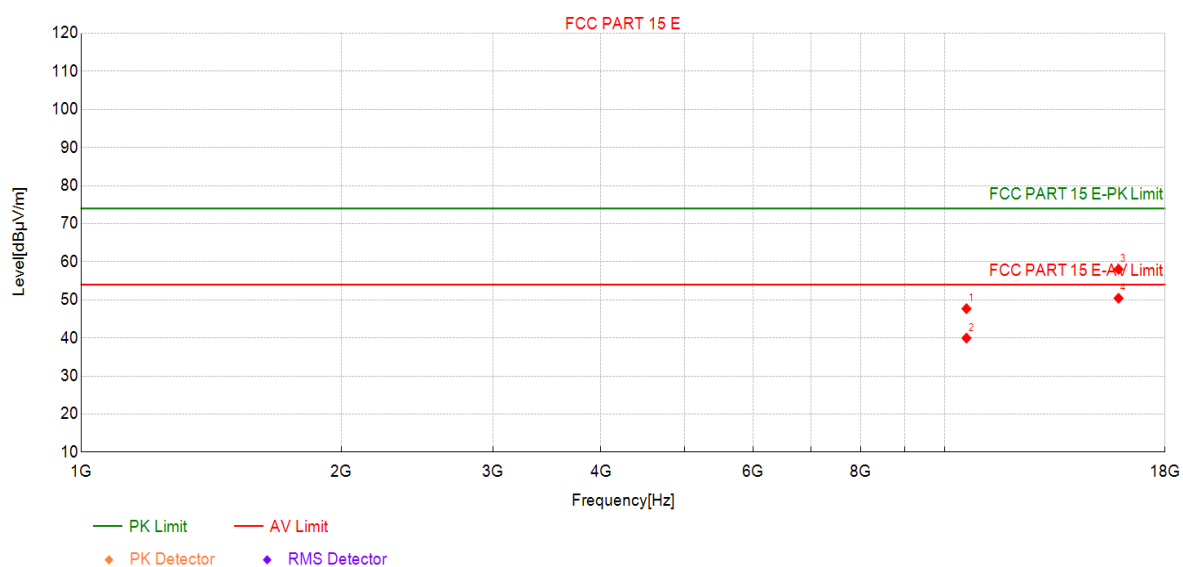

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	40.90	47.68	6.78	74.00	26.32	PK	Vertic	PASS
2	10600	33.19	39.97	6.78	54.00	14.03	AV	Vertic	PASS
3	15900	43.91	58.03	14.12	74.00	15.97	PK	Vertic	PASS
4	15900	36.30	50.42	14.12	54.00	3.58	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

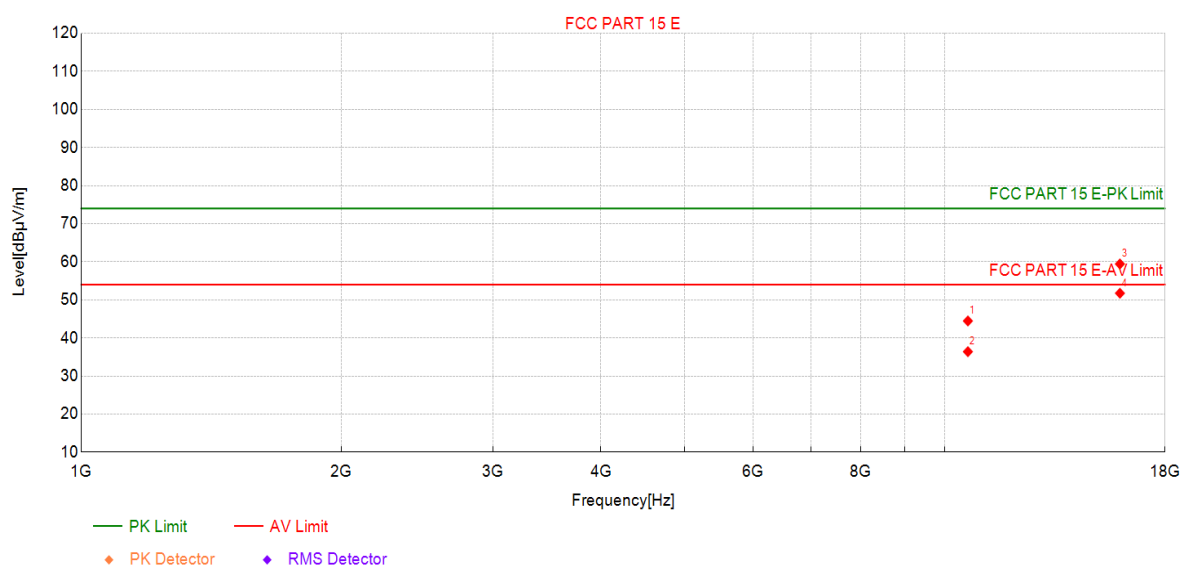

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	37.66	44.46	6.80	74.00	29.54	PK	Horizo	PASS
2	10640	29.59	36.39	6.80	54.00	17.61	AV	Horizo	PASS
3	15960	44.80	59.43	14.63	74.00	14.57	PK	Horizo	PASS
4	15960	37.11	51.74	14.63	54.00	2.26	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

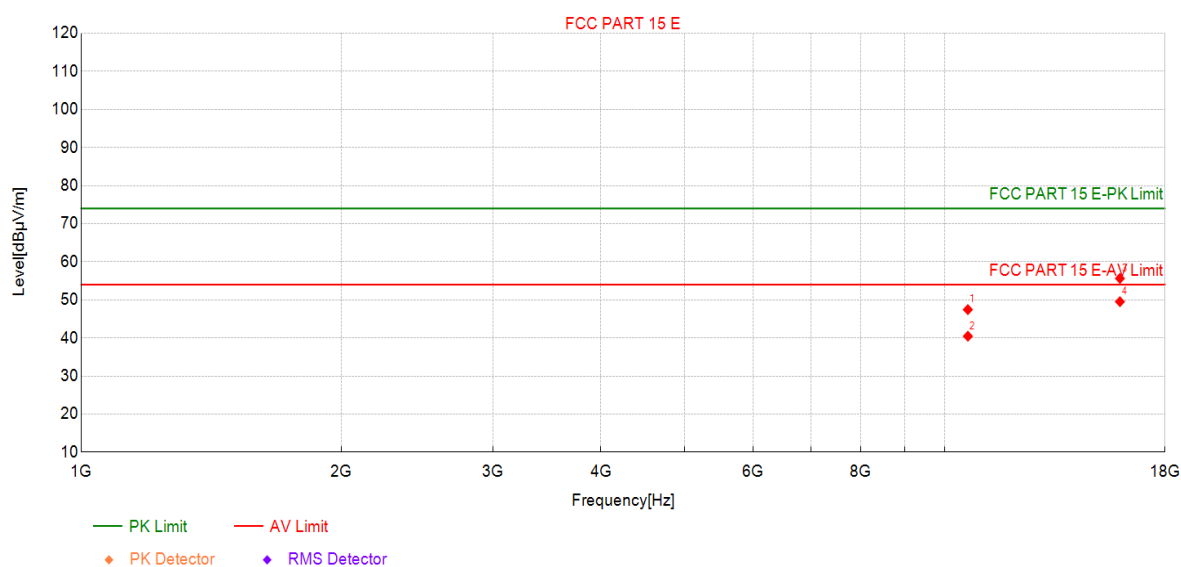

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	40.64	47.44	6.80	74.00	26.56	PK	Vertic	PASS
2	10640	33.65	40.45	6.80	54.00	13.55	AV	Vertic	PASS
3	15960	41.00	55.63	14.63	74.00	18.37	PK	Vertic	PASS
4	15960	34.89	49.52	14.63	54.00	4.48	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5500MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

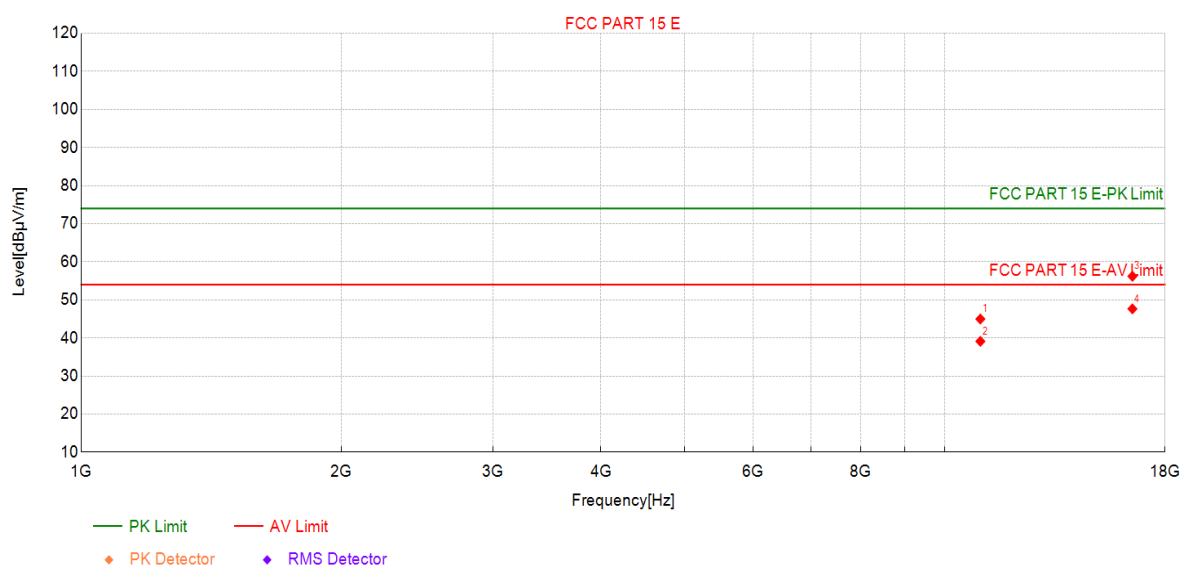

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	37.57	44.97	7.40	74.00	29.03	PK	Horizo	PASS
2	11000	31.71	39.11	7.40	54.00	14.89	AV	Horizo	PASS
3	16500	41.09	56.20	15.11	74.00	17.80	PK	Horizo	PASS
4	16500	32.53	47.64	15.11	54.00	6.36	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5500MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

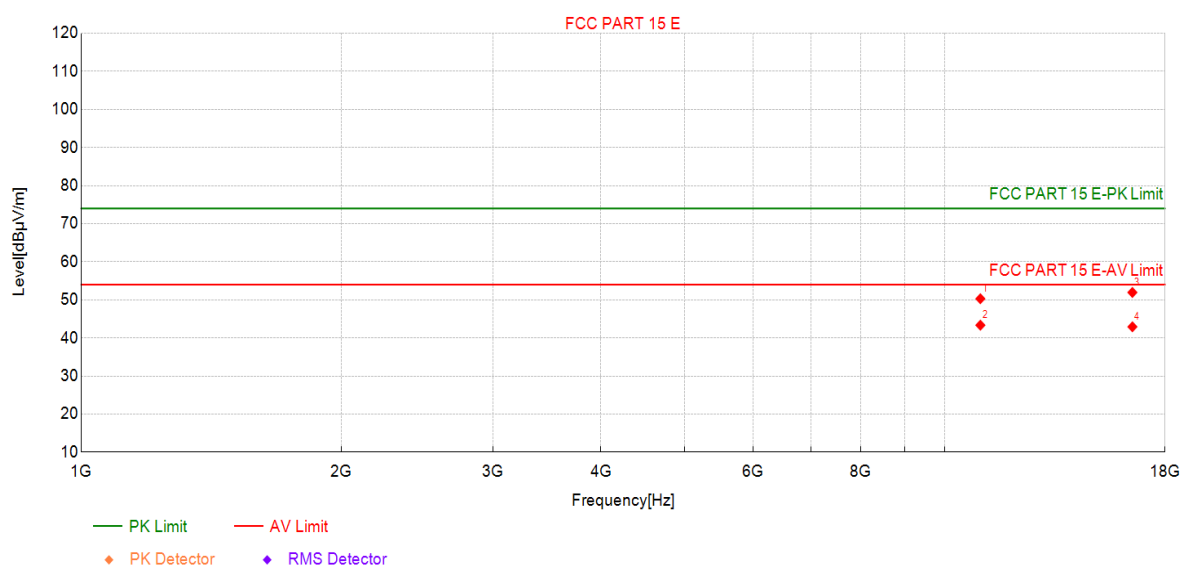

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	42.90	50.30	7.40	74.00	23.70	PK	Vertic	PASS
2	11000	35.95	43.35	7.40	54.00	10.65	AV	Vertic	PASS
3	16500	36.84	51.95	15.11	74.00	22.05	PK	Vertic	PASS
4	16500	27.82	42.93	15.11	54.00	11.07	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5580MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

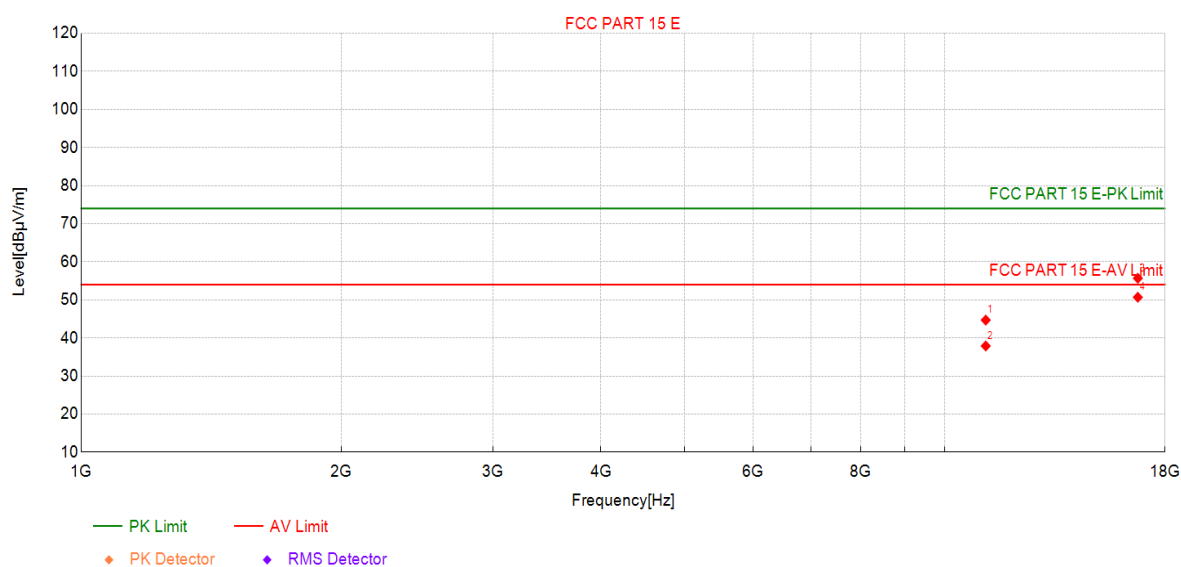

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	37.40	44.69	7.29	74.00	29.31	PK	Horizo	PASS
2	11160	30.60	37.89	7.29	54.00	16.11	AV	Horizo	PASS
3	16740	41.06	55.68	14.62	74.00	18.32	PK	Horizo	PASS
4	16740	36.07	50.69	14.62	54.00	3.31	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5580MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

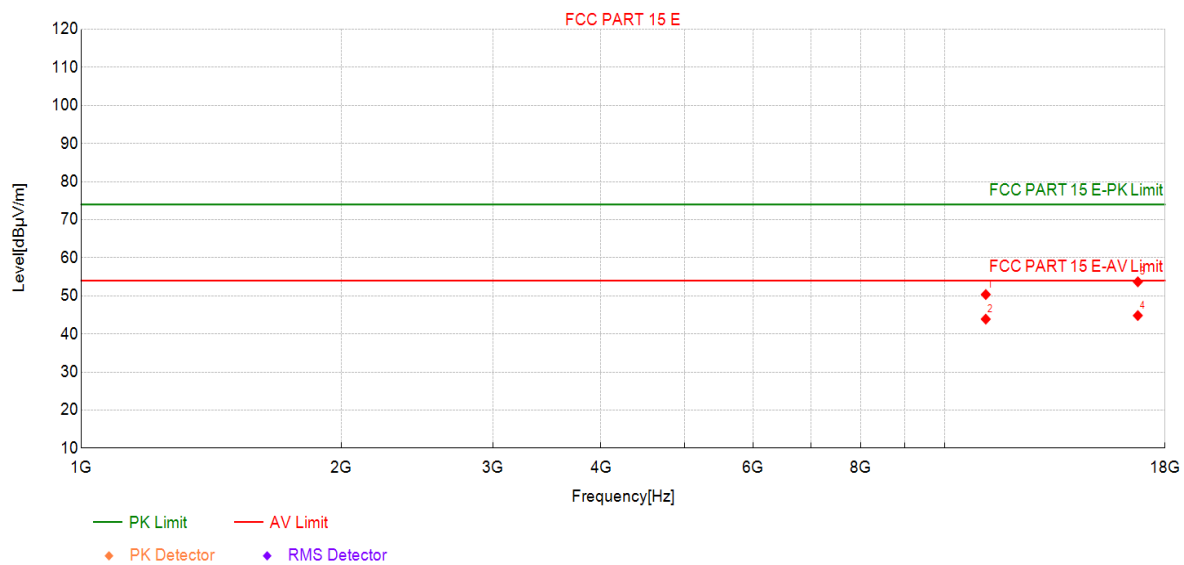

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	43.06	50.35	7.29	74.00	23.65	PK	Vertic	PASS
2	11160	36.60	43.89	7.29	54.00	10.11	AV	Vertic	PASS
3	16740	39.07	53.69	14.62	74.00	20.31	PK	Vertic	PASS
4	16740	30.21	44.83	14.62	54.00	9.17	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5700MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

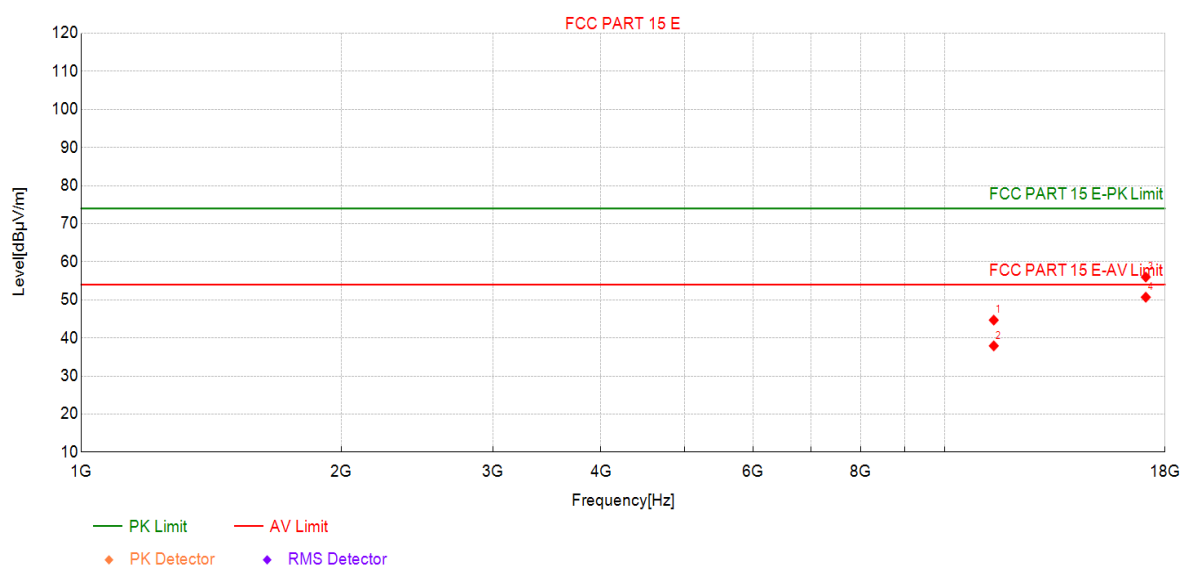

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	36.85	44.68	7.83	74.00	29.32	PK	Horizo	PASS
2	11400	30.09	37.92	7.83	54.00	16.08	AV	Horizo	PASS
3	17100	40.17	55.99	15.82	74.00	18.01	PK	Horizo	PASS
4	17100	34.88	50.70	15.82	54.00	3.30	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5700MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

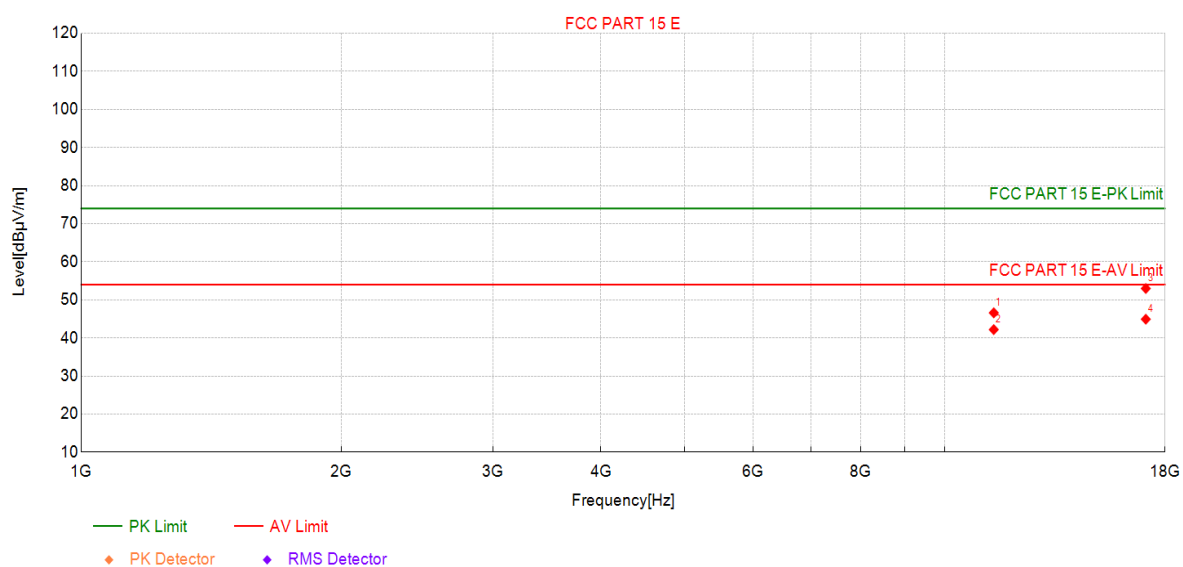

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	38.76	46.59	7.83	74.00	27.41	PK	Vertic	PASS
2	11400	34.36	42.19	7.83	54.00	11.81	AV	Vertic	PASS
3	17100	37.17	52.99	15.82	74.00	21.01	PK	Vertic	PASS
4	17100	29.10	44.92	15.82	54.00	9.08	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

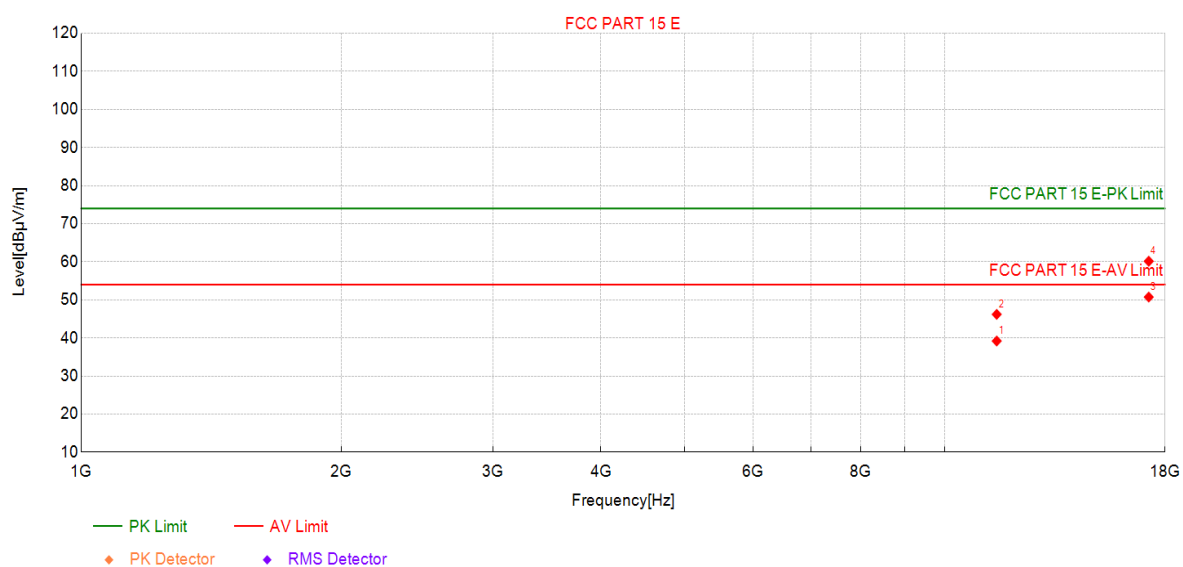

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	30.81	39.19	8.38	54.00	14.81	AV	Horizo	PASS
2	11490	37.82	46.20	8.38	74.00	27.80	PK	Horizo	PASS
3	17235	35.28	50.74	15.46	54.00	3.26	AV	Horizo	PASS
4	17235	44.69	60.15	15.46	74.00	13.85	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

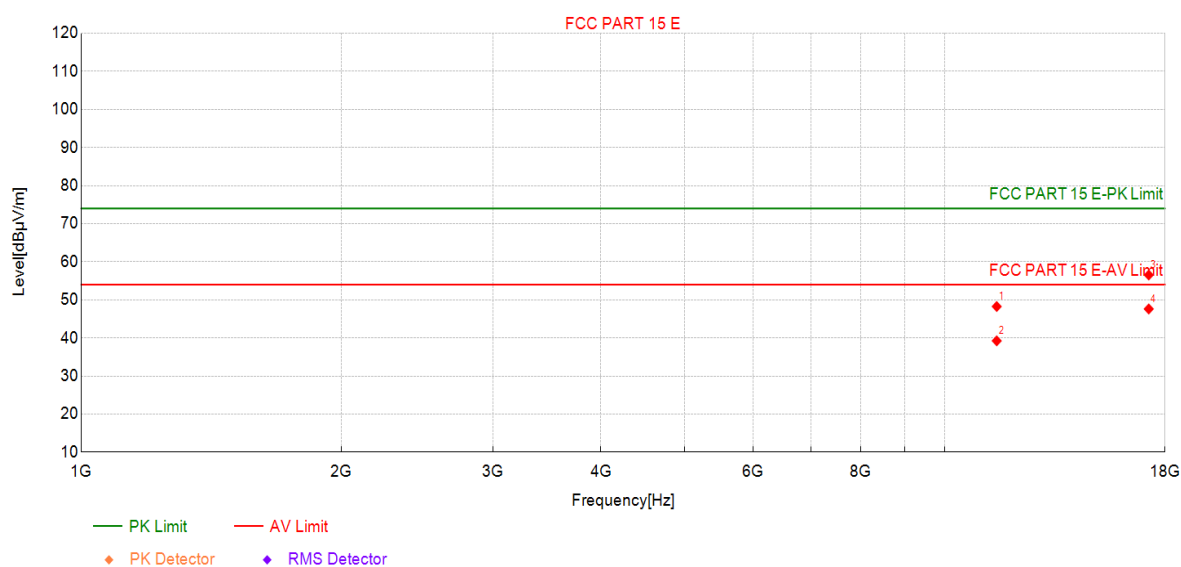

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	39.88	48.26	8.38	74.00	25.74	PK	Vertic	PASS
2	11490	30.86	39.24	8.38	54.00	14.76	AV	Vertic	PASS
3	17235	41.07	56.53	15.46	74.00	17.47	PK	Vertic	PASS
4	17235	32.16	47.62	15.46	54.00	6.38	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

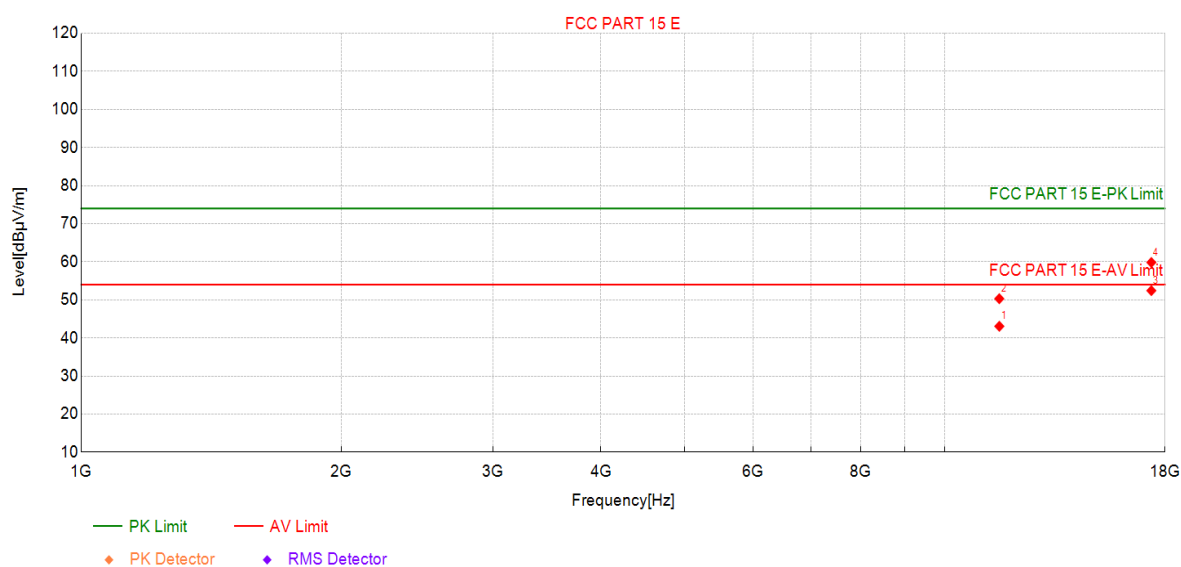

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	34.38	43.06	8.68	54.00	10.94	AV	Horizo	PASS
2	11570	41.63	50.31	8.68	74.00	23.69	PK	Horizo	PASS
3	17355	36.21	52.43	16.22	54.00	1.57	AV	Horizo	PASS
4	17355	43.61	59.83	16.22	74.00	14.17	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

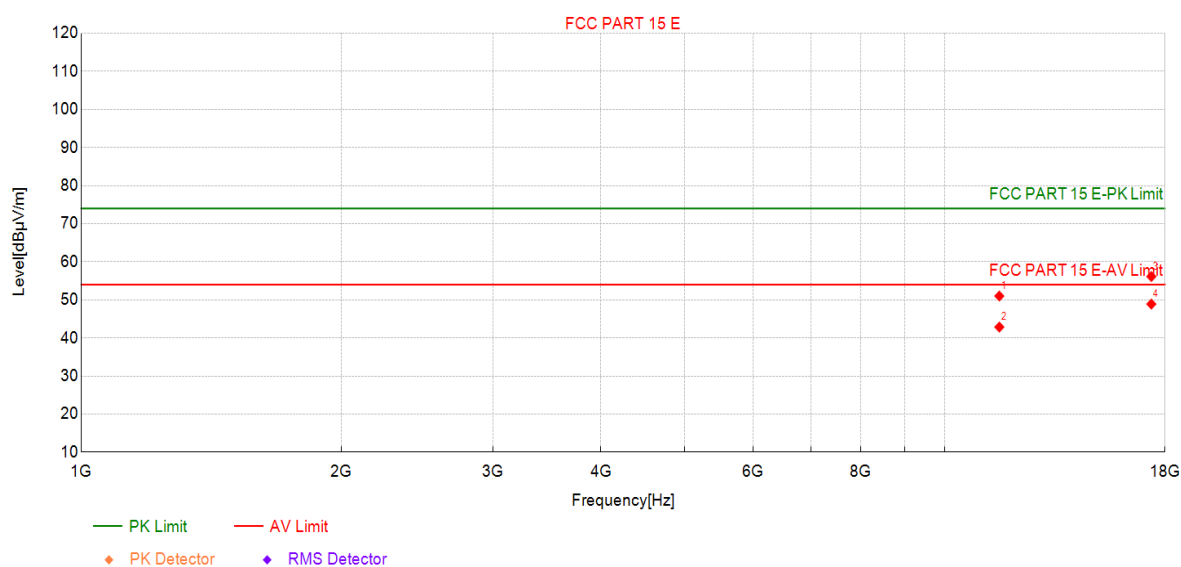

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	42.33	51.01	8.68	74.00	22.99	PK	Vertic	PASS
2	11570	34.18	42.86	8.68	54.00	11.14	AV	Vertic	PASS
3	17355	39.91	56.13	16.22	74.00	17.87	PK	Vertic	PASS
4	17355	32.68	48.90	16.22	54.00	5.10	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

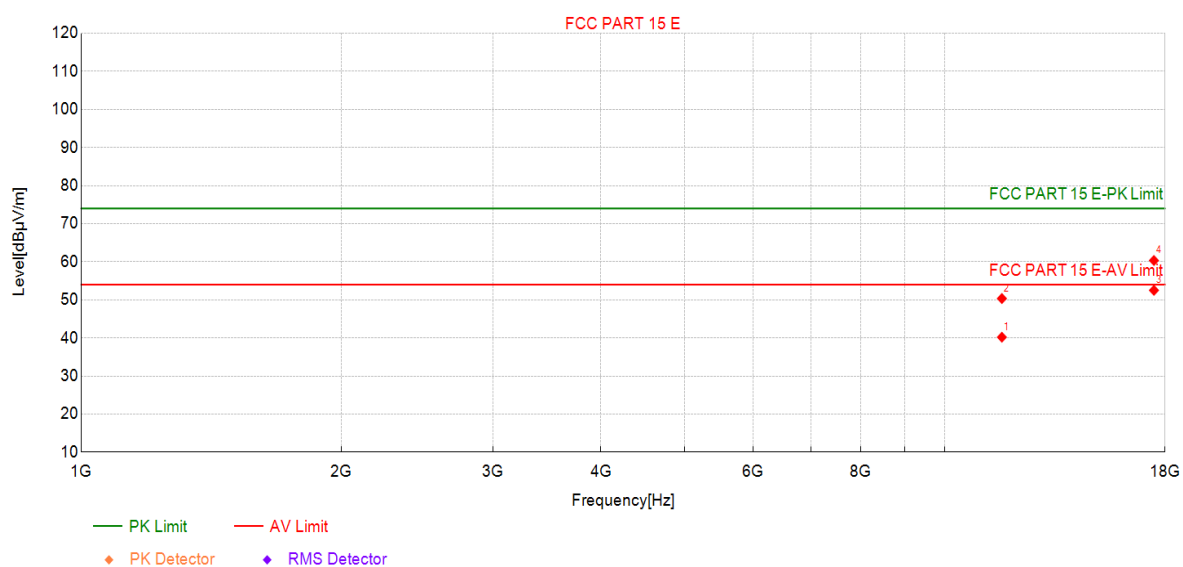

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	31.45	40.19	8.74	54.00	13.81	AV	Horizo	PASS
2	11650	41.61	50.35	8.74	74.00	23.65	PK	Horizo	PASS
3	17475	35.45	52.52	17.07	54.00	1.48	AV	Horizo	PASS
4	17475	43.27	60.34	17.07	74.00	13.66	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

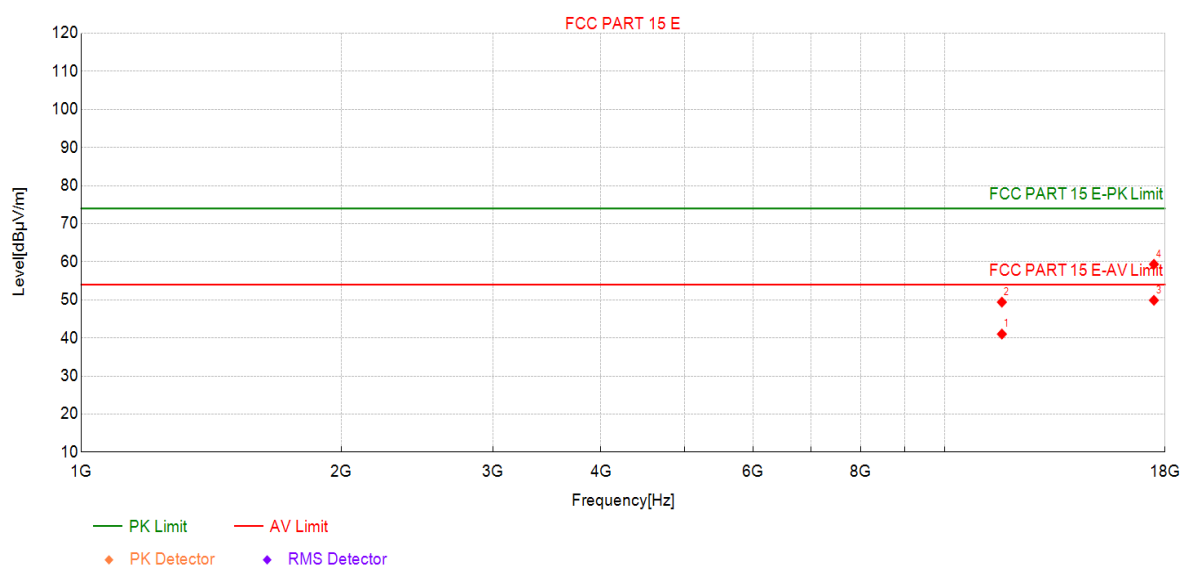

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	32.27	41.01	8.74	54.00	12.99	AV	Vertic	PASS
2	11650	40.66	49.40	8.74	74.00	24.60	PK	Vertic	PASS
3	17475	32.81	49.88	17.07	54.00	4.12	AV	Vertic	PASS
4	17475	42.27	59.34	17.07	74.00	14.66	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

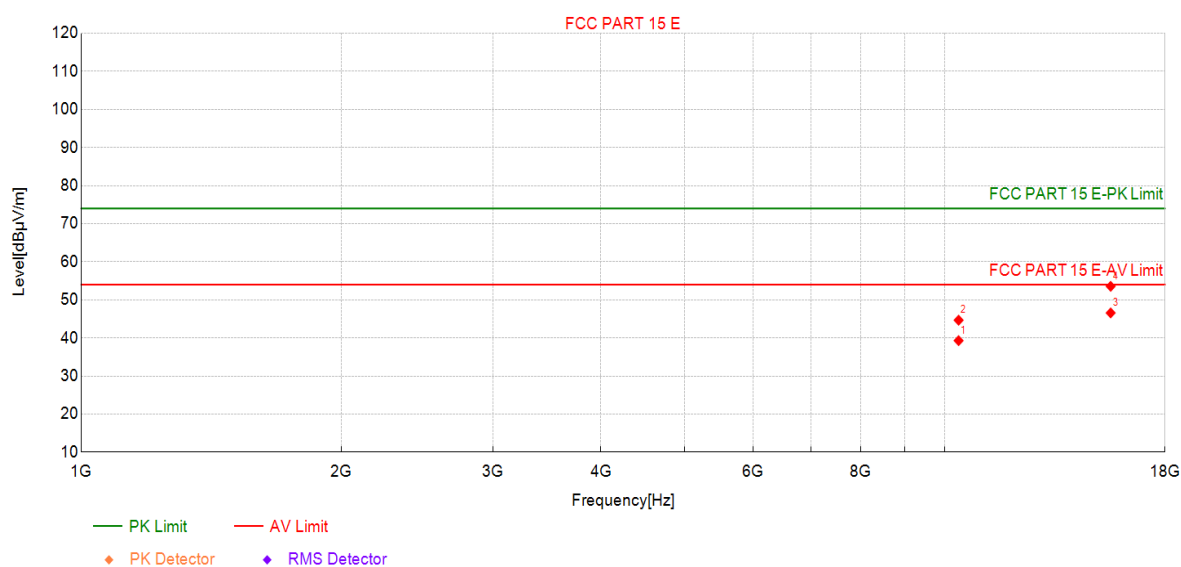

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	32.72	39.29	6.57	54.00	14.71	AV	Horizo	PASS
2	10380	38.09	44.66	6.57	74.00	29.34	PK	Horizo	PASS
3	15570	32.88	46.57	13.69	54.00	7.43	AV	Horizo	PASS
4	15570	39.87	53.56	13.69	74.00	20.44	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

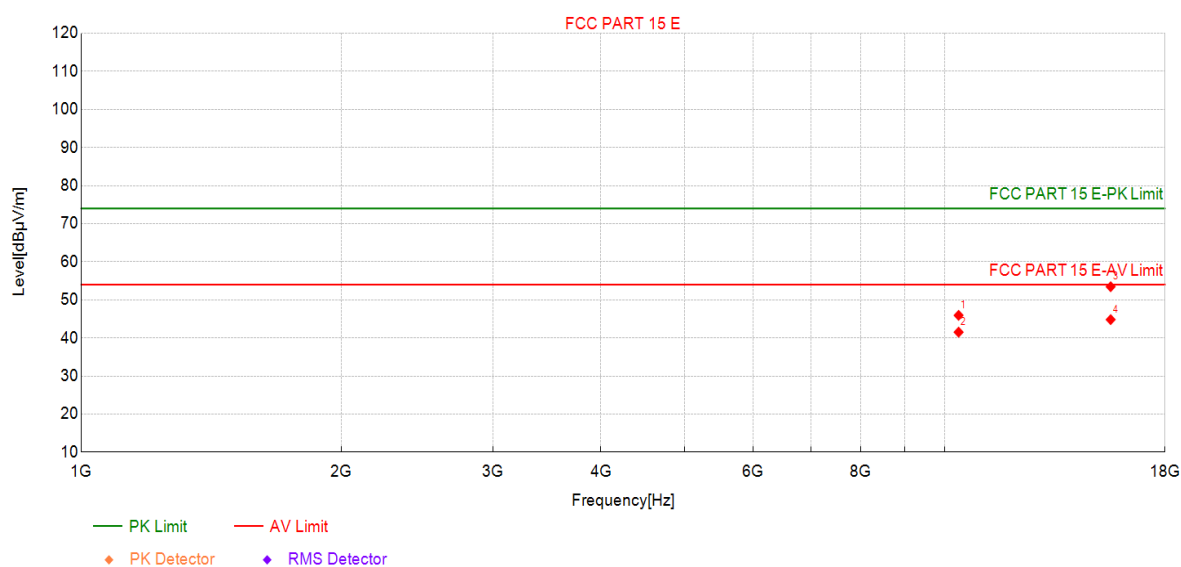

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	39.37	45.94	6.57	74.00	28.06	PK	Vertic	PASS
2	10380	34.95	41.52	6.57	54.00	12.48	AV	Vertic	PASS
3	15570	39.77	53.46	13.69	74.00	20.54	PK	Vertic	PASS
4	15570	31.12	44.81	13.69	54.00	9.19	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5230MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

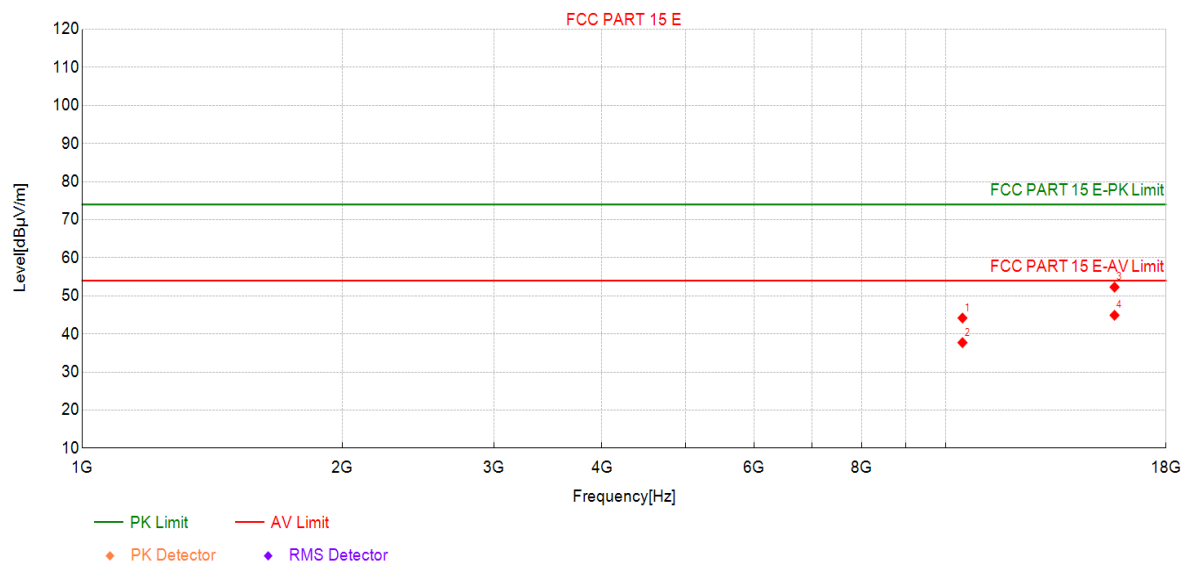

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	37.52	44.19	6.67	74.00	29.81	PK	Horizo	PASS
2	10460	31.04	37.71	6.67	54.00	16.29	AV	Horizo	PASS
3	15690	37.88	52.29	14.41	74.00	21.71	PK	Horizo	PASS
4	15690	30.50	44.91	14.41	54.00	9.09	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5230MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

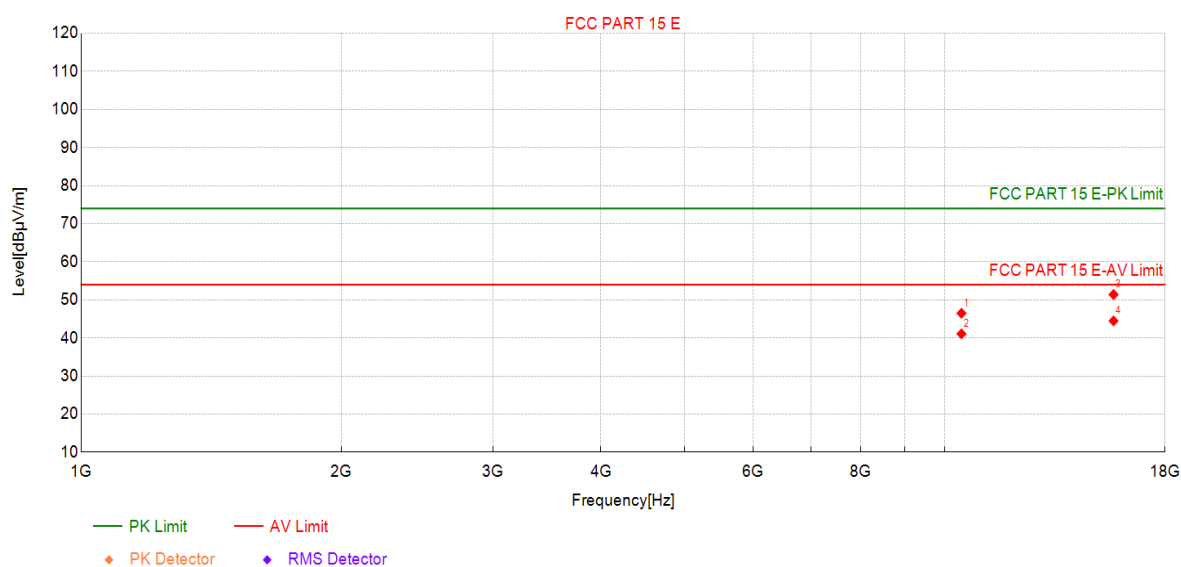

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	39.81	46.48	6.67	74.00	27.52	PK	Vertic	PASS
2	10460	34.40	41.07	6.67	54.00	12.93	AV	Vertic	PASS
3	15690	37.00	51.41	14.41	74.00	22.59	PK	Vertic	PASS
4	15690	30.06	44.47	14.41	54.00	9.53	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5270MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

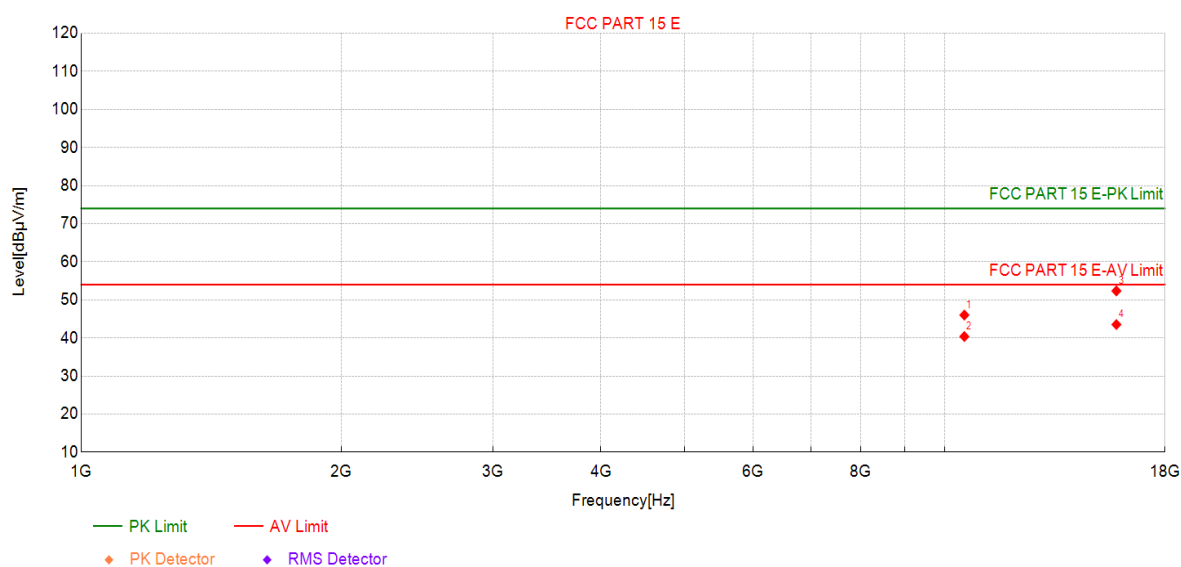

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	39.25	46.01	6.76	74.00	27.99	PK	Horizo	PASS
2	10540	33.61	40.37	6.76	54.00	13.63	AV	Horizo	PASS
3	15810	38.35	52.36	14.01	74.00	21.64	PK	Horizo	PASS
4	15810	29.51	43.52	14.01	54.00	10.48	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5270MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

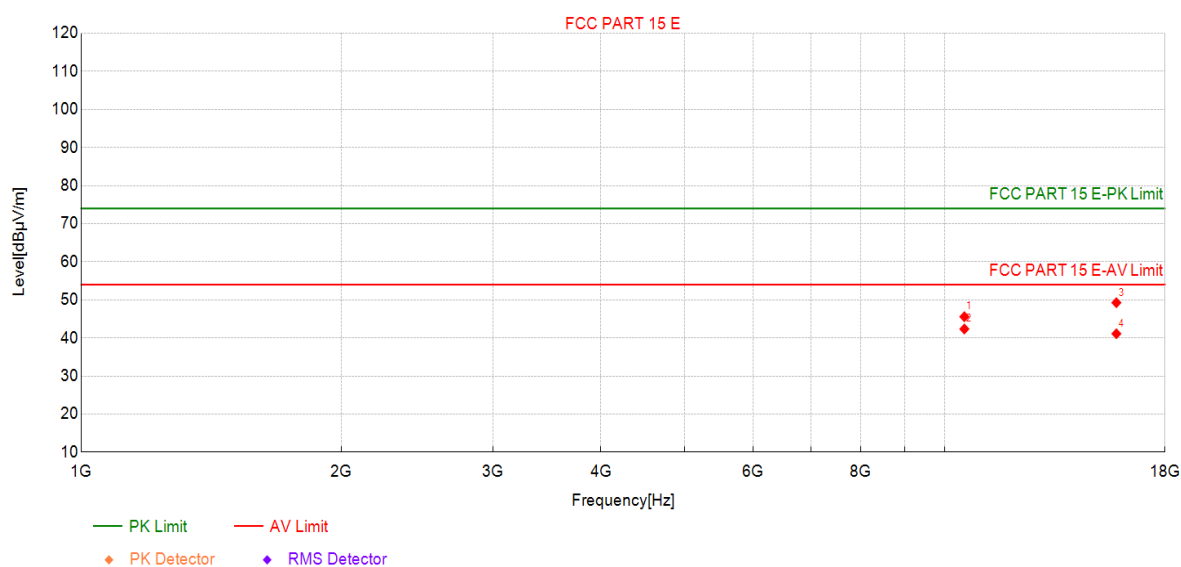

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	38.82	45.58	6.76	74.00	28.42	PK	Vertic	PASS
2	10540	35.59	42.35	6.76	54.00	11.65	AV	Vertic	PASS
3	15810	35.24	49.25	14.01	74.00	24.75	PK	Vertic	PASS
4	15810	27.09	41.10	14.01	54.00	12.90	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

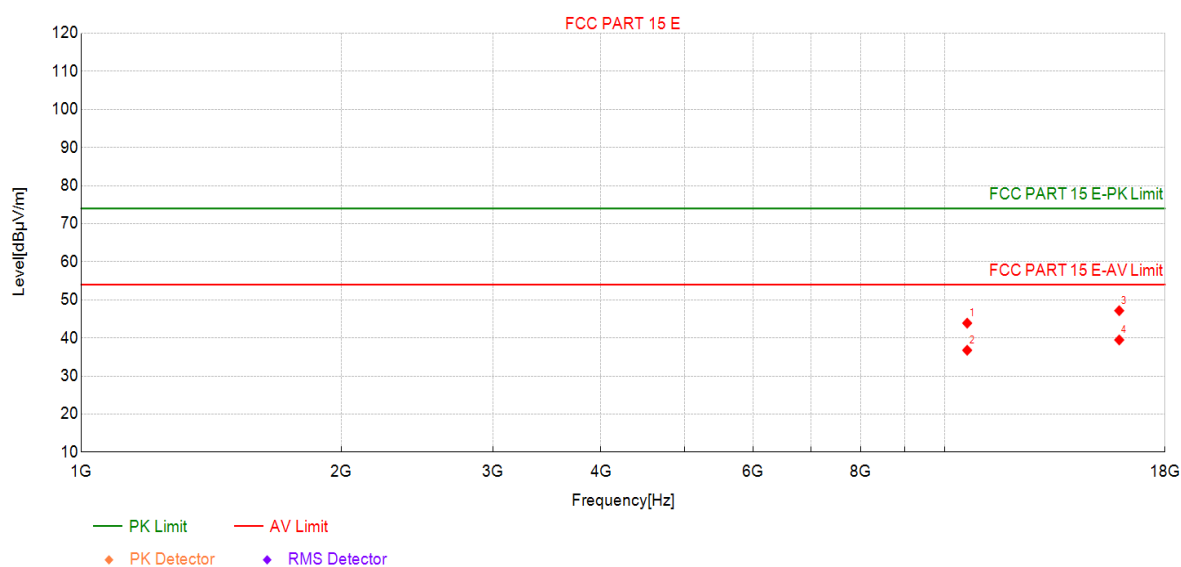

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	37.10	43.89	6.79	74.00	30.11	PK	Horizo	PASS
2	10620	29.97	36.76	6.79	54.00	17.24	AV	Horizo	PASS
3	15930	32.79	47.16	14.37	74.00	26.84	PK	Horizo	PASS
4	15930	25.11	39.48	14.37	54.00	14.52	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

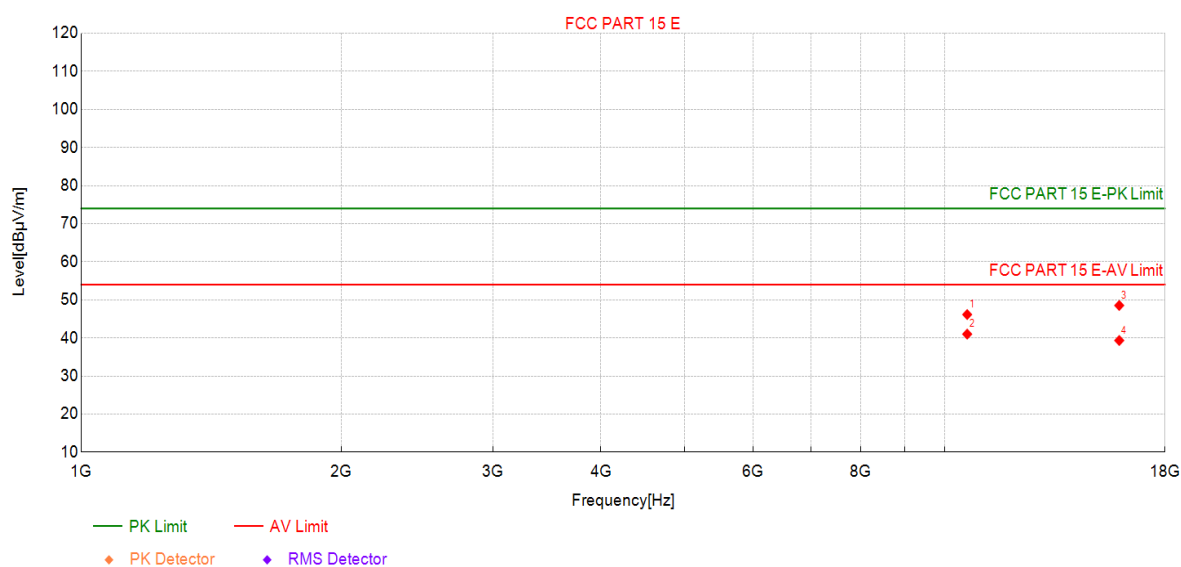

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	39.35	46.14	6.79	74.00	27.86	PK	Vertic	PASS
2	10620	34.21	41.00	6.79	54.00	13.00	AV	Vertic	PASS
3	15930	34.16	48.53	14.37	74.00	25.47	PK	Vertic	PASS
4	15930	24.96	39.33	14.37	54.00	14.67	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

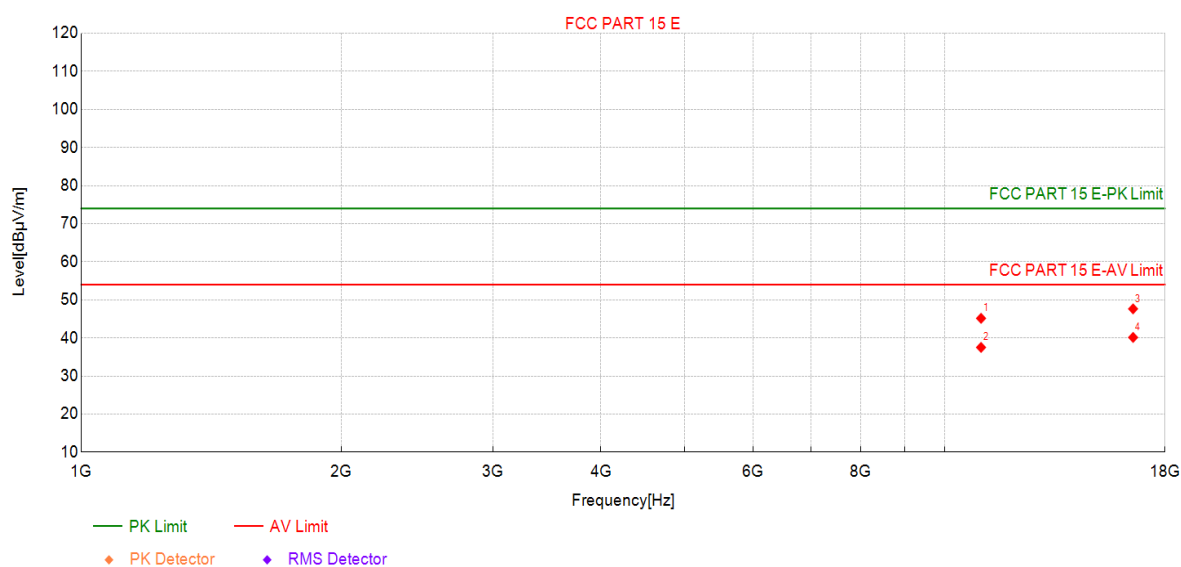

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	37.90	45.15	7.25	74.00	28.85	PK	Horizo	PASS
2	11020	30.26	37.51	7.25	54.00	16.49	AV	Horizo	PASS
3	16530	32.63	47.64	15.01	74.00	26.36	PK	Horizo	PASS
4	16530	25.13	40.14	15.01	54.00	13.86	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

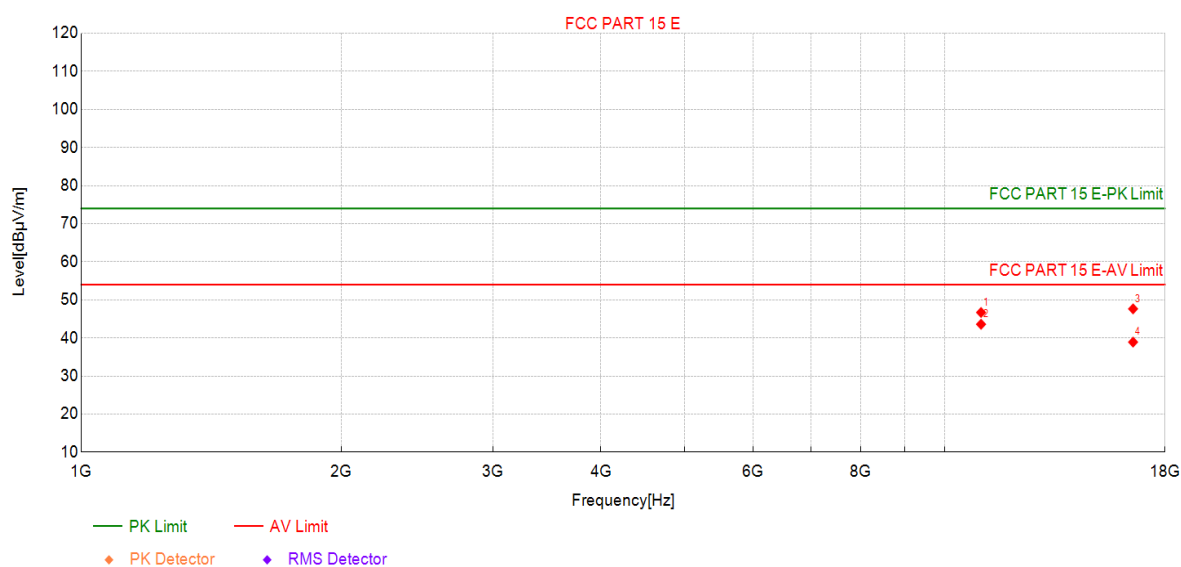

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	39.44	46.69	7.25	74.00	27.31	PK	Vertic	PASS
2	11020	36.35	43.60	7.25	54.00	10.40	AV	Vertic	PASS
3	16530	32.63	47.64	15.01	74.00	26.36	PK	Vertic	PASS
4	16530	23.90	38.91	15.01	54.00	15.09	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5550MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

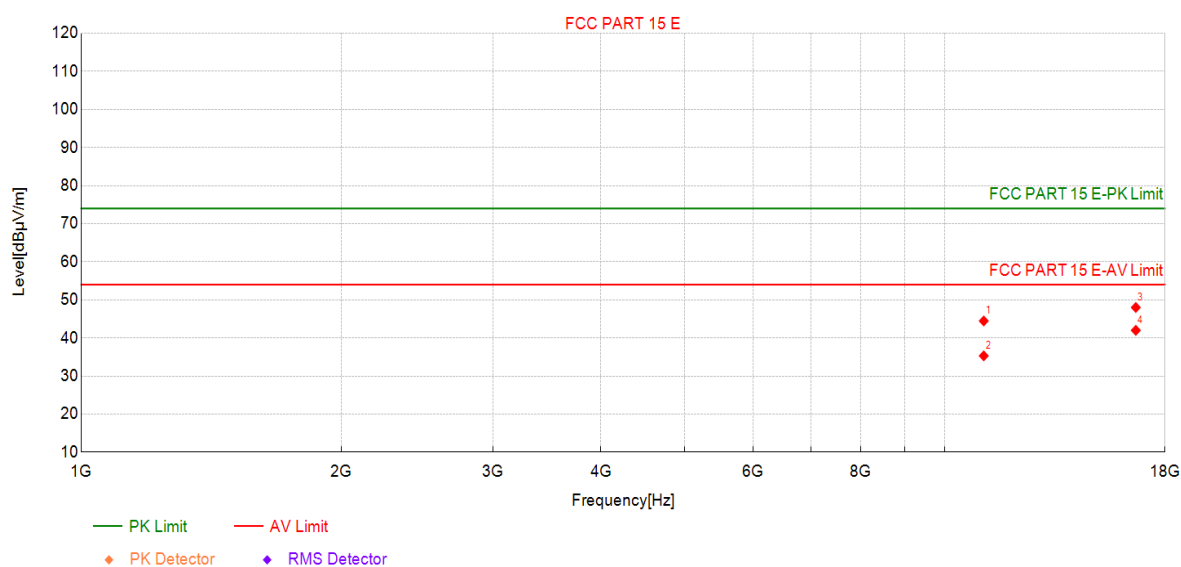

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	37.80	44.46	6.66	74.00	29.54	PK	Horizo	PASS
2	11100	28.63	35.29	6.66	54.00	18.71	AV	Horizo	PASS
3	16650	33.32	48.01	14.69	74.00	25.99	PK	Horizo	PASS
4	16650	27.31	42.00	14.69	54.00	12.00	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5550MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

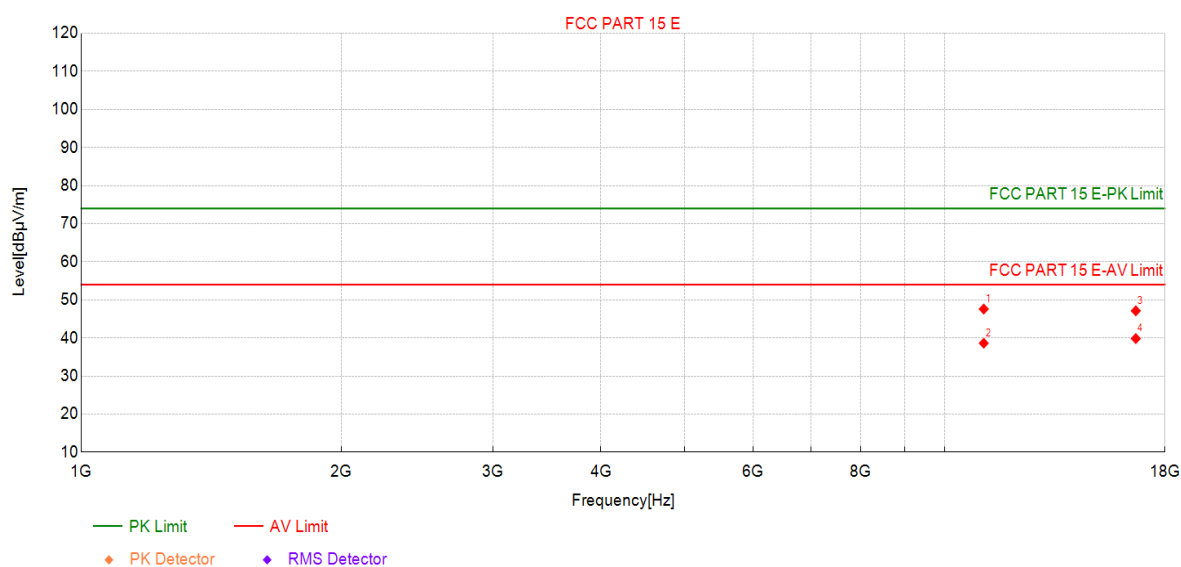

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	40.93	47.59	6.66	74.00	26.41	PK	Vertic	PASS
2	11100	31.95	38.61	6.66	54.00	15.39	AV	Vertic	PASS
3	16650	32.44	47.13	14.69	74.00	26.87	PK	Vertic	PASS
4	16650	25.14	39.83	14.69	54.00	14.17	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5670MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

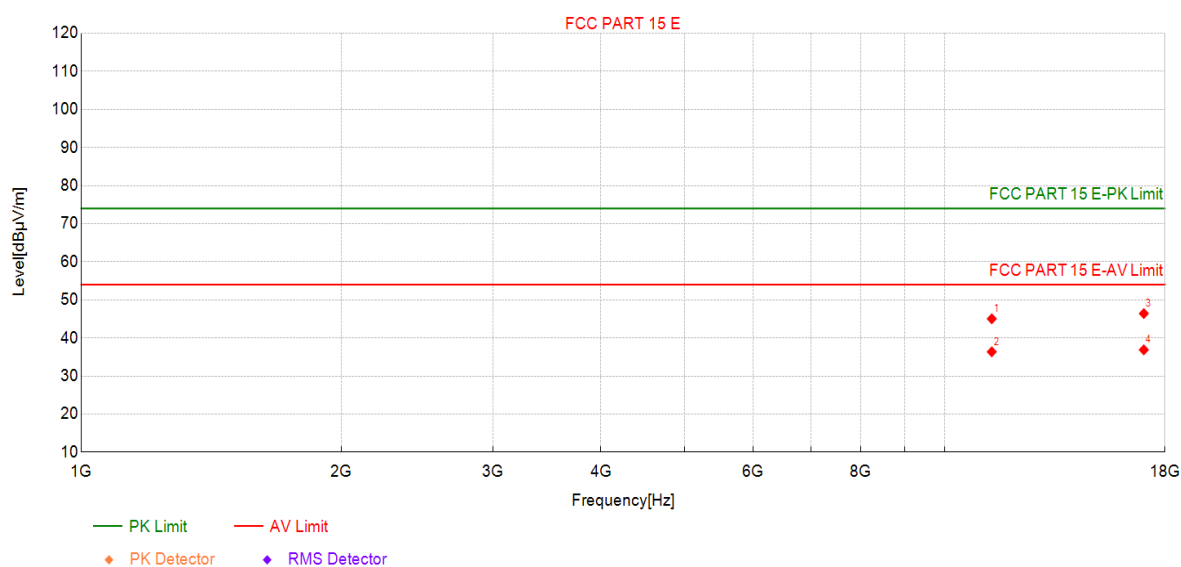

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	37.17	45.03	7.86	74.00	28.97	PK	Horizo	PASS
2	11340	28.49	36.35	7.86	54.00	17.65	AV	Horizo	PASS
3	17010	30.37	46.41	16.04	74.00	27.59	PK	Horizo	PASS
4	17010	20.84	36.88	16.04	54.00	17.12	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5670MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

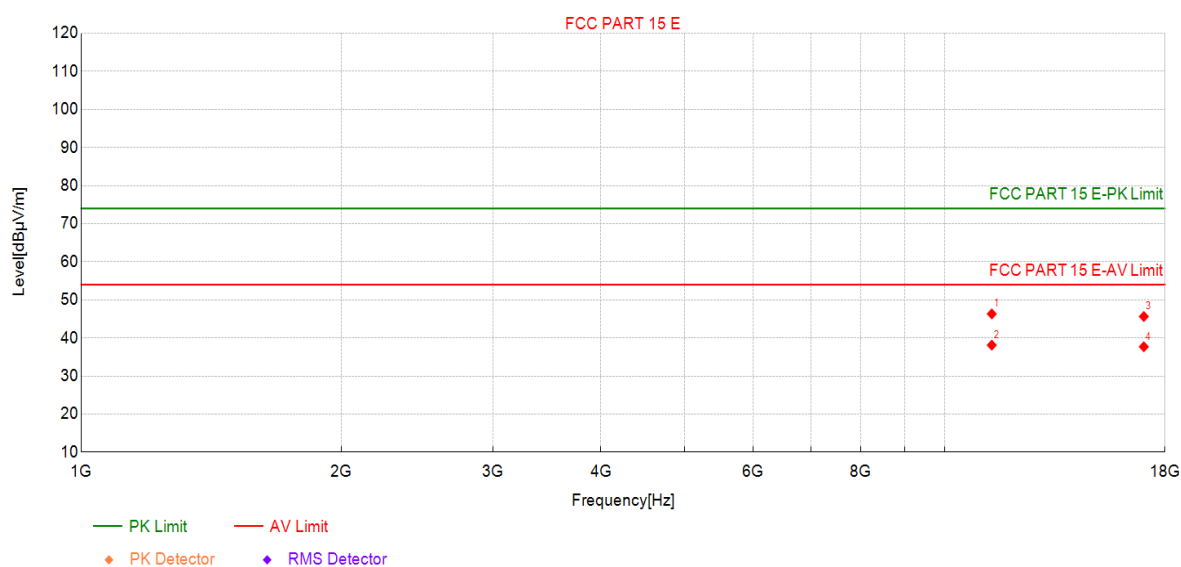

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	38.45	46.31	7.86	74.00	27.69	PK	Vertic	PASS
2	11340	30.25	38.11	7.86	54.00	15.89	AV	Vertic	PASS
3	17010	29.59	45.63	16.04	74.00	28.37	PK	Vertic	PASS
4	17010	21.66	37.70	16.04	54.00	16.30	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

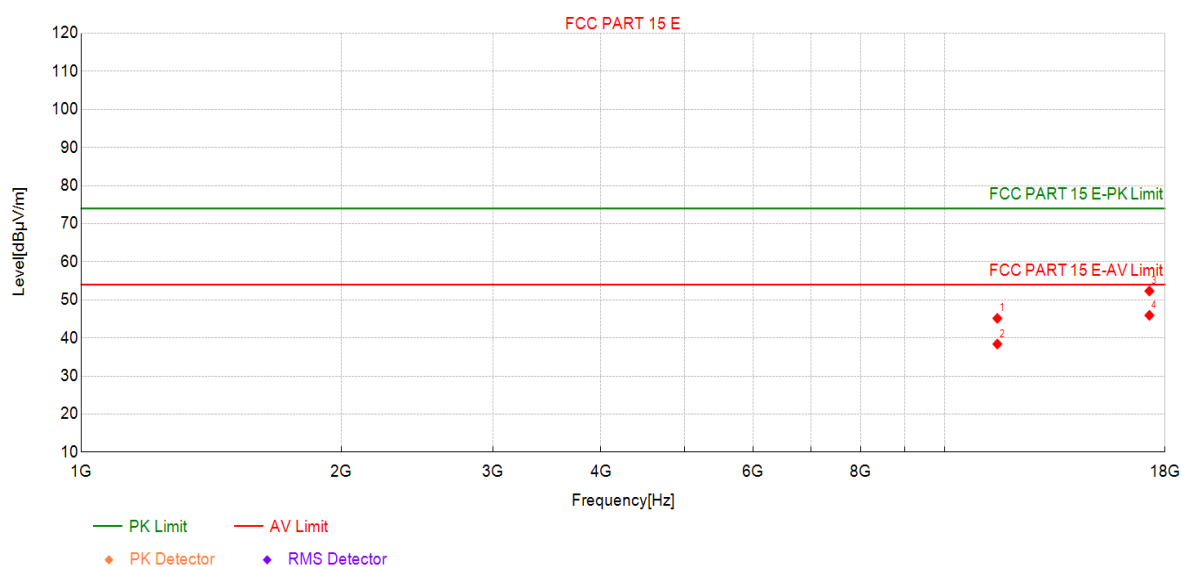

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	36.65	45.13	8.48	74.00	28.87	PK	Horizo	PASS
2	11510	29.91	38.39	8.48	54.00	15.61	AV	Horizo	PASS
3	17265	36.82	52.33	15.51	74.00	21.67	PK	Horizo	PASS
4	17265	30.43	45.94	15.51	54.00	8.06	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

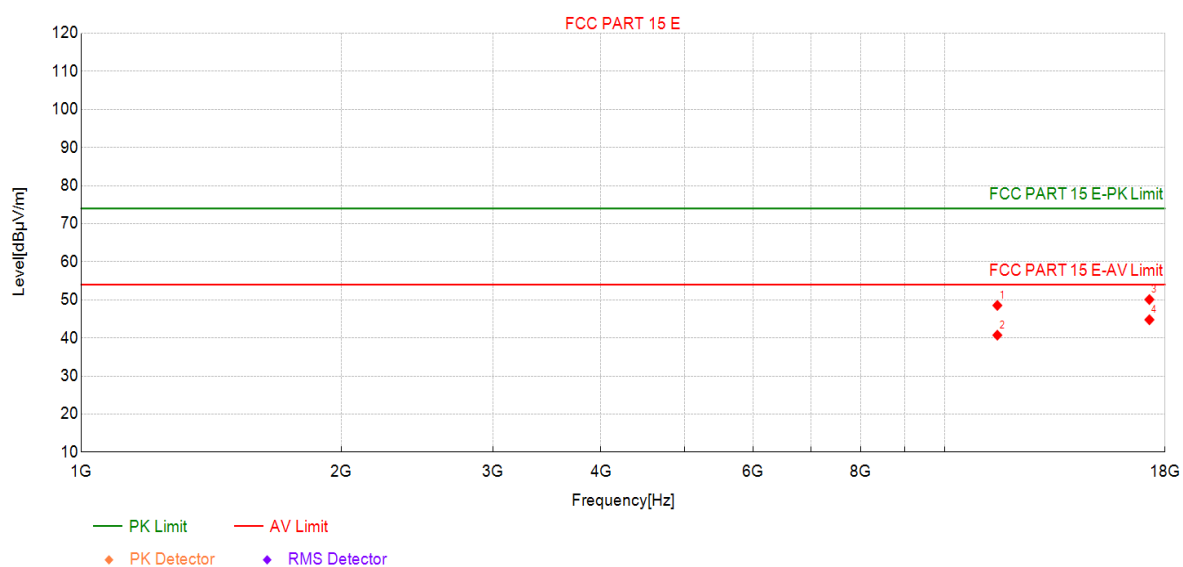

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	40.05	48.53	8.48	74.00	25.47	PK	Vertic	PASS
2	11510	32.25	40.73	8.48	54.00	13.27	AV	Vertic	PASS
3	17265	34.58	50.09	15.51	74.00	23.91	PK	Vertic	PASS
4	17265	29.26	44.77	15.51	54.00	9.23	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

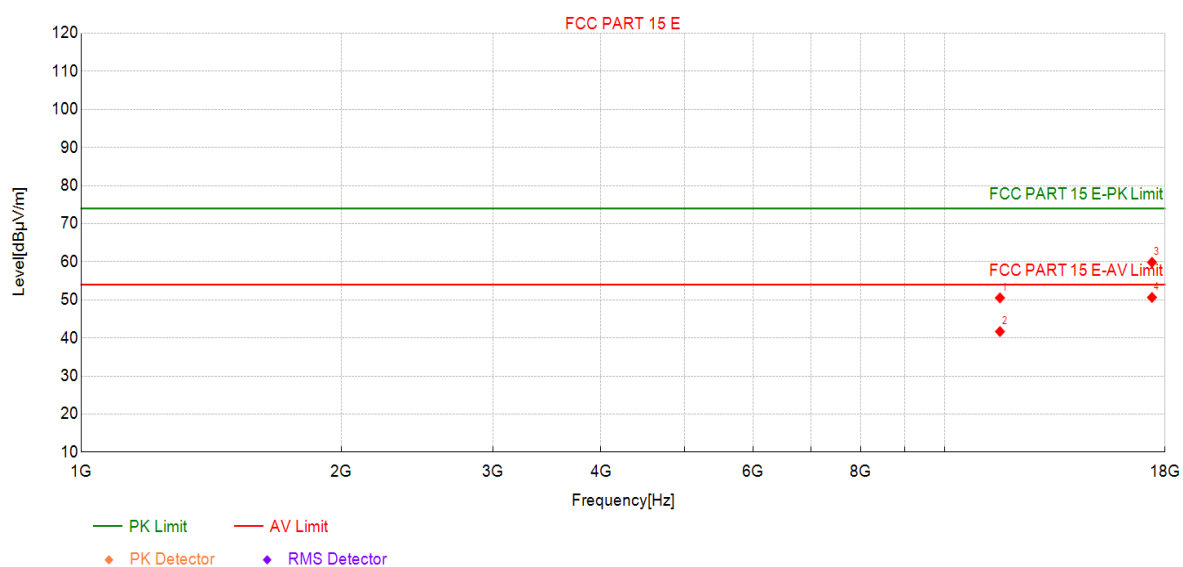

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	41.79	50.53	8.74	74.00	23.47	PK	Horizo	PASS
2	11590	32.94	41.68	8.74	54.00	12.32	AV	Horizo	PASS
3	17385	43.29	59.87	16.58	74.00	14.13	PK	Horizo	PASS
4	17385	34.07	50.65	16.58	54.00	3.35	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

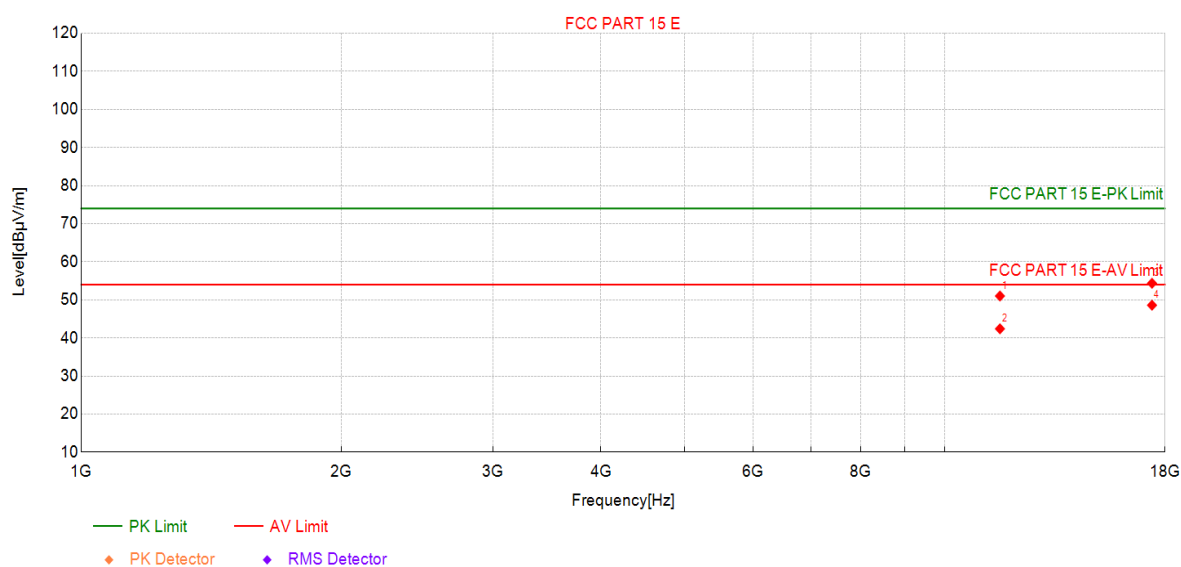

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	42.28	51.02	8.74	74.00	22.98	PK	Vertic	PASS
2	11590	33.66	42.40	8.74	54.00	11.60	AV	Vertic	PASS
3	17385	37.78	54.36	16.58	74.00	19.64	PK	Vertic	PASS
4	17385	32.02	48.60	16.58	54.00	5.40	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

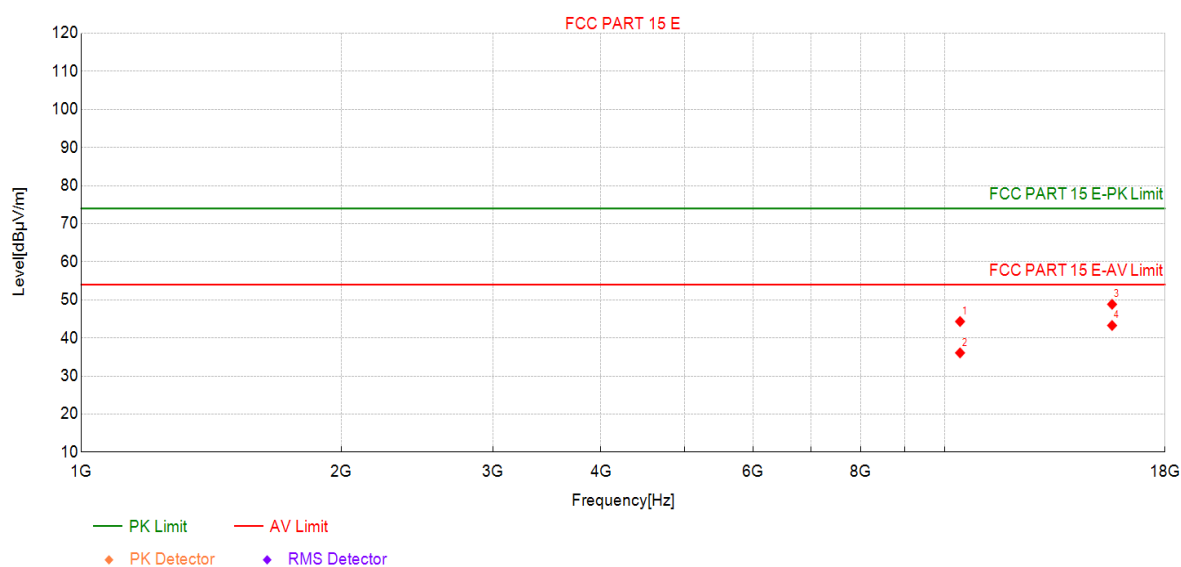

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	37.71	44.31	6.60	74.00	29.69	PK	Horizo	PASS
2	10420	29.48	36.08	6.60	54.00	17.92	AV	Horizo	PASS
3	15630	35.05	48.83	13.78	74.00	25.17	PK	Horizo	PASS
4	15630	29.49	43.27	13.78	54.00	10.73	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

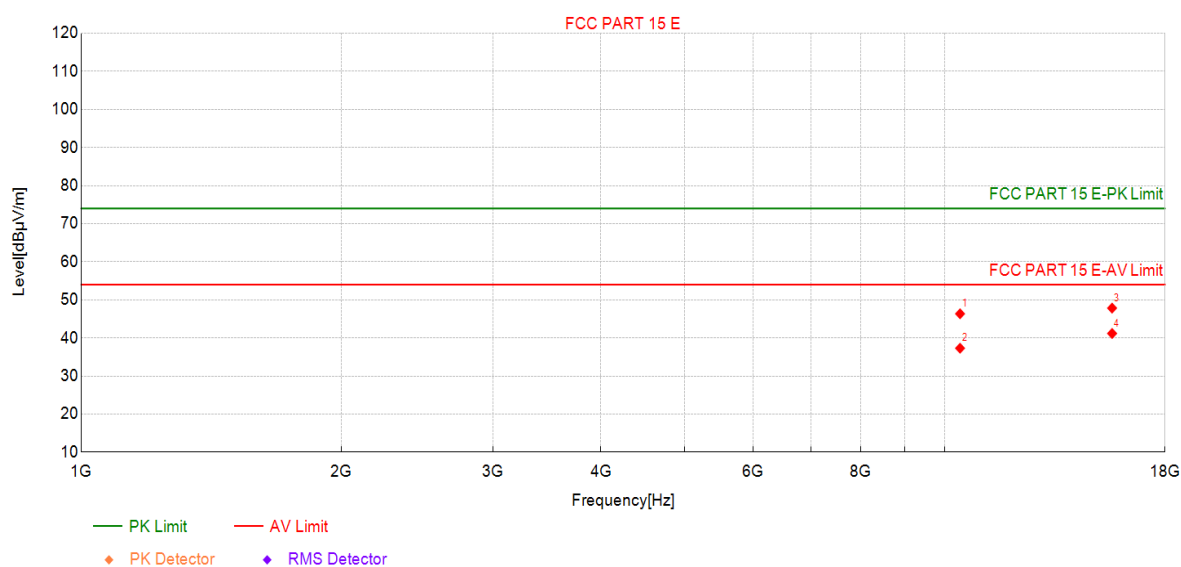

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	39.75	46.35	6.60	74.00	27.65	PK	Vertic	PASS
2	10420	30.70	37.30	6.60	54.00	16.70	AV	Vertic	PASS
3	15630	34.06	47.84	13.78	74.00	26.16	PK	Vertic	PASS
4	15630	27.39	41.17	13.78	54.00	12.83	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

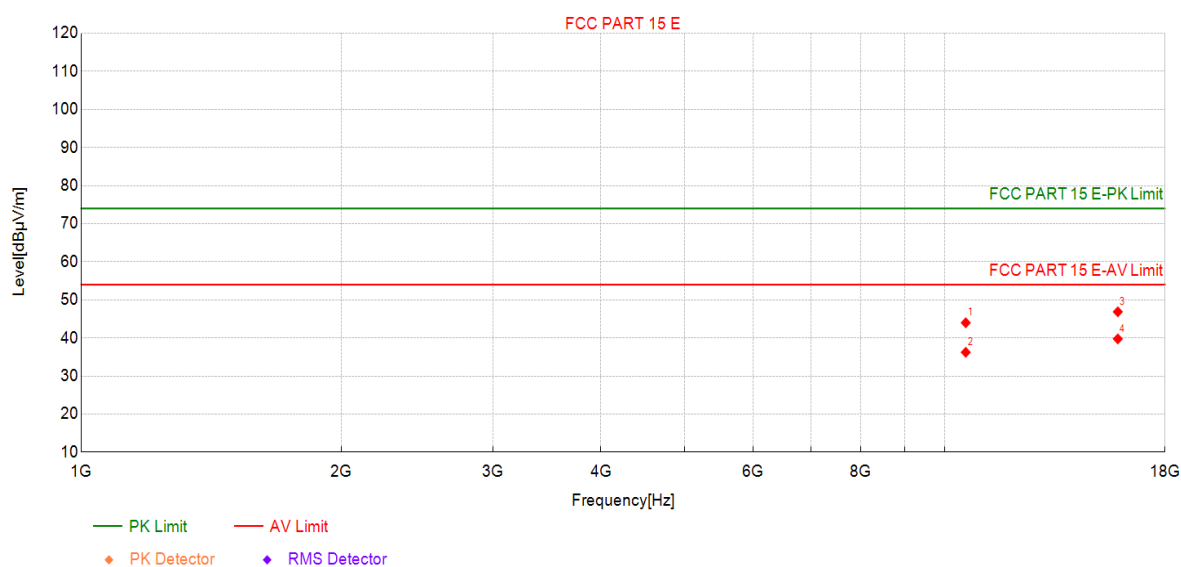

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	37.22	43.99	6.77	74.00	30.01	PK	Horizo	PASS
2	10580	29.46	36.23	6.77	54.00	17.77	AV	Horizo	PASS
3	15870	32.78	46.87	14.09	74.00	27.13	PK	Horizo	PASS
4	15870	25.66	39.75	14.09	54.00	14.25	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

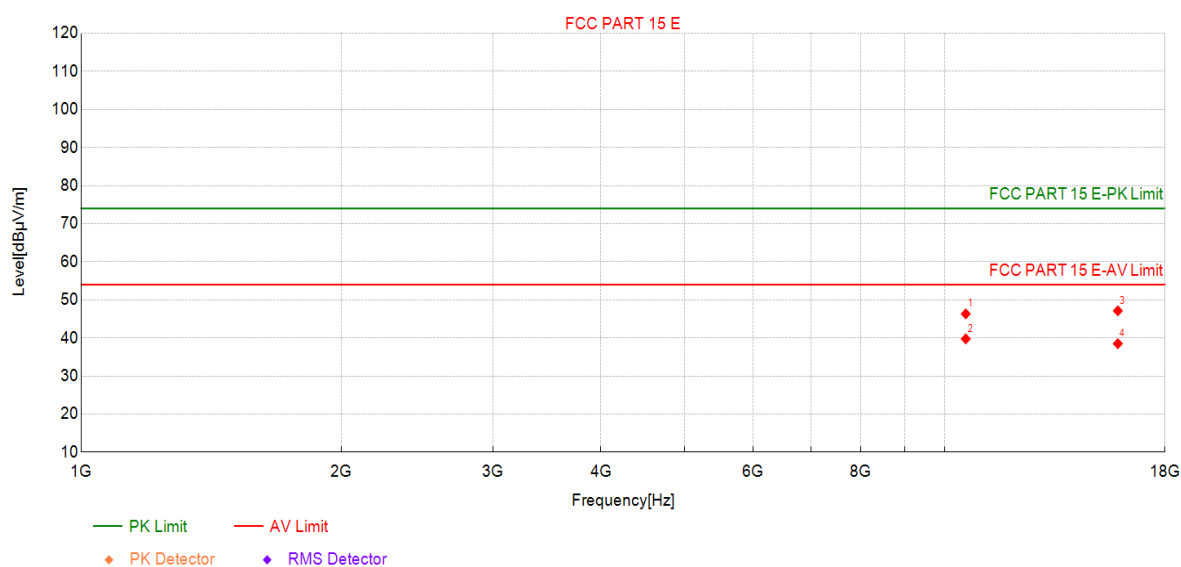

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	39.55	46.32	6.77	74.00	27.68	PK	Vertic	PASS
2	10580	32.99	39.76	6.77	54.00	14.24	AV	Vertic	PASS
3	15870	33.04	47.13	14.09	74.00	26.87	PK	Vertic	PASS
4	15870	24.41	38.50	14.09	54.00	15.50	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

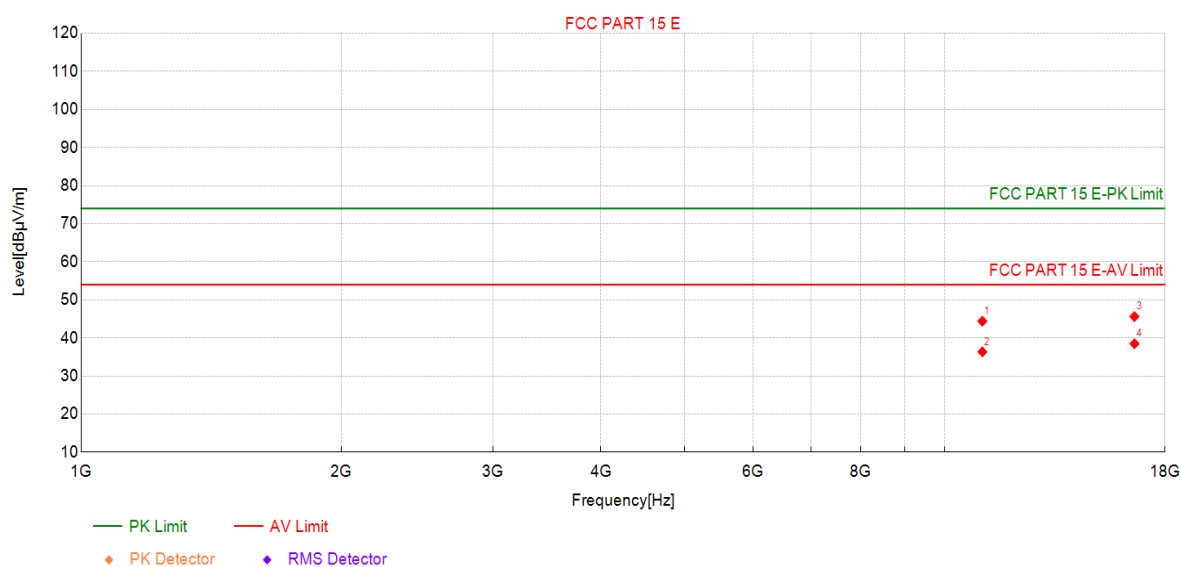

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	37.44	44.40	6.96	74.00	29.60	PK	Horizo	PASS
2	11060	29.38	36.34	6.96	54.00	17.66	AV	Horizo	PASS
3	16590	30.81	45.61	14.80	74.00	28.39	PK	Horizo	PASS
4	16590	23.68	38.48	14.80	54.00	15.52	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

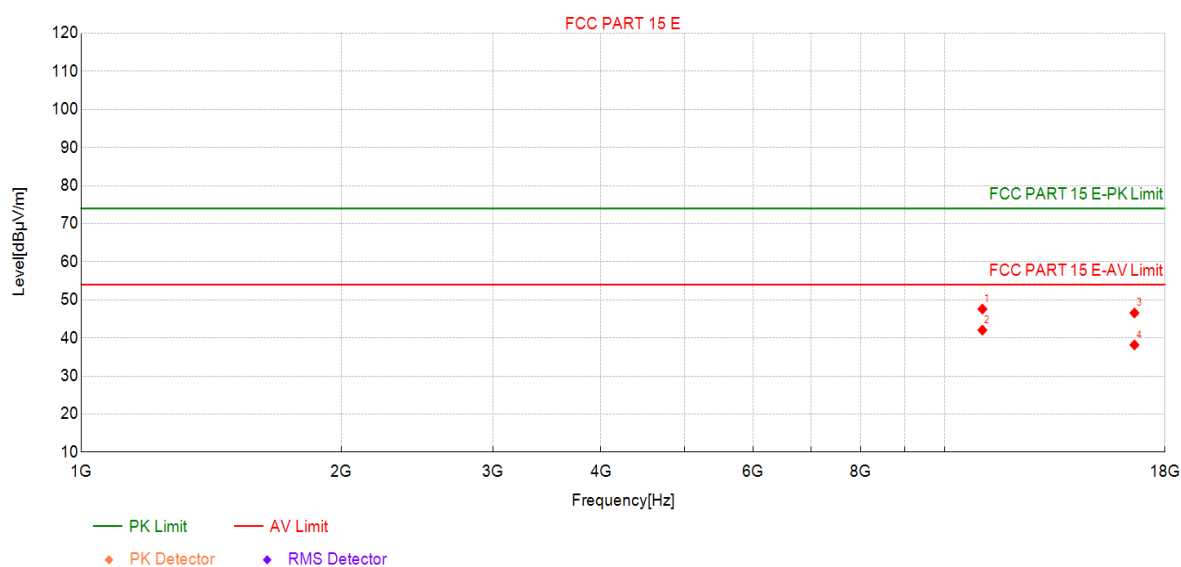

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	40.63	47.59	6.96	74.00	26.41	PK	Vertic	PASS
2	11060	35.09	42.05	6.96	54.00	11.95	AV	Vertic	PASS
3	16590	31.76	46.56	14.80	74.00	27.44	PK	Vertic	PASS
4	16590	23.36	38.16	14.80	54.00	15.84	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5610MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

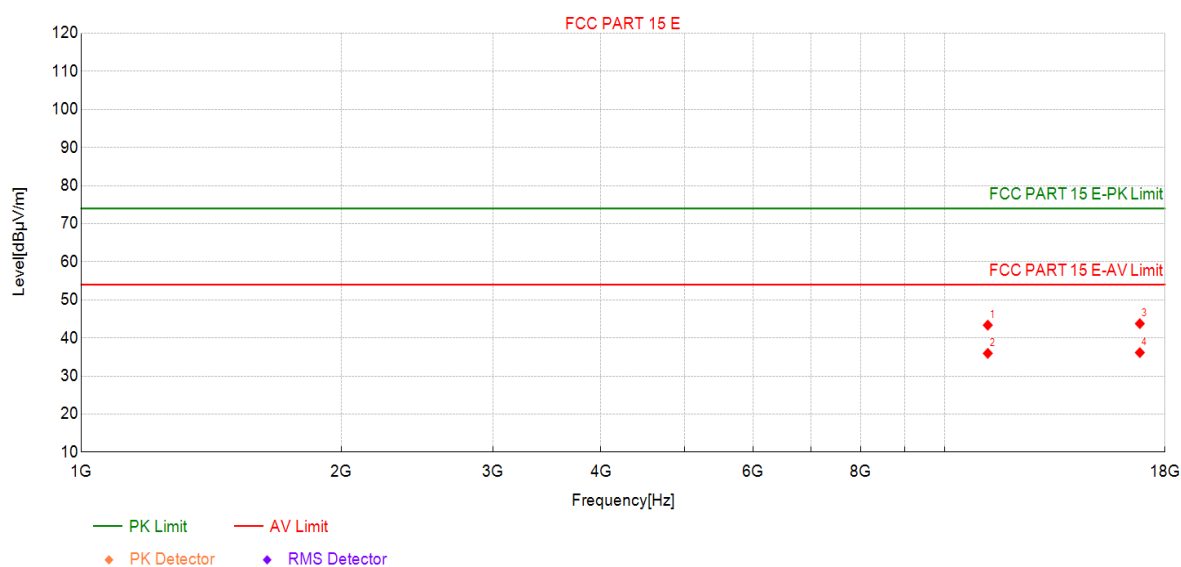

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	35.63	43.36	7.73	74.00	30.64	PK	Horizo	PASS
2	11220	28.22	35.95	7.73	54.00	18.05	AV	Horizo	PASS
3	16830	28.83	43.75	14.92	74.00	30.25	PK	Horizo	PASS
4	16830	21.22	36.14	14.92	54.00	17.86	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5610MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

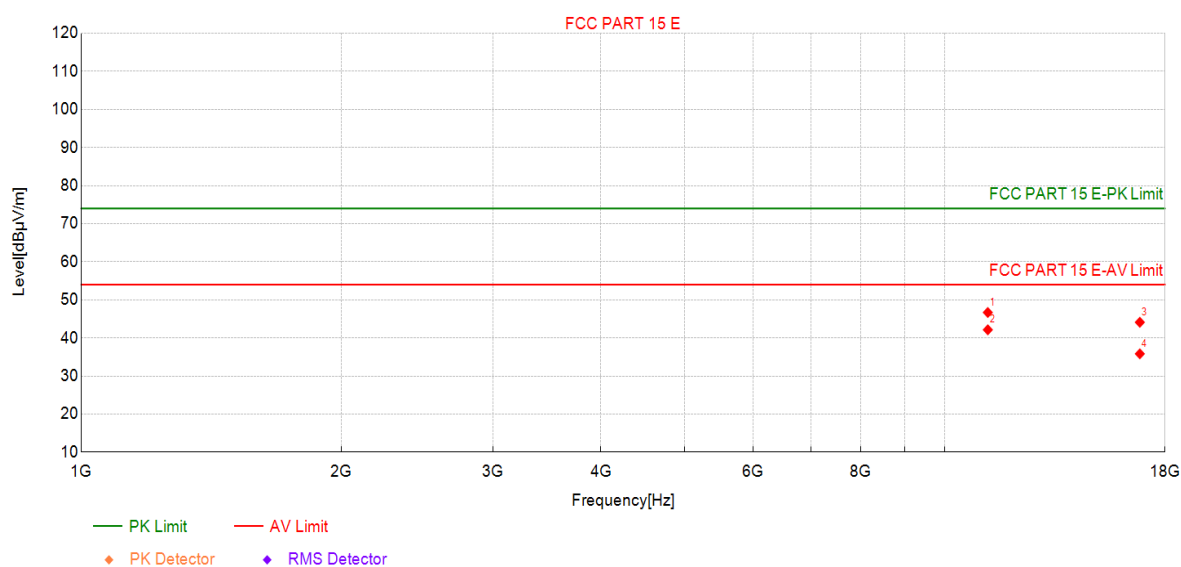

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	38.96	46.69	7.73	74.00	27.31	PK	Vertic	PASS
2	11220	34.41	42.14	7.73	54.00	11.86	AV	Vertic	PASS
3	16830	29.20	44.12	14.92	74.00	29.88	PK	Vertic	PASS
4	16830	20.91	35.83	14.92	54.00	18.17	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

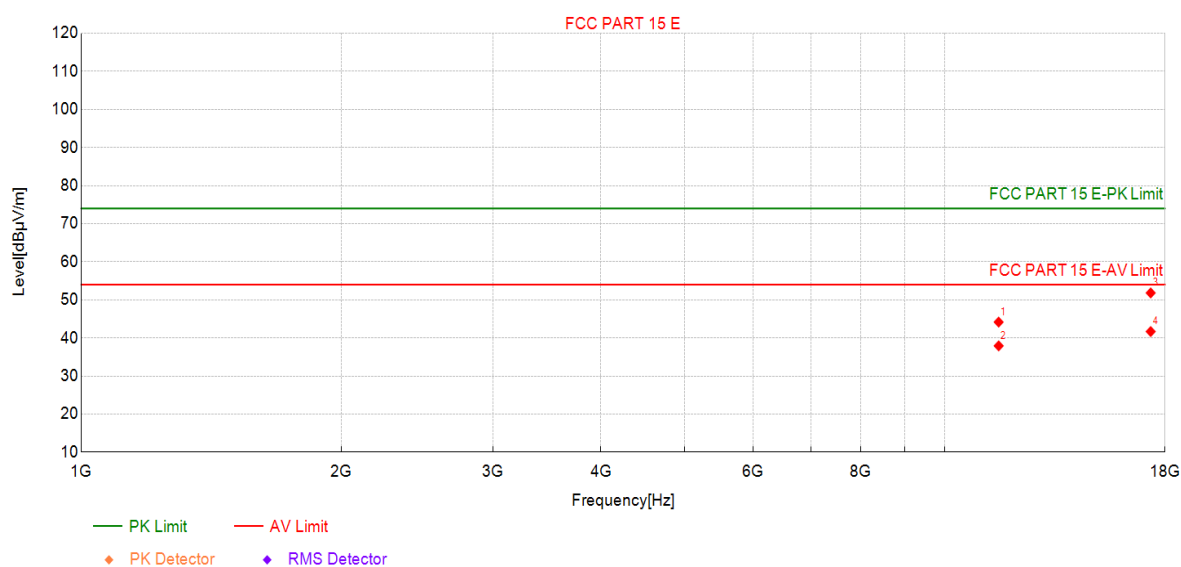

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	35.55	44.16	8.61	74.00	29.84	PK	Horizo	PASS
2	11550	29.31	37.92	8.61	54.00	16.08	AV	Horizo	PASS
3	17325	35.95	51.82	15.87	74.00	22.18	PK	Horizo	PASS
4	17325	25.81	41.68	15.87	54.00	12.32	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

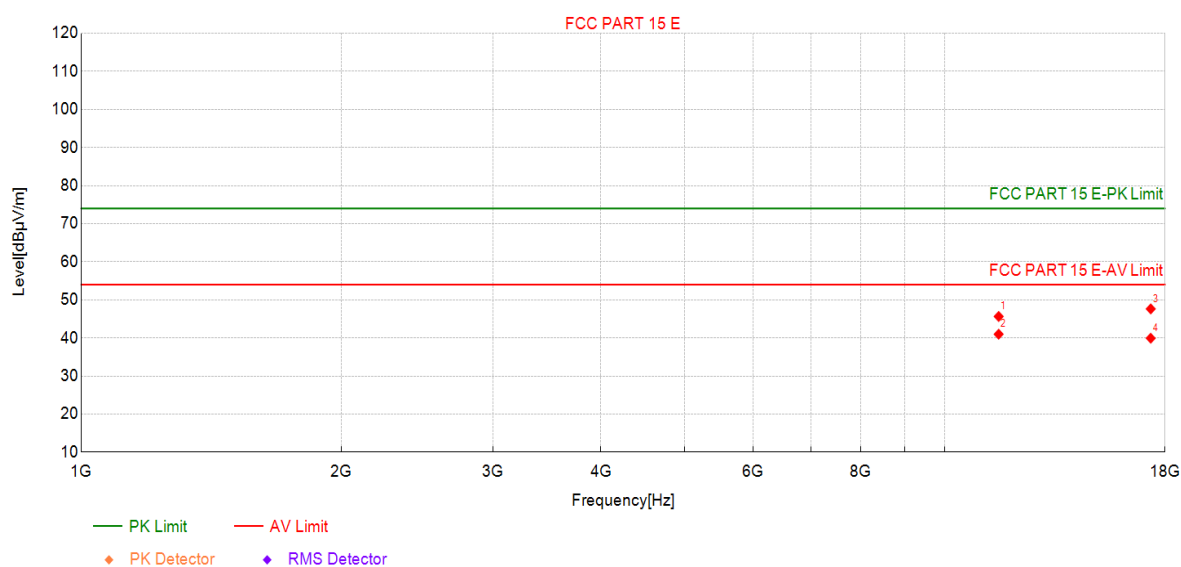

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	37.03	45.64	8.61	74.00	28.36	PK	Vertic	PASS
2	11550	32.37	40.98	8.61	54.00	13.02	AV	Vertic	PASS
3	17325	31.76	47.63	15.87	74.00	26.37	PK	Vertic	PASS
4	17325	24.06	39.93	15.87	54.00	14.07	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

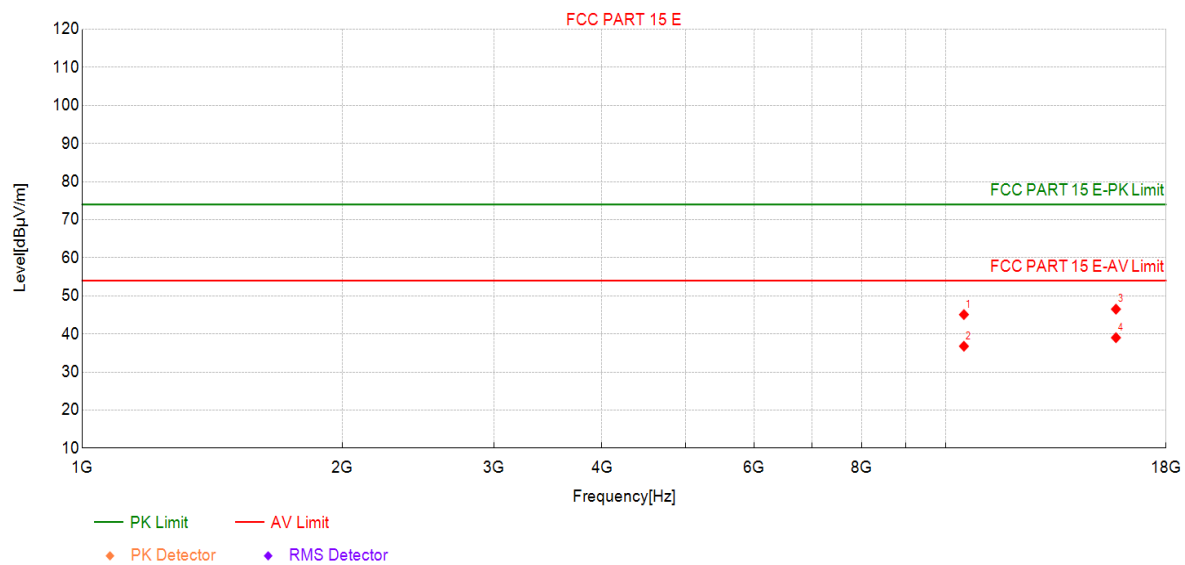

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	38.34	45.09	6.75	74.00	28.91	PK	Horizo	PASS
2	10500	30.02	36.77	6.75	54.00	17.23	AV	Horizo	PASS
3	15750	32.26	46.50	14.24	74.00	27.50	PK	Horizo	PASS
4	15750	24.77	39.01	14.24	54.00	14.99	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

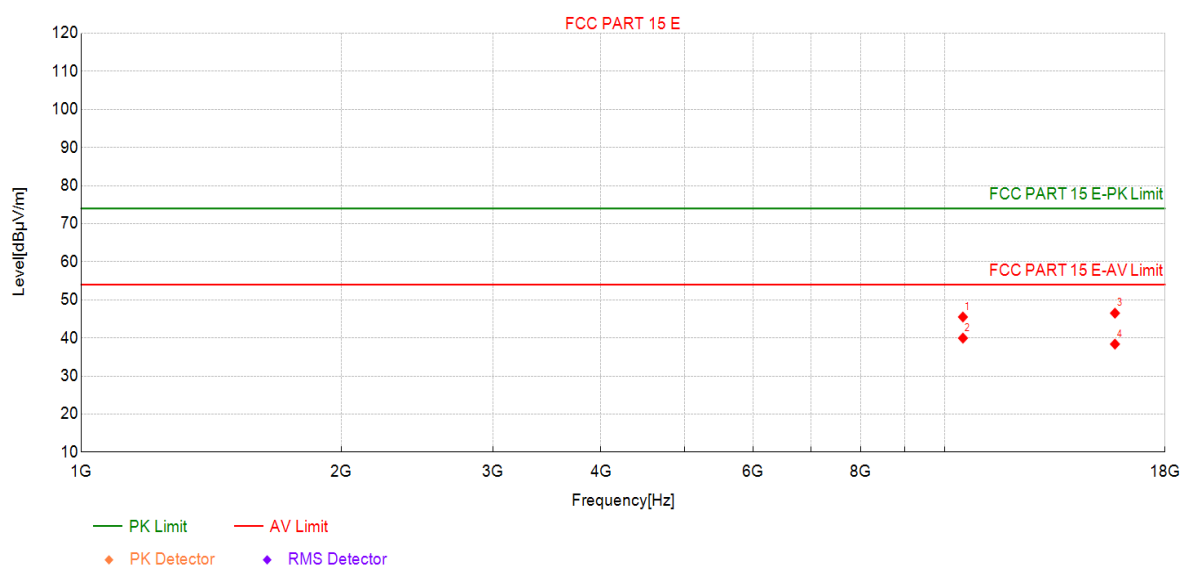

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	38.75	45.50	6.75	74.00	28.50	PK	Vertic	PASS
2	10500	33.20	39.95	6.75	54.00	14.05	AV	Vertic	PASS
3	15750	32.27	46.51	14.24	74.00	27.49	PK	Vertic	PASS
4	15750	24.14	38.38	14.24	54.00	15.62	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5570MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

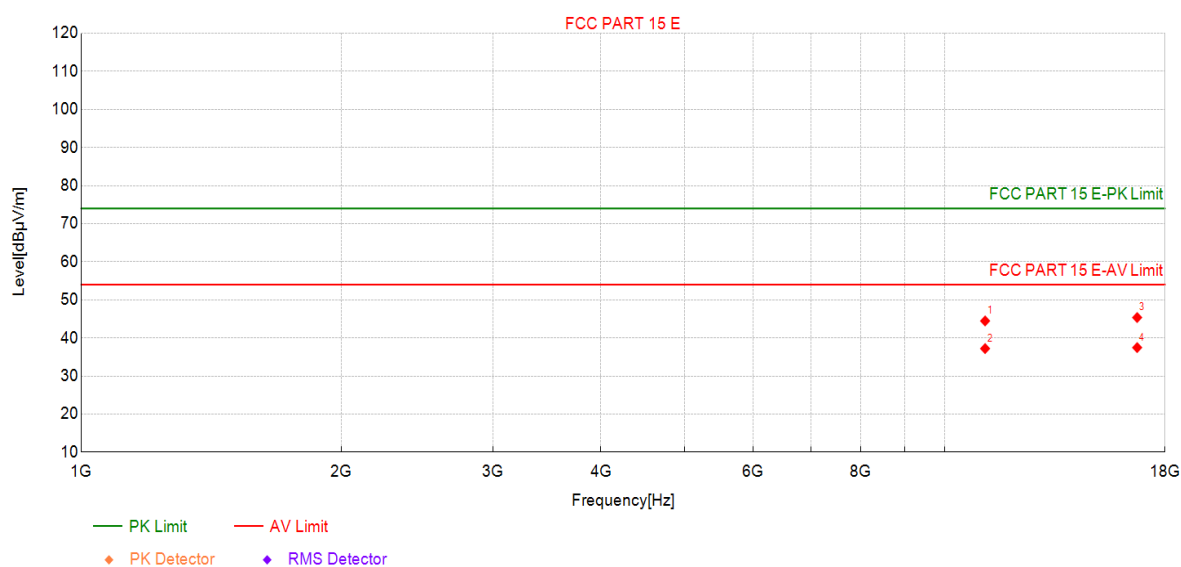

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	37.39	44.47	7.08	74.00	29.53	PK	Horizo	PASS
2	11140	30.13	37.21	7.08	54.00	16.79	AV	Horizo	PASS
3	16710	30.74	45.36	14.62	74.00	28.64	PK	Horizo	PASS
4	16710	22.84	37.46	14.62	54.00	16.54	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5570MHz by 802.11ax(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

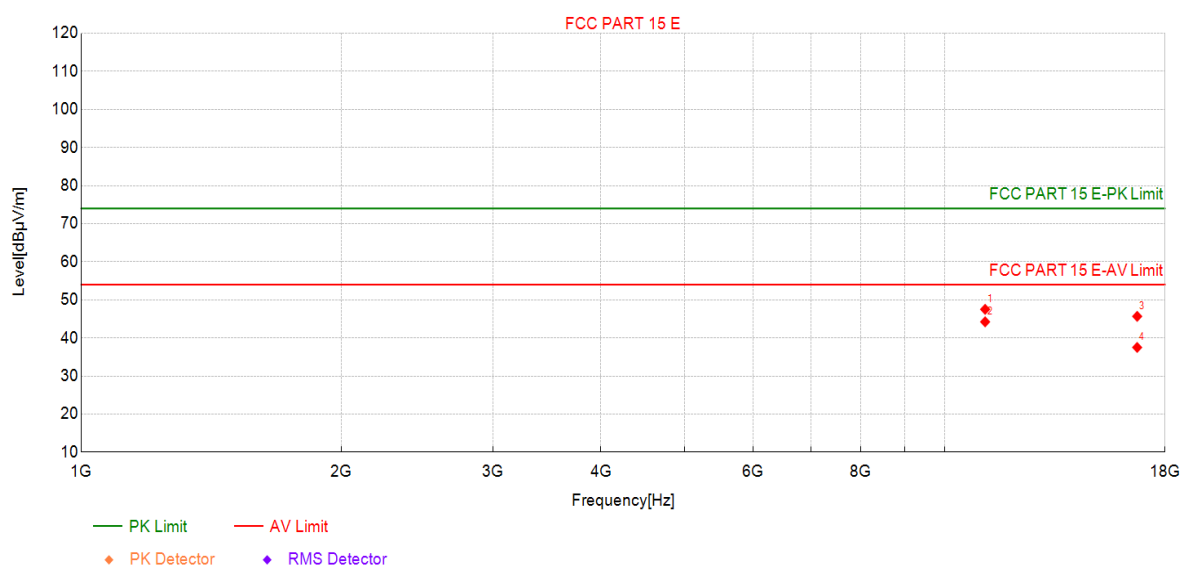

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	40.44	47.52	7.08	74.00	26.48	PK	Vertic	PASS
2	11140	37.15	44.23	7.08	54.00	9.77	AV	Vertic	PASS
3	16710	31.05	45.67	14.62	74.00	28.33	PK	Vertic	PASS
4	16710	22.89	37.51	14.62	54.00	16.49	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5180MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

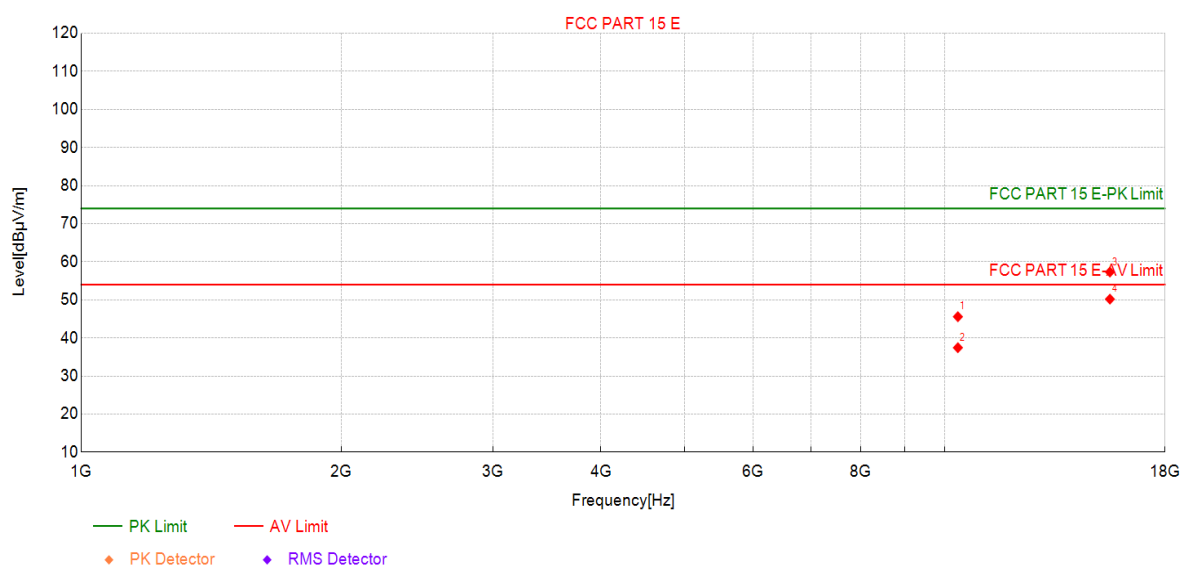

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	39.00	45.58	6.58	74.00	28.42	PK	Horizo	PASS
2	10360	30.86	37.44	6.58	54.00	16.56	AV	Horizo	PASS
3	15540	43.41	57.31	13.90	74.00	16.69	PK	Horizo	PASS
4	15540	36.29	50.19	13.90	54.00	3.81	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5180MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

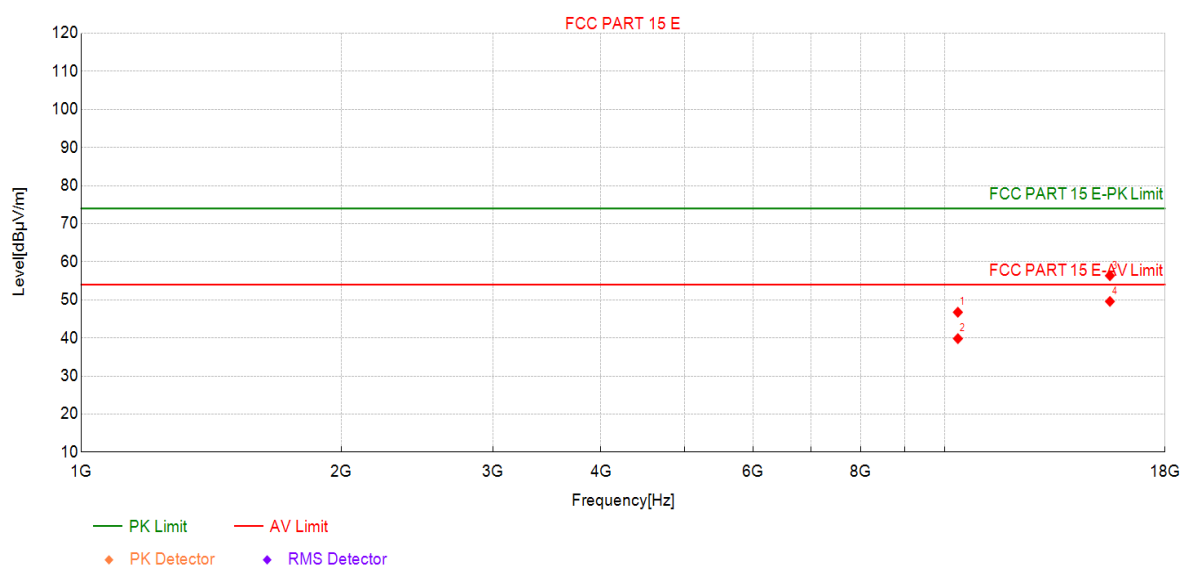

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	40.17	46.75	6.58	74.00	27.25	PK	Vertic	PASS
2	10360	33.24	39.82	6.58	54.00	14.18	AV	Vertic	PASS
3	15540	42.44	56.34	13.90	74.00	17.66	PK	Vertic	PASS
4	15540	35.69	49.59	13.90	54.00	4.41	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5220MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

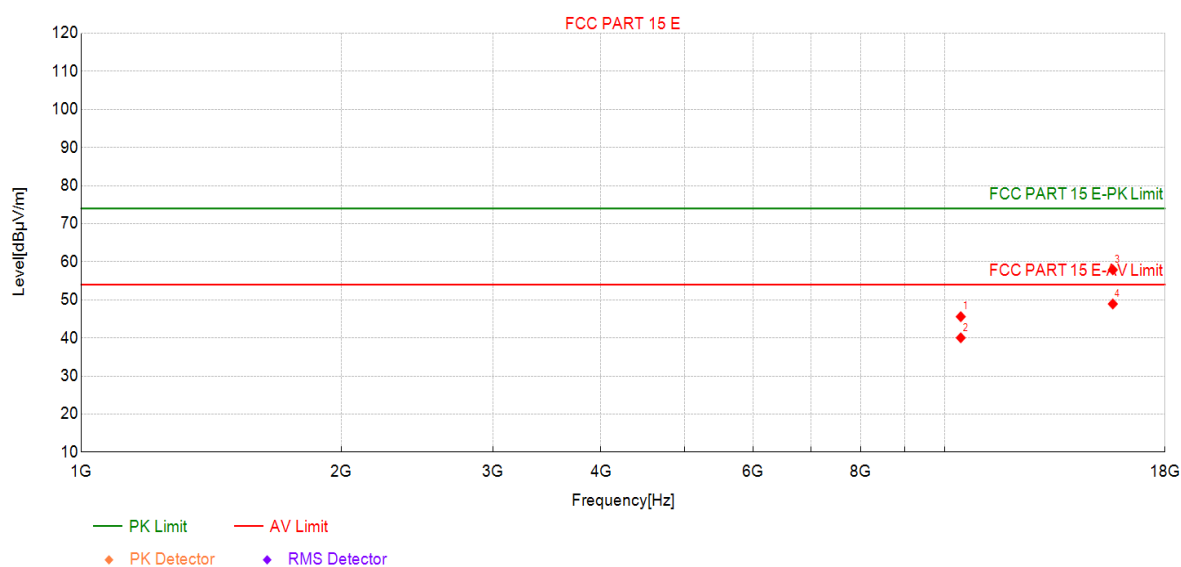

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	38.94	45.58	6.64	74.00	28.42	PK	Horizo	PASS
2	10440	33.40	40.04	6.64	54.00	13.96	AV	Horizo	PASS
3	15660	43.79	57.88	14.09	74.00	16.12	PK	Horizo	PASS
4	15660	34.83	48.92	14.09	54.00	5.08	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5220MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

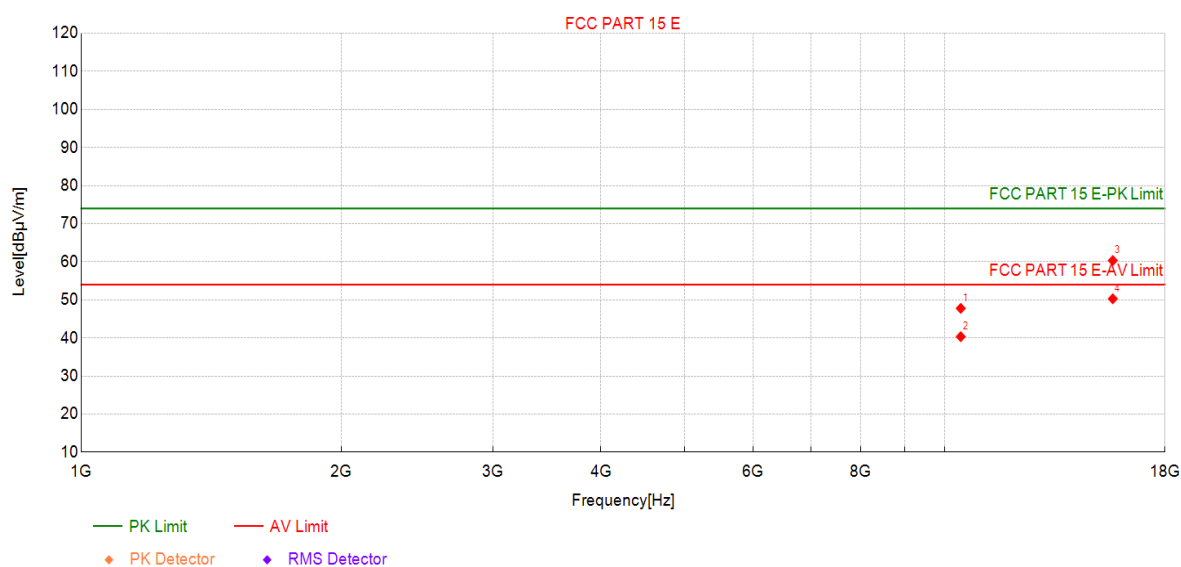

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	41.13	47.77	6.64	74.00	26.23	PK	Vertic	PASS
2	10440	33.70	40.34	6.64	54.00	13.66	AV	Vertic	PASS
3	15660	46.25	60.34	14.09	74.00	13.66	PK	Vertic	PASS
4	15660	36.20	50.29	14.09	54.00	3.71	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5240MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

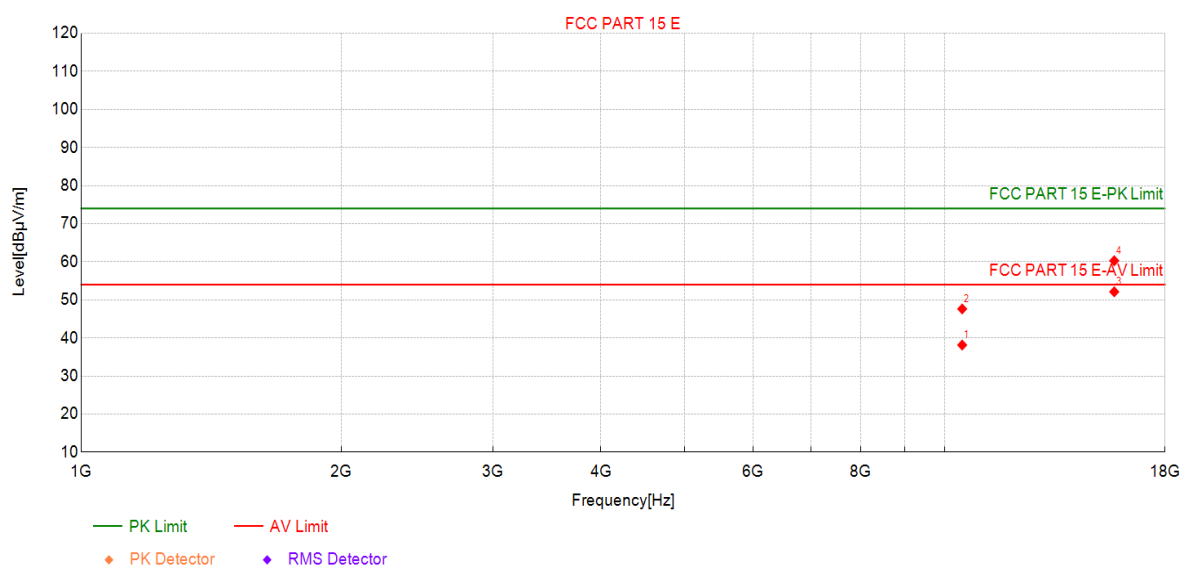

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	31.43	38.14	6.71	54.00	15.86	AV	Horizo	PASS
2	10480	40.90	47.61	6.71	74.00	26.39	PK	Horizo	PASS
3	15720	37.72	52.13	14.41	54.00	1.87	AV	Horizo	PASS
4	15720	45.87	60.28	14.41	74.00	13.72	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5240MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

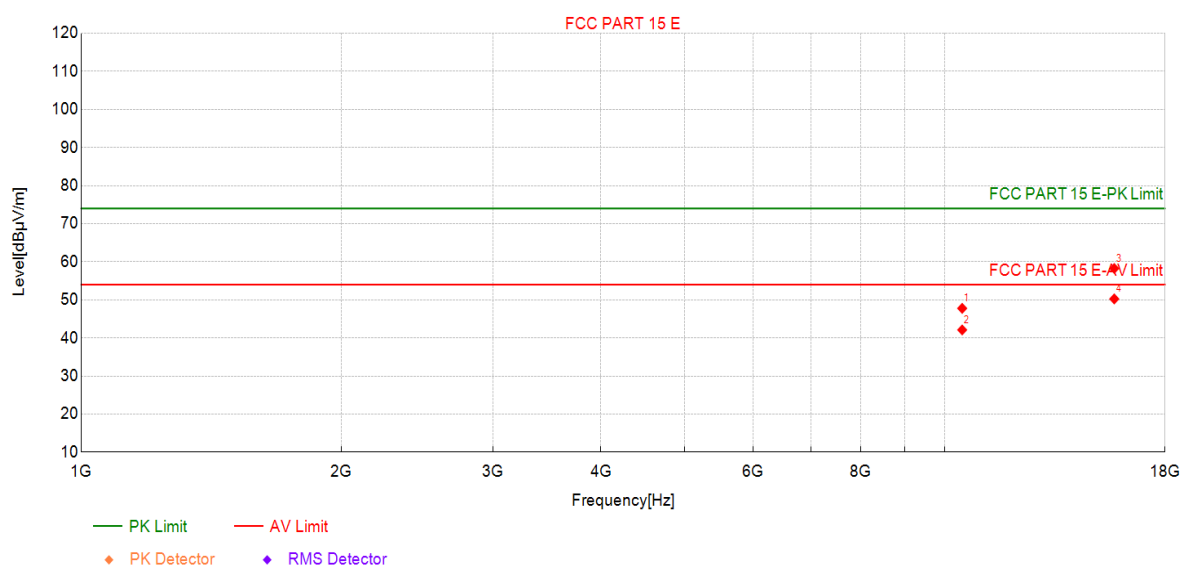

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	41.06	47.77	6.71	74.00	26.23	PK	Vertic	PASS
2	10480	35.40	42.11	6.71	54.00	11.89	AV	Vertic	PASS
3	15720	43.83	58.24	14.41	74.00	15.76	PK	Vertic	PASS
4	15720	35.84	50.25	14.41	54.00	3.75	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5260MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

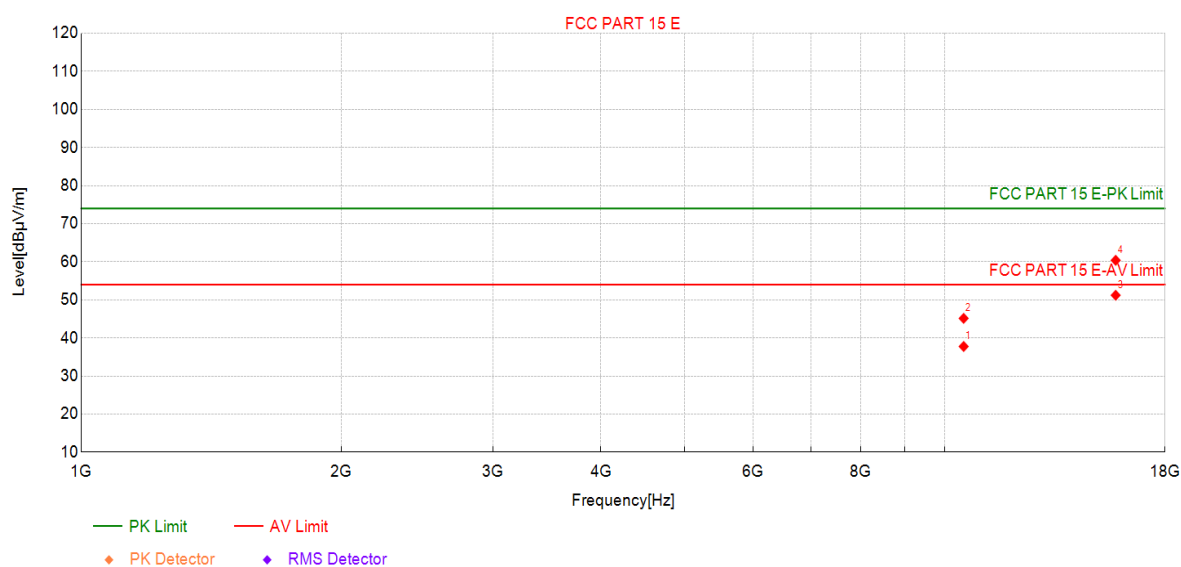

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	31.00	37.76	6.76	54.00	16.24	AV	Horizo	PASS
2	10520	38.38	45.14	6.76	74.00	28.86	PK	Horizo	PASS
3	15780	37.13	51.22	14.09	54.00	2.78	AV	Horizo	PASS
4	15780	46.31	60.40	14.09	74.00	13.60	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5260MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

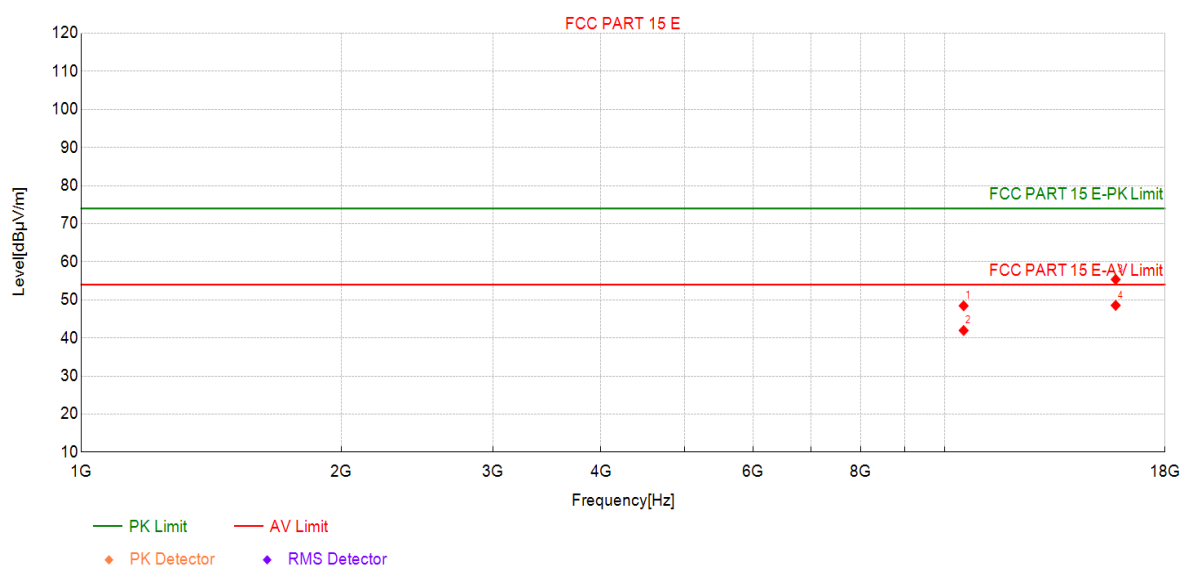

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	41.68	48.44	6.76	74.00	25.56	PK	Vertic	PASS
2	10520	35.20	41.96	6.76	54.00	12.04	AV	Vertic	PASS
3	15780	41.27	55.36	14.09	74.00	18.64	PK	Vertic	PASS
4	15780	34.46	48.55	14.09	54.00	5.45	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5300MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

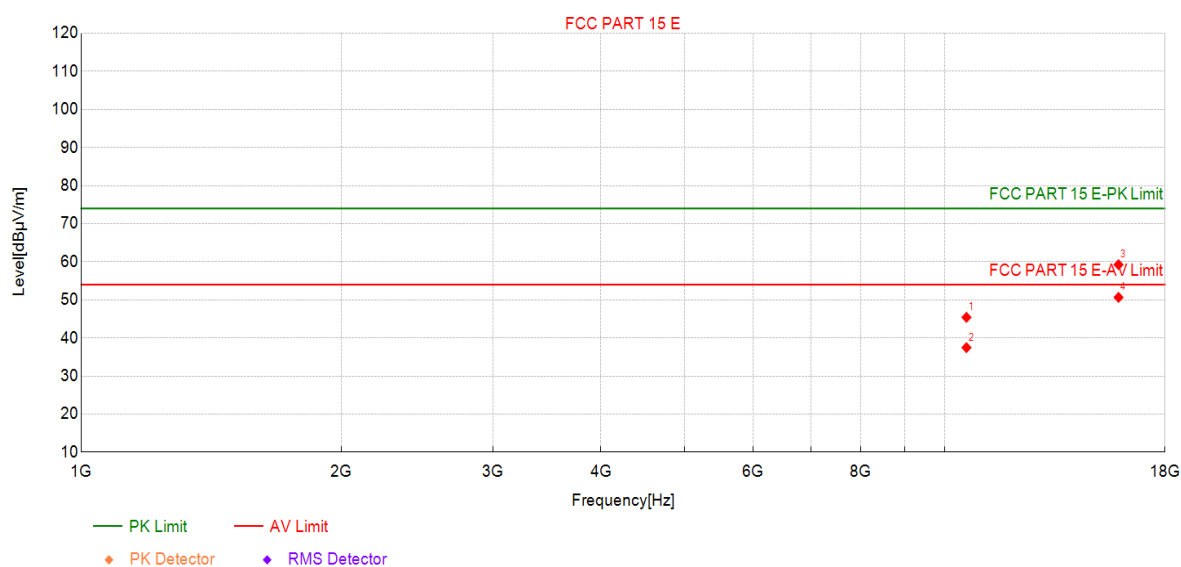

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	38.63	45.41	6.78	74.00	28.59	PK	Horizo	PASS
2	10600	30.67	37.45	6.78	54.00	16.55	AV	Horizo	PASS
3	15900	45.12	59.24	14.12	74.00	14.76	PK	Horizo	PASS
4	15900	36.54	50.66	14.12	54.00	3.34	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5300MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

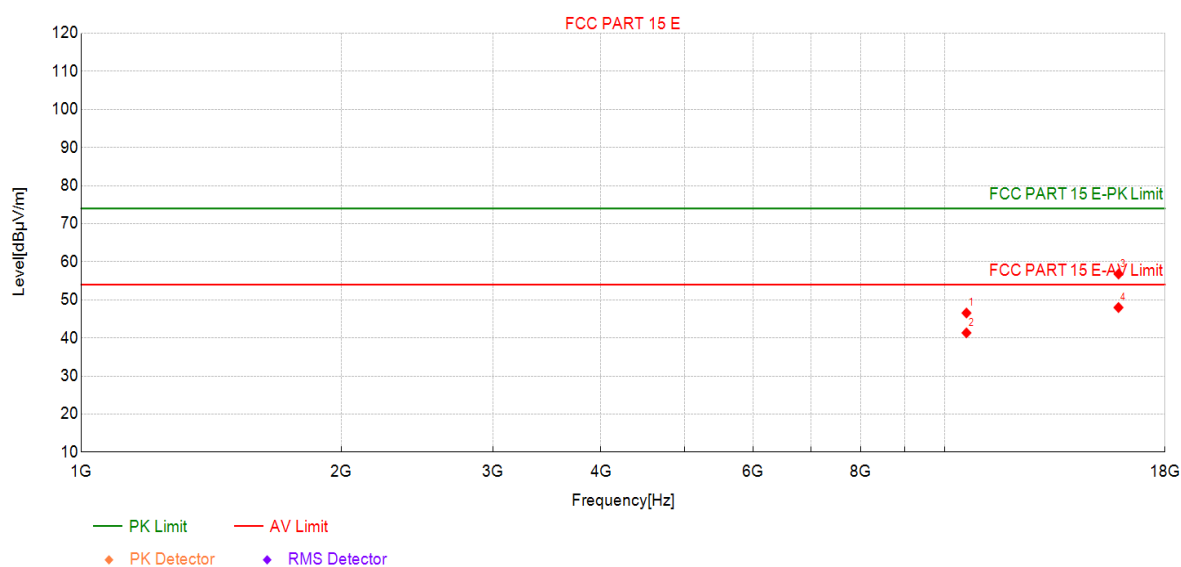

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	39.77	46.55	6.78	74.00	27.45	PK	Vertic	PASS
2	10600	34.55	41.33	6.78	54.00	12.67	AV	Vertic	PASS
3	15900	42.67	56.79	14.12	74.00	17.21	PK	Vertic	PASS
4	15900	33.87	47.99	14.12	54.00	6.01	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5320MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

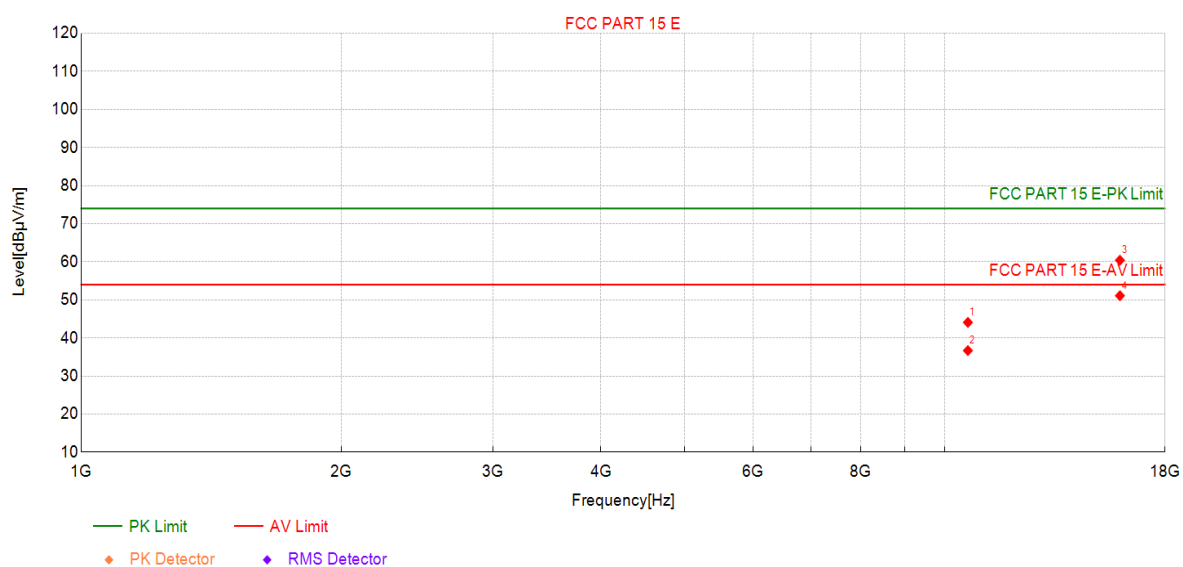

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	37.29	44.09	6.80	74.00	29.91	PK	Horizo	PASS
2	10640	29.89	36.69	6.80	54.00	17.31	AV	Horizo	PASS
3	15960	45.78	60.41	14.63	74.00	13.59	PK	Horizo	PASS
4	15960	36.46	51.09	14.63	54.00	2.91	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5320MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

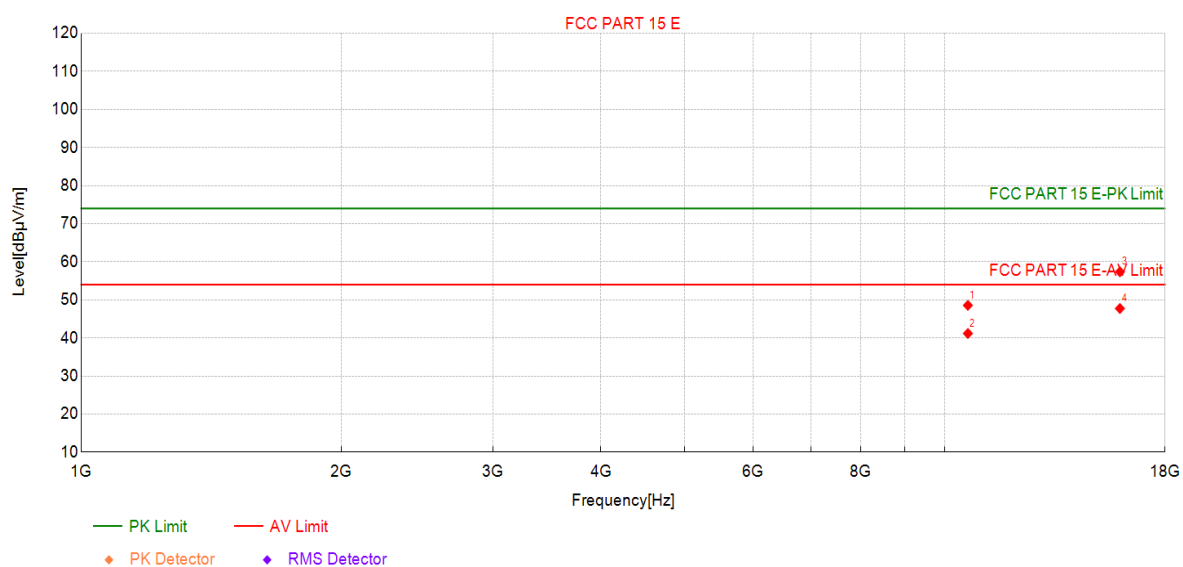

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	41.76	48.56	6.80	74.00	25.44	PK	Vertic	PASS
2	10640	34.38	41.18	6.80	54.00	12.82	AV	Vertic	PASS
3	15960	42.74	57.37	14.63	74.00	16.63	PK	Vertic	PASS
4	15960	33.10	47.73	14.63	54.00	6.27	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5500MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

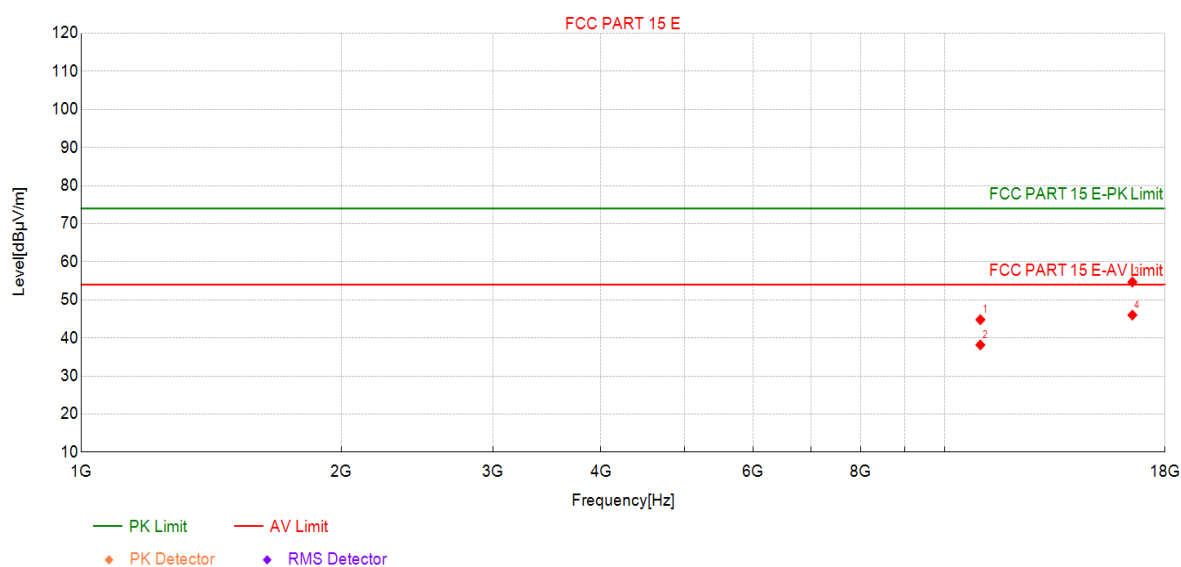

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	37.39	44.79	7.40	74.00	29.21	PK	Horizo	PASS
2	11000	30.76	38.16	7.40	54.00	15.84	AV	Horizo	PASS
3	16500	39.58	54.69	15.11	74.00	19.31	PK	Horizo	PASS
4	16500	30.90	46.01	15.11	54.00	7.99	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5500MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

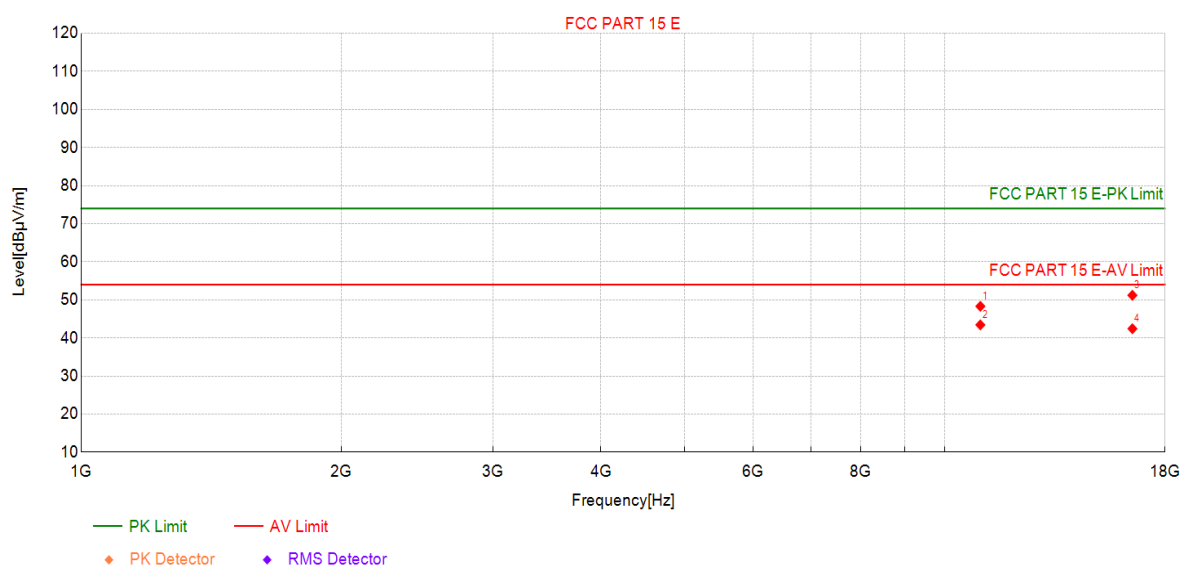

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	40.91	48.31	7.40	74.00	25.69	PK	Vertic	PASS
2	11000	36.03	43.43	7.40	54.00	10.57	AV	Vertic	PASS
3	16500	36.09	51.20	15.11	74.00	22.80	PK	Vertic	PASS
4	16500	27.31	42.42	15.11	54.00	11.58	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5580MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

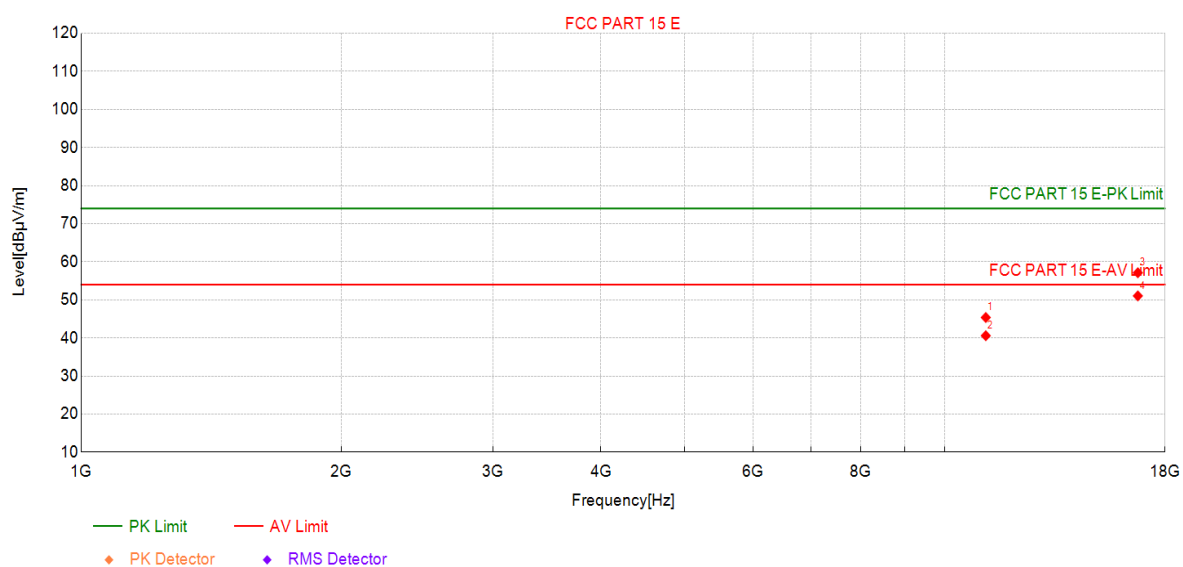

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	38.08	45.37	7.29	74.00	28.63	PK	Horizo	PASS
2	11160	33.30	40.59	7.29	54.00	13.41	AV	Horizo	PASS
3	16740	42.51	57.13	14.62	74.00	16.87	PK	Horizo	PASS
4	16740	36.43	51.05	14.62	54.00	2.95	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5580MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

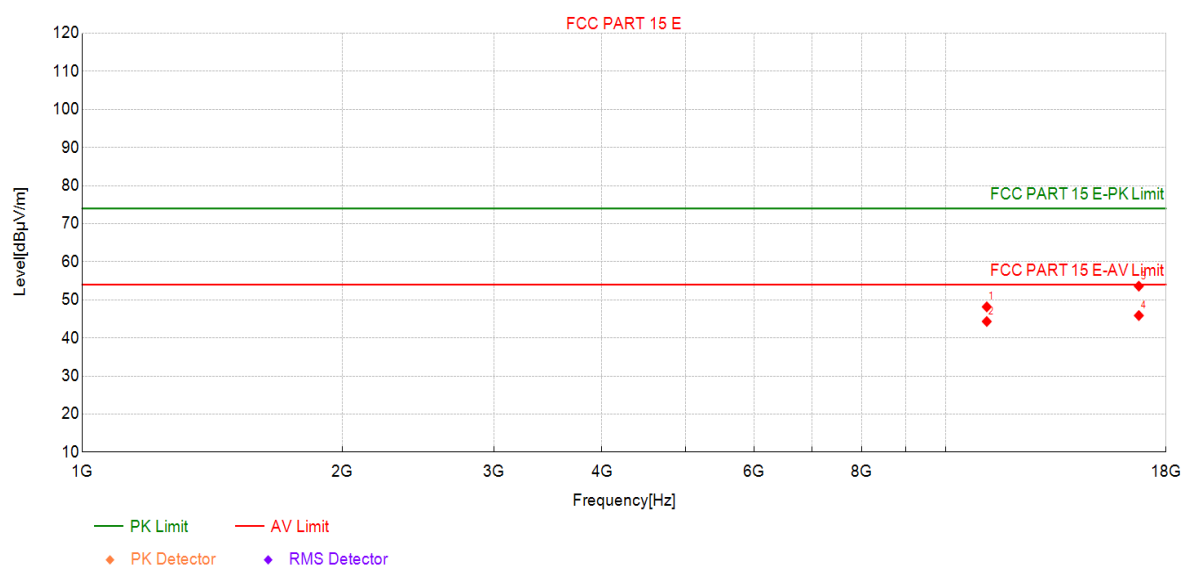

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	40.87	48.16	7.29	74.00	25.84	PK	Vertic	PASS
2	11160	37.03	44.32	7.29	54.00	9.68	AV	Vertic	PASS
3	16740	38.98	53.60	14.62	74.00	20.40	PK	Vertic	PASS
4	16740	31.26	45.88	14.62	54.00	8.12	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5700MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

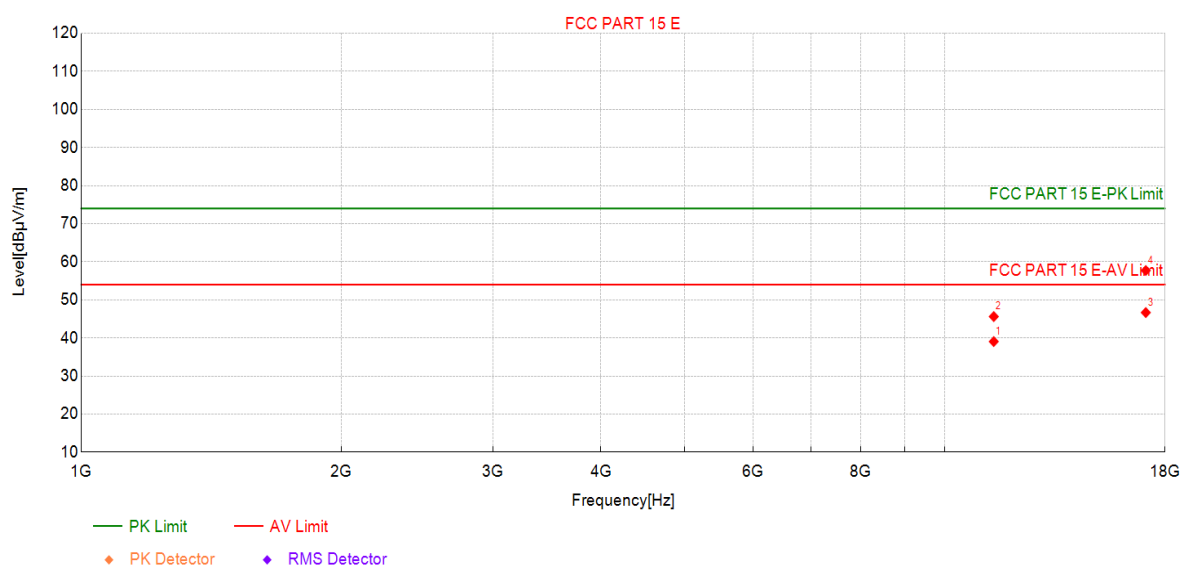

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	31.22	39.05	7.83	54.00	14.95	AV	Horizo	PASS
2	11400	37.78	45.61	7.83	74.00	28.39	PK	Horizo	PASS
3	17100	30.85	46.67	15.82	54.00	7.33	AV	Horizo	PASS
4	17100	41.90	57.72	15.82	74.00	16.28	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5700MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

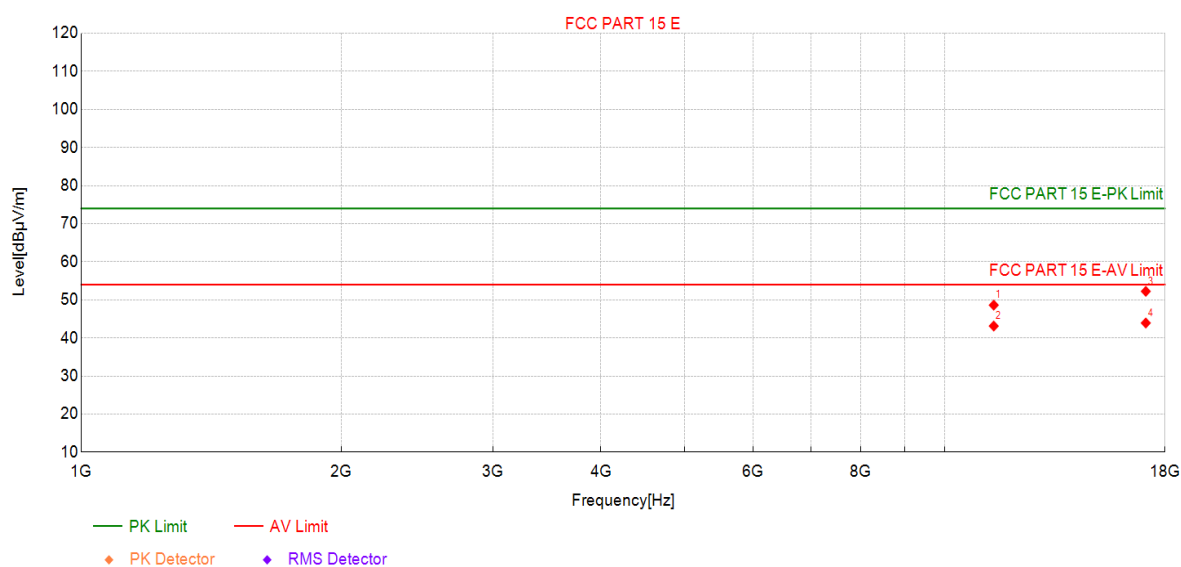

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	40.79	48.62	7.83	74.00	25.38	PK	Vertic	PASS
2	11400	35.30	43.13	7.83	54.00	10.87	AV	Vertic	PASS
3	17100	36.42	52.24	15.82	74.00	21.76	PK	Vertic	PASS
4	17100	28.10	43.92	15.82	54.00	10.08	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5745MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

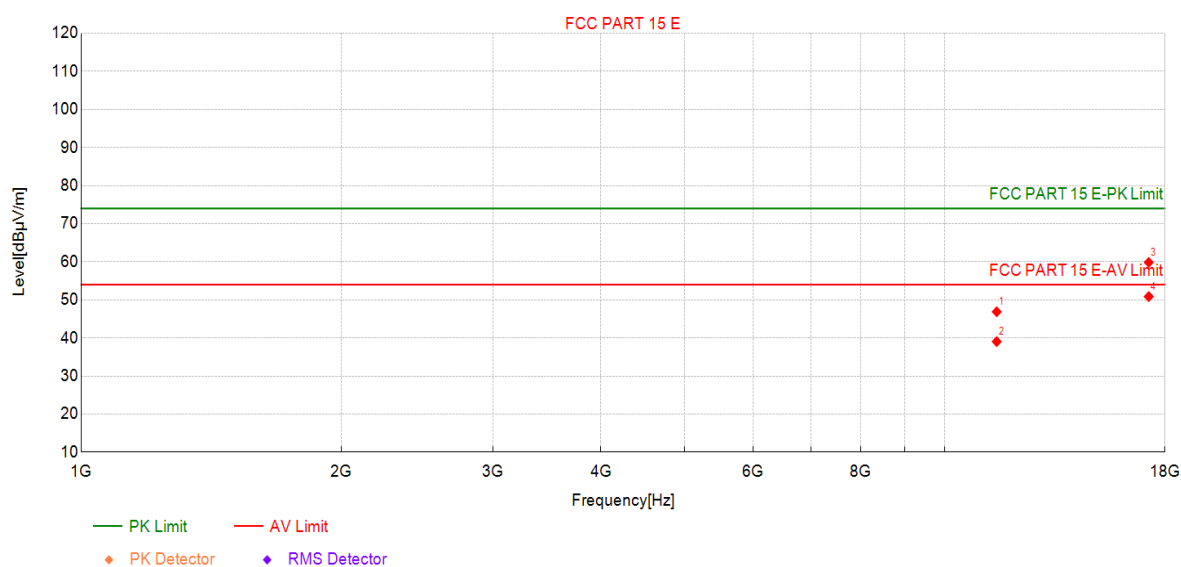

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	38.49	46.87	8.38	74.00	27.13	PK	Horizo	PASS
2	11490	30.65	39.03	8.38	54.00	14.97	AV	Horizo	PASS
3	17235	44.39	59.85	15.46	74.00	14.15	PK	Horizo	PASS
4	17235	35.41	50.87	15.46	54.00	3.13	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5745MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

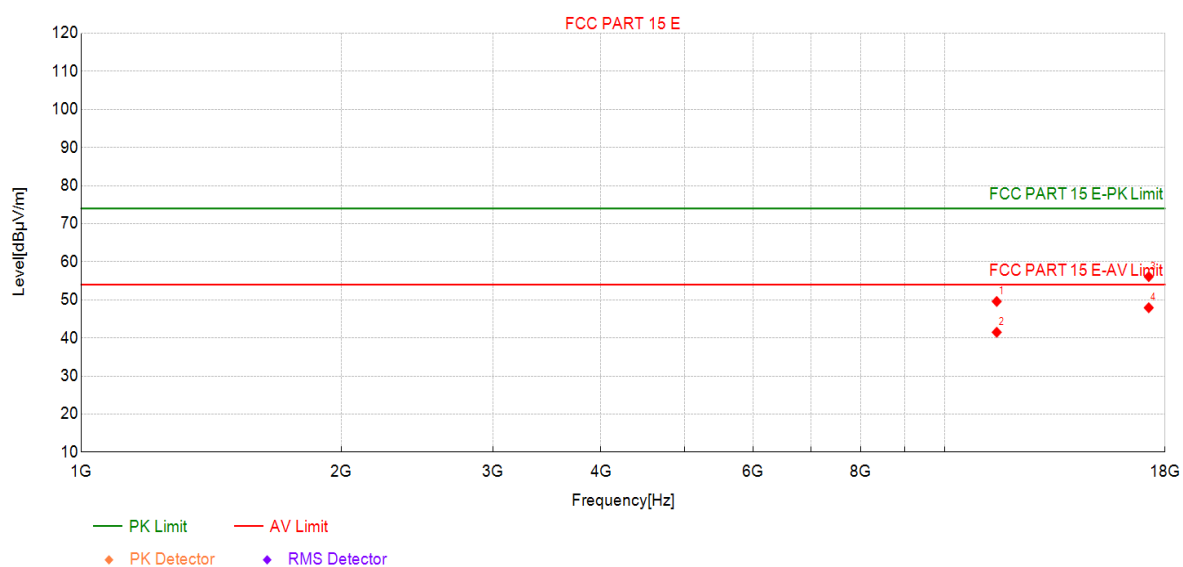

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	41.20	49.58	8.38	74.00	24.42	PK	Vertic	PASS
2	11490	33.11	41.49	8.38	54.00	12.51	AV	Vertic	PASS
3	17235	40.64	56.10	15.46	74.00	17.90	PK	Vertic	PASS
4	17235	32.47	47.93	15.46	54.00	6.07	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5785MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

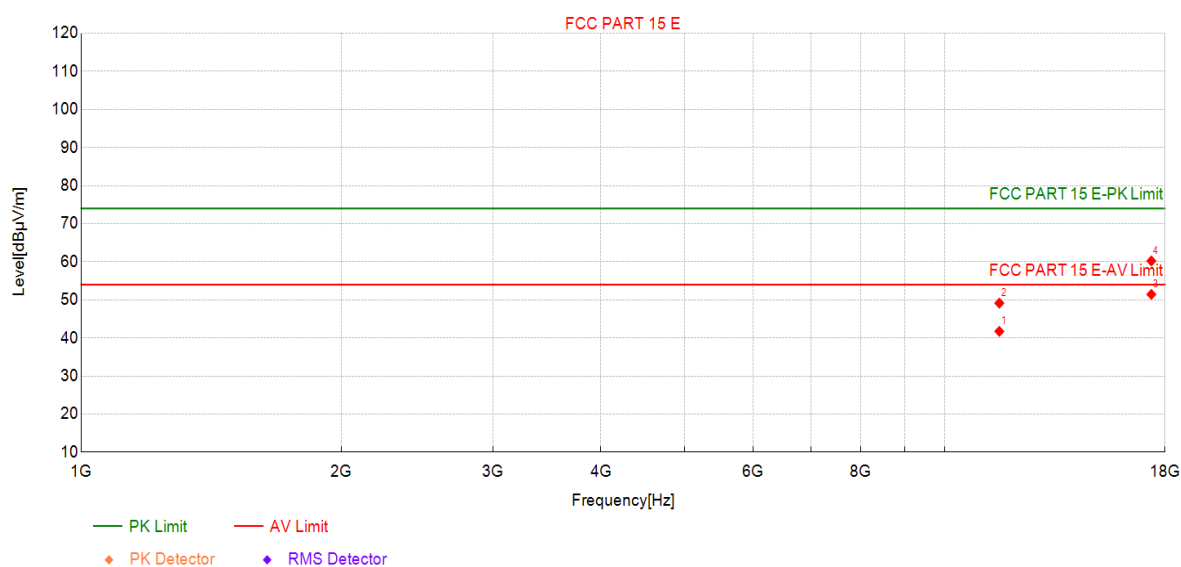

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	33.05	41.73	8.68	54.00	12.27	AV	Horizo	PASS
2	11570	40.46	49.14	8.68	74.00	24.86	PK	Horizo	PASS
3	17355	35.22	51.44	16.22	54.00	2.56	AV	Horizo	PASS
4	17355	44.00	60.22	16.22	74.00	13.78	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5785MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

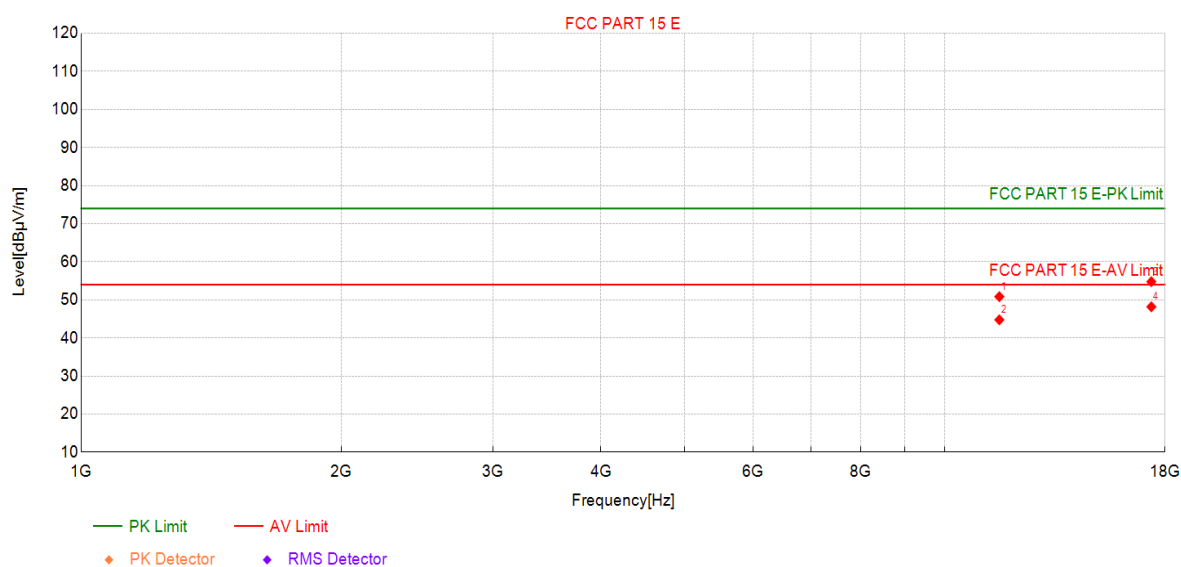

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	42.16	50.84	8.68	74.00	23.16	PK	Vertic	PASS
2	11570	36.08	44.76	8.68	54.00	9.24	AV	Vertic	PASS
3	17355	38.56	54.78	16.22	74.00	19.22	PK	Vertic	PASS
4	17355	31.96	48.18	16.22	54.00	5.82	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5825MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

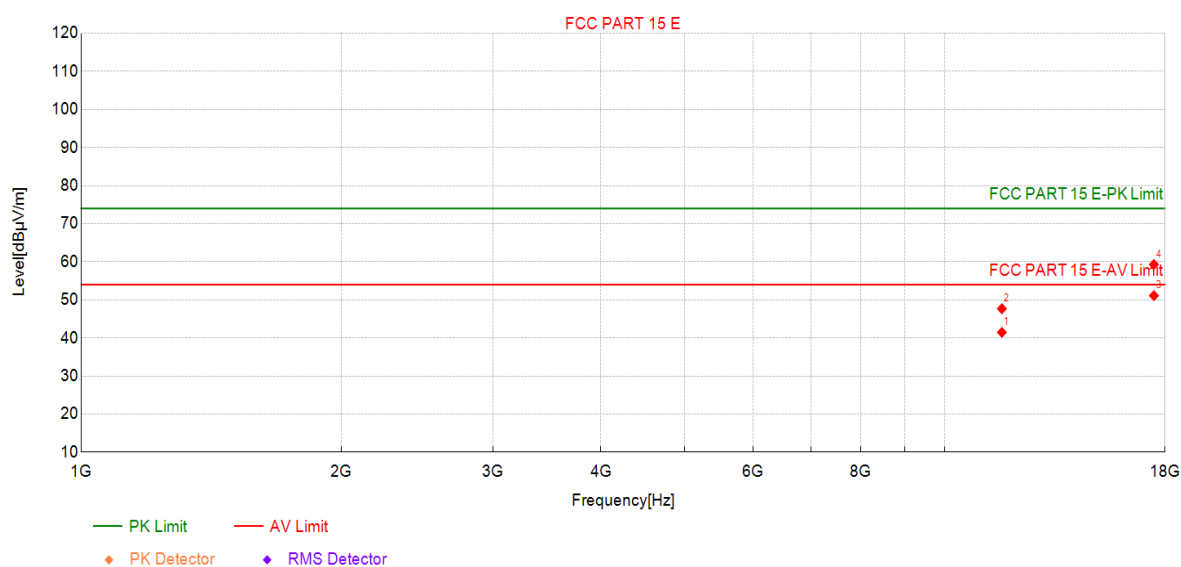

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	32.72	41.46	8.74	54.00	12.54	AV	Horizo	PASS
2	11650	38.93	47.67	8.74	74.00	26.33	PK	Horizo	PASS
3	17475	34.05	51.12	17.07	54.00	2.88	AV	Horizo	PASS
4	17475	42.23	59.30	17.07	74.00	14.70	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 12:Transmit at 5825MHz by 802.11be(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

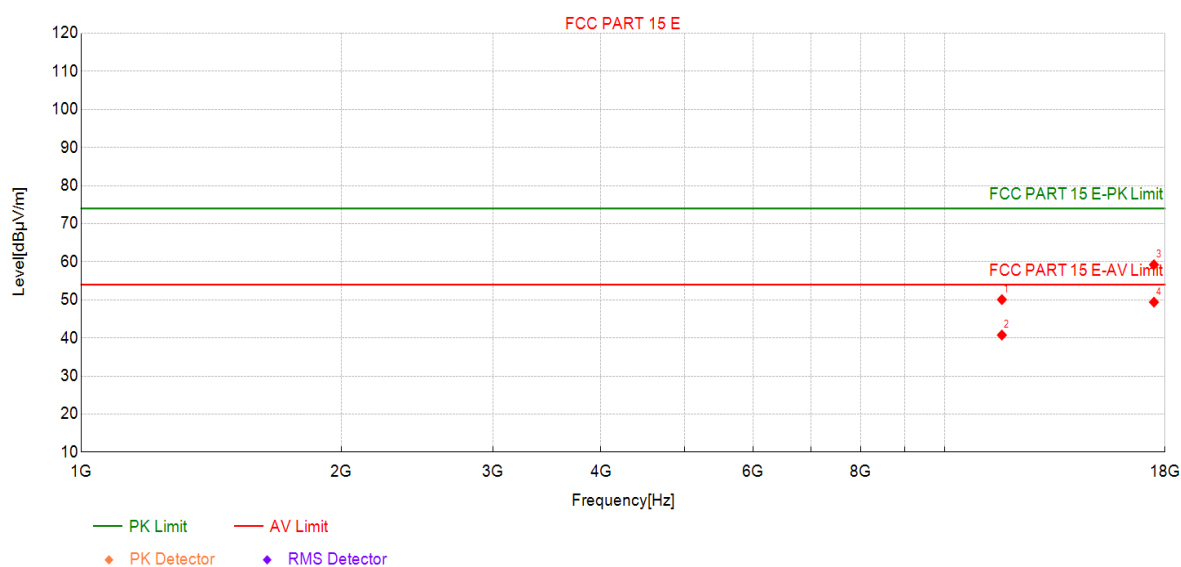

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	41.33	50.07	8.74	74.00	23.93	PK	Vertic	PASS
2	11650	32.02	40.76	8.74	54.00	13.24	AV	Vertic	PASS
3	17475	42.15	59.22	17.07	74.00	14.78	PK	Vertic	PASS
4	17475	32.33	49.40	17.07	54.00	4.60	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5190MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

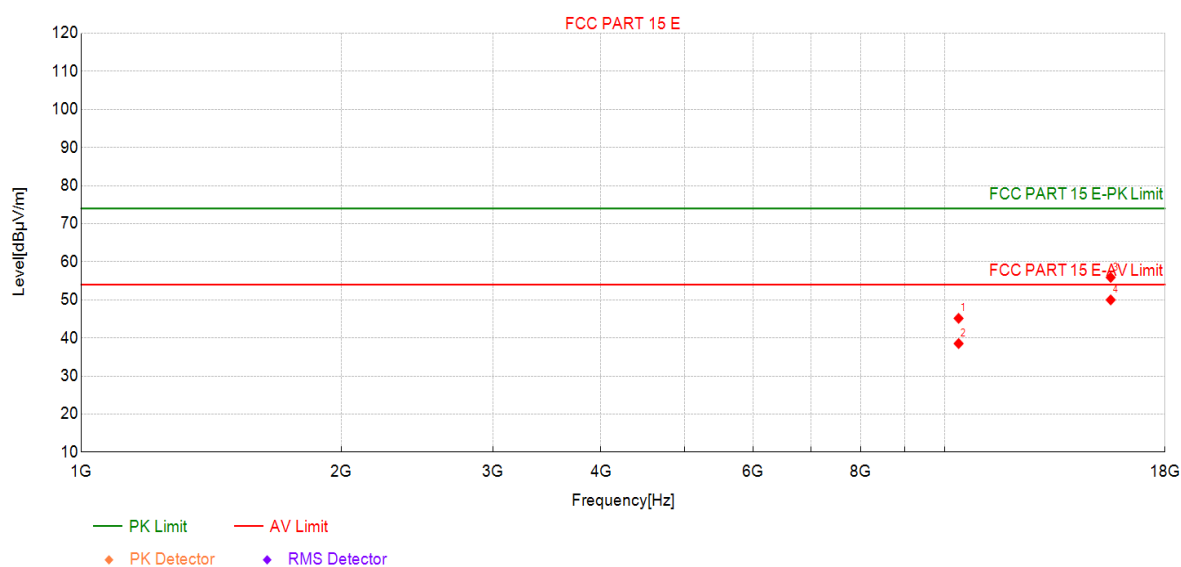

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	38.57	45.14	6.57	74.00	28.86	PK	Horizo	PASS
2	10380	31.96	38.53	6.57	54.00	15.47	AV	Horizo	PASS
3	15570	42.20	55.89	13.69	74.00	18.11	PK	Horizo	PASS
4	15570	36.30	49.99	13.69	54.00	4.01	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5190MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

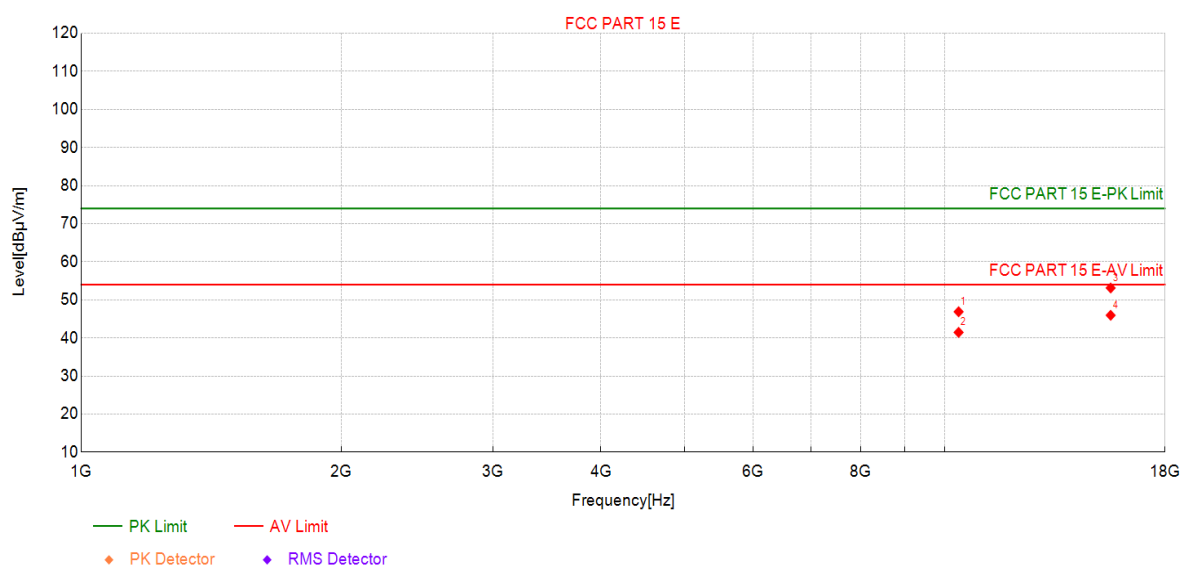

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	40.31	46.88	6.57	74.00	27.12	PK	Vertic	PASS
2	10380	34.89	41.46	6.57	54.00	12.54	AV	Vertic	PASS
3	15570	39.44	53.13	13.69	74.00	20.87	PK	Vertic	PASS
4	15570	32.26	45.95	13.69	54.00	8.05	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5230MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

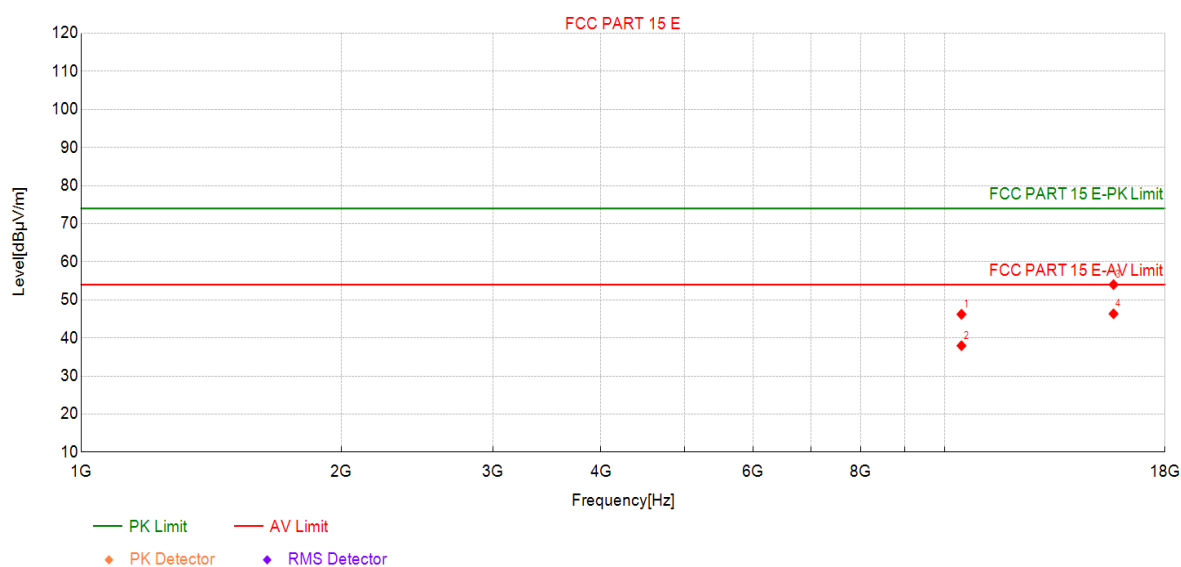

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	39.55	46.22	6.67	74.00	27.78	PK	Horizo	PASS
2	10460	31.29	37.96	6.67	54.00	16.04	AV	Horizo	PASS
3	15690	39.60	54.01	14.41	74.00	19.99	PK	Horizo	PASS
4	15690	31.93	46.34	14.41	54.00	7.66	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5230MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

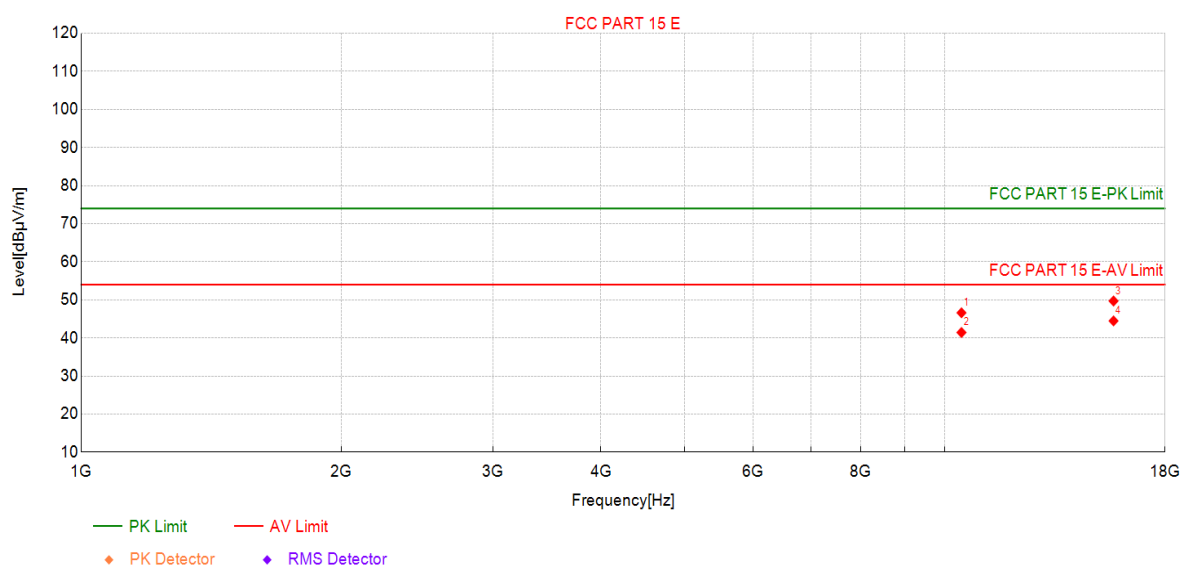

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	39.94	46.61	6.67	74.00	27.39	PK	Vertic	PASS
2	10460	34.76	41.43	6.67	54.00	12.57	AV	Vertic	PASS
3	15690	35.29	49.70	14.41	74.00	24.30	PK	Vertic	PASS
4	15690	30.06	44.47	14.41	54.00	9.53	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5270MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

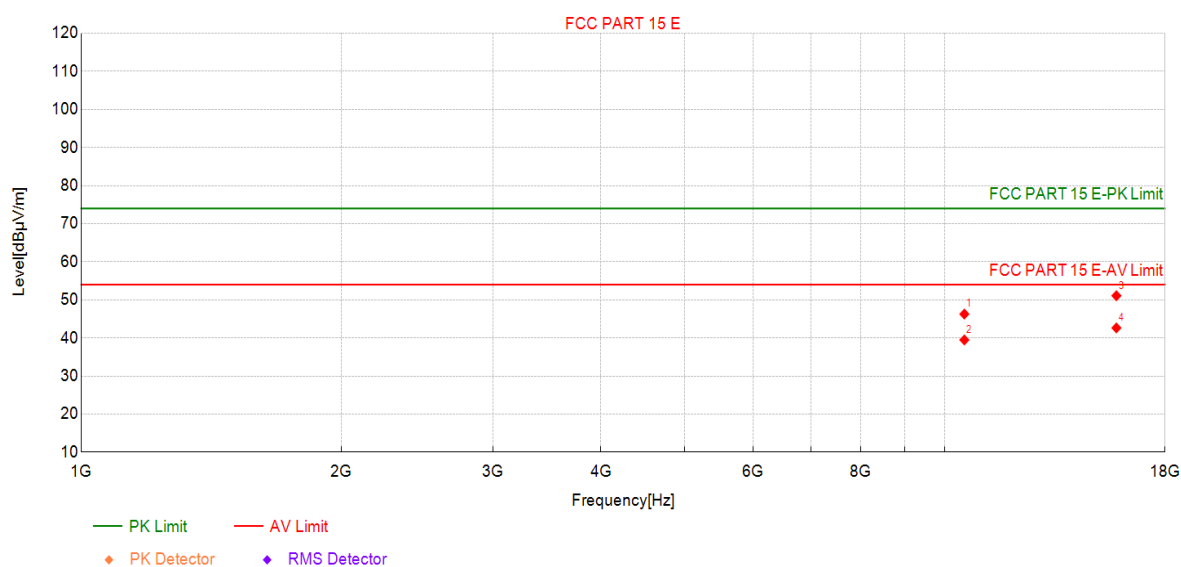

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	39.51	46.27	6.76	74.00	27.73	PK	Horizo	PASS
2	10540	32.72	39.48	6.76	54.00	14.52	AV	Horizo	PASS
3	15810	37.07	51.08	14.01	74.00	22.92	PK	Horizo	PASS
4	15810	28.62	42.63	14.01	54.00	11.37	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5270MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

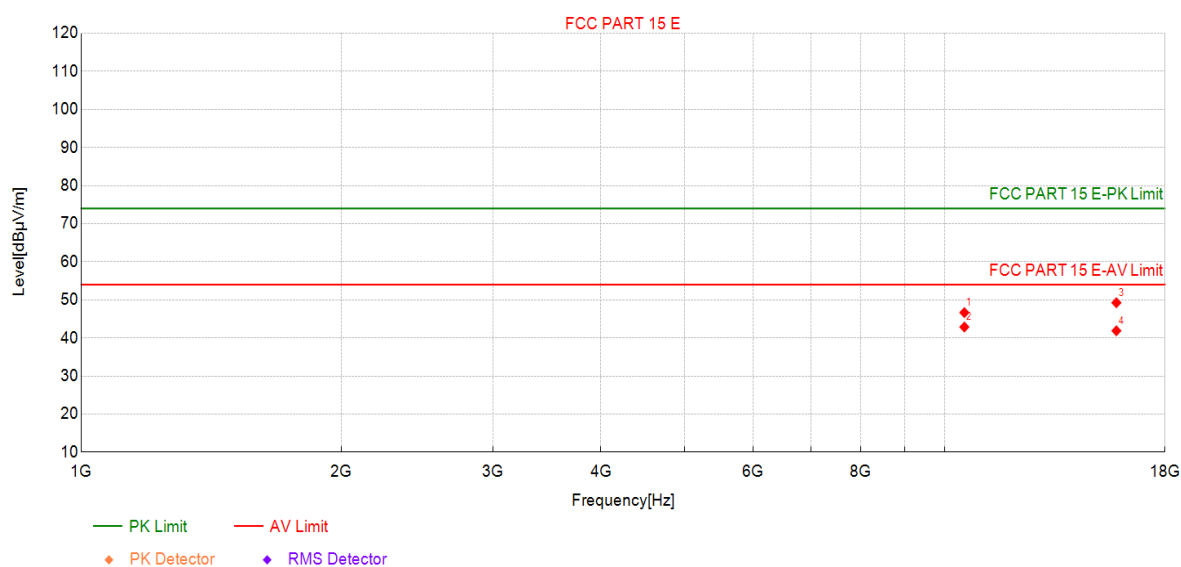

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	39.90	46.66	6.76	74.00	27.34	PK	Vertic	PASS
2	10540	36.11	42.87	6.76	54.00	11.13	AV	Vertic	PASS
3	15810	35.23	49.24	14.01	74.00	24.76	PK	Vertic	PASS
4	15810	27.87	41.88	14.01	54.00	12.12	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5310MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

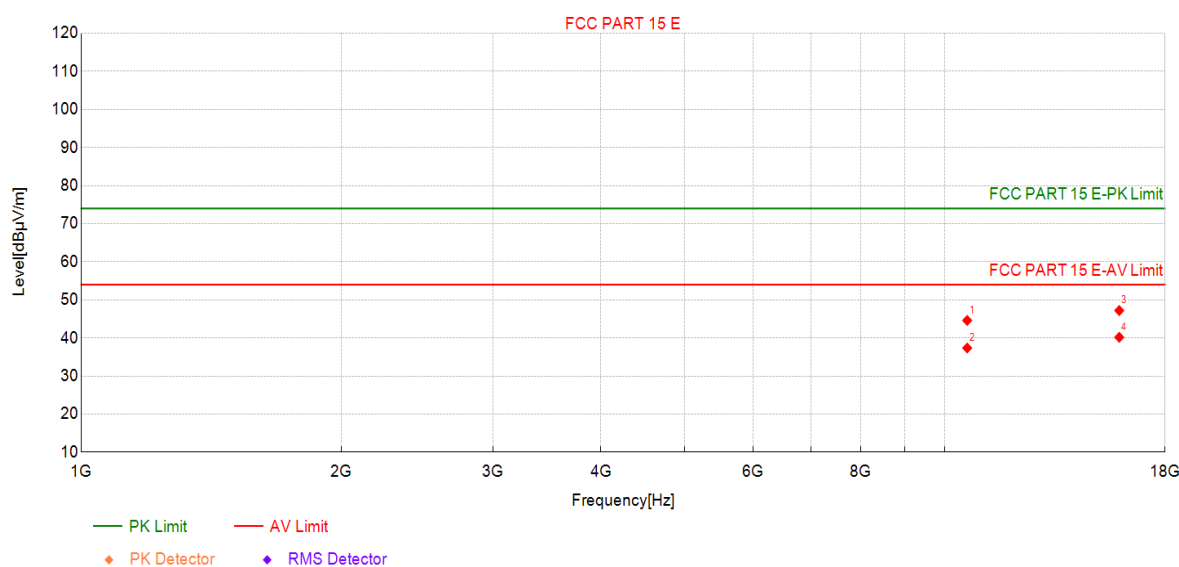

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	37.81	44.60	6.79	74.00	29.40	PK	Horizo	PASS
2	10620	30.56	37.35	6.79	54.00	16.65	AV	Horizo	PASS
3	15930	32.83	47.20	14.37	74.00	26.80	PK	Horizo	PASS
4	15930	25.80	40.17	14.37	54.00	13.83	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5310MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

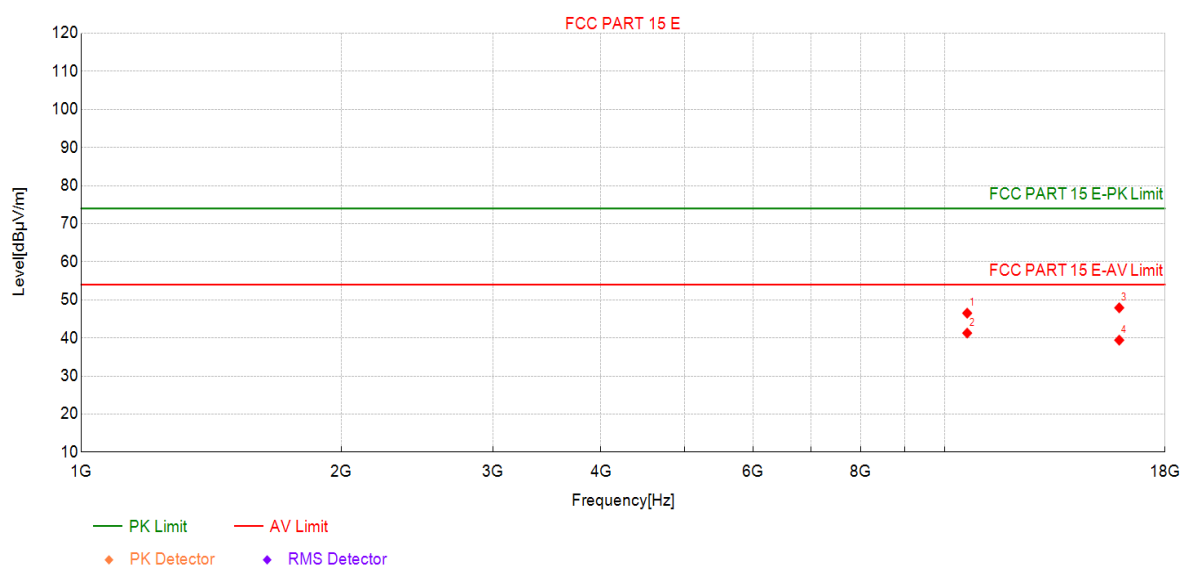

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	39.71	46.50	6.79	74.00	27.50	PK	Vertic	PASS
2	10620	34.48	41.27	6.79	54.00	12.73	AV	Vertic	PASS
3	15930	33.55	47.92	14.37	74.00	26.08	PK	Vertic	PASS
4	15930	25.05	39.42	14.37	54.00	14.58	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5510MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

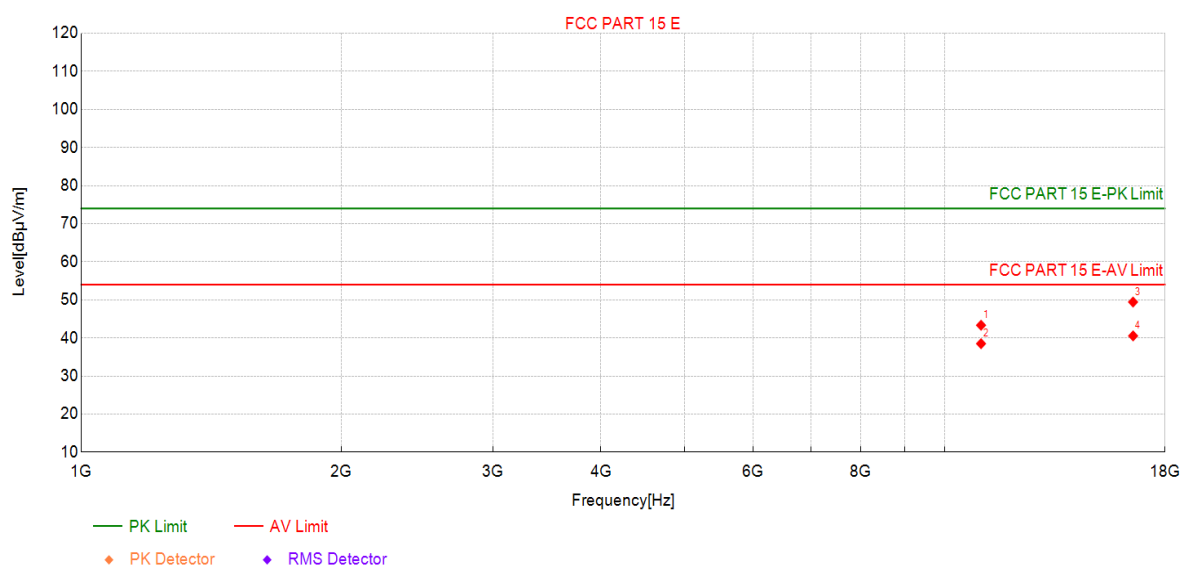

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	36.09	43.34	7.25	74.00	30.66	PK	Horizo	PASS
2	11020	31.24	38.49	7.25	54.00	15.51	AV	Horizo	PASS
3	16530	34.42	49.43	15.01	74.00	24.57	PK	Horizo	PASS
4	16530	25.53	40.54	15.01	54.00	13.46	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5510MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

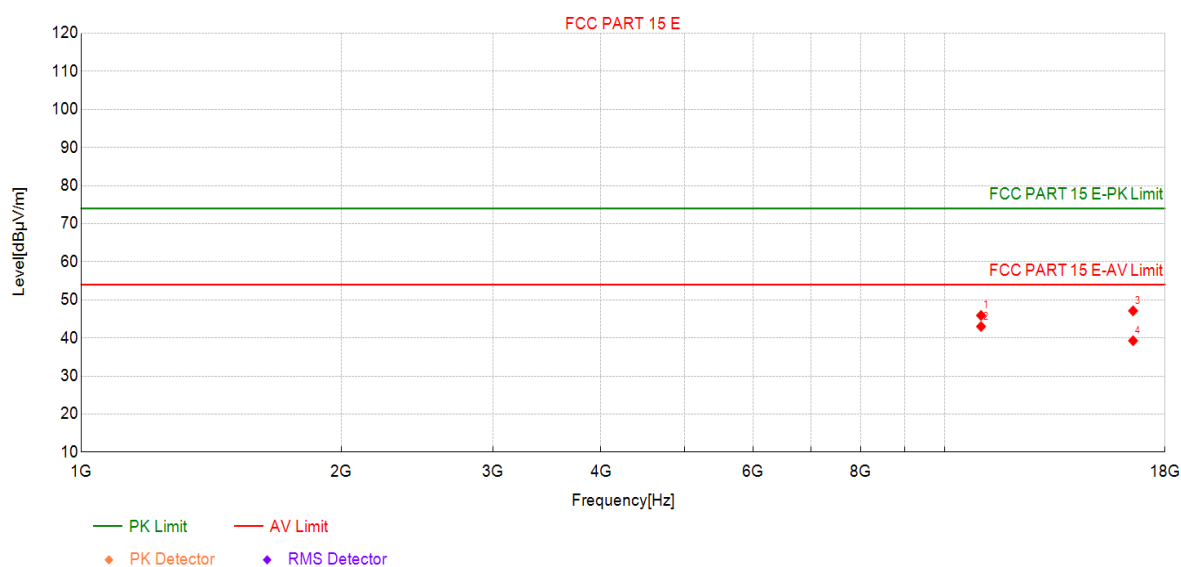

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	38.65	45.90	7.25	74.00	28.10	PK	Vertic	PASS
2	11020	35.76	43.01	7.25	54.00	10.99	AV	Vertic	PASS
3	16530	32.11	47.12	15.01	74.00	26.88	PK	Vertic	PASS
4	16530	24.25	39.26	15.01	54.00	14.74	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5550MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

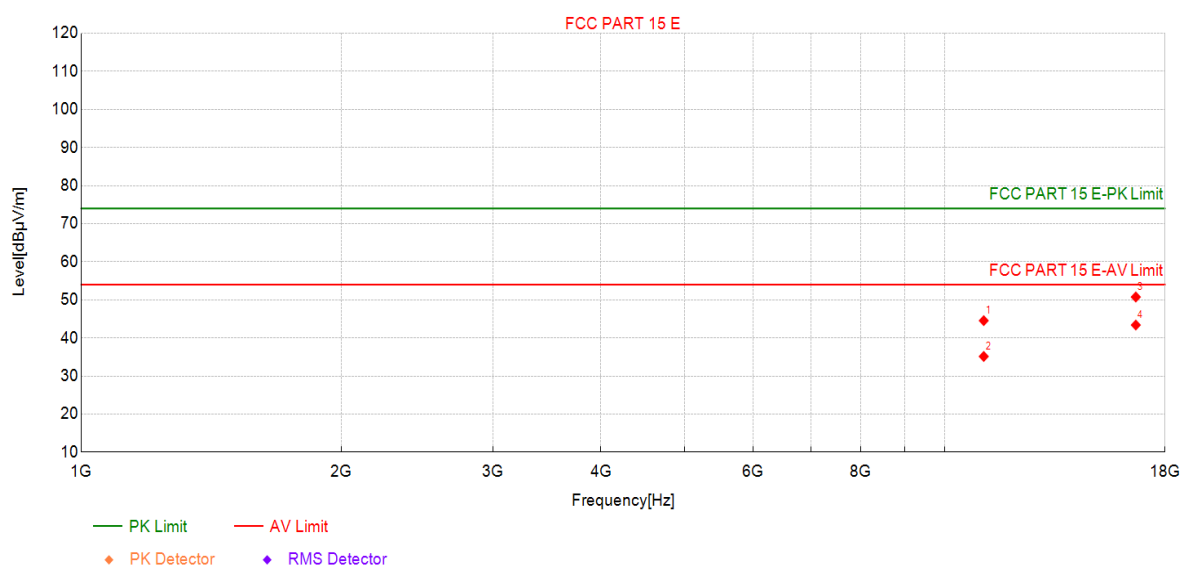

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	37.89	44.55	6.66	74.00	29.45	PK	Horizo	PASS
2	11100	28.48	35.14	6.66	54.00	18.86	AV	Horizo	PASS
3	16650	36.06	50.75	14.69	74.00	23.25	PK	Horizo	PASS
4	16650	28.70	43.39	14.69	54.00	10.61	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5550MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

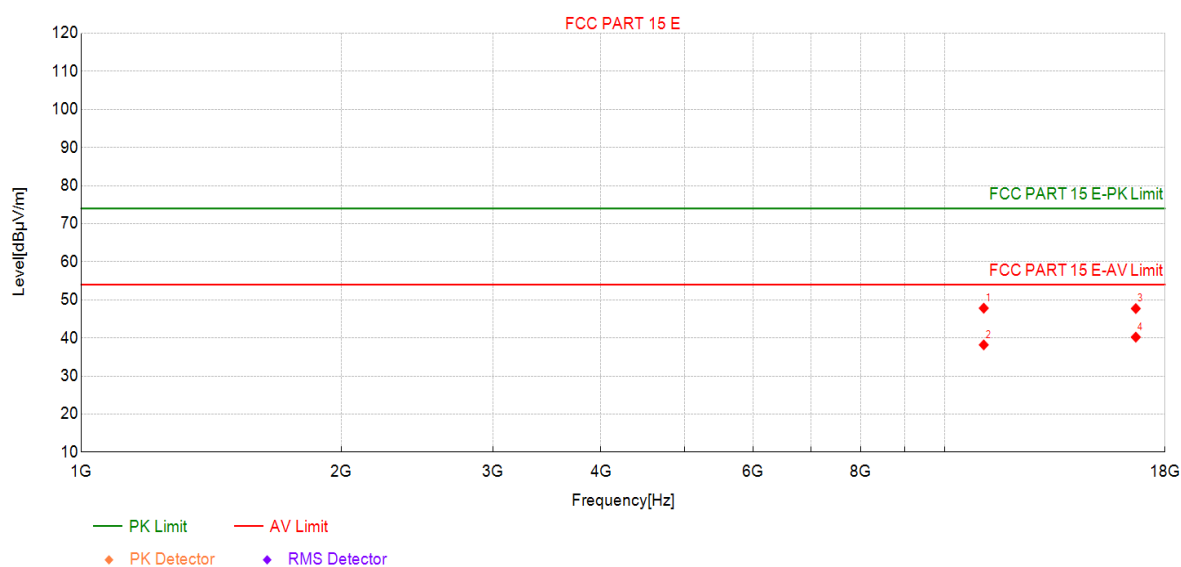

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	41.16	47.82	6.66	74.00	26.18	PK	Vertic	PASS
2	11100	31.52	38.18	6.66	54.00	15.82	AV	Vertic	PASS
3	16650	33.03	47.72	14.69	74.00	26.28	PK	Vertic	PASS
4	16650	25.52	40.21	14.69	54.00	13.79	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5670MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

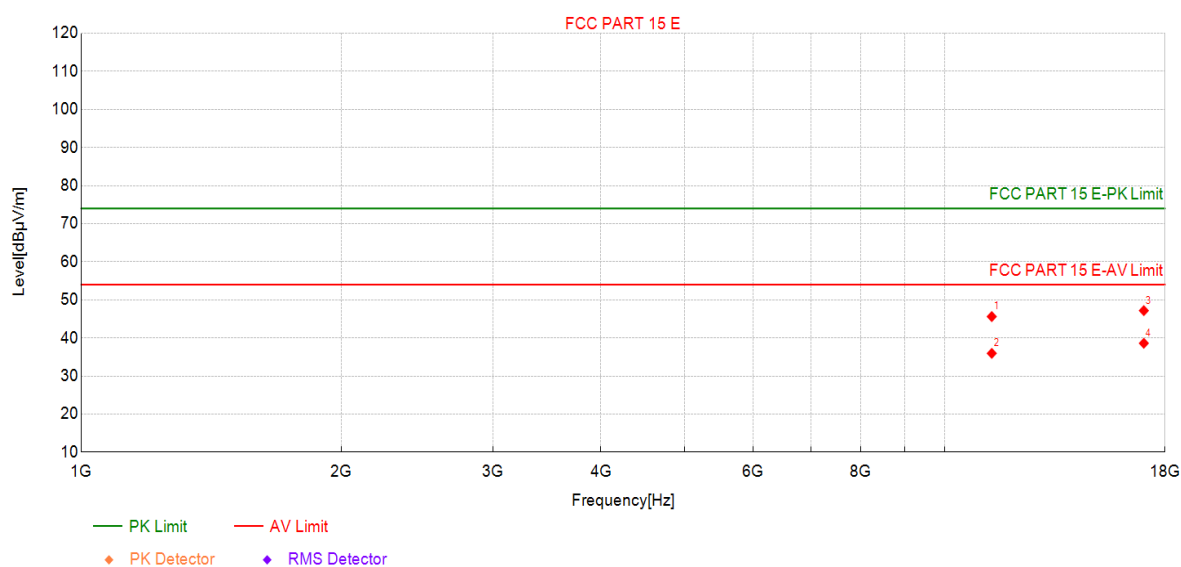

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	37.75	45.61	7.86	74.00	28.39	PK	Horizo	PASS
2	11340	28.09	35.95	7.86	54.00	18.05	AV	Horizo	PASS
3	17010	31.14	47.18	16.04	74.00	26.82	PK	Horizo	PASS
4	17010	22.56	38.60	16.04	54.00	15.40	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5670MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

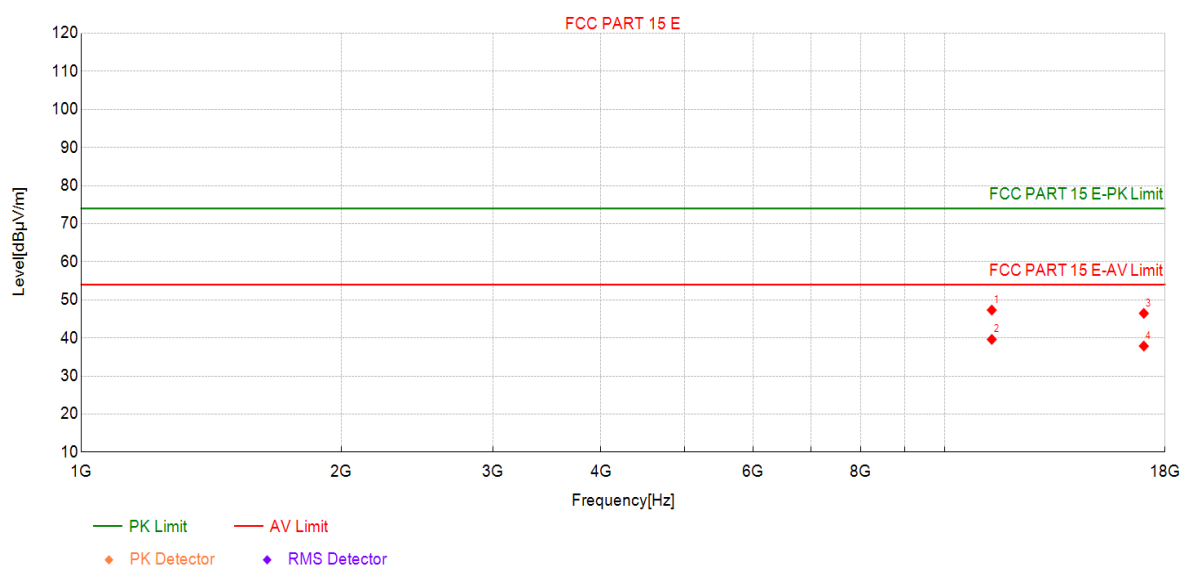

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	39.46	47.32	7.86	74.00	26.68	PK	Vertic	PASS
2	11340	31.75	39.61	7.86	54.00	14.39	AV	Vertic	PASS
3	17010	30.41	46.45	16.04	74.00	27.55	PK	Vertic	PASS
4	17010	21.83	37.87	16.04	54.00	16.13	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5755MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

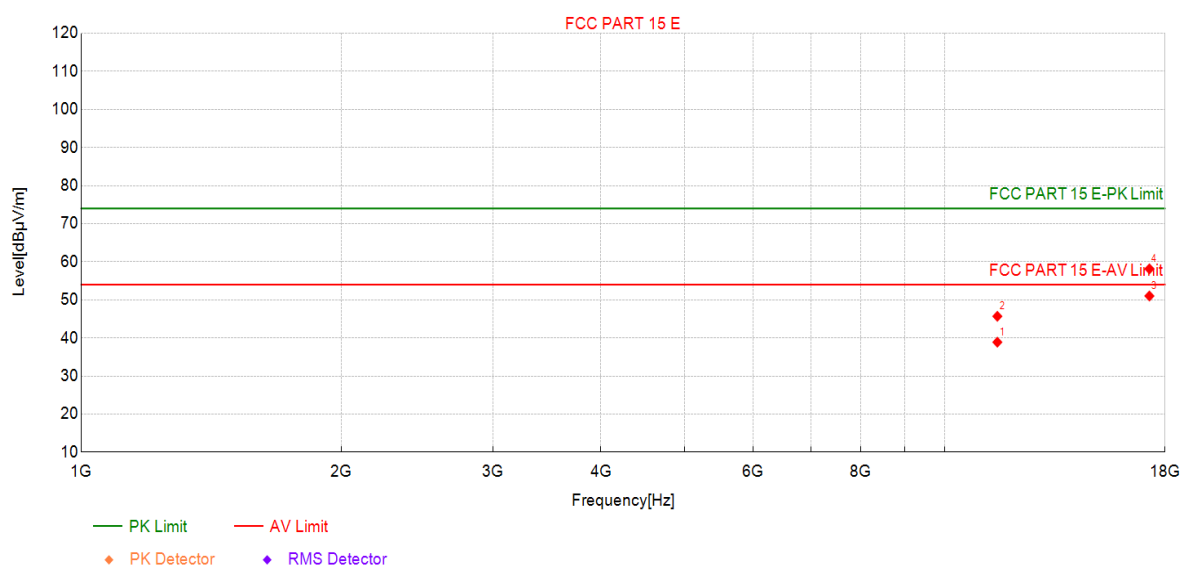

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	30.40	38.88	8.48	54.00	15.12	AV	Horizo	PASS
2	11510	37.21	45.69	8.48	74.00	28.31	PK	Horizo	PASS
3	17265	35.51	51.02	15.51	54.00	2.98	AV	Horizo	PASS
4	17265	42.64	58.15	15.51	74.00	15.85	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5755MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

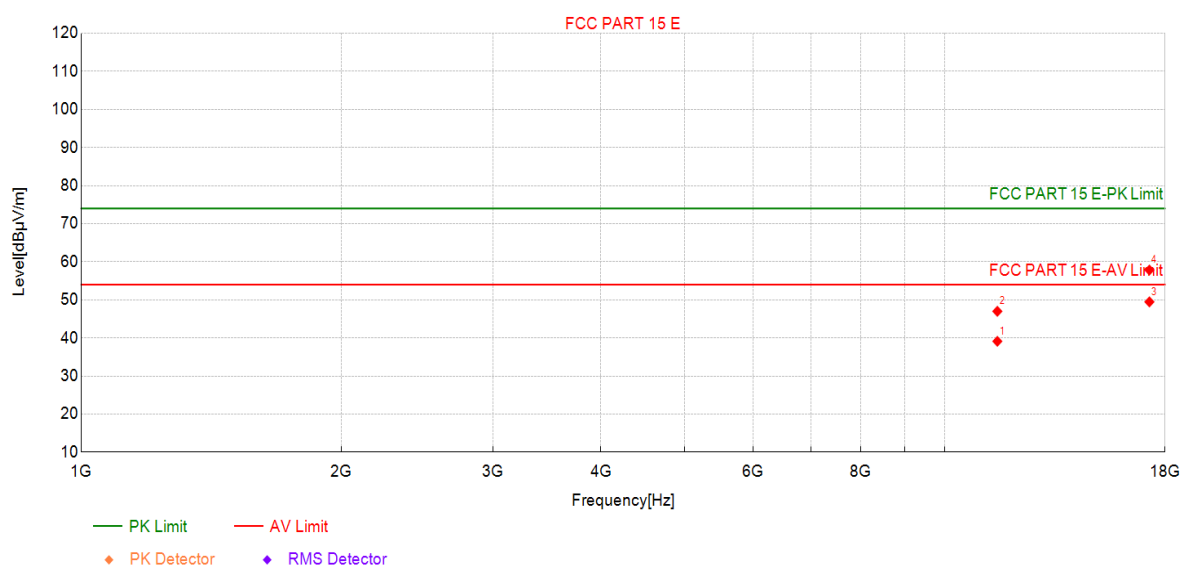

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	30.63	39.11	8.48	54.00	14.89	AV	Vertic	PASS
2	11510	38.51	46.99	8.48	74.00	27.01	PK	Vertic	PASS
3	17265	33.96	49.47	15.51	54.00	4.53	AV	Vertic	PASS
4	17265	42.33	57.84	15.51	74.00	16.16	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5795MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

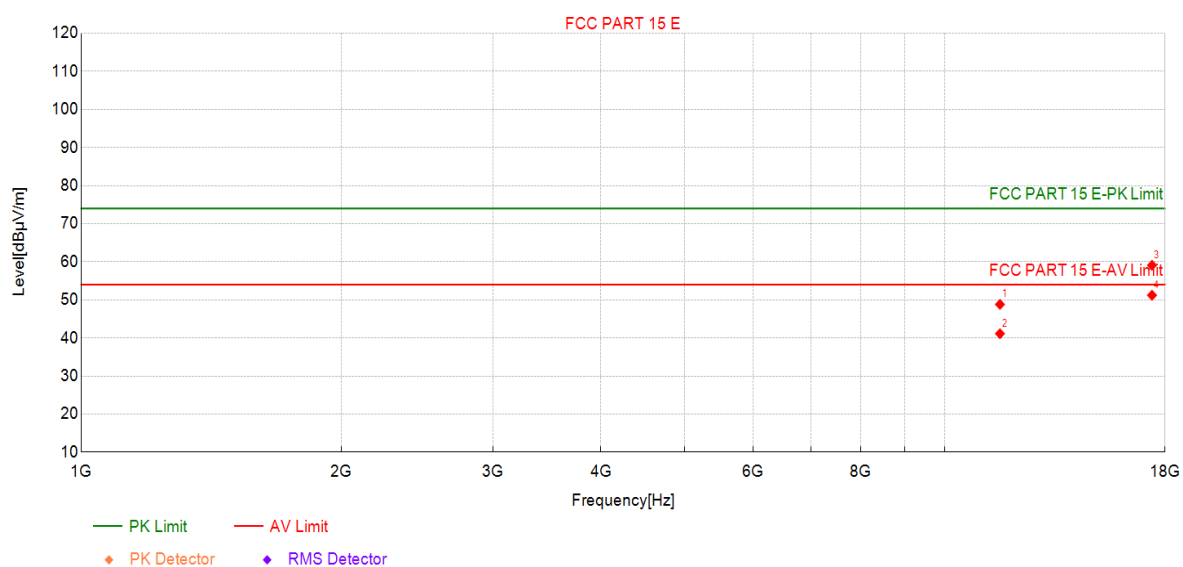

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	40.07	48.81	8.74	74.00	25.19	PK	Horizo	PASS
2	11590	32.37	41.11	8.74	54.00	12.89	AV	Horizo	PASS
3	17385	42.51	59.09	16.58	74.00	14.91	PK	Horizo	PASS
4	17385	34.63	51.21	16.58	54.00	2.79	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5795MHz by 802.11be(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

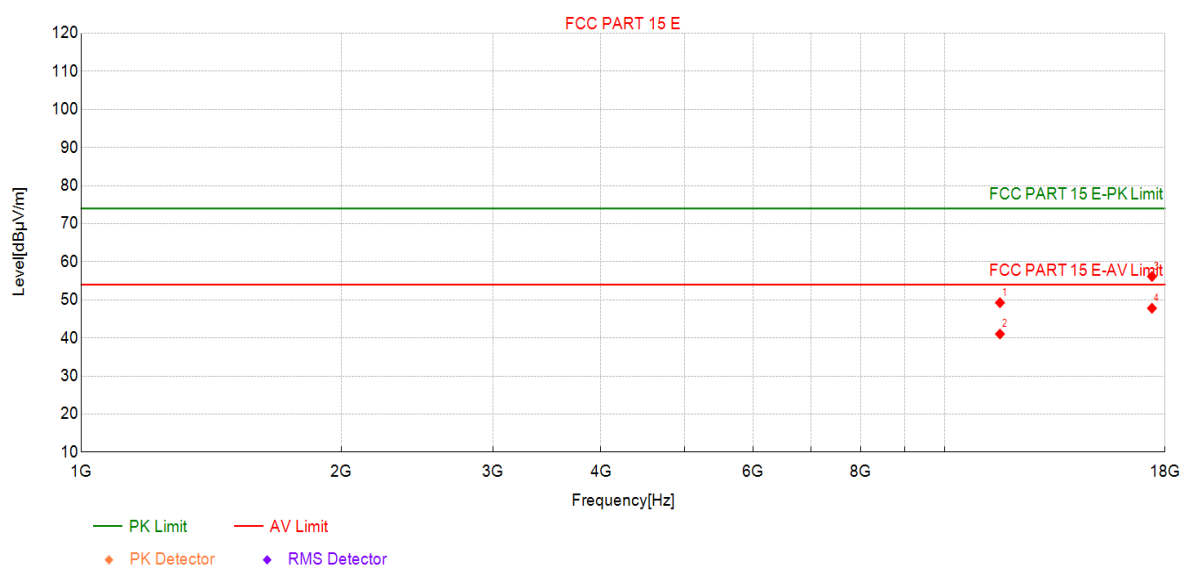

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	40.51	49.25	8.74	74.00	24.75	PK	Vertic	PASS
2	11590	32.29	41.03	8.74	54.00	12.97	AV	Vertic	PASS
3	17385	39.57	56.15	16.58	74.00	17.85	PK	Vertic	PASS
4	17385	31.22	47.80	16.58	54.00	6.20	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

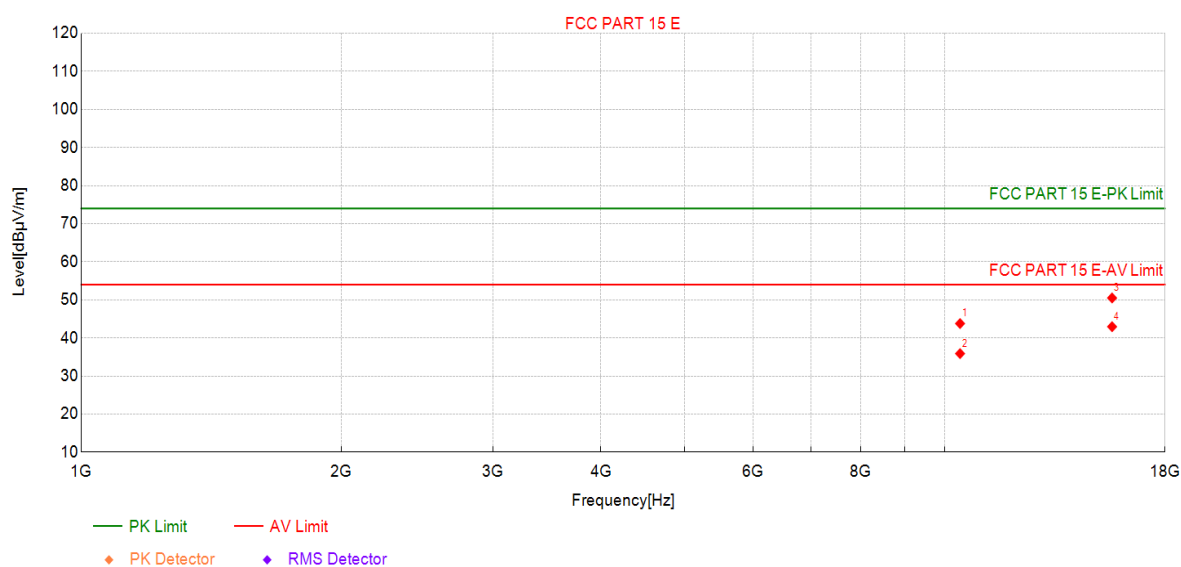

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	37.18	43.78	6.60	74.00	30.22	PK	Horizo	PASS
2	10420	29.29	35.89	6.60	54.00	18.11	AV	Horizo	PASS
3	15630	36.72	50.50	13.78	74.00	23.50	PK	Horizo	PASS
4	15630	29.17	42.95	13.78	54.00	11.05	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

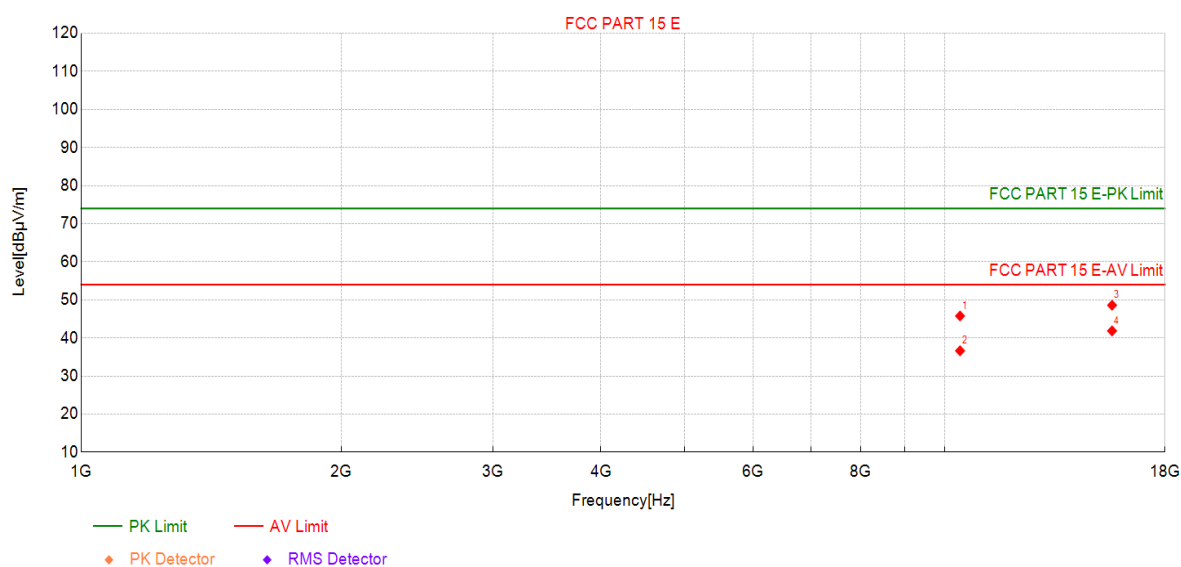

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420	39.17	45.77	6.60	74.00	28.23	PK	Vertic	PASS
2	10420	30.02	36.62	6.60	54.00	17.38	AV	Vertic	PASS
3	15630	34.81	48.59	13.78	74.00	25.41	PK	Vertic	PASS
4	15630	28.07	41.85	13.78	54.00	12.15	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

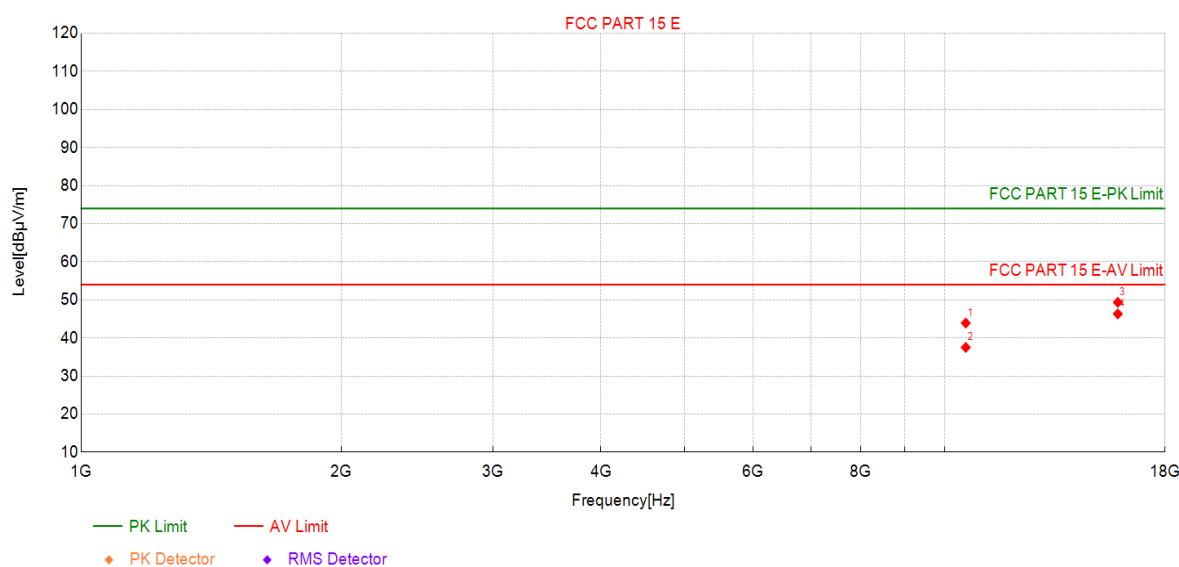

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	37.14	43.91	6.77	74.00	30.09	PK	Horizo	PASS
2	10580	30.75	37.52	6.77	54.00	16.48	AV	Horizo	PASS
3	15870	35.26	49.35	14.09	74.00	24.65	PK	Horizo	PASS
4	15870	32.22	46.31	14.09	54.00	7.69	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

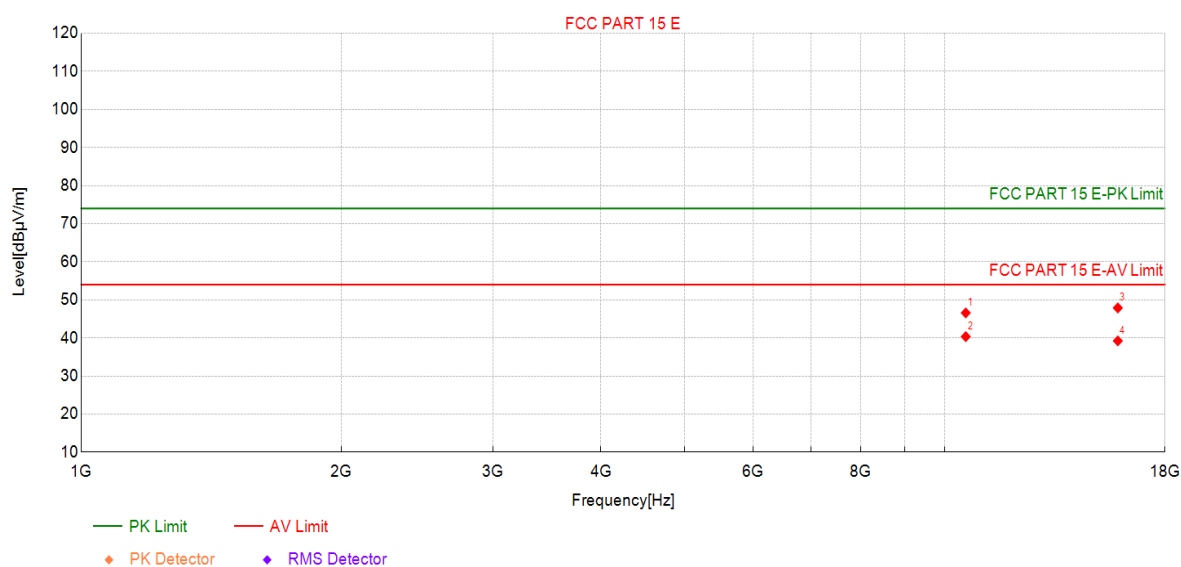

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10580	39.81	46.58	6.77	74.00	27.42	PK	Vertic	PASS
2	10580	33.57	40.34	6.77	54.00	13.66	AV	Vertic	PASS
3	15870	33.80	47.89	14.09	74.00	26.11	PK	Vertic	PASS
4	15870	25.14	39.23	14.09	54.00	14.77	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5530MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

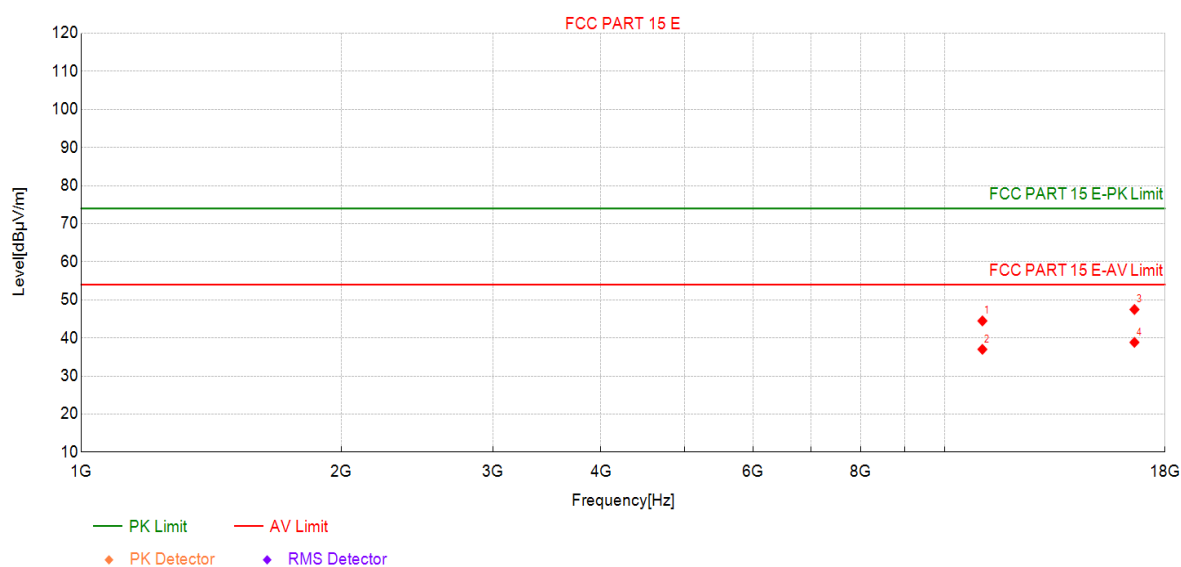

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	37.52	44.48	6.96	74.00	29.52	PK	Horizo	PASS
2	11060	30.04	37.00	6.96	54.00	17.00	AV	Horizo	PASS
3	16590	32.67	47.47	14.80	74.00	26.53	PK	Horizo	PASS
4	16590	24.03	38.83	14.80	54.00	15.17	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5530MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

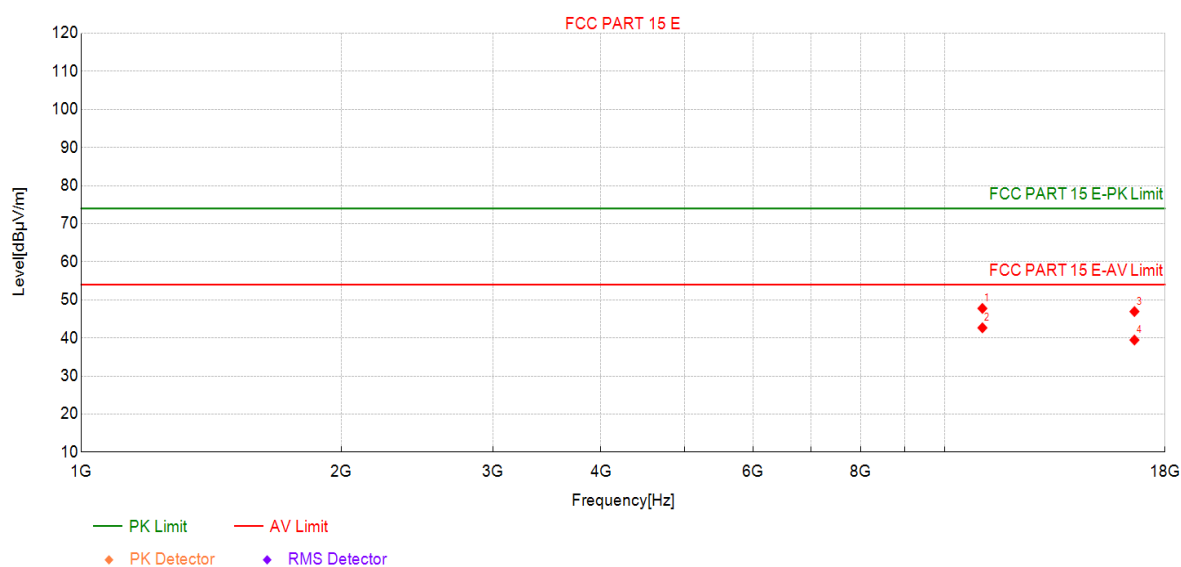

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060	40.79	47.75	6.96	74.00	26.25	PK	Vertic	PASS
2	11060	35.70	42.66	6.96	54.00	11.34	AV	Vertic	PASS
3	16590	32.13	46.93	14.80	74.00	27.07	PK	Vertic	PASS
4	16590	24.65	39.45	14.80	54.00	14.55	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5610MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

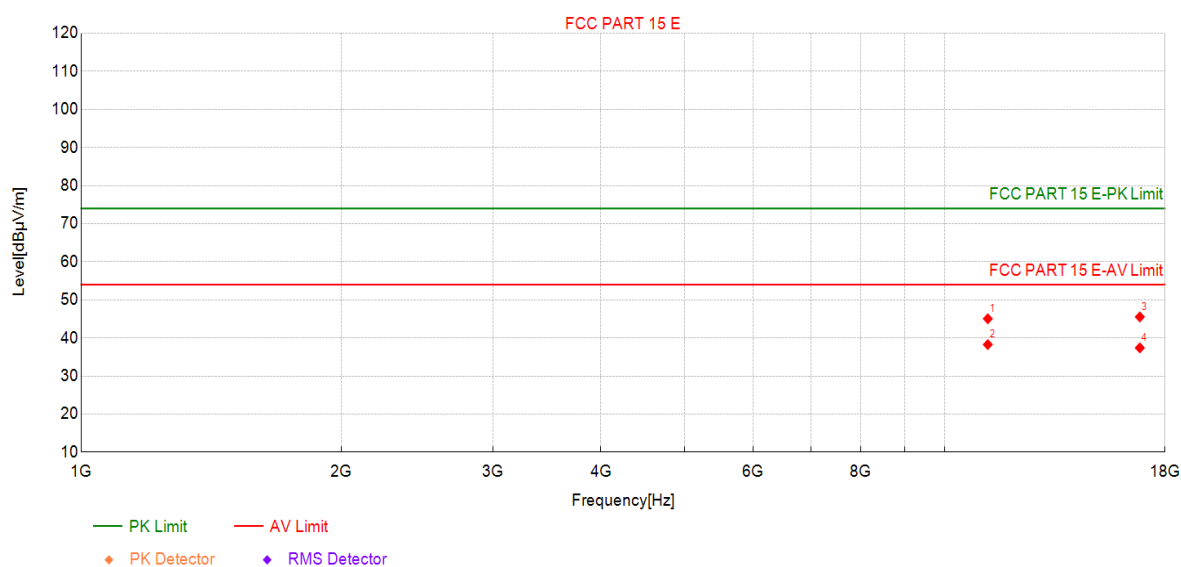

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	37.31	45.04	7.73	74.00	28.96	PK	Horizo	PASS
2	11220	30.53	38.26	7.73	54.00	15.74	AV	Horizo	PASS
3	16830	30.61	45.53	14.92	74.00	28.47	PK	Horizo	PASS
4	16830	22.48	37.40	14.92	54.00	16.60	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5610MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

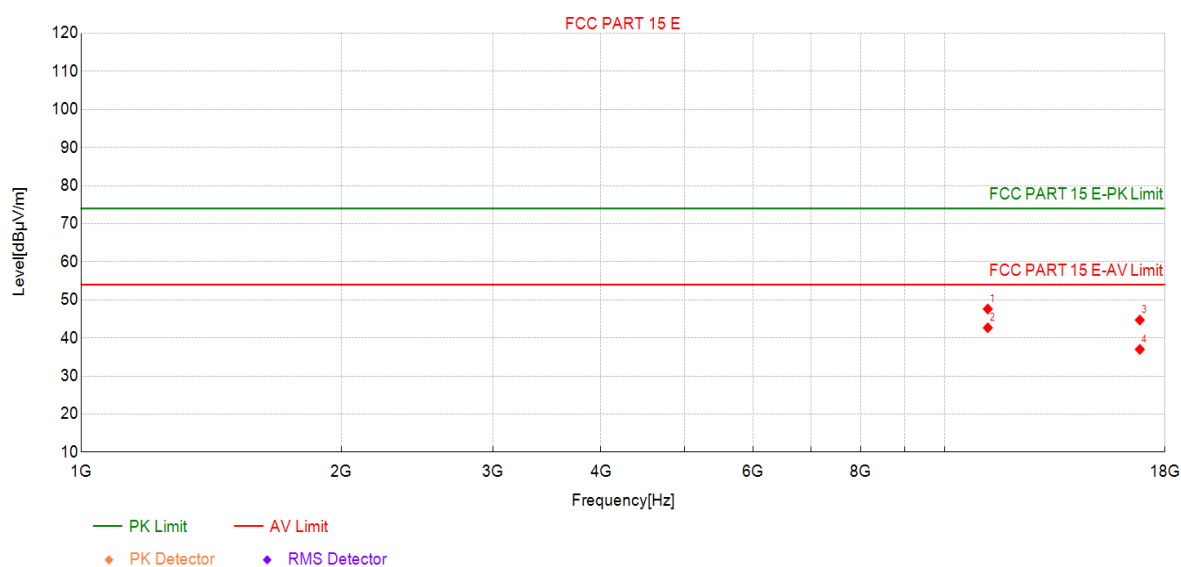

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220	39.87	47.60	7.73	74.00	26.40	PK	Vertic	PASS
2	11220	34.94	42.67	7.73	54.00	11.33	AV	Vertic	PASS
3	16830	29.79	44.71	14.92	74.00	29.29	PK	Vertic	PASS
4	16830	22.07	36.99	14.92	54.00	17.01	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5775MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

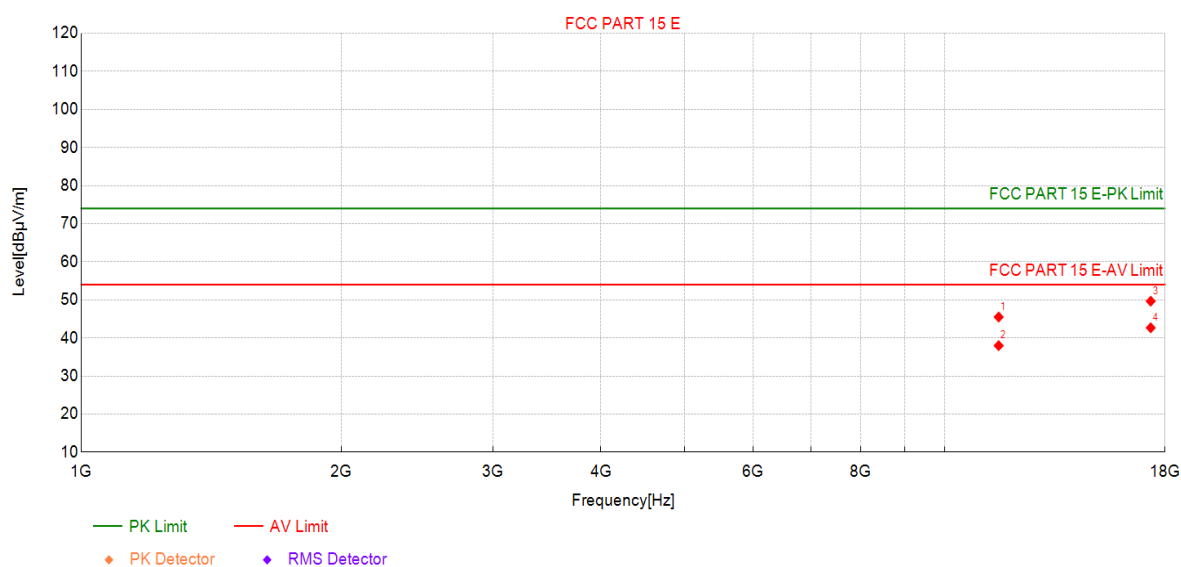

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	36.89	45.50	8.61	74.00	28.50	PK	Horizo	PASS
2	11550	29.37	37.98	8.61	54.00	16.02	AV	Horizo	PASS
3	17325	33.78	49.65	15.87	74.00	24.35	PK	Horizo	PASS
4	17325	26.80	42.67	15.87	54.00	11.33	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5775MHz by 802.11be(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

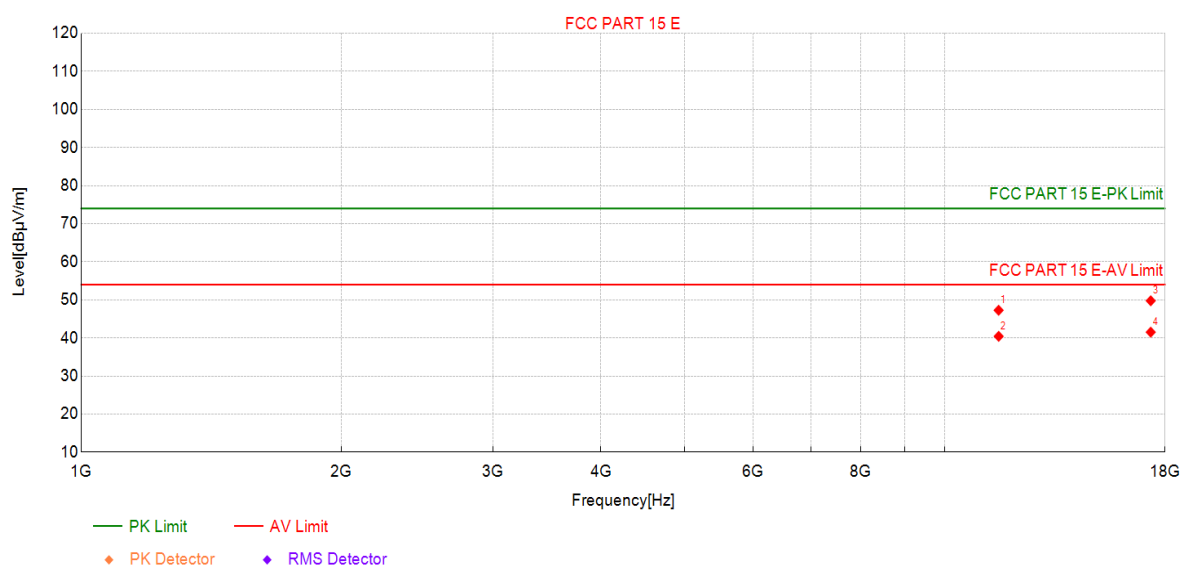

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550	38.66	47.27	8.61	74.00	26.73	PK	Vertic	PASS
2	11550	31.82	40.43	8.61	54.00	13.57	AV	Vertic	PASS
3	17325	33.89	49.76	15.87	74.00	24.24	PK	Vertic	PASS
4	17325	25.65	41.52	15.87	54.00	12.48	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

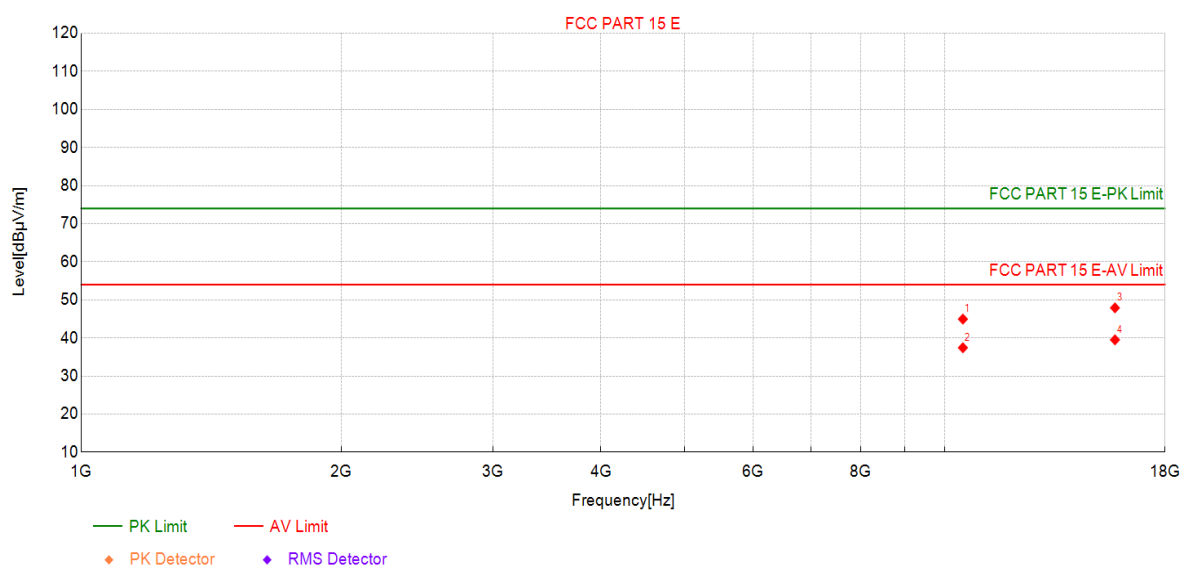

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	38.20	44.95	6.75	74.00	29.05	PK	Horizo	PASS
2	10500	30.68	37.43	6.75	54.00	16.57	AV	Horizo	PASS
3	15750	33.66	47.90	14.24	74.00	26.10	PK	Horizo	PASS
4	15750	25.26	39.50	14.24	54.00	14.50	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

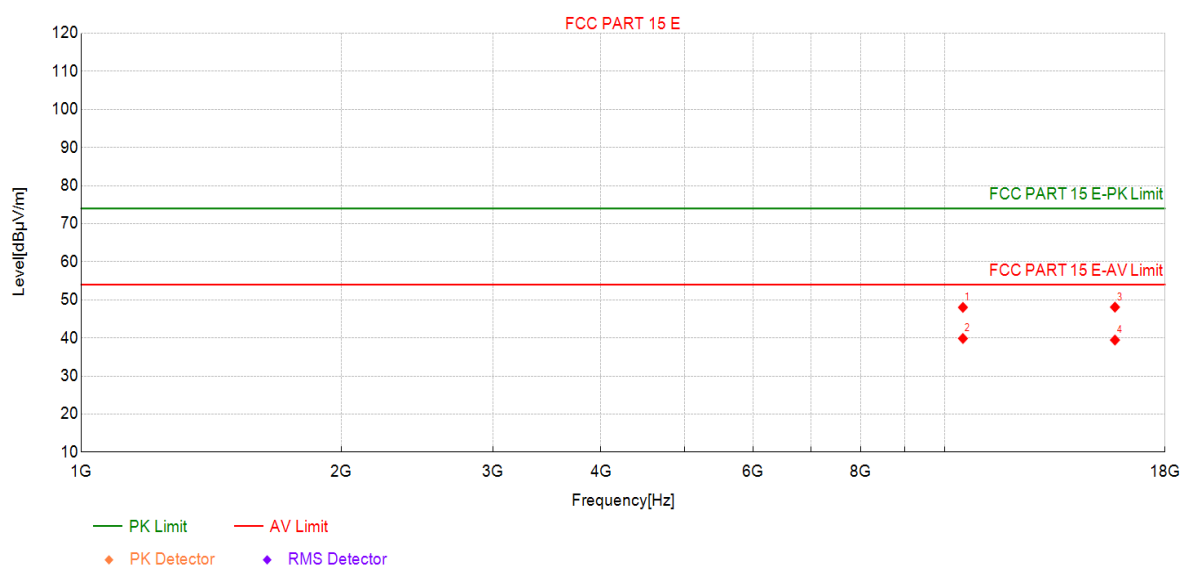

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10500	41.28	48.03	6.75	74.00	25.97	PK	Vertic	PASS
2	10500	33.11	39.86	6.75	54.00	14.14	AV	Vertic	PASS
3	15750	33.85	48.09	14.24	74.00	25.91	PK	Vertic	PASS
4	15750	25.20	39.44	14.24	54.00	14.56	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5570MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

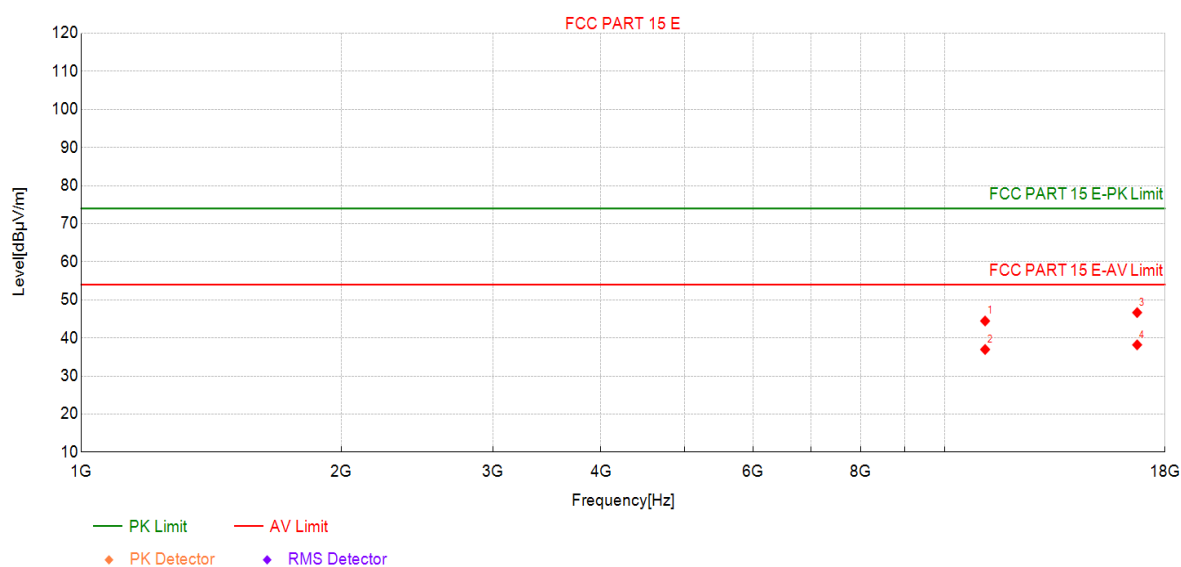

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	37.37	44.45	7.08	74.00	29.55	PK	Horizo	PASS
2	11140	29.89	36.97	7.08	54.00	17.03	AV	Horizo	PASS
3	16710	32.04	46.66	14.62	74.00	27.34	PK	Horizo	PASS
4	16710	23.56	38.18	14.62	54.00	15.82	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5570MHz by 802.11be(160MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

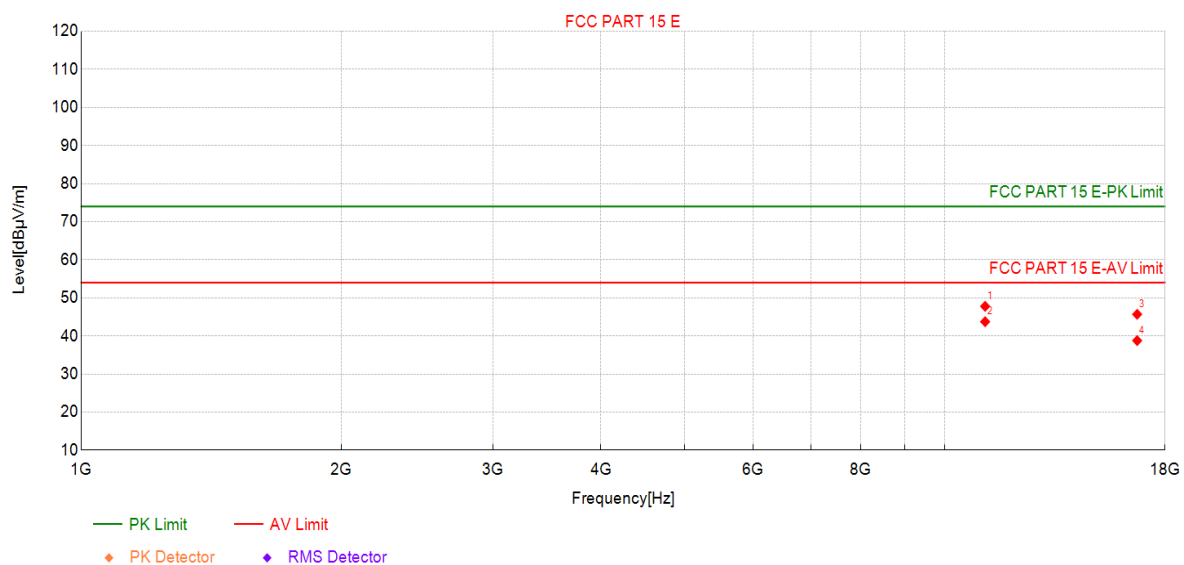

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11140	40.69	47.77	7.08	74.00	26.23	PK	Vertic	PASS
2	11140	36.66	43.74	7.08	54.00	10.26	AV	Vertic	PASS
3	16710	31.06	45.68	14.62	74.00	28.32	PK	Vertic	PASS
4	16710	24.16	38.78	14.62	54.00	15.22	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. If the test result on peak is lower than average limit, then average measurement needn't be performed.
4. We have evaluated SISO, CDD, Beamforming mode, shown in the report is the worst data.
5. We use the RF output power of Indoor Access Point Mode for testing, which has a higher RF output power.

The worst case of Radiated Emission Above 18GHz:


Profile: 24B0230R	Page No.: 25
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5180MHz by 802.11a	

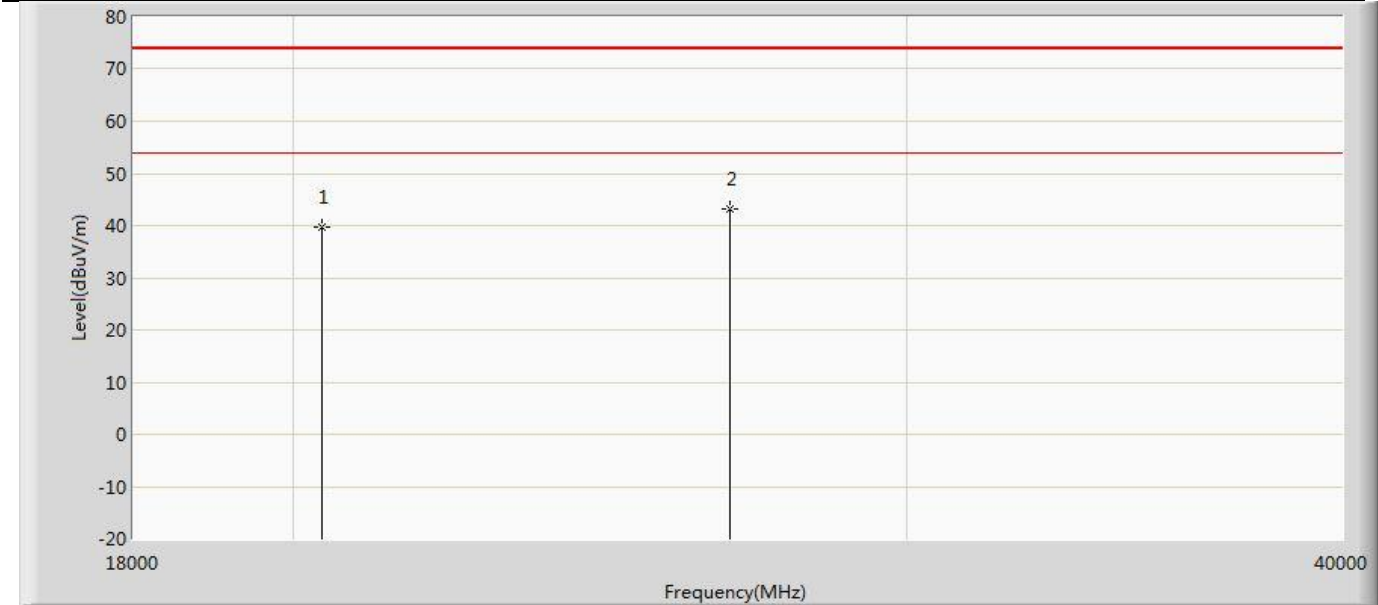

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20398.000	39.617	41.451	-34.383	74.000	-1.834	PK
2	*	26712.000	43.128	39.866	-30.872	74.000	3.262	PK




Profile: 24B0230R	Page No.: 26
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5180MHz by 802.11a	

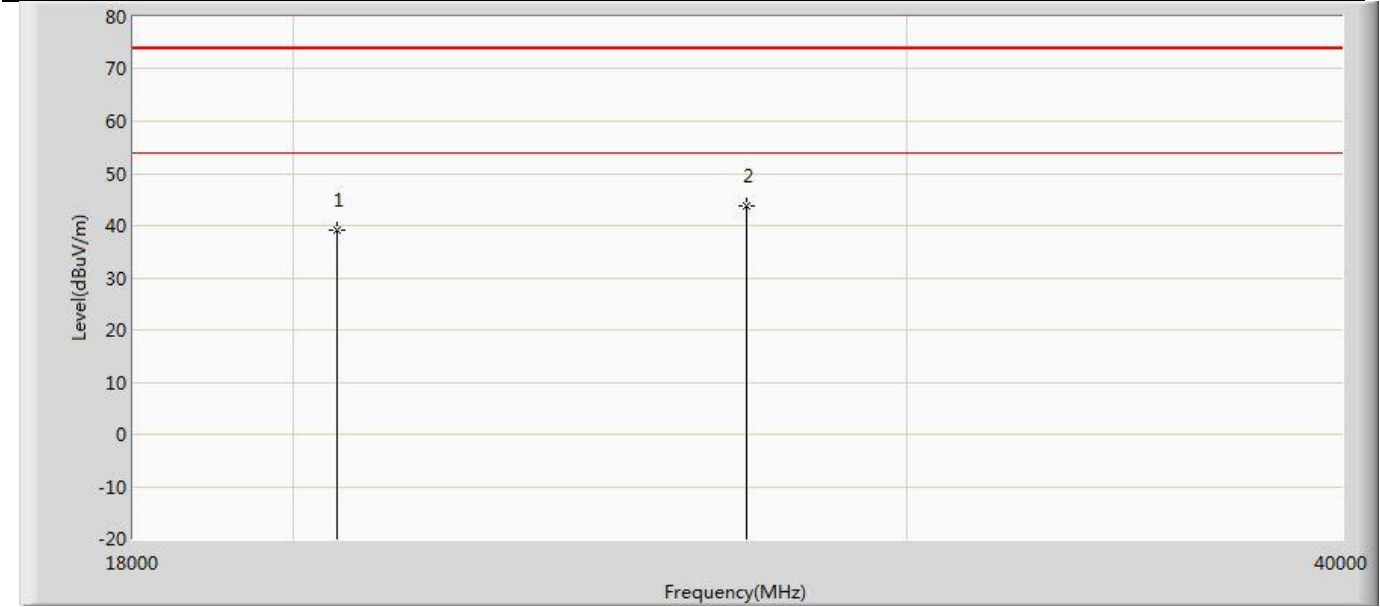

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20596.000	39.000	40.603	-35.000	74.000	-1.603	PK
2	*	26998.000	43.720	40.360	-30.280	74.000	3.360	PK


Profile: 24B0230R	Page No.: 27
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5220MHz by 802.11a	

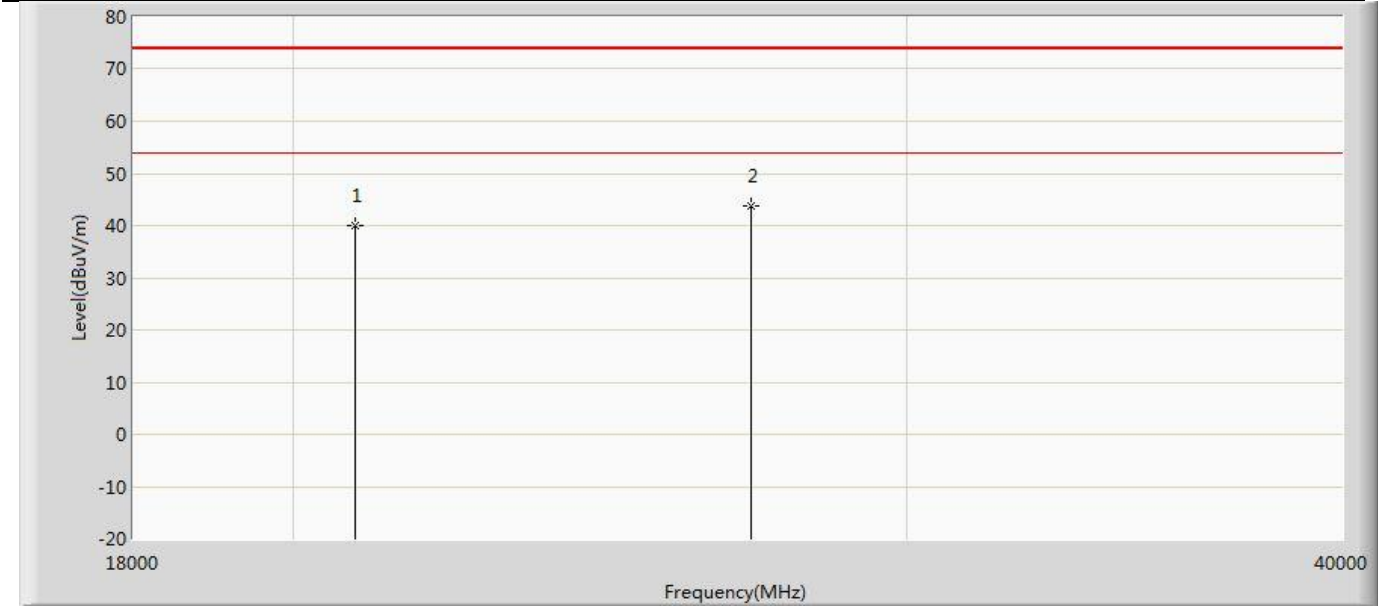

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20838.000	39.952	41.272	-34.048	74.000	-1.320	PK
2	*	27064.000	43.684	40.352	-30.316	74.000	3.332	PK




Profile: 24B0230R	Page No.: 28
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5220MHz by 802.11a	

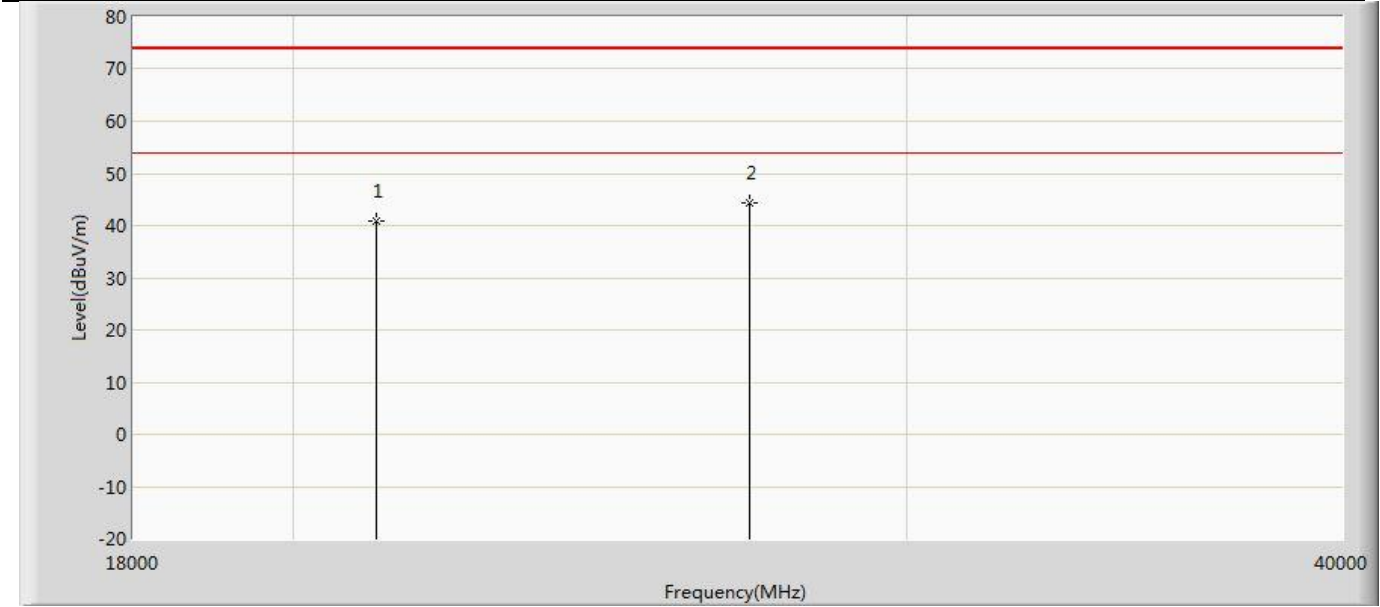

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21146.000	40.900	41.898	-33.100	74.000	-0.998	PK
2	*	27042.000	44.379	41.038	-29.621	74.000	3.341	PK


Profile: 24B0230R	Page No.: 29
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5240MHz by 802.11a	

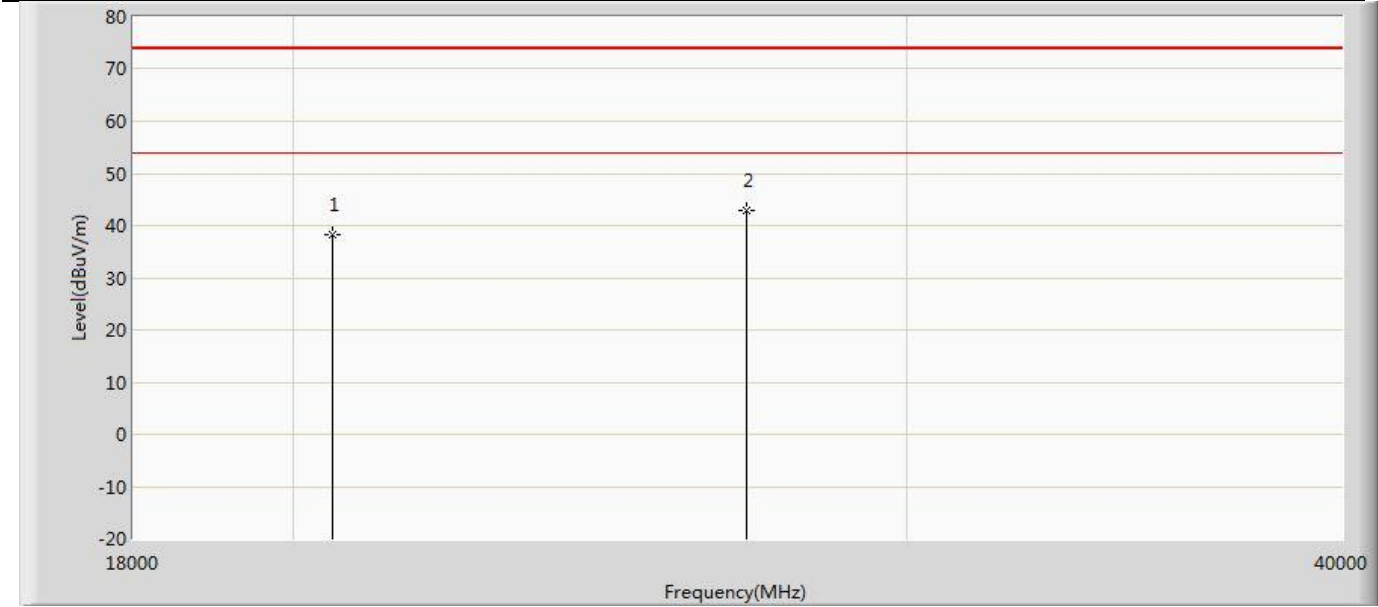

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20530.000	38.317	39.997	-35.683	74.000	-1.680	PK
2	*	26998.000	42.954	39.594	-31.046	74.000	3.360	PK




Profile: 24B0230R	Page No.: 30
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5240MHz by 802.11a	

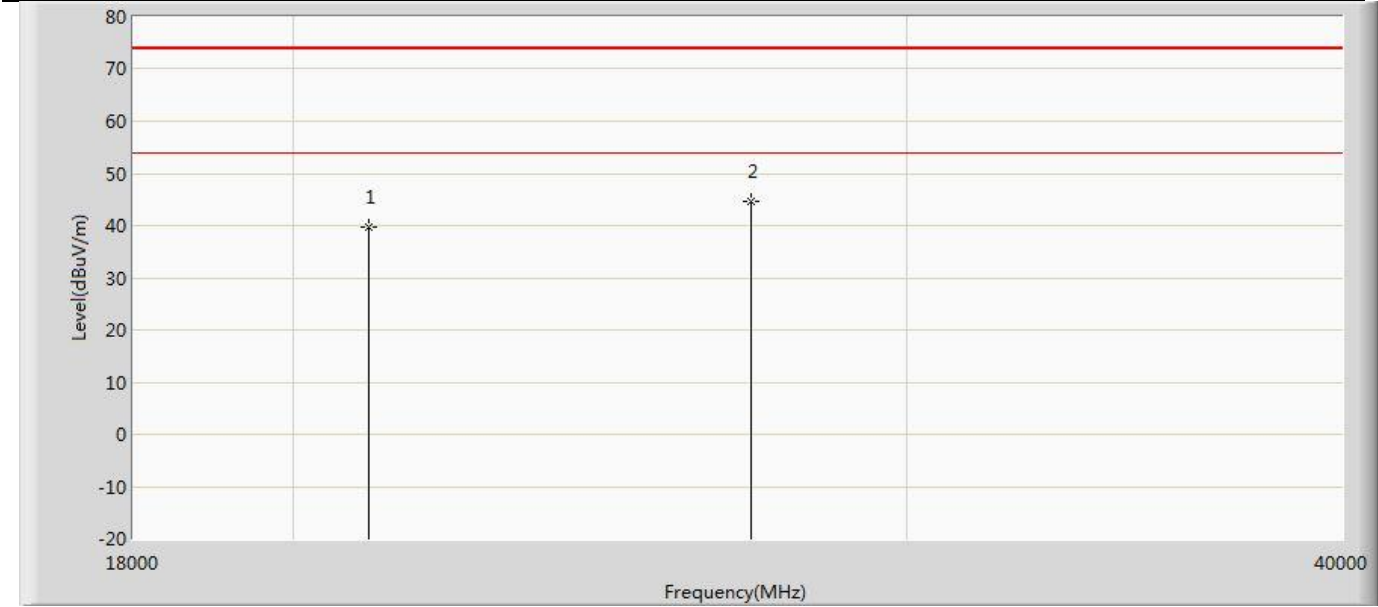


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21036.000	39.617	40.715	-34.383	74.000	-1.098	PK
2	*	27064.000	44.580	41.248	-29.420	74.000	3.332	PK

Profile: 24B0230R	Page No.: 31
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5260MHz by 802.11a	

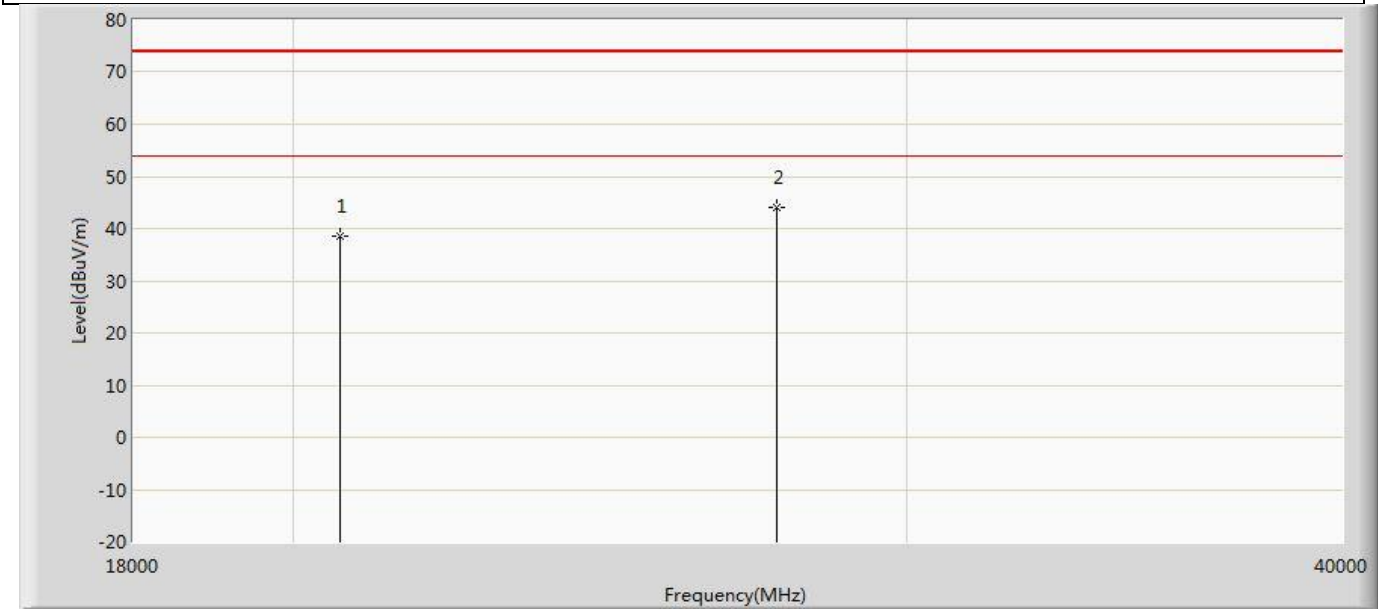


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20640.000	38.610	40.161	-35.390	74.000	-1.551	PK
2	*	27526.000	44.043	40.920	-29.957	74.000	3.123	PK

Profile: 24B0230R	Page No.: 32
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5260MHz by 802.11a	

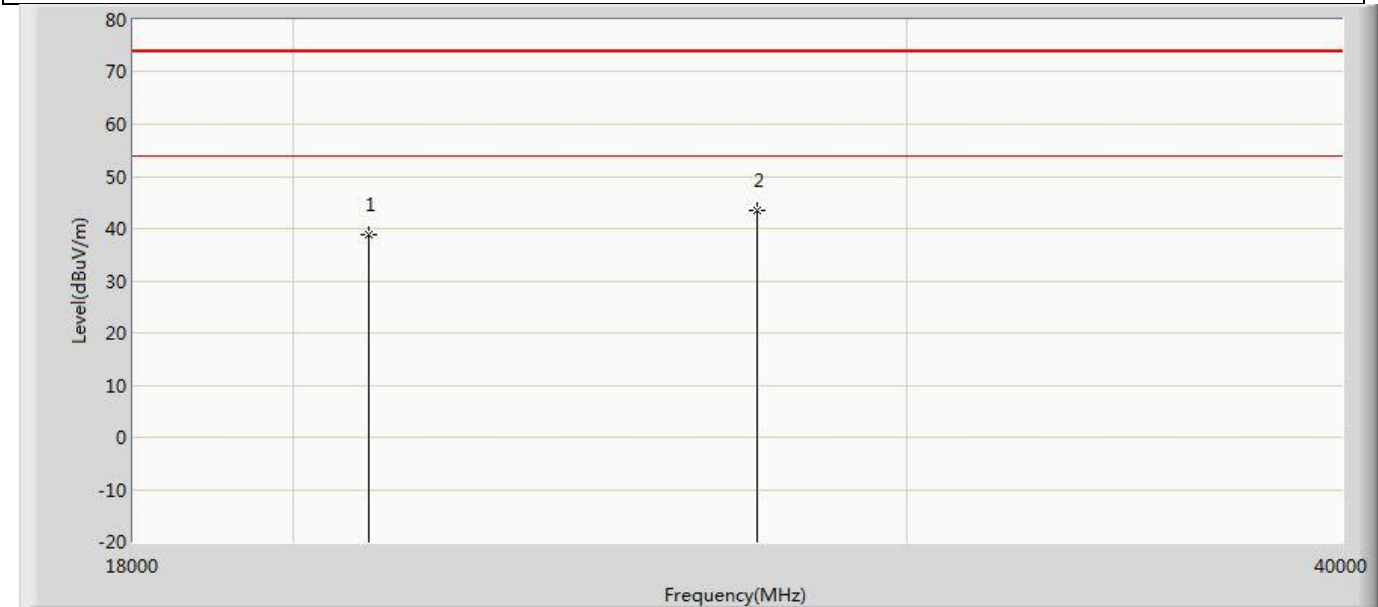

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21036.000	38.878	39.976	-35.122	74.000	-1.098	PK
2	*	27196.000	43.460	40.189	-30.540	74.000	3.271	PK


Profile: 24B0230R	Page No.: 33
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5300MHz by 802.11a	

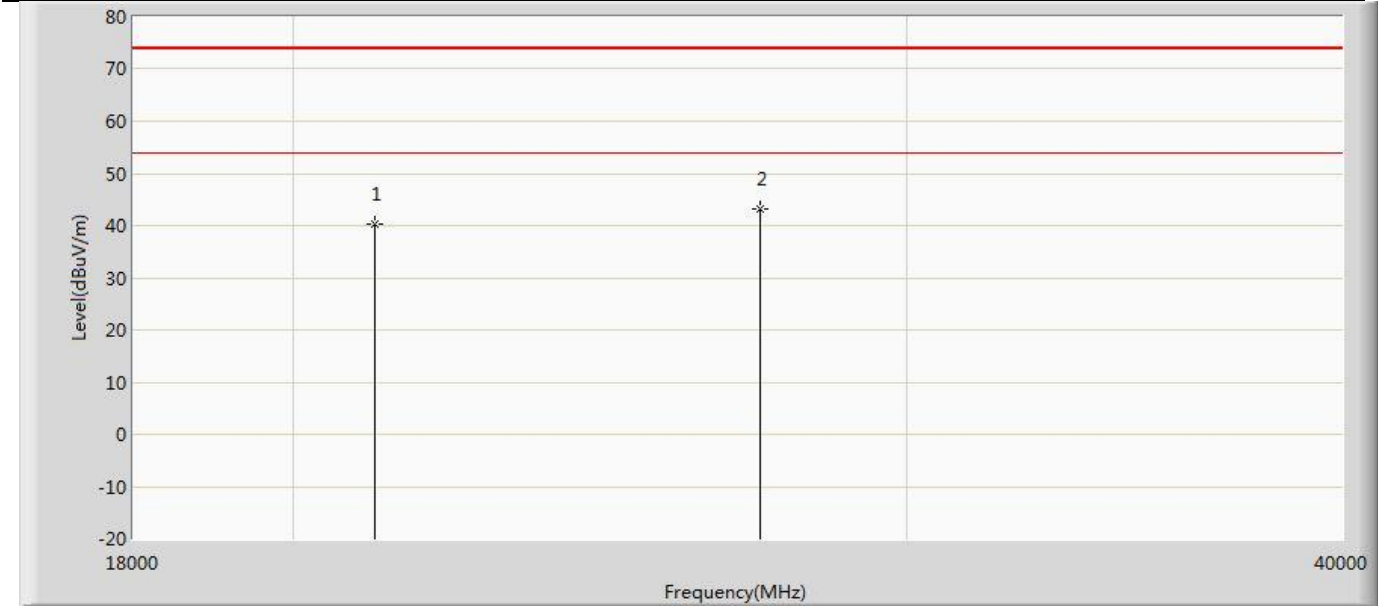

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21124.000	40.430	41.448	-33.570	74.000	-1.018	PK
2	*	27240.000	43.231	39.979	-30.769	74.000	3.252	PK




Profile: 24B0230R	Page No.: 34
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5300MHz by 802.11a	

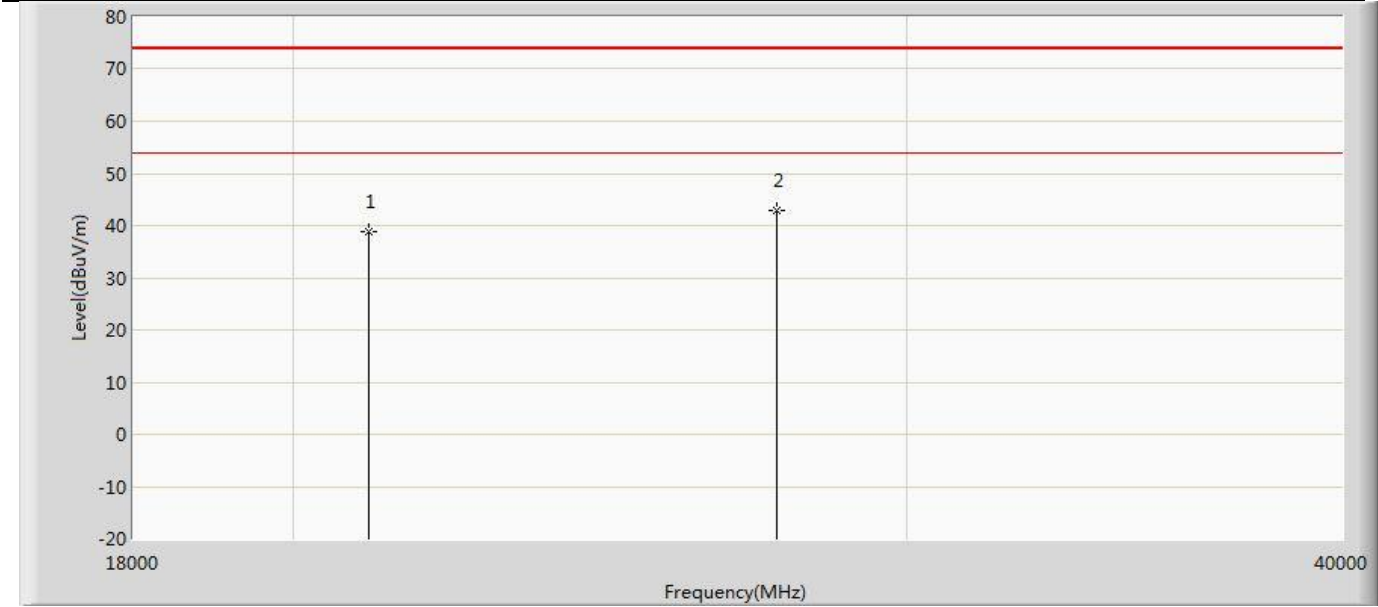

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21036.000	38.699	39.797	-35.301	74.000	-1.098	PK
2	*	27548.000	43.001	39.888	-30.999	74.000	3.113	PK


Profile: 24B0230R	Page No.: 35
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5320MHz by 802.11a	

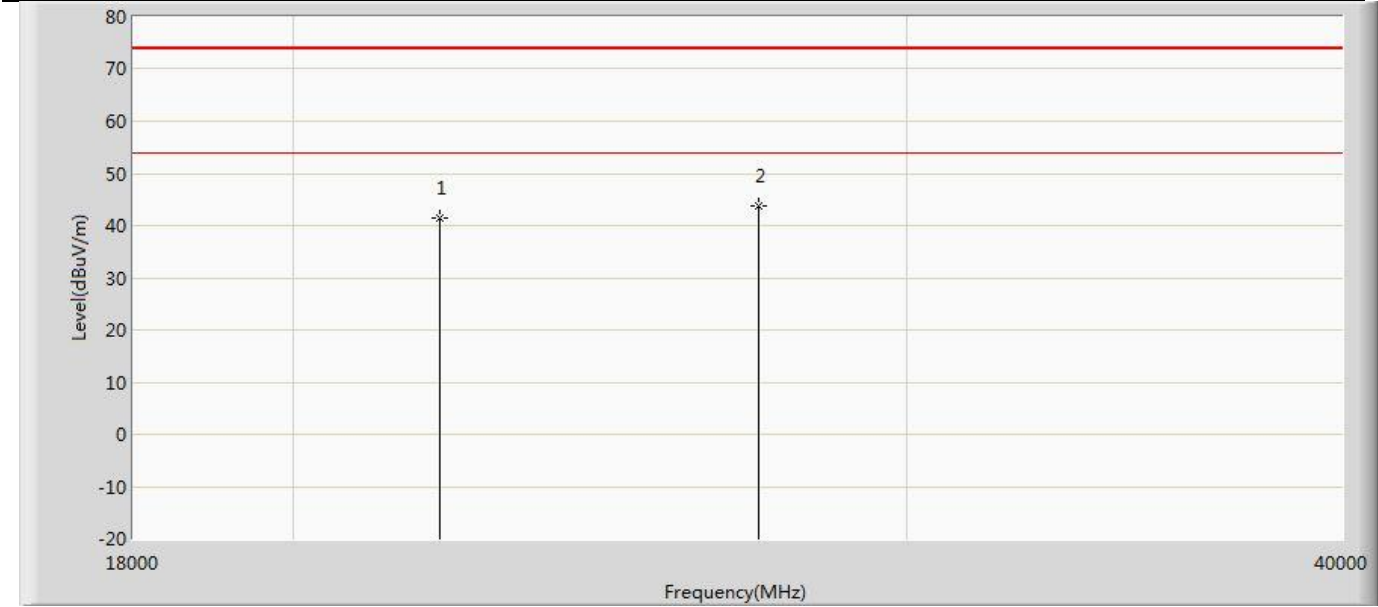

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		22048.000	41.389	41.568	-32.611	74.000	-0.179	PK
2	*	27218.000	43.707	40.445	-30.293	74.000	3.262	PK




Profile: 24B0230R	Page No.: 36
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5320MHz by 802.11a	

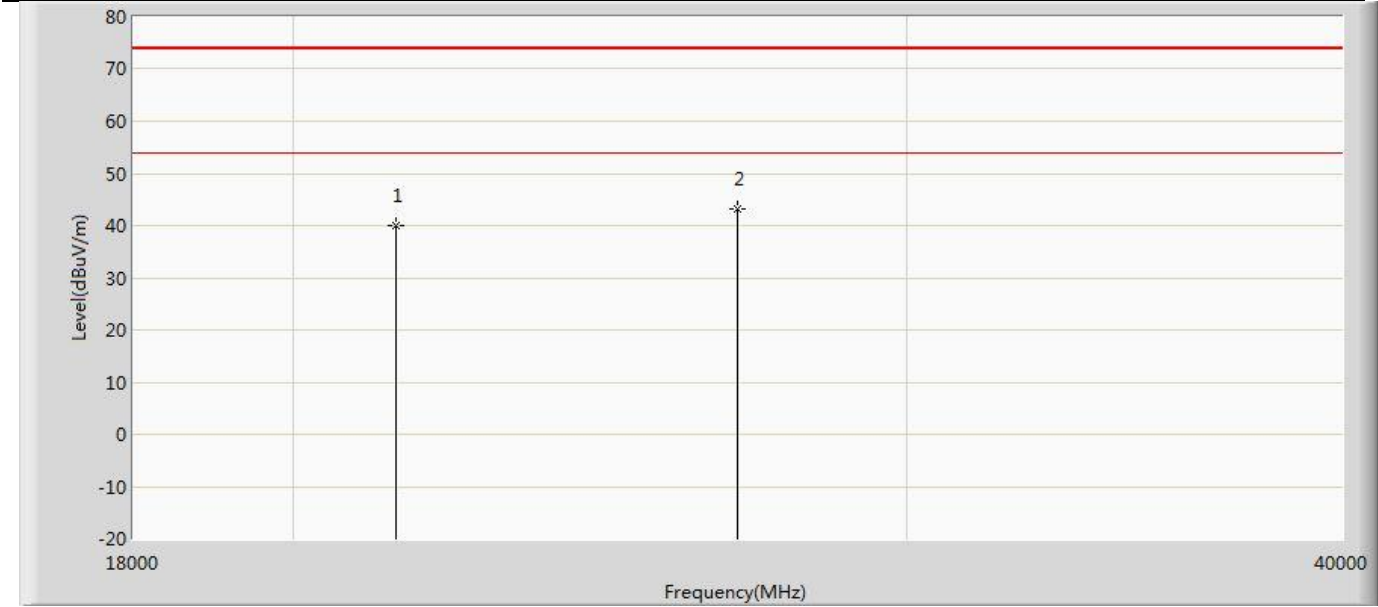


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21410.000	40.133	40.894	-33.867	74.000	-0.761	PK
2	*	26844.000	43.249	39.943	-30.751	74.000	3.306	PK

Profile: 24B0230R	Page No.: 37
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5500MHz by 802.11a	

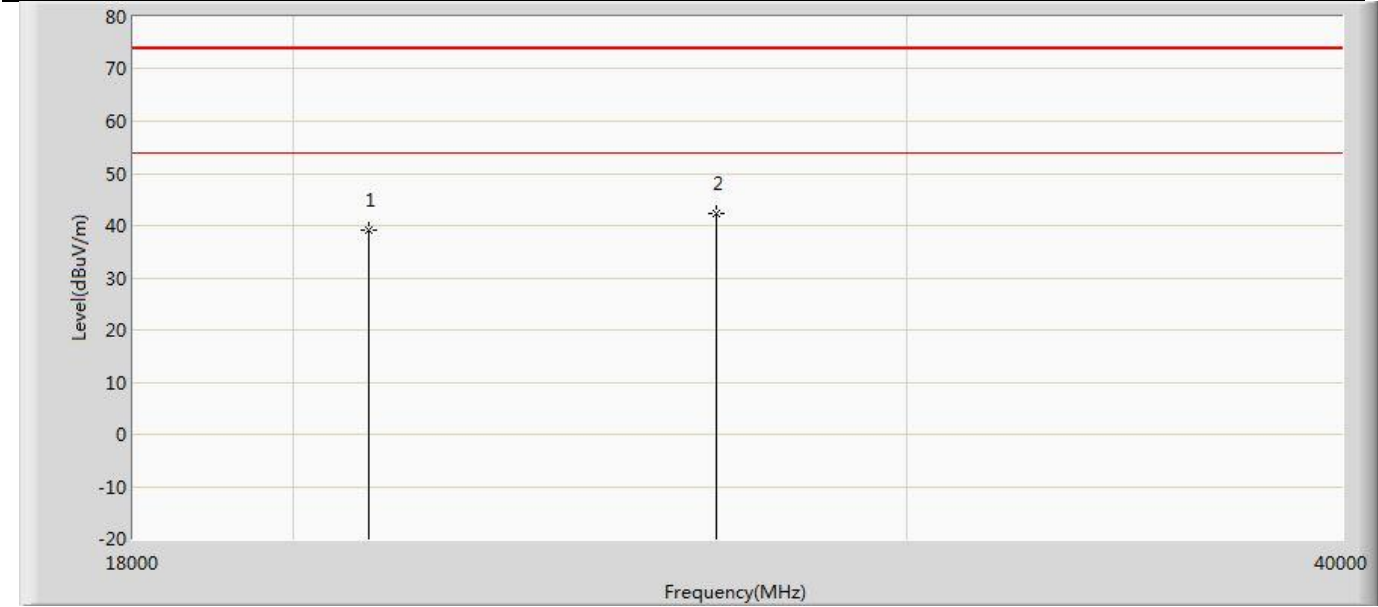


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21036.000	39.027	40.125	-34.973	74.000	-1.098	PK
2	*	26448.000	42.357	39.185	-31.643	74.000	3.172	PK

Profile: 24B0230R	Page No.: 38
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5500MHz by 802.11a	

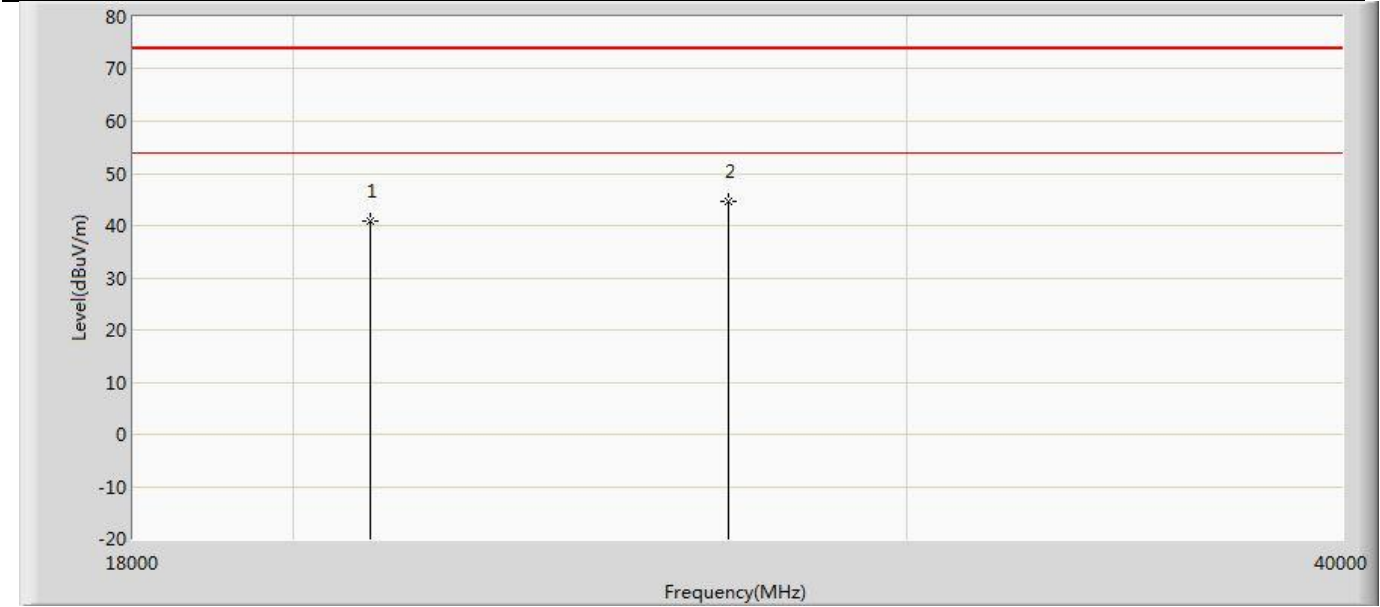


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21058.000	40.900	41.978	-33.100	74.000	-1.078	PK
2	*	26668.000	44.567	41.320	-29.433	74.000	3.247	PK

Profile: 24B0230R	Page No.: 39
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5580MHz by 802.11a	

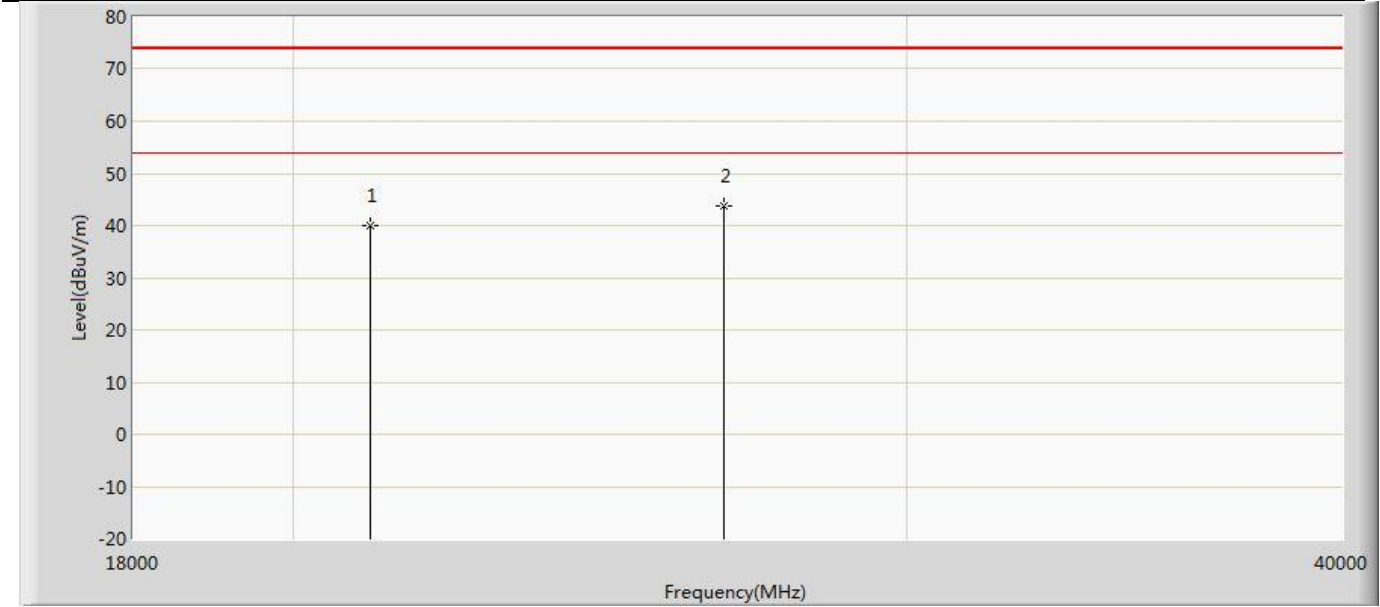


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21058.000	39.952	41.030	-34.048	74.000	-1.078	PK
2	*	26602.000	43.764	40.540	-30.236	74.000	3.224	PK

Profile: 24B0230R	Page No.: 40
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5580MHz by 802.11a	

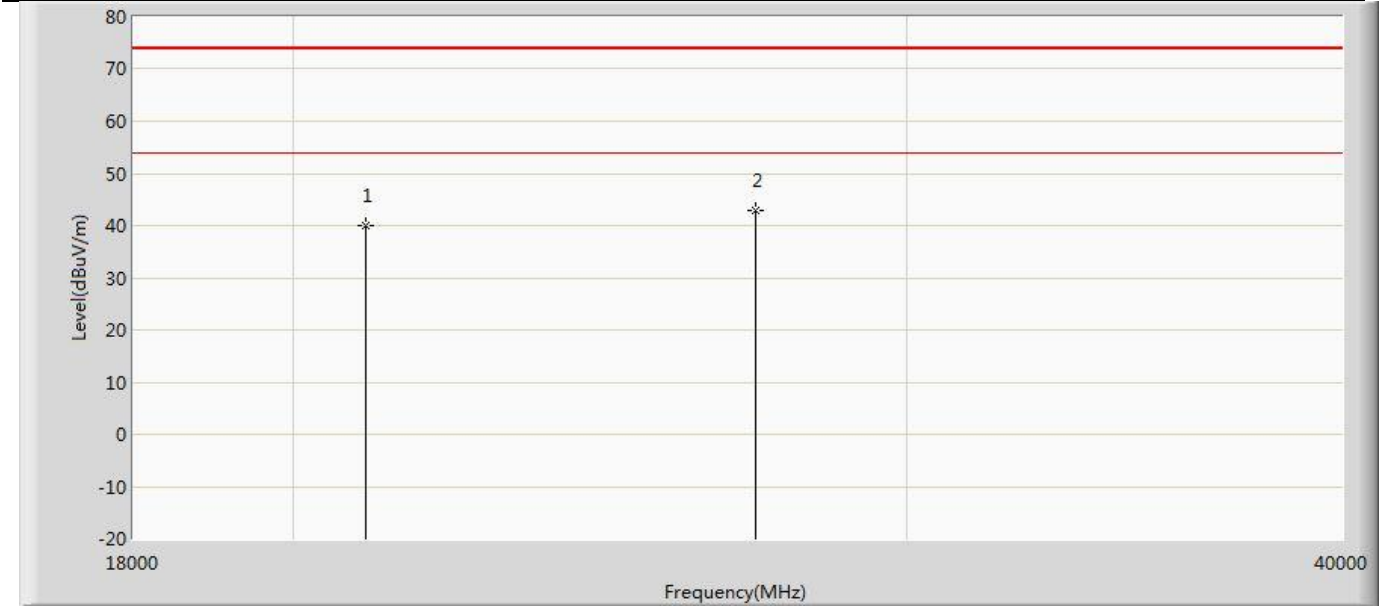


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20992.000	39.892	41.031	-34.108	74.000	-1.139	PK
2	*	27152.000	43.041	39.749	-30.959	74.000	3.292	PK

Profile: 24B0230R	Page No.: 41
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5700MHz by 802.11a	

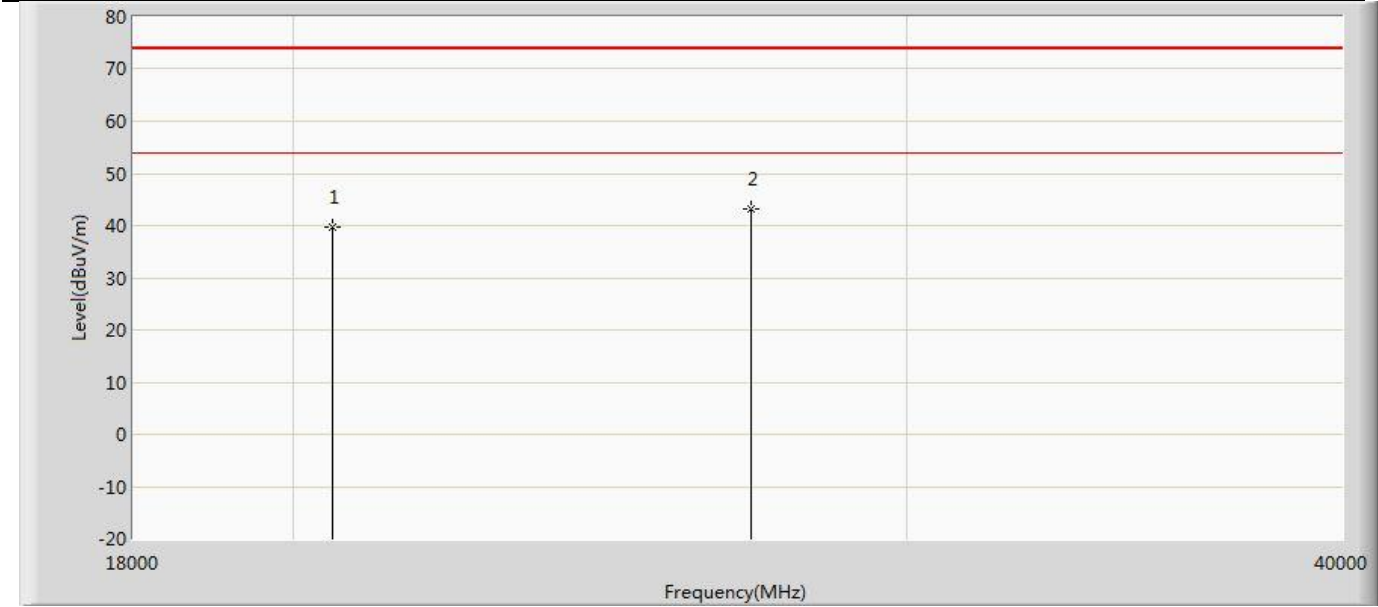

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20530.000	39.592	41.272	-34.408	74.000	-1.680	PK
2	*	27064.000	43.319	39.987	-30.681	74.000	3.332	PK


Profile: 24B0230R	Page No.: 42
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5700MHz by 802.11a	

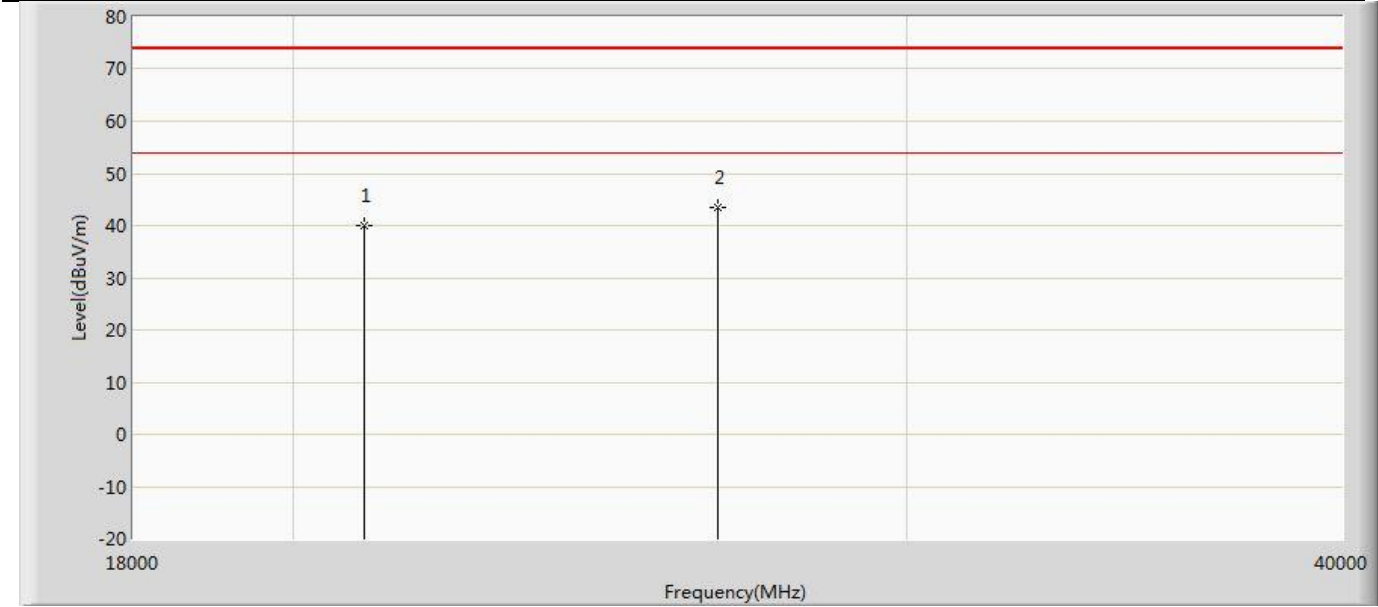

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		20970.000	39.987	41.152	-34.013	74.000	-1.165	PK
2	*	26492.000	43.347	40.160	-30.653	74.000	3.187	PK




Profile: 24B0230R	Page No.: 43
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5745MHz by 802.11a	

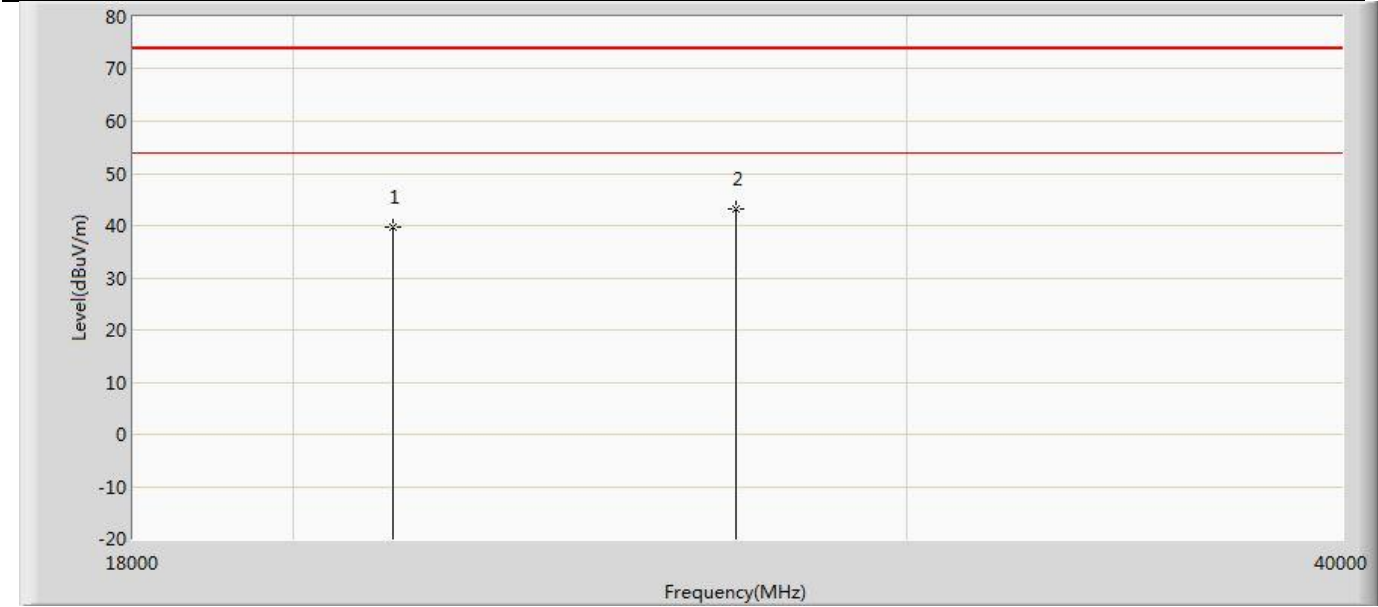


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21366.000	39.777	40.578	-34.223	74.000	-0.801	PK
2	*	26800.000	43.227	39.935	-30.773	74.000	3.292	PK

Profile: 24B0230R	Page No.: 44
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5745MHz by 802.11a	

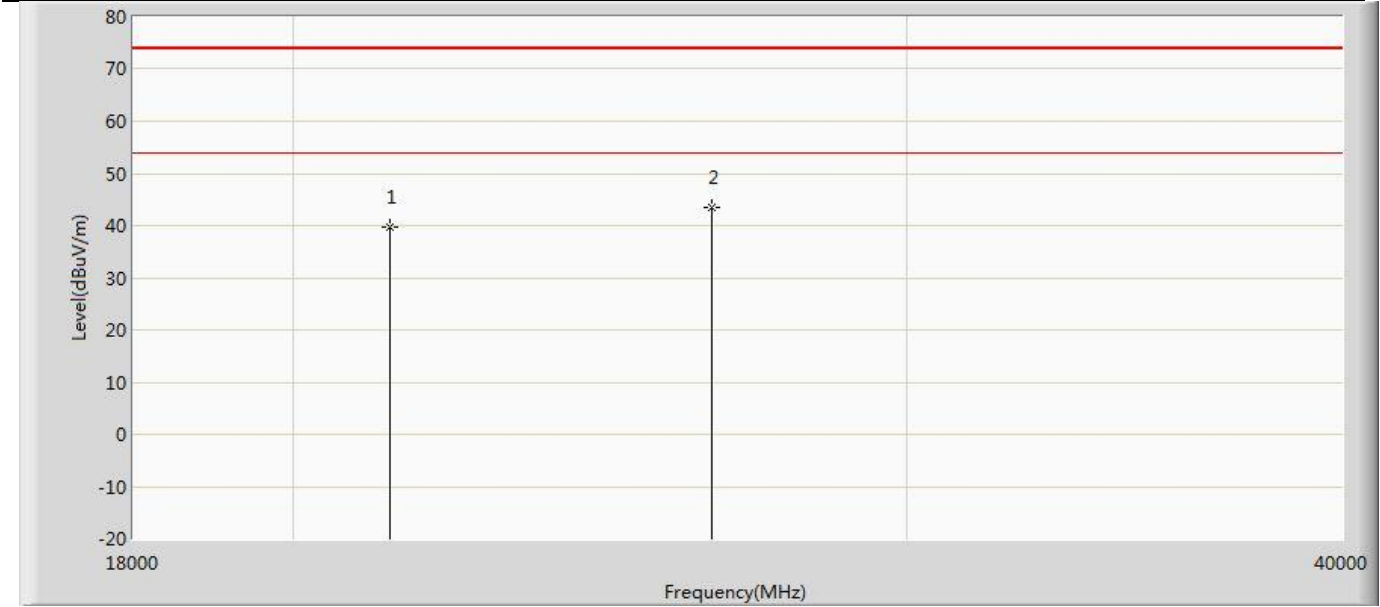

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21322.000	39.799	40.639	-34.201	74.000	-0.840	PK
2	*	26382.000	43.355	40.205	-30.645	74.000	3.150	PK


Profile: 24B0230R	Page No.: 45
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5785MHz by 802.11a	

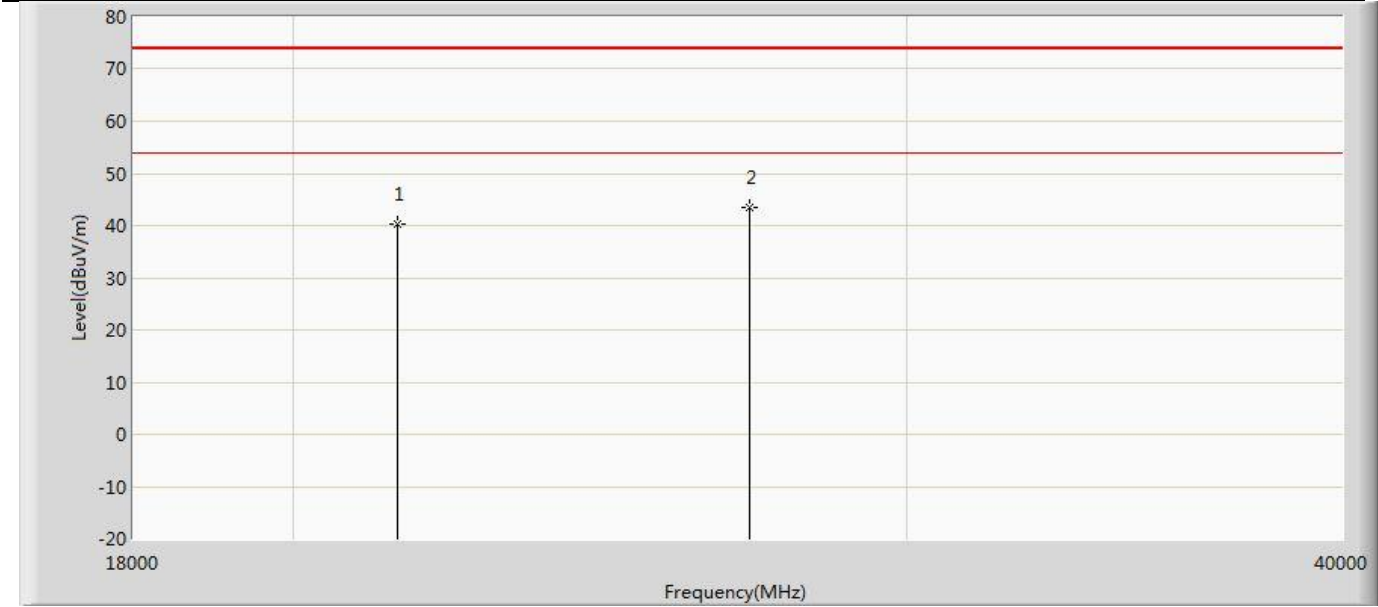

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21432.000	40.222	40.963	-33.778	74.000	-0.741	PK
2	*	27042.000	43.448	40.107	-30.552	74.000	3.341	PK




Profile: 24B0230R	Page No.: 46
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5785MHz by 802.11a	

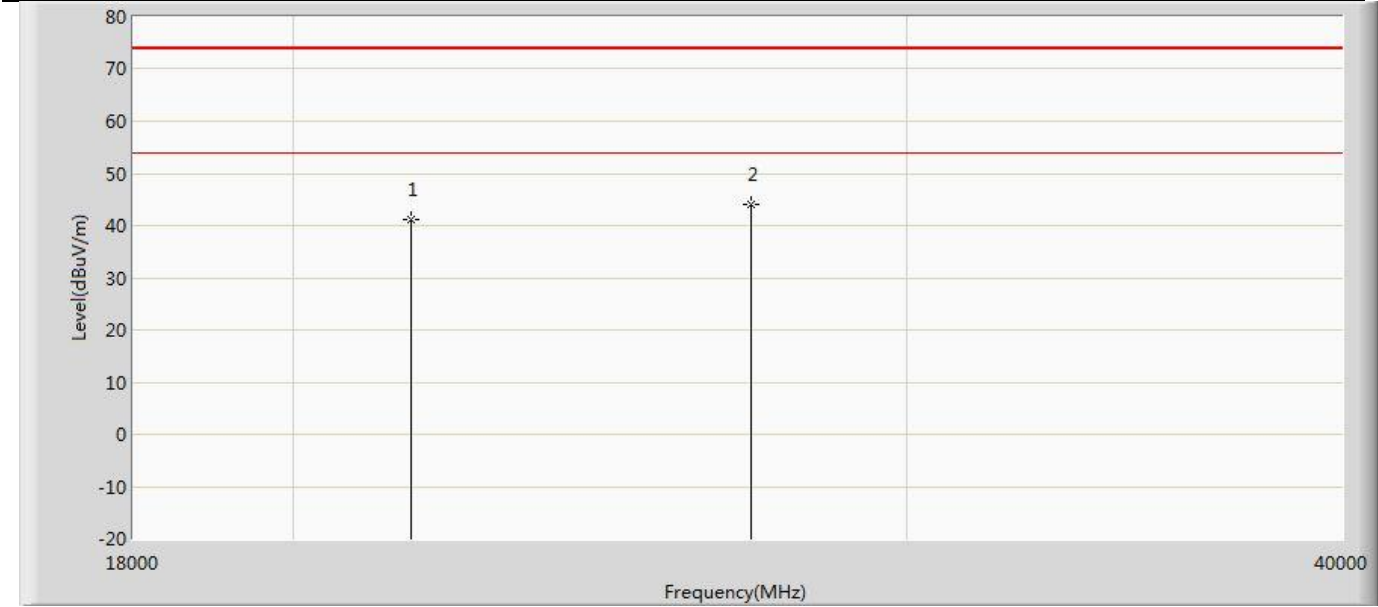


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21630.000	41.152	41.715	-32.848	74.000	-0.563	PK
2	*	27064.000	44.141	40.809	-29.859	74.000	3.332	PK

Profile: 24B0230R	Page No.: 47
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5825MHz by 802.11a	

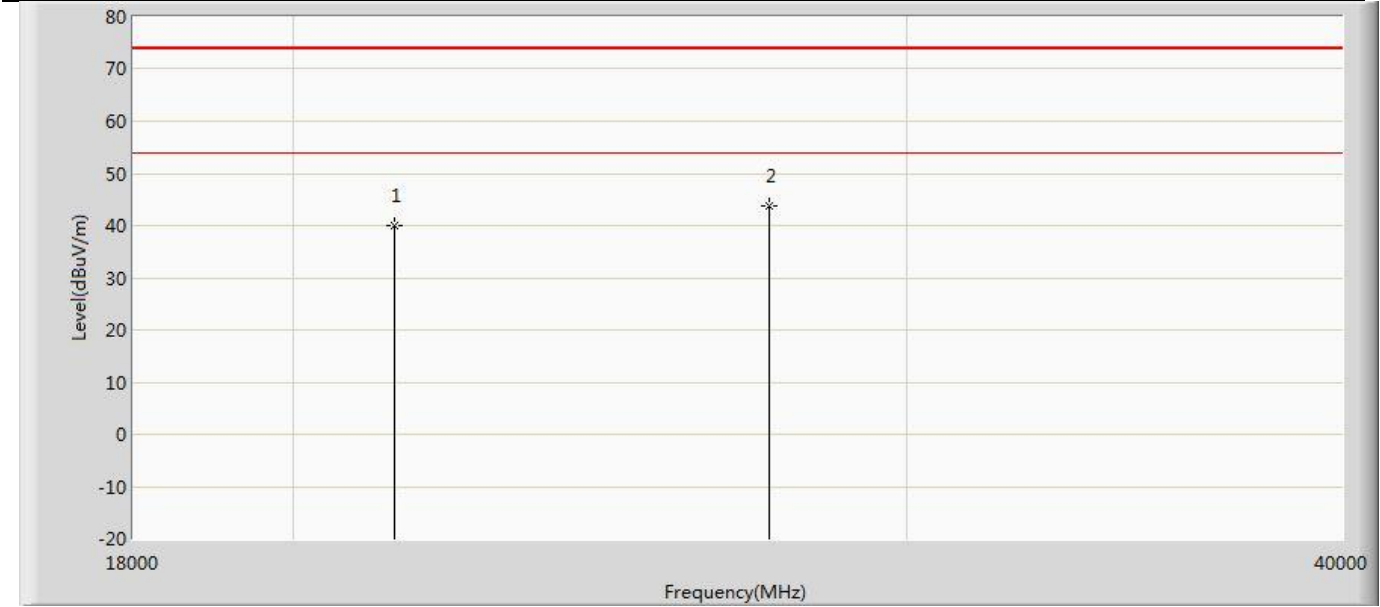

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21388.000	40.137	40.918	-33.863	74.000	-0.781	PK
2	*	27394.000	43.862	40.679	-30.138	74.000	3.183	PK

Profile: 24B0230R	Page No.: 48
Engineer: Yuliu	
Site: AC5	Time: 2024/12/08 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5825MHz by 802.11a	

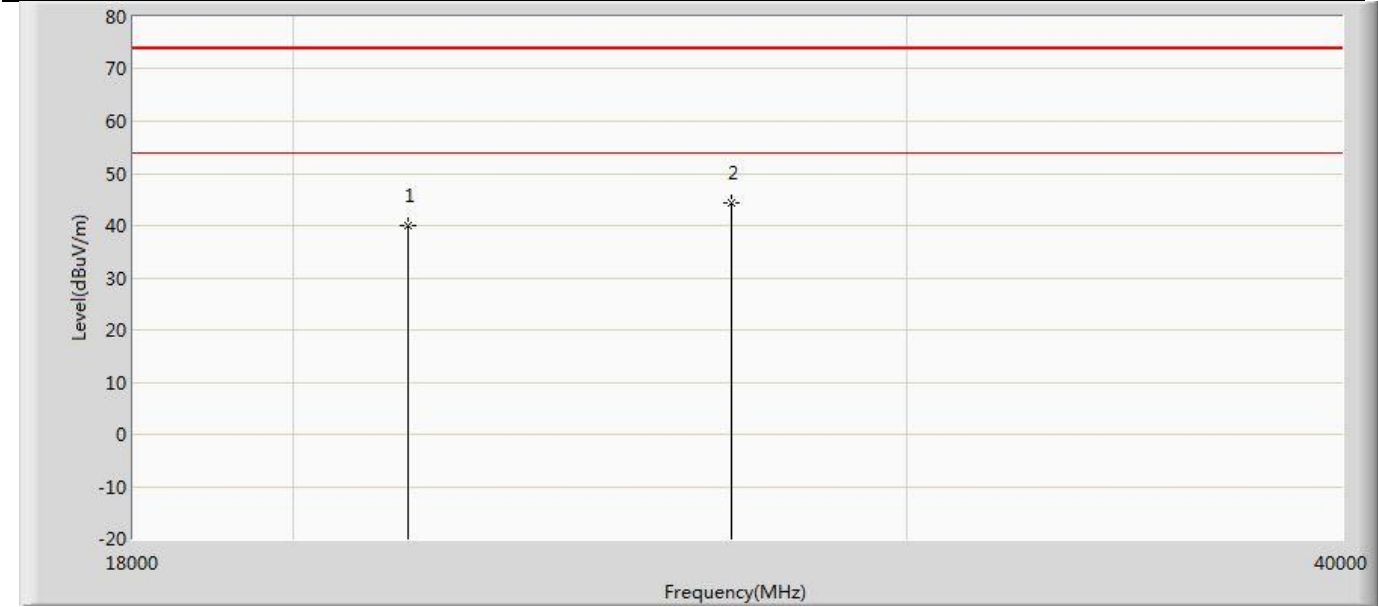

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21586.000	39.905	40.507	-34.095	74.000	-0.602	PK
2	*	26734.000	44.288	41.019	-29.712	74.000	3.269	PK


Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

The worst case of Radiated Emission below 1GHz:


Profile: 24B0230R	Page No.: 13
Engineer: Yu Liu	
Site: AC2	Time: 2024/12/08 - 13:32
Limit: FCC_Part 15.209	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Horizontal
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5180MHz by 802.11a with Ant1	

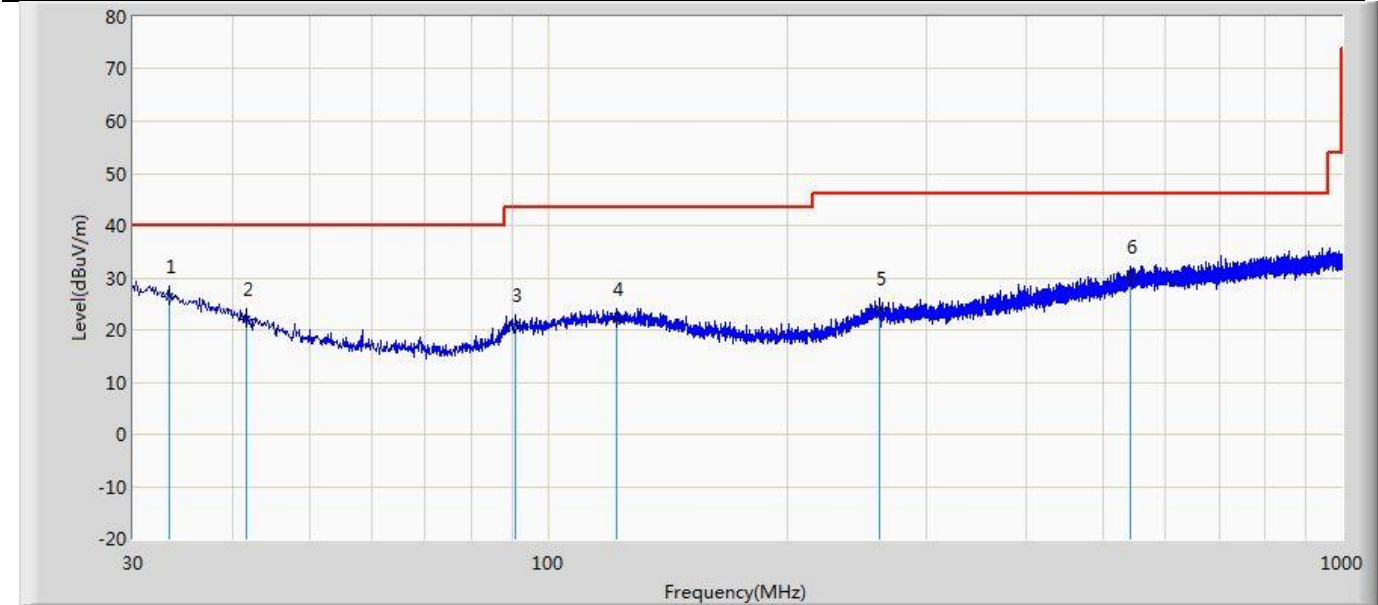

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	33.274	26.431	3.078	-13.569	40.000	23.353	QP
2		41.640	22.169	3.461	-17.831	40.000	18.708	QP
3		90.989	20.867	4.753	-22.633	43.500	16.113	QP
4		121.908	21.912	2.590	-21.588	43.500	19.322	QP
5		261.709	24.018	3.235	-21.982	46.000	20.783	QP
6		540.463	30.087	3.247	-15.913	46.000	26.841	QP



Profile: 24B0230R	Page No.: 14
Engineer: Yu Liu	
Site: AC2	Time: 2024/12/08 - 13:38
Limit: FCC_Part 15.209	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Vertical
EUT: WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module	Power: 3.3Vdc
Note: Mode 1:Transmit at 5180MHz by 802.11a with Ant1	

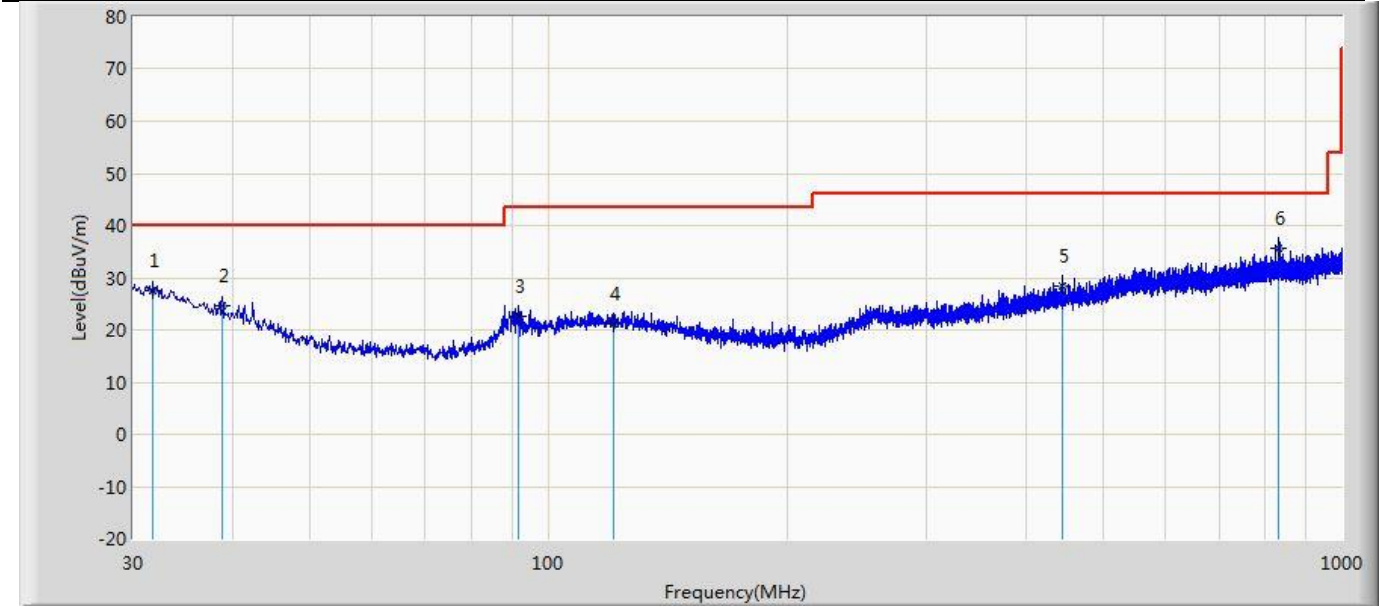

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		31.819	27.411	3.370	-12.589	40.000	24.040	QP
2		38.851	24.499	4.308	-15.501	40.000	20.192	QP
3		91.716	22.522	6.239	-20.978	43.500	16.283	QP
4		120.937	21.052	1.721	-22.448	43.500	19.331	QP
5		444.675	28.490	3.961	-17.510	46.000	24.528	QP
6	*	833.645	35.584	6.244	-10.416	46.000	29.340	QP

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Appendix B: Emission bandwidth and occupied bandwidth

Emission Bandwidth :

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant3	5180	23.520	5168.040	5191.560	N/A	PASS
11A	Ant3	5200	24.160	5188.000	5212.160	N/A	PASS
11A	Ant3	5240	22.920	5228.360	5251.280	N/A	PASS
11A	Ant3	5260	22.840	5248.240	5271.080	N/A	PASS
11A	Ant3	5280	22.960	5268.280	5291.240	N/A	PASS
11A	Ant3	5320	22.920	5308.320	5331.240	N/A	PASS
11A	Ant3	5500	24.200	5487.680	5511.880	N/A	PASS
11A	Ant3	5580	23.760	5567.840	5591.600	N/A	PASS
11A	Ant3	5700	30.680	5683.320	5714.000	N/A	PASS
11A	Ant3	5745	26.200	5730.640	5756.840	N/A	PASS
11A	Ant3	5785	25.240	5772.800	5798.040	N/A	PASS
11A	Ant3	5825	24.360	5812.720	5837.080	N/A	PASS
11N20SISO	Ant3	5180	23.960	5167.920	5191.880	N/A	PASS
11N20SISO	Ant3	5200	24.400	5187.480	5211.880	N/A	PASS
11N20SISO	Ant3	5240	24.080	5227.480	5251.560	N/A	PASS
11N20SISO	Ant3	5260	27.560	5247.840	5275.400	N/A	PASS
11N20SISO	Ant3	5280	23.400	5267.880	5291.280	N/A	PASS
11N20SISO	Ant3	5320	23.960	5307.560	5331.520	N/A	PASS
11N20SISO	Ant3	5500	25.960	5486.840	5512.800	N/A	PASS
11N20SISO	Ant3	5580	23.920	5568.040	5591.960	N/A	PASS
11N20SISO	Ant3	5700	30.760	5683.240	5714.000	N/A	PASS
11N20SISO	Ant3	5745	25.560	5731.240	5756.800	N/A	PASS
11N20SISO	Ant3	5785	26.040	5772.360	5798.400	N/A	PASS
11N20SISO	Ant3	5825	26.120	5811.440	5837.560	N/A	PASS
11N40SISO	Ant3	5190	44.320	5168.080	5212.400	N/A	PASS
11N40SISO	Ant3	5230	44.240	5208.480	5252.720	N/A	PASS
11N40SISO	Ant3	5270	44.800	5247.440	5292.240	N/A	PASS
11N40SISO	Ant3	5310	45.040	5287.680	5332.720	N/A	PASS
11N40SISO	Ant3	5510	45.600	5487.120	5532.720	N/A	PASS
11N40SISO	Ant3	5550	45.120	5527.200	5572.320	N/A	PASS
11N40SISO	Ant3	5670	49.760	5644.480	5694.240	N/A	PASS
11N40SISO	Ant3	5755	45.600	5731.560	5777.160	N/A	PASS
11N40SISO	Ant3	5795	59.760	5770.280	5830.040	N/A	PASS
11AC20SISO	Ant3	5180	31.960	5164.000	5195.960	N/A	PASS
11AC20SISO	Ant3	5200	30.360	5185.920	5216.280	N/A	PASS
11AC20SISO	Ant3	5240	34.520	5222.720	5257.240	N/A	PASS
11AC20SISO	Ant3	5260	27.440	5246.880	5274.320	N/A	PASS
11AC20SISO	Ant3	5280	26.840	5266.840	5293.680	N/A	PASS
11AC20SISO	Ant3	5320	24.000	5308.120	5332.120	N/A	PASS
11AC20SISO	Ant3	5500	32.240	5483.760	5516.000	N/A	PASS
11AC20SISO	Ant3	5580	31.240	5564.760	5596.000	N/A	PASS
11AC20SISO	Ant3	5700	35.840	5682.400	5718.240	N/A	PASS
11AC20SISO	Ant3	5745	32.920	5728.440	5761.360	N/A	PASS
11AC20SISO	Ant3	5785	32.800	5769.360	5802.160	N/A	PASS
11AC20SISO	Ant3	5825	26.640	5810.960	5837.600	N/A	PASS
11AC40SISO	Ant3	5190	46.080	5167.200	5213.280	N/A	PASS

11AC40SISO	Ant3	5230	45.760	5206.960	5252.720	N/A	PASS
11AC40SISO	Ant3	5270	44.000	5248.240	5292.240	N/A	PASS
11AC40SISO	Ant3	5310	45.360	5287.040	5332.400	N/A	PASS
11AC40SISO	Ant3	5510	45.040	5487.520	5532.560	N/A	PASS
11AC40SISO	Ant3	5550	46.000	5526.480	5572.480	N/A	PASS
11AC40SISO	Ant3	5670	45.760	5647.280	5693.040	N/A	PASS
11AC40SISO	Ant3	5755	46.720	5731.400	5778.120	N/A	PASS
11AC40SISO	Ant3	5795	65.760	5766.360	5832.120	N/A	PASS
11AC80SISO	Ant3	5210	93.920	5163.280	5257.200	N/A	PASS
11AC80SISO	Ant3	5290	92.800	5242.320	5335.120	N/A	PASS
11AC80SISO	Ant3	5530	91.680	5483.600	5575.280	N/A	PASS
11AC80SISO	Ant3	5610	95.040	5562.480	5657.520	N/A	PASS
11AC80SISO	Ant3	5775	105.280	5723.640	5828.920	N/A	PASS
11AC160SISO	Ant3	5250	172.480	5165.520	5338.000	N/A	PASS
11AC160SISO	Ant3	5250_UNII-1	84.48	5165.520	5250	N/A	PASS
11AC160SISO	Ant3	5250_UNII-2A	88	5250	5338.000	N/A	PASS
11AC160SISO	Ant3	5570	176.320	5482.000	5658.320	N/A	PASS
11AX20SISO	Ant3	5180	23.960	5168.240	5192.200	N/A	PASS
11AX20SISO	Ant3	5200	23.120	5188.240	5211.360	N/A	PASS
11AX20SISO	Ant3	5240	22.880	5228.600	5251.480	N/A	PASS
11AX20SISO	Ant3	5260	29.400	5245.360	5274.760	N/A	PASS
11AX20SISO	Ant3	5280	31.720	5264.960	5296.680	N/A	PASS
11AX20SISO	Ant3	5320	27.000	5305.960	5332.960	N/A	PASS
11AX20SISO	Ant3	5500	23.280	5488.040	5511.320	N/A	PASS
11AX20SISO	Ant3	5580	22.560	5568.520	5591.080	N/A	PASS
11AX20SISO	Ant3	5700	23.960	5687.960	5711.920	N/A	PASS
11AX20SISO	Ant3	5745	24.240	5732.320	5756.560	N/A	PASS
11AX20SISO	Ant3	5785	23.960	5773.360	5797.320	N/A	PASS
11AX20SISO	Ant3	5825	25.520	5811.840	5837.360	N/A	PASS
11AX40SISO	Ant3	5190	42.880	5168.880	5211.760	N/A	PASS
11AX40SISO	Ant3	5230	43.120	5208.880	5252.000	N/A	PASS
11AX40SISO	Ant3	5270	44.400	5247.680	5292.080	N/A	PASS
11AX40SISO	Ant3	5310	43.600	5288.240	5331.840	N/A	PASS
11AX40SISO	Ant3	5510	44.000	5487.600	5531.600	N/A	PASS
11AX40SISO	Ant3	5550	43.600	5527.920	5571.520	N/A	PASS
11AX40SISO	Ant3	5670	44.400	5648.240	5692.640	N/A	PASS
11AX40SISO	Ant3	5755	45.360	5731.160	5776.520	N/A	PASS
11AX40SISO	Ant3	5795	56.800	5768.680	5825.480	N/A	PASS
11AX80SISO	Ant3	5210	89.120	5166.160	5255.280	N/A	PASS
11AX80SISO	Ant3	5290	85.920	5246.640	5332.560	N/A	PASS
11AX80SISO	Ant3	5530	87.360	5486.160	5573.520	N/A	PASS
11AX80SISO	Ant3	5610	88.320	5565.680	5654.000	N/A	PASS
11AX80SISO	Ant3	5775	97.920	5725.080	5823.000	N/A	PASS
11AX160SISO	Ant3	5250	166.400	5167.760	5334.160	N/A	PASS
11AX160SISO	Ant3	5250_UNII-1	82.24	5167.760	5250	N/A	PASS
11AX160SISO	Ant3	5250_UNII-2A	84.16	5250	5334.160	N/A	PASS
11AX160SISO	Ant3	5570	173.120	5483.920	5657.040	N/A	PASS
11BE20SISO	Ant3	5180	23.520	5168.240	5191.760	N/A	PASS
11BE20SISO	Ant3	5200	22.760	5188.240	5211.000	N/A	PASS
11BE20SISO	Ant3	5240	22.640	5228.480	5251.120	N/A	PASS
11BE20SISO	Ant3	5260	23.200	5248.040	5271.240	N/A	PASS


11BE20SISO	Ant3	5280	31.280	5264.800	5296.080	N/A	PASS
11BE20SISO	Ant3	5320	24.640	5307.120	5331.760	N/A	PASS
11BE20SISO	Ant3	5500	24.360	5487.240	5511.600	N/A	PASS
11BE20SISO	Ant3	5580	32.600	5564.000	5596.600	N/A	PASS
11BE20SISO	Ant3	5700	25.480	5687.400	5712.880	N/A	PASS
11BE20SISO	Ant3	5745	25.000	5731.920	5756.920	N/A	PASS
11BE20SISO	Ant3	5785	35.680	5767.160	5802.840	N/A	PASS
11BE20SISO	Ant3	5825	32.880	5810.080	5842.960	N/A	PASS
11BE40SISO	Ant3	5190	44.640	5167.840	5212.480	N/A	PASS
11BE40SISO	Ant3	5230	44.160	5208.240	5252.400	N/A	PASS
11BE40SISO	Ant3	5270	44.240	5248.400	5292.640	N/A	PASS
11BE40SISO	Ant3	5310	43.840	5288.080	5331.920	N/A	PASS
11BE40SISO	Ant3	5510	44.000	5488.480	5532.480	N/A	PASS
11BE40SISO	Ant3	5550	43.120	5528.320	5571.440	N/A	PASS
11BE40SISO	Ant3	5670	45.200	5647.840	5693.040	N/A	PASS
11BE40SISO	Ant3	5755	44.320	5732.680	5777.000	N/A	PASS
11BE40SISO	Ant3	5795	58.640	5771.960	5830.600	N/A	PASS
11BE80SISO	Ant3	5210	88.960	5165.360	5254.320	N/A	PASS
11BE80SISO	Ant3	5290	86.880	5247.120	5334.000	N/A	PASS
11BE80SISO	Ant3	5530	88.800	5484.560	5573.360	N/A	PASS
11BE80SISO	Ant3	5610	87.520	5566.160	5653.680	N/A	PASS
11BE80SISO	Ant3	5775	92.960	5727.960	5820.920	N/A	PASS
11BE160SISO	Ant3	5250	168.640	5166.800	5335.440	N/A	PASS
11BE160SISO	Ant3	5250_UNII-1	83.2	5166.800	5250	N/A	PASS
11BE160SISO	Ant3	5250_UNII-2A	85.44	5250	5335.440	N/A	PASS
11BE160SISO	Ant3	5570	176.000	5483.280	5659.280	N/A	PASS

Note1: We have evaluated SISO, CDD, Beamforming mode, shown in the report is the worst data.


Note2: We use the RF output power of Indoor Access Point Mode for testing, which has a higher RF output power.




11A-Ant3-5180

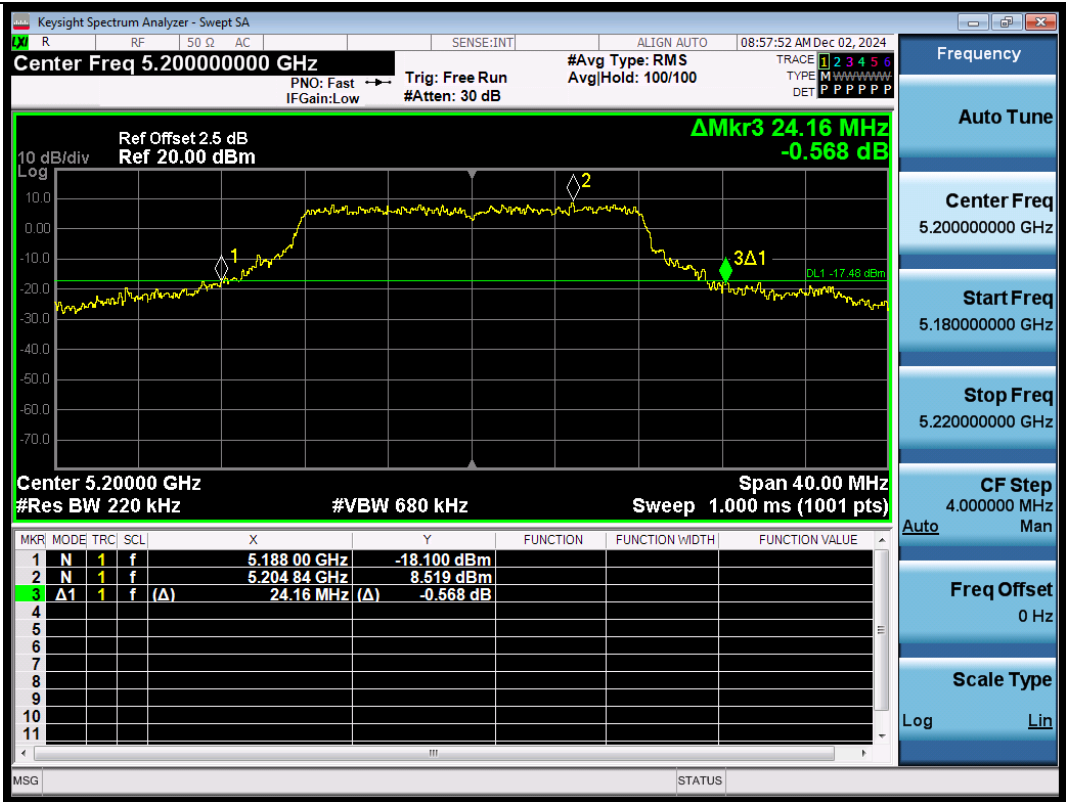


11A-Ant3-5200

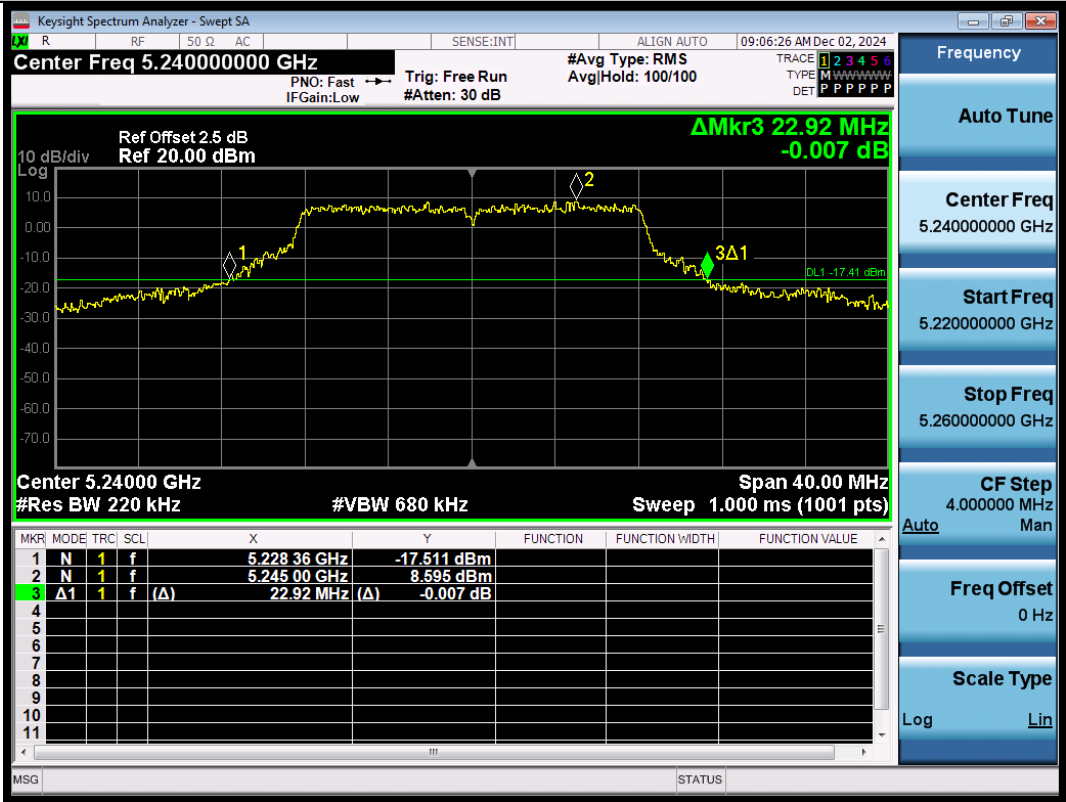

11A-Ant3-5240

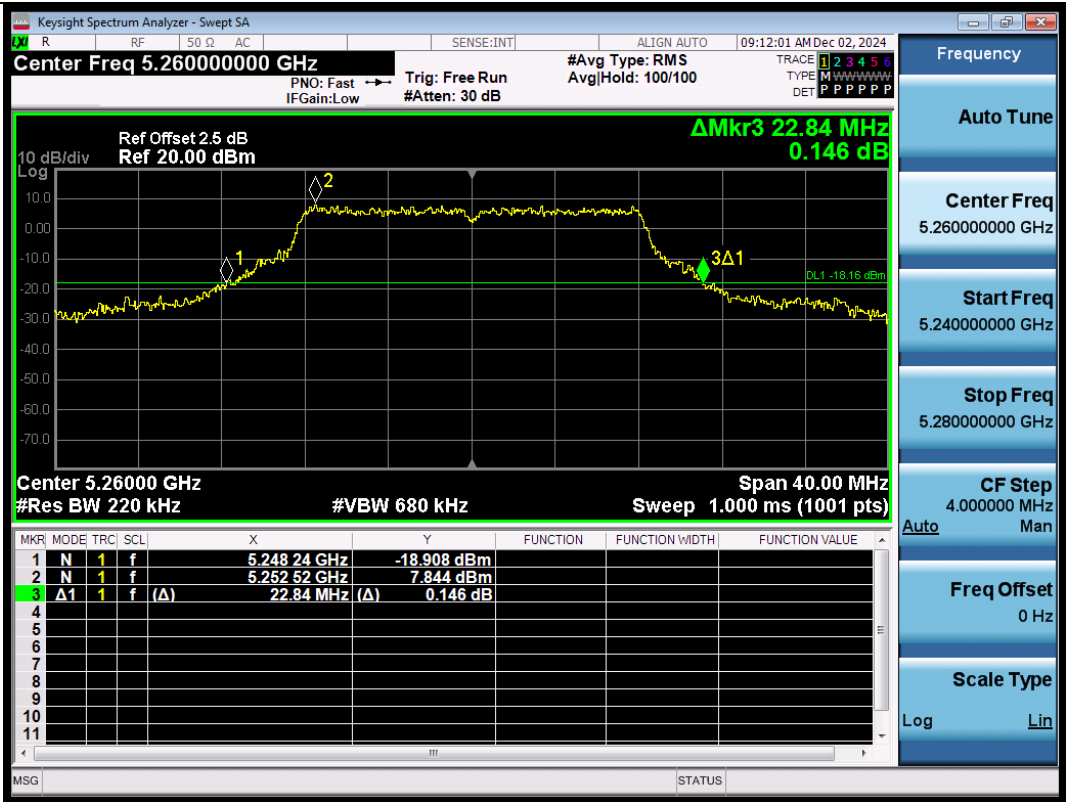

11A-Ant3-5260

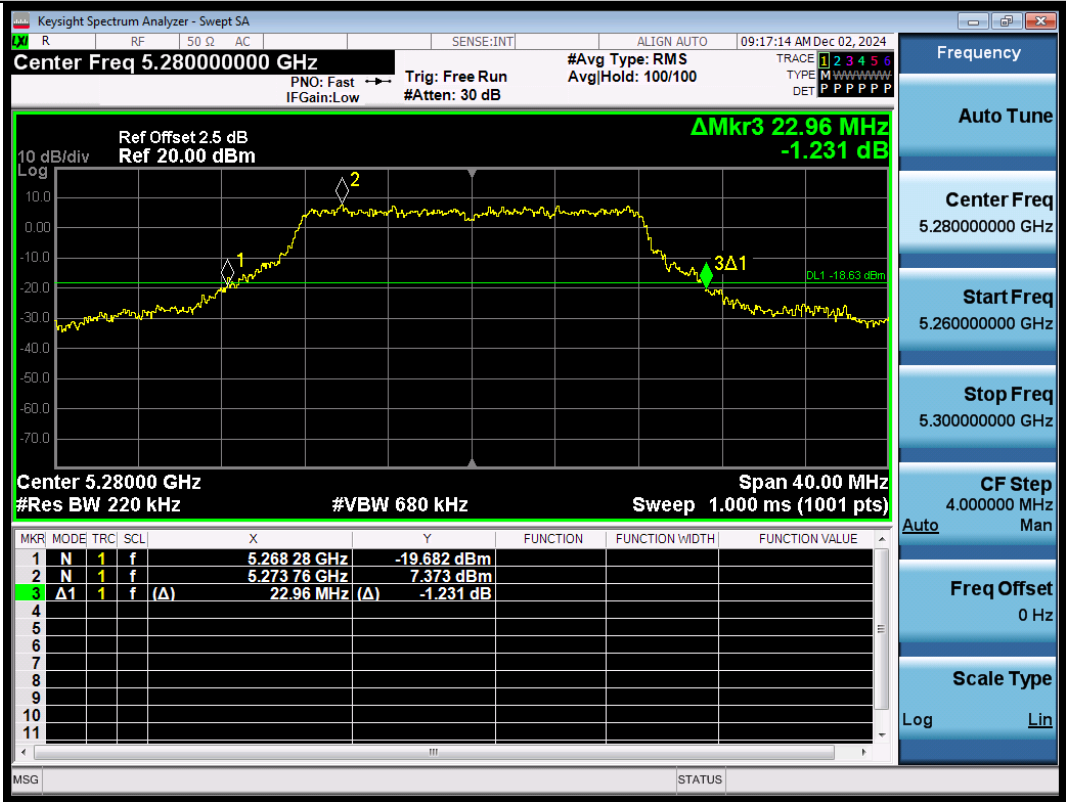

11A-Ant3-5280