

## FCC Test Report - Spot Check

### (5GHz WLAN)

**Report No.:** RF190807D08B-1

**FCC ID:** TK4WLE1216V520

**Test Model:** WLE1216V5-20, WLE1216V5-20-I

**Received Date:** Nov. 18, 2019

**Test Date:** Dec. 11 to 12, 2019

**Issued Date:** Feb. 27, 2020

**Applicant:** Compex Systems Pte Ltd

**Address:** No 9 Harrison Road, Harrison Industrial Building, #05-01, 369651, Singapore

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /**  
**Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1      Certificate of Conformity.....</b>	<b>4</b>
<b>2      Summary of Test Results .....</b>	<b>5</b>
2.1    Measurement Uncertainty .....	5
2.2    Modification Record .....	5
<b>3      General Information.....</b>	<b>6</b>
3.1    General Description of EUT .....	6
3.2    Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3    Duty Cycle of Test Signal .....	10
3.4    Description of Support Units .....	11
3.4.1 Configuration of System under Test .....	11
3.5    General Description of Applied Standard and references.....	12
<b>4      Test Types and Results .....</b>	<b>13</b>
4.1    Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedure .....	15
4.1.4 Deviation from Test Standard .....	15
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Condition .....	17
4.1.7 Test Results .....	18
4.2    Transmit Power Measurement .....	20
4.2.1 Limits of Transmit Power Measurement.....	20
4.2.2 Test Setup.....	20
4.2.3 Test Instruments .....	20
4.2.4 Test Procedure .....	21
4.2.5 Deviation from Test Standard .....	21
4.2.6 EUT Operating Condition .....	21
4.2.7 Test Result.....	22
<b>5      Pictures of Test Arrangements .....</b>	<b>23</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>24</b>

### Release Control Record

Issue No.	Description	Date Issued
RF190807D08B-1	Original release.	Feb. 27, 2020

## 1 Certificate of Conformity

**Product:** 4x4 Wave-2 802.11ac/a/n Mini PCIe WiFi Module

**Equipment Class:** Unlicensed National Information Infrastructure TX

**Brand:** COMPEX

**Test Model:** WLE1216V5-20, WLE1216V5-20-I

**Sample Status:** Pre-Production

**Applicant:** Compex Systems Pte Ltd

**Test Date:** Dec. 11 to 12, 2019

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Annie Chang, **Date:** Feb. 27, 2020  
Annie Chang / Senior Specialist

**Approved by :** Rex Lai, **Date:** Feb. 27, 2020  
Rex Lai / Associate Technical Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	N/A	Refer to Note 2 below
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions (above 1GHz) and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -4.92dB at 5150.00MHz.
	Radiated Emissions (below 1GHz)	N/A	Refer to Note 2 below
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	N/A	Refer to Note 2 below
15.407(a)(1/2/3)	Peak Power Spectral Density	N/A	Refer to Note 2 below
15.407(e)	6dB bandwidth	N/A	Refer to Note 2 below
15.407(g)	Frequency Stability	N/A	Refer to Note 2 below
15.203	Antenna Requirement	Pass	Antenna connector is Reverse SMA not a standard connector.

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. Test items: Radiated Emissions and Conducted power were performed for this addendum. The others testing data refer to original test report.
3. N/A: Not Applicable

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions above 1 GHz	Above 1GHz	5.14 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	4x4 Wave-2 802.11ac/a/n Mini PCIe WiFi Module
Brand	COMPEX
Test Model	WLE1216V5-20, WLE1216V5-20-I
Status of EUT	Pre-Production
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only.
Modulation Technology	OFDM
Transfer Rate	802.11a: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.2Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	<b>5180 ~ 5240MHz</b> 4 for 802.11a, 802.11n (20MHz), 802.11ac (20MHz) 2 for 802.11n (40MHz), 802.11ac (40MHz) 1 for 802.11ac (80MHz) <b>5745 ~ 5825MHz</b> 5 for 802.11a, 802.11n (20MHz) 802.11ac (20MHz) 2 for 802.11n (40MHz) 802.11ac (40MHz) 1 for 802.11ac (80MHz)
Output Power	<b>5180 ~ 5240MHz:</b> 54.353mW <b>5745 ~ 5825MHz:</b> 328.973mW
Antenna Type	Refer to note as below
Antenna Connector	Reverse SMA
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. The difference compared with original test report is adding a platform: Network Security Appliance (Brand: Check Point / Model: V-81WL), therefore only Radiated Emissions and Conducted power were performed for this addendum, and the others testing data refer to original test report.
2. Exhibit prepared for FCC Spot Check Verification report, the format, test items and amount of spot-check test data are decided by applicant's engineering judgment, for more details please refer to declaration letter exhibit.
3. This report is prepared for FCC class II permissive change.
4. 2.4GHz & 5GHz & LTE technologies can transmit at same time.
5. The emission of the simultaneous operation has been evaluated and no non-compliance was found.

6. The antenna information is listed as below: (Add new Platform: Network Security Appliance  
 (Brand: Check Point / Model: V-81WL)

Description	Limited Single Modular				Platform: Network Security Appliance (Brand: Check Point / Model: V-81W)		Platform: Network Security Appliance (Brand: Check Point / Model: V-81WL)	
	5180-5825MHz				2412-2462MHz	5180-5825MHz	2412-2462MHz	5180-5825MHz
Antenna Type	Ant.	Ant.	Ant.	Ant.	Dipole Antenna	Dipole Antenna	Dipole Antenna	Dipole Antenna
Maximum Gain (dBi)	5.0	3.5	4.6	10.0	2.22	4.29	2.22	4.29
Remark	Original Approved				Original Approved		Additional	
Original test report no.	1710RSU02001				RF190807D08-1		-	
Difference	-				WLAN only		WLAN + LTE	
					Two samples are electrically identical, different model names are for wireless function difference only.			

The Platform is authorized for use frequency bands: 2412-2462MHz, 5180-5240MHz and 5745-5825MHz only.

7. The EUT provides 4 completed transmitters and 4 receivers.

Modulation Mode	TX FUNCTION
802.11a	1TX
802.11n (20MHz)	4TX
802.11n (40MHz)	4TX
802.11ac (20MHz)	4TX
802.11ac (40MHz)	4TX
802.11ac (80MHz)	4TX

\* The modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz and 802.11ac mode for 20MHz / 40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

8. Accessory device of Platform as follows.

Brand	Model	Rating
FSP	FSP060-DHAN3	AC I/P : 100-240V ~ 1.8A 50-60Hz DC O/P 12V==5.0A Power cord: AC 2 Pin, Non-shielded DC cable (1.2m) With one Core

9. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

#### FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
42	5210MHz

#### FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
155	5775MHz

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	-	-	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE:** 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.  
 2. “-” means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11ac (40MHz)	5180-5240	38 to 46	38, 46	OFDM	BPSK	29.3
-	802.11ac (40MHz)	5745-5825	151 to 159		OFDM	BPSK	13.5

#### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 44, 48	OFDM	BPSK	6
-	802.11ac (20MHz)		36 to 48	36, 44, 48	OFDM	BPSK	6.5
-	802.11ac (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
-	802.11ac (80MHz)		42	42	OFDM	BPSK	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
-	802.11ac (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
-	802.11ac (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5
-	802.11ac (80MHz)		155	155	OFDM	BPSK	29.3

#### Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	22deg. C, 75%RH	120Vac, 60Hz	Dalen Dai
APCM	25deg. C, 76%RH	120Vac, 60Hz	Saxon Lee

### 3.3 Duty Cycle of Test Signal

If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.


**802.11a:** Duty cycle =  $2.08/2.135 = 0.974$ , Duty factor =  $10 * \log(1/0.974) = 0.11$

**802.11ac (20MHz):** Duty cycle =  $5.03/5.08 = 0.99$


**802.11ac (40MHz):** Duty cycle =  $2.445/2.51 = 0.974$ , Duty factor =  $10 * \log(1/0.974) = 0.11$

**802.11ac (80MHz):** Duty cycle =  $3.39/3.85 = 0.881$ , Duty factor =  $10 * \log(1/0.881) = 0.55$


#### 802.11a

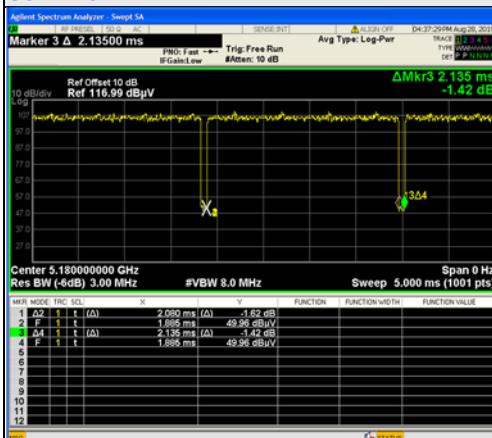


#### 802.11ac (20MHz)

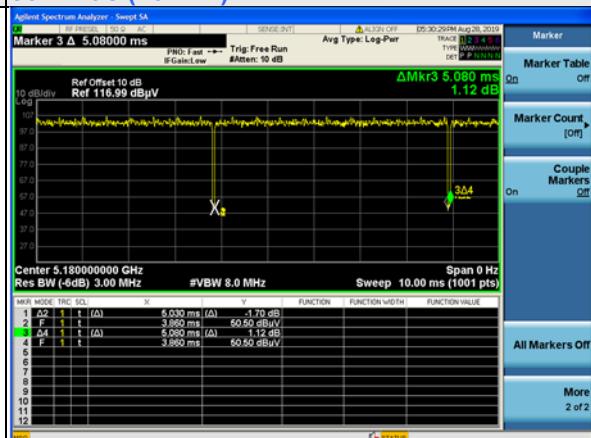

#### 802.11ac (40MHz)

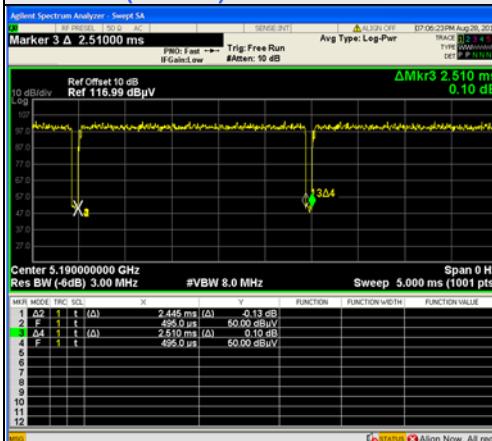

#### 802.11ac (80MHz)

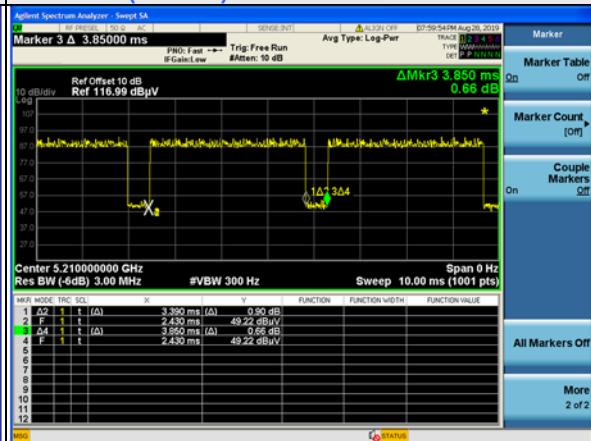


### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC cable	1	1.2	N	1	Supplied by client
2.	AC power cord	1	1.8	N	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

#### 3.4.1 Configuration of System under Test

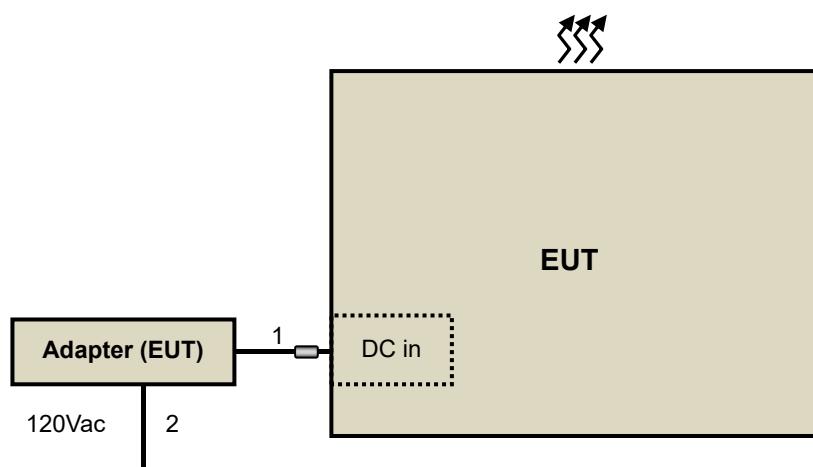

### **3.5 General Description of Applied Standard and references**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart E (15.407)**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 789033 D02 General UNII Test Procedure New Rules v02r01**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
Frequency Band	Applicable To	PK:74 (dB <sub>u</sub> V/m)	AV:54 (dB <sub>u</sub> V/m)
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	Equivalent Field Strength at 3m
5250~5350 MHz	15.407(b)(2)		PK:68.2(dB <sub>u</sub> V/m)
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:10 (dBm/MHz) <sup>*2</sup> PK:15.6 (dBm/MHz) <sup>*3</sup> PK:27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dB <sub>u</sub> V/m) <sup>*1</sup> PK:105.2 (dB <sub>u</sub> V/m) <sup>*2</sup> PK: 110.8(dB <sub>u</sub> V/m) <sup>*3</sup> PK:122.2 (dB <sub>u</sub> V/m) <sup>*4</sup>
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	

\*1 beyond 75 MHz or more above of the band edge.  
 \*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.  
 \*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.  
 \*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

**Note:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

#### 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 20, 2019	Feb. 19, 2020
HP Preamplifier	8449B	3008A01201	Feb. 21, 2019	Feb. 20, 2020
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 20, 2019	Feb. 19, 2020
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 05, 2019	Mar. 04, 2020
Schwarzbeck Antenna	VULB 9168	139	Nov. 7, 2019	Nov. 6, 2020
Schwarzbeck Antenna	VHBA 9123	480	Jun. 3, 2019	Jun. 2, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 24, 2019	Nov. 23, 2020
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 24, 2019	Nov. 23, 2020
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 10, 2019	Jul. 9, 2020
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-3.6m	Jul. 10, 2019	Jul. 9, 2020
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 11, 2019	Jun. 10, 2020
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 30, 2019	Jul. 29, 2020
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021
EMCO Horn Antenna	3115	00028257	Nov. 24, 2019	Nov. 23, 2020
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2019	Sep. 22, 2020
Anritsu Power Sensor	MA2411B	0738404	Apr. 16, 2019	Apr. 15, 2020
Anritsu Power Meter	ML2495A	0842014	Apr. 16, 2019	Apr. 15, 2020

**NOTE:**

1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.

#### 4.1.3 Test Procedure

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

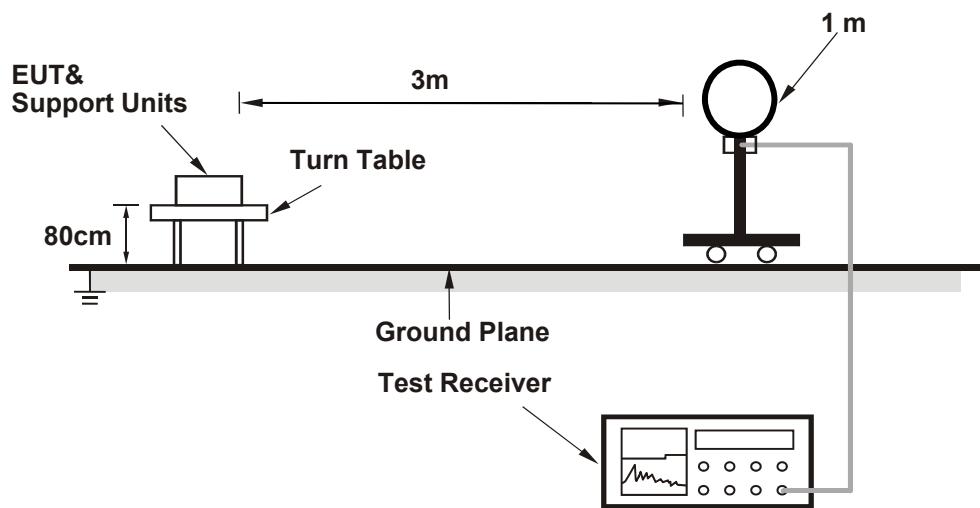

##### For Radiated emission 30MHz to 1GHz

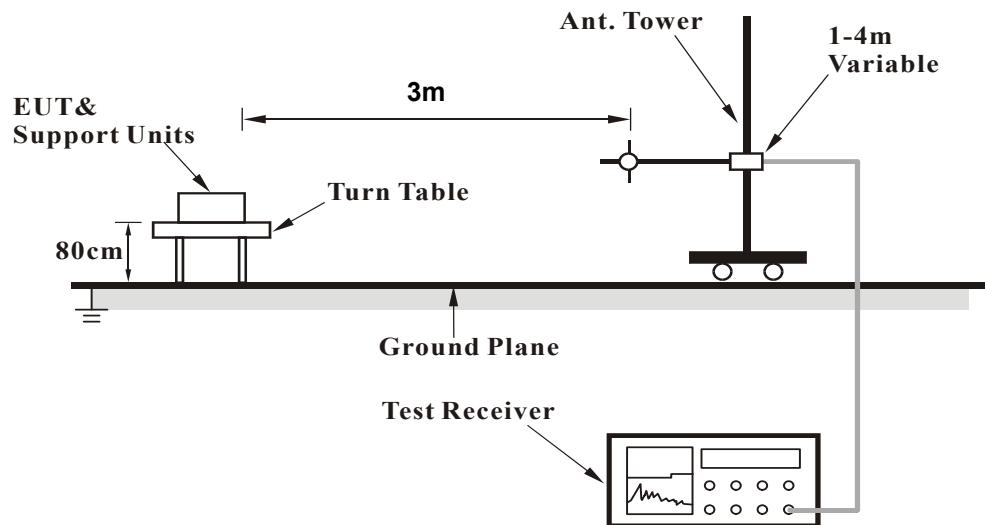

### For Radiated emission above 1GHz

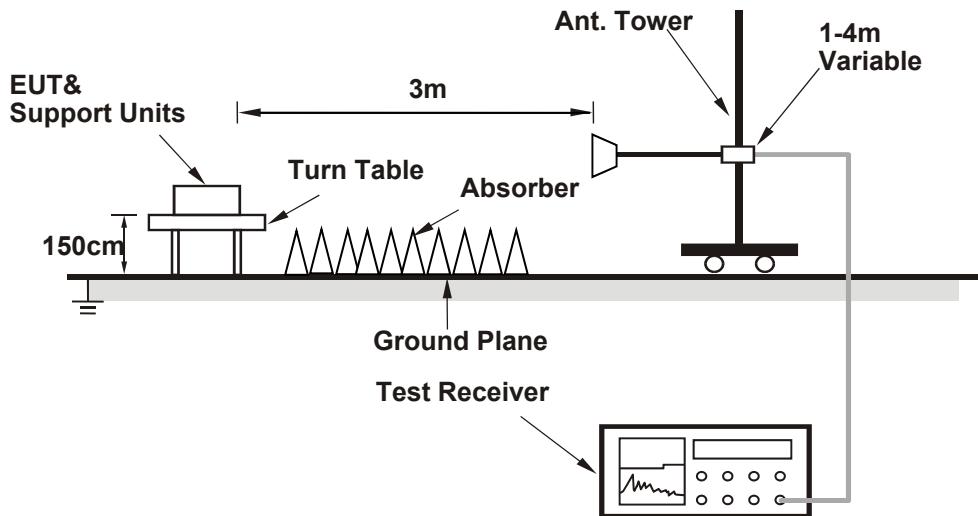

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Condition

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

##### Above 1GHz Data:

###### 802.11ac (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.76 PK	74.00	-13.24	1.64 H	151	51.84	8.92
2	5150.00	48.32 AV	54.00	-5.68	1.64 H	151	39.40	8.92
3	*5190.00	103.05 PK			1.64 H	151	94.03	9.02
4	*5190.00	93.37 AV			1.64 H	151	84.35	9.02
5	#10380.00	56.57 PK	68.20	-11.63	1.37 H	208	40.52	16.05
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.49 PK	74.00	-11.51	2.31 V	22	53.57	8.92
2	<b>5150.00</b>	<b>49.08 AV</b>	<b>54.00</b>	<b>-4.92</b>	<b>2.31 V</b>	<b>22</b>	<b>40.16</b>	<b>8.92</b>
3	*5190.00	111.86 PK			2.31 V	22	102.84	9.02
4	*5190.00	102.29 AV			2.31 V	22	93.27	9.02
5	#10380.00	57.12 PK	68.20	-11.08	1.78 V	296	41.07	16.05

##### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	103.09 PK			1.57 H	160	93.89	9.20
2	*5230.00	93.14 AV			1.57 H	160	83.94	9.20
3	5350.00	61.46 PK	74.00	-12.54	1.57 H	160	51.62	9.84
4	5350.00	48.61 AV	54.00	-5.39	1.57 H	160	38.77	9.84
5	#10460.00	56.99 PK	68.20	-11.21	1.39 H	213	40.66	16.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	111.68 PK			2.36 V	24	102.48	9.20
2	*5230.00	101.73 AV			2.36 V	24	92.53	9.20
3	5350.00	61.93 PK	74.00	-12.07	2.36 V	24	52.09	9.84
4	5350.00	49.02 AV	54.00	-4.98	2.36 V	24	39.18	9.84
5	#10460.00	57.54 PK	68.20	-10.66	1.75 V	313	41.21	16.33

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

## 4.2 Transmit Power Measurement

### 4.2.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1	Outdoor Access Point		1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point		1 Watt (30 dBm)
	<input checked="" type="checkbox"/> Indoor Access Point		1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	<input checked="" type="checkbox"/>		1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.2.2 Test Setup



### 4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.2.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

#### 4.2.5 Deviation from Test Standard

No deviation.

#### 4.2.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.2.7 Test Result

**Power Output:**

802.11a

CHAN.	FREQ. (MHz)	Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass/Fail
36	5180	48.417	16.85	30	Pass
44	5220	50.35	17.02	30	Pass
48	5240	53.456	17.28	30	Pass
149	5745	110.154	20.42	30	Pass
157	5785	118.577	20.74	30	Pass
165	5825	119.124	20.76	30	Pass

**802.11ac (20MHz)**

CHAN.	FREQ. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	11.03	11.08	11.04	10.72	50.009	16.99	30	Pass
44	5220	11.23	11.39	11.33	10.69	52.351	17.19	30	Pass
48	5240	11.38	11.50	11.05	10.67	52.268	17.18	30	Pass
149	5745	18.92	18.98	18.82	18.65	306.541	24.86	30	Pass
157	5785	18.85	18.81	18.85	18.69	303.466	24.82	30	Pass
165	5825	18.77	18.59	18.65	18.42	290.397	24.63	30	Pass

**802.11ac (40MHz)**

CHAN.	FREQ. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	10.93	10.89	11.16	10.48	48.893	16.89	30	Pass
46	5230	10.97	11.08	10.99	10.21	48.381	16.85	30	Pass
151	5755	19.01	19.24	19.23	19.12	328.973	25.17	30	Pass
159	5795	19.06	19.11	19.25	18.96	324.853	25.12	30	Pass

**802.11ac (80MHz)**

CHAN.	FREQ. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass/Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	11.54	11.52	11.39	10.84	54.353	17.35	30	Pass
155	5775	11.50	11.42	11.26	11.45	55.323	17.43	30	Pass

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---