



MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac

FCC ID: TK4WLE600V5-27ESD

APPLICANT: Compex Systems Pte Ltd

Application Type: Certification

Product: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE
ADAPTER

Model No.: WLE600V5-27ESD

Brand Name: COMPEX

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15.407

Test Procedure(s): KDB 789033 D02v01, KDB 662911 D01v02r01

Test Date: Sep. 23, 2014 ~ May. 08, 2015

Reviewed By :

(Robin Wu)

Approved By :

(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1408RSU00101	Rev. 01	Initial report	09-30-2014
1408RSU00101	Rev. 02	Corrected some test frequency	10-07-2014
1408RSU00101	Rev. 03	Corrected all 5.8GHz band data	05-09-2014

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Operation Frequency / Channel List	7
2.3. Description of Available Antennas	9
2.4. Test Mode	10
2.5. Test Software	10
2.6. Device Capabilities	12
2.7. Test Configuration	12
2.8. EMI Suppression Device(s)/Modifications.....	12
2.9. Labeling Requirements	12
3. DESCRIPTION OF TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions	14
4. ANTENNA REQUIREMENTS	15
5. TEST EQUIPMENT CALIBRATION DATE	16
6. MEASUREMENT UNCERTAINTY	17
7. TEST RESULT	18
7.1. Summary	18
7.2. 26dB Bandwidth Measurement.....	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup	20
7.2.5. Test Result.....	21
7.3. 6dB Bandwidth Measurement.....	33
7.3.1. Test Limit	33
7.3.2. Test Procedure used.....	33
7.3.3. Test Setting.....	33

7.3.4. Test Setup	33
7.3.5. Test Result.....	34
7.4. Output Power Measurement	41
7.4.1. Test Limit	41
7.4.2. Test Procedure Used	41
7.4.3. Test Setting.....	41
7.4.4. Test Setup	41
7.4.5. Test Result.....	42
7.5. Power Spectral Density Measurement	47
7.5.1. Test Limit	47
7.5.2. Test Procedure Used	47
7.5.3. Test Setting.....	47
7.5.4. Test Setup	48
7.5.5. Test Result.....	49
7.6. Frequency Stability Measurement.....	68
7.6.1. Test Limit	68
7.6.2. Test Procedure Used	68
7.6.3. Test Setup	68
7.6.4. Test Result.....	69
7.7. Radiated Spurious Emission Measurement	70
7.7.1. Test Limit	70
7.7.2. Test Procedure Used	70
7.7.3. Test Setting.....	70
7.7.4. Test Setup	71
7.7.5. Test Result.....	73
7.8. Radiated Restricted Band Edge Measurement	235
7.8.1. Test Limit	235
7.8.2. Test Result of Radiated Restricted Band Edge	237
7.9. AC Conducted Emissions Measurement.....	653
7.9.1. Test Limit	653
7.9.2. Test Procedure	653
7.9.3. Test Setup	654
7.9.4. Test Result.....	655
8. CONCLUSION.....	658

§2.1033 General Information

Applicant:	Compex Systems Pte Ltd
Applicant Address:	135, Joo Seng Road, #08-01 Singapore 368363
Manufacturer:	Compex Systems Pte Ltd
Manufacturer Address:	135, Joo Seng Road, #08-01 Singapore 368363
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	809388
FCC Rule Part(s):	Part 15.407
Model No.:	WLE600V5-27ESD
FCC ID:	TK4WLE600V5-27ESD
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Unlicensed National Information Infrastructure (UNII)
Date(s) of Test:	Sep. 23, 2014 ~ May. 08, 2015

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER
Model No.	WLE600V5-27ESD
Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz; 5775MHz
Maximum Output Power	802.11a: 28.74dBm 802.11n-HT20: 28.82dBm 802.11ac-VHT20: 28.71dBm 802.11n-HT40: 28.54dBm 802.11ac-VHT40: 29.16dBm 802.11ac-VHT80: 19.87dBm
Type of Modulation	802.11a/n/ac: OFDM

2.2. Operation Frequency / Channel List

Channel List for 802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

Channel List for 802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

Channel List for 802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	--	--

2.3. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	Manufacturer	Tx Paths	Max Directional Gain (dBi)
Panel Antenna 1#	5.1 ~ 5.2	Lanbowan Communications Ltd.	2	25
Panel Antenna 2#	5.1 ~ 5.2	Kenbotong Communication LTD	2	19
Panel Antenna 3#	5.1 ~ 5.2	Compex Systems Pte Ltd	2	17
Panel Antenna 4#	5.1 ~ 5.2	Compex Systems Pte Ltd	2	15
Panel Antenna 5#	5.1 ~ 5.2	Kenbotong Communication LTD	2	10
Panel Antenna 6#	5.1 ~ 5.8	Smart Ant Inc	2	7
Panel Antenna 7#	5.1 ~ 5.8	Compex Systems Pte Ltd	2	5
Panel Antenna 8#	5.1 ~ 5.8	Compex Systems Pte Ltd	2	5
Dipole Antenna 1#	5.1 ~ 5.8	Kunshan Wavelink Electronic Co., Ltd.	2	2

Note 1: The device didn't support transmit beam-forming mode and Cyclic Delay Diversity (CDD) mode, and the transmit signals are uncorrected, so no add array gain to the band power and band PSD.

Note 2: The 5.8GHz frequency band use the maximum antenna gain 7dBi and the 5.2GHz frequency band use the maximum antenna gain 25dBi.

Note 3: We selected the panel 1# and dipole antenna 1# for all radiated emission testing.

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n-HT20
	Mode 3: Transmit by 802.11ac-VHT20
	Mode 4: Transmit by 802.11n-HT40
	Mode 5: Transmit by 802.11ac-VHT40
	Mode 6: Transmit by 802.11ac-VHT80

2.5. Test Software

The test utility software used during testing was “ART2-GUI Version: 2.3”.

Final Power Parameter Value of the test software.

Test Mode	Test Frequency	Power Parameter Value		
		Ant 0	Ant 1	Ant 0 + 1
802.11a	5180	12.0	12.0	--
	5220	12.5	12.0	--
	5240	12.5	12.5	--
	5745	23.0	23.5	--
	5785	29.0	29.0	--
	5825	27.5	27.0	--
802.11n-HT20	5180	12.0	12.0	11.5
	5220	12.5	12.0	11.5
	5240	12.5	12.5	11.5
	5745	23.5	23.5	22.0
	5785	29.0	29.0	26.0
	5825	27.5	25.5	24.5
802.11ac-VHT20	5180	12.0	12.0	11.5
	5220	12.5	12.0	11.5
	5240	12.5	12.0	12.0
	5745	23.0	23.5	22.0
	5785	29.0	29.0	26.0
	5825	27.0	25.0	24.0
802.11n-HT40	5190	11.5	11.0	11.0
	5230	12.0	11.5	11.0
	5755	21.5	21.5	19.0
	5795	28.0	26.0	25.5

802.11ac-VHT40	5190	11.0	11.5	11.0
	5230	11.5	11.5	11.0
	5755	21.5	21.0	18.5
	5795	28.0	25.5	26.0
802.11ac-VHT80	5210	12.0	12.0	11.0
	5775	19.0	20.0	17.0

2.6. Device Capabilities

This device contains the following capabilities:

5GHz WLAN (UNII).

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02v01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11a 20MHz Bandwidth – 96.7%
- 802.11n 20MHz Bandwidth – 96.4%
- 802.11ac 20MHz Bandwidth – 95.7%
- ☐ 802.11n 40MHz Bandwidth – 88.7%
- 802.11ac 40MHz Bandwidth – 88.4%
- 802.11ac 80MHz Bandwidth – 83.6%

2.7. Test Configuration

The **WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER FCC ID:**

TK4WLE600V5-27ESD was tested per the guidance of KDB 789033 D02v01. ANSI C63.4-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.4-2009), and the guidance provided in KDB 789033 D02v01 were used in the measurement of the **WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER FCC ID: TK4WLE600V5-27ESD**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.4-2009 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.10.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER uses a unique connector.

Antenna Type	Antenna Connector Type
Panel Antenna 1#	Inverted connector
Panel Antenna 2#	Inverted connector
Panel Antenna 3#	IPEX connector
Panel Antenna 4#	IPEX connector
Panel Antenna 5#	Inverted threaded connector
Panel Antenna 6#	Inverted threaded connector
Panel Antenna 7#	IPEX connector
Panel Antenna 8#	IPEX connector
Dipole Antenna 1#	Inverted connector

Conclusion:

The **WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER FCC ID: TK4WLE600V5-27ESD** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2015/11/07
Temperature/ Meter Humidity	Anymetre	TH101B	MRTSUE06046	1 year	2015/11/14

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2015/10/09
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Preamplifier	MRT	AP18G40	MRTSUE06020	1 year	2015/10/06
Preamplifier	MRT	AP01G18	MRTSUE06019	1 year	2015/12/13
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2015/11/08
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2015/11/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2015/11/08
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Anymetre	TH101B	MRTSUE06045	1 year	2015/11/14

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2015/04/23
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2015/10/09
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2015/10/15
Temperature/Humidity Meter	Anymetre	TH101B	MRTSUE06049	1 year	2015/11/14

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$ 1GHz ~ 40GHz: $\pm 4.76\text{dB}$

7. TEST RESULT

7.1. Summary

Company Name: **Compex Systems Pte Ltd**
FCC ID: **TK4WLE600V5-27ESD**
FCC Classification: **Unlicensed National Information Infrastructure (UNII)**
Data Rate(s) Tested: **6Mbps ~ 54Mbps (a);**
 6.5Mbps ~ 130Mbps (n-HT20MHz BW);
 6.5Mbps ~ 156Mbps (ac-VHT20MHz BW);
 13.5Mbps ~ 270Mbps (n-HT40MHz BW);
 13.5Mbps ~ 360Mbps (ac-VHT40MHz BW);
 29.3 Mbps ~ 780Mbps (ac-VHT80MHz BW);

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(iii), (3)	Maximum Conducted Output Power	< 30 dBm U-NII-1 < 30 dBm U-NII-3		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	< 24 dBm		Pass	Section 7.5
15.407(a)(1)(iii), (3), (5)	Peak Power Spectral Density	< 17 dBm/MHz U-NII-1 < 30 dBm/MHz U-NII-3		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (4)	Undesirable Emissions	< -27dBm/MHz EIRP < -17dBm/MHz EIRP	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v01 – Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

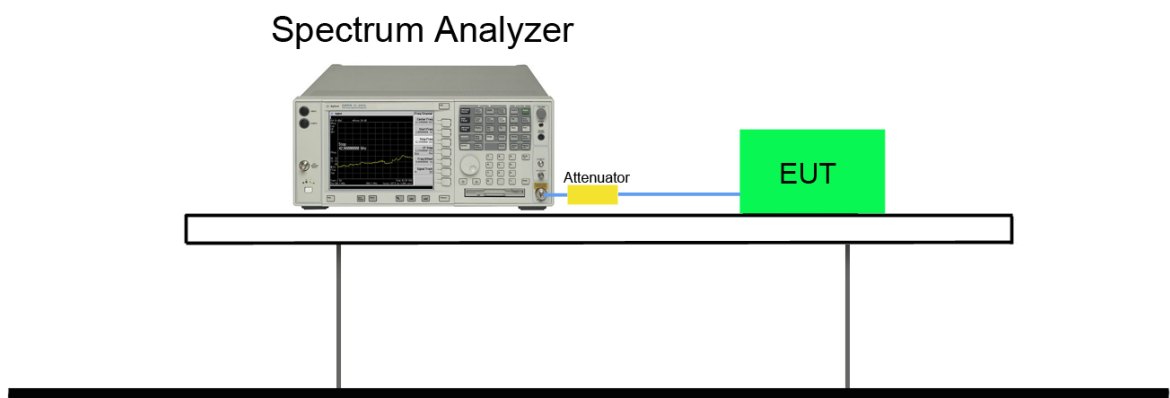


7.2.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 0						
802.11a	6	36	5180	22.31	16.66	Pass
802.11a	6	44	5220	22.05	16.65	Pass
802.11a	6	48	5240	22.09	16.63	Pass
802.11a	6	149	5745	21.83	16.65	Pass
802.11a	6	157	5785	21.95	16.64	Pass
802.11a	6	165	5825	22.21	16.64	Pass
802.11n-HT20	6.5	36	5180	22.99	17.82	Pass
802.11n-HT20	6.5	44	5220	22.39	17.83	Pass
802.11n-HT20	6.5	48	5240	22.87	17.81	Pass
802.11n-HT20	6.5	149	5745	23.05	17.78	Pass
802.11n-HT20	6.5	157	5785	22.76	17.79	Pass
802.11n-HT20	6.5	165	5825	22.69	17.76	Pass
802.11ac-VHT20	6.5	36	5180	23.14	17.83	Pass
802.11ac-VHT20	6.5	44	5220	22.31	17.80	Pass
802.11ac-VHT20	6.5	48	5240	23.26	17.81	Pass
802.11ac-VHT20	6.5	149	5745	23.05	17.81	Pass
802.11ac-VHT20	6.5	157	5785	23.06	17.78	Pass
802.11ac-VHT20	6.5	165	5825	22.85	17.78	Pass
802.11n-HT40	13.5	38	5190	43.93	36.42	Pass
802.11n-HT40	13.5	46	5230	44.21	36.37	Pass
802.11n-HT40	13.5	151	5755	43.43	36.35	Pass
802.11n-HT40	13.5	159	5795	44.63	36.38	Pass
802.11ac-VHT40	13.5	38	5190	44.79	36.42	Pass
802.11ac-VHT40	13.5	46	5230	43.79	36.45	Pass
802.11ac-VHT40	13.5	151	5755	43.30	36.40	Pass
802.11ac-VHT40	13.5	159	5795	43.99	36.42	Pass
802.11ac-VHT80	29.3	42	5210	95.19	76.00	Pass
802.11ac-VHT80	29.3	155	5775	85.13	75.75	Pass
Ant 1						
802.11a	6	36	5180	22.20	16.63	Pass
802.11a	6	44	5220	21.91	16.63	Pass
802.11a	6	48	5240	22.41	16.64	Pass


802.11a	6	149	5745	23.00	16.69	Pass
802.11a	6	157	5785	22.95	16.80	Pass
802.11a	6	165	5825	23.00	16.66	Pass
802.11n-HT20	6.5	36	5180	22.70	17.83	Pass
802.11n-HT20	6.5	44	5220	22.59	17.84	Pass
802.11n-HT20	6.5	48	5240	23.25	17.82	Pass
802.11n-HT20	6.5	149	5745	22.88	17.79	Pass
802.11n-HT20	6.5	157	5785	22.85	17.93	Pass
802.11n-HT20	6.5	165	5825	23.38	17.77	Pass
802.11ac-VHT20	6.5	36	5180	22.73	17.81	Pass
802.11ac-VHT20	6.5	44	5220	22.26	17.82	Pass
802.11ac-VHT20	6.5	48	5240	23.60	17.81	Pass
802.11ac-VHT20	6.5	149	5745	22.76	17.80	Pass
802.11ac-VHT20	6.5	157	5785	22.76	17.90	Pass
802.11ac-VHT20	6.5	165	5825	22.98	17.79	Pass
802.11n-HT40	13.5	38	5190	46.37	36.54	Pass
802.11n-HT40	13.5	46	5230	45.45	36.53	Pass
802.11n-HT40	13.5	151	5755	44.03	36.38	Pass
802.11n-HT40	13.5	159	5795	44.16	36.35	Pass
802.11ac-VHT40	13.5	38	5190	44.42	36.50	Pass
802.11ac-VHT40	13.5	46	5230	44.64	36.44	Pass
802.11ac-VHT40	13.5	151	5755	44.51	36.38	Pass
802.11ac-VHT40	13.5	159	5795	43.76	36.36	Pass
802.11ac-VHT80	29.3	42	5210	91.97	76.10	Pass
802.11ac-VHT80	29.3	155	5775	85.40	75.72	Pass

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 36 (5180MHz)

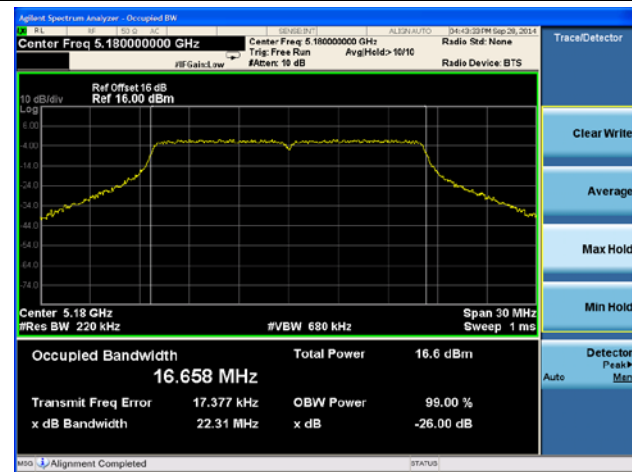


Channel 44 (5220MHz)

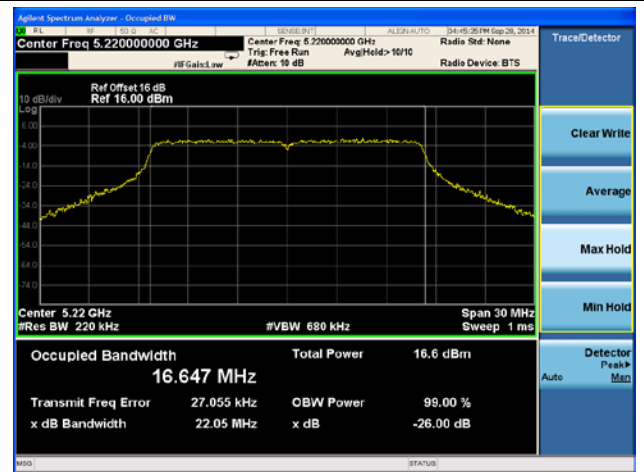


Channel 48 (5240MHz)

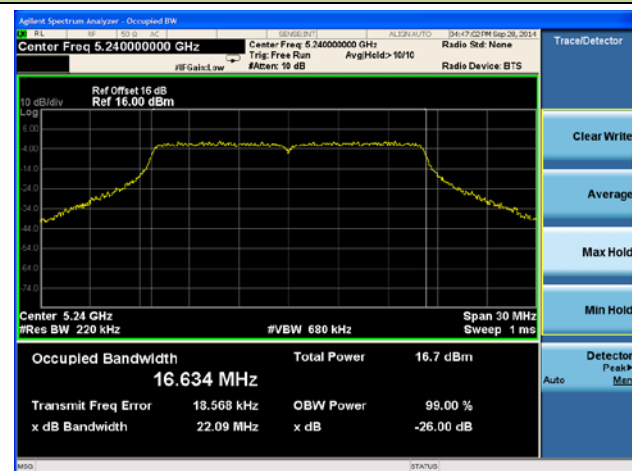


Channel 149 (5745MHz)

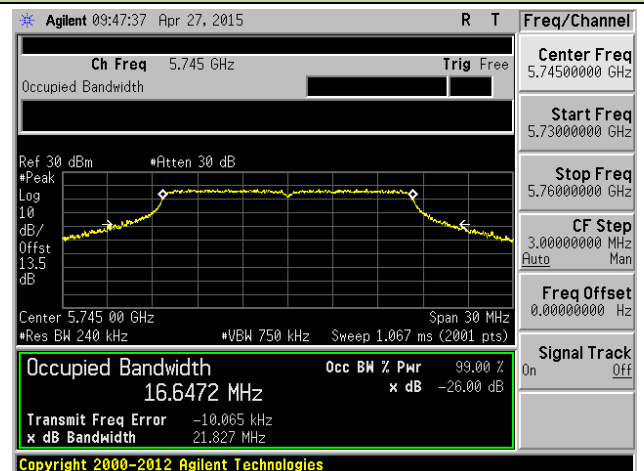

Channel 157 (5785MHz)

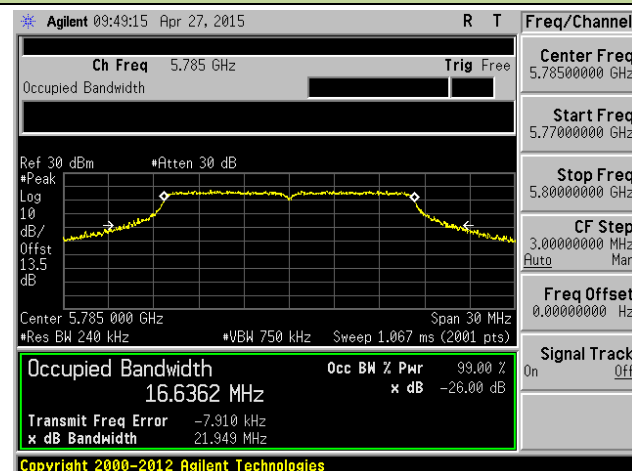


Channel 165 (5825MHz)

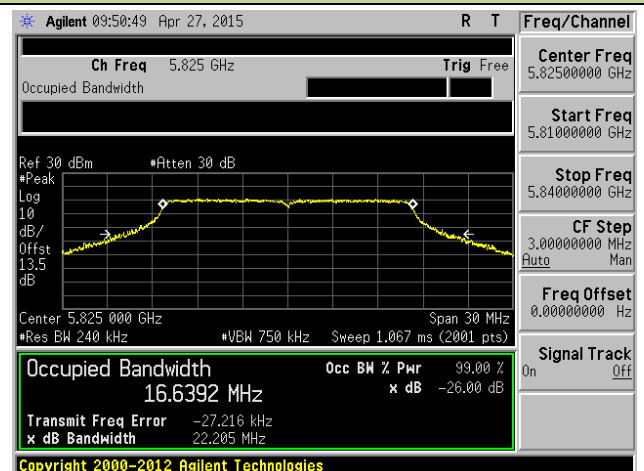


802.11a 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 36 (5180MHz)

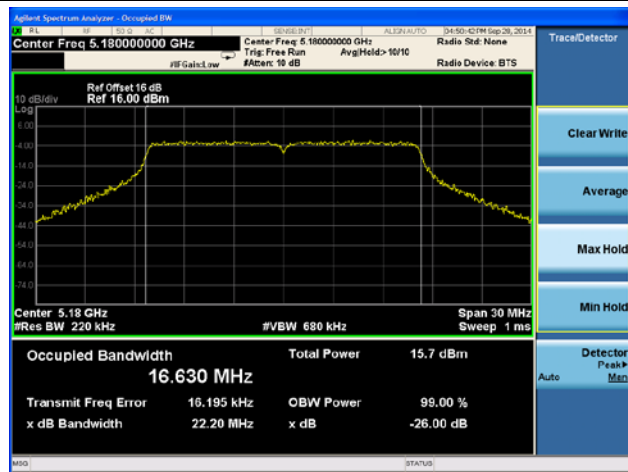


Channel 44 (5220MHz)

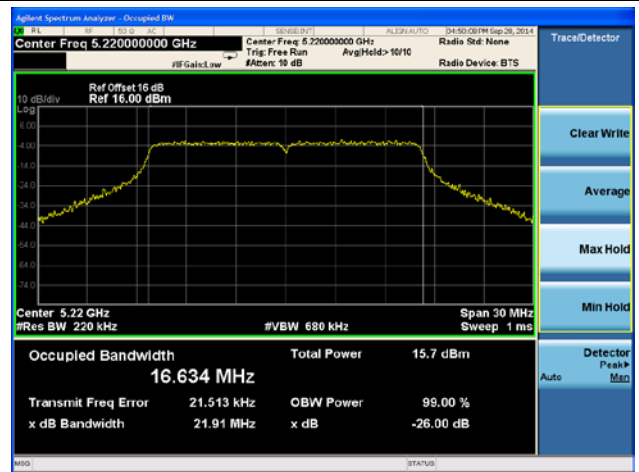


Channel 48 (5240MHz)

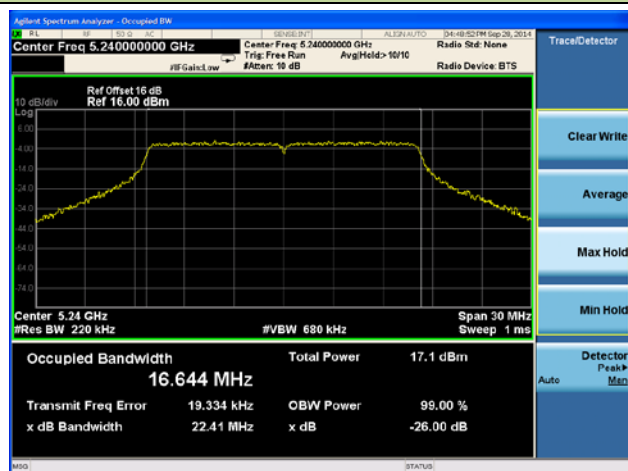


Channel 149 (5745MHz)

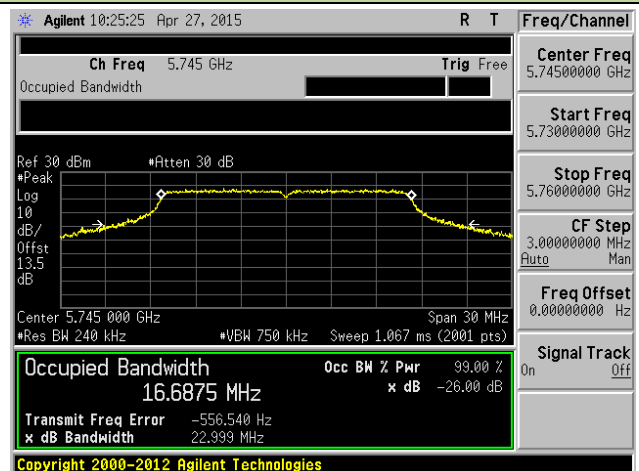

Channel 157 (5785MHz)

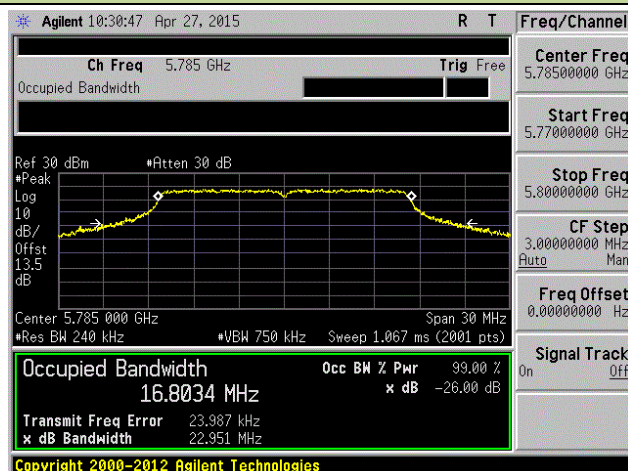


Channel 165 (5825MHz)

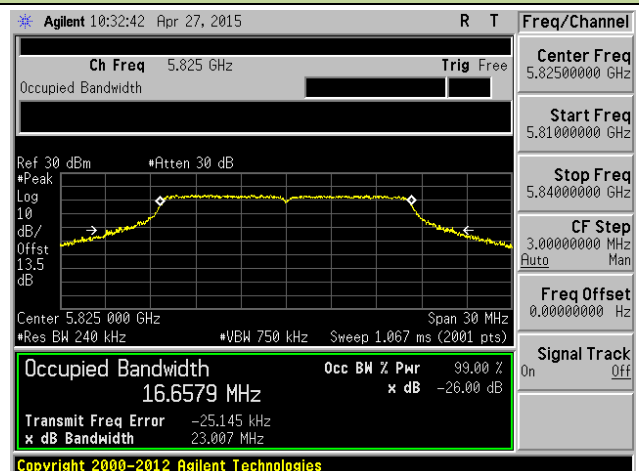


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 36 (5180MHz)

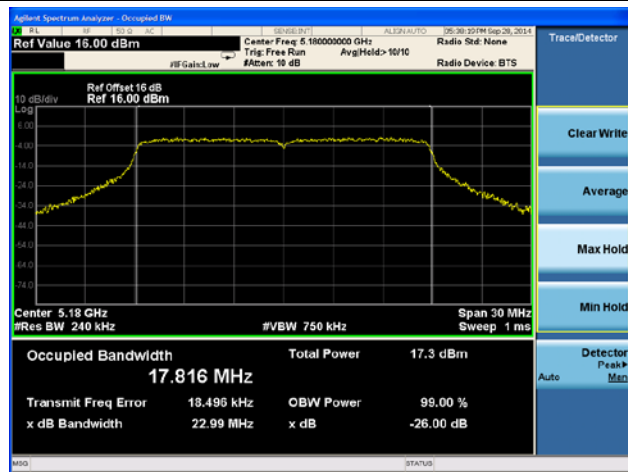


Channel 44 (5220MHz)

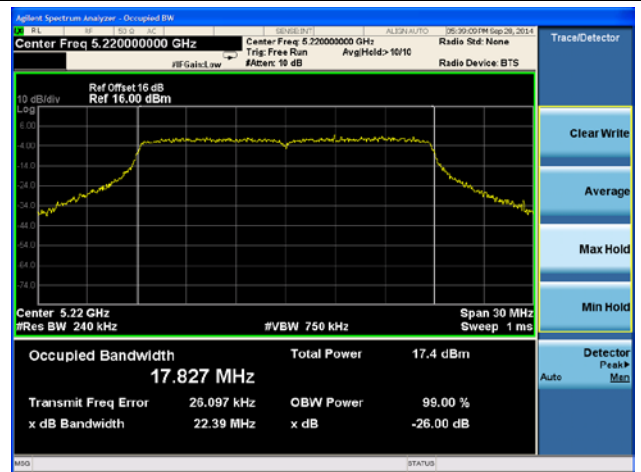


Channel 48 (5240MHz)

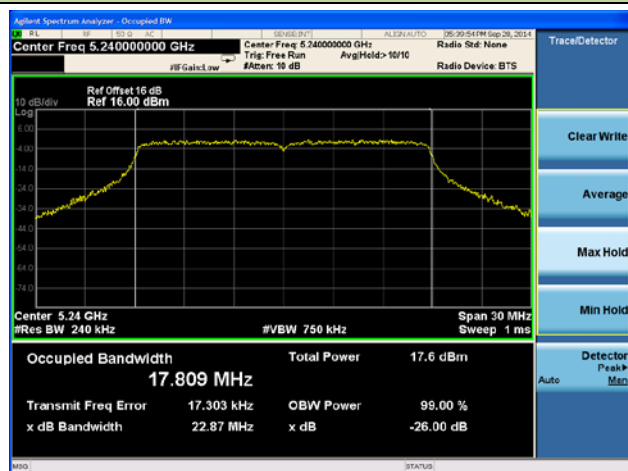


Channel 149 (5745MHz)

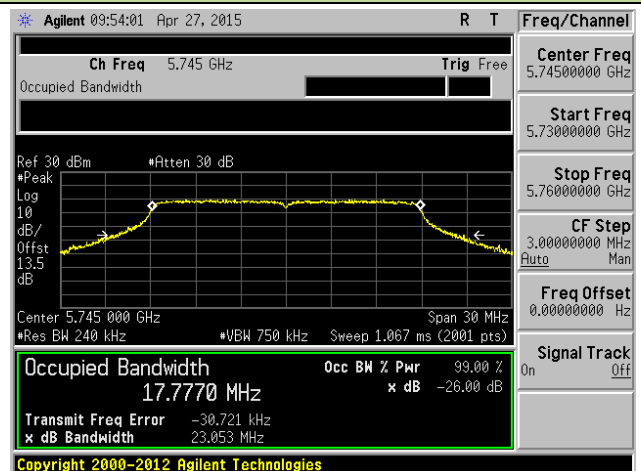

Channel 157 (5785MHz)

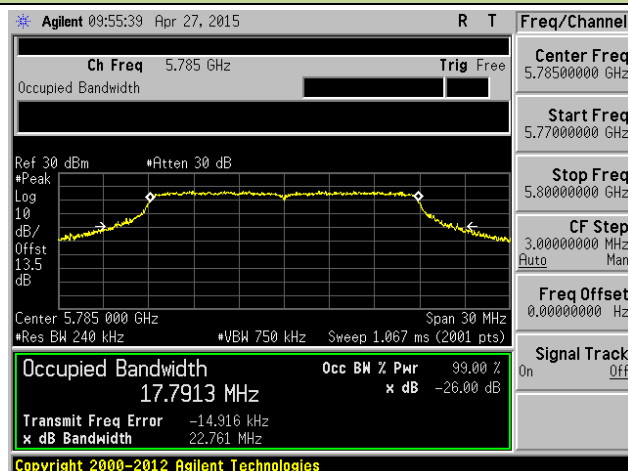


Channel 165 (5825MHz)

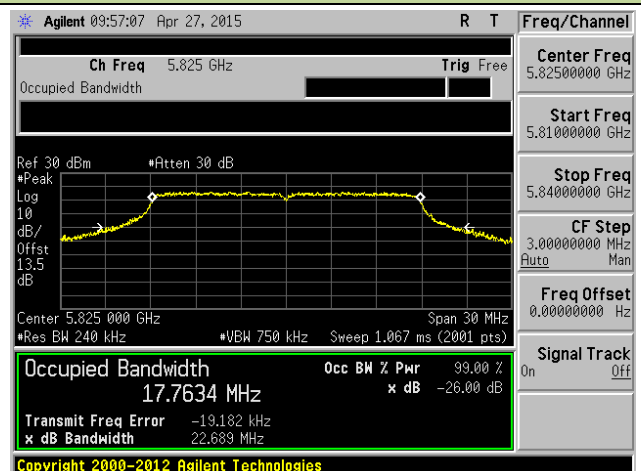


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 36 (5180MHz)

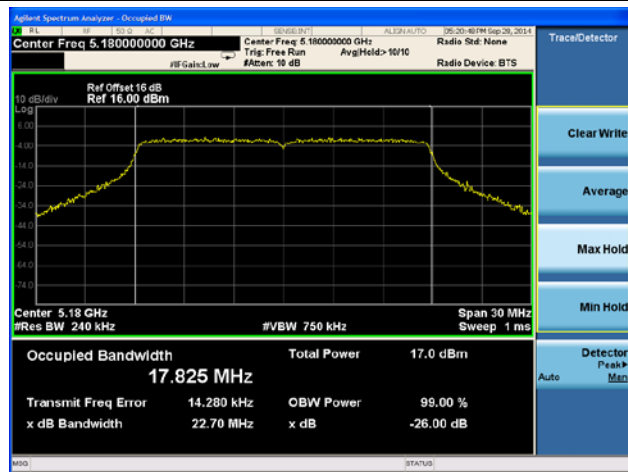


Channel 44 (5220MHz)

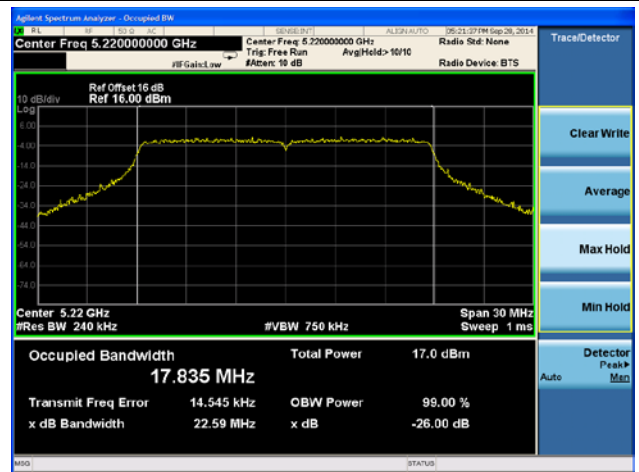


Channel 48 (5240MHz)

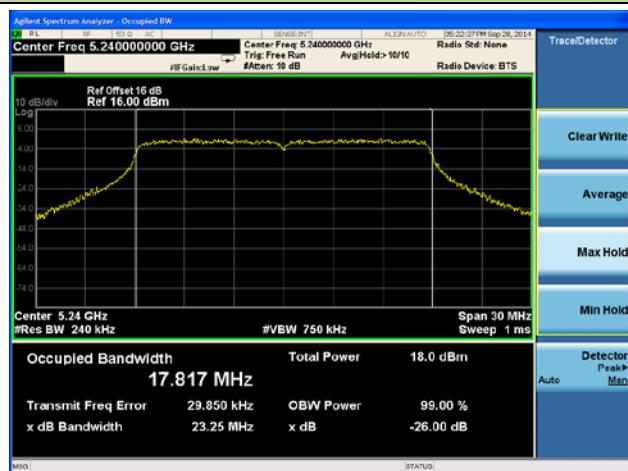


Channel 149 (5745MHz)

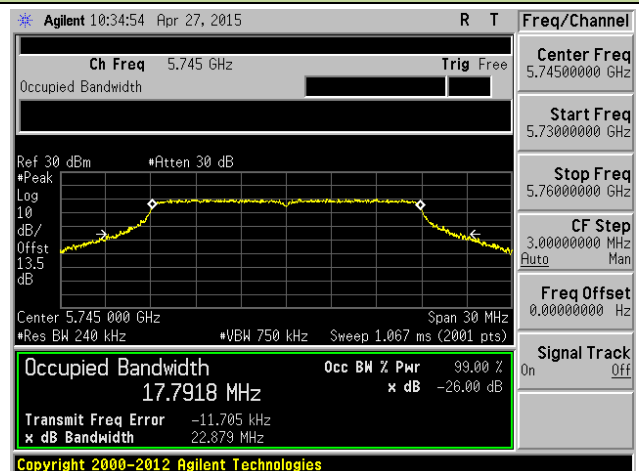

Channel 157 (5785MHz)

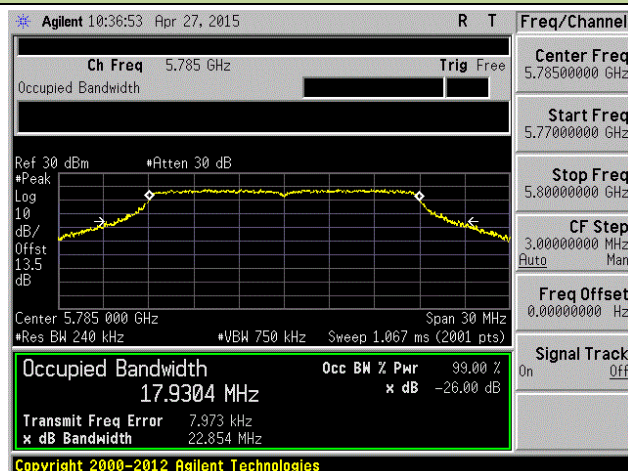


Channel 165 (5825MHz)

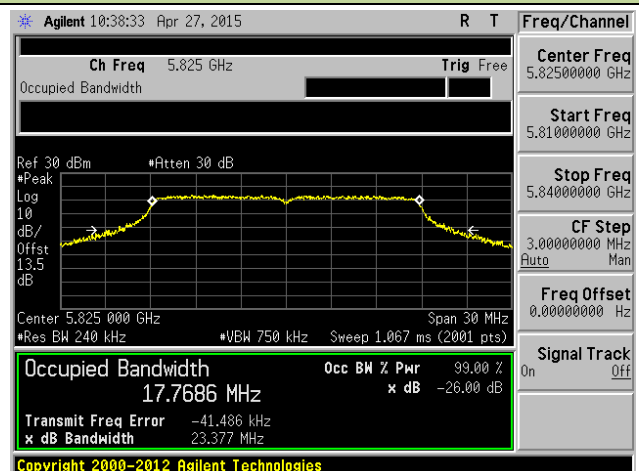


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 36 (5180MHz)

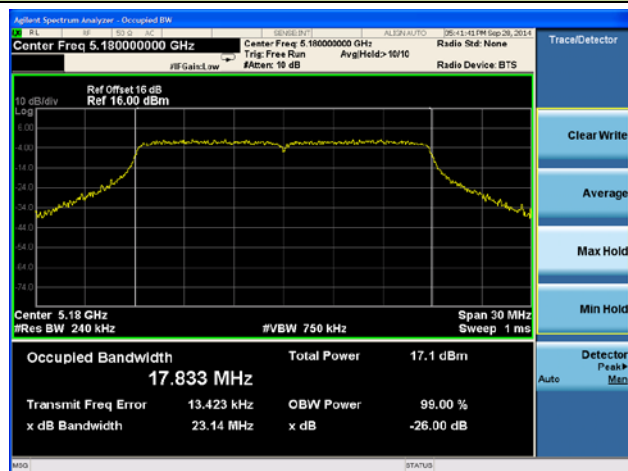


Channel 44 (5220MHz)

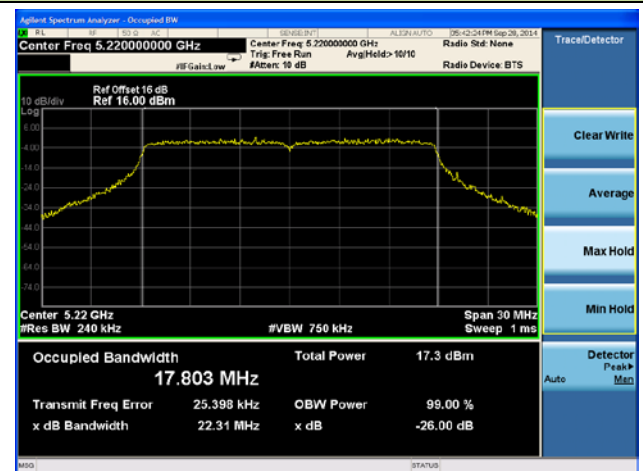


Channel 48 (5240MHz)

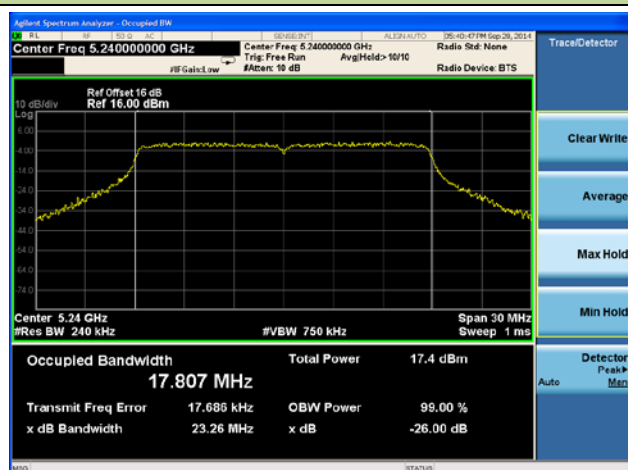


Channel 149 (5745MHz)

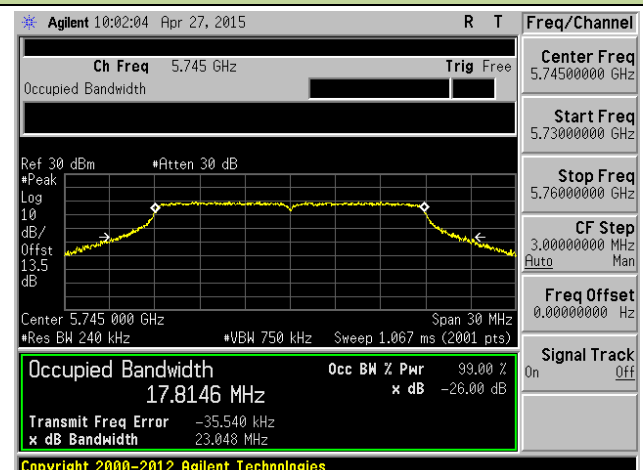

Channel 157 (5785MHz)

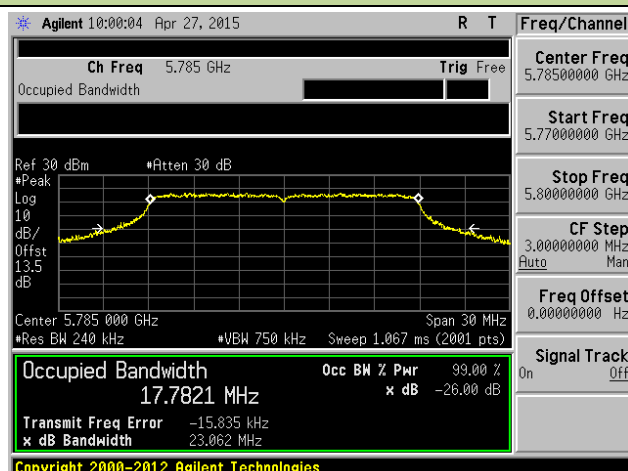


Channel 165 (5825MHz)

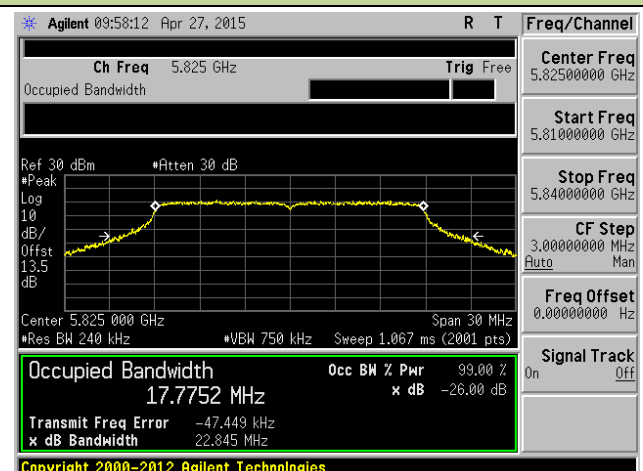


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 36 (5180MHz)

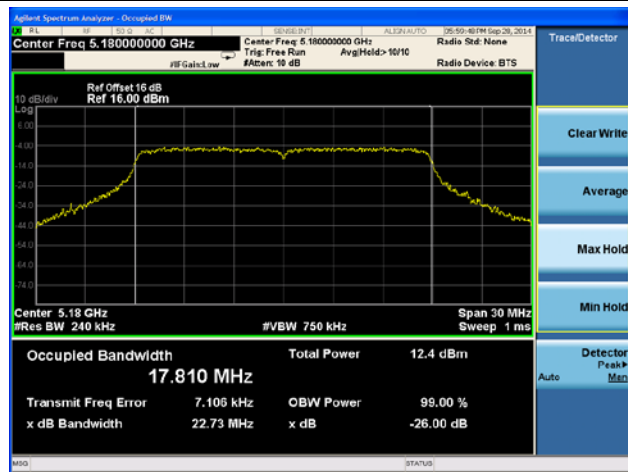


Channel 44 (5220MHz)

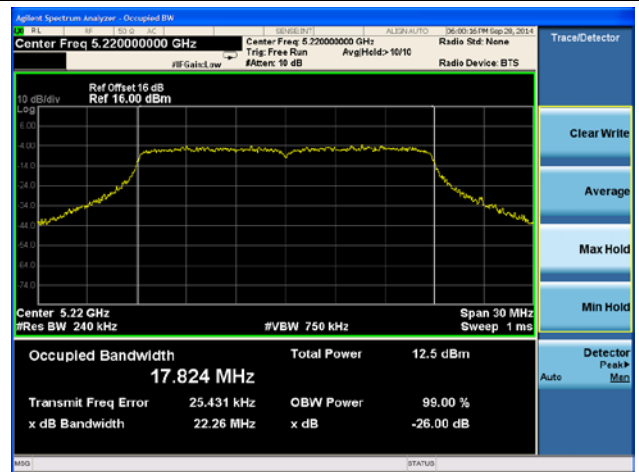


Channel 48 (5240MHz)

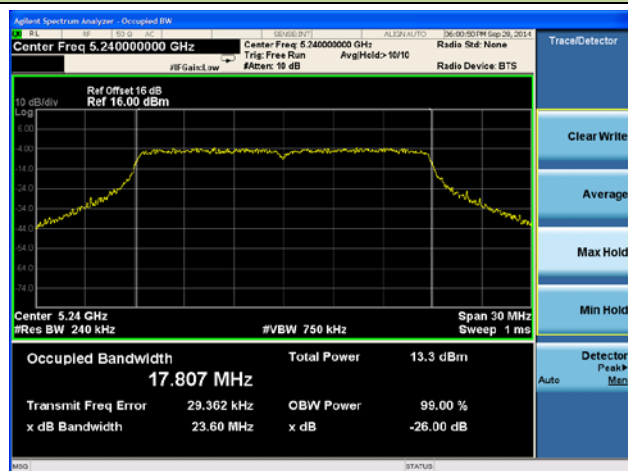


Channel 149 (5745MHz)

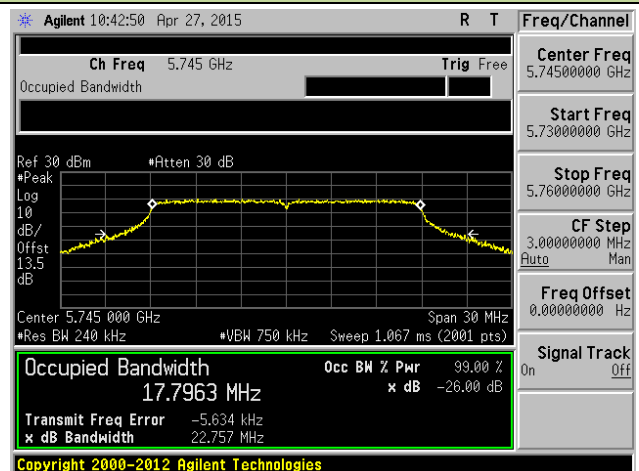

Channel 157 (5785MHz)

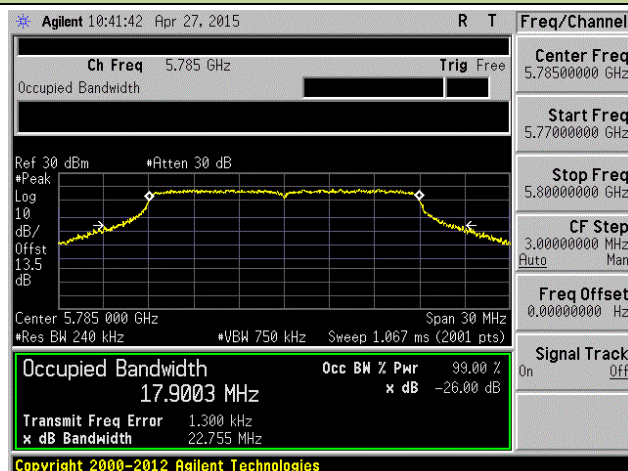


Channel 165 (5825MHz)

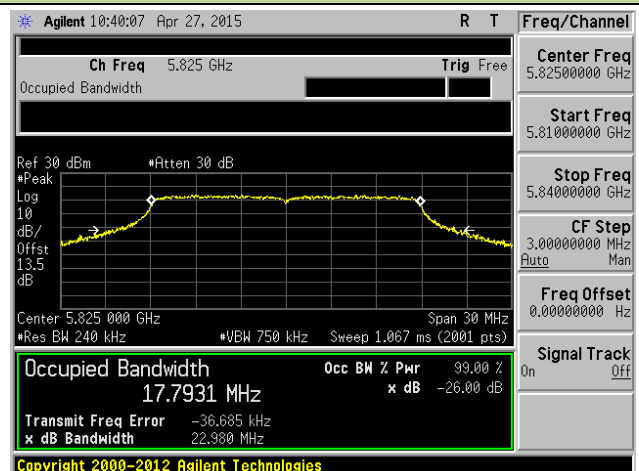


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 38 (5190MHz)

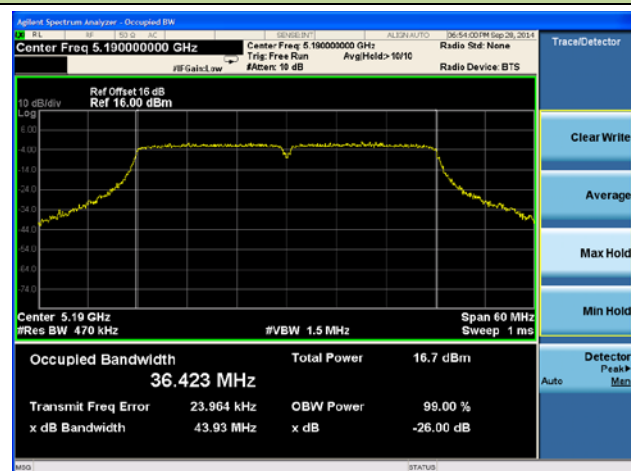


Channel 46 (5230MHz)

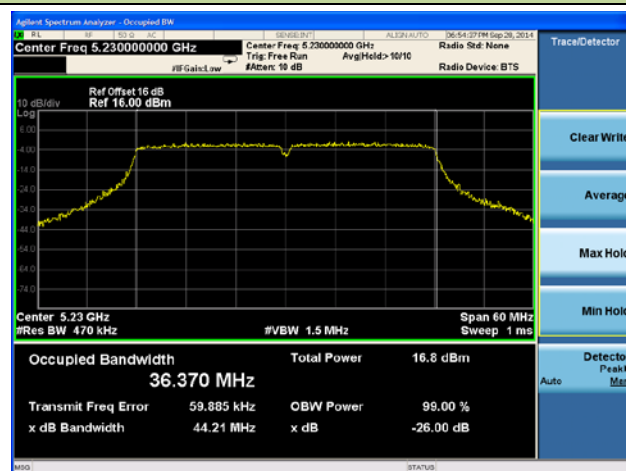

Channel 151 (5755MHz)

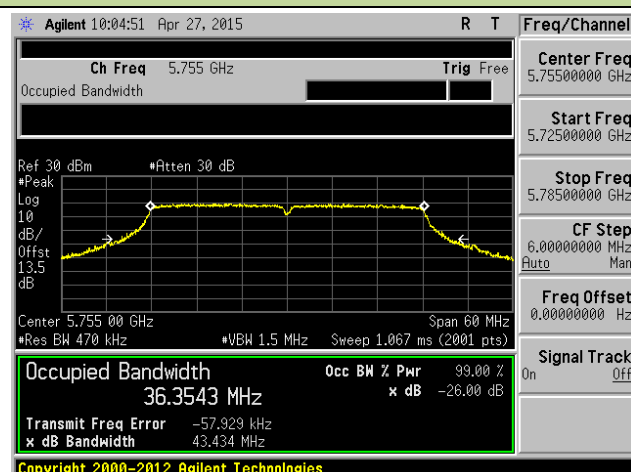


Channel 159 (5795MHz)

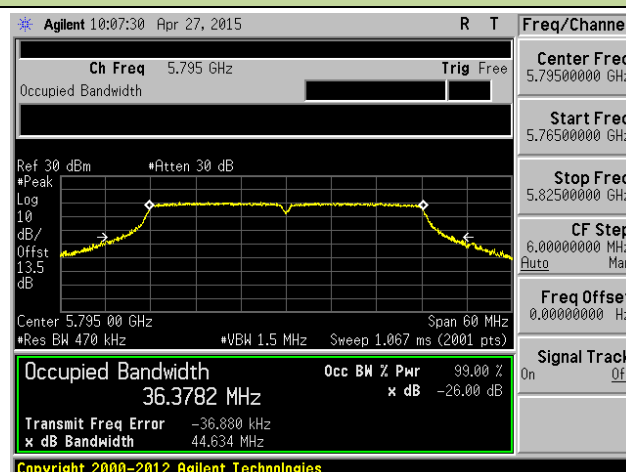


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 38 (5190MHz)

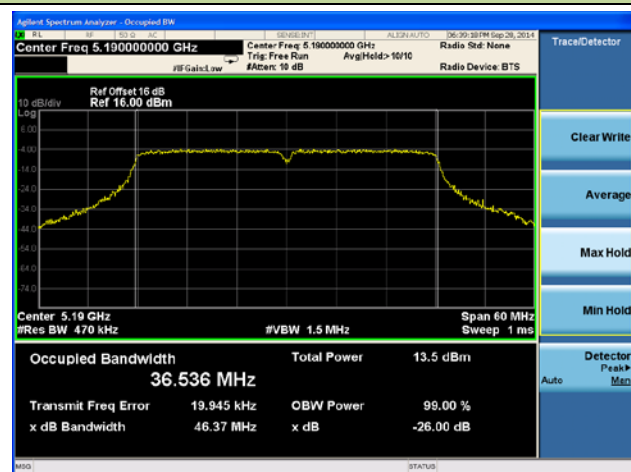


Channel 46 (5230MHz)

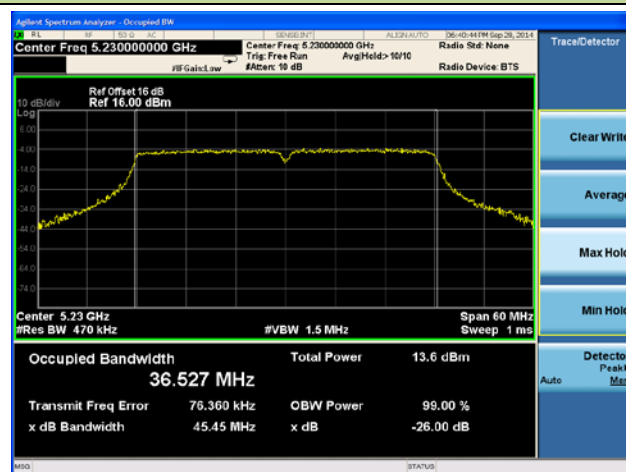

Channel 151 (5755 MHz)

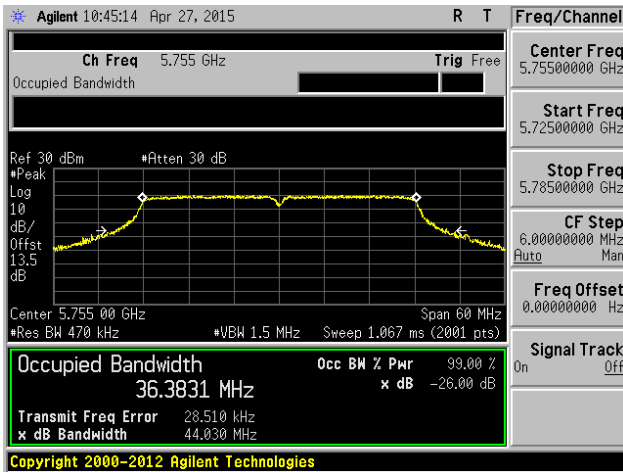


Channel 159 (5795 MHz)

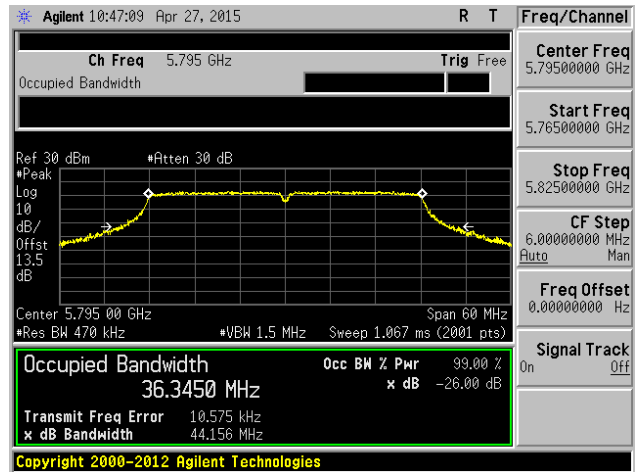


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 38 (5190MHz)

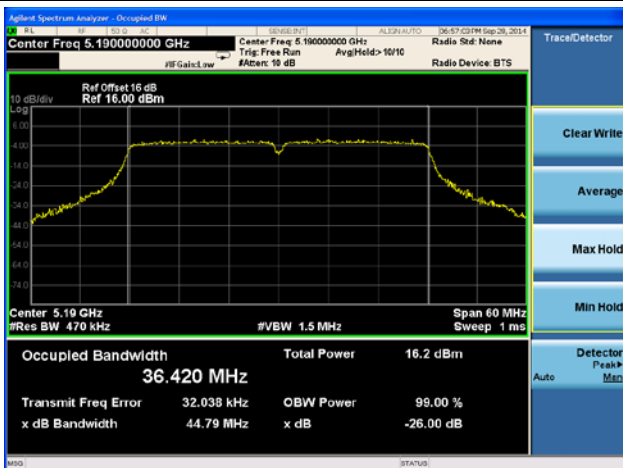


Channel 46 (5230MHz)

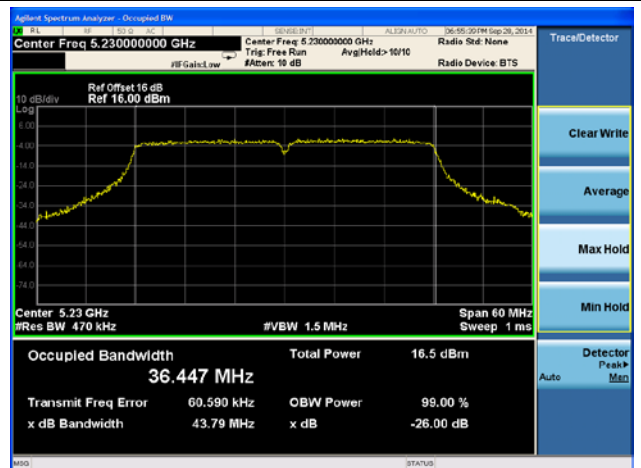

Channel 151 (5755MHz)

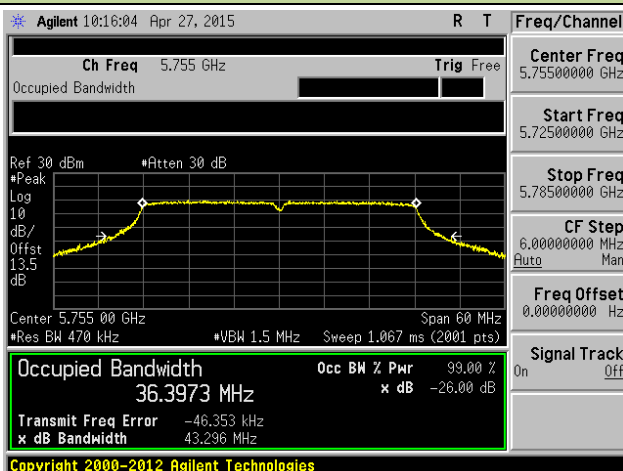


Channel 159 (5795MHz)

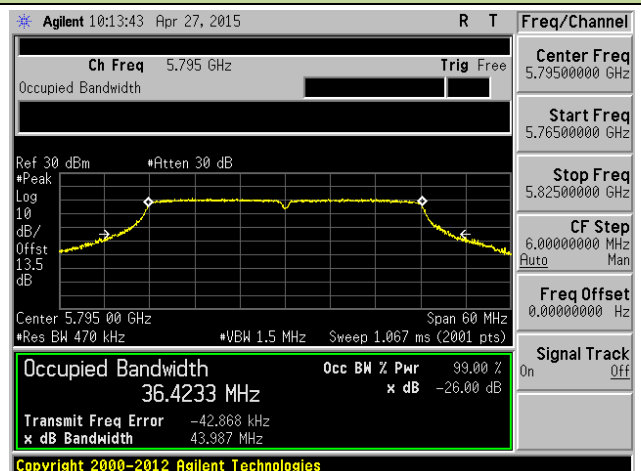


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 38 (5190MHz)

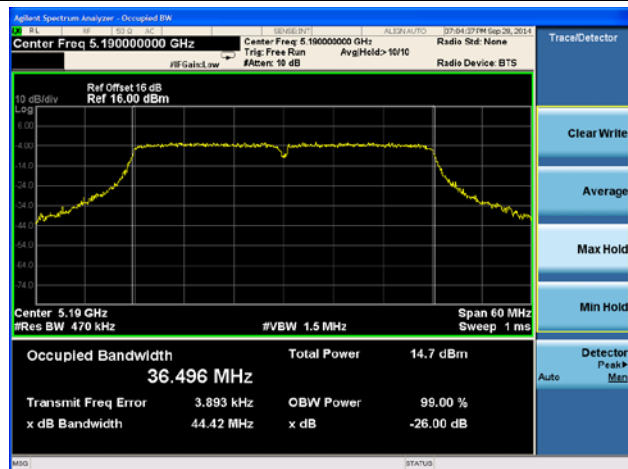


Channel 46 (5230MHz)

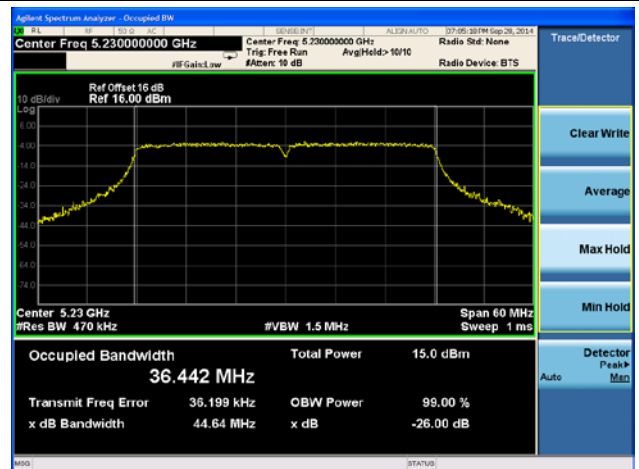

Channel 151 (5755 MHz)

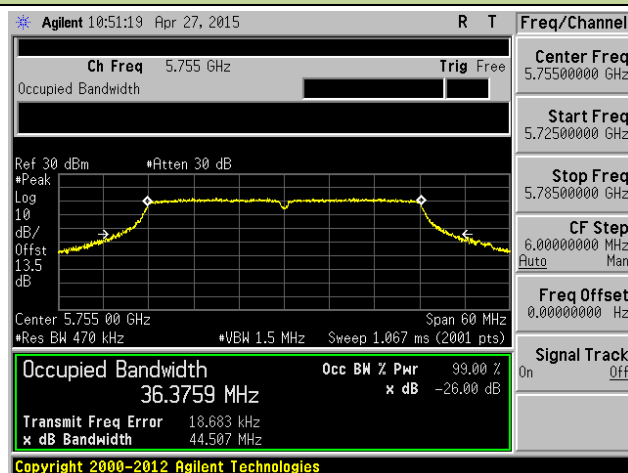


Channel 159 (5795 MHz)

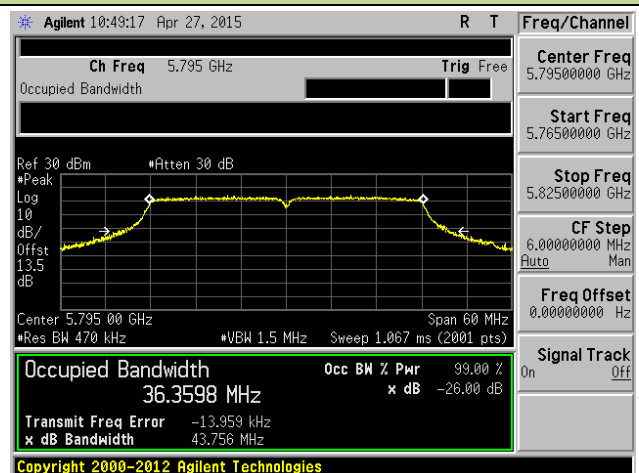


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 0

Channel 42 (5210MHz)

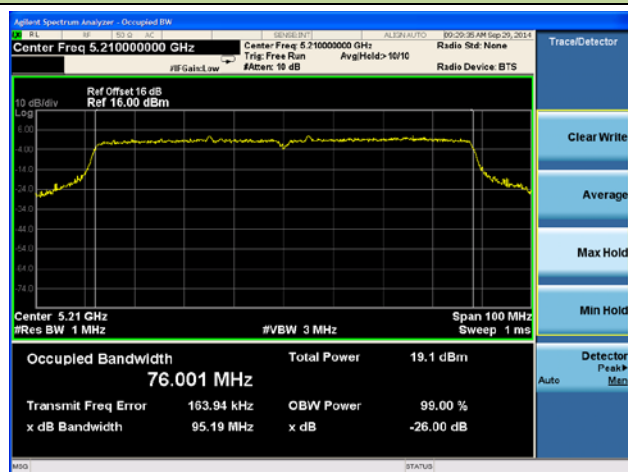


Channel 155 (5775MHz)

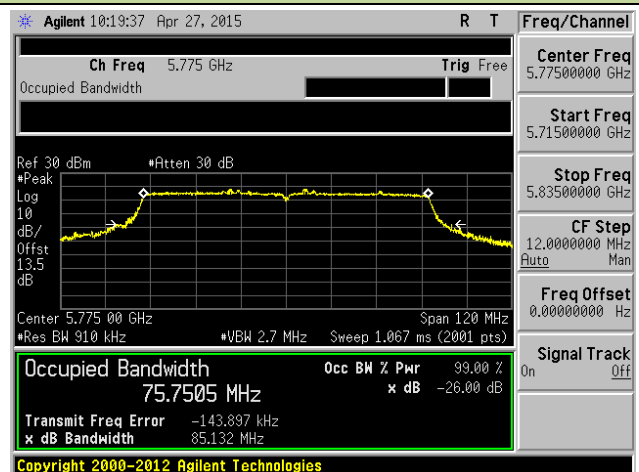


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 1

Channel 42 (5210MHz)

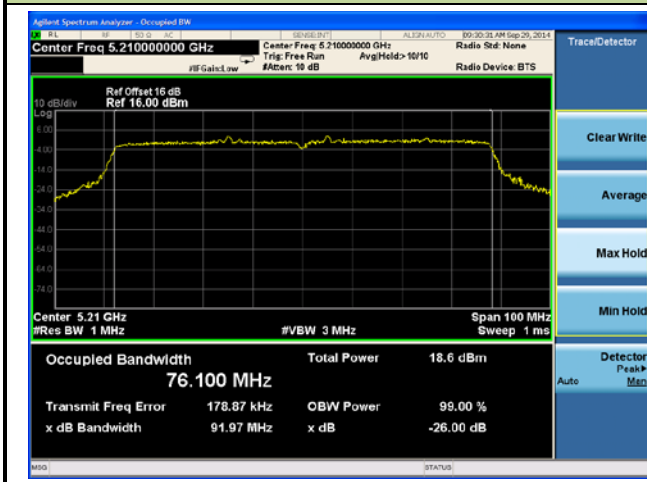

Channel 155 (5775MHz)

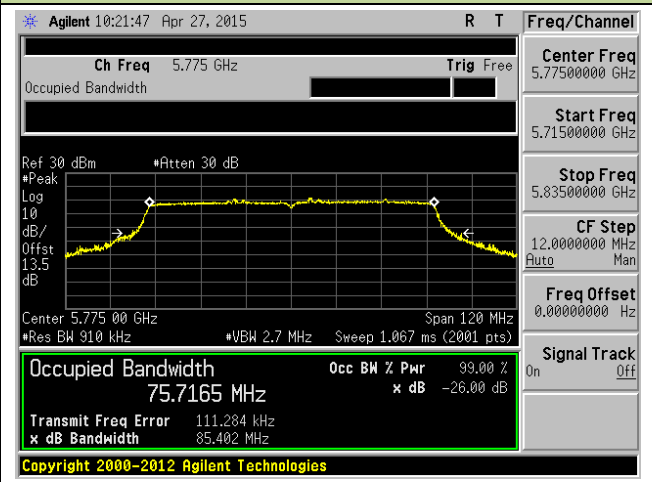

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v01 – Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

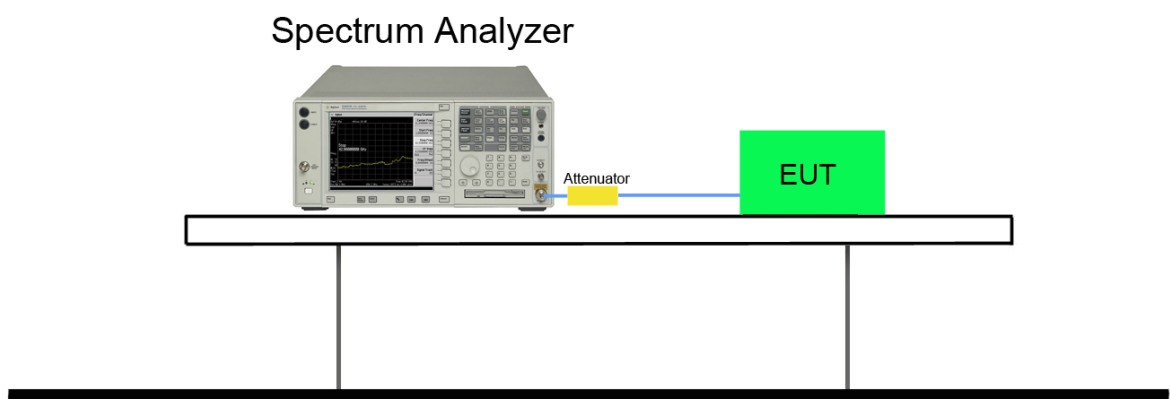

7.3.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0						
802.11a	6	149	5745	16.37	≥ 0.5	Pass
802.11a	6	157	5785	16.36	≥ 0.5	Pass
802.11a	6	165	5825	16.35	≥ 0.5	Pass
802.11n-HT20	13	149	5745	17.59	≥ 0.5	Pass
802.11n-HT20	13	157	5785	17.56	≥ 0.5	Pass
802.11n-HT20	13	165	5825	17.59	≥ 0.5	Pass
802.11ac-VHT20	13	149	5745	17.60	≥ 0.5	Pass
802.11ac-VHT20	13	157	5785	17.56	≥ 0.5	Pass
802.11ac-VHT20	13	165	5825	17.57	≥ 0.5	Pass
802.11n-HT40	27	151	5755	36.06	≥ 0.5	Pass
802.11n-HT40	27	159	5795	36.04	≥ 0.5	Pass
802.11ac-VHT40	27	151	5755	36.11	≥ 0.5	Pass
802.11ac-VHT40	27	159	5795	36.30	≥ 0.5	Pass
802.11ac-VHT80	27	155	5775	75.58	≥ 0.5	Pass
Ant 1						
802.11a	6	149	5745	16.42	≥ 0.5	Pass
802.11a	6	157	5785	16.37	≥ 0.5	Pass
802.11a	6	165	5825	16.37	≥ 0.5	Pass
802.11n-HT20	13	149	5745	17.61	≥ 0.5	Pass
802.11n-HT20	13	157	5785	17.59	≥ 0.5	Pass
802.11n-HT20	13	165	5825	17.58	≥ 0.5	Pass
802.11ac-VHT20	13	149	5745	17.63	≥ 0.5	Pass
802.11ac-VHT20	13	157	5785	17.59	≥ 0.5	Pass
802.11ac-VHT20	13	165	5825	17.58	≥ 0.5	Pass
802.11n-HT40	27	151	5755	36.35	≥ 0.5	Pass
802.11n-HT40	27	159	5795	36.29	≥ 0.5	Pass
802.11ac-VHT40	27	151	5755	36.36	≥ 0.5	Pass
802.11ac-VHT40	27	159	5795	36.30	≥ 0.5	Pass
802.11ac-VHT80	27	155	5775	74.12	≥ 0.5	Pass