


Site: AC1	Time: 2015/05/03 - 12:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0+1	

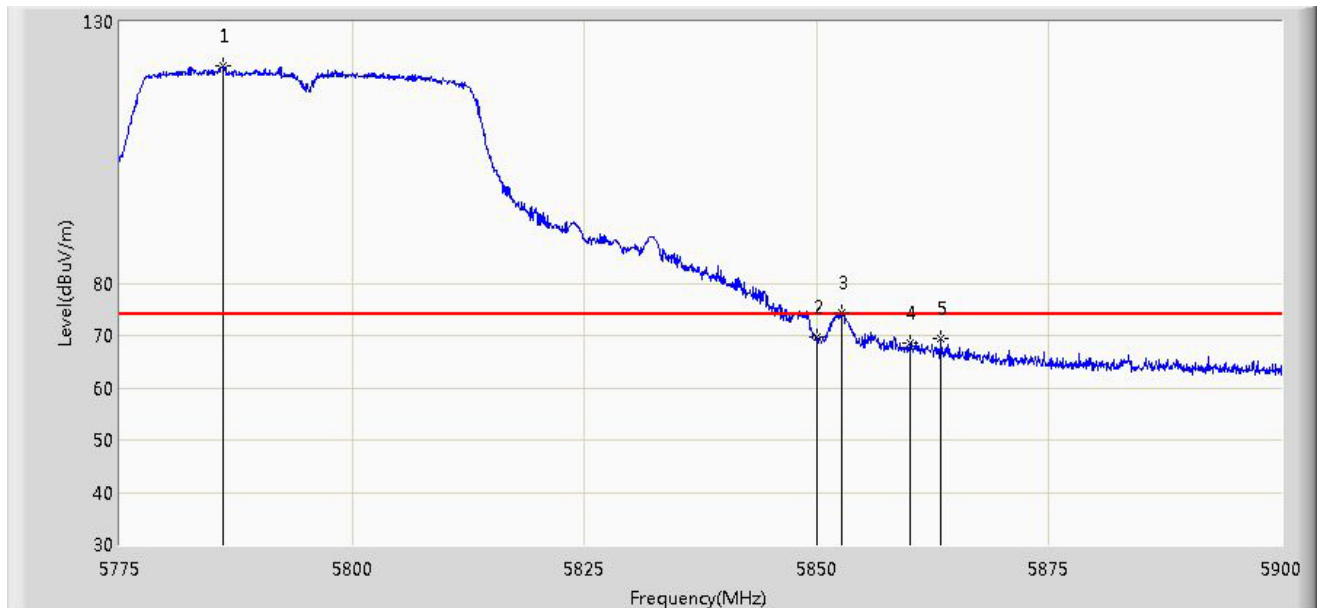


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.062	121.474	117.536	N/A	N/A	3.937	PK
2			5850.000	69.622	65.565	-8.578	78.200	4.058	PK
3			5852.625	74.236	70.177	-3.964	78.200	4.058	PK
4			5860.000	68.470	64.407	-5.530	74.000	4.064	PK
5			5863.375	69.417	65.348	-4.583	74.000	4.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 12:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0+1	

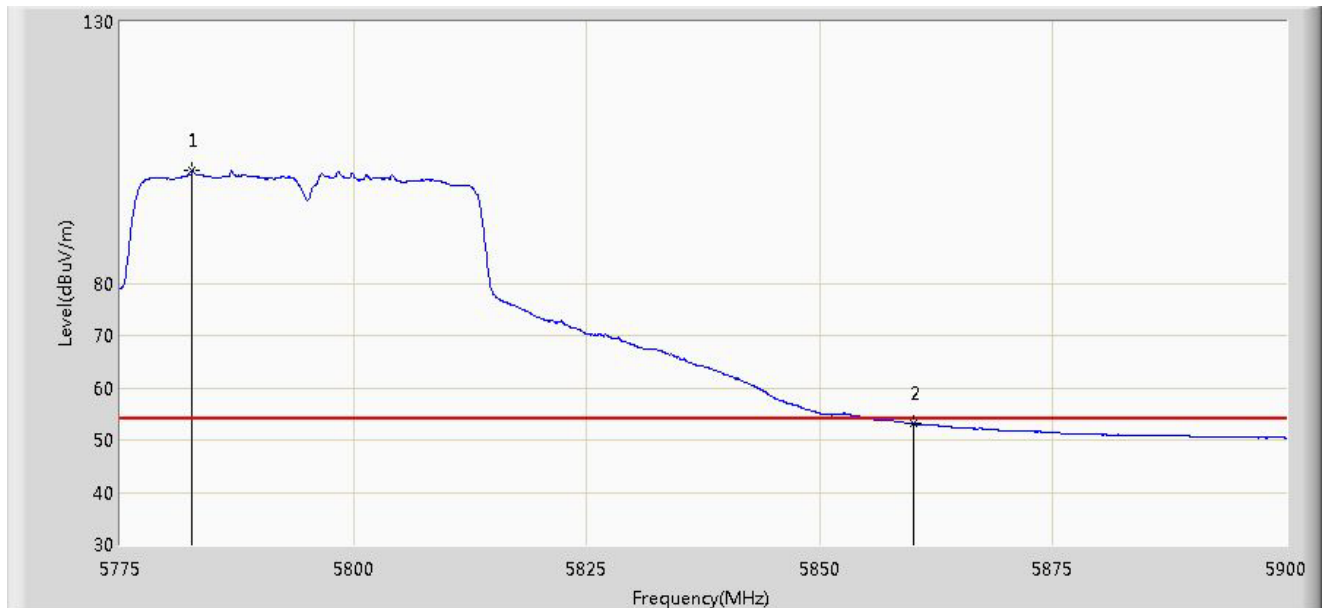


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.750	101.608	97.676	N/A	N/A	3.933	AV
2			5860.000	53.119	49.056	-0.881	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0+1	

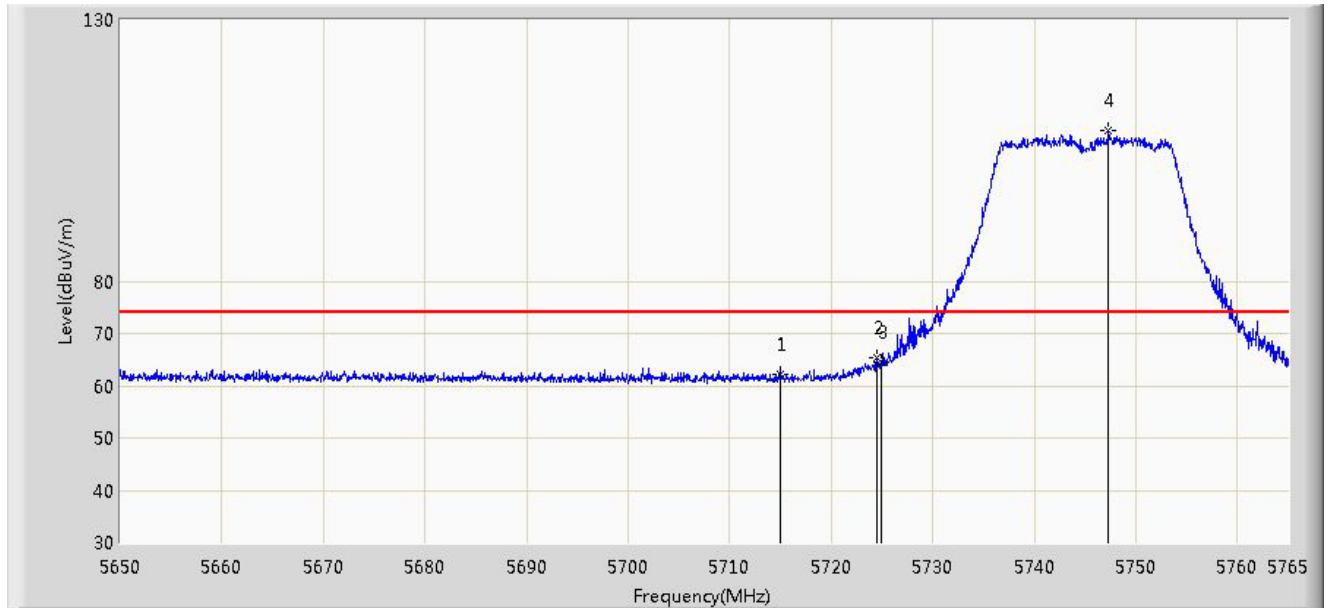


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.241	58.480	-11.759	74.000	3.761	PK
2			5724.520	65.430	61.641	-12.770	78.200	3.790	PK
3			5725.000	64.381	60.590	-13.819	78.200	3.791	PK
4		*	5747.290	108.956	105.095	N/A	N/A	3.861	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0+1	

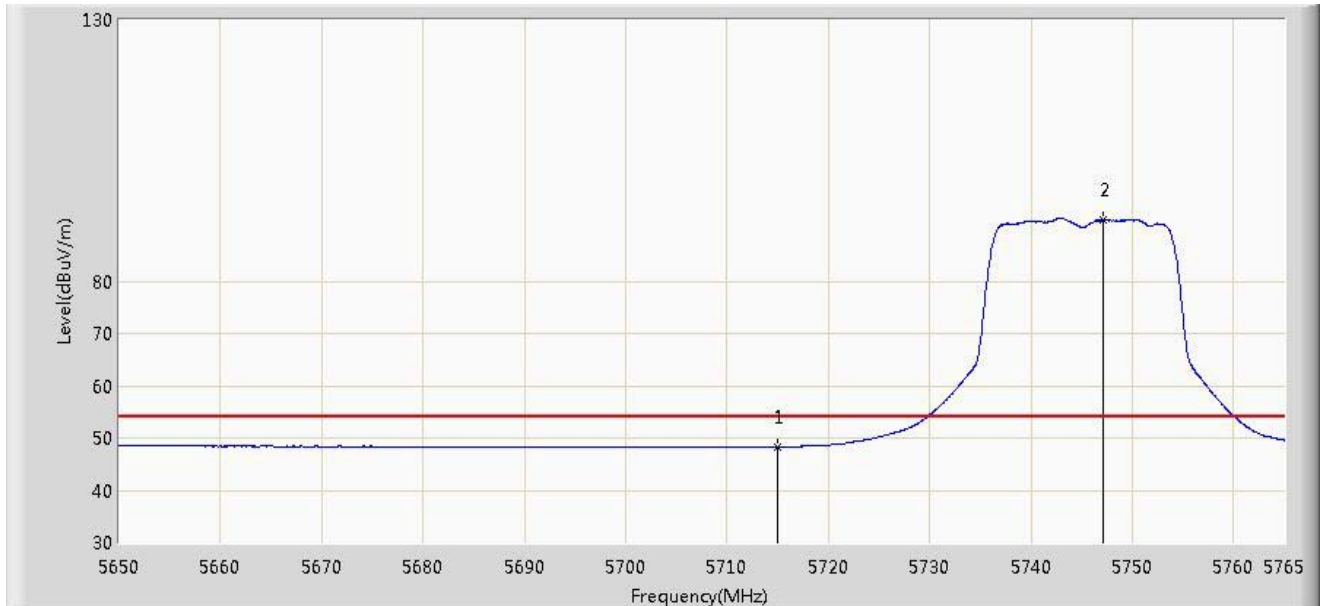


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.352	44.591	-5.648	54.000	3.761	AV
2		*	5747.060	91.651	87.791	N/A	N/A	3.860	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 13:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0+1	

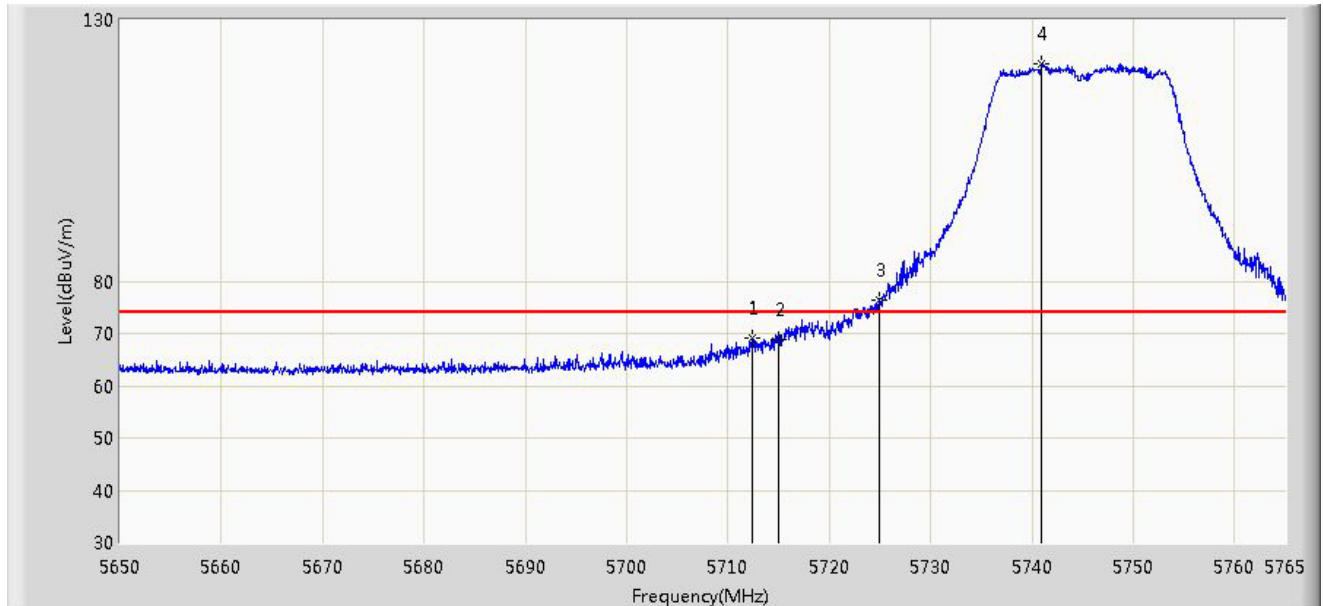


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.388	69.066	65.313	-4.934	74.000	3.753	PK
2			5715.000	68.977	65.216	-5.023	74.000	3.761	PK
3			5725.000	76.468	72.677	-1.732	78.200	3.791	PK
4		*	5740.965	121.682	117.842	N/A	N/A	3.839	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0+1	

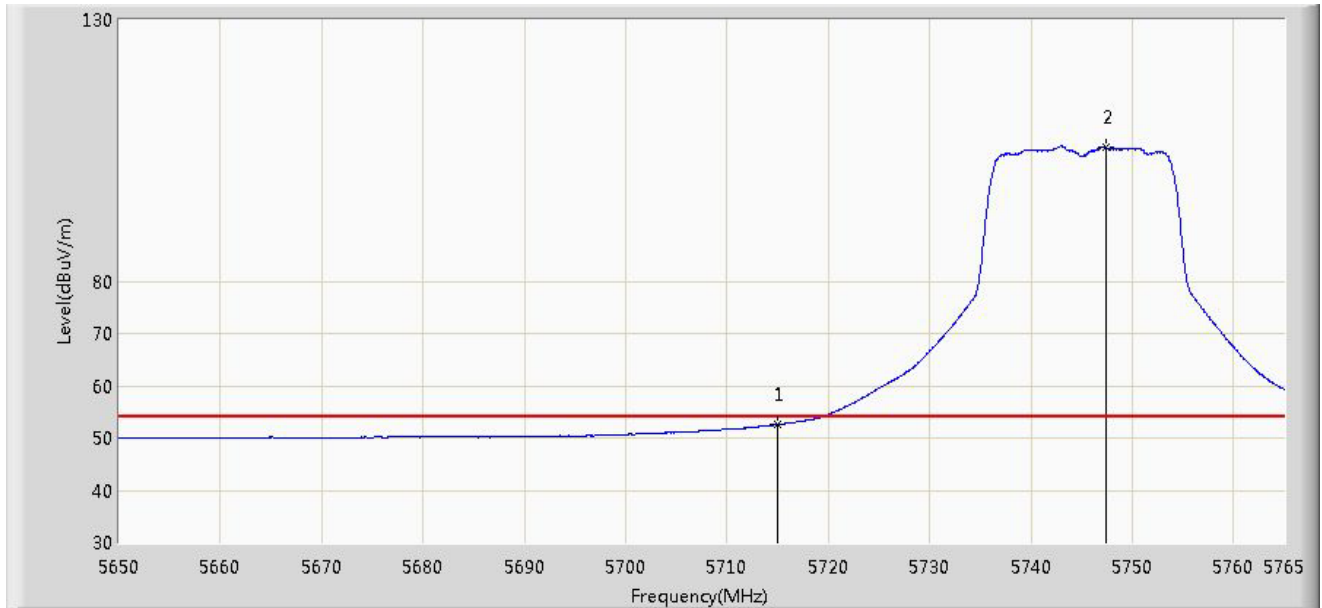


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.595	48.834	-1.405	54.000	3.761	AV
2		*	5747.405	105.678	101.816	N/A	N/A	3.861	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz Ant 0+1	

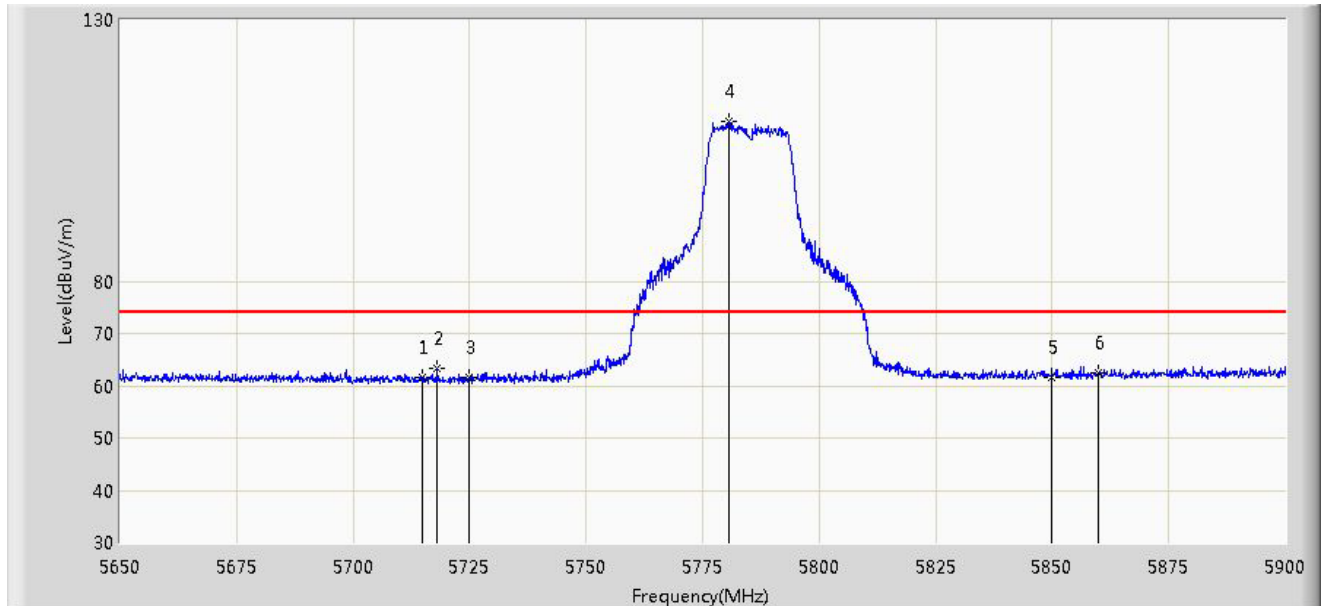


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	61.640	57.879	-12.360	74.000	3.761	PK
2			5718.125	63.252	59.482	-14.948	78.200	3.770	PK
3			5725.000	61.538	57.747	-16.662	78.200	3.791	PK
4		*	5780.500	110.495	106.567	N/A	N/A	3.928	PK
5			5850.000	61.656	57.599	-16.544	78.200	4.058	PK
6			5860.000	62.448	58.385	-11.552	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz Ant 0+1	

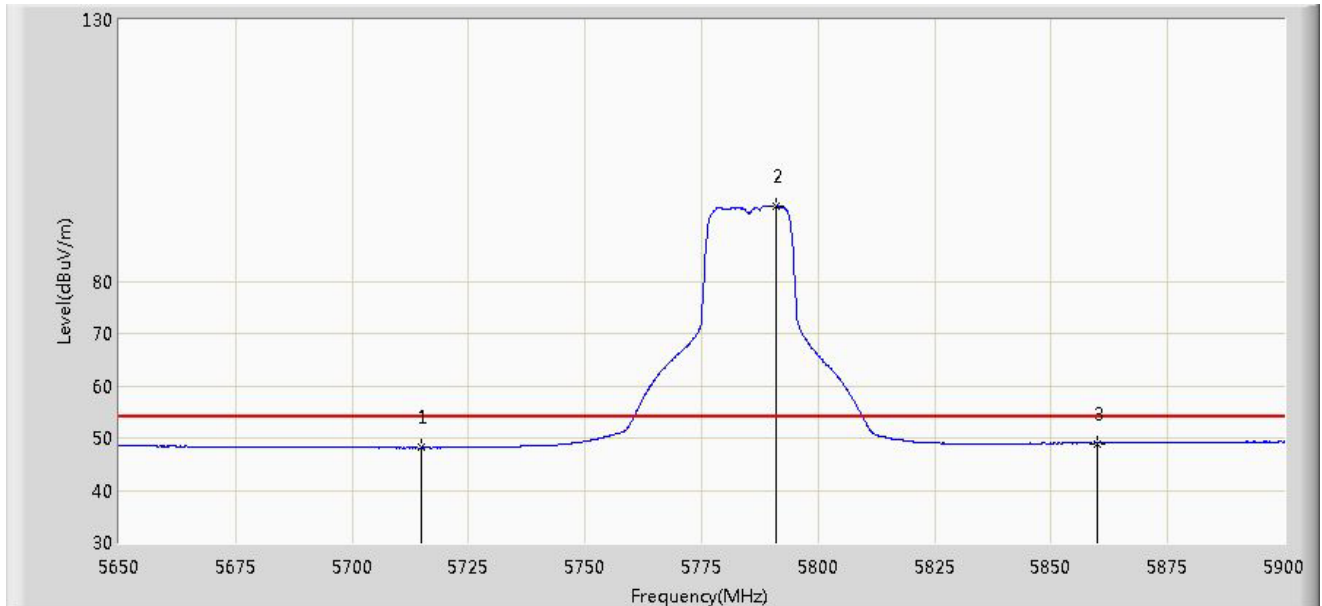


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.134	44.373	-5.866	54.000	3.761	AV
2		*	5791.000	94.442	90.495	N/A	N/A	3.947	AV
3			5860.000	48.985	44.922	-5.015	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz Ant 0+1	

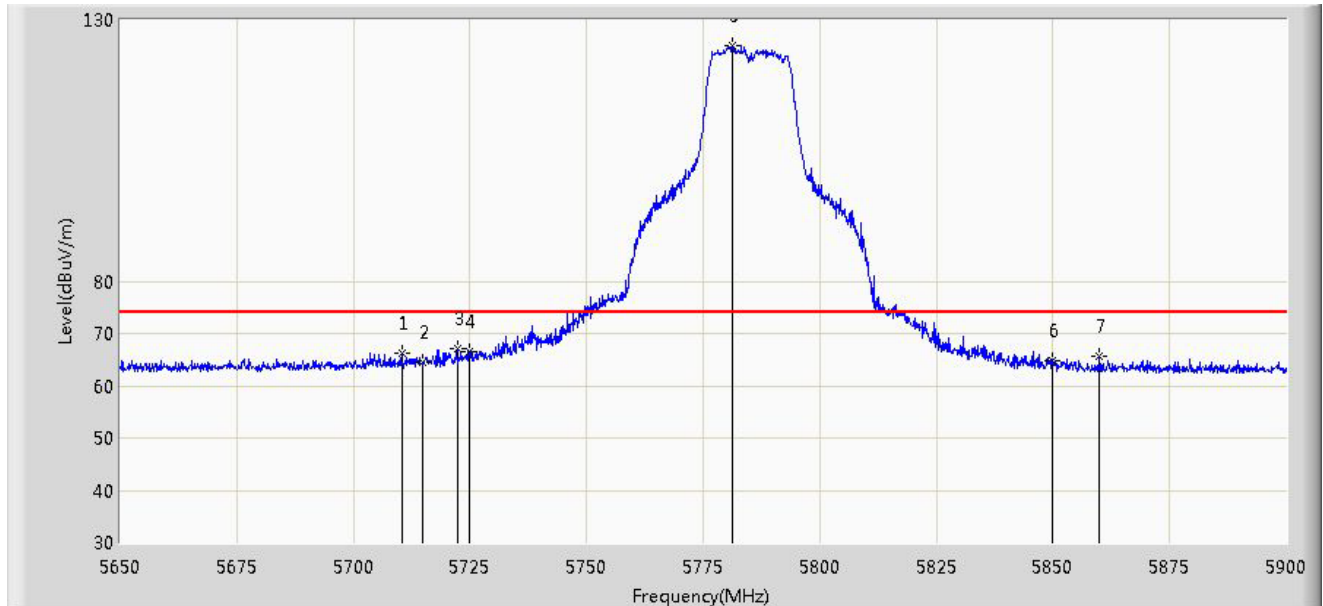


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.375	66.266	62.519	-7.734	74.000	3.747	PK
2			5715.000	64.447	60.686	-9.553	74.000	3.761	PK
3			5722.375	67.169	63.386	-11.031	78.200	3.783	PK
4			5725.000	66.451	62.660	-11.749	78.200	3.791	PK
5		*	5781.125	125.010	121.081	N/A	N/A	3.928	PK
6			5850.000	64.792	60.735	-13.408	78.200	4.058	PK
7			5860.000	65.582	61.519	-8.418	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz Ant 0+1	

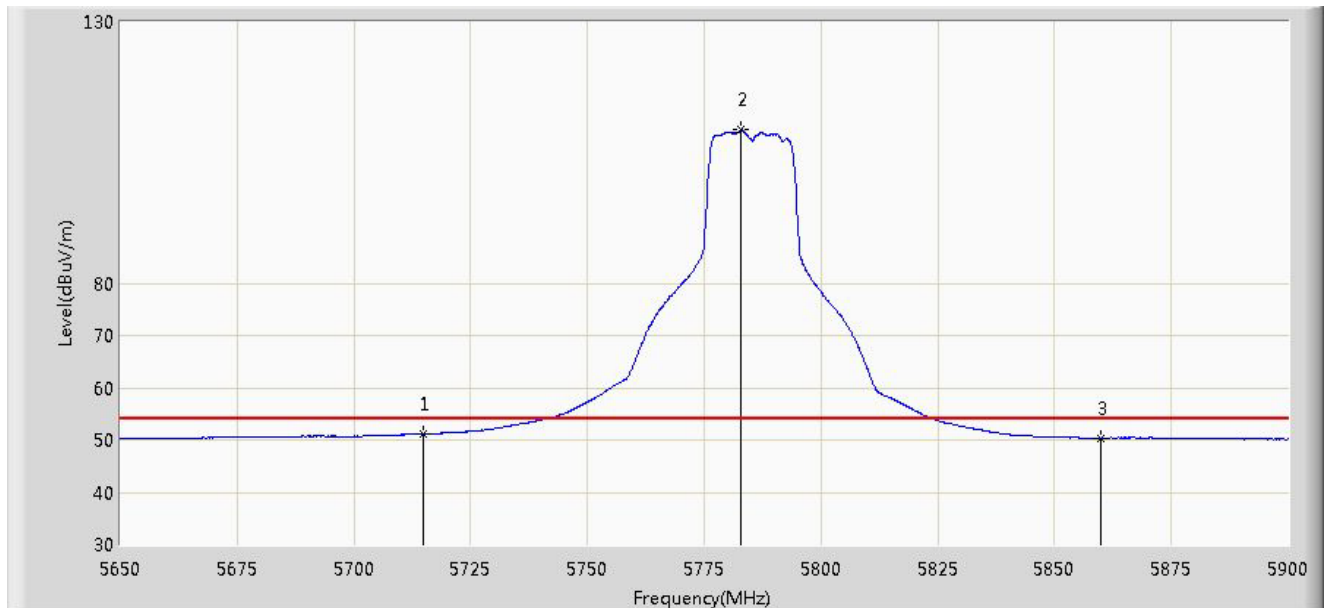


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.168	47.407	-2.832	54.000	3.761	AV
2	X	*	5782.875	109.413	105.481	N/A	N/A	3.932	AV
3			5860.000	50.423	46.360	-3.577	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0+1	

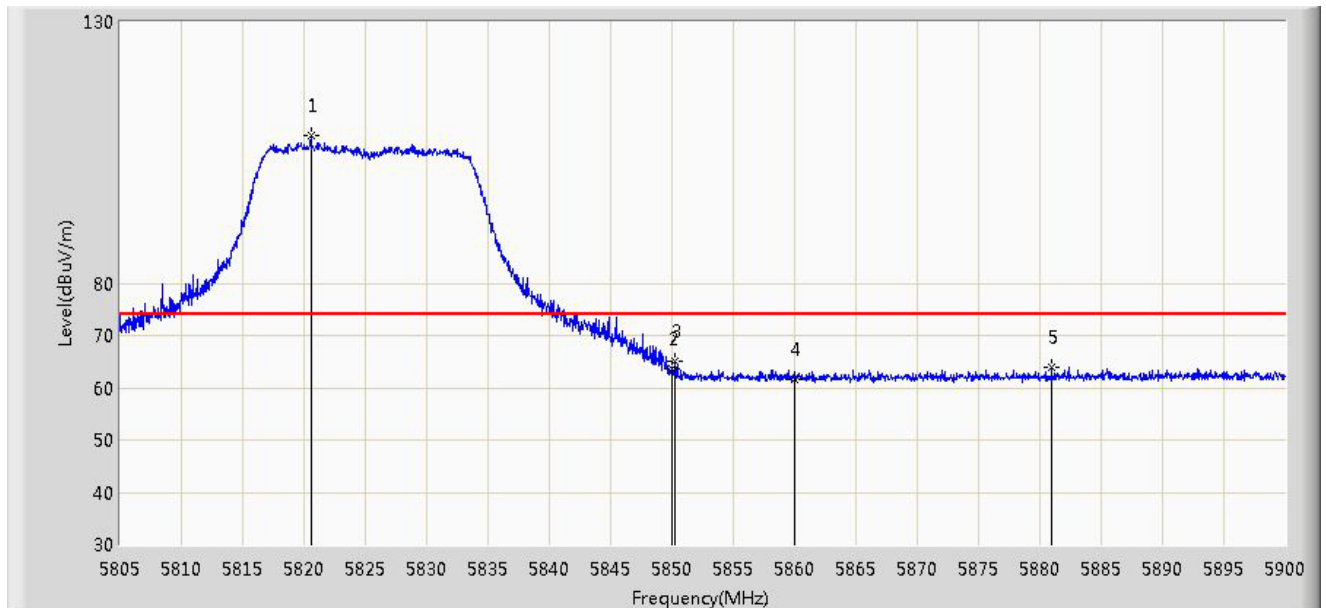


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.580	108.237	104.242	N/A	N/A	3.995	PK
2			5850.000	63.526	59.469	-14.674	78.200	4.058	PK
3			5850.268	65.179	61.122	-13.021	78.200	4.057	PK
4			5860.000	61.635	57.572	-12.365	74.000	4.064	PK
5			5880.953	63.901	59.778	-10.099	74.000	4.122	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0+1	

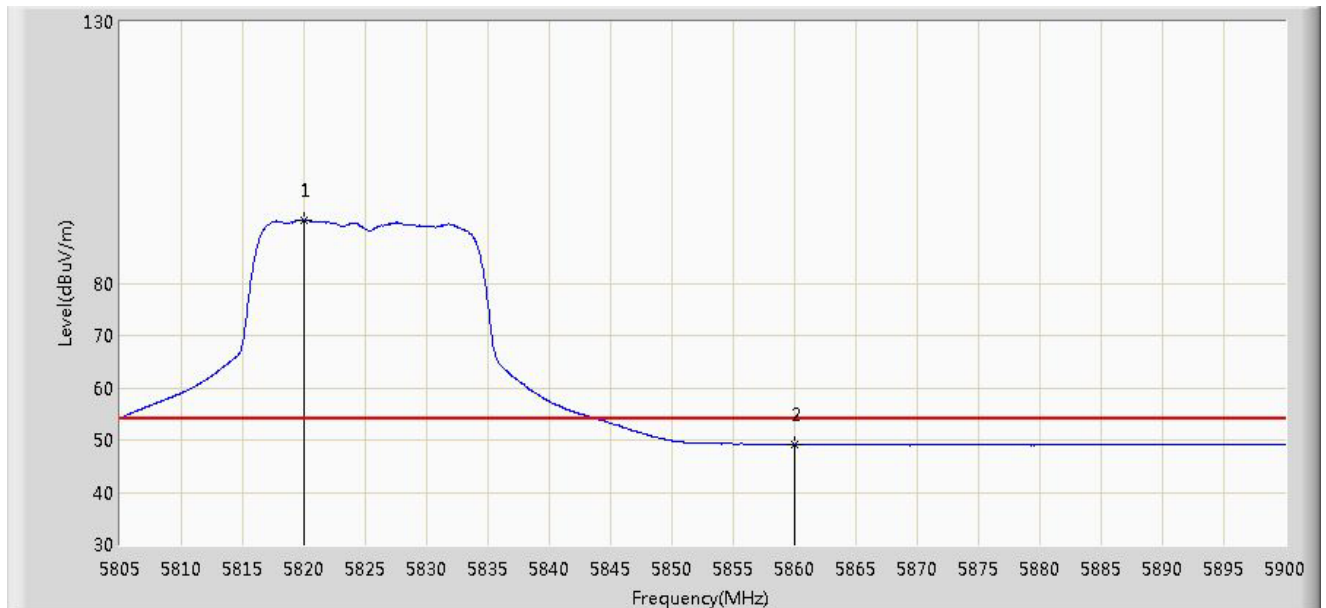


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.010	92.062	88.068	N/A	N/A	3.994	AV
2			5860.000	49.113	45.050	-4.887	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0+1	

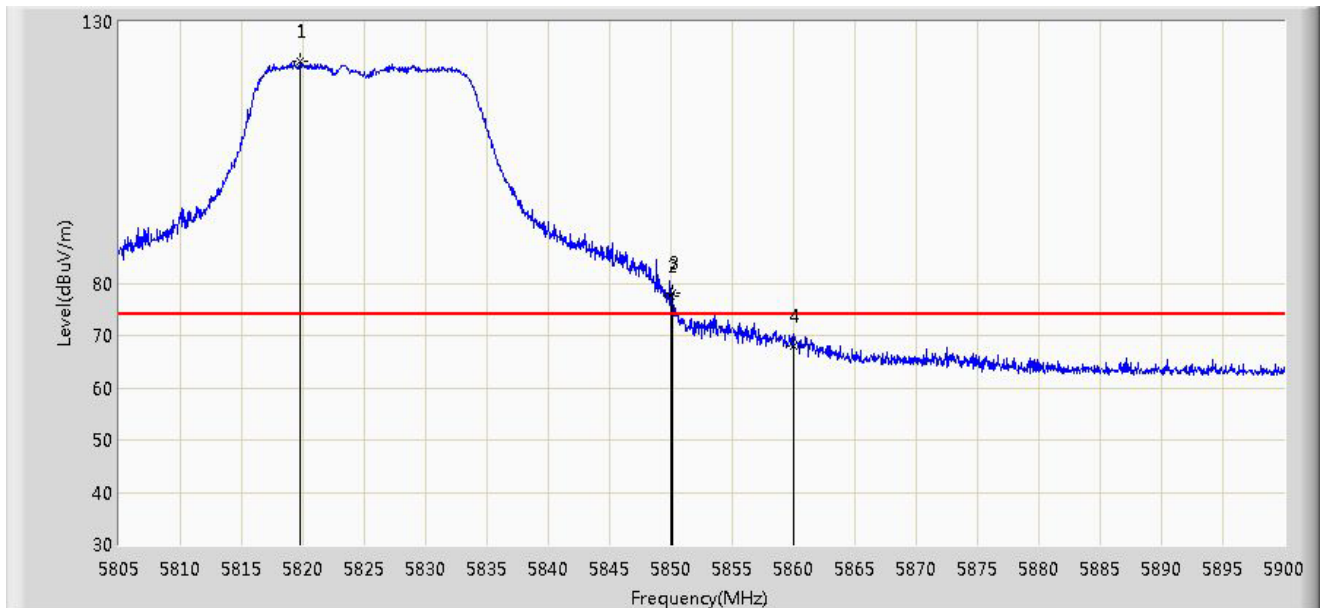


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.725	122.583	118.590	N/A	N/A	3.994	PK
2			5850.000	77.433	73.376	-0.767	78.200	4.058	PK
3			5850.172	78.007	73.950	-0.193	78.200	4.058	PK
4			5860.000	68.090	64.027	-5.910	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 14:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0+1	

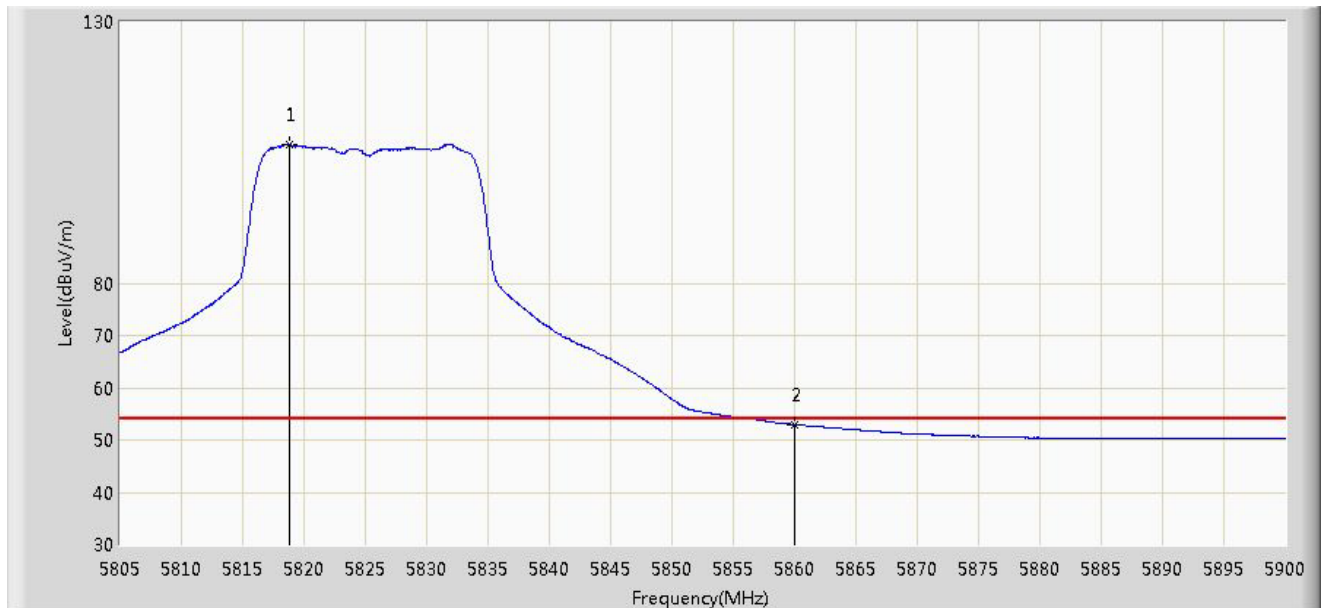


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.822	106.490	102.499	N/A	N/A	3.991	AV
2			5860.000	52.911	48.848	-1.089	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0+1	

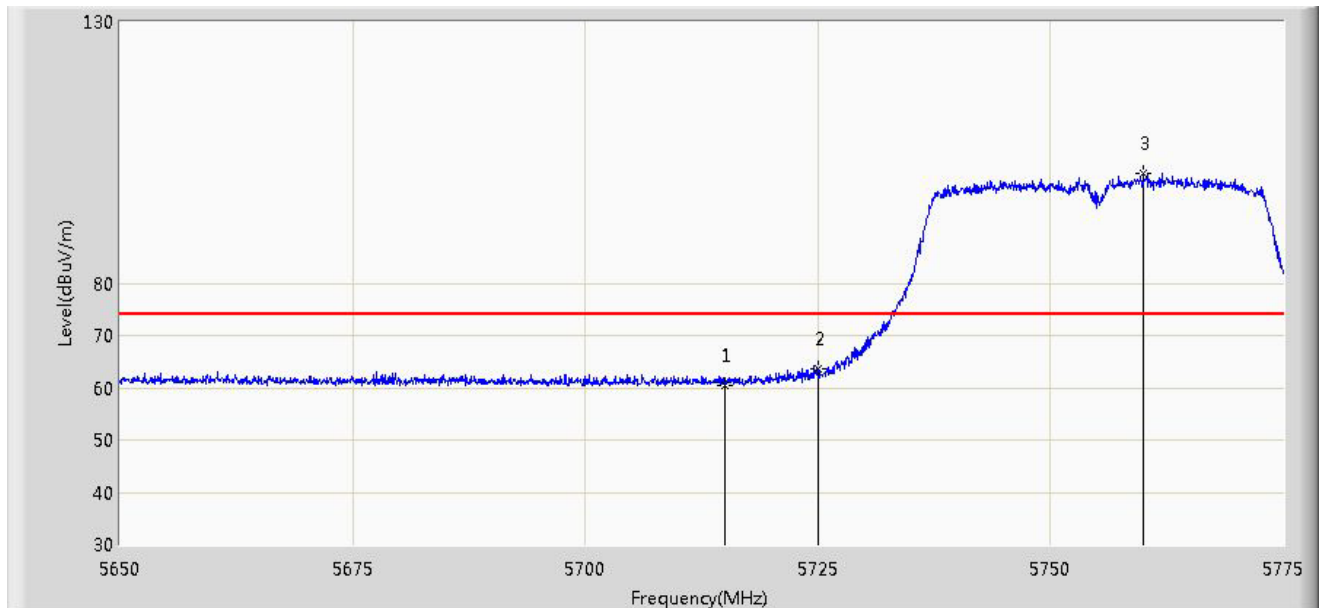


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	60.579	56.818	-13.421	74.000	3.761	PK
2			5725.000	63.530	59.739	-14.670	78.200	3.791	PK
3		*	5759.937	101.012	97.106	N/A	N/A	3.906	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0+1	

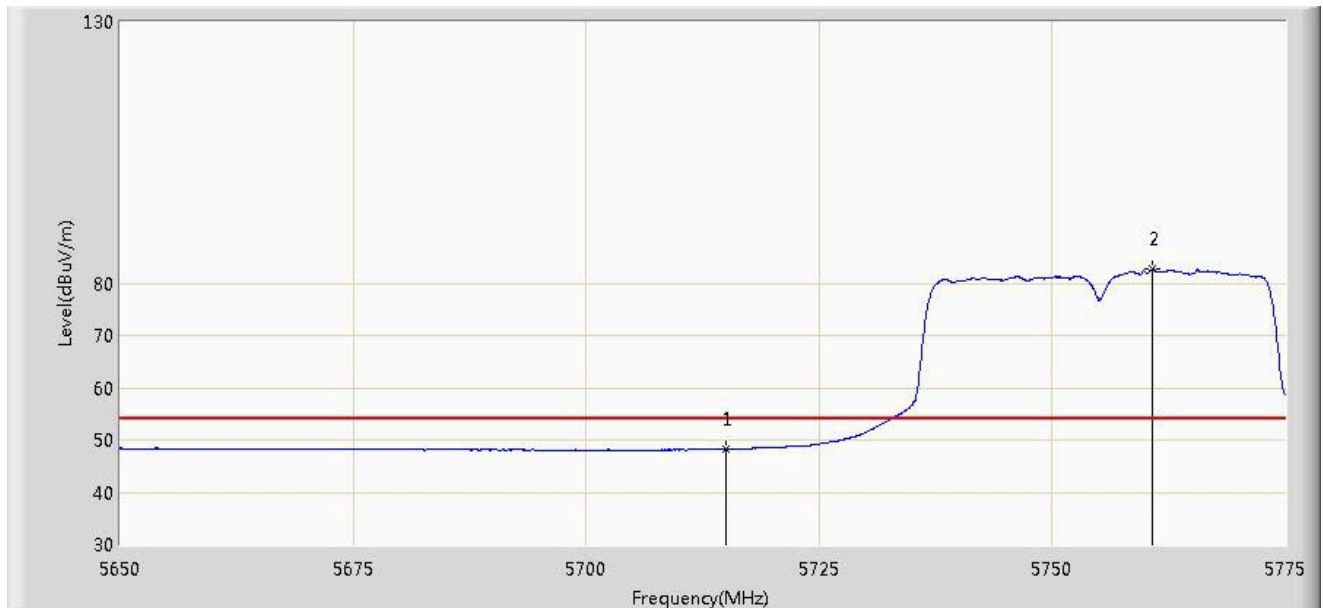


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.198	44.437	-5.802	54.000	3.761	AV
2		*	5760.750	82.687	78.780	N/A	N/A	3.907	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0+1	

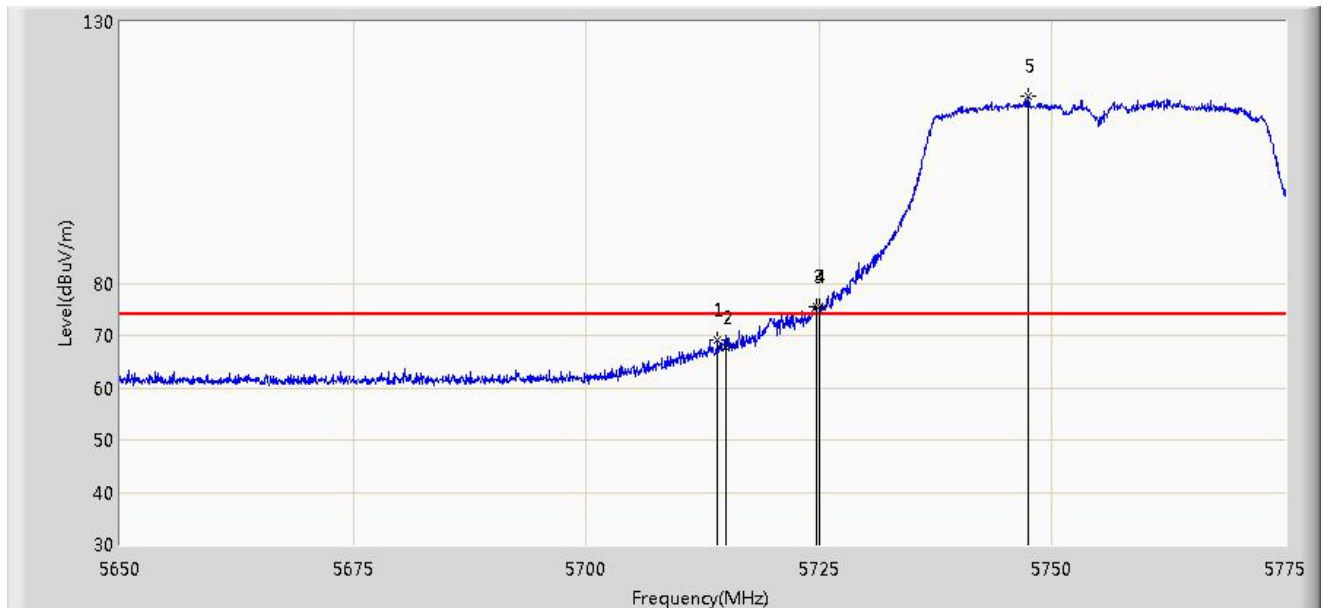


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.125	69.032	65.274	-4.968	74.000	3.758	PK
2			5715.000	67.608	63.847	-6.392	74.000	3.761	PK
3			5724.687	75.589	71.799	-2.611	78.200	3.790	PK
4			5725.000	75.506	71.715	-2.694	78.200	3.791	PK
5		*	5747.375	115.679	111.817	N/A	N/A	3.861	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0+1	

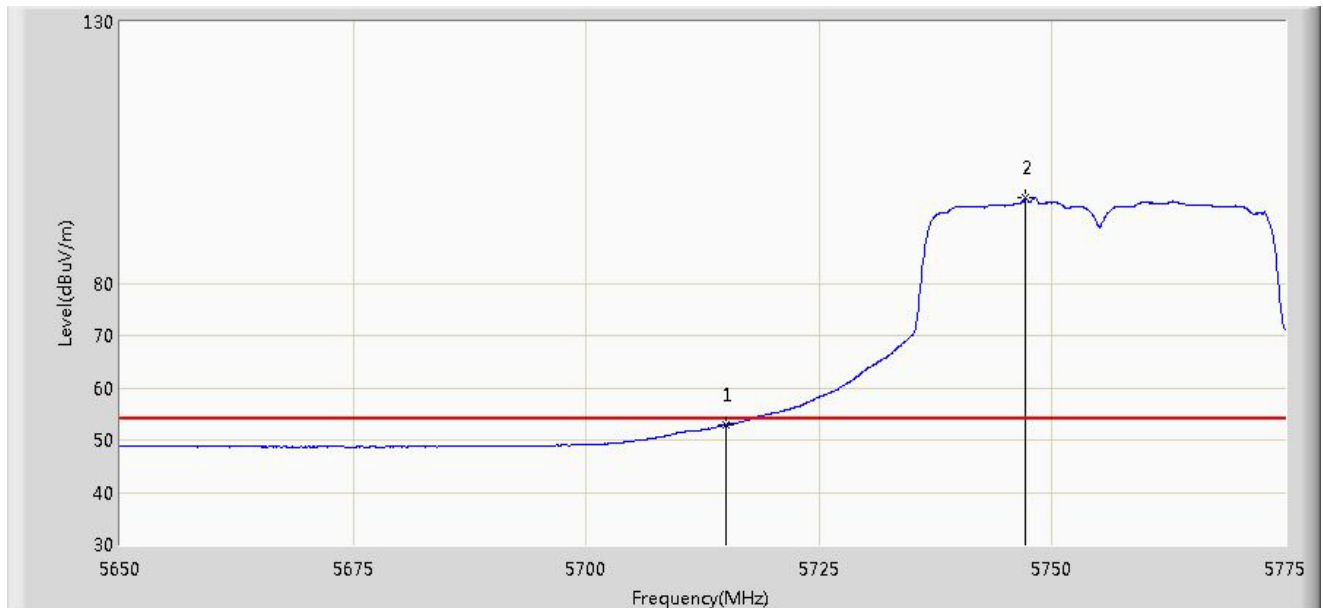


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.876	49.115	-1.124	54.000	3.761	AV
2		*	5747.125	96.353	92.492	N/A	N/A	3.861	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0+1	

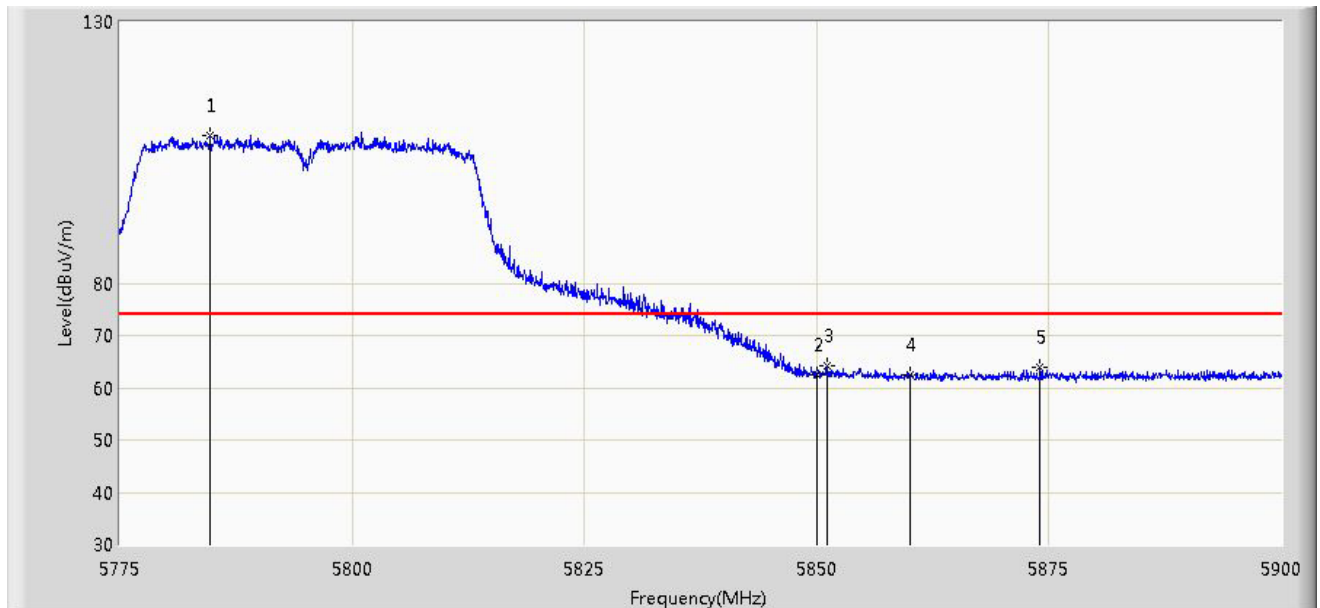


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.750	108.165	104.230	N/A	N/A	3.935	PK
2			5850.000	62.491	58.434	-15.709	78.200	4.058	PK
3			5851.062	64.325	60.267	-13.875	78.200	4.057	PK
4			5860.000	62.373	58.310	-11.627	74.000	4.064	PK
5			5874.062	63.937	59.835	-10.063	74.000	4.102	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0+1	

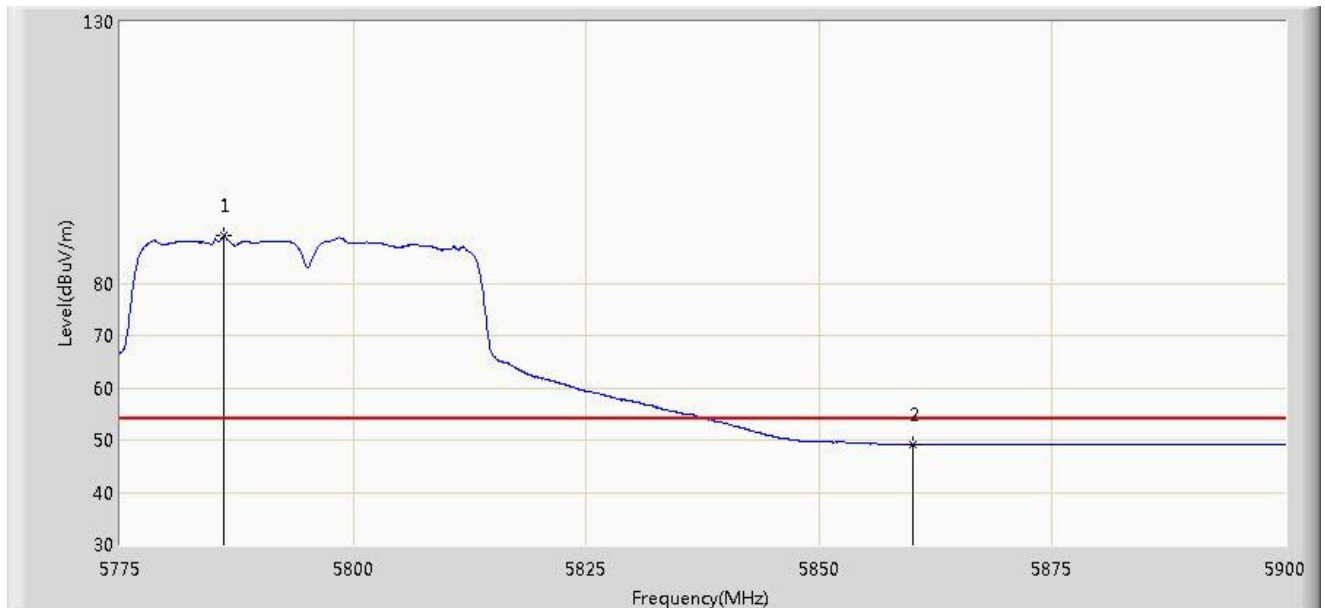


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.187	89.084	85.146	N/A	N/A	3.938	AV
2			5860.000	49.140	45.077	-4.860	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0+1	

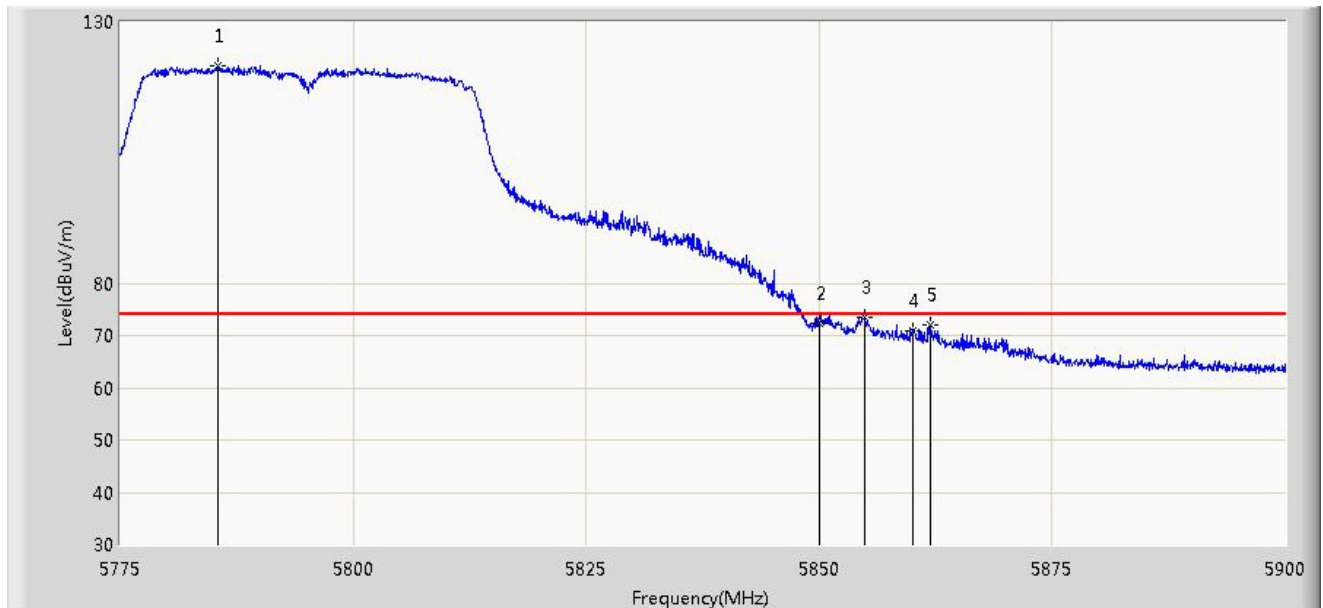


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.500	121.471	117.534	N/A	N/A	3.936	PK
2			5850.000	72.240	68.183	-5.960	78.200	4.058	PK
3			5854.875	73.534	69.474	-4.666	78.200	4.060	PK
4			5860.000	70.834	66.771	-3.166	74.000	4.064	PK
5			5862.000	72.146	68.081	-1.854	74.000	4.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 15:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0+1	

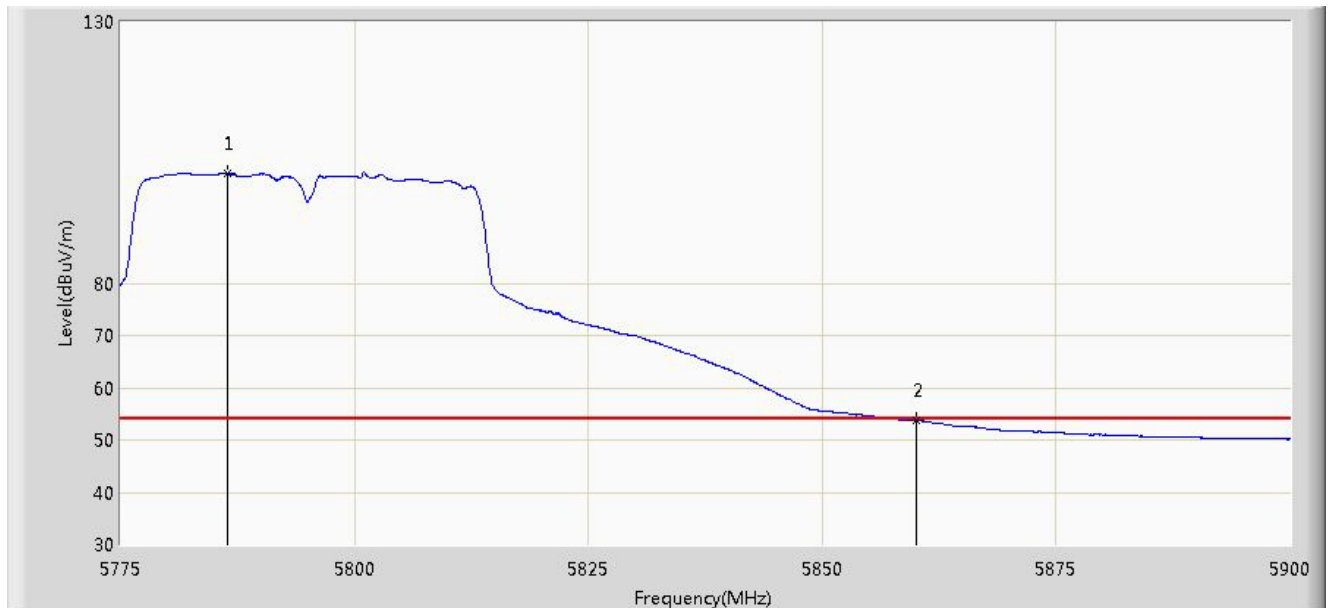


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.375	101.041	97.103	N/A	N/A	3.939	AV
2			5860.000	53.848	49.785	-0.152	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0+1	

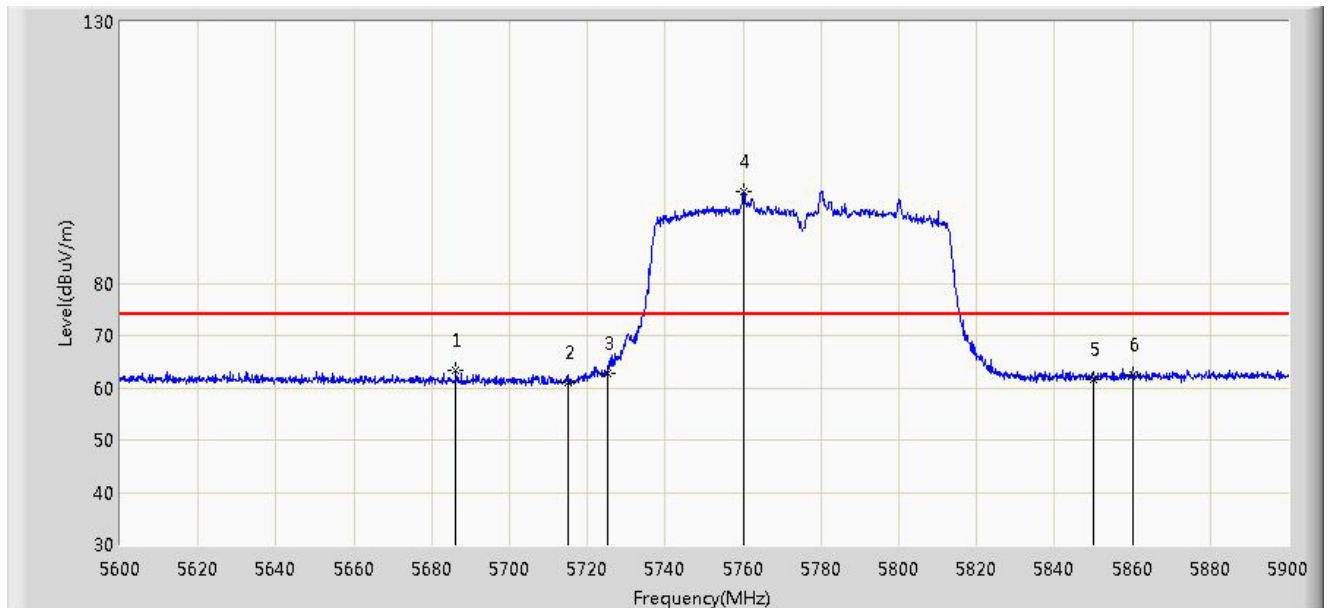


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5686.100	63.308	59.615	-10.692	74.000	3.693	PK
2			5715.000	61.123	57.362	-17.077	78.200	3.761	PK
3			5725.000	62.816	59.025	-15.384	78.200	3.791	PK
4		*	5760.200	97.514	93.608	N/A	N/A	3.907	PK
5			5850.000	61.738	57.681	-16.462	78.200	4.058	PK
6			5860.000	62.557	58.494	-11.443	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0+1	

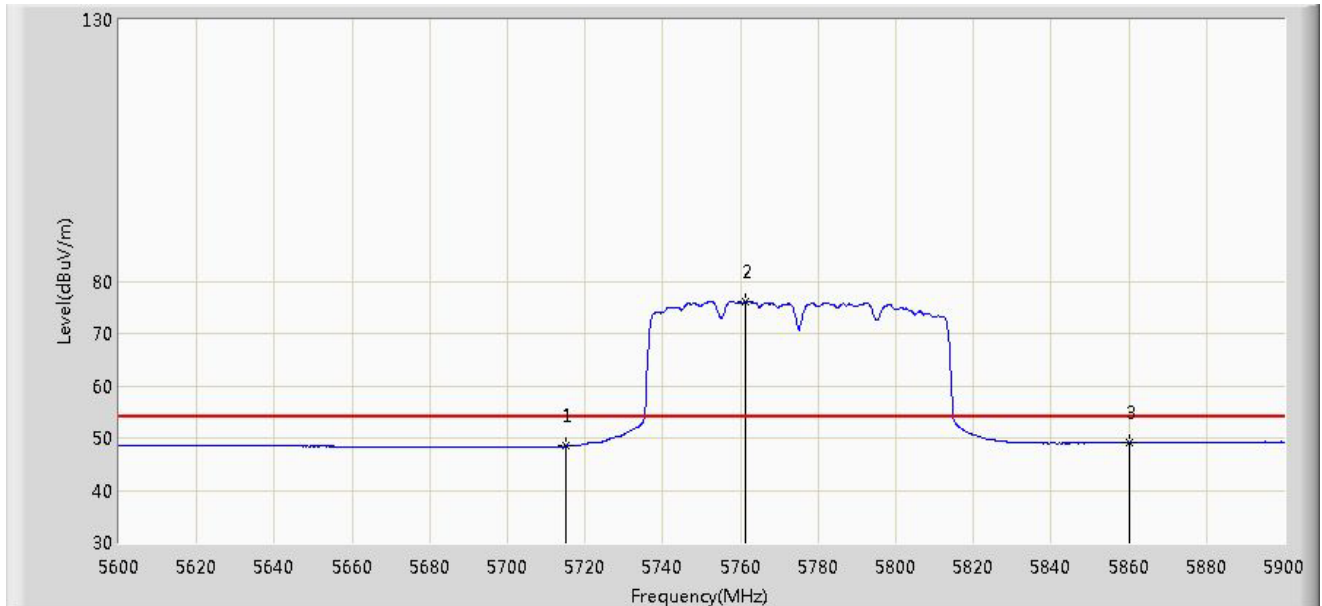


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.420	44.659	-5.580	54.000	3.761	AV
2		*	5761.250	76.148	72.241	N/A	N/A	3.908	AV
3			5860.000	49.020	44.957	-4.980	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0+1	

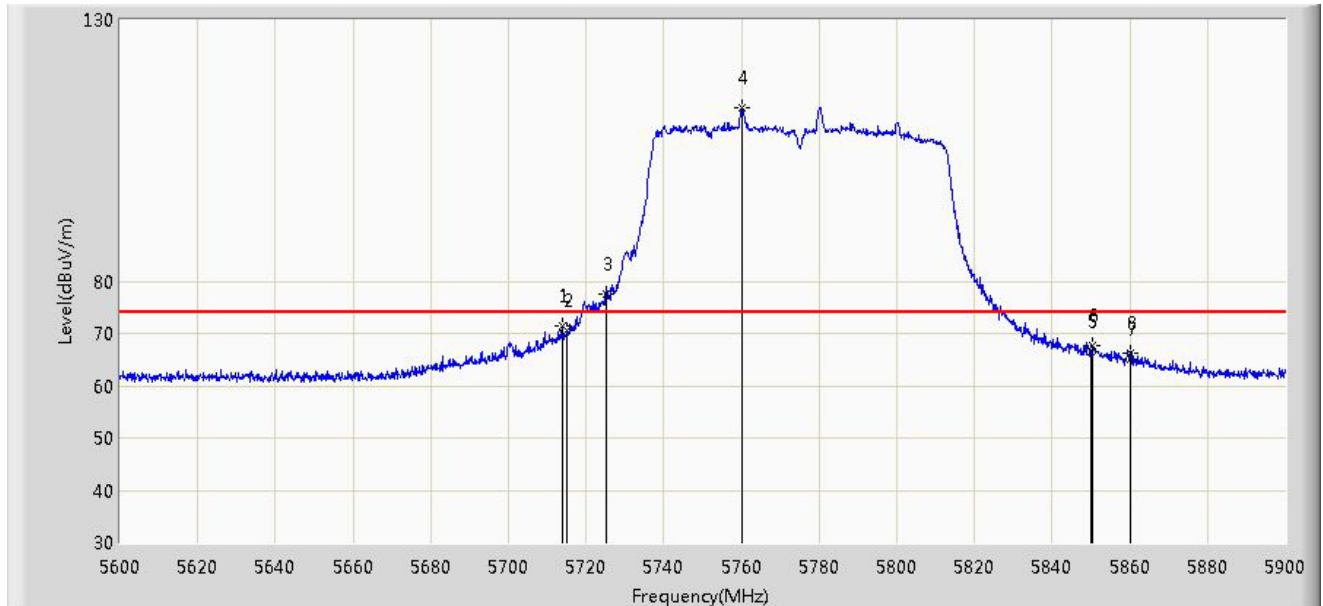


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.000	71.345	67.587	-2.655	74.000	3.758	PK
2			5715.000	70.444	66.683	-7.756	78.200	3.761	PK
3			5725.000	77.601	73.810	-0.599	78.200	3.791	PK
4		*	5760.200	113.098	109.192	N/A	N/A	3.907	PK
5			5850.000	66.495	62.438	-11.705	78.200	4.058	PK
6			5850.350	67.683	63.626	-10.517	78.200	4.057	PK
7			5860.000	65.141	61.078	-8.859	74.000	4.064	PK
8			5860.250	66.337	62.273	-7.663	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0+1	

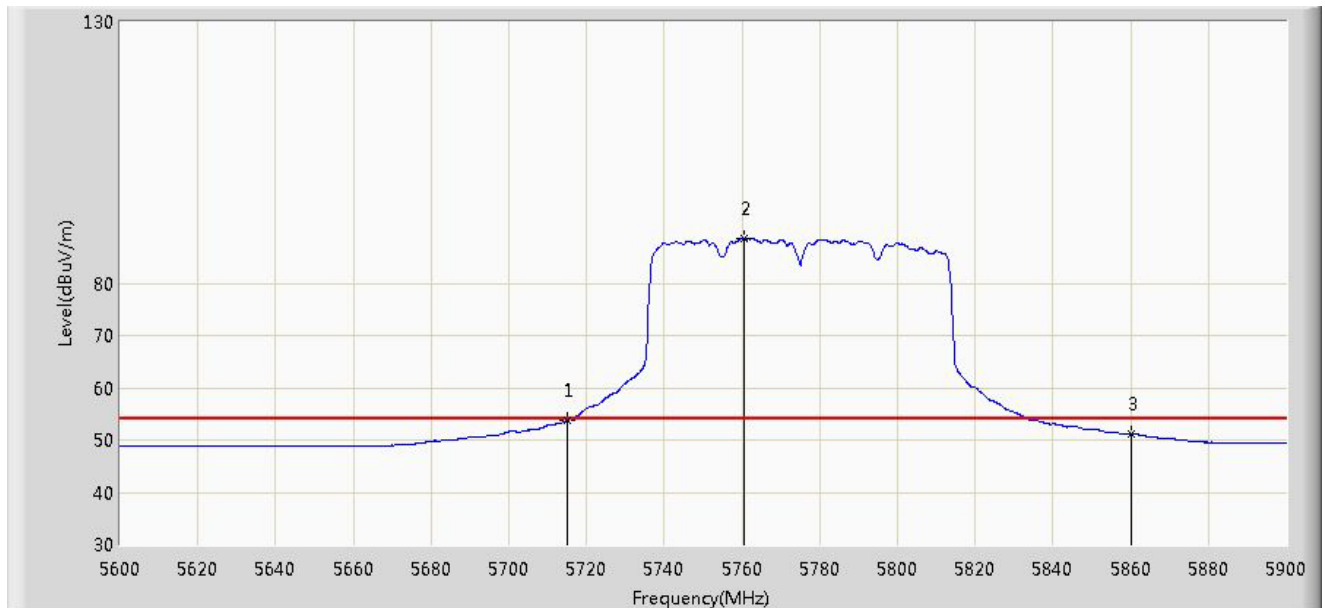


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.733	49.972	-0.267	54.000	3.761	AV
2		*	5760.350	88.558	84.652	N/A	N/A	3.906	AV
3			5860.000	51.094	47.031	-2.906	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test by Dipole Antenna – 2dBi

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

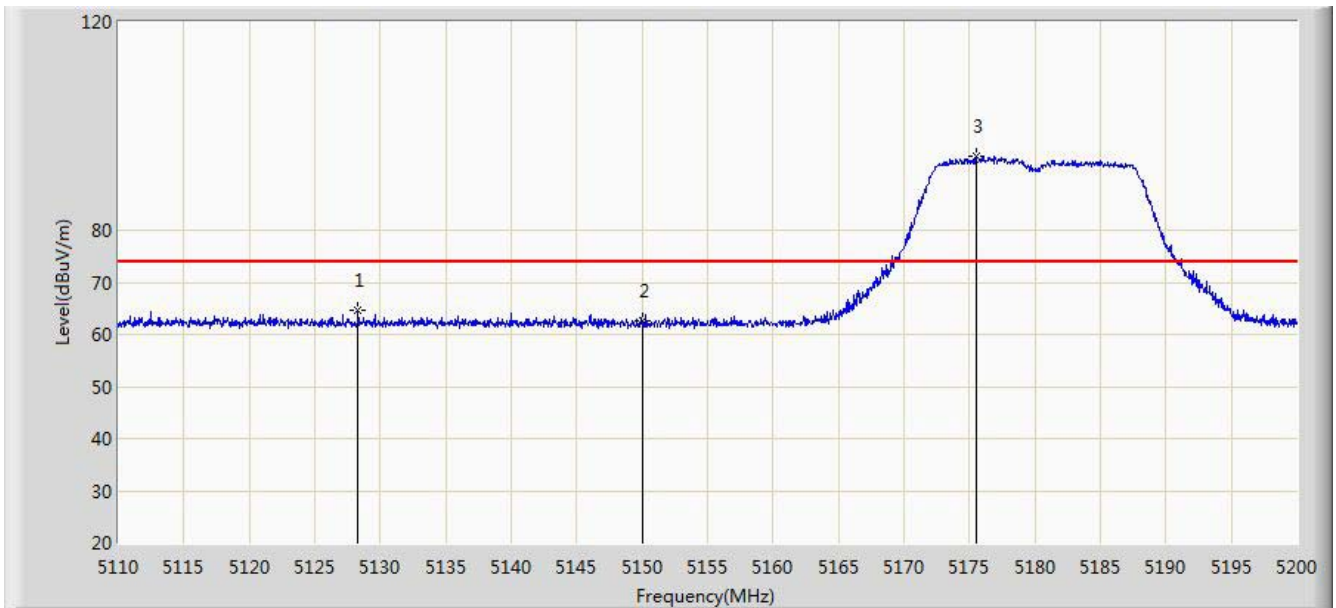


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.315	64.543	27.769	-9.457	74.000	36.774	PK
2			5150.000	62.503	25.751	-11.497	74.000	36.752	PK
3		*	5175.475	94.263	57.583	N/A	N/A	36.680	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

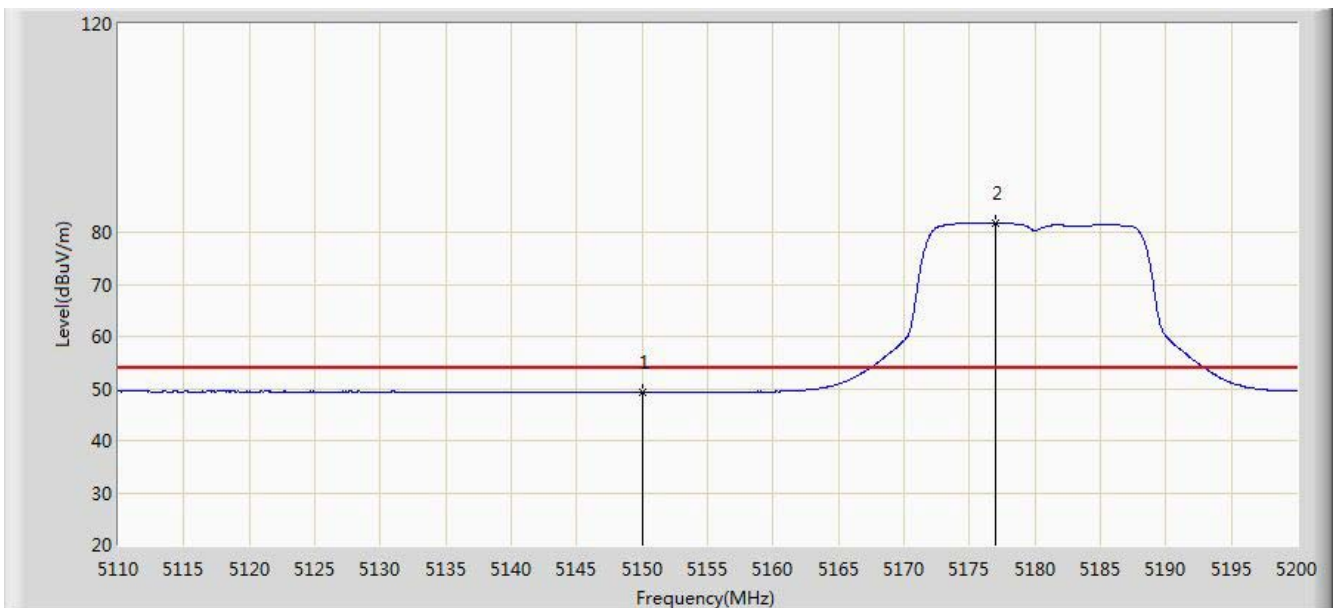


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.336	12.584	-4.664	54.000	36.752	AV
2		*	5177.005	81.685	45.010	N/A	N/A	36.675	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

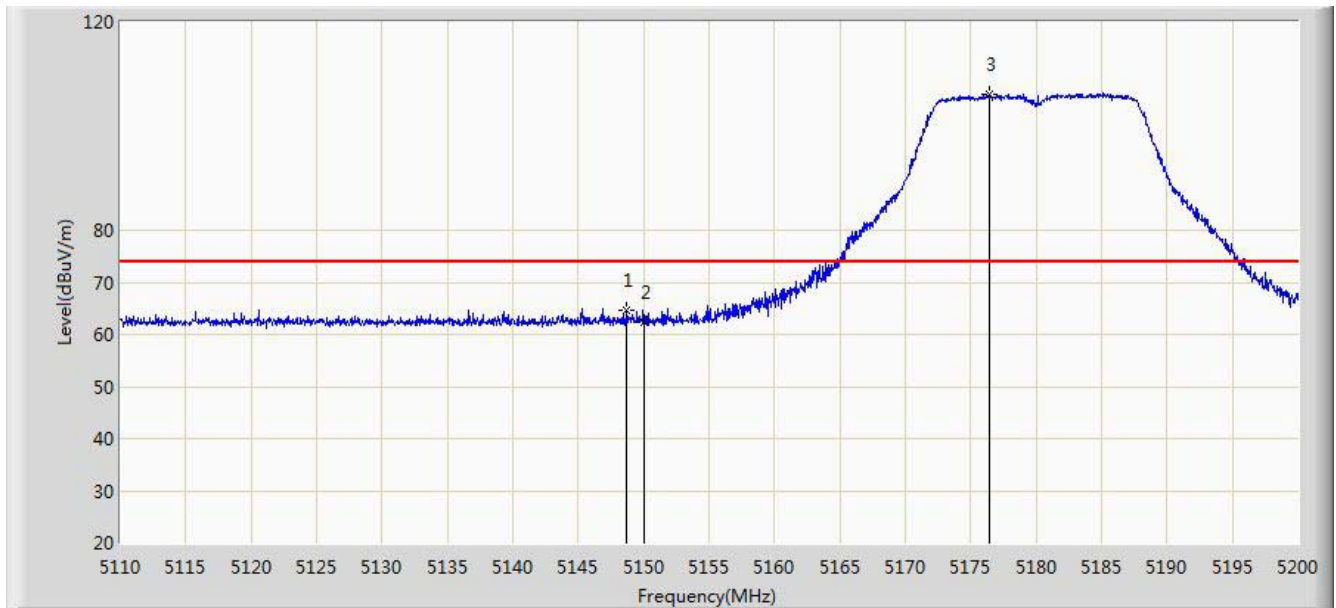


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.700	64.572	27.818	-9.428	74.000	36.754	PK
2			5150.000	62.438	25.686	-11.562	74.000	36.752	PK
3		*	5176.420	106.217	69.540	N/A	N/A	36.676	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

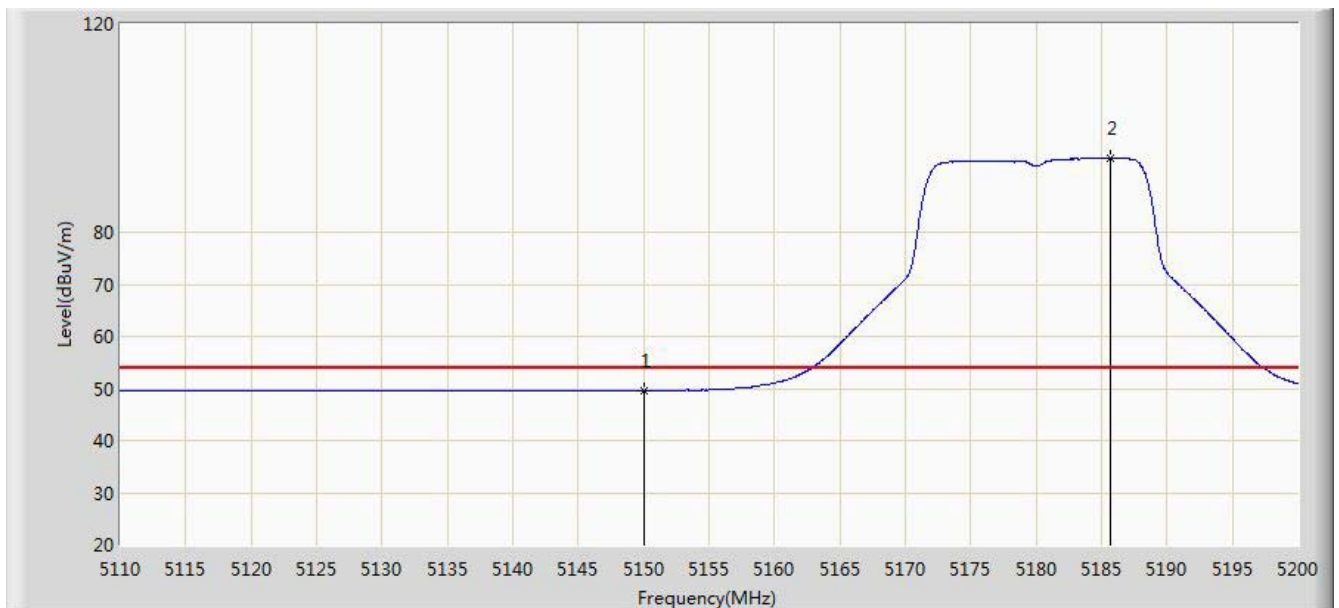


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.607	12.855	-4.393	54.000	36.752	AV
2		*	5185.690	94.232	57.583	N/A	N/A	36.649	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

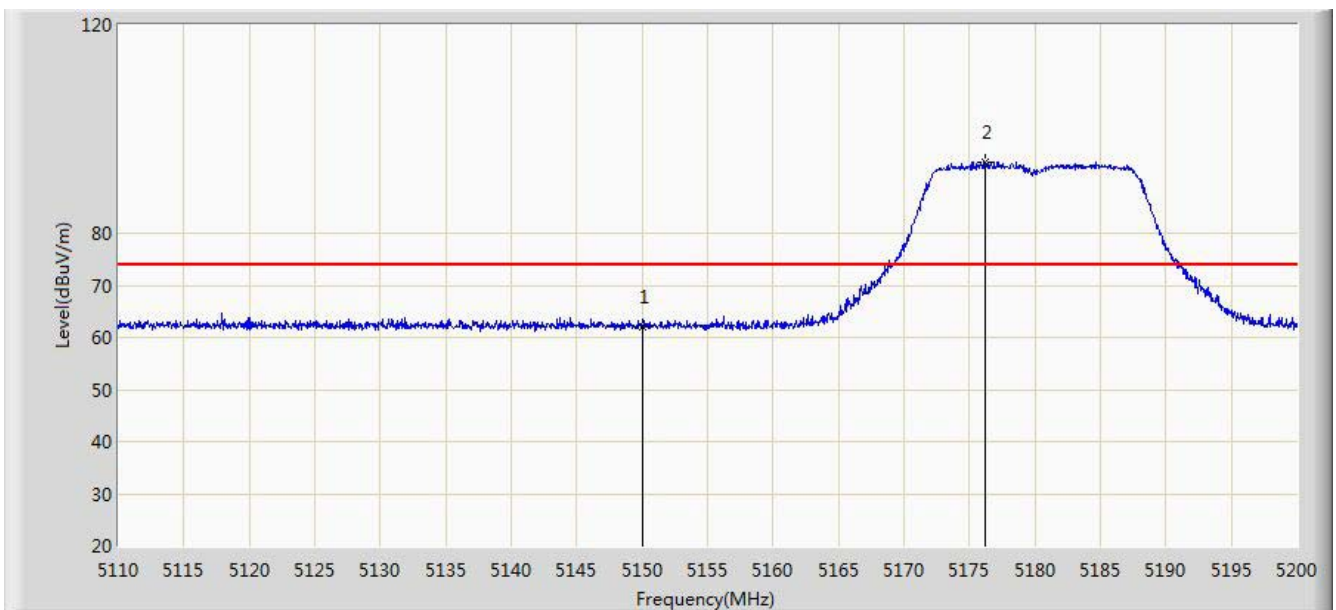


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.082	25.330	-11.918	74.000	36.752	PK
2		*	5176.150	93.765	57.087	N/A	N/A	36.677	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

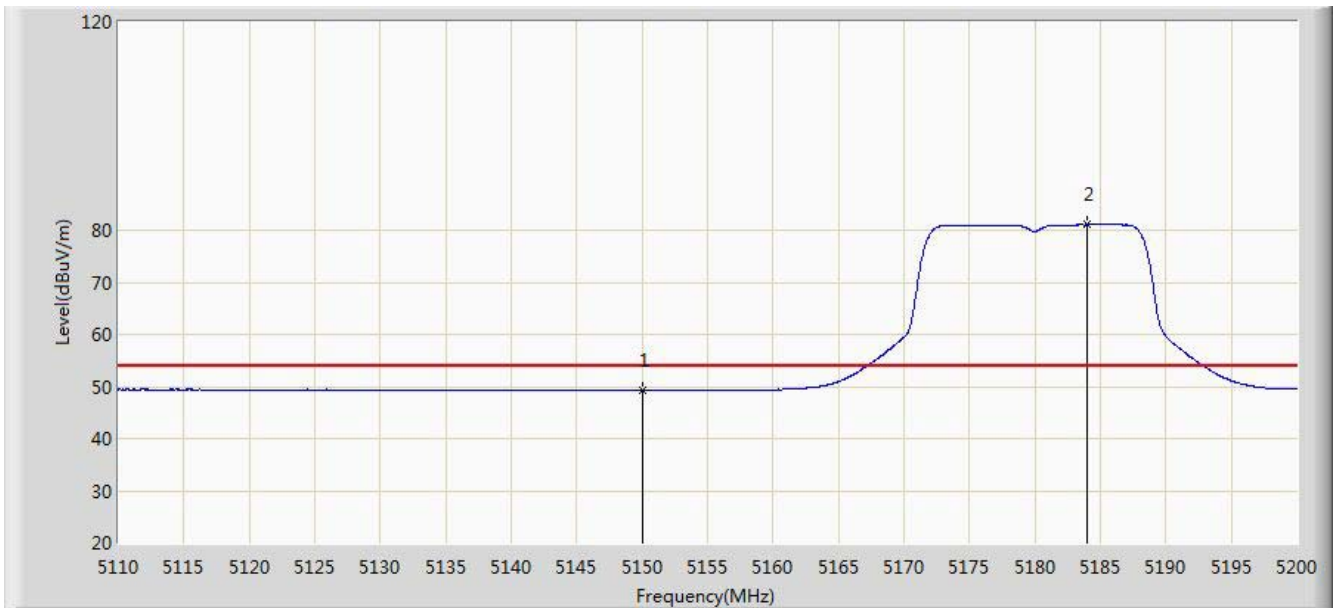


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.277	12.525	-4.723	54.000	36.752	AV
2		*	5183.980	81.031	44.377	N/A	N/A	36.653	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

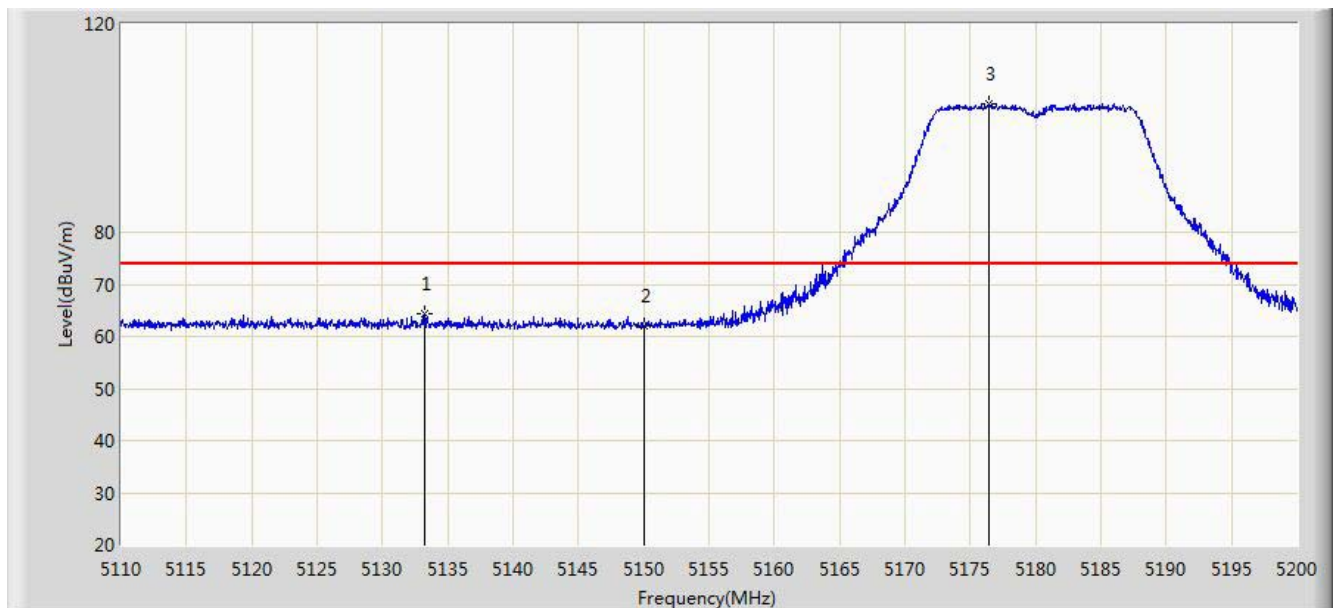


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.220	64.364	27.590	-9.636	74.000	36.774	PK
2			5150.000	61.902	25.150	-12.098	74.000	36.752	PK
3		*	5176.420	104.708	68.031	N/A	N/A	36.676	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

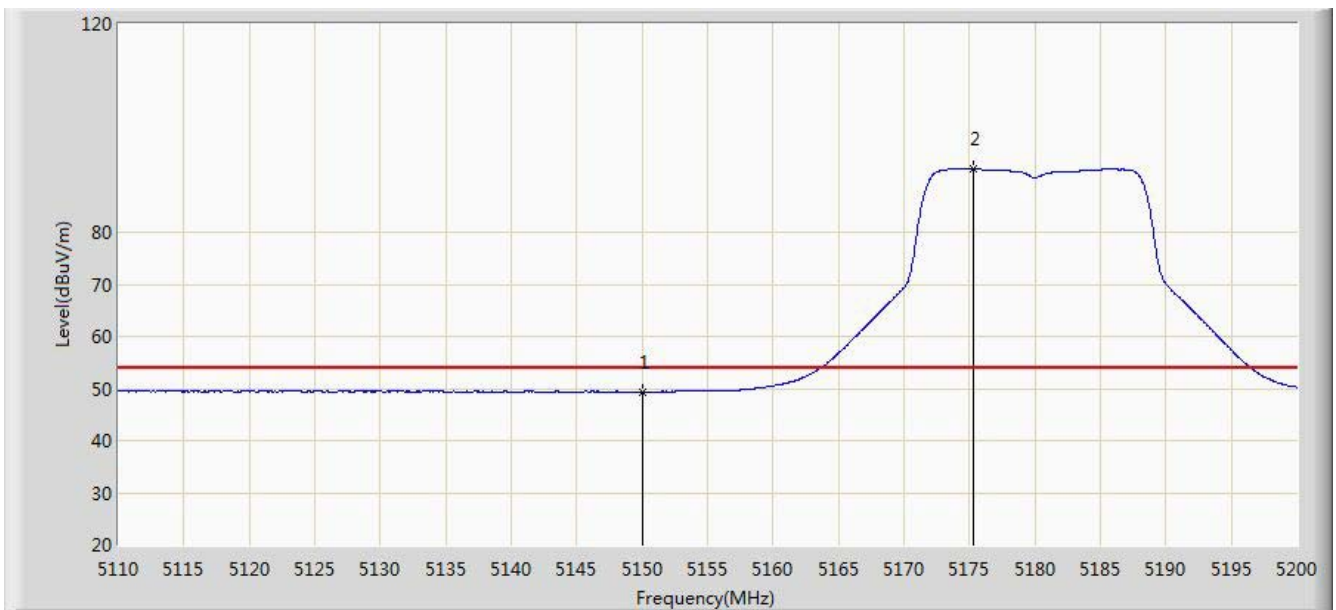


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.400	12.648	-4.600	54.000	36.752	AV
2		*	5175.340	92.074	55.394	N/A	N/A	36.680	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

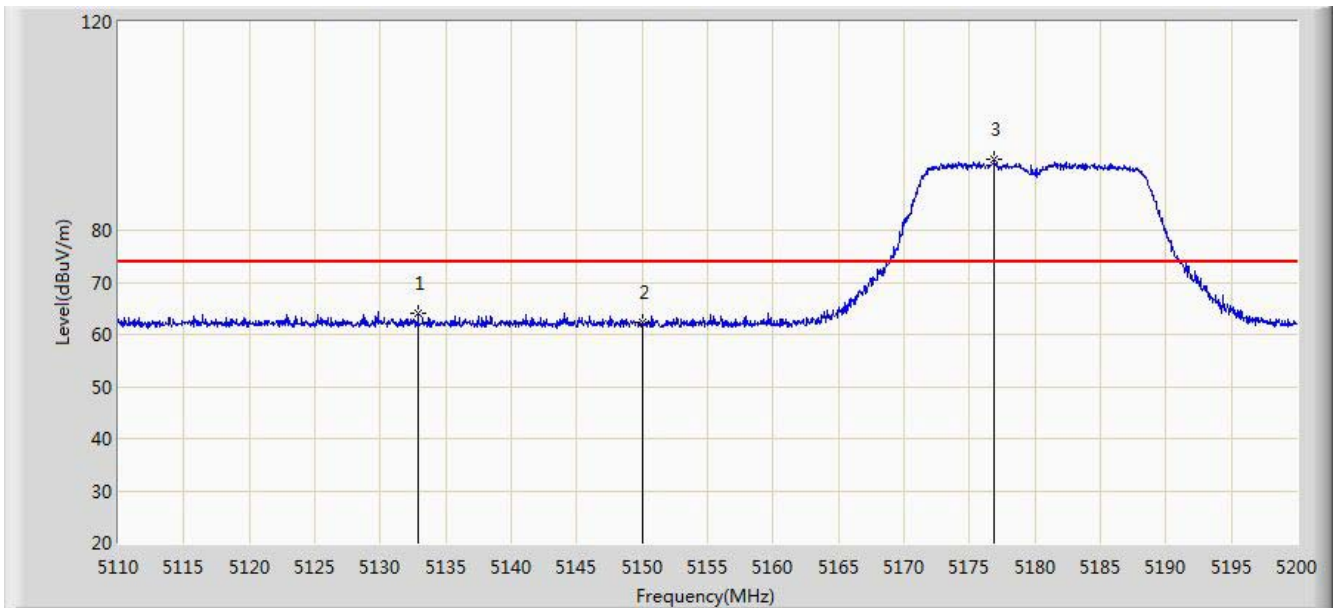


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.905	64.028	27.254	-9.972	74.000	36.774	PK
2			5150.000	62.174	25.422	-11.826	74.000	36.752	PK
3		*	5176.915	93.545	56.870	N/A	N/A	36.676	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

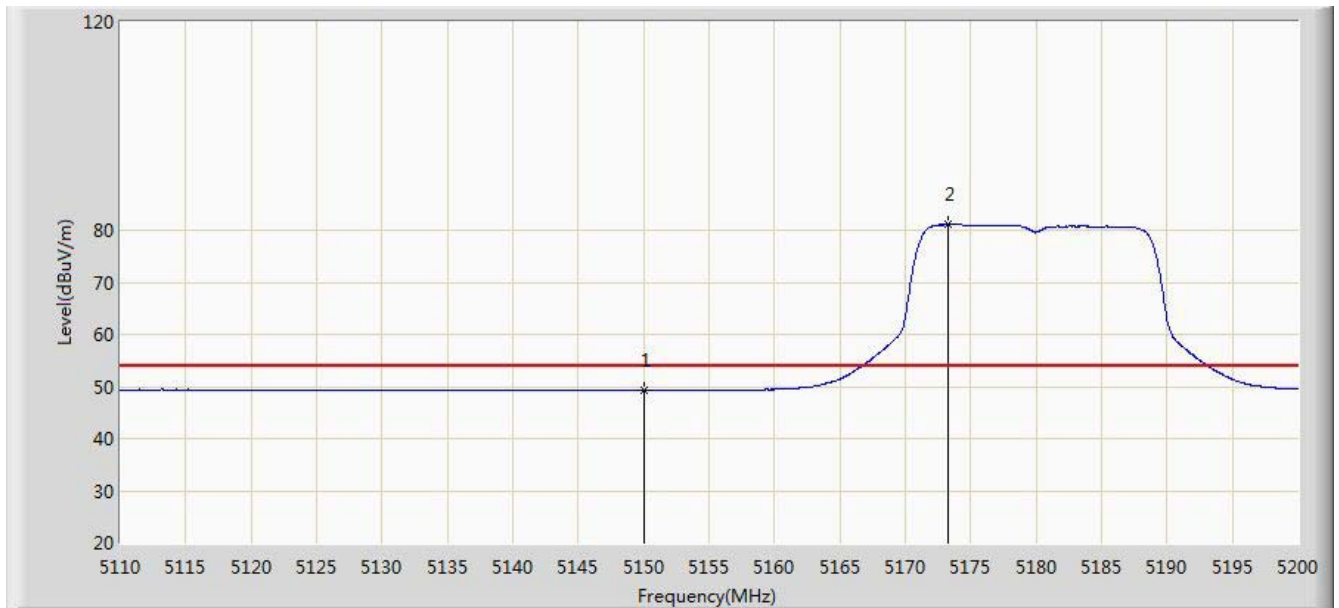


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.323	12.571	-4.677	54.000	36.752	AV
2		*	5173.225	81.052	44.365	N/A	N/A	36.686	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

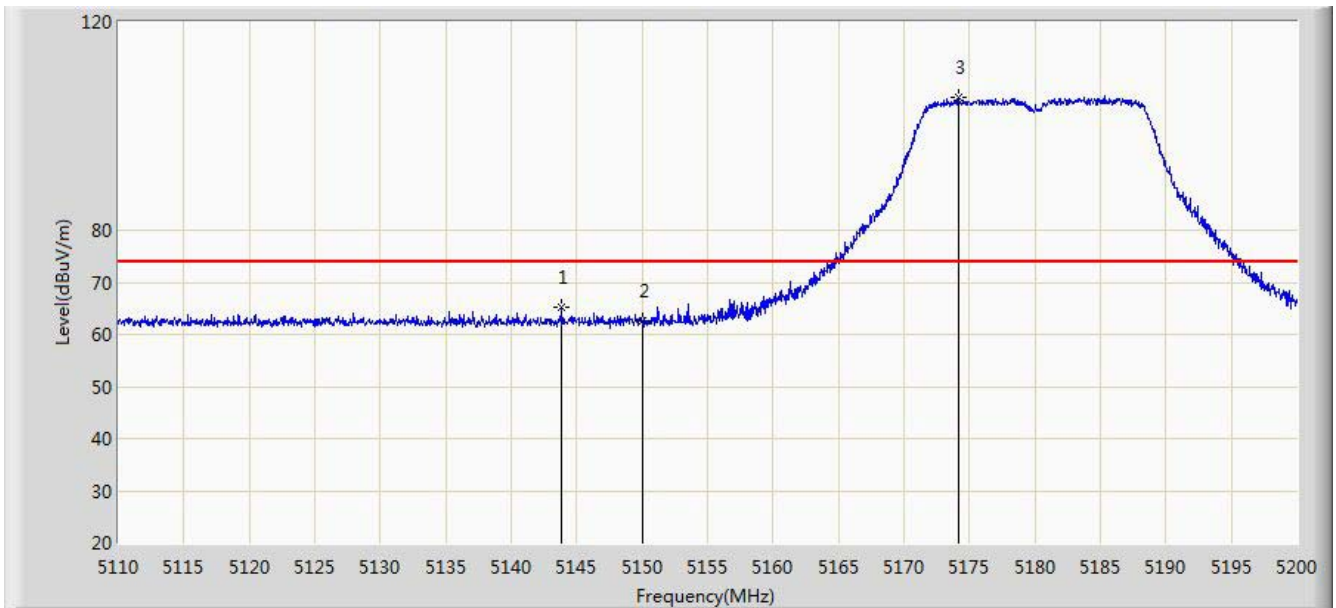


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.840	65.077	28.316	-8.923	74.000	36.761	PK
2			5150.000	62.559	25.807	-11.441	74.000	36.752	PK
3		*	5174.215	105.385	68.701	N/A	N/A	36.684	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 20:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

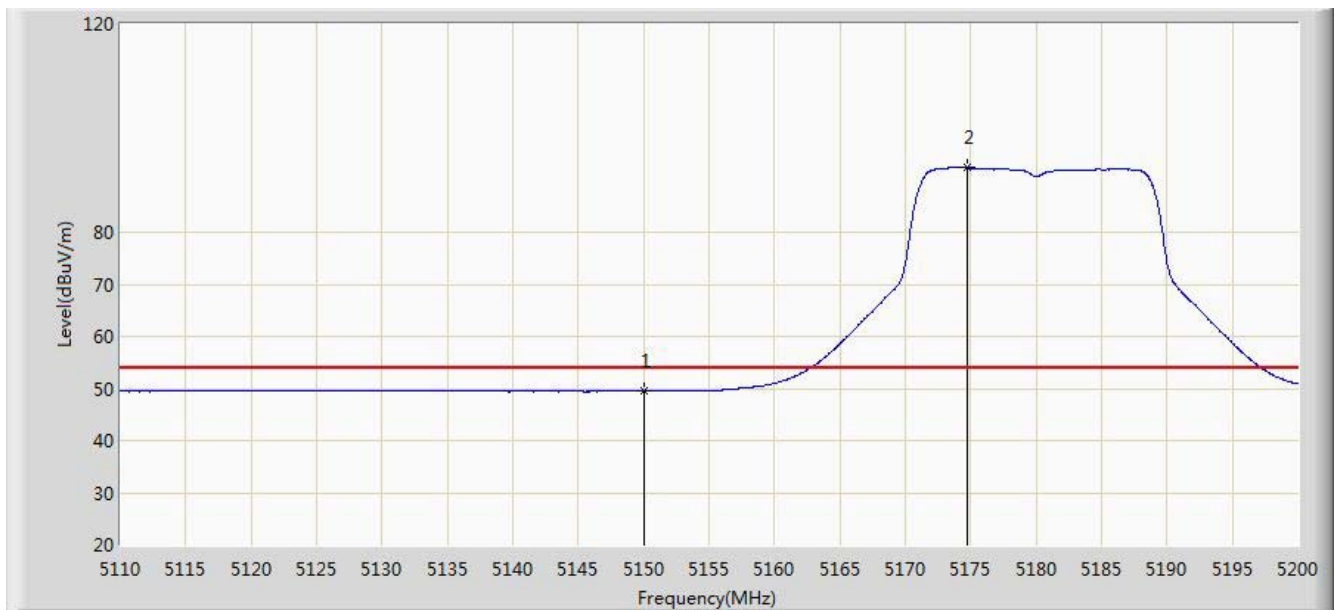


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.486	12.734	-4.514	54.000	36.752	AV
2		*	5174.755	92.328	55.646	N/A	N/A	36.682	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

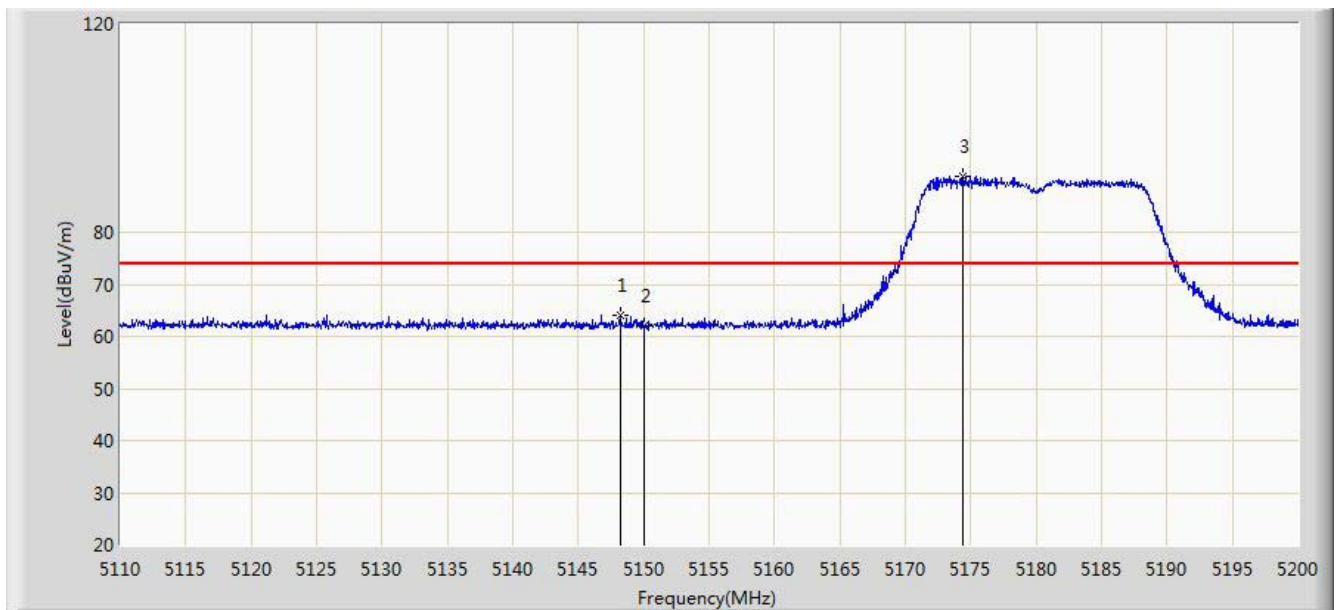


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.205	64.067	27.312	-9.933	74.000	36.754	PK
2			5150.000	61.895	25.143	-12.105	74.000	36.752	PK
3		*	5174.440	90.808	54.125	N/A	N/A	36.683	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

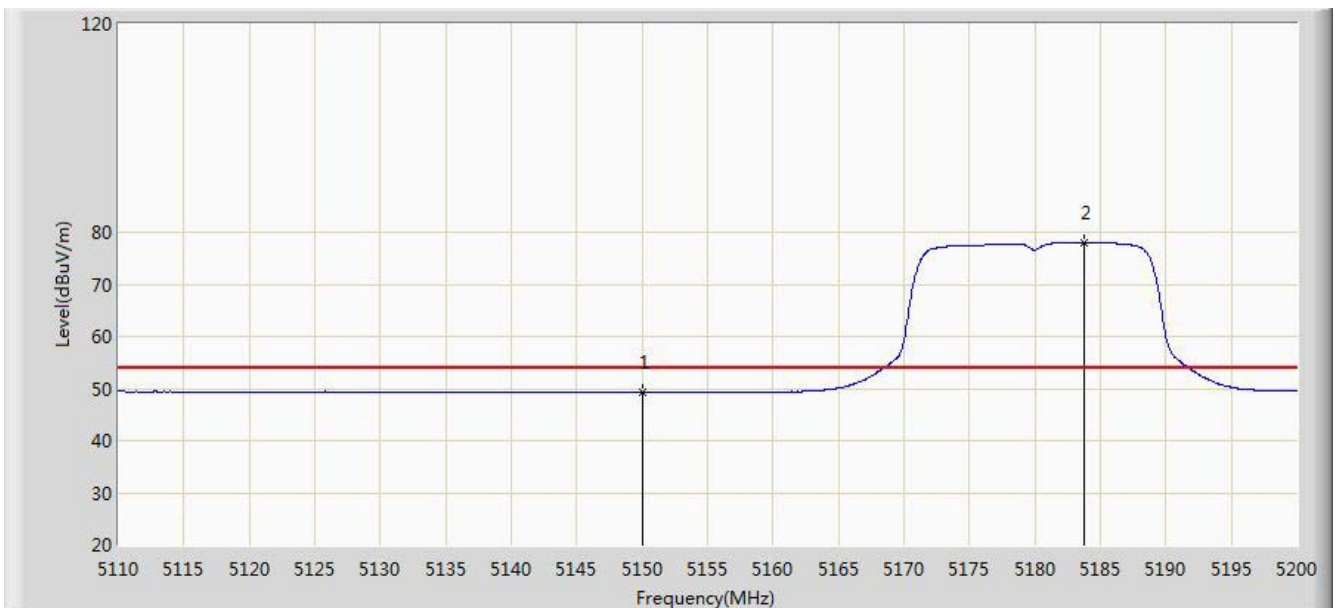


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.328	12.576	-4.672	54.000	36.752	AV
2		*	5183.710	77.966	41.311	N/A	N/A	36.654	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

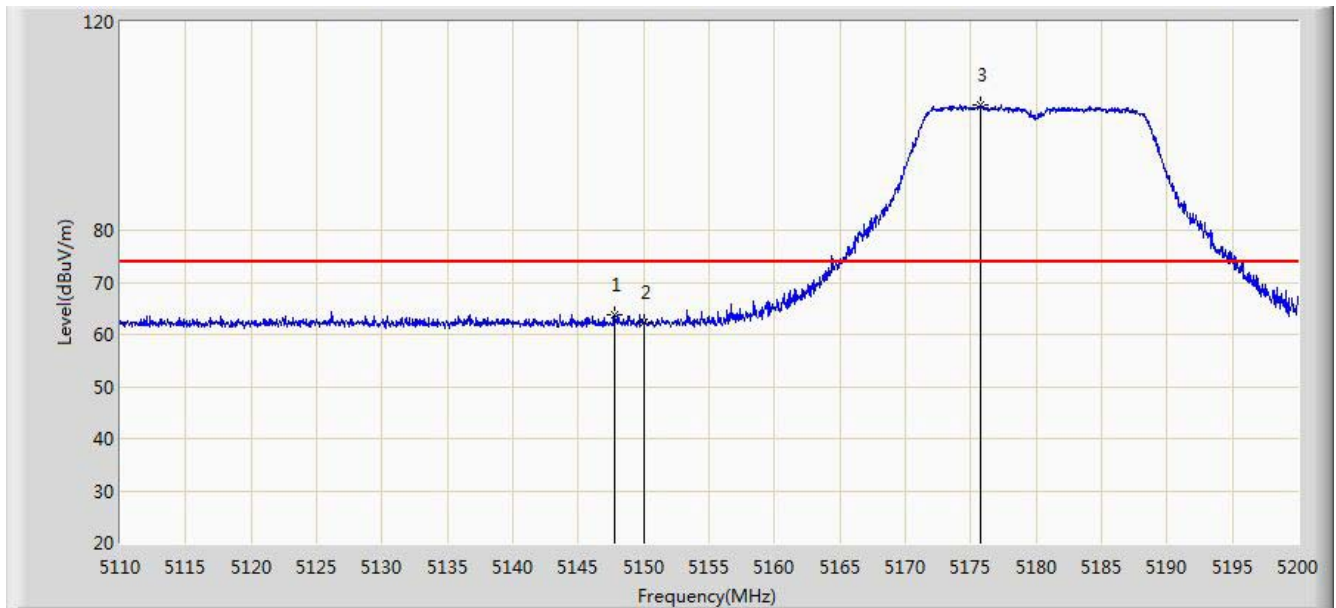


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.800	63.841	27.086	-10.159	74.000	36.755	PK
2			5150.000	62.235	25.483	-11.765	74.000	36.752	PK
3		*	5175.700	104.017	67.338	N/A	N/A	36.679	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

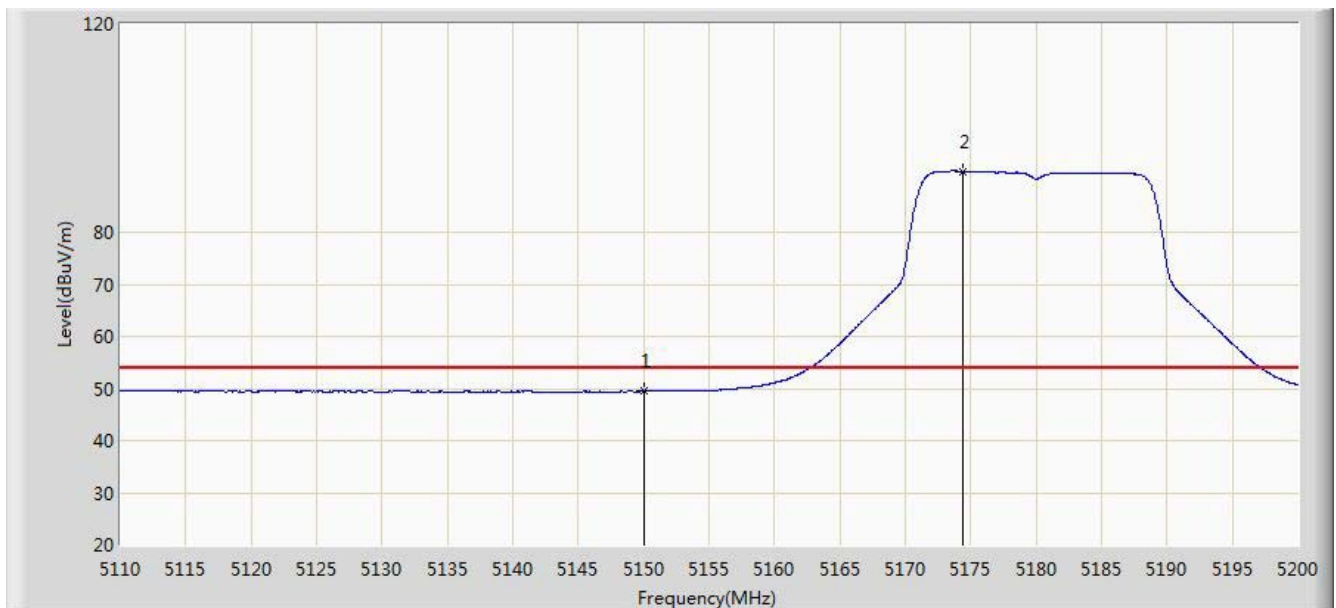


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.431	12.679	-4.569	54.000	36.752	AV
2		*	5174.350	91.677	54.994	N/A	N/A	36.684	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0+1	

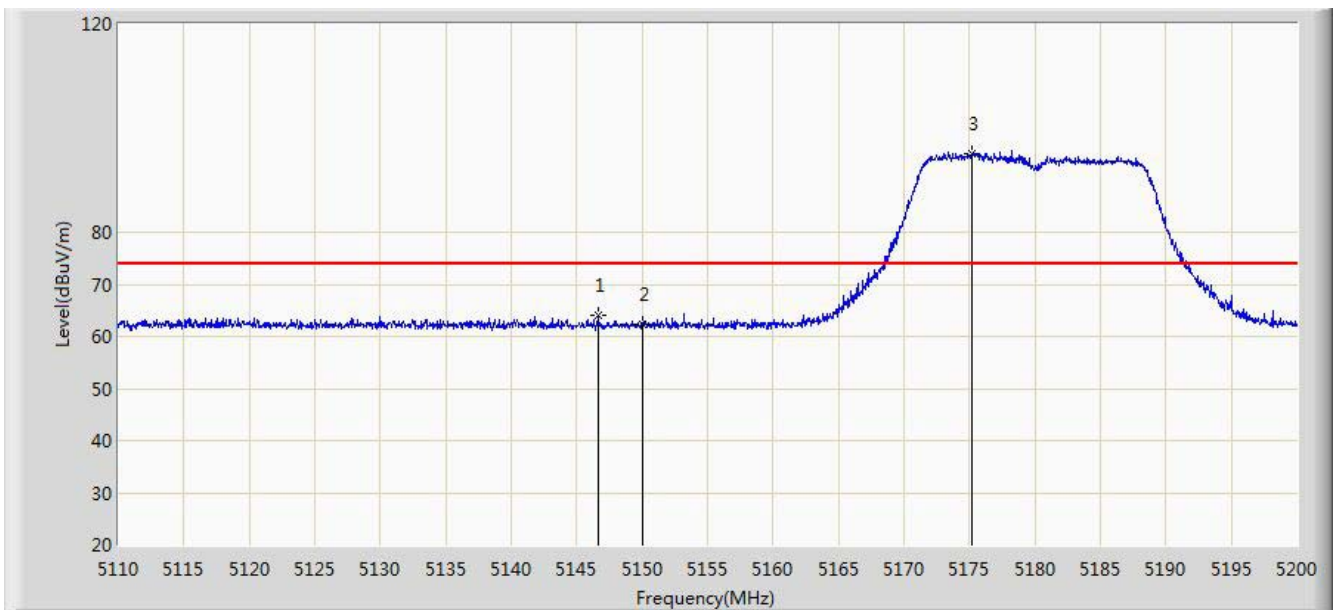


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.630	64.004	27.247	-9.996	74.000	36.757	PK
2			5150.000	62.427	25.675	-11.573	74.000	36.752	PK
3		*	5175.205	95.060	58.379	N/A	N/A	36.681	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0+1	

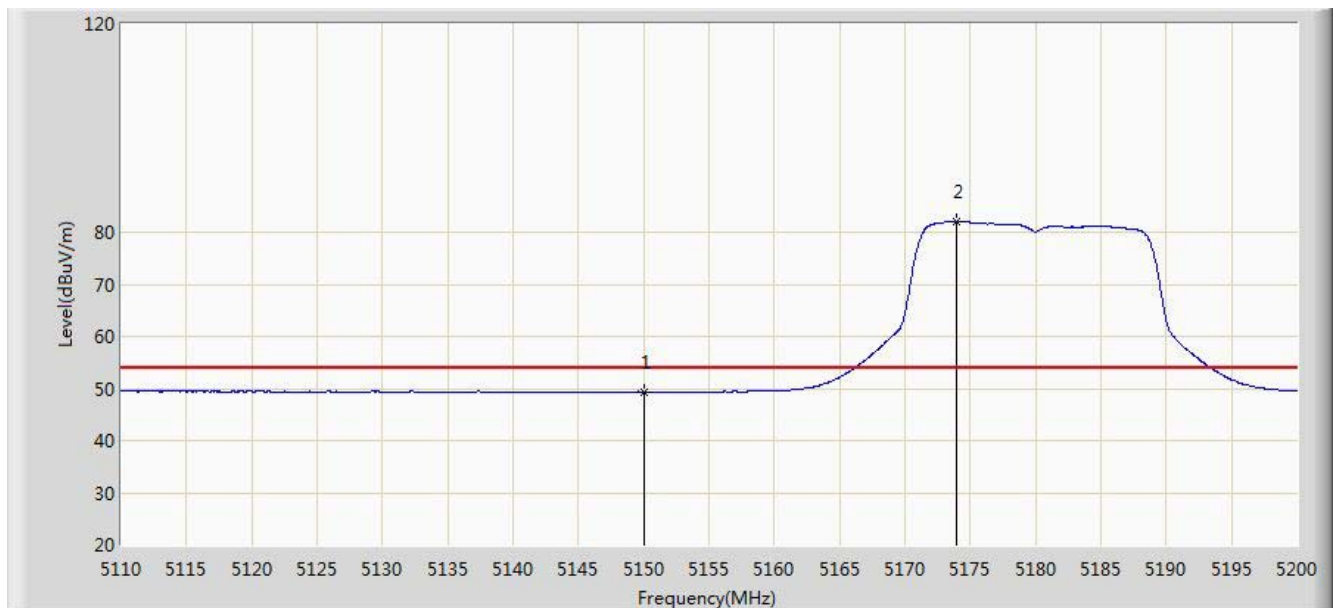


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.384	12.632	-4.616	54.000	36.752	AV
2		*	5173.900	81.992	45.307	N/A	N/A	36.685	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0+1	

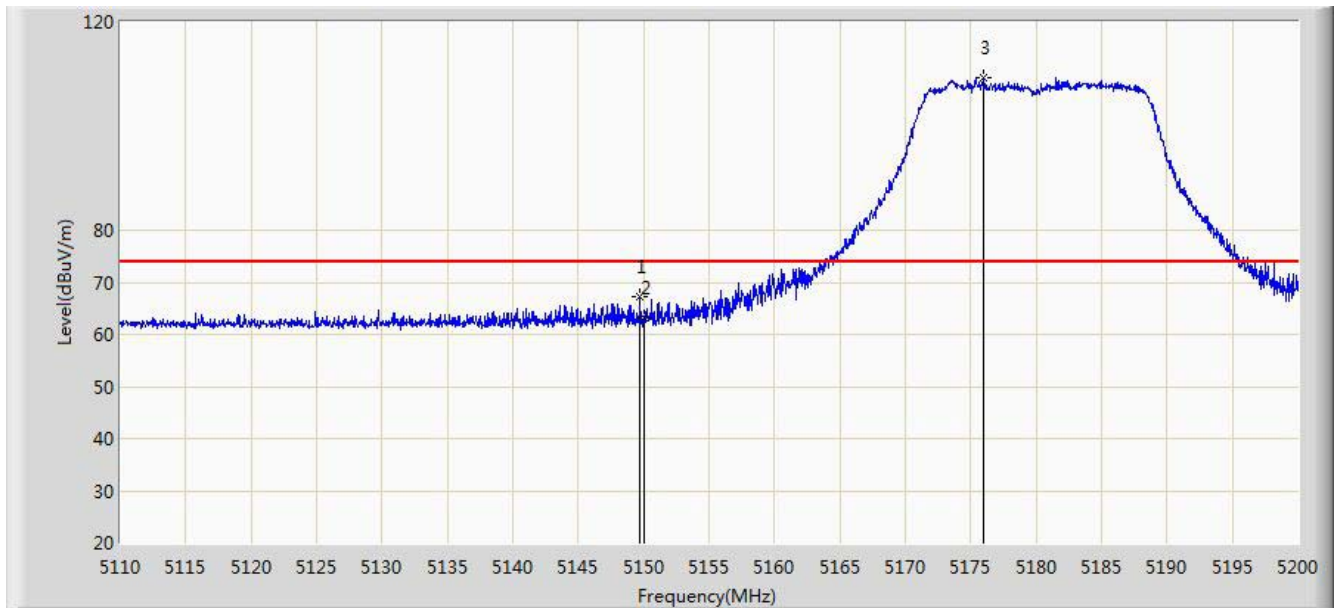


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.690	67.325	30.572	-6.675	74.000	36.752	PK
2			5150.000	63.301	26.549	-10.699	74.000	36.752	PK
3		*	5175.925	109.172	72.494	N/A	N/A	36.678	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0+1	

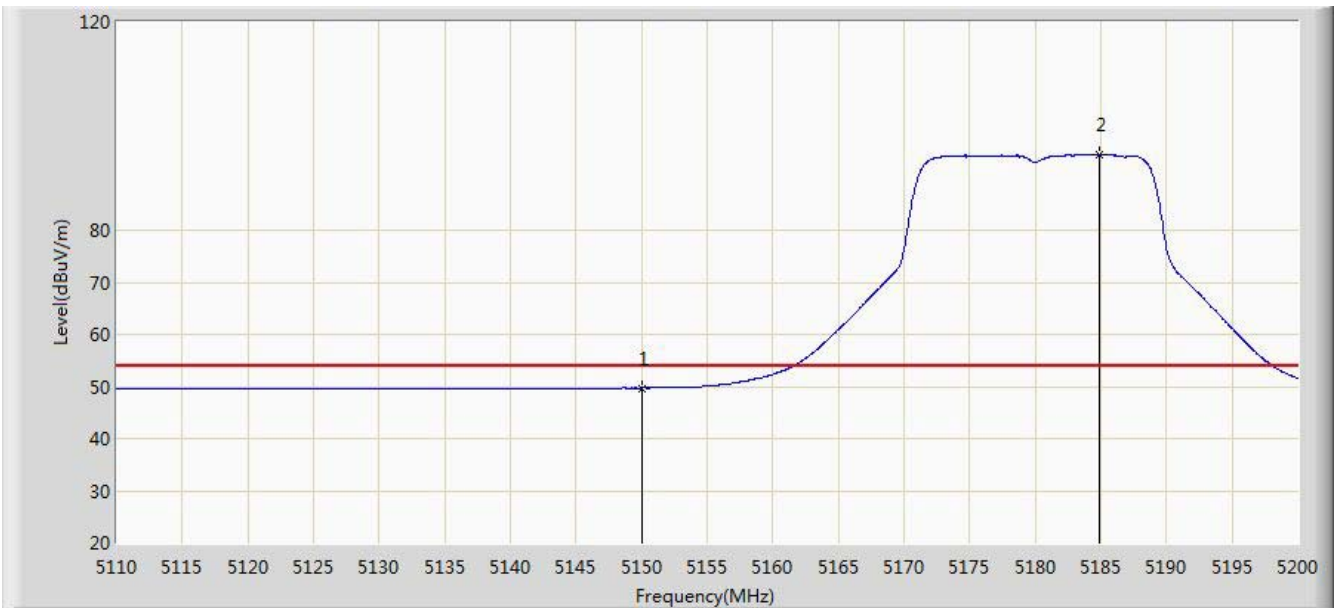


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.706	12.954	-4.294	54.000	36.752	AV
2		*	5184.835	94.577	57.926	N/A	N/A	36.651	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

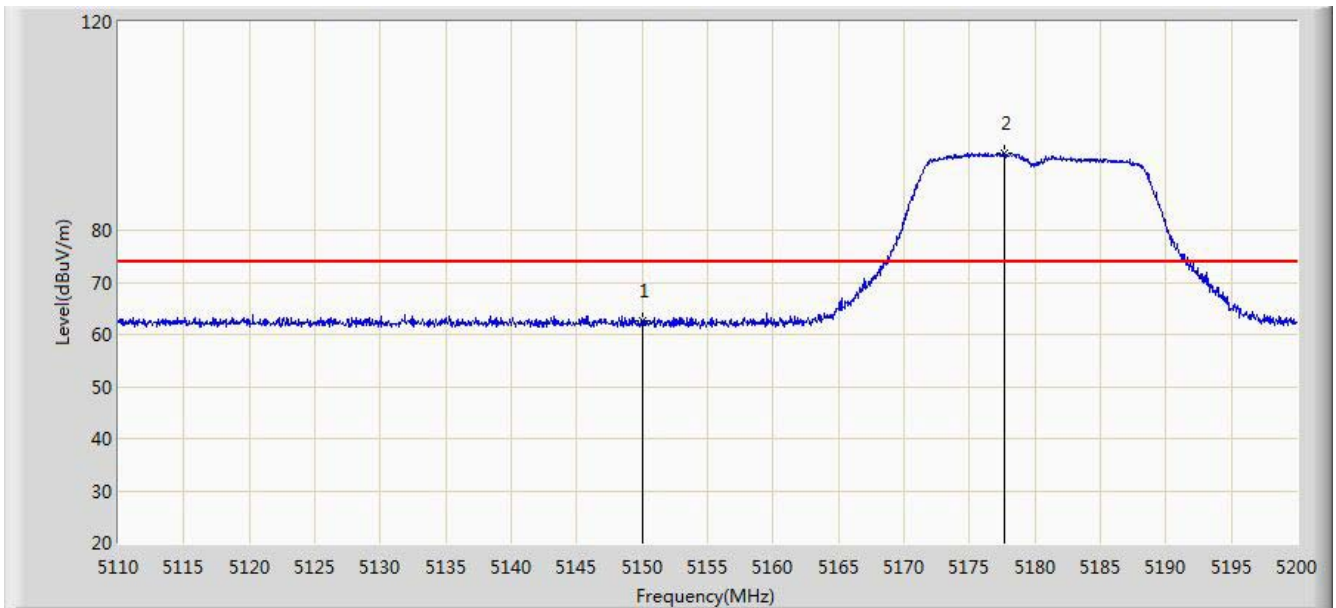


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.494	25.742	-11.506	74.000	36.752	PK
2		*	5177.725	94.718	58.045	N/A	N/A	36.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

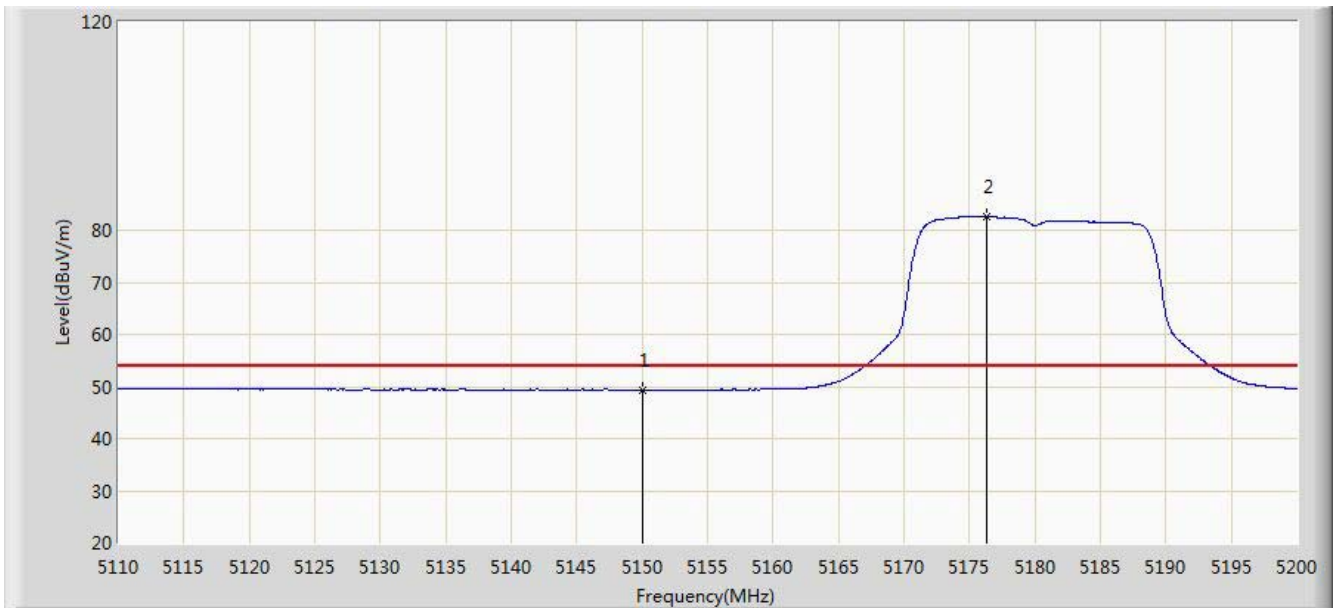


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.320	12.568	-4.680	54.000	36.752	AV
2		*	5176.330	82.588	45.911	N/A	N/A	36.677	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

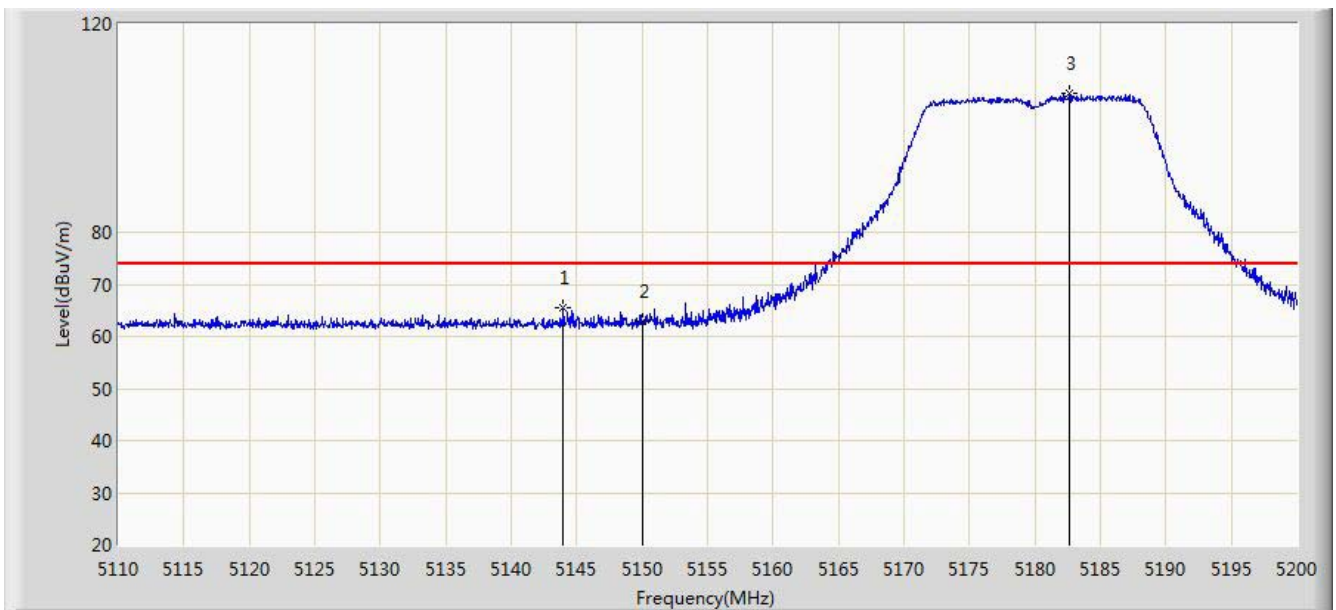


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.975	65.625	28.865	-8.375	74.000	36.760	PK
2			5150.000	62.890	26.138	-11.110	74.000	36.752	PK
3		*	5182.630	106.564	69.907	N/A	N/A	36.657	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

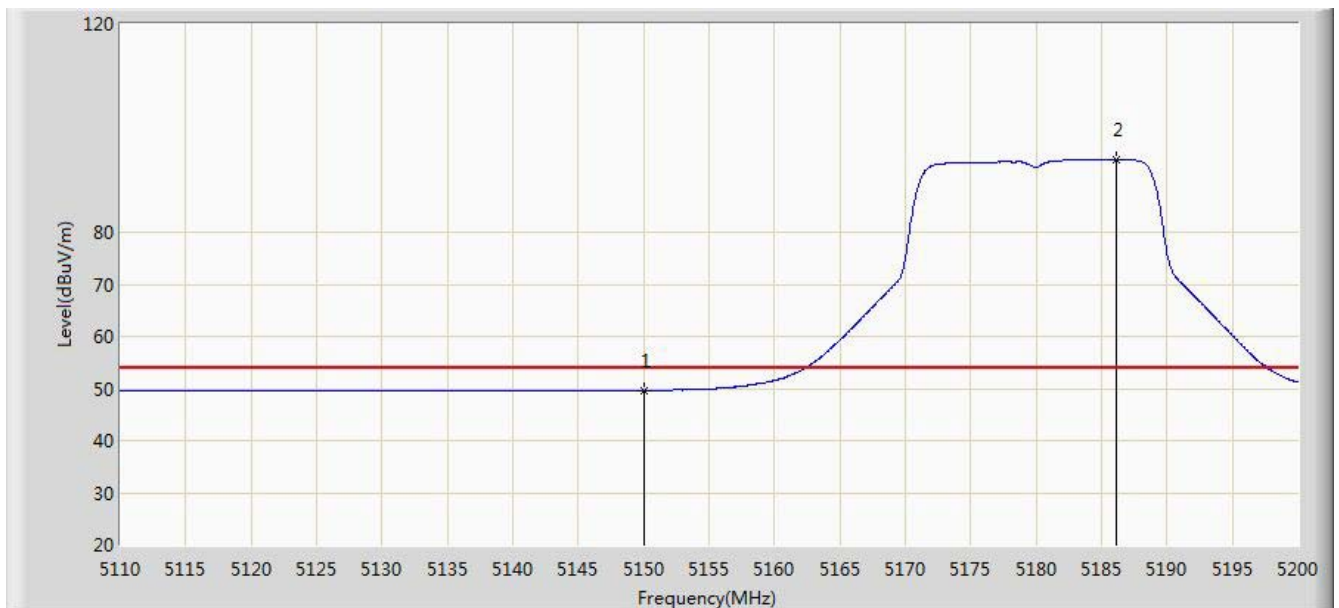


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.621	12.869	-4.379	54.000	36.752	AV
2		*	5186.095	94.046	57.398	N/A	N/A	36.648	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1	

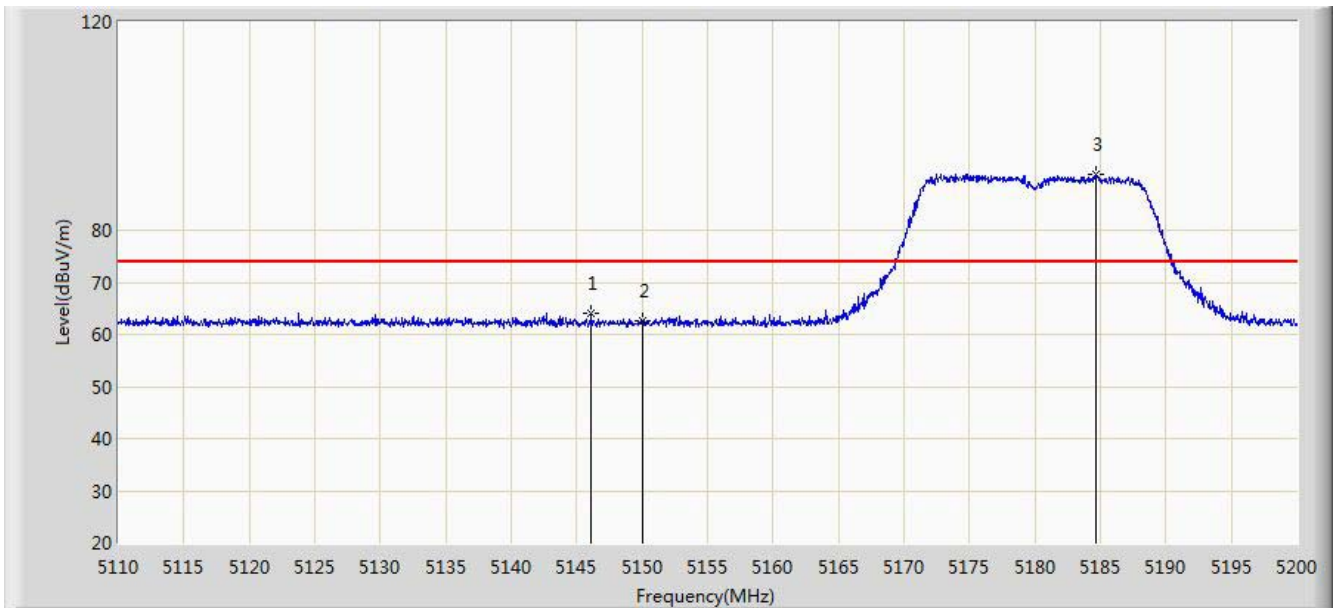


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.135	64.082	27.325	-9.918	74.000	36.757	PK
2			5150.000	62.526	25.774	-11.474	74.000	36.752	PK
3		*	5184.655	90.839	54.187	N/A	N/A	36.652	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1	

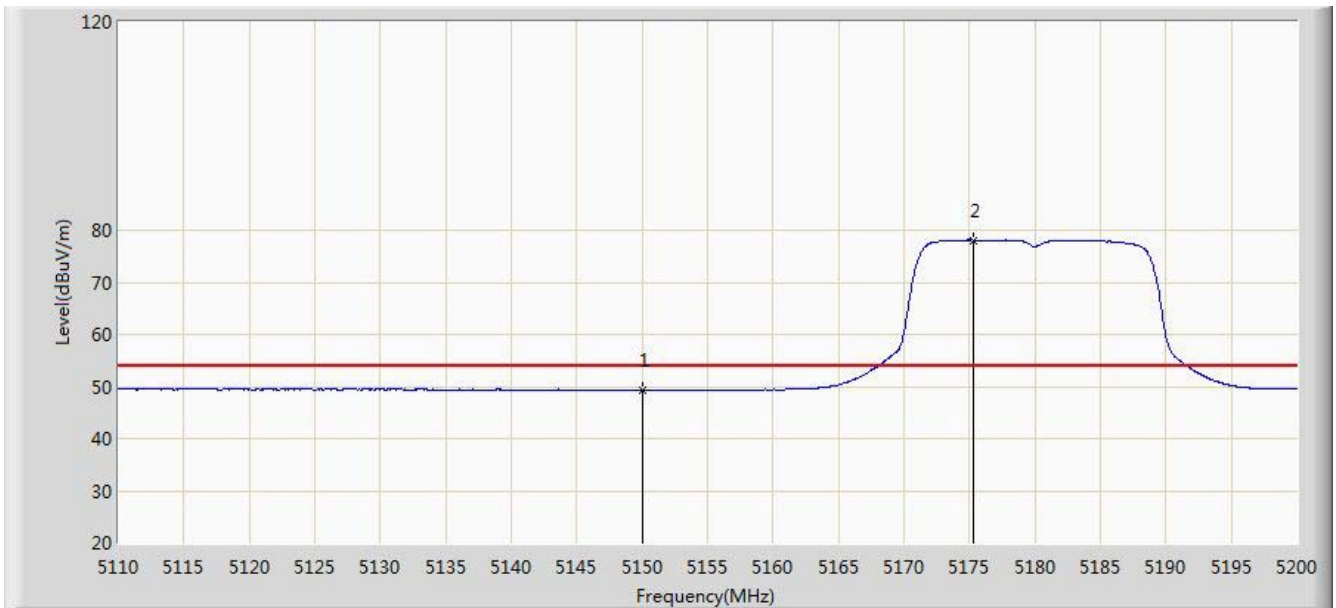


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.382	12.630	-4.618	54.000	36.752	AV
2		*	5175.340	78.077	41.397	N/A	N/A	36.680	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 21:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1	

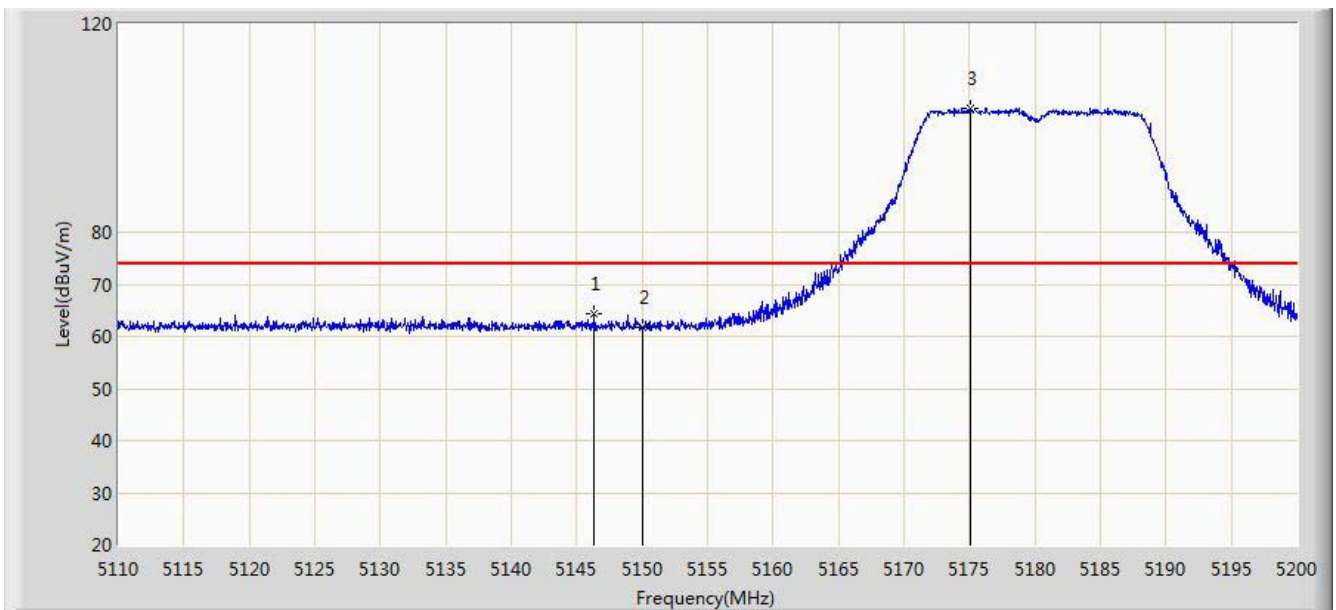


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.360	64.290	27.533	-9.710	74.000	36.757	PK
2			5150.000	61.733	24.981	-12.267	74.000	36.752	PK
3		*	5175.115	103.874	67.193	N/A	N/A	36.681	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1	

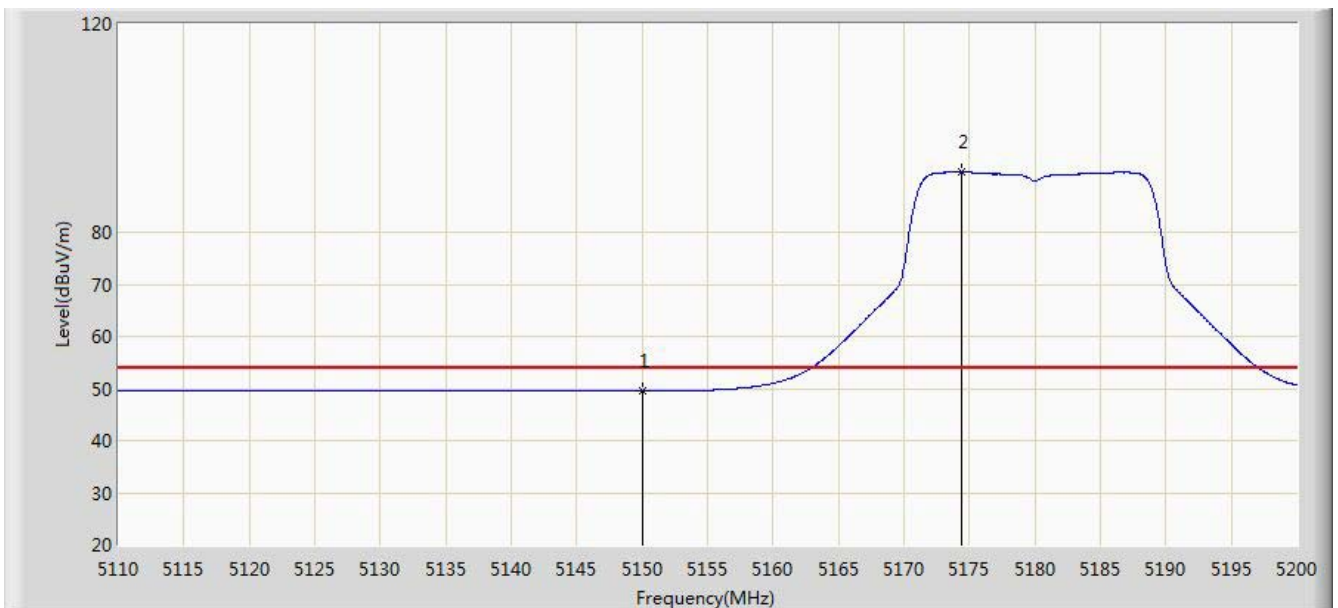


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.468	12.716	-4.532	54.000	36.752	AV
2		*	5174.350	91.484	54.801	N/A	N/A	36.684	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0+1	

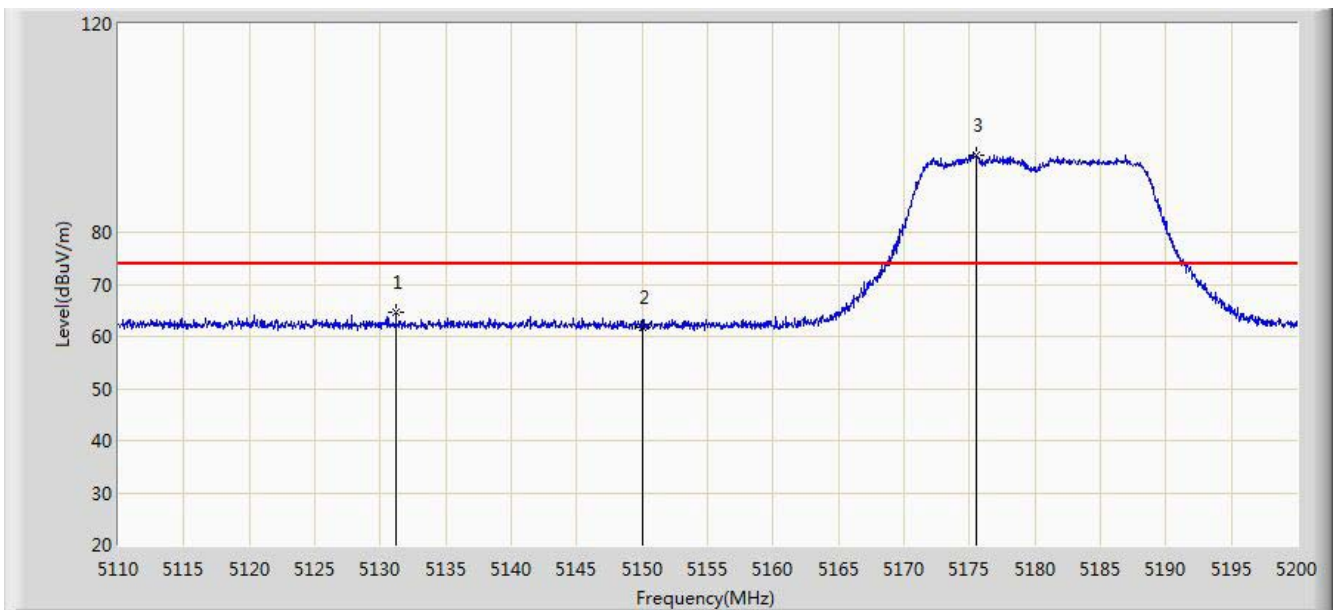


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.195	64.495	27.720	-9.505	74.000	36.775	PK
2			5150.000	61.760	25.008	-12.240	74.000	36.752	PK
3		*	5175.475	94.900	58.220	N/A	N/A	36.680	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0+1	

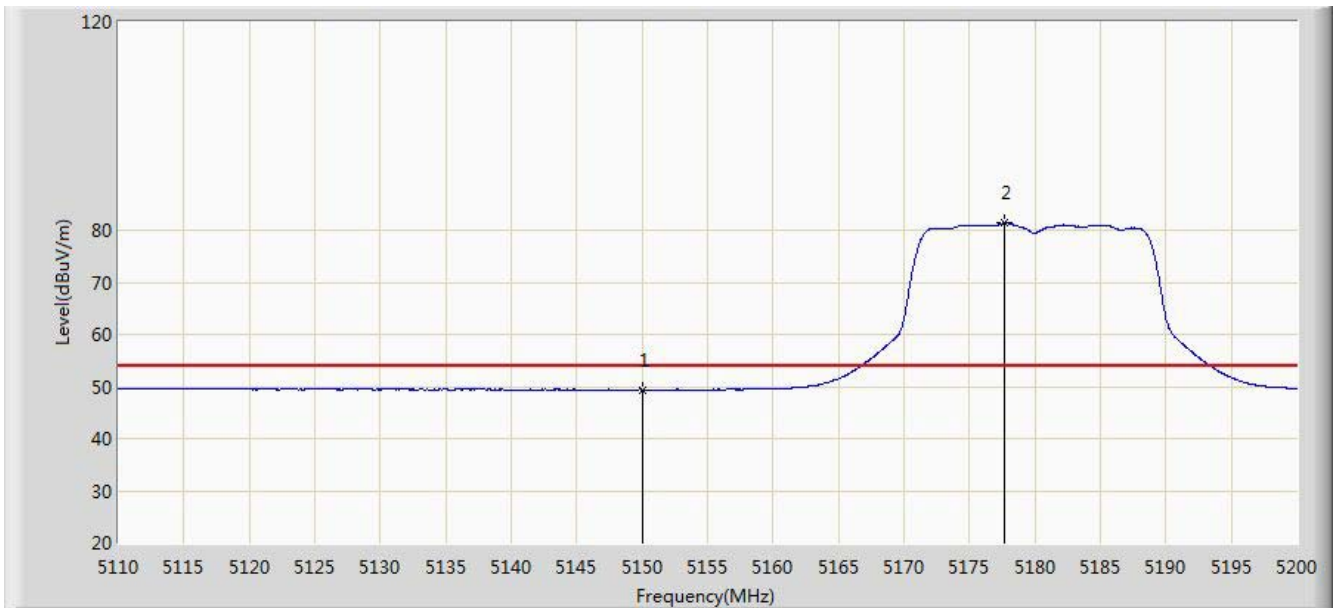


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.407	12.655	-4.593	54.000	36.752	AV
2		*	5177.680	81.373	44.700	N/A	N/A	36.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0+1	

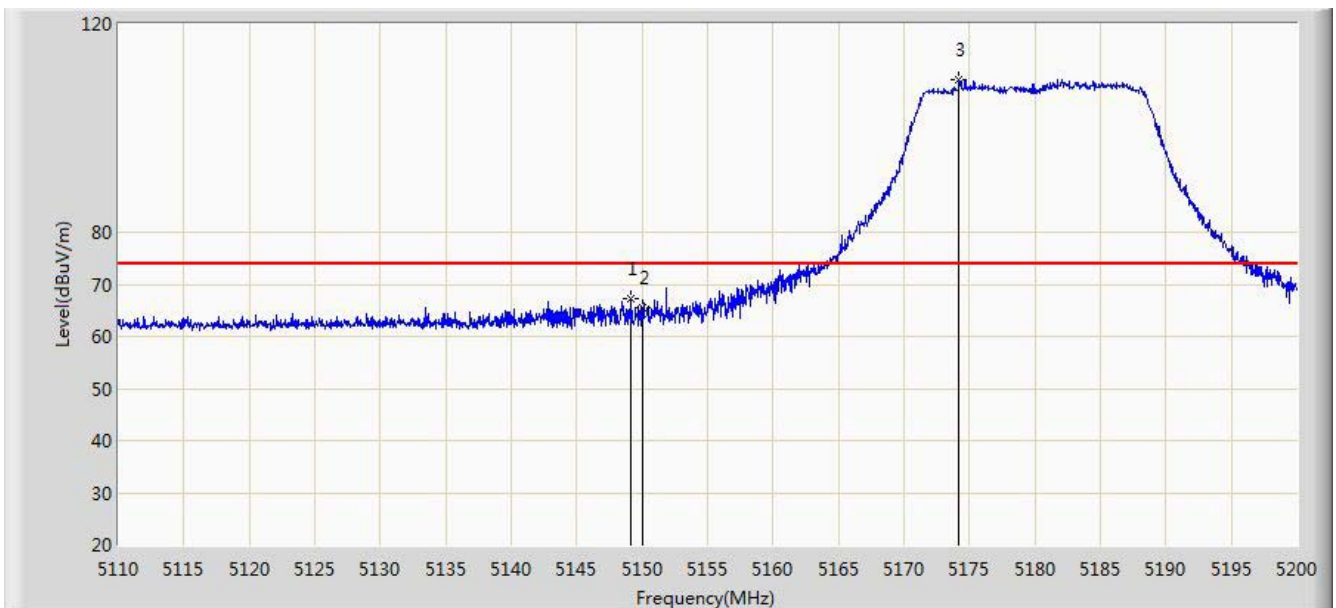


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.105	67.208	30.455	-6.792	74.000	36.753	PK
2			5150.000	65.372	28.620	-8.628	74.000	36.752	PK
3		*	5174.215	109.287	72.603	N/A	N/A	36.684	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0+1	

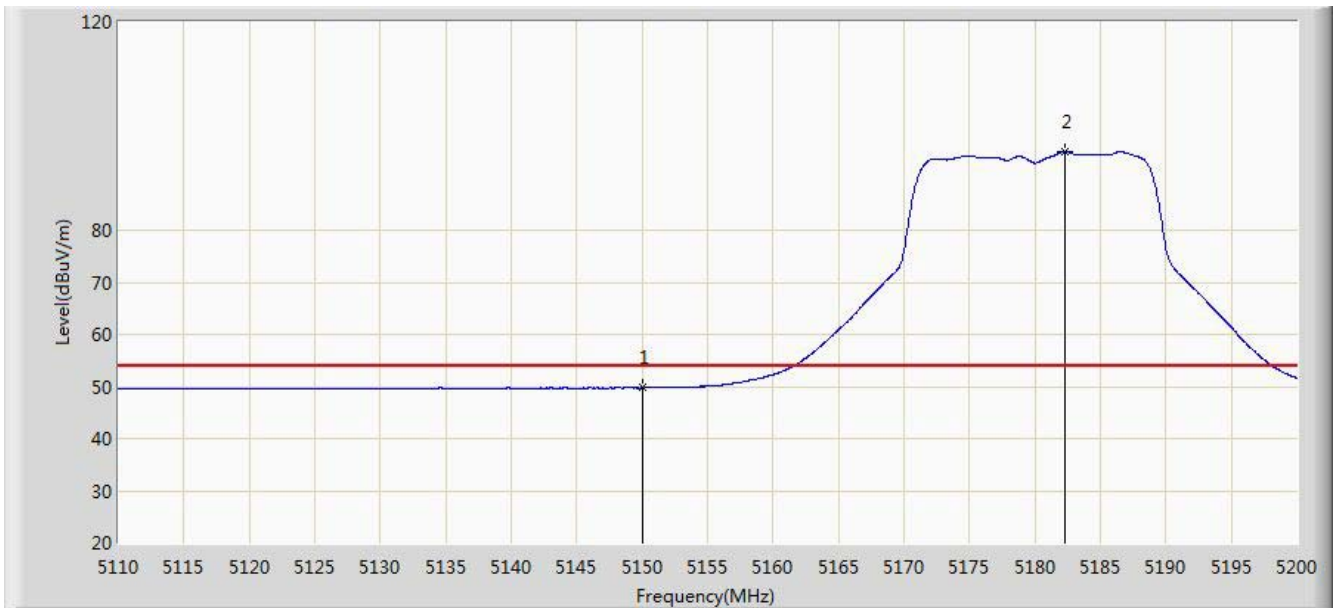


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.717	12.965	-4.283	54.000	36.752	AV
2		*	5182.315	95.034	58.376	N/A	N/A	36.658	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

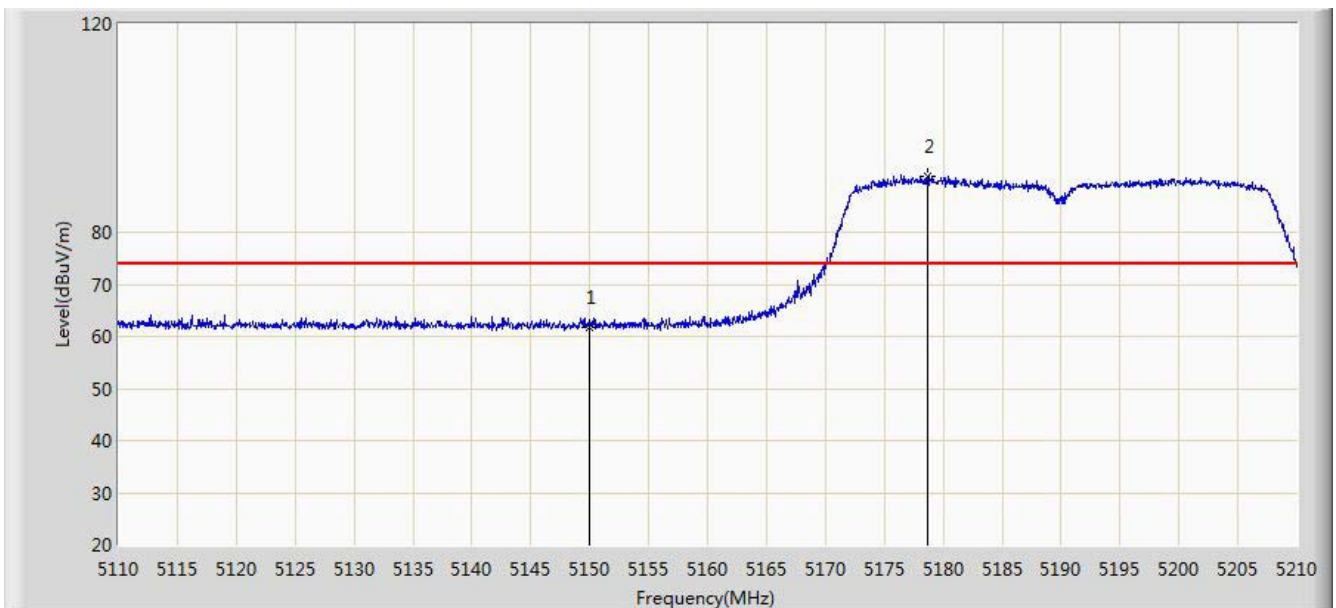


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.824	25.072	-12.176	74.000	36.752	PK
2		*	5178.700	90.708	54.038	N/A	N/A	36.670	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

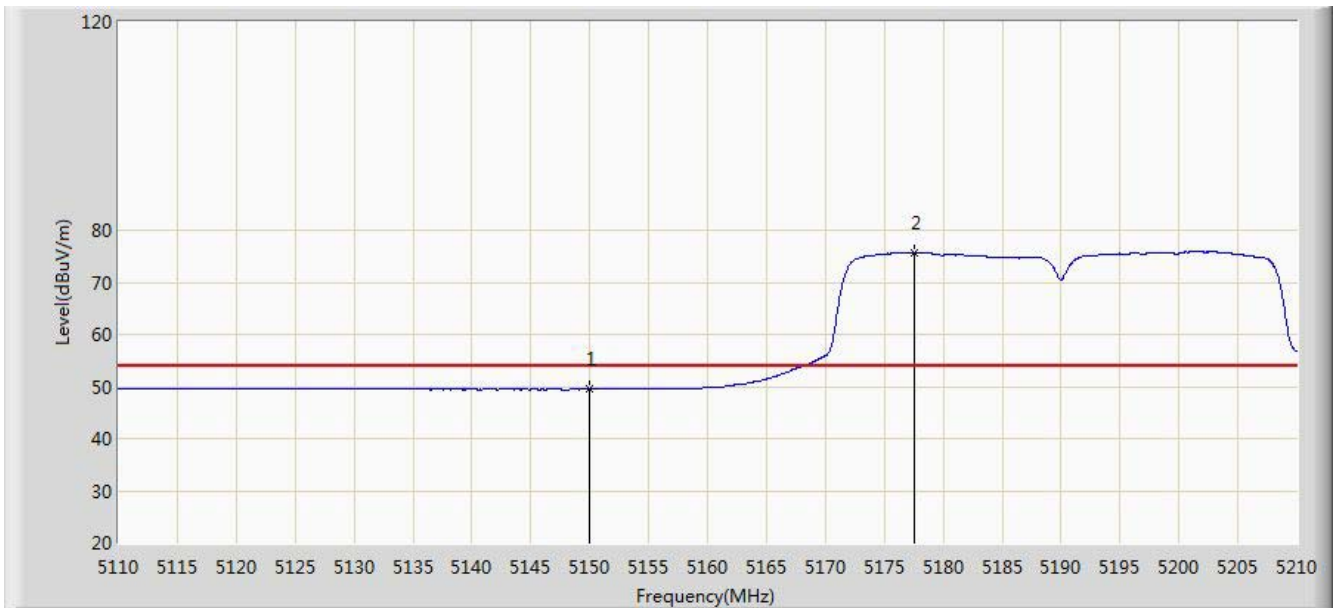


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.466	12.714	-4.534	54.000	36.752	AV
2		*	5177.550	75.752	39.079	N/A	N/A	36.674	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

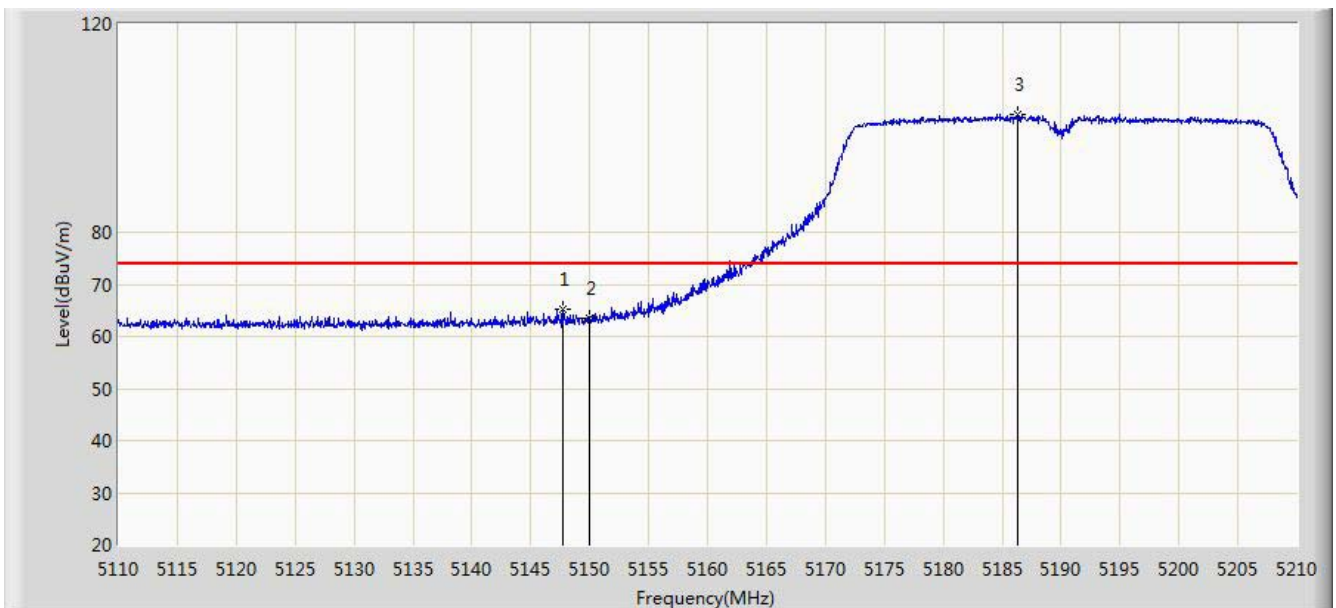


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.700	65.350	28.595	-8.650	74.000	36.755	PK
2			5150.000	63.464	26.712	-10.536	74.000	36.752	PK
3		*	5186.300	102.580	65.933	N/A	N/A	36.647	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

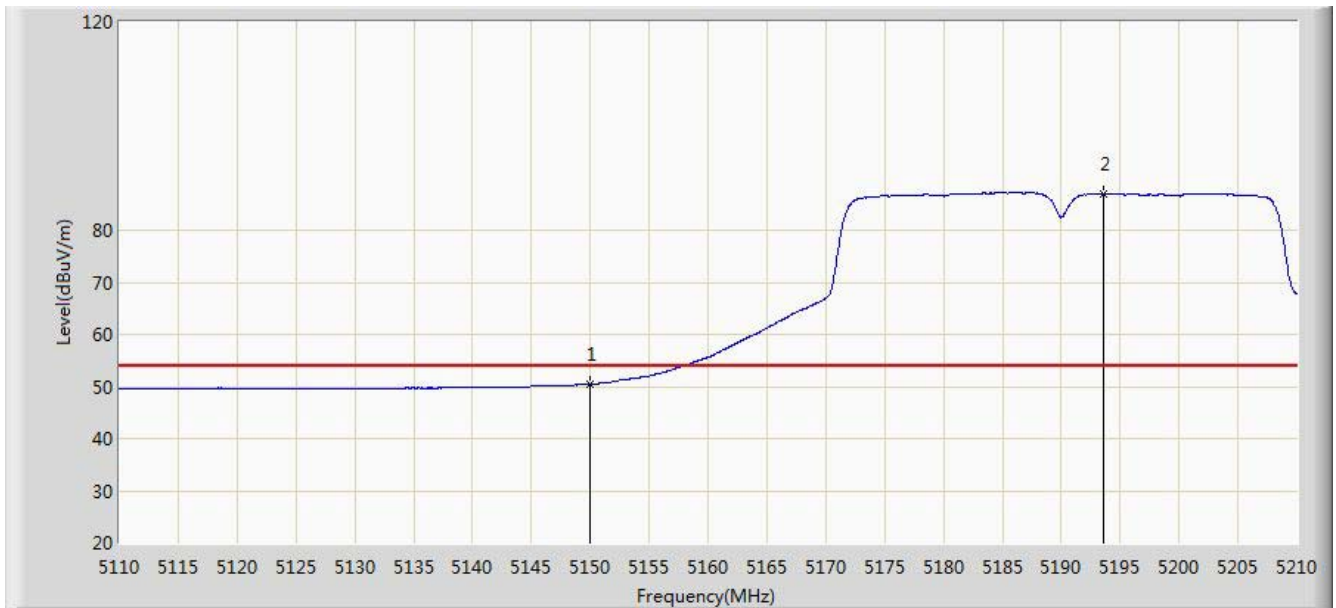


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.467	13.715	-3.533	54.000	36.752	AV
2		*	5193.550	86.933	50.305	N/A	N/A	36.628	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

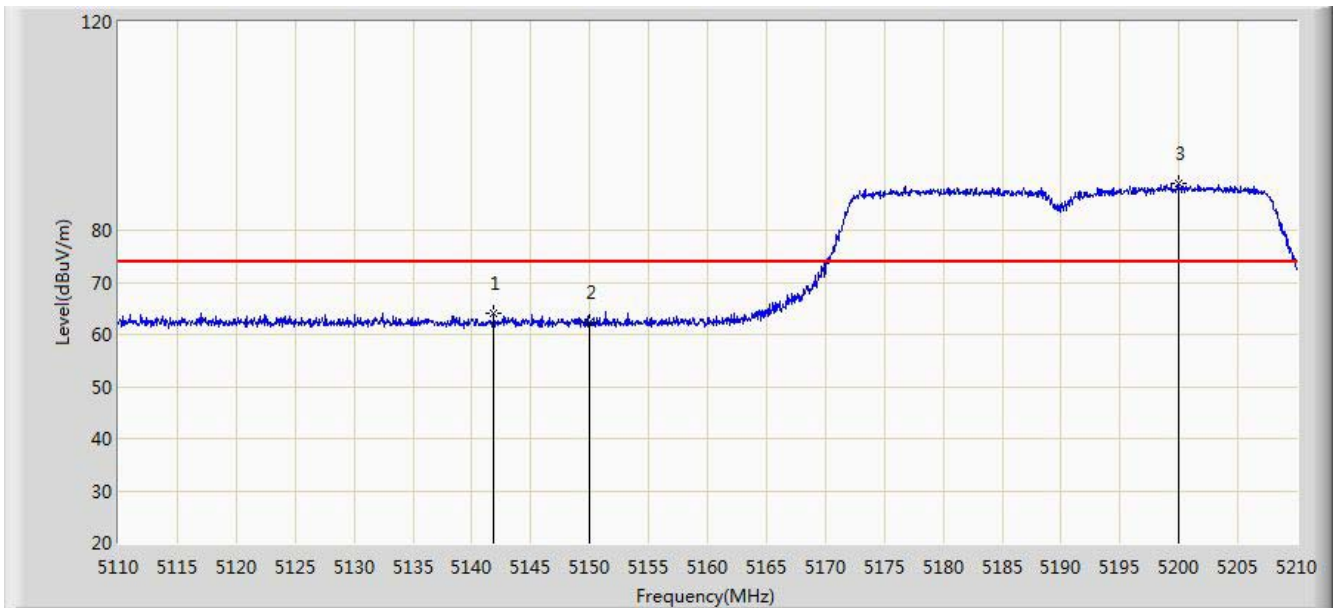


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.850	64.025	27.262	-9.975	74.000	36.763	PK
2			5150.000	62.390	25.638	-11.610	74.000	36.752	PK
3		*	5200.000	89.063	52.450	N/A	N/A	36.613	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

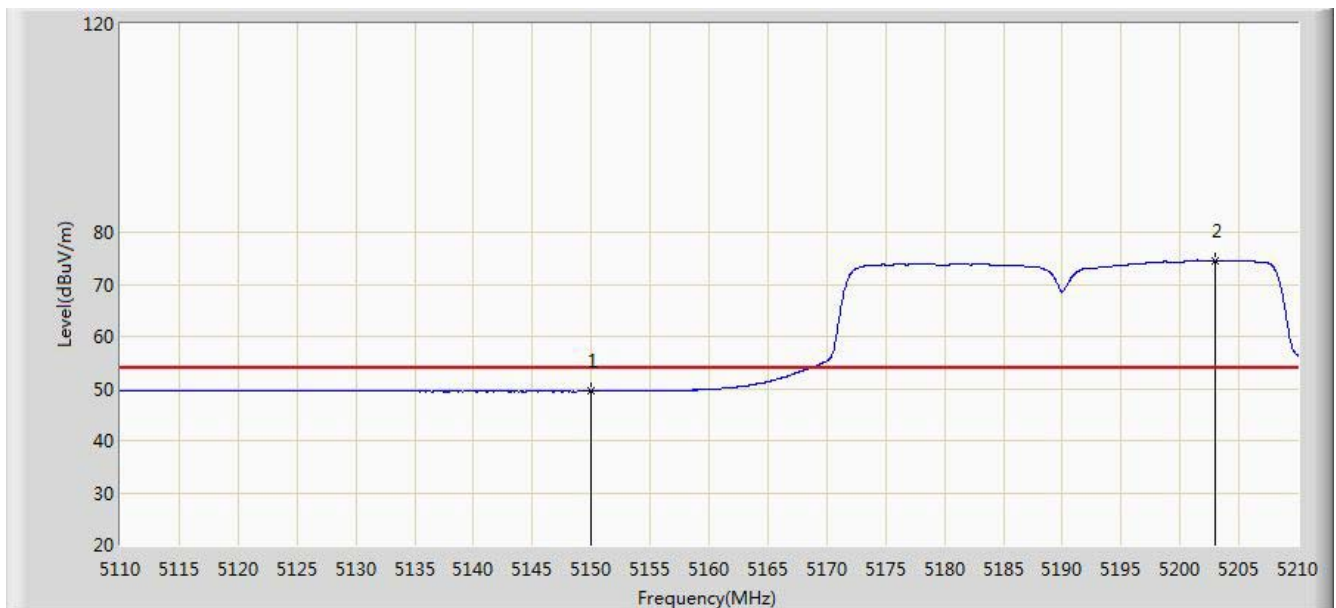


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.460	12.708	-4.540	54.000	36.752	AV
2		*	5202.950	74.617	38.010	N/A	N/A	36.607	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

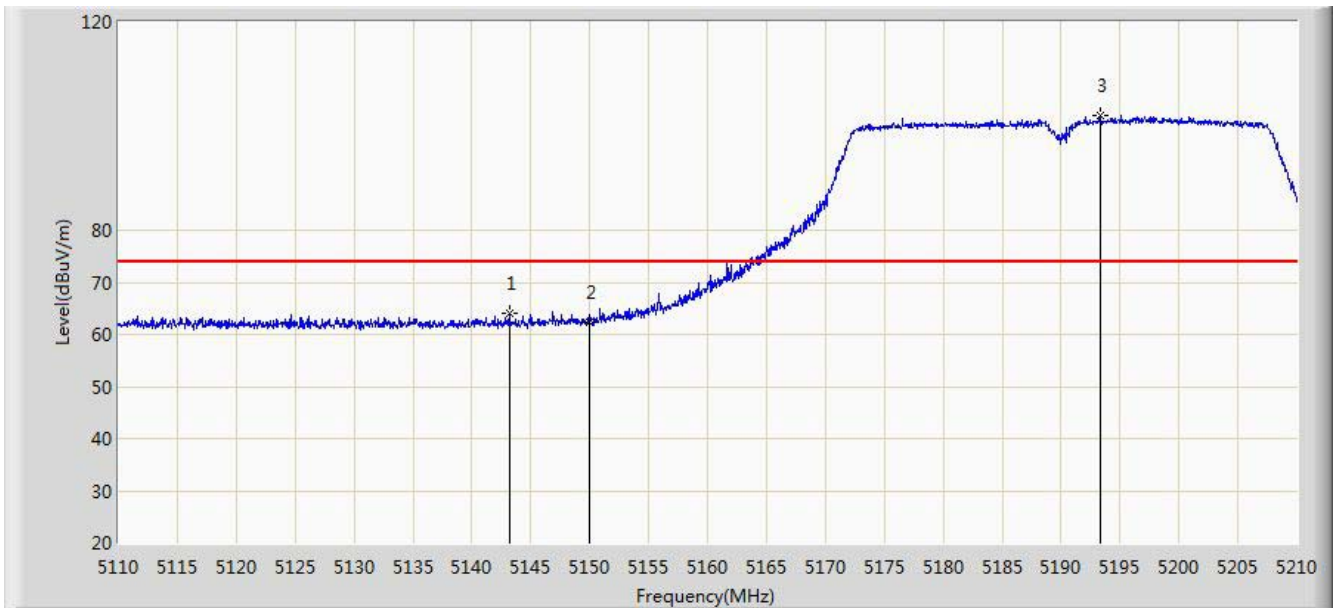

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.150	64.022	27.260	-9.978	74.000	36.762	PK
2			5150.000	62.285	25.533	-11.715	74.000	36.752	PK
3		*	5193.300	102.005	65.376	N/A	N/A	36.629	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 22:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.255	13.503	-3.745	54.000	36.752	AV
2		*	5197.750	86.318	49.700	N/A	N/A	36.618	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0+1	

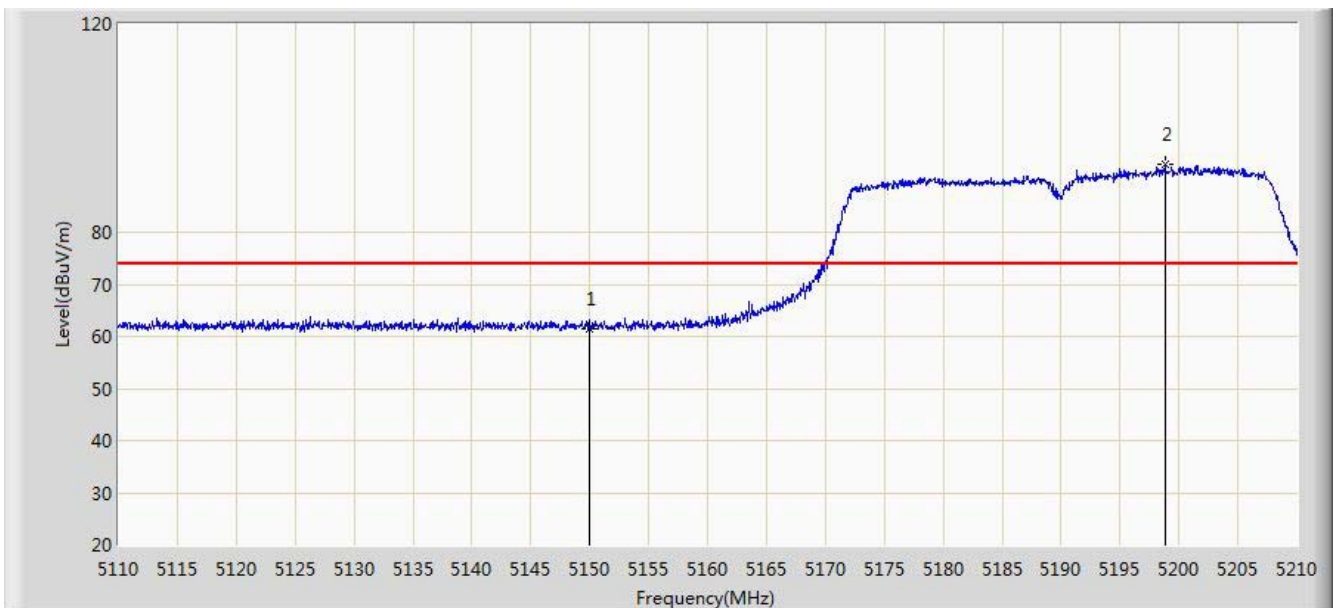


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.358	24.606	-12.642	74.000	36.752	PK
2		*	5198.800	93.011	56.396	N/A	N/A	36.615	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0+1	

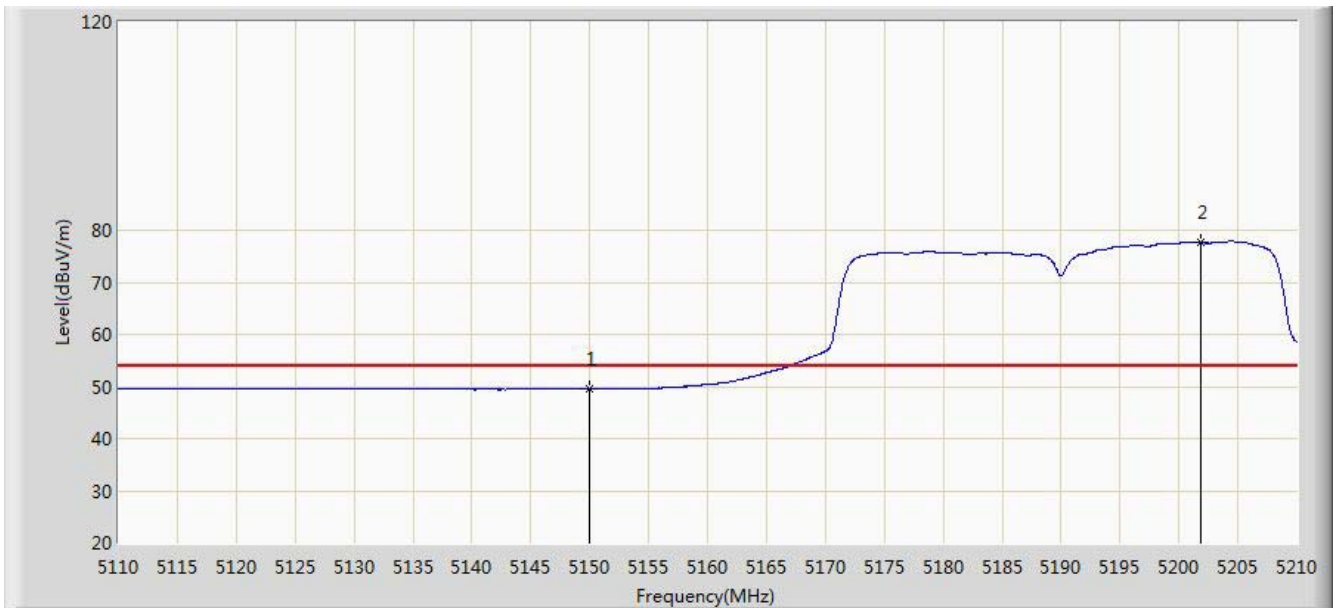


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.478	12.726	-4.522	54.000	36.752	AV
2		*	5201.850	77.728	41.119	N/A	N/A	36.609	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0+1	

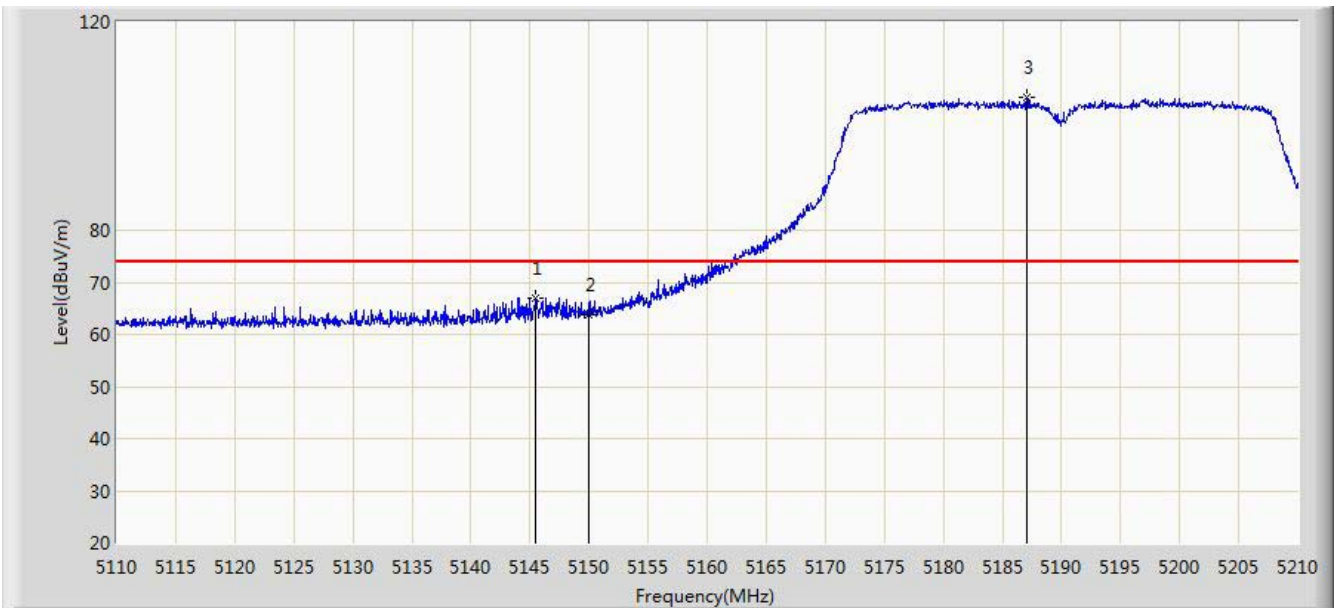

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.500	66.820	30.062	-7.180	74.000	36.758	PK
2			5150.000	63.737	26.985	-10.263	74.000	36.752	PK
3		*	5187.050	105.634	68.989	N/A	N/A	36.646	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.005	14.253	-2.995	54.000	36.752	AV
2		*	5183.050	88.798	52.142	N/A	N/A	36.657	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

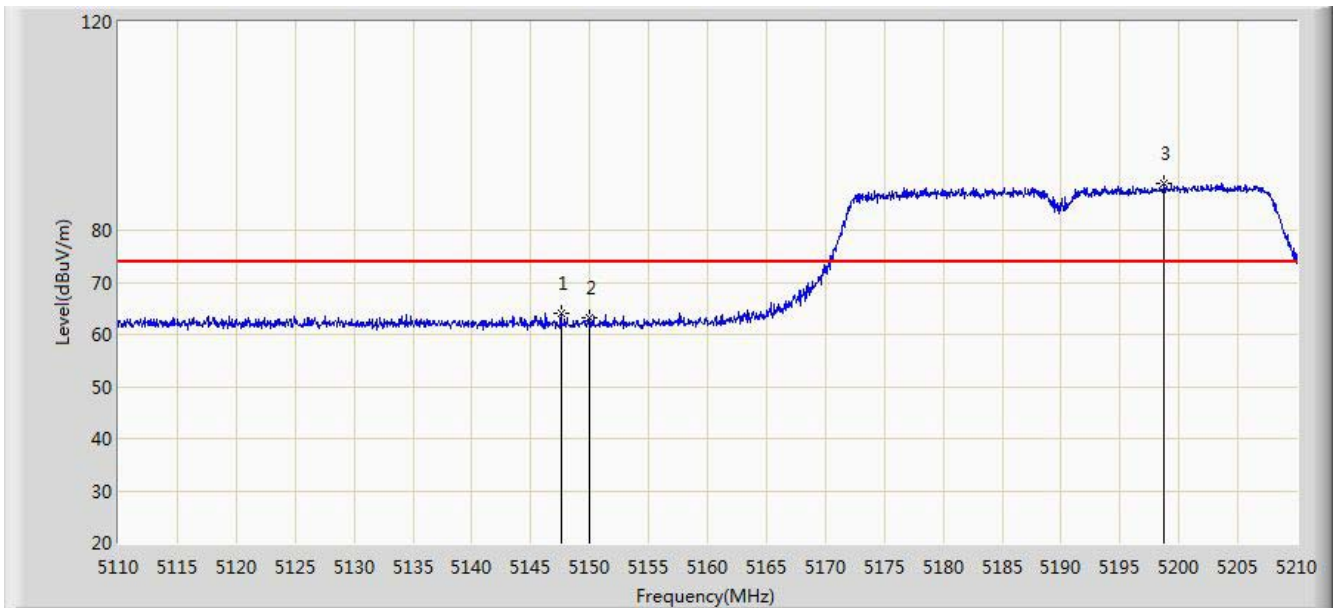


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.550	64.024	27.269	-9.976	74.000	36.755	PK
2			5150.000	63.245	26.493	-10.755	74.000	36.752	PK
3		*	5198.750	88.946	52.331	N/A	N/A	36.616	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

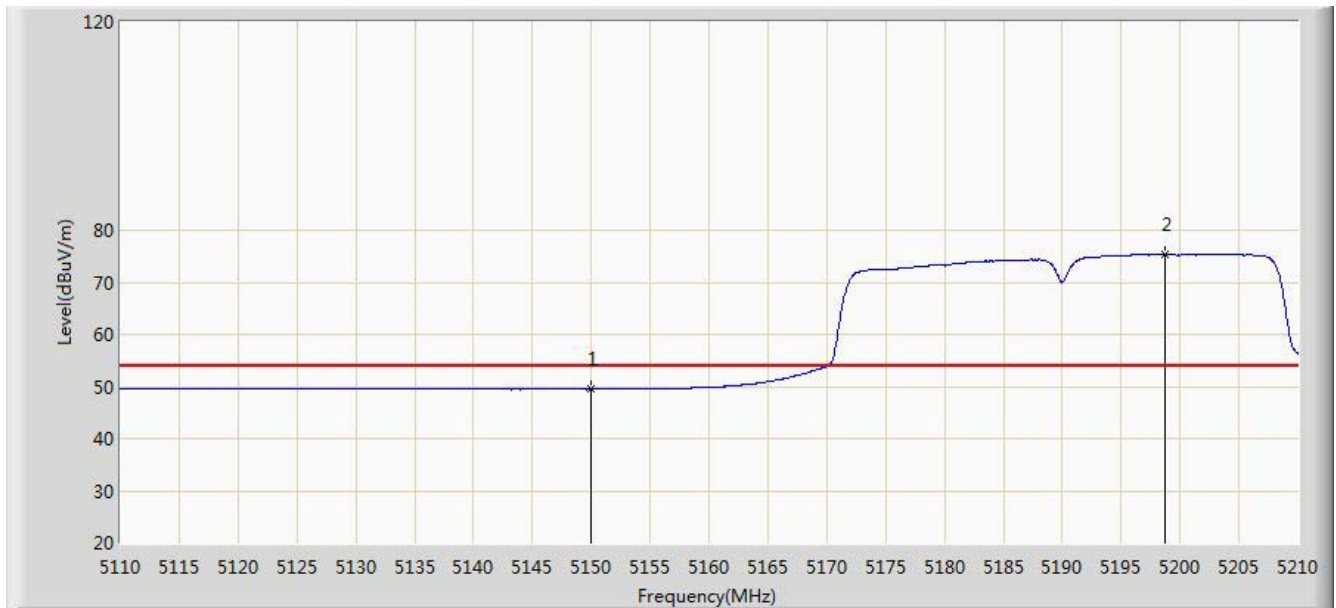


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.458	12.706	-4.542	54.000	36.752	AV
2		*	5198.750	75.439	38.824	N/A	N/A	36.616	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

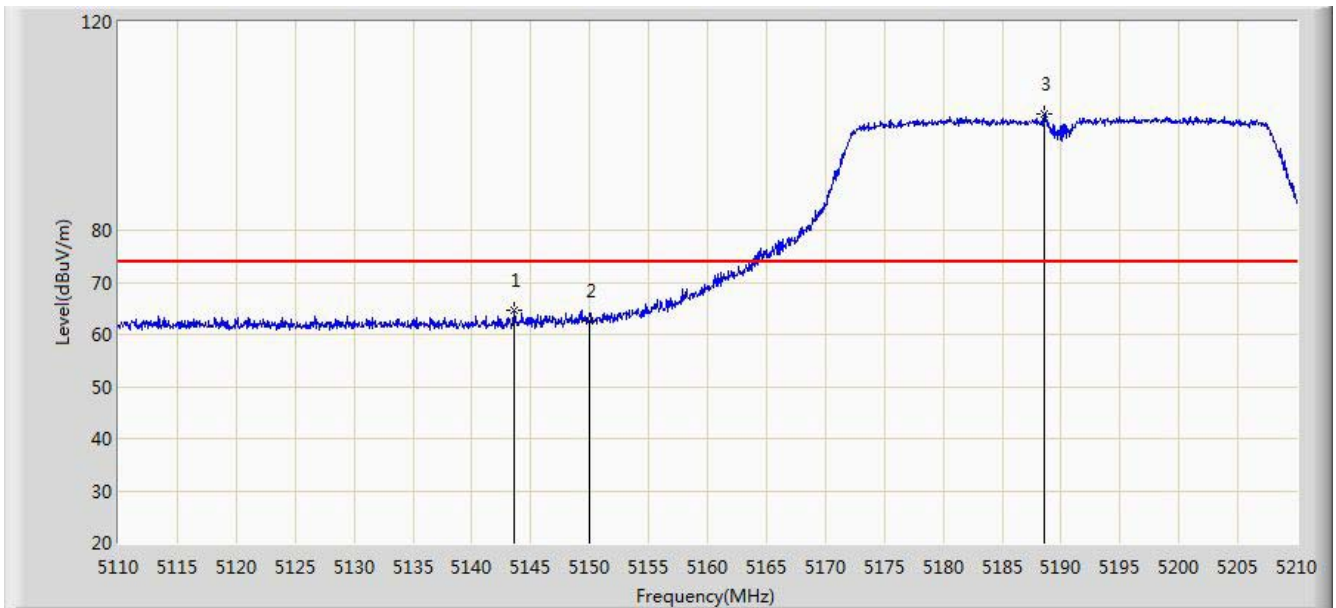


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.550	64.562	27.801	-9.438	74.000	36.761	PK
2			5150.000	62.713	25.961	-11.287	74.000	36.752	PK
3		*	5188.550	102.242	65.601	N/A	N/A	36.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

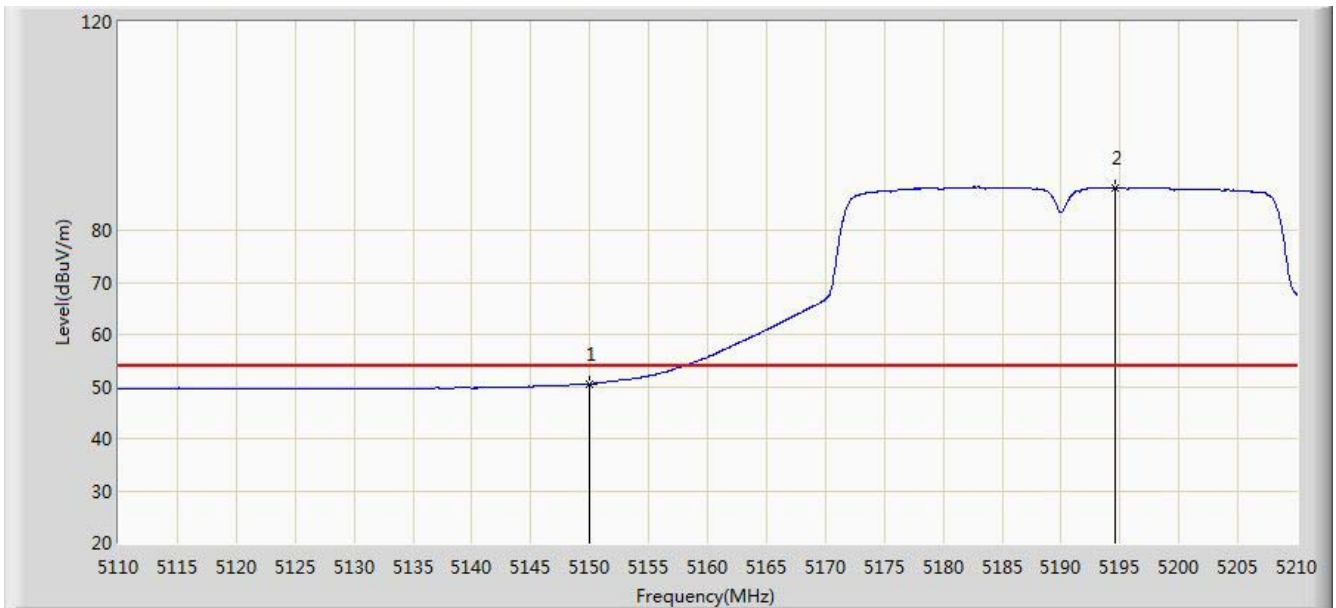


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.525	13.773	-3.475	54.000	36.752	AV
2		*	5194.600	88.171	51.545	N/A	N/A	36.626	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1	

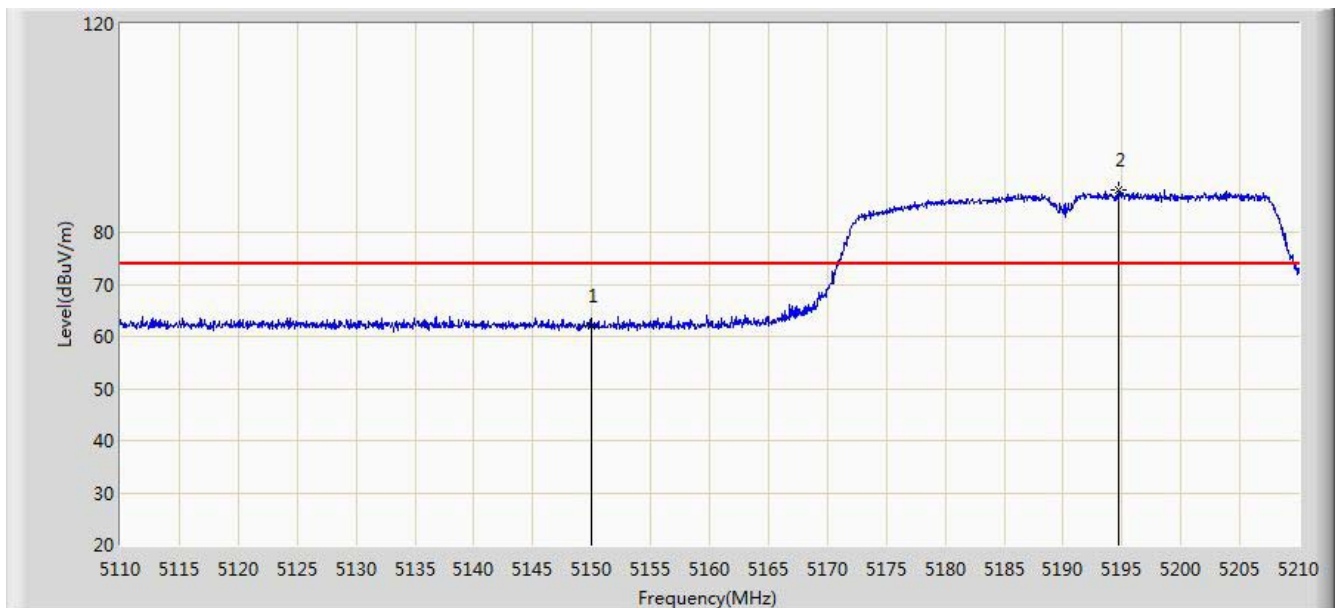


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.140	25.388	-11.860	74.000	36.752	PK
2		*	5194.650	88.231	51.605	N/A	N/A	36.626	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1	

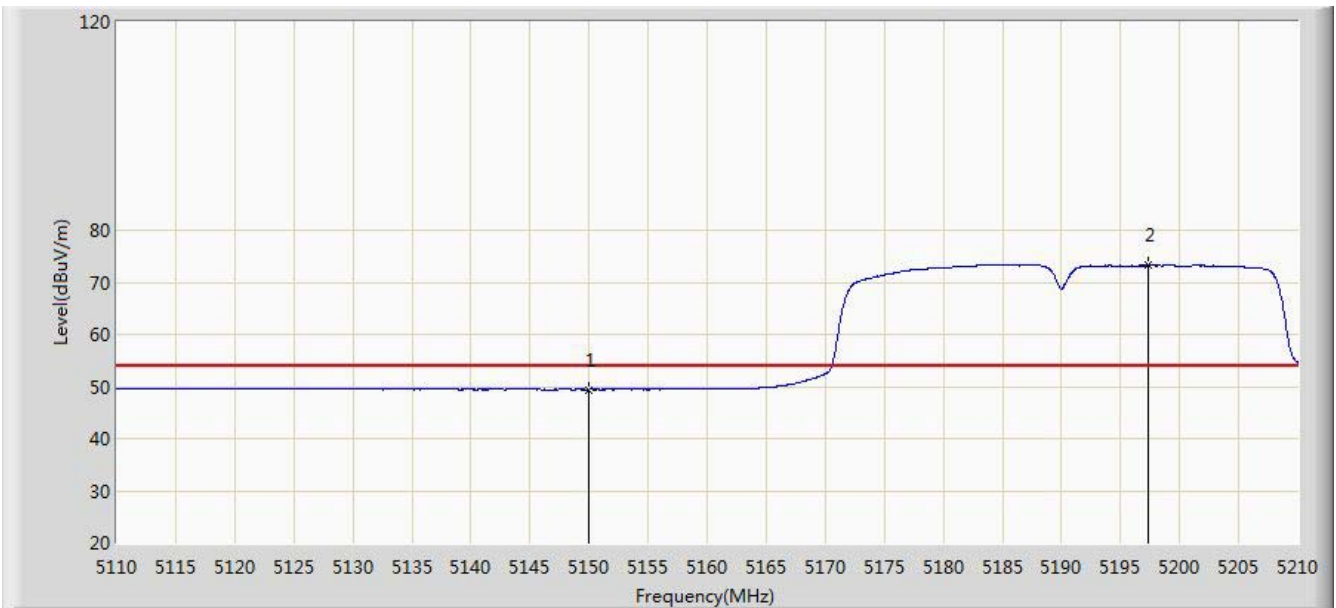


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.416	12.664	-4.584	54.000	36.752	AV
2		*	5197.350	73.269	36.650	N/A	N/A	36.619	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1	

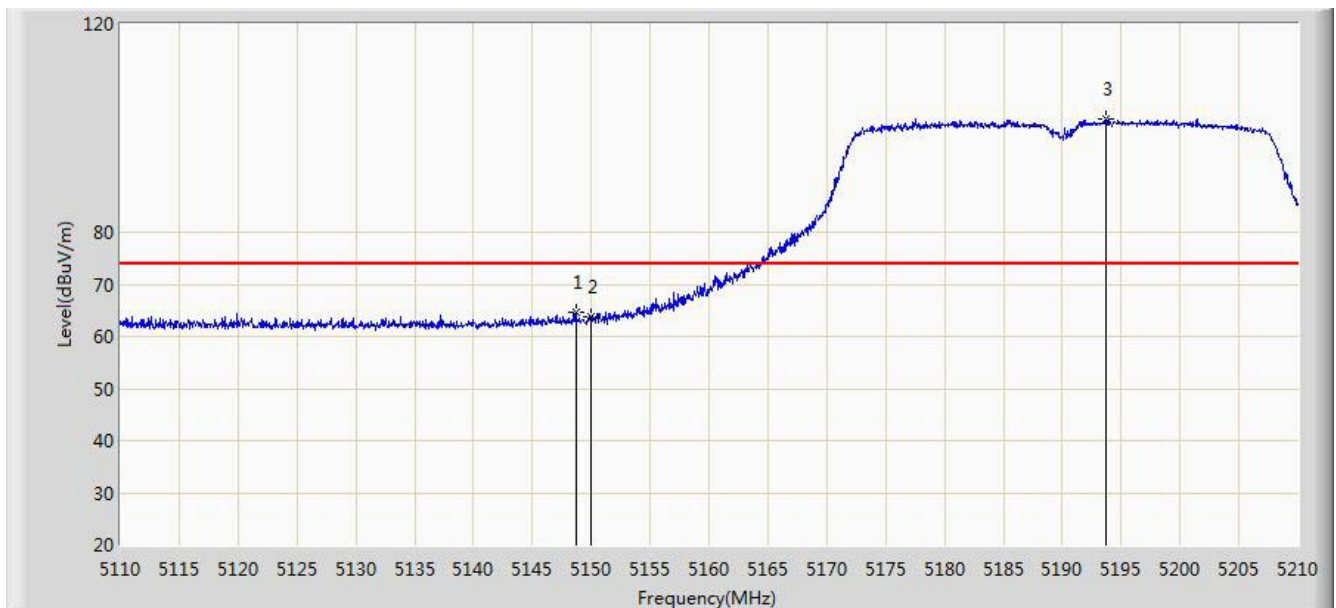


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.700	64.707	27.953	-9.293	74.000	36.754	PK
2			5150.000	63.834	27.082	-10.166	74.000	36.752	PK
3		*	5193.700	101.659	65.031	N/A	N/A	36.628	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1	

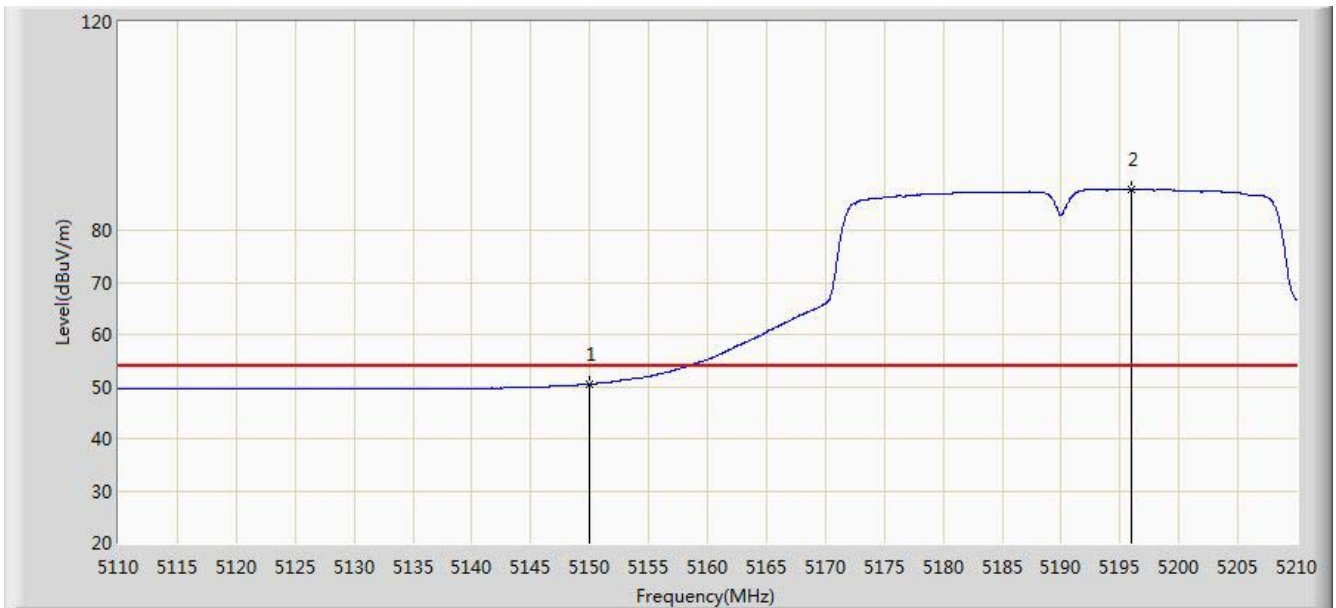


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.447	13.695	-3.553	54.000	36.752	AV
2		*	5195.950	87.922	51.300	N/A	N/A	36.623	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0+1	

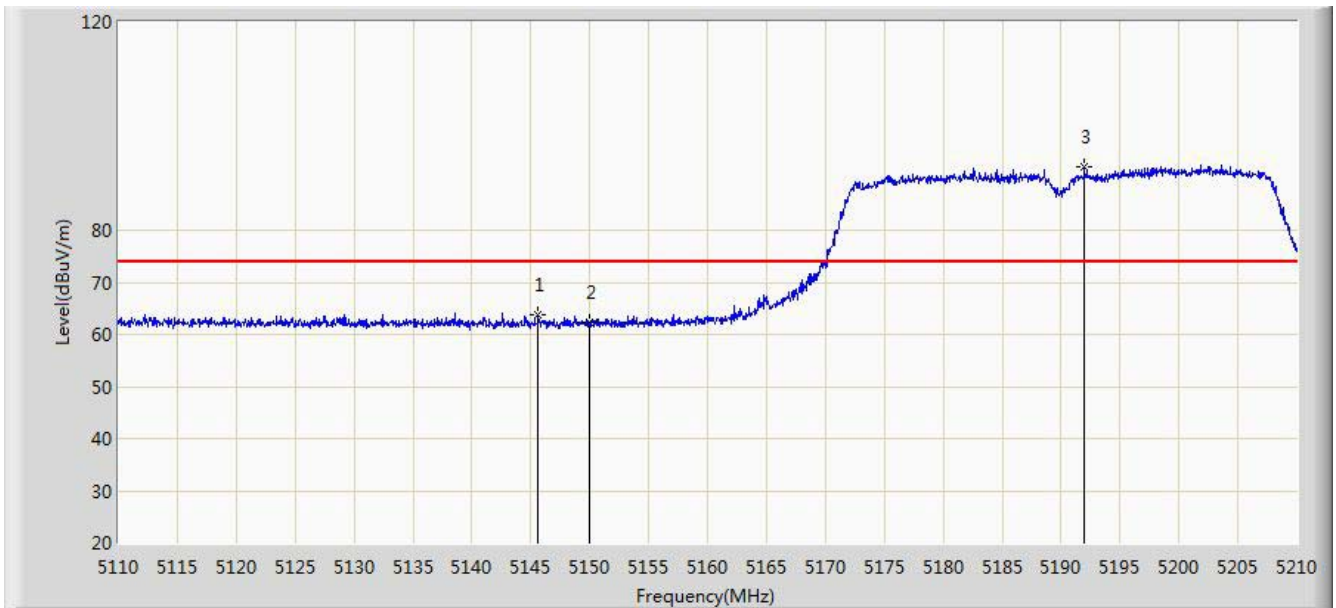


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.600	63.809	27.051	-10.191	74.000	36.758	PK
2			5150.000	62.289	25.537	-11.711	74.000	36.752	PK
3		*	5191.950	92.102	55.470	N/A	N/A	36.632	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0+1	

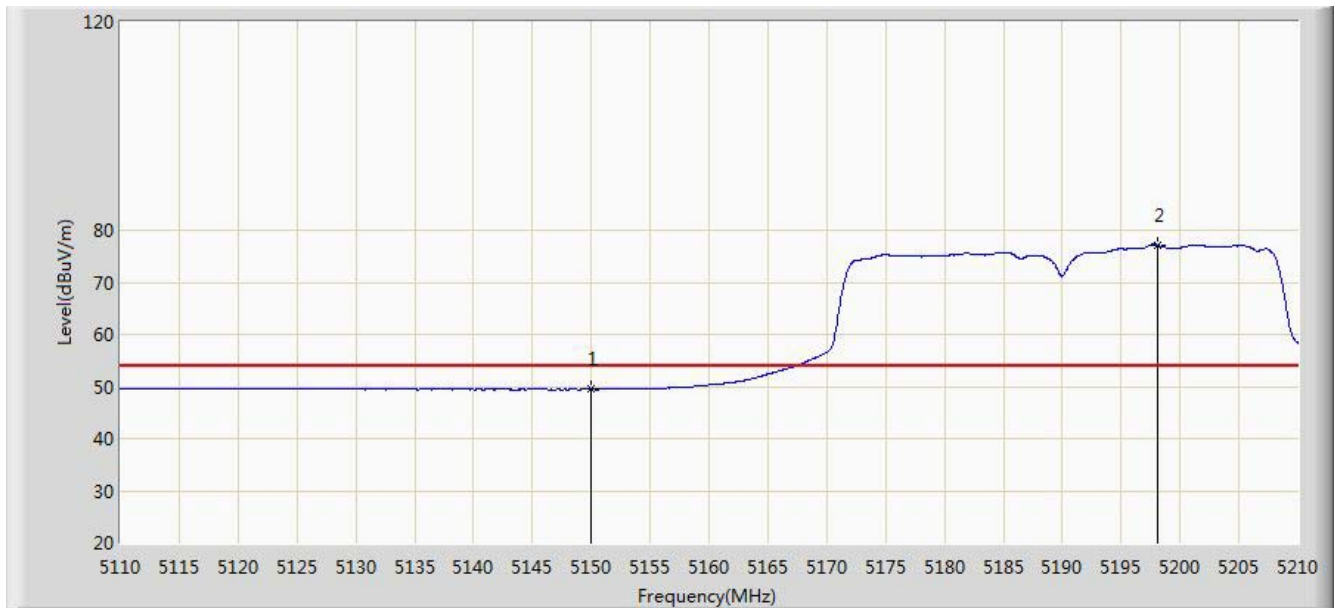


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.481	12.729	-4.519	54.000	36.752	AV
2		*	5198.150	77.024	40.407	N/A	N/A	36.616	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0+1	

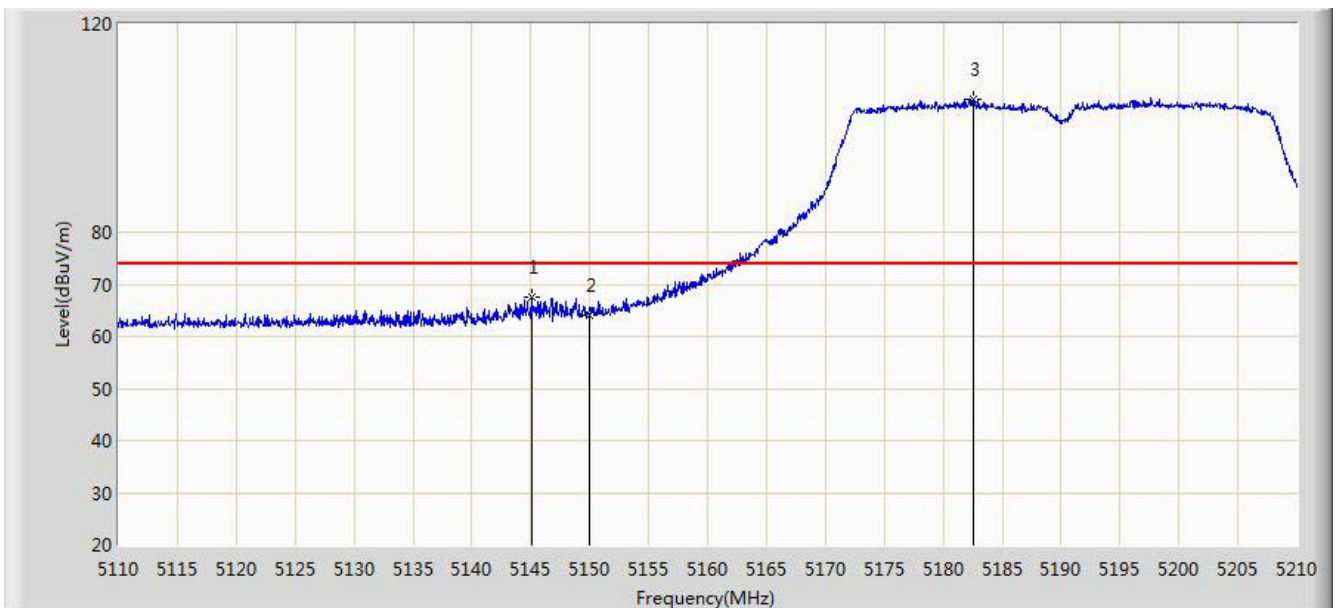


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.050	67.476	30.717	-6.524	74.000	36.759	PK
2			5150.000	64.056	27.304	-9.944	74.000	36.752	PK
3		*	5182.500	105.634	68.976	N/A	N/A	36.657	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/28 - 23:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 5: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0+1	

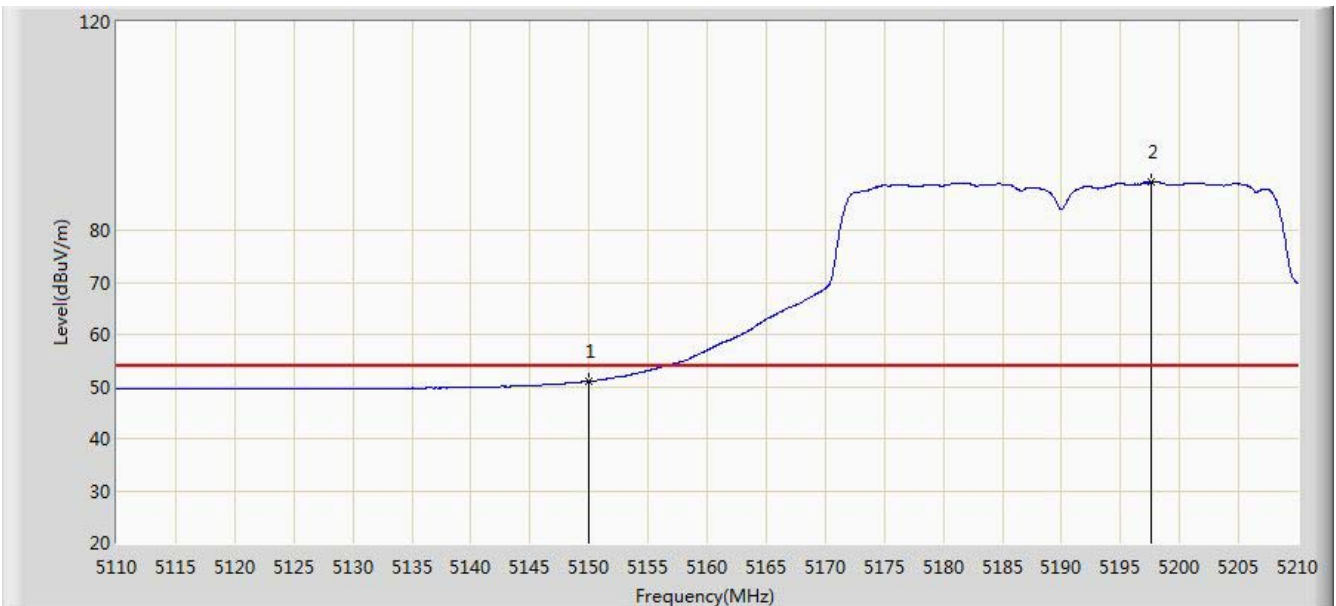


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.025	14.273	-2.975	54.000	36.752	AV
2		*	5197.650	89.374	52.756	N/A	N/A	36.618	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

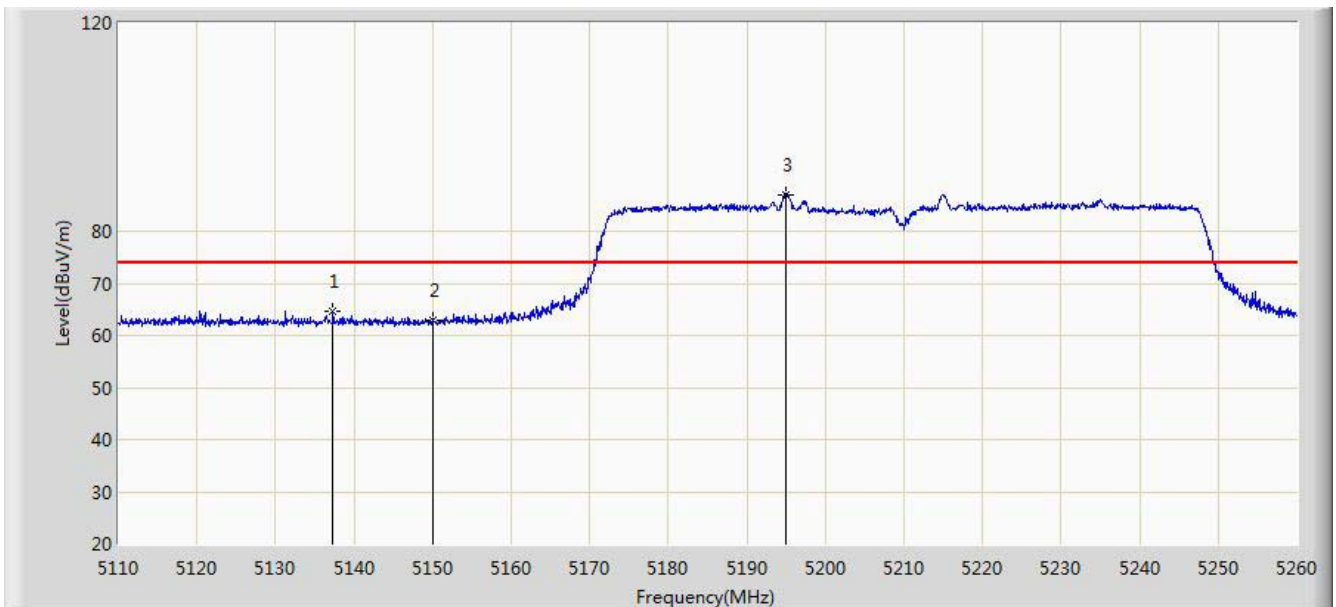


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.300	64.510	27.740	-9.490	74.000	36.770	PK
2			5150.000	62.925	26.173	-11.075	74.000	36.752	PK
3		*	5195.050	87.079	50.454	N/A	N/A	36.624	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

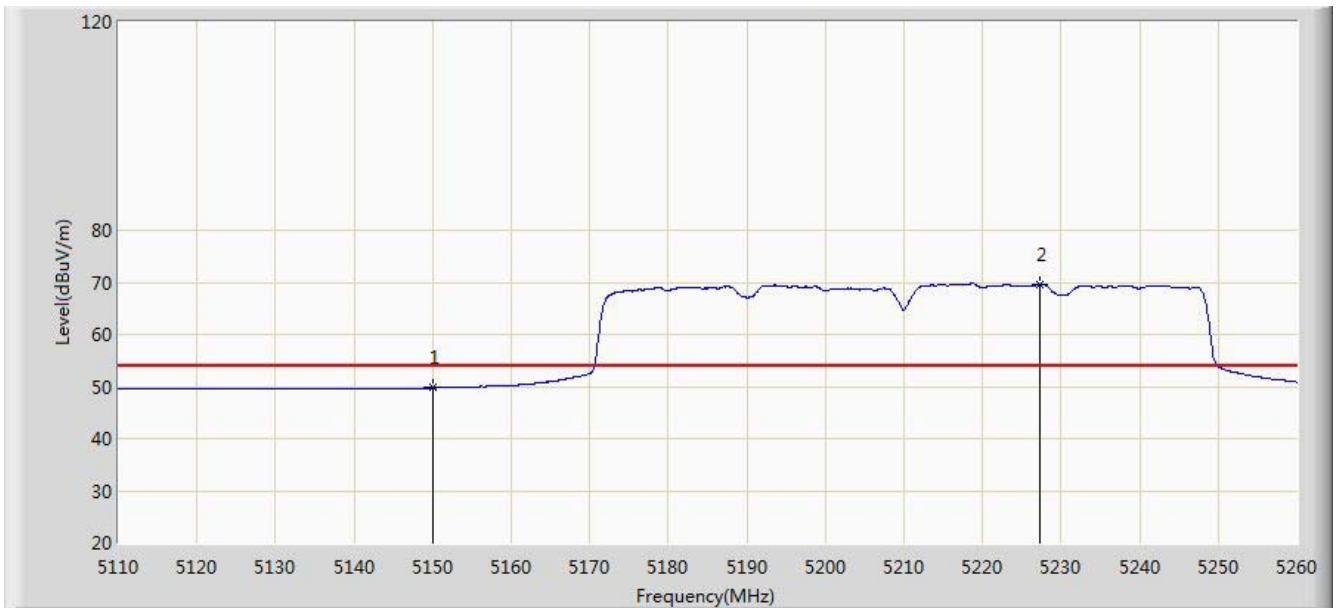


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.745	12.993	-4.255	54.000	36.752	AV
2		*	5227.225	69.610	33.060	N/A	N/A	36.549	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

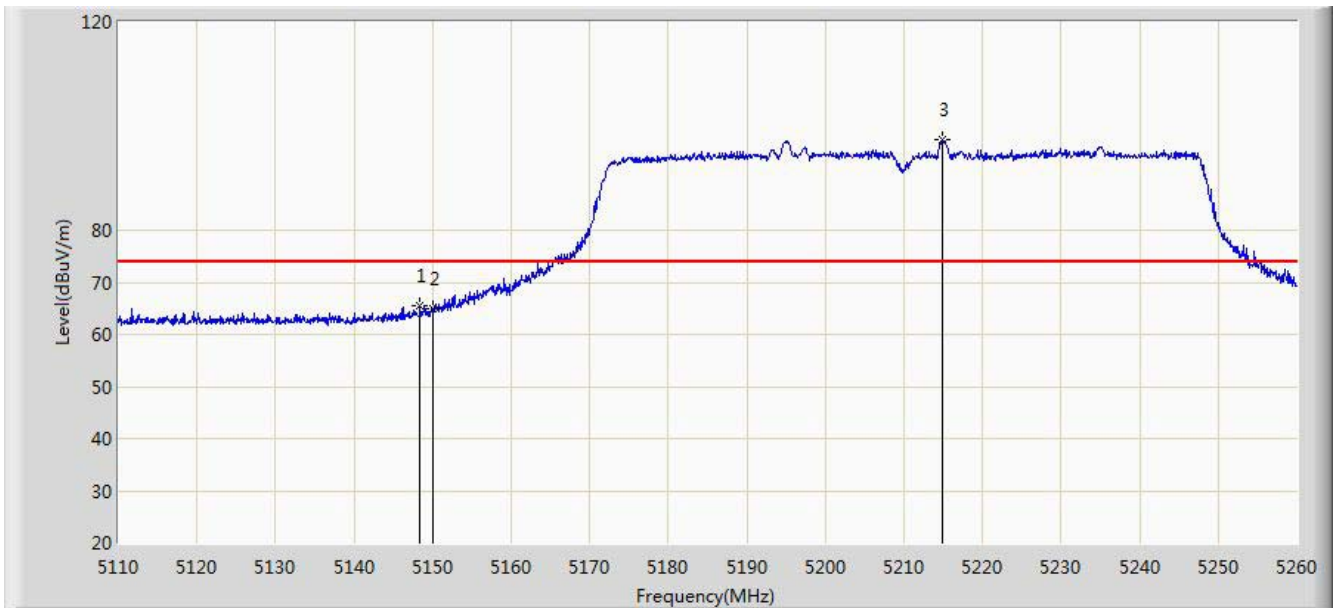


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.400	65.564	28.810	-8.436	74.000	36.754	PK
2			5150.000	64.828	28.076	-9.172	74.000	36.752	PK
3		*	5214.925	97.272	60.688	N/A	N/A	36.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

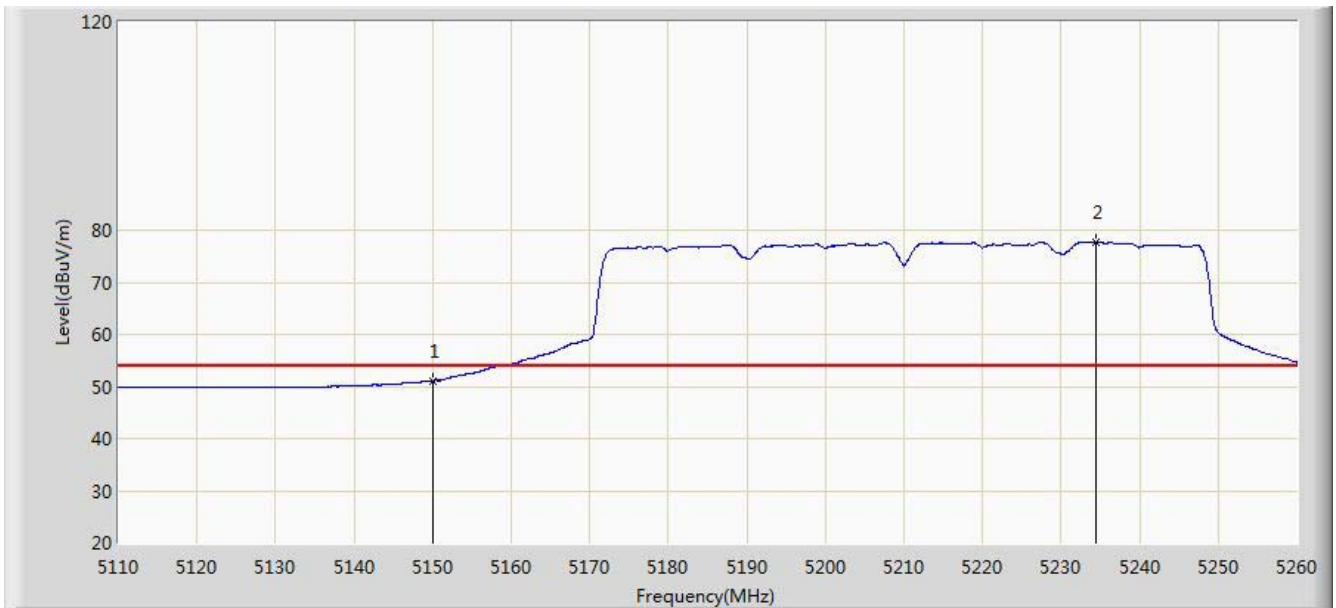


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.042	14.290	-2.958	54.000	36.752	AV
2		*	5234.350	77.630	41.102	N/A	N/A	36.528	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1	

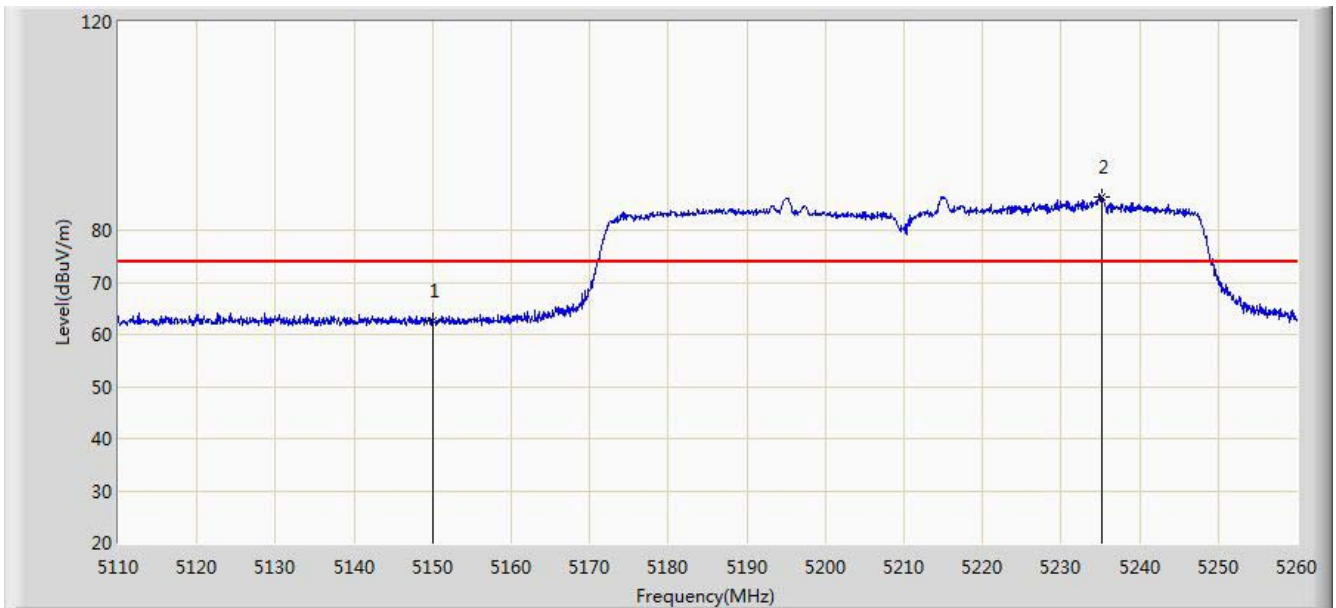


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.556	25.804	-11.444	74.000	36.752	PK
2		*	5235.175	86.361	49.836	N/A	N/A	36.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1	

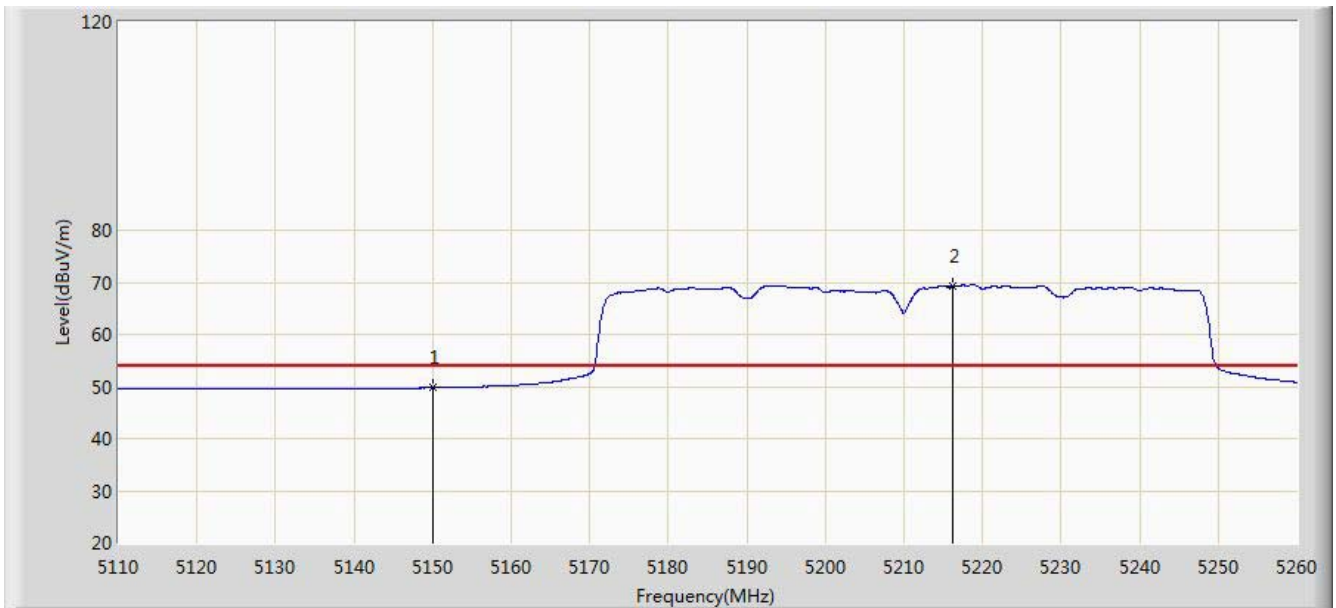


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.746	12.994	-4.254	54.000	36.752	AV
2		*	5216.275	69.347	32.766	N/A	N/A	36.581	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1	

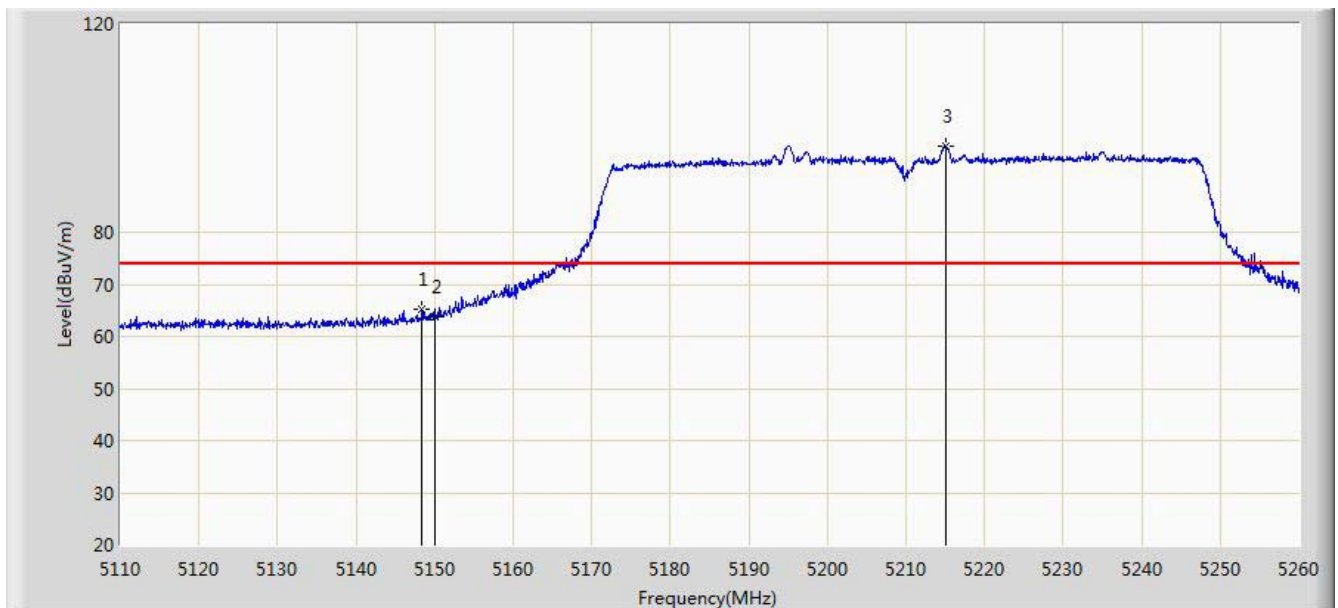


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.400	65.351	28.597	-8.649	74.000	36.754	PK
2			5150.000	63.748	26.996	-10.252	74.000	36.752	PK
3		*	5215.150	96.437	59.854	N/A	N/A	36.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1	

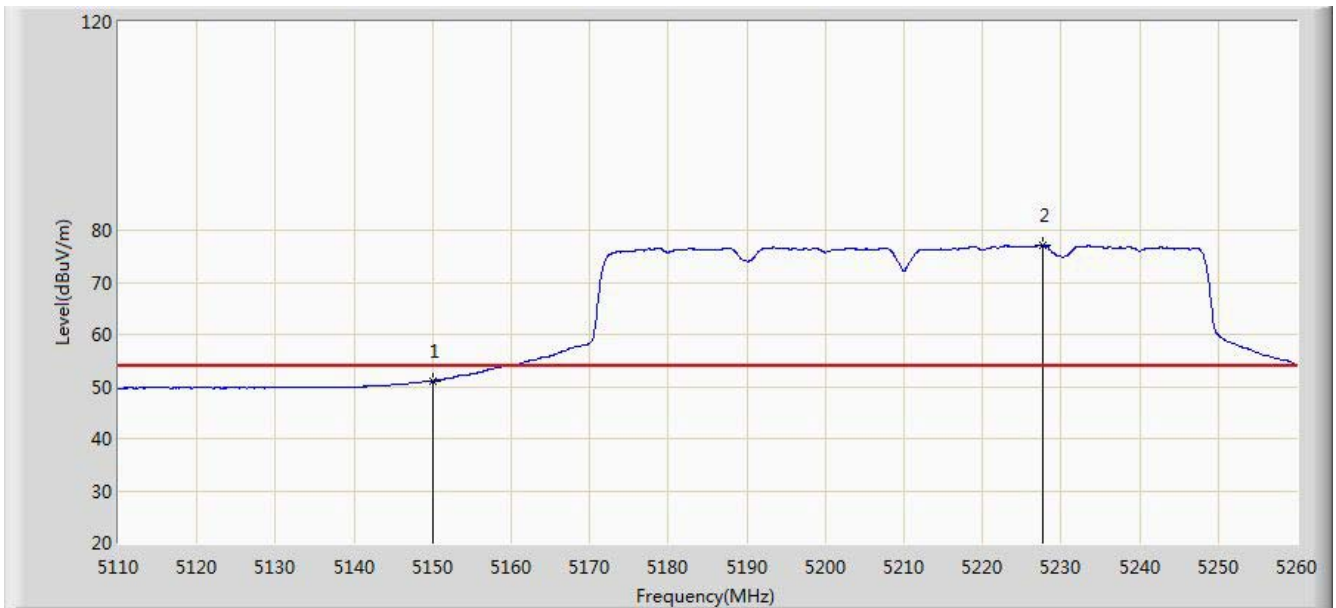


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.041	14.289	-2.959	54.000	36.752	AV
2		*	5227.750	77.063	40.515	N/A	N/A	36.548	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0+1	

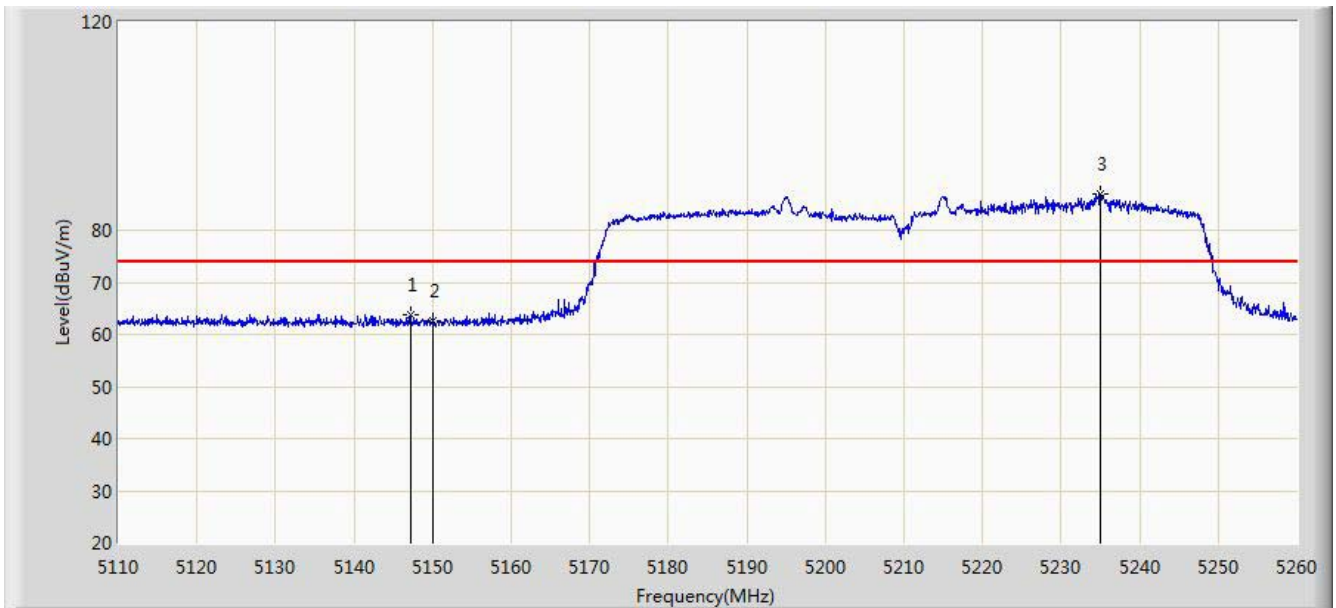


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.125	63.848	27.092	-10.152	74.000	36.756	PK
2			5150.000	62.634	25.882	-11.366	74.000	36.752	PK
3		*	5234.950	87.058	50.532	N/A	N/A	36.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/26 - 17:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0+1	

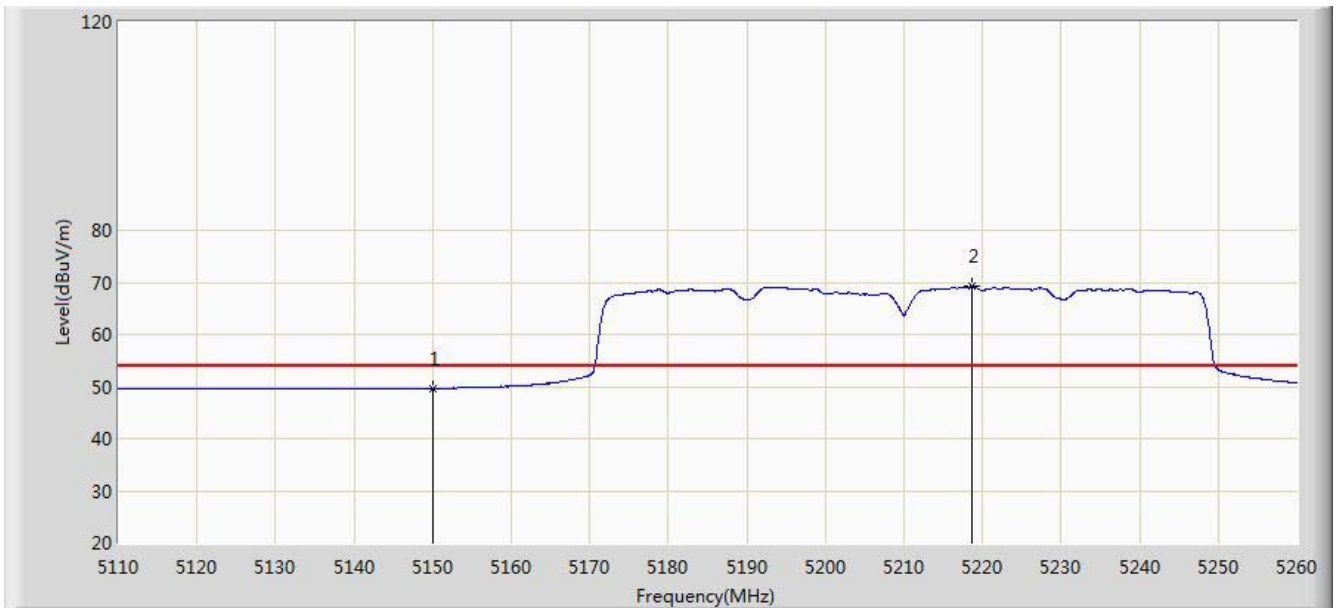


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.649	12.897	-4.351	54.000	36.752	AV
2		*	5218.600	69.197	32.623	N/A	N/A	36.574	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/29 - 10:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0+1	

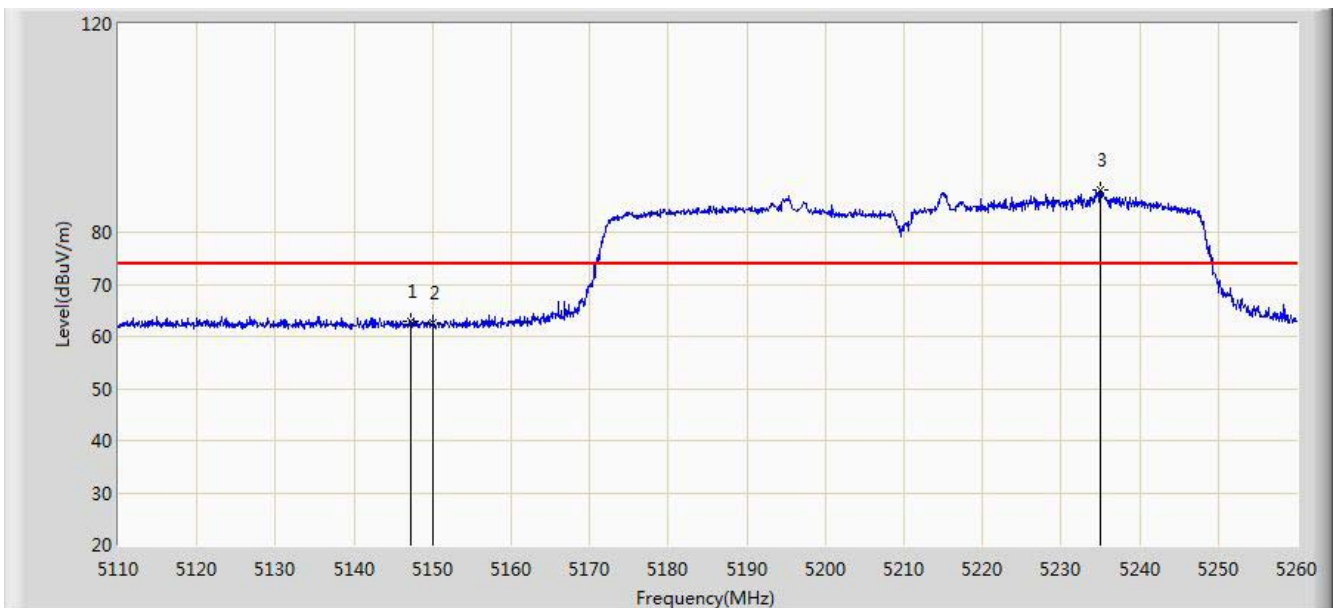


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.125	62.848	26.092	-11.152	74.000	36.756	PK
2			5150.000	62.634	25.882	-11.366	74.000	36.752	PK
3		*	5234.950	88.057	51.532	N/A	N/A	36.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Milo Li	
Site: AC1	Time: 2014/09/29 - 10:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 6: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0+1	

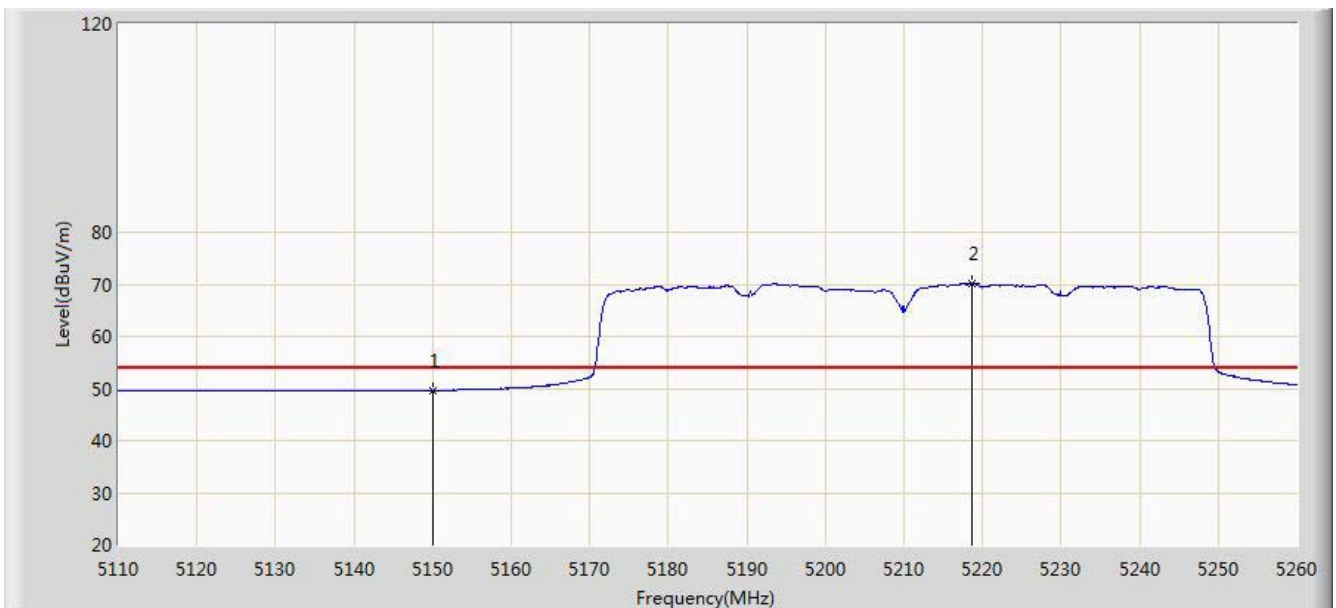


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.649	12.897	-4.351	54.000	36.752	AV
2		*	5218.600	70.198	33.624	N/A	N/A	36.574	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/05/03 - 16:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0	

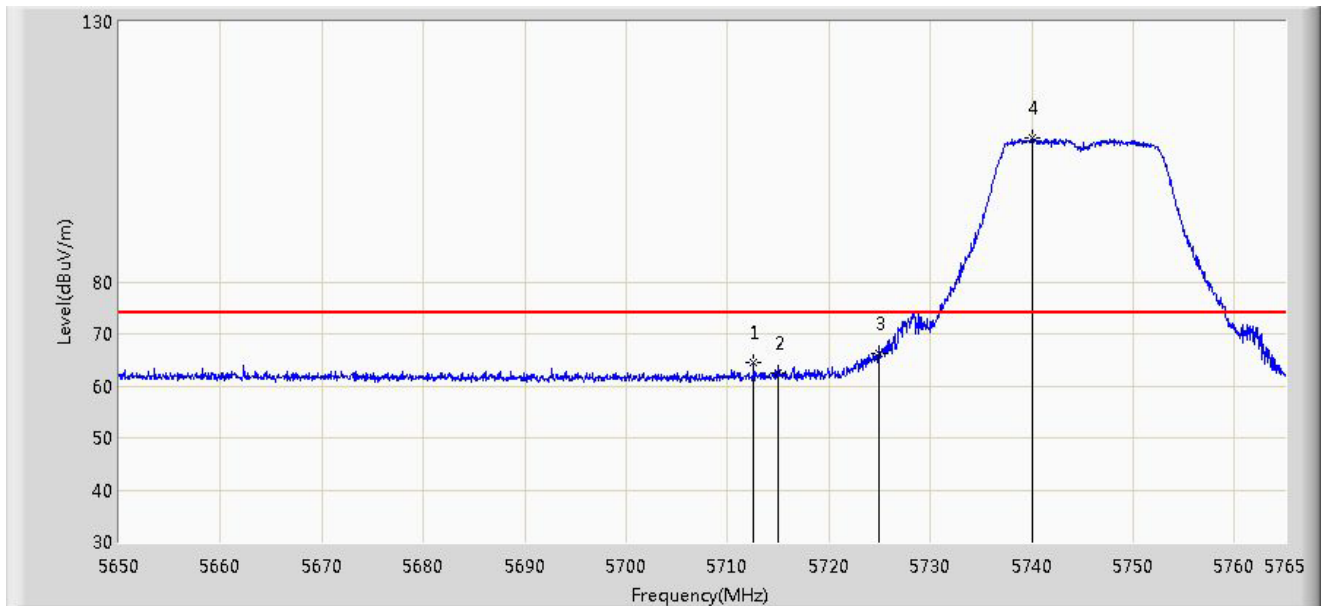


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.560	64.595	60.841	-9.405	74.000	3.754	PK
2			5715.000	62.508	58.747	-11.492	74.000	3.761	PK
3			5725.000	66.353	62.562	-11.847	78.200	3.791	PK
4		*	5740.045	107.592	103.755	N/A	N/A	3.837	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0	

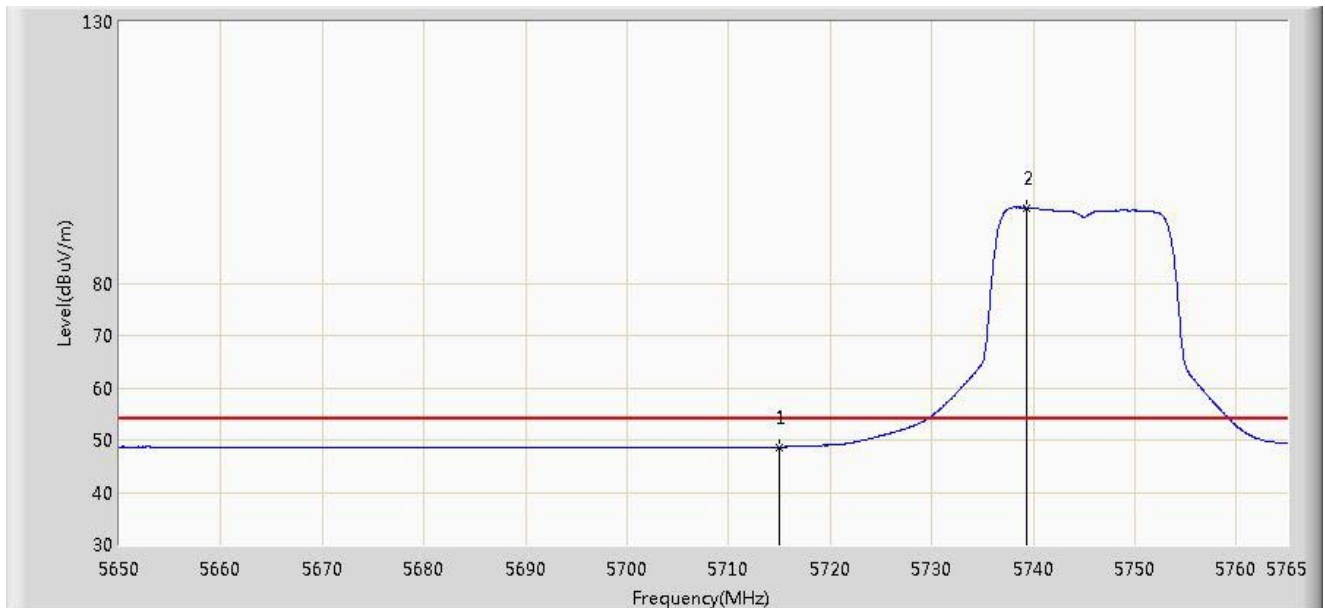


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.670	44.909	-5.330	54.000	3.761	AV
2		*	5739.355	94.449	90.614	N/A	N/A	3.836	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0	

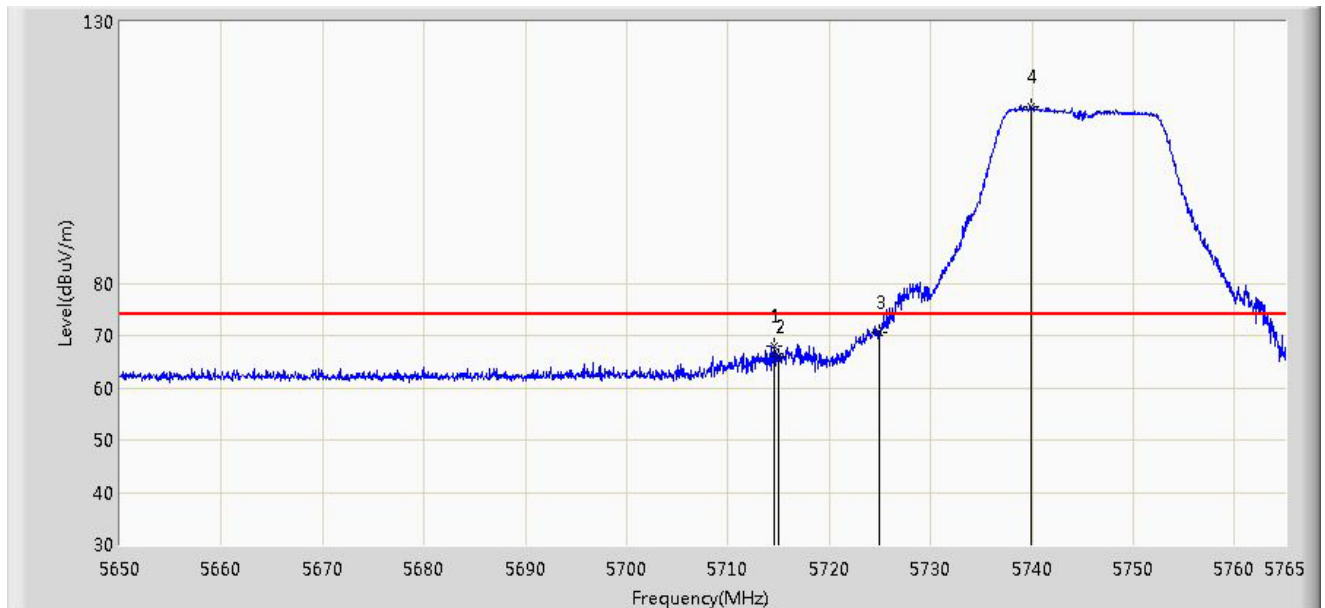


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.515	67.995	64.236	-6.005	74.000	3.759	PK
2			5715.000	65.834	62.073	-8.166	74.000	3.761	PK
3			5725.000	70.639	66.848	-7.561	78.200	3.791	PK
4		*	5739.930	113.718	109.881	N/A	N/A	3.837	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0	

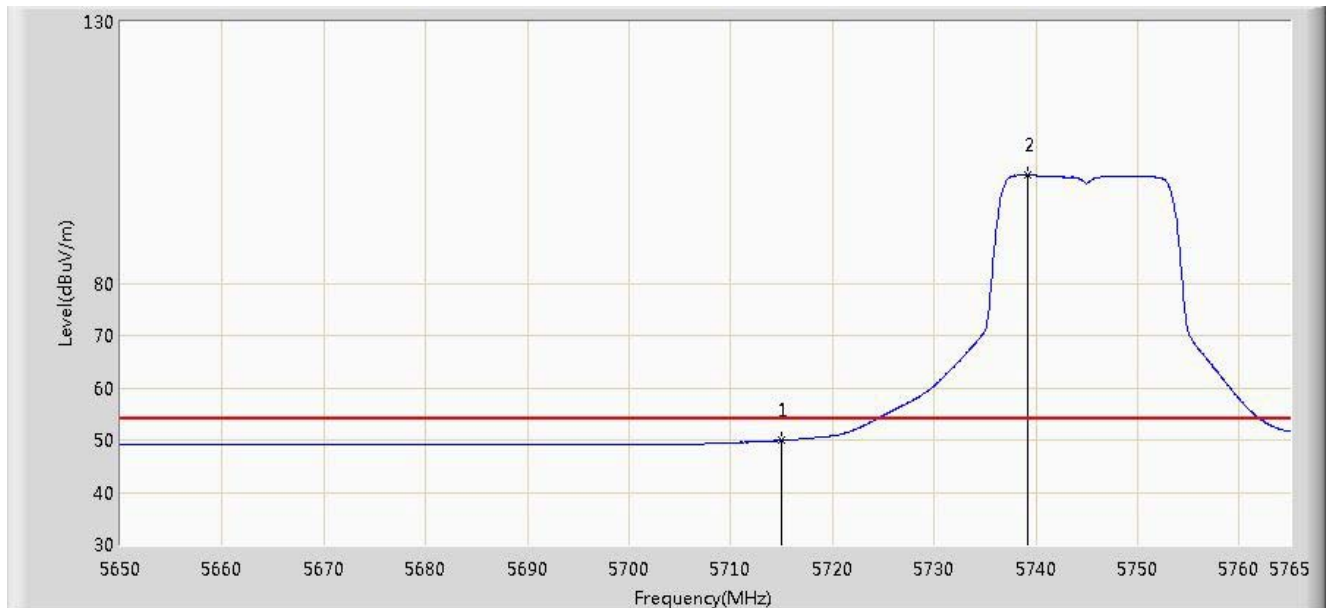


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.898	46.137	-4.102	54.000	3.761	AV
2		*	5739.183	100.668	96.833	N/A	N/A	3.835	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0	

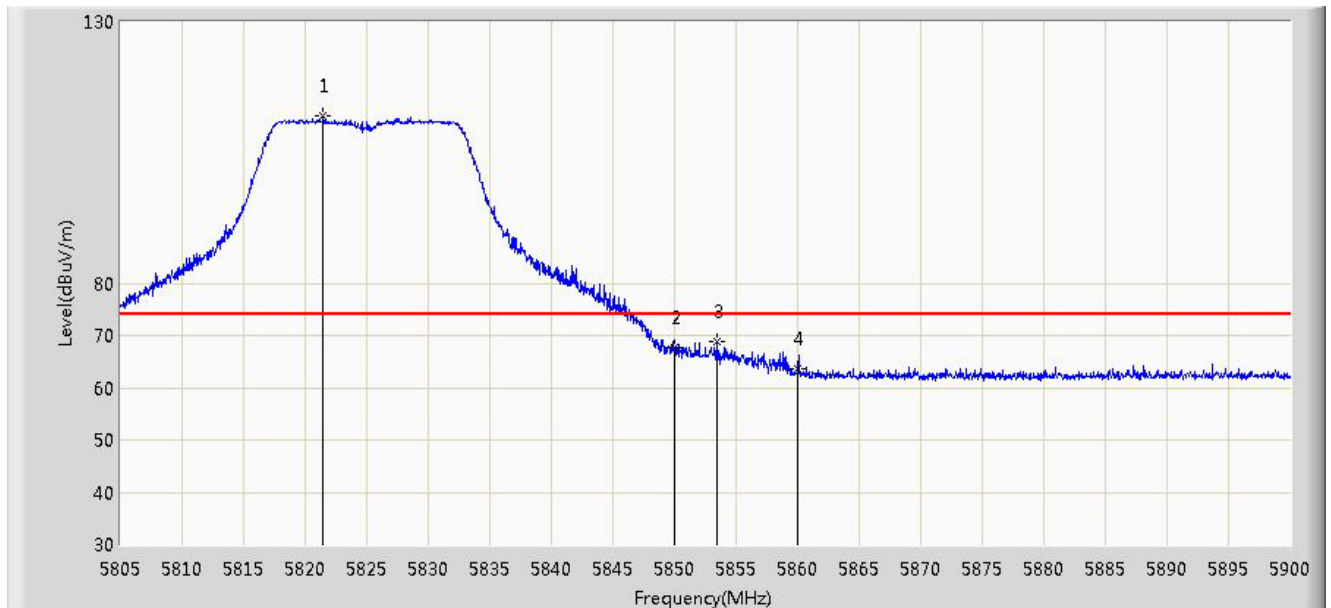


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.435	112.114	108.117	N/A	N/A	3.997	PK
2			5850.000	67.592	63.535	-10.608	78.200	4.058	PK
3			5853.402	68.758	64.699	-9.442	78.200	4.060	PK
4			5860.000	63.517	59.454	-10.483	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0	

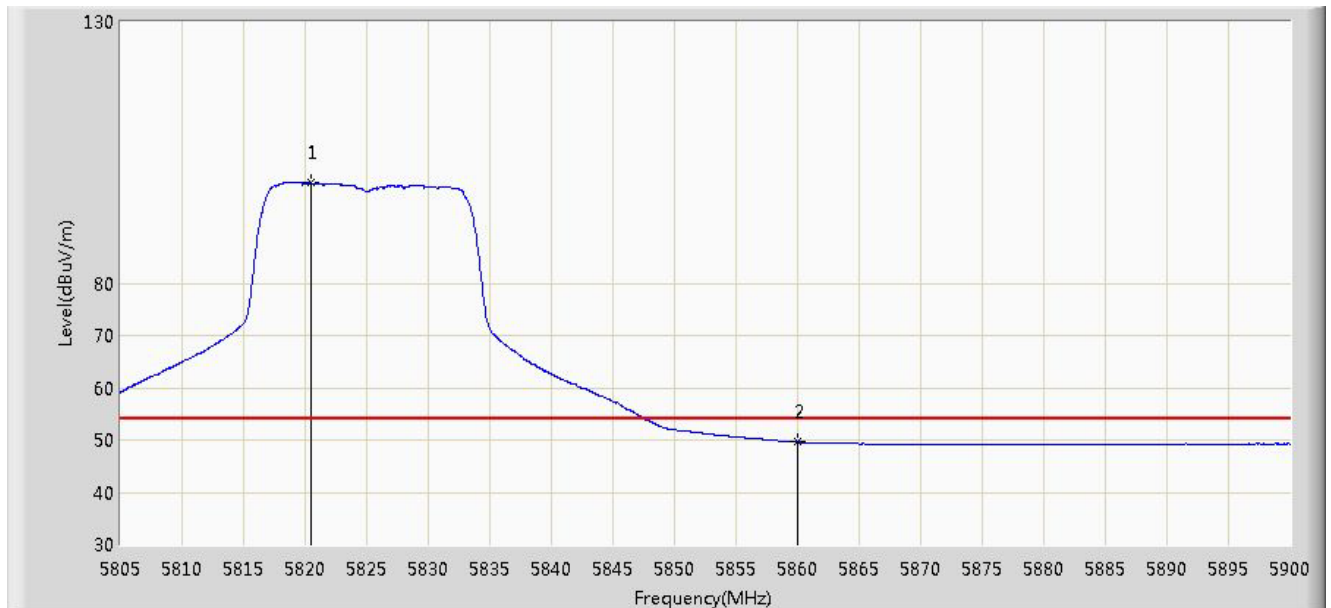


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.485	99.150	95.155	N/A	N/A	3.995	AV
2			5860.000	49.612	45.549	-4.388	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0	

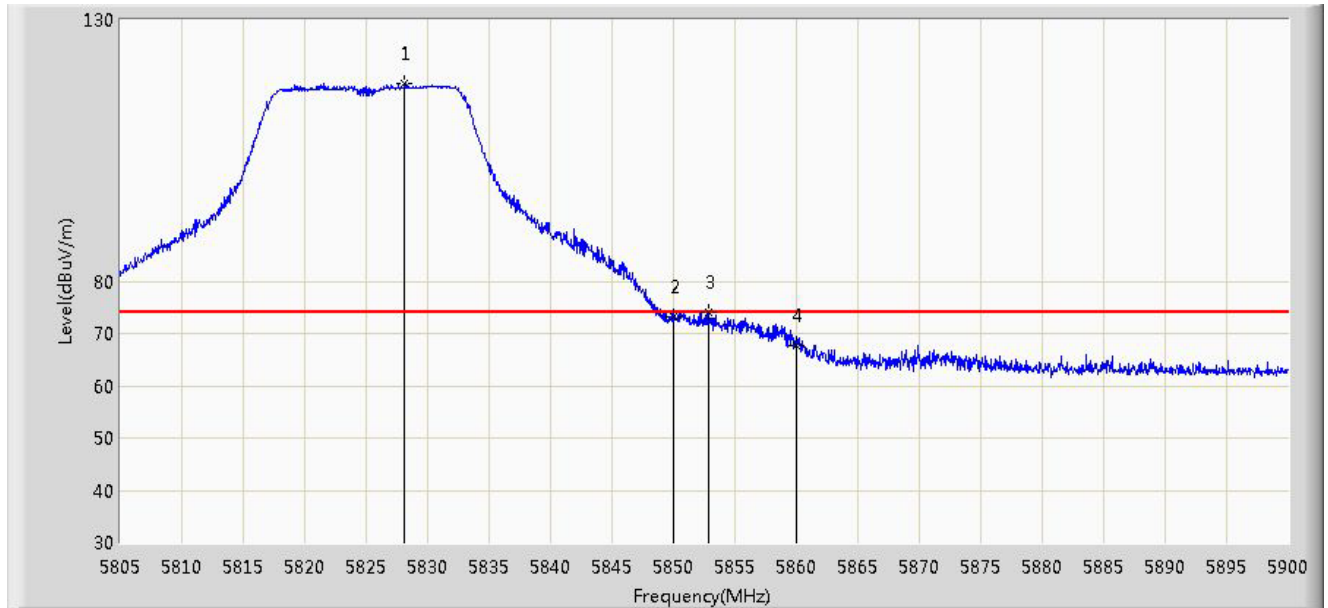


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.132	117.746	113.734	N/A	N/A	4.013	PK
2			5850.000	73.048	68.991	-5.152	78.200	4.058	PK
3			5852.880	73.955	69.896	-4.245	78.200	4.060	PK
4			5860.000	67.644	63.581	-6.356	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 16:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0	

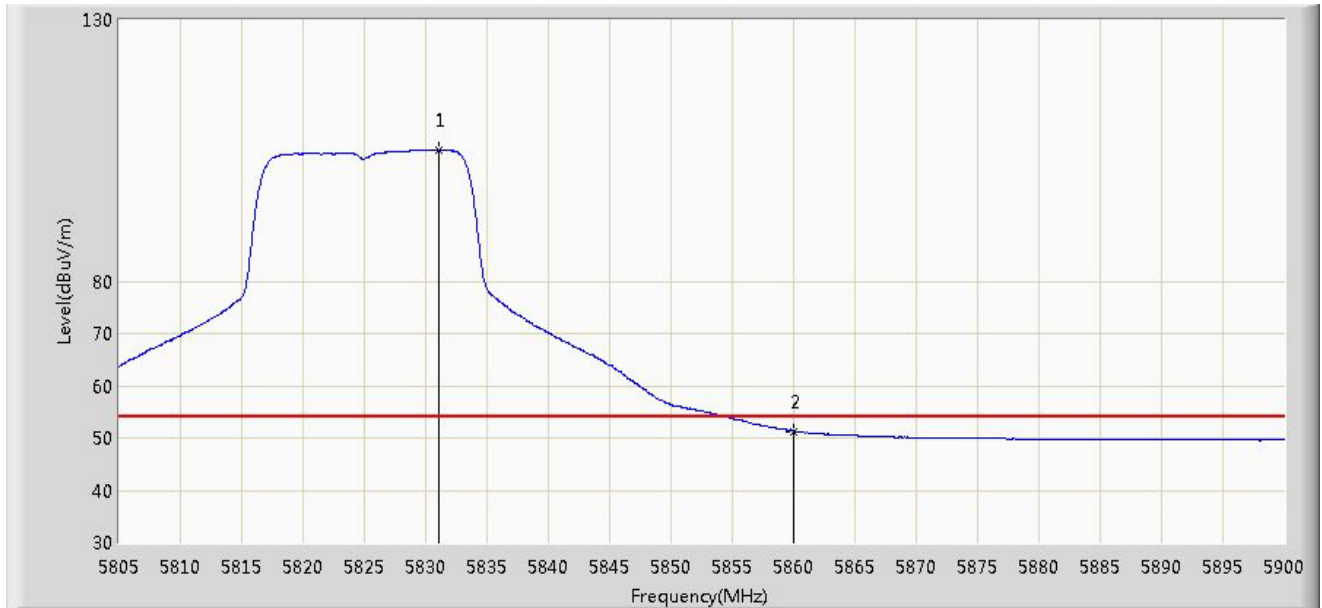


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.078	105.128	101.108	N/A	N/A	4.020	AV
2			5860.000	51.304	47.241	-2.696	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 17:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0	

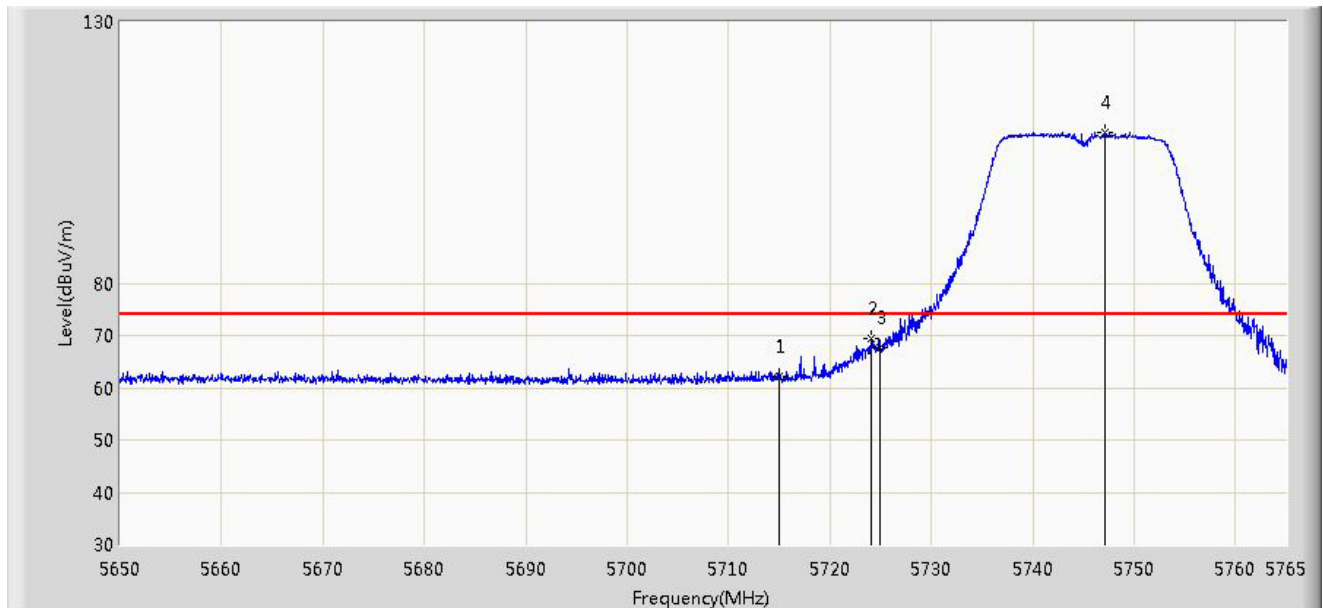


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.188	58.427	-11.812	74.000	3.761	PK
2			5724.060	69.375	65.587	-8.825	78.200	3.788	PK
3			5725.000	67.556	63.765	-10.644	78.200	3.791	PK
4		*	5747.118	108.736	104.875	N/A	N/A	3.861	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 17:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0	

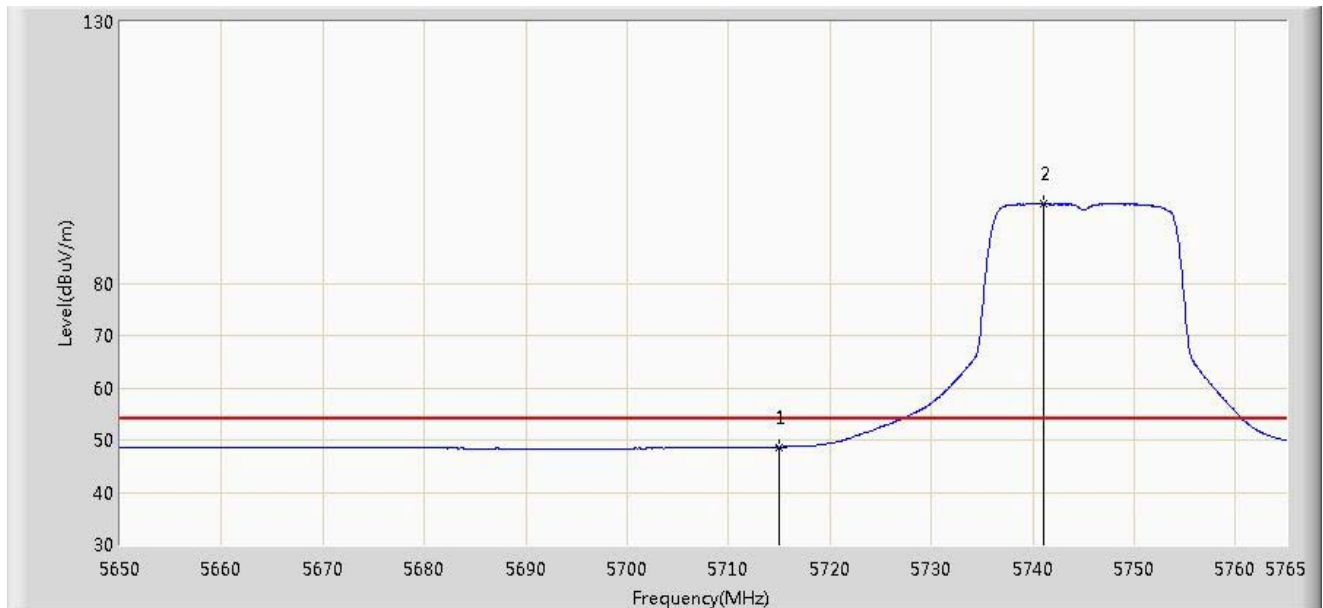


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	48.675	44.914	-5.325	54.000	3.761	AV
2		*	5741.138	95.086	91.246	N/A	N/A	3.840	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 17:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0	

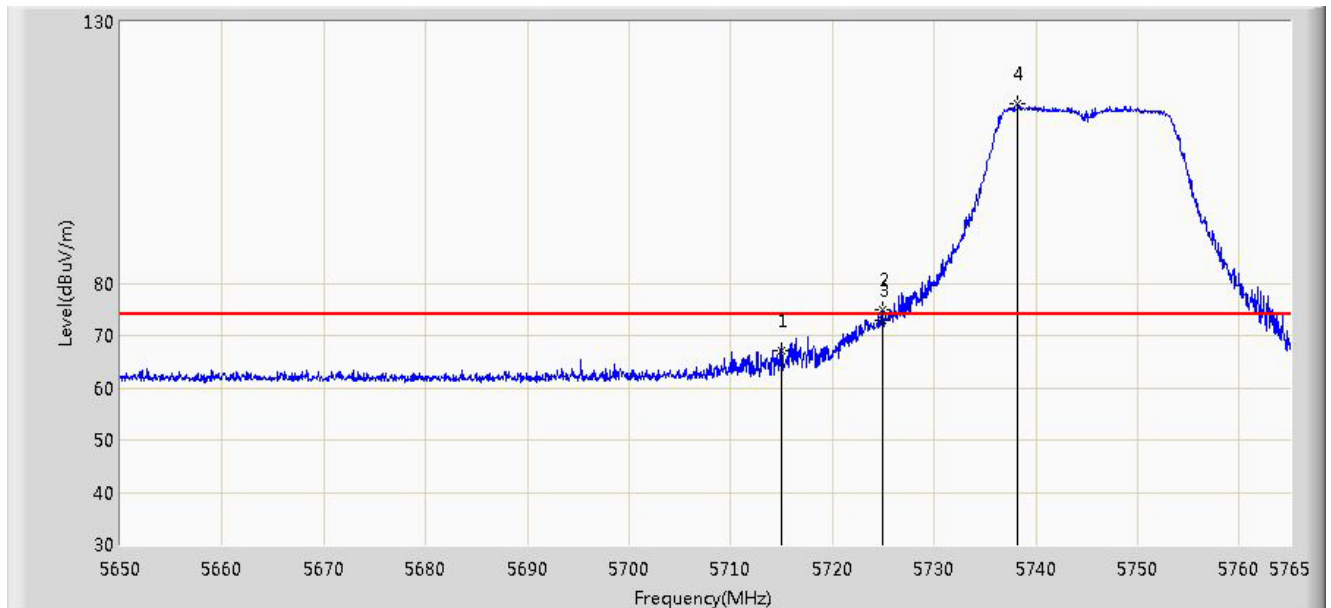


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	66.973	63.212	-7.027	74.000	3.761	PK
2			5724.922	74.803	71.013	-3.397	78.200	3.791	PK
3			5725.000	72.895	69.104	-5.305	78.200	3.791	PK
4		*	5738.263	114.214	110.382	N/A	N/A	3.833	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/05/03 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS-AC 2X2 27DBM NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0	

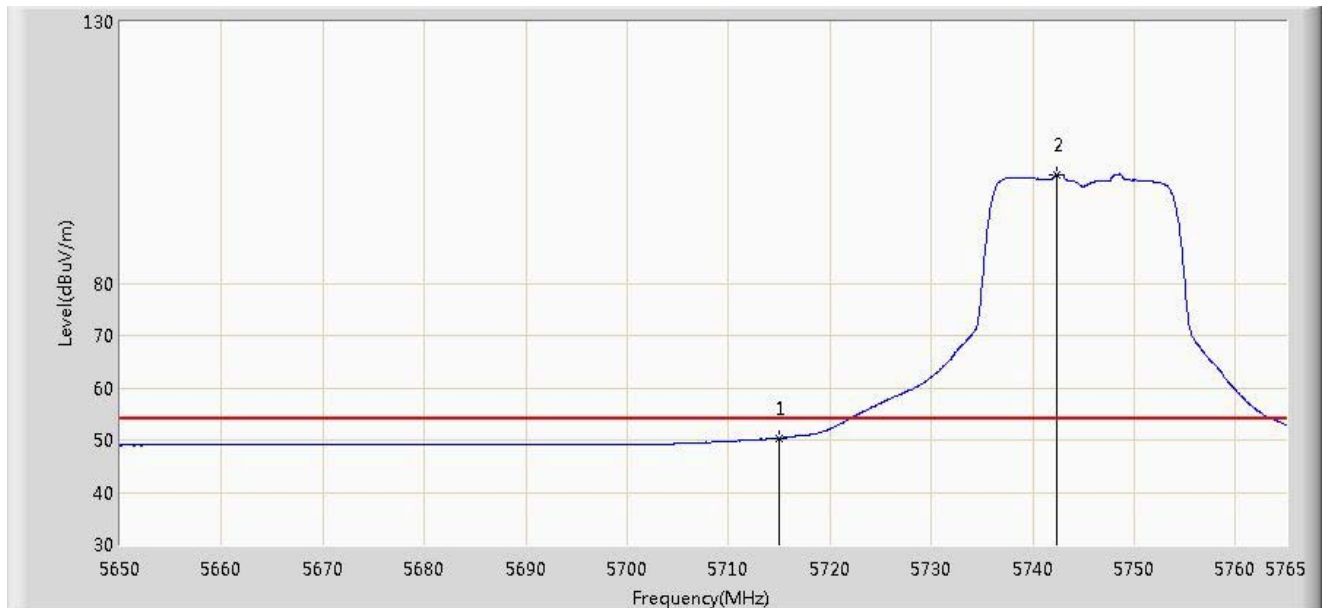

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.353	46.592	-3.647	54.000	3.761	AV
2		*	5742.402	100.698	96.854	N/A	N/A	3.844	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)