


Site: AC1	Time: 2015/04/24 - 03:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11a 1TX	

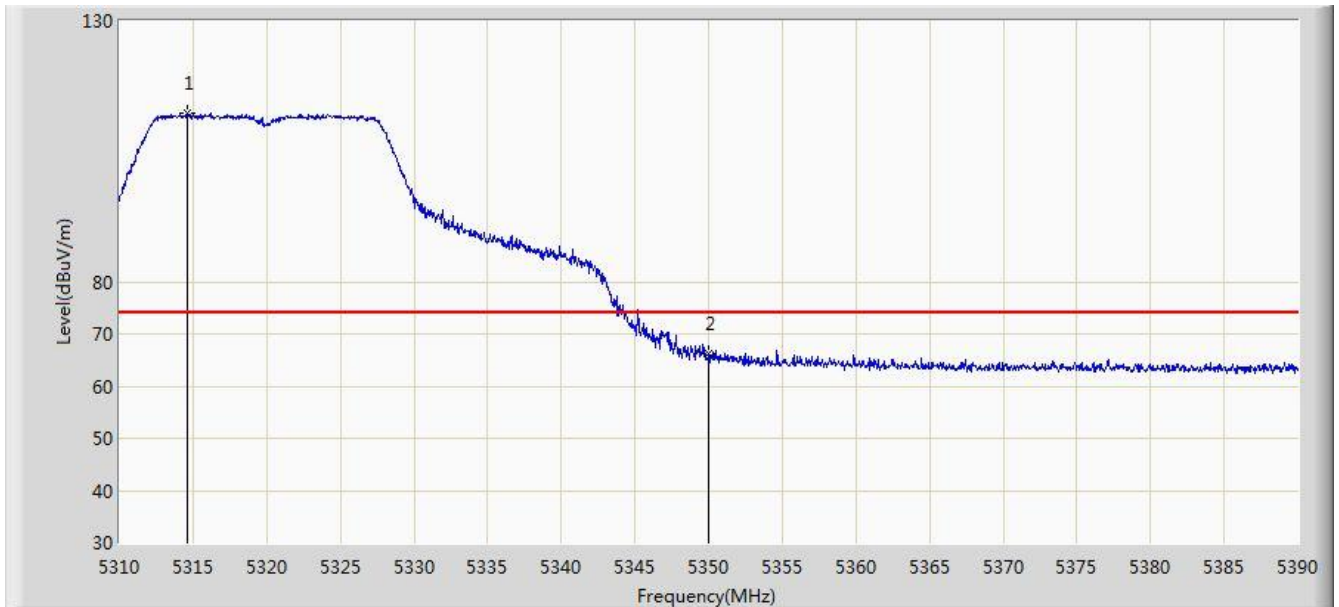


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.650	112.243	75.039	N/A	N/A	37.204	PK
2			5350.000	66.316	29.030	-7.684	74.000	37.286	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11a 1TX	

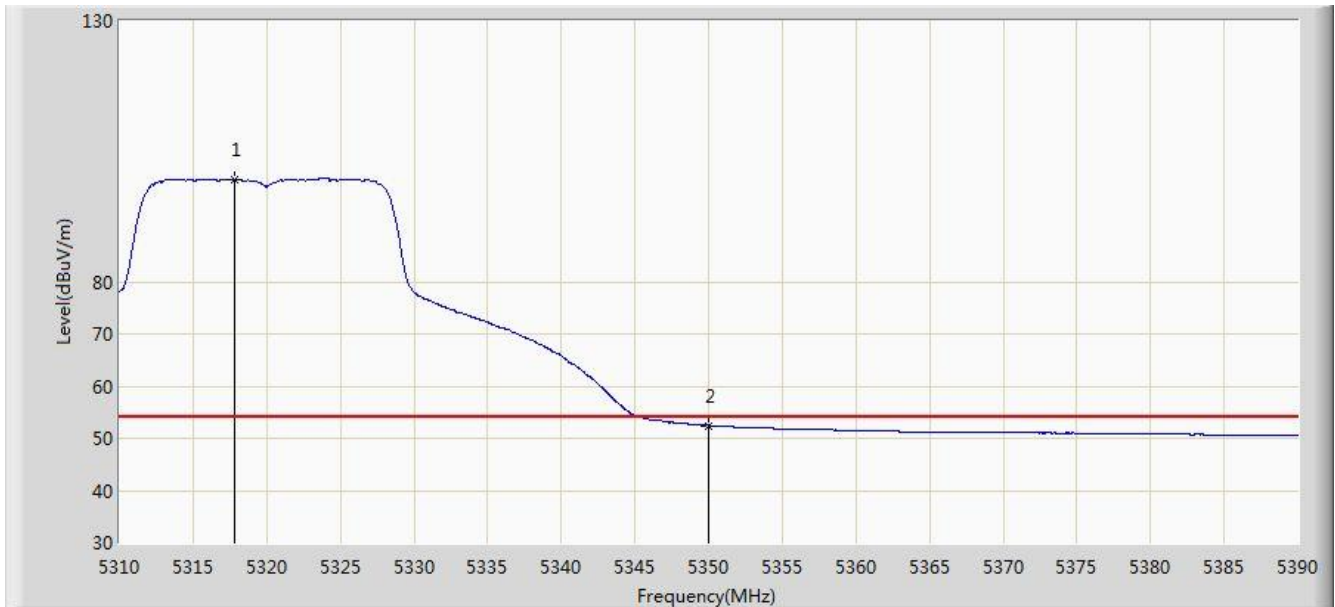


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	99.546	62.336	N/A	N/A	37.210	AV
2			5350.000	52.450	15.164	-1.550	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11a 1TX	

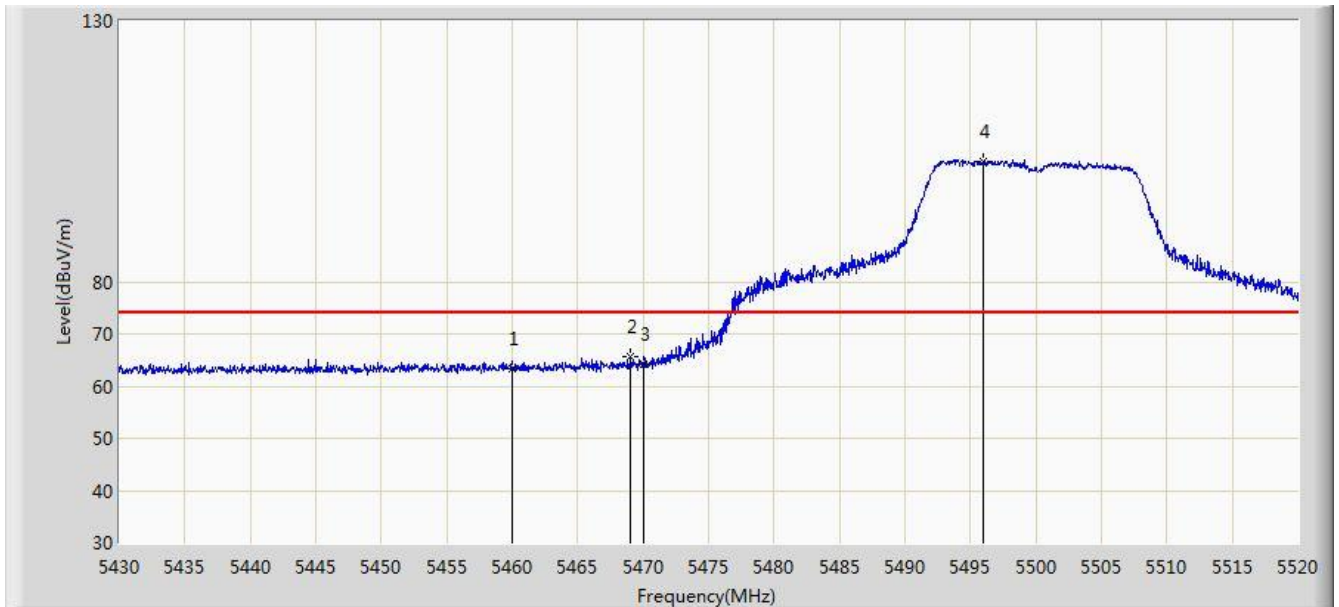


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.401	25.838	-10.599	74.000	37.563	PK
2			5469.060	65.720	28.134	-8.280	74.000	37.586	PK
3			5470.000	64.315	26.726	-9.685	74.000	37.588	PK
4		*	5495.970	103.180	65.560	N/A	N/A	37.620	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11a 1TX	

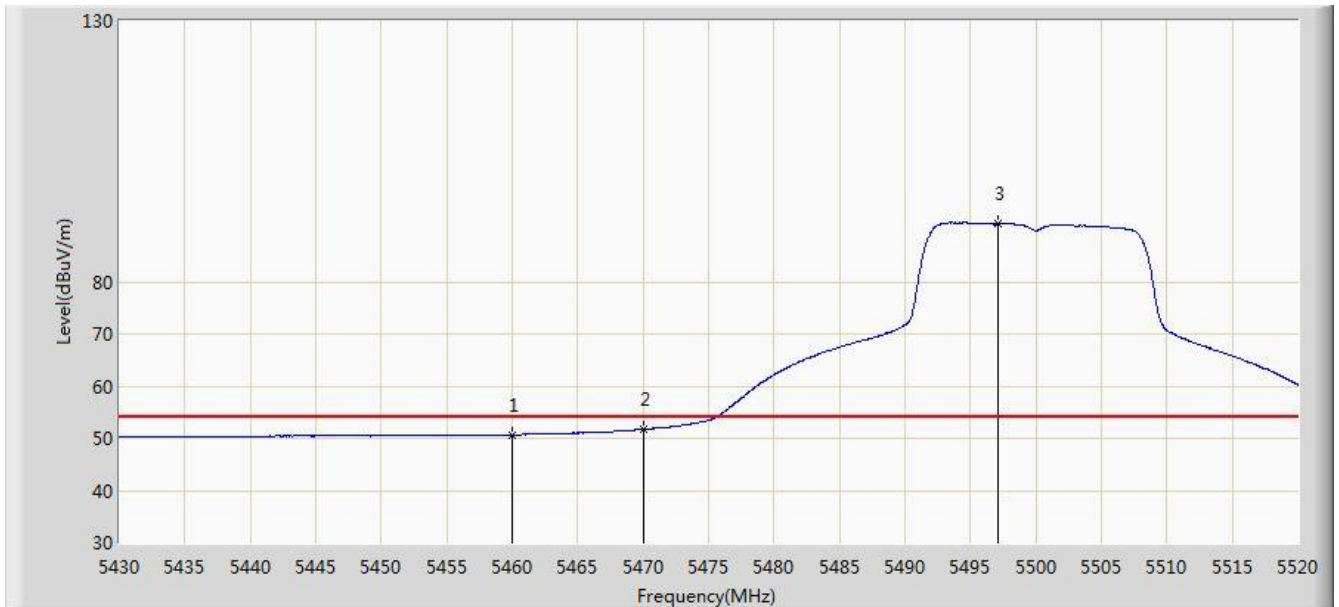


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.682	13.119	-3.318	54.000	37.563	AV
2			5470.000	51.715	14.126	-2.285	54.000	37.588	AV
3		*	5497.140	91.106	53.485	N/A	N/A	37.622	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11a 1TX	

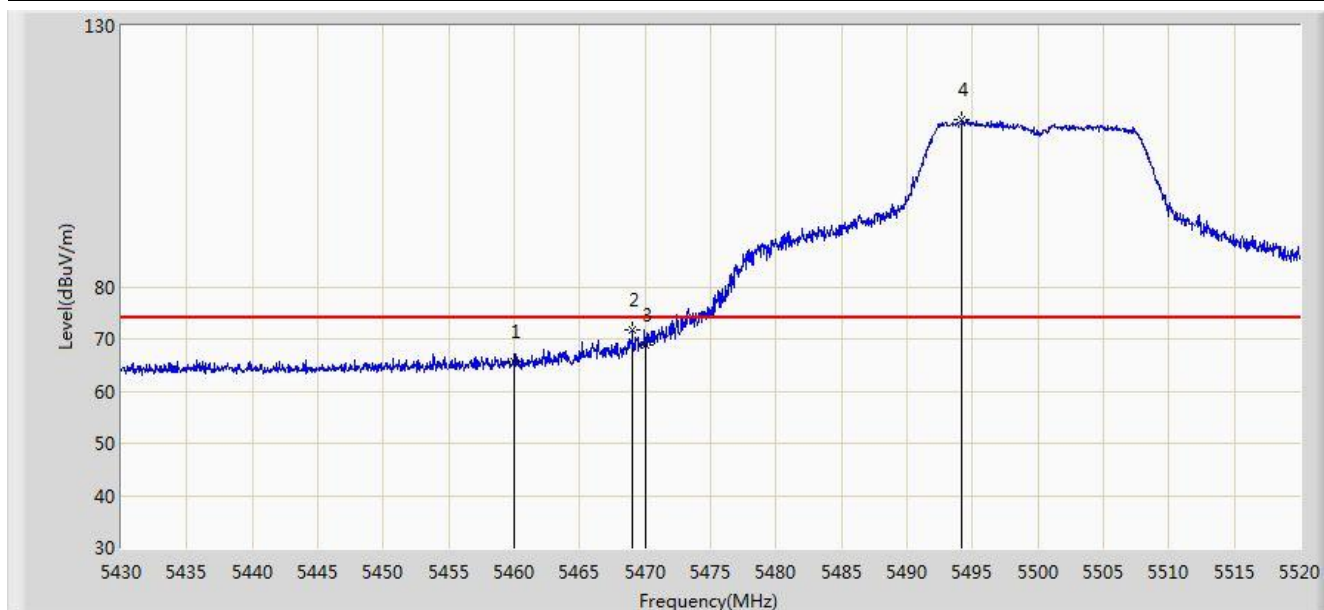


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	65.653	28.090	-8.347	74.000	37.563	PK
2			5469.015	71.873	34.287	-2.127	74.000	37.586	PK
3			5470.000	68.820	31.231	-5.180	74.000	37.588	PK
4		*	5494.170	112.007	74.389	N/A	N/A	37.618	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11a 1TX	

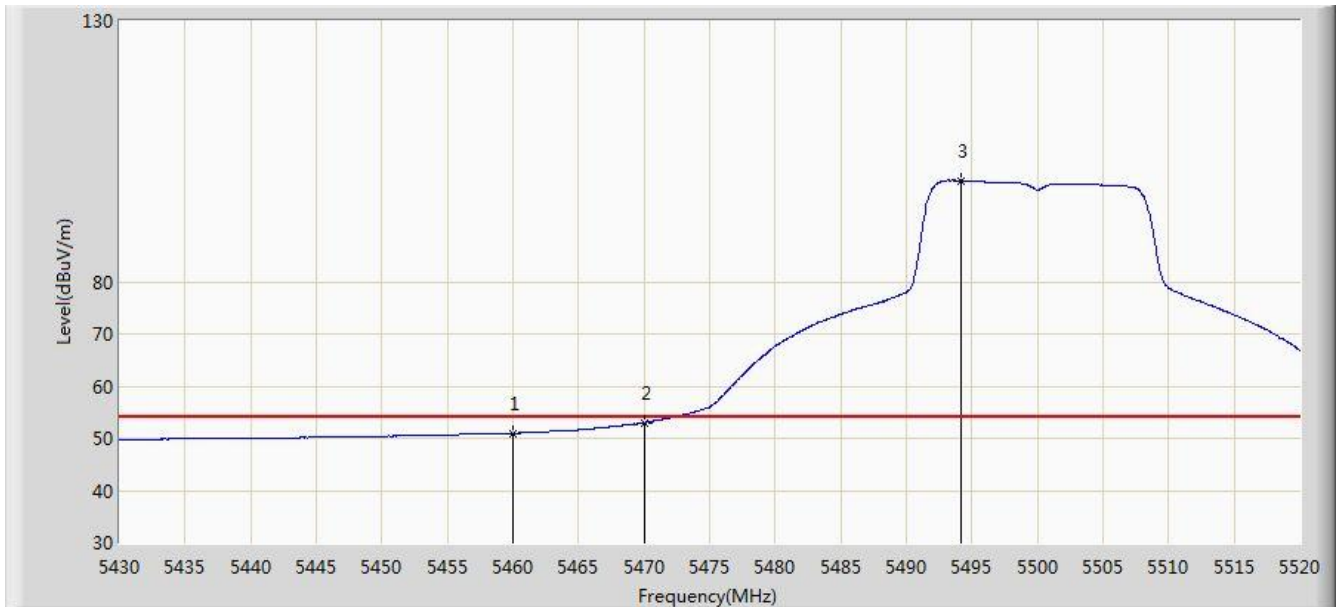


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.975	13.412	-3.025	54.000	37.563	AV
2			5470.000	52.977	15.389	-1.023	54.000	37.588	AV
3		*	5494.215	99.412	61.794	N/A	N/A	37.618	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11a 1TX	

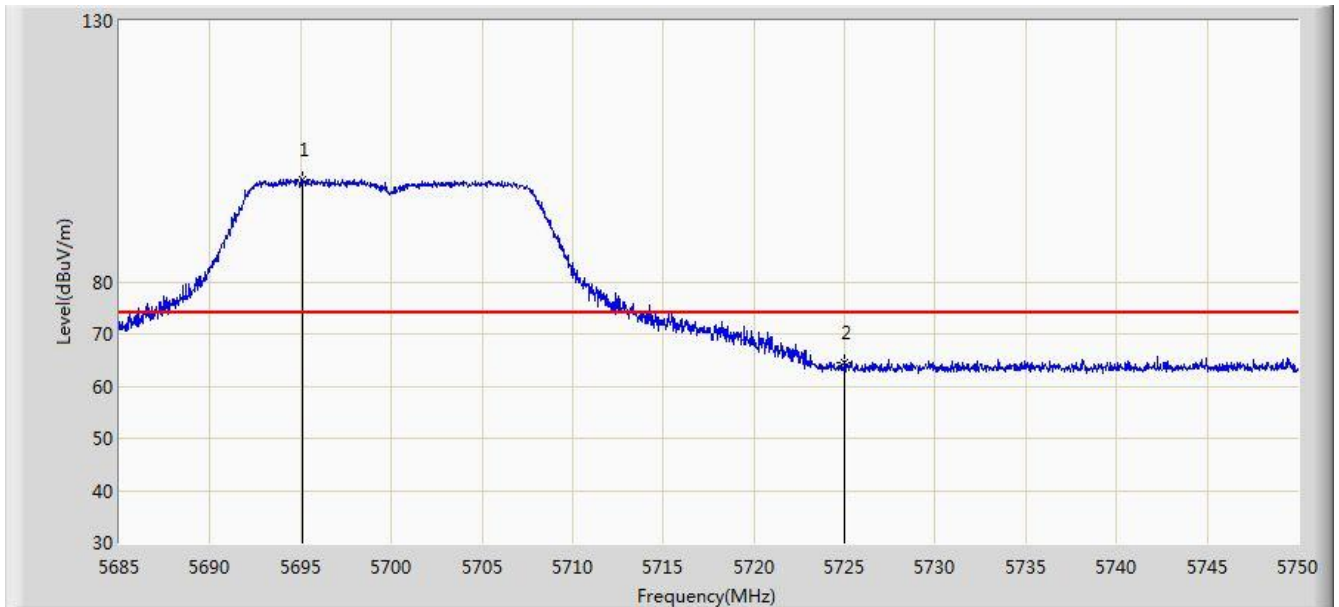


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.075	99.462	61.582	N/A	N/A	37.880	PK
2			5725.000	64.577	26.587	-9.423	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11a 1TX	

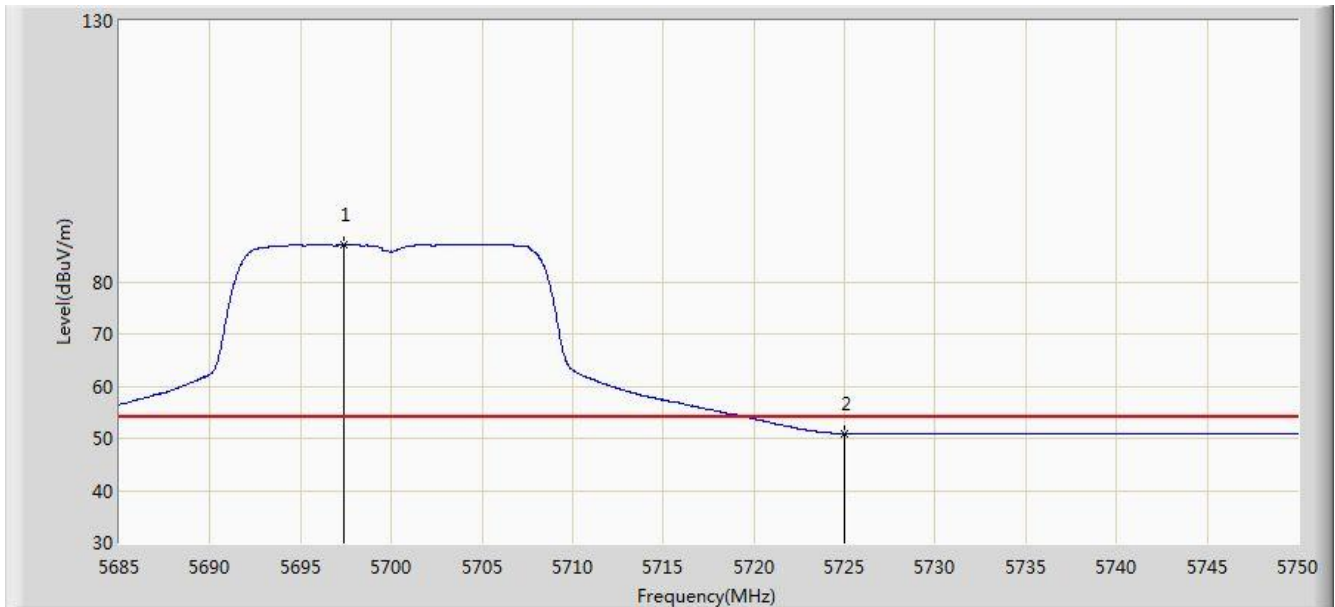


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.415	86.989	49.103	N/A	N/A	37.886	AV
2			5725.000	50.924	12.934	-3.076	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11a 1TX	

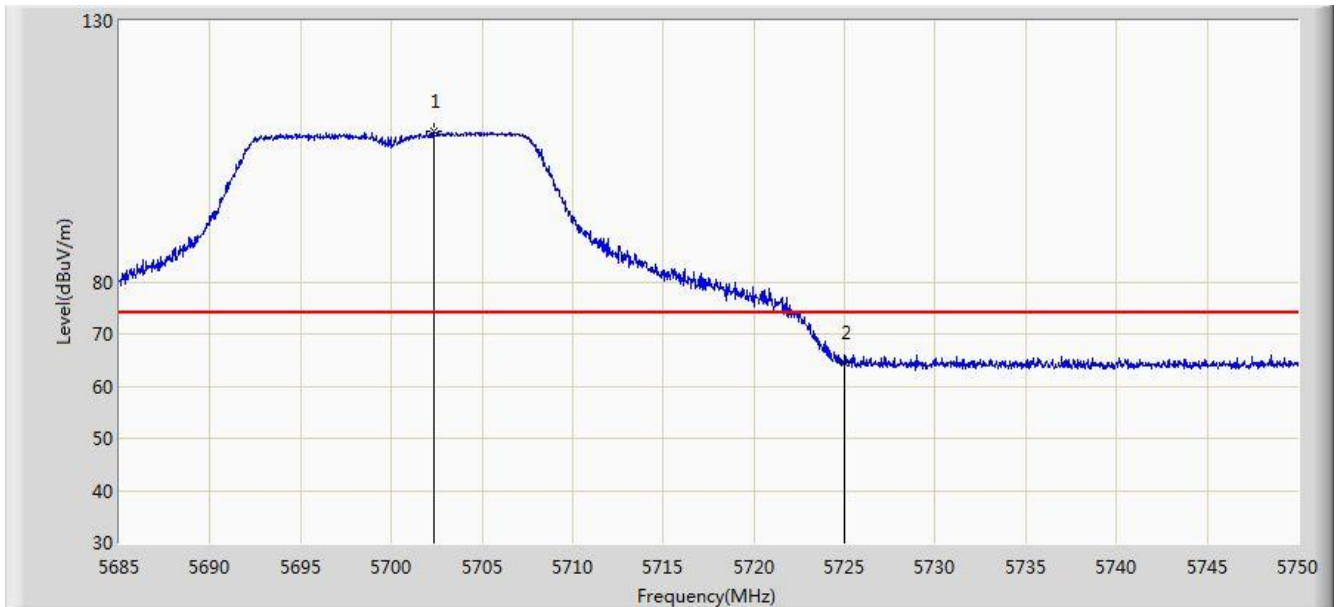


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.322	108.882	70.984	N/A	N/A	37.898	PK
2			5725.000	64.513	26.523	-9.487	74.000	37.990	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/24 - 03:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11a 1TX	

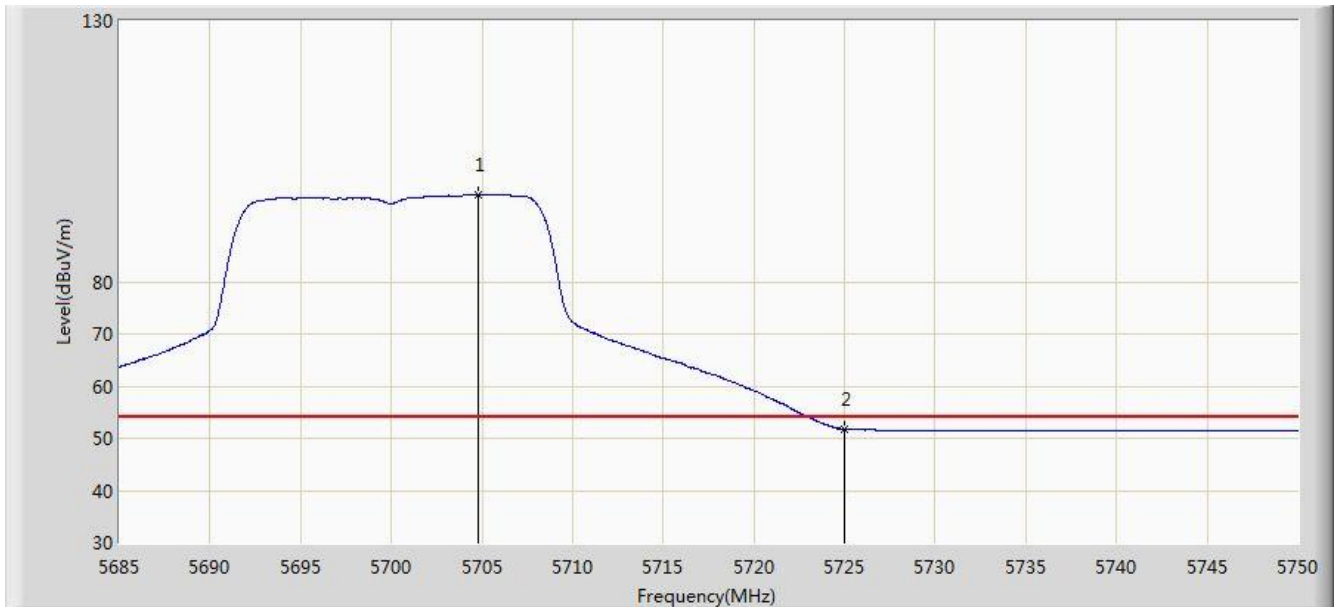


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.825	96.619	58.712	N/A	N/A	37.907	AV
2			5725.000	51.791	13.801	-2.209	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11a 1TX	

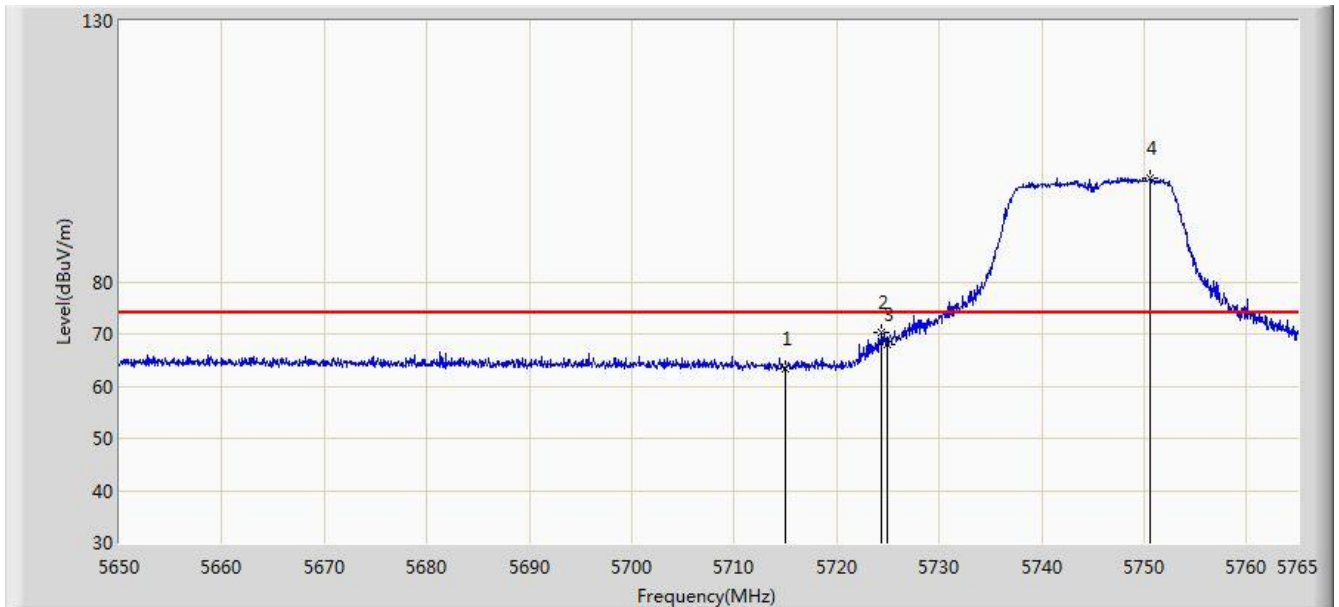


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.453	25.504	-10.547	74.000	37.949	PK
2			5724.405	70.287	32.300	-7.913	78.200	37.988	PK
3			5725.000	68.097	30.107	-10.103	78.200	37.990	PK
4		*	5750.625	99.759	61.660	N/A	N/A	38.098	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11a 1TX	

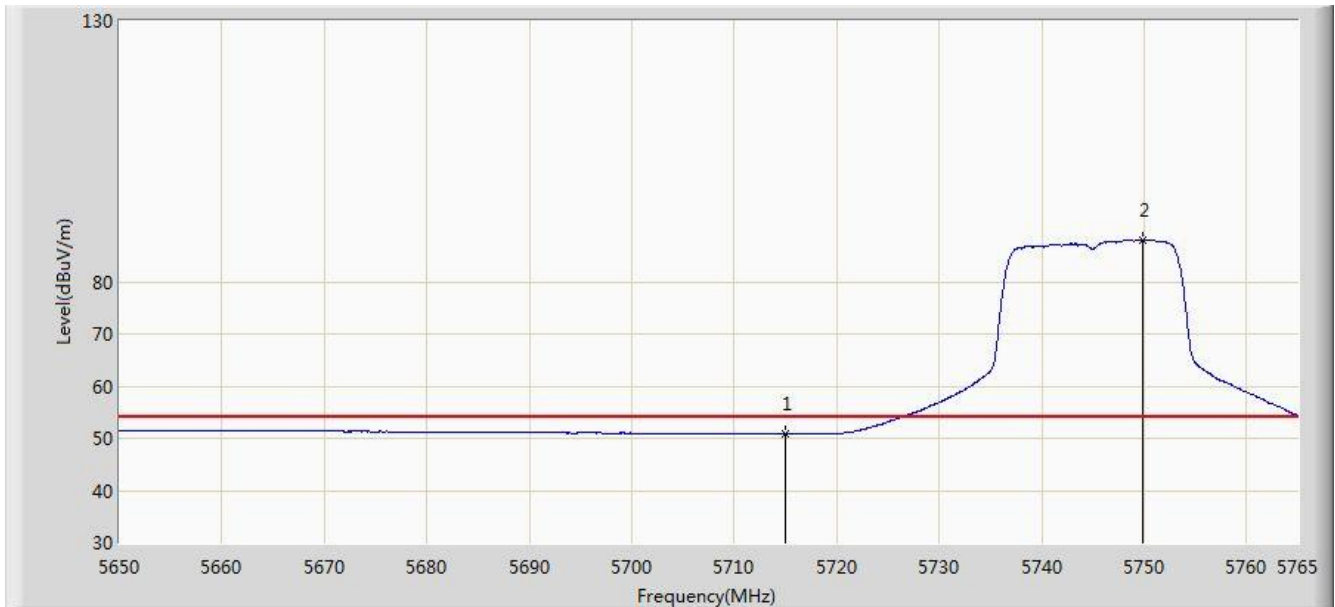


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.857	12.908	-3.143	54.000	37.949	AV
2		*	5749.935	87.963	49.868	N/A	N/A	38.095	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11a 1TX	

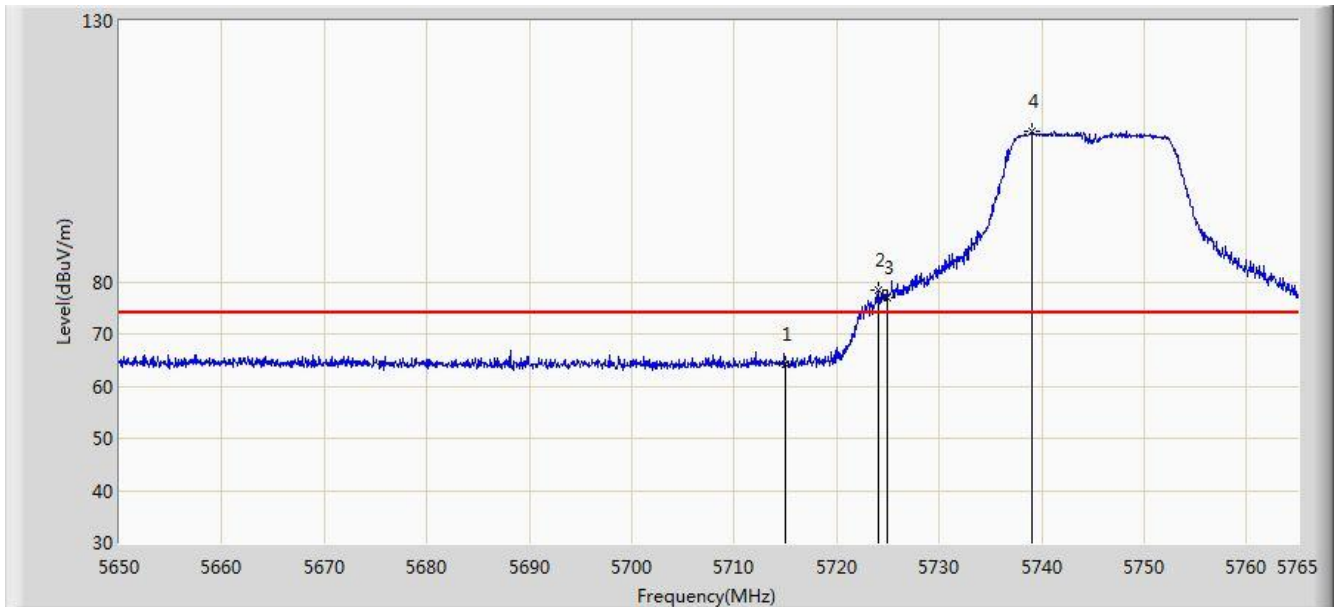


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.313	26.364	-9.687	74.000	37.949	PK
2			5724.002	78.041	40.055	-0.159	78.200	37.986	PK
3			5725.000	77.068	39.078	-1.132	78.200	37.990	PK
4		*	5739.010	108.767	70.720	N/A	N/A	38.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11a 1TX	

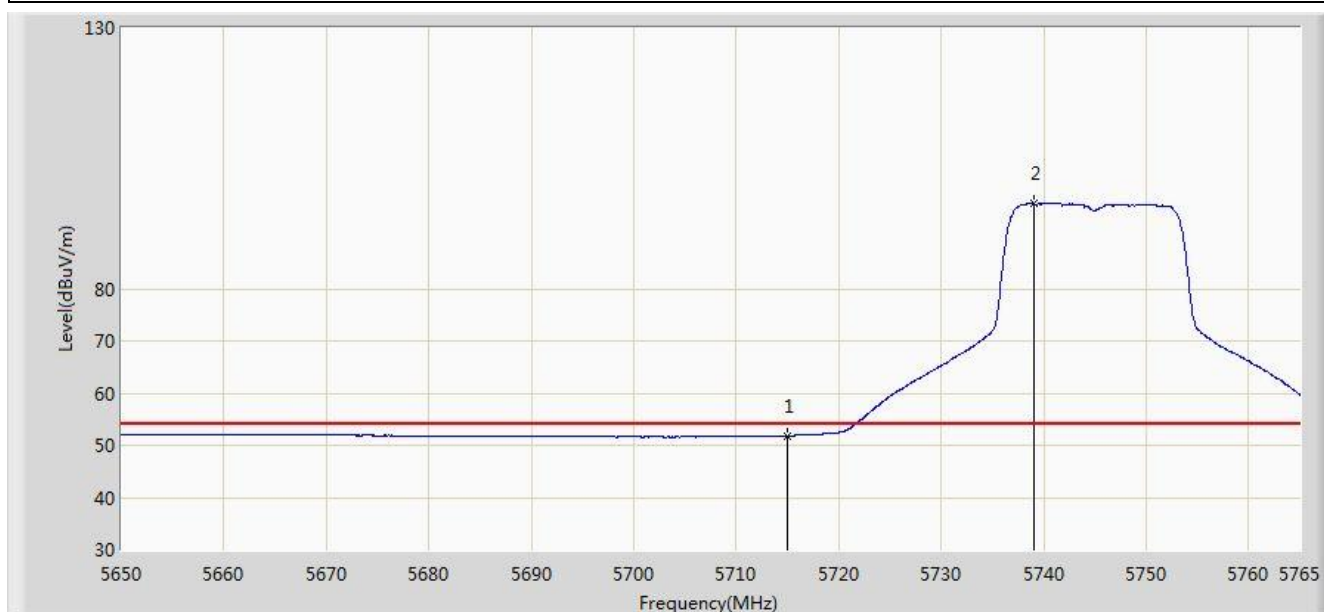


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.861	13.912	-2.139	54.000	37.949	AV
2		*	5739.010	96.343	58.296	N/A	N/A	38.047	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11a 1TX	

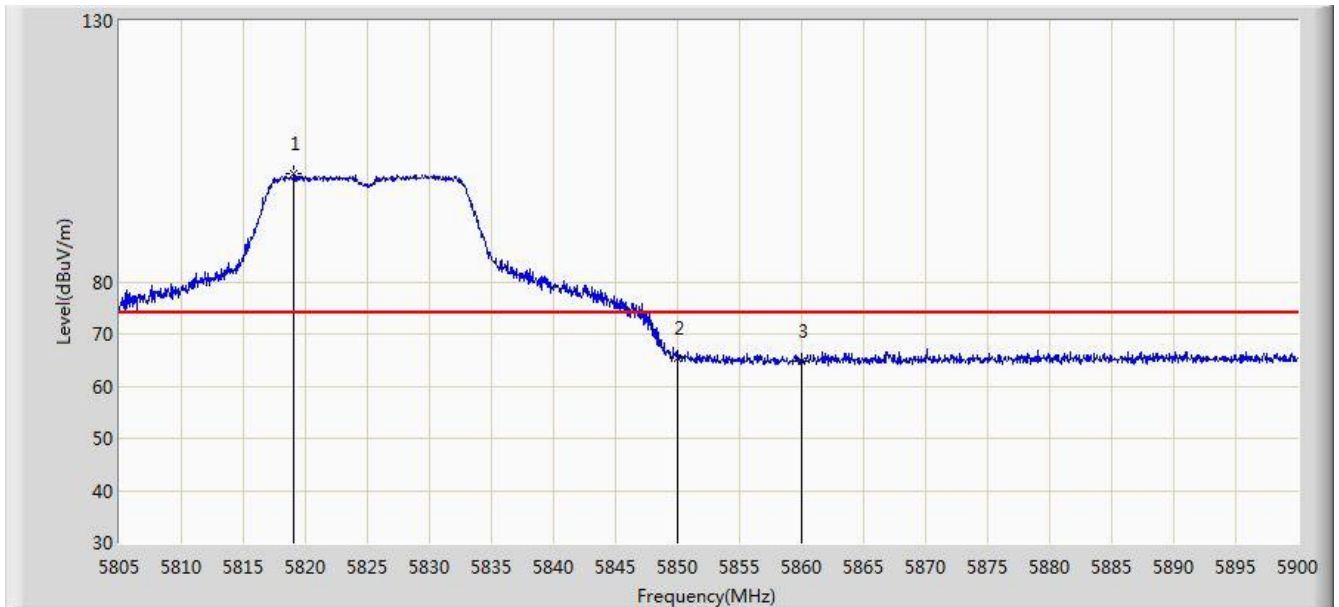


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.060	100.631	62.300	N/A	N/A	38.331	PK
2			5850.000	65.334	26.881	-12.866	78.200	38.454	PK
3			5860.000	64.823	26.345	-9.177	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11a 1TX	

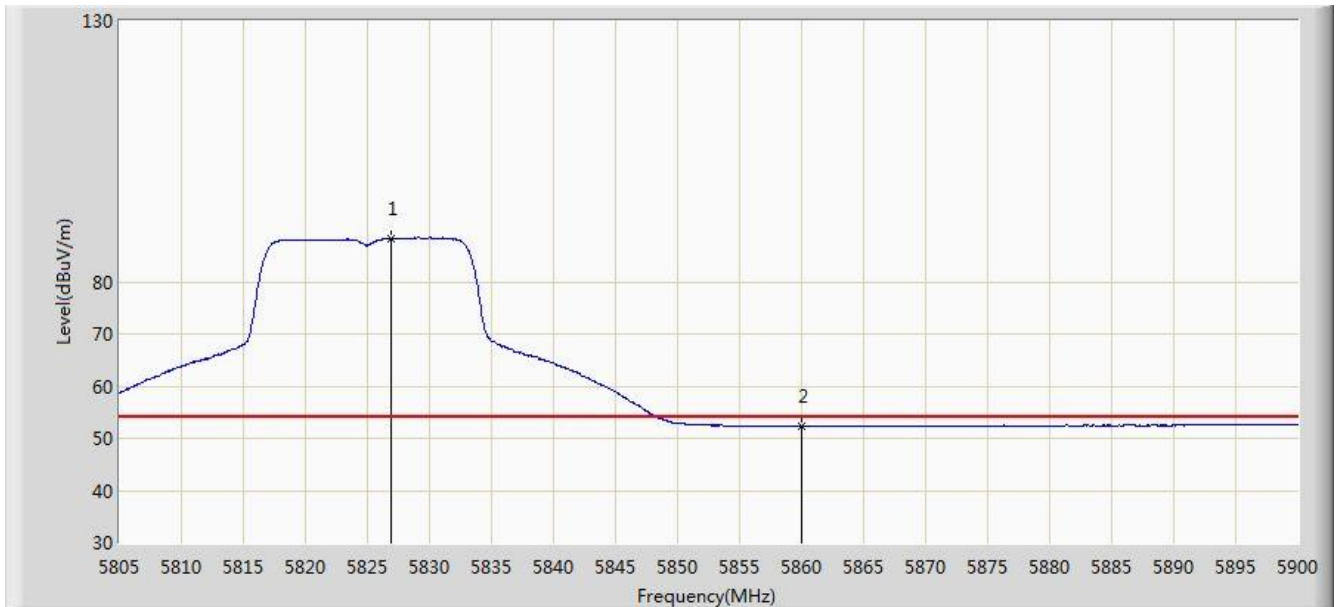


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5826.945	88.280	49.916	N/A	N/A	38.363	AV
2			5860.000	52.313	13.835	-1.687	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11a 1TX	

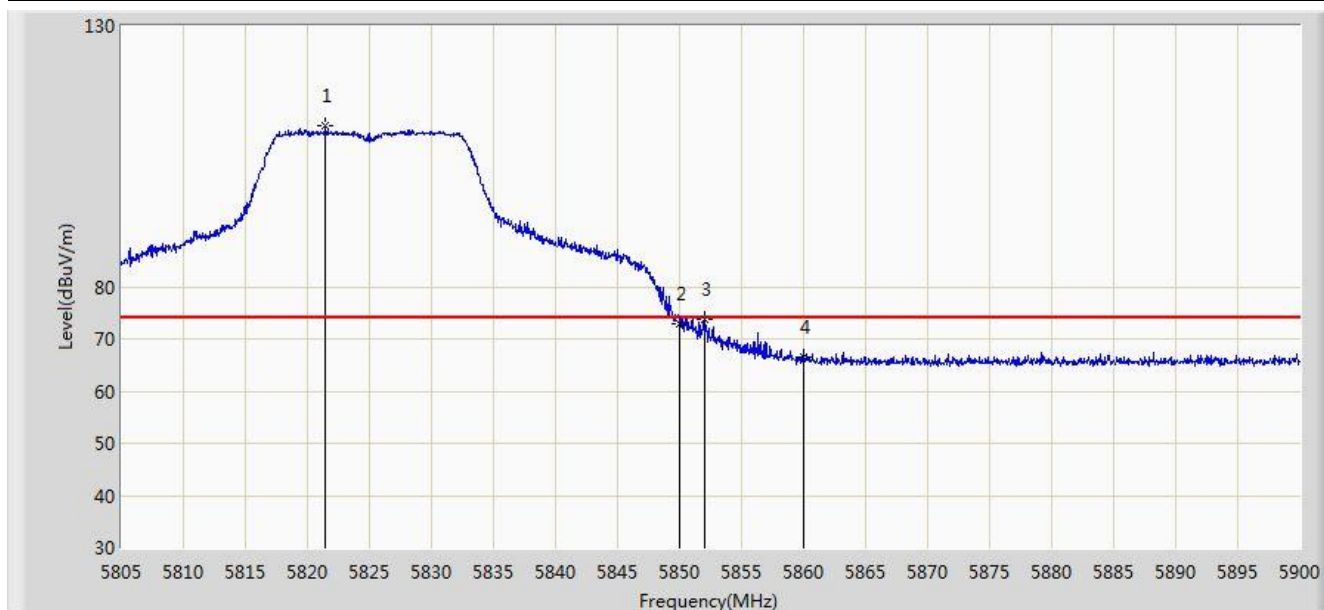


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.482	110.812	72.471	N/A	N/A	38.341	PK
2			5850.000	73.035	34.582	-5.165	78.200	38.454	PK
3			5852.025	73.799	35.341	-4.401	78.200	38.458	PK
4			5860.000	66.572	28.094	-7.428	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 01:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Andy Zhu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11a 1TX	

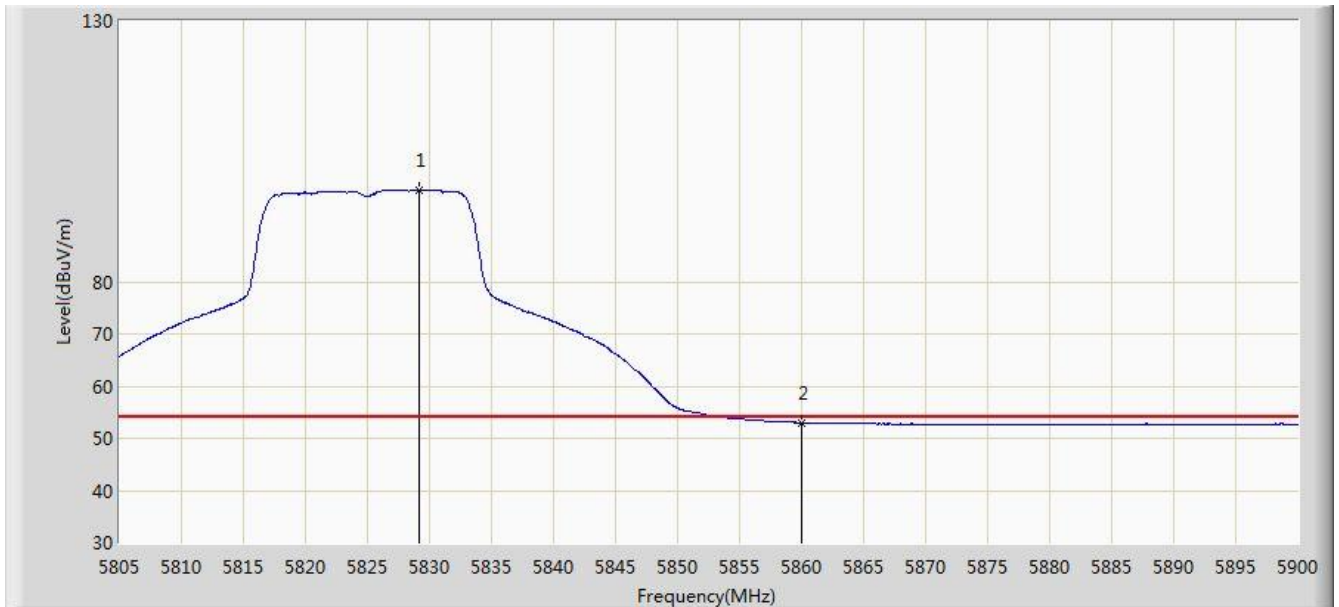


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.178	97.605	59.232	N/A	N/A	38.373	AV
2			5860.000	52.982	14.504	-1.018	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11n-HT20 2TX	

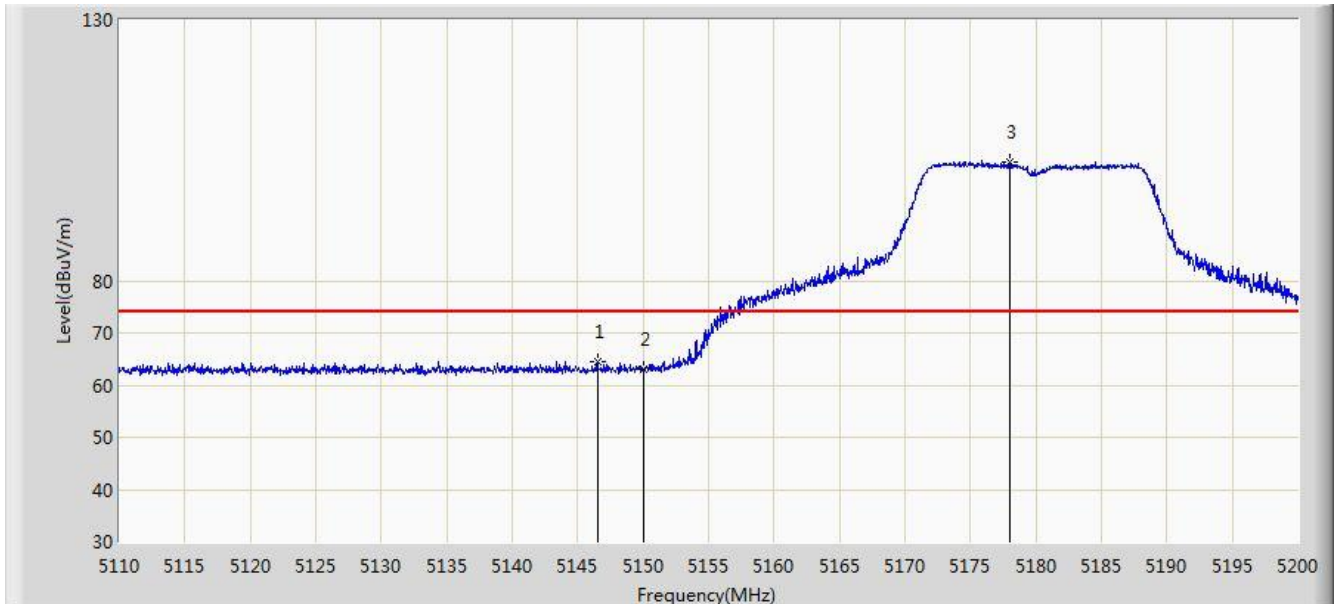


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.495	64.569	27.112	-9.431	74.000	37.457	PK
2			5150.000	63.107	25.655	-10.893	74.000	37.452	PK
3		*	5177.995	102.828	65.450	N/A	N/A	37.378	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11n-HT20 2TX	

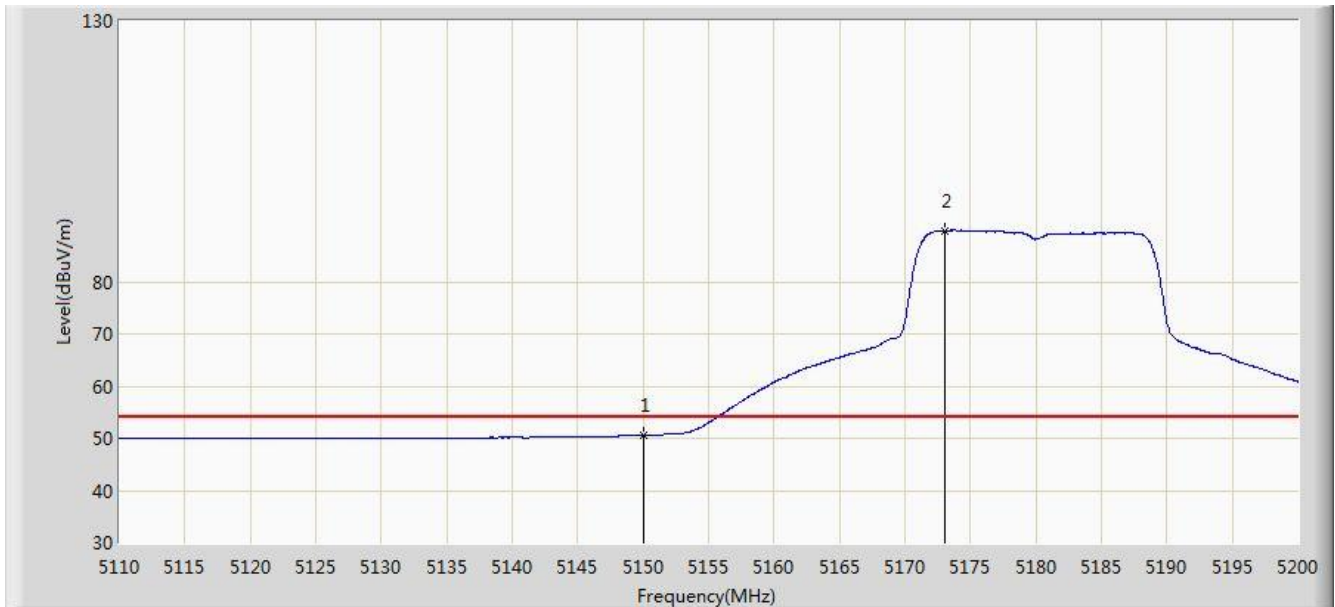


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.563	13.111	-3.437	54.000	37.452	AV
2		*	5173.045	89.828	52.438	N/A	N/A	37.389	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11n-HT20 2TX	

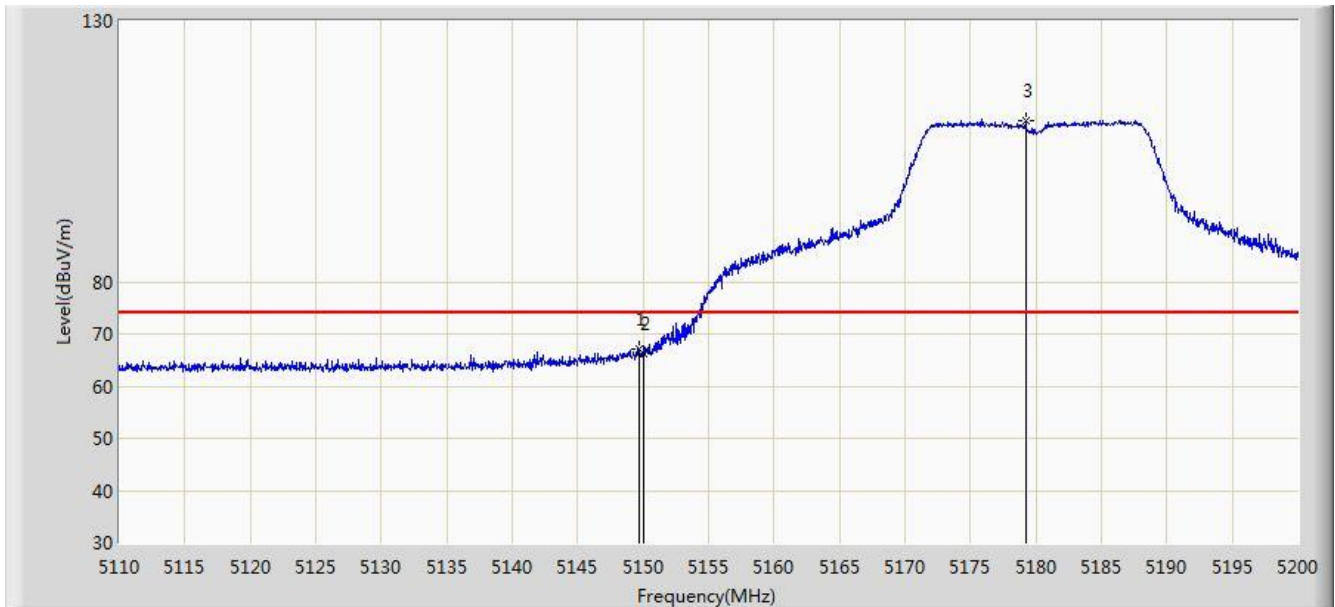


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.690	67.229	29.777	-6.771	74.000	37.452	PK
2			5150.000	66.373	28.921	-7.627	74.000	37.452	PK
3		*	5179.210	110.876	73.500	N/A	N/A	37.376	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11n-HT20 2TX	

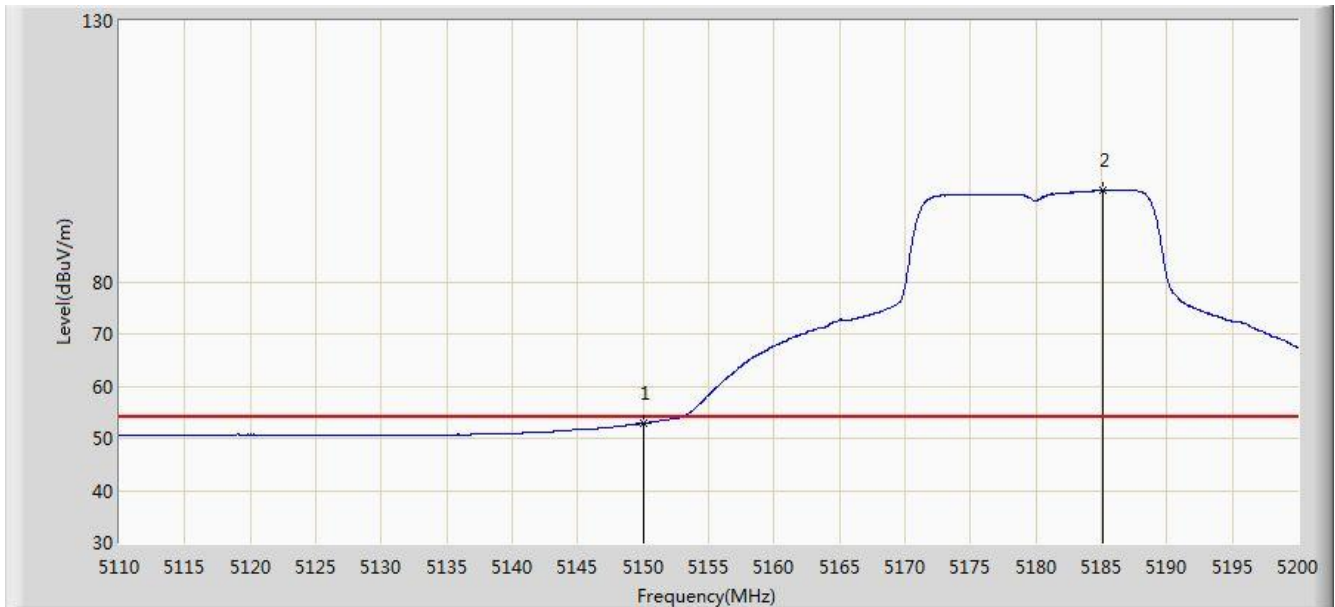


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.825	15.373	-1.175	54.000	37.452	AV
2		*	5185.105	97.550	60.189	N/A	N/A	37.361	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11n-HT20 2TX	

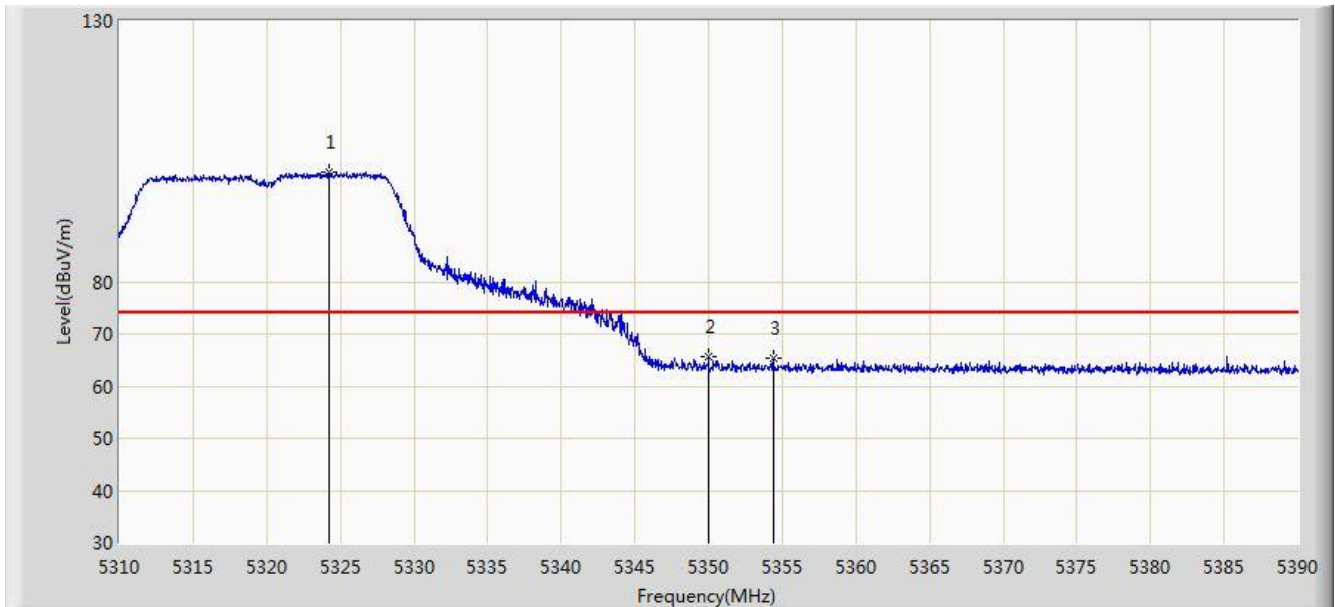


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.280	101.050	63.829	N/A	N/A	37.221	PK
2			5350.000	65.715	28.429	-8.285	74.000	37.286	PK
3			5354.400	65.491	28.192	-8.509	74.000	37.299	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11n-HT20 2TX	

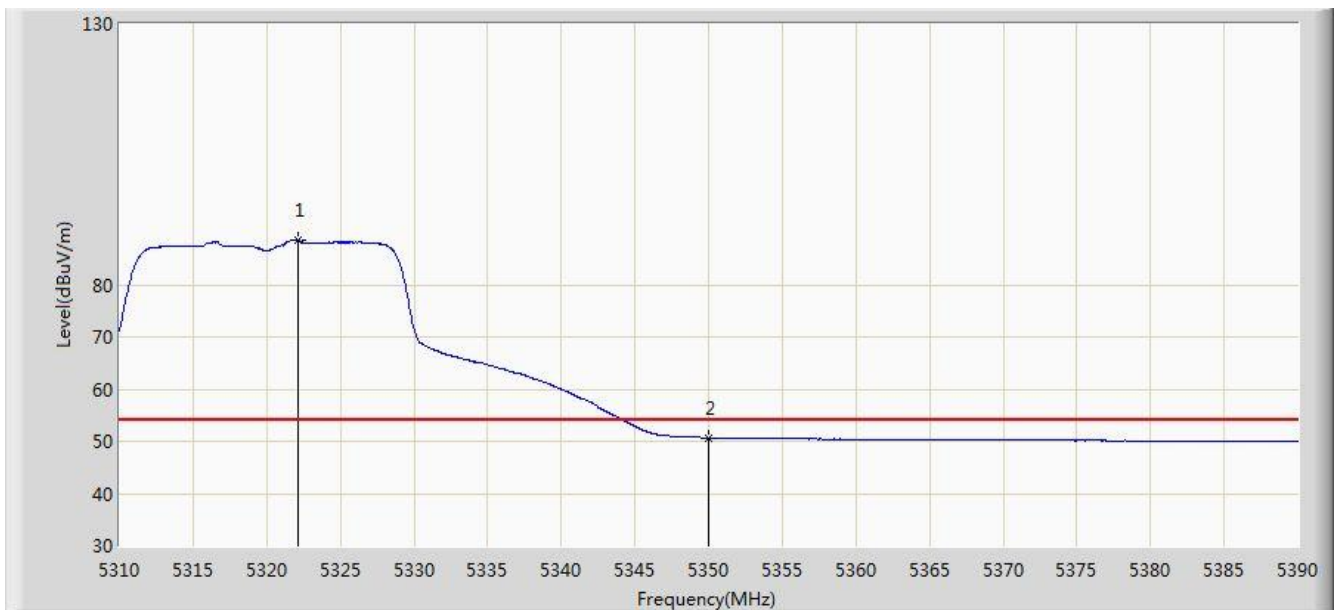


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.160	88.600	51.383	N/A	N/A	37.218	AV
2			5350.000	50.711	13.425	-3.289	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11n-HT20 2TX	

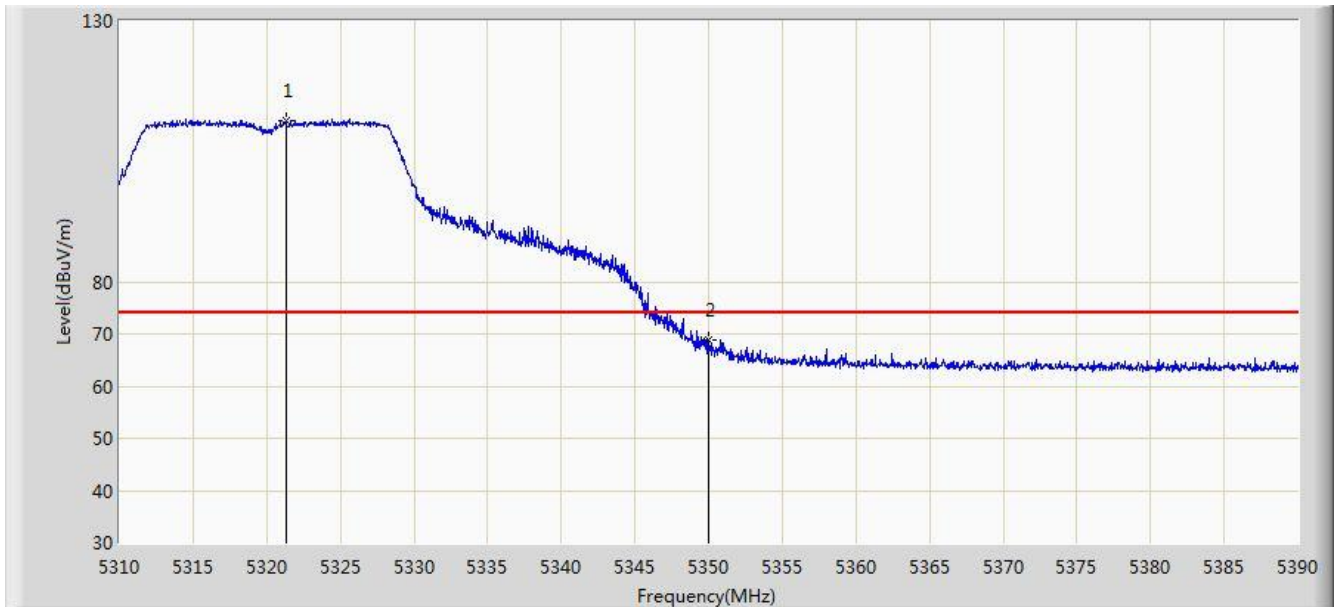


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.320	110.963	73.747	N/A	N/A	37.216	PK
2			5350.000	68.961	31.675	-5.039	74.000	37.286	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11n-HT20 2TX	

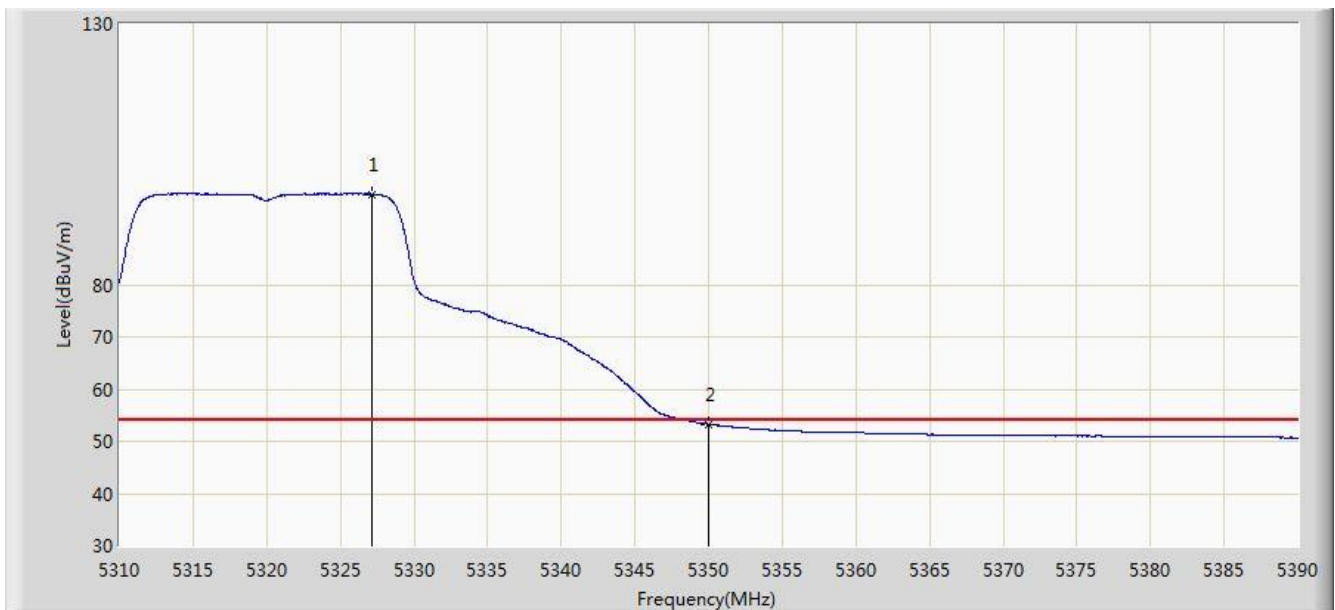


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.160	97.311	60.085	N/A	N/A	37.226	AV
2			5350.000	53.290	16.004	-0.710	54.000	37.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11n-HT20 2TX	

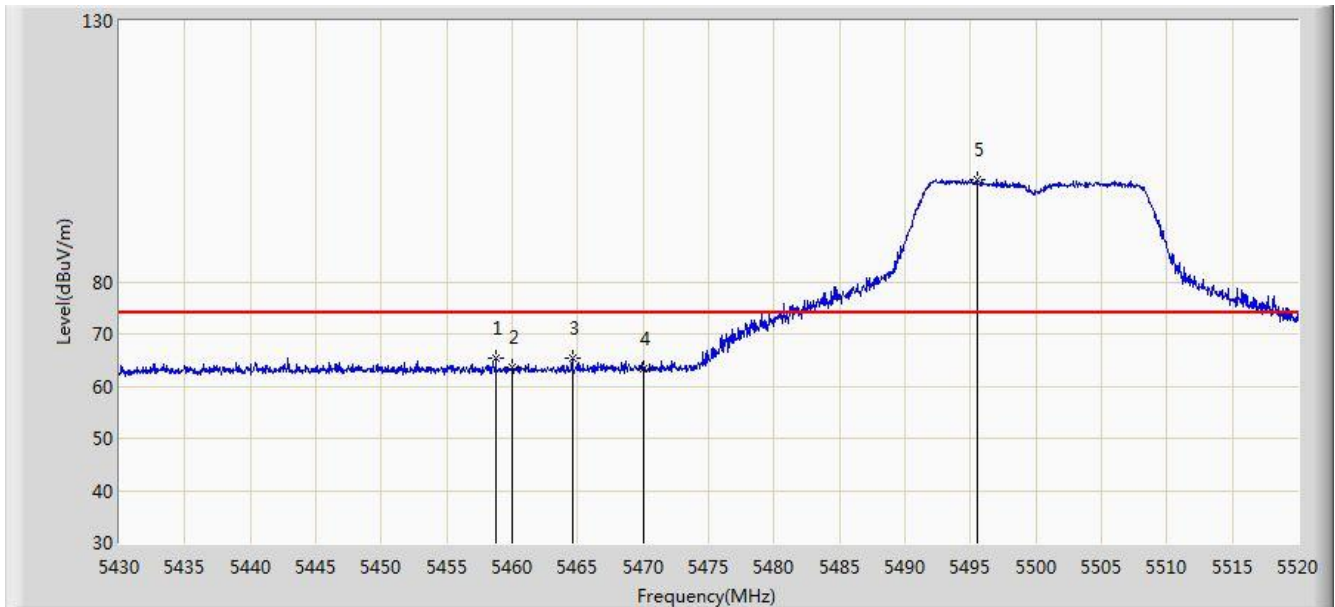


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.755	65.328	27.769	-8.672	74.000	37.560	PK
2			5460.000	63.516	25.953	-10.484	74.000	37.563	PK
3			5464.605	65.374	27.799	-8.626	74.000	37.575	PK
4			5470.000	63.419	25.830	-10.581	74.000	37.588	PK
5		*	5495.520	99.514	61.894	N/A	N/A	37.619	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11n-HT20 2TX	

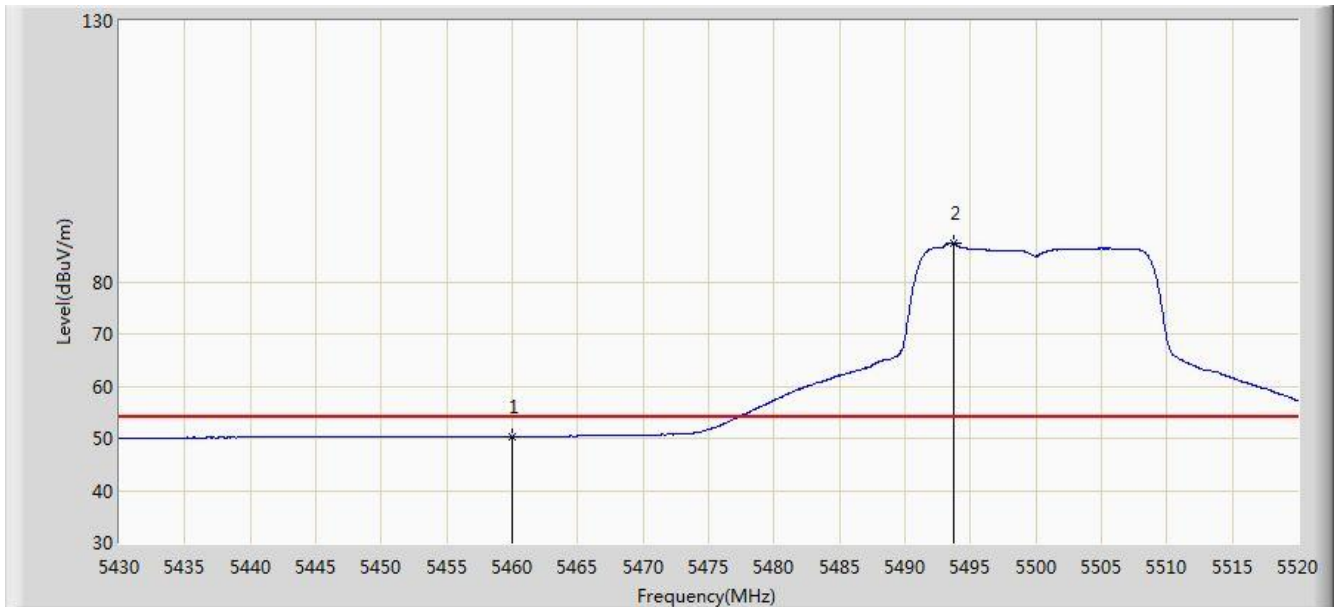


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.338	12.775	-3.662	54.000	37.563	AV
2		*	5493.675	87.300	49.682	N/A	N/A	37.617	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11n-HT20 2TX	

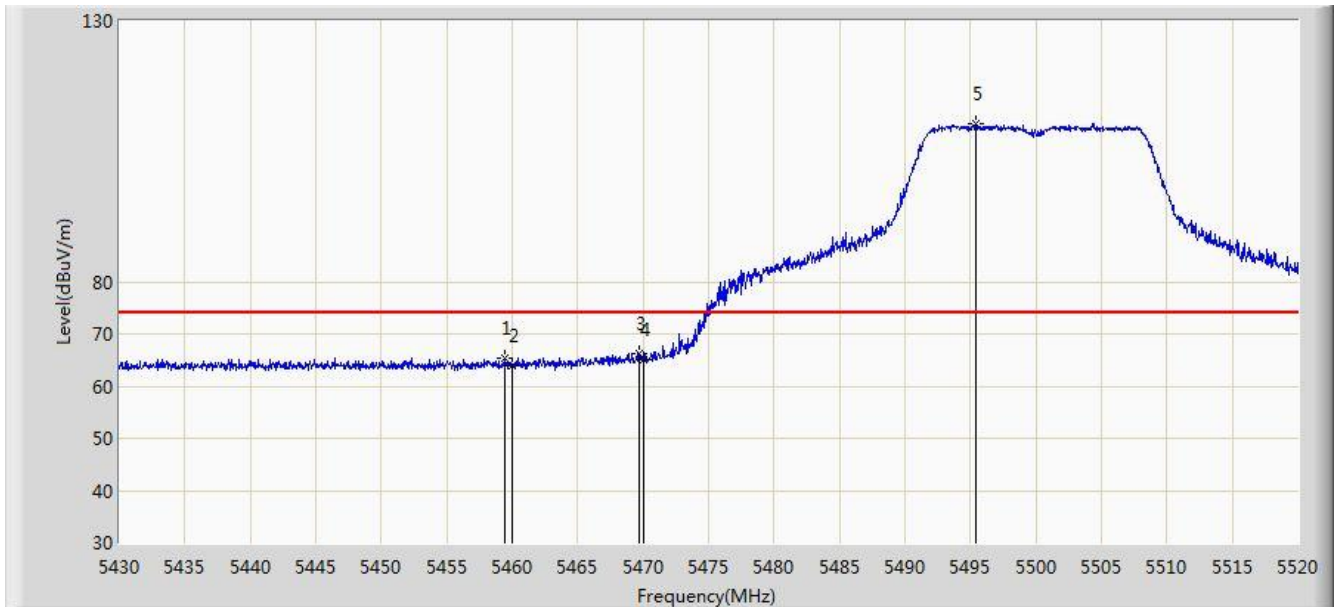


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.475	65.401	27.840	-8.599	74.000	37.561	PK
2			5460.000	64.012	26.449	-9.988	74.000	37.563	PK
3			5469.690	66.209	28.621	-7.791	74.000	37.588	PK
4			5470.000	65.132	27.543	-8.868	74.000	37.588	PK
5		*	5495.430	110.337	72.718	N/A	N/A	37.619	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11n-HT20 2TX	

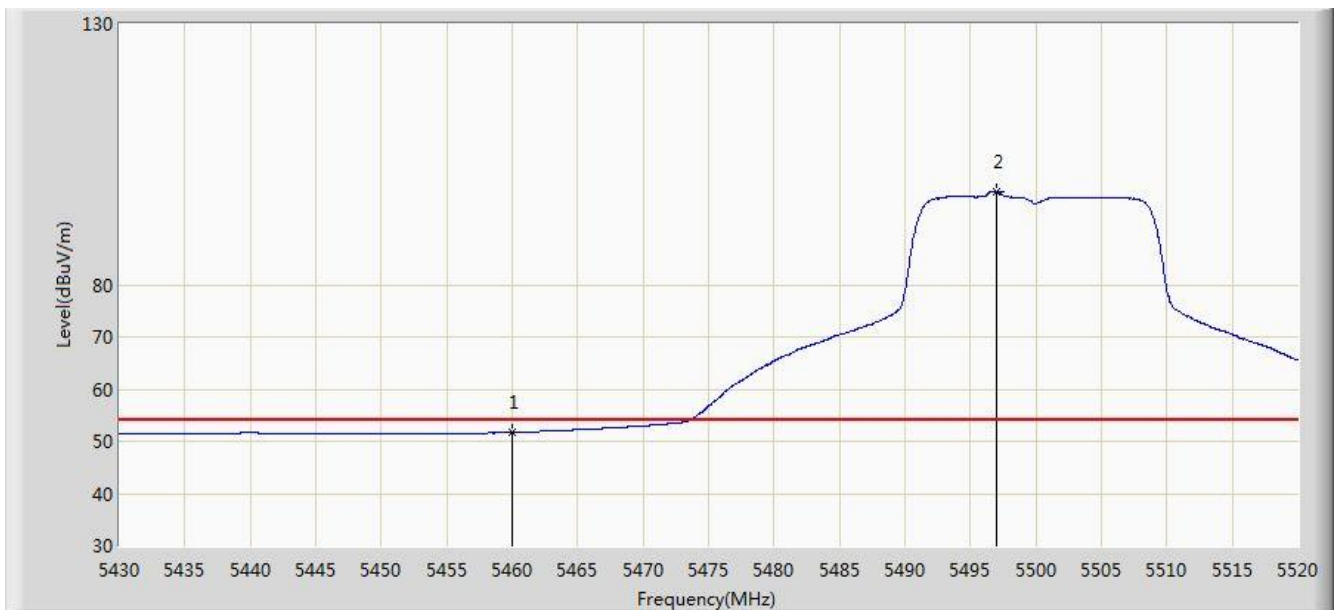


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.699	14.136	-2.301	54.000	37.563	AV
2		*	5496.960	97.869	60.248	N/A	N/A	37.622	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11n-HT20 2TX	

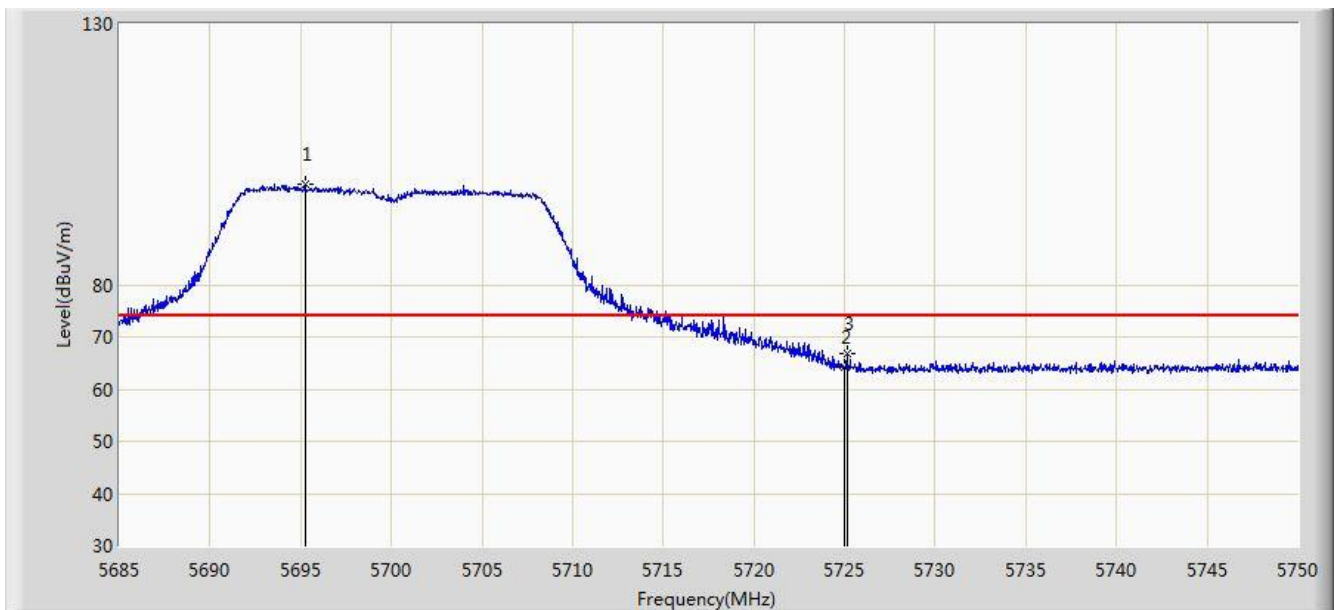


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.237	99.156	61.276	N/A	N/A	37.881	PK
2			5725.000	64.148	26.158	-9.852	74.000	37.990	PK
3			5725.138	66.830	28.840	-7.170	74.000	37.990	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11n-HT20 2TX	

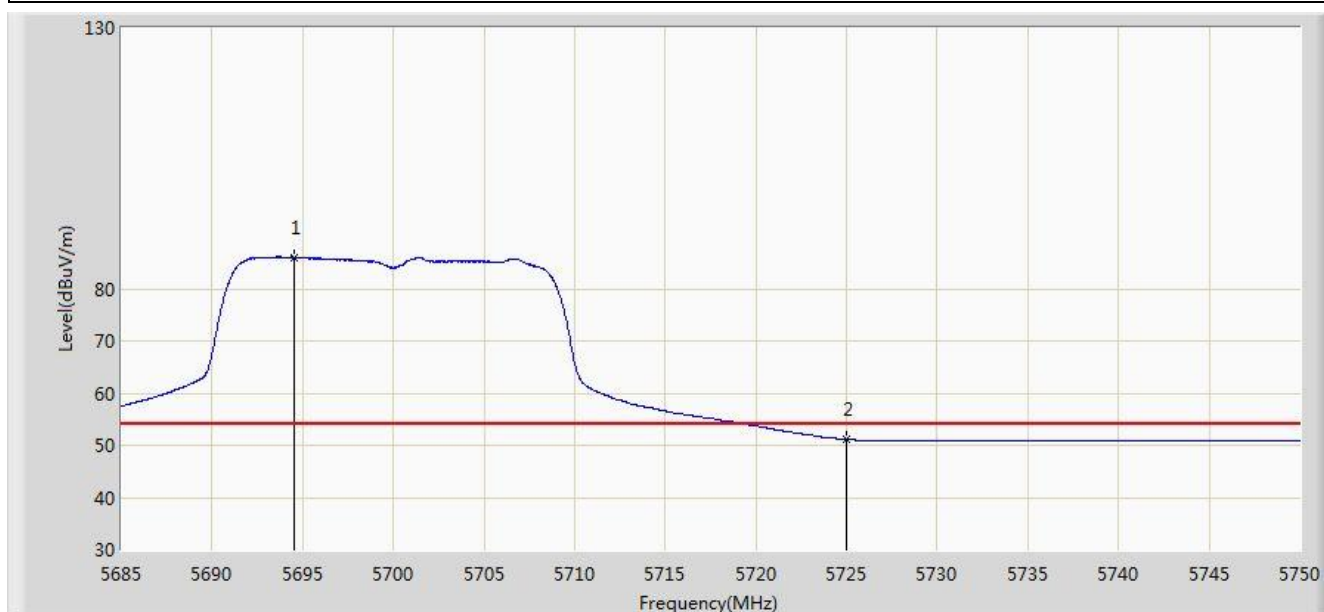


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.555	86.070	48.191	N/A	N/A	37.878	AV
2			5725.000	51.126	13.136	-2.874	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11n-HT20 2TX	

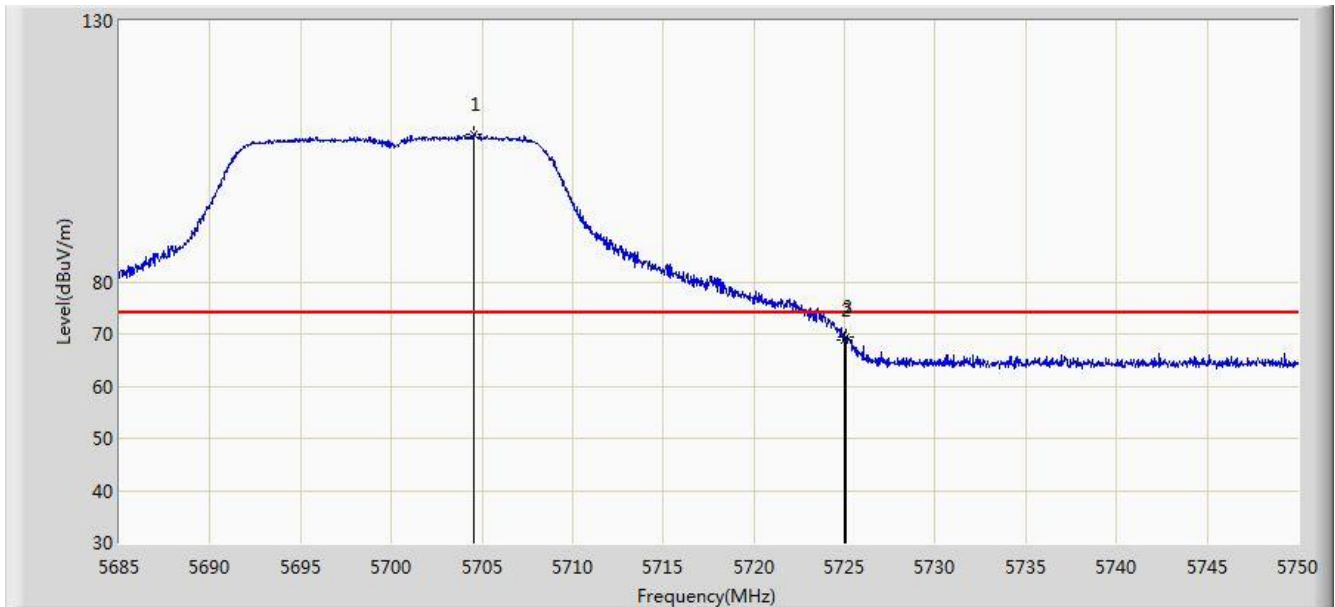


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.533	108.300	70.394	N/A	N/A	37.906	PK
2			5725.000	68.801	30.811	-5.199	74.000	37.990	PK
3			5725.105	69.277	31.287	-4.723	74.000	37.990	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 00:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11n-HT20 2TX	

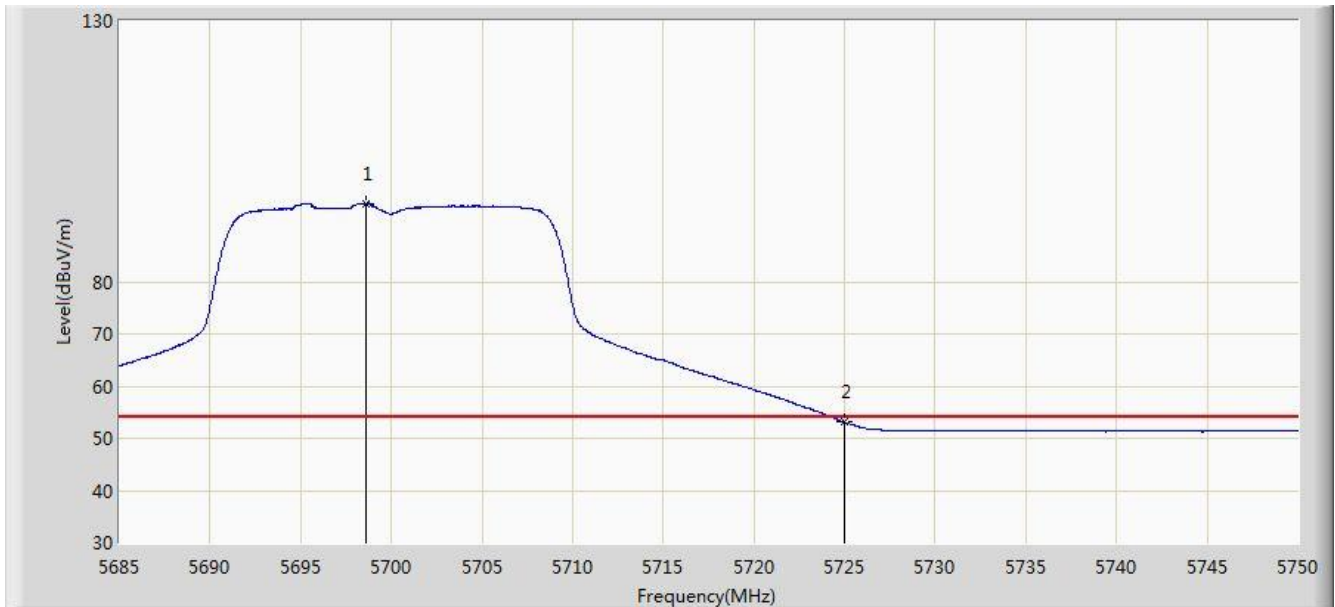


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.585	95.072	57.183	N/A	N/A	37.888	AV
2			5725.000	53.080	15.090	-0.920	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11n20 2TX	

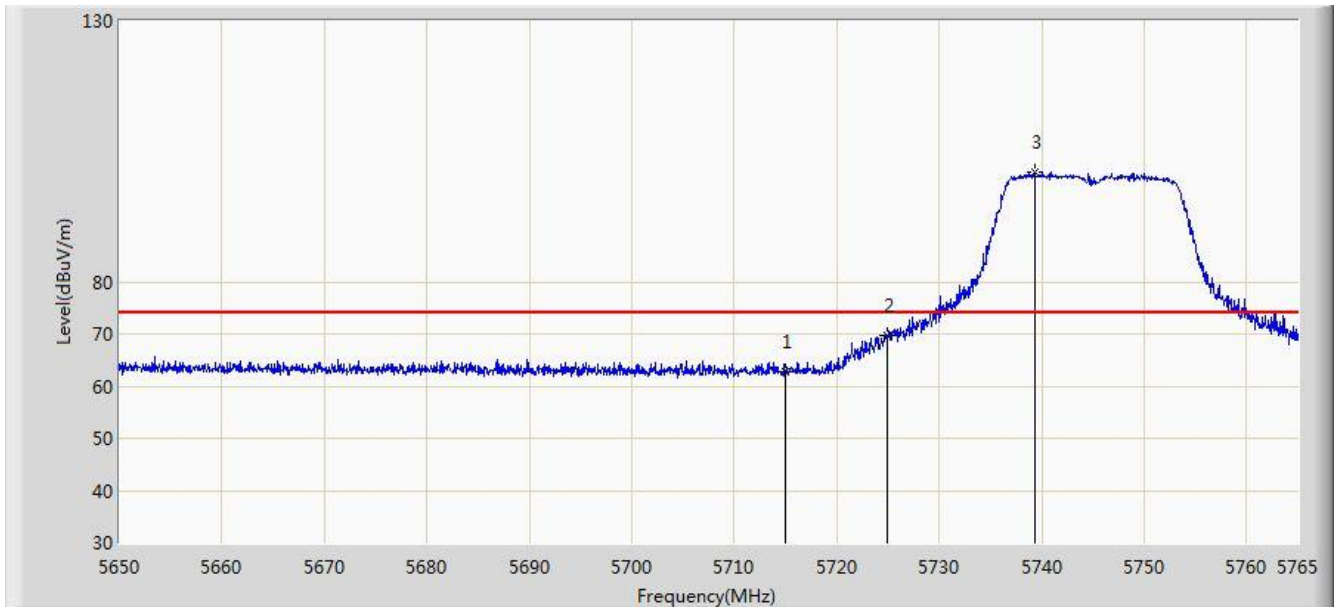


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.756	24.807	-11.244	74.000	37.949	PK
2			5725.000	69.647	31.657	-8.553	78.200	37.990	PK
3		*	5739.297	101.036	62.988	N/A	N/A	38.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11n20 2TX	

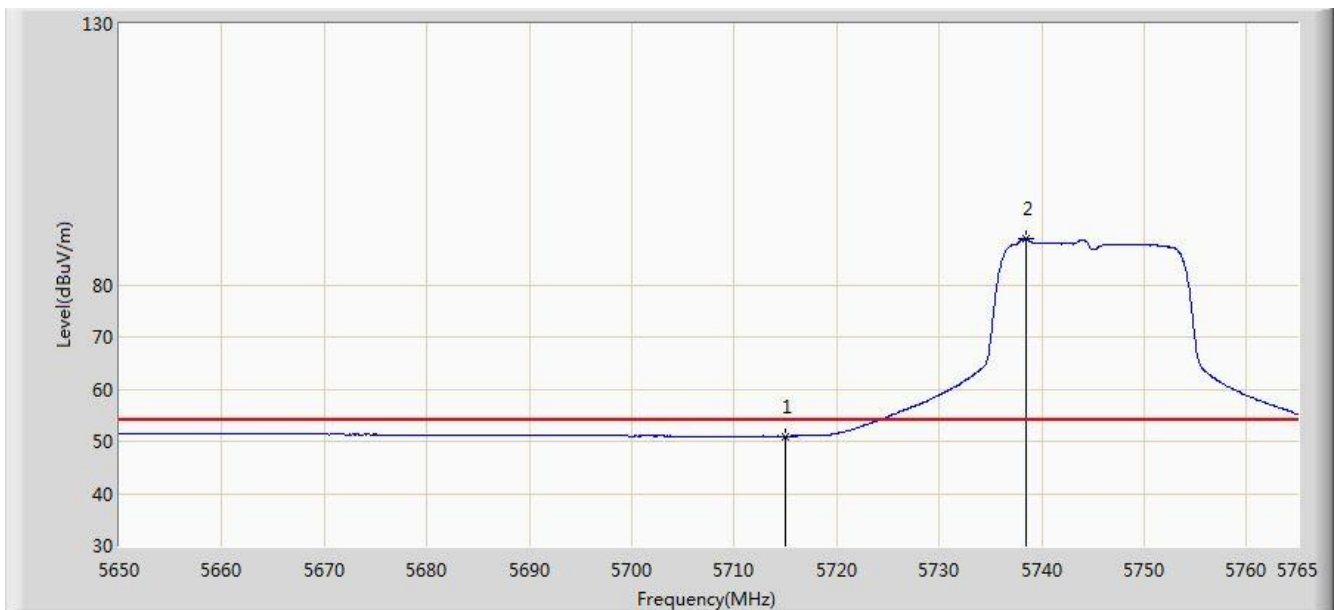


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.007	13.058	-2.993	54.000	37.949	AV
2		*	5738.493	88.852	50.807	N/A	N/A	38.046	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11n20 2TX	

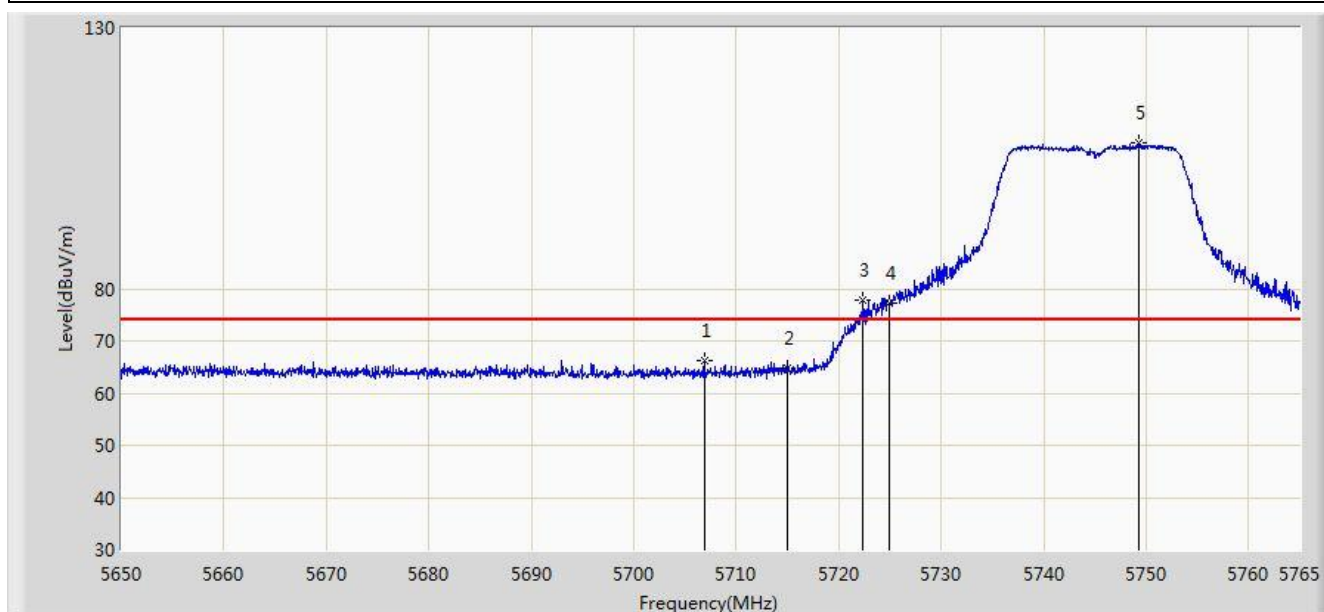


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5706.868	66.373	28.457	-7.627	74.000	37.916	PK
2			5715.000	64.827	26.878	-9.173	74.000	37.949	PK
3			5722.393	77.773	39.794	-0.427	78.200	37.979	PK
4			5725.000	77.141	39.151	-1.059	78.200	37.990	PK
5		*	5749.360	108.026	69.933	N/A	N/A	38.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11n20 2TX	

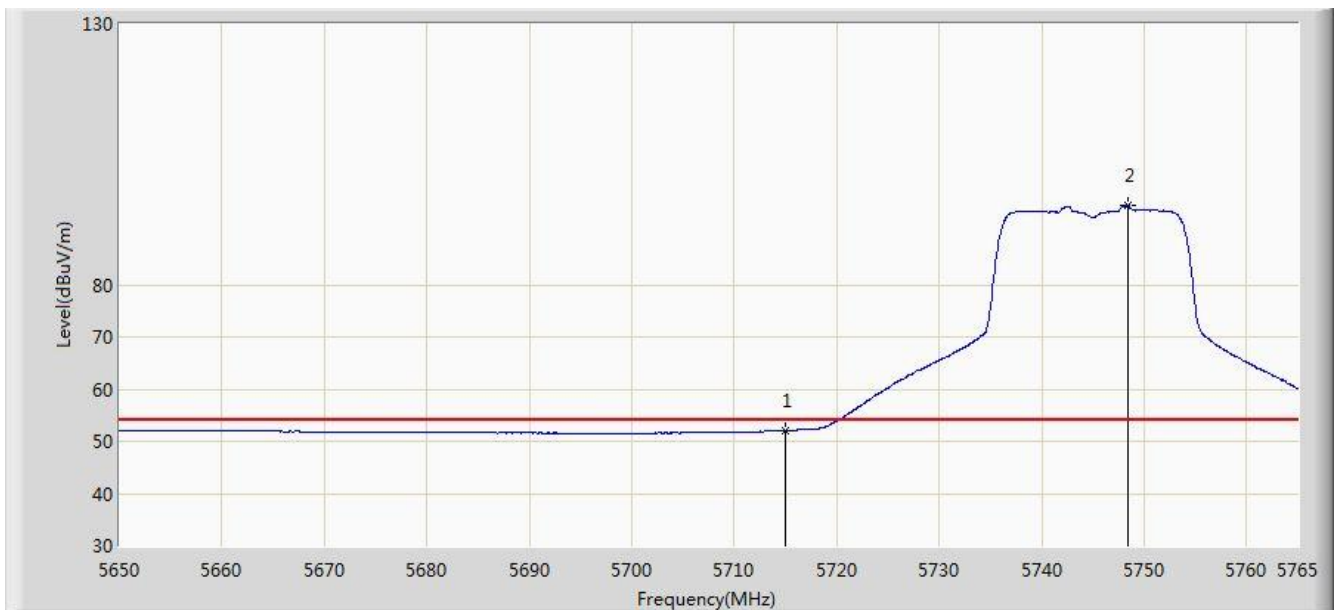


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.004	14.055	-1.996	54.000	37.949	AV
2		*	5748.498	95.112	57.023	N/A	N/A	38.088	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11n20 2TX	

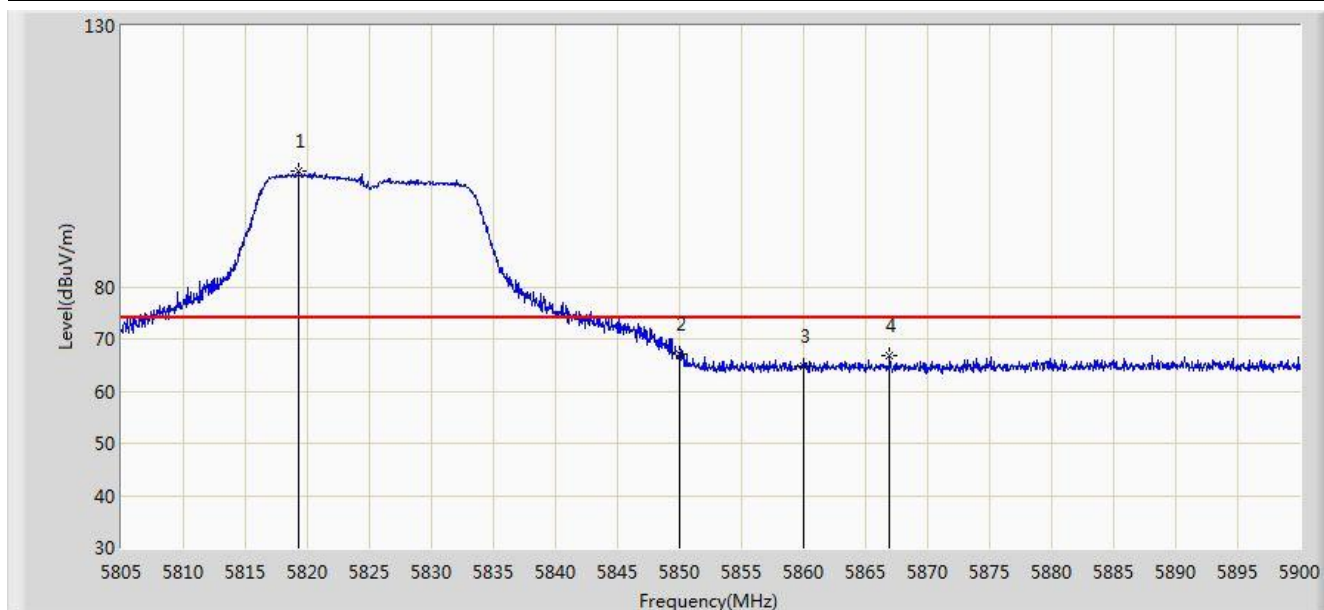


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.297	102.055	63.723	N/A	N/A	38.332	PK
2			5850.000	67.052	28.599	-11.148	78.200	38.454	PK
3			5860.000	64.903	26.425	-9.097	74.000	38.478	PK
4			5866.940	66.885	28.397	-7.115	74.000	38.488	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11n20 2TX	

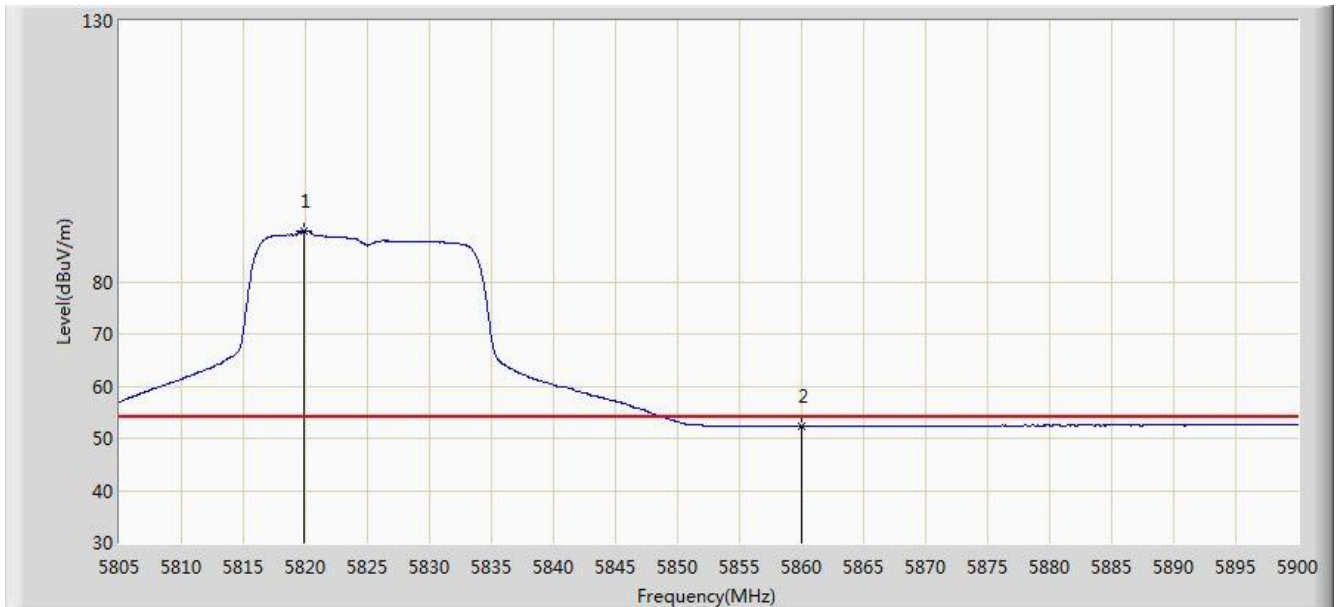


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.868	89.641	51.307	N/A	N/A	38.335	AV
2			5860.000	52.349	13.871	-1.651	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11n20 2TX	

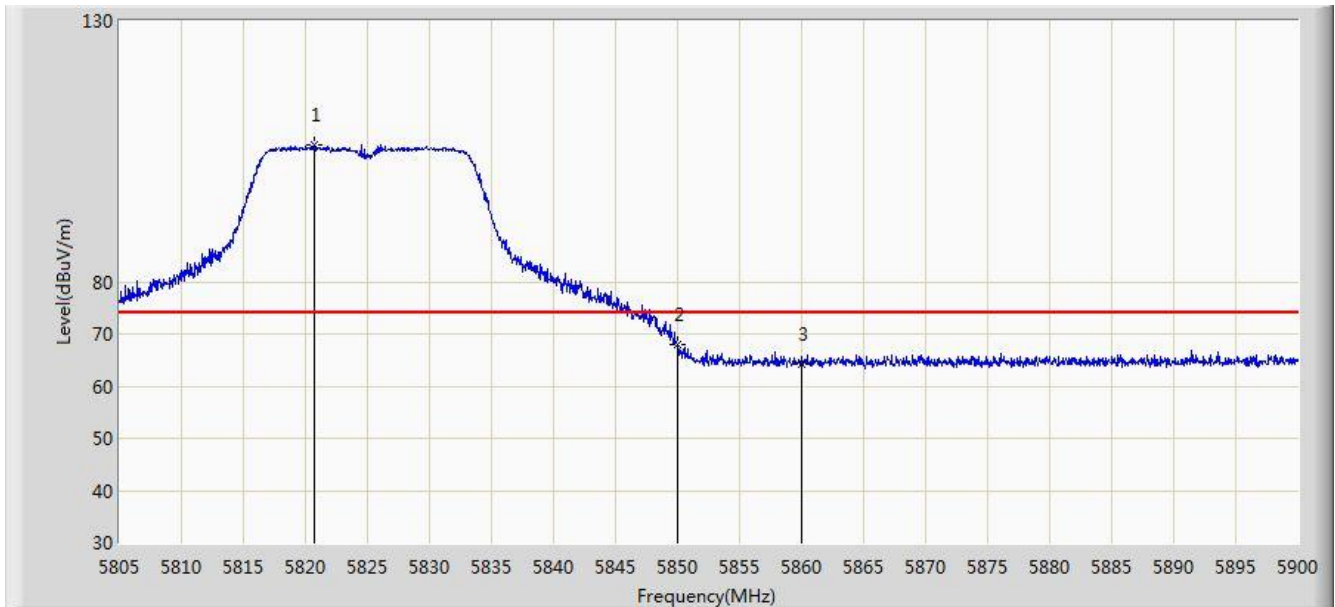


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.675	106.370	68.032	N/A	N/A	38.337	PK
2			5850.000	67.854	29.401	-10.346	78.200	38.454	PK
3			5860.000	64.209	25.731	-9.791	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11n20 2TX	

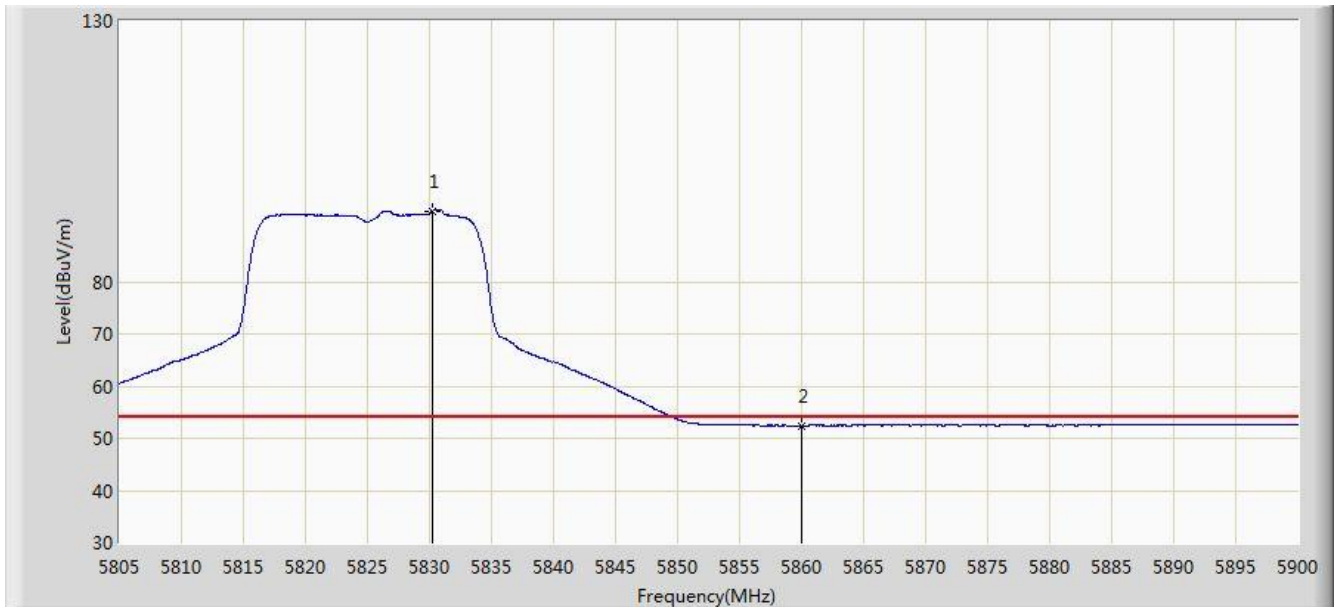


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.223	93.538	55.160	N/A	N/A	38.378	AV
2			5860.000	52.416	13.938	-1.584	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 03:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11n-HT40 2TX	

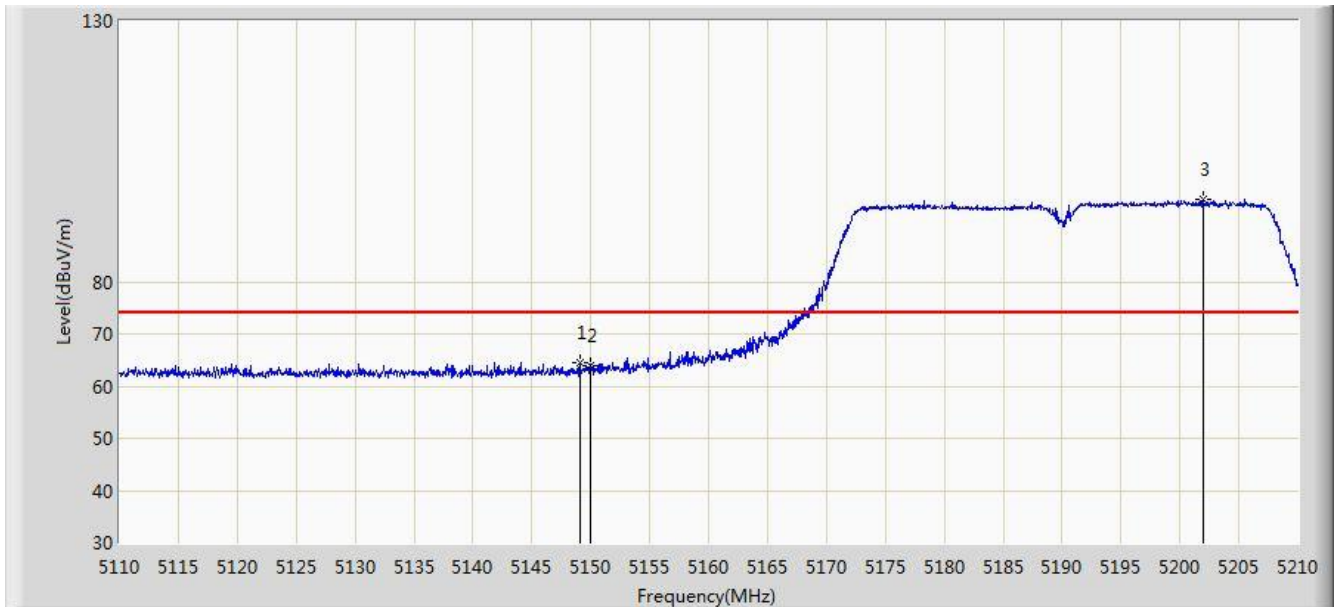


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.100	64.534	27.081	-9.466	74.000	37.453	PK
2			5150.000	63.801	26.349	-10.199	74.000	37.452	PK
3		*	5201.950	95.720	58.402	N/A	N/A	37.317	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 03:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11n-HT40 2TX	

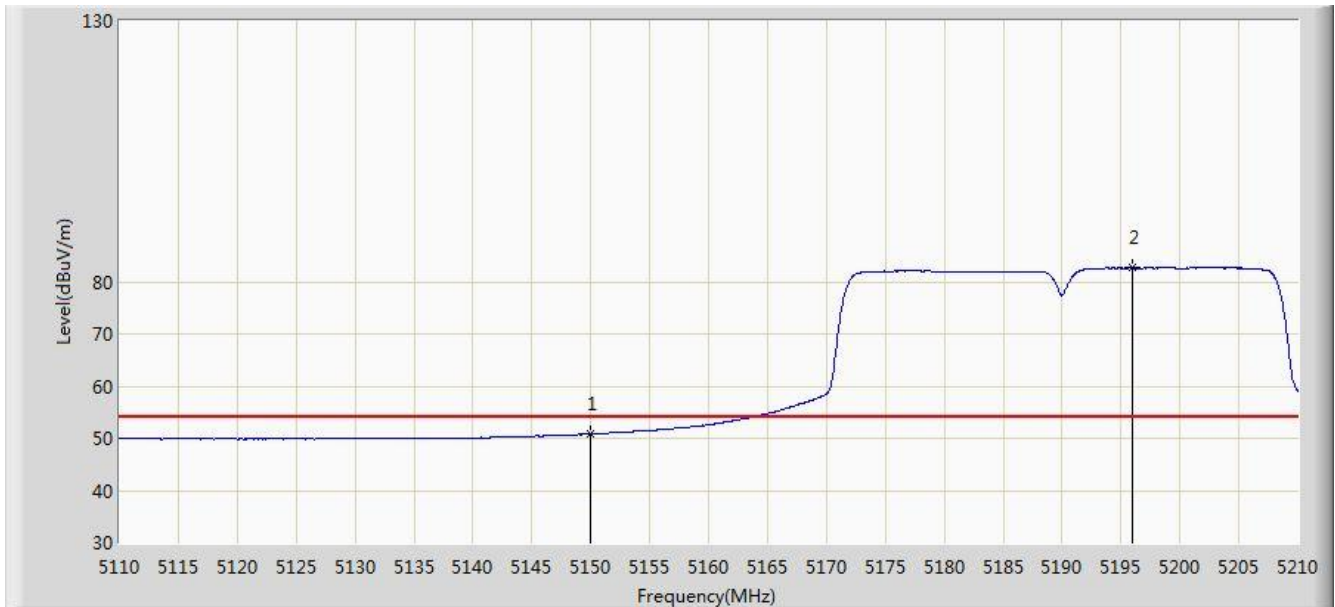


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.797	13.345	-3.203	54.000	37.452	AV
2		*	5196.000	82.645	45.310	N/A	N/A	37.334	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 03:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11n-HT40 2TX	

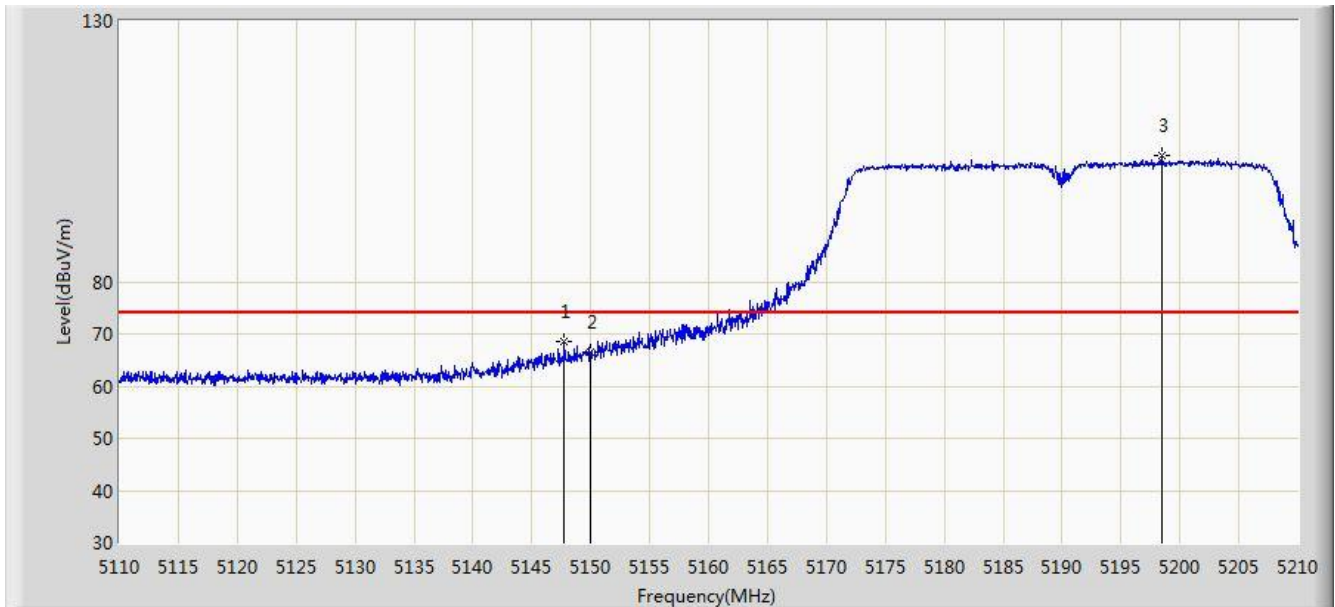


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.750	68.472	31.017	-5.528	74.000	37.455	PK
2			5150.000	66.385	28.933	-7.615	74.000	37.452	PK
3		*	5198.450	104.240	66.911	N/A	N/A	37.329	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 03:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11n-HT40 2TX	

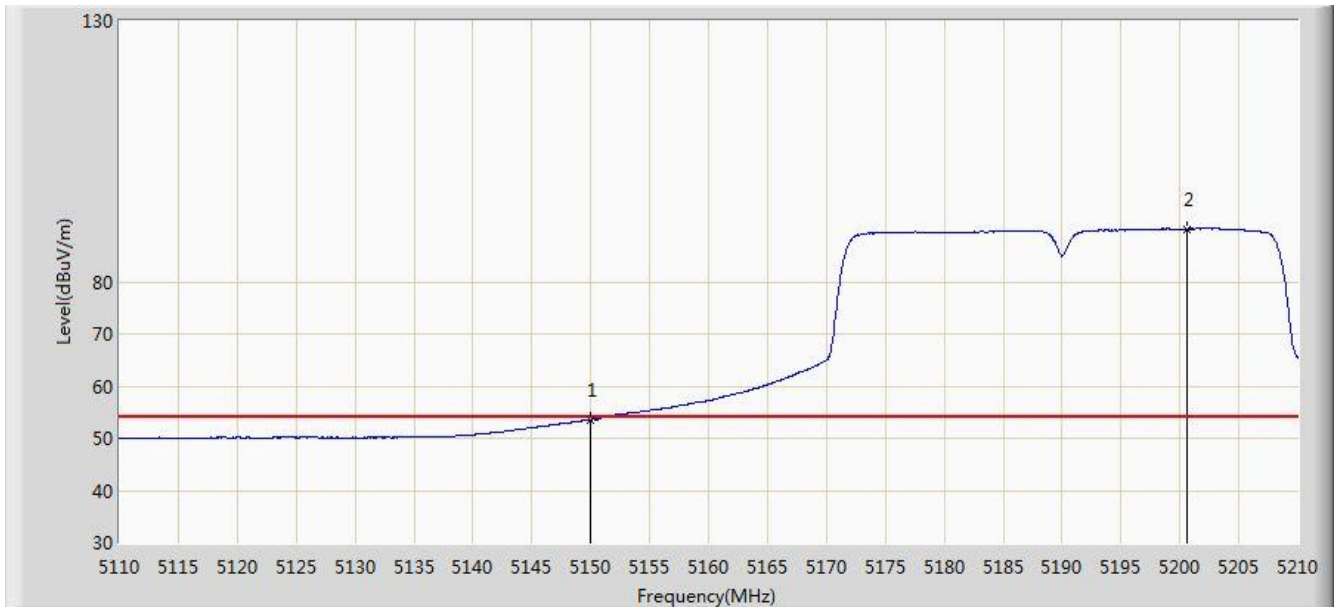


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.574	16.122	-0.426	54.000	37.452	AV
2		*	5200.600	90.106	52.784	N/A	N/A	37.323	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11n-HT40 2TX	

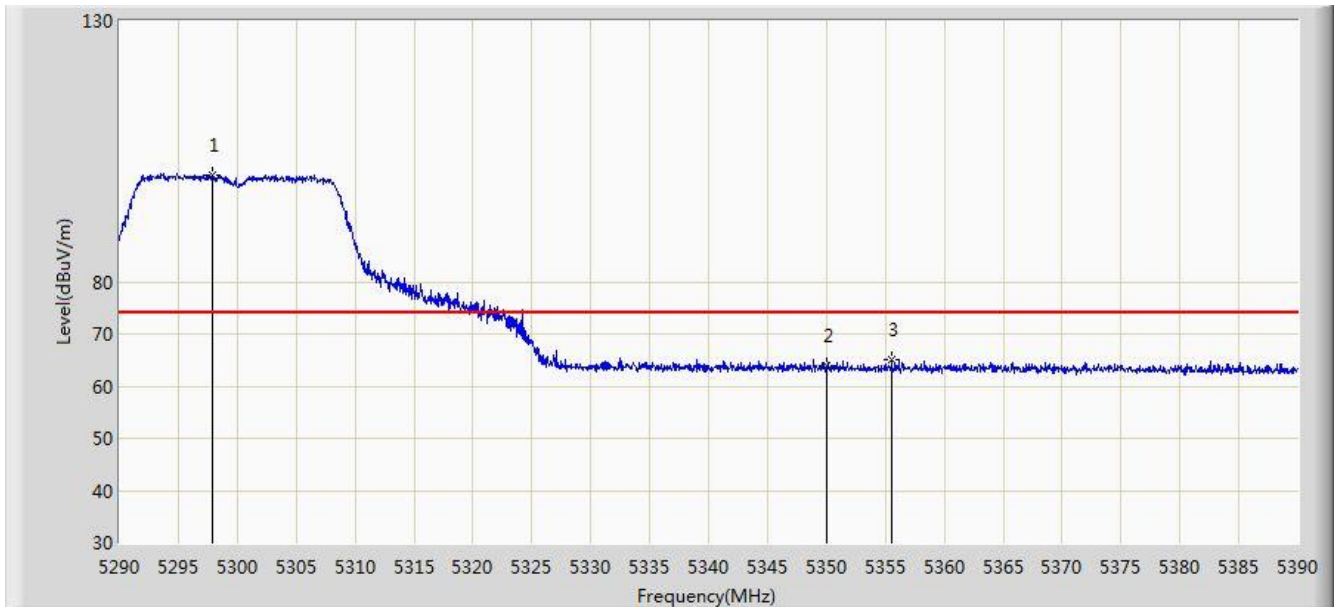


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.900	100.452	63.270	N/A	N/A	37.182	PK
2			5350.000	63.808	26.522	-10.192	74.000	37.286	PK
3			5355.550	65.138	27.836	-8.862	74.000	37.302	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11n-HT40 2TX	

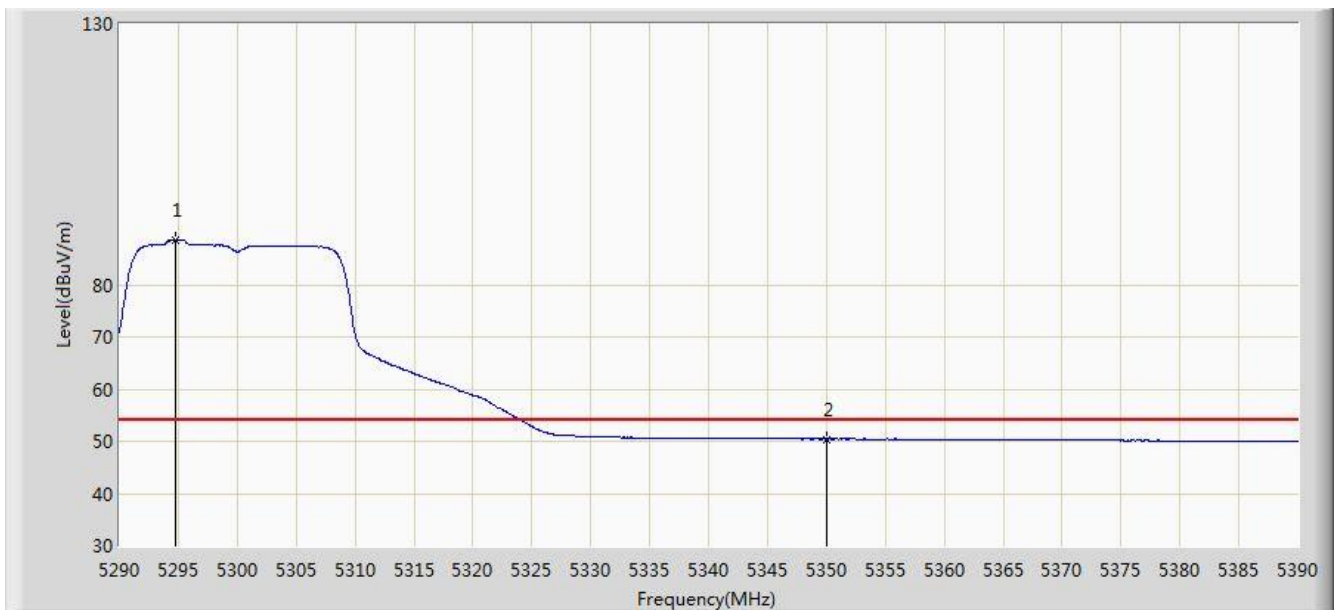


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.800	88.548	51.370	N/A	N/A	37.178	AV
2			5350.000	50.419	13.133	-3.581	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11n-HT40 2TX	

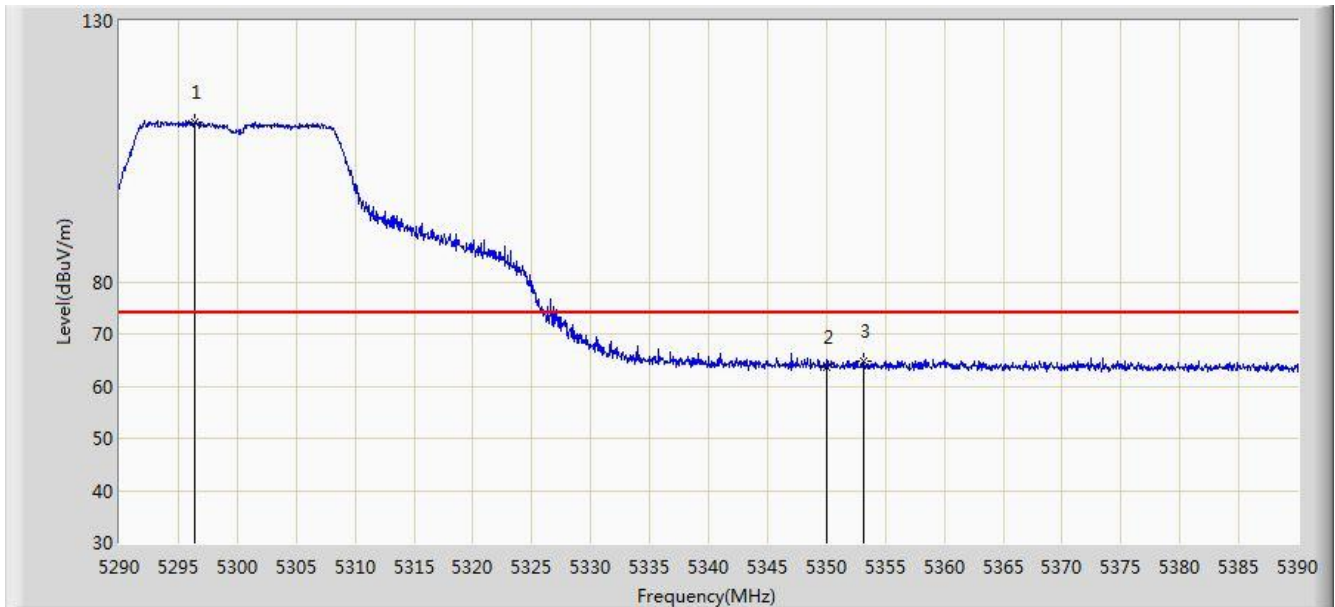


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.350	110.641	73.462	N/A	N/A	37.179	PK
2			5350.000	63.542	26.256	-10.458	74.000	37.286	PK
3			5353.100	64.781	27.485	-9.219	74.000	37.296	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11n-HT40 2TX	

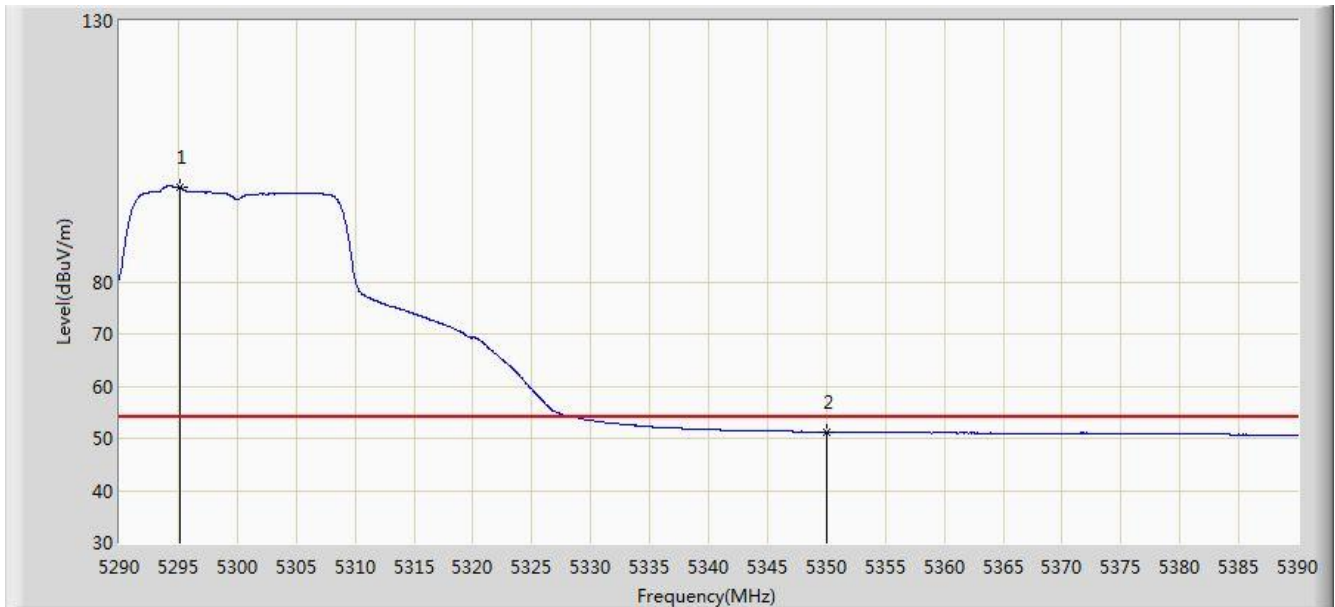


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.100	98.228	61.050	N/A	N/A	37.178	AV
2			5350.000	51.180	13.894	-2.820	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5510MHz by 802.11n-HT40 2TX	

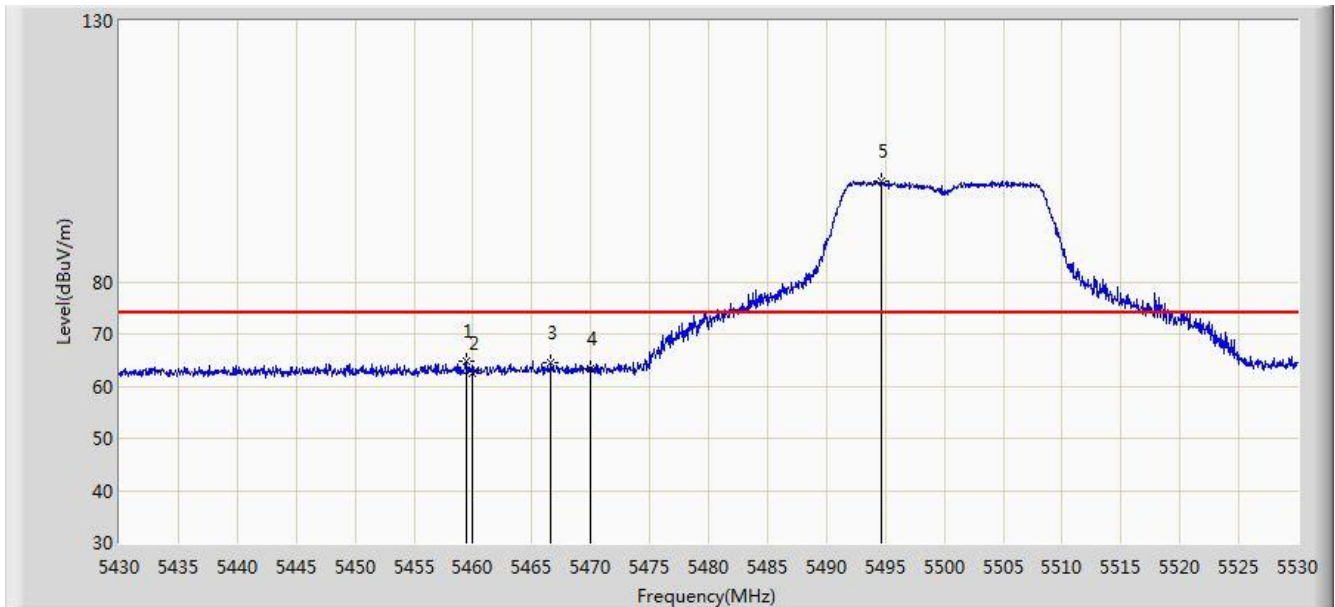


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.400	64.640	27.079	-9.360	74.000	37.561	PK
2			5460.000	62.498	24.935	-11.502	74.000	37.563	PK
3			5466.650	64.628	27.048	-9.372	74.000	37.580	PK
4			5470.000	63.474	25.885	-10.526	74.000	37.588	PK
5		*	5494.600	99.241	61.622	N/A	N/A	37.618	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5510MHz by 802.11n-HT40 2TX	

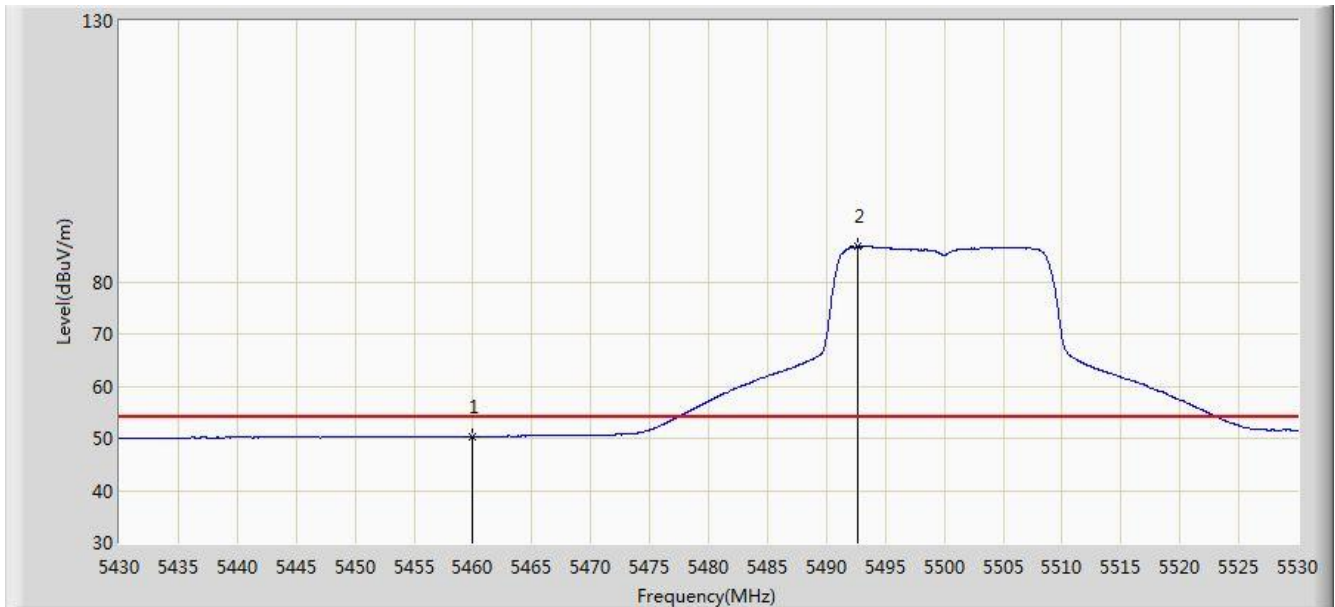


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.398	12.835	-3.602	54.000	37.563	AV
2		*	5492.600	86.712	49.096	N/A	N/A	37.616	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5510MHz by 802.11n-HT40 2TX	

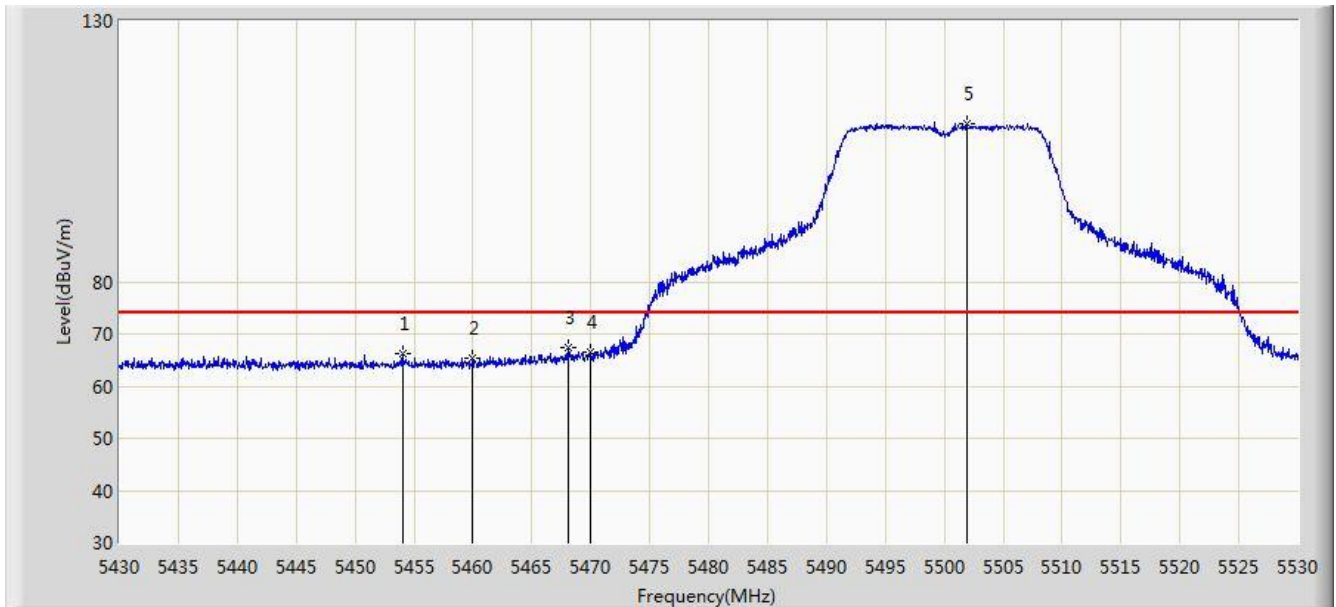


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.050	66.137	28.591	-7.863	74.000	37.546	PK
2			5460.000	65.265	27.702	-8.735	74.000	37.563	PK
3			5468.050	67.420	29.837	-6.580	74.000	37.583	PK
4			5470.000	66.550	28.961	-7.450	74.000	37.588	PK
5		*	5501.900	110.316	72.690	N/A	N/A	37.627	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5510MHz by 802.11n-HT40 2TX	

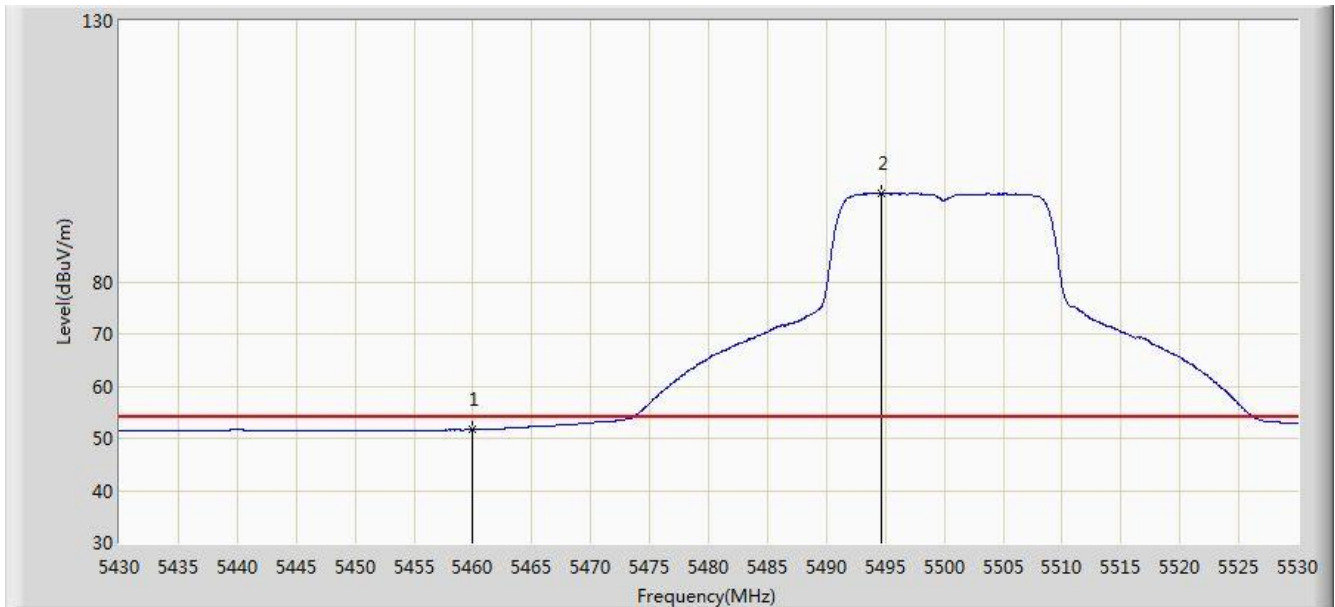


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.664	14.101	-2.336	54.000	37.563	AV
2		*	5494.650	96.929	59.310	N/A	N/A	37.618	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5670MHz by 802.11n-HT40 2TX	

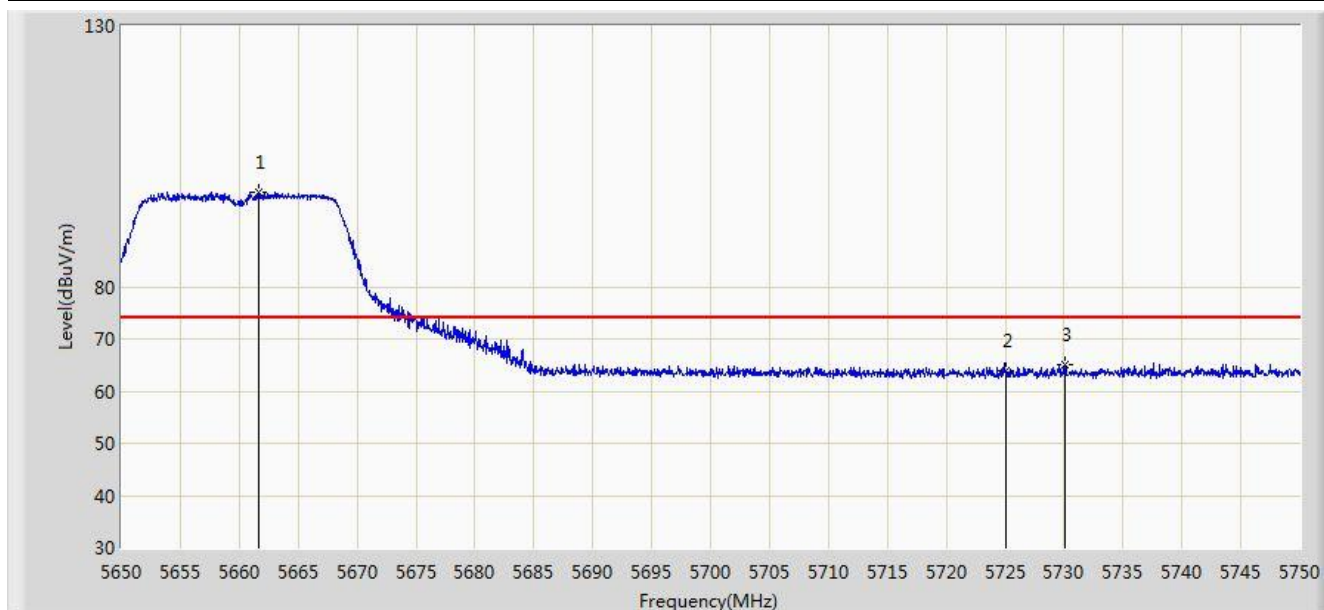


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.650	98.237	60.438	N/A	N/A	37.799	PK
2			5725.000	63.795	25.805	-10.205	74.000	37.990	PK
3			5730.050	65.069	27.059	-8.931	74.000	38.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5670MHz by 802.11n-HT40 2TX	

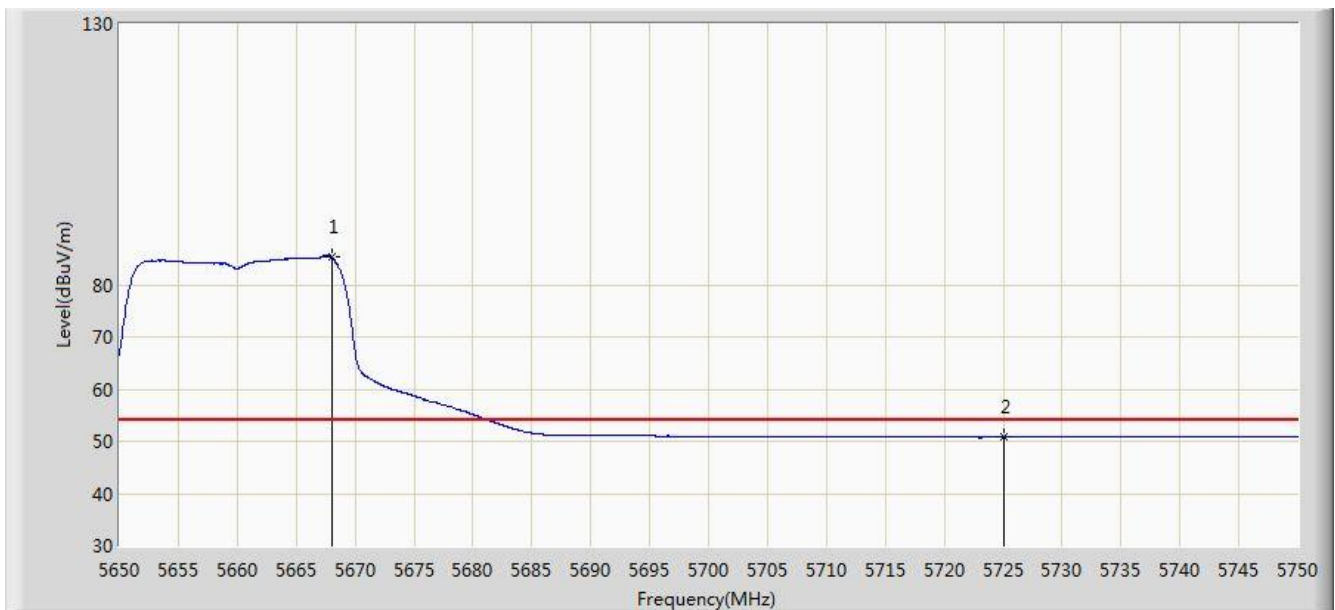


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.000	85.442	47.635	N/A	N/A	37.807	AV
2			5725.000	50.806	12.816	-3.194	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5670MHz by 802.11n-HT40 2TX	

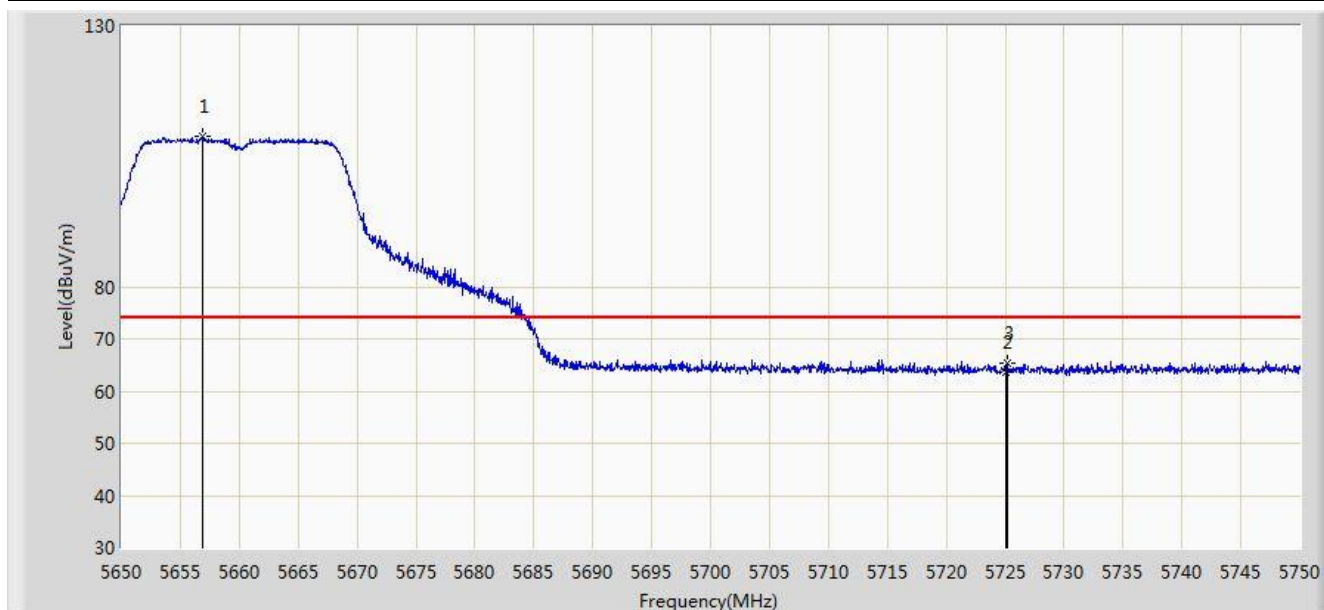


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5656.900	108.816	71.023	N/A	N/A	37.793	PK
2			5725.000	63.529	25.539	-10.471	74.000	37.990	PK
3			5725.150	65.291	27.301	-8.709	74.000	37.990	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5670MHz by 802.11n-HT40 2TX	

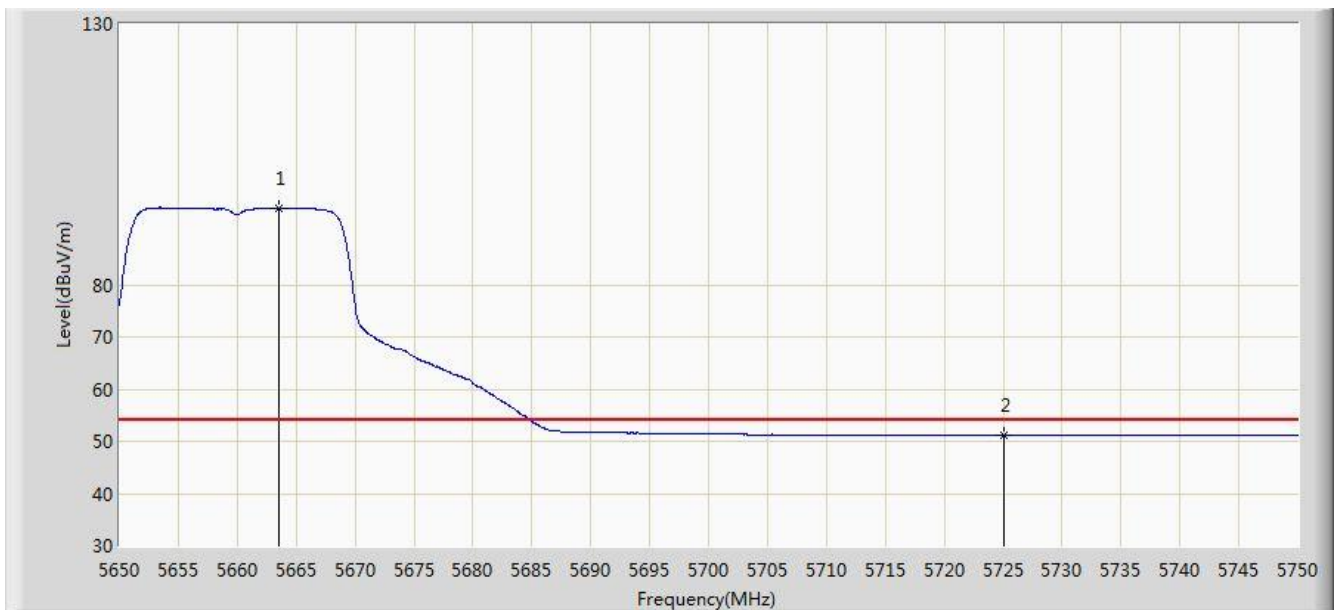


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.550	94.774	56.973	N/A	N/A	37.801	AV
2			5725.000	51.109	13.119	-2.891	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5755MHz by 802.11n40 2TX	

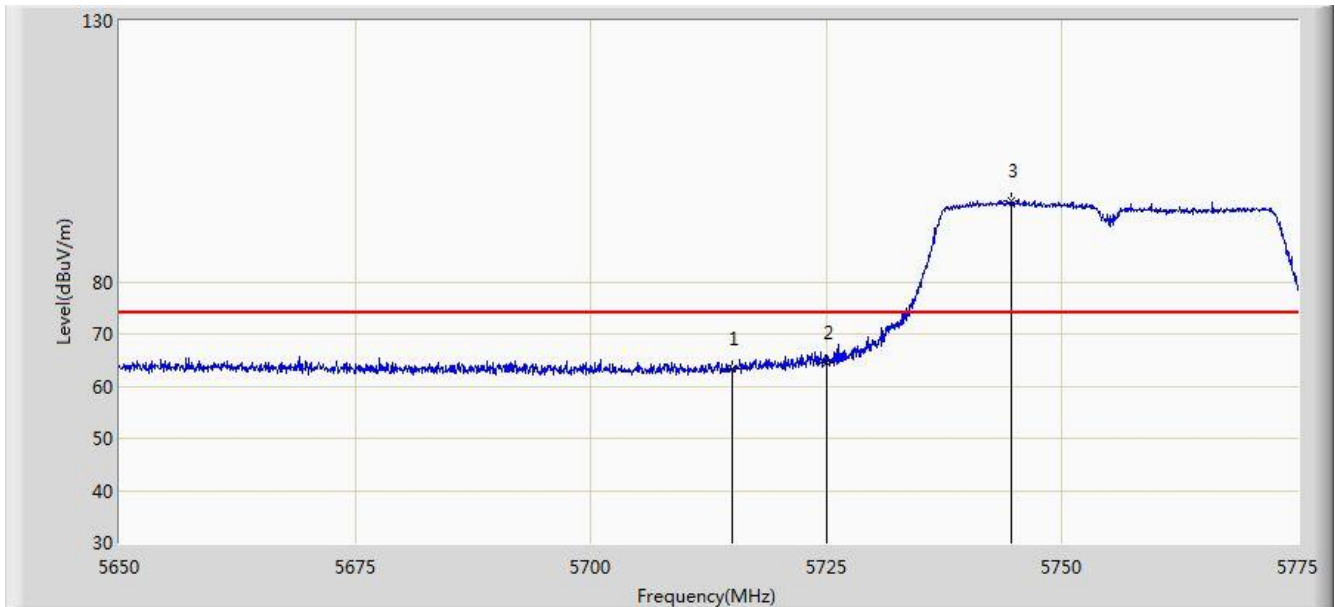


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.419	25.470	-10.581	74.000	37.949	PK
2			5725.000	64.416	26.426	-13.784	78.200	37.990	PK
3		*	5744.562	95.389	57.319	N/A	N/A	38.070	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5755MHz by 802.11n40 2TX	

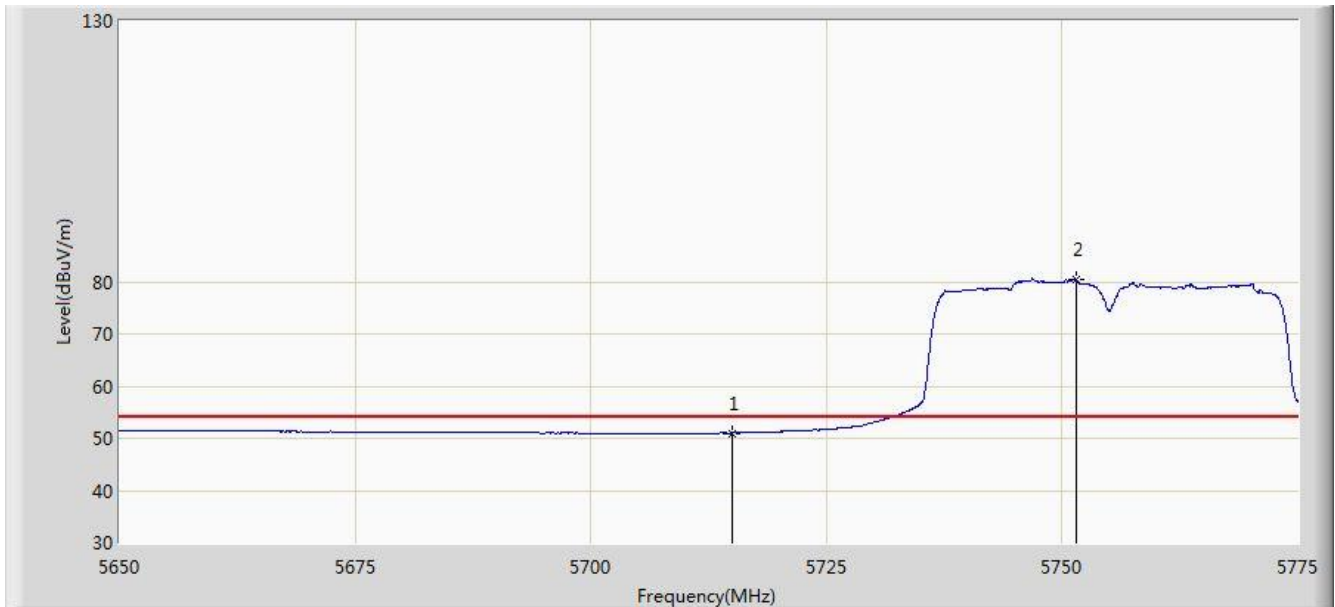


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.014	13.065	-2.986	54.000	37.949	AV
2		*	5751.437	80.340	42.237	N/A	N/A	38.102	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5755MHz by 802.11n40 2TX	

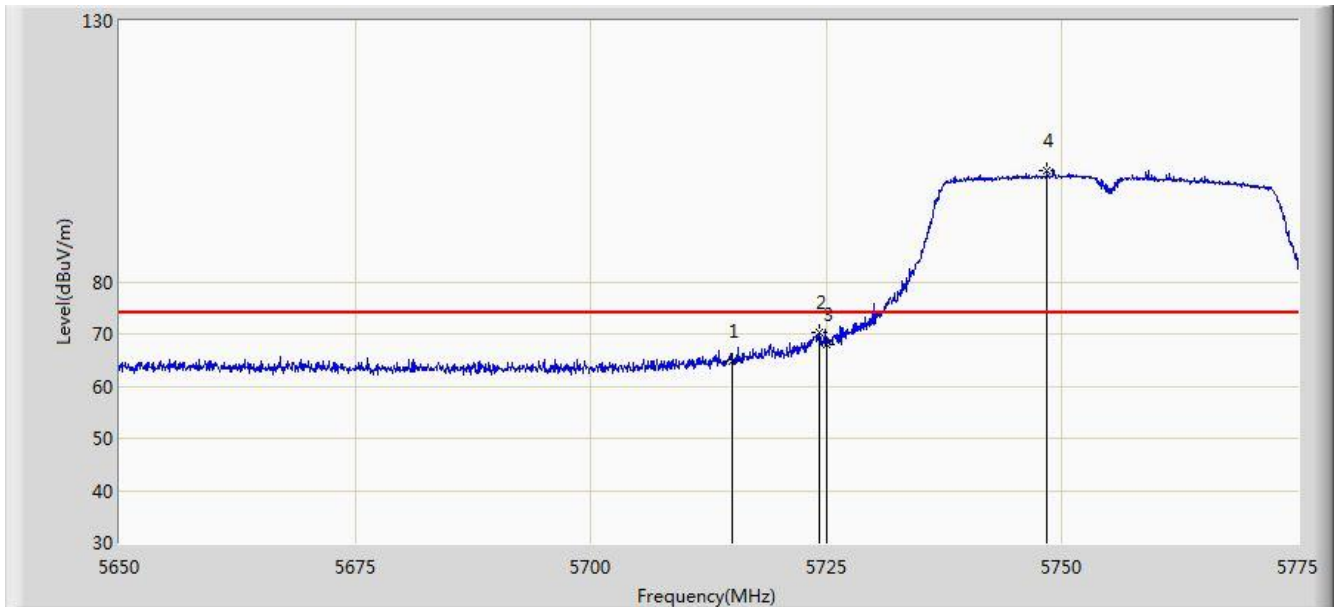


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.749	26.800	-9.251	74.000	37.949	PK
2			5724.312	70.274	32.287	-7.926	78.200	37.987	PK
3			5725.000	67.841	29.851	-10.359	78.200	37.990	PK
4		*	5748.375	101.284	63.196	N/A	N/A	38.088	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5755MHz by 802.11n40 2TX	

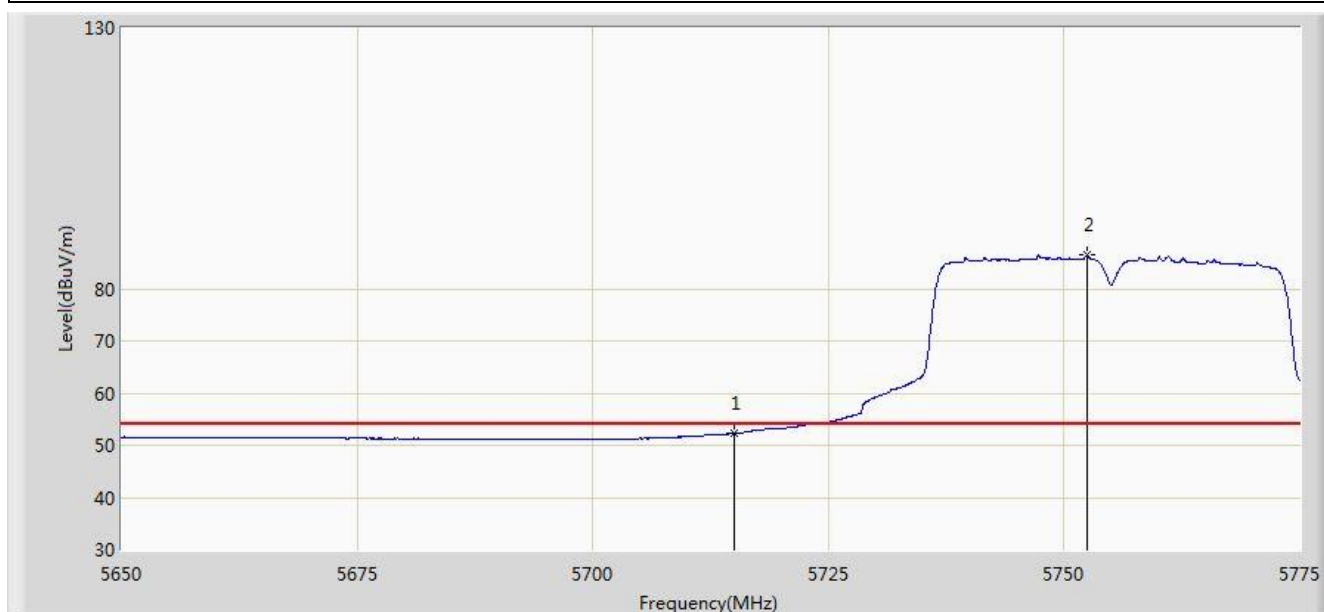


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.246	14.297	-1.754	54.000	37.949	AV
2		*	5752.375	86.427	48.320	N/A	N/A	38.108	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5795MHz by 802.11n40 2TX	

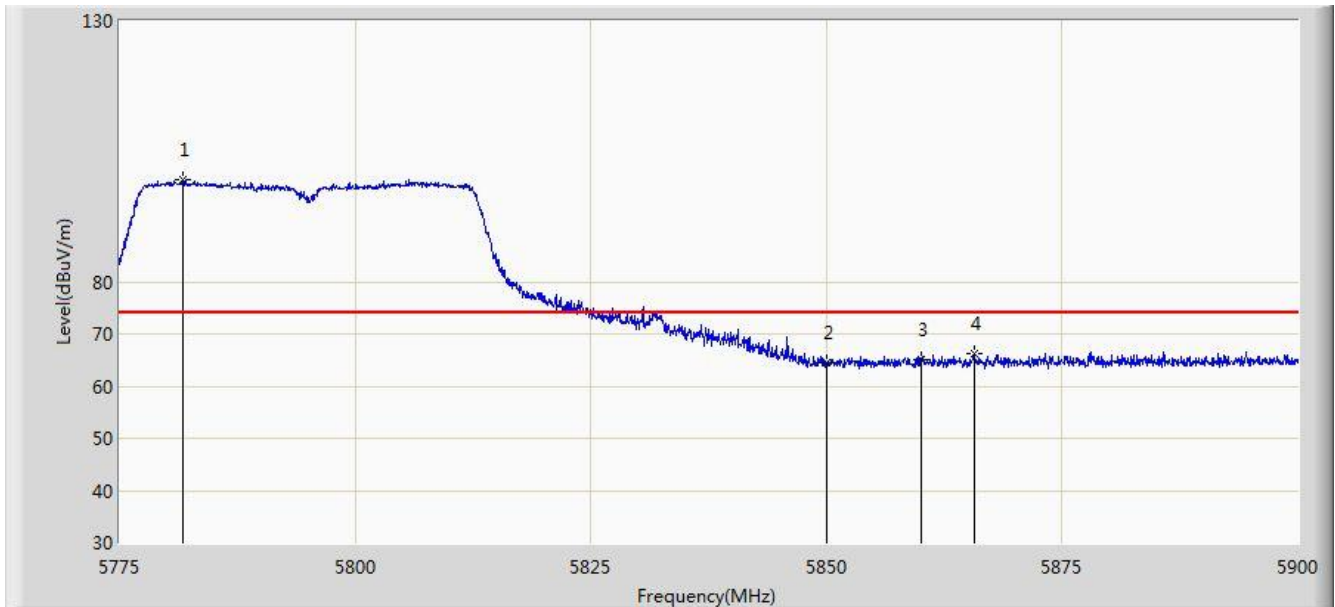


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5781.812	99.548	61.347	N/A	N/A	38.201	PK
2			5850.000	64.595	26.142	-13.605	78.200	38.454	PK
3			5860.000	65.076	26.598	-8.924	74.000	38.478	PK
4			5865.625	66.348	27.861	-7.652	74.000	38.486	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5795MHz by 802.11n40 2TX	

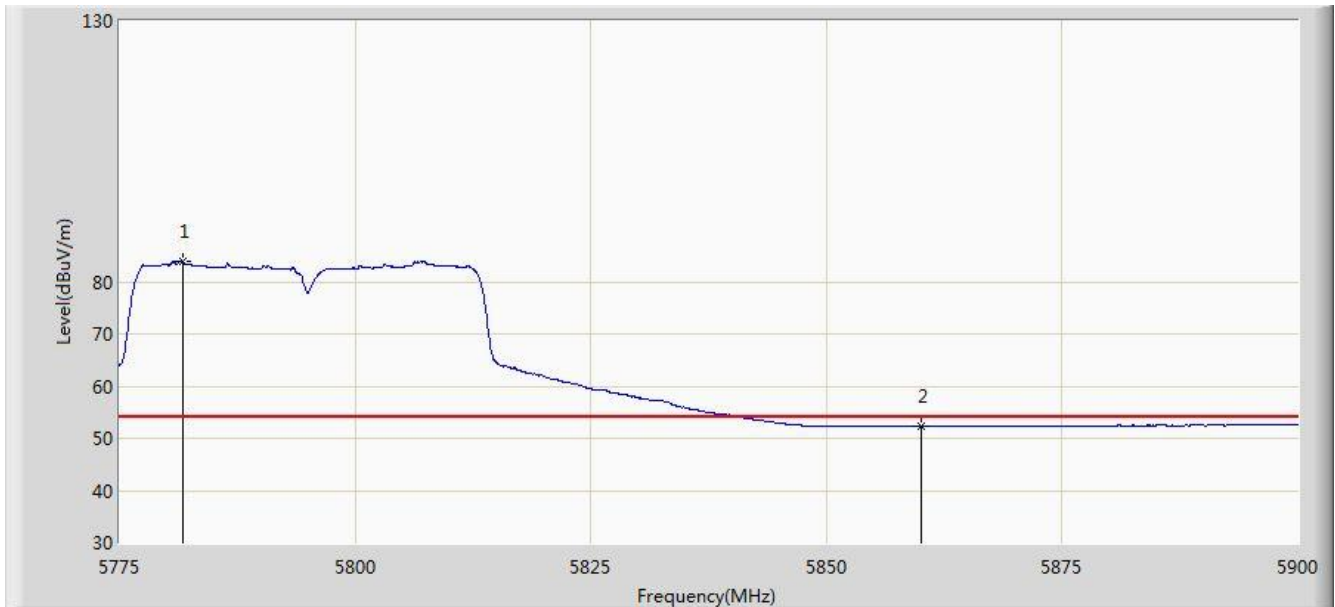


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5781.750	83.953	45.752	N/A	N/A	38.201	AV
2			5860.000	52.264	13.786	-1.736	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5795MHz by 802.11n40 2TX	

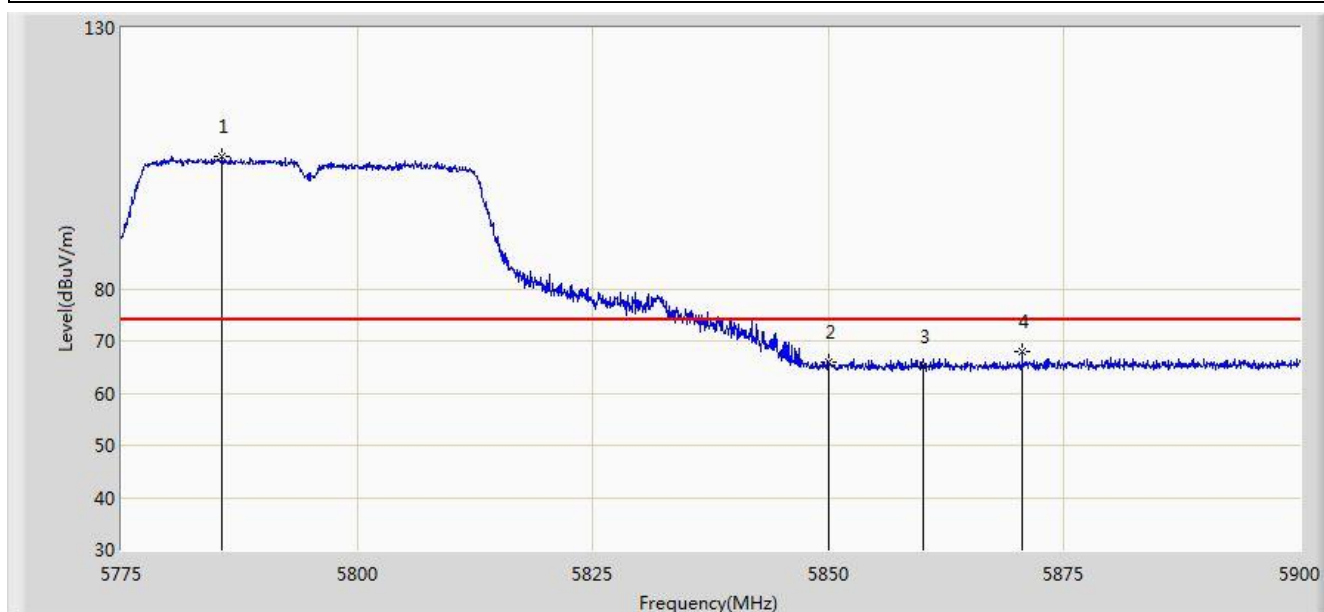


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.687	105.388	67.173	N/A	N/A	38.215	PK
2			5850.000	65.906	27.453	-12.294	78.200	38.454	PK
3			5860.000	65.134	26.656	-8.866	74.000	38.478	PK
4			5870.562	67.842	29.350	-6.158	74.000	38.493	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5795MHz by 802.11n40 2TX	

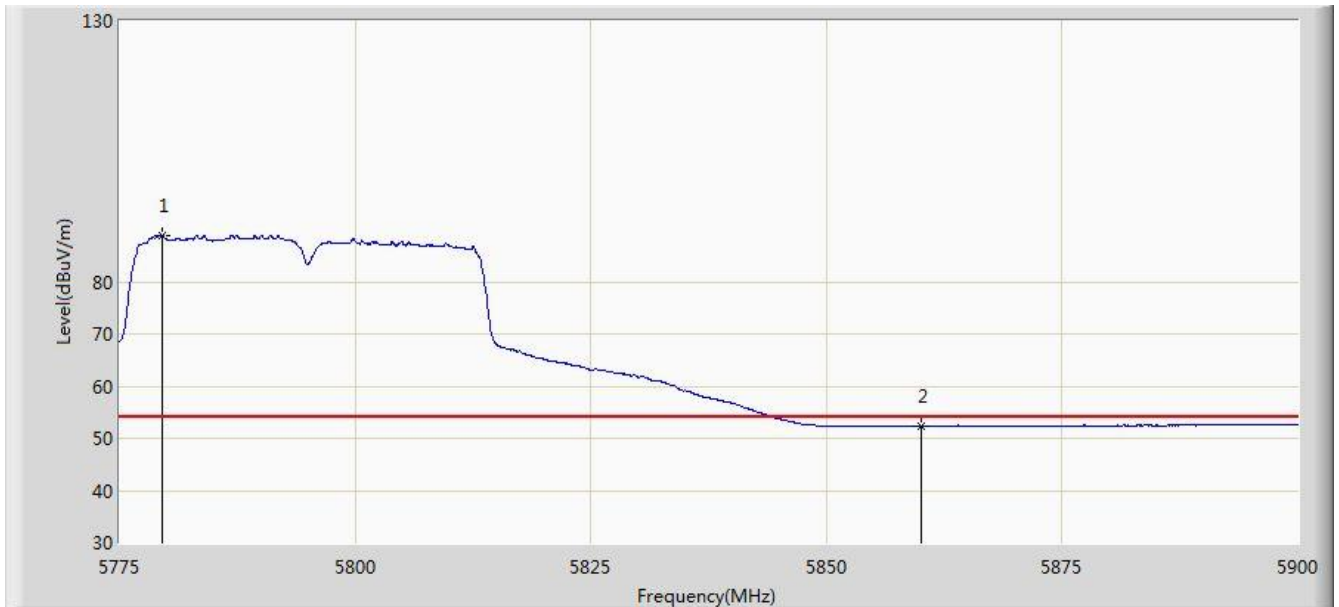


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5779.500	88.923	50.731	N/A	N/A	38.192	AV
2			5860.000	52.333	13.855	-1.667	54.000	38.478	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11ac-VHT20 2TX	

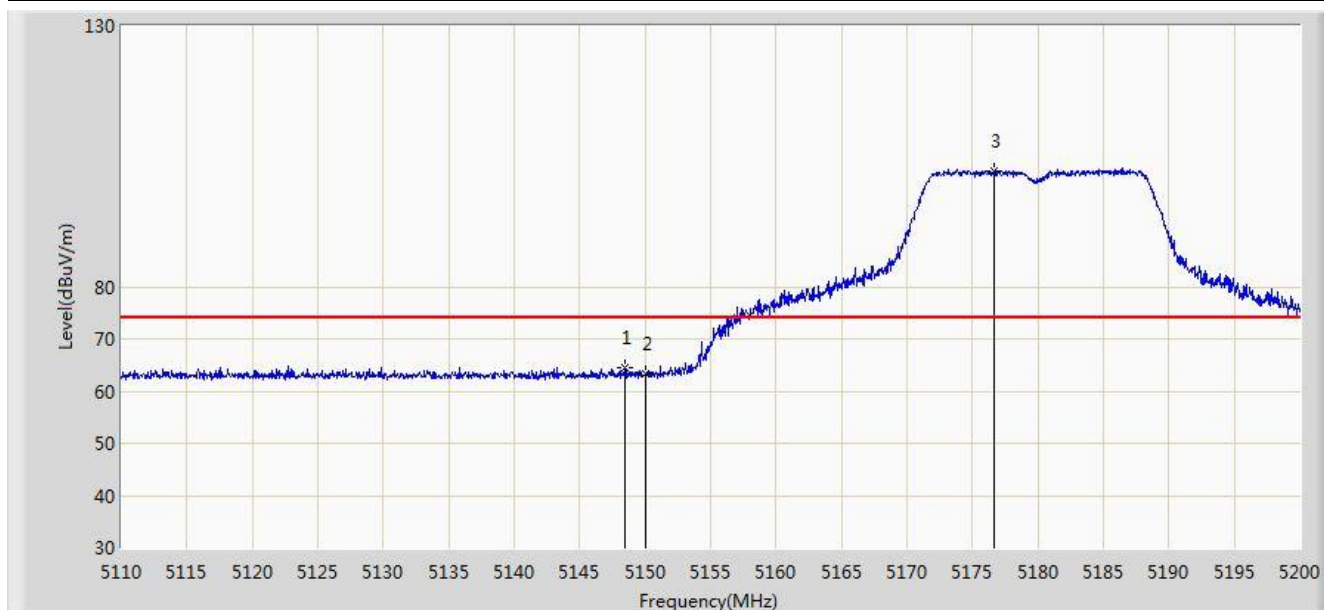


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.430	64.514	27.060	-9.486	74.000	37.454	PK
2			5150.000	63.265	25.813	-10.735	74.000	37.452	PK
3		*	5176.690	102.231	64.850	N/A	N/A	37.381	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11ac-VHT20 2TX	

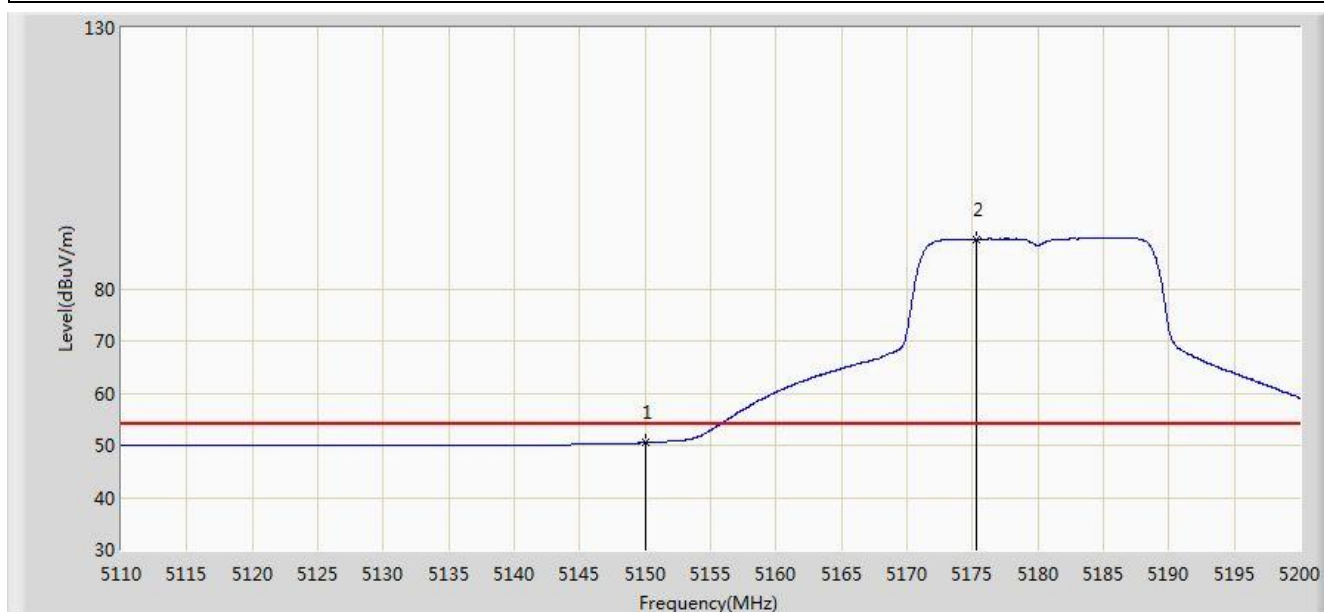


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.467	13.015	-3.533	54.000	37.452	AV
2		*	5175.340	89.525	52.141	N/A	N/A	37.384	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11ac-VHT20 2TX	

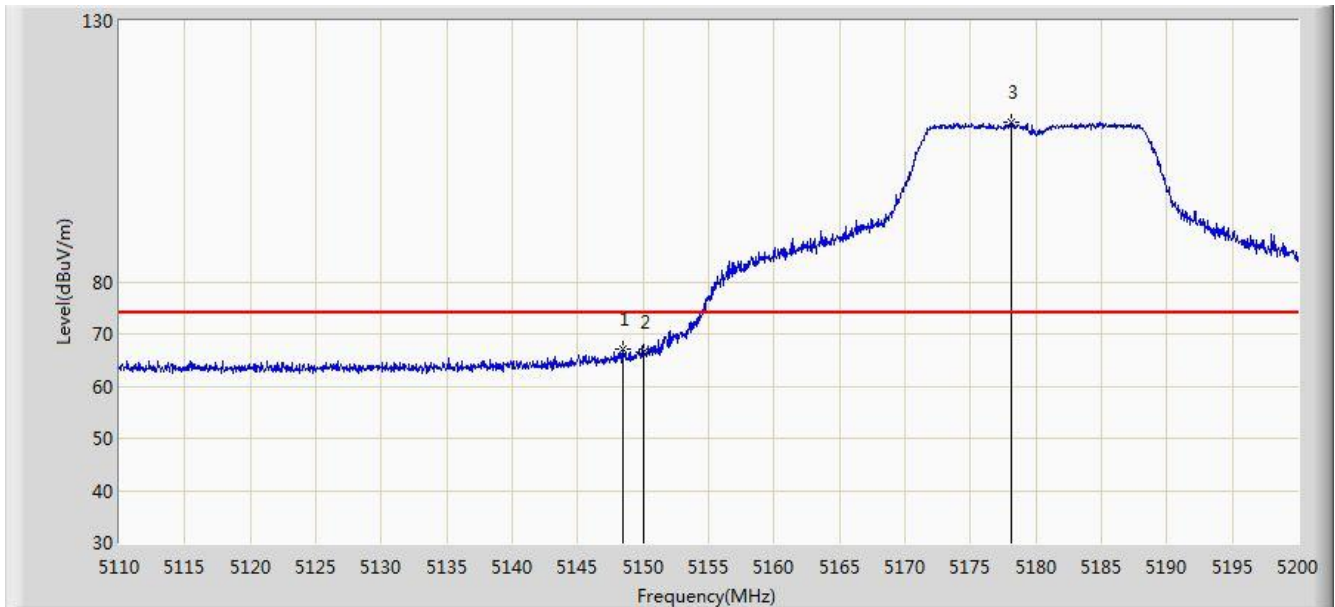


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.475	67.016	29.562	-6.984	74.000	37.454	PK
2			5150.000	66.566	29.114	-7.434	74.000	37.452	PK
3		*	5178.085	110.642	73.264	N/A	N/A	37.378	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5180MHz by 802.11ac-VHT20 2TX	

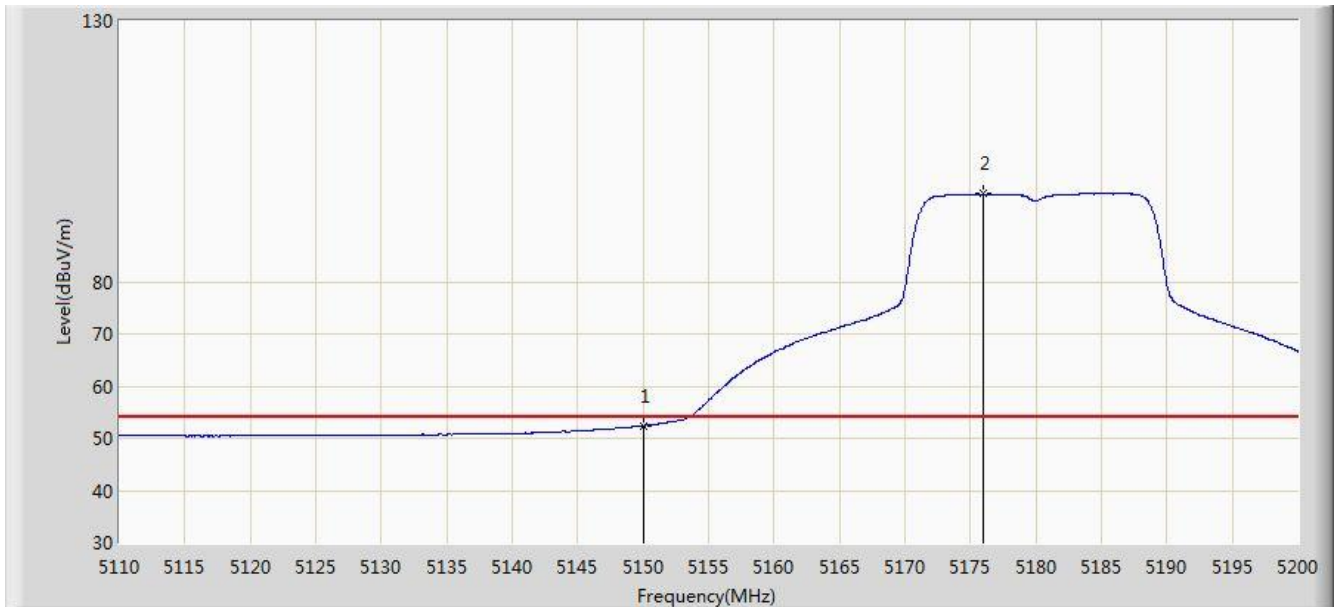


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.438	14.986	-1.562	54.000	37.452	AV
2		*	5175.925	96.929	59.546	N/A	N/A	37.383	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11ac-VHT20 2TX	

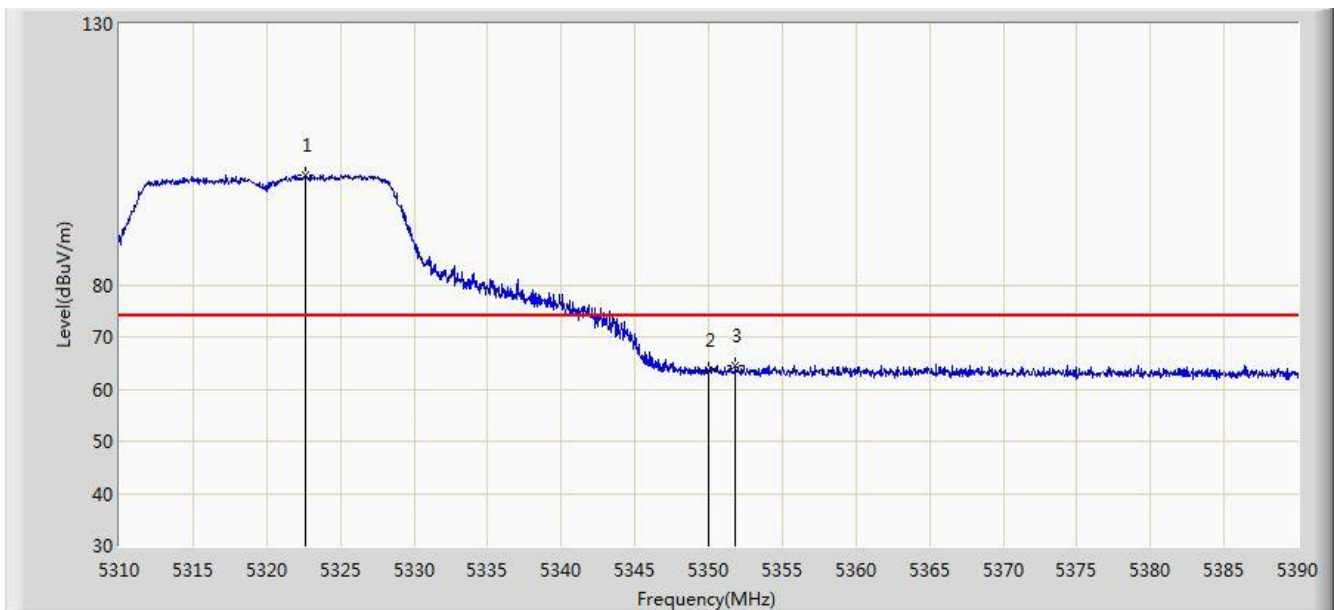


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	101.060	63.842	N/A	N/A	37.218	PK
2			5350.000	63.653	26.367	-10.347	74.000	37.286	PK
3			5351.840	64.575	27.283	-9.425	74.000	37.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11ac-VHT20 2TX	

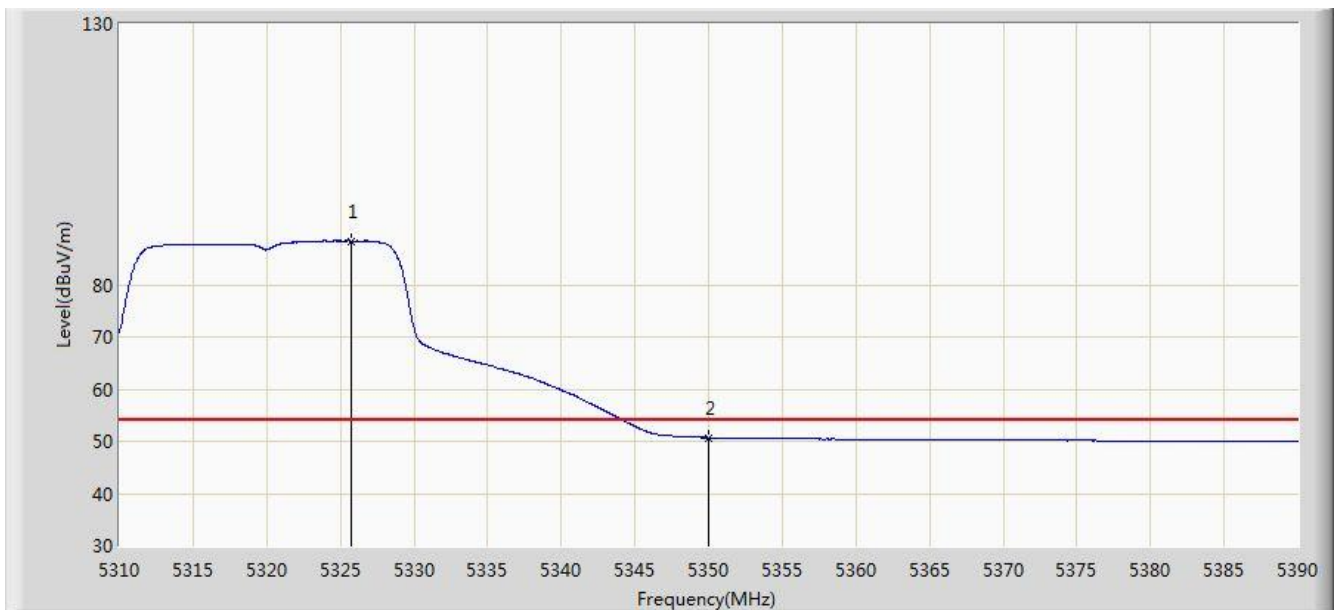


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.760	88.383	51.159	N/A	N/A	37.224	AV
2			5350.000	50.669	13.383	-3.331	54.000	37.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11ac-VHT20 2TX	

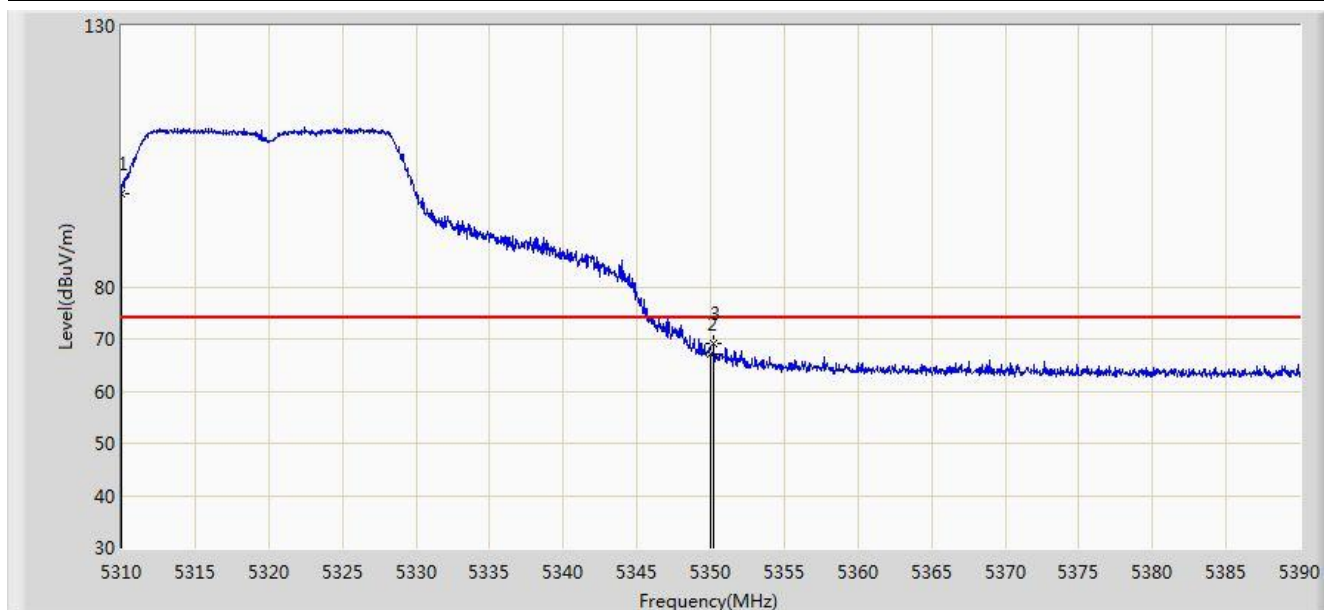


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5310.000	97.896	60.698	N/A	N/A	37.198	PK
2			5350.000	67.171	29.885	-6.829	74.000	37.286	PK
3			5350.200	69.035	31.748	-4.965	74.000	37.287	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5320MHz by 802.11ac-VHT20 2TX	

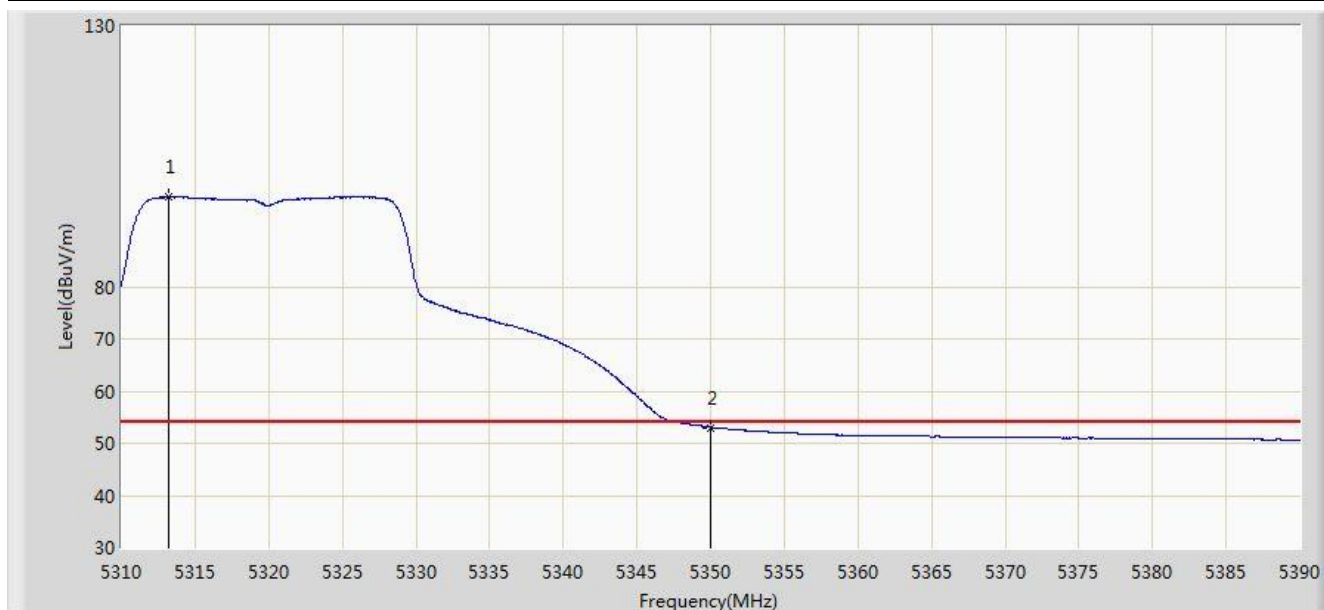


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.240	97.236	60.035	N/A	N/A	37.202	AV
2			5350.000	53.037	15.751	-0.963	54.000	37.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11ac-VHT20 2TX	

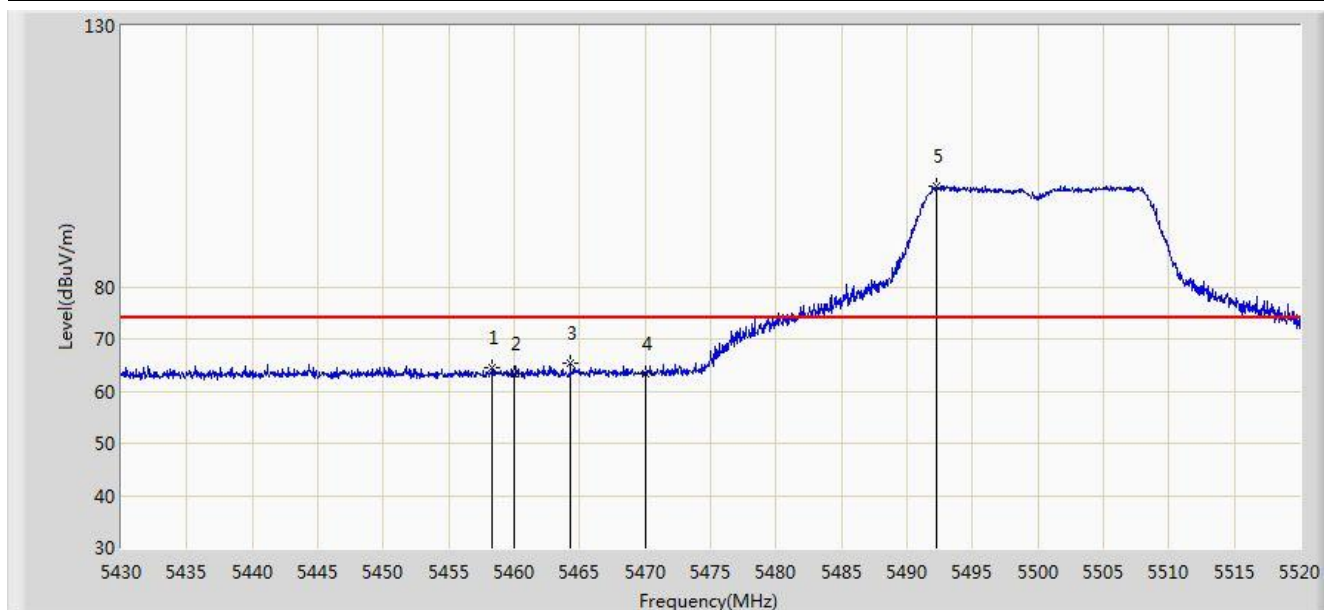


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.305	64.631	27.073	-9.369	74.000	37.558	PK
2			5460.000	63.263	25.700	-10.737	74.000	37.563	PK
3			5464.290	65.351	27.777	-8.649	74.000	37.573	PK
4			5470.000	63.240	25.651	-10.760	74.000	37.588	PK
5		*	5492.235	99.323	61.707	N/A	N/A	37.616	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11ac-VHT20 2TX	

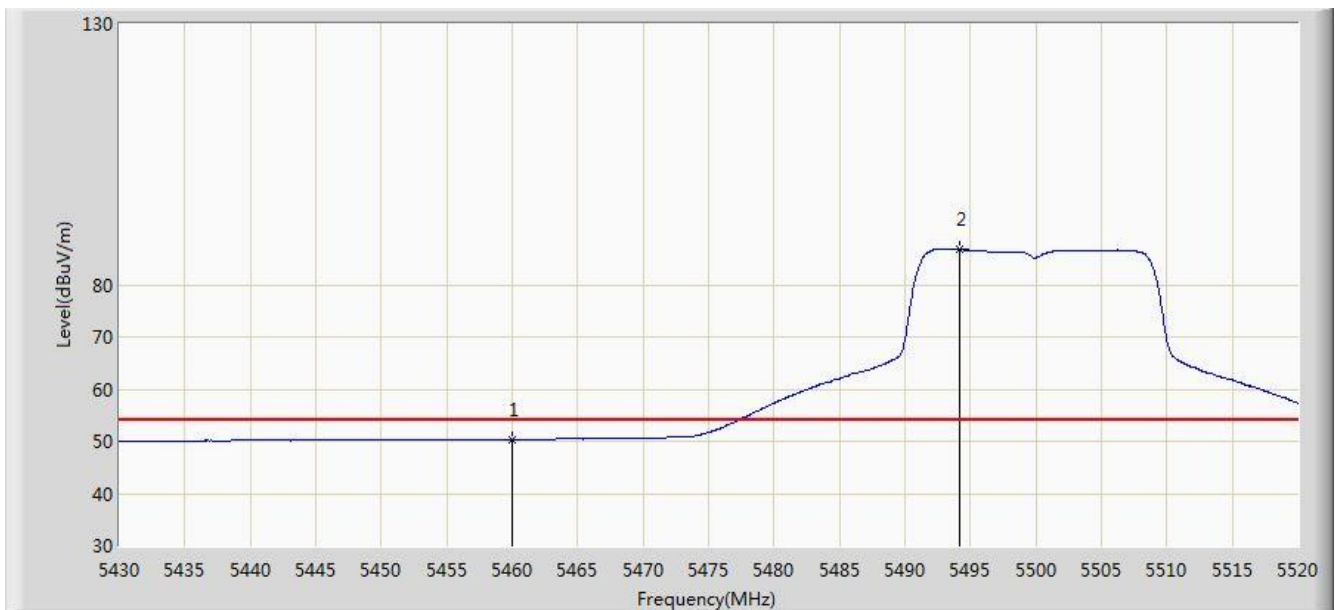


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.372	12.809	-3.628	54.000	37.563	AV
2		*	5494.215	86.708	49.090	N/A	N/A	37.618	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11ac-VHT20 2TX	

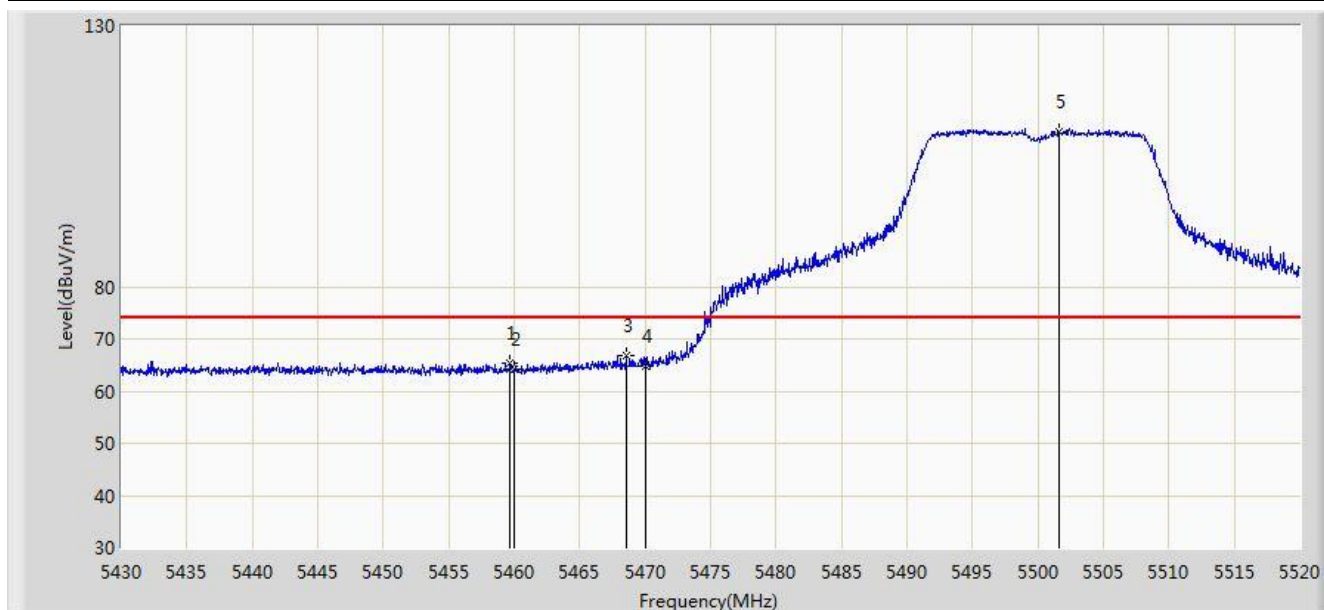


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.700	65.328	27.766	-8.672	74.000	37.562	PK
2			5460.000	64.103	26.540	-9.897	74.000	37.563	PK
3			5468.520	66.814	29.229	-7.186	74.000	37.585	PK
4			5470.000	64.841	27.252	-9.159	74.000	37.588	PK
5		*	5501.640	109.713	72.087	N/A	N/A	37.626	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5500MHz by 802.11ac-VHT20 2TX	

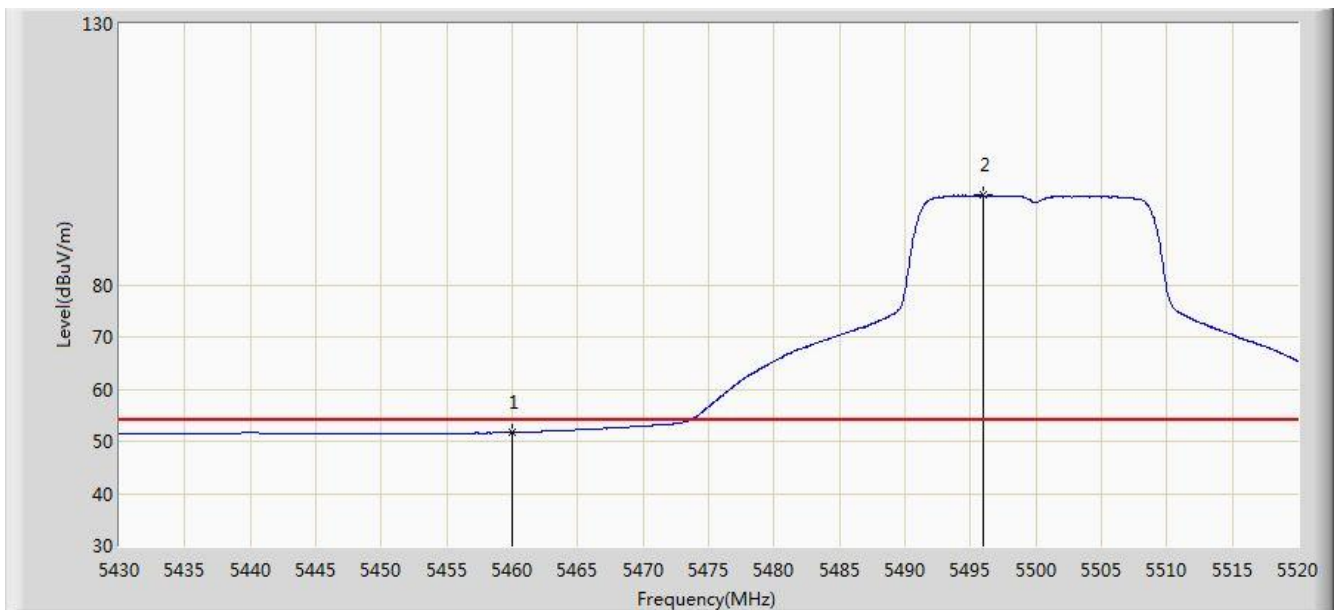


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.712	14.149	-2.288	54.000	37.563	AV
2		*	5495.925	97.278	59.658	N/A	N/A	37.620	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11ac-VHT20 2TX	

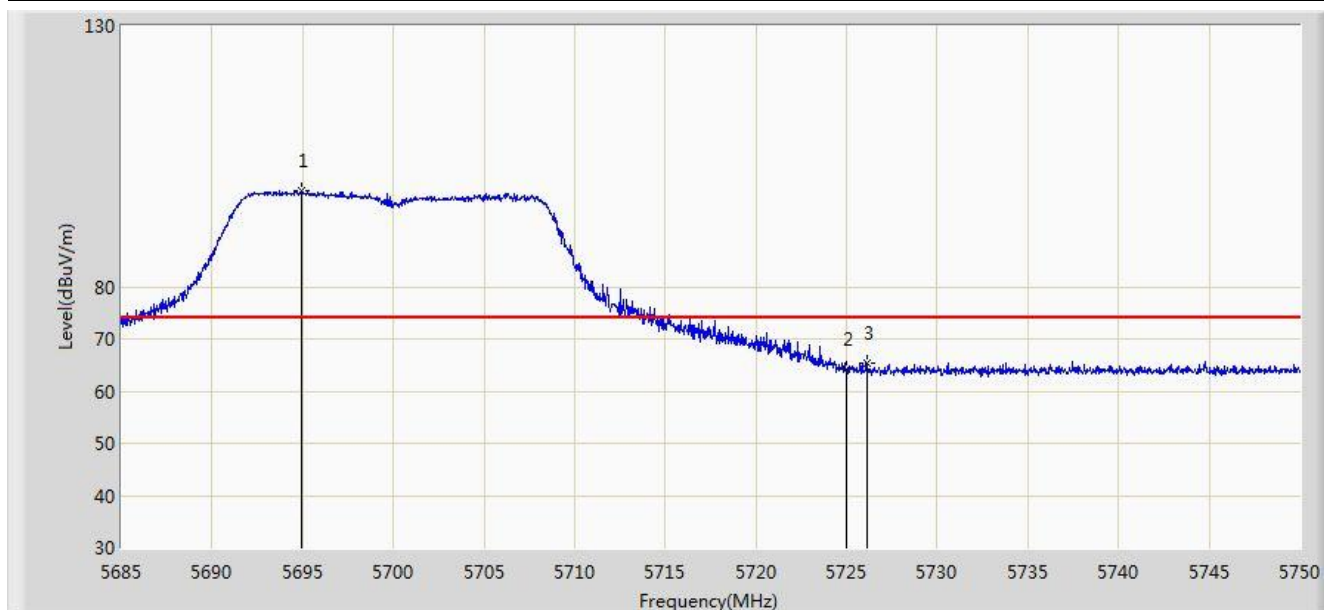


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.978	98.540	60.660	N/A	N/A	37.879	PK
2			5725.000	64.060	26.070	-9.940	74.000	37.990	PK
3			5726.145	65.355	27.361	-8.645	74.000	37.994	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11ac-VHT20 2TX	

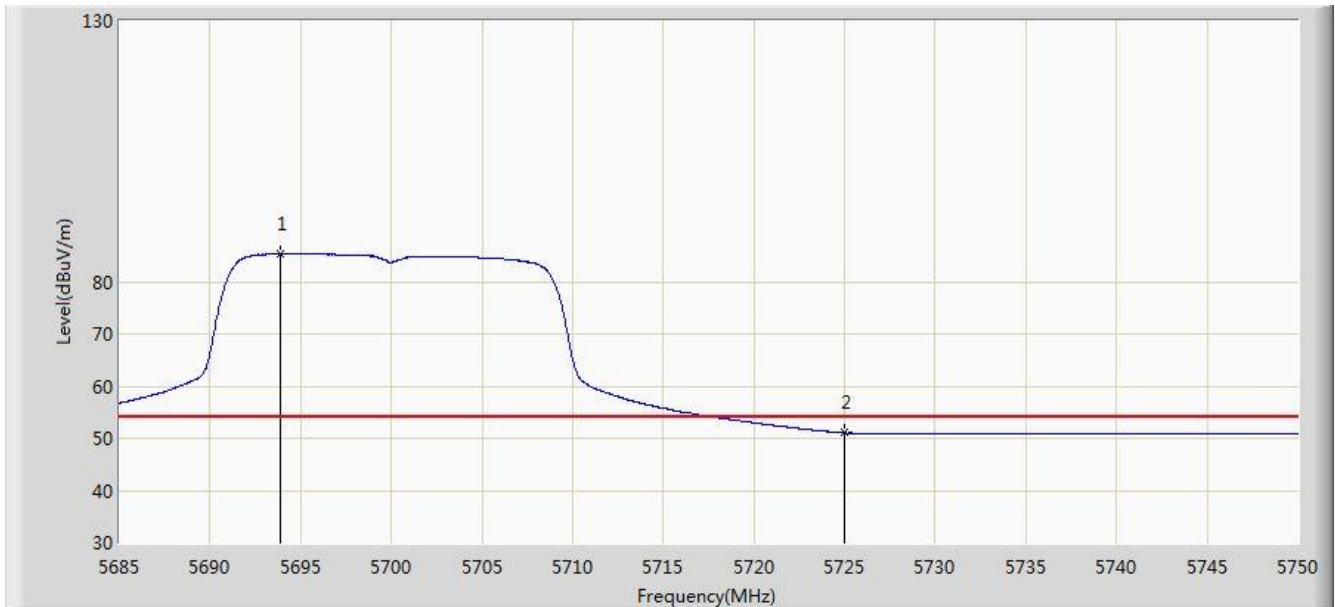


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.873	85.438	47.561	N/A	N/A	37.877	AV
2			5725.000	51.040	13.050	-2.960	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11ac-VHT20 2TX	

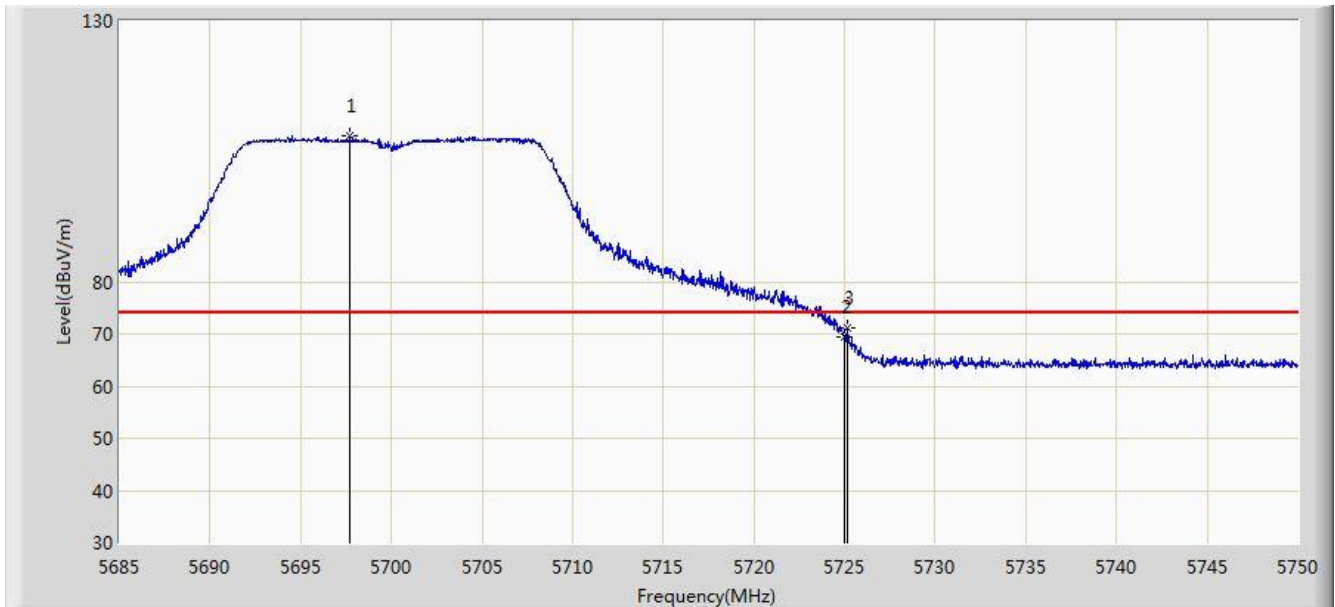


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.708	107.957	70.071	N/A	N/A	37.887	PK
2			5725.000	69.390	31.400	-4.610	74.000	37.990	PK
3			5725.170	71.295	33.305	-2.705	74.000	37.991	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 01:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5700MHz by 802.11ac-VHT20 2TX	

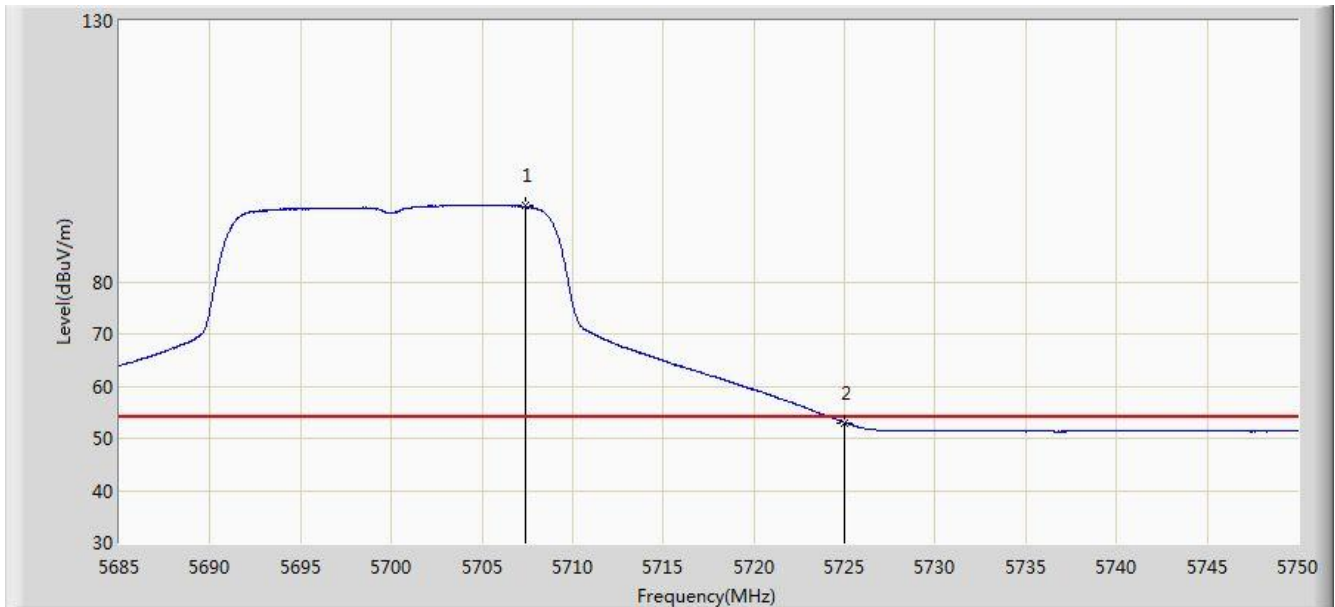


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.425	94.497	56.579	N/A	N/A	37.918	AV
2			5725.000	52.995	15.005	-1.005	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11ac20 2TX	

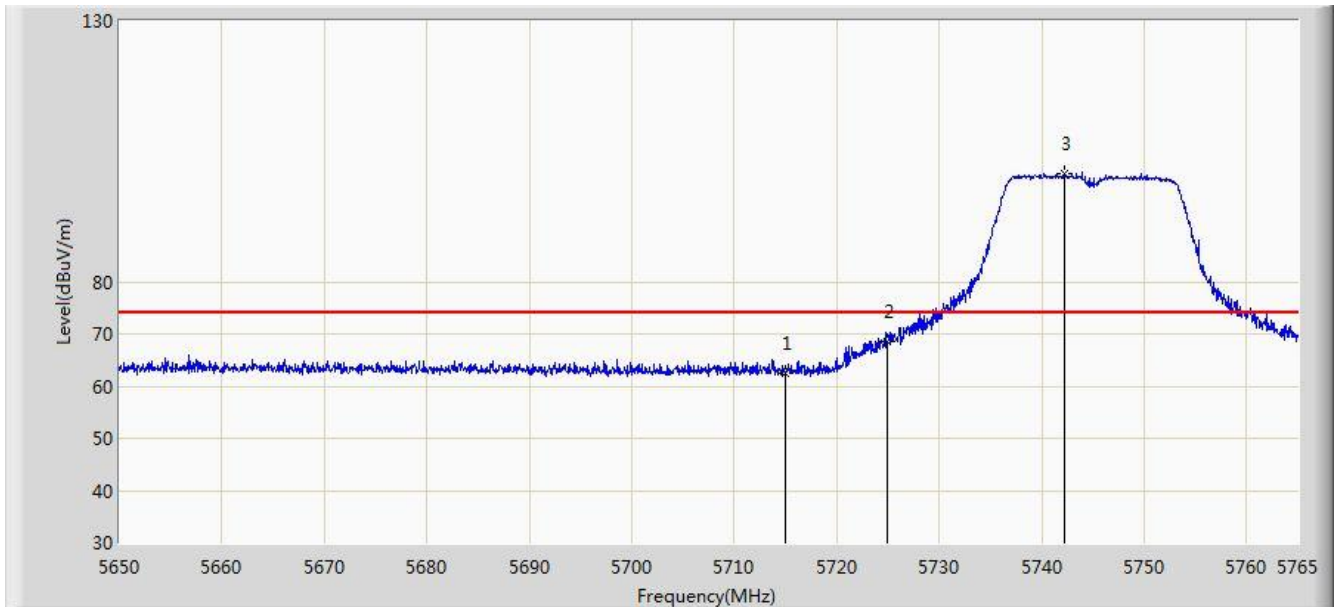


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.520	24.571	-11.480	74.000	37.949	PK
2			5725.000	68.637	30.647	-9.563	78.200	37.990	PK
3		*	5742.172	100.684	62.625	N/A	N/A	38.059	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11ac20 2TX	

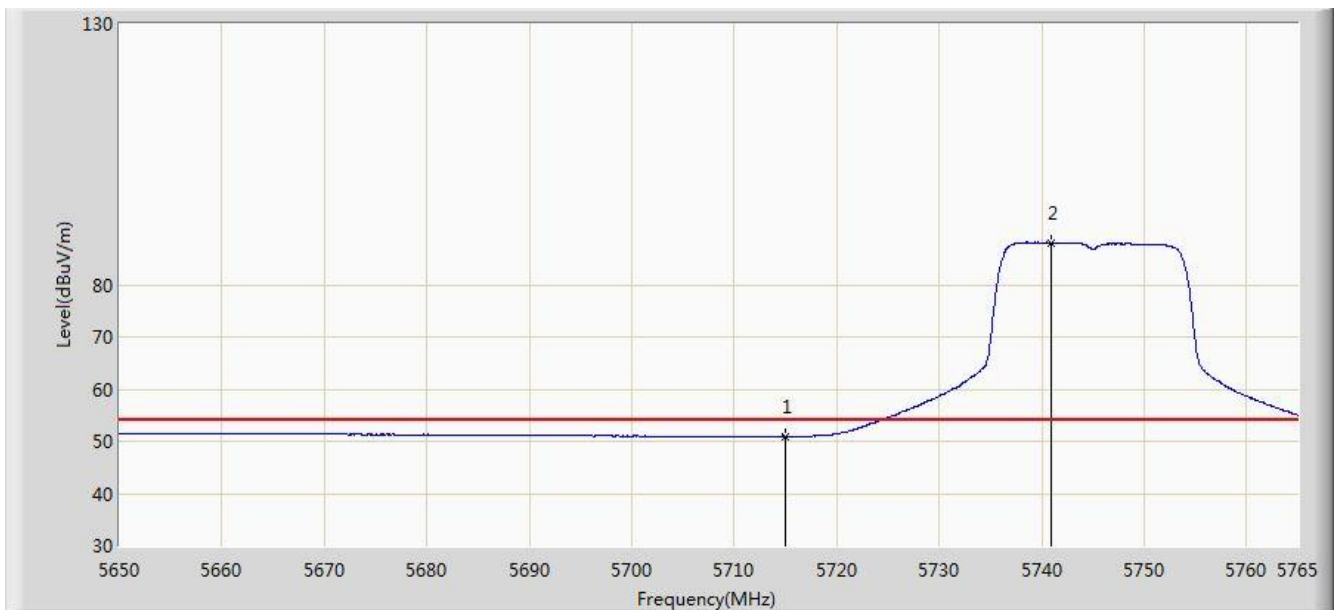


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.955	13.006	-3.045	54.000	37.949	AV
2		*	5740.965	88.053	49.998	N/A	N/A	38.054	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11ac20 2TX	

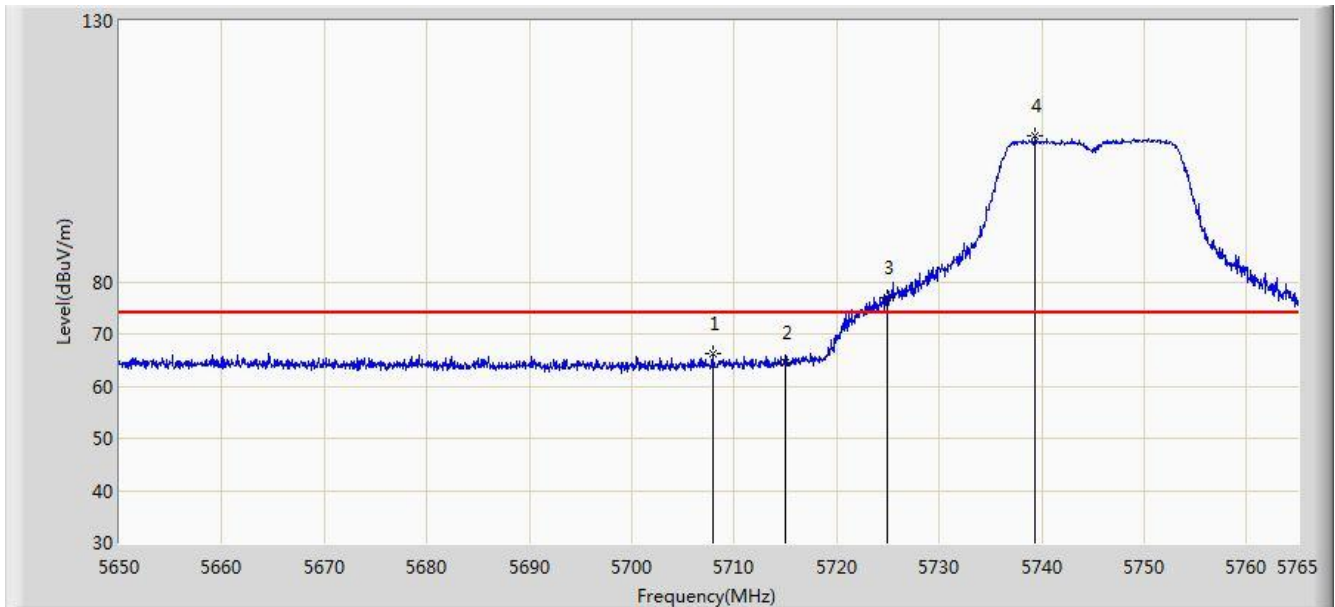


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5707.902	66.254	28.334	-7.746	74.000	37.920	PK
2			5715.000	64.559	26.610	-9.441	74.000	37.949	PK
3			5725.000	76.854	38.864	-1.346	78.200	37.990	PK
4		*	5739.413	107.846	69.797	N/A	N/A	38.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5745MHz by 802.11ac20 2TX	

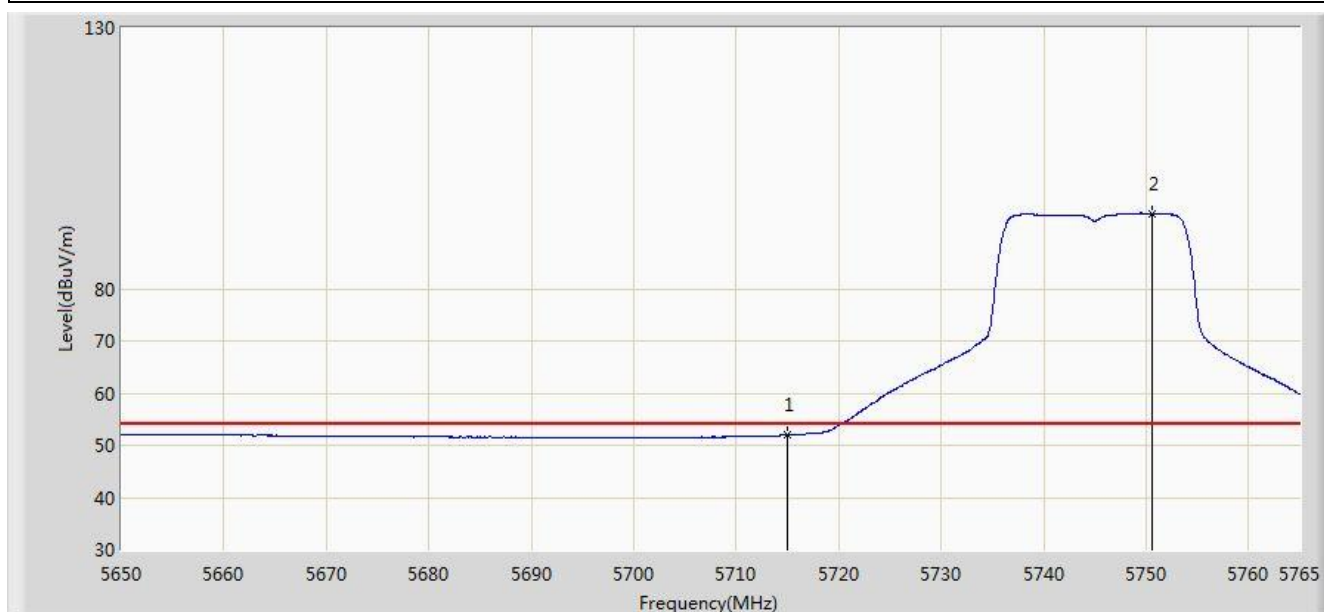


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.014	14.065	-1.986	54.000	37.949	AV
2		*	5750.567	94.444	56.345	N/A	N/A	38.098	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11ac20 2TX	

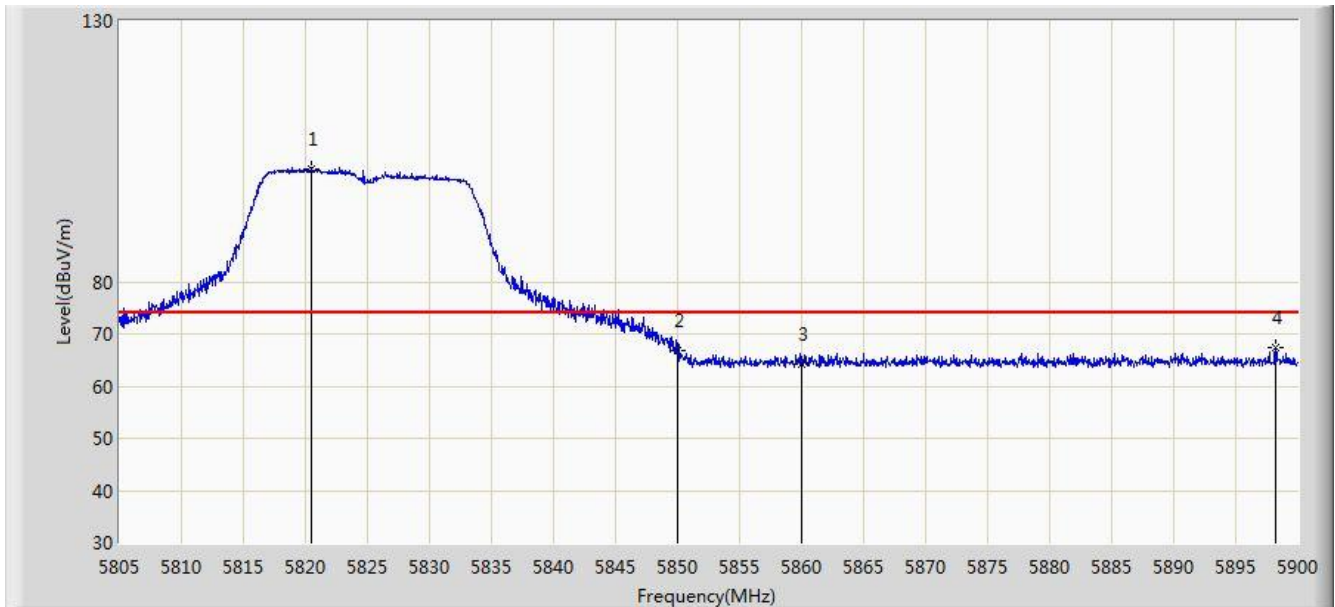


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.533	101.675	63.338	N/A	N/A	38.337	PK
2			5850.000	66.884	28.431	-11.316	78.200	38.454	PK
3			5860.000	64.301	25.823	-9.699	74.000	38.478	PK
4			5898.195	67.485	28.967	-6.515	74.000	38.517	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11ac20 2TX	

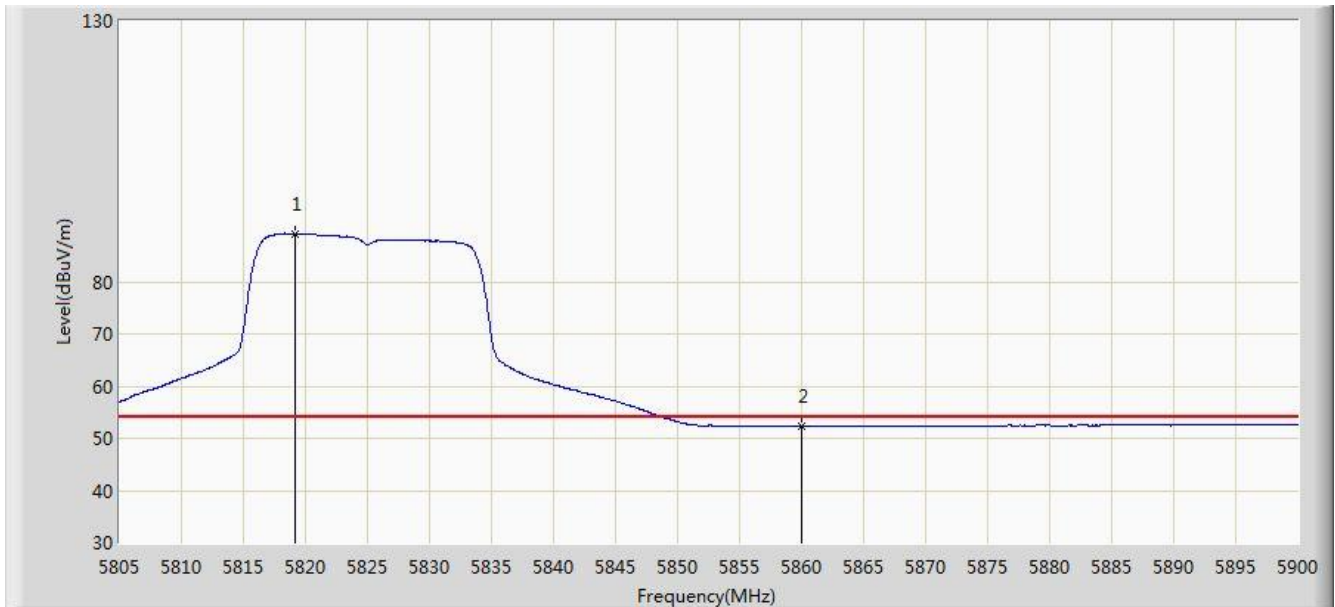


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.155	89.253	50.922	N/A	N/A	38.331	AV
2			5860.000	52.377	13.899	-1.623	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11ac20 2TX	

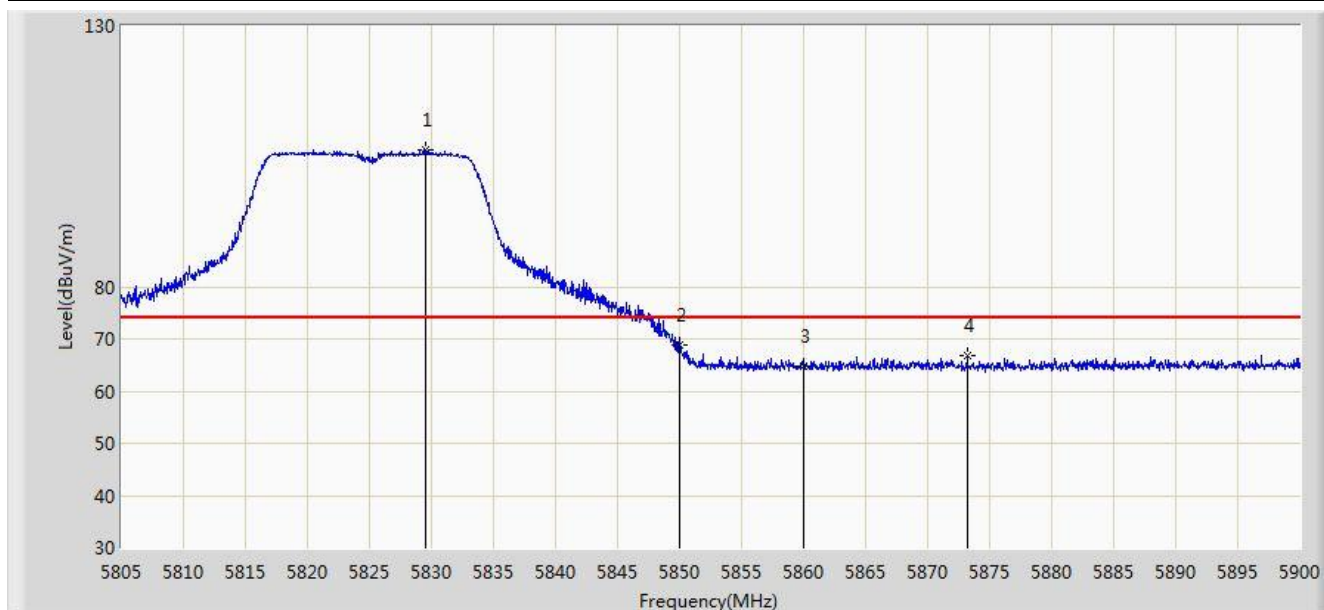


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.558	106.312	67.937	N/A	N/A	38.374	PK
2			5850.000	68.837	30.384	-9.363	78.200	38.454	PK
3			5860.000	64.751	26.273	-9.249	74.000	38.478	PK
4			5873.210	66.818	28.323	-7.182	74.000	38.495	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/05/06 - 02:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module Card	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5825MHz by 802.11ac20 2TX	

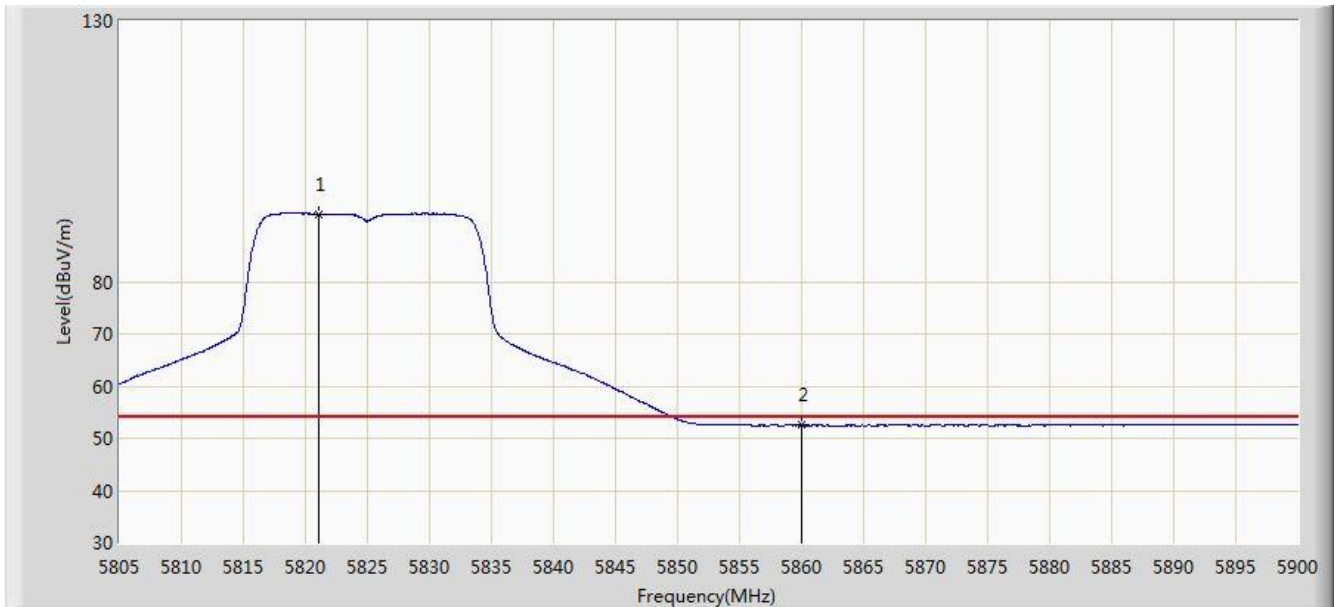


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.055	93.034	54.695	N/A	N/A	38.340	AV
2			5860.000	52.509	14.031	-1.491	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 2TX	

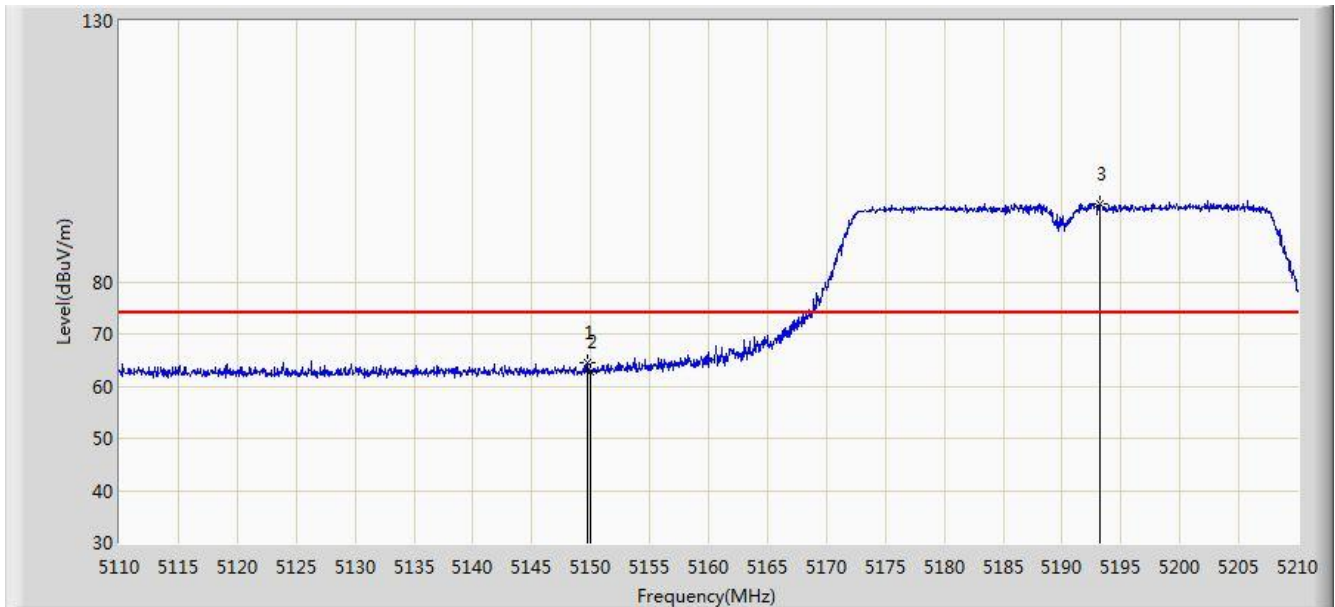


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.700	64.487	27.035	-9.513	74.000	37.452	PK
2			5150.000	62.814	25.362	-11.186	74.000	37.452	PK
3		*	5193.200	94.928	57.587	N/A	N/A	37.341	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 2TX	

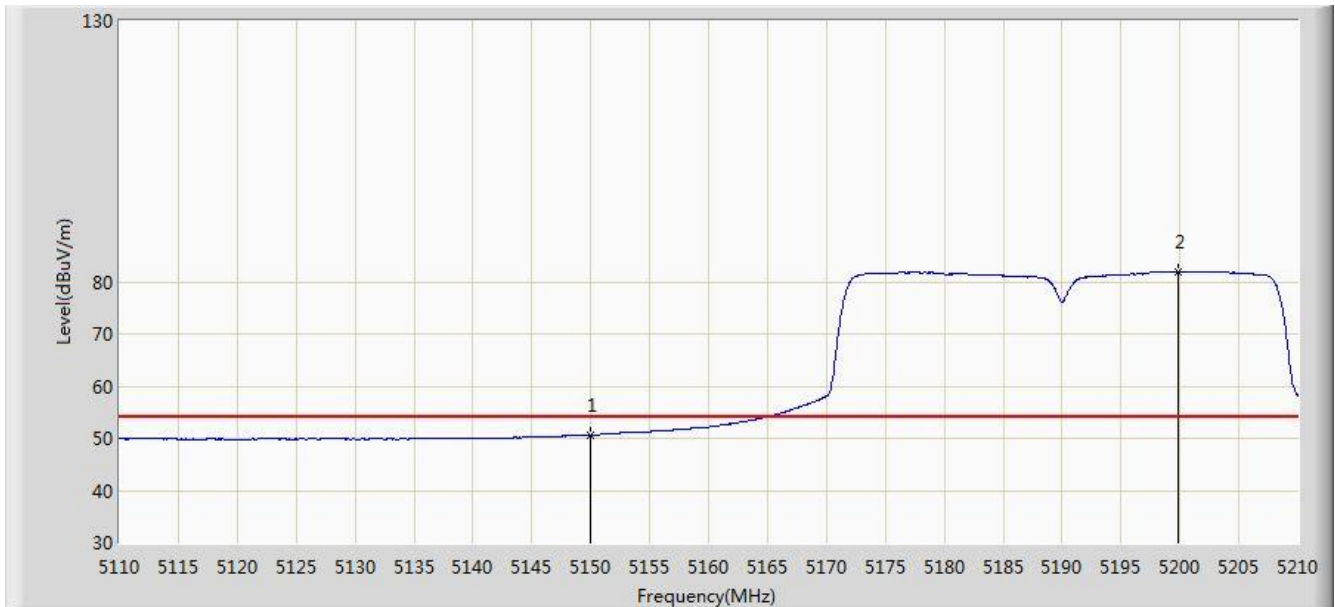


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.655	13.203	-3.345	54.000	37.452	AV
2		*	5199.850	81.797	44.472	N/A	N/A	37.325	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 2TX	

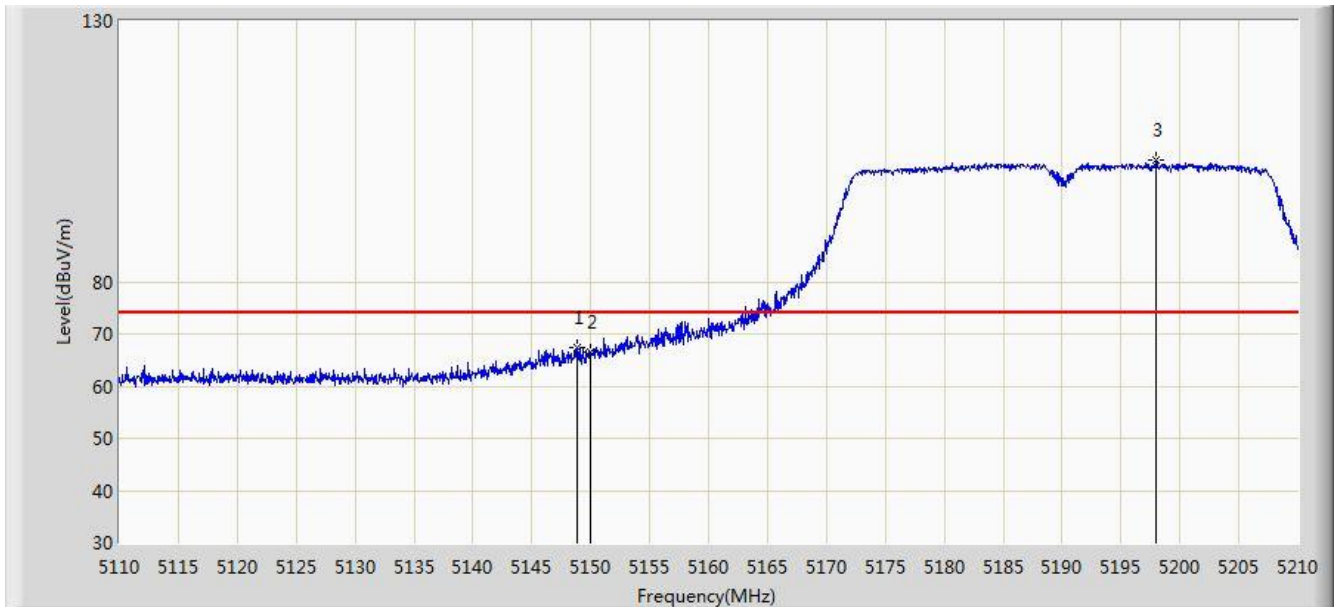

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.800	67.500	30.046	-6.500	74.000	37.454	PK
2			5150.000	66.535	29.083	-7.465	74.000	37.452	PK
3		*	5197.950	103.287	65.957	N/A	N/A	37.330	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 2TX	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.632	16.180	-0.368	54.000	37.452	AV
2		*	5187.700	89.529	52.174	N/A	N/A	37.355	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 2TX	

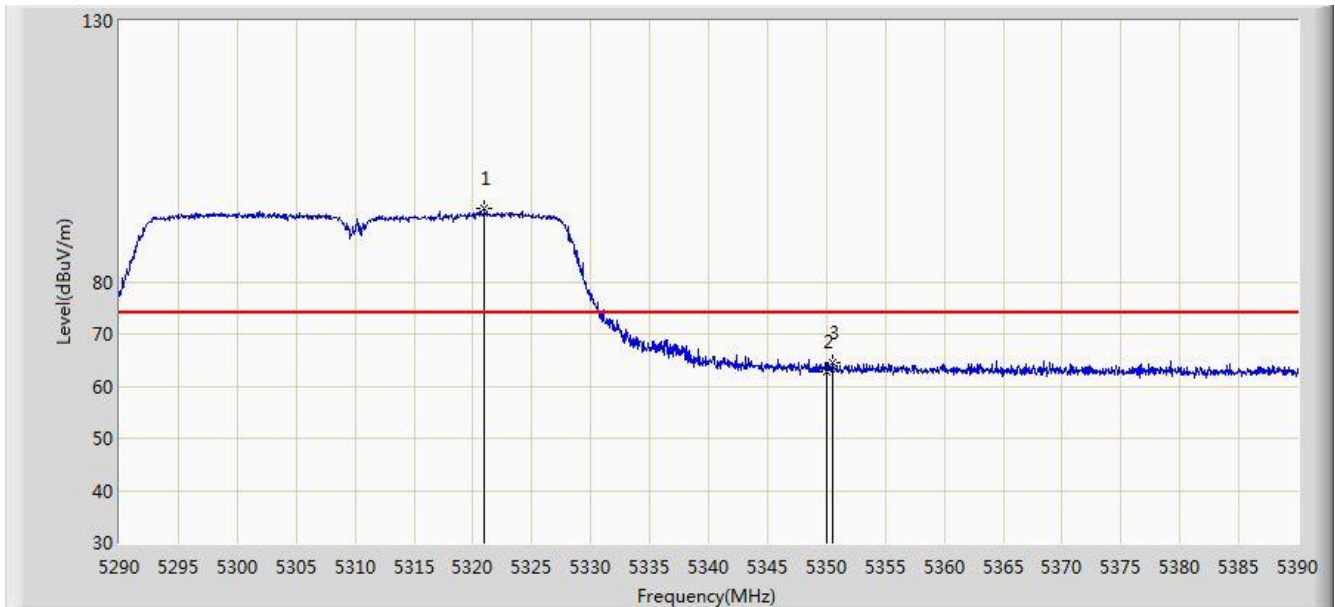


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.000	93.947	56.732	N/A	N/A	37.216	PK
2			5350.000	62.684	25.398	-11.316	74.000	37.286	PK
3			5350.500	64.504	27.216	-9.496	74.000	37.288	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 2TX	

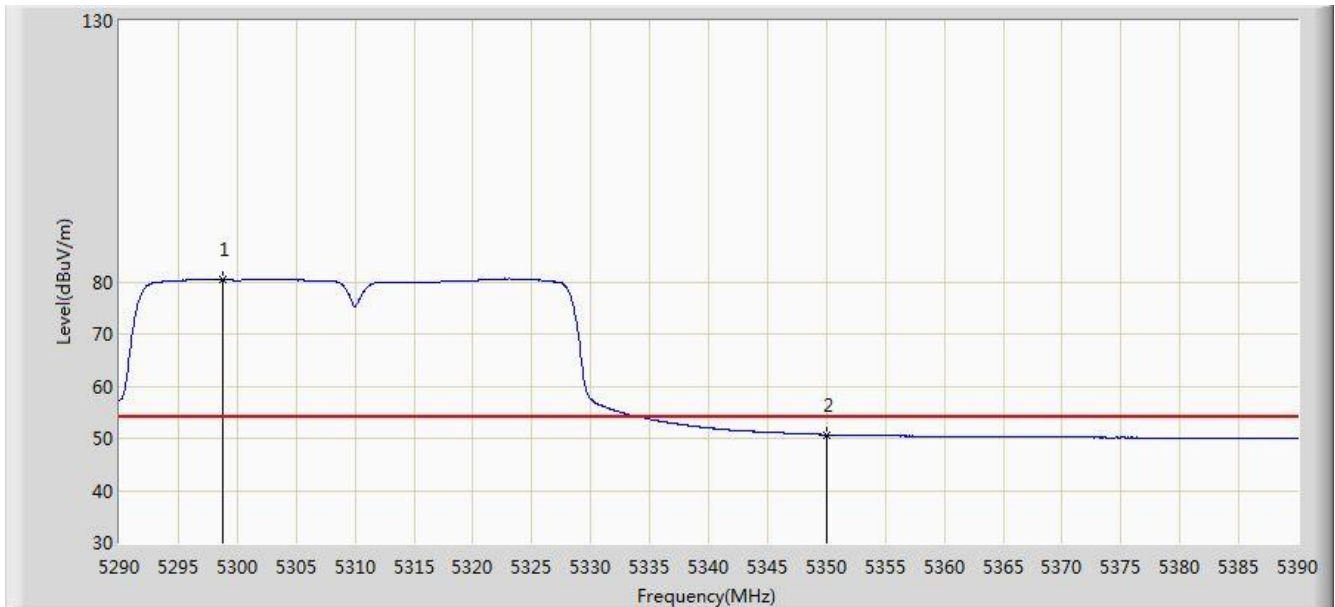


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.800	80.479	43.295	N/A	N/A	37.183	AV
2			5350.000	50.663	13.377	-3.337	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 2TX	

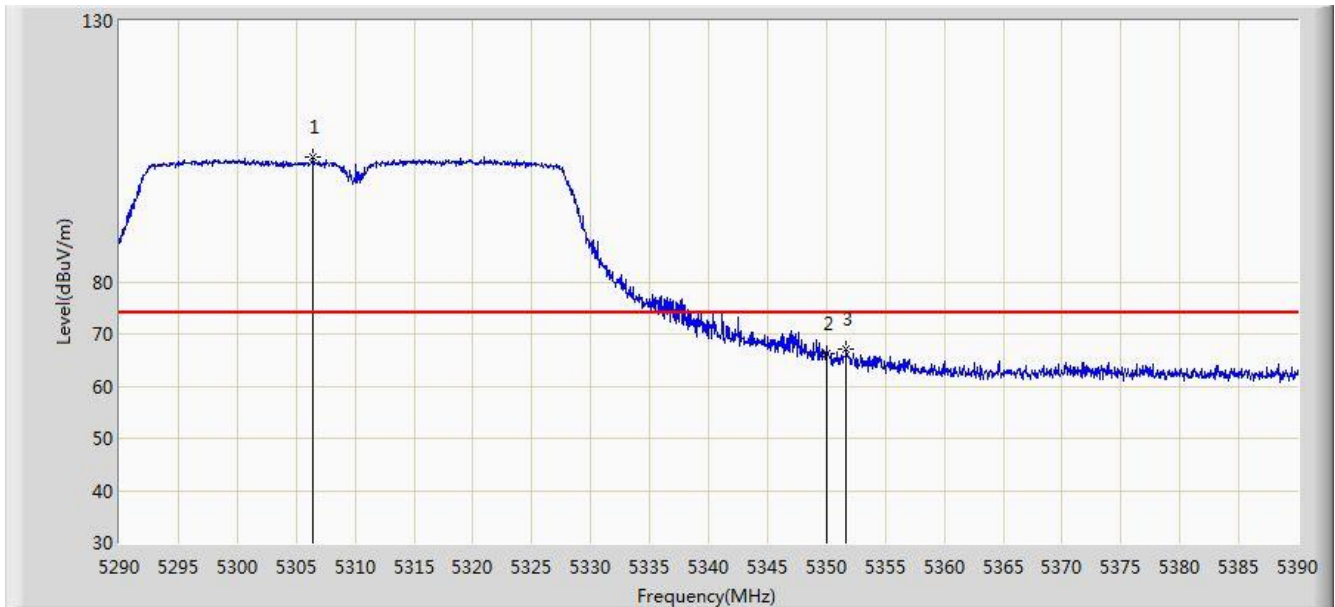


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.450	103.875	66.681	N/A	N/A	37.193	PK
2			5350.000	66.347	29.061	-7.653	74.000	37.286	PK
3			5351.700	66.980	29.688	-7.020	74.000	37.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 2TX	

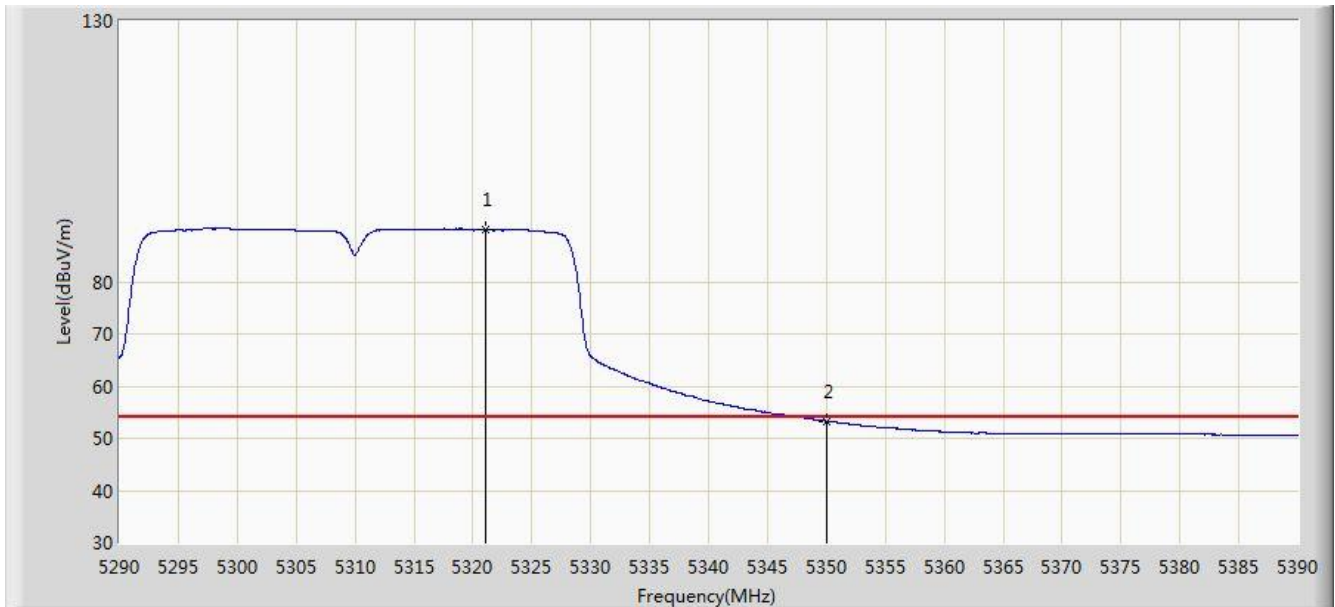


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.050	90.098	52.883	N/A	N/A	37.216	AV
2			5350.000	53.285	15.999	-0.715	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5510MHz by 802.11ac-VHT40 2TX	

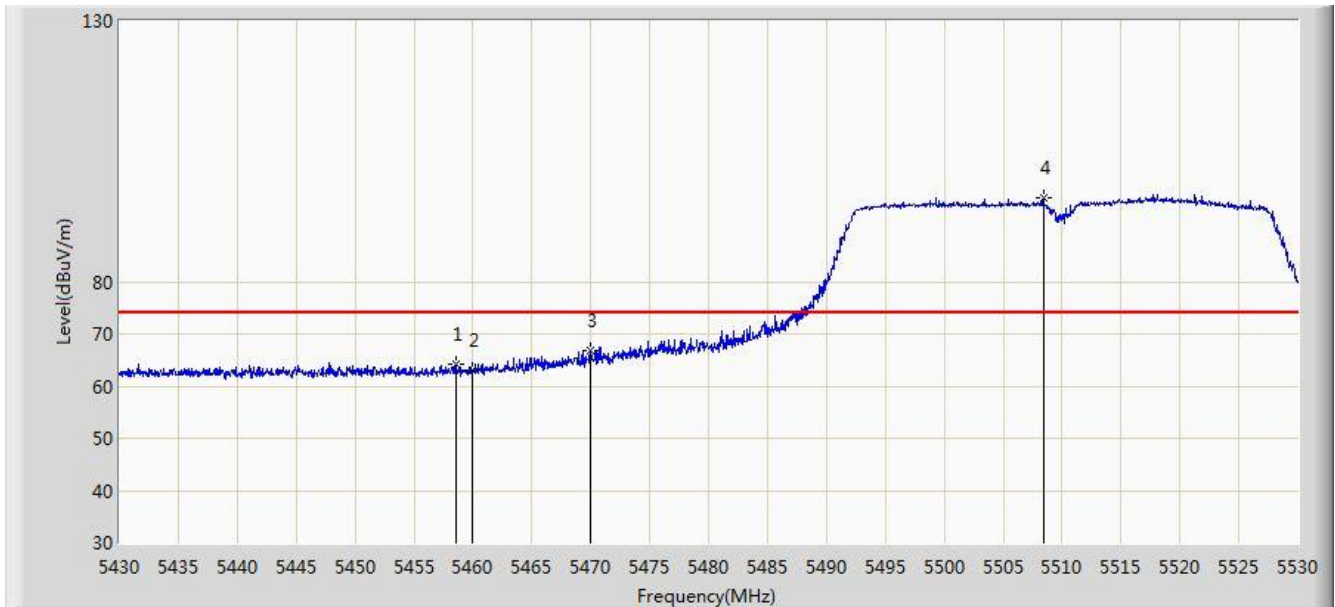


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.550	64.234	26.675	-9.766	74.000	37.559	PK
2			5460.000	62.939	25.376	-11.061	74.000	37.563	PK
3			5470.000	66.953	29.364	-7.047	74.000	37.588	PK
4		*	5508.400	96.155	58.521	N/A	N/A	37.633	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/25 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode: Transmit at channel 5510MHz by 802.11ac-VHT40 2TX	

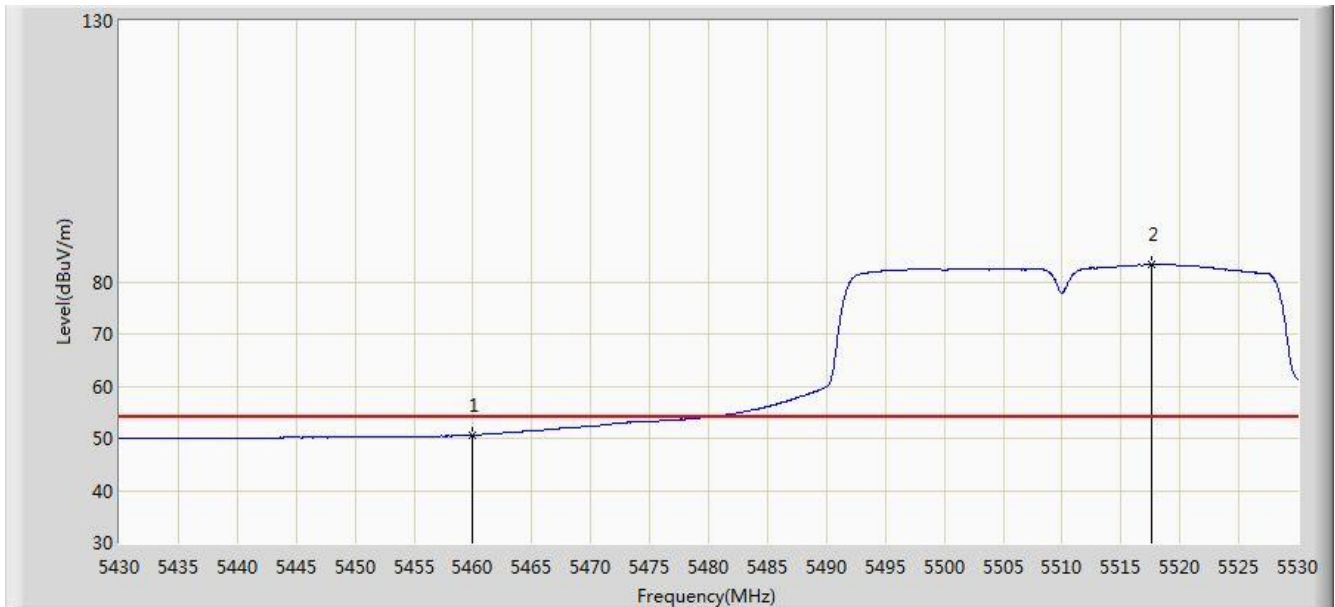

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.550	12.987	-3.450	54.000	37.563	AV
2		*	5517.650	83.345	45.701	N/A	N/A	37.644	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).