


|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 13:57 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 1 |                          |

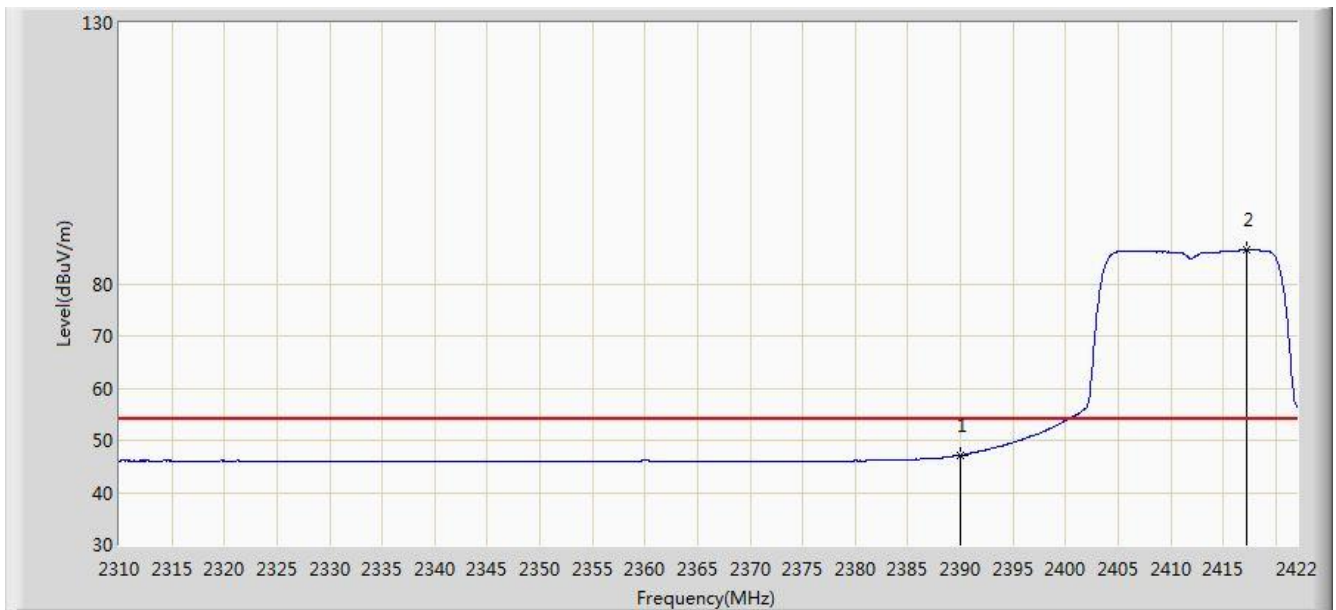


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.101                 | 14.823               | -6.899          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2417.240        | 86.454                 | 54.236               | N/A             | N/A            | 32.217      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 13:52 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 1 |                          |

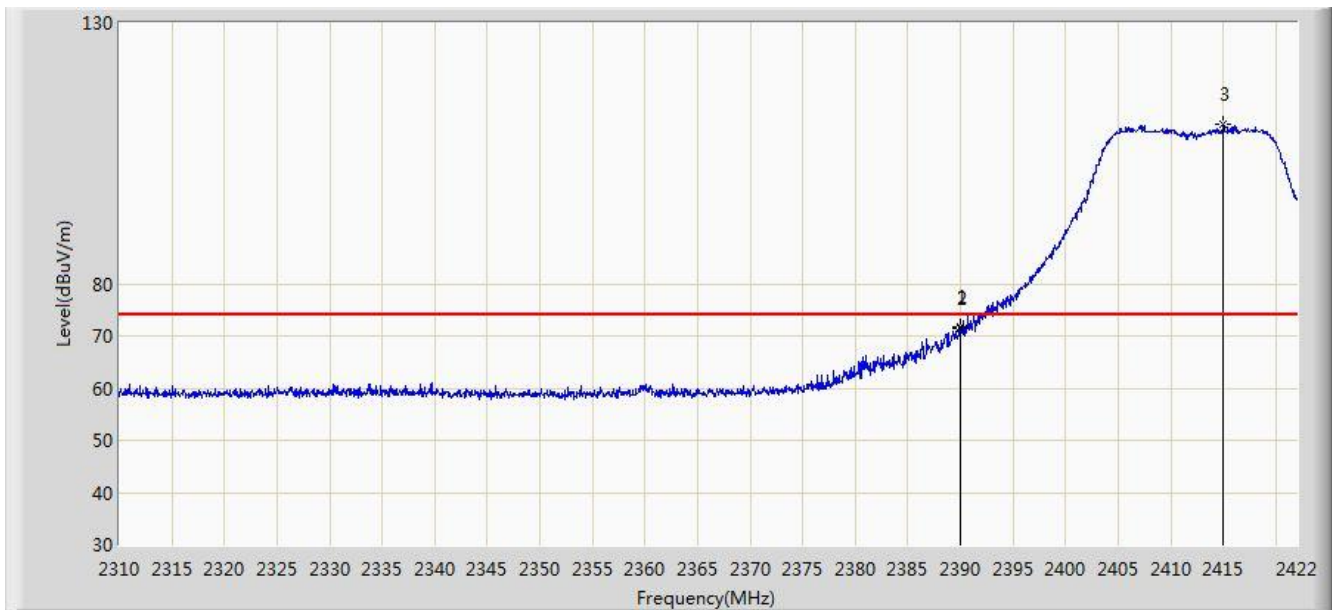


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.968        | 71.859                 | 39.581               | -2.141          | 74.000         | 32.278      | PK   |
| 2  |      |      | 2390.000        | 71.498                 | 39.220               | -2.502          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2415.000        | 110.482                | 78.255               | N/A             | N/A            | 32.227      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 13:51 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 1 |                          |

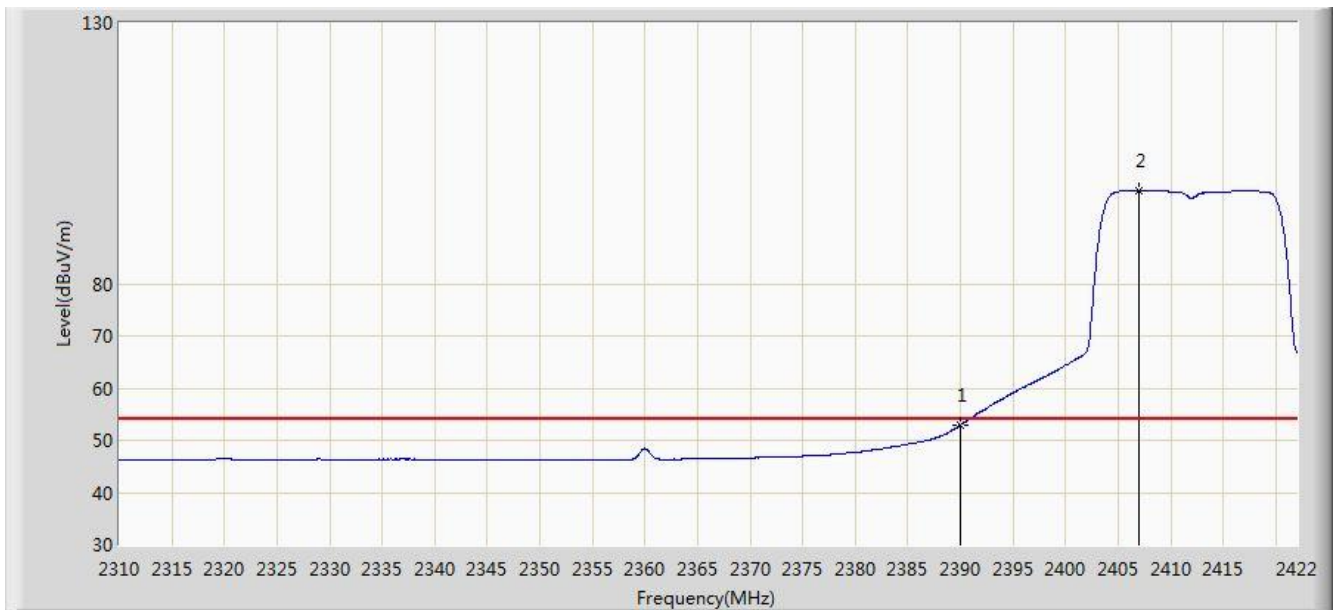


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 52.908                 | 20.630               | -1.092          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2406.936        | 97.937                 | 65.680               | N/A             | N/A            | 32.257      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:07 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 1 |                          |

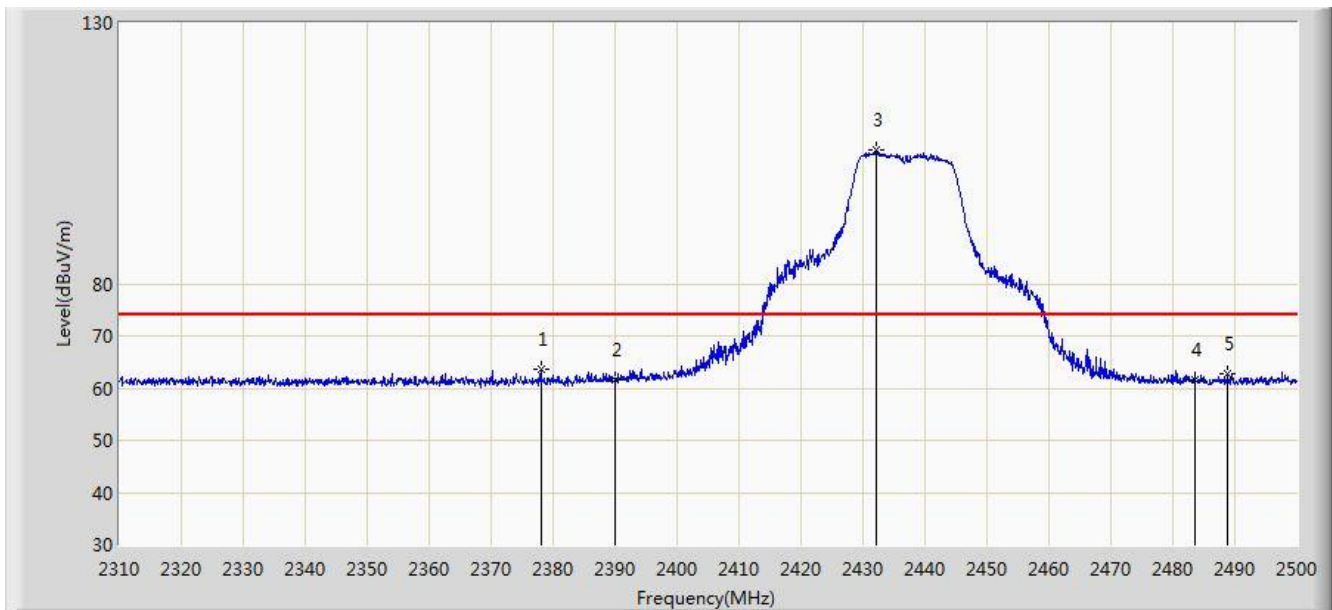


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2378.020        | 63.660                 | 31.449               | -10.340         | 74.000         | 32.211      | PK   |
| 2  |      |      | 2390.000        | 61.624                 | 29.346               | -12.376         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2432.075        | 105.704                | 73.532               | N/A             | N/A            | 32.172      | PK   |
| 4  |      |      | 2483.500        | 61.530                 | 29.249               | -12.470         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2488.790        | 62.621                 | 30.322               | -11.379         | 74.000         | 32.299      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:10 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 1 |                          |

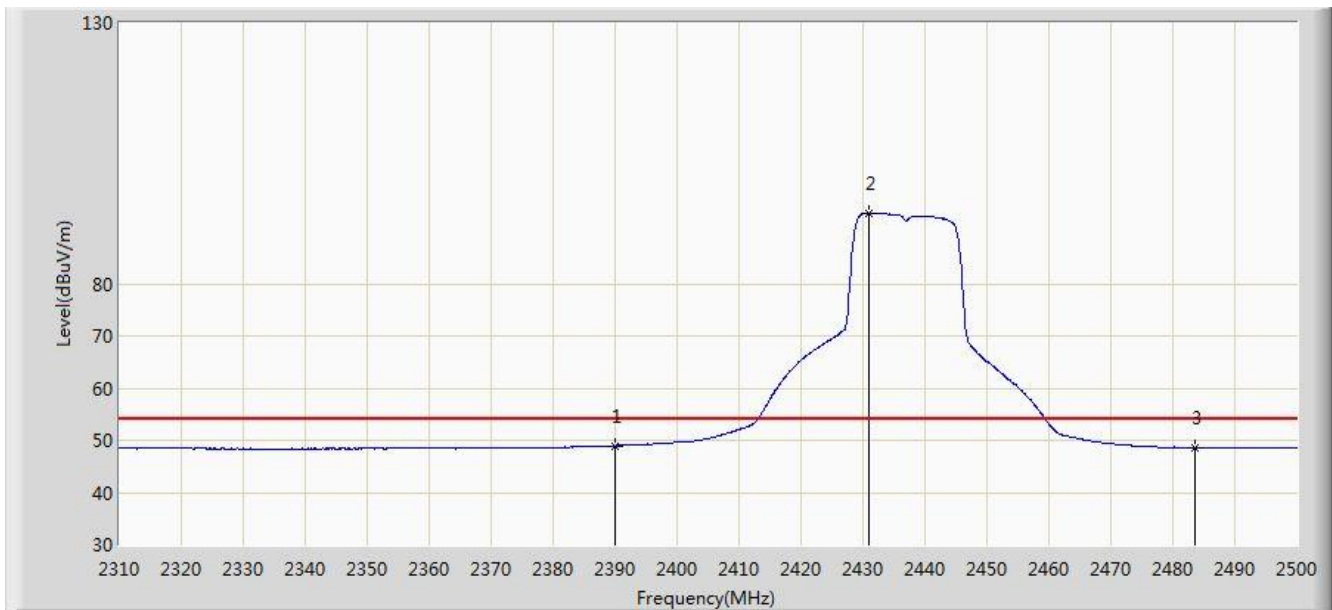


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 48.959                 | 16.681               | -5.041          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2430.935        | 93.534                 | 61.362               | N/A             | N/A            | 32.173      | AV   |
| 3  |      |      | 2483.500        | 48.661                 | 16.380               | -5.339          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:05 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 1 |                          |

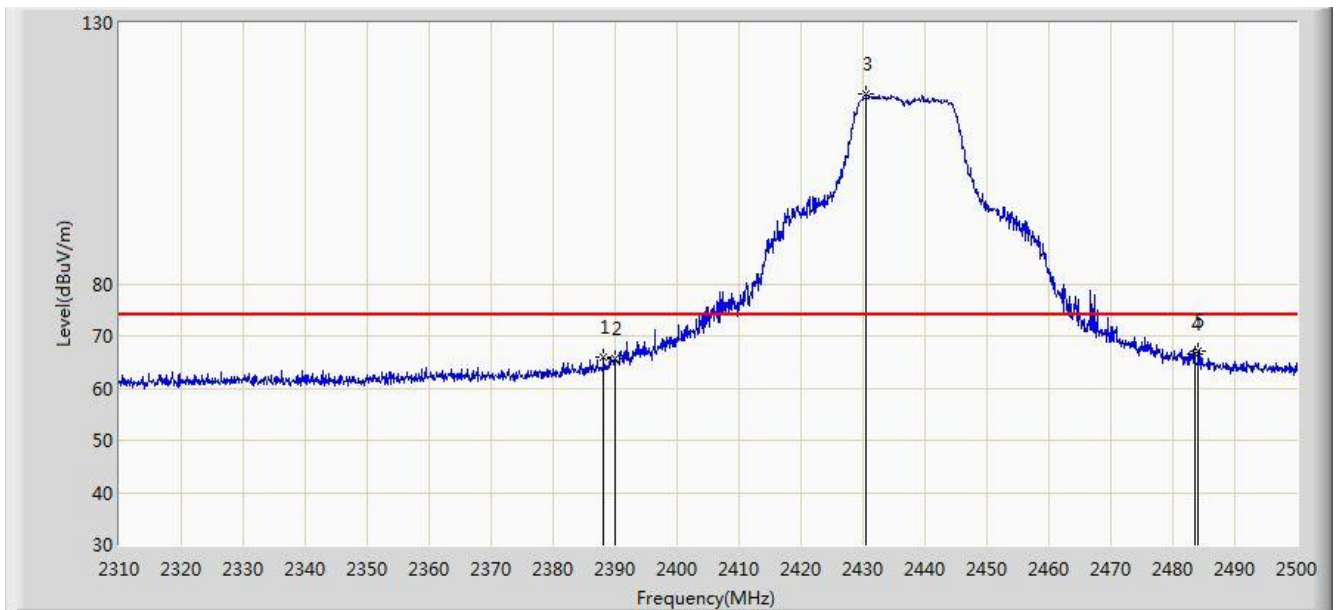


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2388.090        | 65.903                 | 33.636               | -8.097          | 74.000         | 32.268      | PK   |
| 2  |      |      | 2390.000        | 65.738                 | 33.460               | -8.262          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2430.460        | 116.348                | 84.175               | N/A             | N/A            | 32.173      | PK   |
| 4  |      |      | 2483.500        | 66.440                 | 34.159               | -7.560          | 74.000         | 32.282      | PK   |
| 5  |      |      | 2484.135        | 67.176                 | 34.893               | -6.824          | 74.000         | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:00 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 1 |                          |

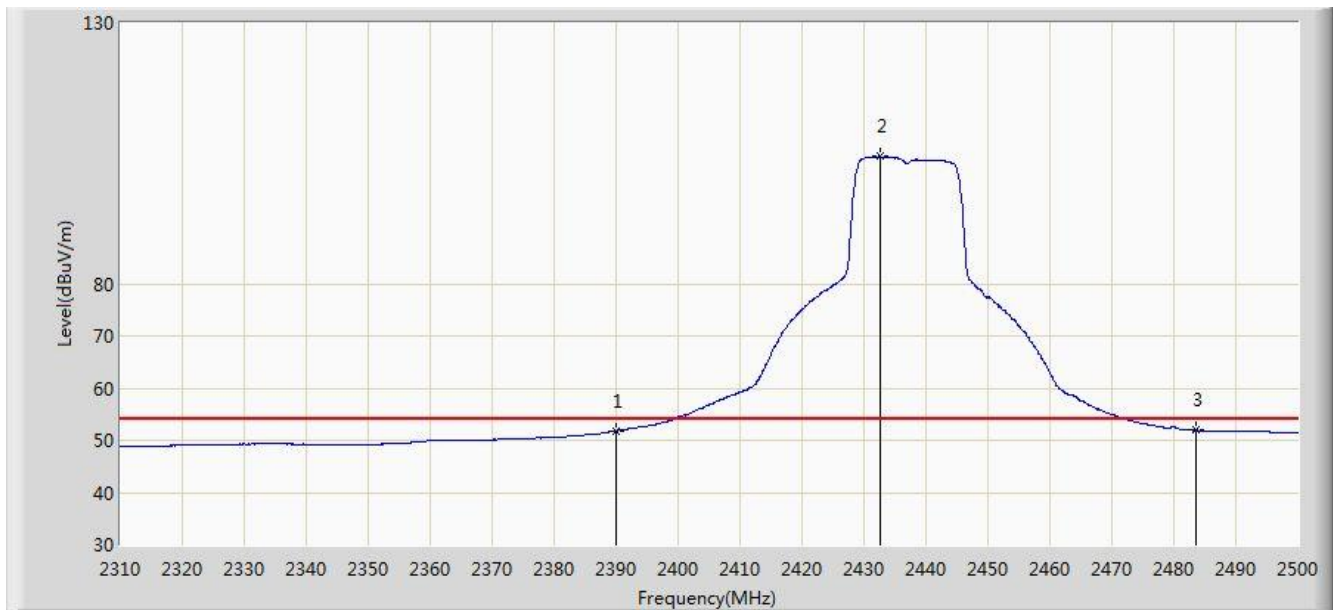


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 51.824                 | 19.546               | -2.176          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2432.550        | 104.384                | 72.212               | N/A             | N/A            | 32.172      | AV   |
| 3  |      |      | 2483.500        | 51.897                 | 19.616               | -2.103          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:22 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 1 |                          |

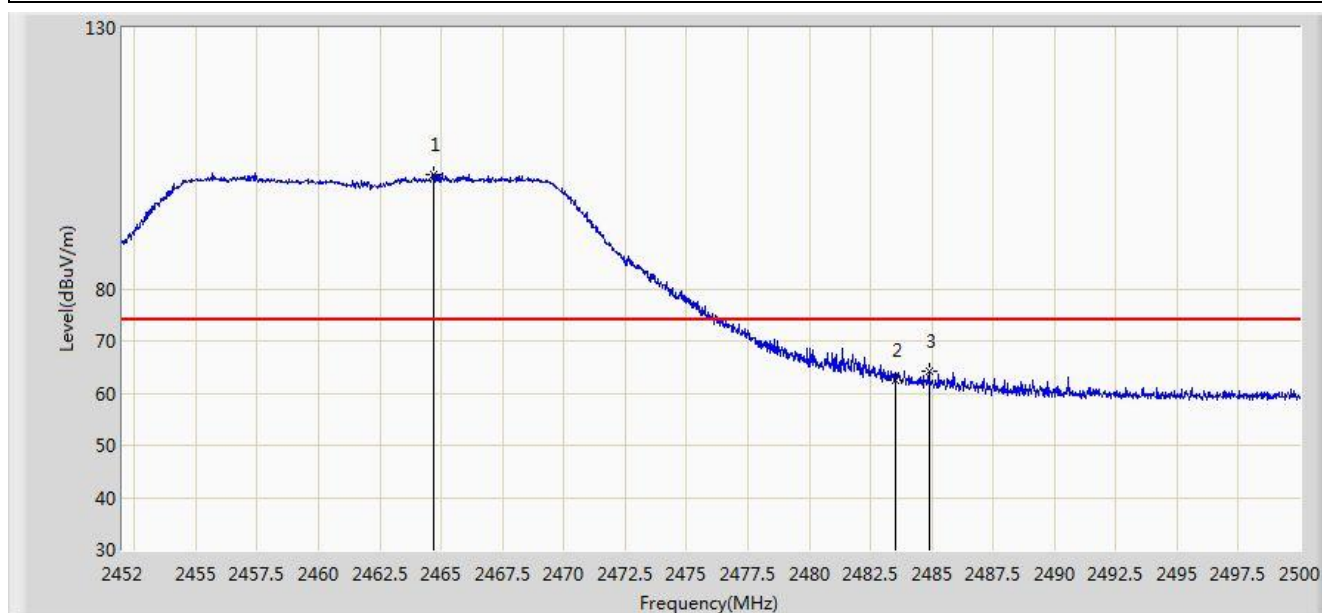


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.720        | 101.986                | 69.745               | N/A             | N/A            | 32.242      | PK   |
| 2  |      |      | 2483.500        | 62.500                 | 30.219               | -11.500         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2484.880        | 64.245                 | 31.959               | -9.755          | 74.000         | 32.286      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:26 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 1 |                          |

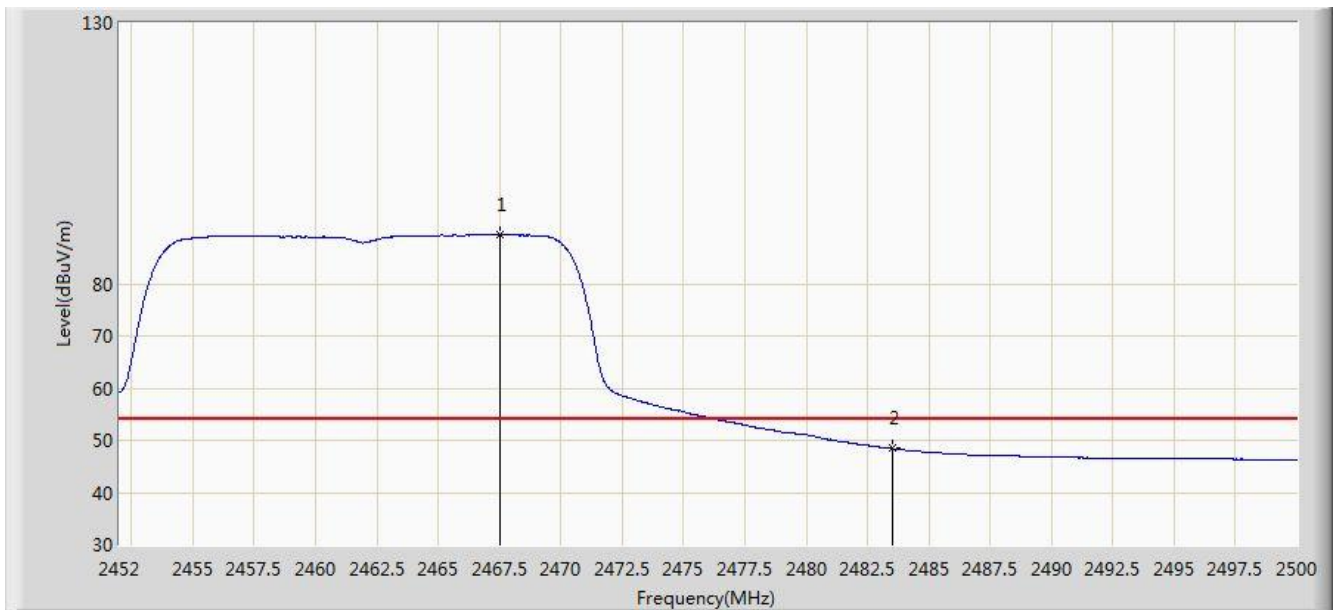


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2467.504        | 89.362                 | 57.116               | N/A             | N/A            | 32.246      | AV   |
| 2  |      |      | 2483.500        | 48.432                 | 16.151               | -5.568          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:22 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 1 |                          |

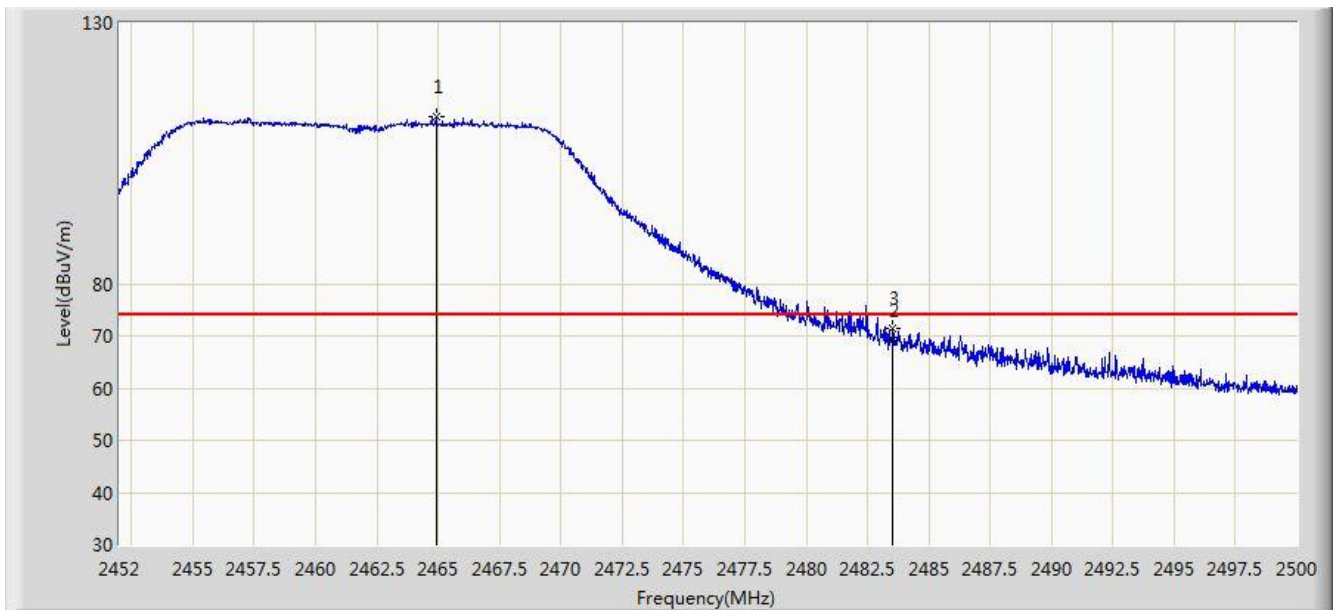


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.936        | 111.937                | 79.695               | N/A             | N/A            | 32.242      | PK   |
| 2  |      |      | 2483.500        | 69.218                 | 36.937               | -4.782          | 74.000         | 32.282      | PK   |
| 3  |      |      | 2483.536        | 71.566                 | 39.285               | -2.434          | 74.000         | 32.282      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:21 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 1 |                          |

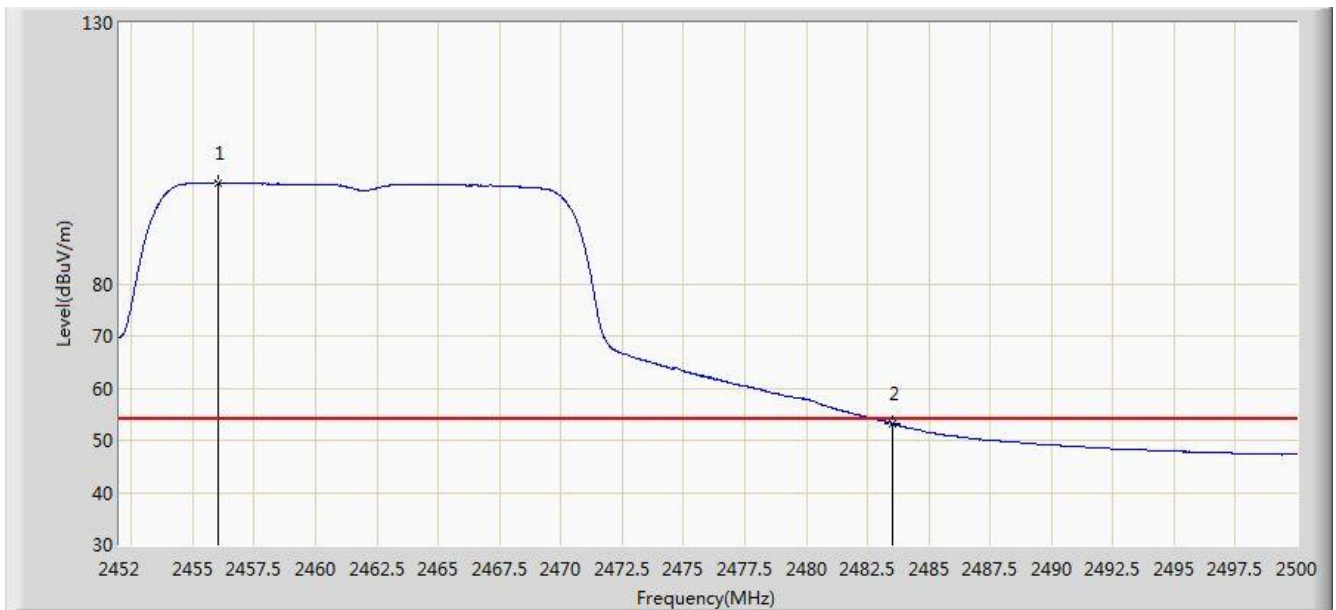


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2456.008        | 99.415                 | 67.203               | N/A             | N/A            | 32.213      | AV   |
| 2  |      |      | 2483.500        | 53.279                 | 20.998               | -0.721          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:35 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Chain 2 |                          |

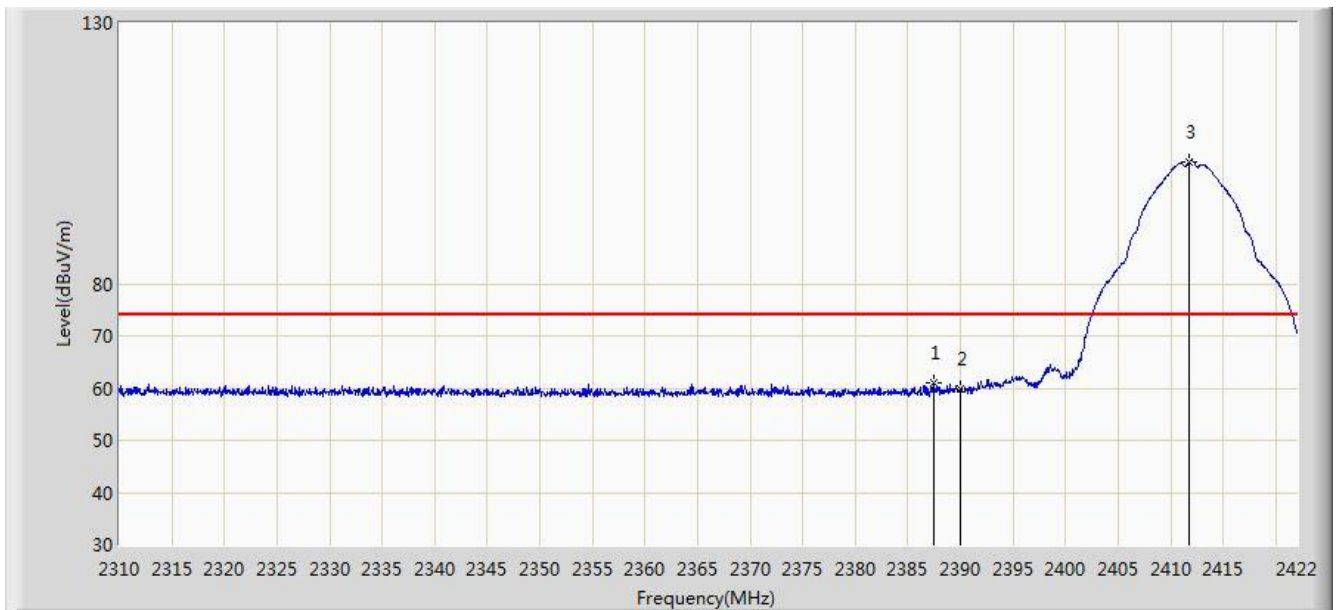

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2387.448        | 61.146                 | 28.882               | -12.854         | 74.000         | 32.263      | PK   |
| 2  |      |      | 2390.000        | 59.784                 | 27.506               | -14.216         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2411.808        | 103.457                | 71.216               | N/A             | N/A            | 32.240      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:39 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Chain 2 |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.514                 | 14.236               | -7.486          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2411.080        | 99.866                 | 67.622               | N/A             | N/A            | 32.243      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:33 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Chain 2 |                          |

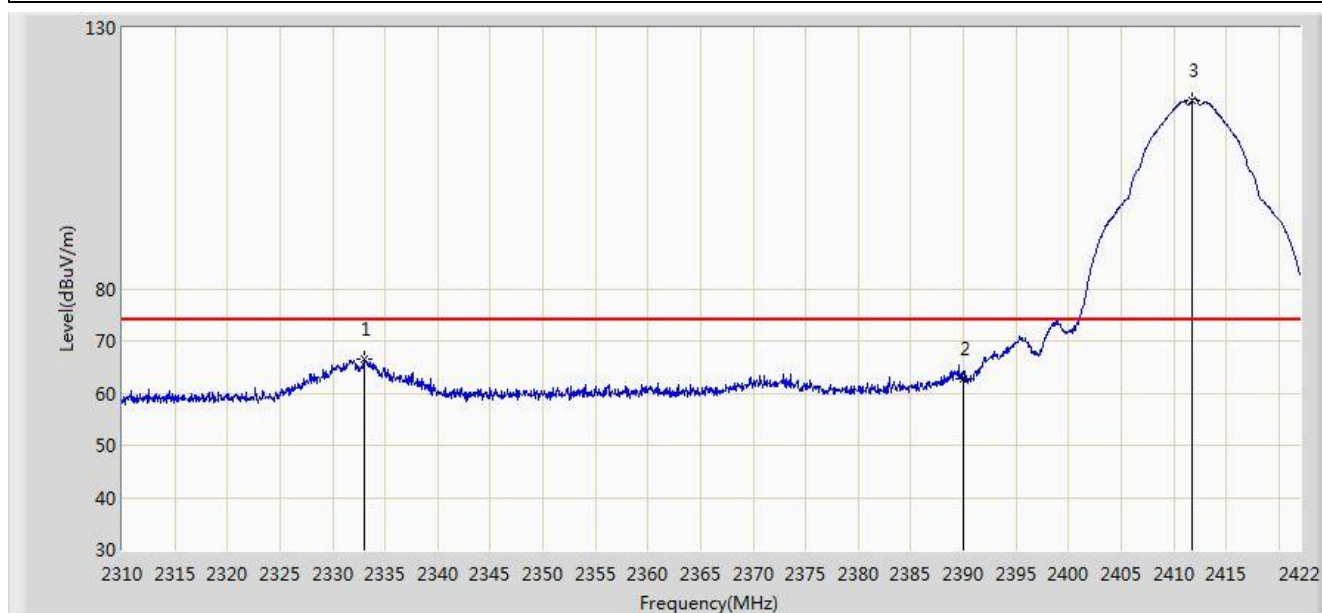


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2333.072        | 66.434                 | 34.087               | -7.566          | 74.000         | 32.347      | PK   |
| 2  |      |      | 2390.000        | 62.789                 | 30.511               | -11.211         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2411.752        | 116.198                | 83.957               | N/A             | N/A            | 32.241      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:29 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Chain 2 |                          |

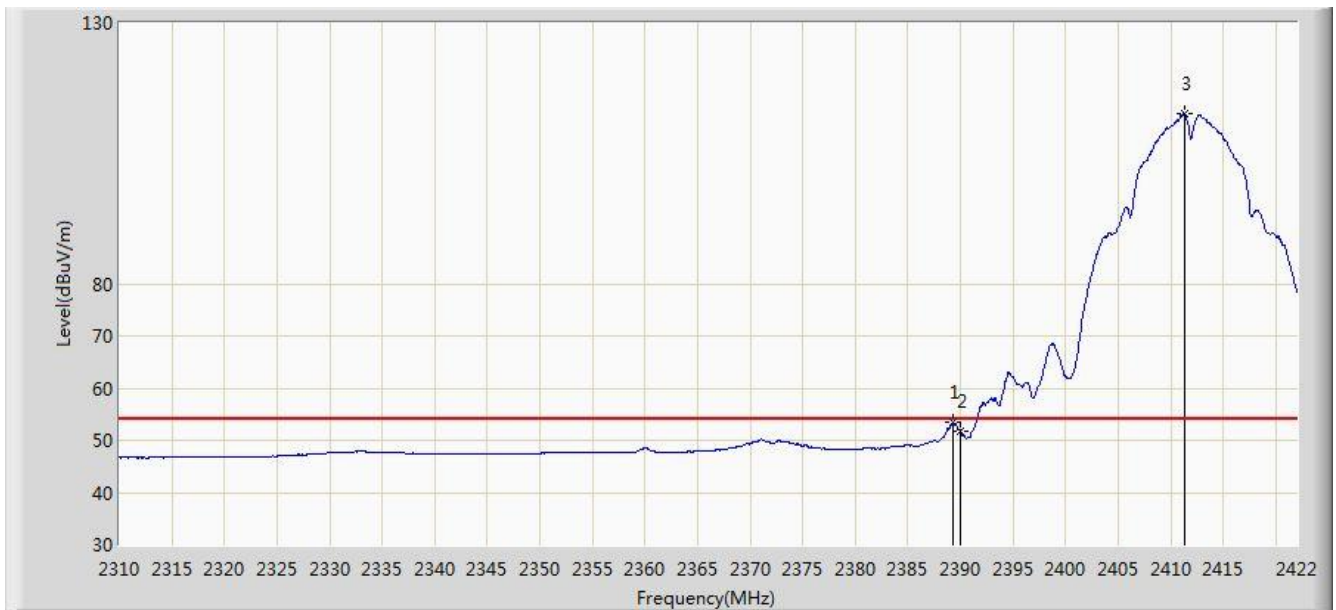


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.240        | 53.365                 | 21.091               | -0.635          | 54.000         | 32.274      | AV   |
| 2  |      |      | 2390.000        | 51.791                 | 19.513               | -2.209          | 54.000         | 32.278      | AV   |
| 3  |      | *    | 2411.304        | 112.586                | 80.343               | N/A             | N/A            | 32.243      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:00 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2437MHz Chain 2 |                          |

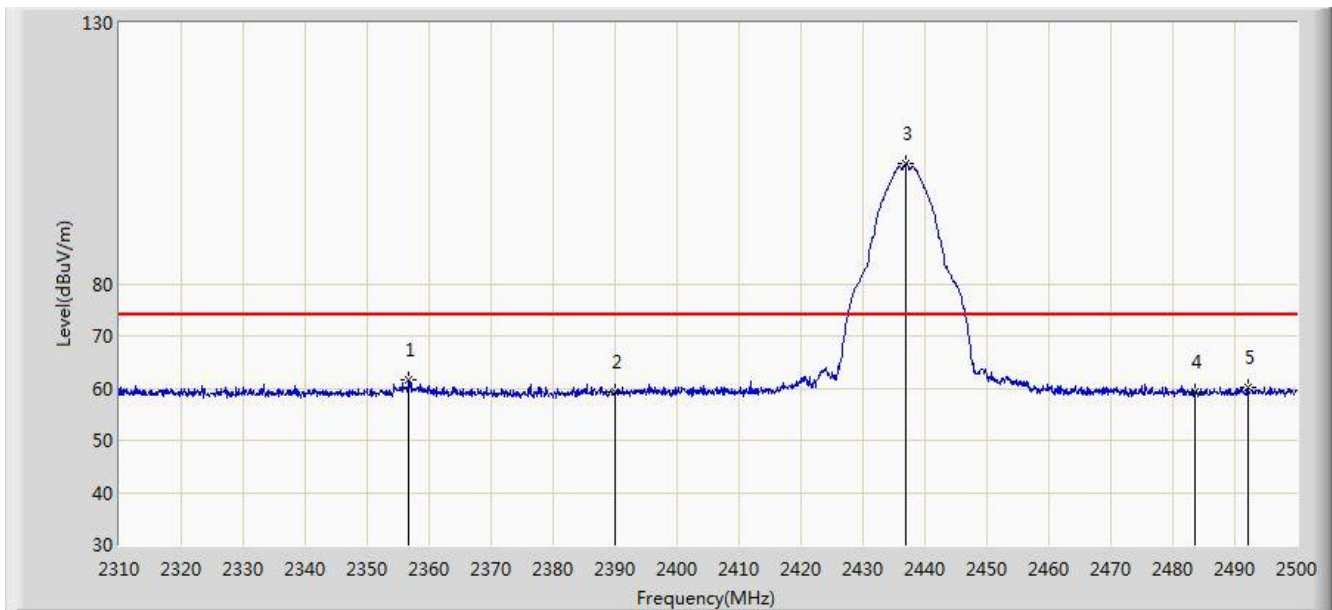


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2356.740        | 61.530                 | 29.273               | -12.470         | 74.000         | 32.257      | PK   |
| 2  |      |      | 2390.000        | 59.223                 | 26.945               | -14.777         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2436.920        | 103.025                | 70.854               | N/A             | N/A            | 32.171      | PK   |
| 4  |      |      | 2483.500        | 59.146                 | 26.865               | -14.854         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2492.210        | 60.244                 | 27.933               | -13.756         | 74.000         | 32.311      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:29 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2437MHz Chain 2 |                          |

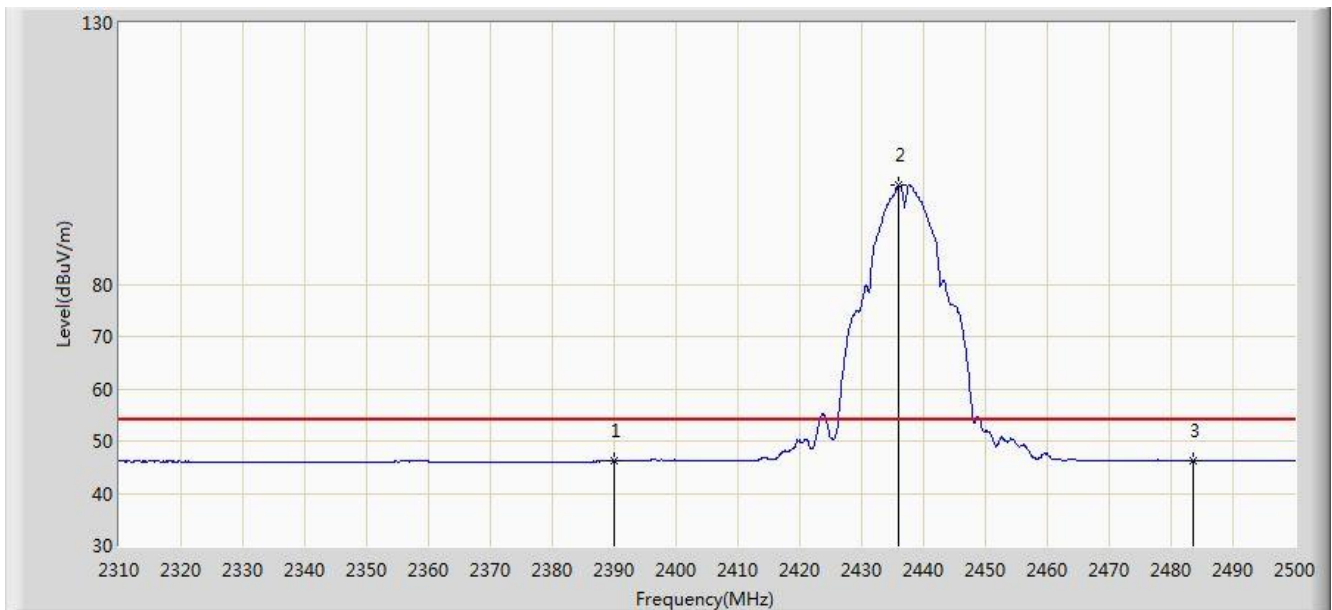


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.165                 | 13.887               | -7.835          | 54.000         | 32.278      | AV   |
| 2  |      |      | 2436.065        | 99.109                 | 66.938               | N/A             | N/A            | 32.171      | AV   |
| 3  |      | *    | 2483.500        | 46.209                 | 13.928               | -7.791          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:59 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2437MHz Chain 2 |                          |

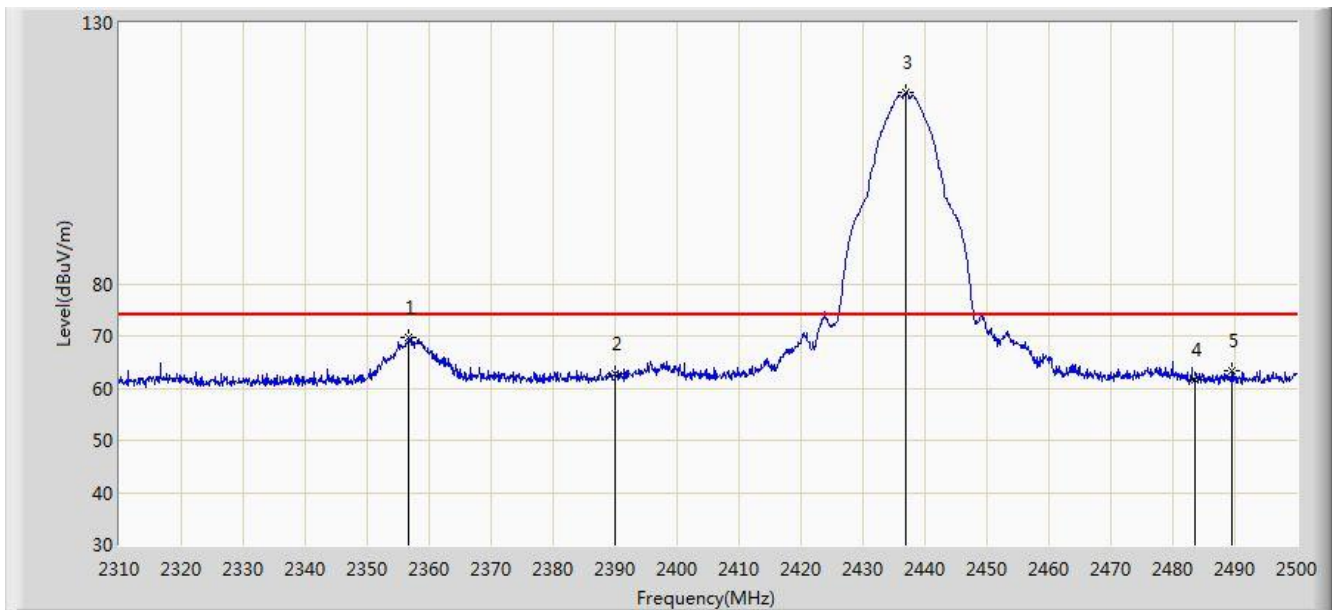


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2356.740        | 69.610                 | 37.353               | -4.390          | 74.000         | 32.257      | PK   |
| 2  |      |      | 2390.000        | 62.818                 | 30.540               | -11.182         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2436.920        | 116.635                | 84.464               | N/A             | N/A            | 32.171      | PK   |
| 4  |      |      | 2483.500        | 61.630                 | 29.349               | -12.370         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2489.550        | 63.392                 | 31.090               | -10.608         | 74.000         | 32.303      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:52 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2437MHz Chain 2 |                          |

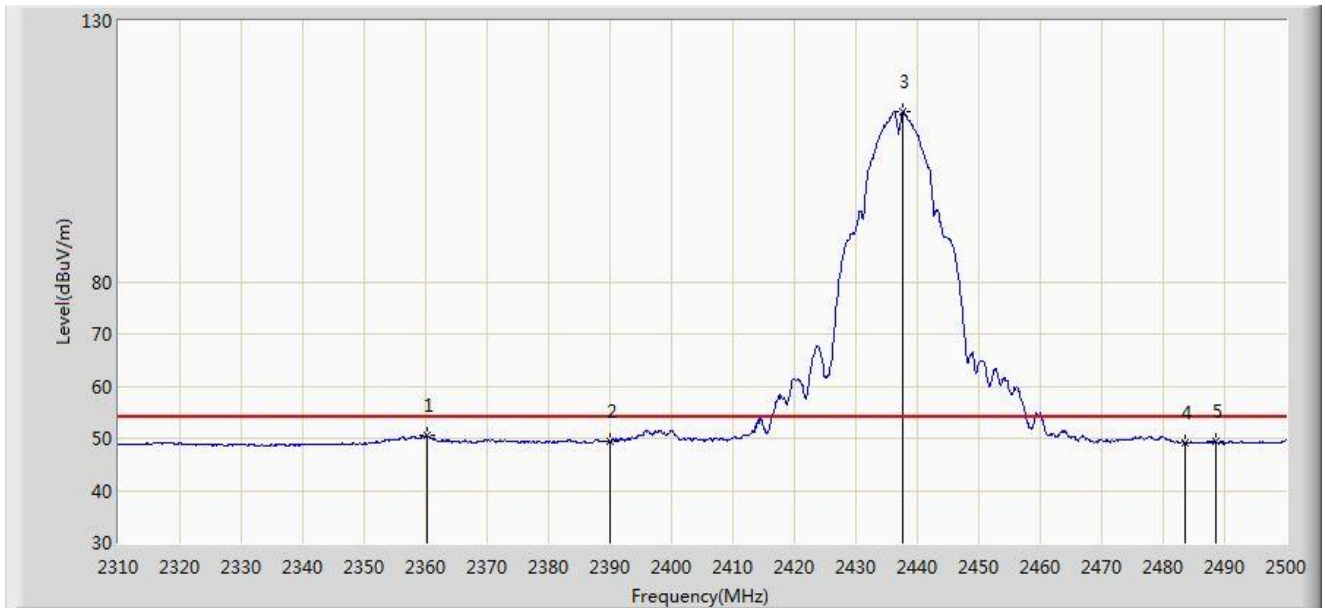


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2360.160        | 50.453                 | 18.203               | -3.547          | 54.000         | 32.249      | AV   |
| 2  |      |      | 2390.000        | 49.323                 | 17.045               | -4.677          | 54.000         | 32.278      | AV   |
| 3  |      | *    | 2437.680        | 112.637                | 80.466               | N/A             | N/A            | 32.170      | AV   |
| 4  |      |      | 2483.500        | 49.133                 | 16.852               | -4.867          | 54.000         | 32.282      | AV   |
| 5  |      |      | 2488.505        | 49.385                 | 17.087               | -4.615          | 54.000         | 32.299      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:48 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Chain 2 |                          |

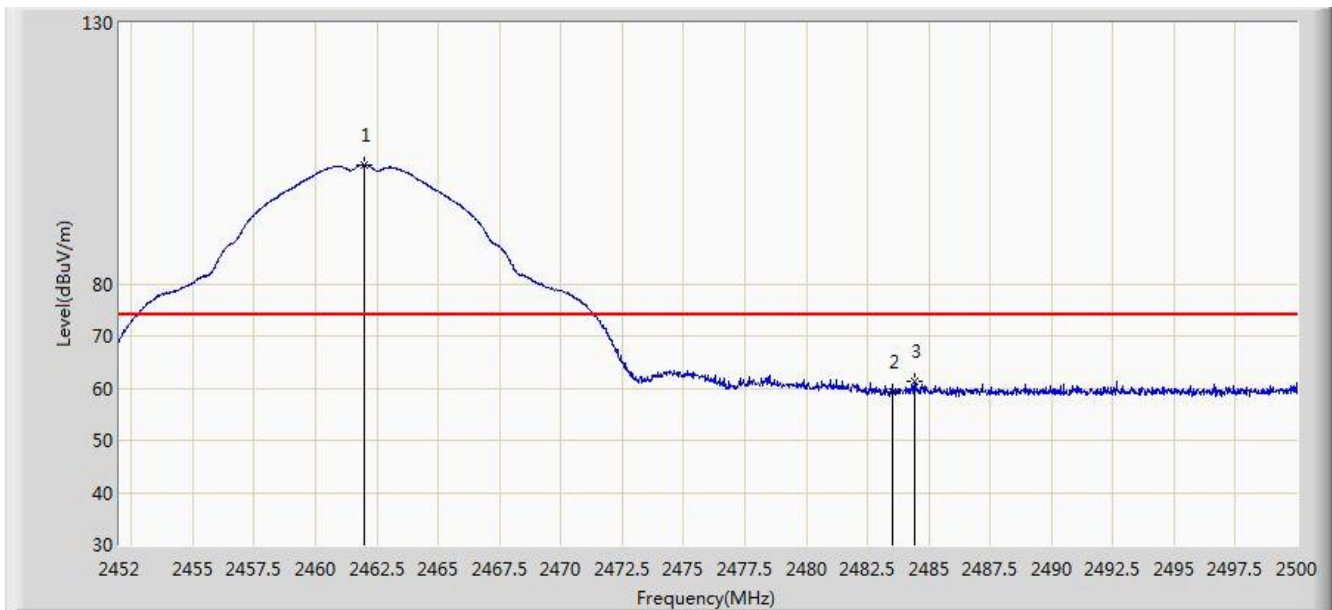

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2461.984        | 102.878                | 70.640               | N/A             | N/A            | 32.238      | PK   |
| 2  |      |      | 2483.500        | 59.353                 | 27.072               | -14.647         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2484.400        | 61.396                 | 29.112               | -12.604         | 74.000         | 32.284      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:51 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Chain 2 |                          |



| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2461.168        | 99.321                 | 67.086               | N/A             | N/A            | 32.235      | AV   |
| 2  |      |      | 2483.500        | 46.300                 | 14.019               | -7.700          | 54.000         | 32.282      | AV   |
| 3  |      |      | 2484.616        | 46.662                 | 14.377               | -7.338          | 54.000         | 32.285      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:47 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Chain 2 |                          |



| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2461.984        | 114.666                | 82.428               | N/A             | N/A            | 32.238      | PK   |
| 2  |      |      | 2483.500        | 61.369                 | 29.088               | -12.631         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2484.424        | 64.053                 | 31.769               | -9.947          | 74.000         | 32.284      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 14:46 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Chain 2 |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2461.168        | 111.152                | 78.917               | N/A             | N/A            | 32.235      | AV   |
| 2  |      |      | 2483.500        | 49.897                 | 17.616               | -4.103          | 54.000         | 32.282      | AV   |
| 3  |      |      | 2484.664        | 53.289                 | 21.004               | -0.711          | 54.000         | 32.286      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:17 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 2 |                          |

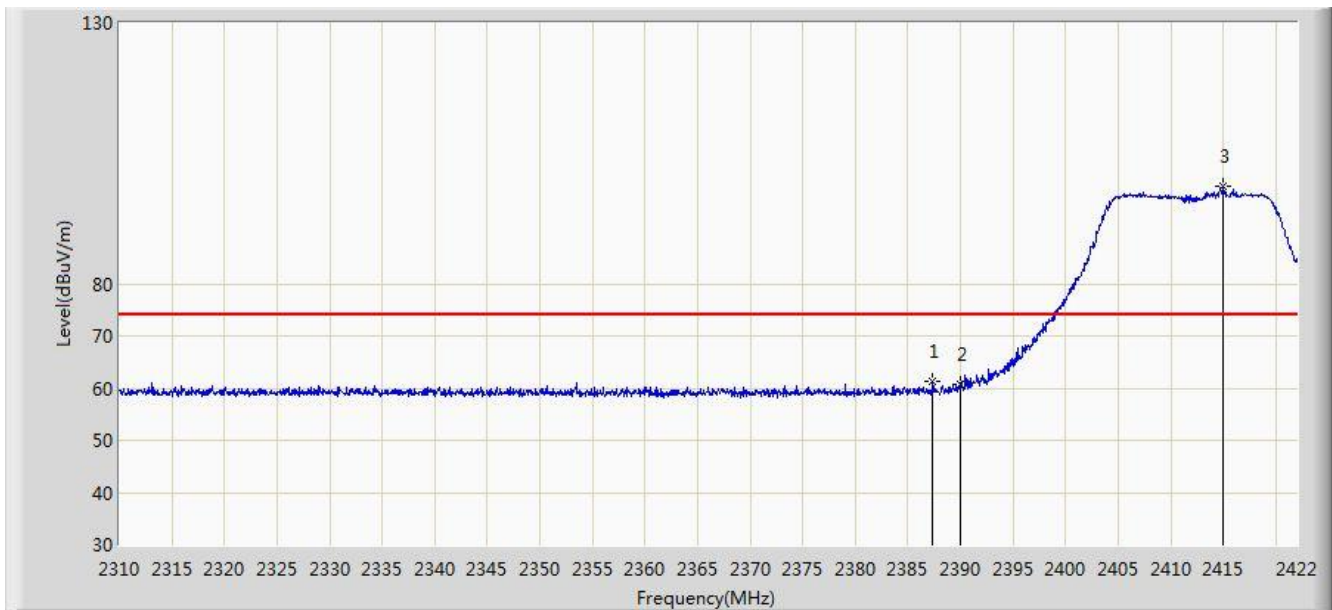


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2387.392        | 61.252                 | 28.988               | -12.748         | 74.000         | 32.264      | PK   |
| 2  |      |      | 2390.000        | 60.605                 | 28.327               | -13.395         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2414.944        | 98.765                 | 66.538               | N/A             | N/A            | 32.228      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:20 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 2 |                          |

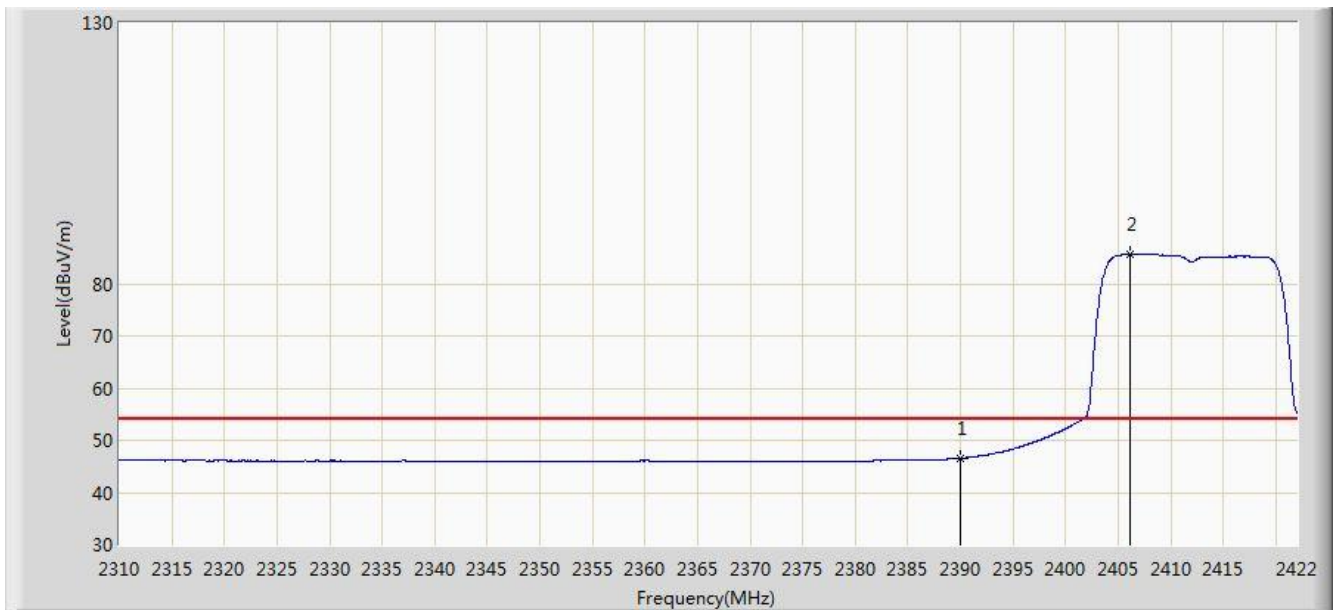


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.557                 | 14.279               | -7.443          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2406.096        | 85.643                 | 53.383               | N/A             | N/A            | 32.260      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:15 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 2 |                          |

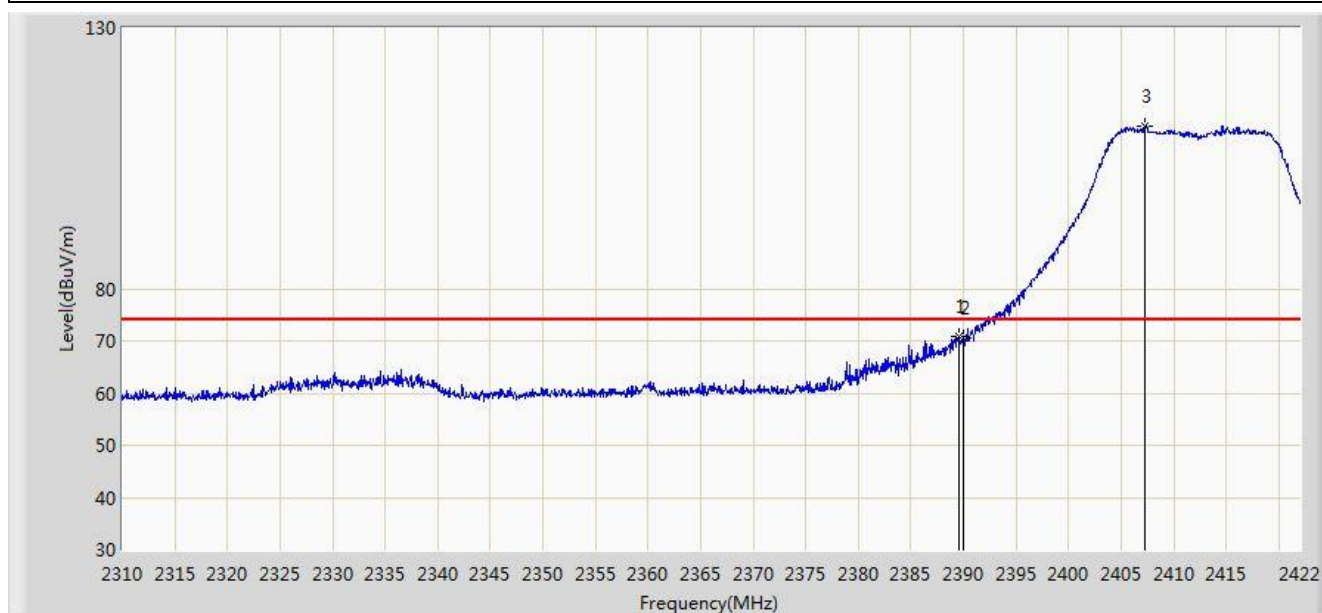


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.520        | 70.994                 | 38.719               | -3.006          | 74.000         | 32.275      | PK   |
| 2  |      |      | 2390.000        | 70.689                 | 38.411               | -3.311          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2407.272        | 111.237                | 78.981               | N/A             | N/A            | 32.257      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:14 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Chain 2 |                          |

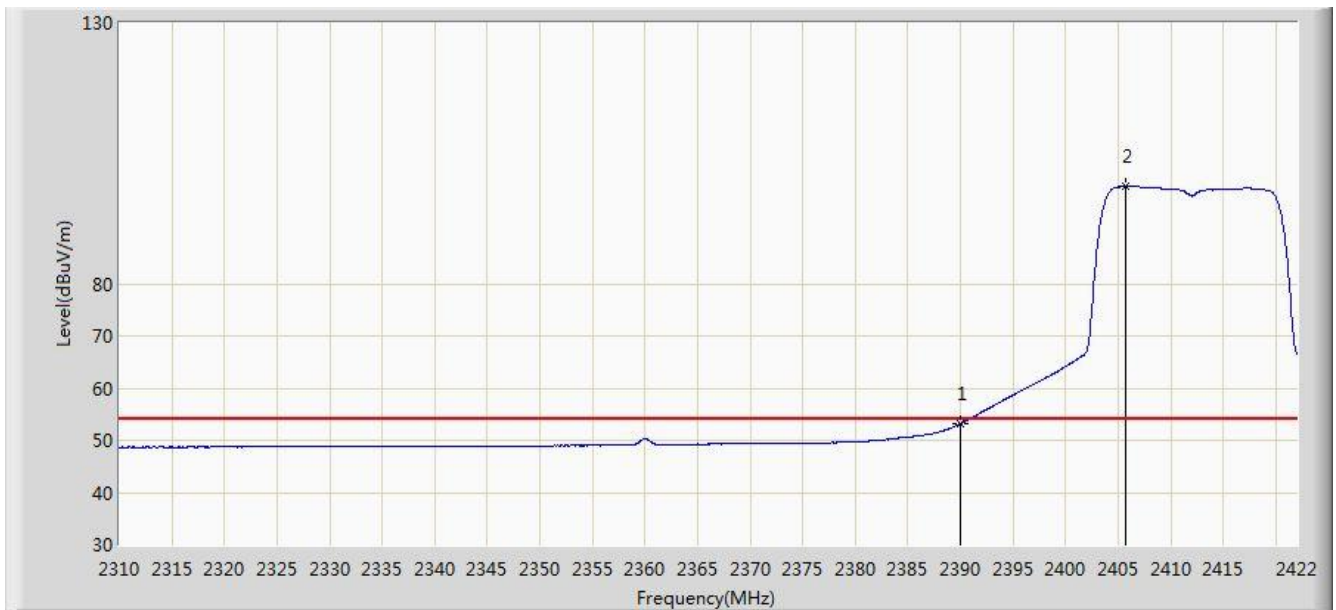


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.204                 | 20.926               | -0.796          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2405.760        | 98.567                 | 66.306               | N/A             | N/A            | 32.261      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:32 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 2 |                          |

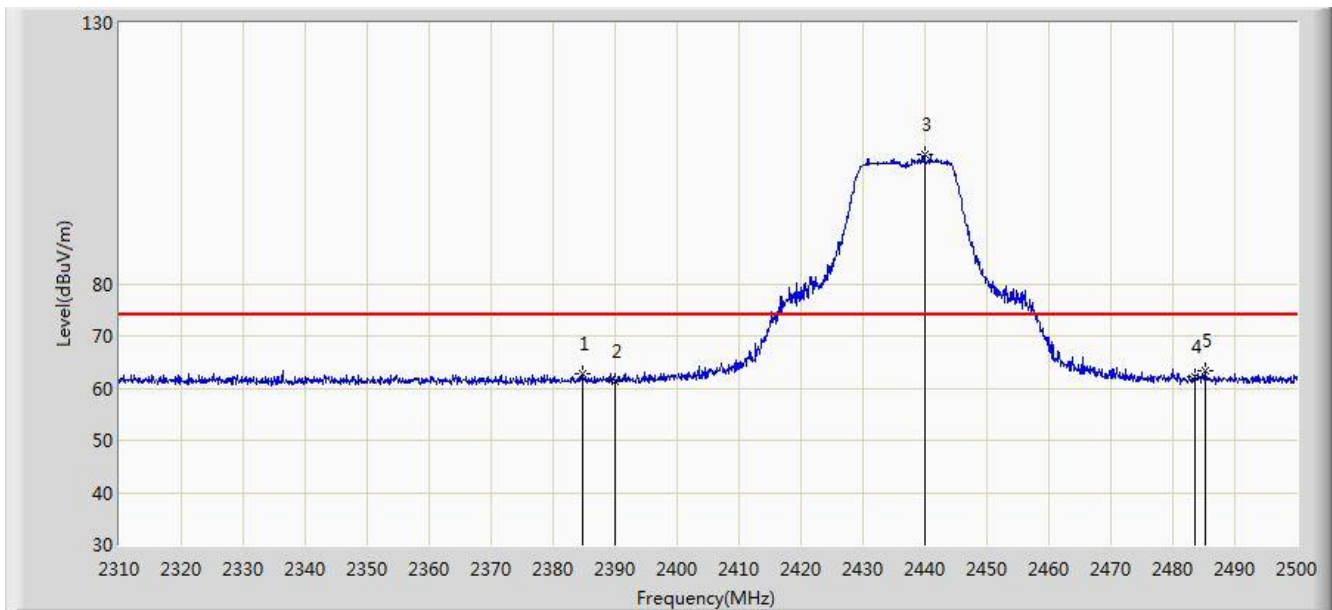


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2384.765        | 62.671                 | 30.422               | -11.329         | 74.000         | 32.248      | PK   |
| 2  |      |      | 2390.000        | 61.431                 | 29.153               | -12.569         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2439.960        | 104.794                | 72.624               | N/A             | N/A            | 32.170      | PK   |
| 4  |      |      | 2483.500        | 62.212                 | 29.931               | -11.788         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2485.275        | 63.240                 | 30.953               | -10.760         | 74.000         | 32.288      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:36 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 2 |                          |

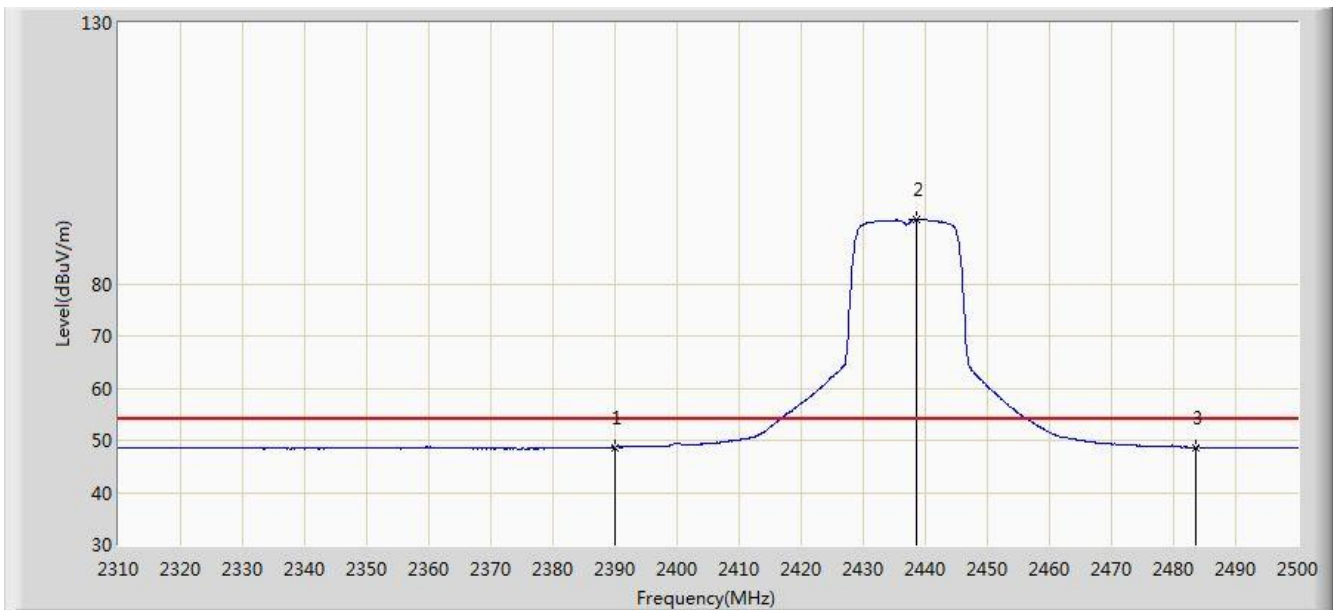


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 48.683                 | 16.405               | -5.317          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2438.535        | 92.271                 | 60.100               | N/A             | N/A            | 32.170      | AV   |
| 3  |      |      | 2483.500        | 48.642                 | 16.361               | -5.358          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:31 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 2 |                          |

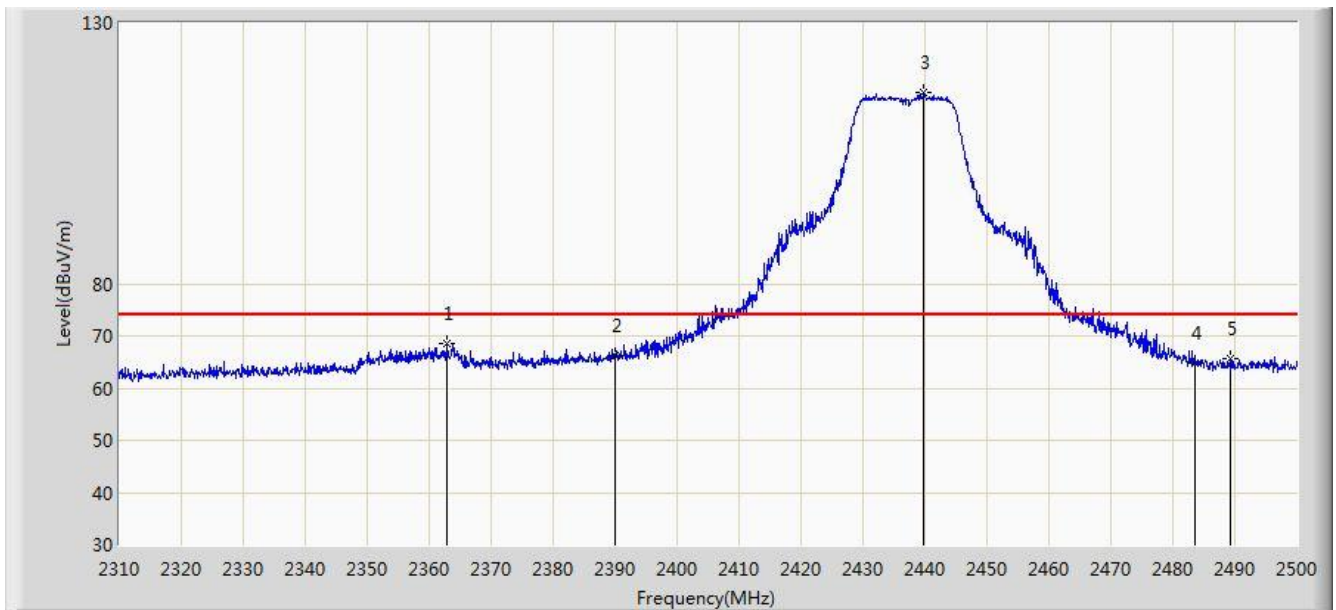


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2362.915        | 68.583                 | 36.341               | -5.417          | 74.000         | 32.242      | PK   |
| 2  |      |      | 2390.000        | 66.174                 | 33.896               | -7.826          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2439.770        | 116.704                | 84.534               | N/A             | N/A            | 32.170      | PK   |
| 4  |      |      | 2483.500        | 64.798                 | 32.517               | -9.202          | 74.000         | 32.282      | PK   |
| 5  |      |      | 2489.360        | 65.746                 | 33.445               | -8.254          | 74.000         | 32.301      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:29 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2437MHz Chain 2 |                          |

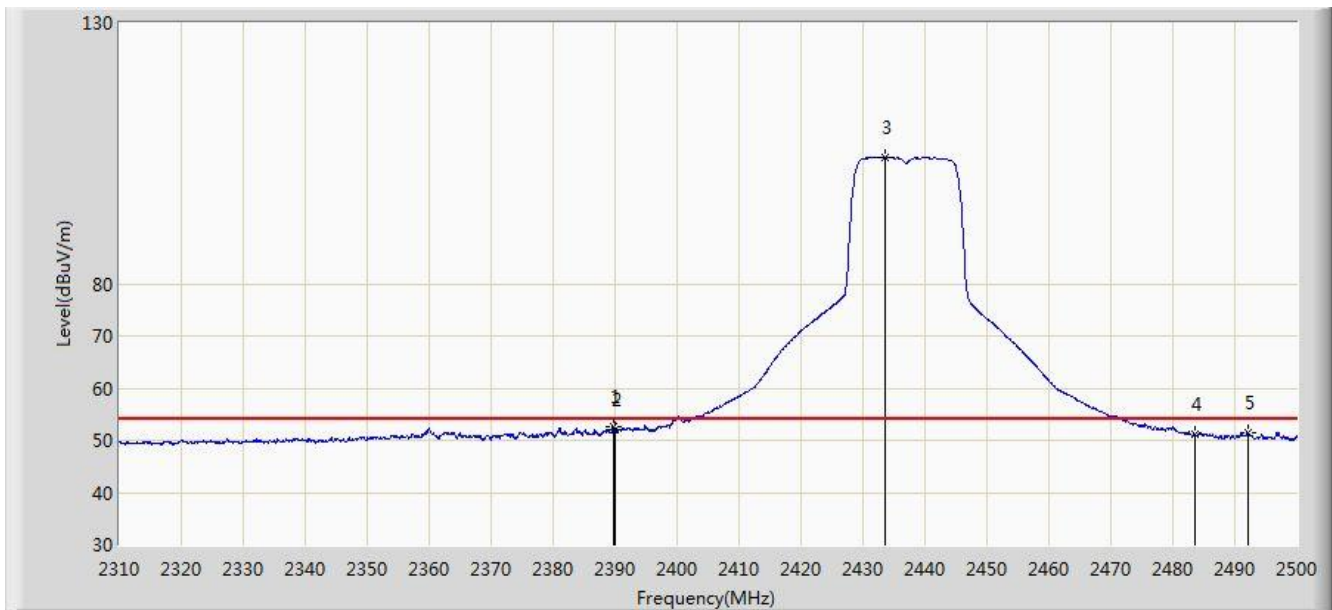


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.800        | 52.545                 | 20.268               | -1.455          | 54.000         | 32.277      | AV   |
| 2  |      |      | 2390.000        | 51.917                 | 19.639               | -2.083          | 54.000         | 32.278      | AV   |
| 3  |      | *    | 2433.690        | 104.115                | 71.943               | N/A             | N/A            | 32.172      | AV   |
| 4  |      |      | 2483.500        | 51.137                 | 18.856               | -2.863          | 54.000         | 32.282      | AV   |
| 5  |      |      | 2492.115        | 51.489                 | 19.178               | -2.511          | 54.000         | 32.311      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:43 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 2 |                          |

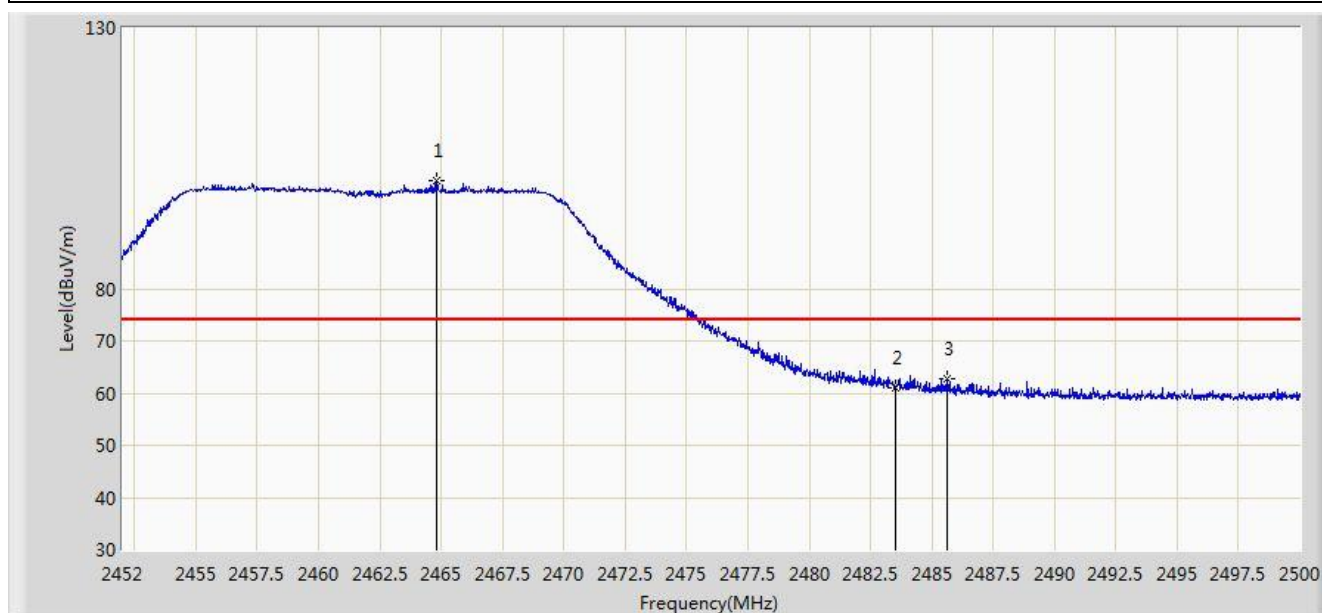


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.816        | 100.611                | 68.370               | N/A             | N/A            | 32.242      | PK   |
| 2  |      |      | 2483.500        | 61.090                 | 28.809               | -12.910         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2485.600        | 62.810                 | 30.522               | -11.190         | 74.000         | 32.288      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:45 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 2 |                          |

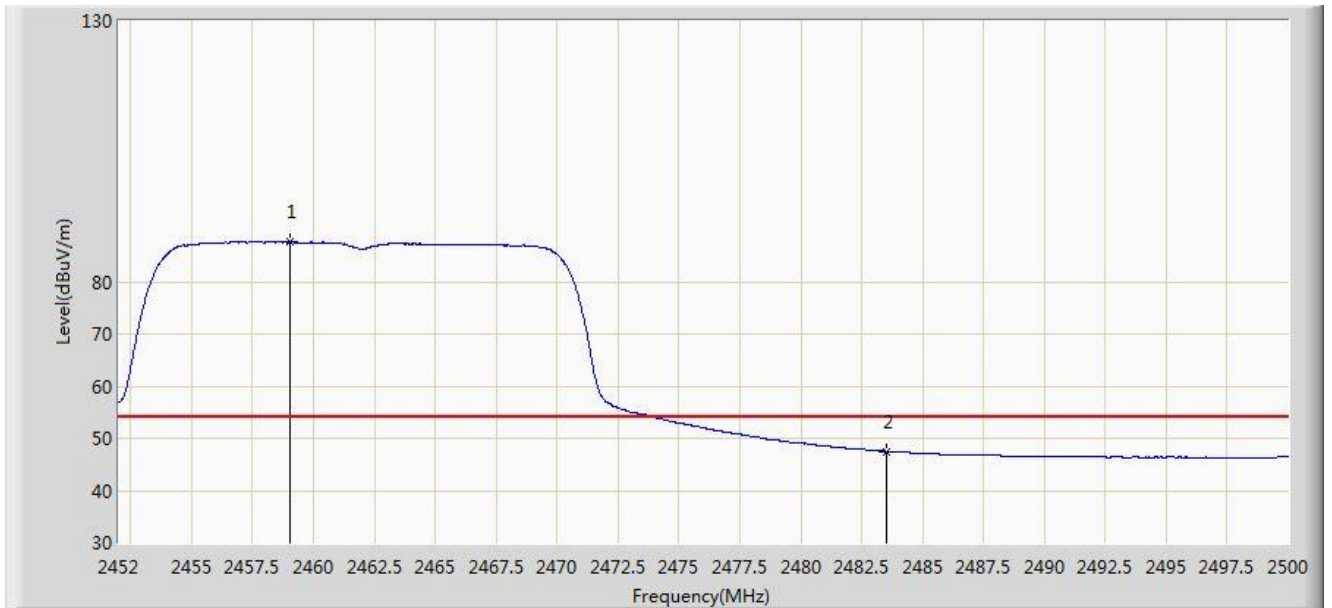


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2459.056        | 87.672                 | 55.446               | N/A             | N/A            | 32.226      | AV   |
| 2  |      |      | 2483.500        | 47.519                 | 15.238               | -6.481          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:42 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 2 |                          |

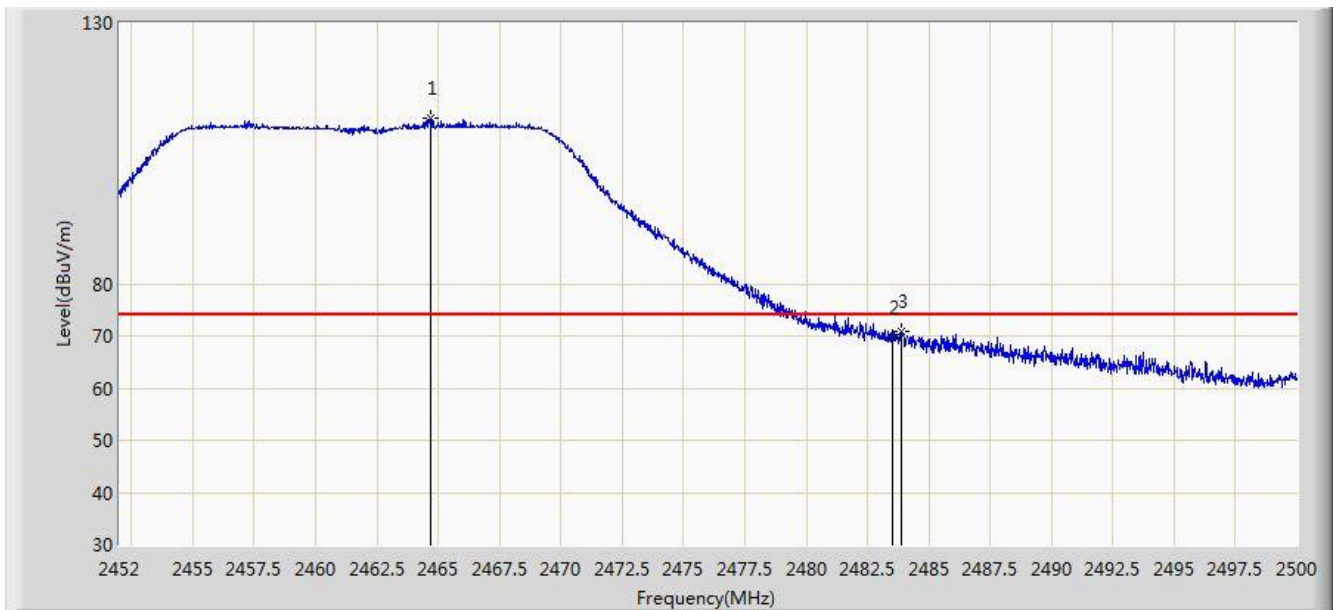


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.696        | 111.723                | 79.482               | N/A             | N/A            | 32.242      | PK   |
| 2  |      |      | 2483.500        | 69.819                 | 37.538               | -4.181          | 74.000         | 32.282      | PK   |
| 3  |      |      | 2483.872        | 70.941                 | 38.658               | -3.059          | 74.000         | 32.282      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2016/11/14 - 15:41 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                  | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Chain 2 |                          |

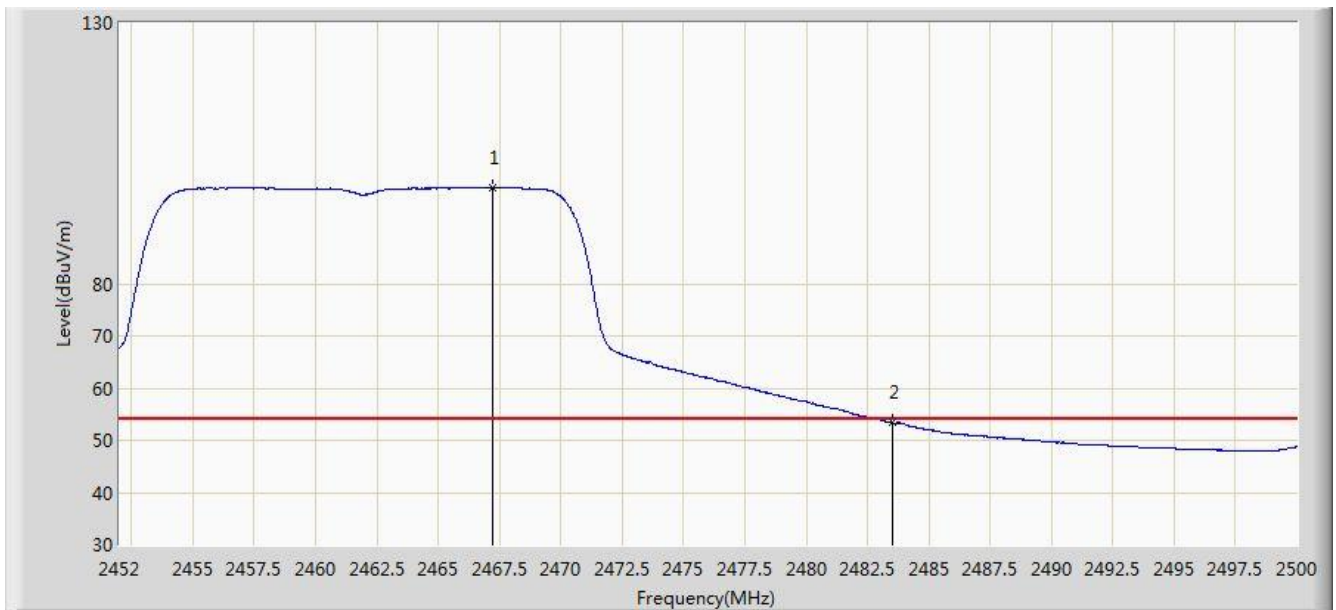


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2467.192        | 98.488                 | 66.243               | N/A             | N/A            | 32.245      | AV   |
| 2  |      |      | 2483.500        | 53.382                 | 21.101               | -0.618          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:45 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1 |                          |

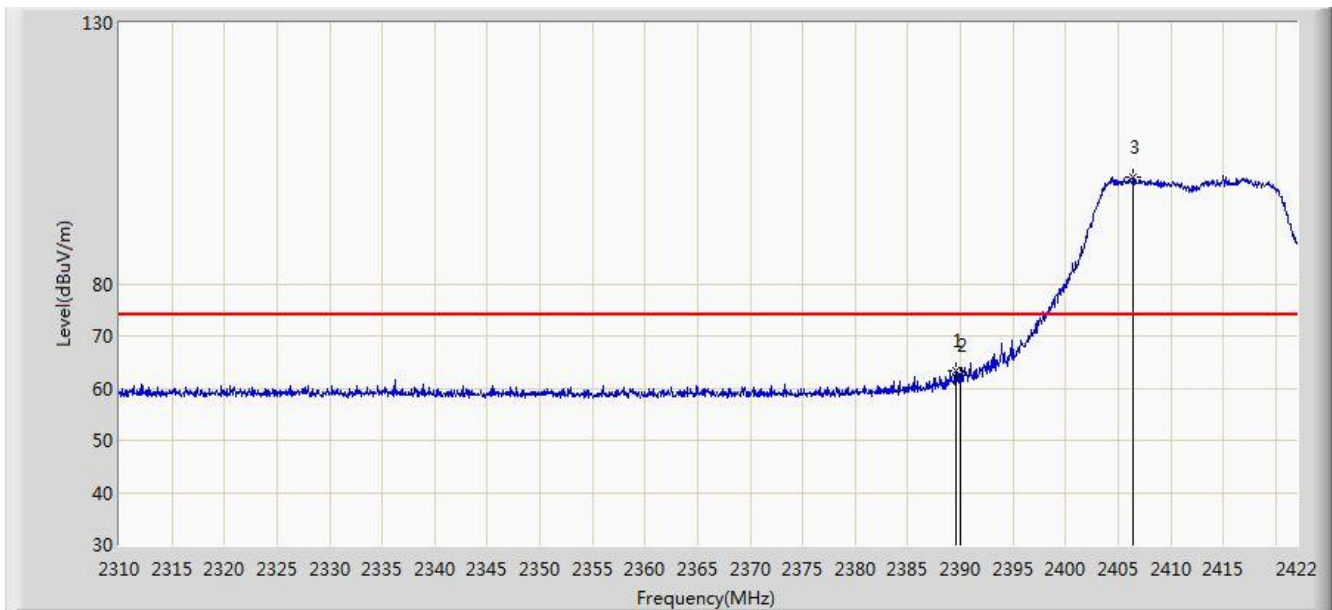


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.520        | 63.207                 | 30.932               | -10.793         | 74.000         | 32.275      | PK   |
| 2  |      |      | 2390.000        | 62.547                 | 30.269               | -11.453         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2406.488        | 100.534                | 68.275               | N/A             | N/A            | 32.258      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:48 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1 |                          |

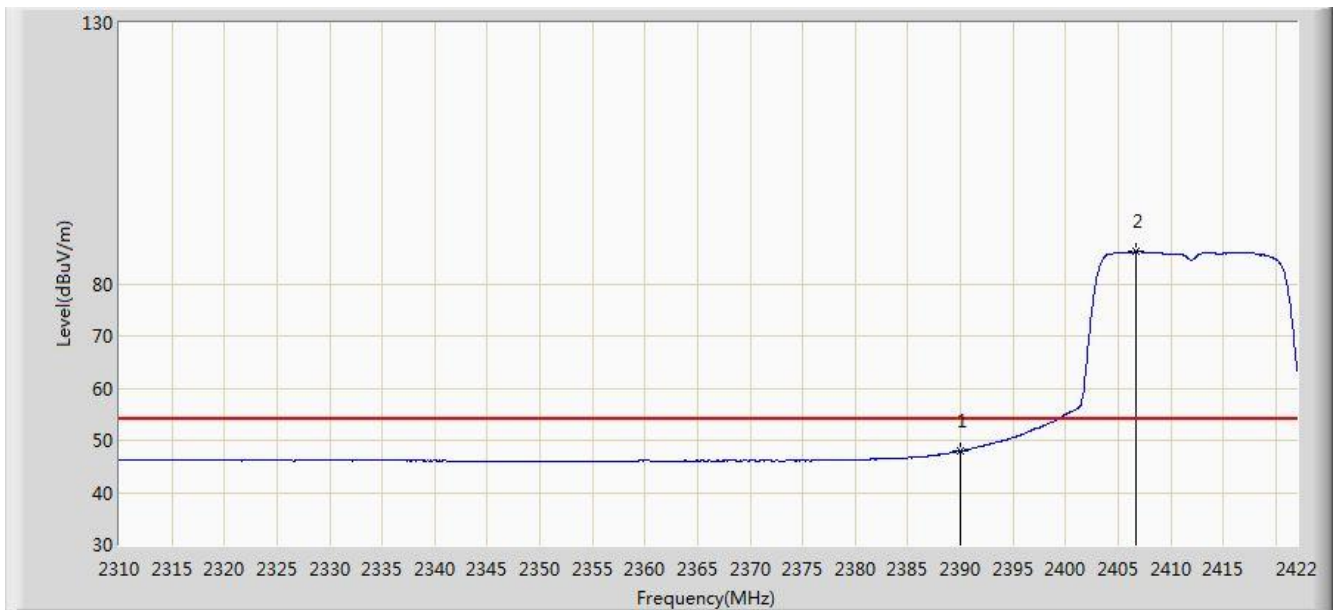


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.973                 | 15.695               | -6.027          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2406.768        | 86.112                 | 53.854               | N/A             | N/A            | 32.258      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:44 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1 |                          |

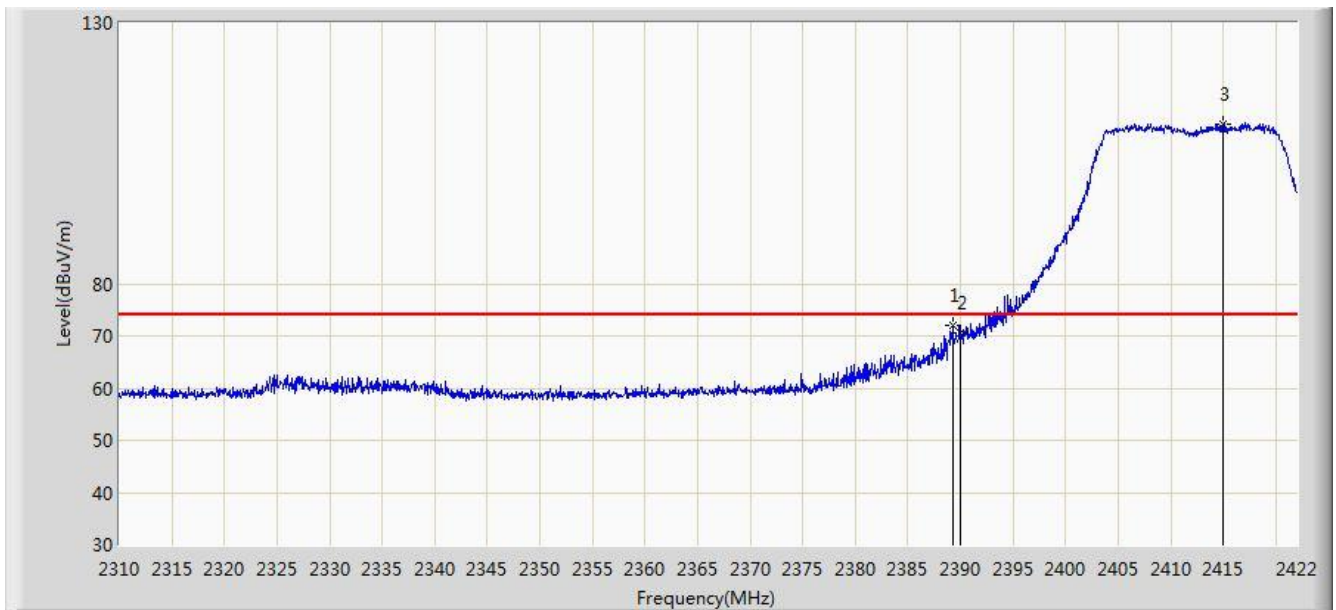


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.240        | 71.909                 | 39.635               | -2.091          | 74.000         | 32.274      | PK   |
| 2  |      |      | 2390.000        | 70.553                 | 38.275               | -3.447          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2415.000        | 110.711                | 78.484               | N/A             | N/A            | 32.227      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:43 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1 |                          |

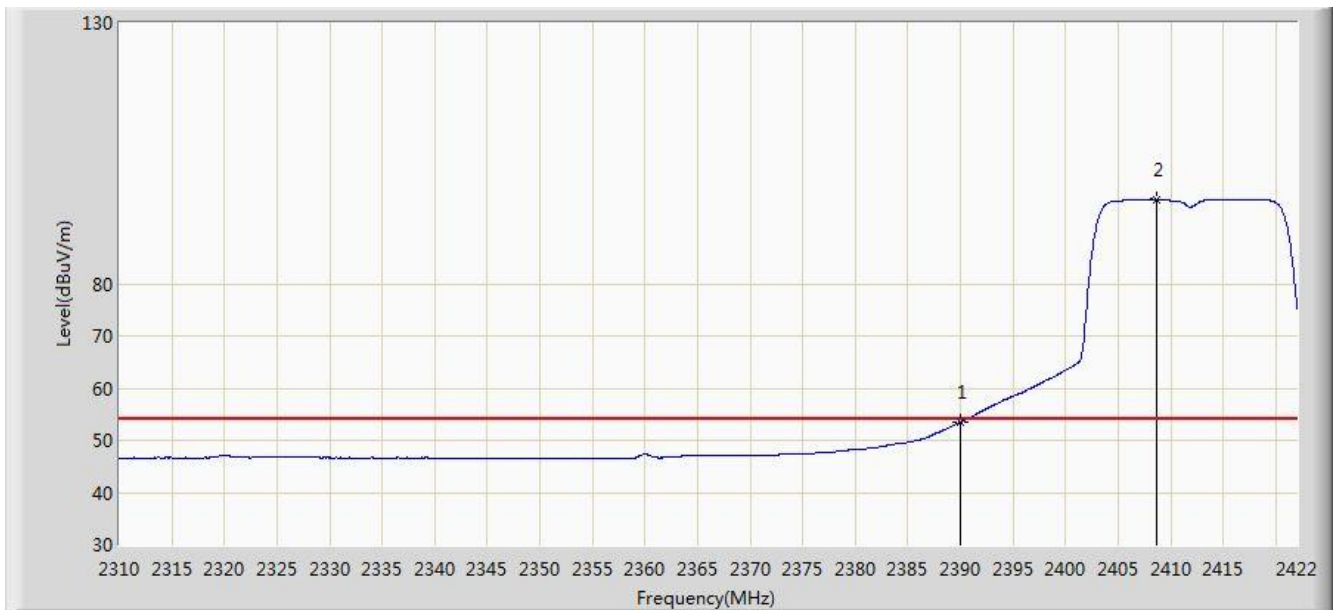


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.458                 | 21.180               | -0.542          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2408.728        | 96.144                 | 63.893               | N/A             | N/A            | 32.252      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 19:02 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1 |                          |

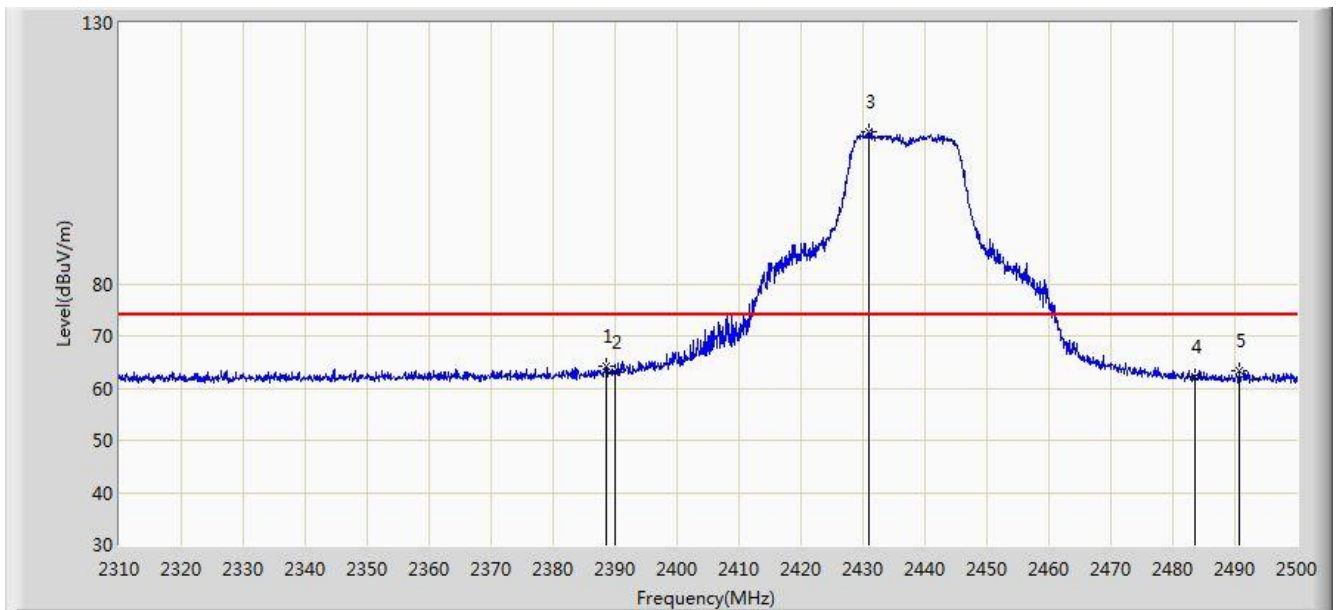


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2388.660        | 64.333                 | 32.062               | -9.667          | 74.000         | 32.270      | PK   |
| 2  |      |      | 2390.000        | 63.063                 | 30.785               | -10.937         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2431.030        | 109.187                | 77.015               | N/A             | N/A            | 32.173      | PK   |
| 4  |      |      | 2483.500        | 62.074                 | 29.793               | -11.926         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2490.690        | 63.258                 | 30.952               | -10.742         | 74.000         | 32.306      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 19:04 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1 |                          |

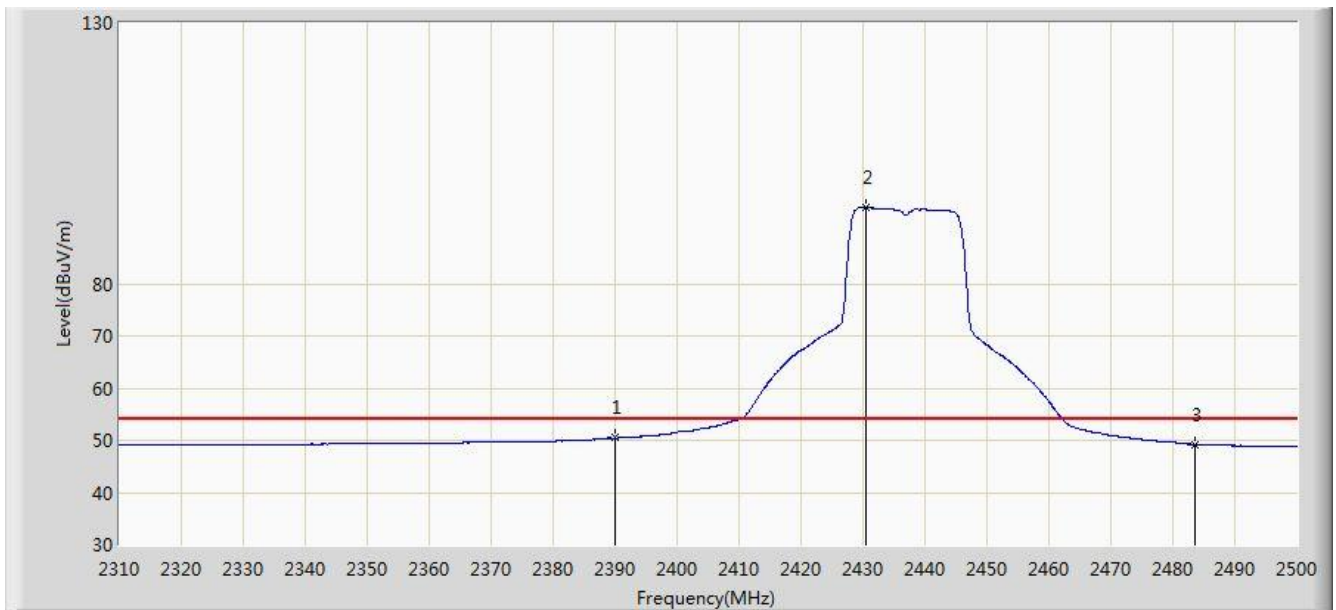


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 50.437                 | 18.159               | -3.563          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2430.460        | 94.561                 | 62.388               | N/A             | N/A            | 32.173      | AV   |
| 3  |      |      | 2483.500        | 49.266                 | 16.985               | -4.734          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 19:01 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1 |                          |

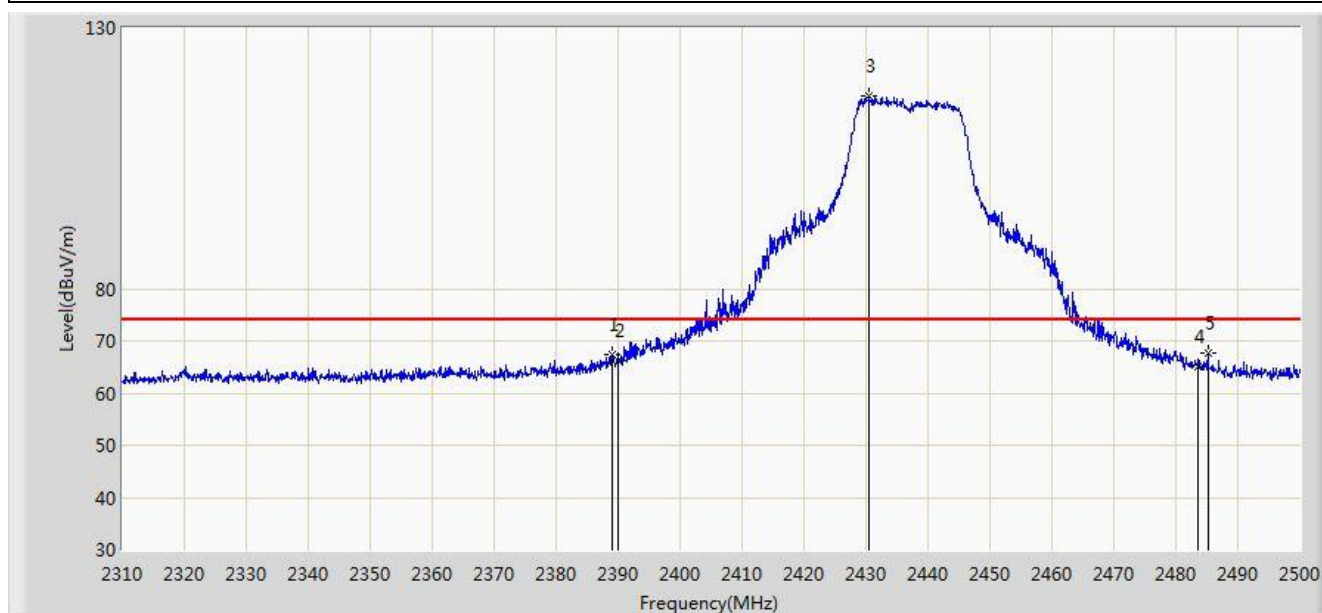


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.040        | 67.493                 | 35.220               | -6.507          | 74.000         | 32.272      | PK   |
| 2  |      |      | 2390.000        | 66.148                 | 33.870               | -7.852          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2430.555        | 116.906                | 84.733               | N/A             | N/A            | 32.173      | PK   |
| 4  |      |      | 2483.500        | 65.189                 | 32.908               | -8.811          | 74.000         | 32.282      | PK   |
| 5  |      |      | 2485.180        | 67.743                 | 35.456               | -6.257          | 74.000         | 32.287      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 19:00 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1 |                          |

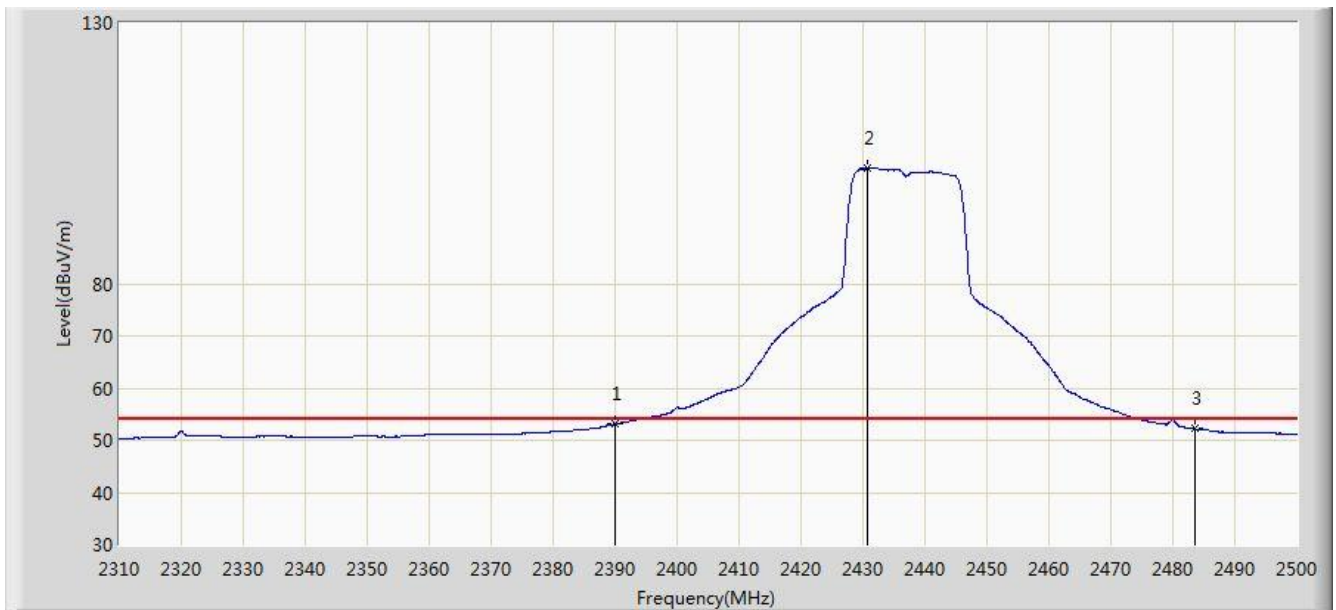


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.110                 | 20.832               | -0.890          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2430.745        | 102.155                | 69.982               | N/A             | N/A            | 32.172      | AV   |
| 3  |      |      | 2483.500        | 52.193                 | 19.912               | -1.807          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/15 - 10:27 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1 |                          |

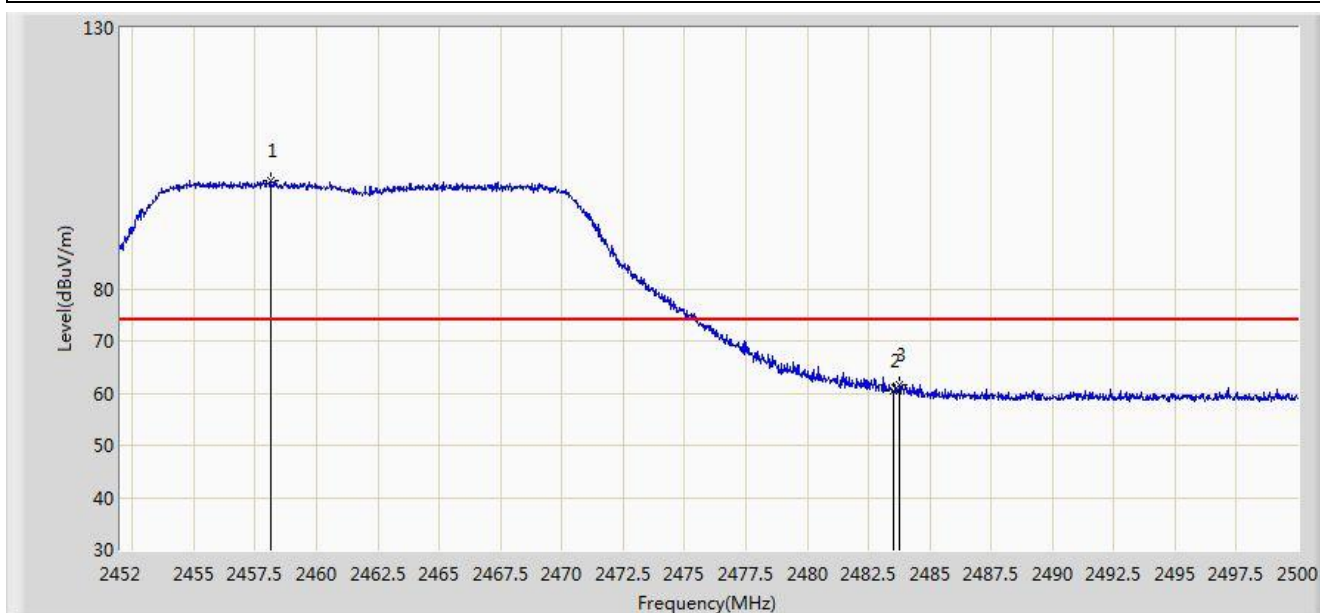


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2458.120        | 100.650                | 68.428               | N/A             | N/A            | 32.222      | PK   |
| 2  |      |      | 2483.500        | 60.438                 | 28.157               | -13.562         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2483.752        | 61.612                 | 29.330               | -12.388         | 74.000         | 32.282      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/15 - 10:29 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1 |                          |

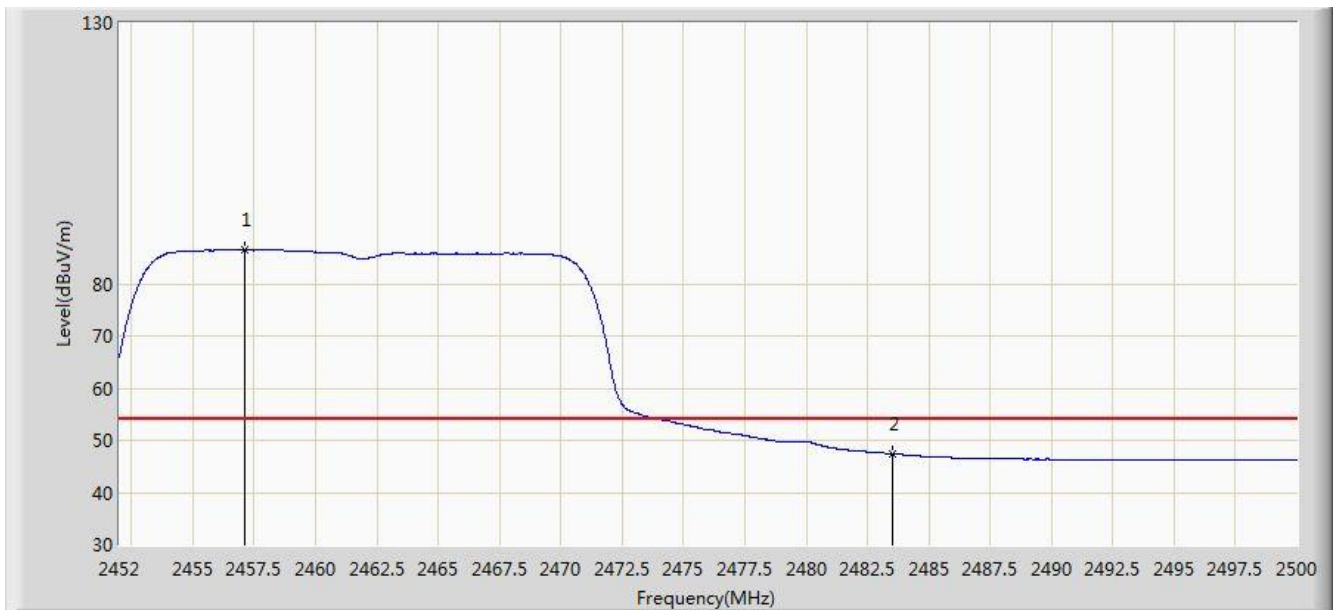


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2457.136        | 86.445                 | 54.228               | N/A             | N/A            | 32.217      | AV   |
| 2  |      |      | 2483.500        | 47.403                 | 15.122               | -6.597          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/15 - 10:25 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1 |                          |

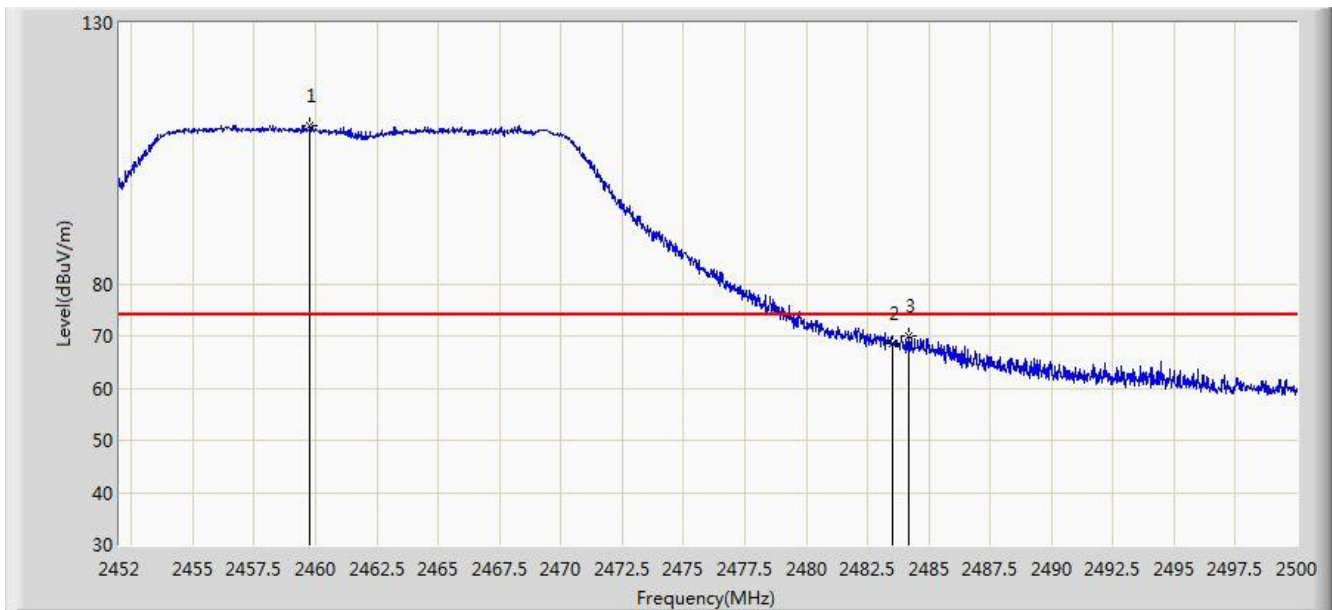


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2459.776        | 110.274                | 78.045               | N/A             | N/A            | 32.228      | PK   |
| 2  |      |      | 2483.500        | 68.585                 | 36.304               | -5.415          | 74.000         | 32.282      | PK   |
| 3  |      |      | 2484.208        | 70.085                 | 37.801               | -3.915          | 74.000         | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/15 - 10:25 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1 |                          |

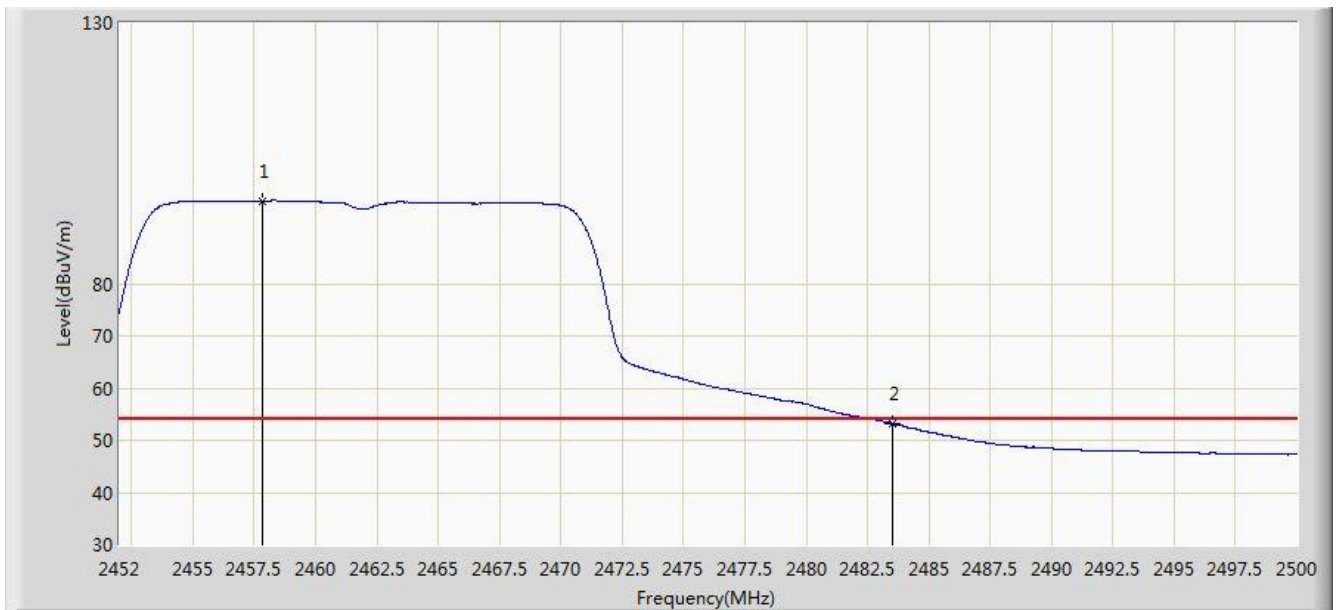


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2457.808        | 95.877                 | 63.657               | N/A             | N/A            | 32.221      | AV   |
| 2  |      |      | 2483.500        | 53.246                 | 20.965               | -0.754          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 17:45 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1 |                          |

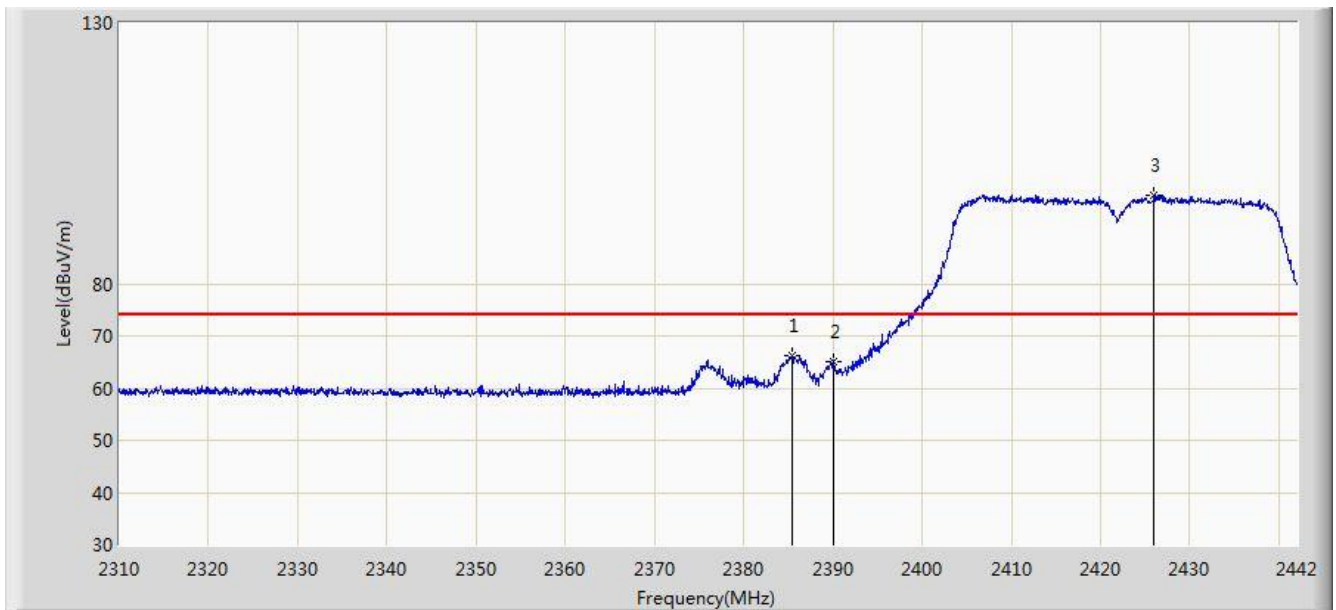


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2385.504        | 66.124                 | 33.871               | -7.876          | 74.000         | 32.253      | PK   |
| 2  |      |      | 2390.000        | 65.123                 | 32.845               | -8.877          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2426.028        | 96.959                 | 64.778               | N/A             | N/A            | 32.182      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 17:49 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1 |                          |

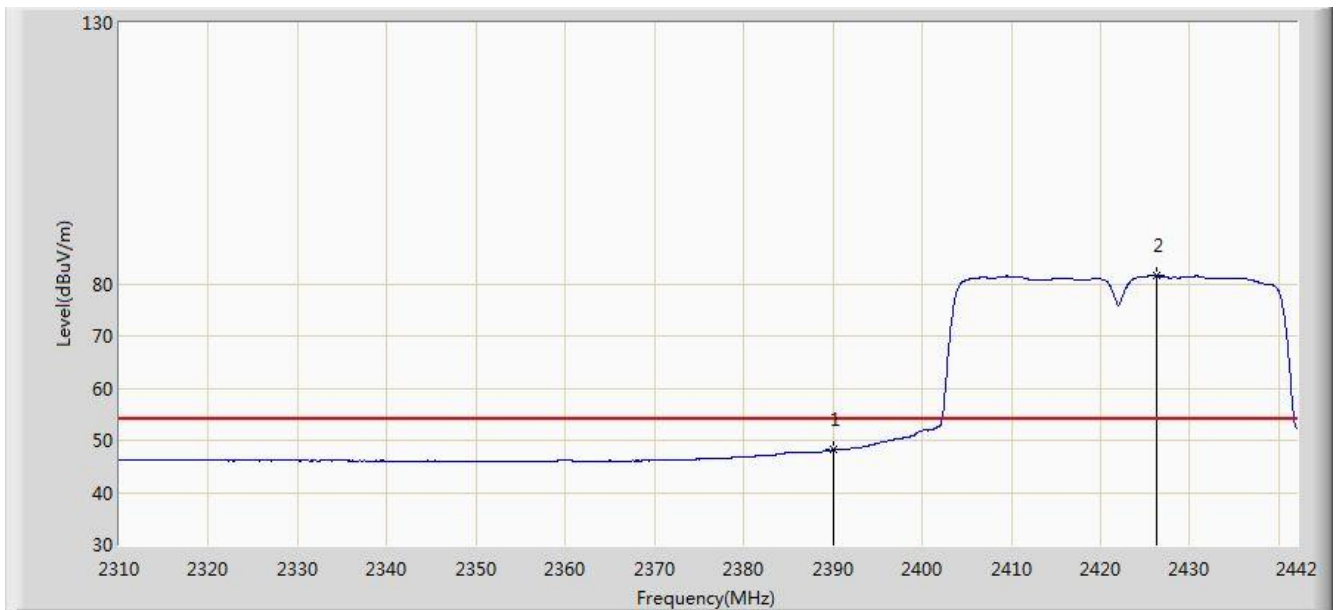


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 48.141                 | 15.863               | -5.859          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2426.358        | 81.453                 | 49.273               | N/A             | N/A            | 32.180      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 17:44 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1 |                          |

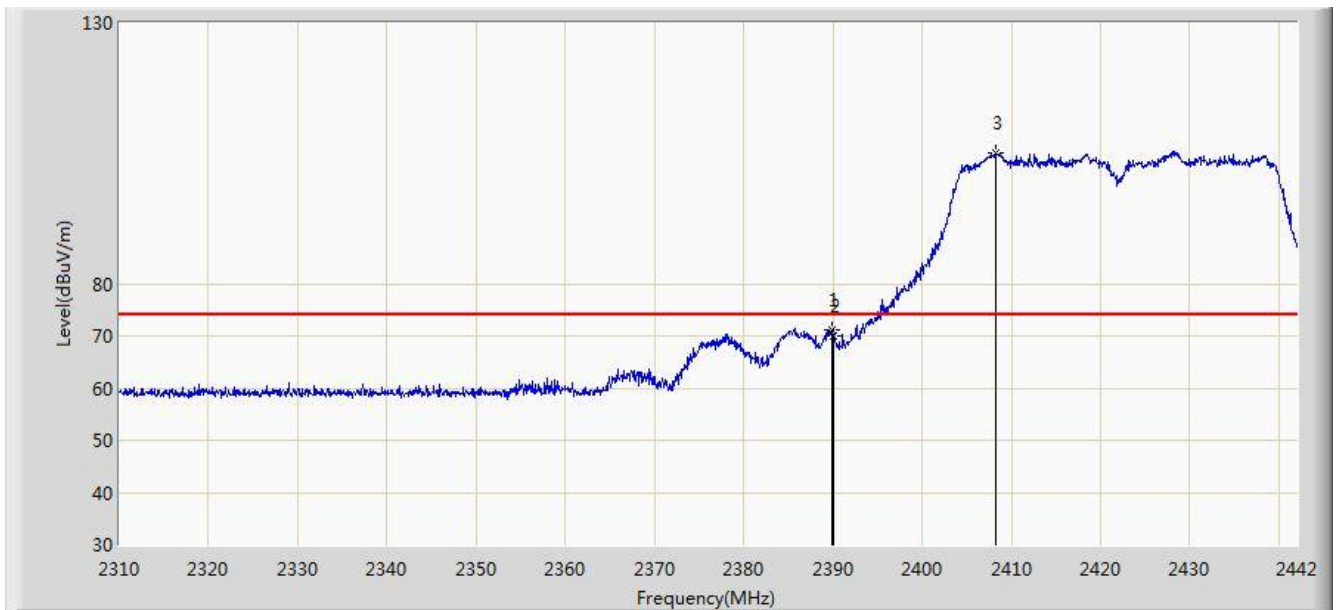


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.860        | 71.157                 | 38.880               | -2.843          | 74.000         | 32.277      | PK   |
| 2  |      |      | 2390.000        | 69.910                 | 37.632               | -4.090          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2408.274        | 105.034                | 72.781               | N/A             | N/A            | 32.253      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 17:40 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1 |                          |

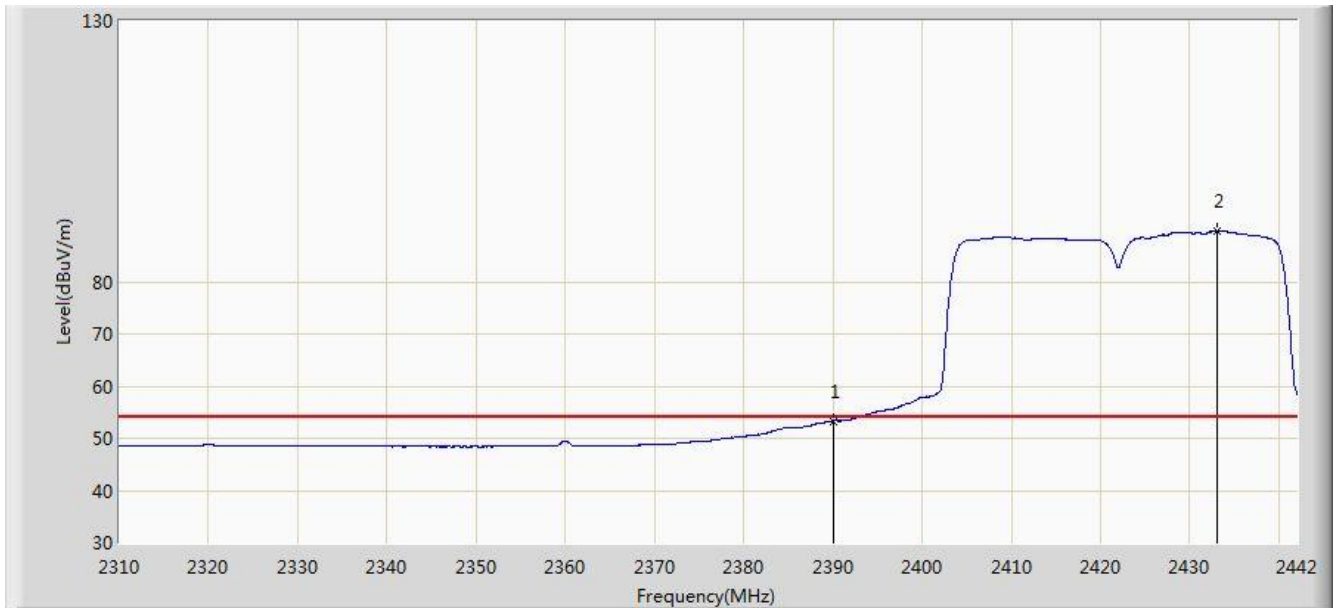


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.307                 | 21.029               | -0.693          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2433.090        | 89.804                 | 57.632               | N/A             | N/A            | 32.172      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:02 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1 |                          |

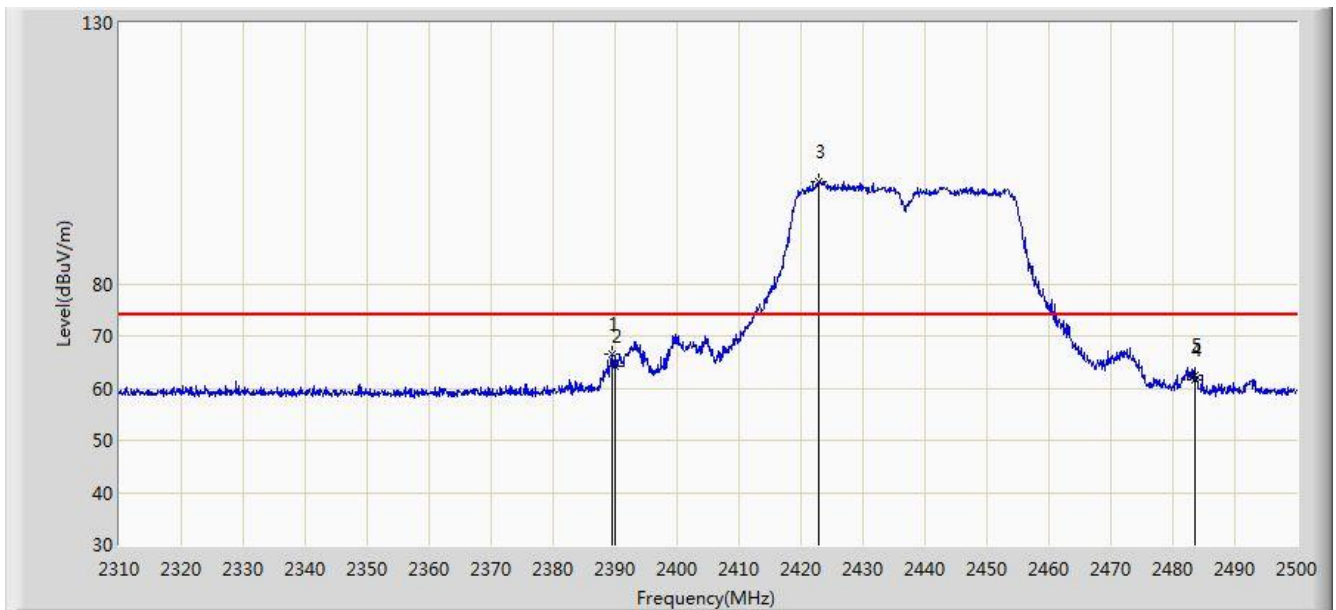


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.420        | 66.503                 | 34.228               | -7.497          | 74.000         | 32.275      | PK   |
| 2  |      |      | 2390.000        | 64.215                 | 31.937               | -9.785          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2422.955        | 99.590                 | 67.396               | N/A             | N/A            | 32.194      | PK   |
| 4  |      |      | 2483.500        | 61.590                 | 29.309               | -12.410         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2483.660        | 62.508                 | 30.226               | -11.492         | 74.000         | 32.282      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:05 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1 |                          |

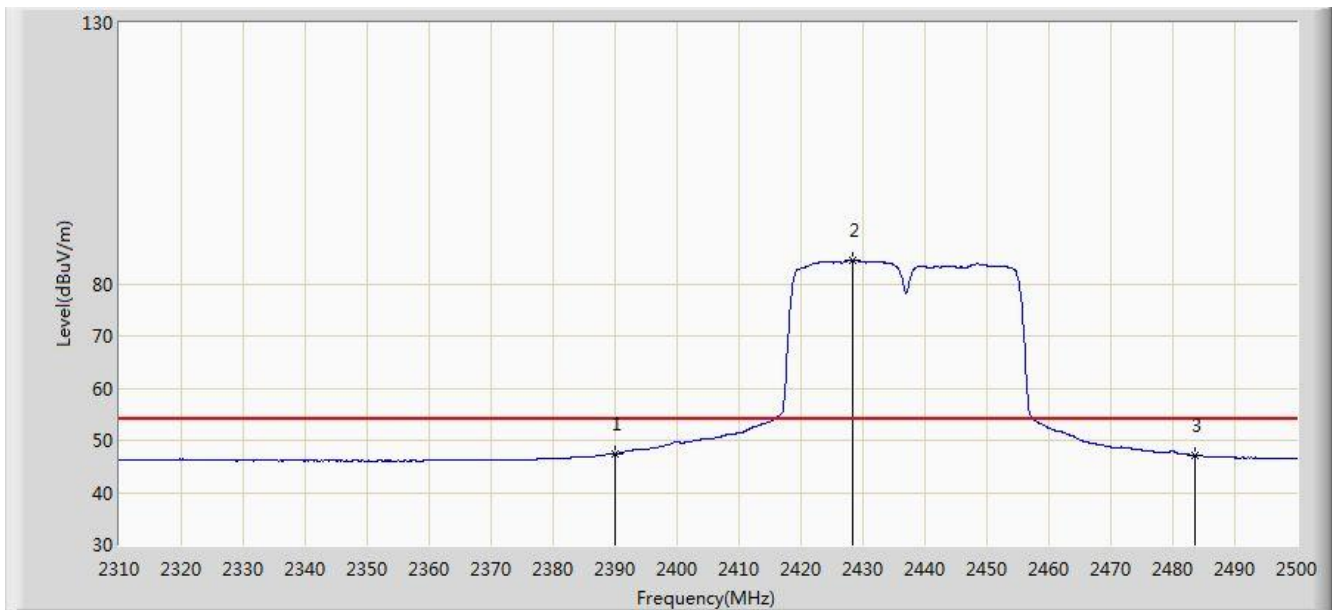


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.449                 | 15.171               | -6.551          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2428.370        | 84.584                 | 52.411               | N/A             | N/A            | 32.173      | AV   |
| 3  |      |      | 2483.500        | 47.075                 | 14.794               | -6.925          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:00 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1 |                          |

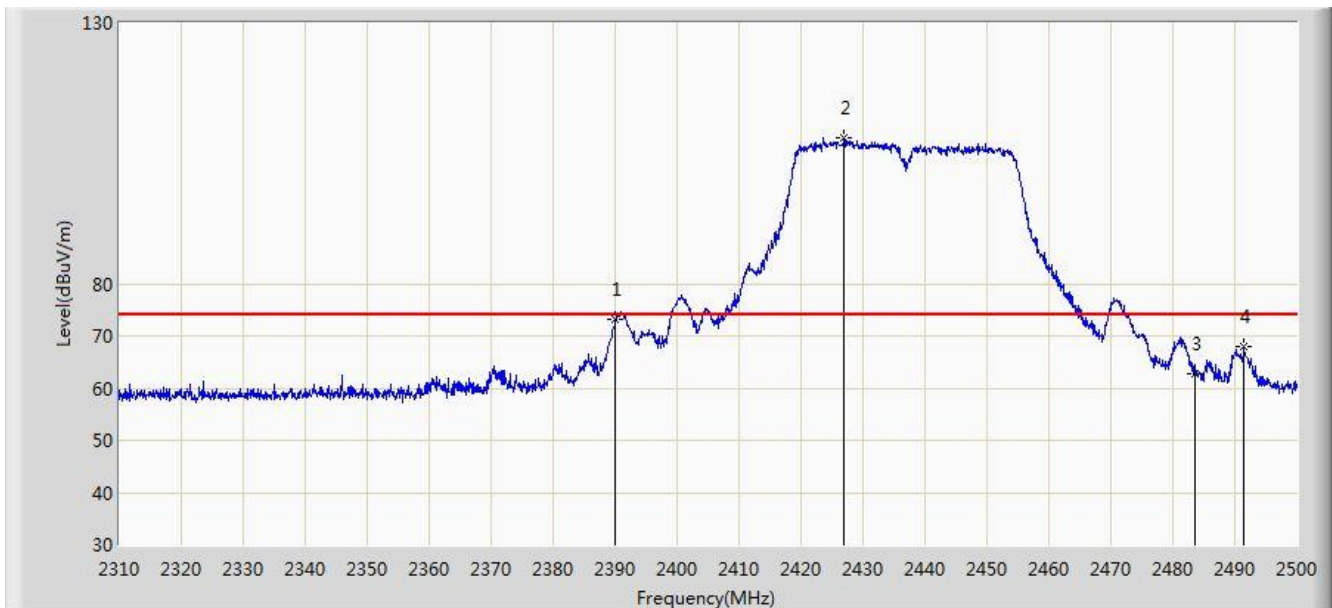


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 73.204                 | 40.926               | -0.796          | 74.000         | 32.278      | PK   |
| 2  |      | *    | 2426.945        | 107.976                | 75.798               | N/A             | N/A            | 32.177      | PK   |
| 3  |      |      | 2483.500        | 62.628                 | 30.347               | -11.372         | 74.000         | 32.282      | PK   |
| 4  |      |      | 2491.545        | 67.880                 | 35.571               | -6.120          | 74.000         | 32.309      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:01 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1 |                          |

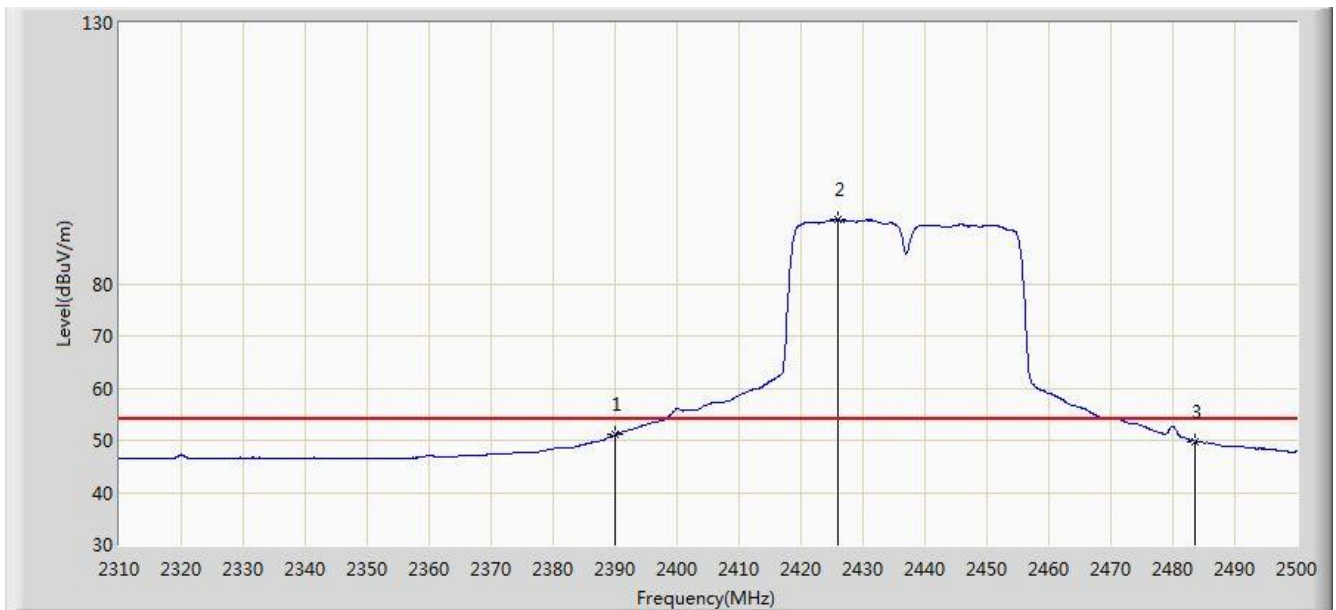


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 51.038                 | 18.760               | -2.962          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2425.995        | 92.316                 | 60.134               | N/A             | N/A            | 32.182      | AV   |
| 3  |      |      | 2483.500        | 49.839                 | 17.558               | -4.161          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:33 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Chain 0+1 |                          |

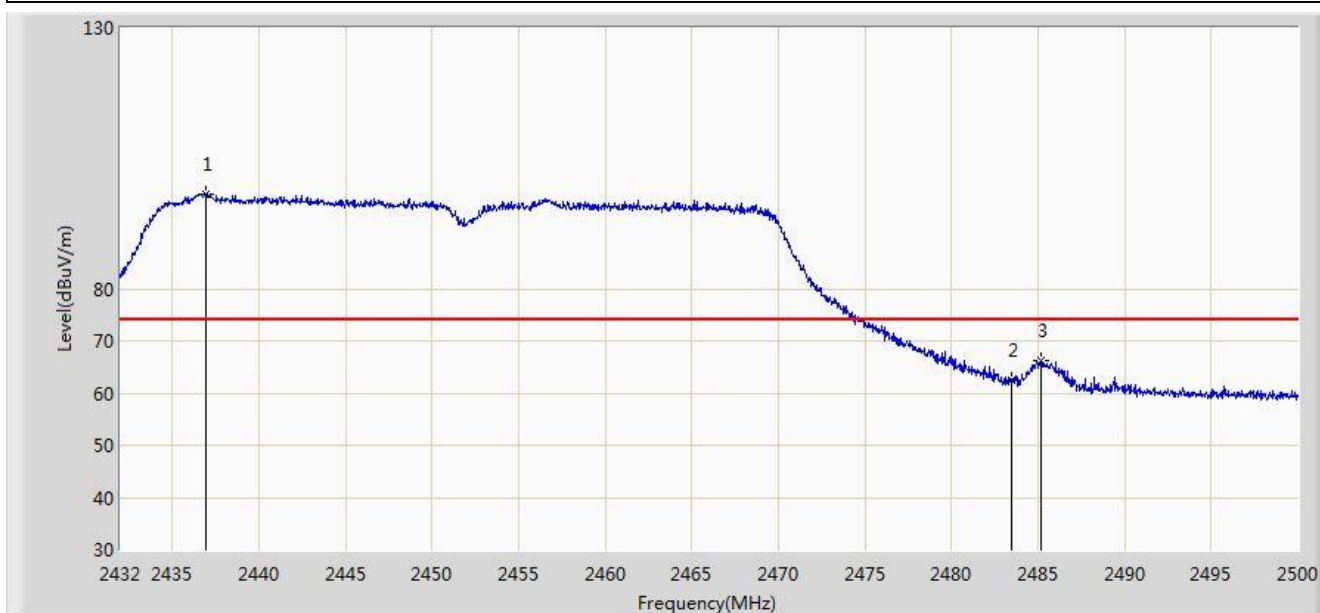


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2436.930        | 98.183                 | 66.012               | N/A             | N/A            | 32.171      | PK   |
| 2  |      |      | 2483.500        | 62.430                 | 30.149               | -11.570         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2485.142        | 66.097                 | 33.810               | -7.903          | 74.000         | 32.287      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:36 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Chain 0+1 |                          |

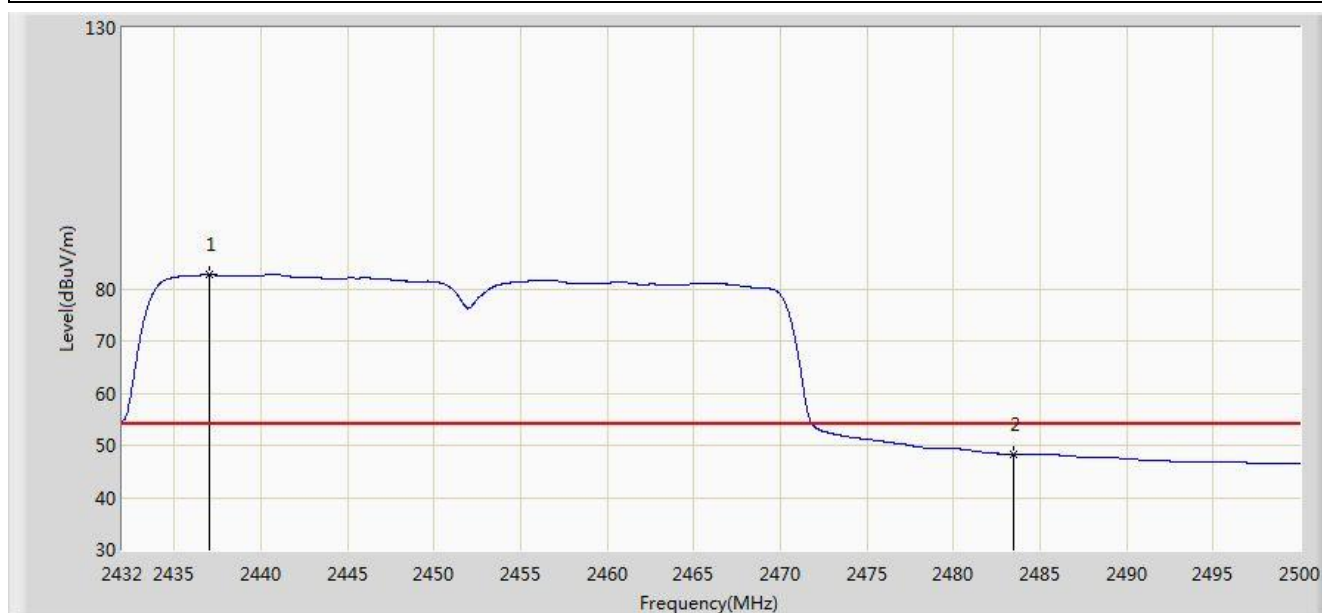


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2437.032        | 82.673                 | 50.502               | N/A             | N/A            | 32.171      | AV   |
| 2  |      |      | 2483.500        | 48.257                 | 15.976               | -5.743          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:32 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Chain 0+1 |                          |

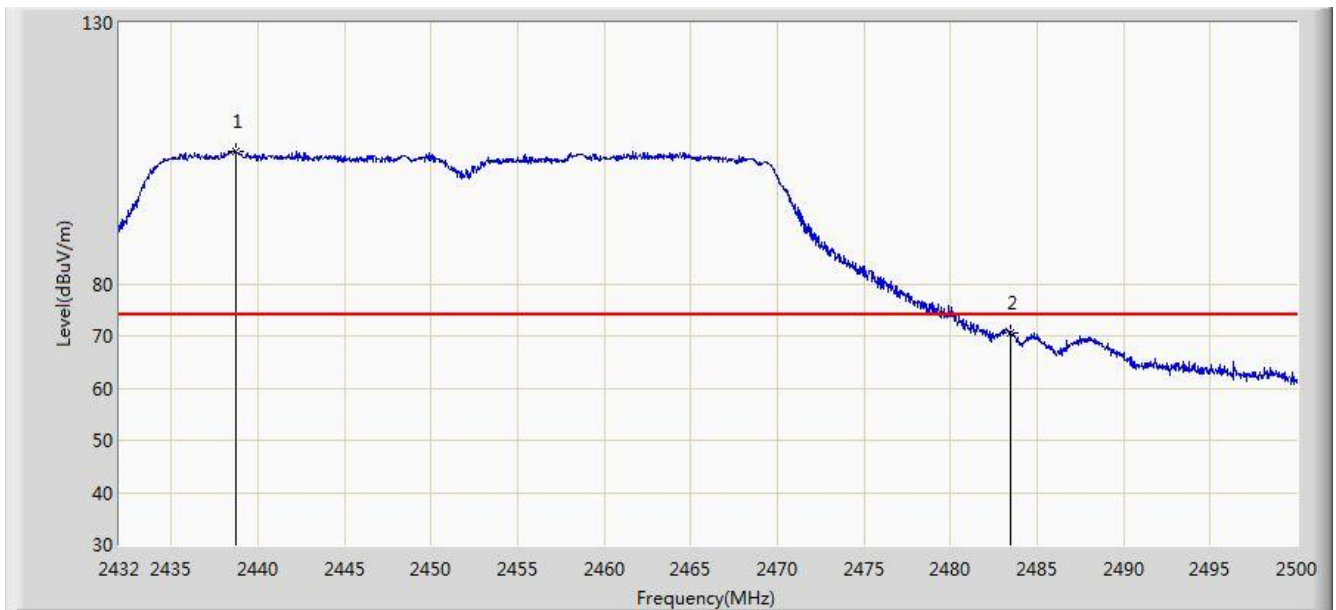


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2438.698        | 105.314                | 73.143               | N/A             | N/A            | 32.171      | PK   |
| 2  |      |      | 2483.500        | 70.587                 | 38.306               | -3.413          | 74.000         | 32.282      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                  |                          |
|------------------------------------------------------------------|--------------------------|
| Site: AC2                                                        | Time: 2016/11/14 - 18:28 |
| Limit: FCC_Part15.209_RE(3m)                                     | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                         | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Chain 0+1 |                          |

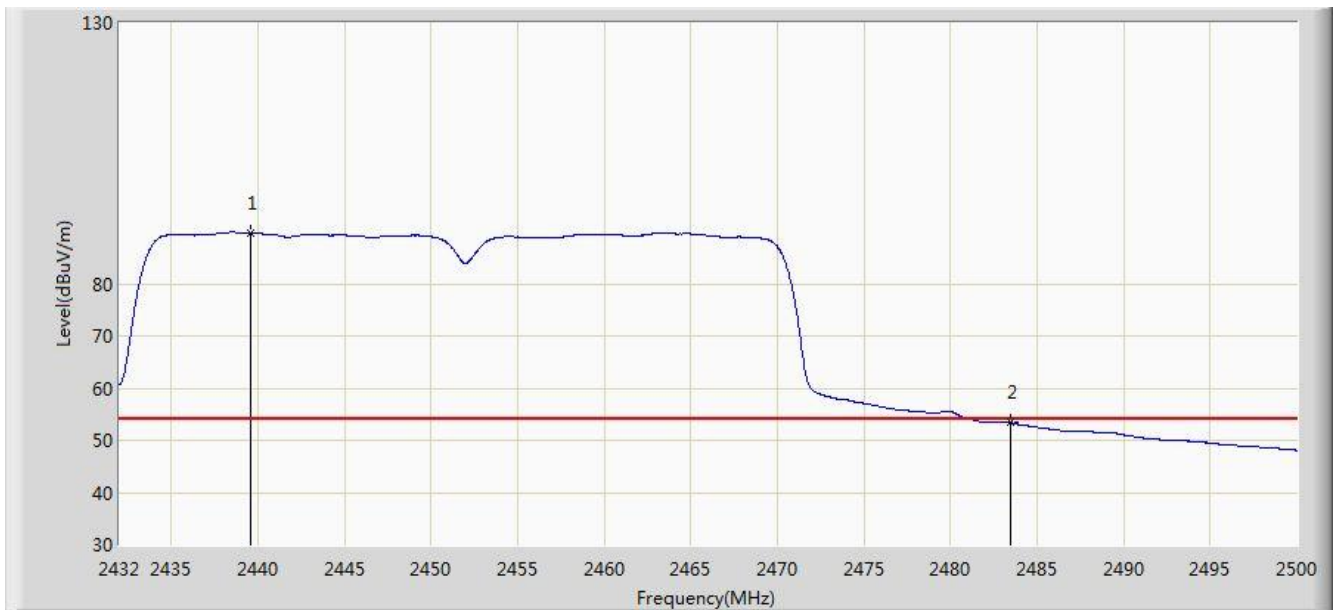


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2439.582        | 89.785                 | 57.615               | N/A             | N/A            | 32.170      | AV   |
| 2  |      |      | 2483.500        | 53.355                 | 21.074               | -0.645          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:38 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1+2 |                          |

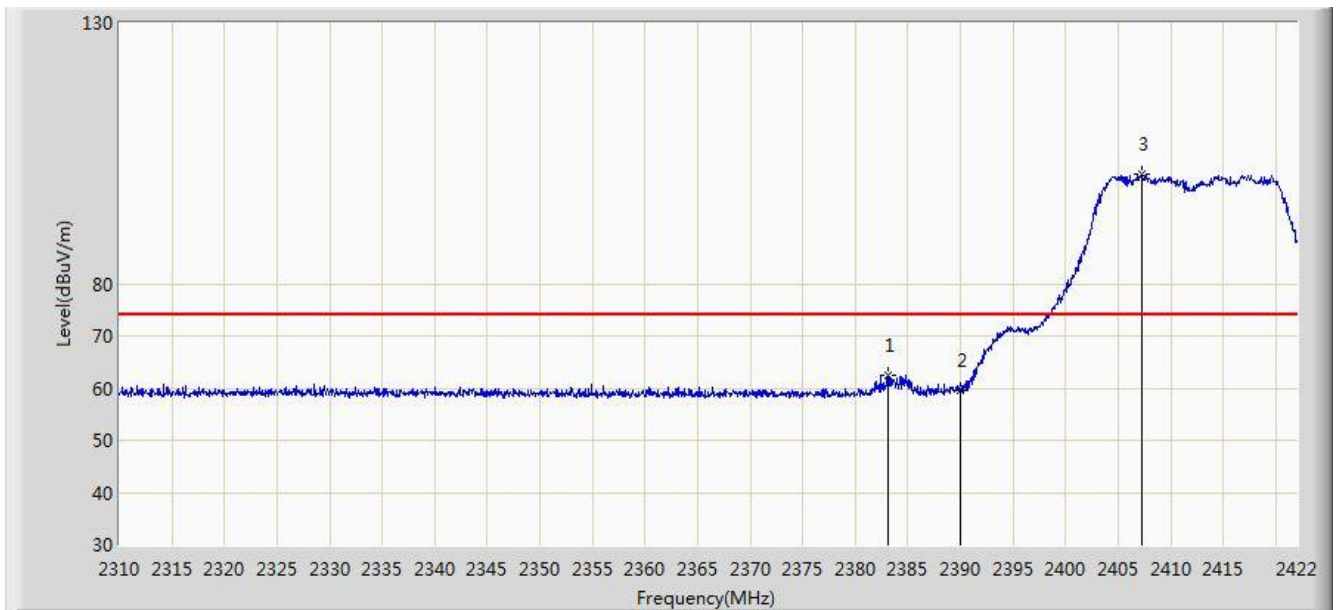


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2383.080        | 62.421                 | 30.182               | -11.579         | 74.000         | 32.240      | PK   |
| 2  |      |      | 2390.000        | 59.495                 | 27.217               | -14.505         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2407.216        | 100.979                | 68.723               | N/A             | N/A            | 32.257      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:40 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1+2 |                          |

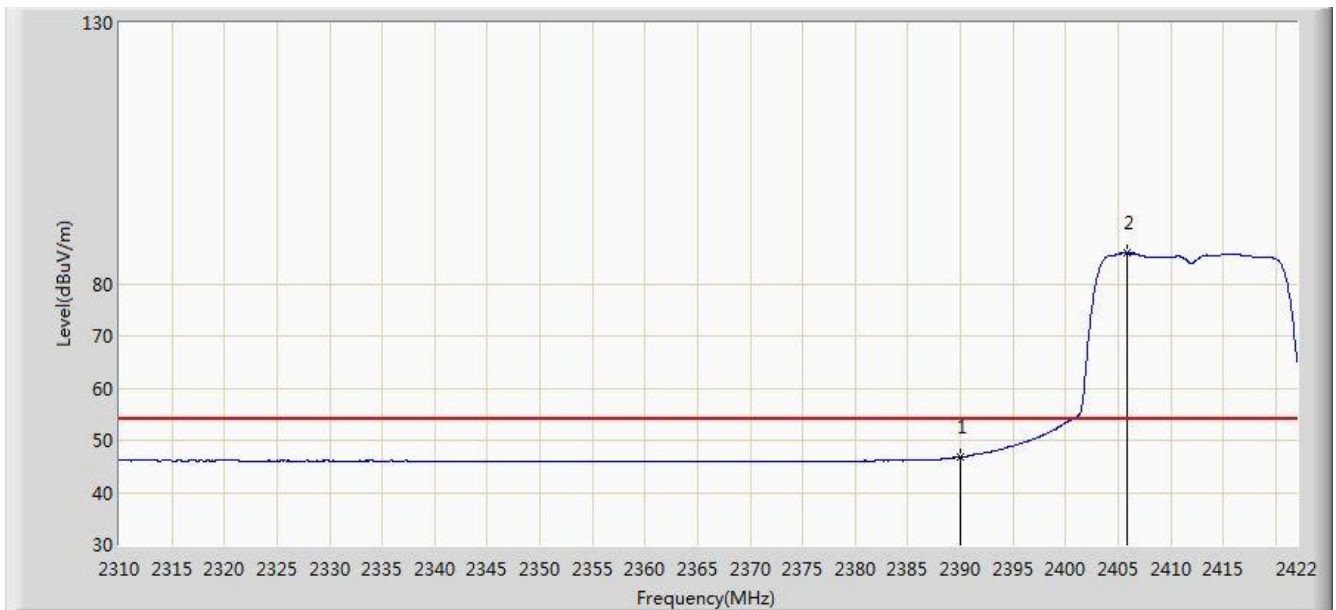


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.780                 | 14.502               | -7.220          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2405.816        | 85.864                 | 53.603               | N/A             | N/A            | 32.261      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:37 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1+2 |                          |

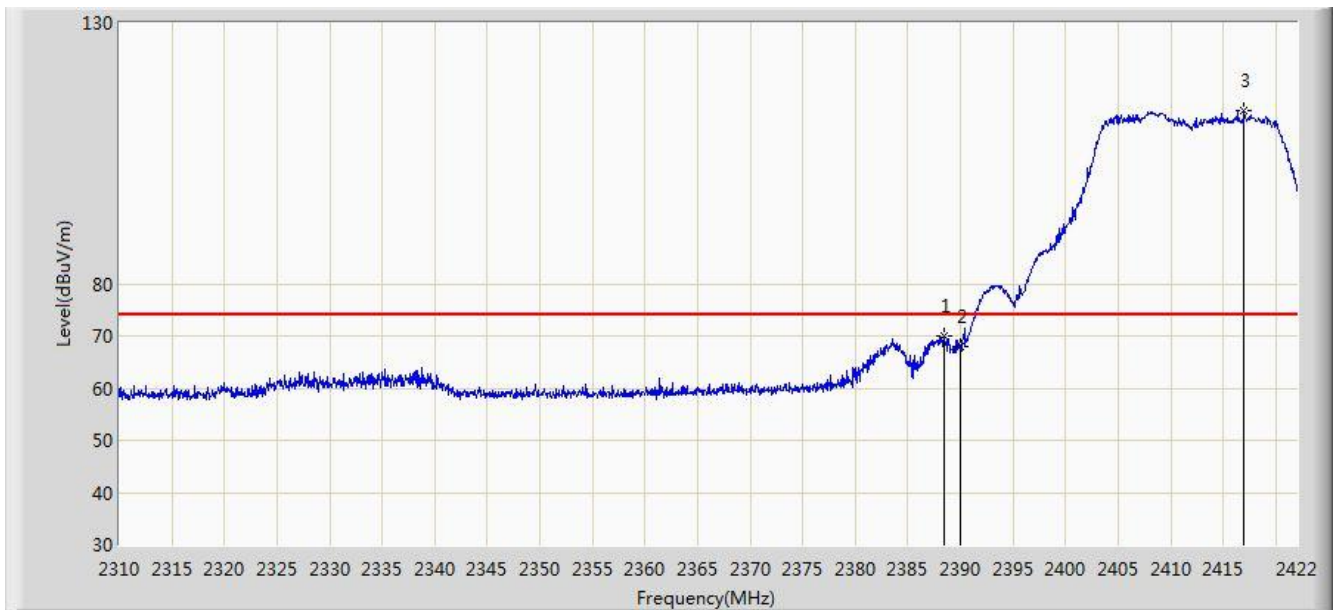


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2388.400        | 69.933                 | 37.664               | -4.067          | 74.000         | 32.269      | PK   |
| 2  |      |      | 2390.000        | 67.939                 | 35.661               | -6.061          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2417.016        | 113.234                | 81.015               | N/A             | N/A            | 32.219      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:36 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Chain 0+1+2 |                          |

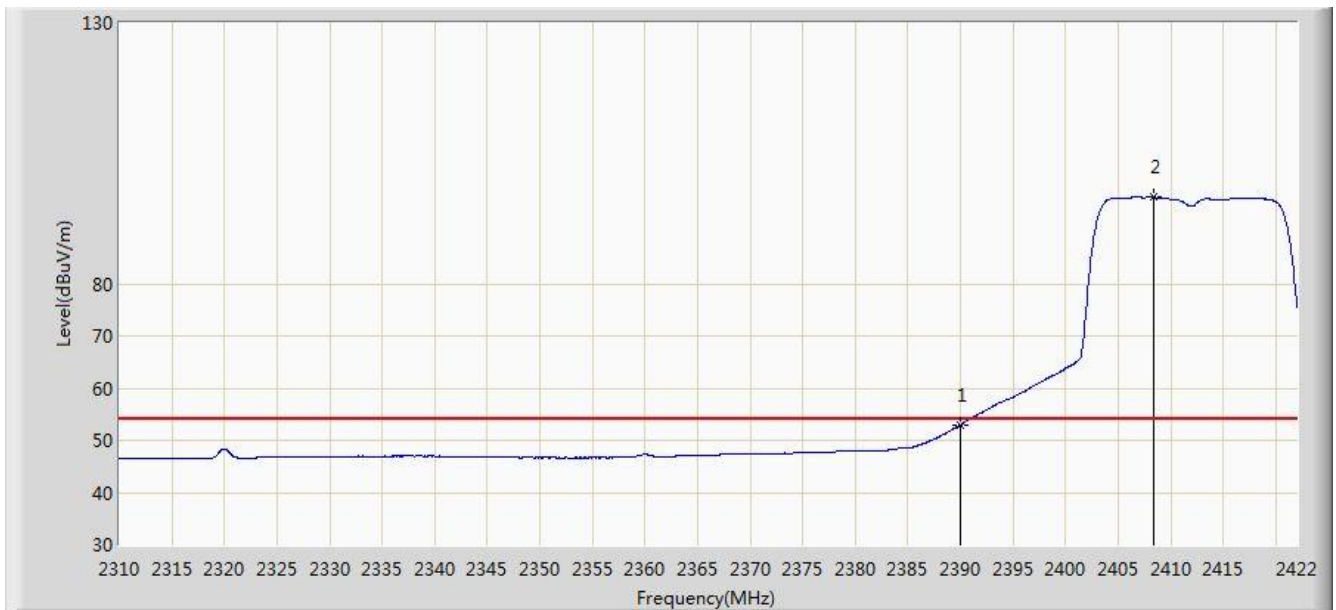


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 52.943                 | 20.665               | -1.057          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2408.336        | 96.635                 | 64.382               | N/A             | N/A            | 32.253      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:55 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1+2 |                          |

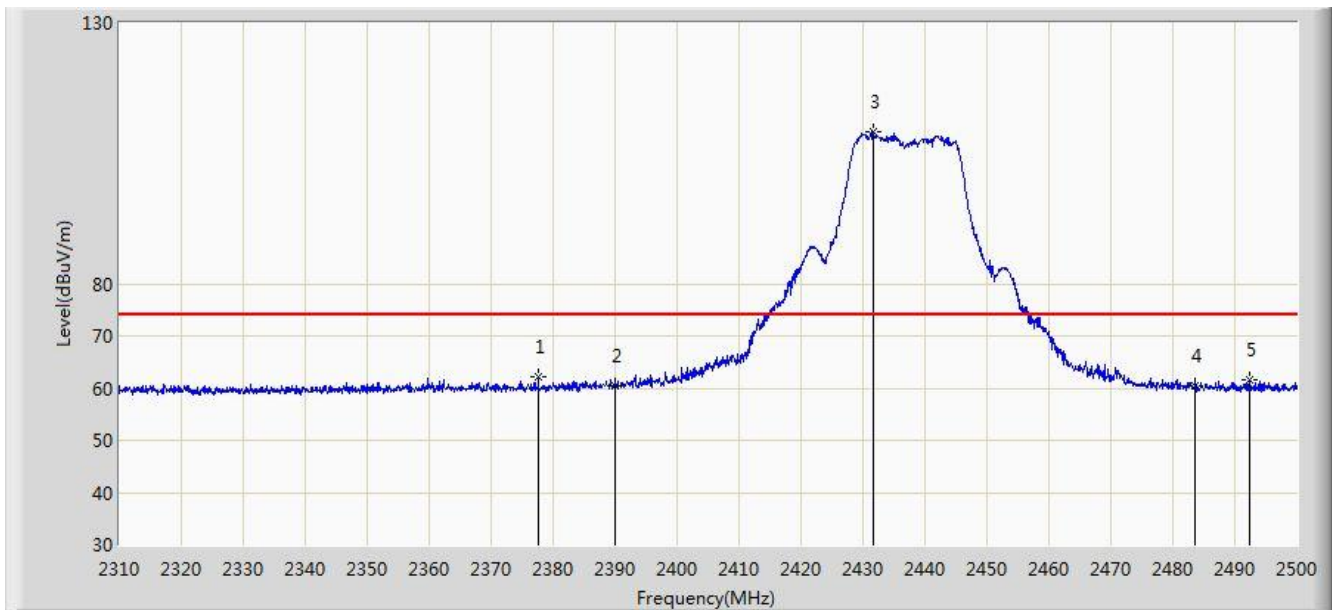


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2377.640        | 62.091                 | 29.882               | -11.909         | 74.000         | 32.209      | PK   |
| 2  |      |      | 2390.000        | 60.472                 | 28.194               | -13.528         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2431.695        | 109.050                | 76.878               | N/A             | N/A            | 32.172      | PK   |
| 4  |      |      | 2483.500        | 60.367                 | 28.086               | -13.633         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2492.495        | 61.603                 | 29.291               | -12.397         | 74.000         | 32.312      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:58 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1+2 |                          |

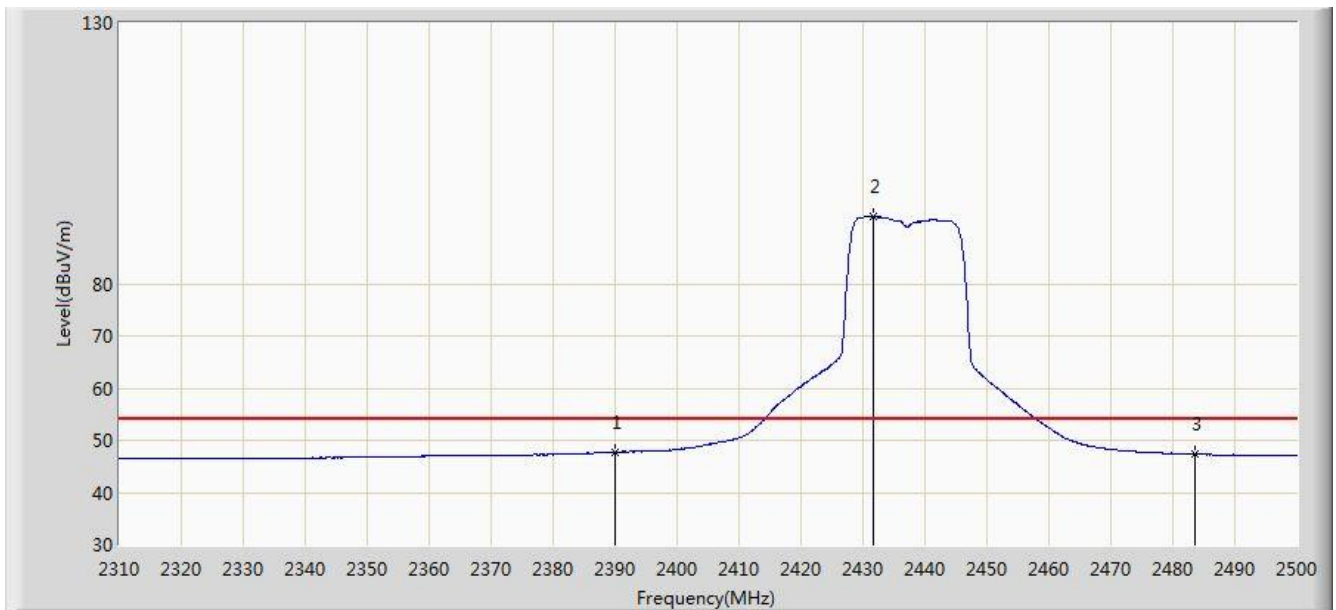


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.769                 | 15.491               | -6.231          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2431.600        | 93.012                 | 60.840               | N/A             | N/A            | 32.172      | AV   |
| 3  |      |      | 2483.500        | 47.339                 | 15.058               | -6.661          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:53 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1+2 |                          |

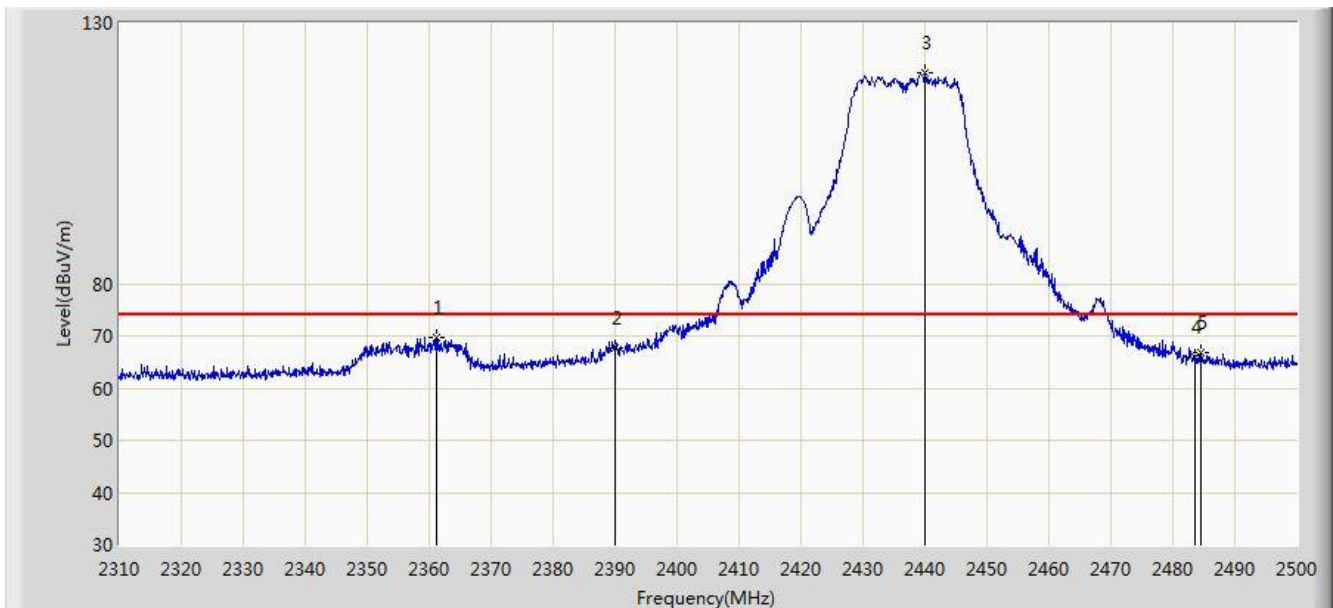


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2361.300        | 69.838                 | 37.591               | -4.162          | 74.000         | 32.246      | PK   |
| 2  |      |      | 2390.000        | 67.611                 | 35.333               | -6.389          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2440.055        | 120.325                | 88.155               | N/A             | N/A            | 32.171      | PK   |
| 4  |      |      | 2483.500        | 65.829                 | 33.548               | -8.171          | 74.000         | 32.282      | PK   |
| 5  |      |      | 2484.420        | 66.730                 | 34.446               | -7.270          | 74.000         | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 10:53 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Chain 0+1+2 |                          |

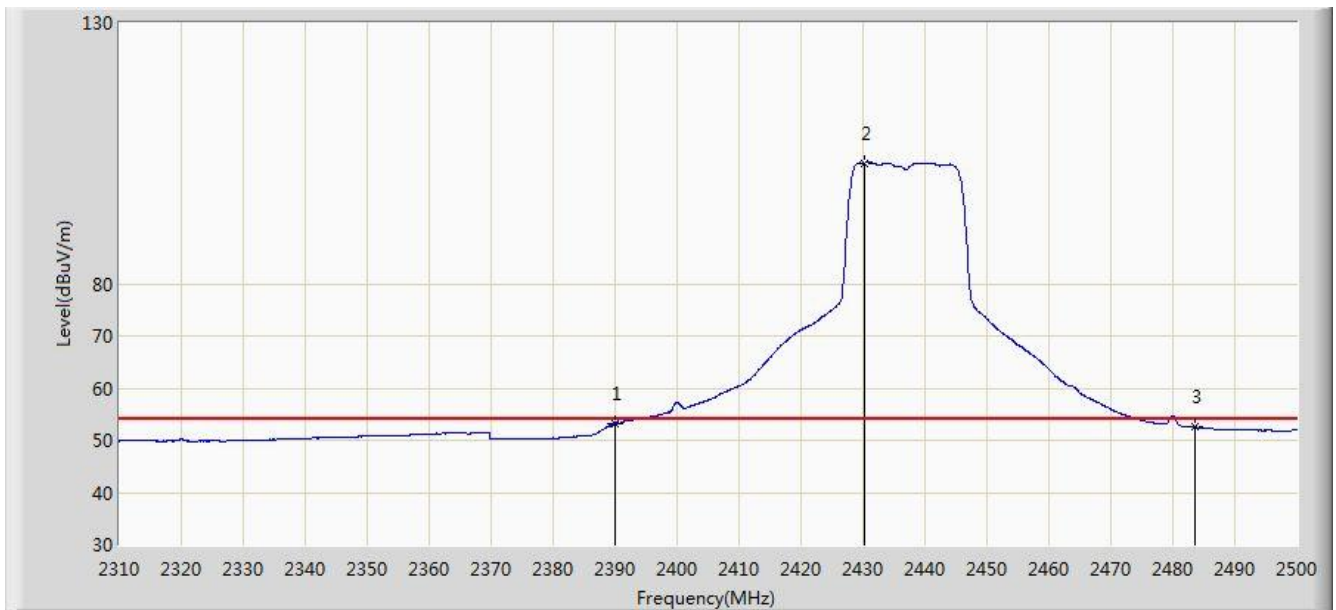


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.246                 | 20.968               | -0.754          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2430.175        | 103.185                | 71.012               | N/A             | N/A            | 32.173      | AV   |
| 3  |      |      | 2483.500        | 52.516                 | 20.235               | -1.484          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:17 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1+2 |                          |

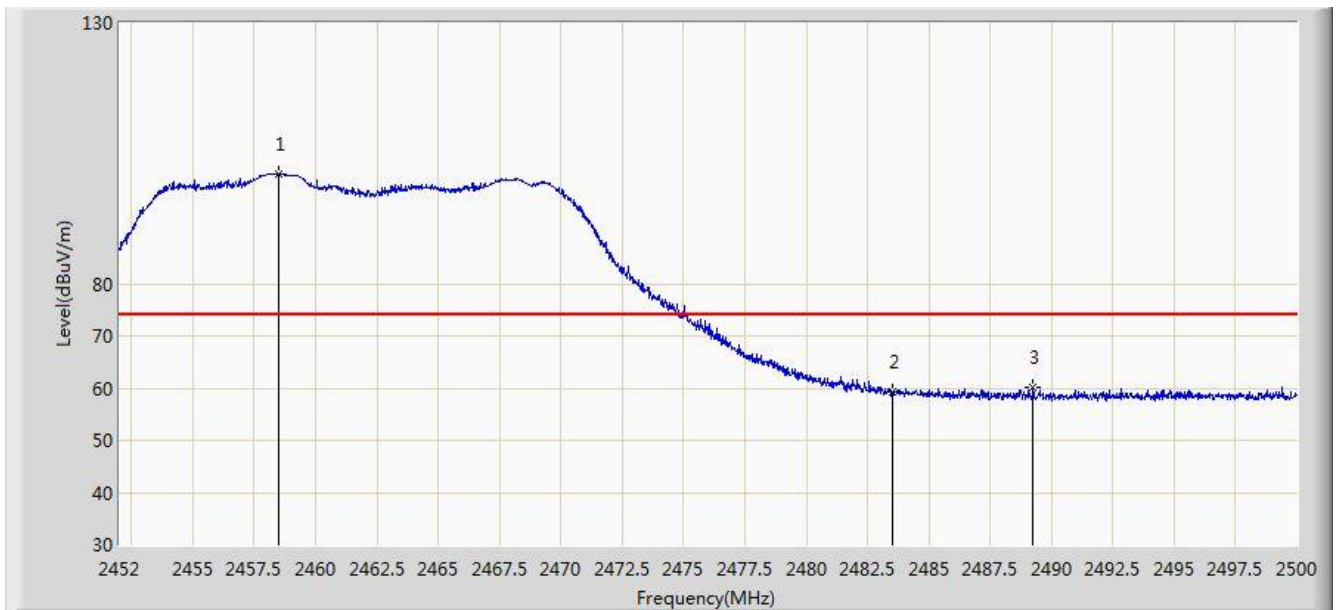


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2458.480        | 101.065                | 68.842               | N/A             | N/A            | 32.223      | PK   |
| 2  |      |      | 2483.500        | 59.218                 | 26.937               | -14.782         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2489.248        | 60.075                 | 27.774               | -13.925         | 74.000         | 32.301      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:30 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1+2 |                          |

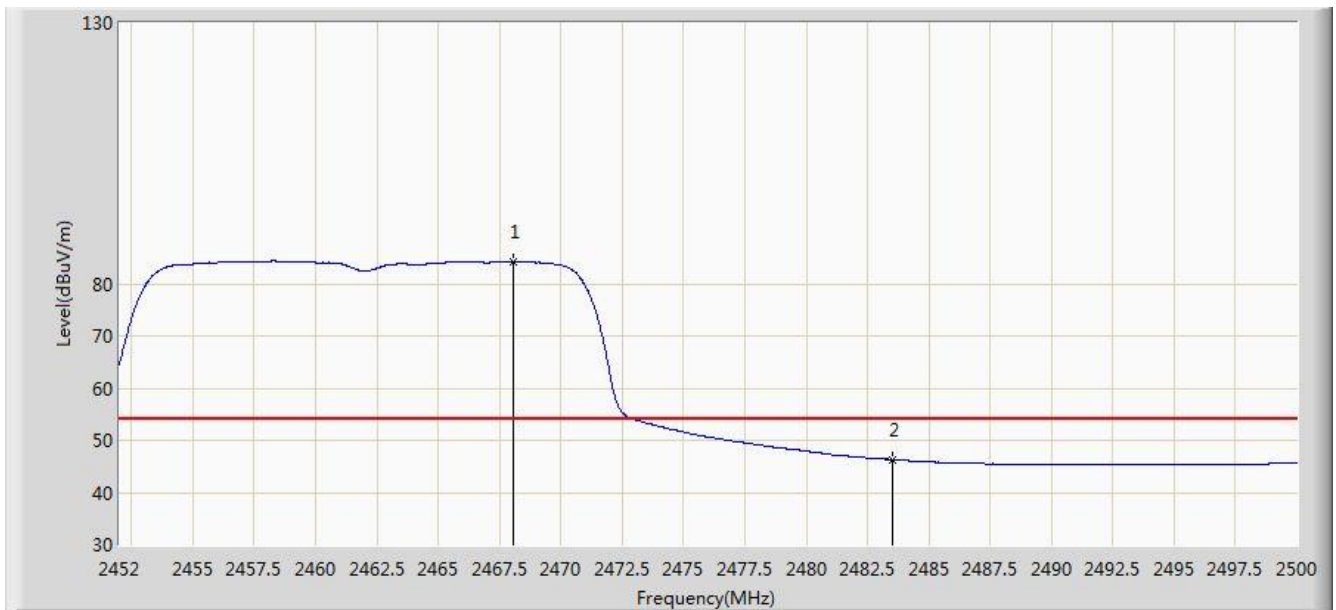


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2468.032        | 84.289                 | 52.042               | N/A             | N/A            | 32.247      | AV   |
| 2  |      |      | 2483.500        | 46.323                 | 14.042               | -7.677          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:15 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1+2 |                          |

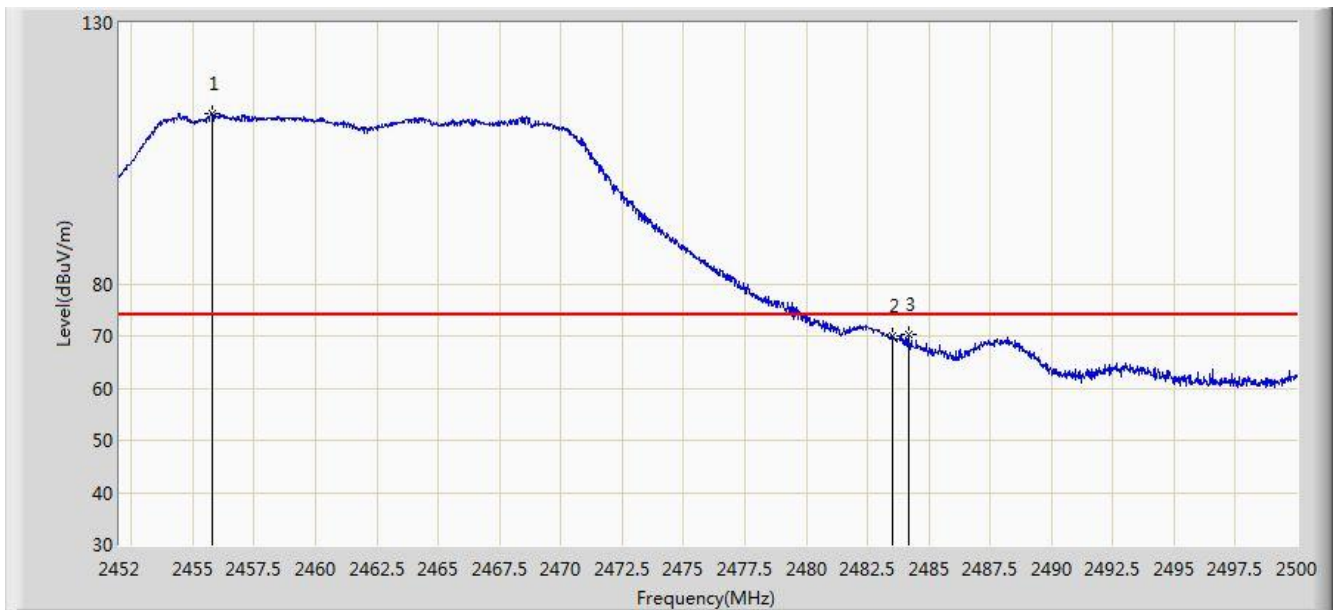


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2455.816        | 112.596                | 80.384               | N/A             | N/A            | 32.212      | PK   |
| 2  |      |      | 2483.500        | 69.949                 | 37.668               | -4.051          | 74.000         | 32.282      | PK   |
| 3  |      |      | 2484.160        | 70.422                 | 38.139               | -3.578          | 74.000         | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:00 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Chain 0+1+2 |                          |

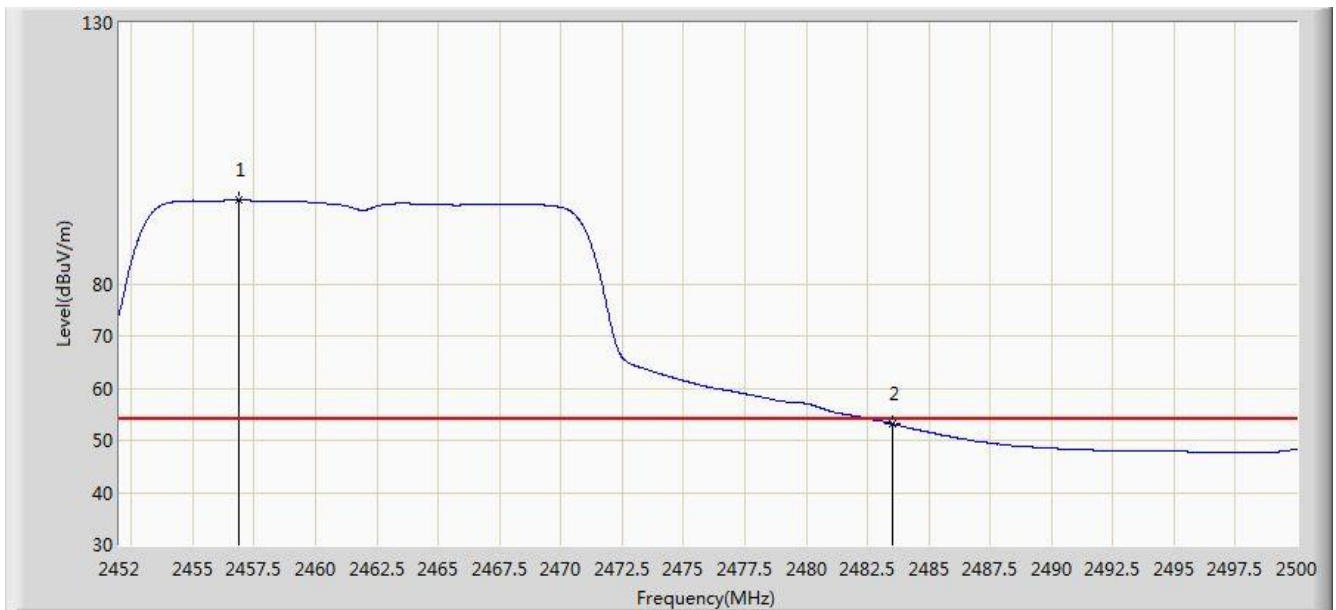


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2456.896        | 96.049                 | 63.833               | N/A             | N/A            | 32.217      | AV   |
| 2  |      |      | 2483.500        | 53.208                 | 20.927               | -0.792          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:41 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1+2 |                          |

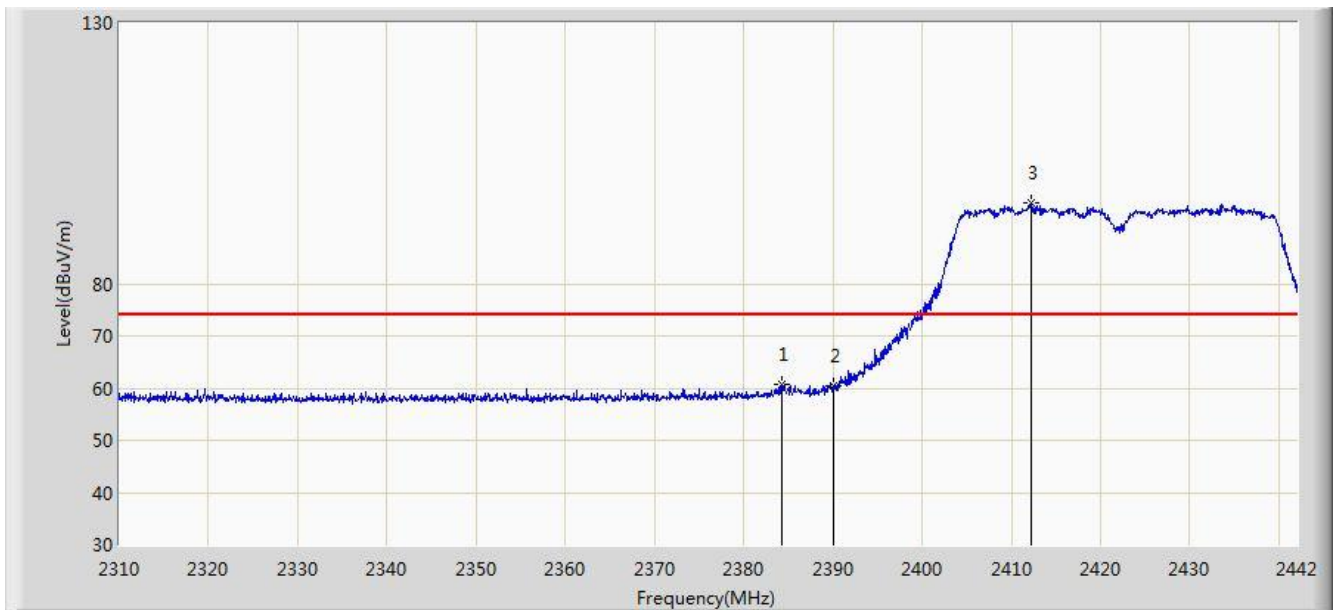


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2384.250        | 60.760                 | 28.514               | -13.240         | 74.000         | 32.246      | PK   |
| 2  |      |      | 2390.000        | 60.312                 | 28.034               | -13.688         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2412.300        | 95.479                 | 63.241               | N/A             | N/A            | 32.238      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:44 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1+2 |                          |

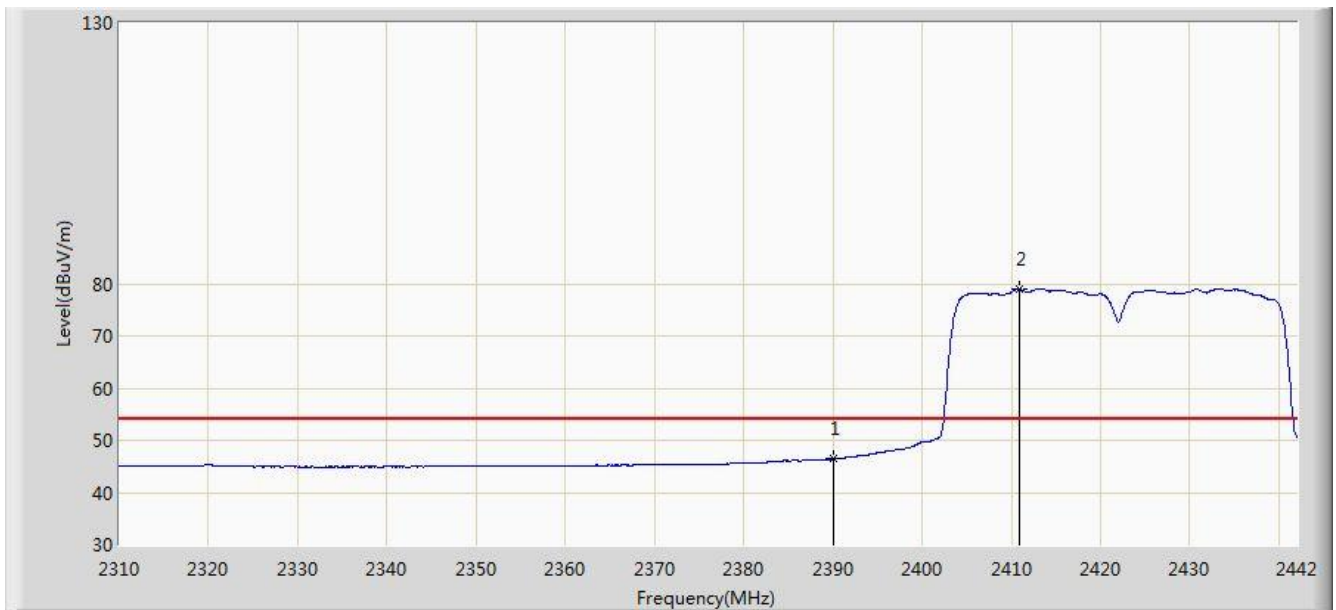


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.403                 | 14.125               | -7.597          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2410.914        | 78.966                 | 46.722               | N/A             | N/A            | 32.244      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:40 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1+2 |                          |

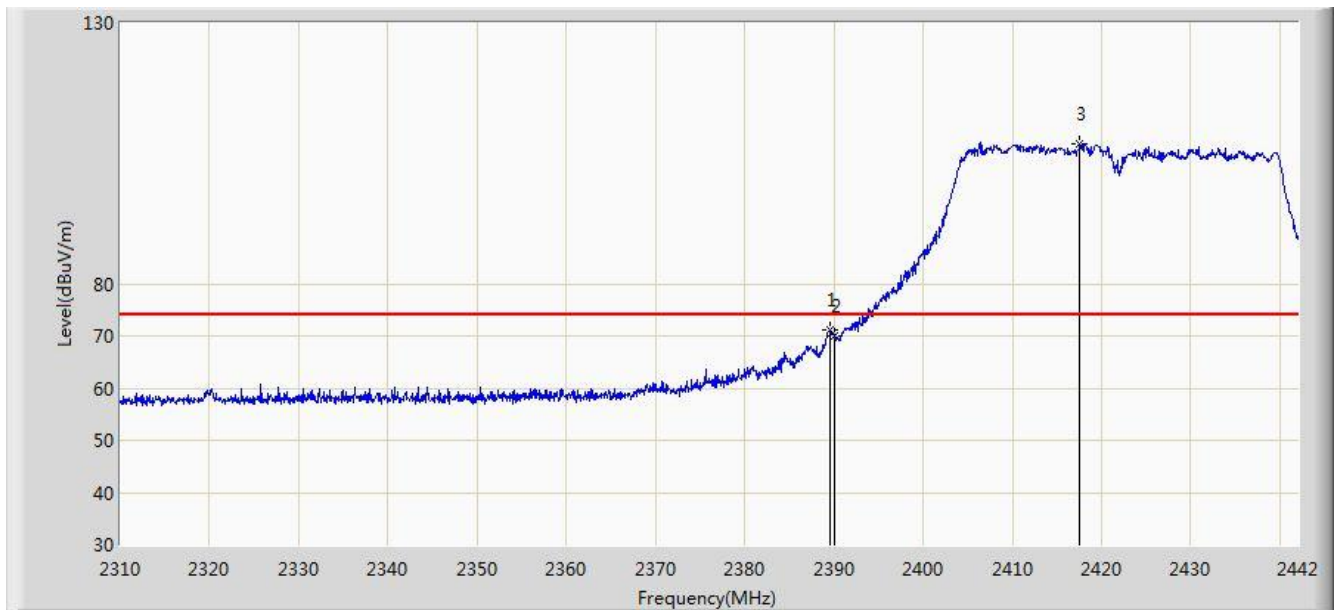


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.596        | 71.036                 | 38.760               | -2.964          | 74.000         | 32.276      | PK   |
| 2  |      |      | 2390.000        | 70.127                 | 37.849               | -3.873          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2417.580        | 106.882                | 74.665               | N/A             | N/A            | 32.217      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:40 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Chain 0+1+2 |                          |

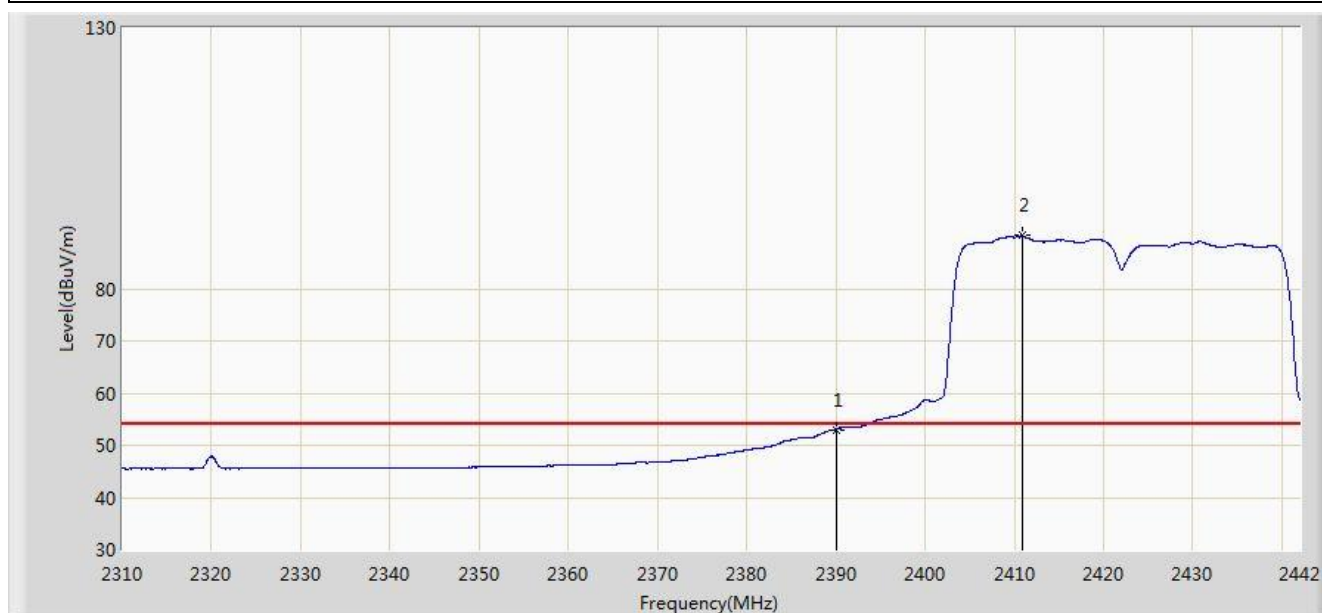


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.016                 | 20.738               | -0.984          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2410.914        | 90.160                 | 57.916               | N/A             | N/A            | 32.244      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:55 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1+2 |                          |

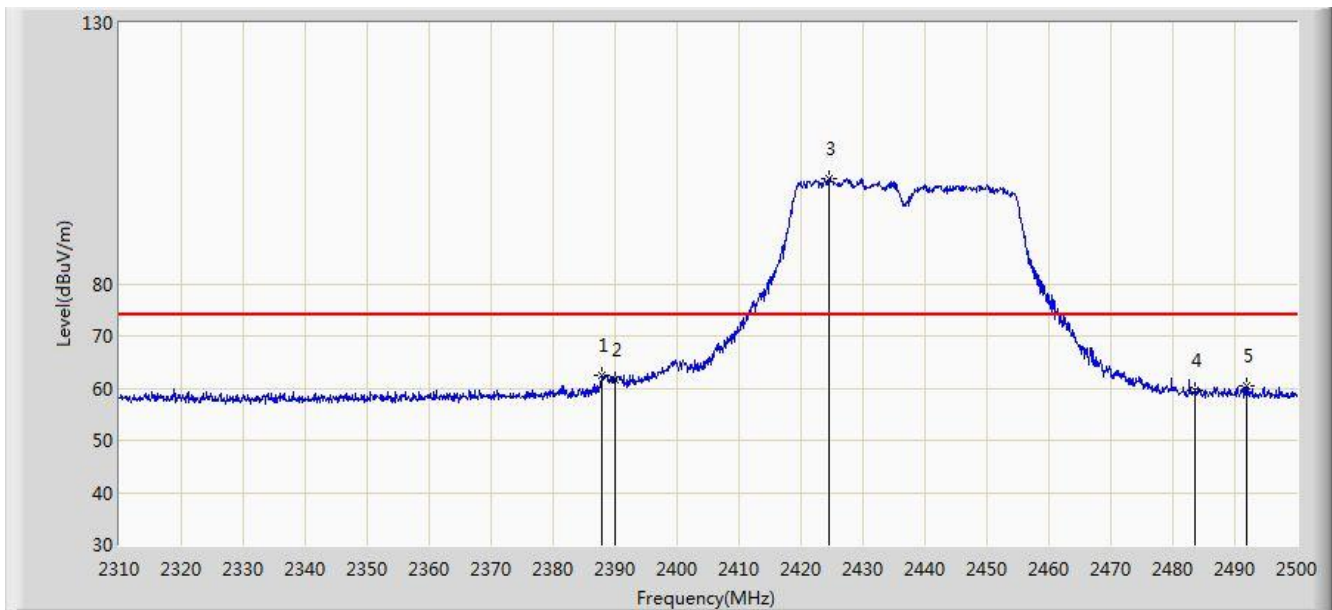


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2387.805        | 62.471                 | 30.205               | -11.529         | 74.000         | 32.266      | PK   |
| 2  |      |      | 2390.000        | 61.669                 | 29.391               | -12.331         | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2424.570        | 100.237                | 68.050               | N/A             | N/A            | 32.187      | PK   |
| 4  |      |      | 2483.500        | 59.522                 | 27.241               | -14.478         | 74.000         | 32.282      | PK   |
| 5  |      |      | 2491.830        | 60.420                 | 28.110               | -13.580         | 74.000         | 32.310      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:58 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1+2 |                          |

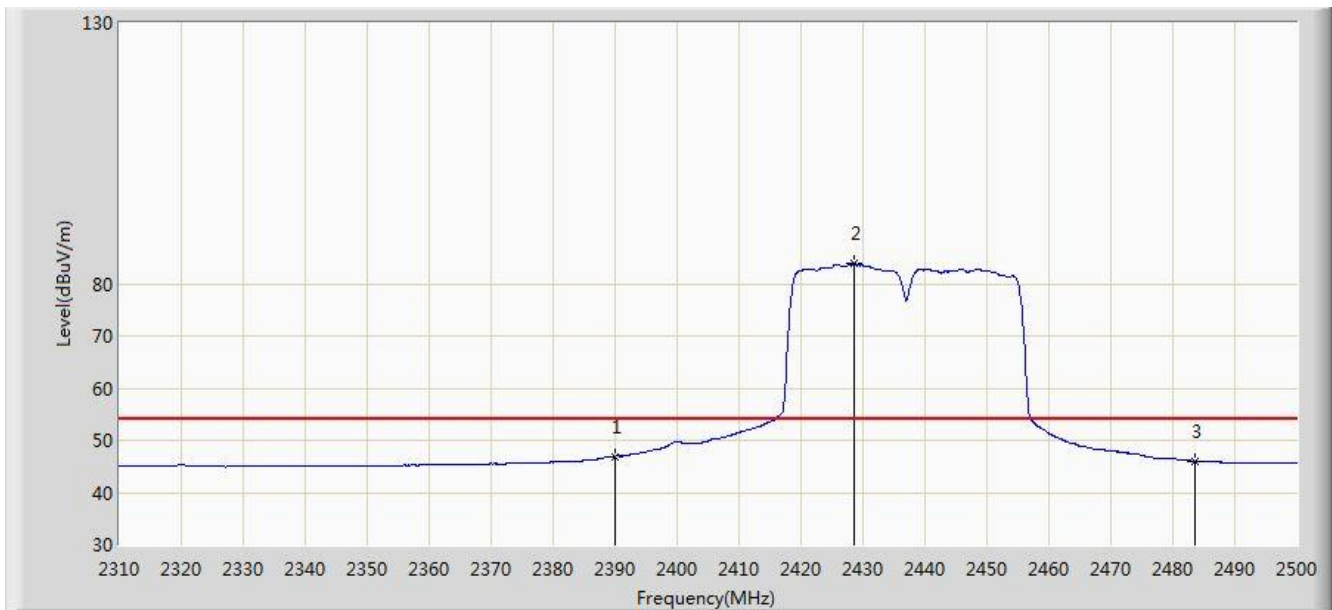


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.930                 | 14.652               | -7.070          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2428.465        | 83.840                 | 51.667               | N/A             | N/A            | 32.173      | AV   |
| 3  |      |      | 2483.500        | 46.023                 | 13.742               | -7.977          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:54 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1+2 |                          |

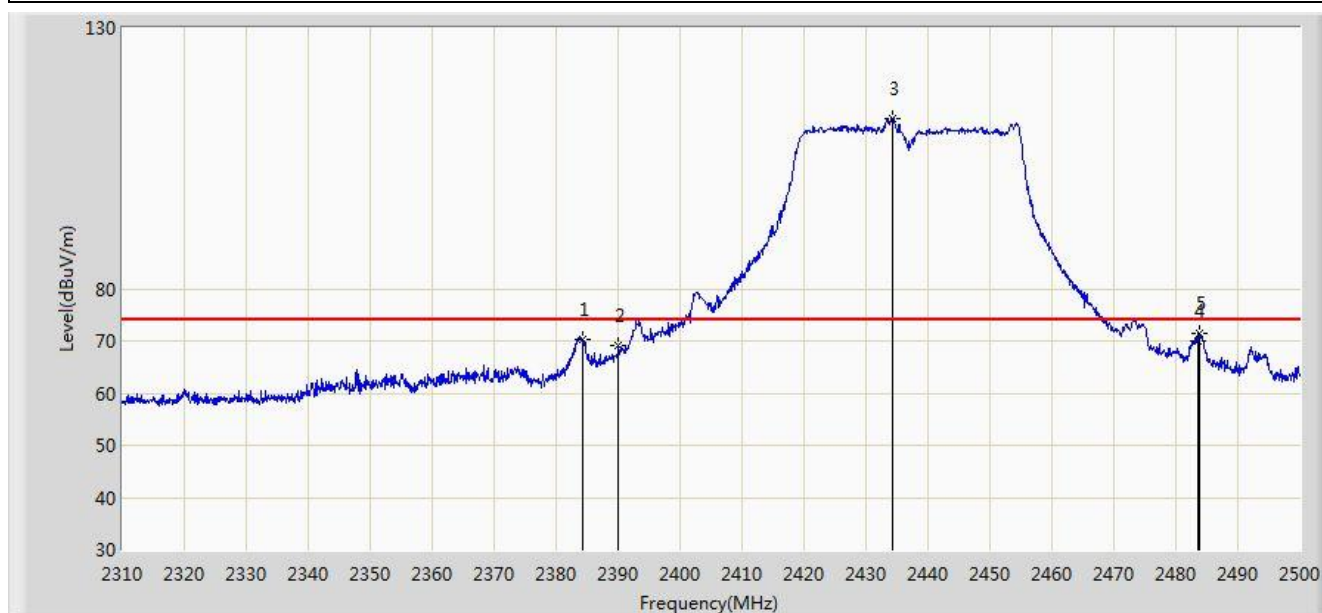


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2384.195        | 70.370                 | 38.124               | -3.630          | 74.000         | 32.246      | PK   |
| 2  |      |      | 2390.000        | 69.086                 | 36.808               | -4.914          | 74.000         | 32.278      | PK   |
| 3  |      | *    | 2434.260        | 112.557                | 80.385               | N/A             | N/A            | 32.172      | PK   |
| 4  |      |      | 2483.500        | 70.076                 | 37.795               | -3.924          | 74.000         | 32.282      | PK   |
| 5  |      |      | 2483.755        | 71.362                 | 39.080               | -2.638          | 74.000         | 32.282      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 11:52 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Vertical       |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Chain 0+1+2 |                          |

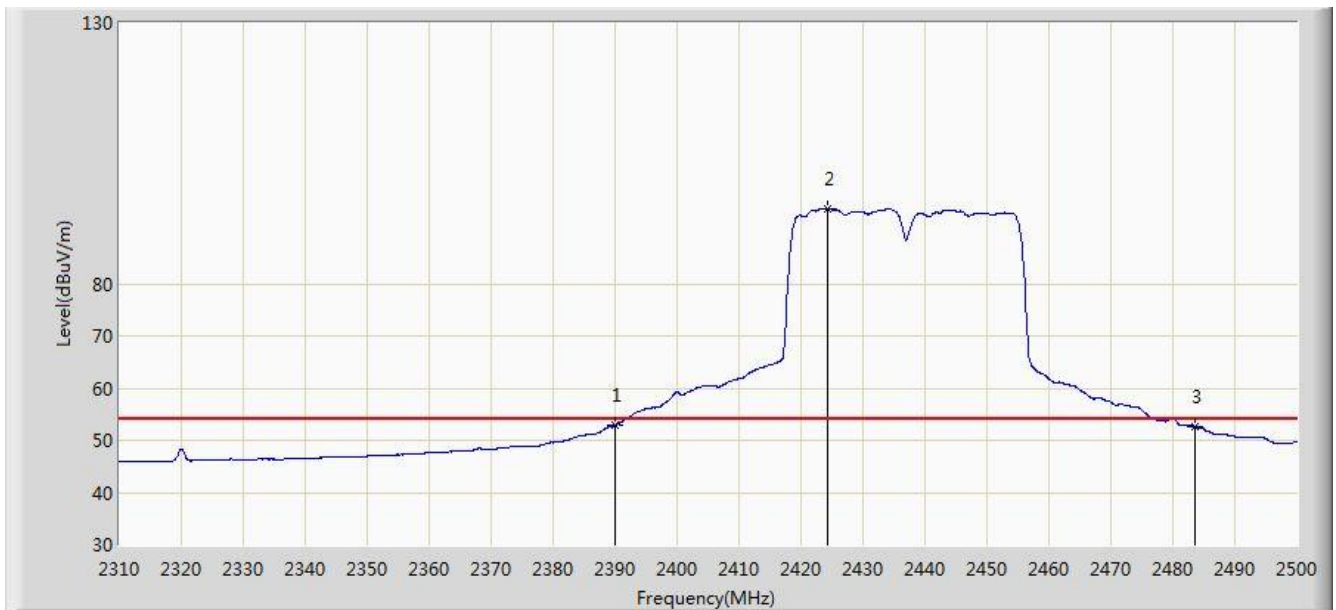


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 52.978                 | 20.700               | -1.022          | 54.000         | 32.278      | AV   |
| 2  |      | *    | 2424.190        | 94.444                 | 62.255               | N/A             | N/A            | 32.189      | AV   |
| 3  |      |      | 2483.500        | 52.604                 | 20.323               | -1.396          | 54.000         | 32.282      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                    |                          |
|--------------------------------------------------------------------|--------------------------|
| Site: AC2                                                          | Time: 2016/11/15 - 13:21 |
| Limit: FCC_Part15.209_RE(3m)                                       | Engineer: Snake Ni       |
| Probe: BBHA9120D_1-18GHz                                           | Polarity: Horizontal     |
| EUT: WIRELESS ACCESS POINT                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Chain 0+1+2 |                          |

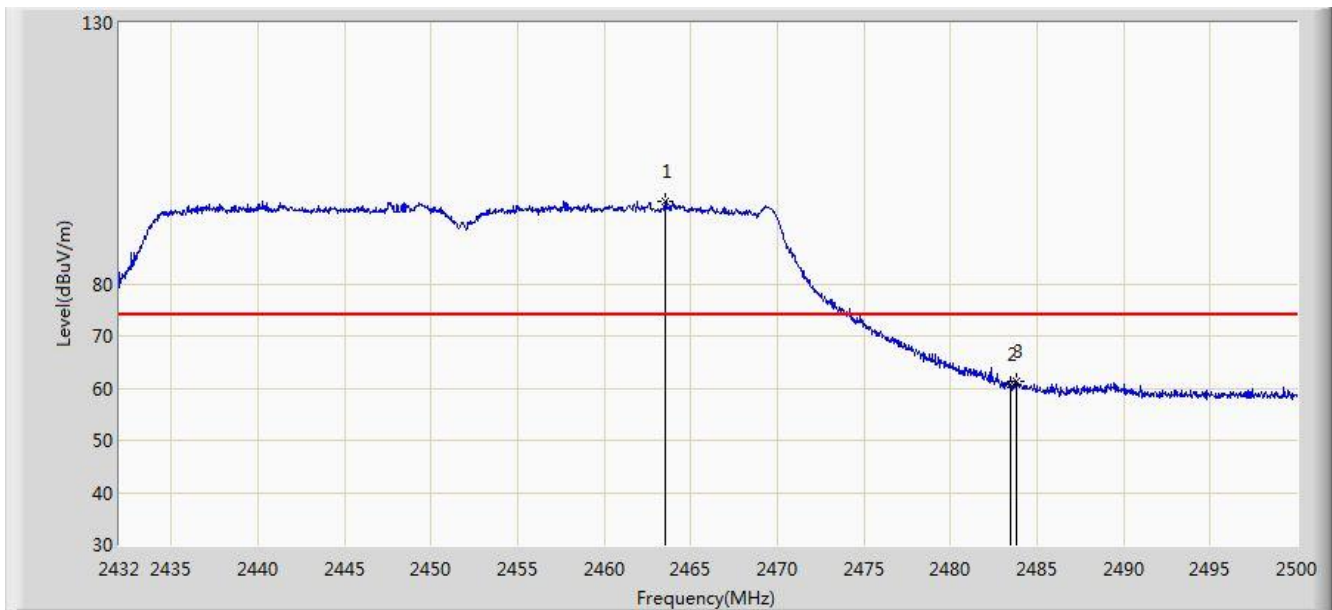

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2463.518        | 95.787                 | 63.548               | N/A             | N/A            | 32.240      | PK   |
| 2  |      |      | 2483.500        | 60.645                 | 28.364               | -13.355         | 74.000         | 32.282      | PK   |
| 3  |      |      | 2483.782        | 61.366                 | 29.084               | -12.634         | 74.000         | 32.282      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)