



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n/ax

FCC ID: TK4WPQ872

APPLICANT: Compex Systems Pte Ltd.

Application Type: Certification

Product: Wireless Access Point

Model No.: WPQ872, WPQ872-I, WPQ872HV, WPQ872LV

Brand Name: COMPEX

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 662911 D01v02r01

Test Date February 10 ~ July 30, 2020

Reviewed By:

Jame Yuan

(Jame Yuan)

Approved By:

Robin Wu

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2001RSU050-U2	Rev. 01	Initial Report	08-30-2020	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Feature of Equipment under Test	7
2.2. Product Specification Subjective to this Report	7
2.3. Working Frequencies for this report.....	8
2.4. Description of Available Antennas	8
2.5. Description of Antenna RF Port.....	9
2.6. Test Mode	9
2.7. Description of Test Configuration and Software.....	10
2.8. Duty Cycle.....	10
2.9. EMI Suppression Device(s)/Modifications.....	11
2.10. Labeling Requirements.....	11
3. DESCRIPTION of TEST.....	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions	12
3.3. Radiated Emissions.....	13
4. ANTENNA REQUIREMENTS.....	14
5. TEST EQUIPMENT CALIBRATION DATE.....	15
6. MEASUREMENT UNCERTAINTY	17
7. TEST RESULT	18
7.1. Summary.....	18
7.2. 6dB Bandwidth Measurement.....	19
7.2.1. Test Limit	19
7.2.2. Test Procedure Used	19
7.2.3. Test Setting.....	19
7.2.4. Test Setup	19
7.2.5. Test Result.....	20
7.3. Output Power Measurement.....	27
7.3.1. Test Limit	27
7.3.2. Test Procedure Used	27
7.3.3. Test Setting.....	27

7.3.4.	Test Setup	27
7.3.5.	Test Result.....	28
7.4.	Power Spectral Density Measurement.....	31
7.4.1.	Test Limit	31
7.4.2.	Test Procedure Used	31
7.4.3.	Test Setting.....	31
7.4.4.	Test Setup	32
7.4.5.	Test Result.....	33
7.5.	Conducted Band Edge and Out-of-Band Emissions	83
7.5.1.	Test Limit	83
7.5.2.	Test Procedure Used	83
7.5.3.	Test Setting.....	83
7.5.4.	Test Setup	84
7.5.5.	Test Result.....	85
7.6.	Radiated Spurious Emission Measurement	134
7.6.1.	Test Limit	134
7.6.2.	Test Procedure Used	134
7.6.3.	Test Setting.....	134
7.6.4.	Test Setup	136
7.6.5.	Test Result.....	137
7.7.	Radiated Restricted Band Edge Measurement.....	177
7.7.1.	Test Limit	177
7.7.2.	Test Procedure Used	178
7.7.3.	Test Setting.....	178
7.7.4.	Test Setup	179
7.7.5.	Test Result.....	180
7.8.	AC Conducted Emissions Measurement	276
7.8.1.	Test Limit	276
7.8.2.	Test Setup	276
7.8.3.	Test Result.....	277
8.	CONCLUSION	279
	Appendix A - Test Setup Photograph	280
	Appendix B - EUT Photograph.....	281

General Information

Applicant:	Compex Systems Pte Ltd.
Applicant Address:	No:9 Harrison Road, Harrison Industrial Building, #05-01, Singapore 369651
Manufacturer:	Compex Systems Pte Ltd.
Manufacturer Address:	No:9 Harrison Road, Harrison Industrial Building, #05-01, Singapore 369651
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Designation No. CN1166) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	Wireless Access Point
Model No.:	WPQ872, WPQ872-I, WPQ872HV, WPQ872LV
Serial No.:	400562741600251 (Configured External Wi-Fi Antenna) 400562741600252 (Configured Internal Wi-Fi Antenna)
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
Bluetooth Specification:	v5.0 (Single mode only for BLE)
Accessories	
Adapter:	MODEL: FSP040-DHMN2 INPUT: 100 - 240V ~ 50/60Hz, 1.2A. OUTPUT: DC 12.0V, 3.4A
POE:	MODEL: PD-9001GR/AT/AC INPUT: 100 - 240V ~ 50/60Hz, 0.67A. OUTPUT: DC 55.0V, 0.6A

Note 1: This device has two antenna configurations, one is internal, another is external, detail see EUT photo and operation description.

Note 2: This device has two power supply, we select DC adapter for all RF testing.

Note 3: The difference of models is only for marketing different client.

Note 4: We selected WPQ872 to perform all RF testing.

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462 MHz 802.11n-HT40/ax-HE40: 2422 ~ 2452 MHz
Channel Number:	802.11b/g/n-HT20/ax-HE20: 11 802.11n-HT40/ax-HE40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDMA
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ax: up to 1147.1Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11b/g/n-HT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	T _x Paths	Max Antenna Gain (dBi)	CDD Directional Gain (dBi)	
				For Power	For PSD
External Antenna					
Dipole	2.4	4	2.3	2.3	8.32
	5	4	5.0	5.0	11.02
Internal Antenna					
Panel Antenna	2.4	4	6.0	6.0	12.02
	5	4	7.0	7.0	13.02
Bluetooth Antenna					
FPC	2.4	1	3		

Note:

The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 4$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.




- For power spectral density (PSD) measurements on all devices,

$$\text{Array Gain} = 10 \log (N_{ANT} / N_{SS}) \text{ dB} = 6.02;$$

- For power measurements on IEEE 802.11 devices,

$$\text{Array Gain} = 0 \text{ dB for } N_{ANT} \leq 4;$$

2.5. Description of Antenna RF Port

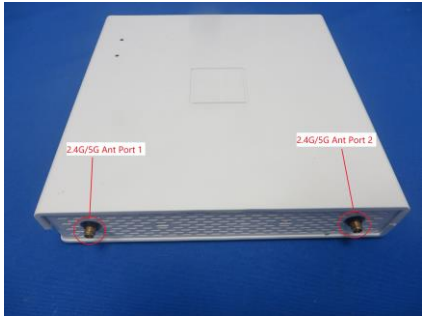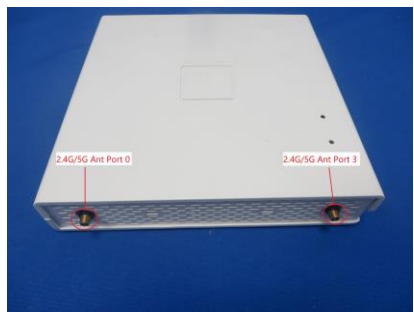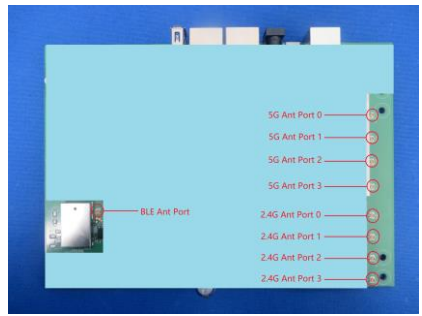
Antenna RF Port									
Software Control Port	2.4GHz RF Port				5GHz RF Port				BLE
	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 3	Ant
External Antenna							Internal Antenna		
									

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)
	Mode 5: Transmit by 802.11ax-HE20 (MCS0)
	Mode 6: Transmit by 802.11ax-HE40 (MCS0)

2.7. Description of Test Configuration and Software

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

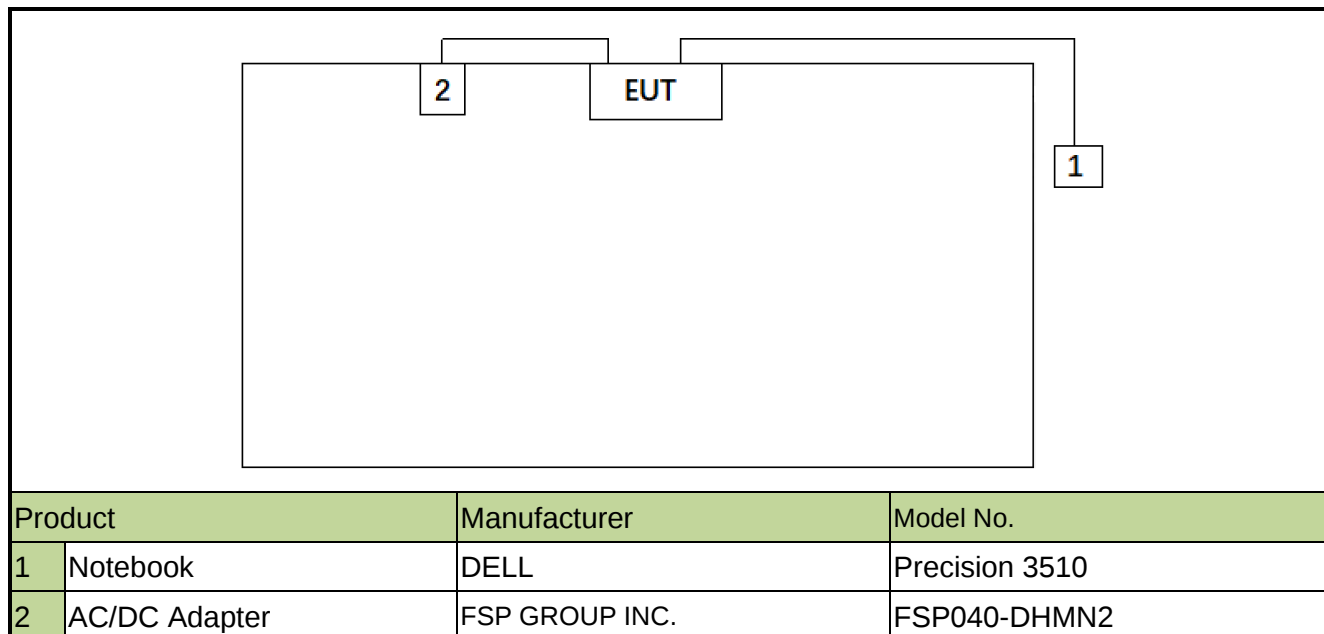

Note 1: The test utility software used during testing was “QRCT”, and the version was 4.0.00123.

Note 2: Detail power setting refer to operation description.

2.8. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Transmission Duration (ms)	Duty Cycle (%)
802.11b	1.54	72.58
802.11g	1.97	93.59
802.11n-HT20	16.78	78.30
802.11n-HT40	11.11	89.67
802.11ax-HE20	22.67	95.25
802.11ax-HE40	5.54	95.77

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedure described in the document titled “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices” (ANSI C63.10-2013) was used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50 μ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

For Internal Antenna Configuration

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

For External Antenna Configuration

- The antenna of the device uses one **unique reversed** SMA connector.

Conclusion:

This unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2021/01/18
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2021/06/11
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/04/03
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/29
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/29
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/10
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/17
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/06/11
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/06/11
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Attenuator	MVE	6dB	MRTSUE06534	N/A	N/A
Attenuator	MVE	10dB	MRTSUE06543	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Attenuator	MVE	3dB	MRTSUE06529	N/A	N/A
Attenuator	MVE	3dB	MRTSUE06532	N/A	N/A
Attenuator	MVE	10dB	MRTSUE06540	N/A	N/A
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 1\text{Watt}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\leq 30\text{dBc}$ (Average)		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure Used

ANSI C63.10-2013 Section 11.8.2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

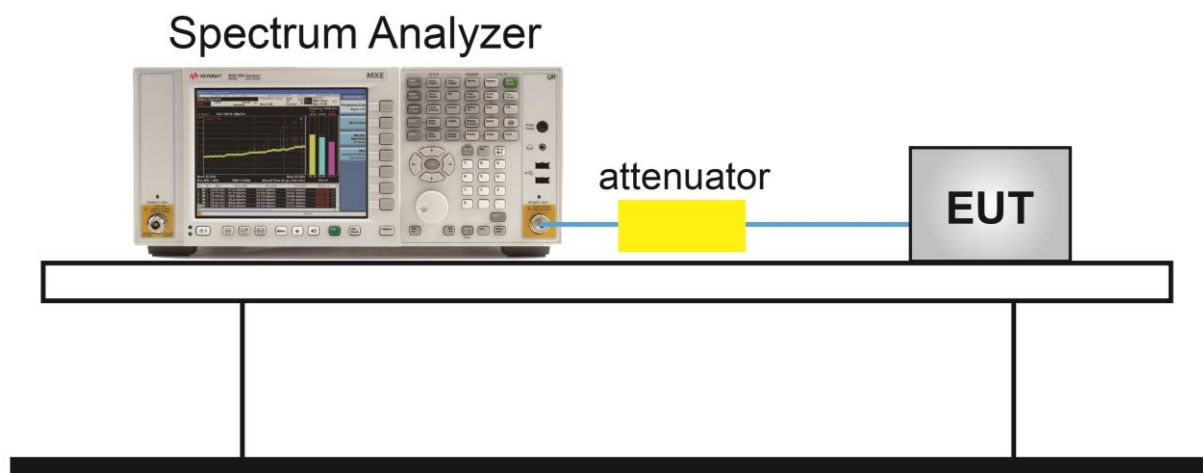


7.2.5. Test Result

Product	Wireless Access Point	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2020/02/21
Test Item	6dB Bandwidth		


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 3 / Ant 0 + 1 + 2 + 3						
11b	1Mbps	01	2412	8.07	≥ 0.5	Pass
11b	1Mbps	06	2437	8.07	≥ 0.5	Pass
11b	1Mbps	11	2462	8.07	≥ 0.5	Pass
11g	6Mbps	01	2412	16.34	≥ 0.5	Pass
11g	6Mbps	06	2437	16.34	≥ 0.5	Pass
11g	6Mbps	11	2462	16.34	≥ 0.5	Pass
11n-HT20	MCS0	01	2412	17.57	≥ 0.5	Pass
11n-HT20	MCS0	06	2437	17.57	≥ 0.5	Pass
11n-HT20	MCS0	11	2462	17.56	≥ 0.5	Pass
11n-HT40	MCS0	03	2422	35.83	≥ 0.5	Pass
11n-HT40	MCS0	06	2437	35.74	≥ 0.5	Pass
11n-HT40	MCS0	09	2452	36.05	≥ 0.5	Pass
11ax-HE20	MCS0	01	2412	18.98	≥ 0.5	Pass
11ax-HE20	MCS0	06	2437	18.96	≥ 0.5	Pass
11ax-HE20	MCS0	11	2462	18.91	≥ 0.5	Pass
11ax-HE40	MCS0	03	2422	37.99	≥ 0.5	Pass
11ax-HE40	MCS0	06	2437	38.03	≥ 0.5	Pass
11ax-HE40	MCS0	09	2452	38.04	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

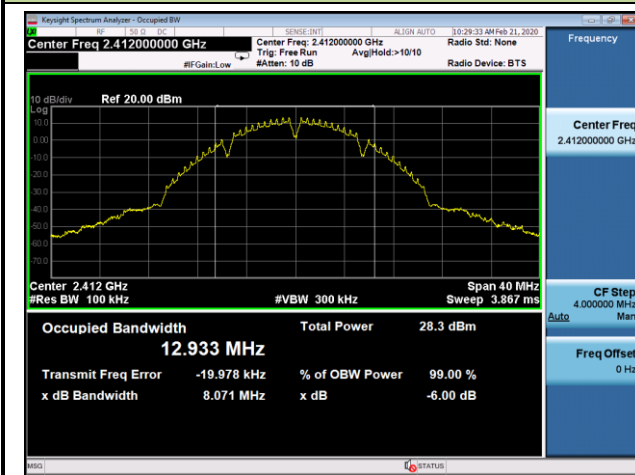

Channel 06 (2437MHz)

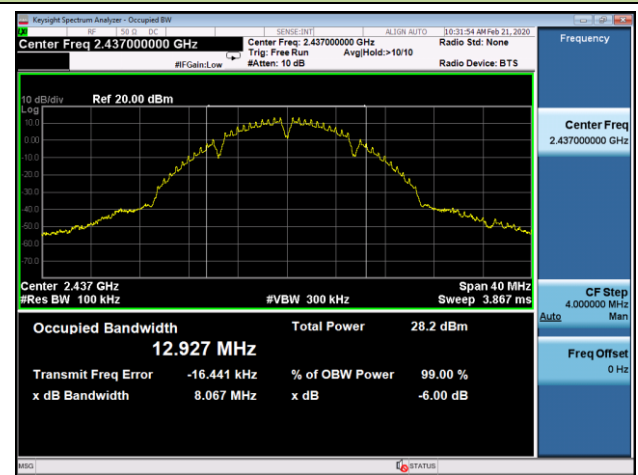


Channel 11 (2462MHz)

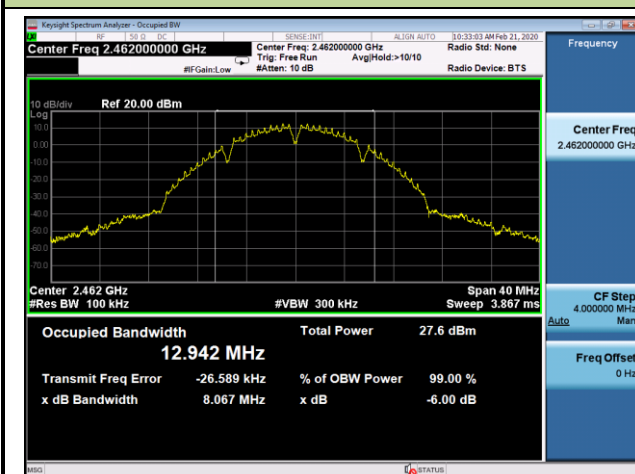


802.11g 6dB Bandwidth - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

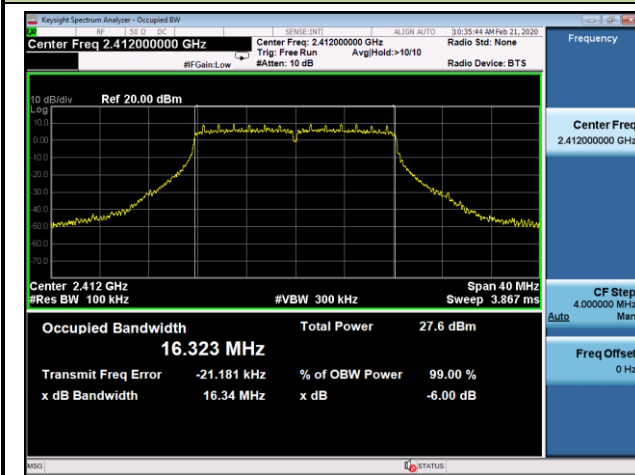

Channel 06 (2437MHz)

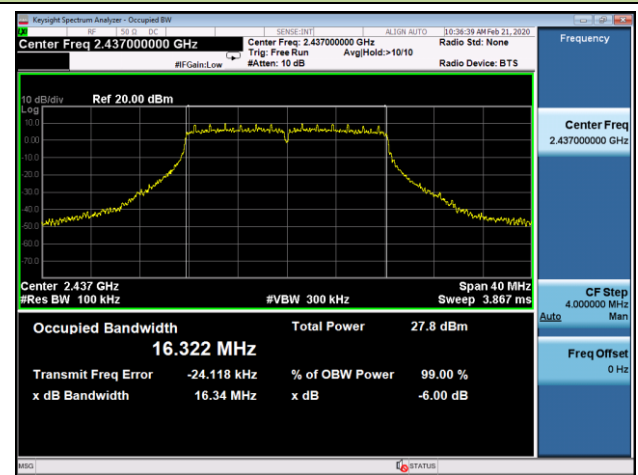


Channel 11 (2462MHz)

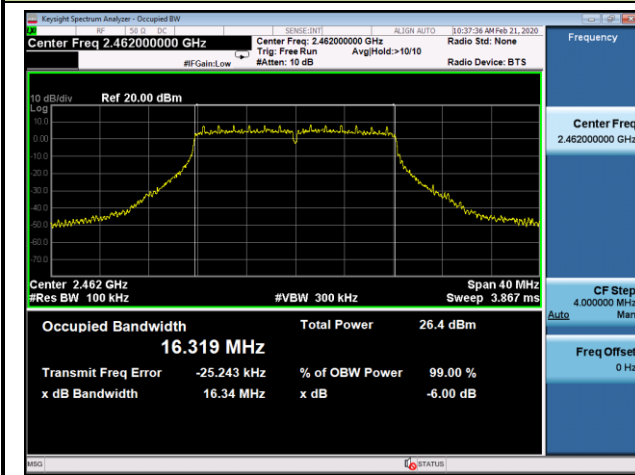


802.11n-HT20 6dB Bandwidth - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

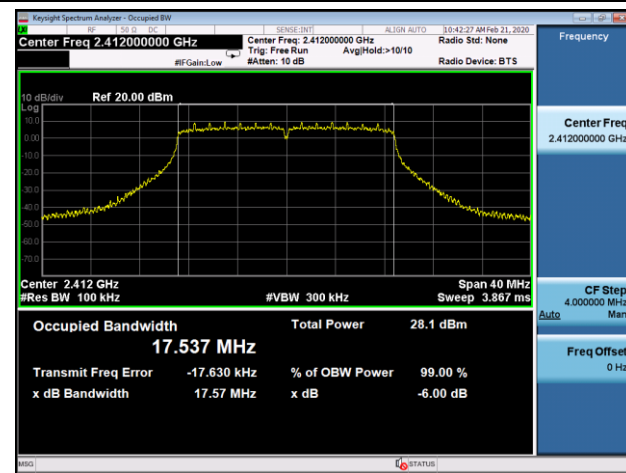

Channel 06 (2437MHz)

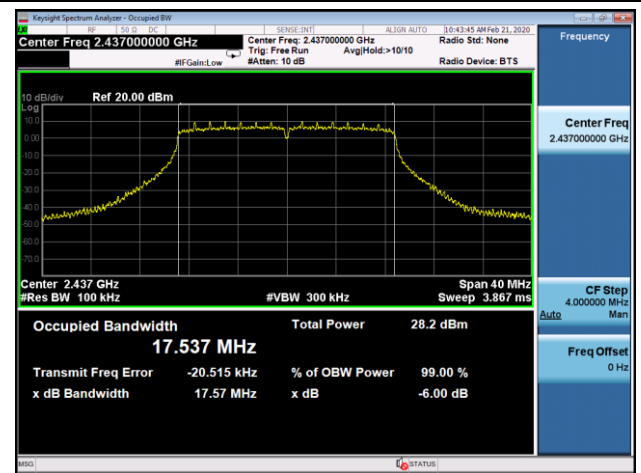


Channel 11 (2462MHz)

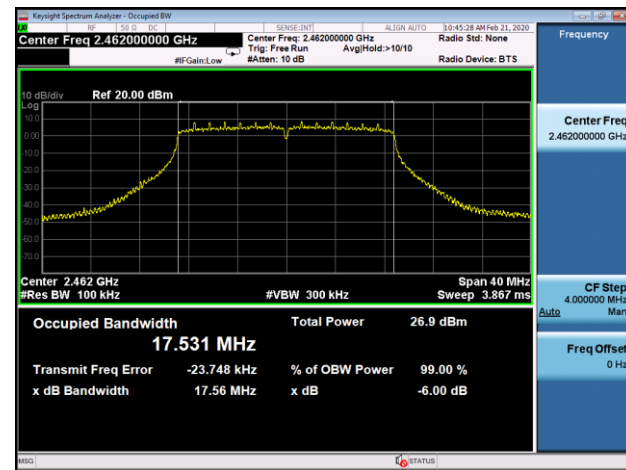


802.11n-HT40 6dB Bandwidth - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 03 (2422MHz)

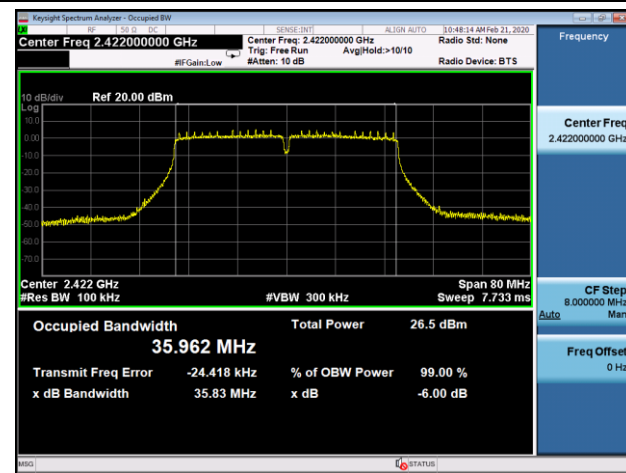

Channel 06 (2437MHz)

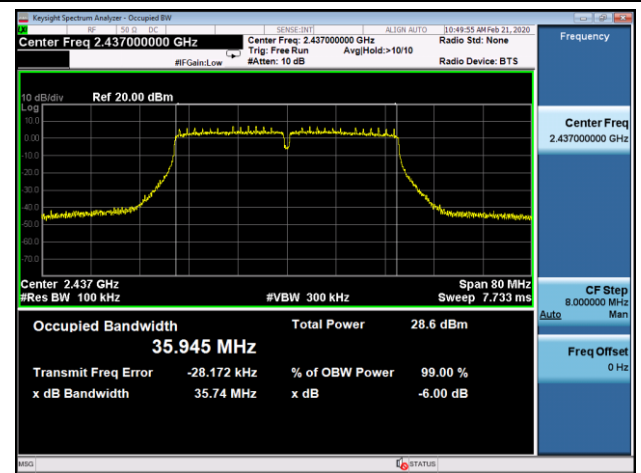


Channel 09 (2452MHz)

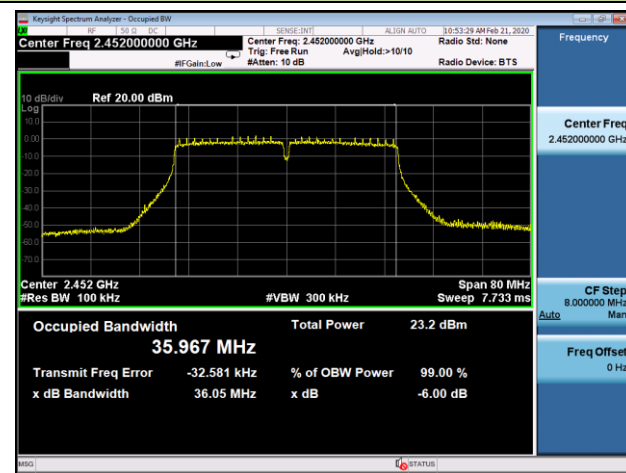


802.11ax-HE20 6dB Bandwidth - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

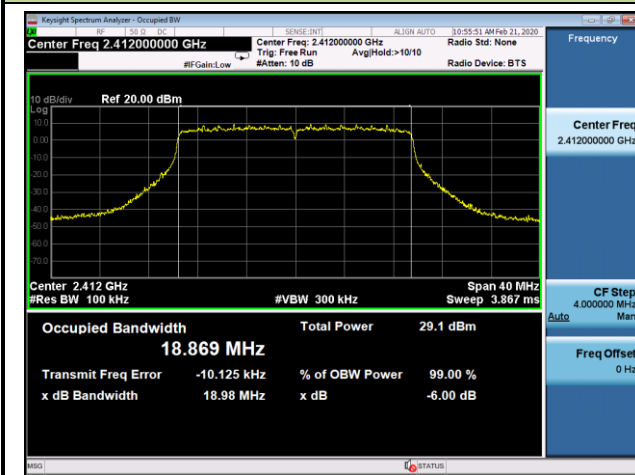

Channel 06 (2437MHz)

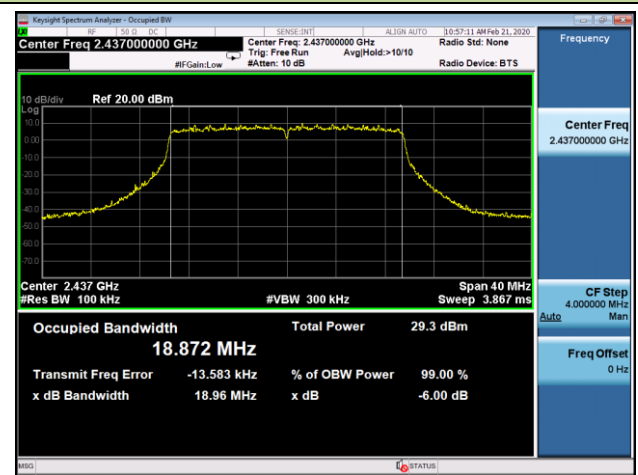


Channel 11 (2462MHz)

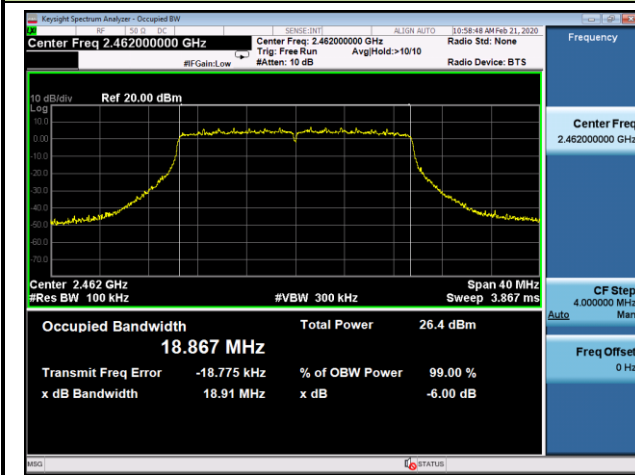


802.11ax-HE40 6dB Bandwidth - Ant 3 / Ant 0 + 1 + 2 + 3


Channel 03 (2422MHz)

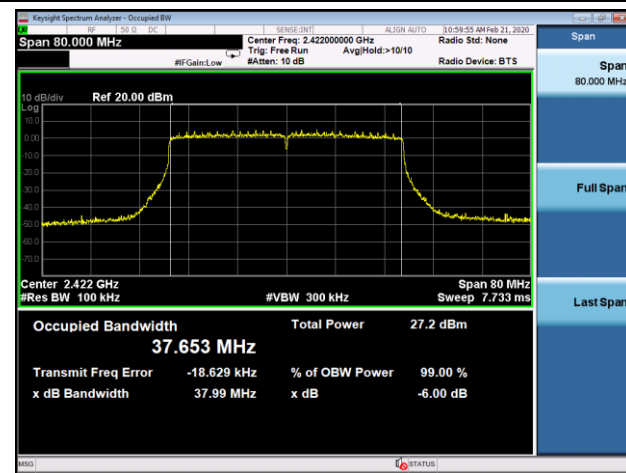

Channel 06 (2437MHz)

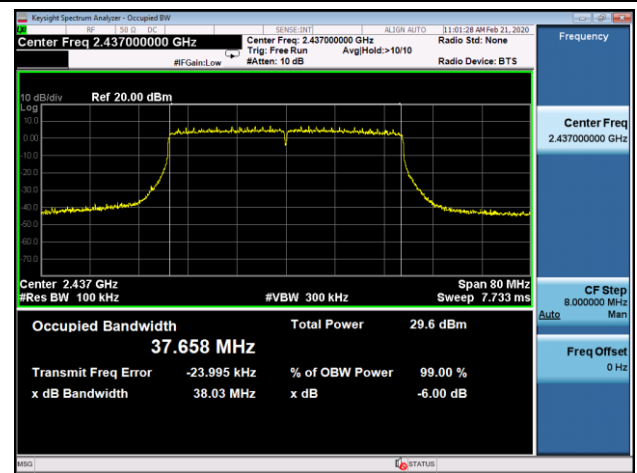

Channel 09 (2452MHz)

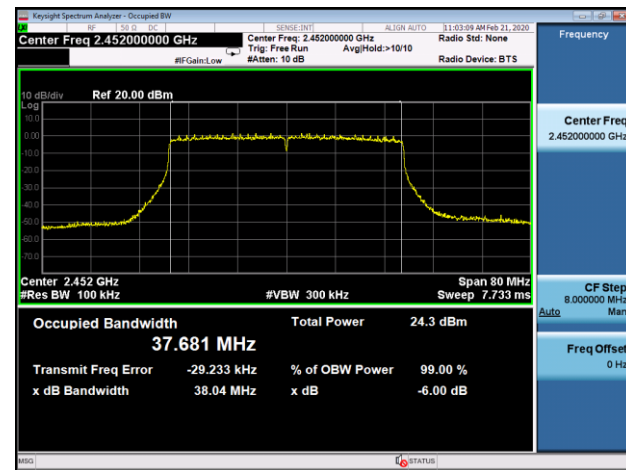

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

The conducted output power limit is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used


ANSI C63.10-2013 Section 11.9.2.3.2

7.3.3. Test Setting

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

7.3.4. Test Setup

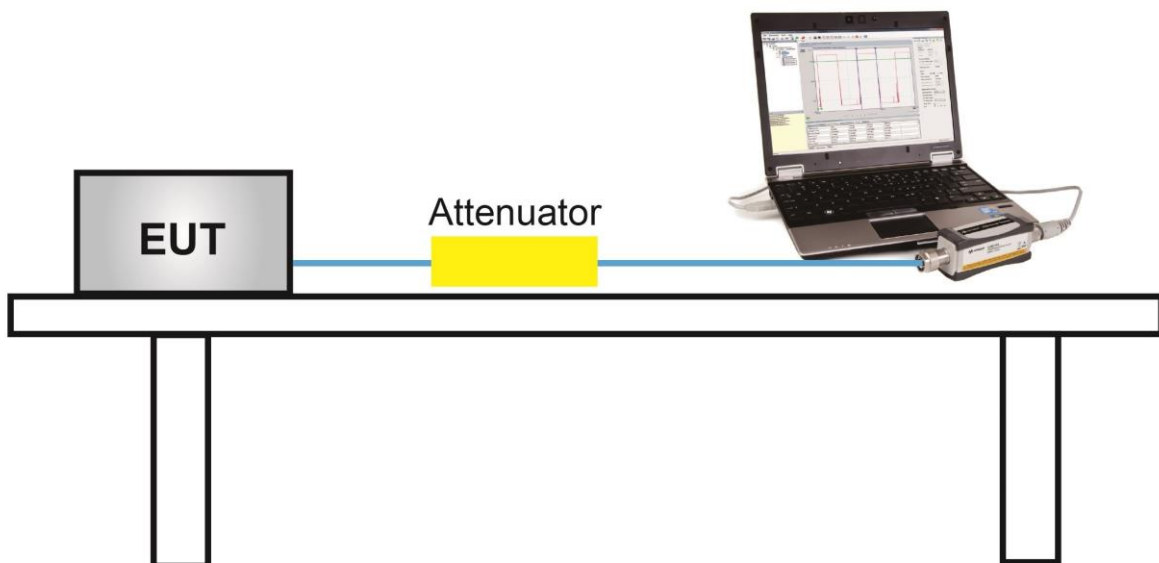

7.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (Gray marker) for final test of each channel.

Output power at various data rates

Ant 0 / Ant 0 + 1 + 2 + 3 - 802.11b - Channel 06 (2437MHz)			
Date Rate (Mbps)	1	5.5	11
Power (dBm)	17.59	17.23	17.11

Ant 0 / Ant 0 + 1 + 2 + 3 - 802.11g - Channel 06 (2437MHz)			
Date Rate (Mbps)	6	24	54
Power (dBm)	17.61	17.18	16.97

Ant 0 / Ant 0 + 1 + 2 + 3 - 802.11n-HT20 - Channel 06 (2437MHz)			
Date Rate (Mbps)	MCS0	MCS3	MCS7
Power (dBm)	17.94	17.69	17.45

Ant 0 / Ant 0 + 1 + 2 + 3 - 802.11n-HT40 - Channel 06 (2437MHz)			
Date Rate (Mbps)	MCS0	MCS3	MCS7
Power (dBm)	17.91	17.60	17.44

Ant 0 / Ant 0 + 1 + 2 + 3 - 802.11ax-HE20 - Channel 06 (2437MHz)			
Date Rate (Mbps)	MCS0	MCS5	MCS11
Power (dBm)	17.68	17.23	16.83

Ant 0 / Ant 0 + 1 + 2 + 3 - 802.11ax-HE40 - Channel 06 (2437MHz)			
Date Rate (Mbps)	MCS0	MCS5	MCS11
Power (dBm)	17.65	17.20	16.67

Product	Wireless Access Point	Temperature	23°C
Test Engineer	Snake Ni	Relative Humidity	51%
Test Site	TR3	Test Date	2020/02/10
Test Item	Output Power (Internal Antenna)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	1	2412	17.62	17.81	17.62	17.81	23.74	≤ 30	Pass
11b	1Mbps	6	2437	17.59	17.65	17.68	17.71	23.68	≤ 30	Pass
11b	1Mbps	11	2462	17.73	17.65	17.90	17.96	23.83	≤ 30	Pass
11g	6Mbps	1	2412	17.55	17.71	17.69	17.27	23.58	≤ 30	Pass
11g	6Mbps	6	2437	17.61	17.64	17.72	17.61	23.67	≤ 30	Pass
11g	6Mbps	11	2462	17.52	17.13	17.45	17.52	23.43	≤ 30	Pass
11n-HT20	MCS0	1	2412	18.16	17.92	17.95	17.56	23.92	≤ 30	Pass
11n-HT20	MCS0	6	2437	17.94	17.93	17.97	17.95	23.97	≤ 30	Pass
11n-HT20	MCS0	11	2462	17.83	17.52	17.82	17.81	23.77	≤ 30	Pass
11n-HT40	MCS0	3	2422	17.94	17.91	17.94	17.81	23.92	≤ 30	Pass
11n-HT40	MCS0	6	2437	17.91	17.94	17.96	17.94	23.96	≤ 30	Pass
11n-HT40	MCS0	9	2452	15.54	15.44	15.39	14.76	21.31	≤ 30	Pass
11ax-HE20	MCS0	1	2412	17.66	17.84	17.82	17.47	23.72	≤ 30	Pass
11ax-HE20	MCS0	6	2437	17.68	17.74	17.65	17.66	23.70	≤ 30	Pass
11ax-HE20	MCS0	11	2462	17.94	17.73	17.92	17.53	23.80	≤ 30	Pass
11ax-HE40	MCS0	3	2422	17.47	17.64	17.59	17.38	23.54	≤ 30	Pass
11ax-HE40	MCS0	6	2437	17.65	17.75	17.72	17.59	23.70	≤ 30	Pass
11ax-HE40	MCS0	9	2452	15.64	15.55	15.11	14.37	21.22	≤ 30	Pass

Note: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$ (dBm)

Product	Wireless Access Point	Temperature	23°C
Test Engineer	Snake Ni	Relative Humidity	51%
Test Site	TR3	Test Date	2020/02/10
Test Item	Output Power (External Antenna)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	1	2412	17.83	17.97	17.98	17.78	23.91	≤ 30	Pass
11b	1Mbps	6	2437	17.97	17.85	17.67	17.76	23.83	≤ 30	Pass
11b	1Mbps	11	2462	17.84	17.38	17.55	18.21	23.78	≤ 30	Pass
11g	6Mbps	1	2412	17.67	17.98	17.86	17.55	23.79	≤ 30	Pass
11g	6Mbps	6	2437	17.92	17.74	17.53	17.83	23.78	≤ 30	Pass
11g	6Mbps	11	2462	16.46	16.01	16.19	16.91	22.43	≤ 30	Pass
11n-HT20	MCS0	1	2412	17.13	17.42	17.36	17.02	23.26	≤ 30	Pass
11n-HT20	MCS0	6	2437	17.66	17.82	17.38	17.74	23.67	≤ 30	Pass
11n-HT20	MCS0	11	2462	15.06	14.55	14.67	15.35	20.94	≤ 30	Pass
11n-HT40	MCS0	3	2422	14.73	14.82	14.68	14.82	20.78	≤ 30	Pass
11n-HT40	MCS0	6	2437	17.71	17.85	17.43	17.82	23.73	≤ 30	Pass
11n-HT40	MCS0	9	2452	11.78	11.65	11.31	11.81	17.66	≤ 30	Pass
11ax-HE20	MCS0	1	2412	15.83	16.17	15.80	15.92	21.95	≤ 30	Pass
11ax-HE20	MCS0	6	2437	17.75	17.82	17.54	17.90	23.78	≤ 30	Pass
11ax-HE20	MCS0	11	2462	14.12	14.46	14.27	15.02	20.50	≤ 30	Pass
11ax-HE40	MCS0	3	2422	14.53	15.25	14.71	14.91	20.88	≤ 30	Pass
11ax-HE40	MCS0	6	2437	17.90	17.78	17.61	17.98	23.84	≤ 30	Pass
11ax-HE40	MCS0	9	2452	11.78	11.72	11.40	12.02	17.76	≤ 30	Pass

Note: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$ (dBm)

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted power spectral density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.4.2. Test Procedure Used

ANSI C63.10-2013 Section 11.10.5

7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 30kHz
5. Detector = RMS
6. Ensure that the number of measurement points in the sweep $\geq 2 \text{ span/RBW}$
7. Sweep time = auto couple
8. Employ trace averaging (RMS) mode over a minimum of 100 traces
9. Use the peak marker function to determine the maximum amplitude level
10. If duty cycle $< 98 \%$, add $10 \cdot \log(1/x)$, where x is the duty cycle measured to the measured PSD to compute the average PSD during the actual transmission time.

7.4.4. Test Setup

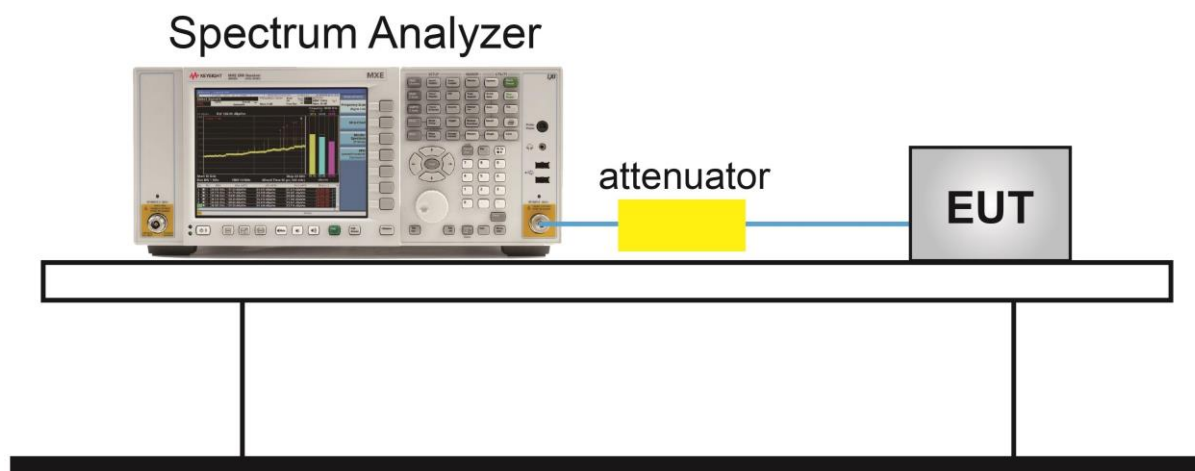

7.4.5. Test Result

Product	Wireless Access Point	Temperature	23°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2020/02/21~ 2020/02/29
Test Item	Power Spectral Density (Internal Antenna)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm / 10kHz)	Ant 1 PSD (dBm / 10kHz)	Ant 2 PSD (dBm / 10kHz)	Ant 3 PSD (dBm / 10kHz)	Duty Cycle (%)	Final PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	1	2412	-8.51	-6.55	-8.75	-8.24	72.58	-0.51	≤ 1.98	Pass
11b	1Mbps	6	2437	-7.61	-8.49	-8.15	-8.66	72.58	-0.80	≤ 1.98	Pass
11b	1Mbps	11	2462	-8.72	-8.54	-8.86	-8.02	72.58	-1.11	≤ 1.98	Pass
11g	6Mbps	1	2412	-11.49	-11.21	-11.32	-11.41	93.59	-5.05	≤ 1.98	Pass
11g	6Mbps	6	2437	-11.29	-10.75	-11.32	-11.54	93.59	-4.91	≤ 1.98	Pass
11g	6Mbps	11	2462	-11.26	-11.39	-11.63	-11.23	93.59	-5.07	≤ 1.98	Pass
11n-HT20	MCS0	1	2412	-11.56	-11.25	-11.44	-11.75	78.30	-4.41	≤ 1.98	Pass
11n-HT20	MCS0	6	2437	-10.96	-11.30	-11.00	-11.13	78.30	-4.01	≤ 1.98	Pass
11n-HT20	MCS0	11	2462	-11.38	-10.98	-11.78	-11.40	78.30	-4.29	≤ 1.98	Pass
11n-HT40	MCS0	3	2422	-13.95	-14.51	-14.51	-15.14	89.67	-8.01	≤ 1.98	Pass
11n-HT40	MCS0	6	2437	-14.49	-14.44	-14.31	-14.01	89.67	-7.81	≤ 1.98	Pass
11n-HT40	MCS0	9	2452	-17.20	-17.10	-16.99	-16.89	89.67	-10.55	≤ 1.98	Pass
11ax-HE20	MCS0	1	2412	-12.50	-12.53	-12.92	-13.09	95.25	-6.52	≤ 1.98	Pass
11ax-HE20	MCS0	6	2437	-12.64	-12.82	-12.62	-12.88	95.25	-6.51	≤ 1.98	Pass
11ax-HE20	MCS0	11	2462	-12.51	-13.13	-13.29	-13.09	95.25	-6.76	≤ 1.98	Pass
11ax-HE40	MCS0	3	2422	-15.74	-15.66	-15.65	-15.95	95.77	-9.54	≤ 1.98	Pass
11ax-HE40	MCS0	6	2437	-15.60	-15.75	-15.68	-15.81	95.77	-9.50	≤ 1.98	Pass
11ax-HE40	MCS0	9	2452	-17.94	-17.46	-17.76	-17.92	95.77	-11.56	≤ 1.98	Pass

Note 1: When duty cycle < 98%, Final PSD (dBm / 3kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$.

When duty cycle ≥ 98%, Final PSD (dBm / 3kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$.

Note 2: Limit = 8(dBm / 3kHz) – (12.02dBi – 6dBi) = 1.98(dBm / 3kHz)

Product	Wireless Access Point	Temperature	23°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2020/02/21~ 2020/02/29
Test Item	Power Spectral Density (External Antenna)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm / 10kHz)	Ant 1 PSD (dBm / 10kHz)	Ant 2 PSD (dBm / 10kHz)	Ant 3 PSD (dBm / 10kHz)	Duty Cycle (%)	Final PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	1	2412	-10.37	-11.28	-11.25	-11.27	72.58	-3.61	≤ 5.68	Pass
11b	1Mbps	6	2437	-7.21	-8.37	-8.48	-7.73	72.58	-0.50	≤ 5.68	Pass
11b	1Mbps	11	2462	-8.31	-8.77	-9.06	-8.40	72.58	-1.21	≤ 5.68	Pass
11g	6Mbps	1	2412	-10.56	-9.91	-10.83	-10.72	93.59	-4.18	≤ 5.68	Pass
11g	6Mbps	6	2437	-11.00	-10.16	-10.71	-10.43	93.59	-4.26	≤ 5.68	Pass
11g	6Mbps	11	2462	-12.25	-12.25	-12.06	-12.23	93.59	-5.89	≤ 5.68	Pass
11n-HT20	MCS0	1	2412	-11.92	-12.00	-12.26	-12.24	78.30	-5.02	≤ 5.68	Pass
11n-HT20	MCS0	6	2437	-11.35	-10.76	-11.07	-11.45	78.30	-4.07	≤ 5.68	Pass
11n-HT20	MCS0	11	2462	-14.04	-14.22	-14.69	-14.39	78.30	-7.25	≤ 5.68	Pass
11n-HT40	MCS0	3	2422	-17.77	-17.63	-18.23	-17.88	89.67	-11.38	≤ 5.68	Pass
11n-HT40	MCS0	6	2437	-14.42	-14.02	-14.37	-14.09	89.67	-7.73	≤ 5.68	Pass
11n-HT40	MCS0	9	2452	-20.93	-20.72	-21.27	-21.00	89.67	-14.48	≤ 5.68	Pass
11ax-HE20	MCS0	1	2412	-14.67	-14.34	-14.95	-14.91	95.25	-8.48	≤ 5.68	Pass
11ax-HE20	MCS0	6	2437	-12.37	-11.88	-12.04	-11.79	95.25	-5.78	≤ 5.68	Pass
11ax-HE20	MCS0	11	2462	-15.70	-15.82	-15.71	-15.59	95.25	-9.47	≤ 5.68	Pass
11ax-HE40	MCS0	3	2422	-18.69	-18.17	-18.95	-18.14	95.77	-12.27	≤ 5.68	Pass
11ax-HE40	MCS0	6	2437	-15.32	-14.79	-15.43	-15.14	95.77	-8.95	≤ 5.68	Pass
11ax-HE40	MCS0	9	2452	-21.30	-21.57	-21.95	-21.61	95.77	-15.39	≤ 5.68	Pass

Note 1: When duty cycle < 98%, Final PSD (dBm / 3kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$.

When duty cycle ≥ 98%, Final PSD (dBm / 3kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$.

Note 2: Limit = 8(dBm / 3kHz) – (8.32dBi – 6dBi) = 5.68(dBm / 3kHz)

For Internal Antenna:

802.11b PSD - Ant 0 / Ant 0 + 1 + 2 + 3

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g PSD - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

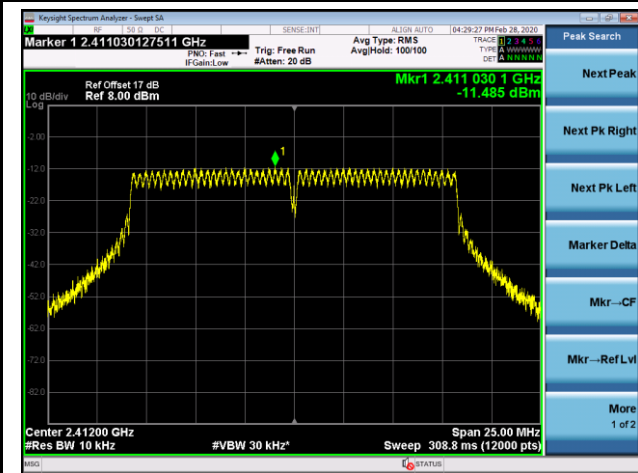

Channel 06 (2437MHz)

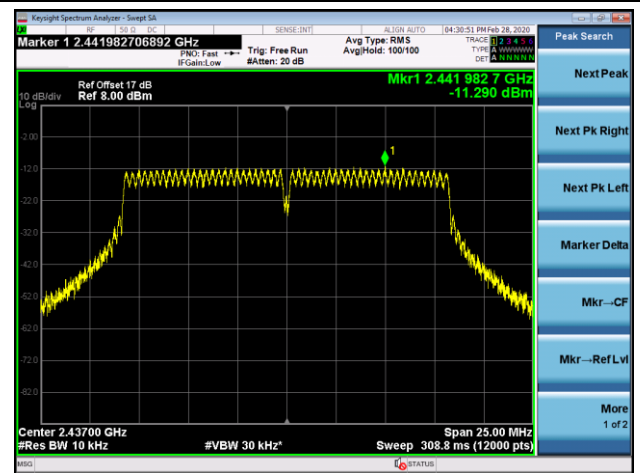


Channel 11 (2462MHz)

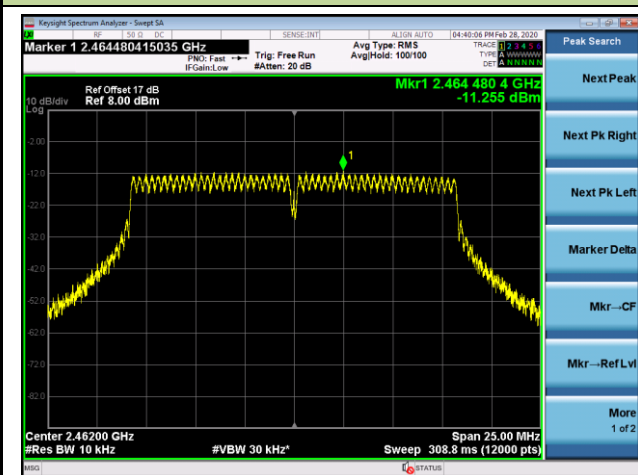


802.11n-HT20 PSD - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

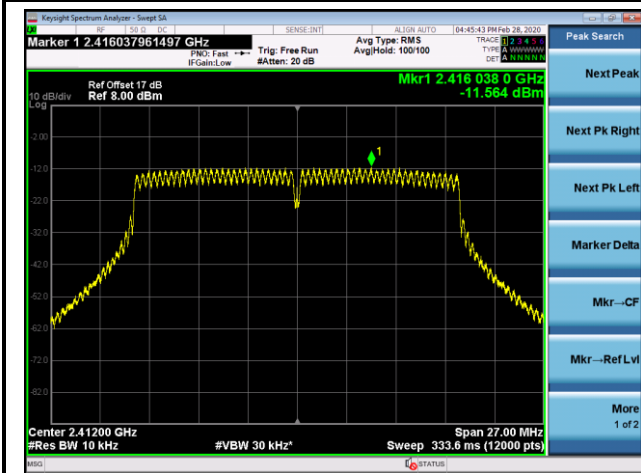

Channel 06 (2437MHz)

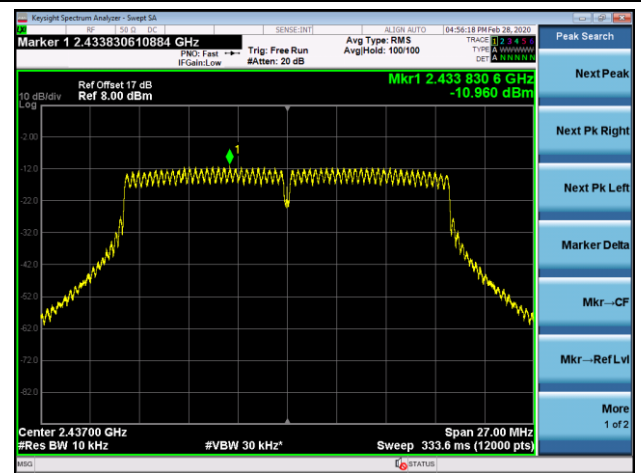


Channel 11 (2462MHz)

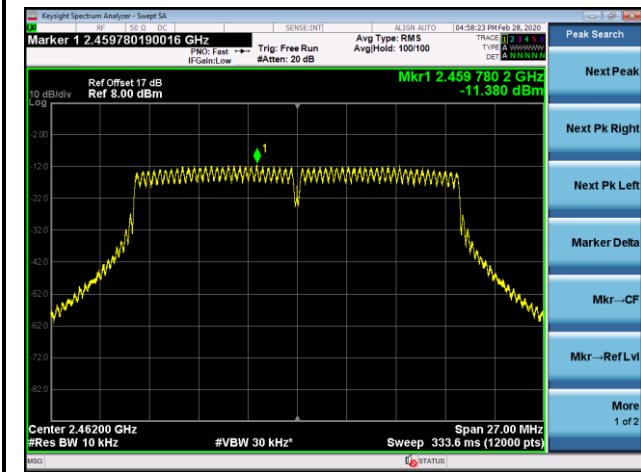


802.11n-HT40 PSD - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 03 (2422MHz)

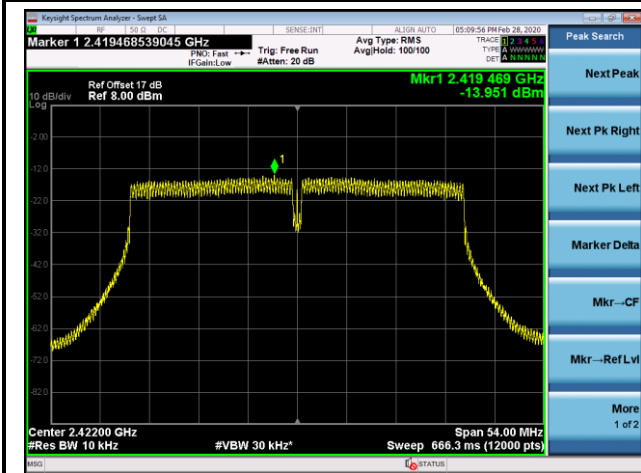

Channel 06 (2437MHz)

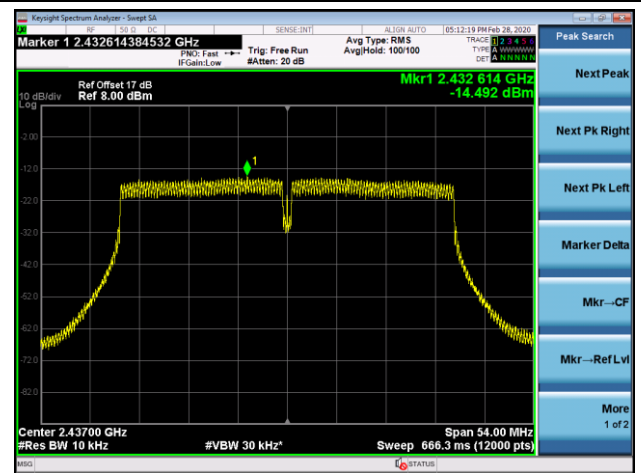


Channel 09 (2452MHz)

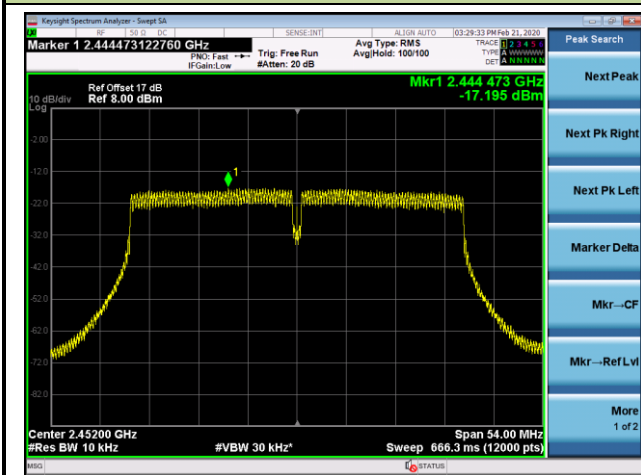


802.11ax-HE20 PSD - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

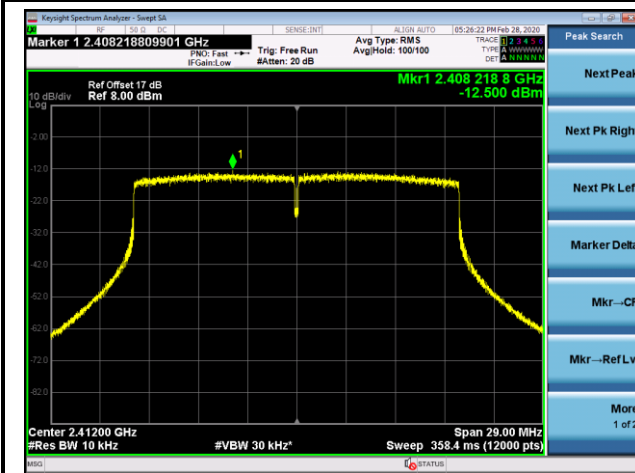

Channel 06 (2437MHz)

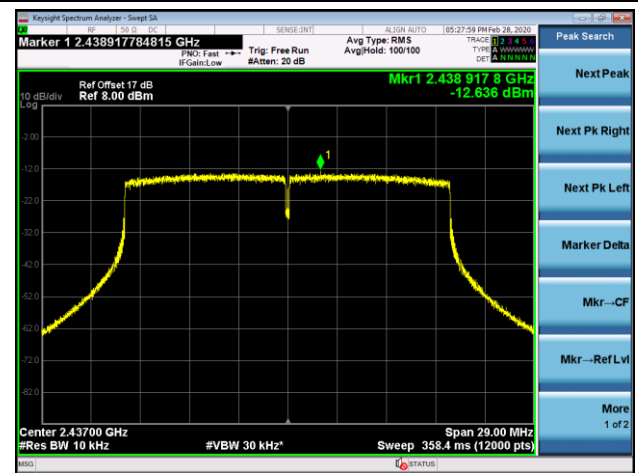


Channel 11 (2462MHz)

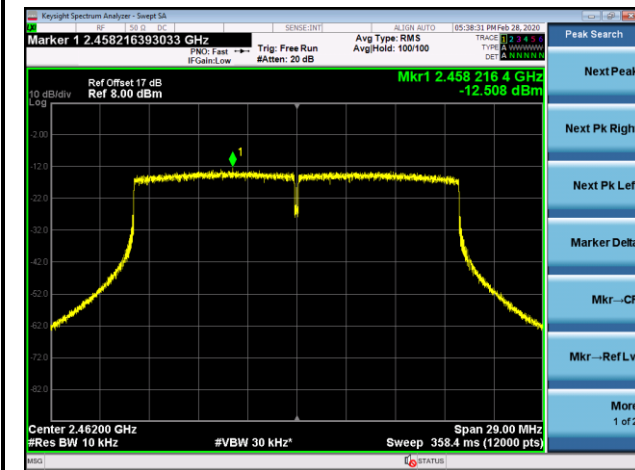


802.11ax-HE40 PSD - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 03 (2422MHz)

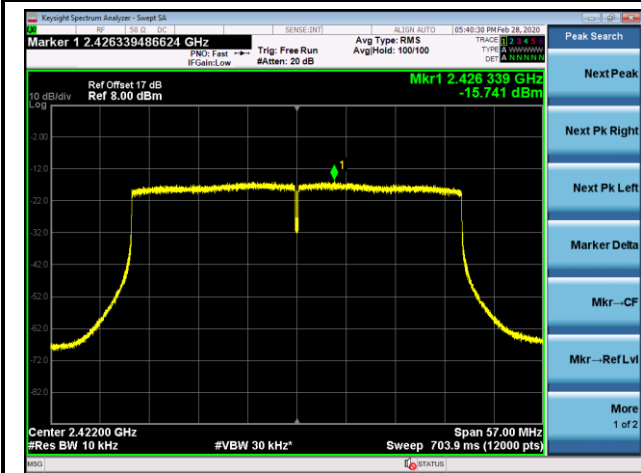

Channel 06 (2437MHz)

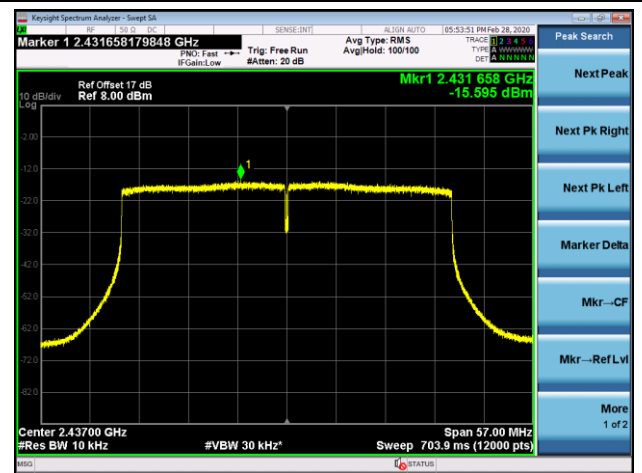

Channel 09 (2452MHz)

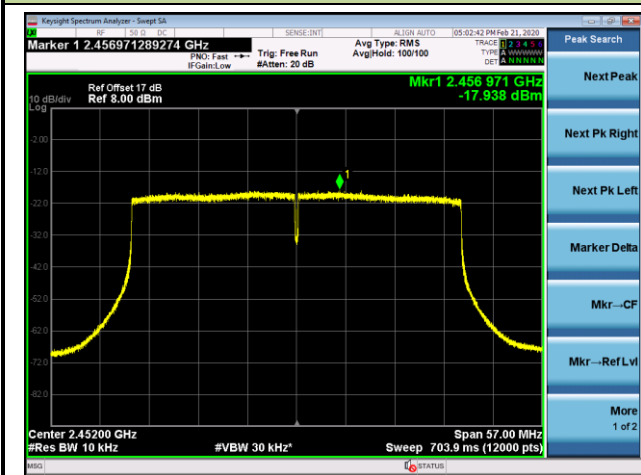

802.11b PSD - Ant 1 / Ant 0 + 1 + 2 + 3

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g PSD - Ant 1 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

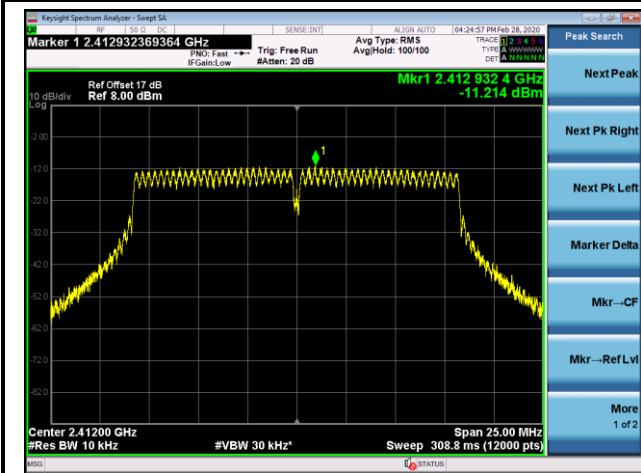

Channel 06 (2437MHz)

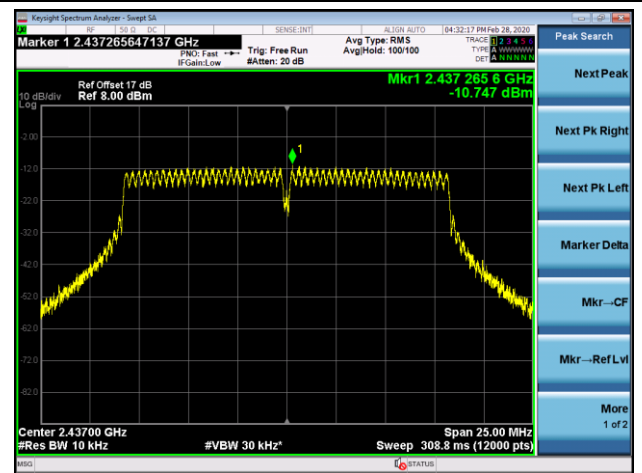


Channel 11 (2462MHz)

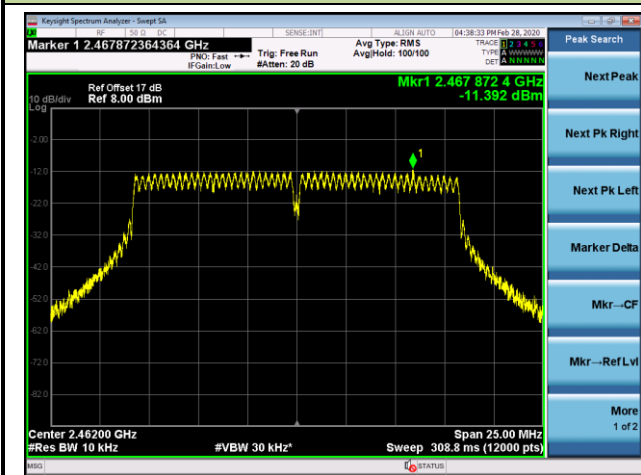


802.11n-HT20 PSD - Ant 1 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

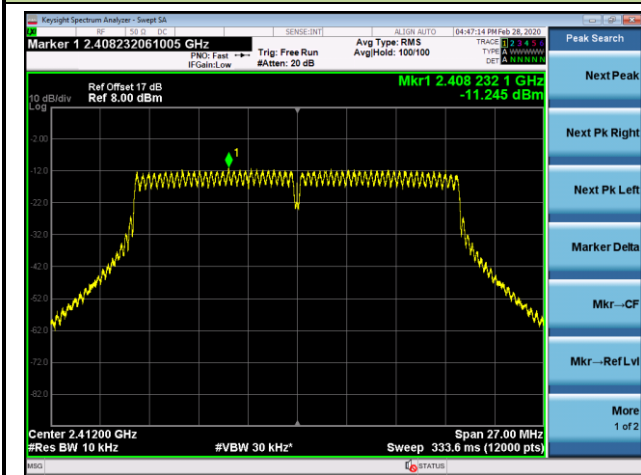

Channel 06 (2437MHz)

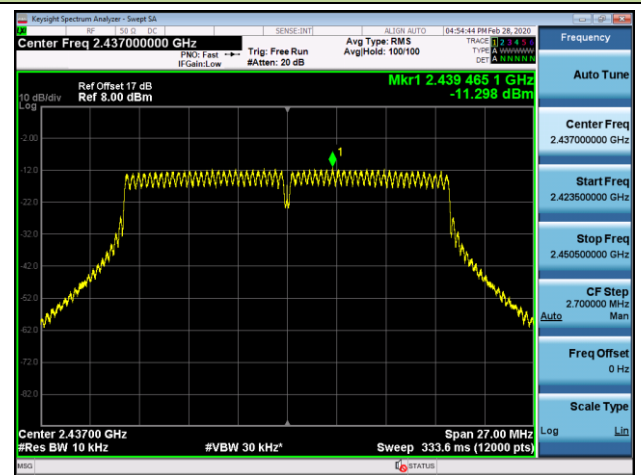


Channel 11 (2462MHz)

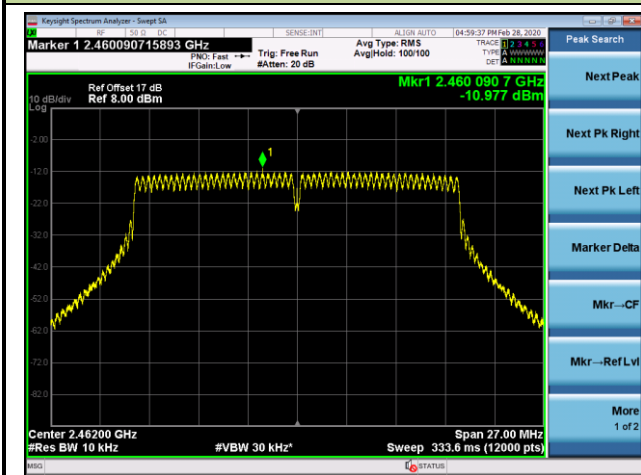


802.11n-HT40 PSD - Ant 1 / Ant 0 + 1 + 2 + 3


Channel 03 (2422MHz)

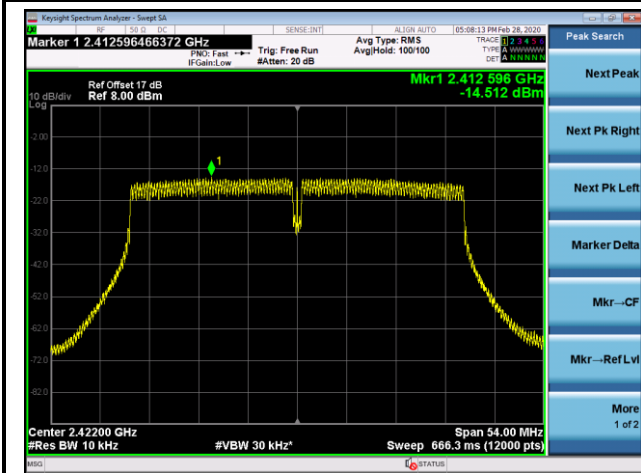

Channel 06 (2437MHz)

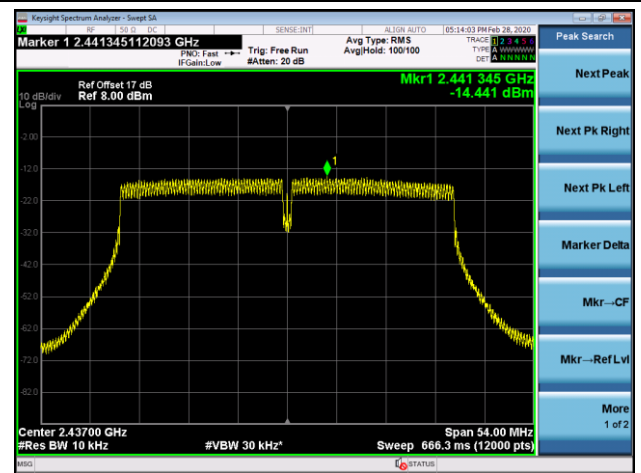


Channel 09 (2452MHz)

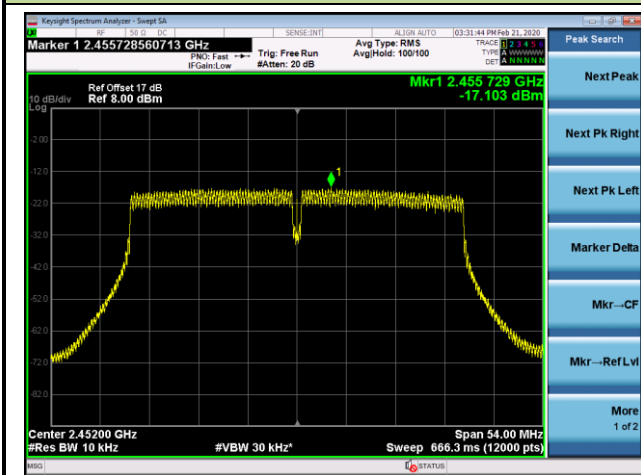


802.11ax-HE20 PSD - Ant 1 / Ant 0 + 1 + 2 + 3


Channel 01 (2412MHz)

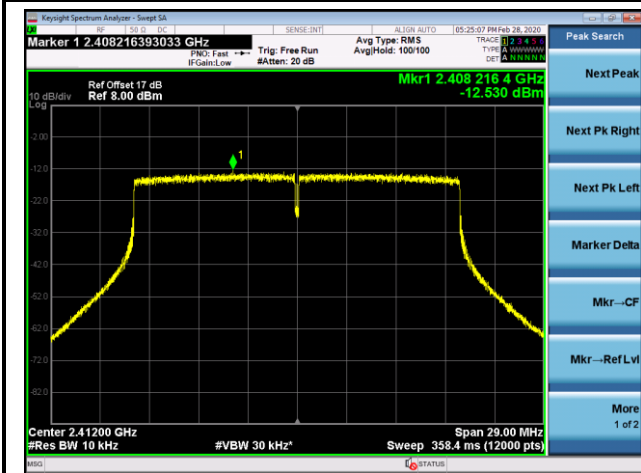

Channel 06 (2437MHz)

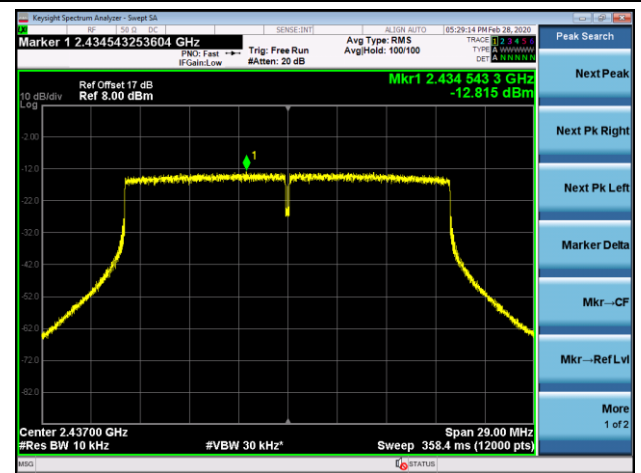


Channel 11 (2462MHz)

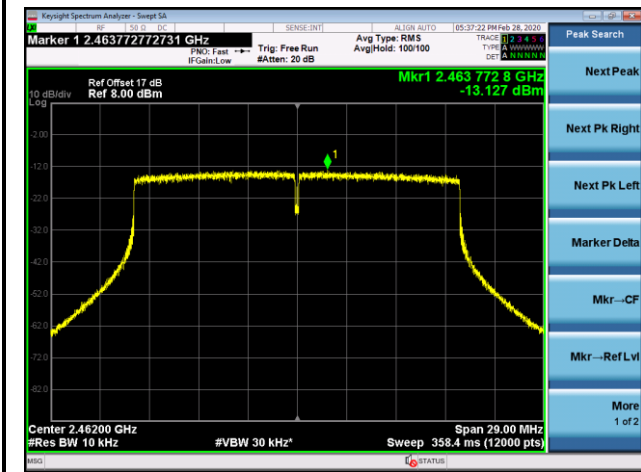


802.11ax-HE40 PSD - Ant 1 / Ant 0 + 1 + 2 + 3


Channel 03 (2422MHz)

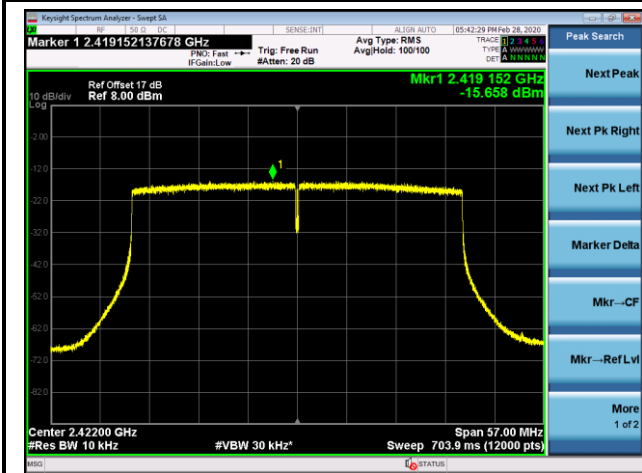

Channel 06 (2437MHz)

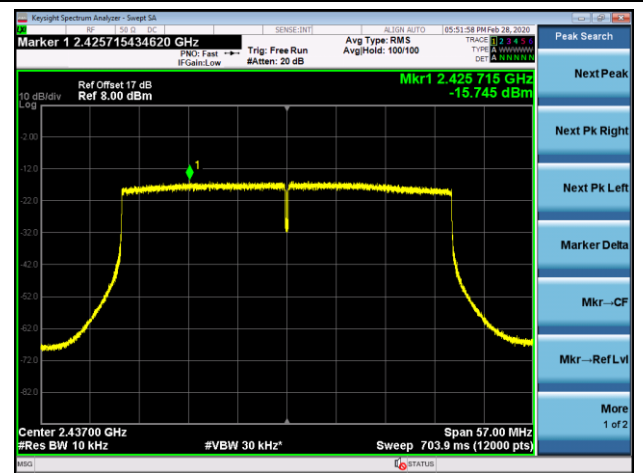

Channel 09 (2452MHz)

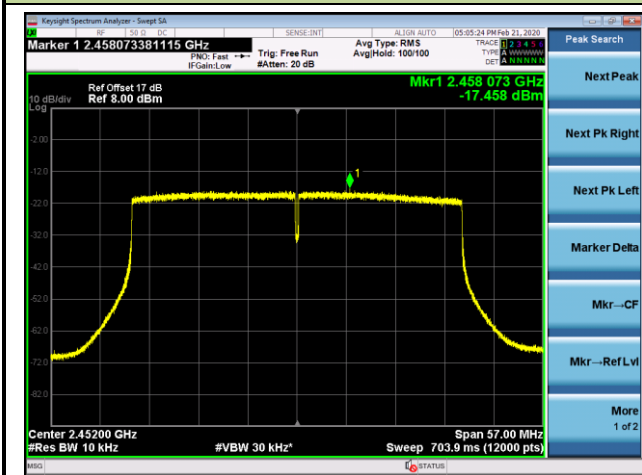

802.11b PSD - Ant 2 / Ant 0 + 1 + 2 + 3

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)

