


Site: AC1	Time: 2020/02/16 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

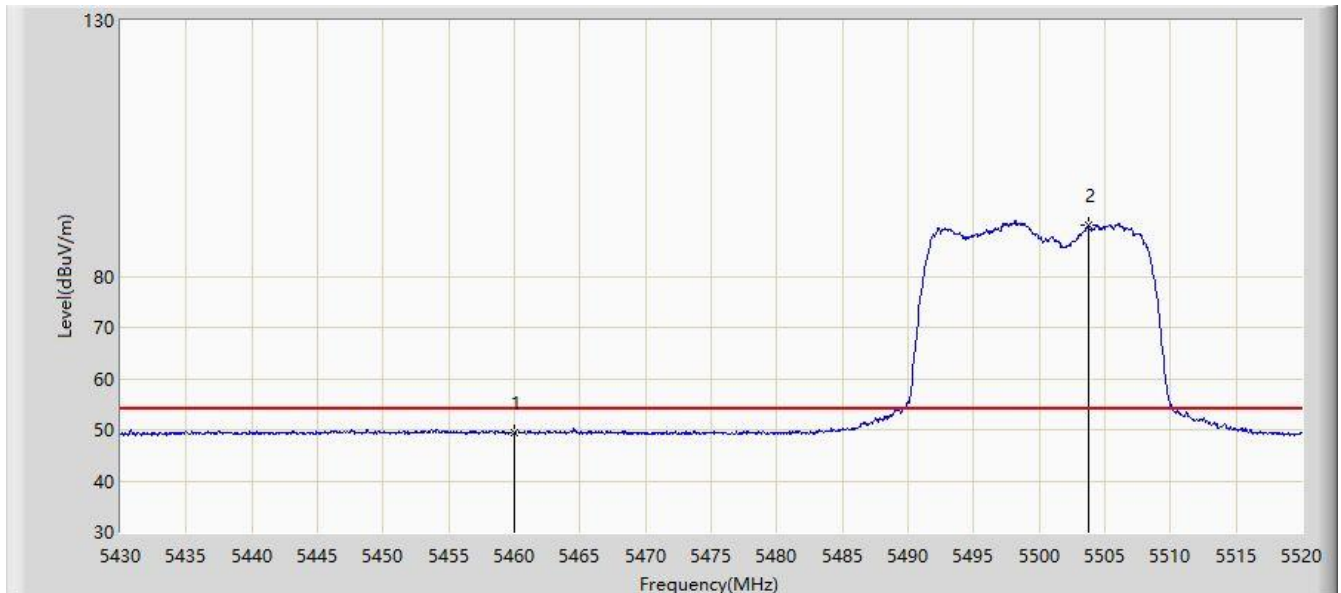


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.315	42.338	-4.685	54.000	6.978	AV
2		*	5503.710	89.958	82.650	N/A	N/A	7.308	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 11:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

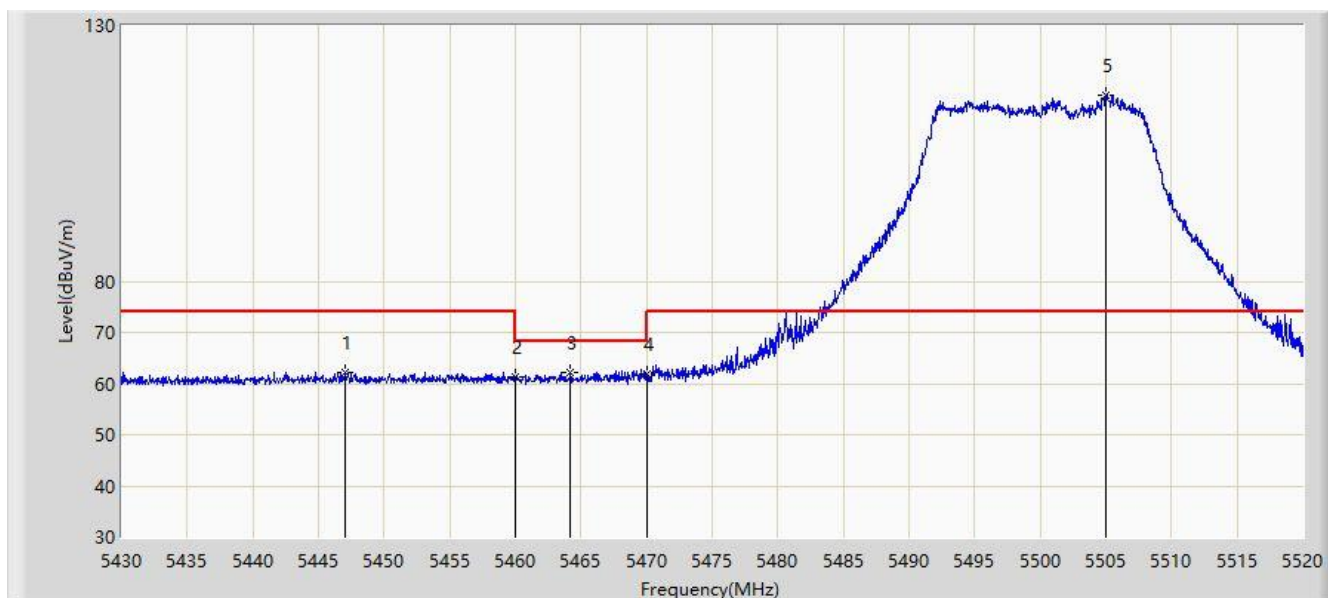


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.010	62.144	55.165	-11.856	74.000	6.980	PK
2			5460.000	61.271	54.294	-12.729	74.000	6.978	PK
3			5464.200	62.296	55.302	-5.904	68.200	6.994	PK
4			5470.000	61.911	54.894	-6.289	68.200	7.016	PK
5		*	5505.015	116.462	109.141	N/A	N/A	7.321	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 11:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

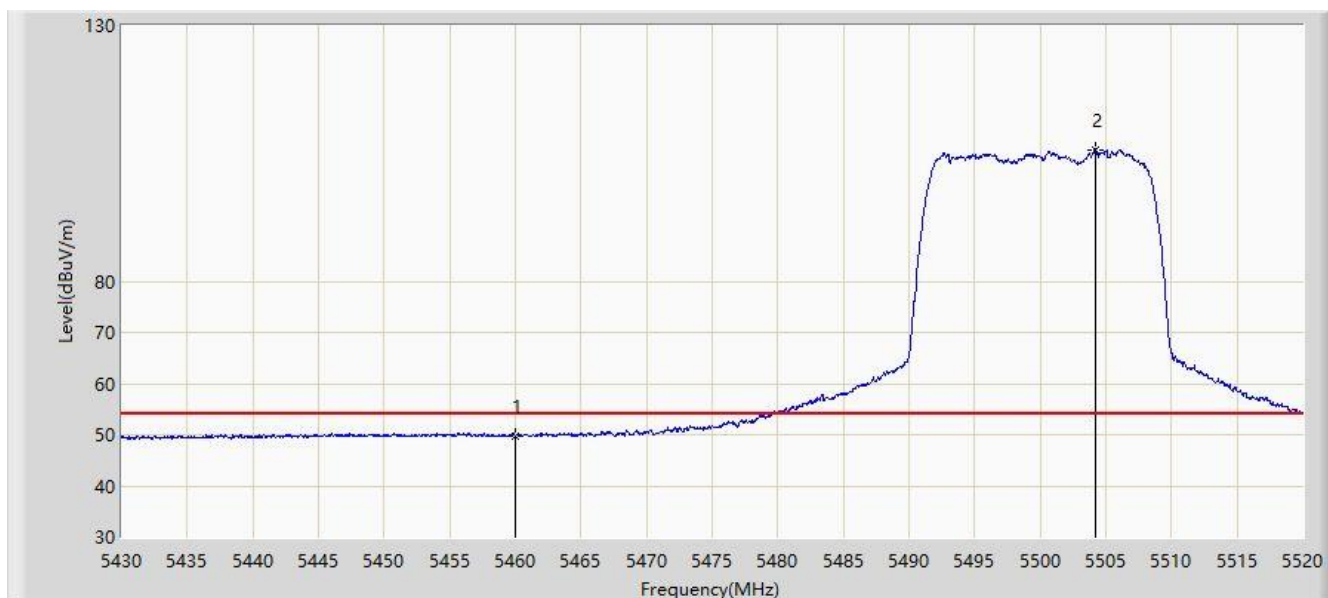


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.805	42.828	-4.195	54.000	6.978	AV
2		*	5504.160	105.770	98.457	N/A	N/A	7.312	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz, Ant 0 + 1 + 2 + 3	

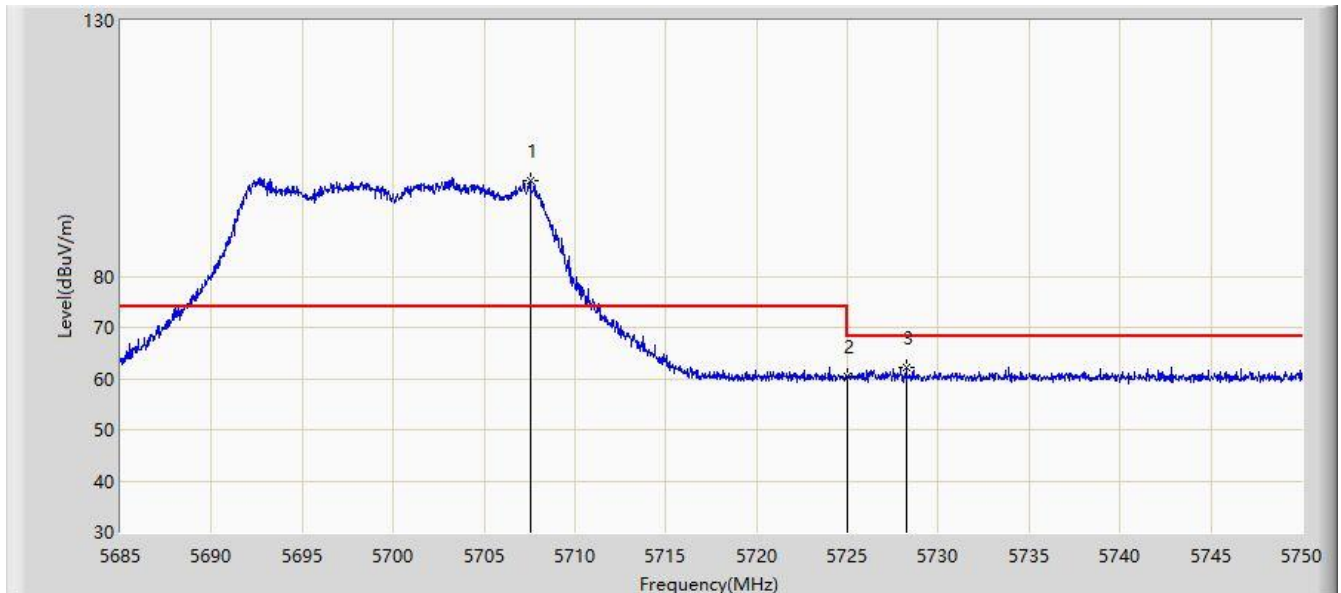


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.522	98.646	91.491	N/A	N/A	7.154	PK
2			5725.000	60.297	52.965	-7.903	68.200	7.332	PK
3			5728.225	62.122	54.765	-6.078	68.200	7.357	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz, Ant 0 + 1 + 2 + 3	

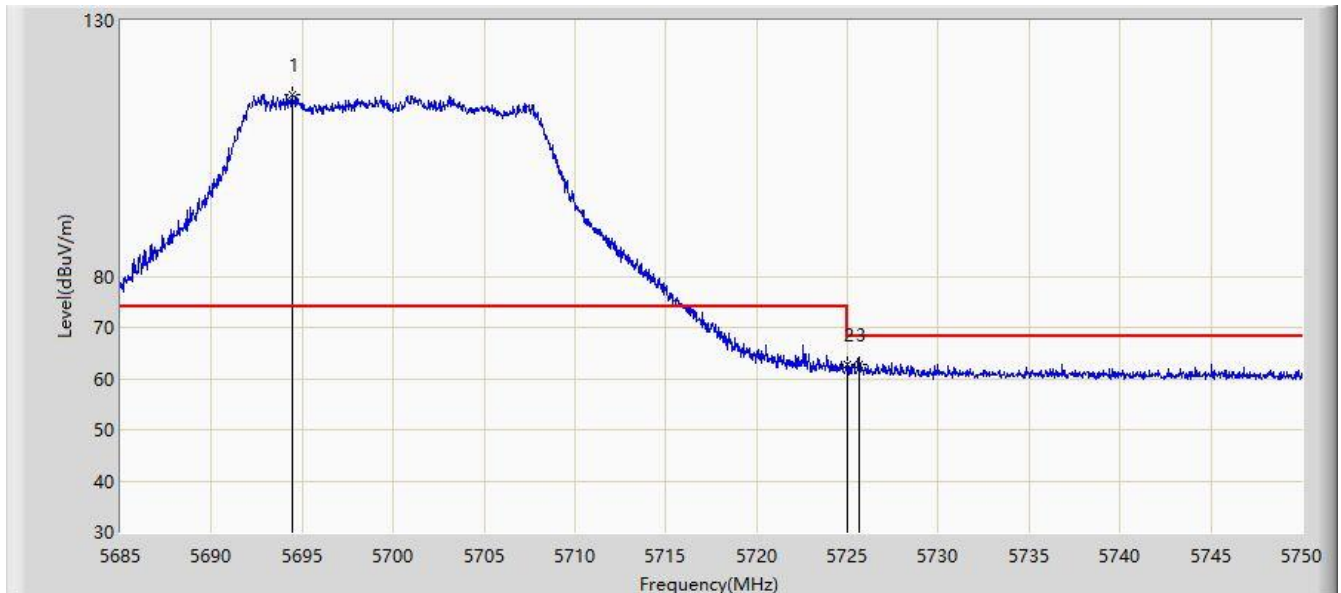


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.458	115.414	108.154	N/A	N/A	7.259	PK
2			5725.000	62.651	55.319	-5.549	68.200	7.332	PK
3			5725.625	62.731	55.392	-5.469	68.200	7.339	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:02
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz, Ant 0 + 1 + 2 + 3	

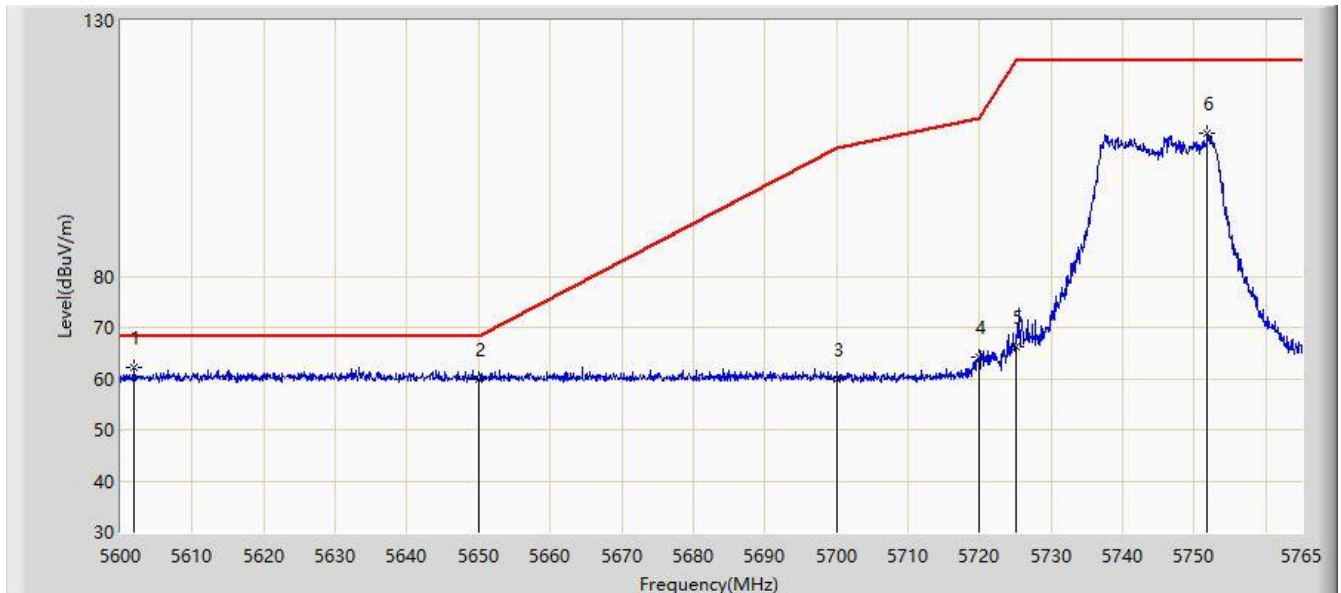


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5601.815	62.074	54.938	-6.126	68.200	7.136	PK
2			5650.000	59.804	52.664	-8.396	68.200	7.140	PK
3			5700.000	59.900	52.685	-45.300	105.200	7.215	PK
4			5720.000	64.246	56.973	-46.554	110.800	7.273	PK
5			5725.000	66.214	58.882	-55.986	122.200	7.332	PK
6			5751.800	107.844	100.408	N/A	N/A	7.436	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:05
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz, Ant 0 + 1 + 2 + 3	

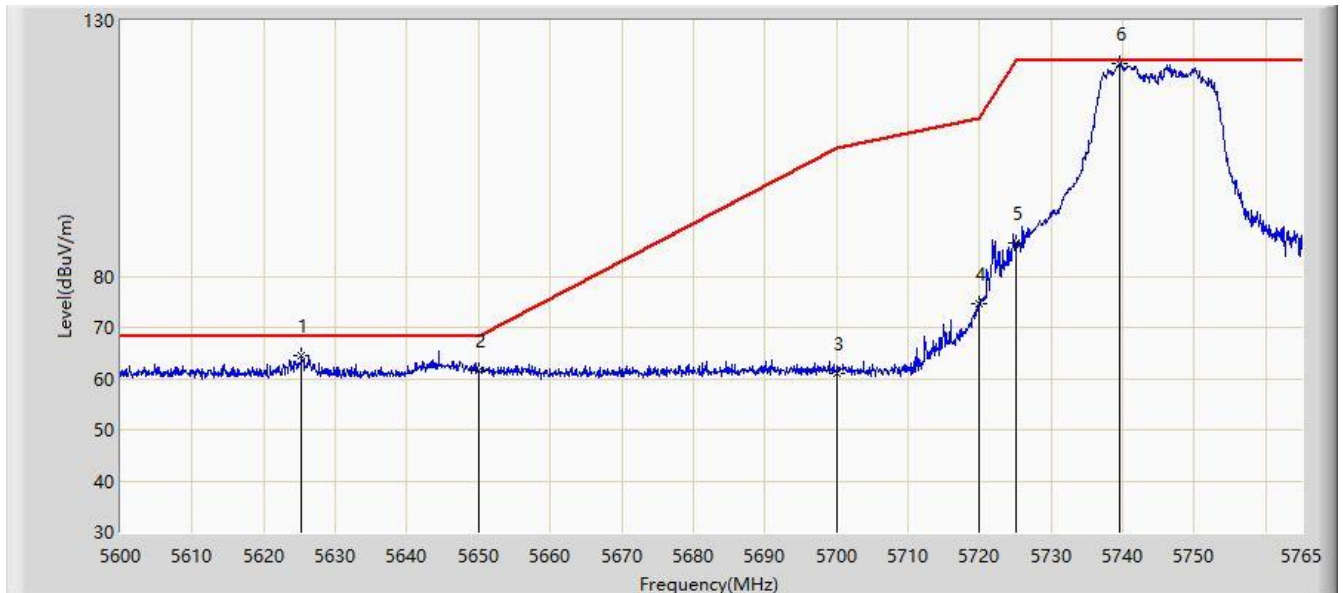


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.245	64.505	57.480	-3.695	68.200	7.026	PK
2			5650.000	61.637	54.497	-6.563	68.200	7.140	PK
3			5700.000	60.943	53.728	-44.257	105.200	7.215	PK
4			5720.000	74.589	67.316	-36.211	110.800	7.273	PK
5			5725.000	86.618	79.286	-35.582	122.200	7.332	PK
6		*	5739.590	121.467	114.042	N/A	N/A	7.425	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz, Ant 0 + 1 + 2 + 3	

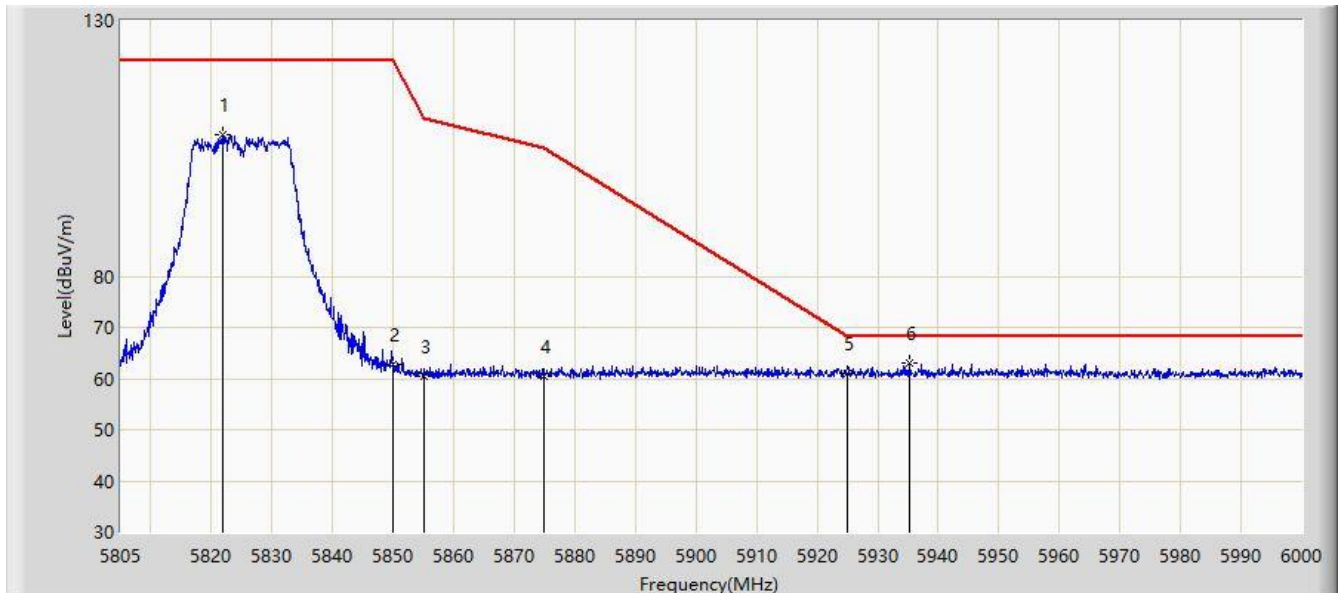


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.965	107.602	99.946	N/A	N/A	7.656	PK
2			5850.000	62.641	54.949	-59.559	122.200	7.692	PK
3			5855.000	60.432	52.788	-50.368	110.800	7.644	PK
4			5875.000	60.509	52.907	-44.691	105.200	7.602	PK
5			5925.000	60.881	53.055	-7.319	68.200	7.826	PK
6		*	5935.357	63.175	55.411	-5.025	68.200	7.764	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:10
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz, Ant 0 + 1 + 2 + 3	

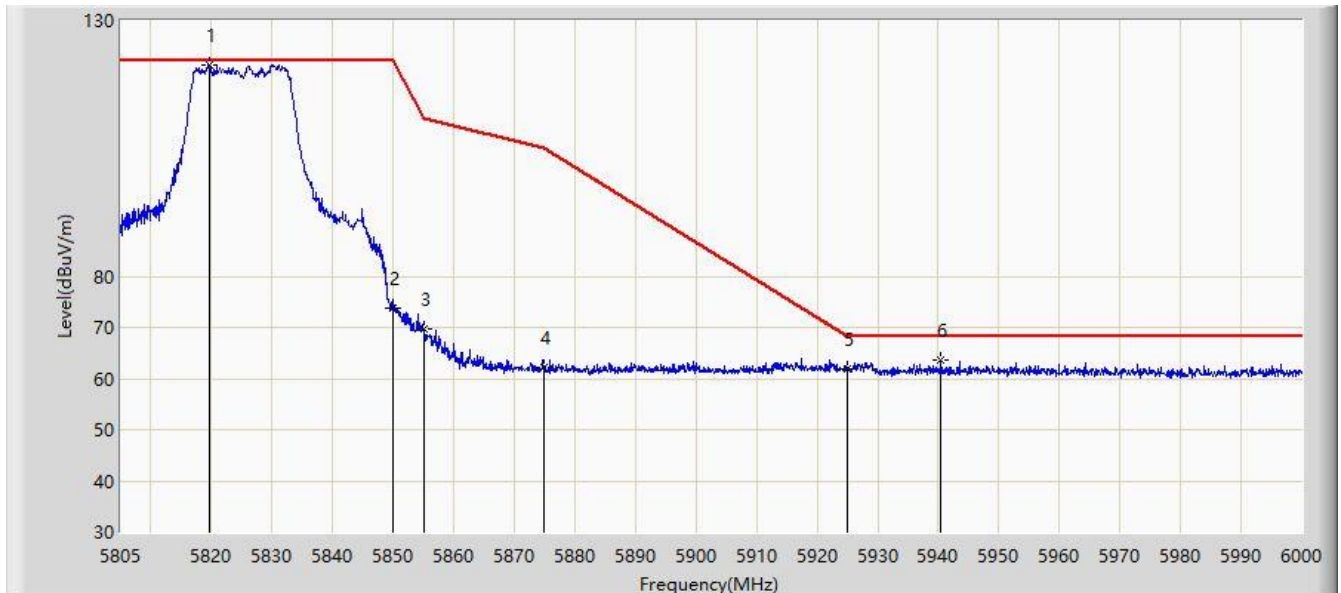


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.723	121.199	113.585	N/A	N/A	7.615	PK
2			5850.000	73.890	66.198	-48.310	122.200	7.692	PK
3			5855.000	69.773	62.129	-41.027	110.800	7.644	PK
4			5875.000	62.284	54.682	-42.916	105.200	7.602	PK
5			5925.000	61.900	54.074	-6.300	68.200	7.826	PK
6			5940.428	63.558	55.830	-4.642	68.200	7.728	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

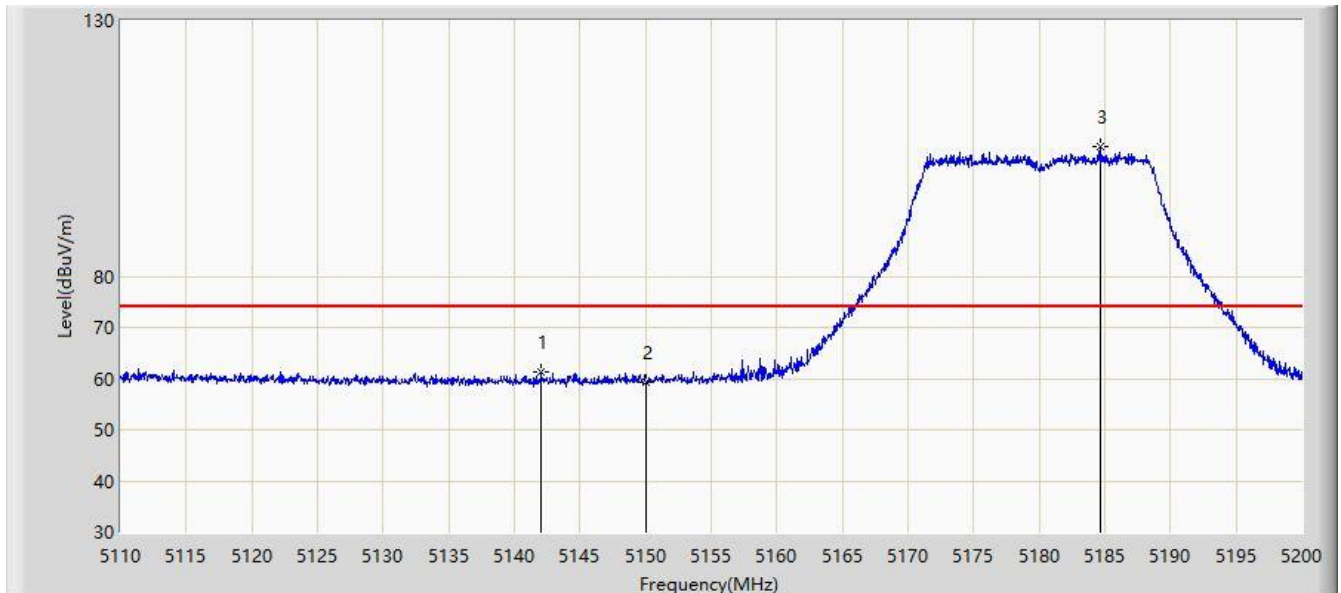


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.085	61.281	54.466	-12.719	74.000	6.814	PK
2			5150.000	59.304	52.505	-14.696	74.000	6.799	PK
3		*	5184.610	105.392	98.643	N/A	N/A	6.749	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

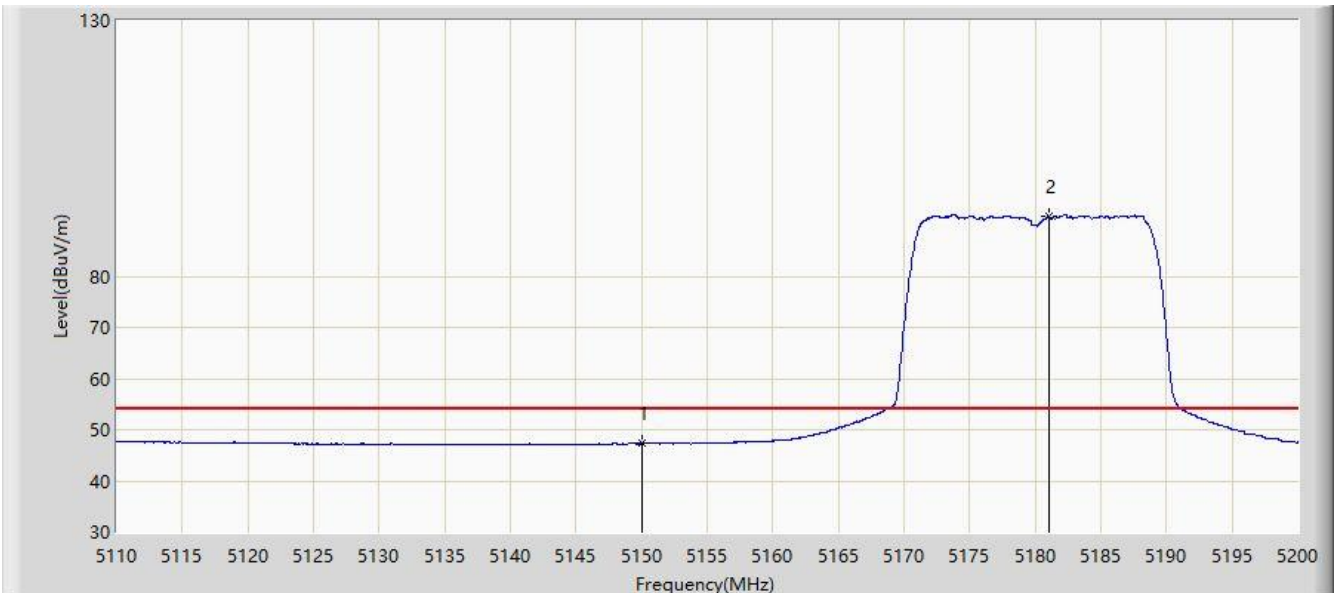


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.325	40.526	-6.675	54.000	6.799	AV
2		*	5181.010	91.674	84.881	N/A	N/A	6.794	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

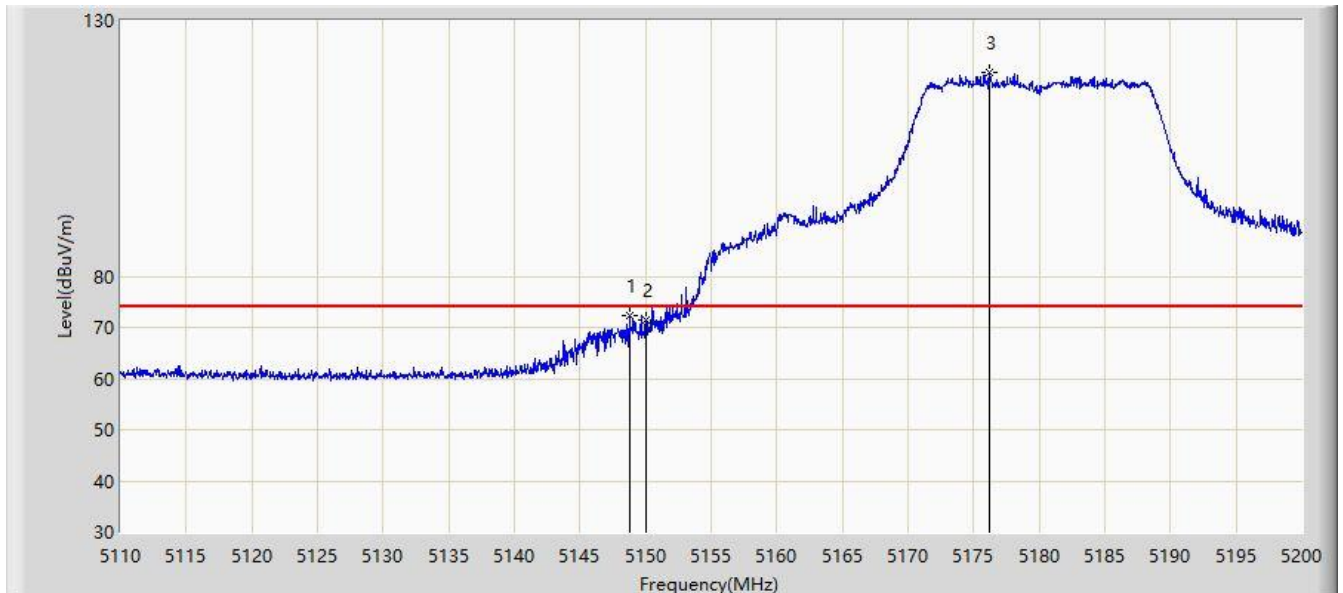


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.745	72.438	65.644	-1.562	74.000	6.794	PK
2			5150.000	71.333	64.534	-2.667	74.000	6.799	PK
3		*	5176.150	119.958	113.146	N/A	N/A	6.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

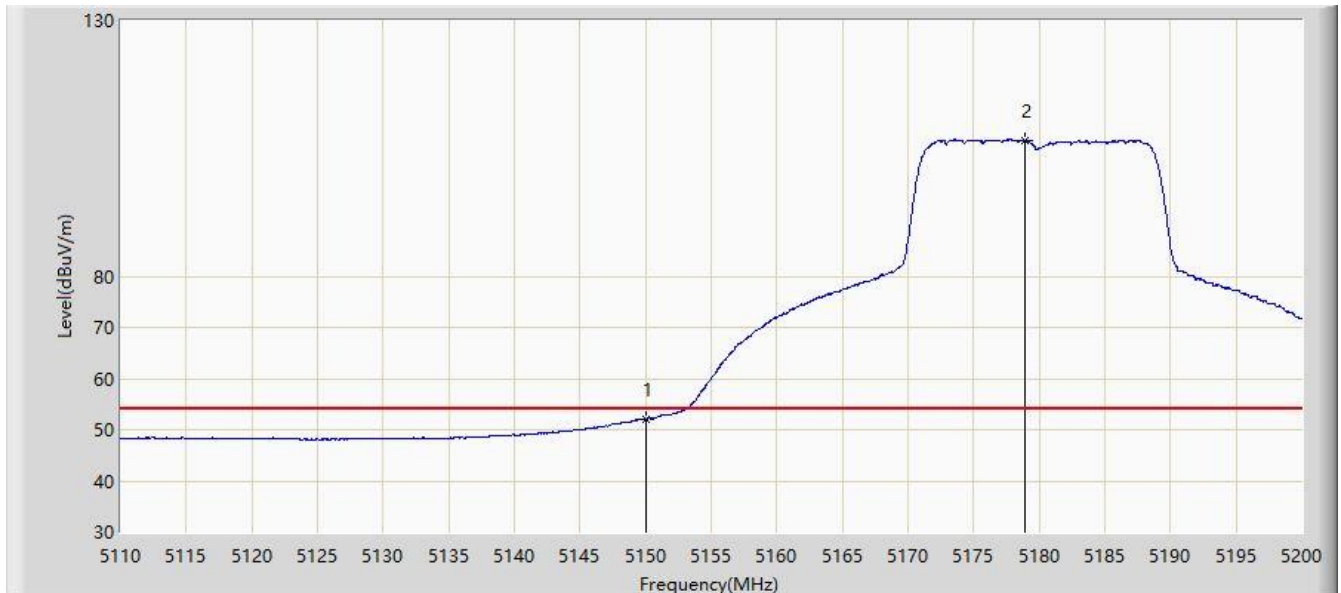


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.994	45.195	-2.006	54.000	6.799	AV
2		*	5178.940	106.578	99.777	N/A	N/A	6.802	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

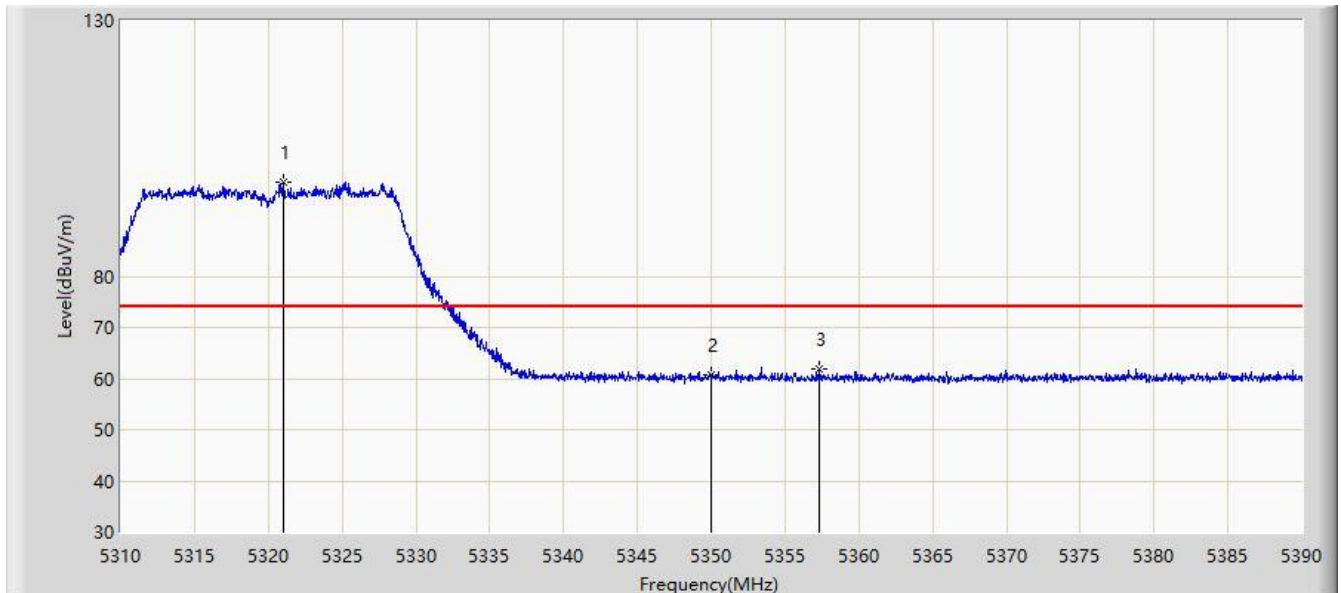


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.040	98.355	91.725	N/A	N/A	6.630	PK
2			5350.000	60.714	54.086	-13.286	74.000	6.629	PK
3			5357.280	61.894	55.286	-12.106	74.000	6.608	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

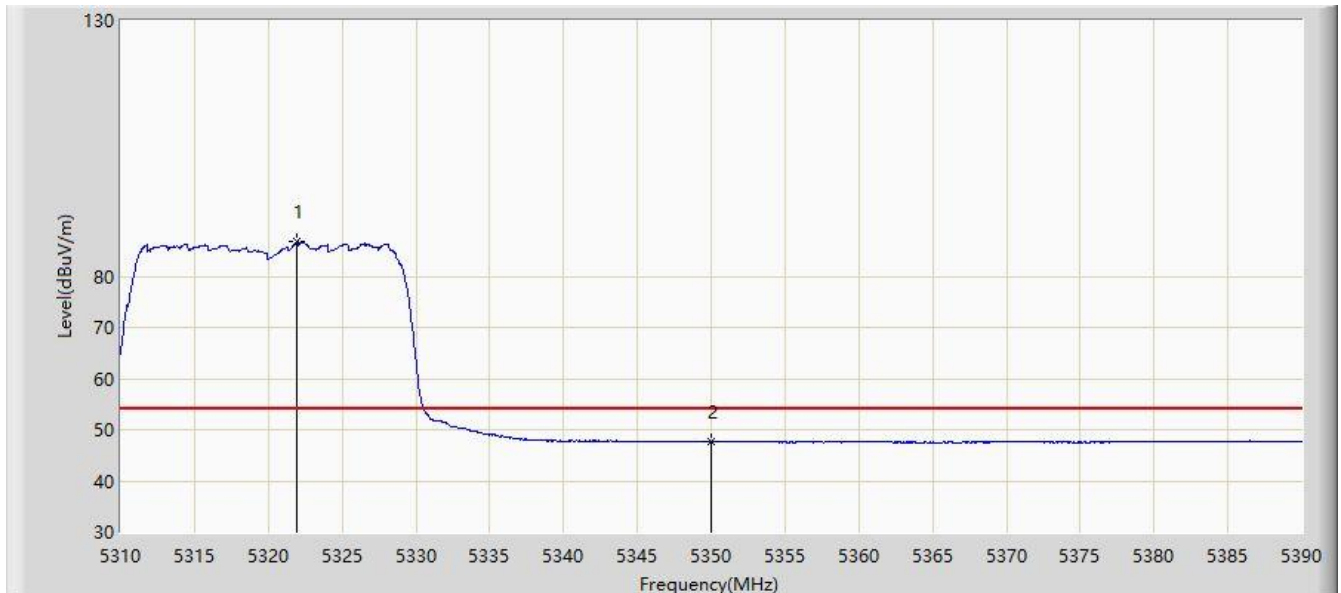


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.960	86.700	80.064	N/A	N/A	6.636	AV
2			5350.000	47.732	41.104	-6.268	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

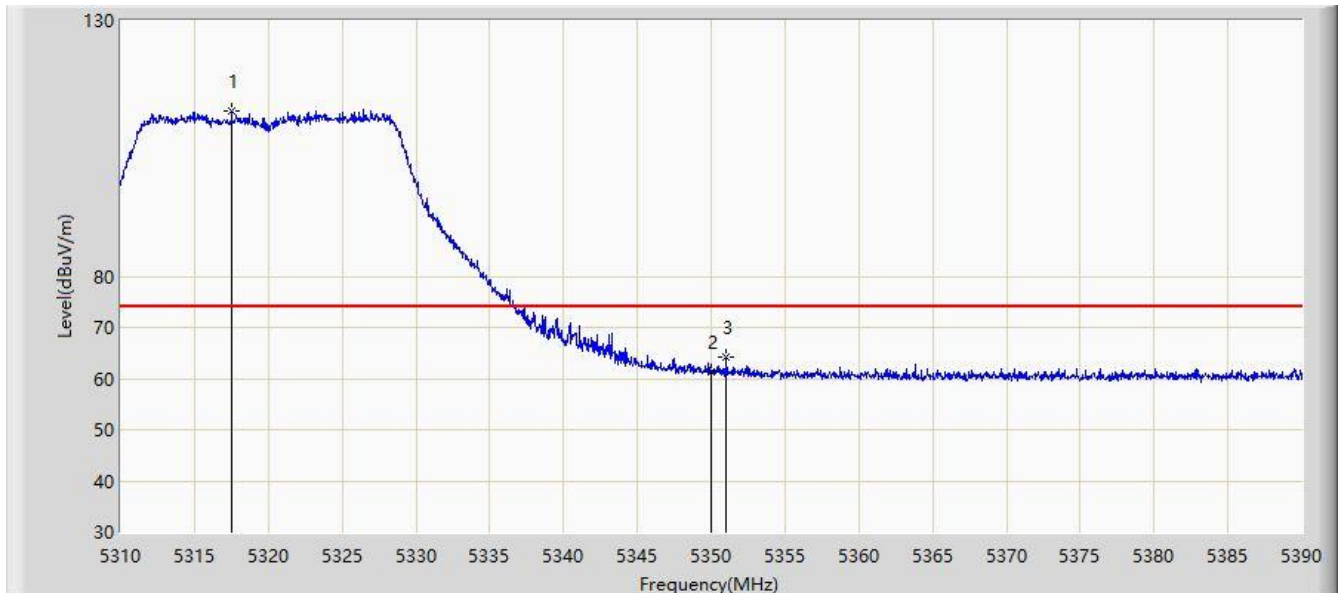


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.520	112.241	105.632	N/A	N/A	6.609	PK
2			5350.000	61.177	54.549	-12.823	74.000	6.629	PK
3			5351.040	64.331	57.709	-9.669	74.000	6.622	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

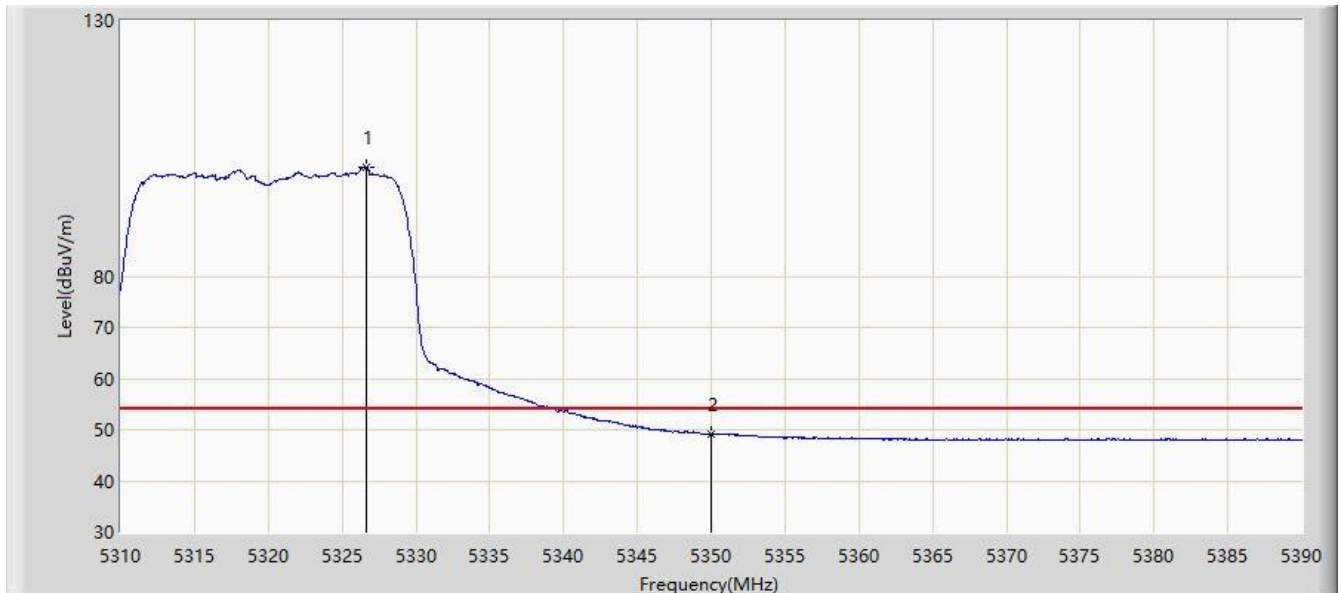


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.640	101.336	94.667	N/A	N/A	6.669	AV
2			5350.000	49.175	42.547	-4.825	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

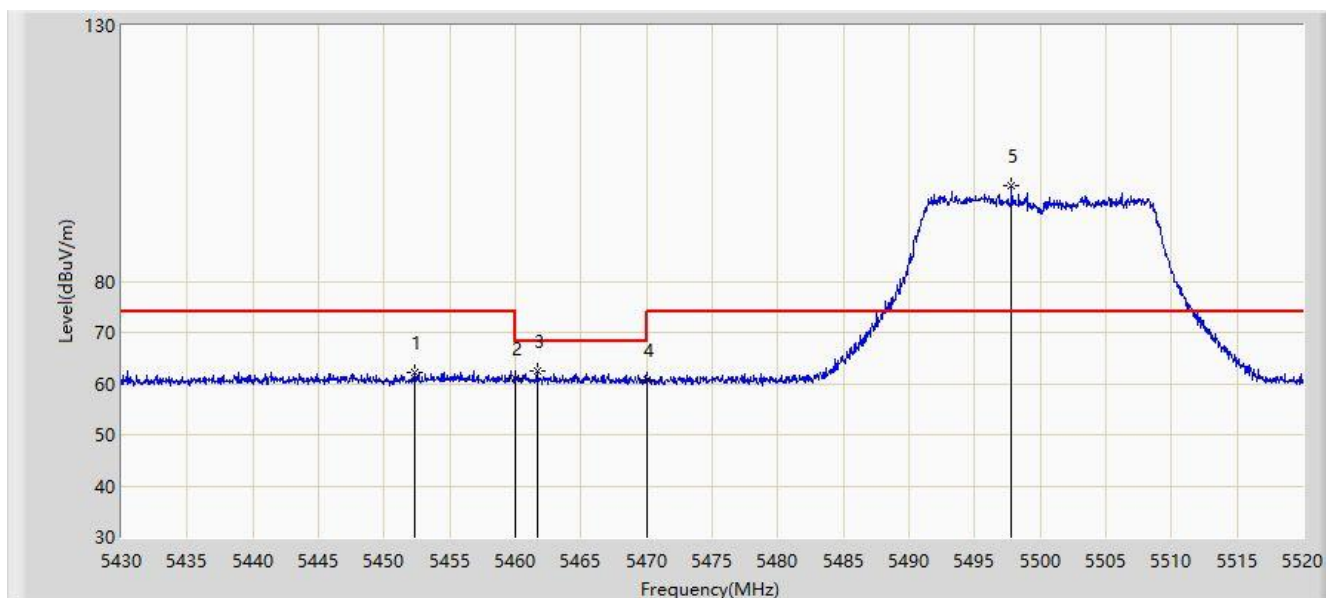


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.275	62.211	55.251	-11.789	74.000	6.960	PK
2			5460.000	61.126	54.149	-12.874	74.000	6.978	PK
3			5461.680	62.370	55.386	-5.830	68.200	6.983	PK
4			5470.000	60.753	53.736	-7.447	68.200	7.016	PK
5		*	5497.815	98.565	91.320	N/A	N/A	7.246	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

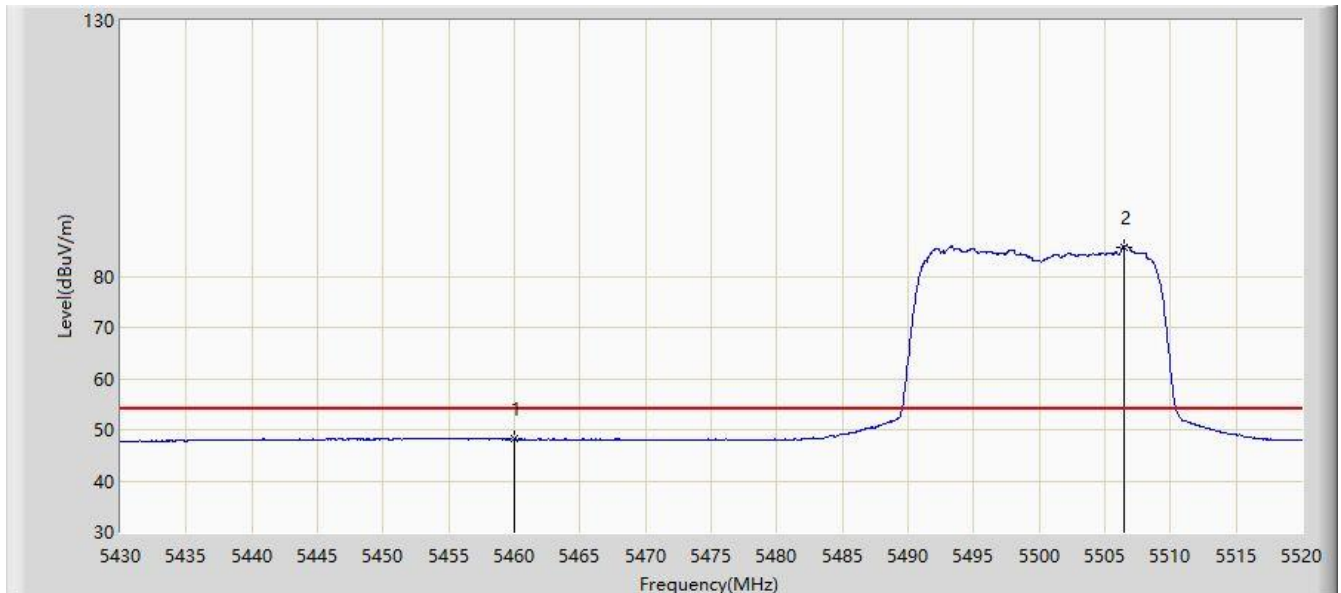


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.148	41.171	-5.852	54.000	6.978	AV
2		*	5506.410	85.774	78.473	N/A	N/A	7.301	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

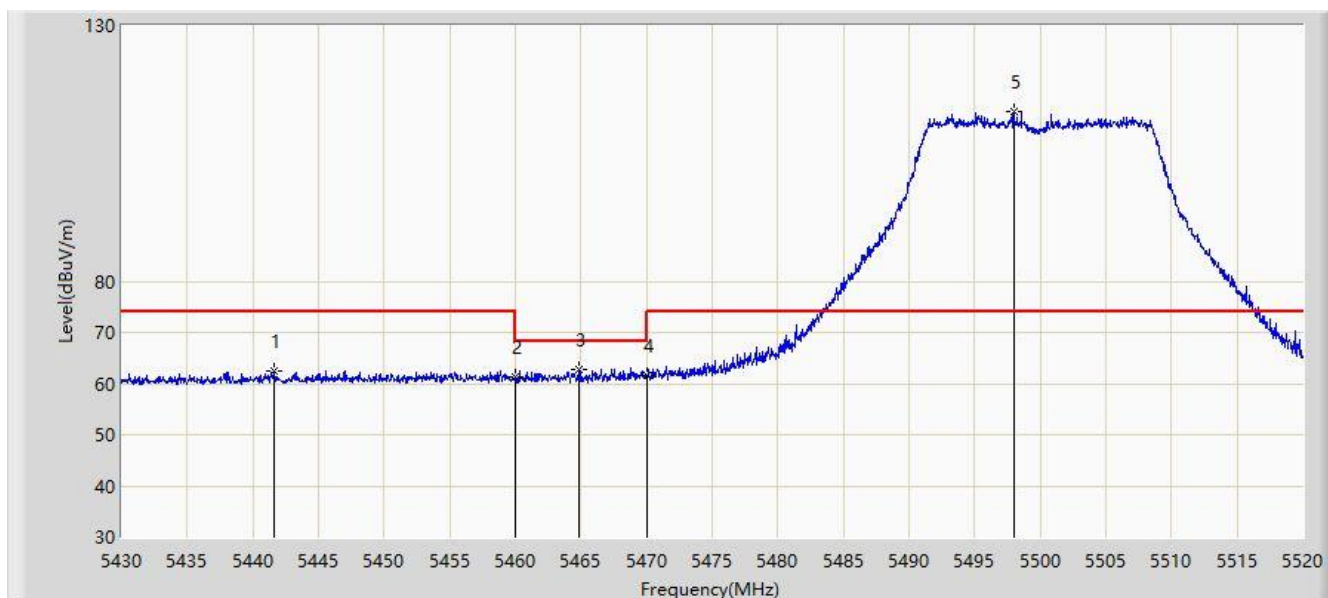


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.655	62.458	55.459	-11.542	74.000	7.000	PK
2			5460.000	61.201	54.224	-12.799	74.000	6.978	PK
3			5464.830	62.892	55.895	-5.308	68.200	6.996	PK
4			5470.000	61.532	54.515	-6.668	68.200	7.016	PK
5		*	5497.995	113.284	106.037	N/A	N/A	7.247	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

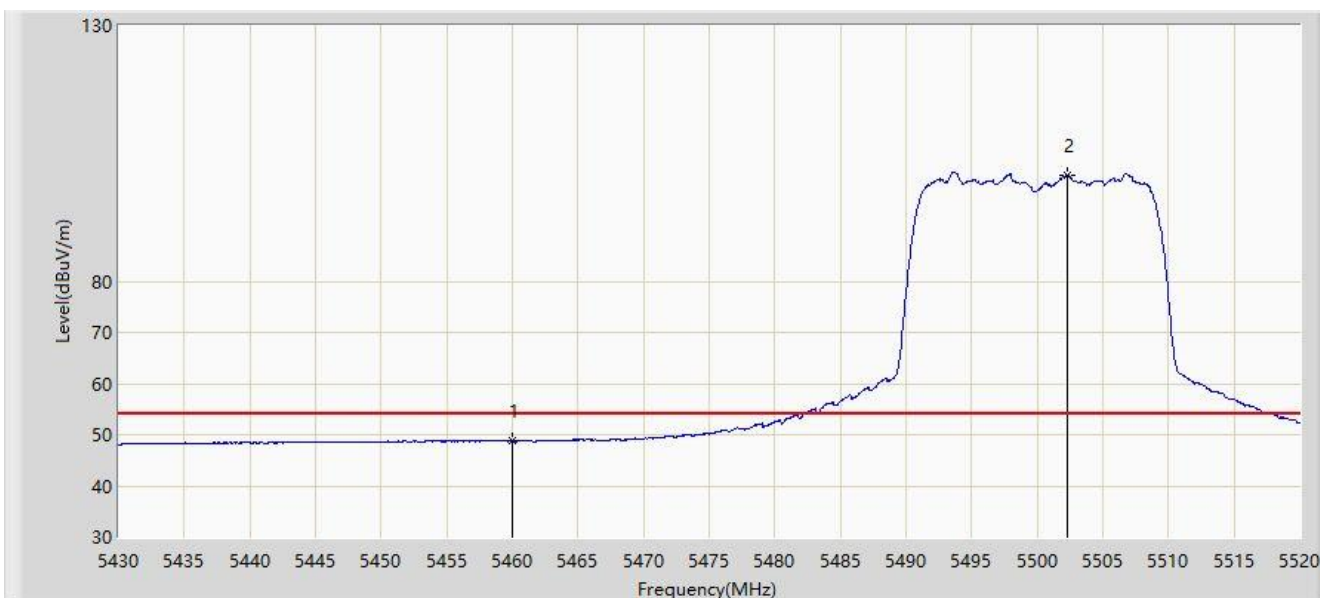


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.814	41.837	-5.186	54.000	6.978	AV
2		*	5502.315	100.738	93.445	N/A	N/A	7.293	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz, Ant 0 + 1 + 2 + 3	

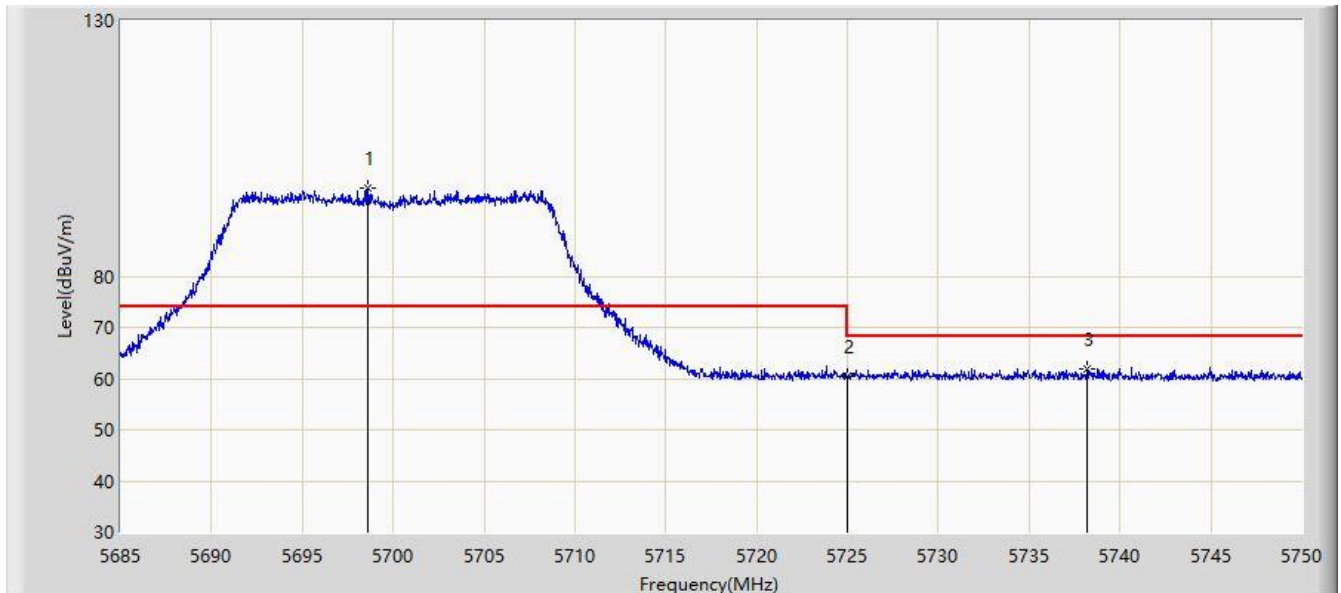


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.585	97.281	90.054	N/A	N/A	7.227	PK
2			5725.000	60.390	53.058	-7.810	68.200	7.332	PK
3			5738.170	61.841	54.425	-6.359	68.200	7.416	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 12:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz, Ant 0 + 1 + 2 + 3	

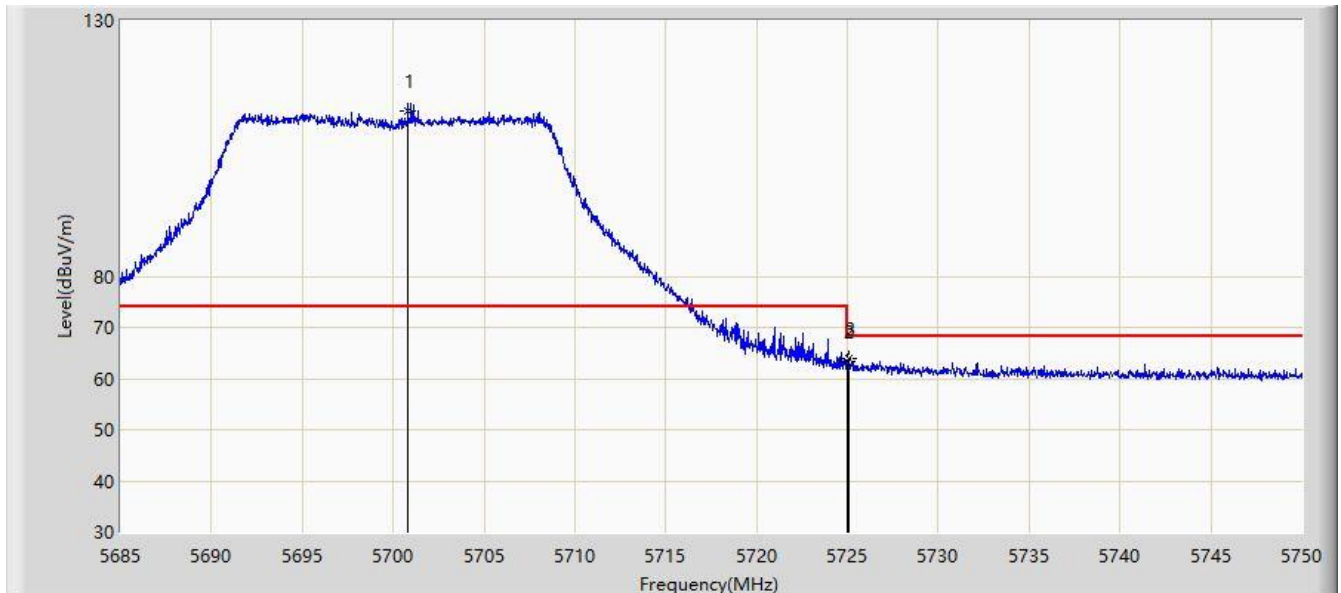


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5700.828	112.369	105.160	N/A	N/A	7.209	PK
2			5725.000	63.267	55.935	-4.933	68.200	7.332	PK
3			5725.105	63.894	56.561	-4.306	68.200	7.334	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:28
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz, Ant 0 + 1 + 2 + 3	

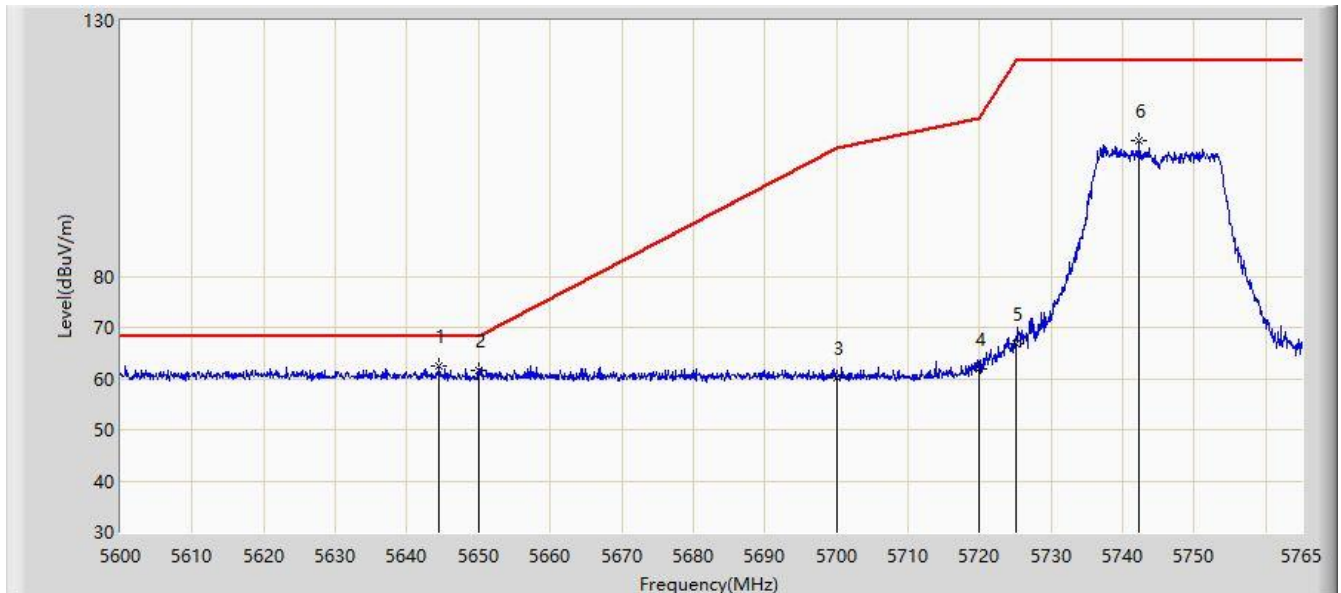


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5644.550	62.404	55.381	-5.796	68.200	7.023	PK
2			5650.000	61.663	54.523	-6.537	68.200	7.140	PK
3			5700.000	60.285	53.070	-44.915	105.200	7.215	PK
4			5720.000	61.956	54.683	-48.844	110.800	7.273	PK
5			5725.000	66.791	59.459	-55.409	122.200	7.332	PK
6			5742.312	106.455	99.014	N/A	N/A	7.441	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz, Ant 0 + 1 + 2 + 3	

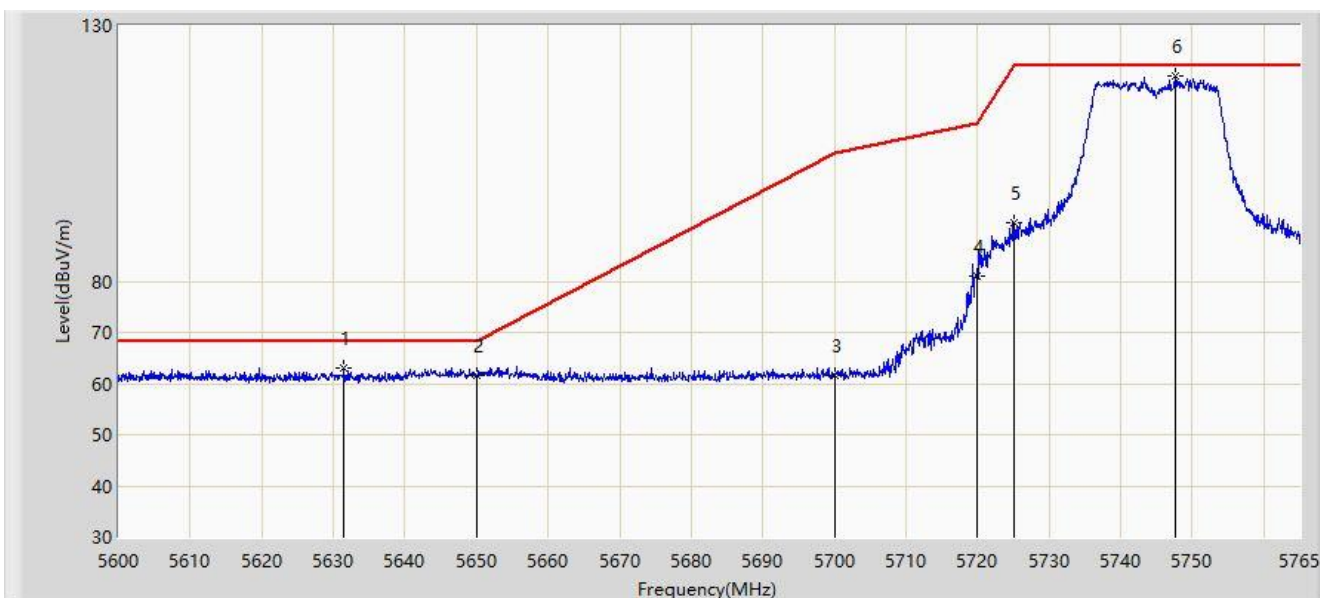


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.433	63.123	56.128	-5.077	68.200	6.995	PK
2			5650.000	61.710	54.570	-6.490	68.200	7.140	PK
3			5700.000	61.605	54.390	-43.595	105.200	7.215	PK
4			5720.000	80.978	73.705	-29.822	110.800	7.273	PK
5			5725.000	91.319	83.987	-30.881	122.200	7.332	PK
6		*	5747.675	120.280	112.839	N/A	N/A	7.441	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:31
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz, Ant 0 + 1 + 2 + 3	

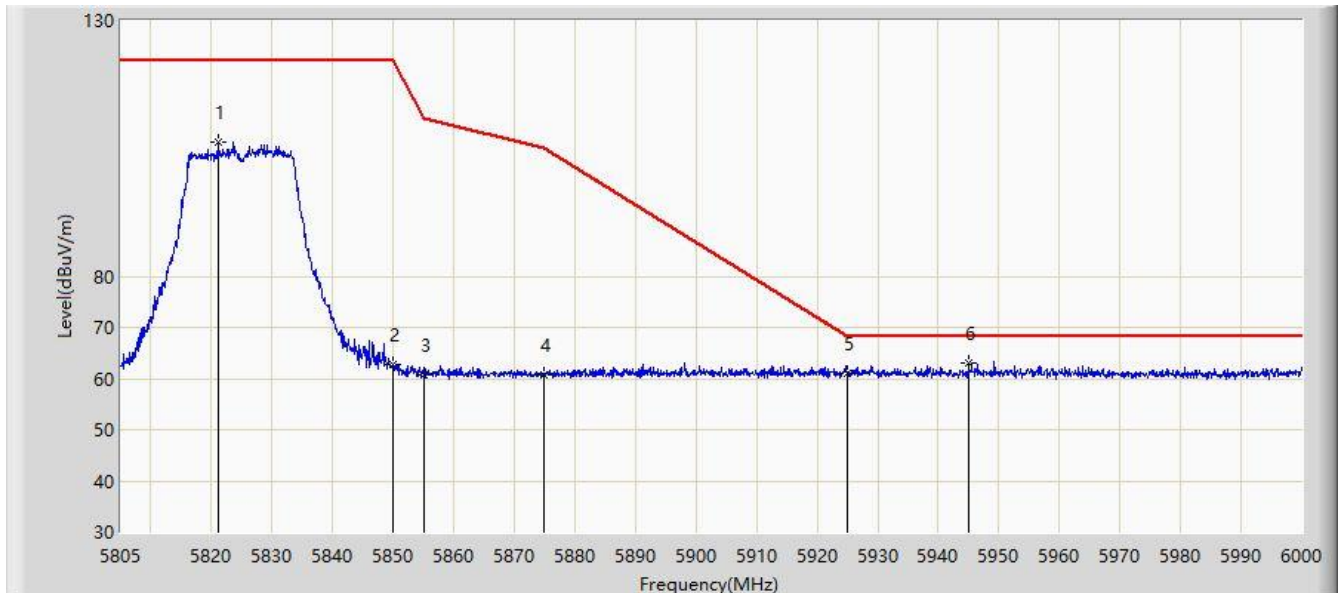


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.087	106.251	98.612	N/A	N/A	7.639	PK
2			5850.000	62.693	55.001	-59.507	122.200	7.692	PK
3			5855.000	60.658	53.014	-50.142	110.800	7.644	PK
4			5875.000	60.756	53.154	-44.444	105.200	7.602	PK
5			5925.000	60.893	53.067	-7.307	68.200	7.826	PK
6		*	5945.000	63.095	55.399	-5.105	68.200	7.696	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:33
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz, Ant 0 + 1 + 2 + 3	

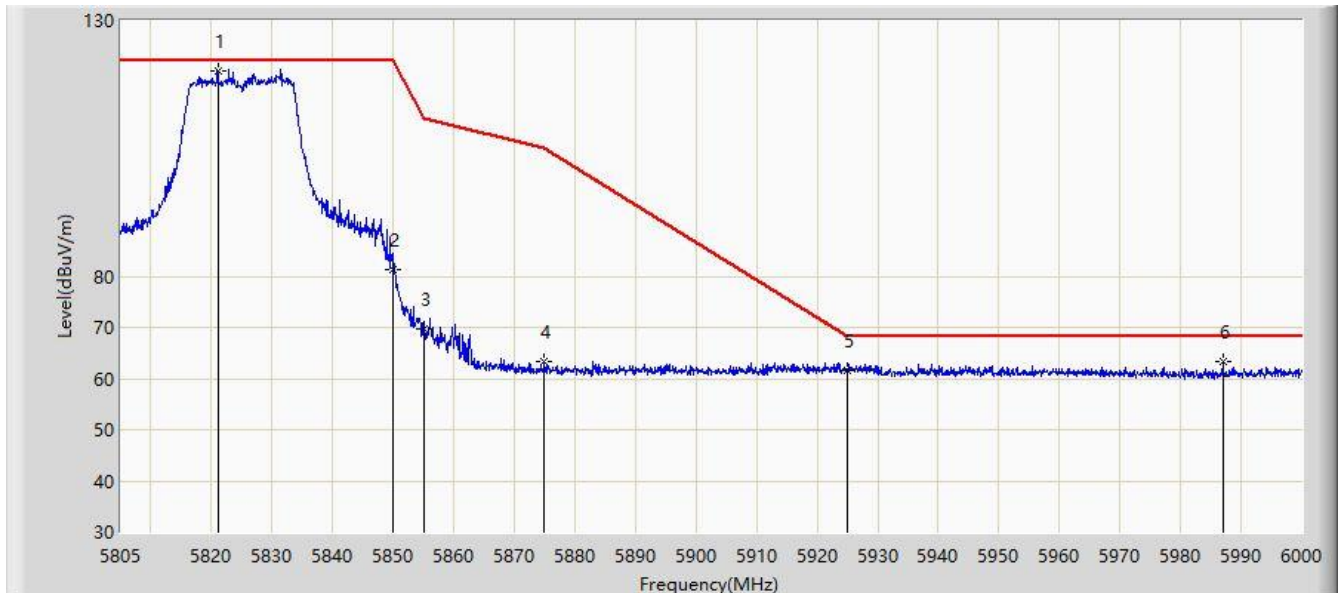


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.087	120.229	112.590	N/A	N/A	7.639	PK
2			5850.000	81.400	73.708	-40.800	122.200	7.692	PK
3			5855.000	69.719	62.075	-41.081	110.800	7.644	PK
4			5875.000	63.219	55.617	-41.981	105.200	7.602	PK
5			5925.000	61.543	53.717	-6.657	68.200	7.826	PK
6			5986.935	63.258	55.468	-4.942	68.200	7.790	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

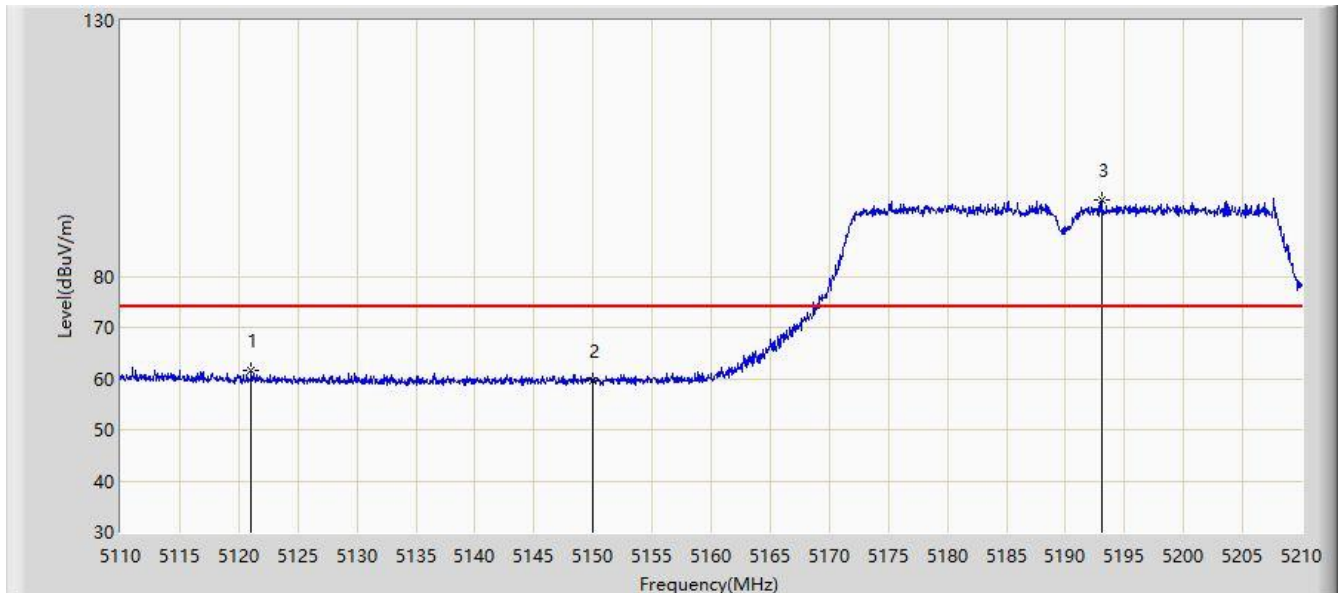


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5121.050	61.649	54.922	-12.351	74.000	6.727	PK
2			5150.000	59.455	52.656	-14.545	74.000	6.799	PK
3		*	5193.050	94.923	88.304	N/A	N/A	6.619	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

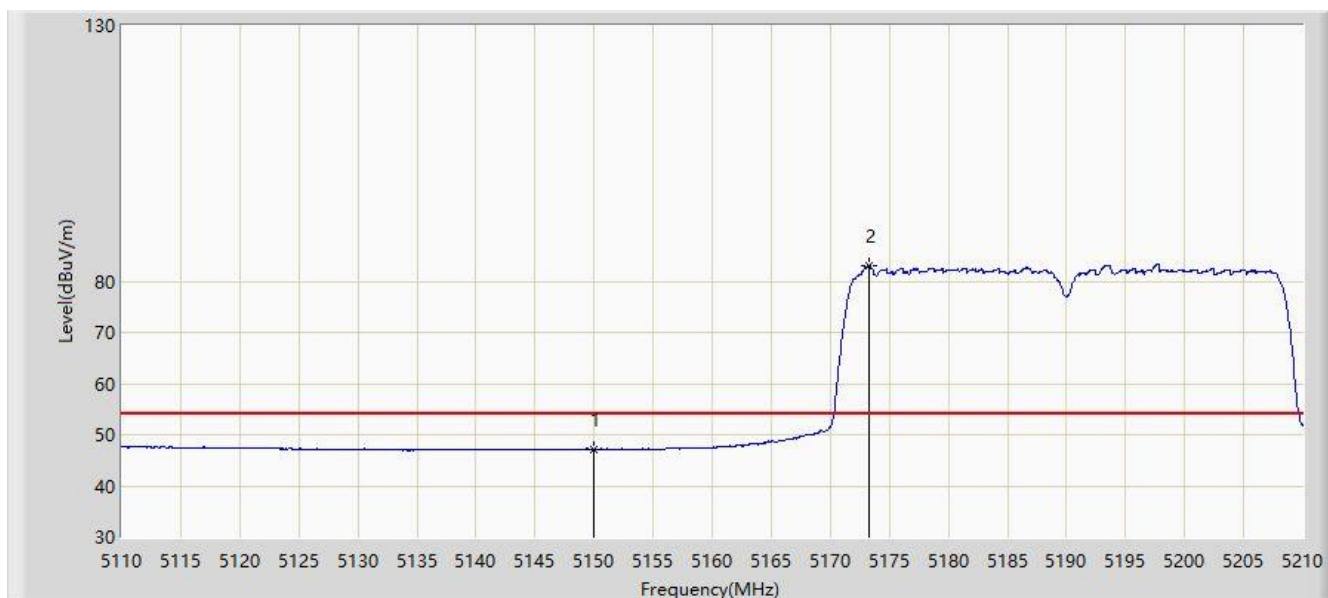


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.198	40.399	-6.802	54.000	6.799	AV
2		*	5173.250	83.066	76.243	N/A	N/A	6.822	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

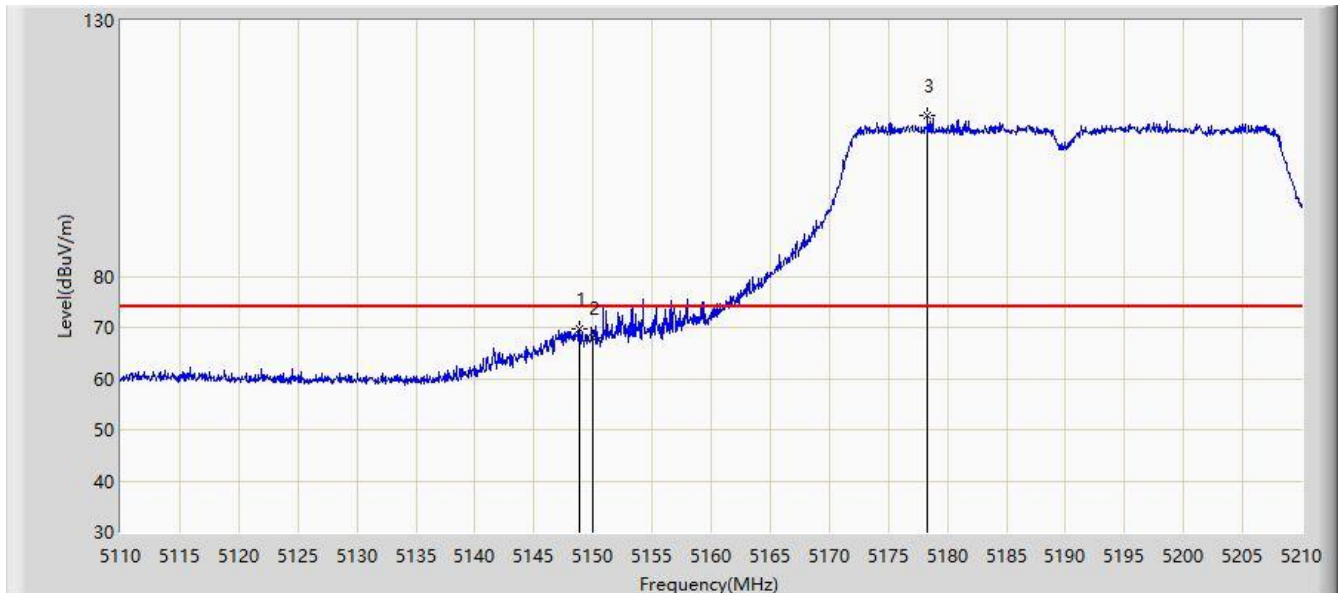


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.800	69.785	62.990	-4.215	74.000	6.794	PK
2			5150.000	67.834	61.035	-6.166	74.000	6.799	PK
3		*	5178.350	111.560	104.757	N/A	N/A	6.803	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

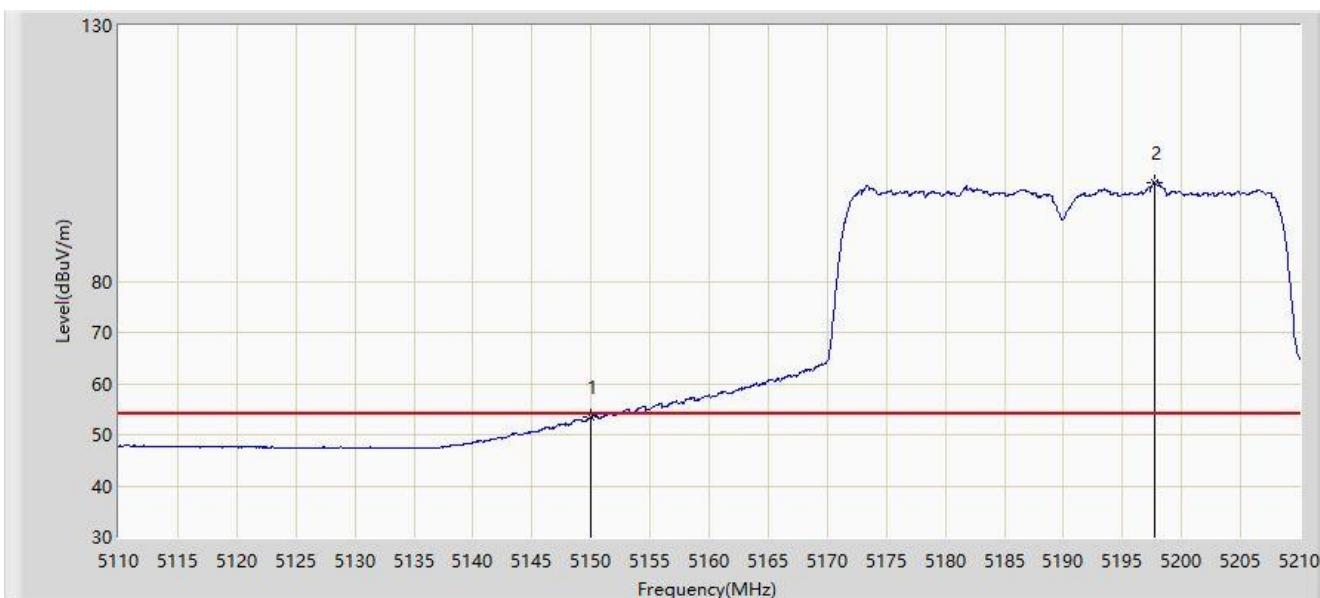


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.529	46.730	-0.471	54.000	6.799	AV
2		*	5197.750	99.410	92.864	N/A	N/A	6.546	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

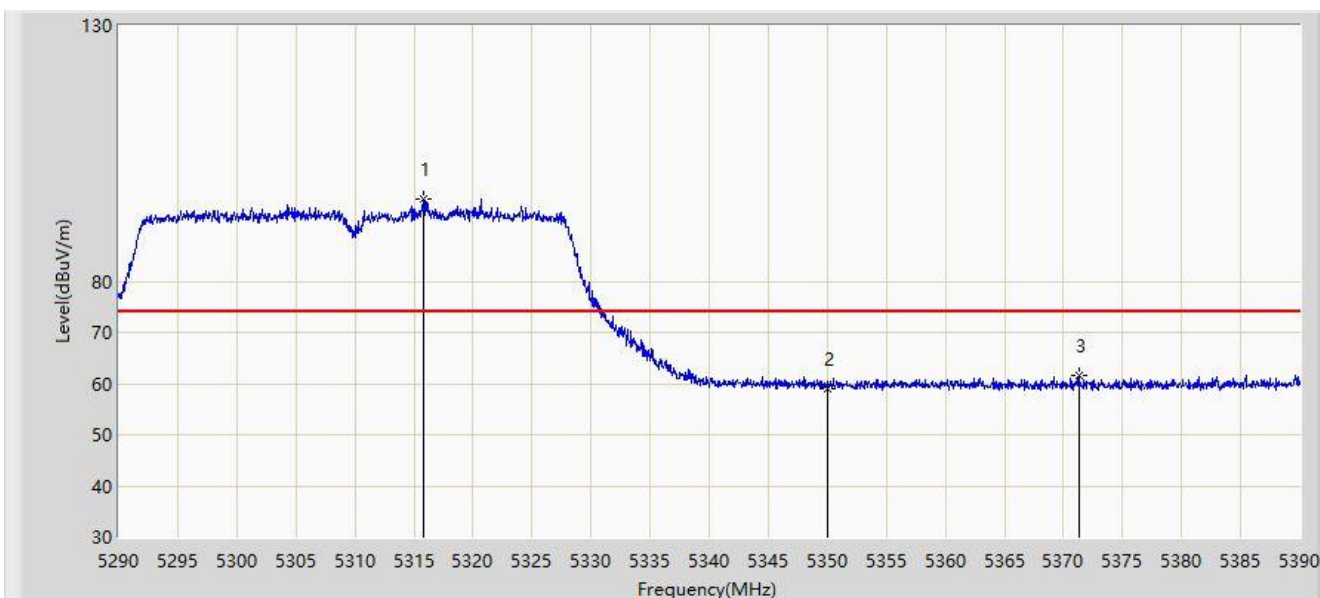


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.800	96.044	89.431	N/A	N/A	6.613	PK
2			5350.000	59.066	52.438	-14.934	74.000	6.629	PK
3			5371.300	61.595	54.982	-12.405	74.000	6.613	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

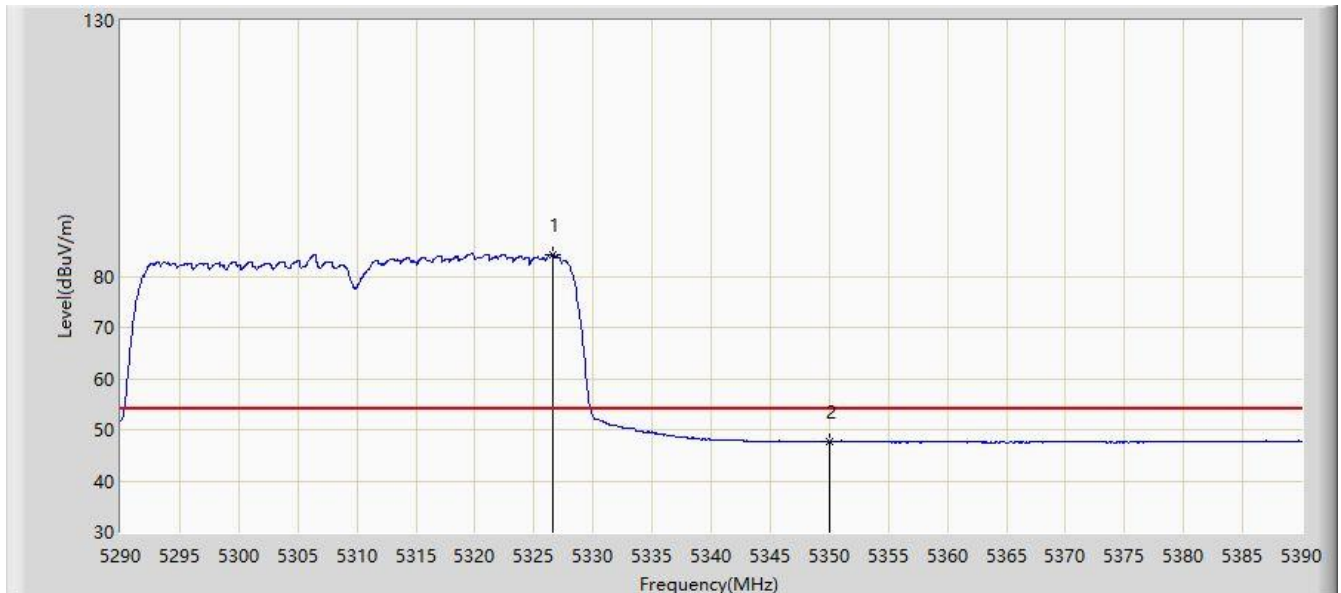


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.650	84.259	77.590	N/A	N/A	6.669	AV
2			5350.000	47.670	41.042	-6.330	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

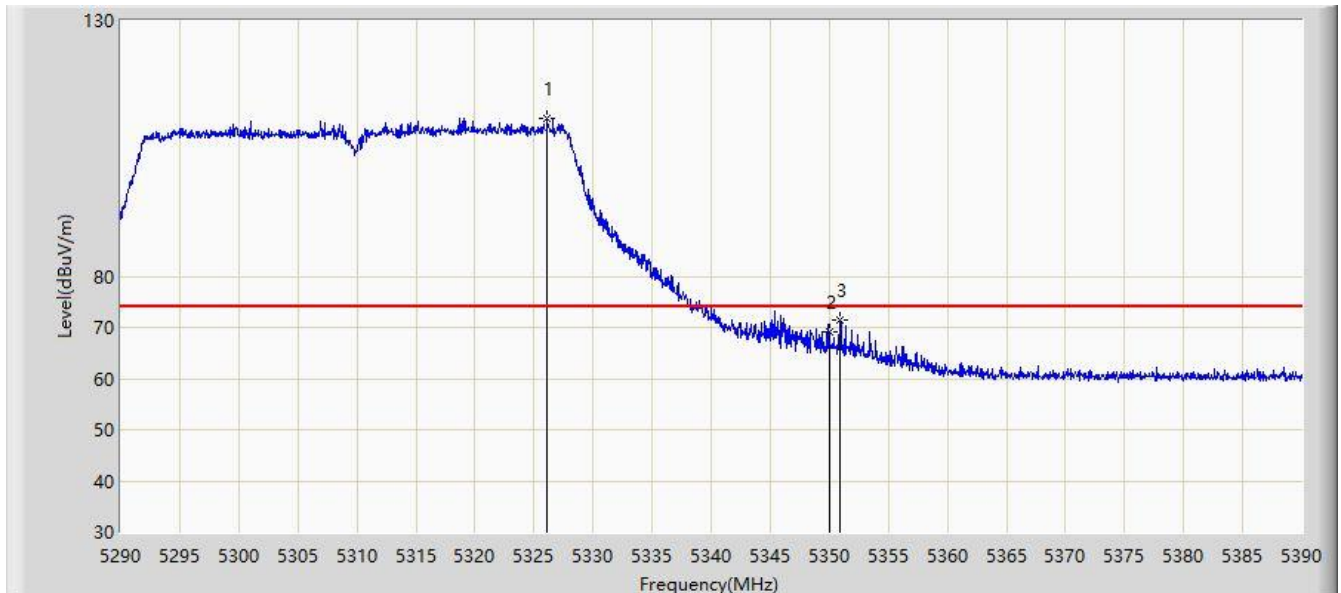


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.100	110.967	104.302	N/A	N/A	6.665	PK
2			5350.000	69.263	62.635	-4.737	74.000	6.629	PK
3			5350.850	71.475	64.852	-2.525	74.000	6.622	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

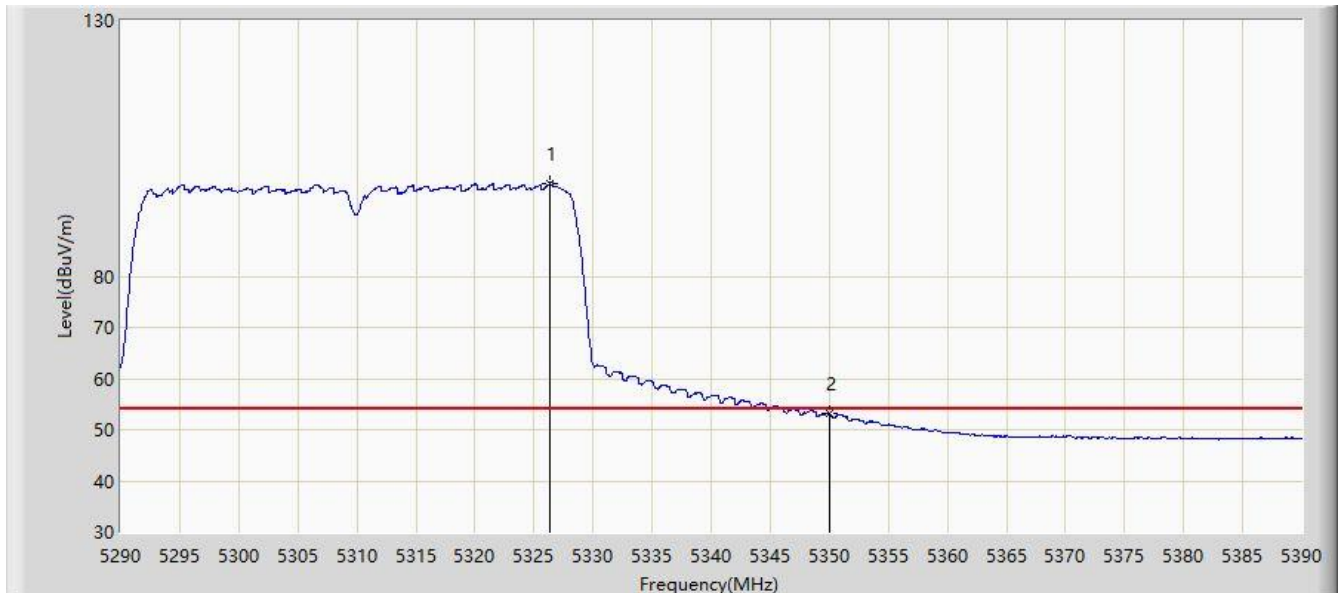


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.350	98.179	91.512	N/A	N/A	6.666	AV
2			5350.000	53.054	46.426	-0.946	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

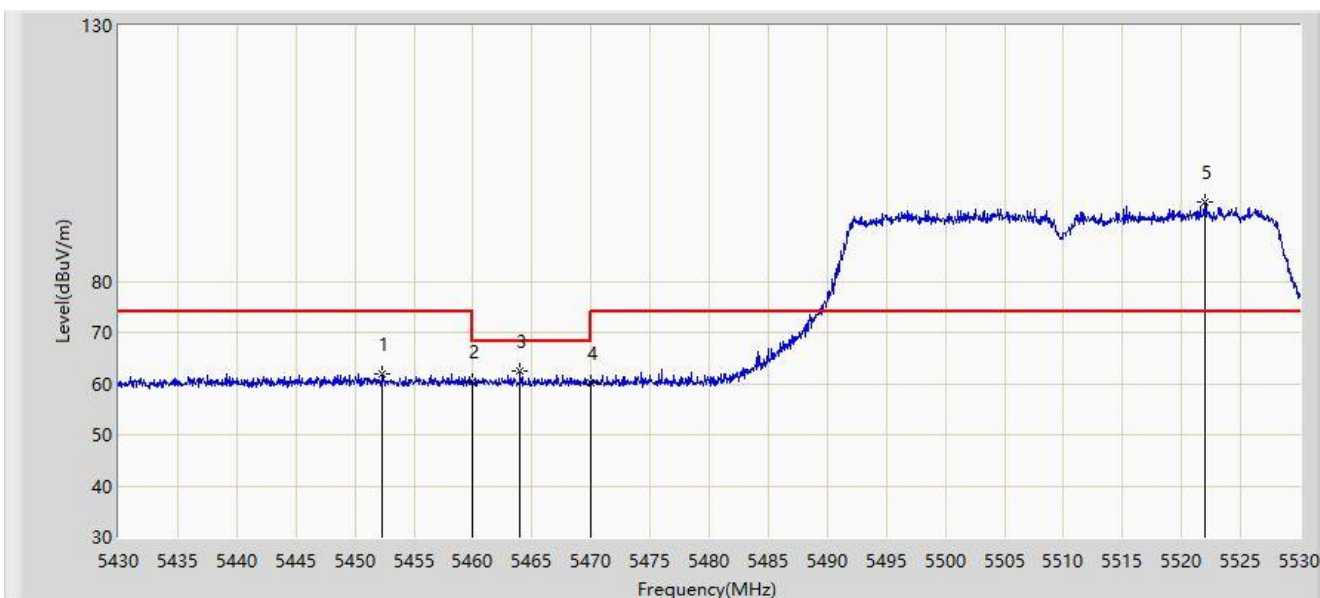


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.300	61.988	55.028	-12.012	74.000	6.960	PK
2			5460.000	60.329	53.352	-13.671	74.000	6.978	PK
3			5463.950	62.363	55.370	-5.837	68.200	6.993	PK
4			5470.000	60.245	53.228	-7.955	68.200	7.016	PK
5		*	5522.000	95.548	88.478	N/A	N/A	7.070	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

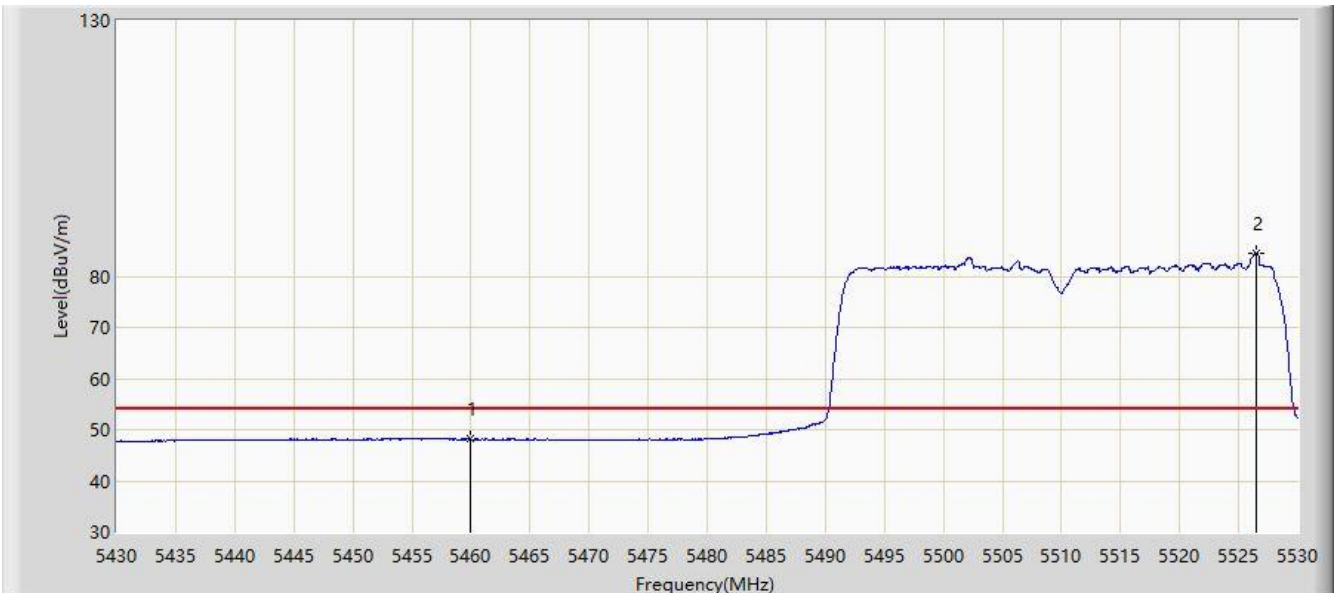


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.156	41.179	-5.844	54.000	6.978	AV
2		*	5526.500	84.572	77.514	N/A	N/A	7.058	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

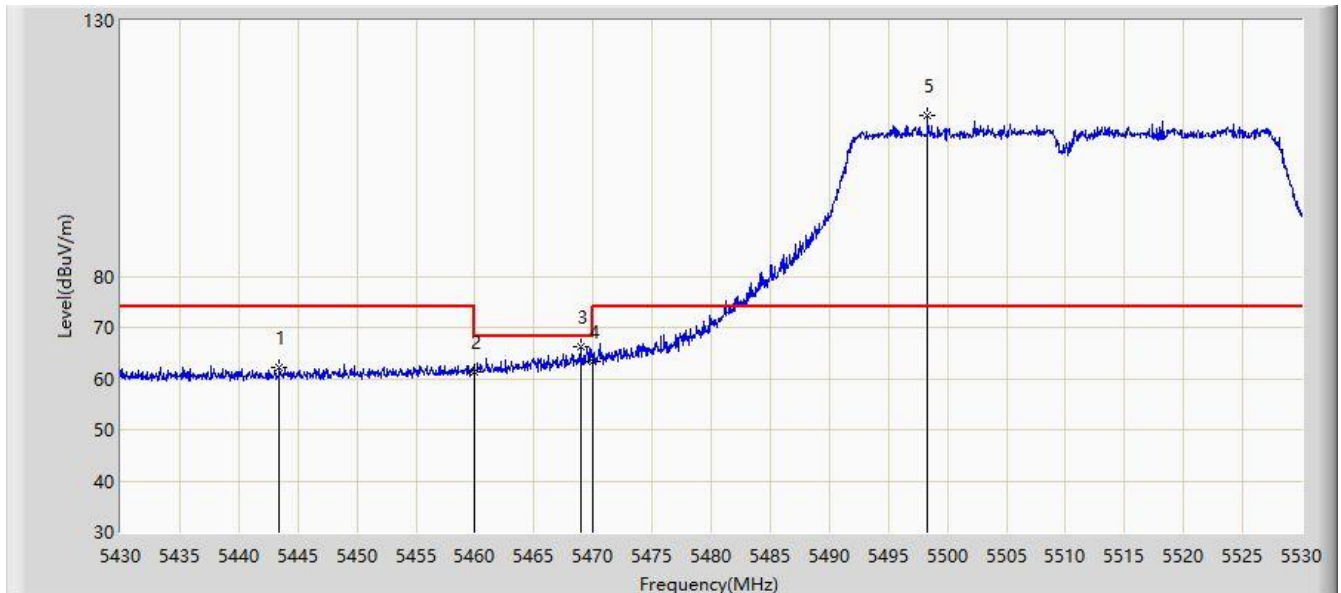


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.400	62.154	55.161	-11.846	74.000	6.993	PK
2			5460.000	61.388	54.411	-12.612	74.000	6.978	PK
3			5468.950	66.253	59.240	-1.947	68.200	7.014	PK
4			5470.000	63.257	56.240	-4.943	68.200	7.016	PK
5		*	5498.350	111.561	104.310	N/A	N/A	7.251	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

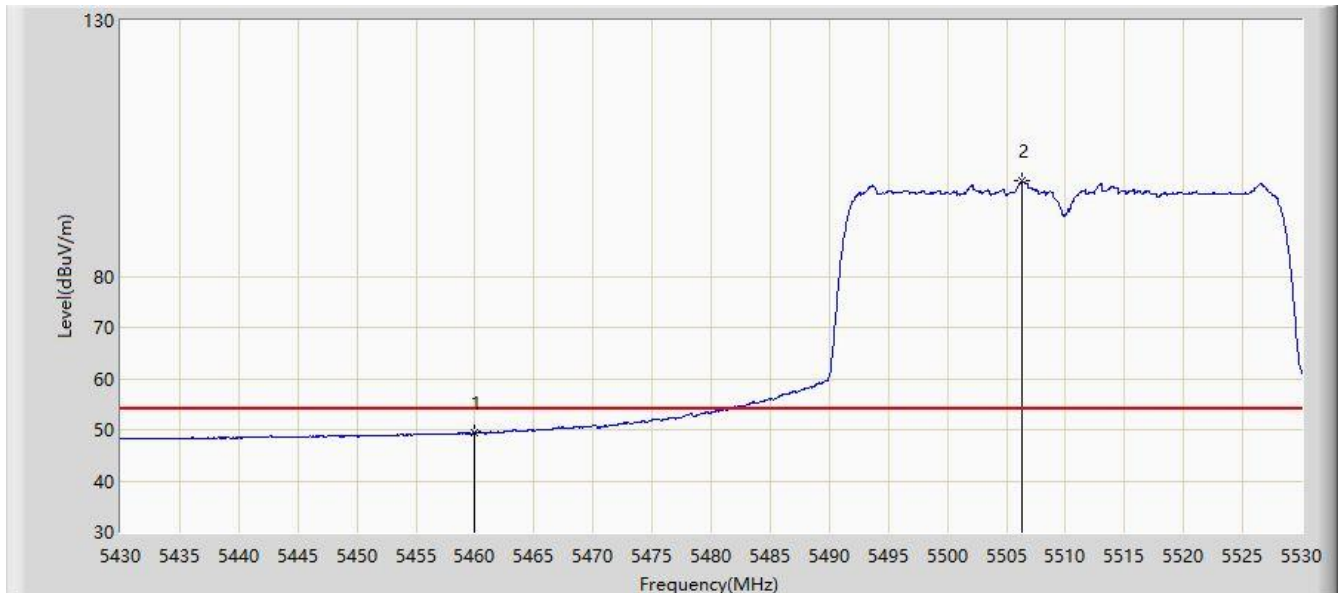


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.403	42.426	-4.597	54.000	6.978	AV
2		*	5506.300	98.635	91.333	N/A	N/A	7.303	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz, Ant 0 + 1 + 2 + 3	

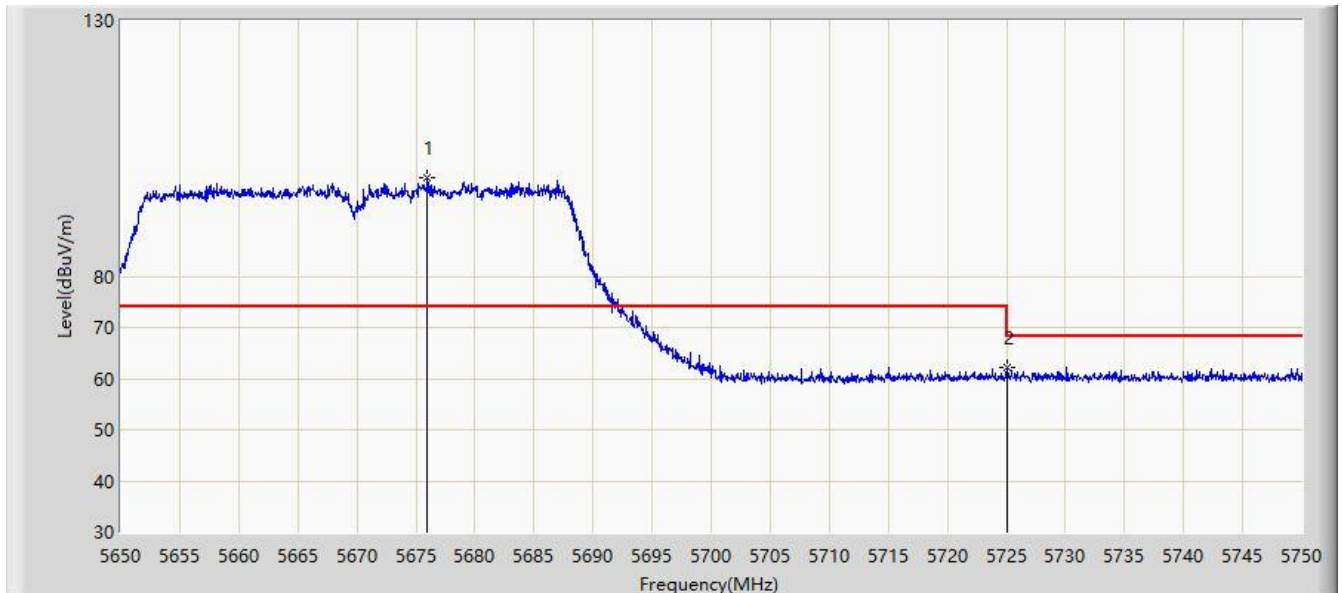


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.950	99.375	92.063	N/A	N/A	7.311	PK
2			5725.000	62.138	54.806	-6.062	68.200	7.332	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz, Ant 0 + 1 + 2 + 3	

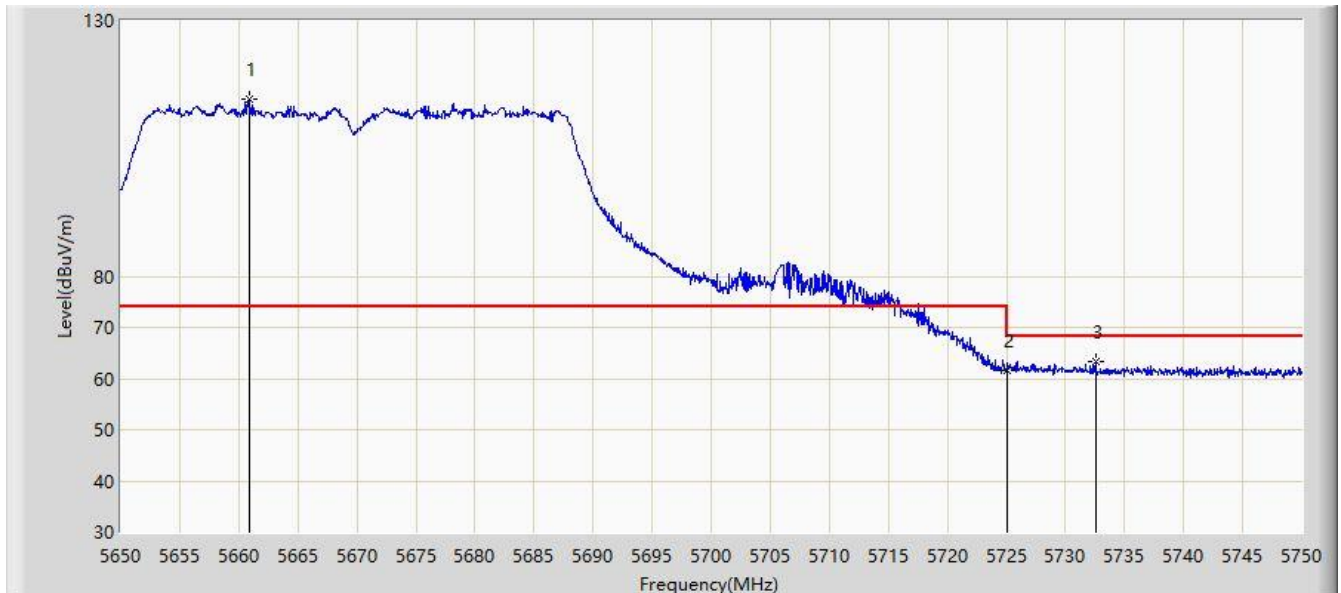


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.900	114.729	107.417	N/A	N/A	7.312	PK
2			5725.000	61.641	54.309	-6.559	68.200	7.332	PK
3			5732.550	63.196	55.813	-5.004	68.200	7.383	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 15:59
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz, Ant 0 + 1 + 2 + 3	

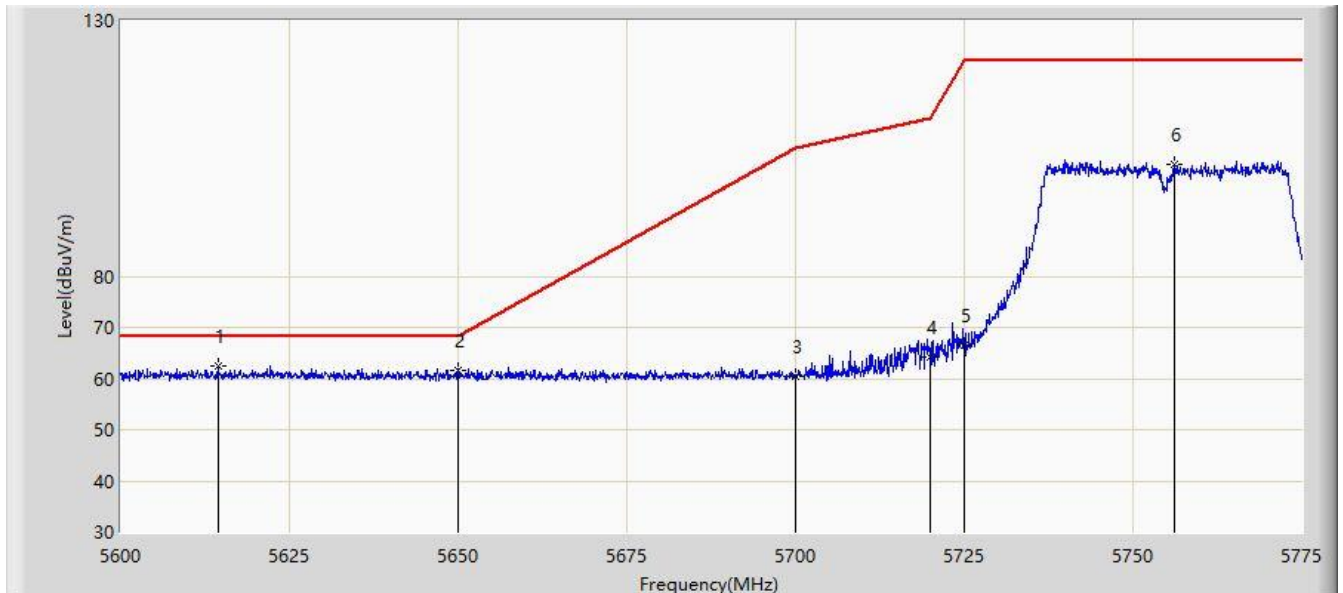


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5614.437	62.344	55.290	-5.856	68.200	7.055	PK
2			5650.000	61.456	54.316	-6.744	68.200	7.140	PK
3			5700.000	60.508	53.293	-44.692	105.200	7.215	PK
4			5720.000	64.207	56.934	-46.593	110.800	7.273	PK
5			5725.000	66.616	59.284	-55.584	122.200	7.332	PK
6			5756.100	101.910	94.478	N/A	N/A	7.432	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:01
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz, Ant 0 + 1 + 2 + 3	

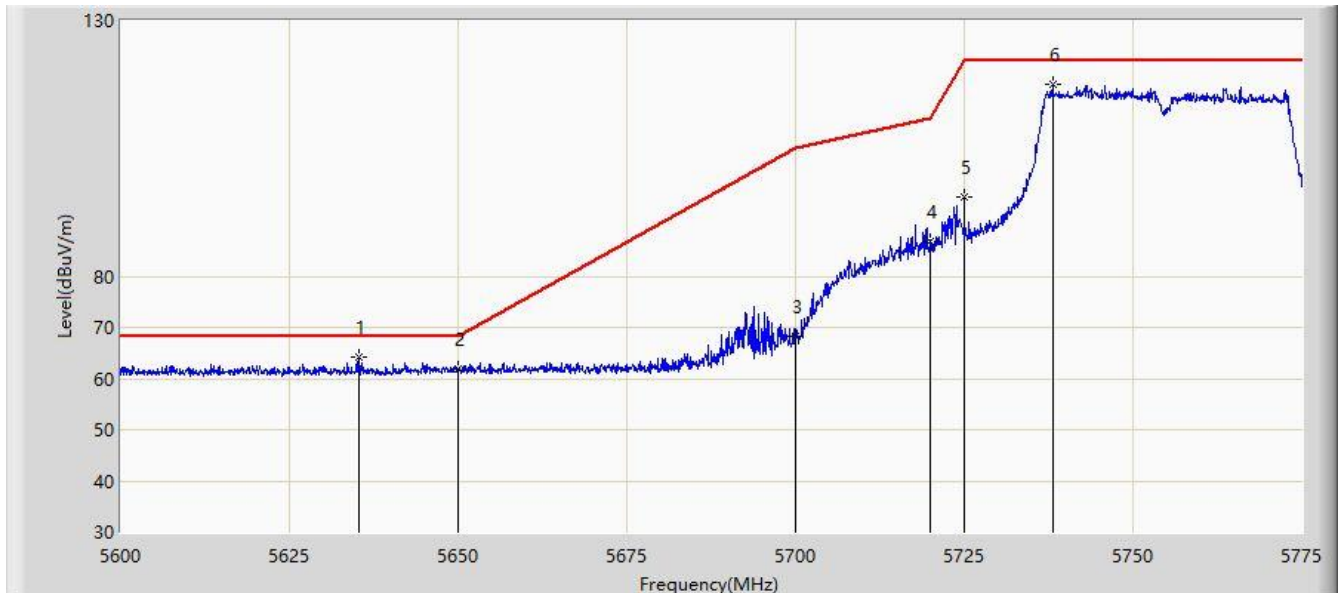


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.350	64.167	57.192	-4.033	68.200	6.975	PK
2			5650.000	61.854	54.714	-6.346	68.200	7.140	PK
3			5700.000	68.342	61.127	-36.858	105.200	7.215	PK
4			5720.000	86.874	79.601	-23.926	110.800	7.273	PK
5			5725.000	95.537	88.205	-26.663	122.200	7.332	PK
6			5738.075	117.490	110.074	N/A	N/A	7.416	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:02
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz, Ant 0 + 1 + 2 + 3	

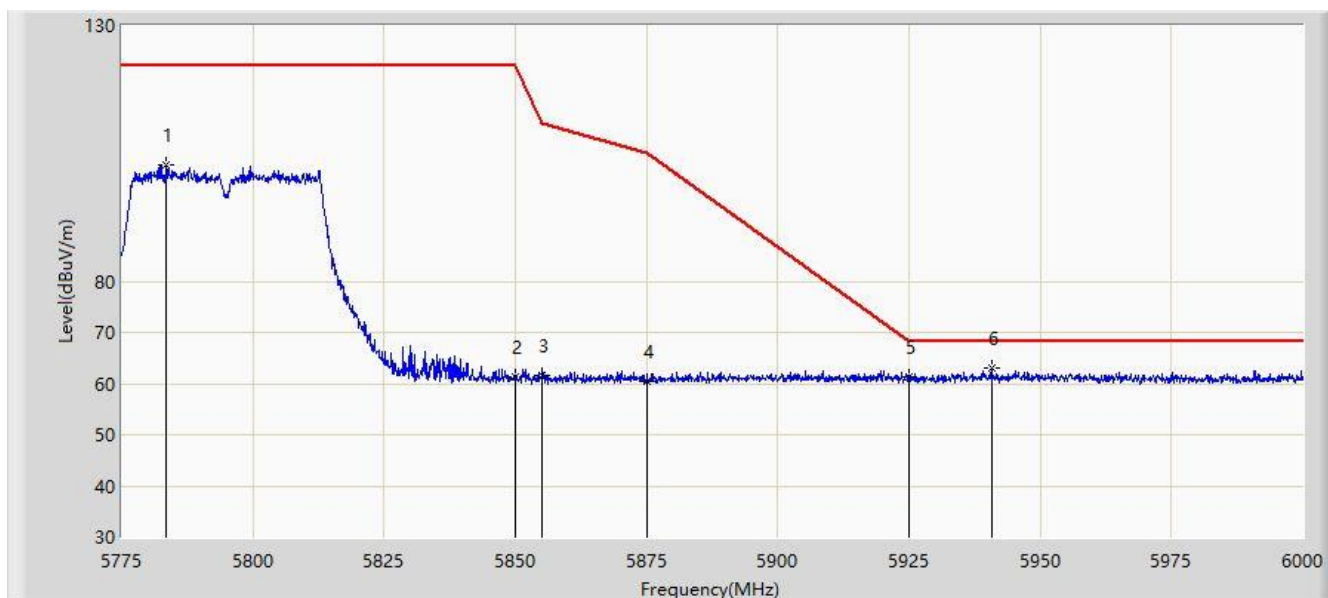


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5783.550	102.861	95.330	N/A	N/A	7.531	PK
2			5850.000	61.296	53.604	-60.904	122.200	7.692	PK
3			5855.000	61.586	53.942	-49.214	110.800	7.644	PK
4			5875.000	60.355	52.753	-44.845	105.200	7.602	PK
5			5925.000	61.329	53.503	-6.871	68.200	7.826	PK
6		*	5940.712	62.964	55.238	-5.236	68.200	7.727	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:05
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz, Ant 0 + 1 + 2 + 3	

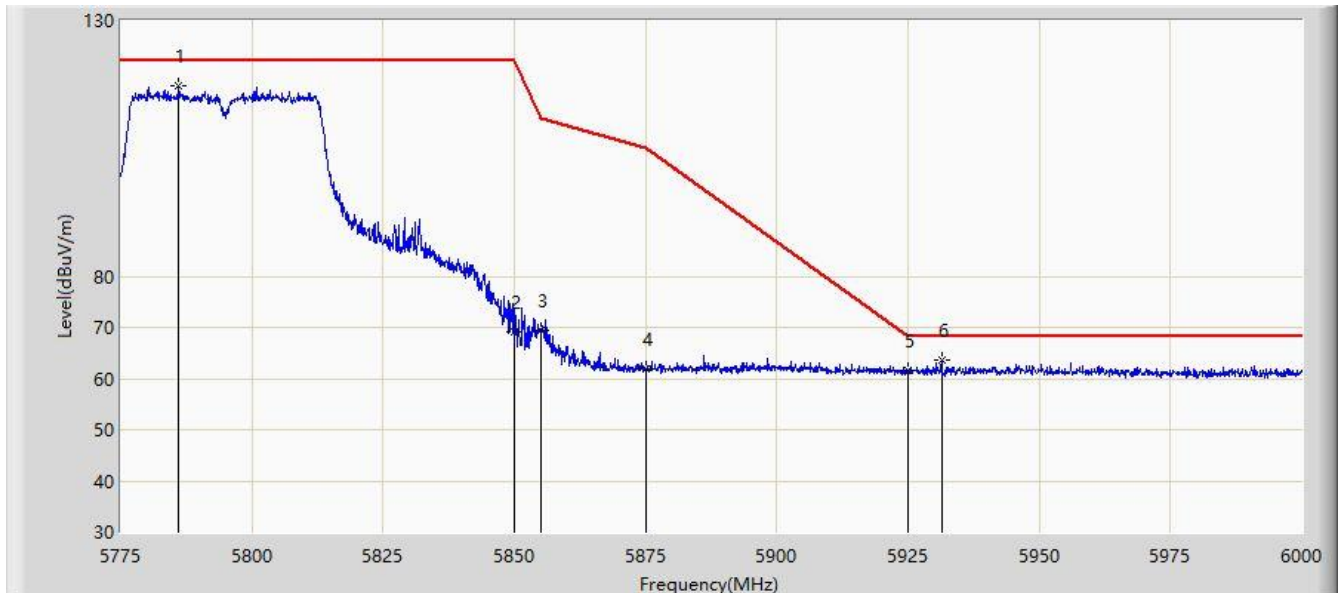


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5786.025	117.187	109.666	N/A	N/A	7.522	PK
2			5850.000	69.080	61.388	-53.120	122.200	7.692	PK
3			5855.000	69.485	61.841	-41.315	110.800	7.644	PK
4			5875.000	61.853	54.251	-43.347	105.200	7.602	PK
5			5925.000	61.595	53.769	-6.605	68.200	7.826	PK
6		*	5931.375	63.721	55.929	-4.479	68.200	7.792	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

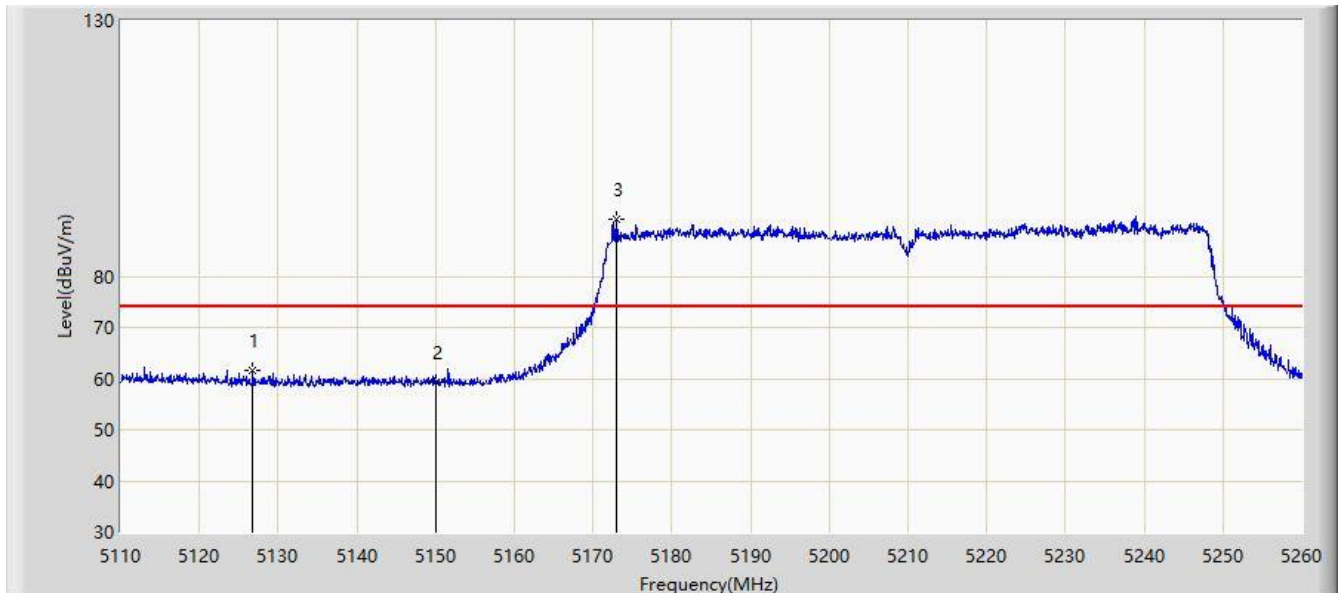


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5126.800	61.490	54.687	-12.510	74.000	6.803	PK
2			5150.000	59.186	52.387	-14.814	74.000	6.799	PK
3		*	5173.000	91.025	84.201	N/A	N/A	6.824	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

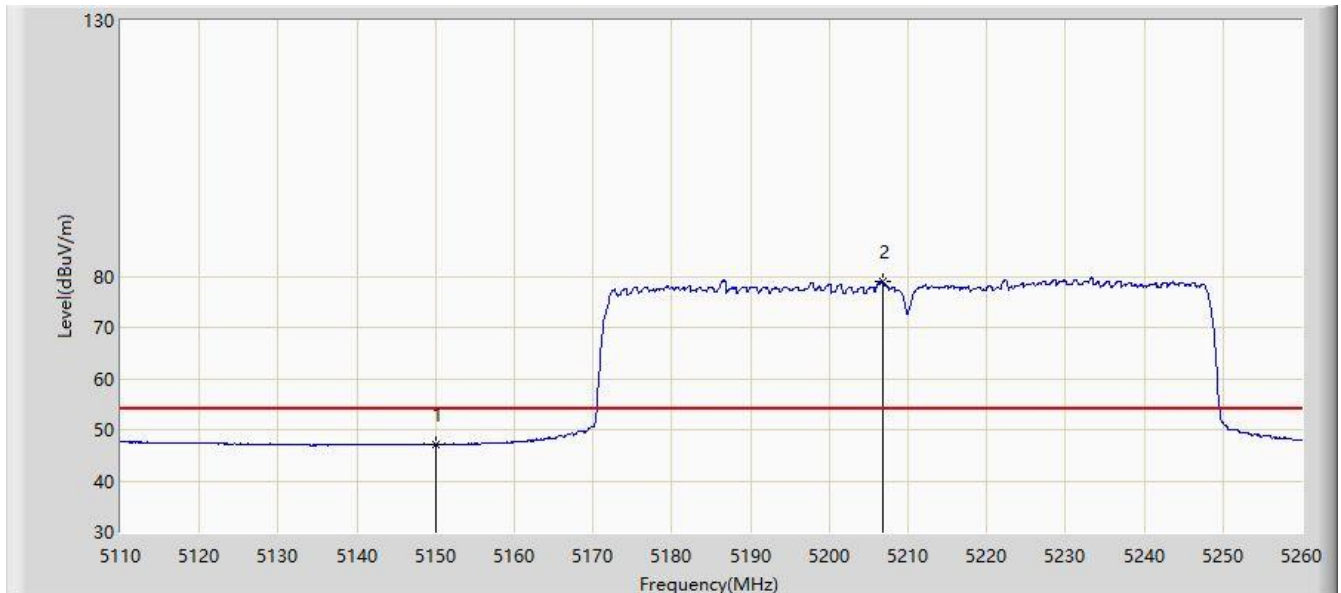


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.140	40.341	-6.860	54.000	6.799	AV
2		*	5206.750	79.036	72.540	N/A	N/A	6.496	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

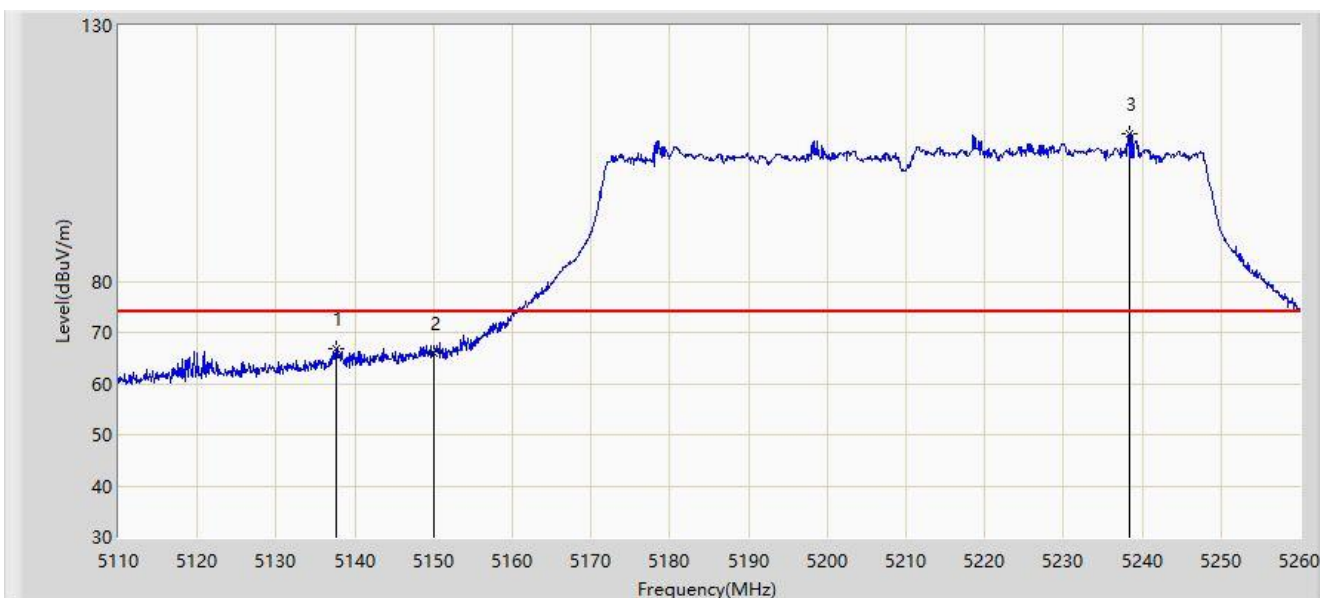


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.600	66.822	59.990	-7.178	74.000	6.833	PK
2			5150.000	66.079	59.280	-7.921	74.000	6.799	PK
3		*	5238.400	108.767	102.031	N/A	N/A	6.735	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

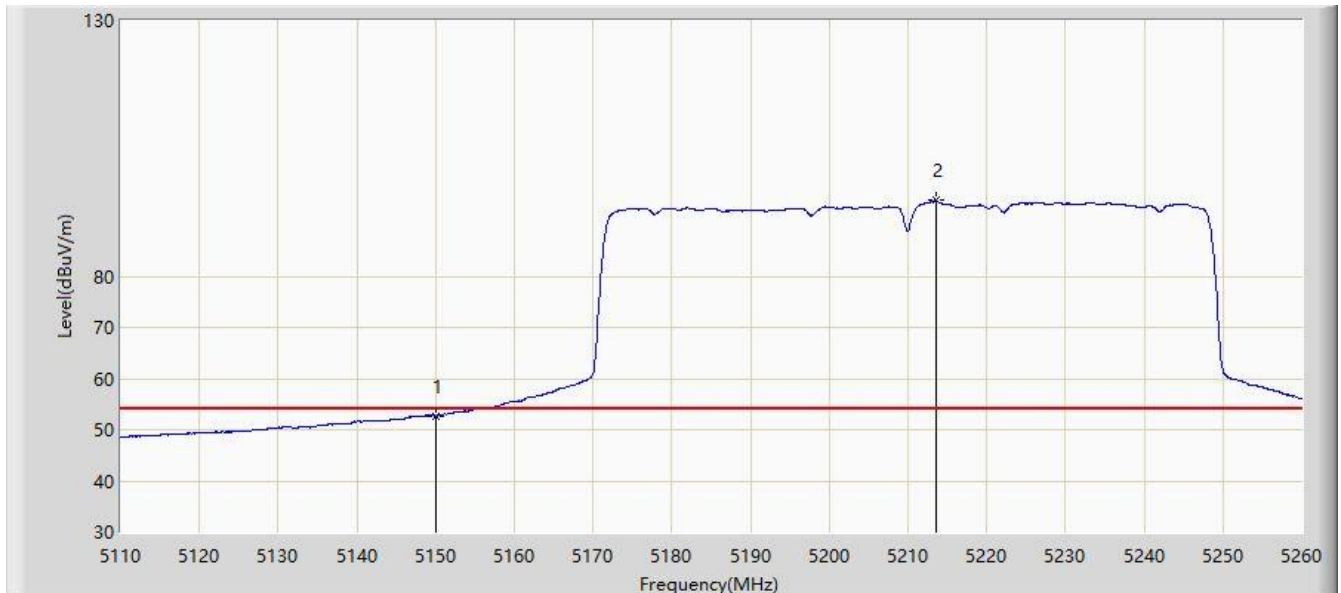


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.711	45.912	-1.289	54.000	6.799	AV
2		*	5213.500	94.803	88.334	N/A	N/A	6.469	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

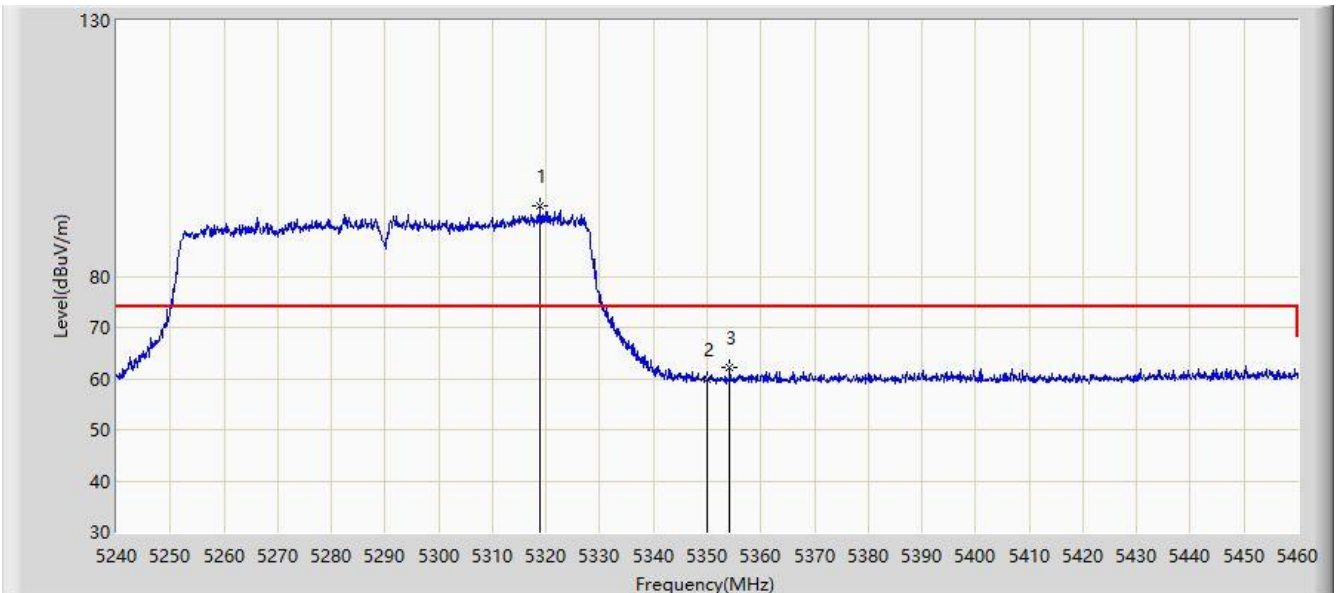


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.760	93.816	87.202	N/A	N/A	6.613	PK
2			5350.000	59.872	53.244	-14.128	74.000	6.629	PK
3			5354.180	62.102	55.490	-11.898	74.000	6.612	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

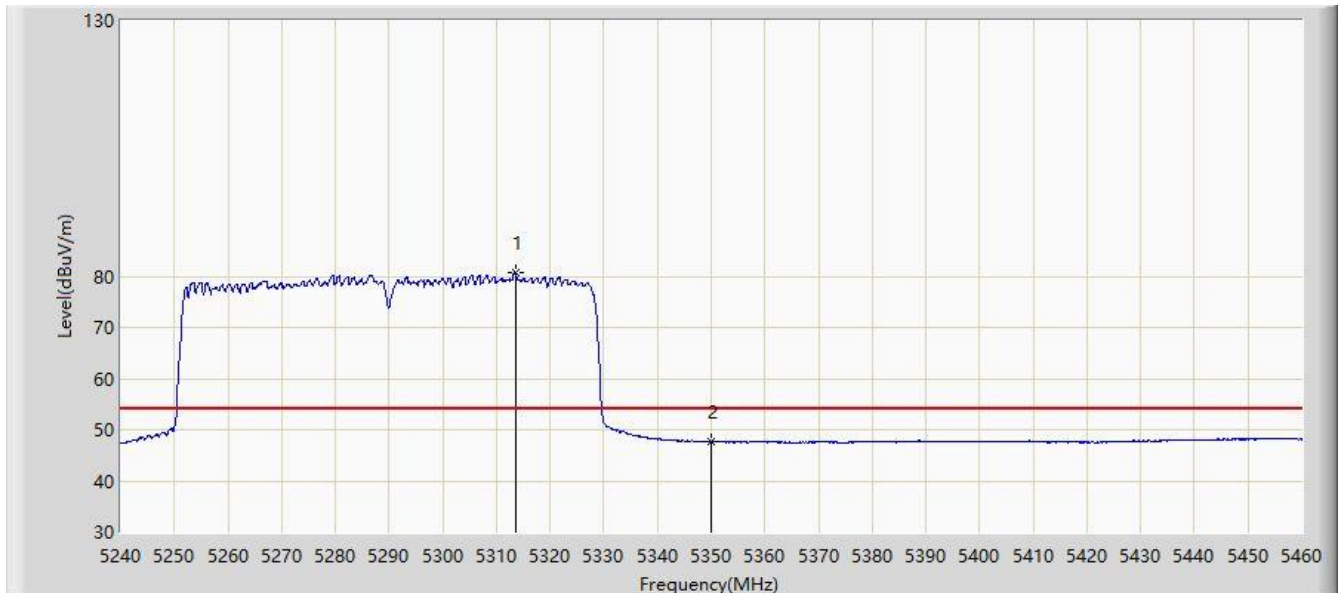


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.480	80.837	74.219	N/A	N/A	6.617	AV
2			5350.000	47.618	40.990	-6.382	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

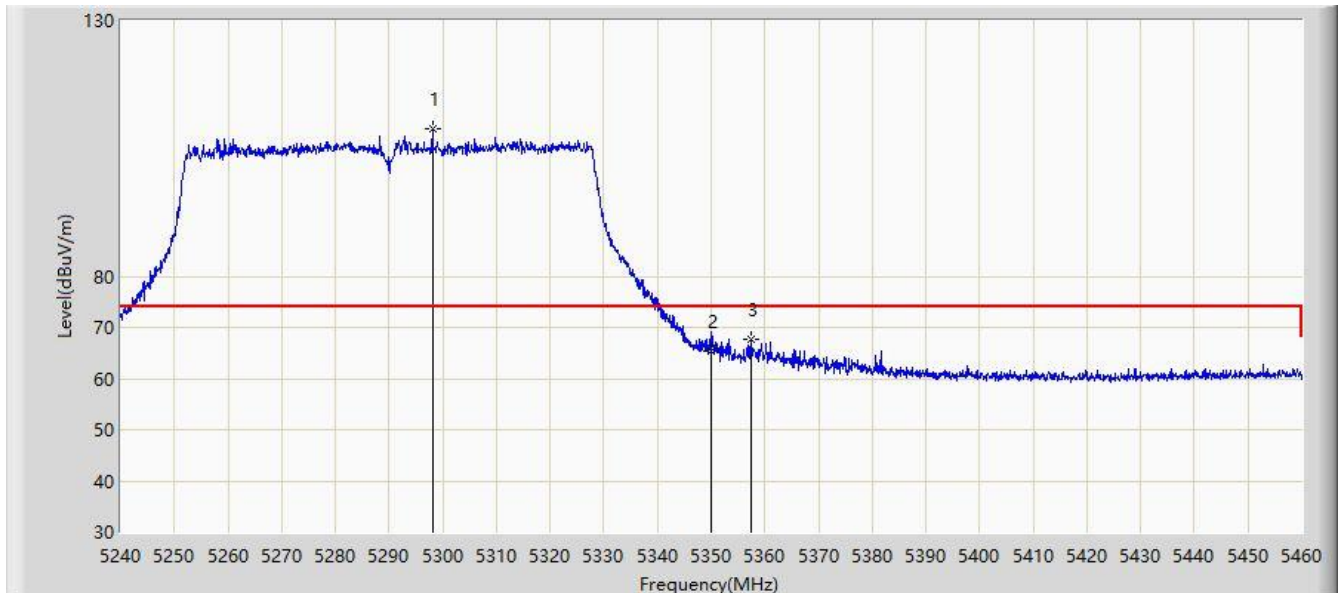


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.080	108.711	102.108	N/A	N/A	6.603	PK
2			5350.000	65.308	58.680	-8.692	74.000	6.629	PK
3			5357.480	67.620	61.012	-6.380	74.000	6.608	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

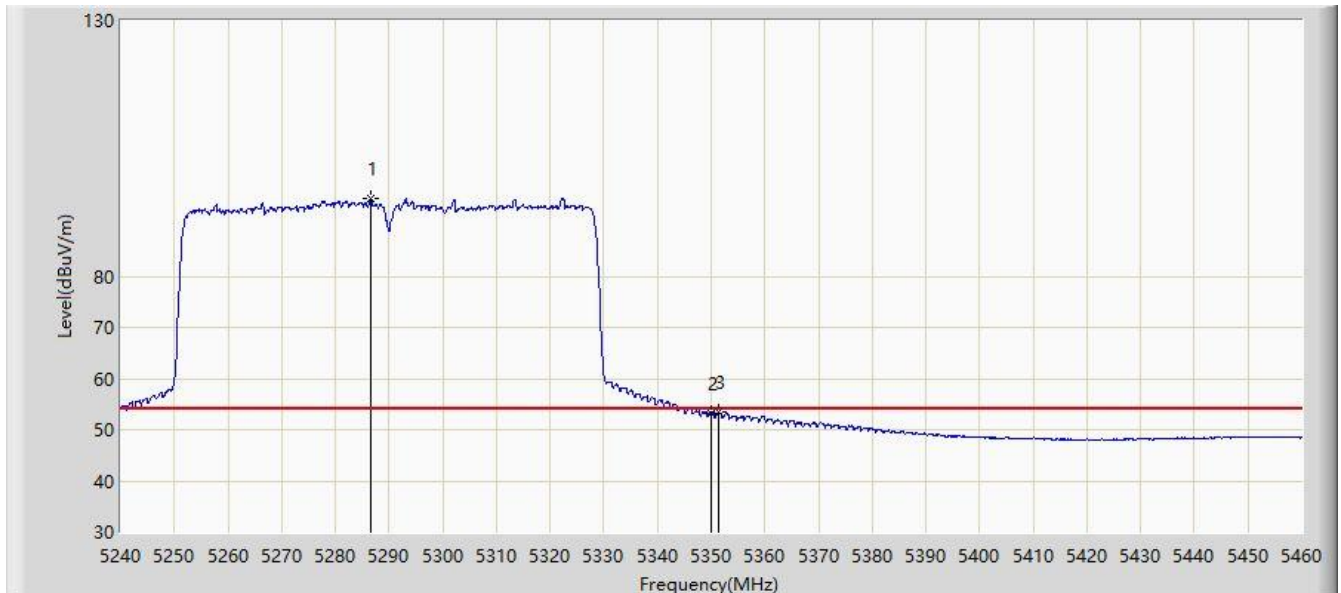


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5286.530	95.138	88.691	N/A	N/A	6.447	AV
2			5350.000	53.202	46.574	-0.798	54.000	6.629	AV
3			5351.430	53.355	46.736	-0.645	54.000	6.620	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

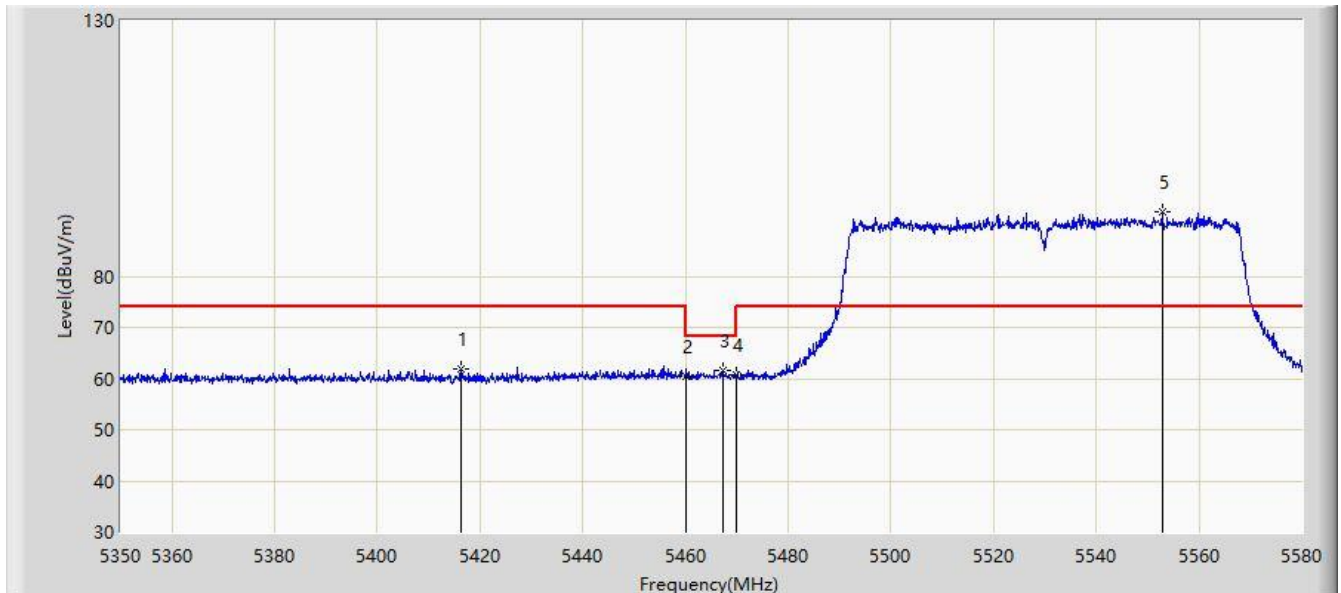


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5416.240	61.975	54.981	-12.025	74.000	6.994	PK
2			5460.000	60.375	53.398	-13.625	74.000	6.978	PK
3			5467.185	61.558	54.552	-6.642	68.200	7.006	PK
4			5470.000	60.739	53.722	-7.461	68.200	7.016	PK
5		*	5552.860	92.748	85.558	N/A	N/A	7.191	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

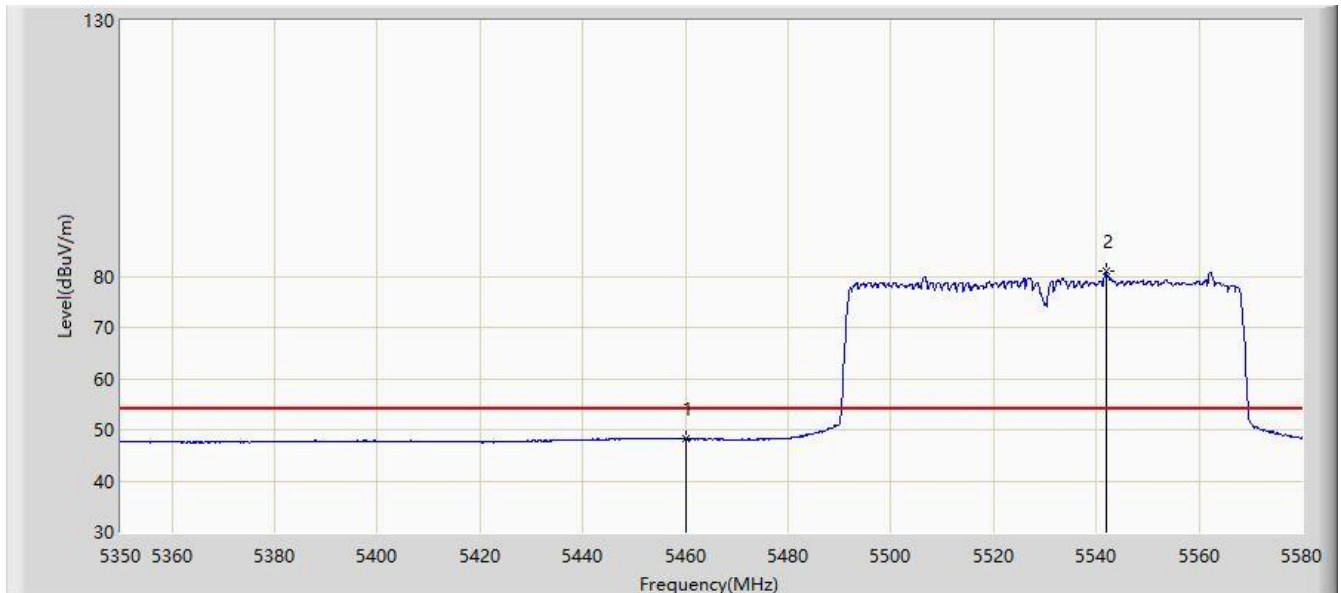


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.161	41.184	-5.839	54.000	6.978	AV
2		*	5542.050	81.109	74.048	N/A	N/A	7.061	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

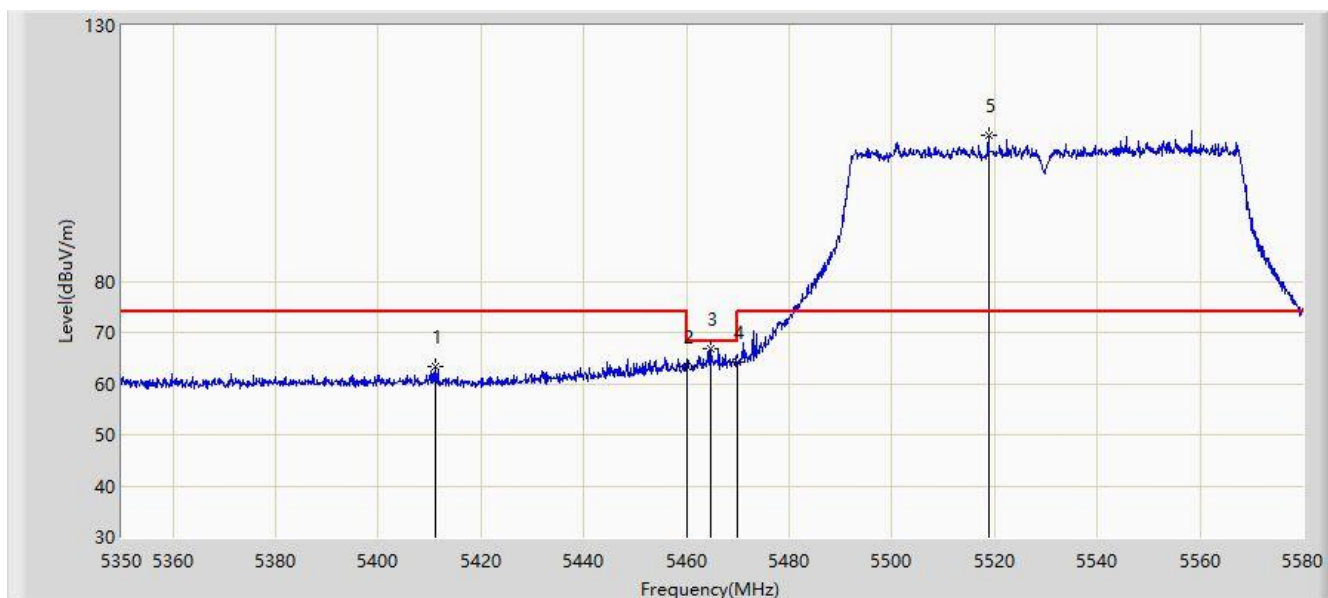


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5411.065	63.291	56.314	-10.709	74.000	6.978	PK
2			5460.000	63.330	56.353	-10.670	74.000	6.978	PK
3			5464.770	66.786	59.790	-1.414	68.200	6.996	PK
4			5470.000	64.133	57.116	-4.067	68.200	7.016	PK
5		*	5518.820	108.504	101.387	N/A	N/A	7.118	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

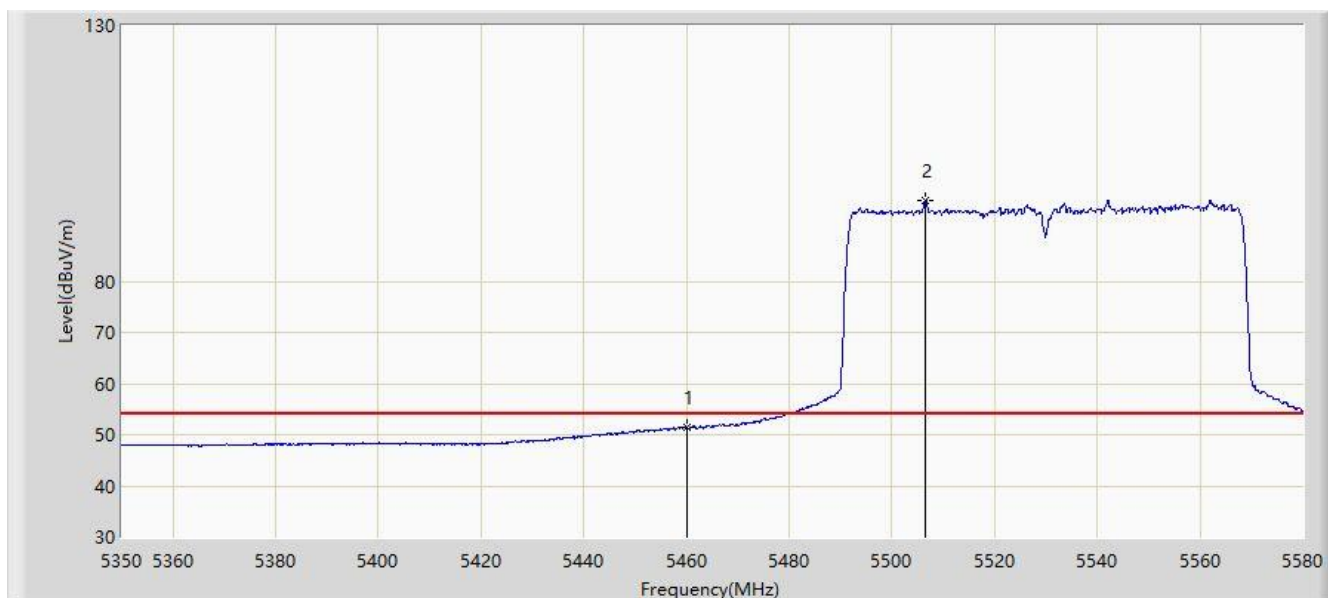


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.514	44.537	-2.486	54.000	6.978	AV
2		*	5506.630	95.691	88.394	N/A	N/A	7.297	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz, Ant 0 + 1 + 2 + 3	

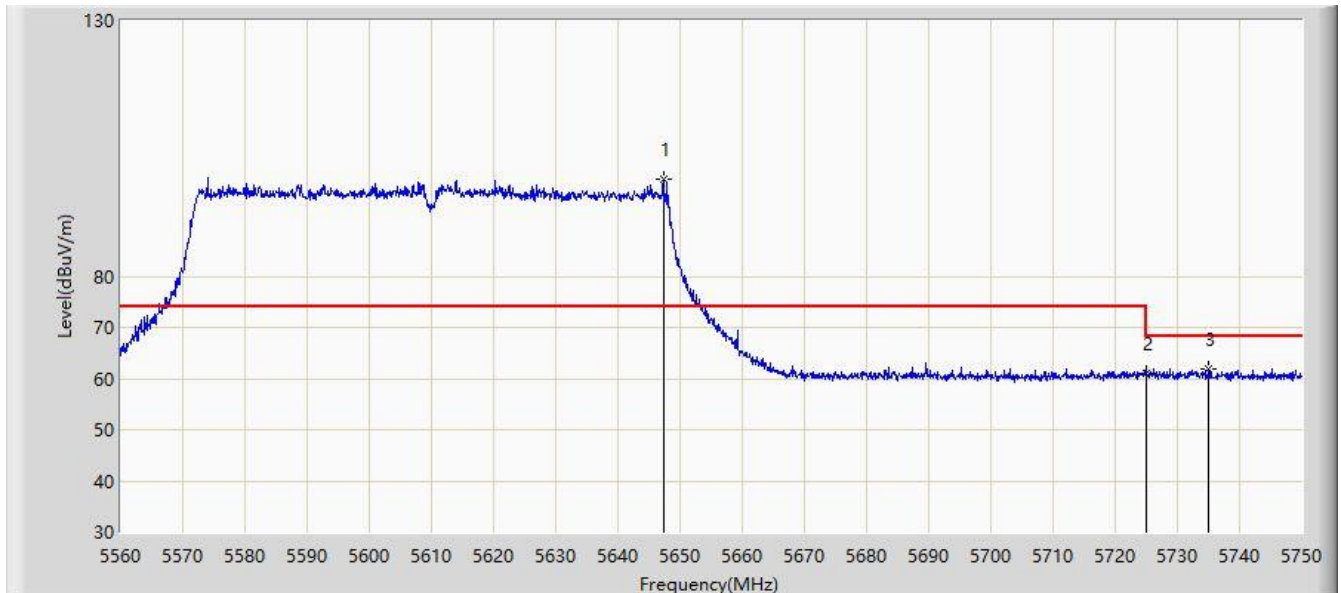


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.305	99.070	91.988	N/A	N/A	7.082	PK
2			5725.000	61.159	53.827	-7.041	68.200	7.332	PK
3			5735.085	61.928	54.530	-6.272	68.200	7.398	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz, Ant 0 + 1 + 2 + 3	

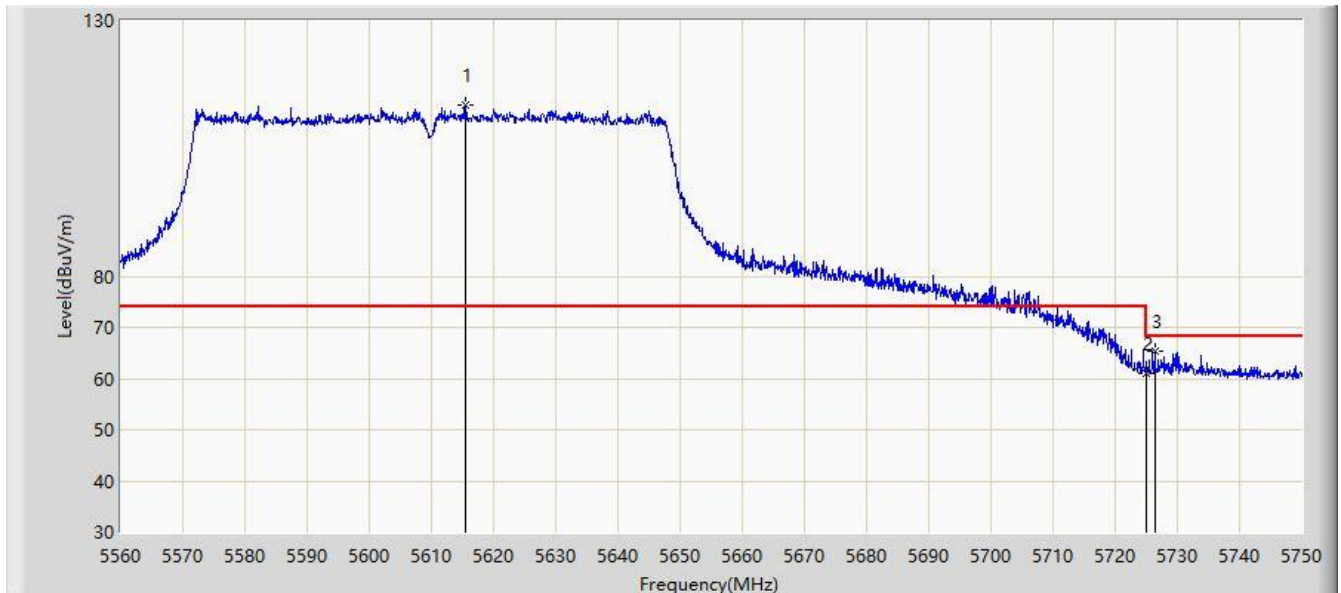


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5615.385	113.579	106.527	N/A	N/A	7.052	PK
2			5725.000	61.116	53.784	-7.084	68.200	7.332	PK
3			5726.440	65.375	58.029	-2.825	68.200	7.346	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:21
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz, Ant 0 + 1 + 2 + 3	

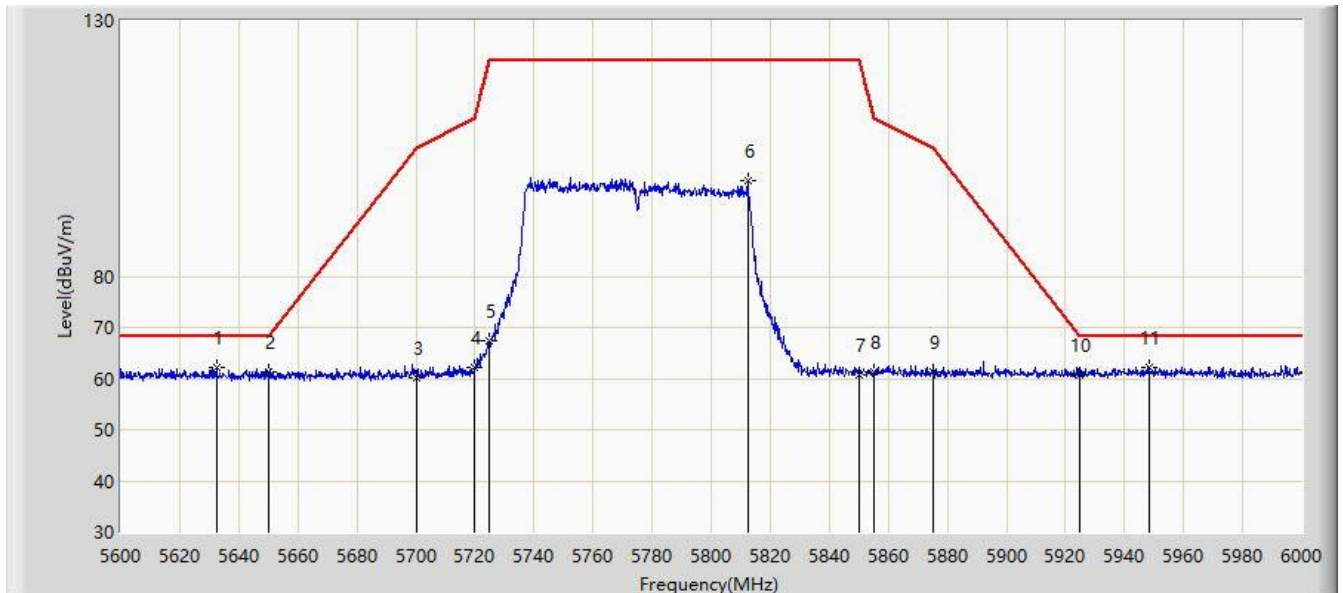


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.400	62.242	55.252	-5.958	68.200	6.990	PK
2			5650.000	61.239	54.099	-6.961	68.200	7.140	PK
3			5700.000	60.156	52.941	-45.044	105.200	7.215	PK
4			5720.000	62.116	54.843	-48.684	110.800	7.273	PK
5			5725.000	67.348	60.016	-54.852	122.200	7.332	PK
6			5812.400	98.805	91.326	N/A	N/A	7.479	PK
7			5850.000	60.818	53.126	-61.382	122.200	7.692	PK
8			5855.000	61.289	53.645	-49.511	110.800	7.644	PK
9			5875.000	61.338	53.736	-43.862	105.200	7.602	PK
10			5925.000	60.726	52.900	-7.474	68.200	7.826	PK
11			5948.600	62.173	54.498	-6.027	68.200	7.675	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:24
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz, Ant 0 + 1 + 2 + 3	

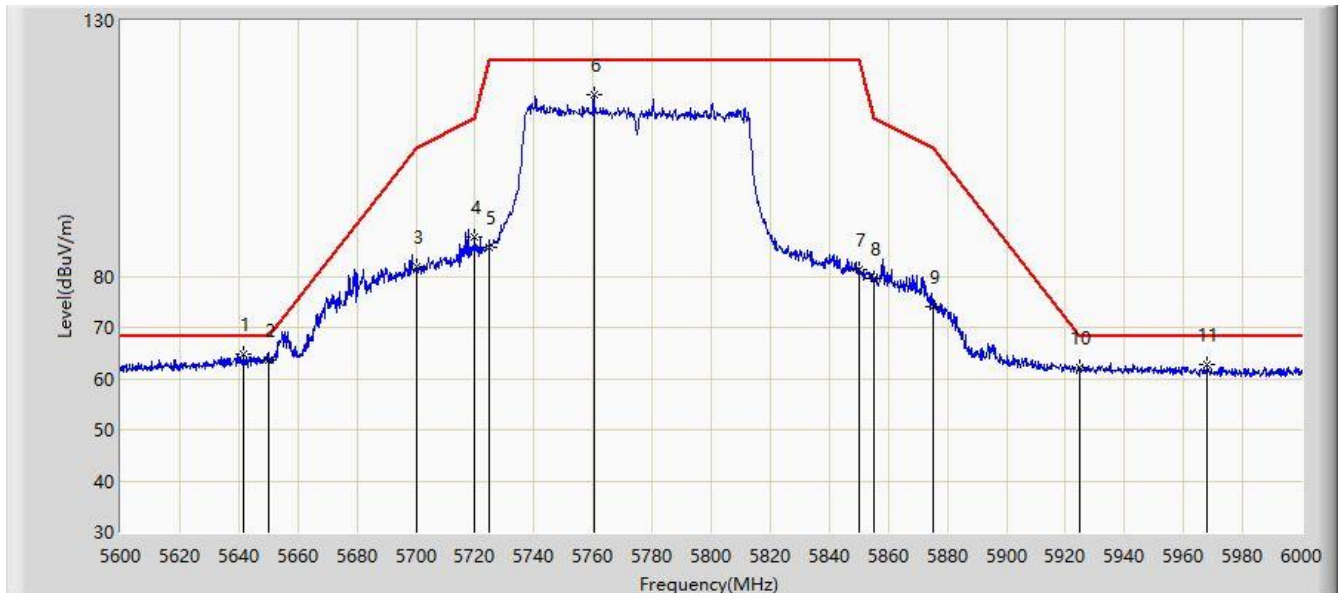


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.600	64.730	57.770	-3.470	68.200	6.960	PK
2			5650.000	63.565	56.425	-4.635	68.200	7.140	PK
3			5700.000	81.773	74.558	-23.427	105.200	7.215	PK
4			5720.000	87.800	80.527	-23.000	110.800	7.273	PK
5			5725.000	85.761	78.429	-36.439	122.200	7.332	PK
6			5760.400	115.580	108.149	N/A	N/A	7.430	PK
7			5850.000	81.335	73.643	-40.865	122.200	7.692	PK
8			5855.000	79.505	71.861	-31.295	110.800	7.644	PK
9			5875.000	73.996	66.394	-31.204	105.200	7.602	PK
10			5925.000	62.274	54.448	-5.926	68.200	7.826	PK
11			5968.000	62.894	55.259	-5.306	68.200	7.634	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

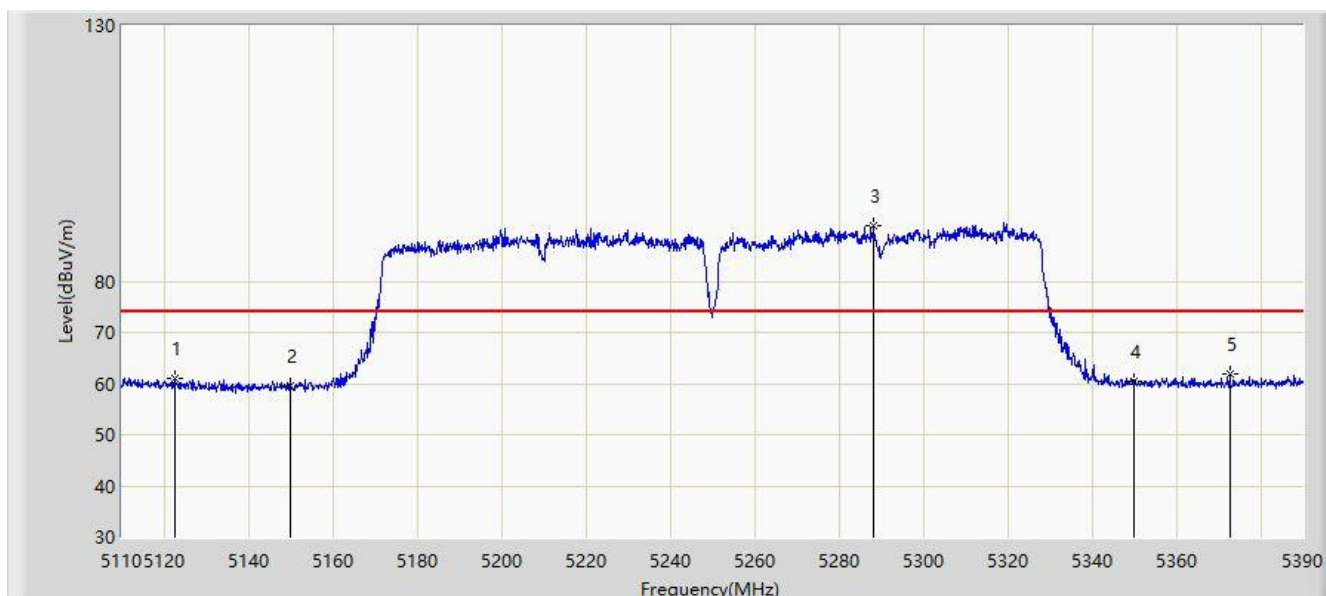


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.600	60.936	54.189	-13.064	74.000	6.747	PK
2			5150.000	59.571	52.772	-14.429	74.000	6.799	PK
3		*	5288.360	90.875	84.403	N/A	N/A	6.471	PK
4			5350.000	60.540	53.912	-13.460	74.000	6.629	PK
5			5372.640	61.910	55.285	-12.090	74.000	6.625	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

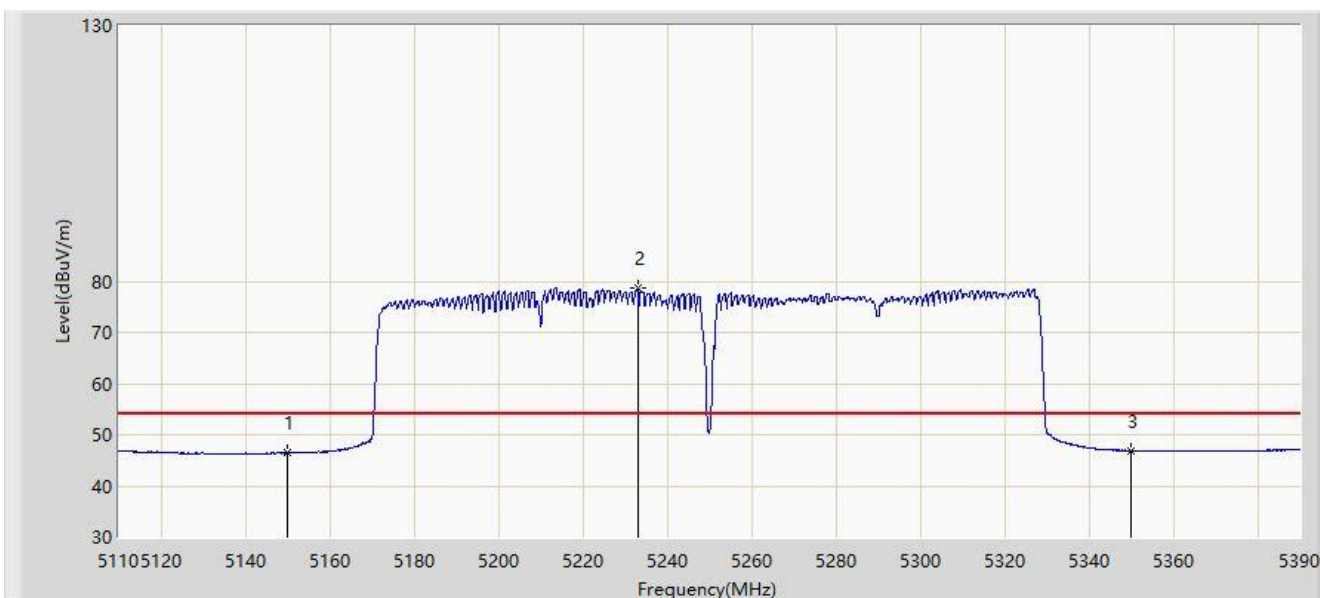

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.471	39.672	-7.529	54.000	6.799	AV
2		*	5233.060	78.703	71.947	N/A	N/A	6.756	AV
3			5350.000	46.901	40.273	-7.099	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.460	69.181	62.436	-4.819	74.000	6.746	PK
2			5150.000	66.722	59.923	-7.278	74.000	6.799	PK
3		*	5319.160	104.242	97.625	N/A	N/A	6.617	PK
4			5350.000	66.246	59.618	-7.754	74.000	6.629	PK
5			5361.020	69.945	63.342	-4.055	74.000	6.603	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

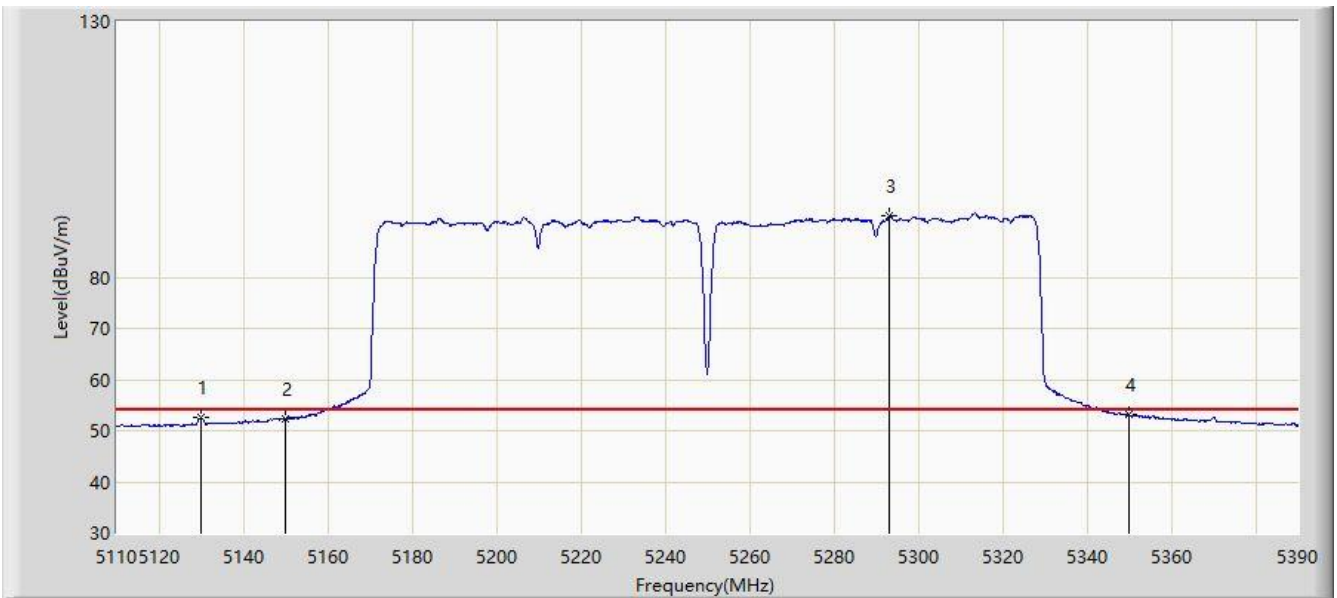


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.020	52.585	45.740	-1.415	54.000	6.846	AV
2			5150.000	52.262	45.463	-1.738	54.000	6.799	AV
3		*	5293.260	92.031	85.493	N/A	N/A	6.538	AV
4			5350.000	53.054	46.426	-0.946	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

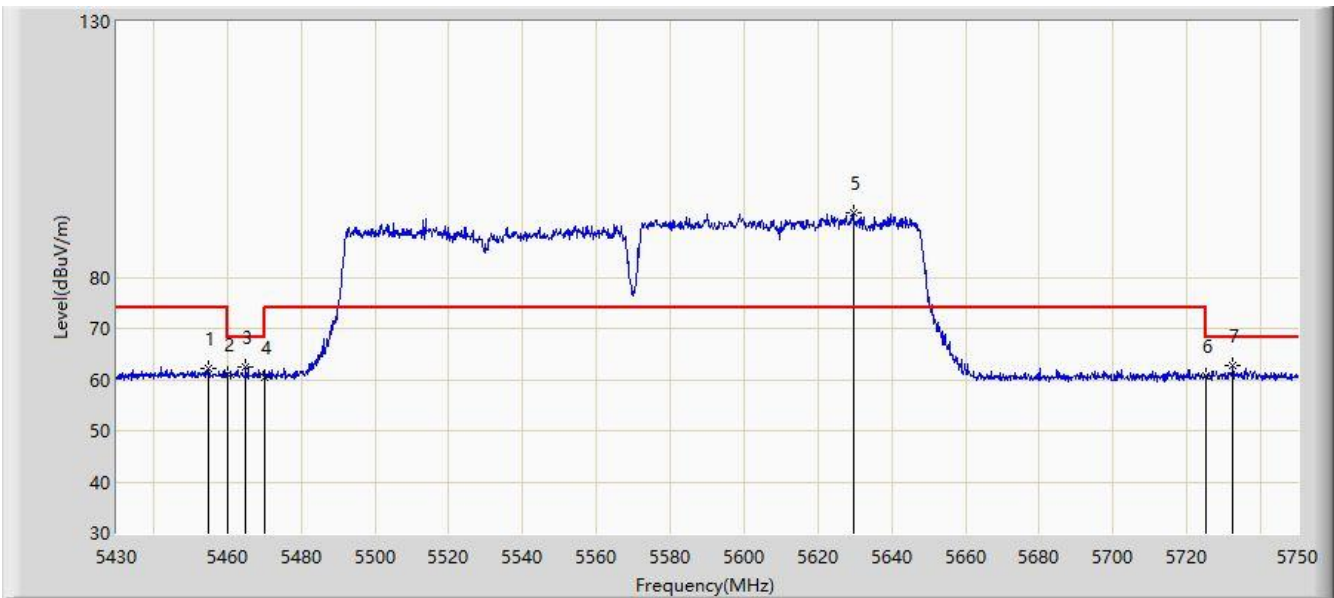


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.800	62.188	55.231	-11.812	74.000	6.956	PK
2			5460.000	60.875	53.898	-13.125	74.000	6.978	PK
3			5464.880	62.474	55.477	-5.726	68.200	6.997	PK
4			5470.000	60.506	53.489	-7.694	68.200	7.016	PK
5		*	5629.520	92.631	85.627	N/A	N/A	7.005	PK
6			5725.000	60.596	53.264	-7.604	68.200	7.332	PK
7			5732.400	62.627	55.245	-5.573	68.200	7.382	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

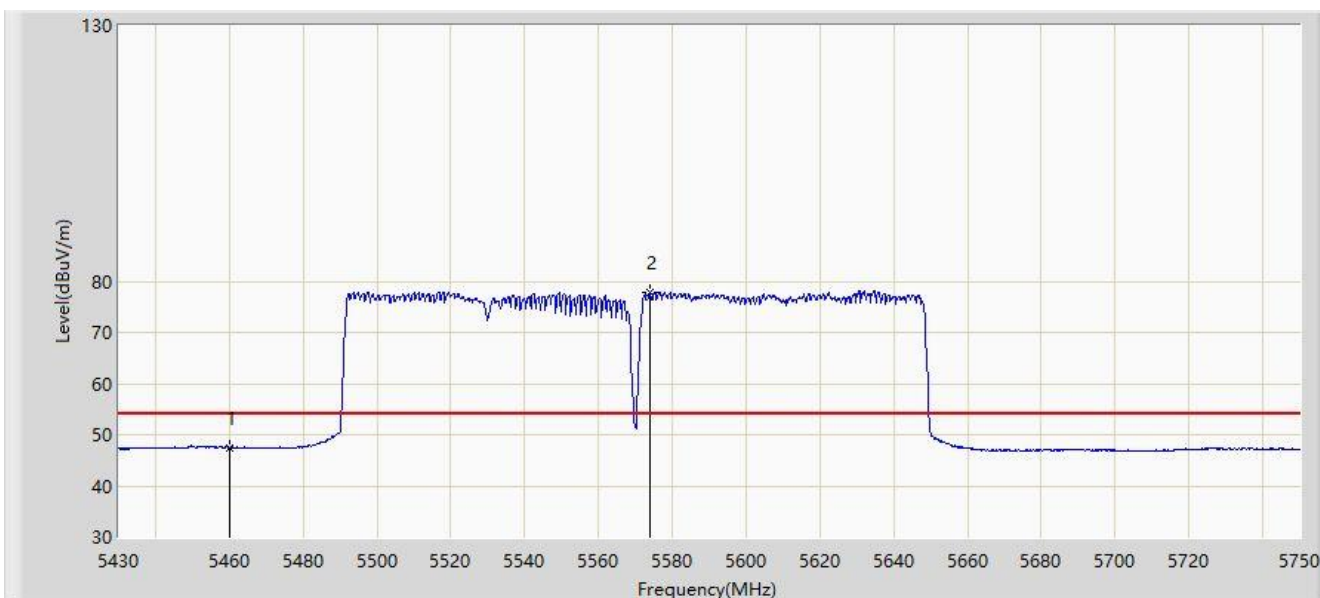


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.463	40.486	-6.537	54.000	6.978	AV
2		*	5574.000	77.717	70.448	N/A	N/A	7.269	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

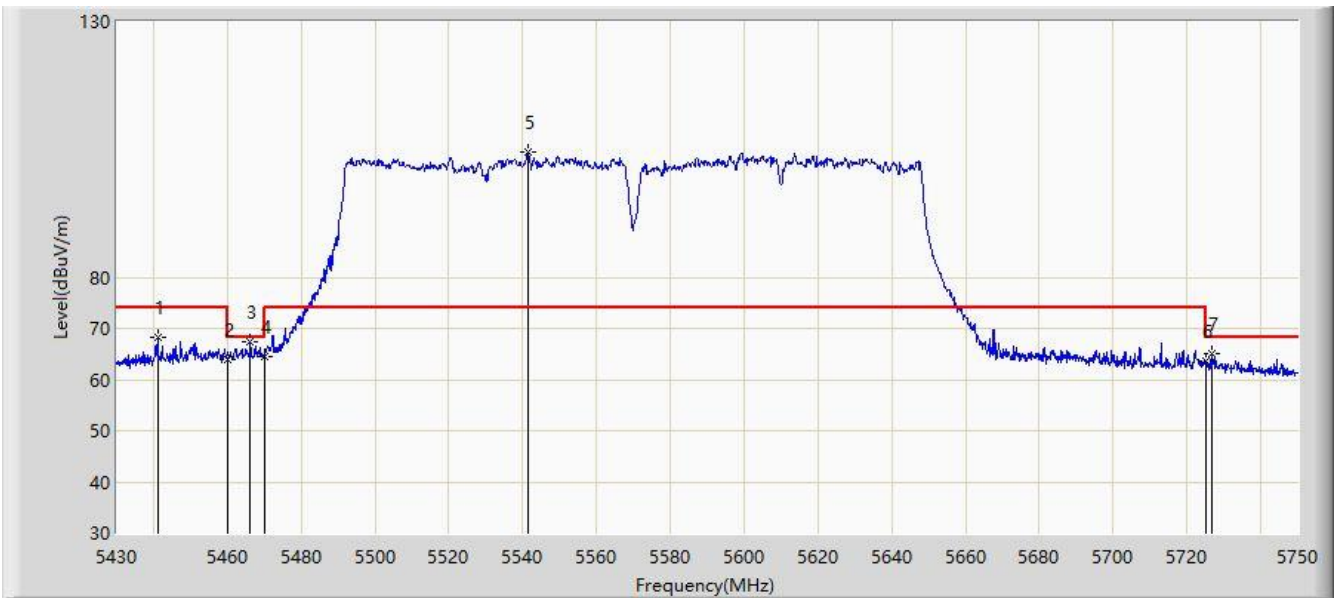


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.200	68.297	61.296	-5.703	74.000	7.001	PK
2			5460.000	63.894	56.917	-10.106	74.000	6.978	PK
3			5466.160	67.480	60.478	-0.720	68.200	7.002	PK
4			5470.000	64.424	57.407	-3.776	68.200	7.016	PK
5		*	5541.360	104.405	97.352	N/A	N/A	7.053	PK
6			5725.000	63.495	56.163	-4.705	68.200	7.332	PK
7			5726.640	64.937	57.589	-3.263	68.200	7.347	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

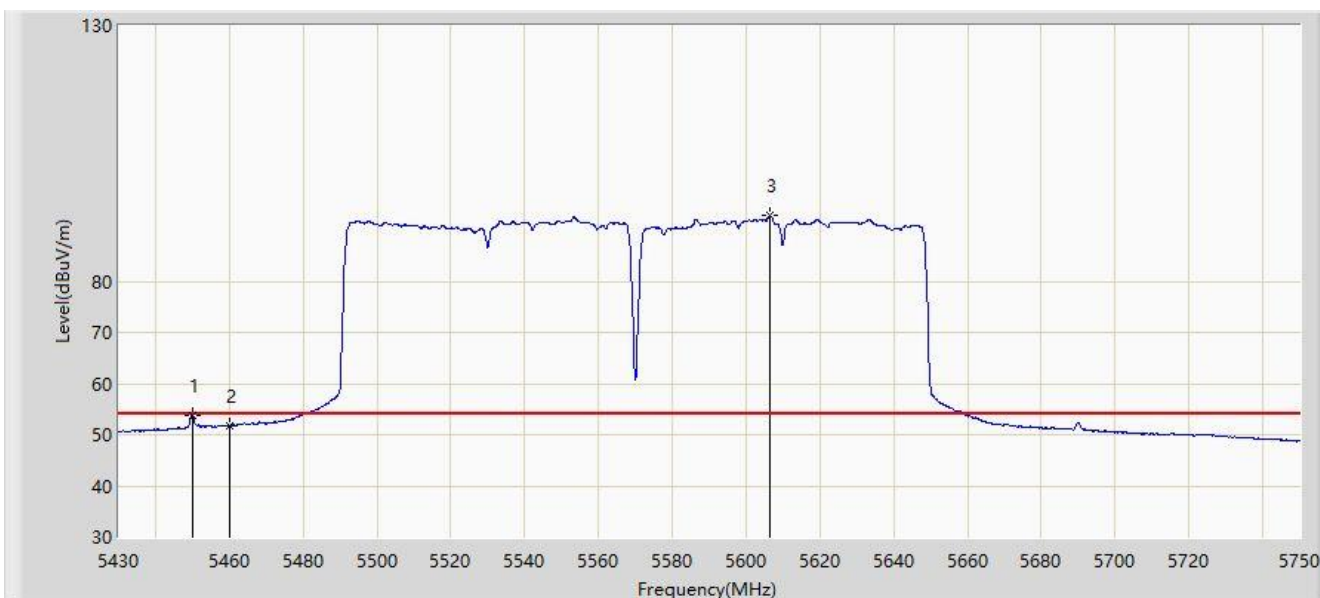


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.160	53.843	46.875	-0.157	54.000	6.967	AV
2			5460.000	51.819	44.842	-2.181	54.000	6.978	AV
3		*	5606.320	92.757	85.676	N/A	N/A	7.080	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

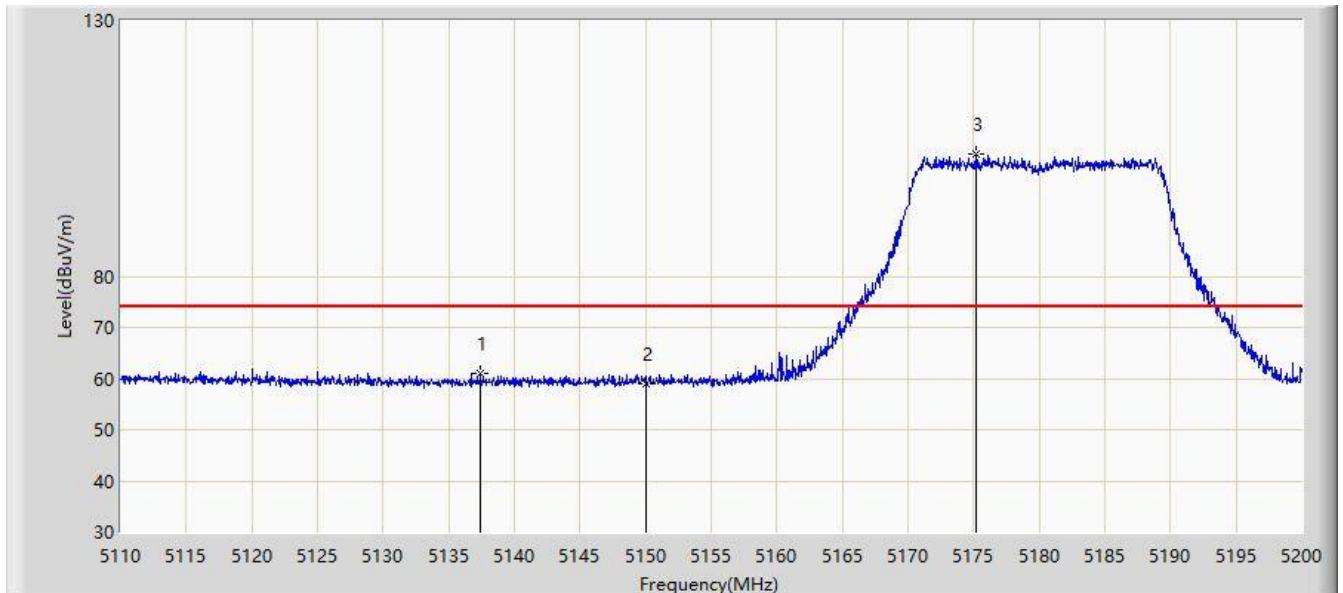


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.450	60.931	54.098	-13.069	74.000	6.833	PK
2			5150.000	58.856	52.057	-15.144	74.000	6.799	PK
3		*	5175.160	103.826	97.010	N/A	N/A	6.815	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

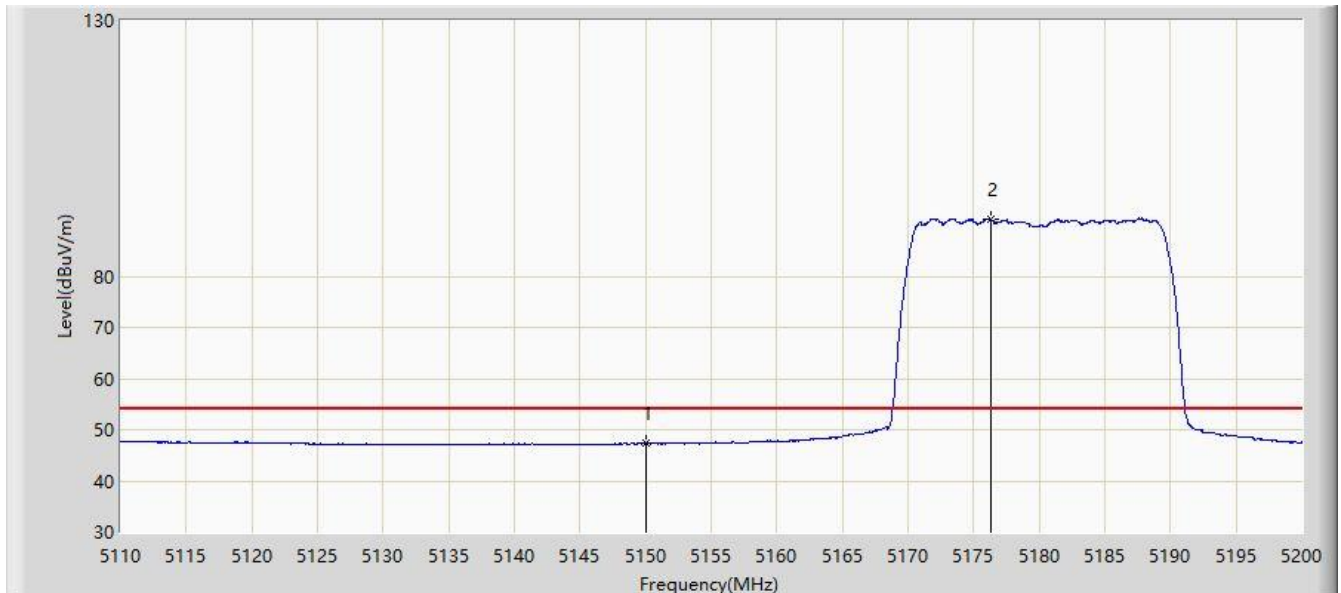


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.266	40.467	-6.734	54.000	6.799	AV
2		*	5176.285	91.275	84.464	N/A	N/A	6.810	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

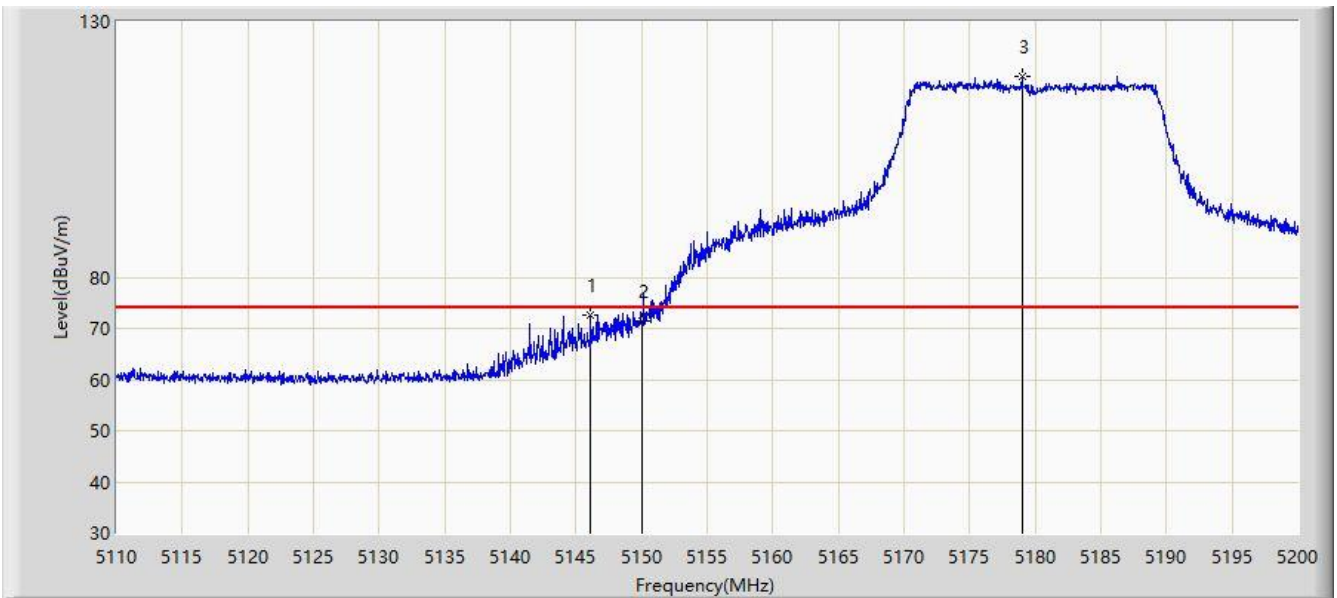


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.135	72.745	65.946	-1.255	74.000	6.799	PK
2			5150.000	71.378	64.579	-2.622	74.000	6.799	PK
3		*	5179.030	119.228	112.427	N/A	N/A	6.801	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

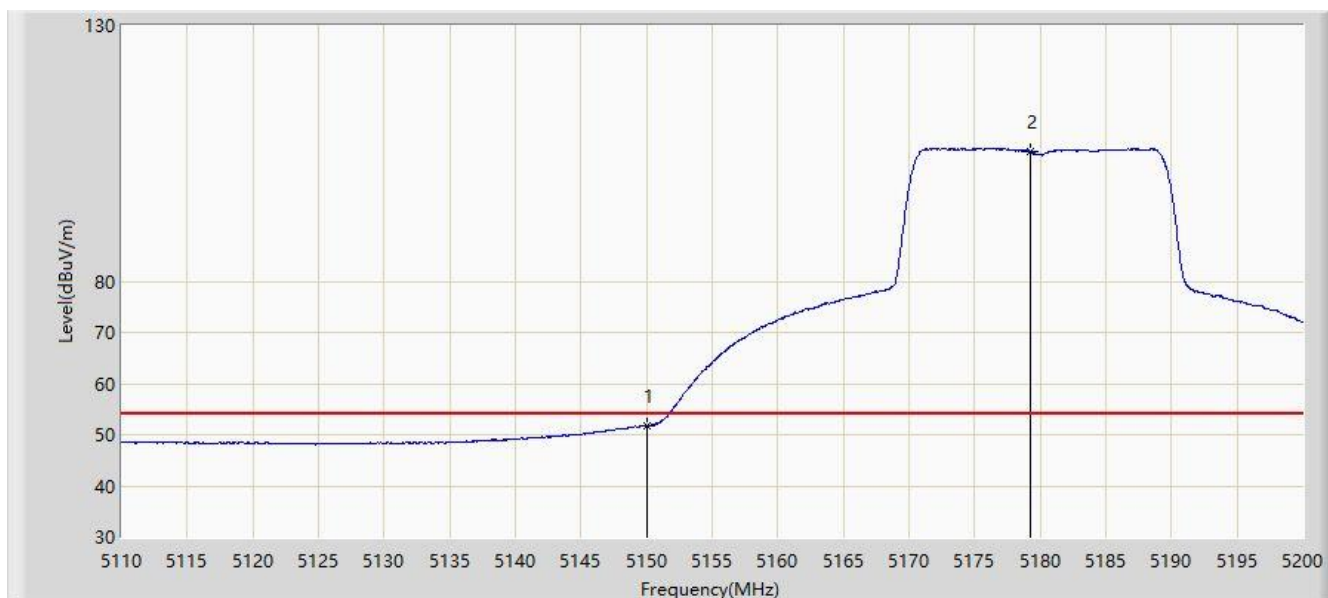


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.831	45.032	-2.169	54.000	6.799	AV
2		*	5179.255	105.459	98.659	N/A	N/A	6.800	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

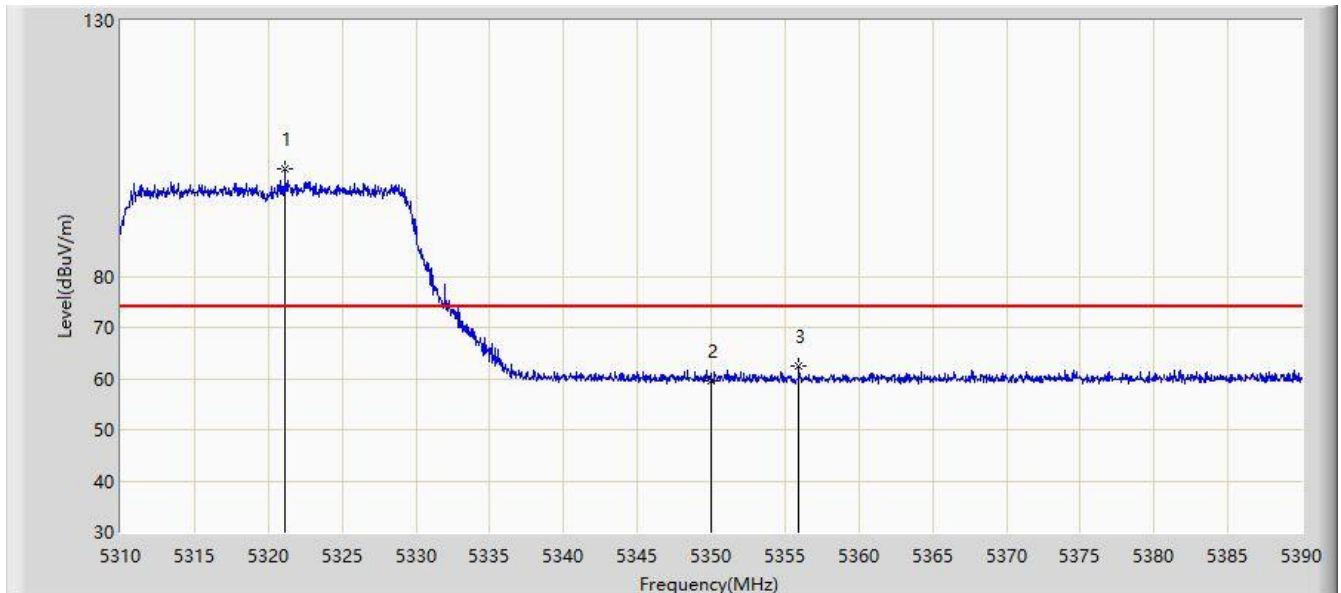


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.120	100.948	94.318	N/A	N/A	6.630	PK
2			5350.000	59.463	52.835	-14.537	74.000	6.629	PK
3			5355.960	62.584	55.974	-11.416	74.000	6.610	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

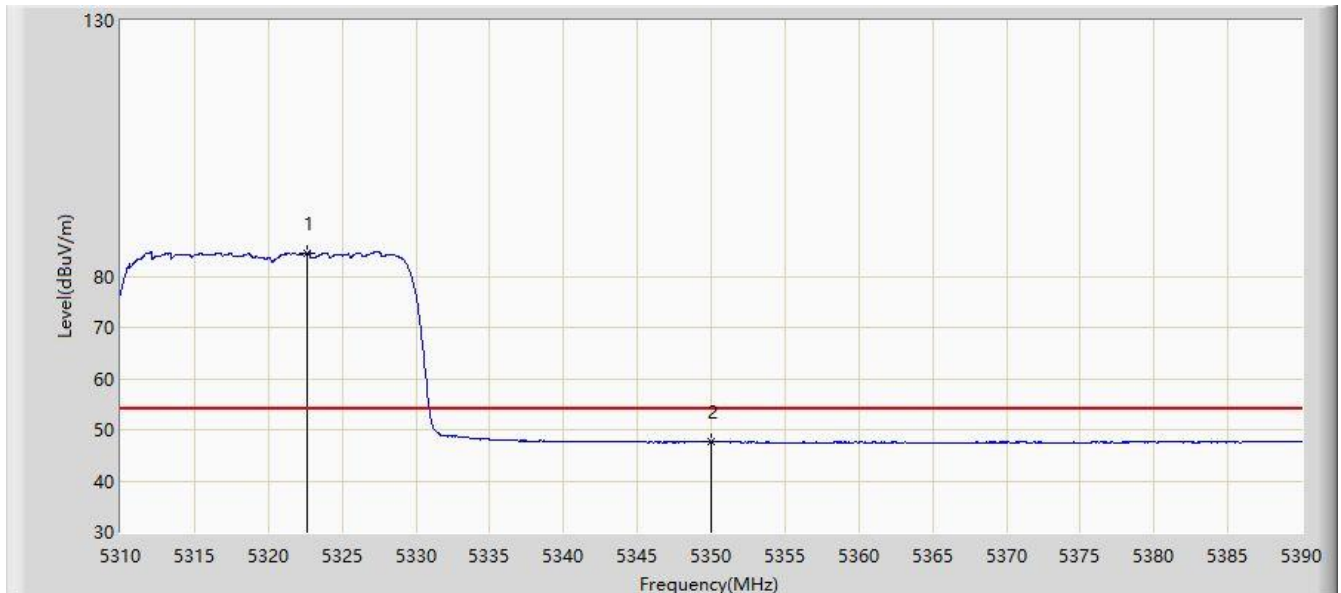


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.640	84.616	77.975	N/A	N/A	6.640	AV
2			5350.000	47.659	41.031	-6.341	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

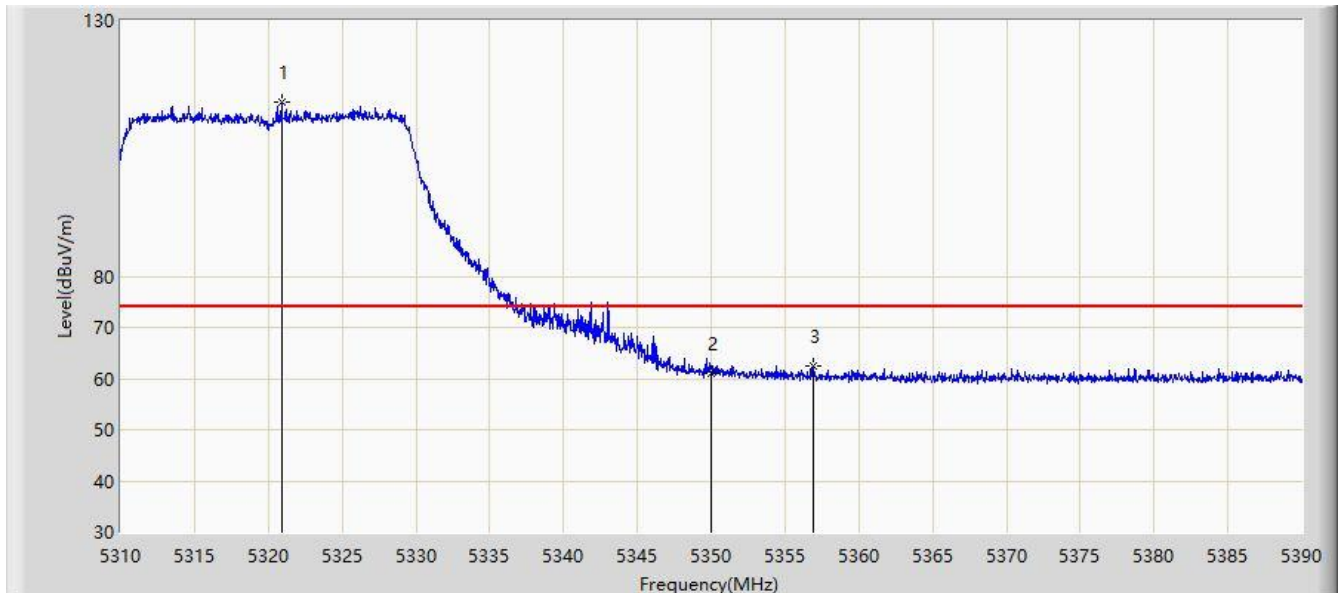


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.880	114.025	107.396	N/A	N/A	6.629	PK
2			5350.000	61.027	54.399	-12.973	74.000	6.629	PK
3			5356.880	62.525	55.916	-11.475	74.000	6.609	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 13:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

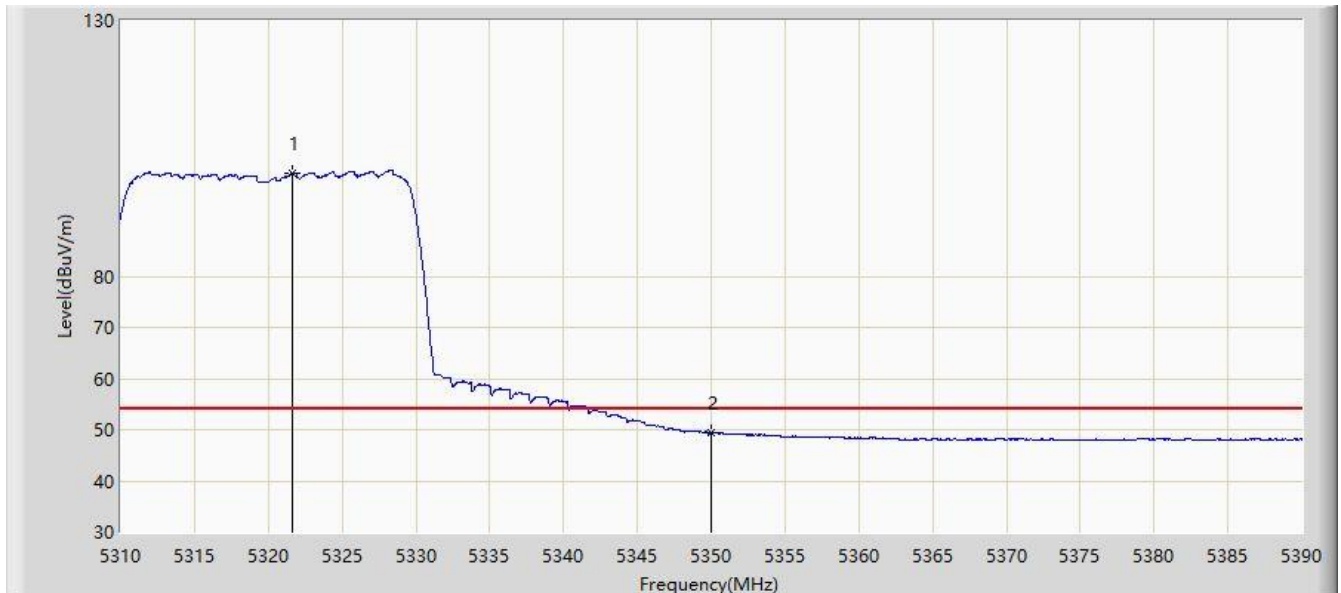


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.640	100.046	93.412	N/A	N/A	6.634	AV
2			5350.000	49.342	42.714	-4.658	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

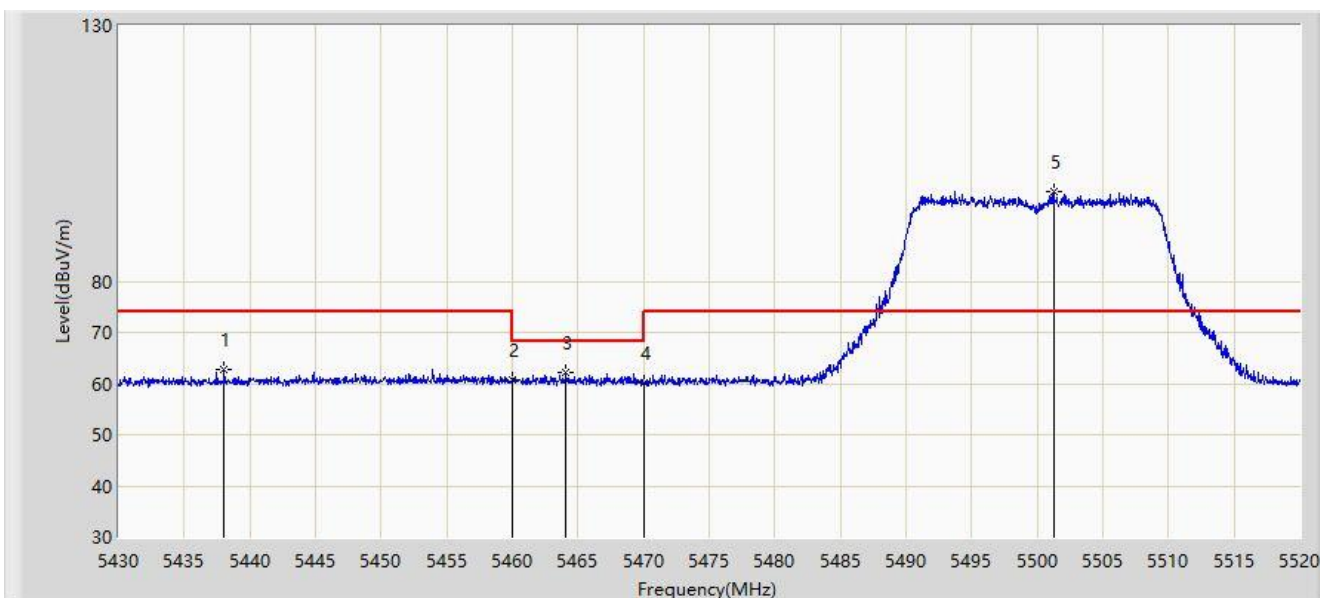


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5438.055	62.779	55.766	-11.221	74.000	7.013	PK
2			5460.000	60.769	53.792	-13.231	74.000	6.978	PK
3			5464.110	62.124	55.130	-6.076	68.200	6.994	PK
4			5470.000	60.105	53.088	-8.095	68.200	7.016	PK
5		*	5501.235	97.590	90.308	N/A	N/A	7.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

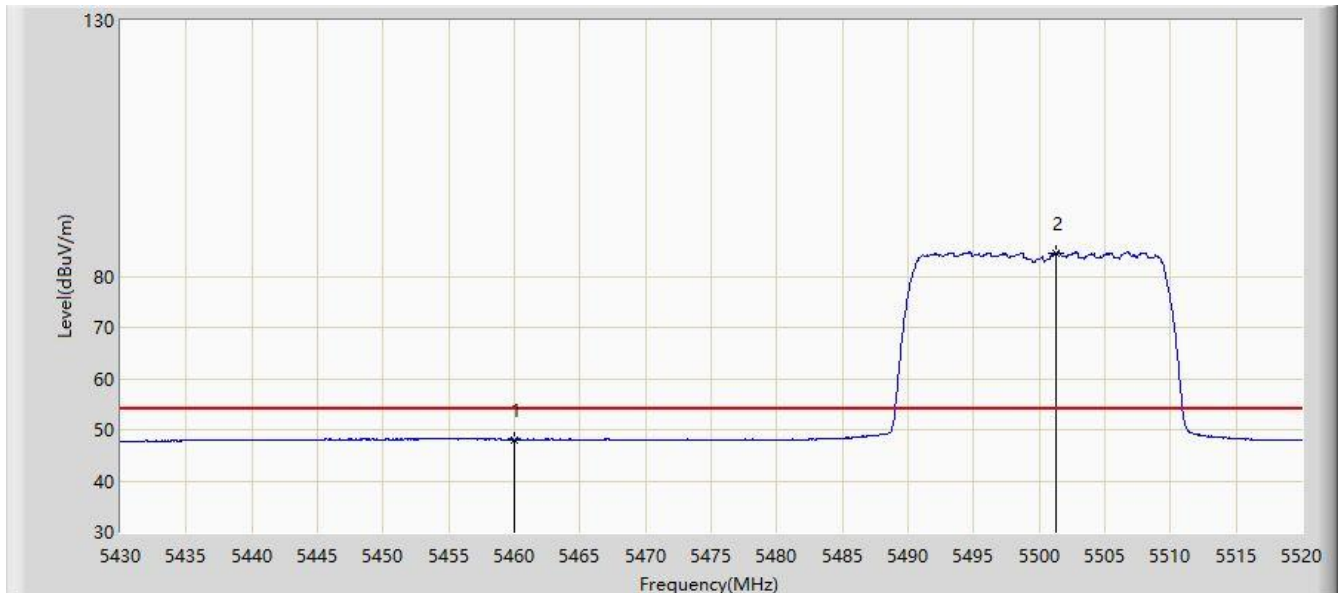


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.076	41.099	-5.924	54.000	6.978	AV
2		*	5501.325	84.556	77.274	N/A	N/A	7.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

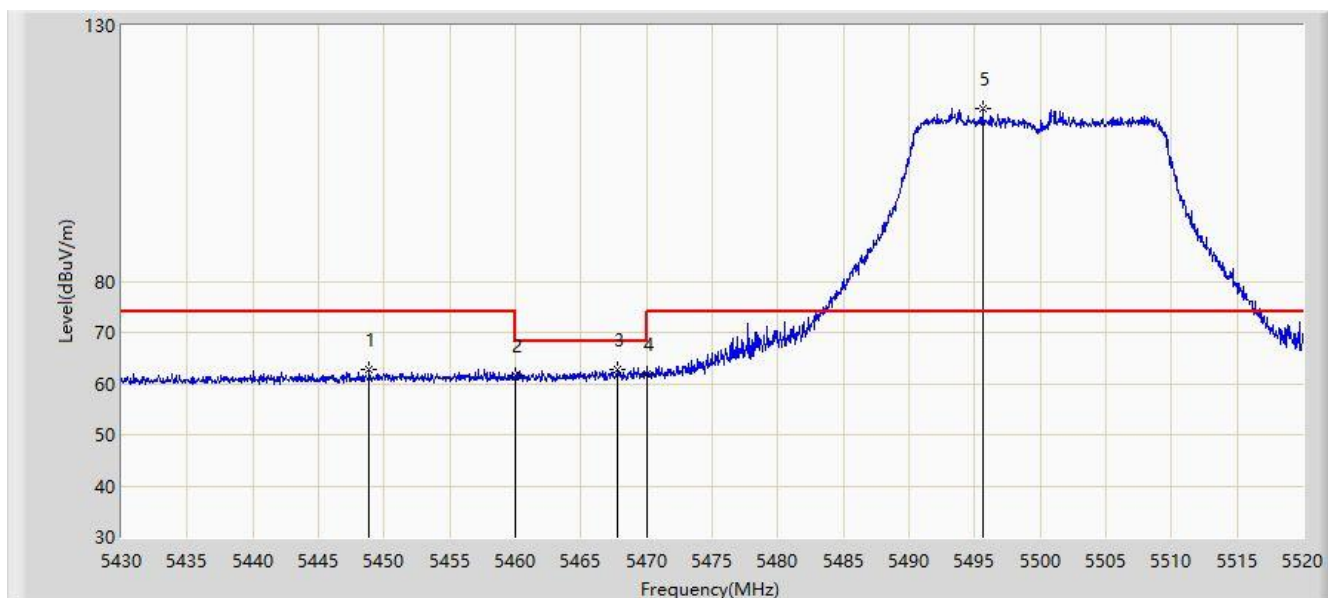


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.855	62.806	55.833	-11.194	74.000	6.972	PK
2			5460.000	61.472	54.495	-12.528	74.000	6.978	PK
3			5467.800	62.847	55.839	-5.353	68.200	7.009	PK
4			5470.000	62.002	54.985	-6.198	68.200	7.016	PK
5		*	5495.610	113.800	106.578	N/A	N/A	7.223	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

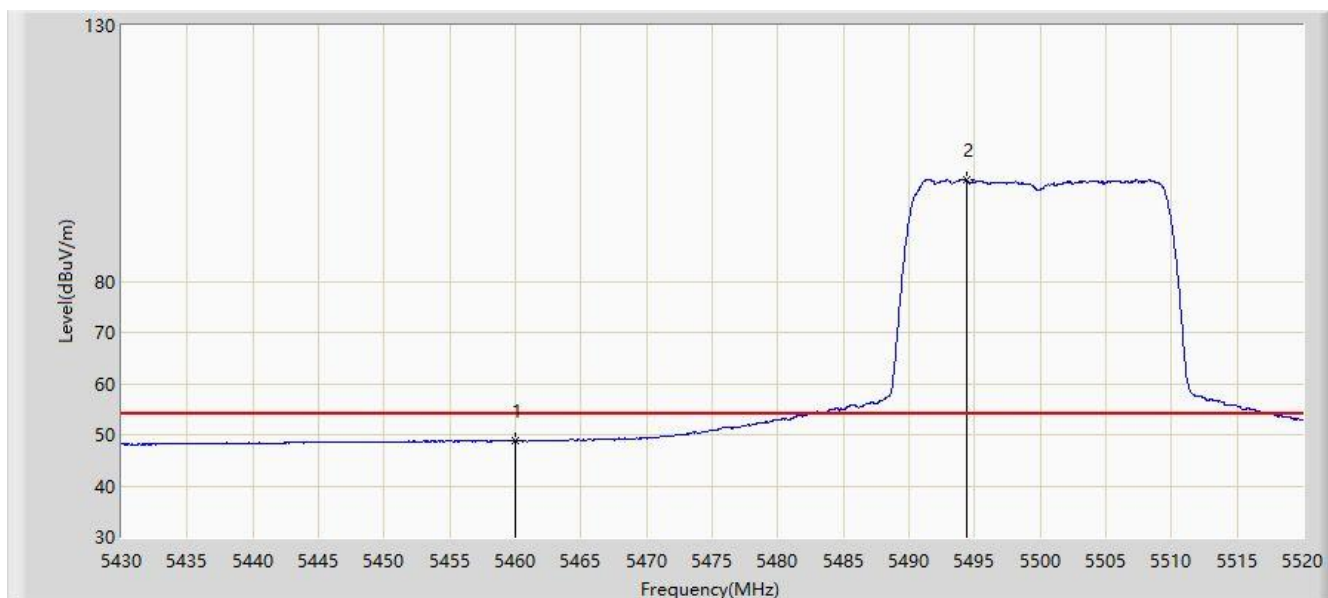


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.726	41.749	-5.274	54.000	6.978	AV
2		*	5494.350	99.746	92.537	N/A	N/A	7.208	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz, Ant 0 + 1 + 2 + 3	

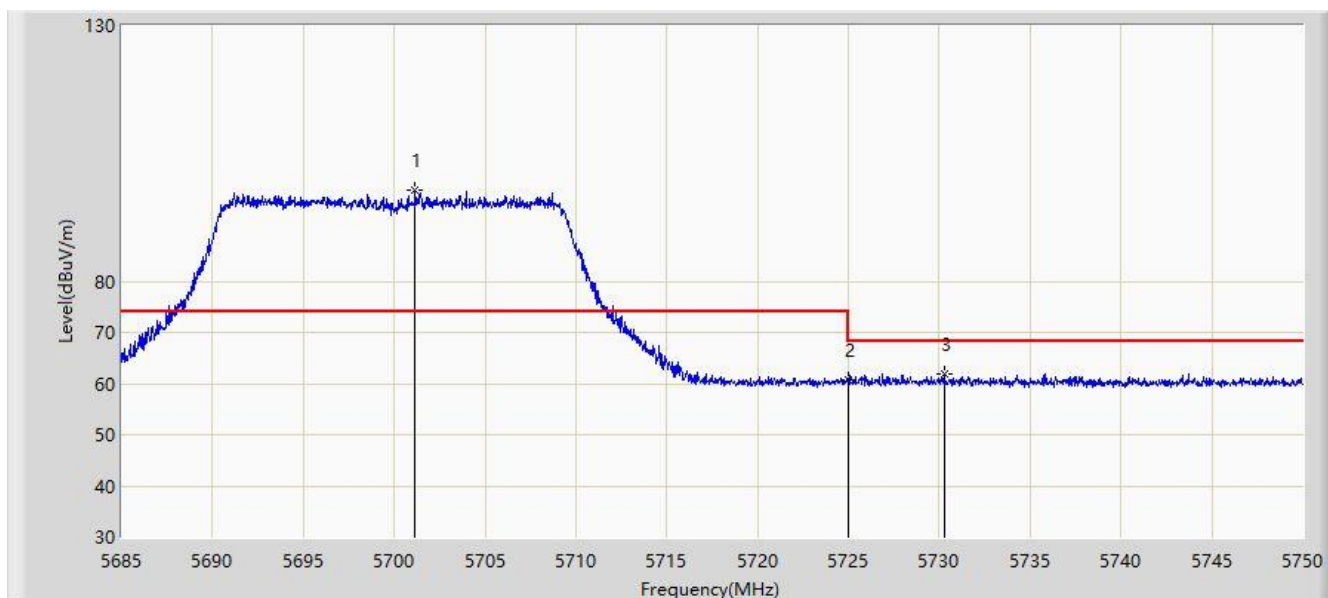


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.152	97.826	90.620	N/A	N/A	7.207	PK
2			5725.000	60.818	53.486	-7.382	68.200	7.332	PK
3			5730.272	61.870	54.501	-6.330	68.200	7.370	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz, Ant 0 + 1 + 2 + 3	

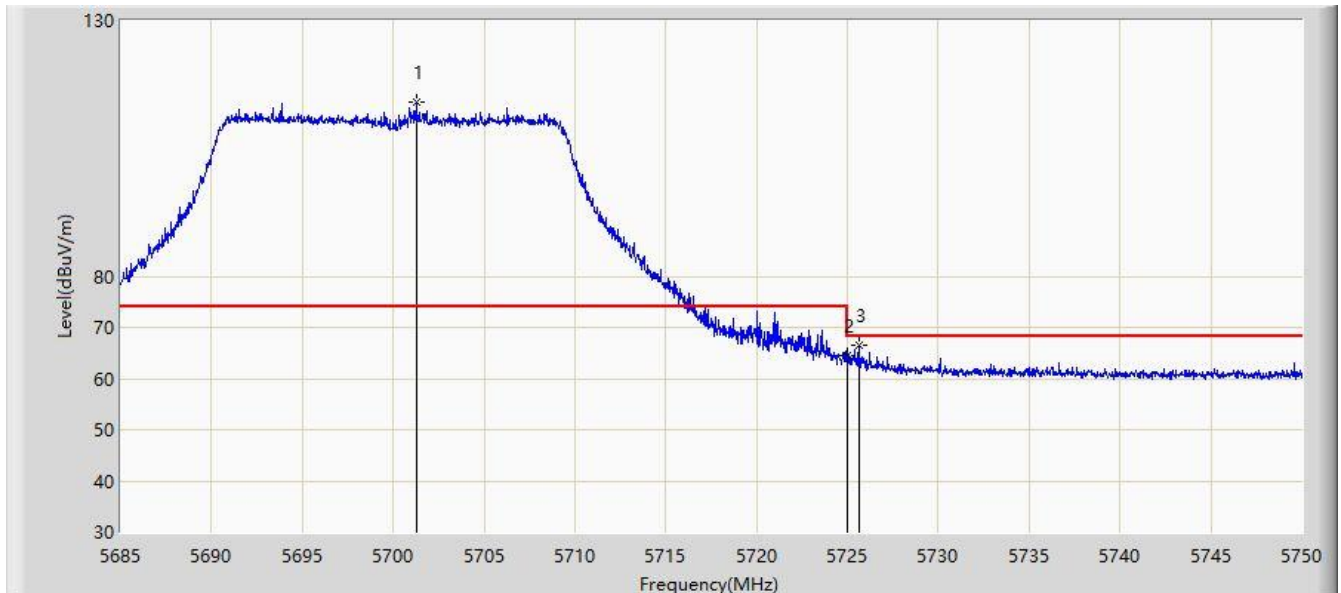


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.250	113.930	106.725	N/A	N/A	7.205	PK
2			5725.000	64.448	57.116	-3.752	68.200	7.332	PK
3			5725.625	66.455	59.116	-1.745	68.200	7.339	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:15
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz, Ant 0 + 1 + 2 + 3	

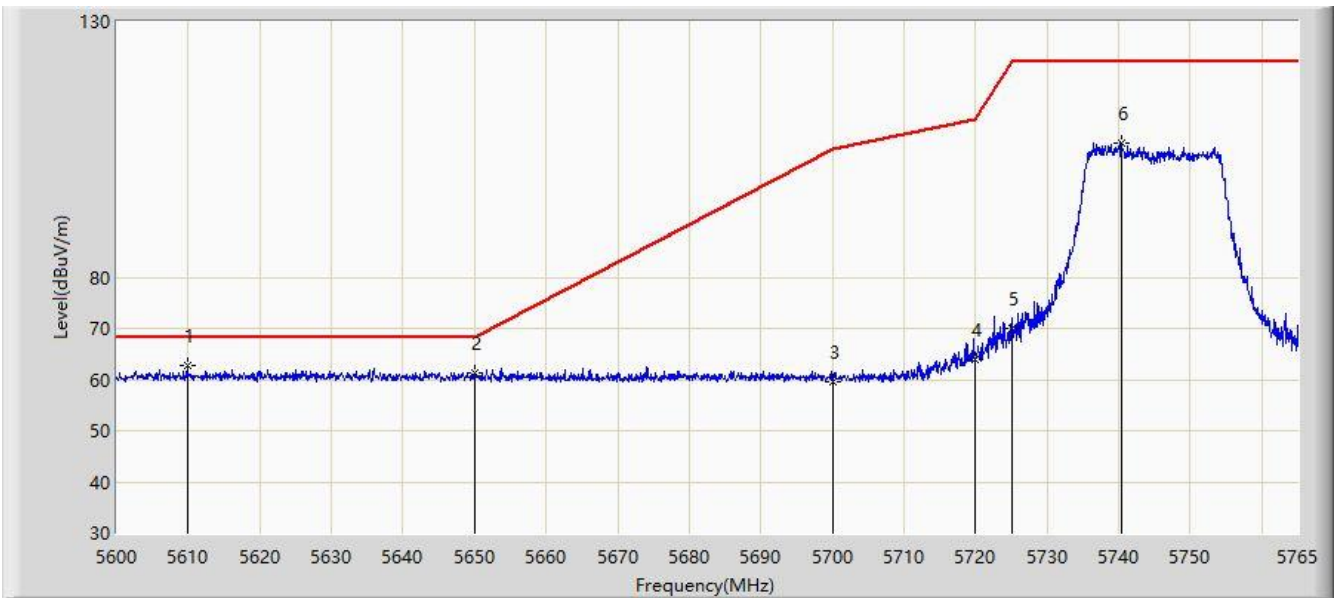


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5609.900	62.651	55.586	-5.549	68.200	7.065	PK
2			5650.000	61.313	54.173	-6.887	68.200	7.140	PK
3			5700.000	59.562	52.347	-45.638	105.200	7.215	PK
4			5720.000	64.032	56.759	-46.768	110.800	7.273	PK
5			5725.000	70.027	62.695	-52.173	122.200	7.332	PK
6			5740.415	106.256	98.826	N/A	N/A	7.430	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:16
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz, Ant 0 + 1 + 2 + 3	

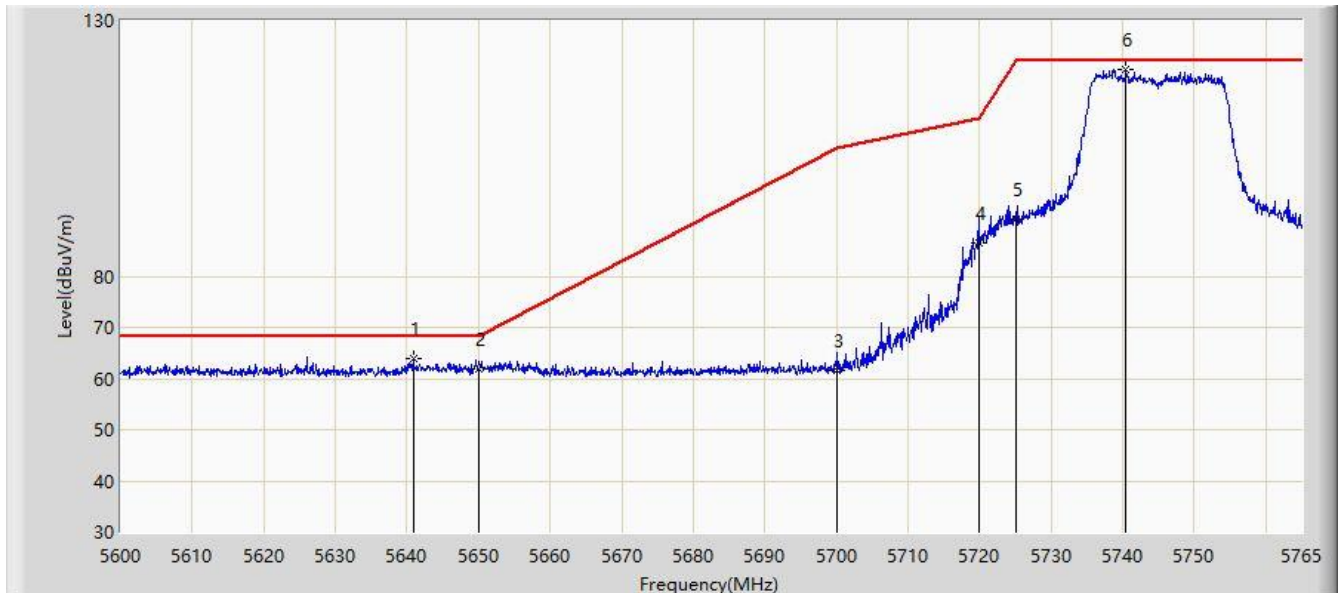


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5640.837	64.031	57.083	-4.169	68.200	6.948	PK
2			5650.000	61.758	54.618	-6.442	68.200	7.140	PK
3			5700.000	61.696	54.481	-43.504	105.200	7.215	PK
4			5720.000	86.658	79.385	-24.142	110.800	7.273	PK
5			5725.000	91.146	83.814	-31.054	122.200	7.332	PK
6		*	5740.415	120.553	113.123	N/A	N/A	7.430	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:20
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz, Ant 0 + 1 + 2 + 3	

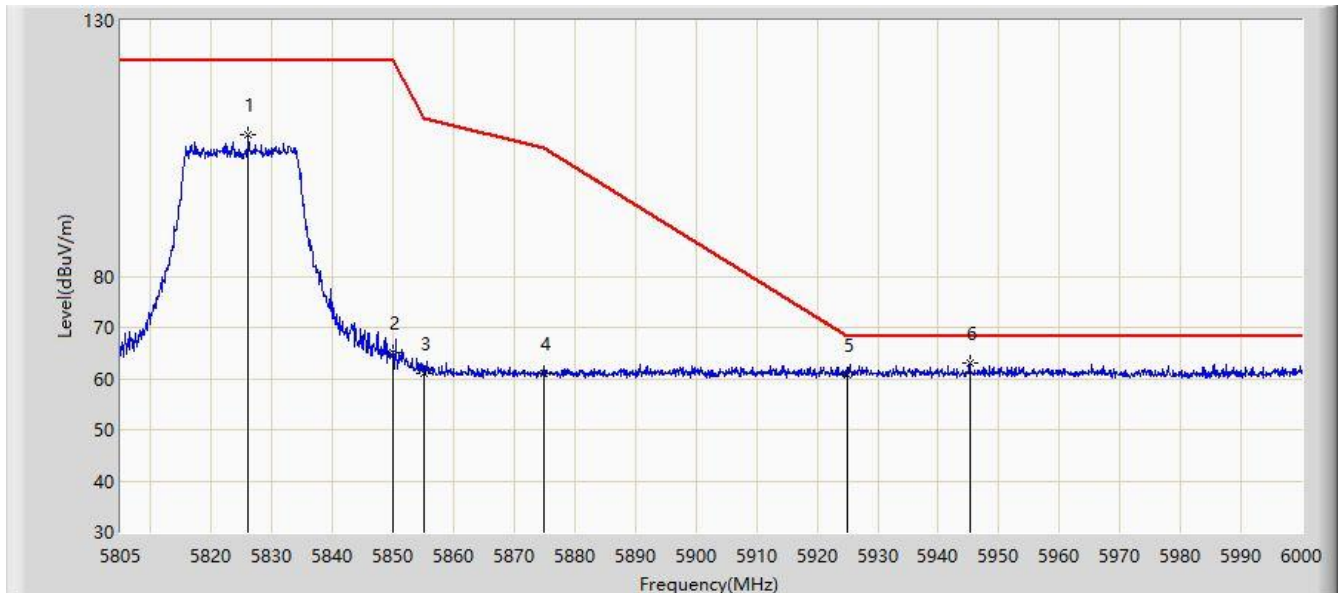


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.060	107.629	99.898	N/A	N/A	7.731	PK
2			5850.000	64.969	57.277	-57.231	122.200	7.692	PK
3			5855.000	61.091	53.447	-49.709	110.800	7.644	PK
4			5875.000	60.916	53.314	-44.284	105.200	7.602	PK
5			5925.000	60.698	52.872	-7.502	68.200	7.826	PK
6		*	5945.205	63.188	55.493	-5.012	68.200	7.694	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:22
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz, Ant 0 + 1 + 2 + 3	

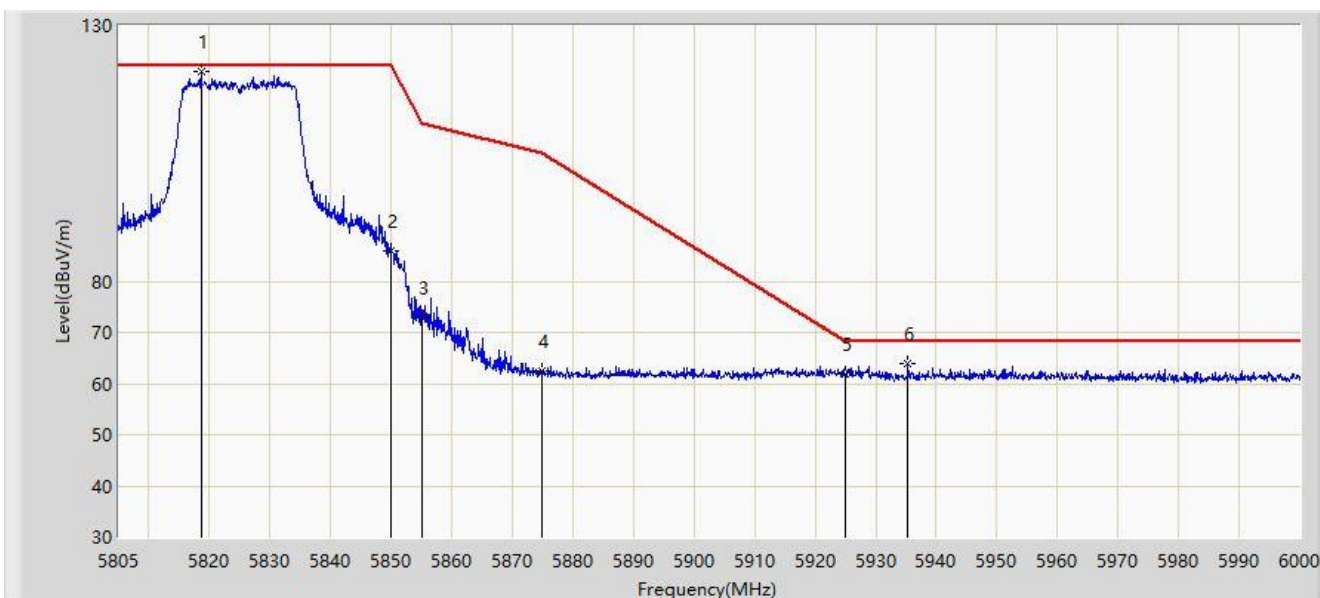


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.650	121.028	113.434	N/A	N/A	7.594	PK
2			5850.000	86.012	78.320	-36.188	122.200	7.692	PK
3			5855.000	72.782	65.138	-38.018	110.800	7.644	PK
4			5875.000	62.338	54.736	-42.862	105.200	7.602	PK
5			5925.000	61.770	53.944	-6.430	68.200	7.826	PK
6			5935.357	63.832	56.068	-4.368	68.200	7.764	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

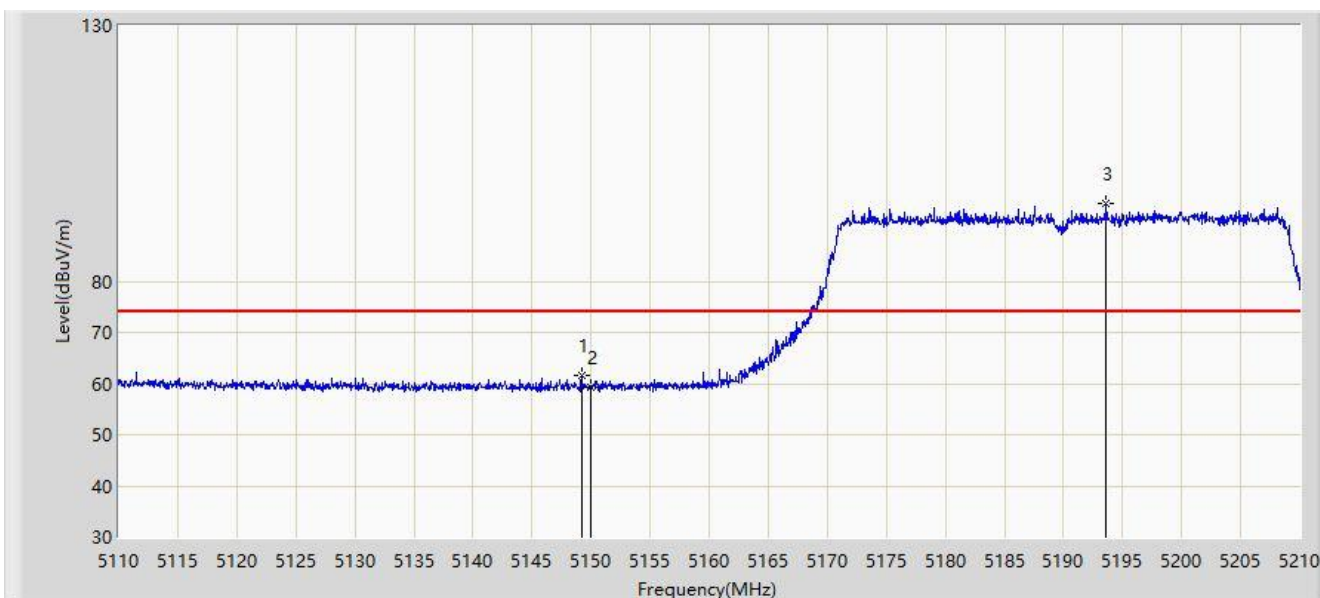


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.200	61.694	54.898	-12.306	74.000	6.797	PK
2			5150.000	59.254	52.455	-14.746	74.000	6.799	PK
3		*	5193.600	95.141	88.531	N/A	N/A	6.609	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

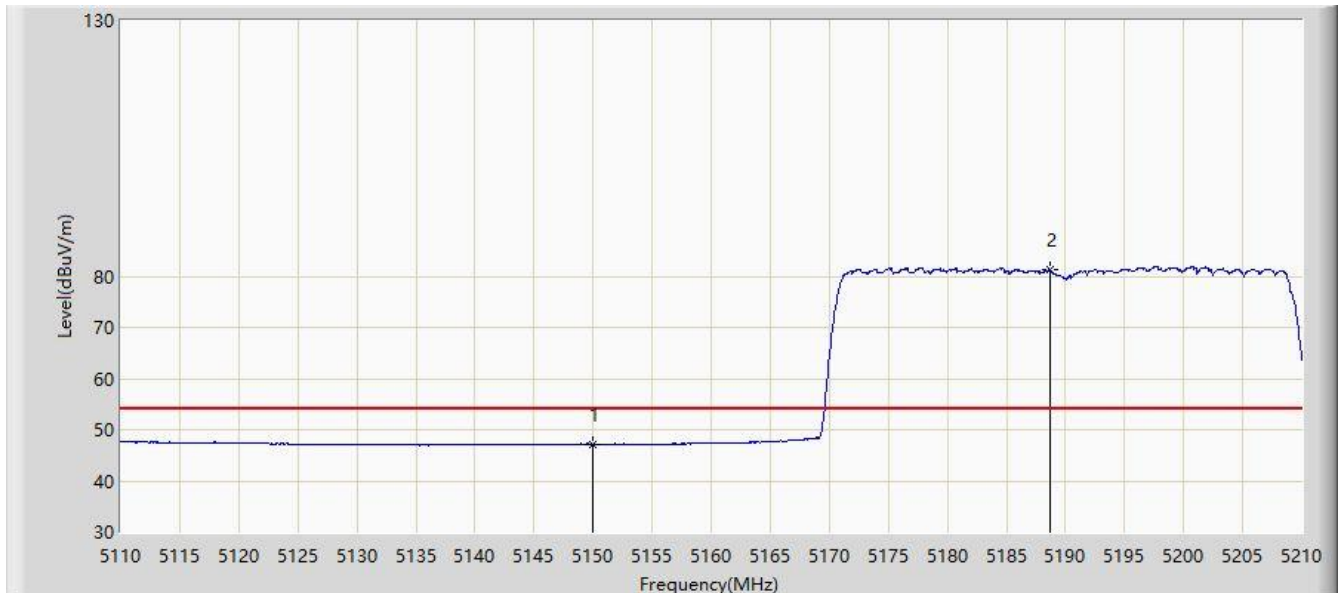


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.132	40.333	-6.868	54.000	6.799	AV
2		*	5188.650	81.268	74.581	N/A	N/A	6.686	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

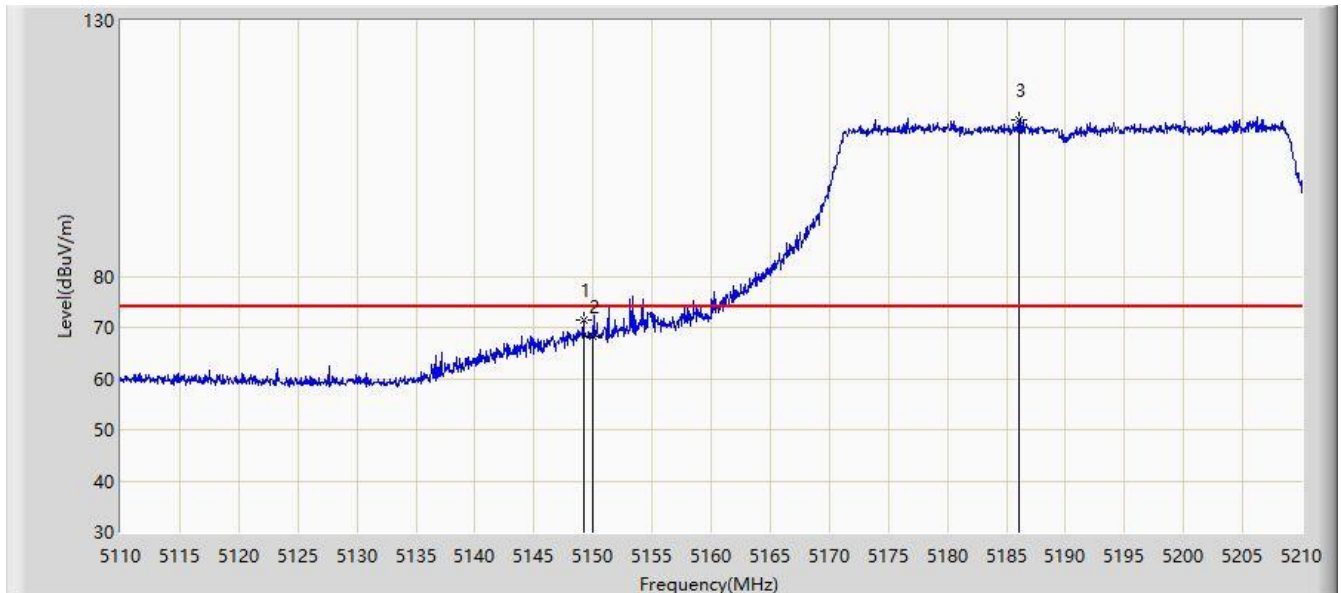


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.200	71.325	64.529	-2.675	74.000	6.797	PK
2			5150.000	68.197	61.398	-5.803	74.000	6.799	PK
3		*	5186.050	110.652	103.925	N/A	N/A	6.727	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

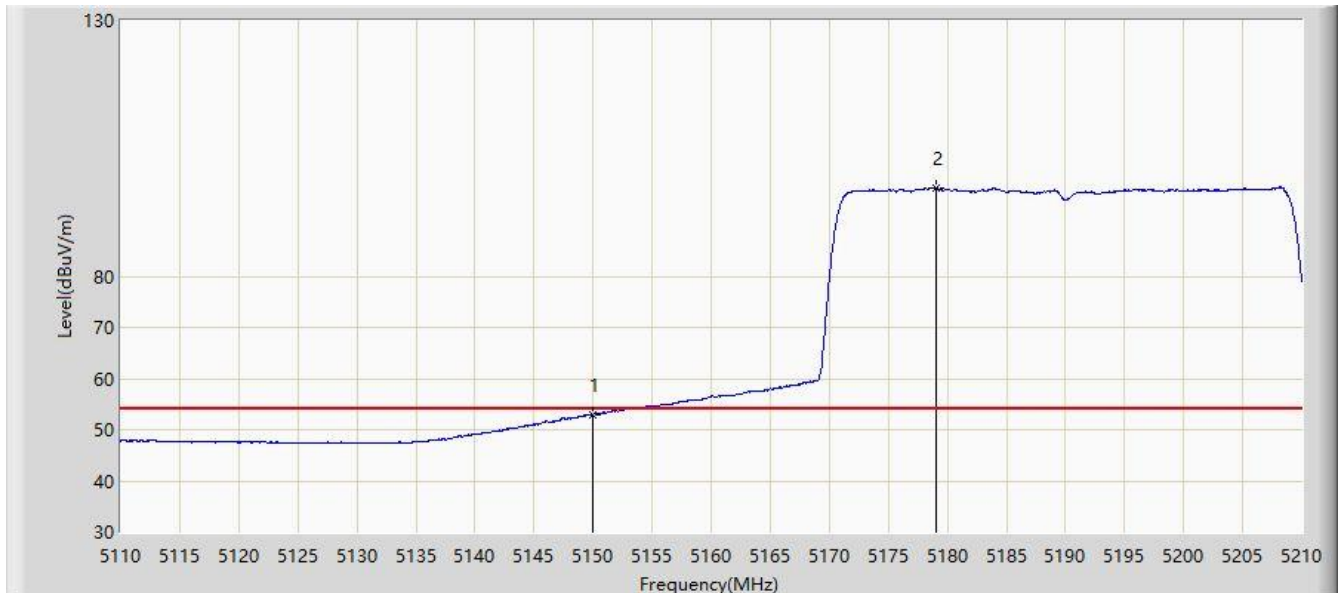


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.977	46.178	-1.023	54.000	6.799	AV
2		*	5179.050	97.258	90.457	N/A	N/A	6.800	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

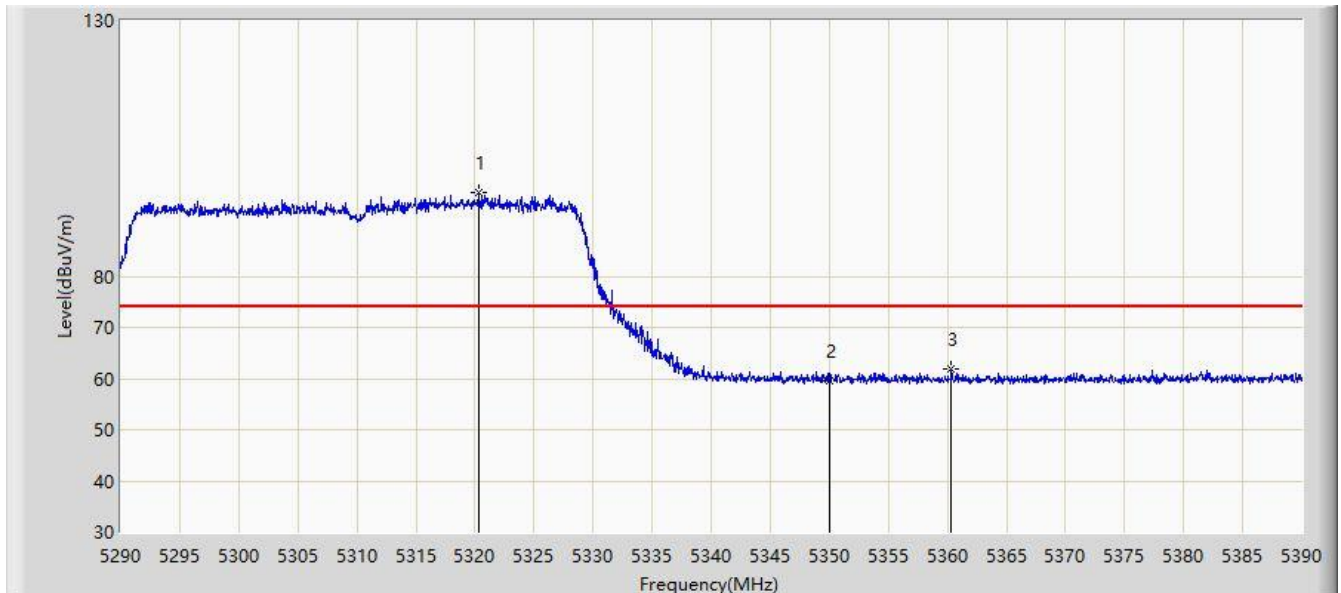


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.350	96.252	89.627	N/A	N/A	6.625	PK
2			5350.000	59.626	52.998	-14.374	74.000	6.629	PK
3			5360.350	61.741	55.137	-12.259	74.000	6.604	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

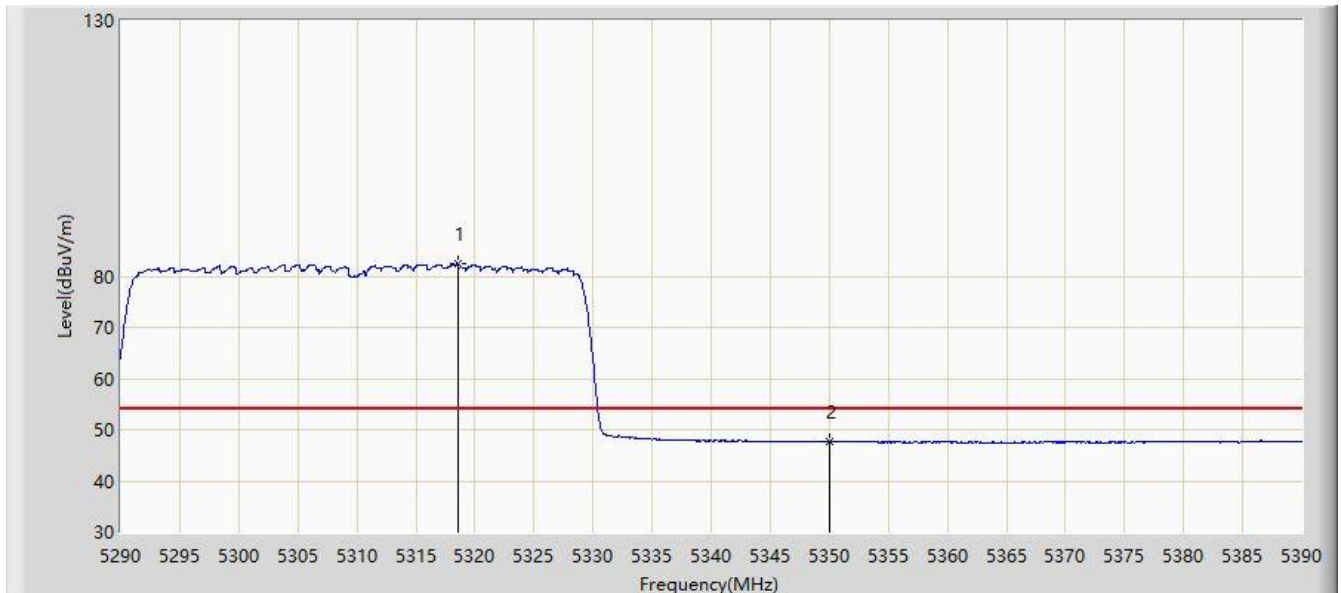


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.550	82.386	75.774	N/A	N/A	6.613	AV
2			5350.000	47.645	41.017	-6.355	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

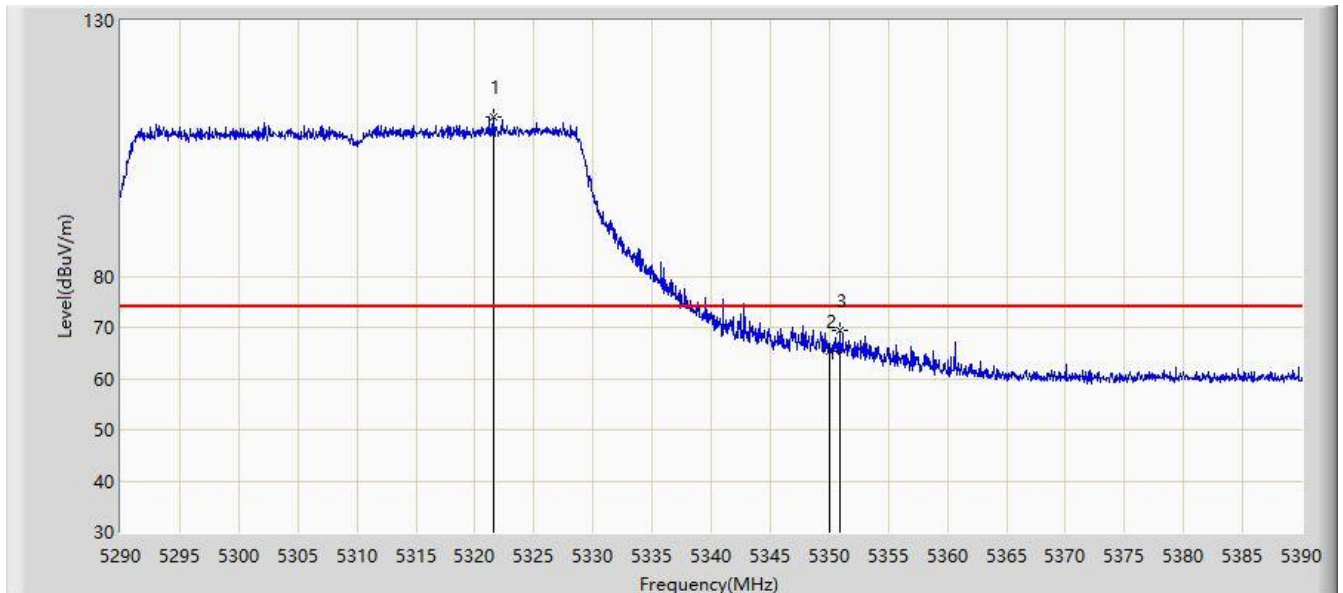


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.600	111.249	104.615	N/A	N/A	6.634	PK
2			5350.000	65.254	58.626	-8.746	74.000	6.629	PK
3			5350.850	69.552	62.929	-4.448	74.000	6.622	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

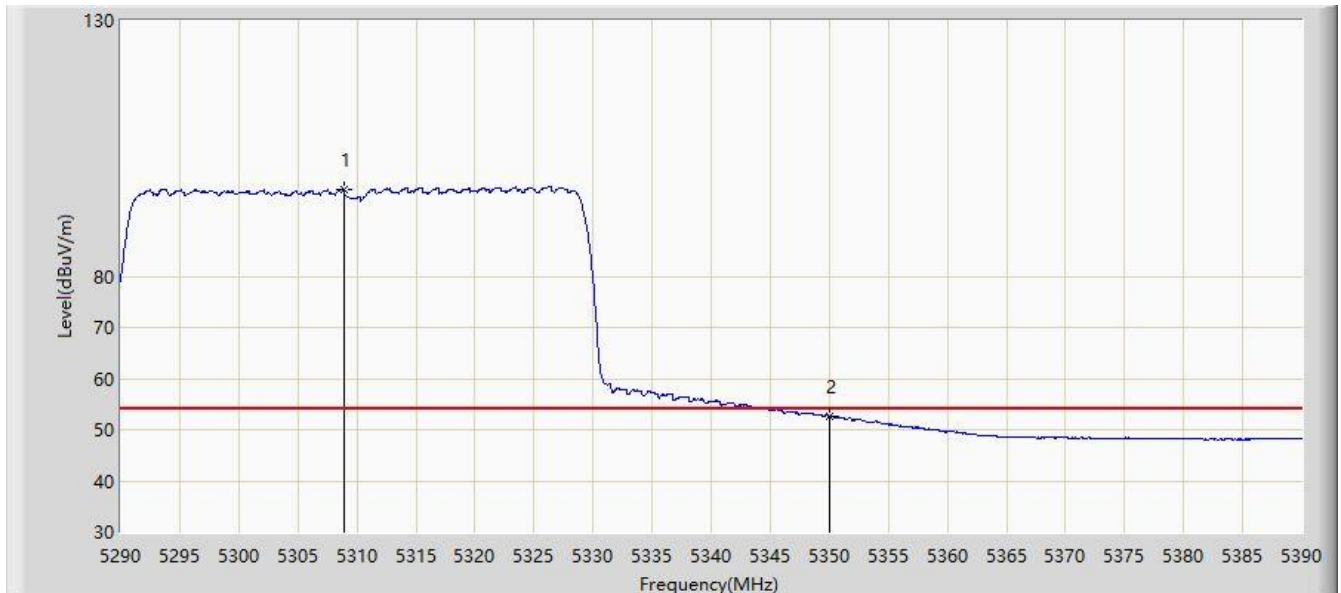


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.900	96.837	90.210	N/A	N/A	6.627	AV
2			5350.000	52.515	45.887	-1.485	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

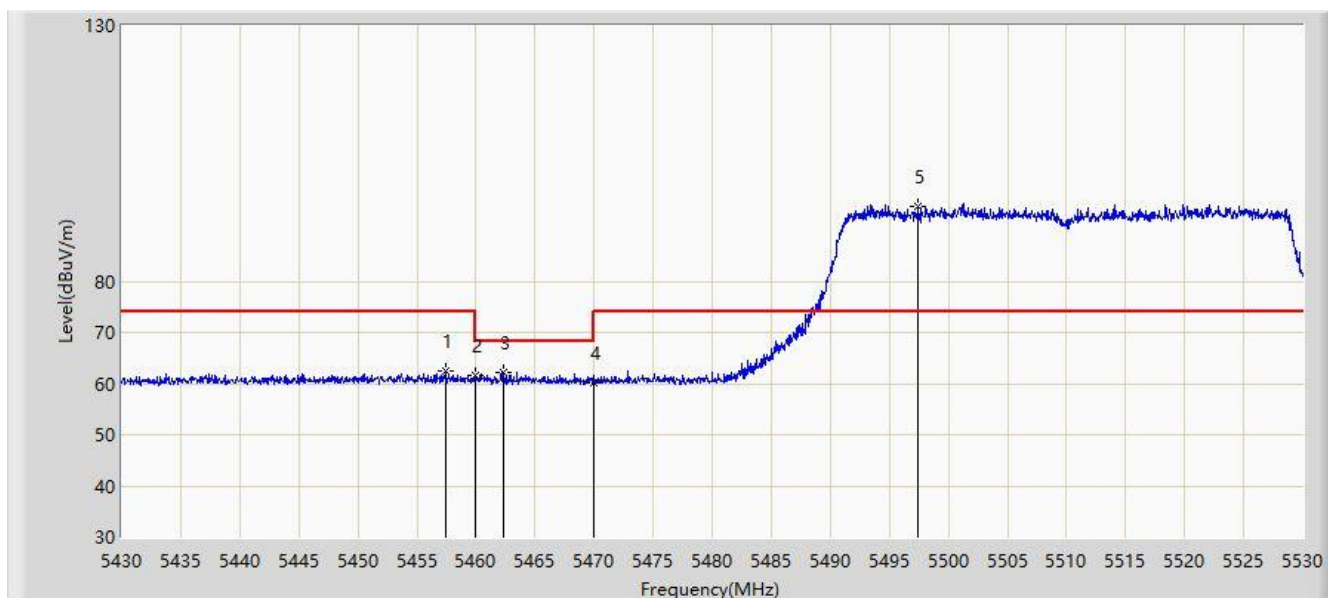


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.400	62.361	55.394	-11.639	74.000	6.967	PK
2			5460.000	61.602	54.625	-12.398	74.000	6.978	PK
3			5462.300	62.171	55.184	-6.029	68.200	6.986	PK
4			5470.000	60.149	53.132	-8.051	68.200	7.016	PK
5		*	5497.450	94.678	87.437	N/A	N/A	7.241	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

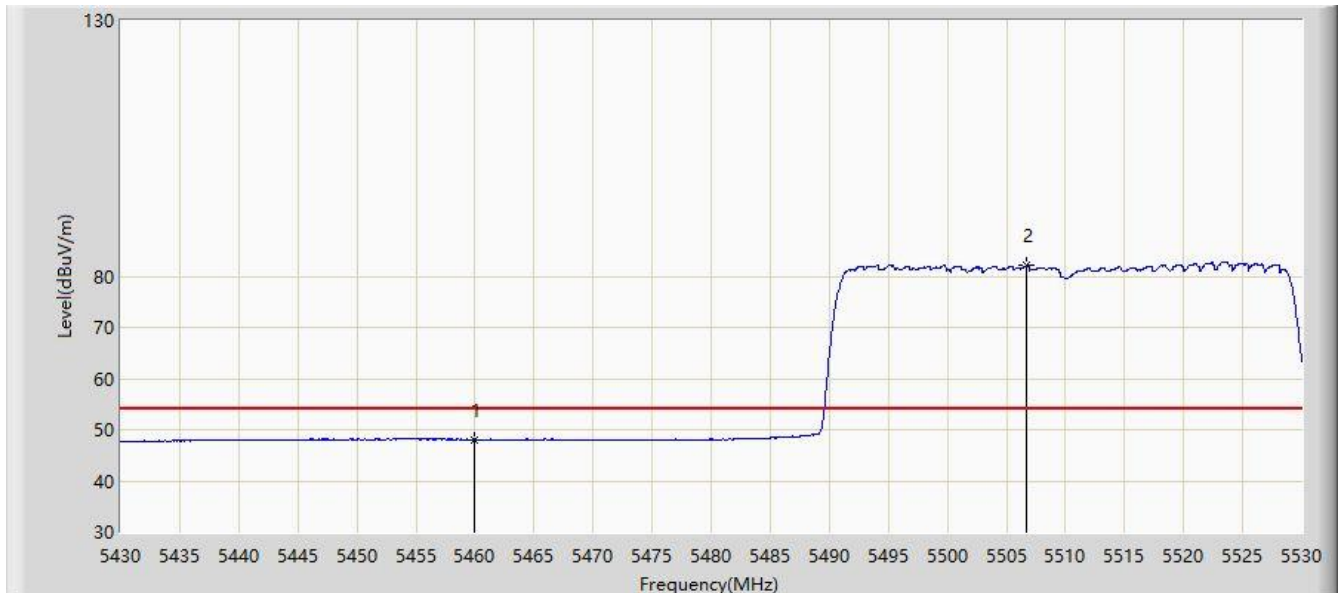


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.086	41.109	-5.914	54.000	6.978	AV
2		*	5506.750	82.065	74.769	N/A	N/A	7.295	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

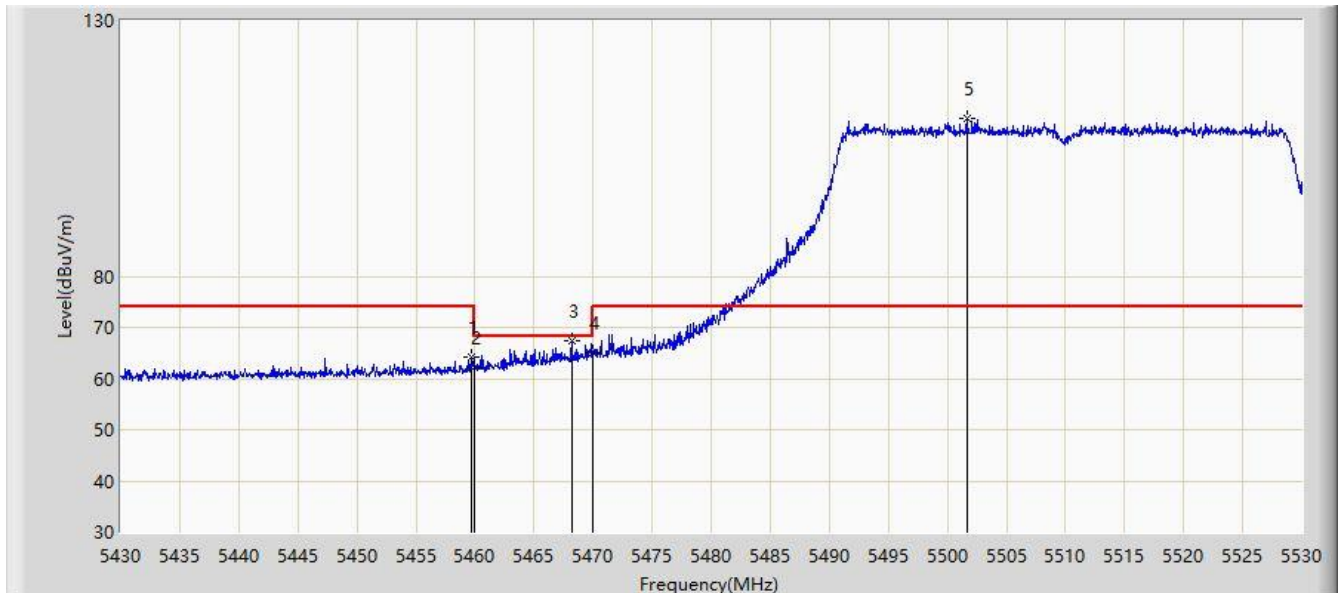


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.650	64.099	57.123	-9.901	74.000	6.976	PK
2			5460.000	62.096	55.119	-11.904	74.000	6.978	PK
3			5468.200	67.299	60.289	-0.901	68.200	7.011	PK
4			5470.000	65.137	58.120	-3.063	68.200	7.016	PK
5		*	5501.650	110.890	103.604	N/A	N/A	7.286	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

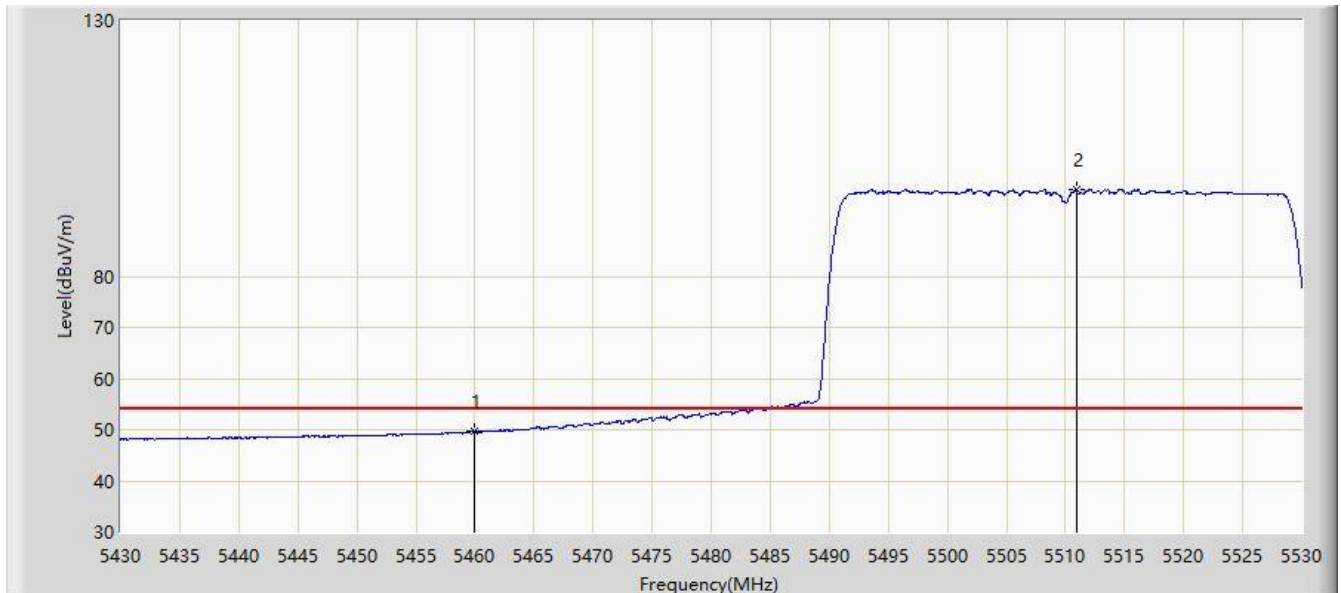


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.758	42.781	-4.242	54.000	6.978	AV
2		*	5510.950	97.006	89.773	N/A	N/A	7.233	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz, Ant 0 + 1 + 2 + 3	

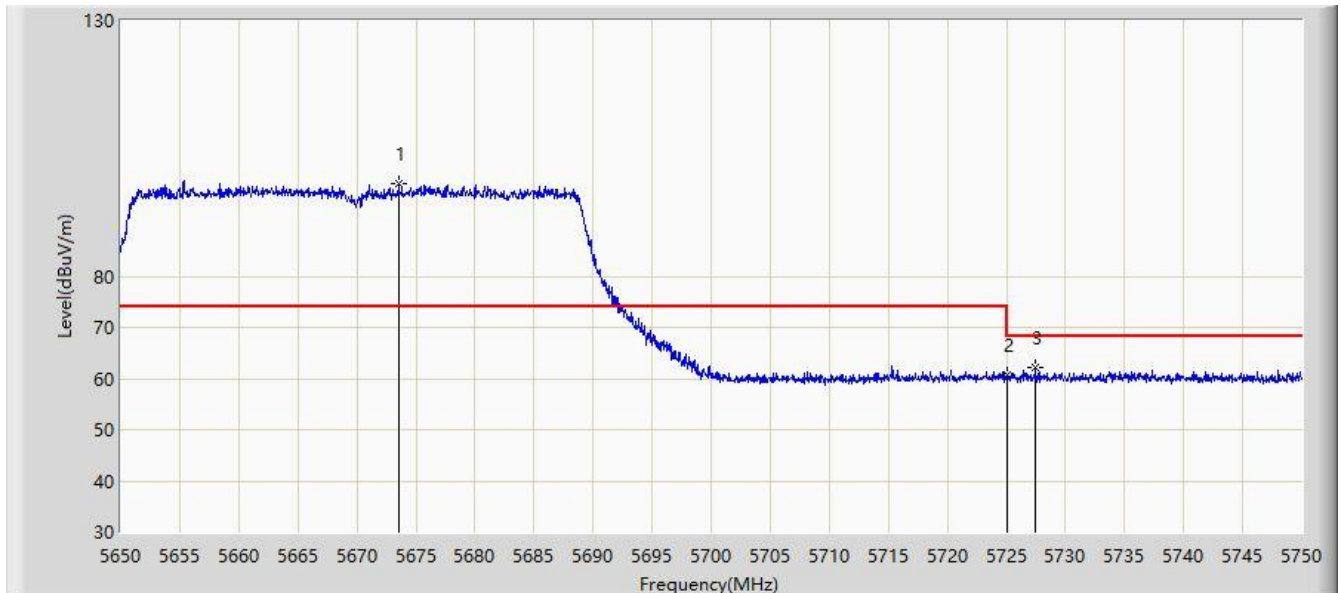


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.550	98.223	90.910	N/A	N/A	7.313	PK
2			5725.000	60.690	53.358	-7.510	68.200	7.332	PK
3			5727.500	62.050	54.697	-6.150	68.200	7.352	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz, Ant 0 + 1 + 2 + 3	

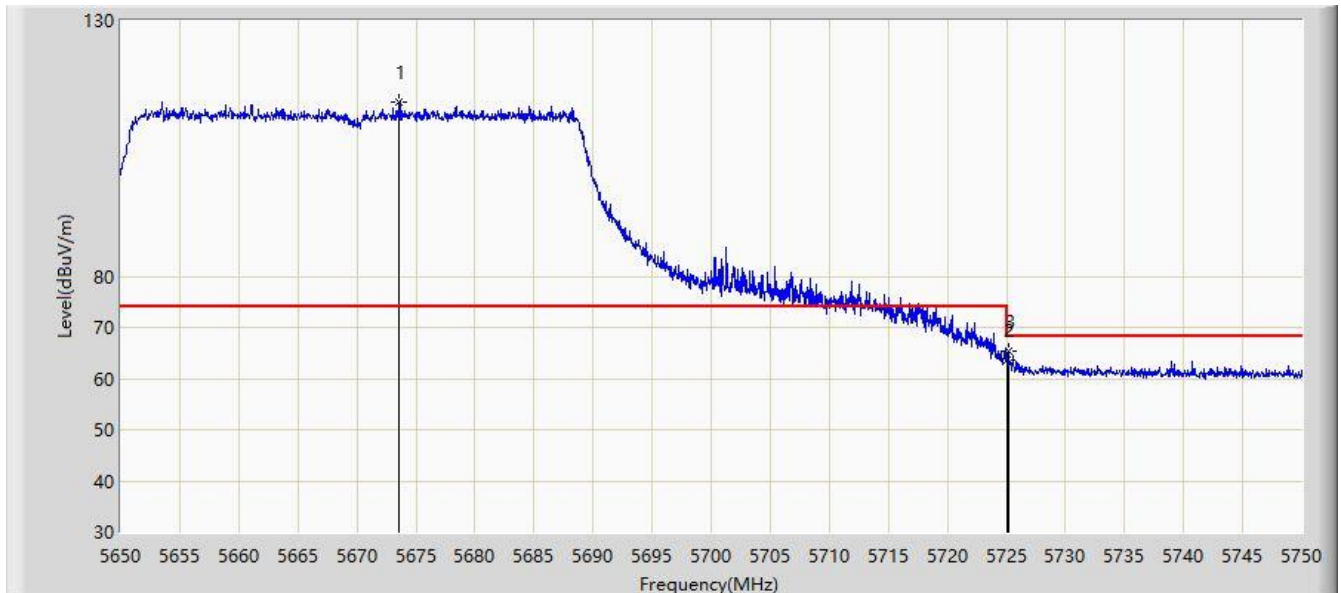


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.600	114.059	106.746	N/A	N/A	7.313	PK
2			5725.000	63.740	56.408	-4.460	68.200	7.332	PK
3			5725.200	65.303	57.969	-2.897	68.200	7.334	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:48
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz, Ant 0 + 1 + 2 + 3	

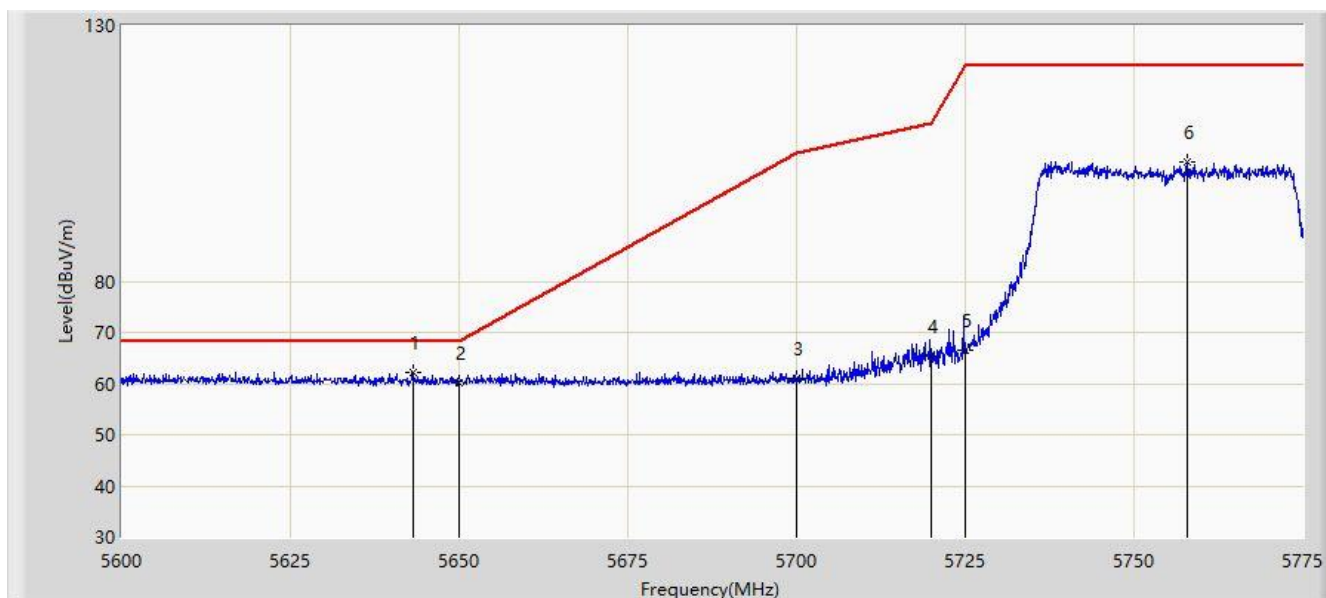


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.138	62.060	55.067	-6.140	68.200	6.994	PK
2			5650.000	60.172	53.032	-8.028	68.200	7.140	PK
3			5700.000	61.032	53.817	-44.168	105.200	7.215	PK
4			5720.000	65.310	58.037	-45.490	110.800	7.273	PK
5			5725.000	66.614	59.282	-55.586	122.200	7.332	PK
6			5757.937	103.269	95.839	N/A	N/A	7.430	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:50
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz, Ant 0 + 1 + 2 + 3	

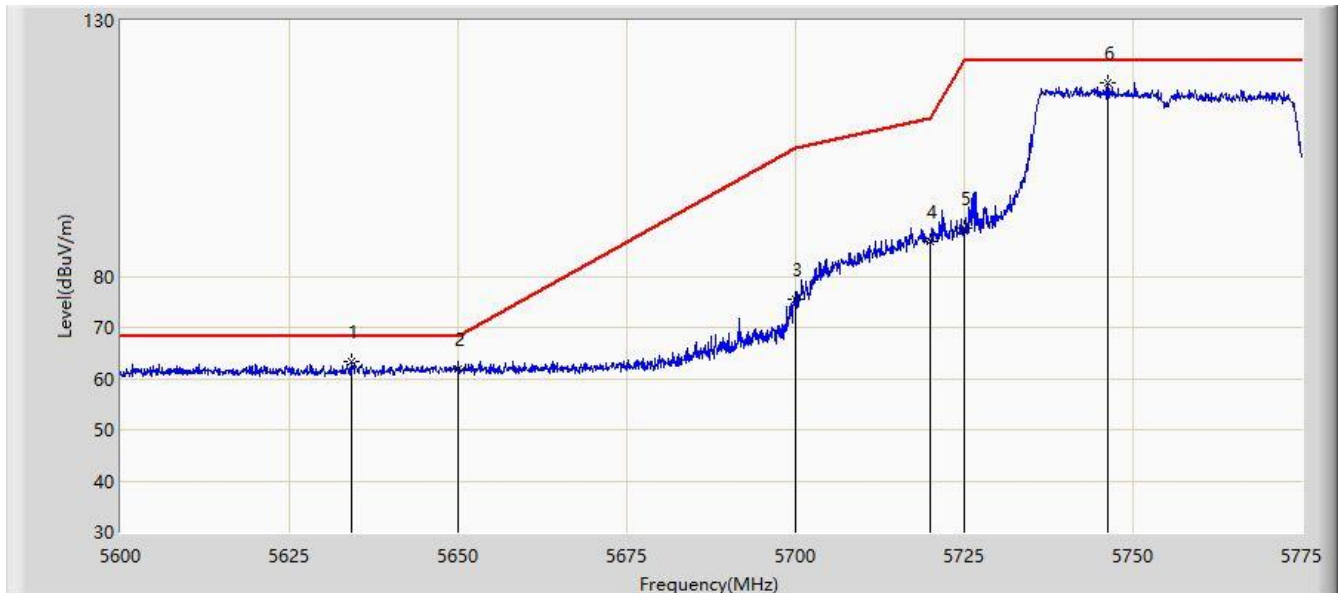


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5634.212	63.393	56.412	-4.807	68.200	6.980	PK
2			5650.000	61.810	54.670	-6.390	68.200	7.140	PK
3			5700.000	75.364	68.149	-29.836	105.200	7.215	PK
4			5720.000	86.746	79.473	-24.054	110.800	7.273	PK
5			5725.000	89.314	81.982	-32.886	122.200	7.332	PK
6		*	5746.300	117.843	110.401	N/A	N/A	7.442	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz, Ant 0 + 1 + 2 + 3	

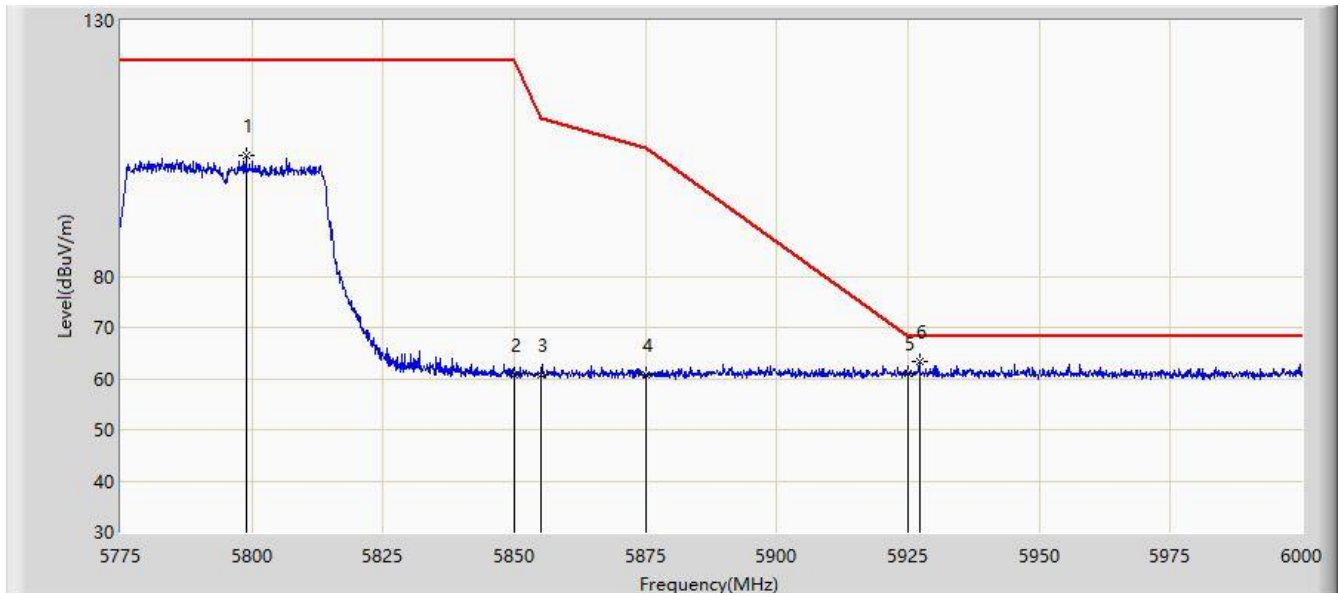


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5798.850	103.533	96.055	N/A	N/A	7.478	PK
2			5850.000	60.759	53.067	-61.441	122.200	7.692	PK
3			5855.000	60.745	53.101	-50.055	110.800	7.644	PK
4			5875.000	60.592	52.990	-44.608	105.200	7.602	PK
5			5925.000	60.982	53.156	-7.218	68.200	7.826	PK
6		*	5927.212	63.223	55.408	-4.977	68.200	7.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:53
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz, Ant 0 + 1 + 2 + 3	

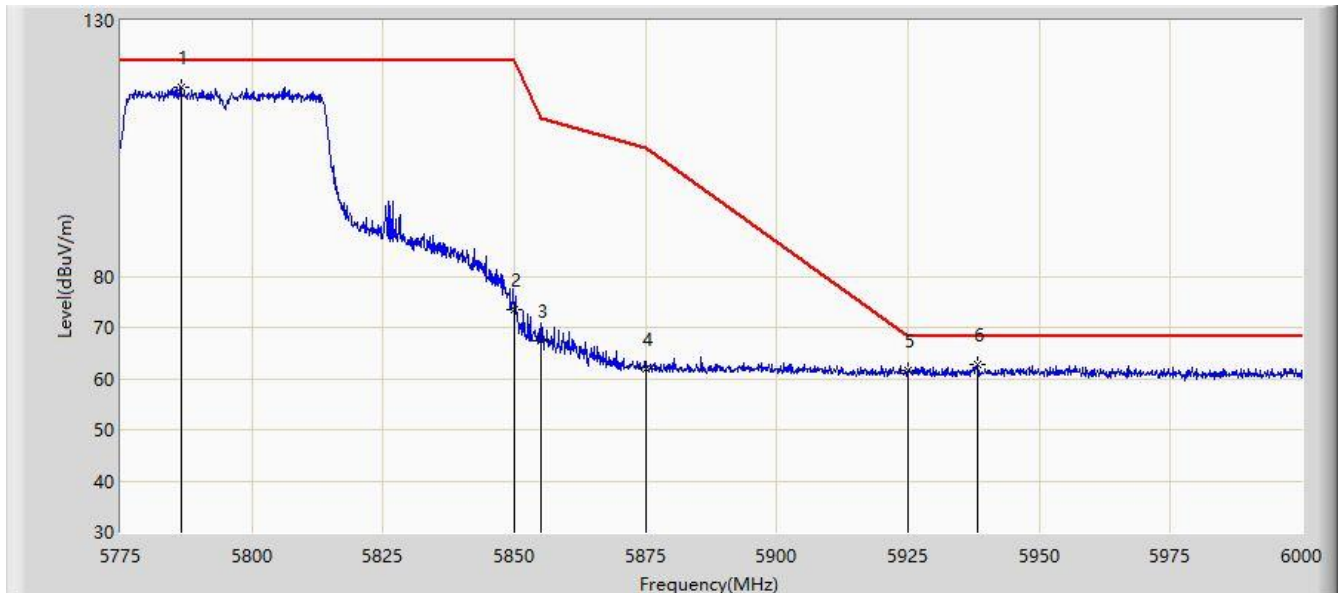


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.587	116.984	109.466	N/A	N/A	7.518	PK
2			5850.000	73.524	65.832	-48.676	122.200	7.692	PK
3			5855.000	67.491	59.847	-43.309	110.800	7.644	PK
4			5875.000	61.969	54.367	-43.231	105.200	7.602	PK
5			5925.000	61.464	53.638	-6.736	68.200	7.826	PK
6			5938.125	62.848	55.104	-5.352	68.200	7.744	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

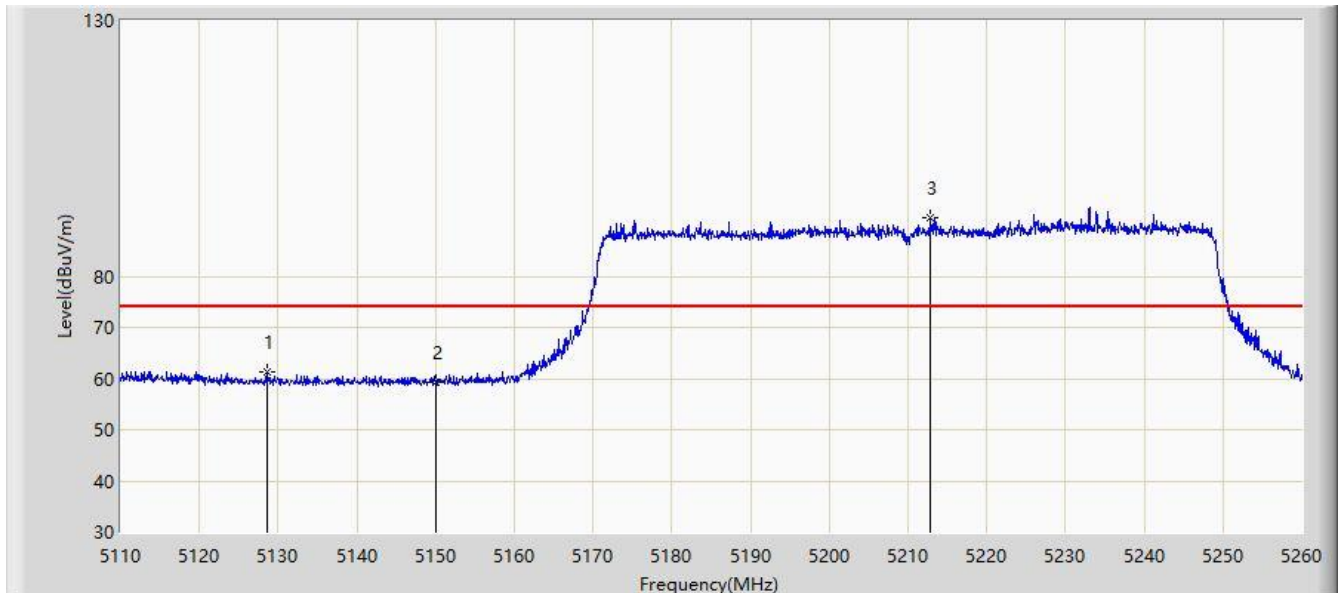


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.675	61.375	54.547	-12.625	74.000	6.828	PK
2			5150.000	59.404	52.605	-14.596	74.000	6.799	PK
3		*	5212.900	91.390	84.919	N/A	N/A	6.471	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

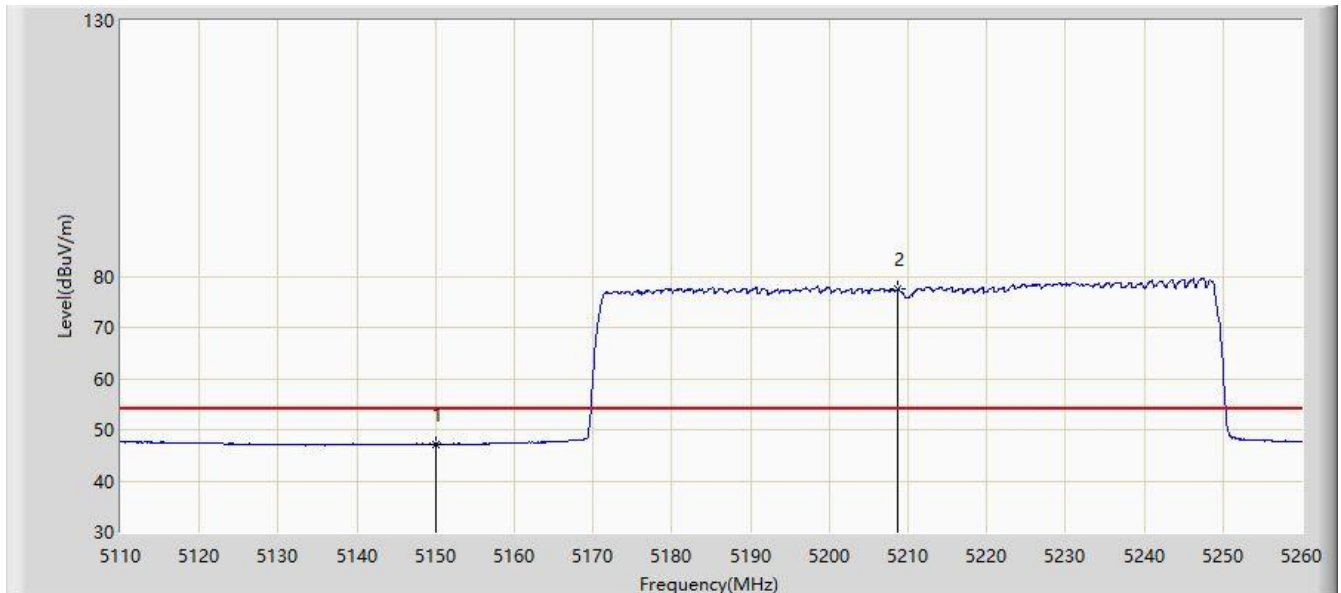


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.226	40.427	-6.774	54.000	6.799	AV
2		*	5208.775	77.420	70.932	N/A	N/A	6.488	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

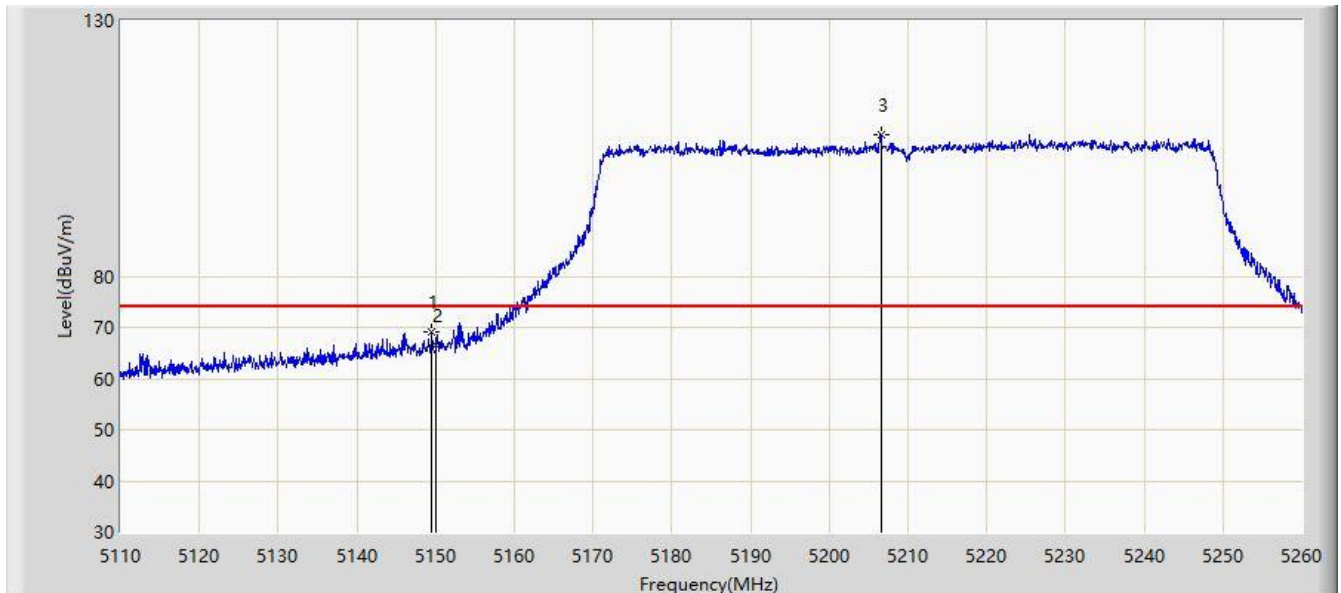


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.525	69.060	62.263	-4.940	74.000	6.797	PK
2			5150.000	66.475	59.676	-7.525	74.000	6.799	PK
3		*	5206.525	107.574	101.077	N/A	N/A	6.497	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 17:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

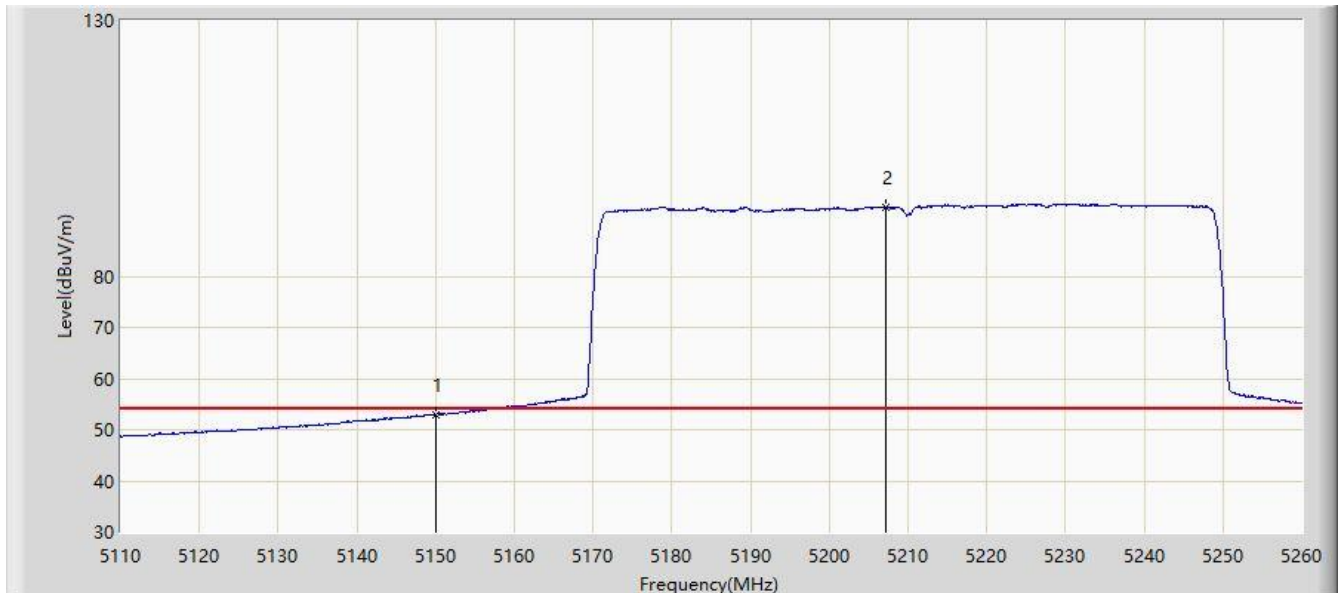

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.998	46.199	-1.002	54.000	6.799	AV
2		*	5207.200	93.525	87.031	N/A	N/A	6.494	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)