


Site: AC1	Time: 2020/02/16 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

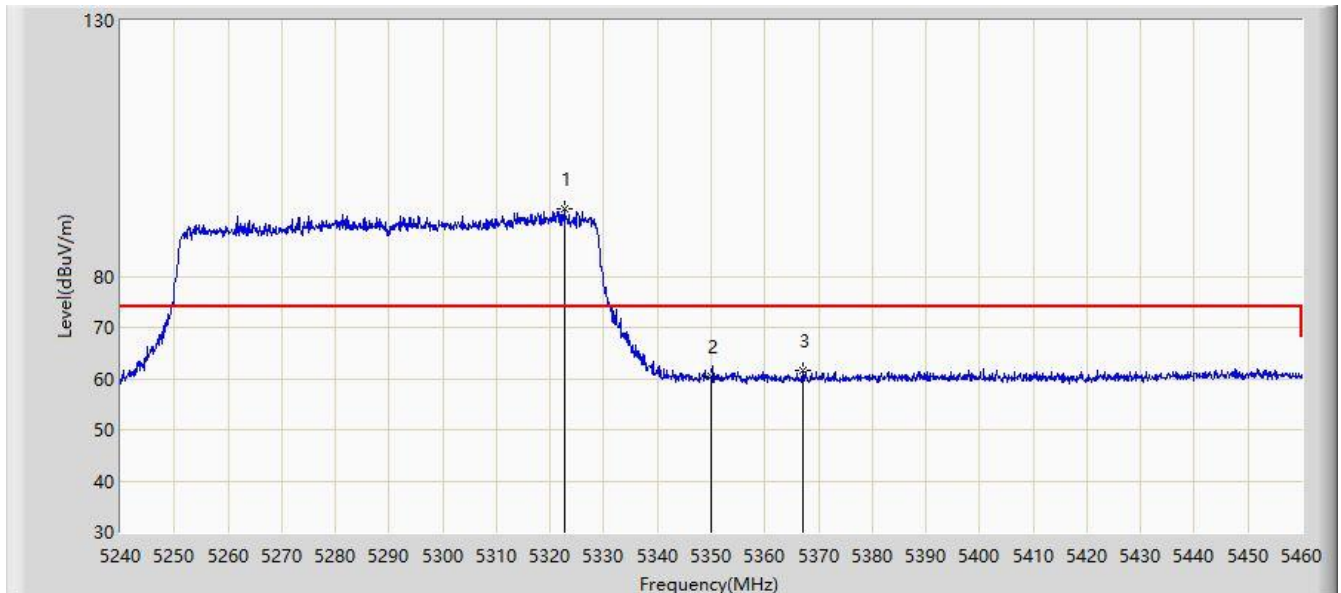


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.610	93.188	86.547	N/A	N/A	6.640	PK
2			5350.000	60.478	53.850	-13.522	74.000	6.629	PK
3			5367.050	61.567	54.972	-12.433	74.000	6.595	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

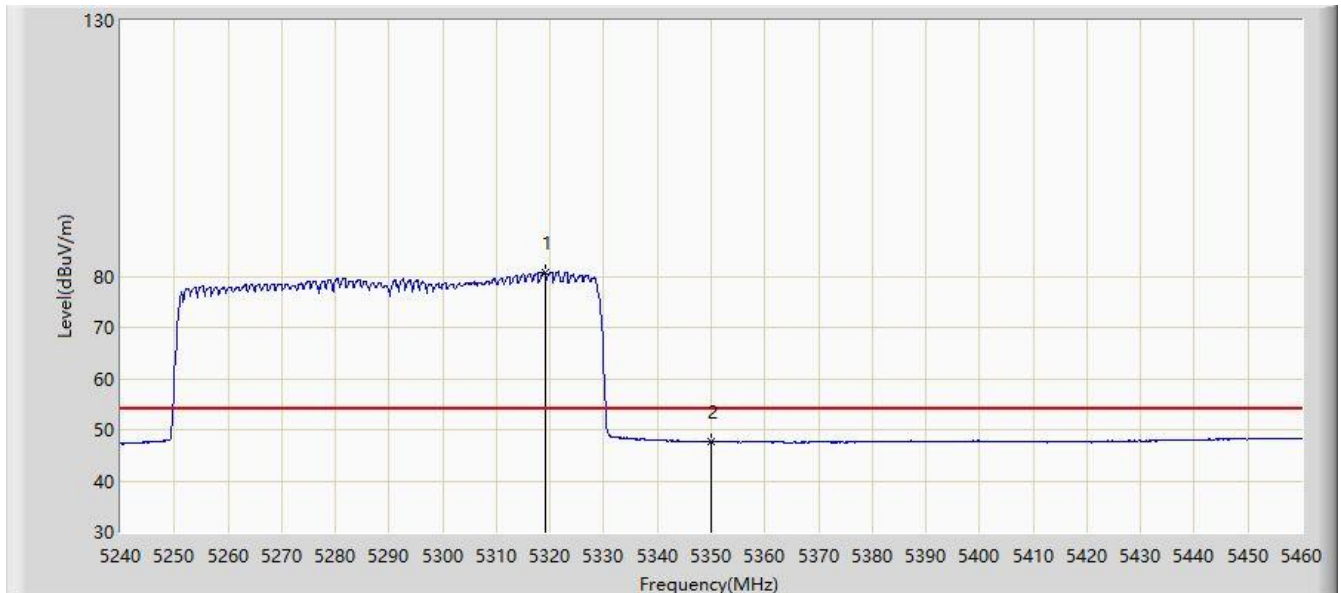


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.090	80.827	74.211	N/A	N/A	6.616	AV
2			5350.000	47.759	41.131	-6.241	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

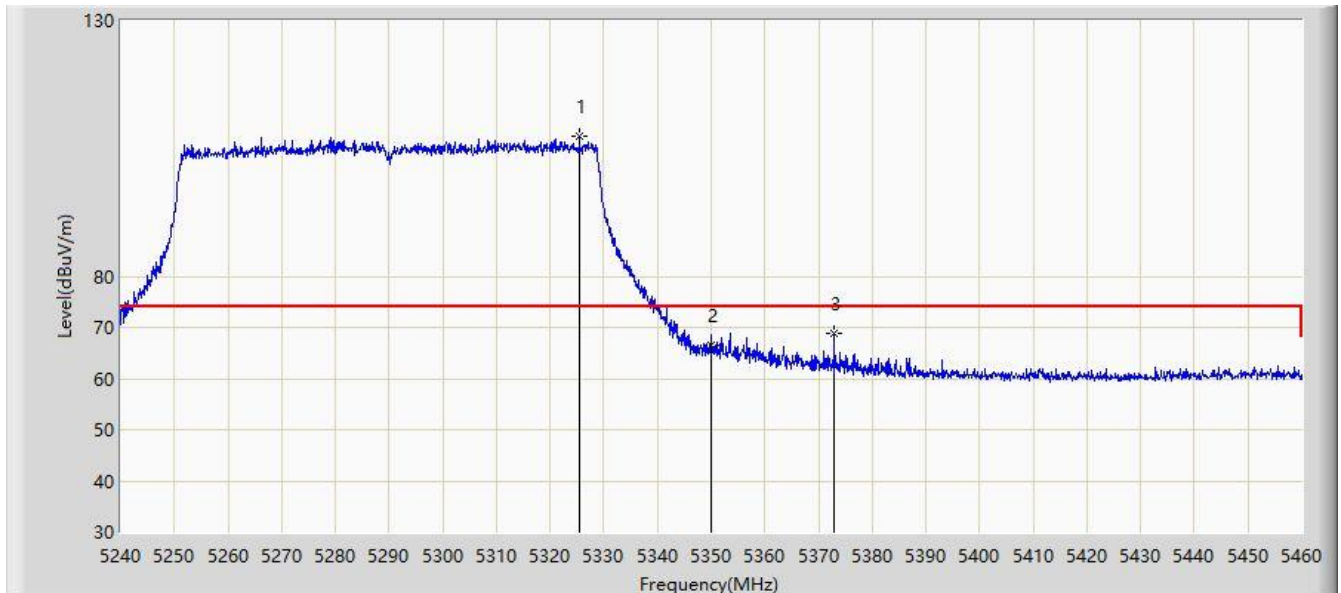


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.470	107.260	100.600	N/A	N/A	6.661	PK
2			5350.000	66.642	60.014	-7.358	74.000	6.629	PK
3			5372.880	68.935	62.308	-5.065	74.000	6.626	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

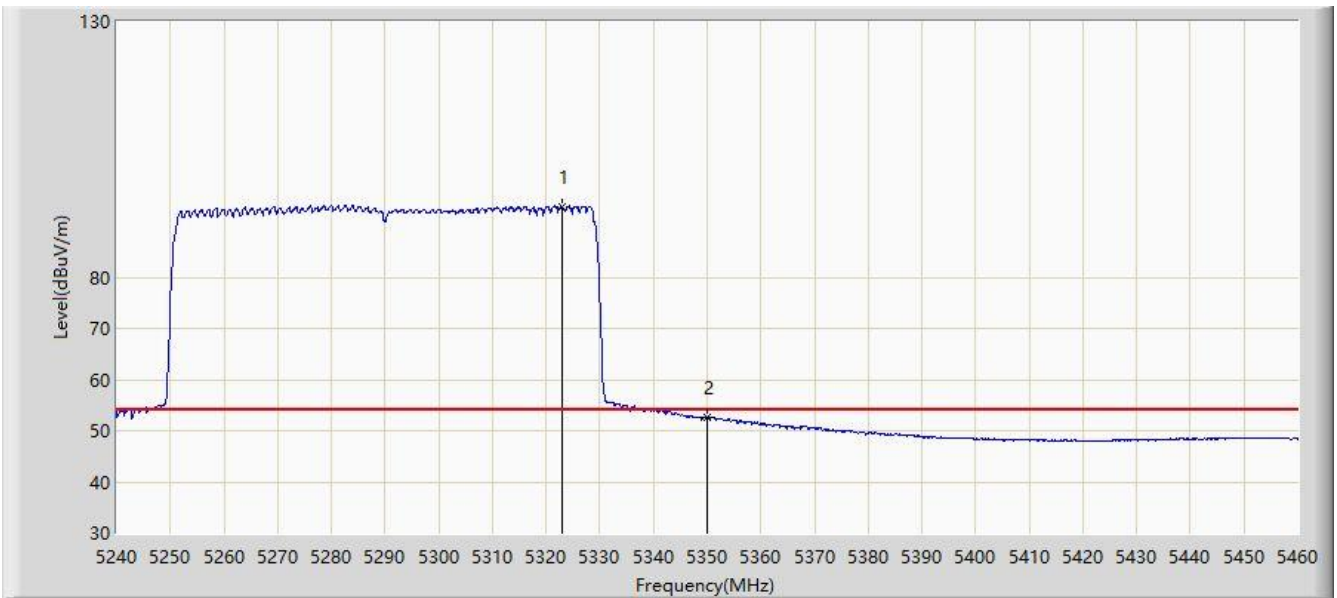


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.050	93.873	87.229	N/A	N/A	6.644	AV
2			5350.000	52.616	45.988	-1.384	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

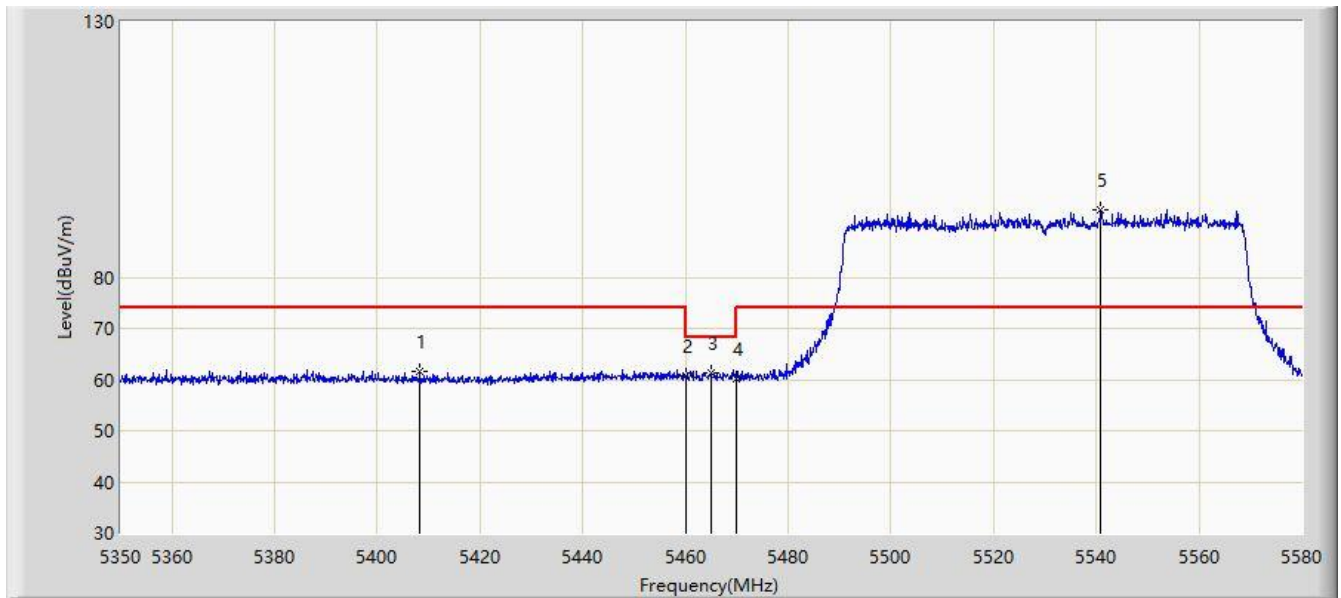


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5408.305	61.651	54.683	-12.349	74.000	6.968	PK
2			5460.000	60.781	53.804	-13.219	74.000	6.978	PK
3			5464.885	61.258	54.261	-6.942	68.200	6.997	PK
4			5470.000	60.272	53.255	-7.928	68.200	7.016	PK
5		*	5540.785	93.084	86.038	N/A	N/A	7.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

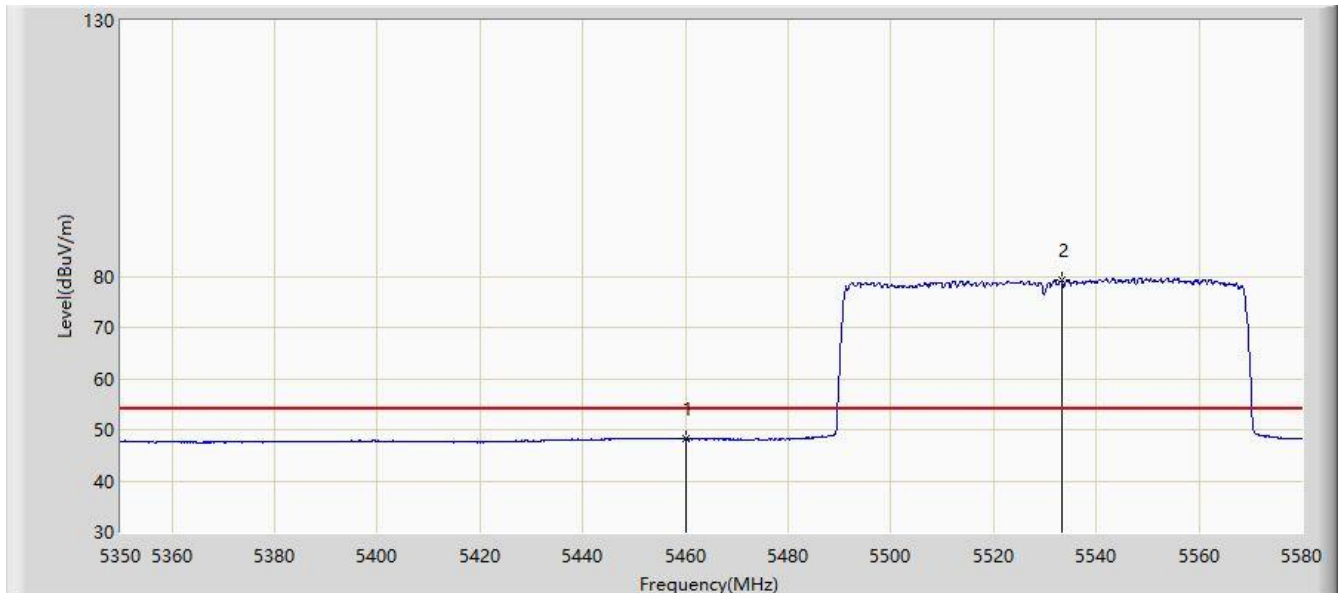


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.165	41.188	-5.835	54.000	6.978	AV
2		*	5533.195	79.230	72.190	N/A	N/A	7.040	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

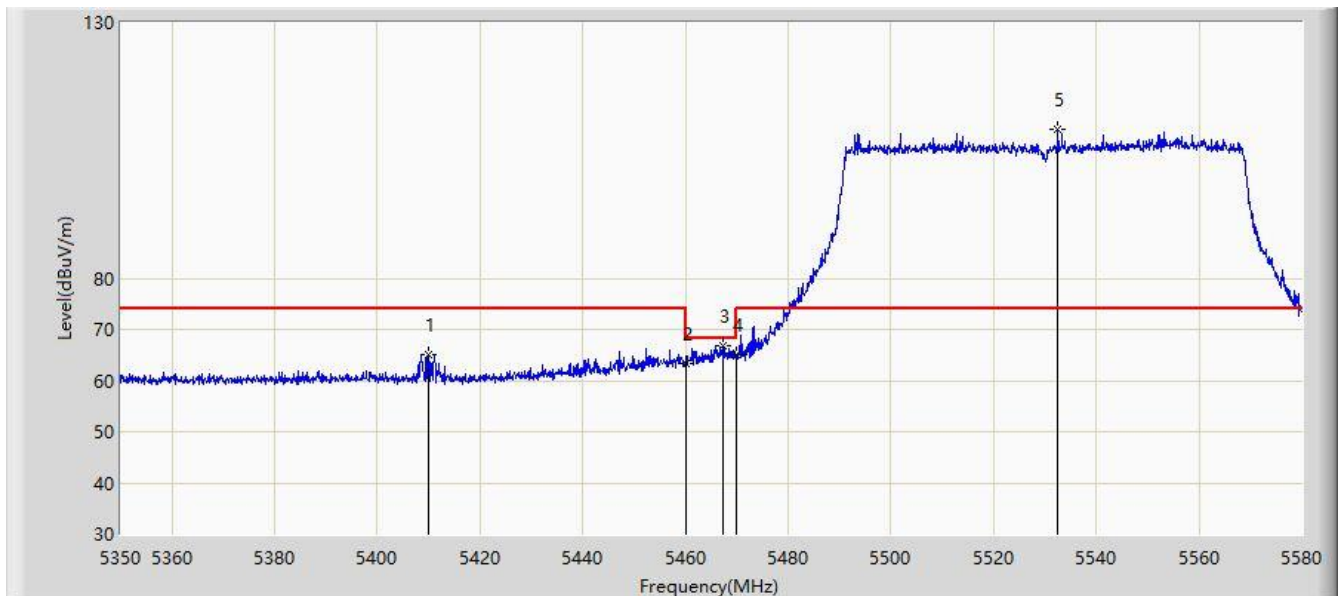


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5409.915	64.940	57.967	-9.060	74.000	6.973	PK
2			5460.000	63.232	56.255	-10.768	74.000	6.978	PK
3			5467.415	66.732	59.725	-1.468	68.200	7.007	PK
4			5470.000	65.019	58.002	-3.181	68.200	7.016	PK
5		*	5532.505	109.188	102.146	N/A	N/A	7.042	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

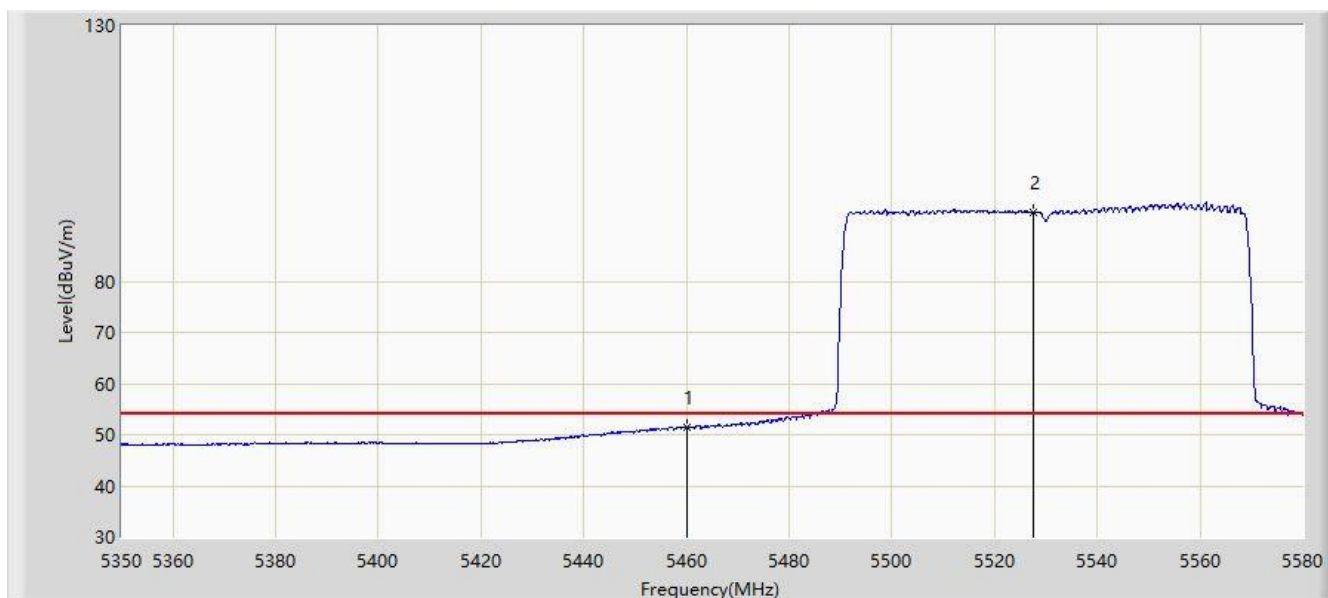


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.414	44.437	-2.586	54.000	6.978	AV
2		*	5527.445	93.613	86.558	N/A	N/A	7.055	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz, Ant 0 + 1 + 2 + 3	

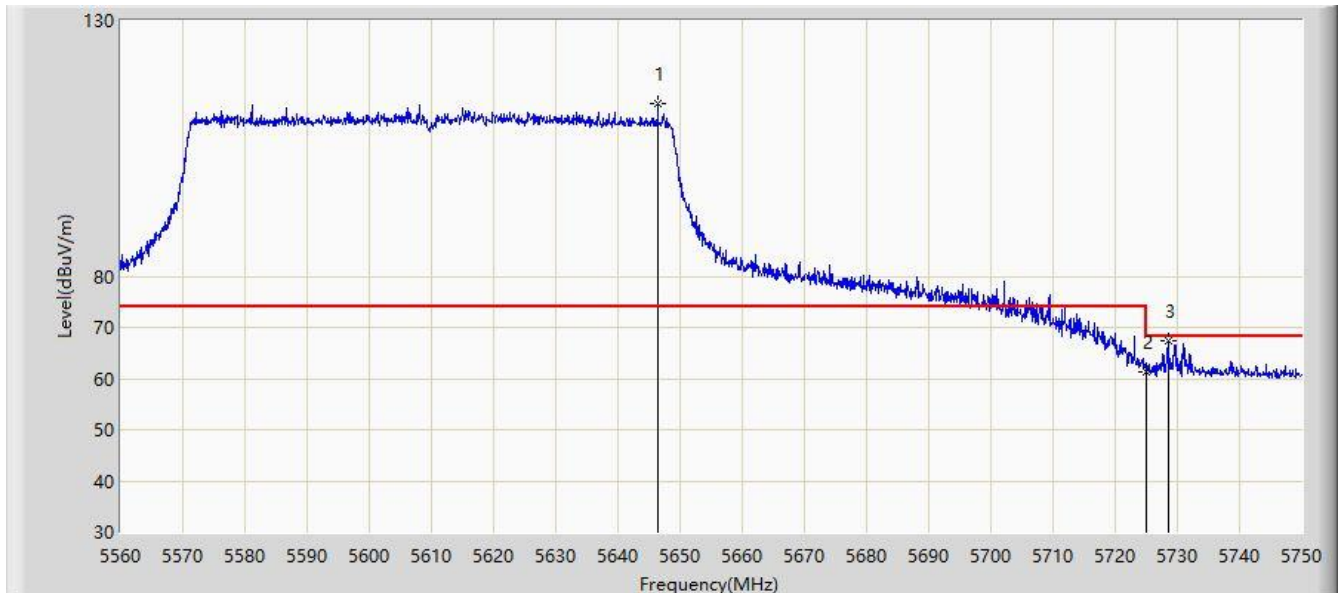


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5646.450	113.637	106.573	N/A	N/A	7.064	PK
2			5725.000	61.398	54.066	-6.802	68.200	7.332	PK
3			5728.530	67.495	60.136	-0.705	68.200	7.359	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/16 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz, Ant 0 + 1 + 2 + 3	

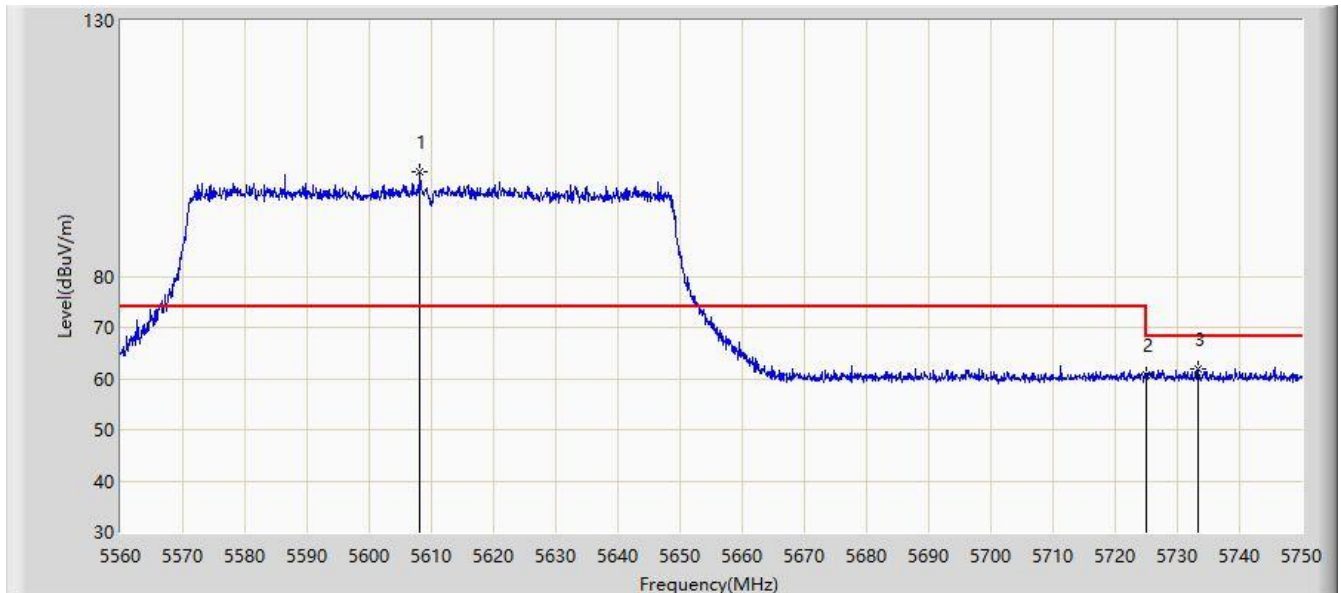


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5608.165	100.561	93.492	N/A	N/A	7.069	PK
2			5725.000	60.586	53.254	-7.614	68.200	7.332	PK
3			5733.375	61.933	54.545	-6.267	68.200	7.388	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:01
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz, Ant 0 + 1 + 2 + 3	

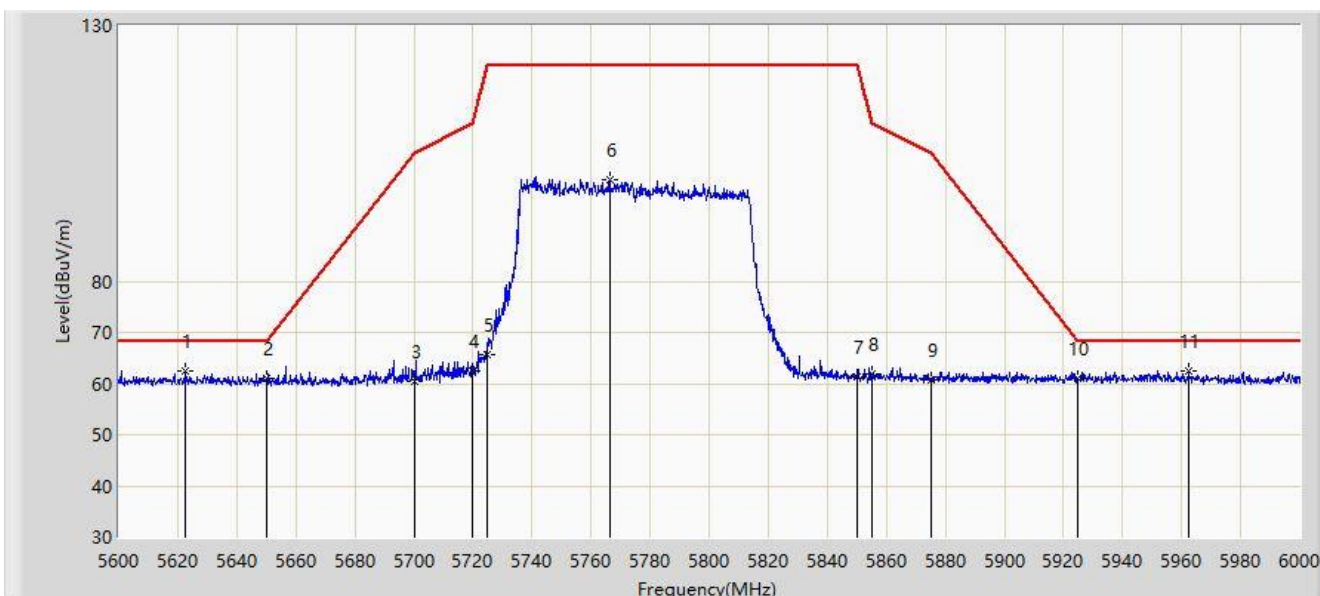


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5622.800	62.466	55.432	-5.734	68.200	7.035	PK
2			5650.000	61.148	54.008	-7.052	68.200	7.140	PK
3			5700.000	60.347	53.132	-44.853	105.200	7.215	PK
4			5720.000	62.590	55.317	-48.210	110.800	7.273	PK
5			5725.000	65.707	58.375	-56.493	122.200	7.332	PK
6			5766.200	99.941	92.465	-22.259	122.200	7.476	PK
7			5850.000	61.183	53.491	-61.017	122.200	7.692	PK
8			5855.000	61.828	54.184	-48.972	110.800	7.644	PK
9			5875.000	60.807	53.205	-44.393	105.200	7.602	PK
10			5925.000	61.009	53.183	-7.191	68.200	7.826	PK
11		*	5962.400	62.588	54.973	N/A	N/A	7.616	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:05
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz, Ant 0 + 1 + 2 + 3	

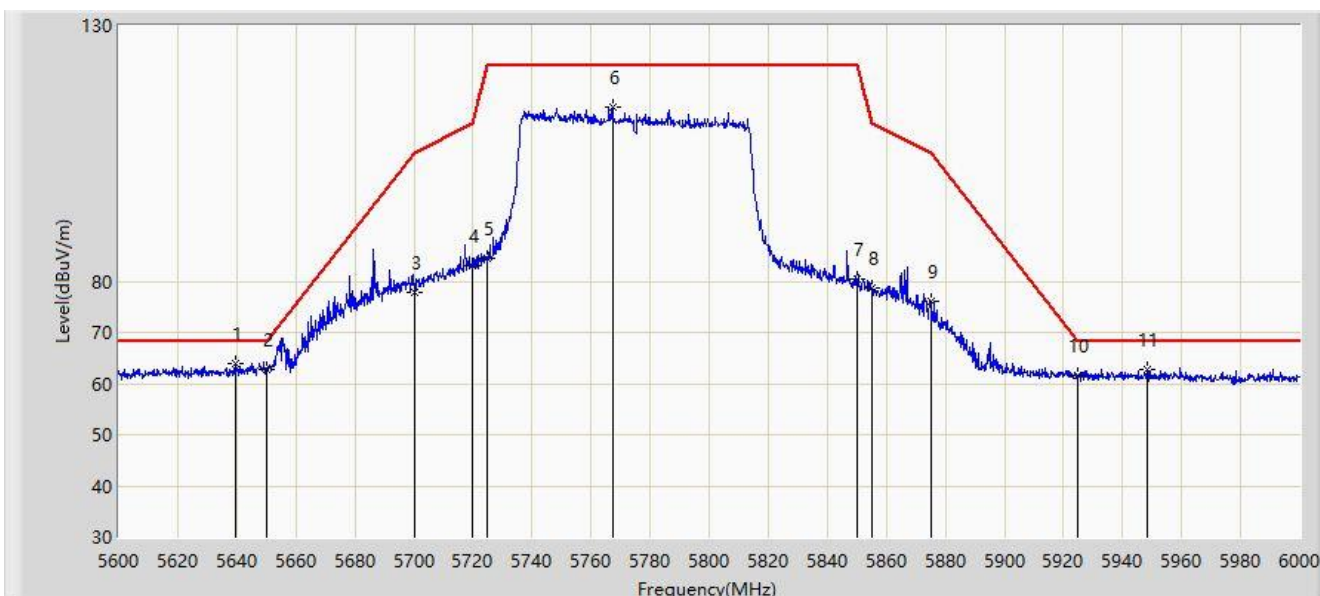


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5639.400	63.878	56.923	-4.322	68.200	6.955	PK
2			5650.000	62.895	55.755	-5.305	68.200	7.140	PK
3			5700.000	77.943	70.728	-27.257	105.200	7.215	PK
4			5720.000	83.024	75.751	-27.776	110.800	7.273	PK
5			5725.000	84.562	77.230	-37.638	122.200	7.332	PK
6			5767.200	114.018	106.535	N/A	N/A	7.483	PK
7			5850.000	80.467	72.775	-41.733	122.200	7.692	PK
8			5855.000	78.694	71.050	-32.106	110.800	7.644	PK
9			5875.000	76.165	68.563	-29.035	105.200	7.602	PK
10			5925.000	61.669	53.843	-6.531	68.200	7.826	PK
11			5948.600	62.896	55.221	-5.304	68.200	7.675	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

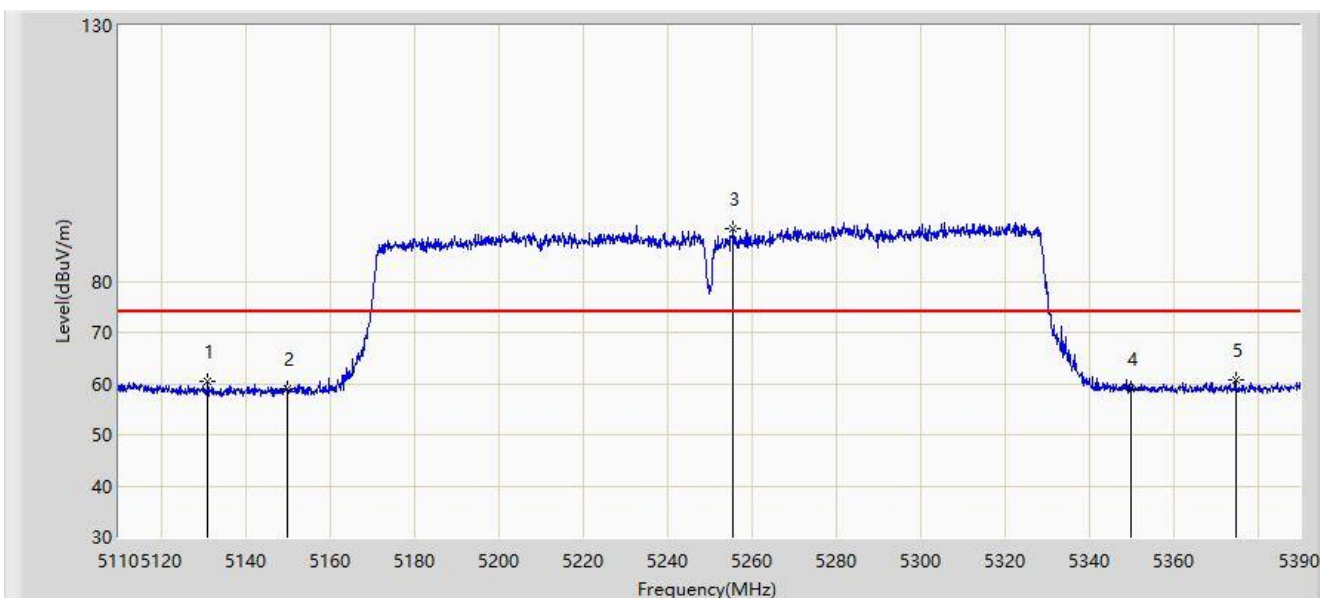


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.140	60.367	53.509	-13.633	74.000	6.859	PK
2			5150.000	58.872	52.073	-15.128	74.000	6.799	PK
3		*	5255.740	90.433	83.776	N/A	N/A	6.658	PK
4			5350.000	58.977	52.349	-15.023	74.000	6.629	PK
5			5374.740	60.629	53.986	-13.371	74.000	6.643	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

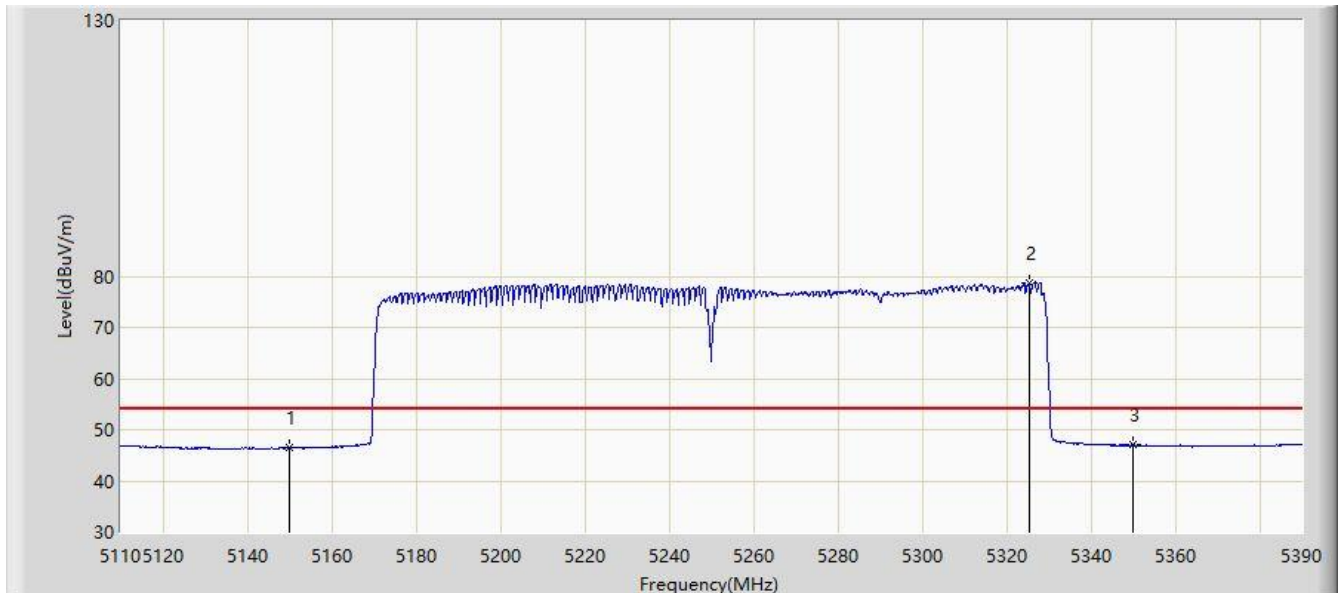


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.457	39.658	-7.543	54.000	6.799	AV
2		*	5325.600	78.616	71.955	N/A	N/A	6.661	AV
3			5350.000	46.979	40.351	-7.021	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

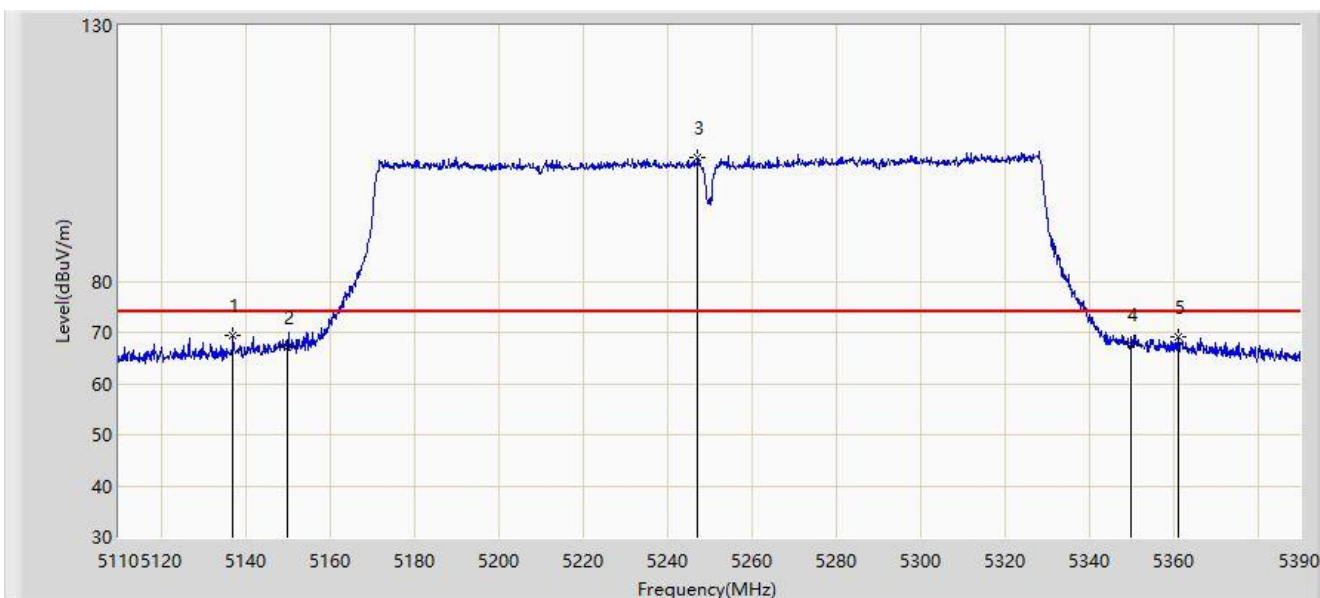


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.160	69.449	62.615	-4.551	74.000	6.834	PK
2			5150.000	67.094	60.295	-6.906	74.000	6.799	PK
3		*	5247.340	104.120	97.418	N/A	N/A	6.701	PK
4			5350.000	67.818	61.190	-6.182	74.000	6.629	PK
5			5361.300	68.989	62.386	-5.011	74.000	6.602	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

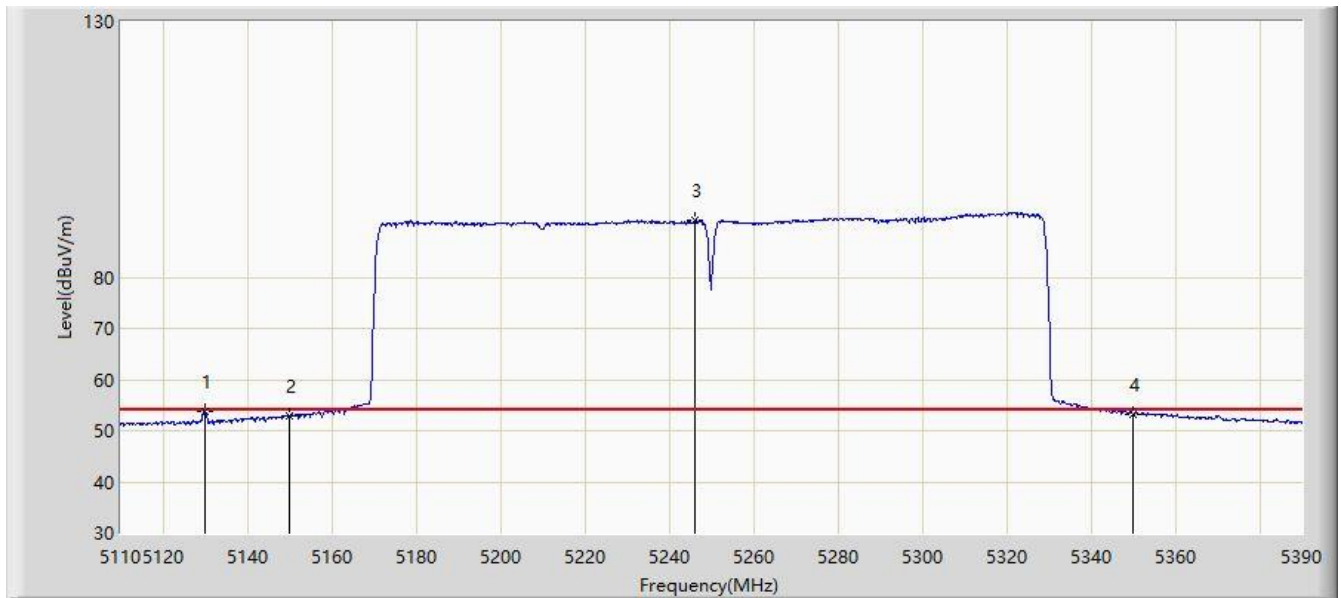


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.880	53.809	46.965	-0.191	54.000	6.844	AV
2			5150.000	52.872	46.073	-1.128	54.000	6.799	AV
3		*	5246.220	91.044	84.338	N/A	N/A	6.706	AV
4			5350.000	53.256	46.628	-0.744	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

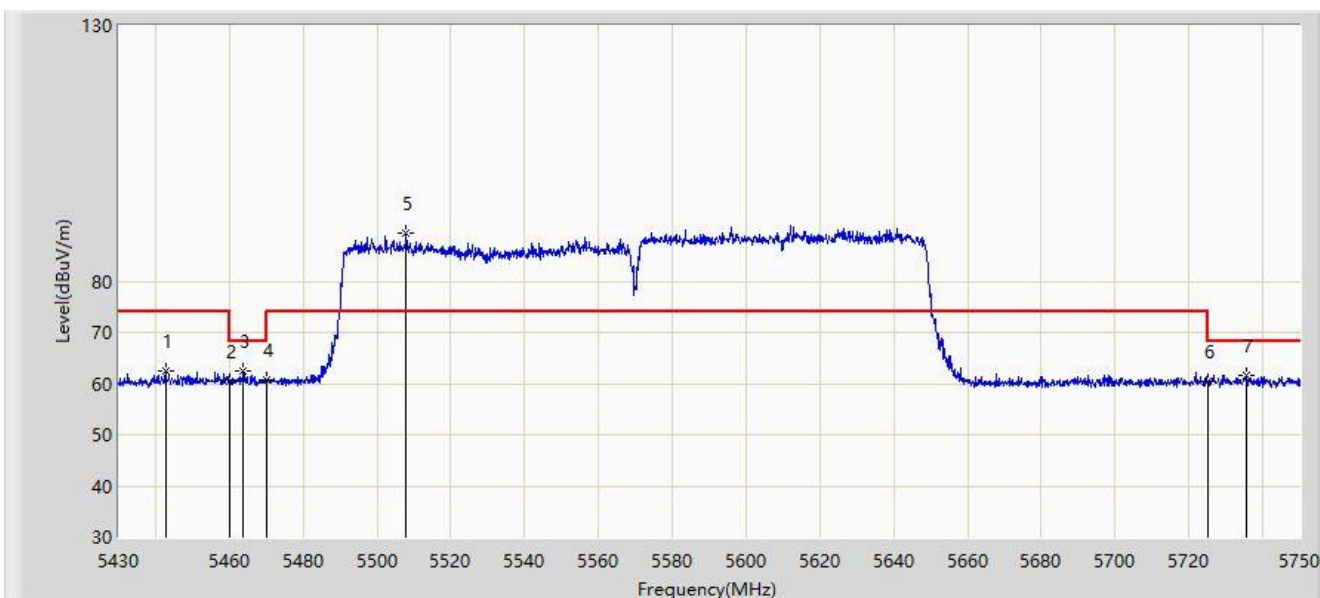


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5442.800	62.522	55.527	-11.478	74.000	6.995	PK
2			5460.000	60.342	53.365	-13.658	74.000	6.978	PK
3			5463.760	62.586	55.594	-5.614	68.200	6.993	PK
4			5470.000	60.810	53.793	-7.390	68.200	7.016	PK
5		*	5507.920	89.410	82.132	N/A	N/A	7.278	PK
6			5725.000	60.341	53.009	-7.859	68.200	7.332	PK
7			5735.600	61.714	54.313	-6.486	68.200	7.401	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

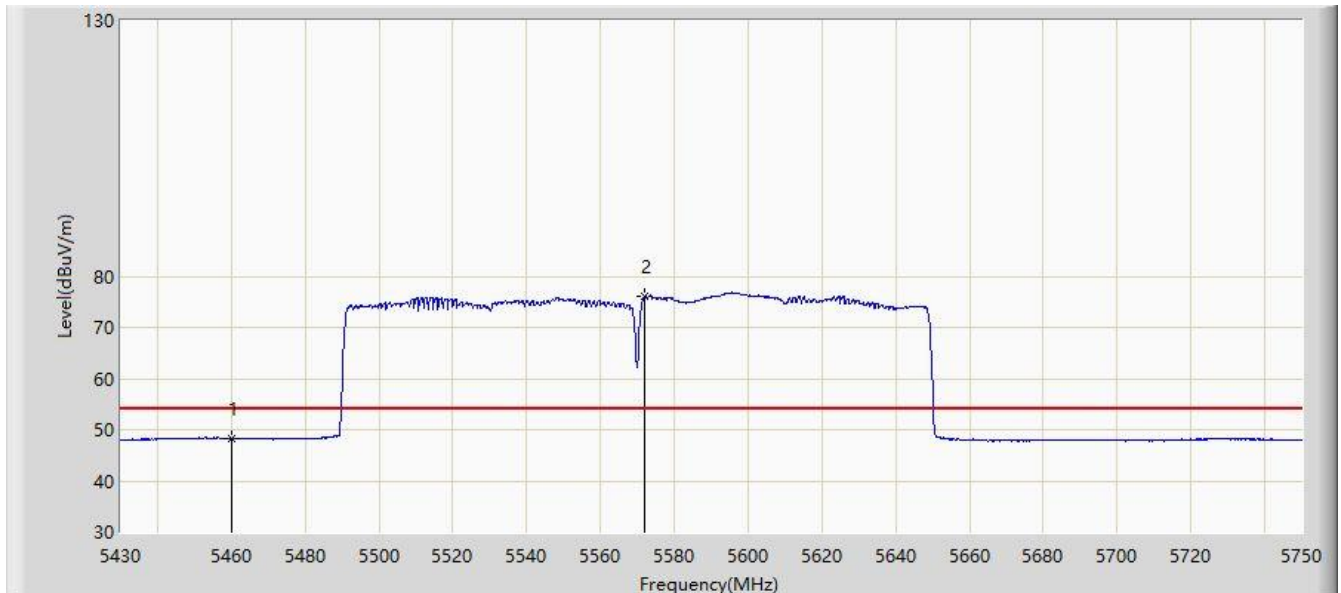


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.364	41.387	-5.636	54.000	6.978	AV
2		*	5572.080	76.131	68.865	N/A	N/A	7.265	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

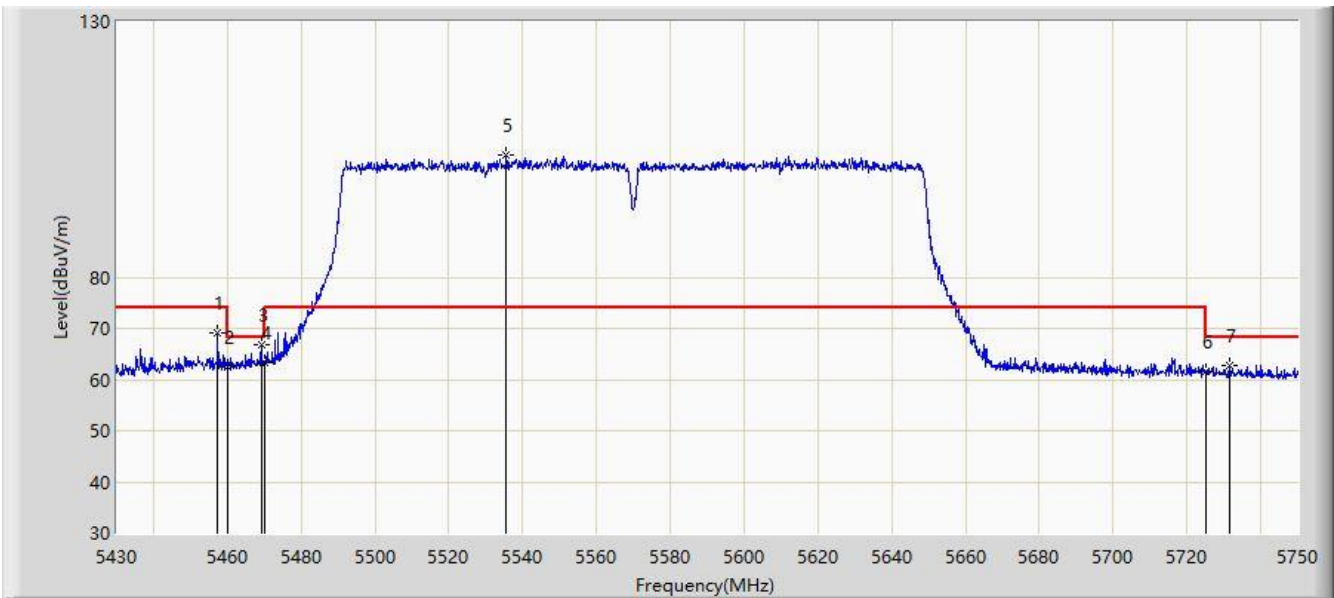


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.360	69.121	62.154	-4.879	74.000	6.967	PK
2			5460.000	62.588	55.611	-11.412	74.000	6.978	PK
3			5469.200	66.829	59.815	-1.371	68.200	7.014	PK
4			5470.000	63.365	56.348	-4.835	68.200	7.016	PK
5		*	5535.600	104.046	97.012	N/A	N/A	7.033	PK
6			5725.000	61.459	54.127	-6.741	68.200	7.332	PK
7			5731.440	62.859	55.483	-5.341	68.200	7.375	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/14 - 18:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

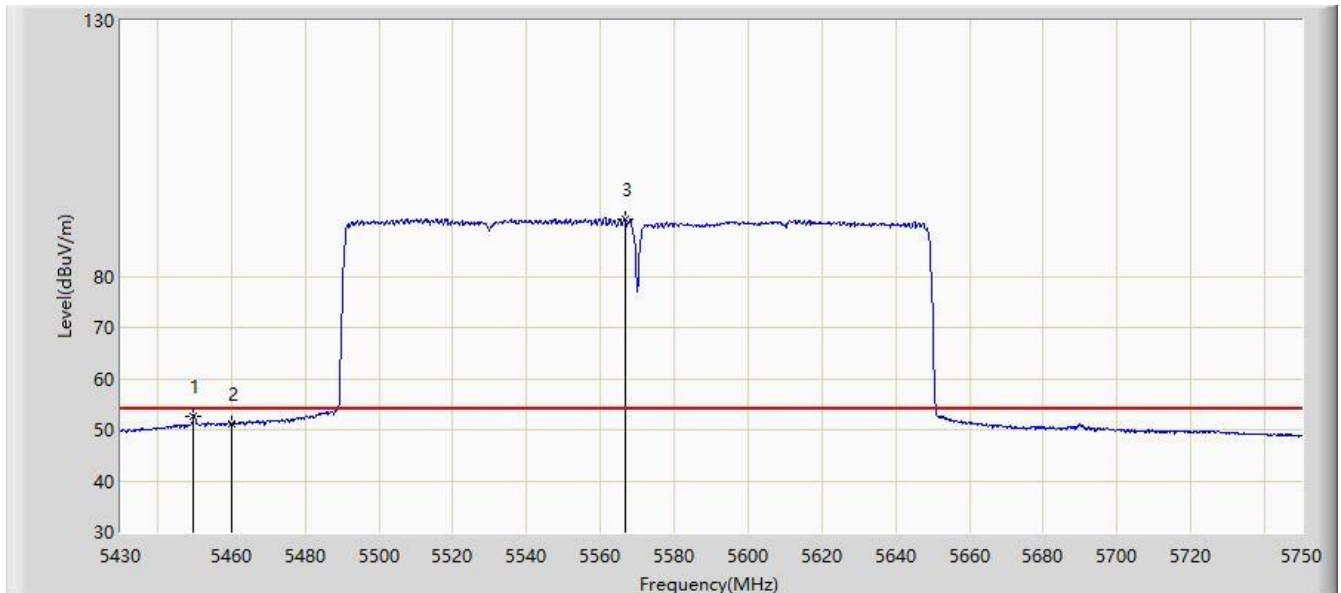


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.680	52.521	45.552	-1.479	54.000	6.970	AV
2			5460.000	51.116	44.139	-2.884	54.000	6.978	AV
3		*	5566.640	91.195	83.942	N/A	N/A	7.253	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For Wireless Access Point configured internal Wi-Fi Antenna

Site: AC1	Time: 2020/02/17 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz, Ant 0 + 1 + 2 + 3	

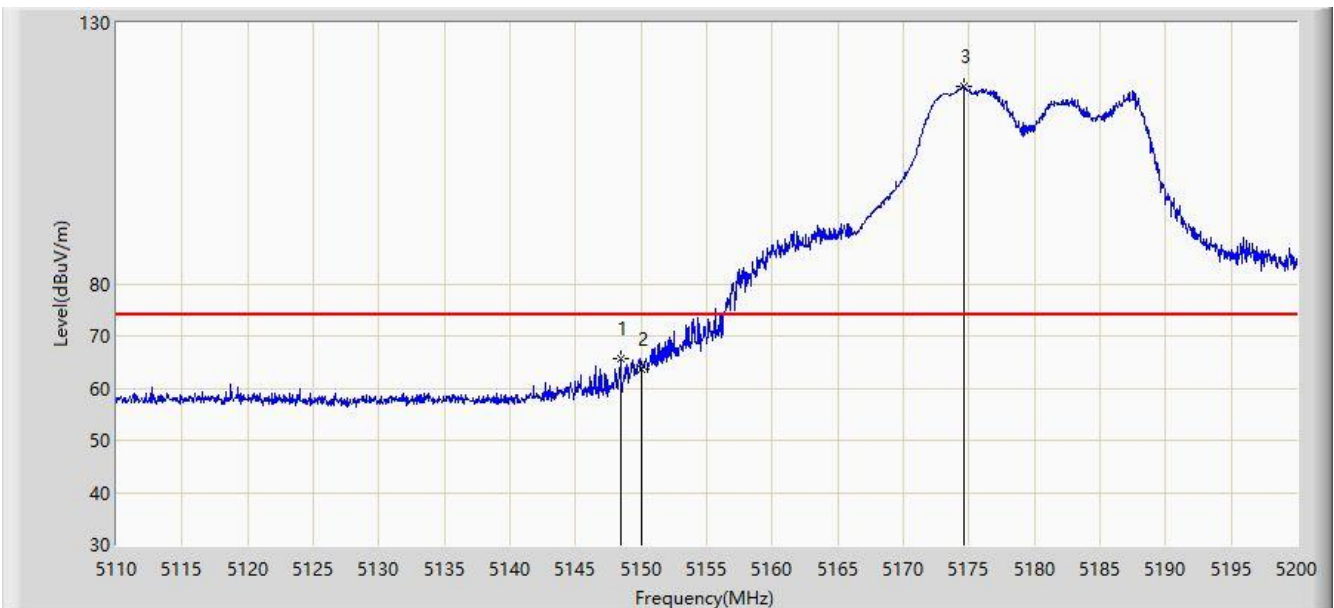


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.430	65.620	58.827	-8.380	74.000	6.793	PK
2			5150.000	63.545	56.746	-10.455	74.000	6.799	PK
3		*	5174.620	117.738	110.920	N/A	N/A	6.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz, Ant 0 + 1 + 2 + 3	

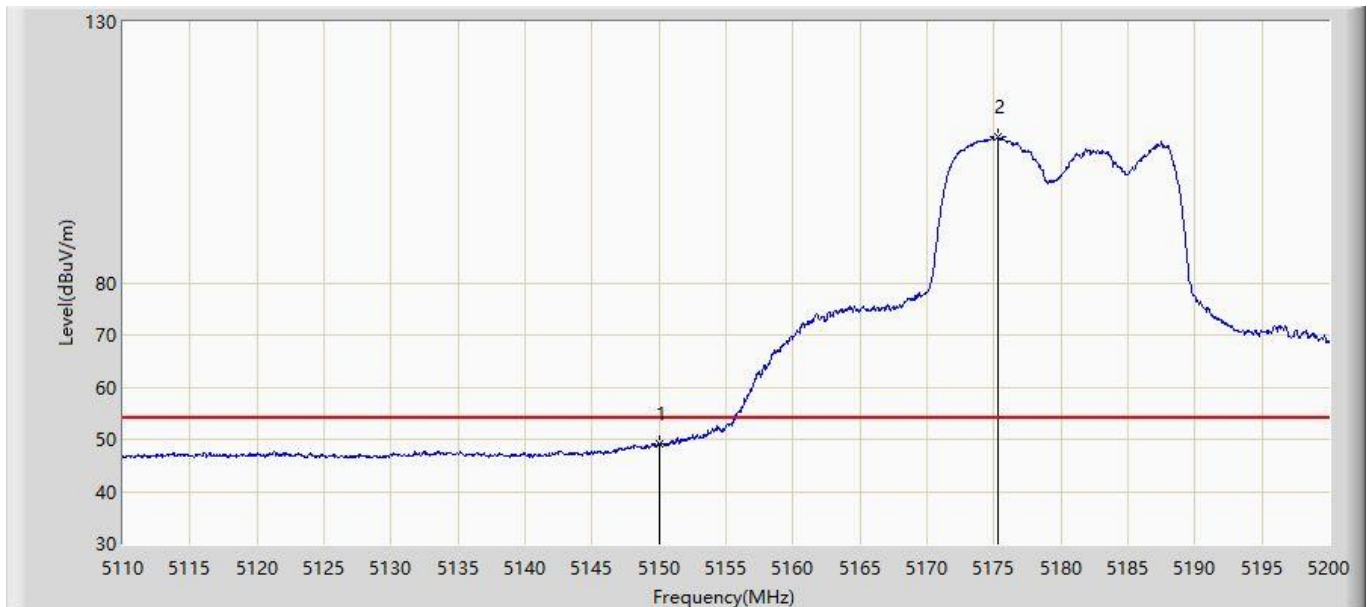


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.075	42.276	-4.925	54.000	6.799	AV
2		*	5175.250	107.962	101.147	N/A	N/A	6.815	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz, Ant 0 + 1 + 2 + 3	

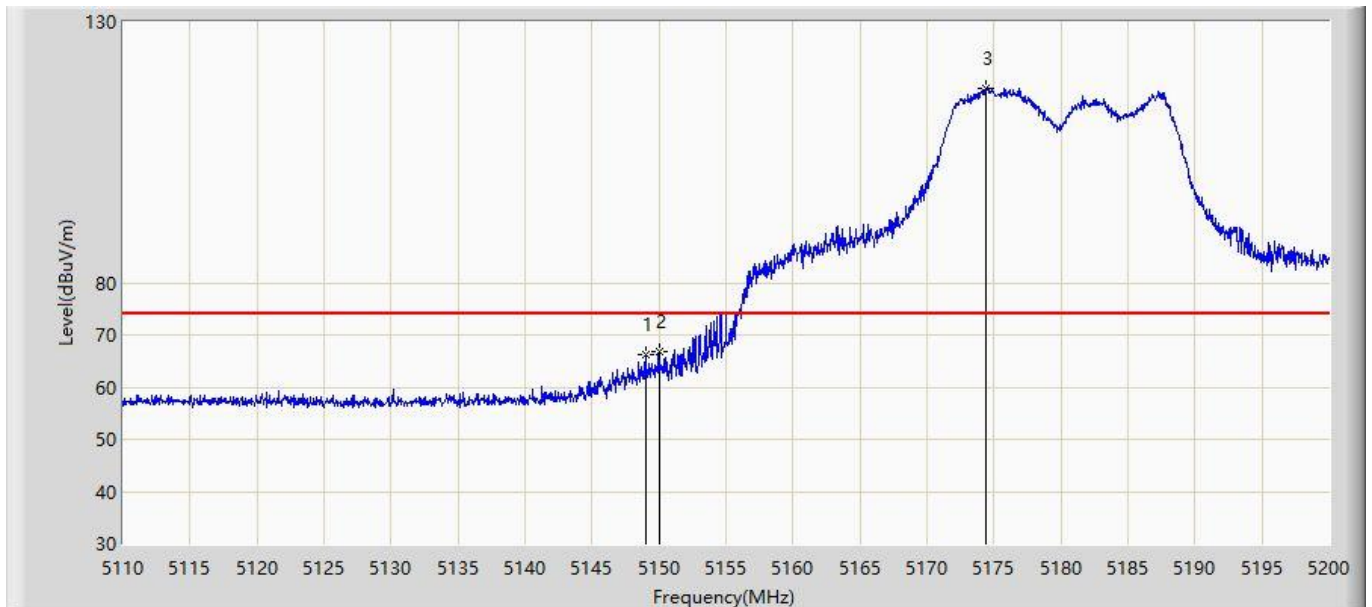


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.015	66.215	59.420	-7.785	74.000	6.796	PK
2			5150.000	66.873	60.074	-7.127	74.000	6.799	PK
3		*	5174.440	117.190	110.372	N/A	N/A	6.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz, Ant 0 + 1 + 2 + 3	

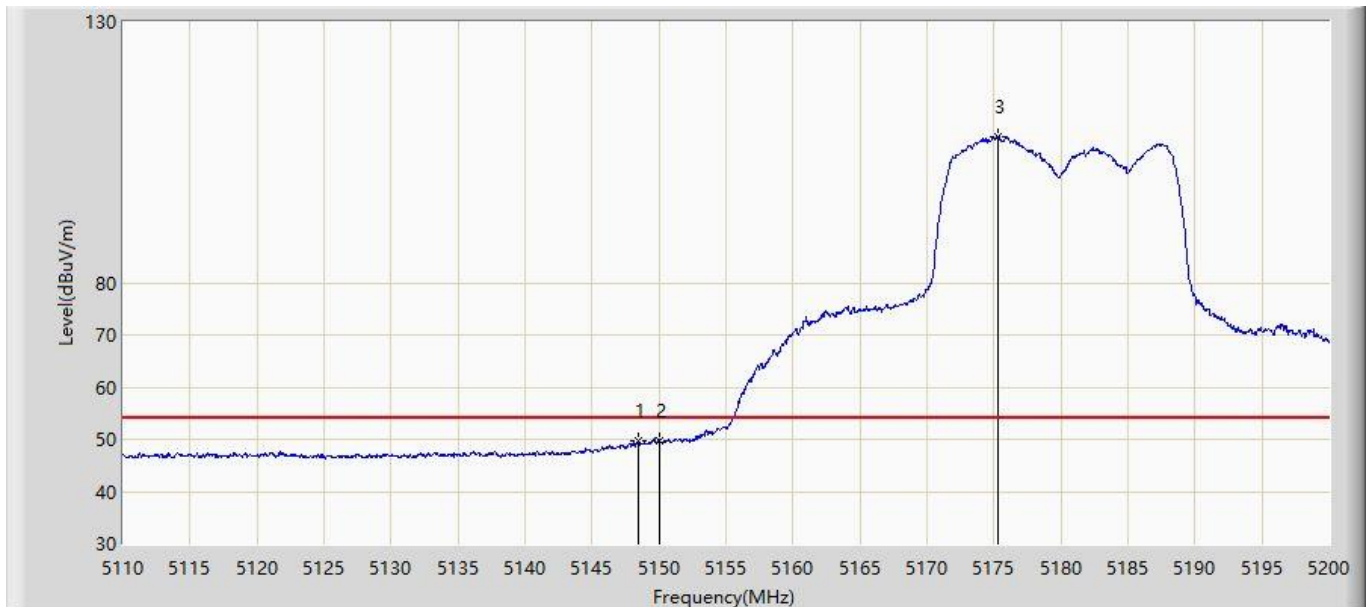


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.475	49.722	42.929	-4.278	54.000	6.793	AV
2			5150.000	49.704	42.905	-4.296	54.000	6.799	AV
3	X	*	5175.340	108.087	101.272	N/A	N/A	6.815	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz, Ant 0 + 1 + 2 + 3	

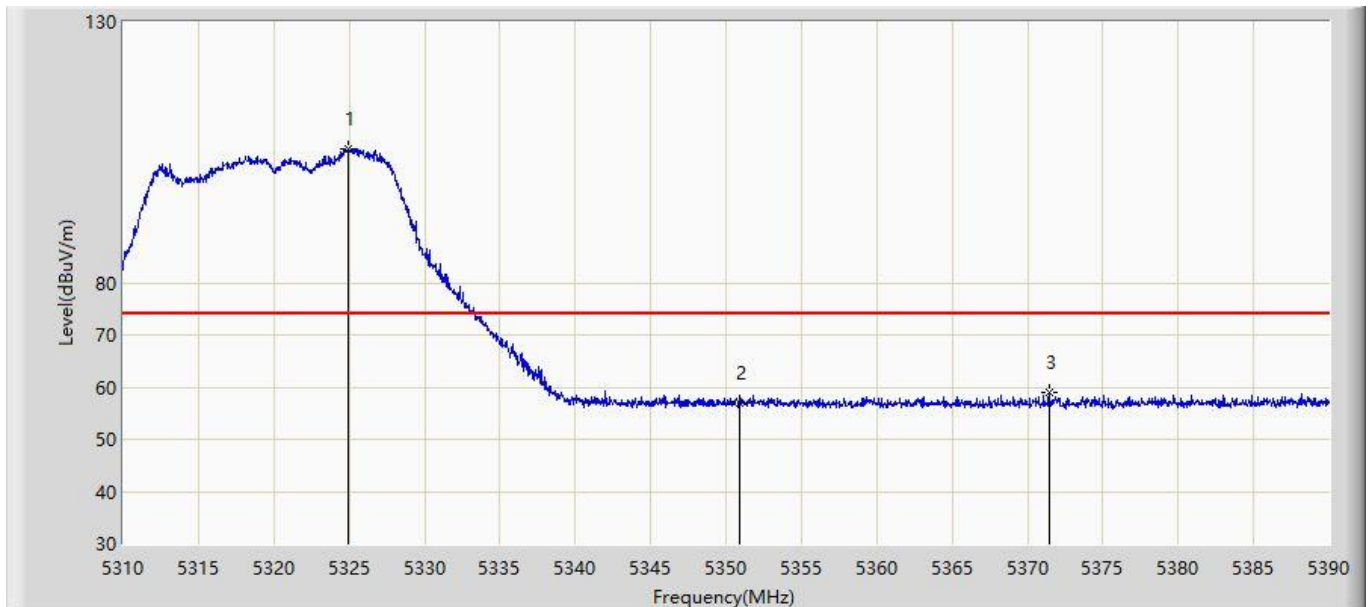


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.920	105.671	99.014	N/A	N/A	6.657	PK
2			5350.920	57.068	50.446	-16.932	74.000	6.622	PK
3			5371.440	59.116	52.502	-14.884	74.000	6.614	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz, Ant 0 + 1 + 2 + 3	

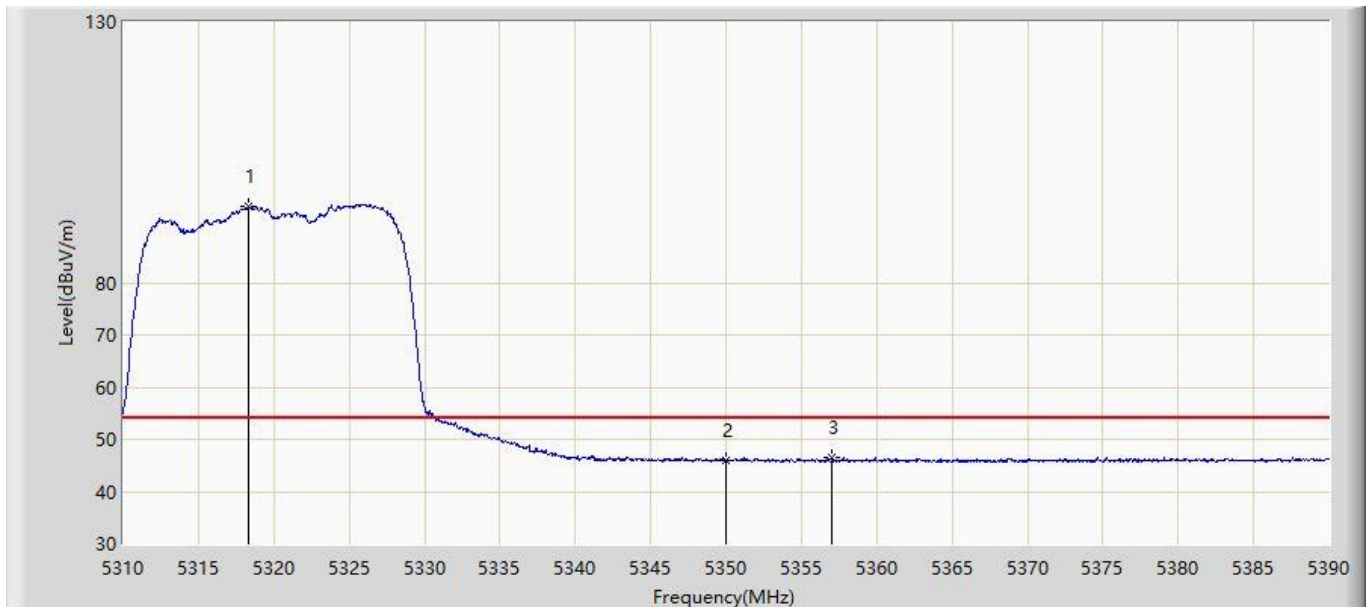


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.360	94.509	87.898	N/A	N/A	6.611	AV
2			5350.000	45.925	39.297	-8.075	54.000	6.629	AV
3			5357.000	46.405	39.796	-7.595	54.000	6.608	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz, Ant 0 + 1 + 2 + 3	

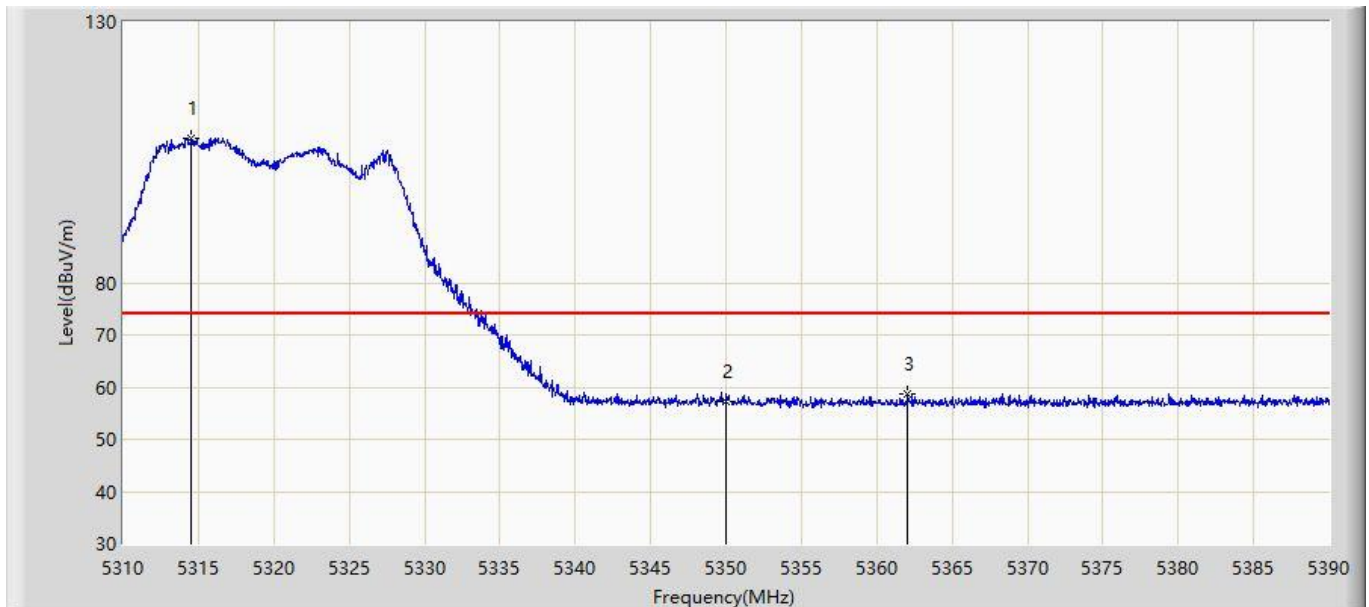


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.560	107.695	101.080	N/A	N/A	6.616	PK
2			5350.000	57.169	50.541	-16.831	74.000	6.629	PK
3			5362.080	58.670	52.068	-15.330	74.000	6.601	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz, Ant 0 + 1 + 2 + 3	

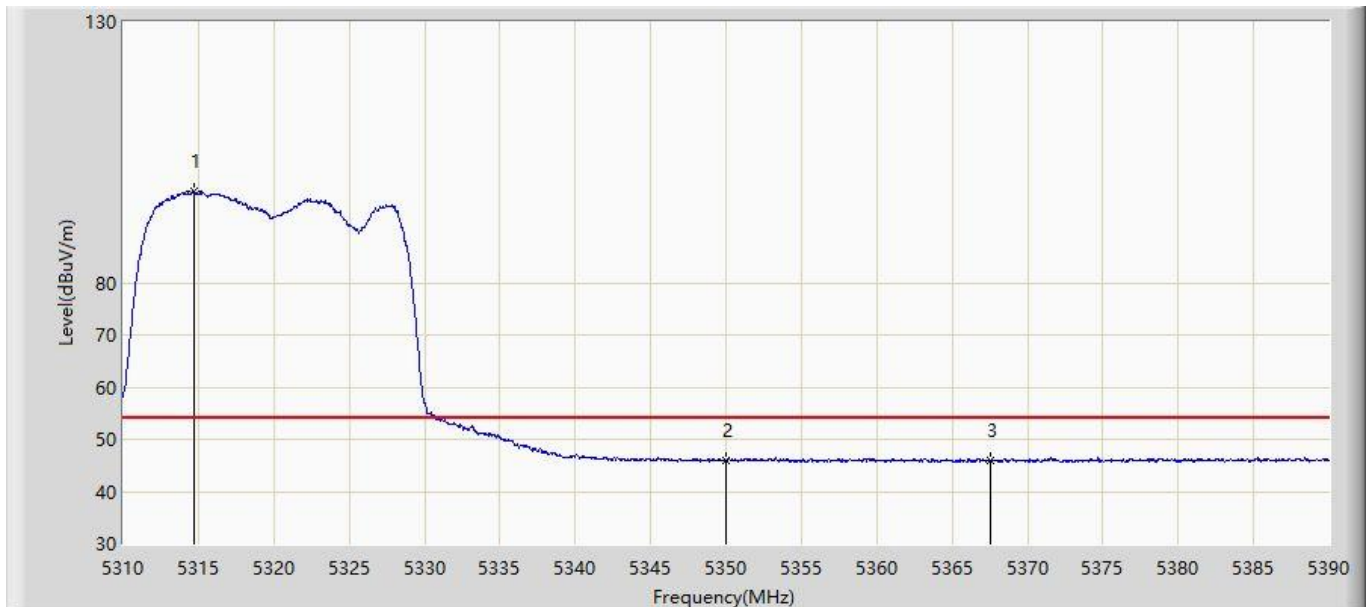


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.680	97.513	90.898	N/A	N/A	6.616	AV
2			5350.000	45.897	39.269	-8.103	54.000	6.629	AV
3			5367.560	46.019	39.425	-7.981	54.000	6.595	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

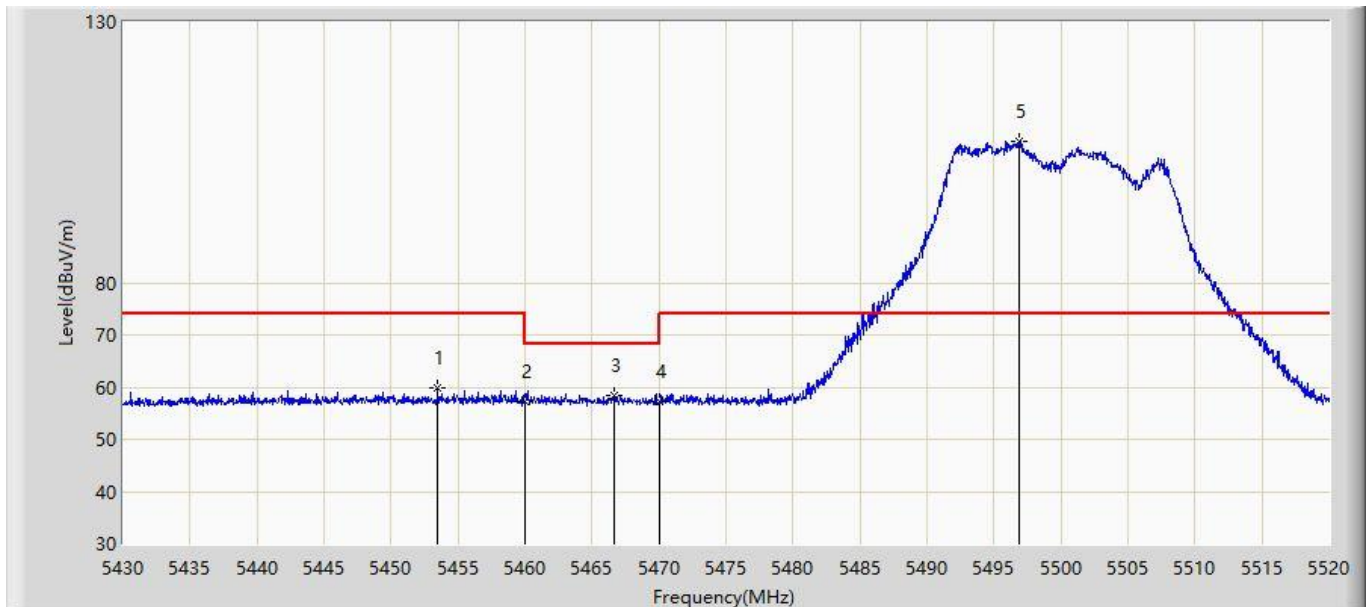


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.490	59.854	52.899	-14.146	74.000	6.955	PK
2			5460.000	57.139	50.162	-16.861	74.000	6.978	PK
3			5466.675	58.492	51.488	-9.708	68.200	7.004	PK
4			5470.000	57.305	50.288	-10.895	68.200	7.016	PK
5		*	5496.825	107.071	99.836	N/A	N/A	7.235	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

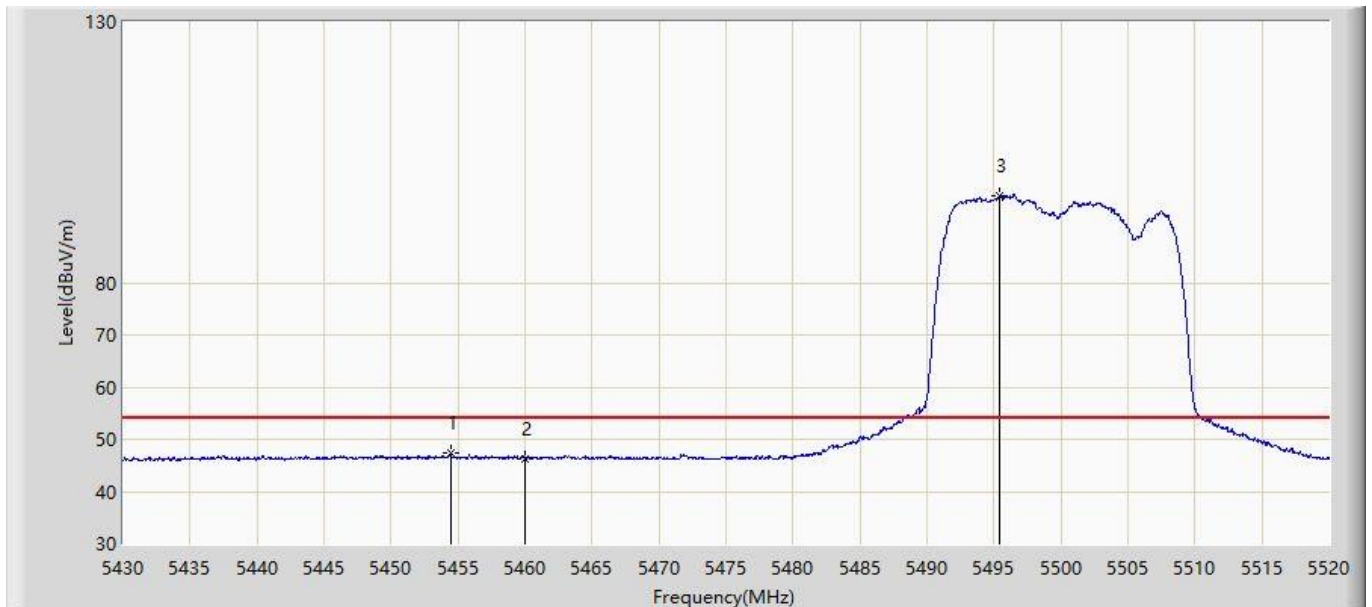


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.435	47.364	40.409	-6.636	54.000	6.955	AV
2			5460.000	46.371	39.394	-7.629	54.000	6.978	AV
3		*	5495.385	96.631	89.411	N/A	N/A	7.219	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

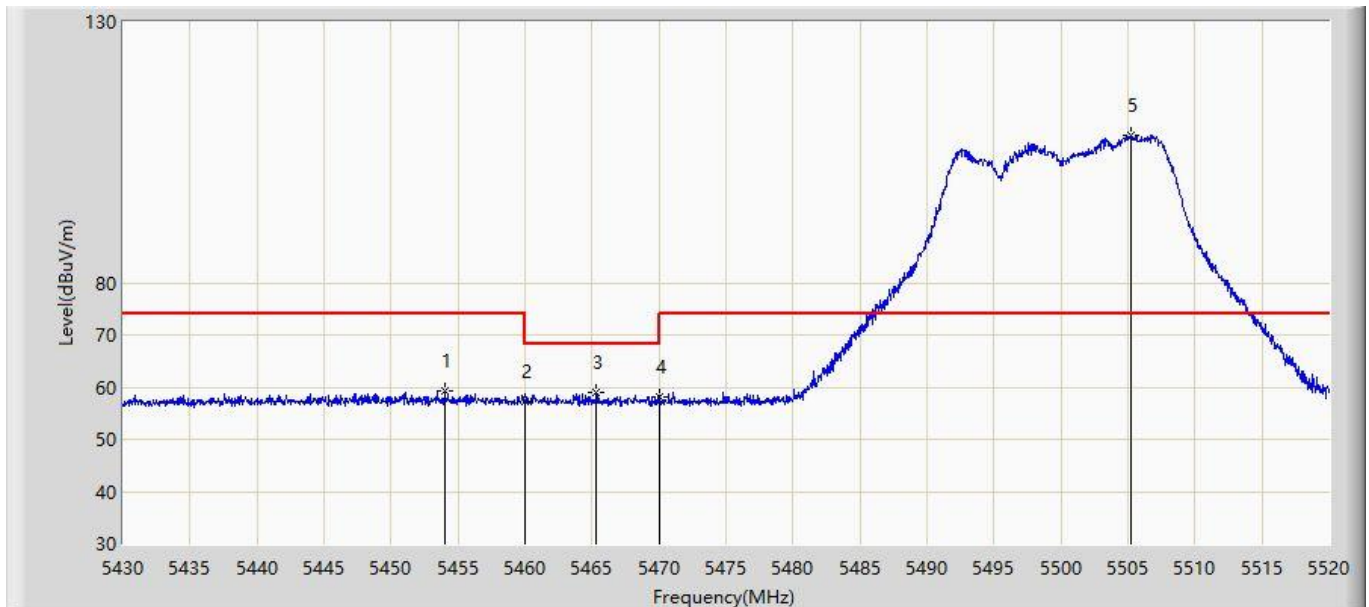


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.985	59.354	52.400	-14.646	74.000	6.953	PK
2			5460.000	57.175	50.198	-16.825	74.000	6.978	PK
3			5465.325	58.853	51.854	-9.347	68.200	6.999	PK
4			5470.000	58.165	51.148	-10.035	68.200	7.016	PK
5		*	5505.195	108.289	100.970	N/A	N/A	7.319	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 13:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz, Ant 0 + 1 + 2 + 3	

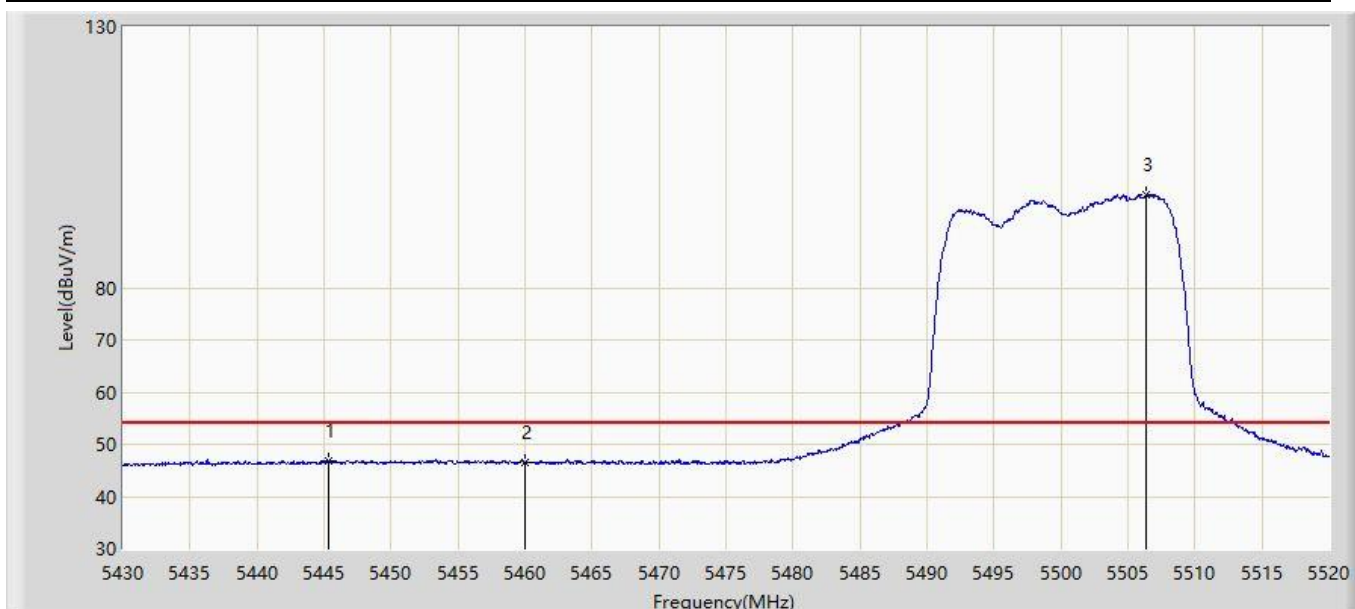


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.390	46.953	39.968	-7.047	54.000	6.985	AV
2			5460.000	46.541	39.564	-7.459	54.000	6.978	AV
3		*	5506.365	97.955	90.654	N/A	N/A	7.302	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz, Ant 0 + 1 + 2 + 3	

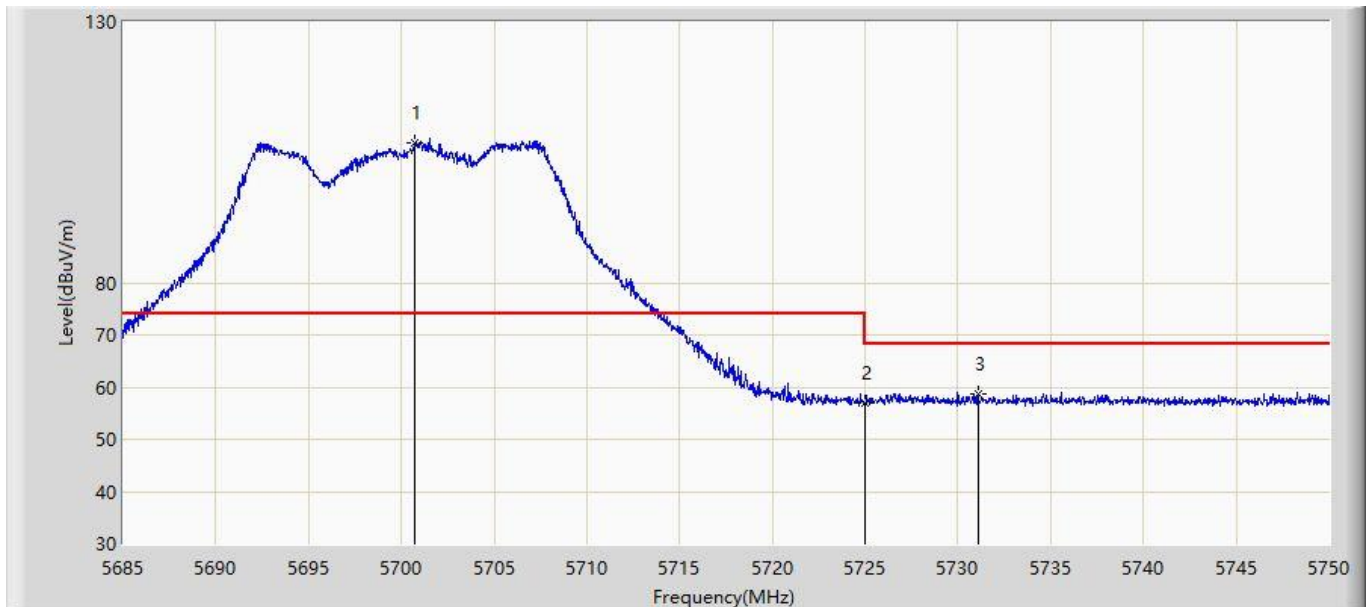


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5700.697	106.895	99.685	N/A	N/A	7.210	PK
2			5725.000	57.018	49.686	-11.182	68.200	7.332	PK
3			5731.085	58.780	51.406	-9.420	68.200	7.374	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz, Ant 0 + 1 + 2 + 3	

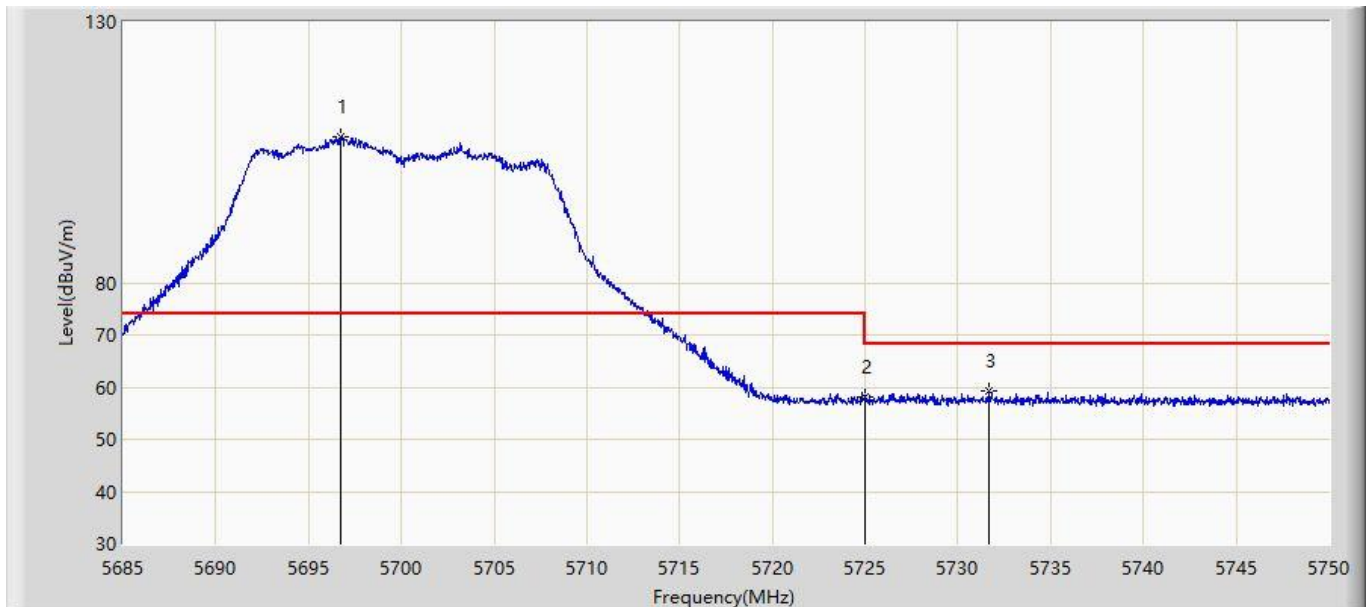


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.732	107.964	100.722	N/A	N/A	7.242	PK
2			5725.000	58.124	50.792	-10.076	68.200	7.332	PK
3			5731.638	59.145	51.768	-9.055	68.200	7.377	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:08
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz, Ant 0 + 1 + 2 + 3	

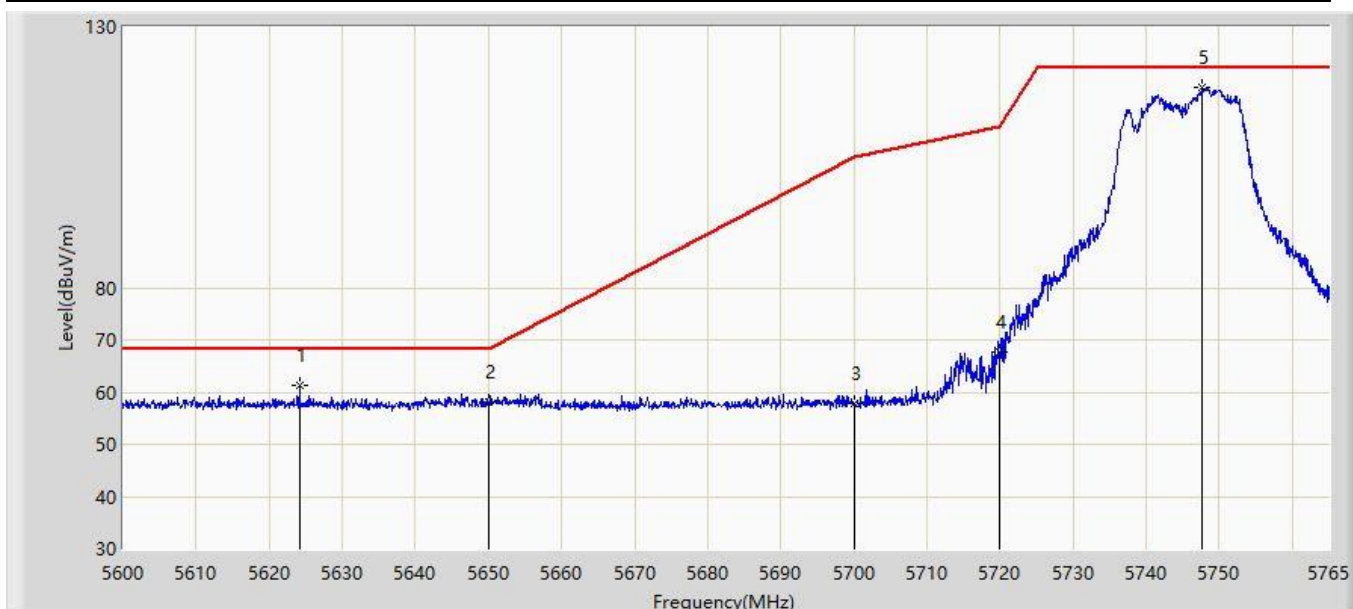


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5624.090	61.179	54.148	-7.021	68.200	7.031	PK
2			5650.000	57.992	50.852	-10.208	68.200	7.140	PK
3			5700.000	57.684	50.469	-47.516	105.200	7.215	PK
4			5720.000	67.720	60.447	-43.080	110.800	7.273	PK
5		*	5747.675	118.369	110.928	N/A	N/A	7.441	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:10
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz, Ant 0 + 1 + 2 + 3	

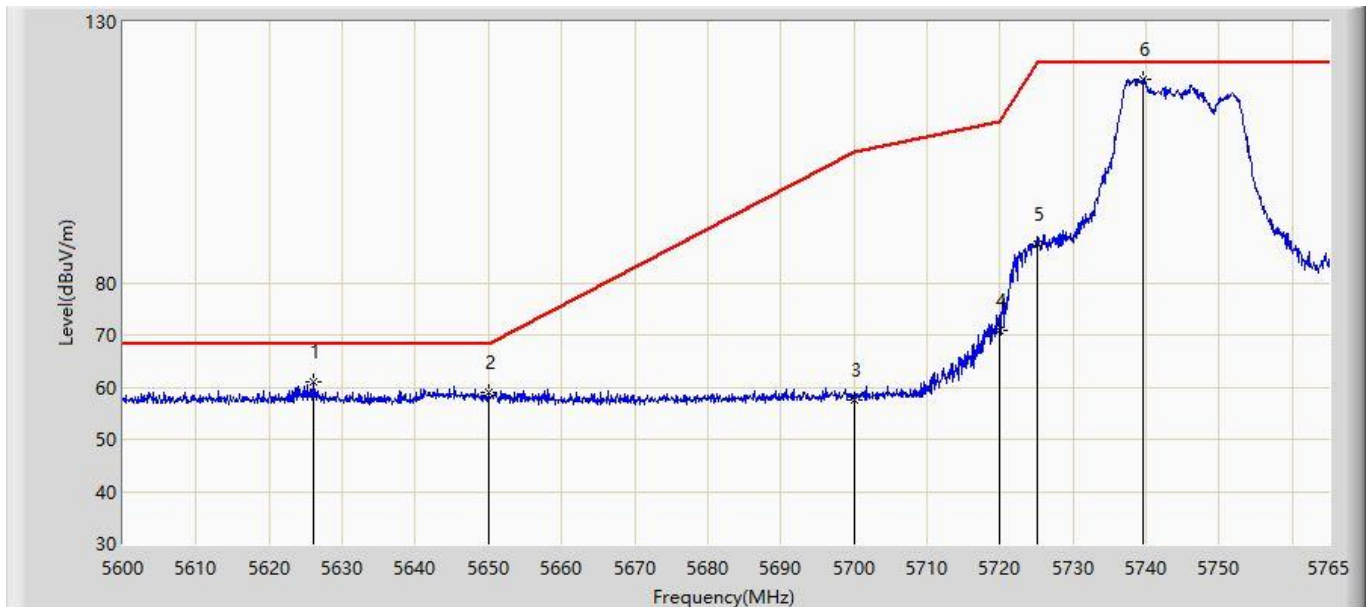


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5626.070	61.102	54.081	-7.098	68.200	7.022	PK
2			5650.000	58.954	51.814	-9.246	68.200	7.140	PK
3			5700.000	57.401	50.186	-47.799	105.200	7.215	PK
4			5720.000	70.818	63.545	-39.982	110.800	7.273	PK
5			5725.000	87.533	80.201	-34.667	122.200	7.332	PK
6		*	5739.590	119.018	111.593	N/A	N/A	7.425	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:11
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz, Ant 0 + 1 + 2 + 3	

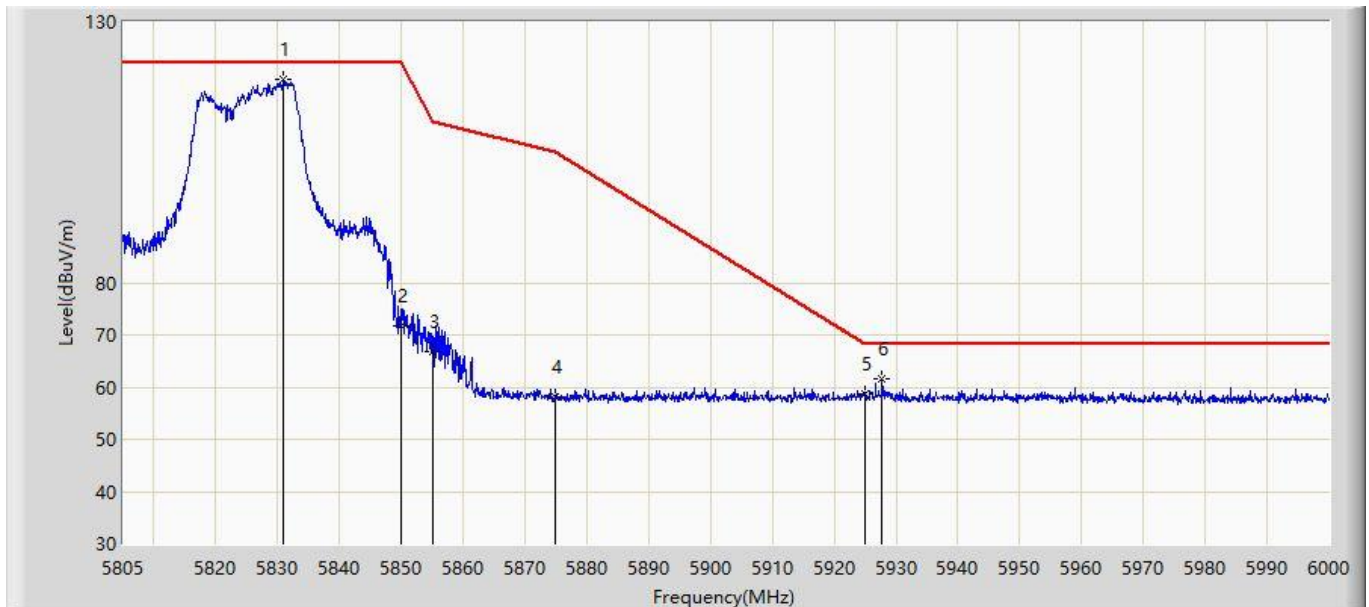


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.935	118.861	111.099	N/A	N/A	7.762	PK
2			5850.000	71.692	64.000	-50.508	122.200	7.692	PK
3			5855.000	66.716	59.072	-44.084	110.800	7.644	PK
4			5875.000	58.022	50.420	-47.178	105.200	7.602	PK
5			5925.000	58.607	50.781	-9.593	68.200	7.826	PK
6			5927.752	61.662	53.849	-6.538	68.200	7.813	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz, Ant 0 + 1 + 2 + 3	

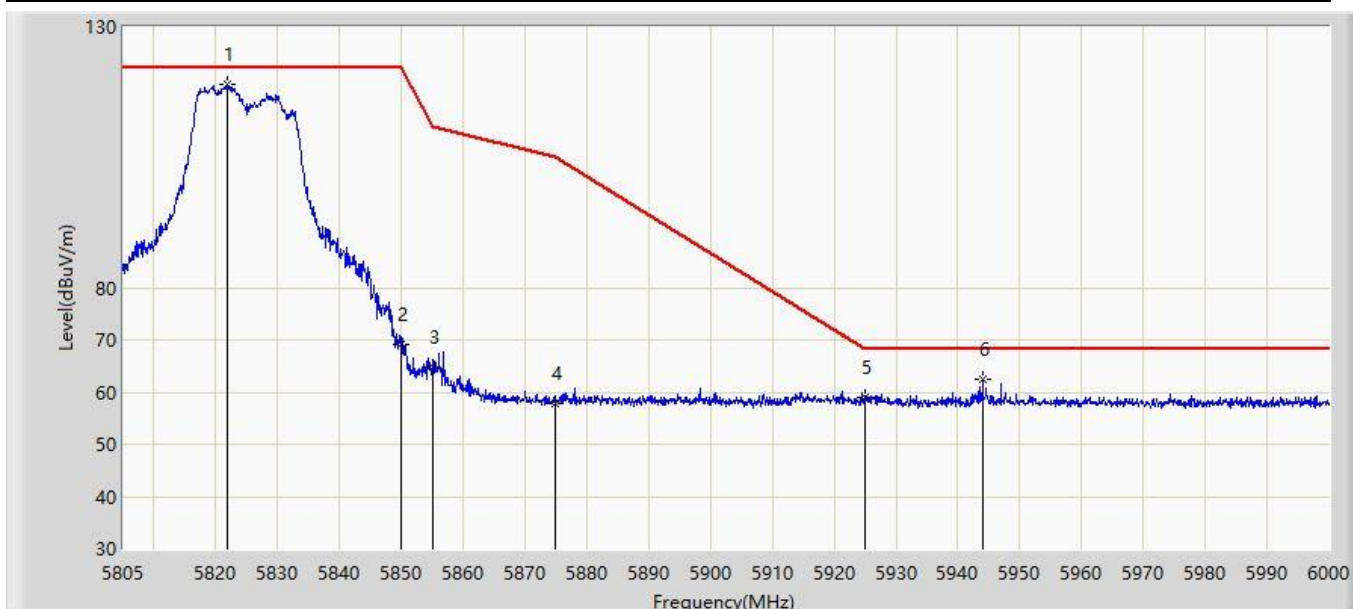


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.965	118.911	111.255	N/A	N/A	7.656	PK
2			5850.000	69.053	61.361	-53.147	122.200	7.692	PK
3			5855.000	64.798	57.154	-46.002	110.800	7.644	PK
4			5875.000	57.878	50.276	-47.322	105.200	7.602	PK
5			5925.000	59.058	51.232	-9.142	68.200	7.826	PK
6			5944.035	62.334	54.631	-5.866	68.200	7.703	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

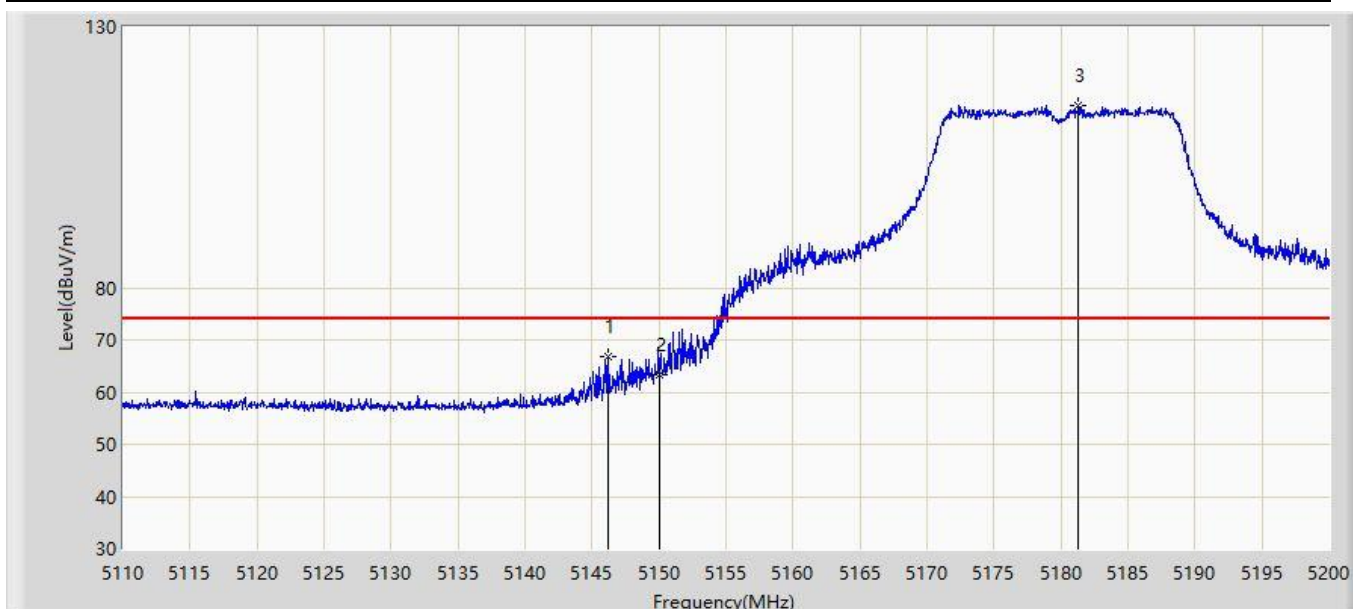


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.225	66.834	60.035	-7.166	74.000	6.799	PK
2			5150.000	63.410	56.611	-10.590	74.000	6.799	PK
3		*	5181.325	114.814	108.022	N/A	N/A	6.792	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

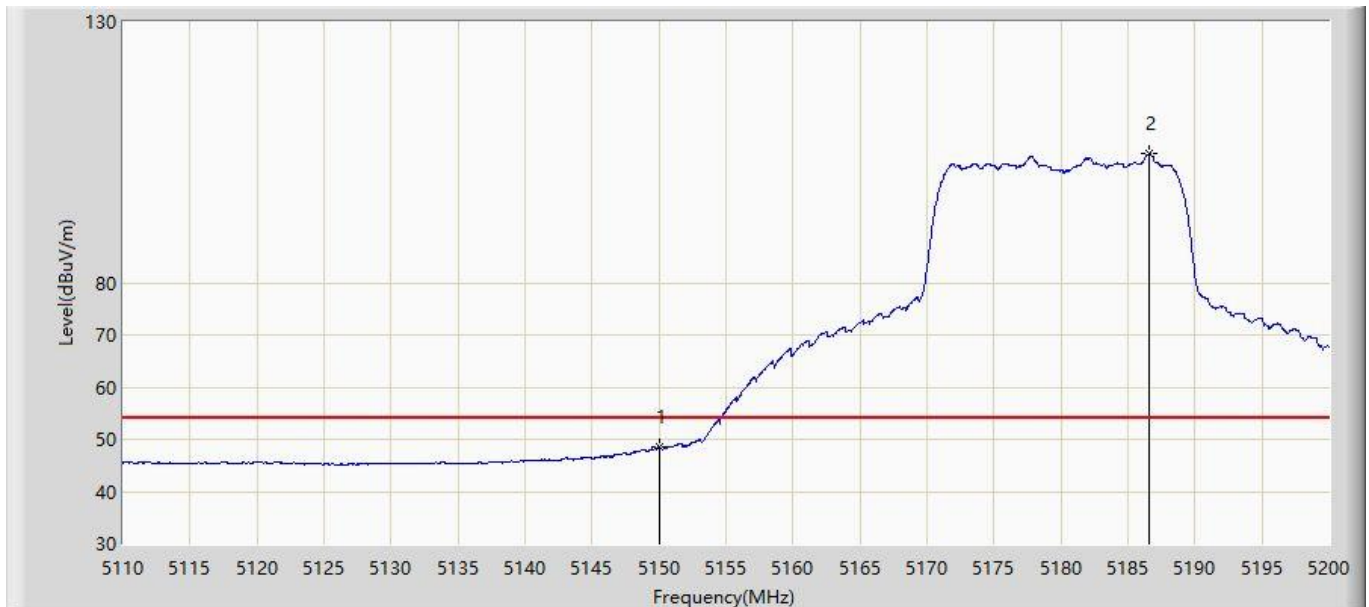


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.441	41.642	-5.559	54.000	6.799	AV
2		*	5186.635	104.697	97.979	N/A	N/A	6.717	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

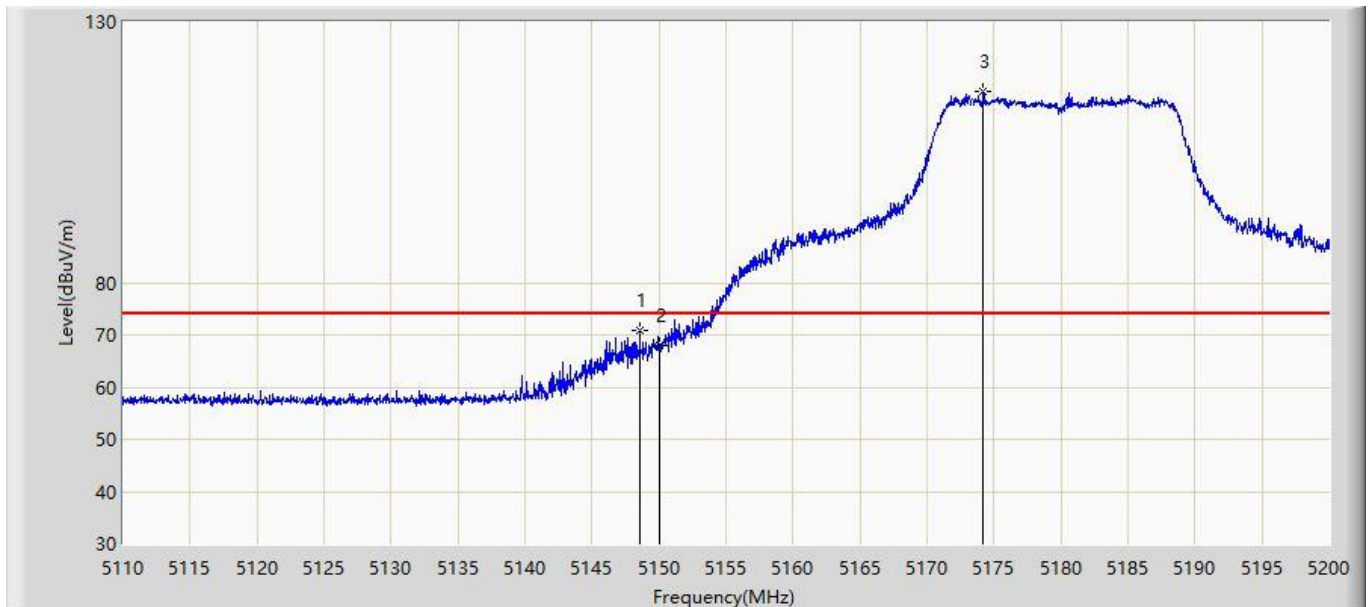


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.565	70.771	63.977	-3.229	74.000	6.793	PK
2			5150.000	67.952	61.153	-6.048	74.000	6.799	PK
3		*	5174.215	116.574	109.755	N/A	N/A	6.820	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

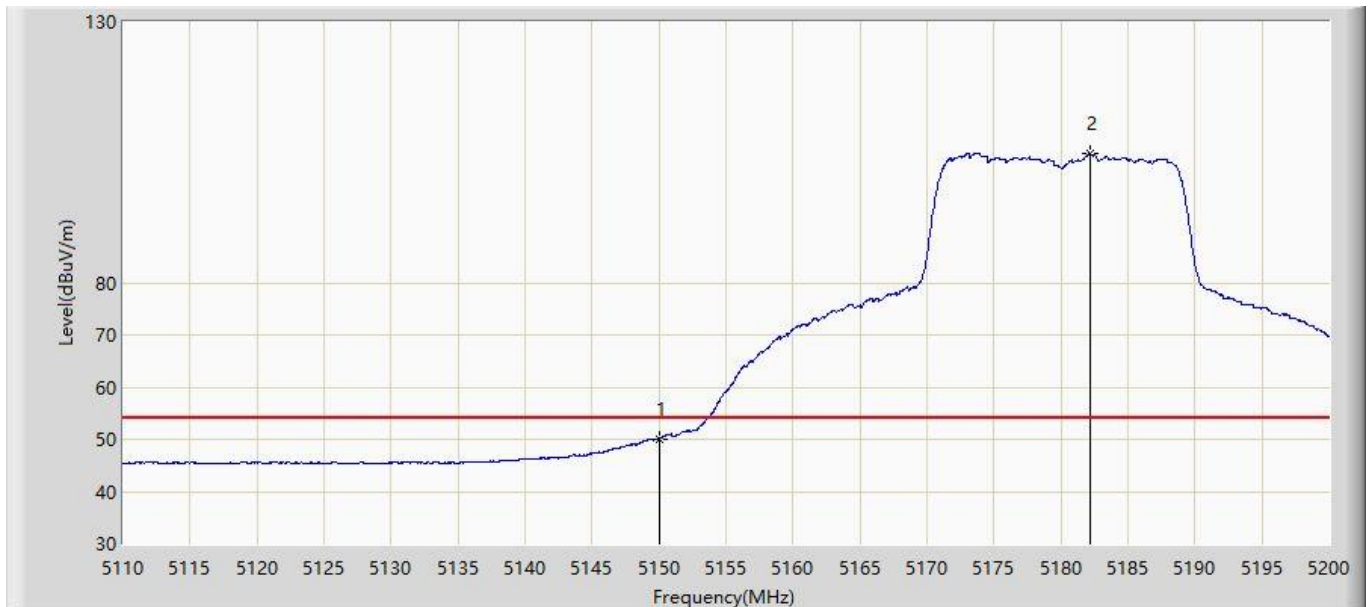


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.126	43.327	-3.874	54.000	6.799	AV
2		*	5182.180	104.737	97.950	N/A	N/A	6.786	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

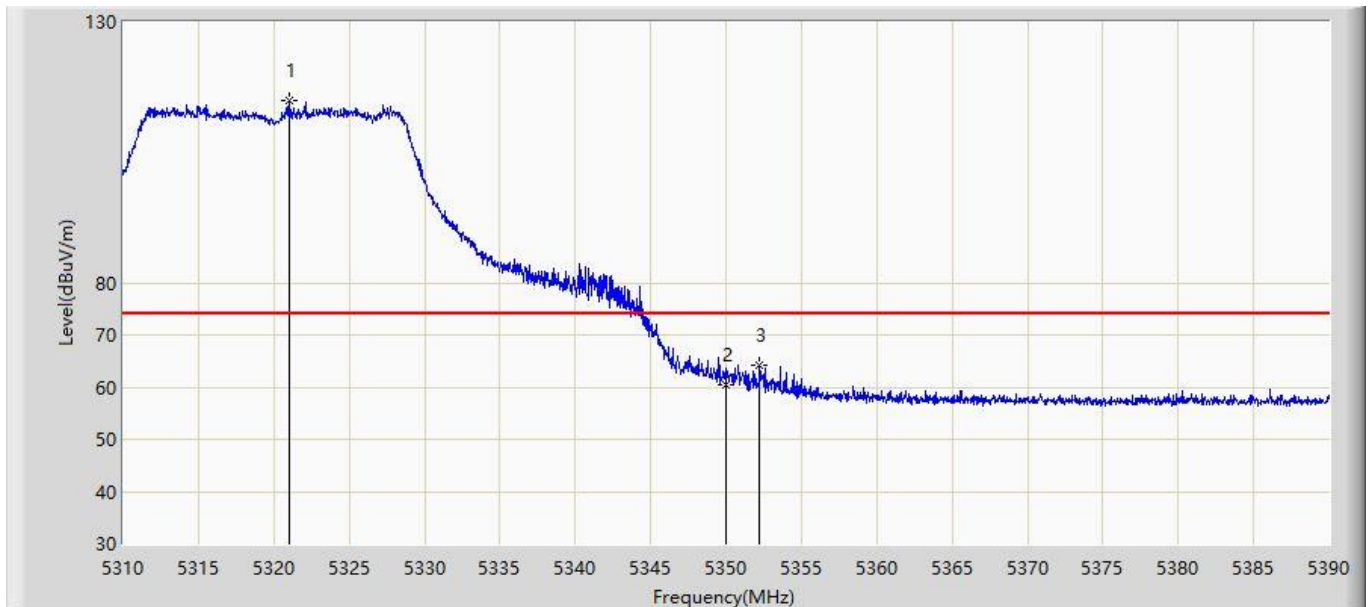


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.000	114.803	108.174	N/A	N/A	6.629	PK
2			5350.000	60.547	53.919	-13.453	74.000	6.629	PK
3			5352.240	64.097	57.482	-9.903	74.000	6.615	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

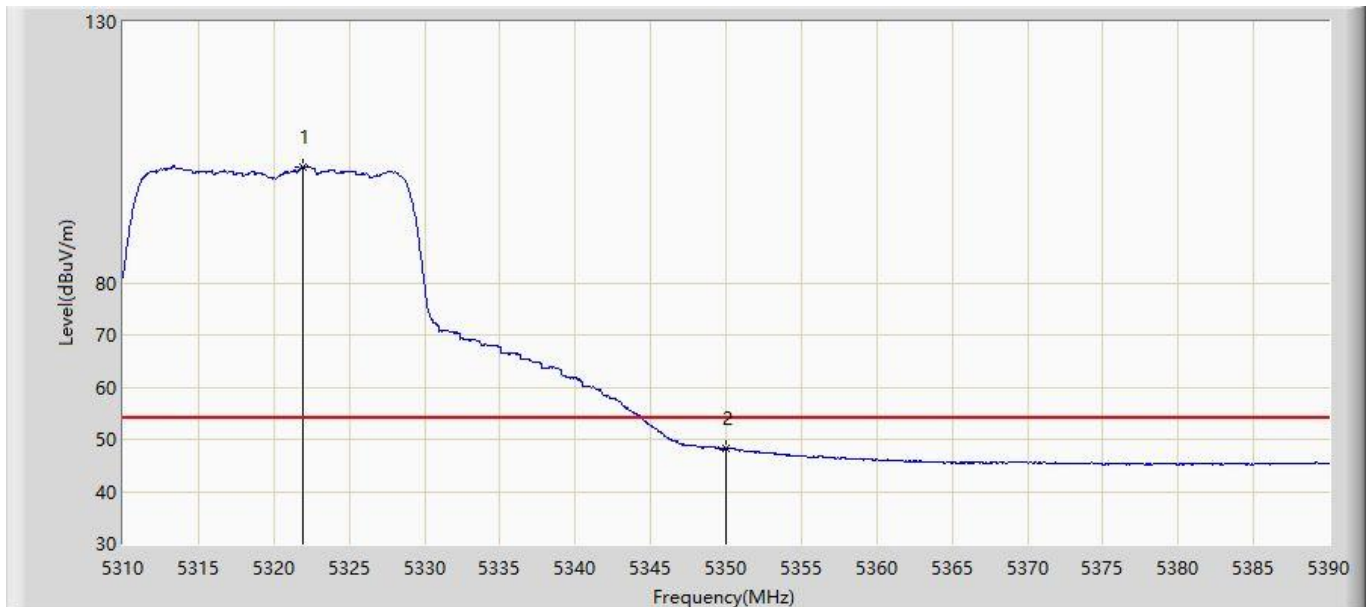


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.880	102.248	95.613	N/A	N/A	6.635	AV
2			5350.000	48.231	41.603	-5.769	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

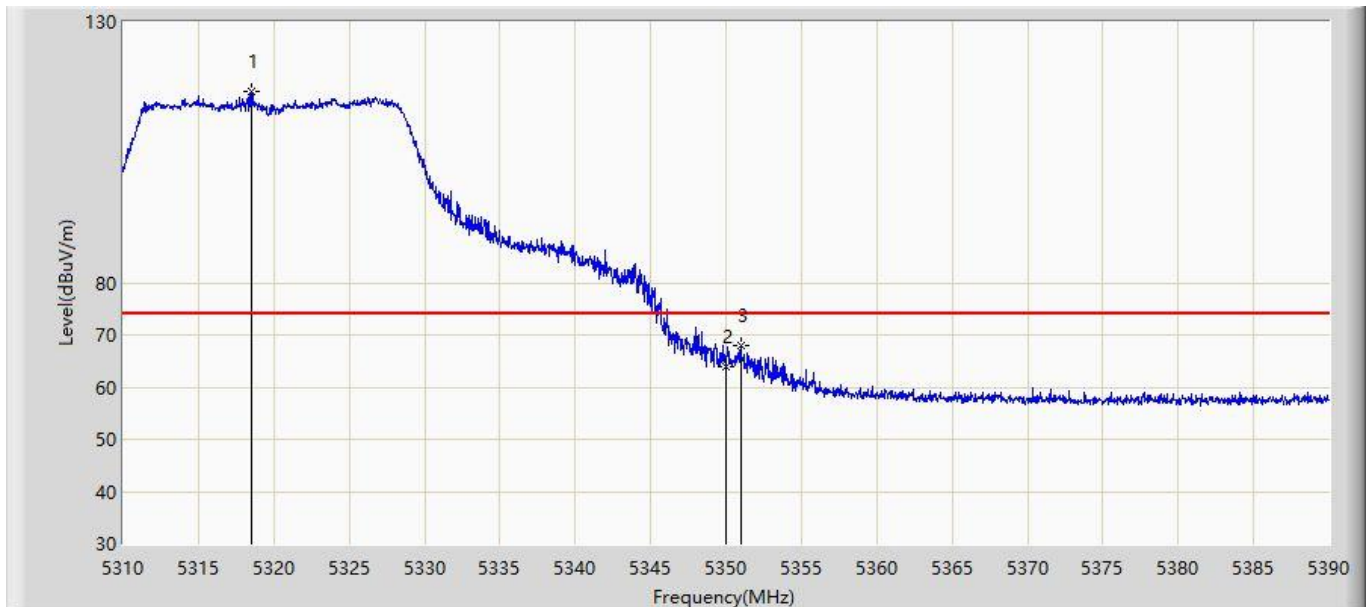


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.560	116.528	109.916	N/A	N/A	6.613	PK
2			5350.000	64.055	57.427	-9.945	74.000	6.629	PK
3			5350.960	68.030	61.408	-5.970	74.000	6.621	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

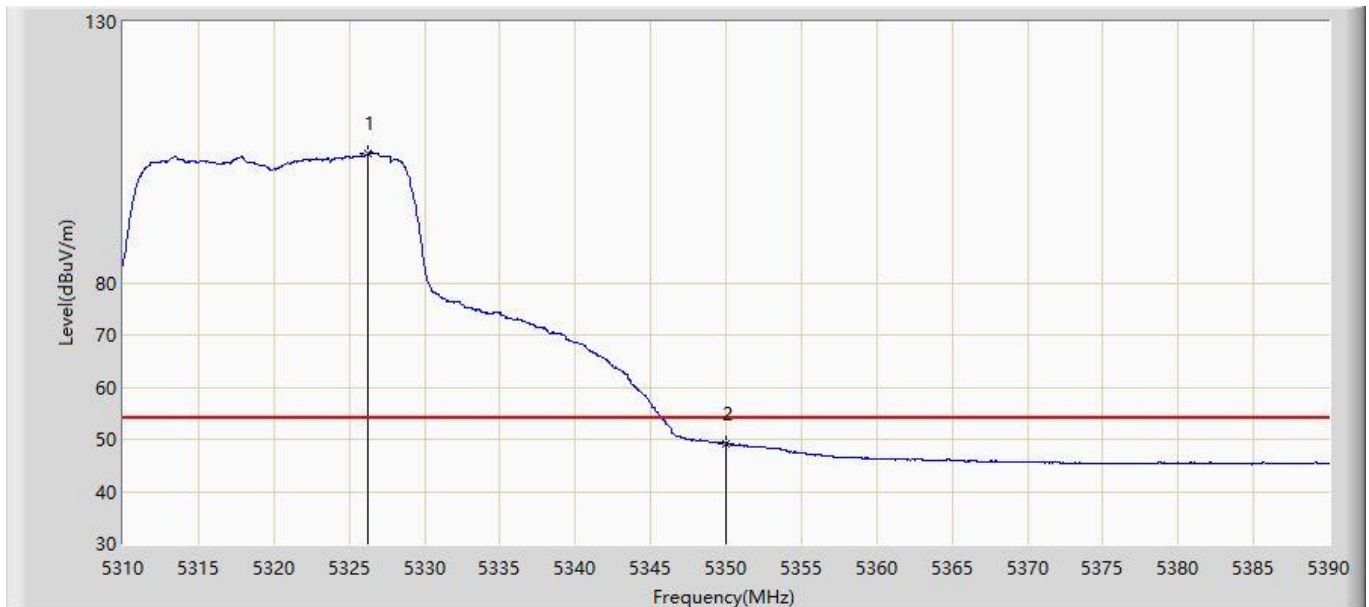


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.280	104.750	98.084	N/A	N/A	6.666	AV
2			5350.000	49.214	42.586	-4.786	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

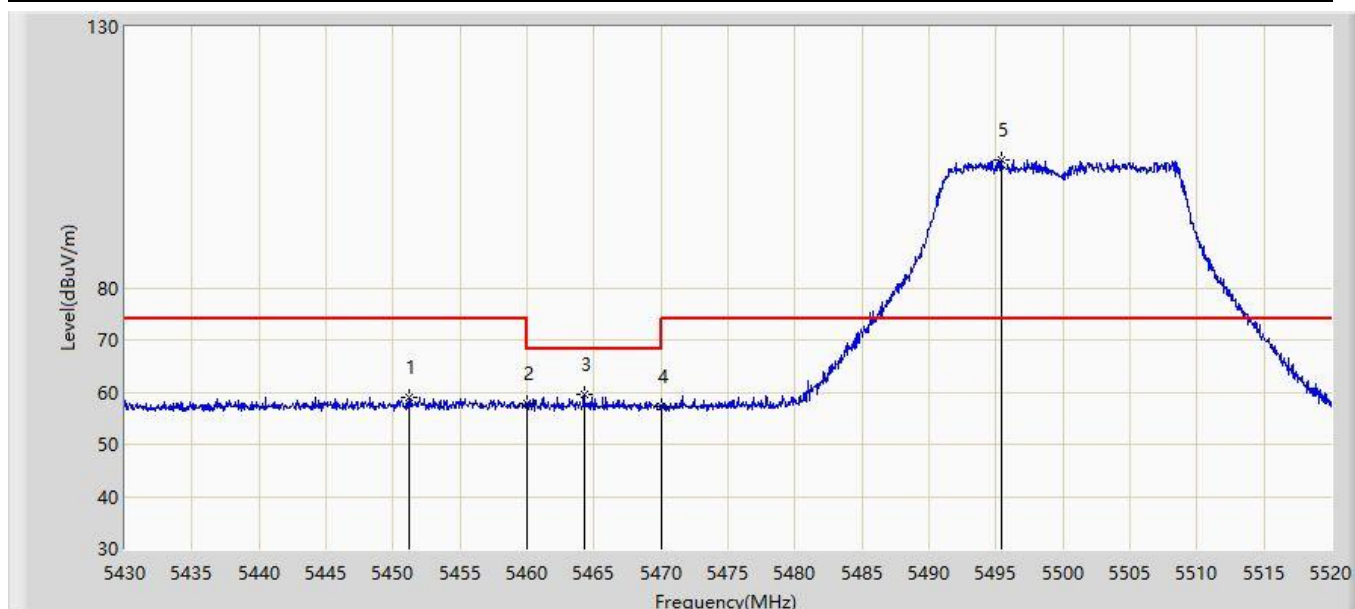


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.240	59.120	52.156	-14.880	74.000	6.964	PK
2			5460.000	57.850	50.873	-16.150	74.000	6.978	PK
3			5464.245	59.422	52.428	-8.778	68.200	6.994	PK
4			5470.000	57.386	50.369	-10.814	68.200	7.016	PK
5		*	5495.430	104.463	97.243	N/A	N/A	7.219	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

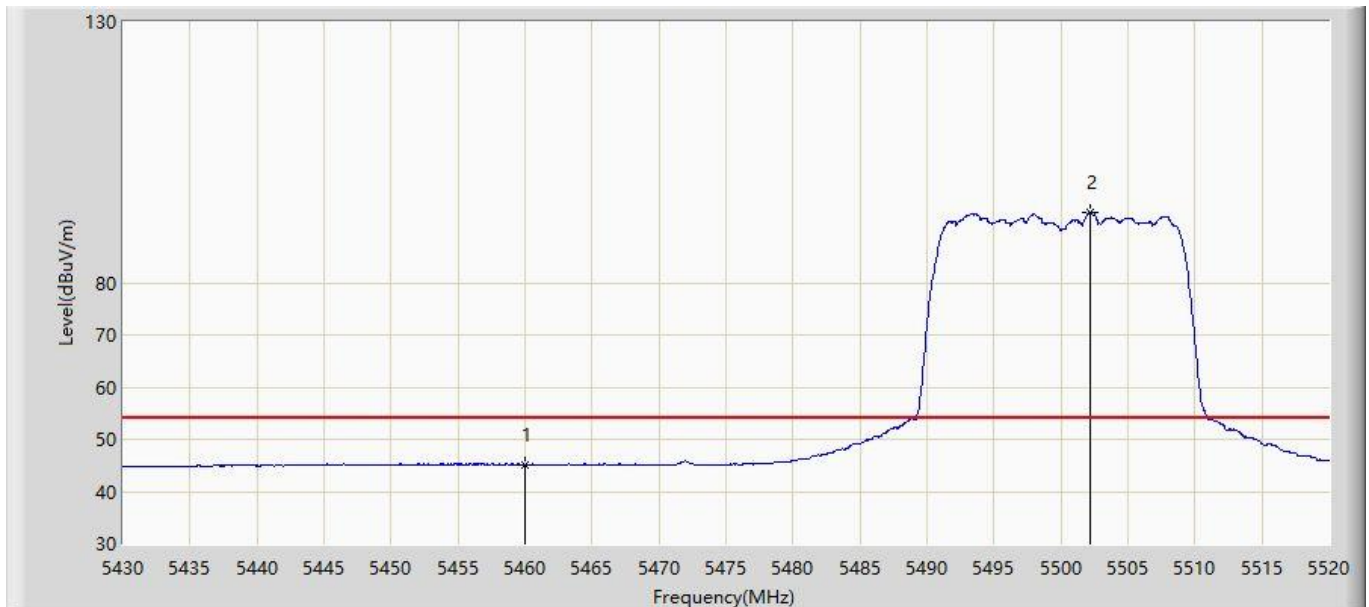


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.105	38.128	-8.895	54.000	6.978	AV
2		*	5502.180	93.564	86.272	N/A	N/A	7.292	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

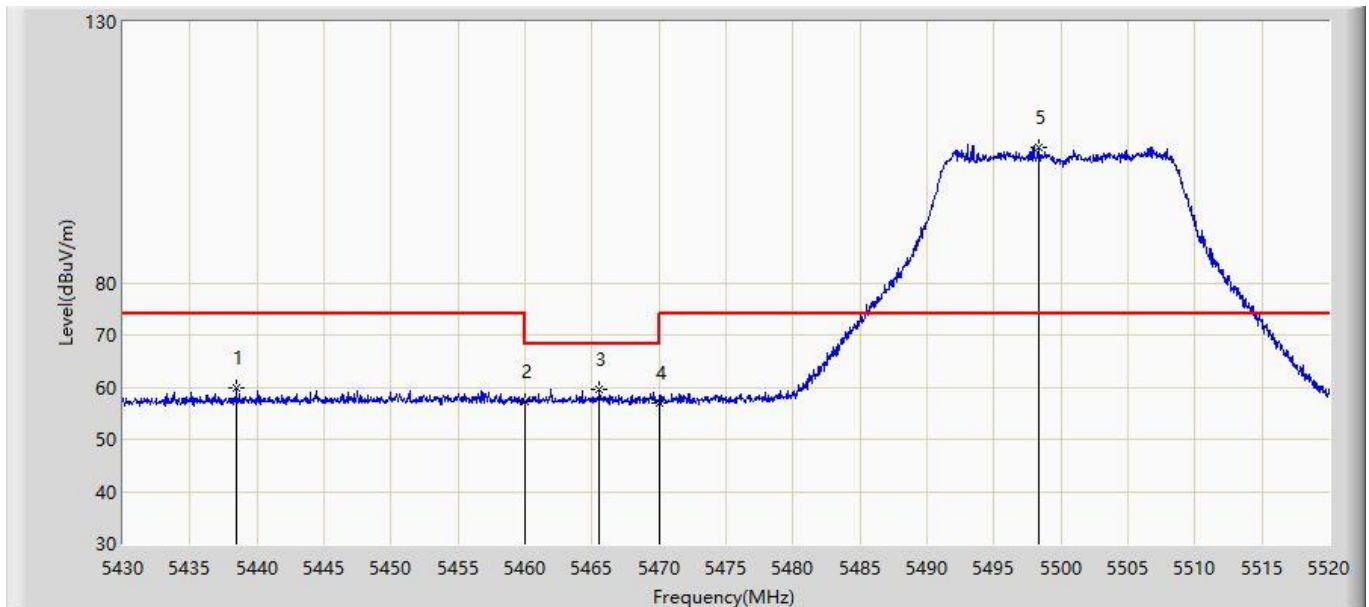


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5438.460	59.989	52.978	-14.011	74.000	7.011	PK
2			5460.000	57.131	50.154	-16.869	74.000	6.978	PK
3			5465.550	59.647	52.648	-8.553	68.200	6.999	PK
4			5470.000	57.039	50.022	-11.161	68.200	7.016	PK
5		*	5498.310	106.017	98.766	N/A	N/A	7.250	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

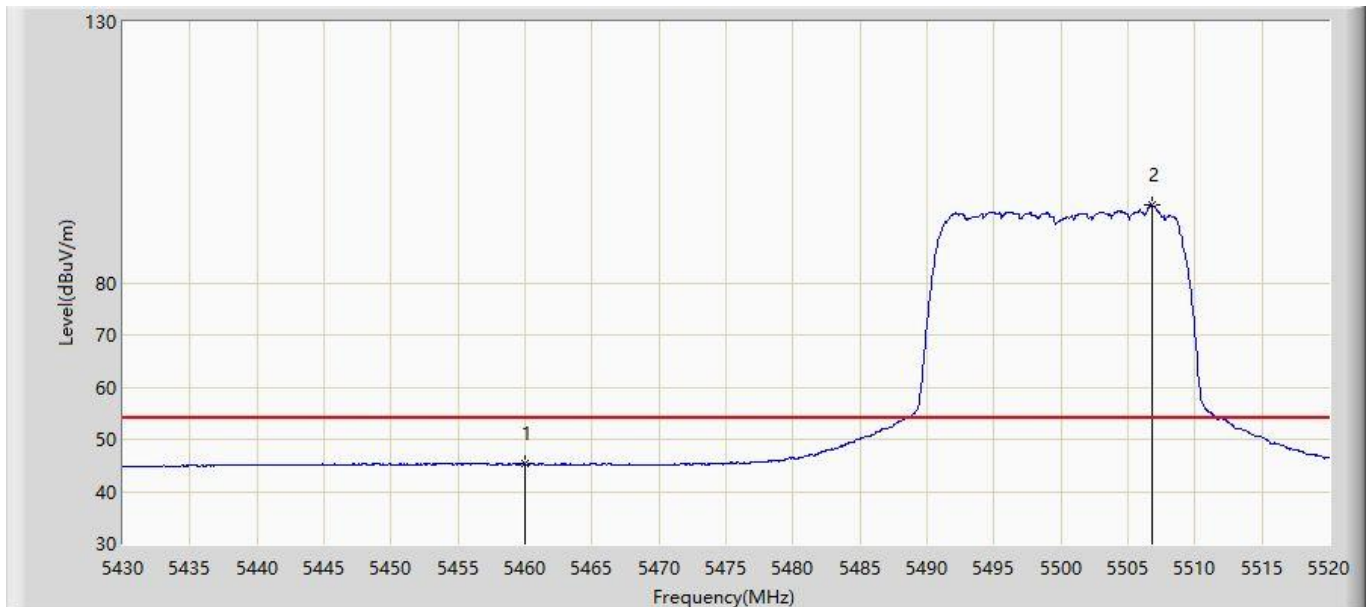


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.243	38.266	-8.757	54.000	6.978	AV
2		*	5506.815	94.875	87.580	N/A	N/A	7.294	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz, Ant 0 + 1 + 2 + 3	

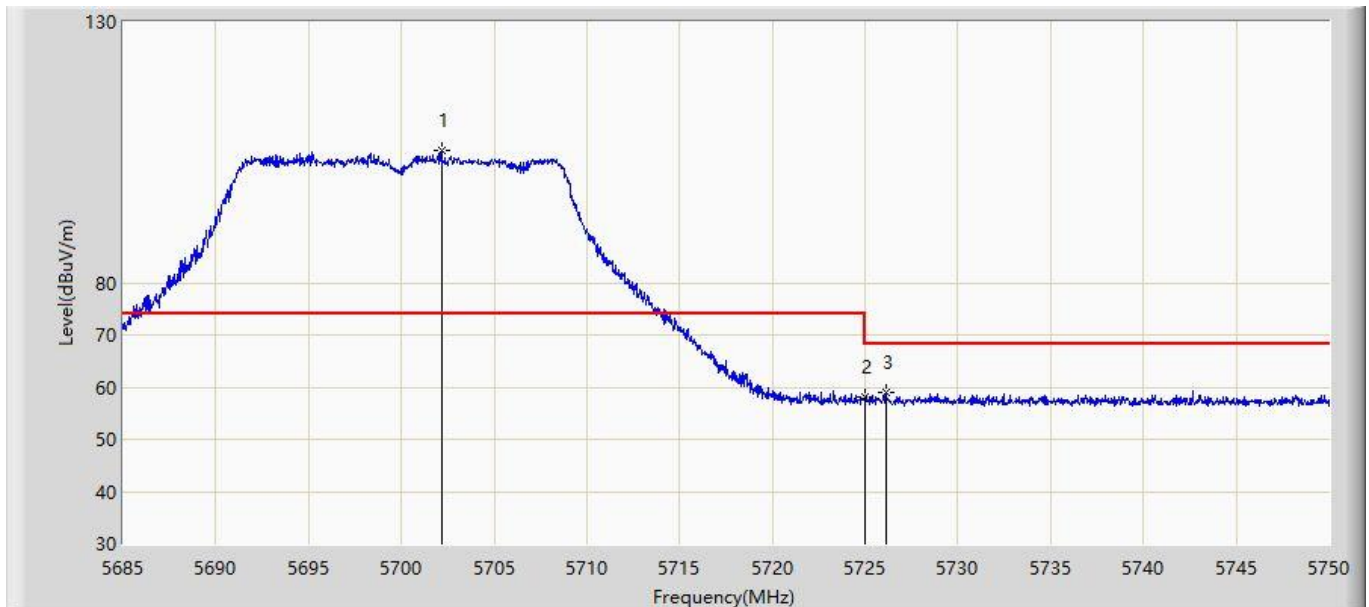


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.192	105.383	98.185	N/A	N/A	7.197	PK
2			5725.000	57.985	50.653	-10.215	68.200	7.332	PK
3			5726.112	58.878	51.534	-9.322	68.200	7.344	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz, Ant 0 + 1 + 2 + 3	

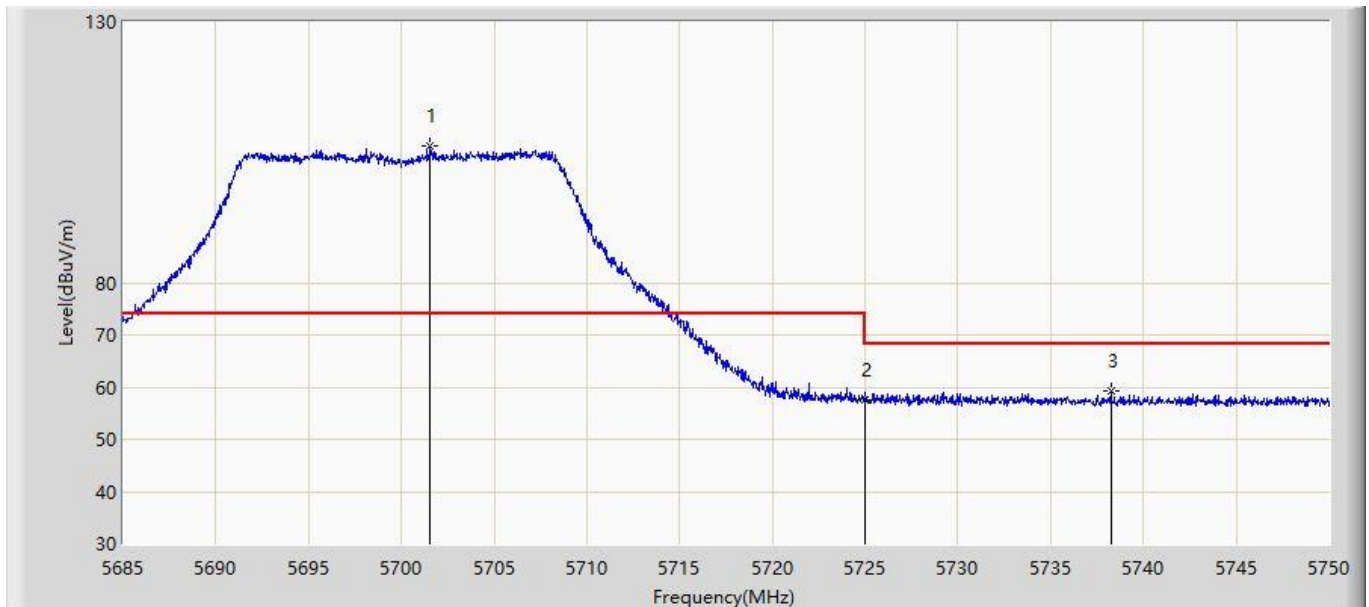


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.542	106.109	98.906	N/A	N/A	7.203	PK
2			5725.000	57.462	50.130	-10.738	68.200	7.332	PK
3			5738.235	59.364	51.947	-8.836	68.200	7.417	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:40
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz, Ant 0 + 1 + 2 + 3	

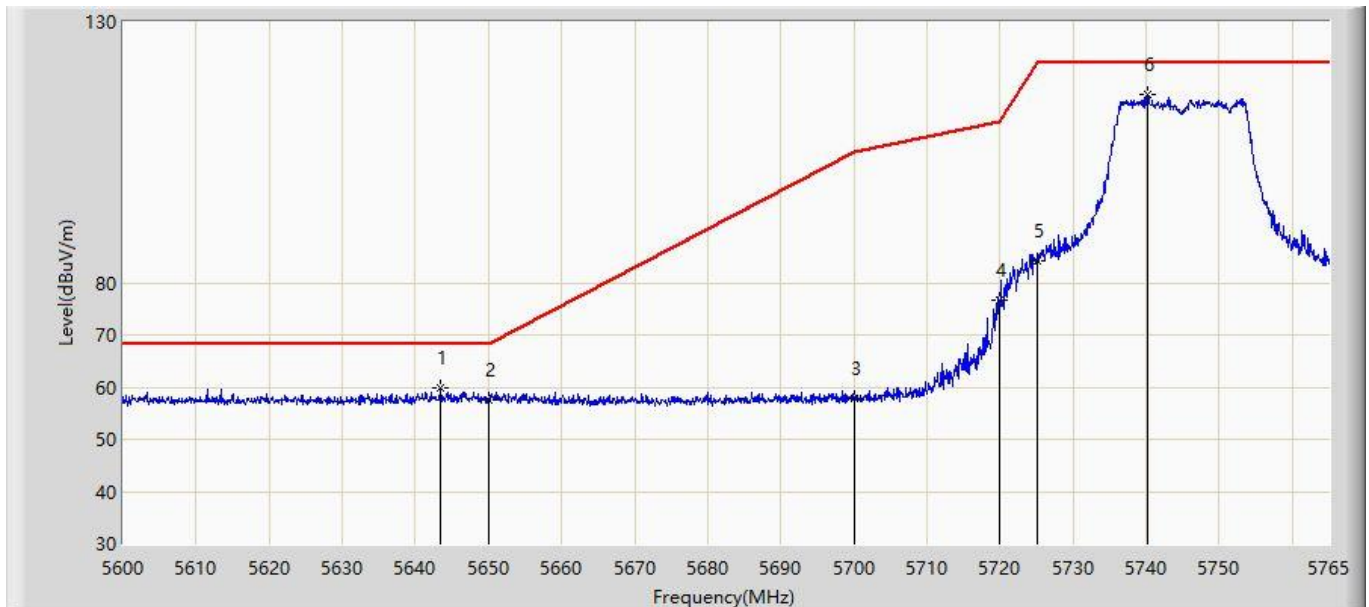


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.478	59.877	52.877	-8.323	68.200	7.000	PK
2			5650.000	57.527	50.387	-10.673	68.200	7.140	PK
3			5700.000	57.824	50.609	-47.376	105.200	7.215	PK
4			5720.000	76.611	69.338	-34.189	110.800	7.273	PK
5			5725.000	84.180	76.848	-38.020	122.200	7.332	PK
6		*	5740.167	116.188	108.760	N/A	N/A	7.429	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:42
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz, Ant 0 + 1 + 2 + 3	

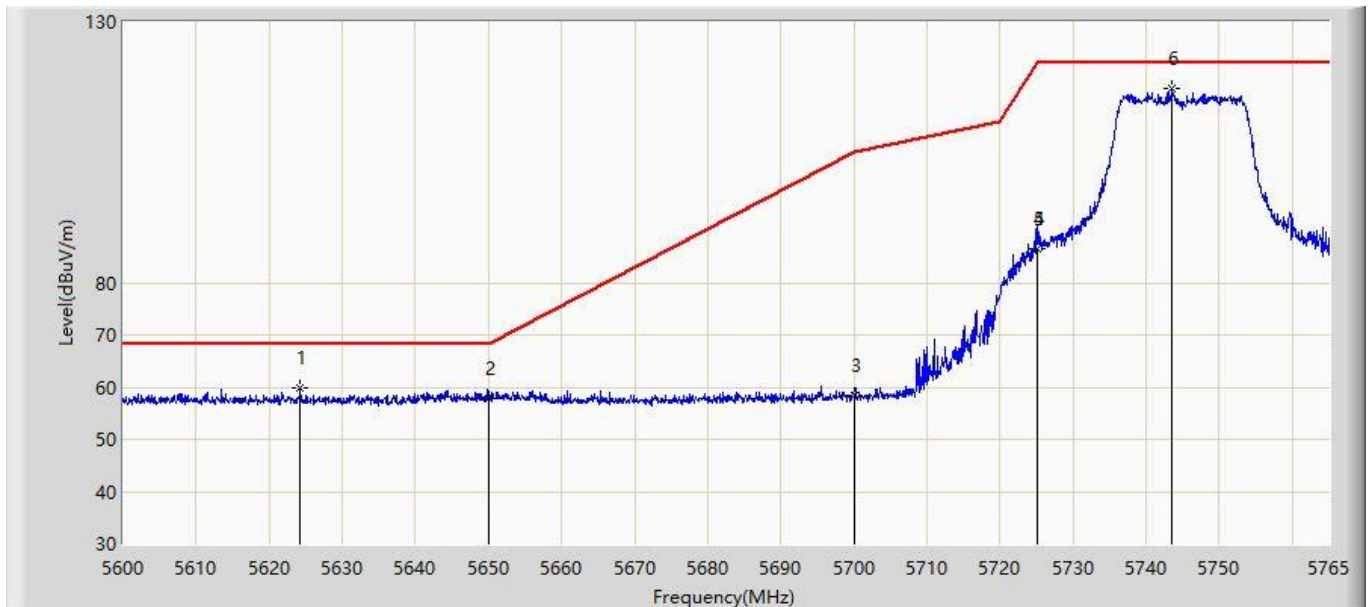


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5624.255	59.752	52.722	-8.448	68.200	7.030	PK
2			5650.000	57.774	50.634	-10.426	68.200	7.140	PK
3			5700.000	58.332	51.117	-46.868	105.200	7.215	PK
4			5725.000	86.547	79.215	-35.653	122.200	7.332	PK
5			5725.000	86.547	79.215	-35.653	122.200	7.332	PK
6		*	5743.550	117.129	109.684	N/A	N/A	7.445	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:43
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz, Ant 0 + 1 + 2 + 3	

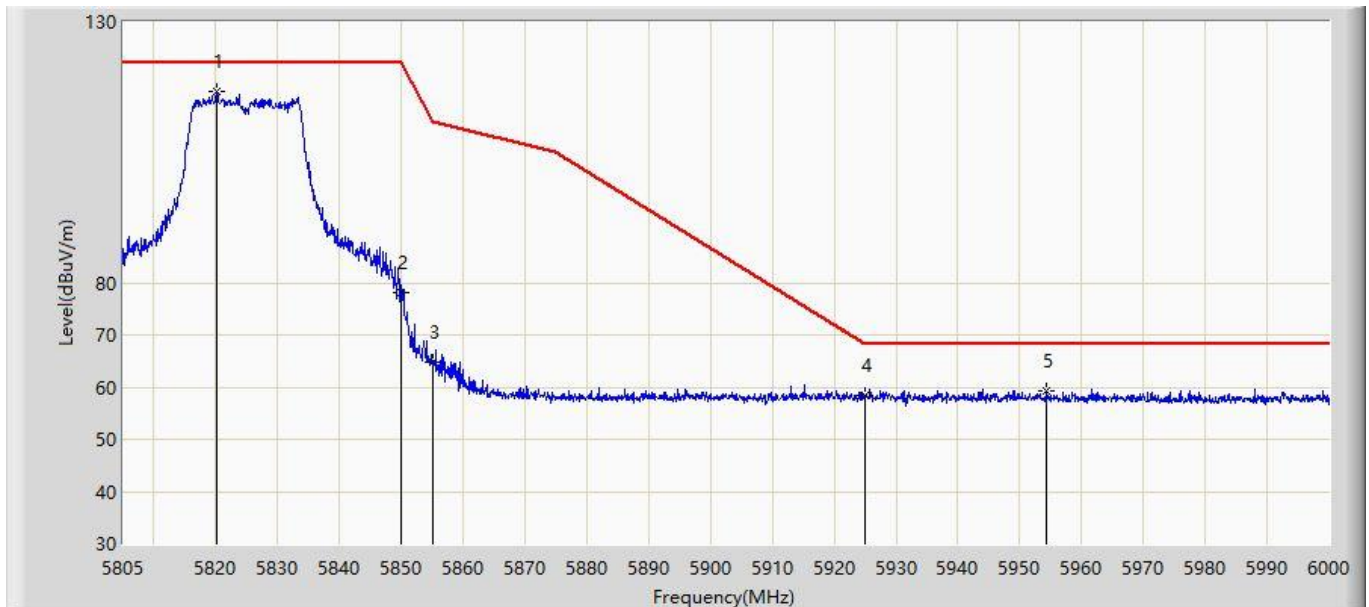


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.210	116.583	108.960	N/A	N/A	7.623	PK
2			5850.000	78.140	70.448	-44.060	122.200	7.692	PK
3			5855.000	64.671	57.027	-46.129	110.800	7.644	PK
4			5925.000	58.338	50.512	-9.862	68.200	7.826	PK
5			5954.370	59.378	51.728	-8.822	68.200	7.650	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 14:44
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz, Ant 0 + 1 + 2 + 3	

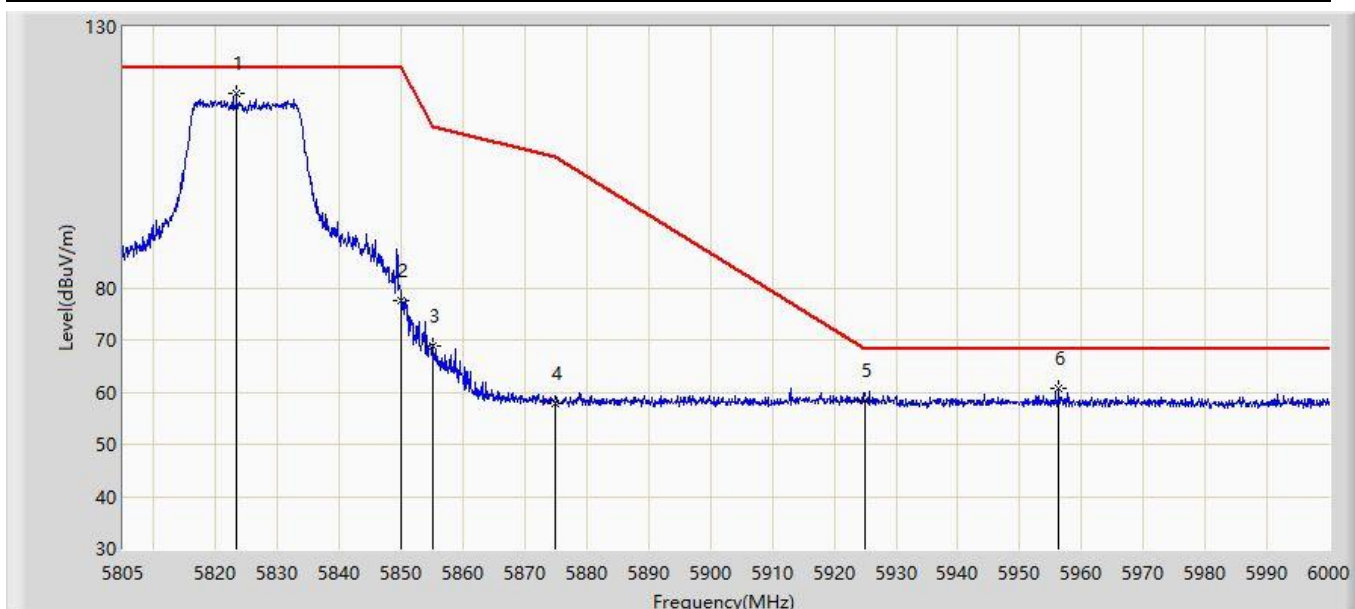


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.330	117.304	109.623	N/A	N/A	7.680	PK
2			5850.000	77.584	69.892	-44.616	122.200	7.692	PK
3			5855.000	68.817	61.173	-41.983	110.800	7.644	PK
4			5875.000	57.804	50.202	-47.396	105.200	7.602	PK
5			5925.000	58.419	50.593	-9.781	68.200	7.826	PK
6			5956.320	60.622	52.980	-7.578	68.200	7.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 15:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

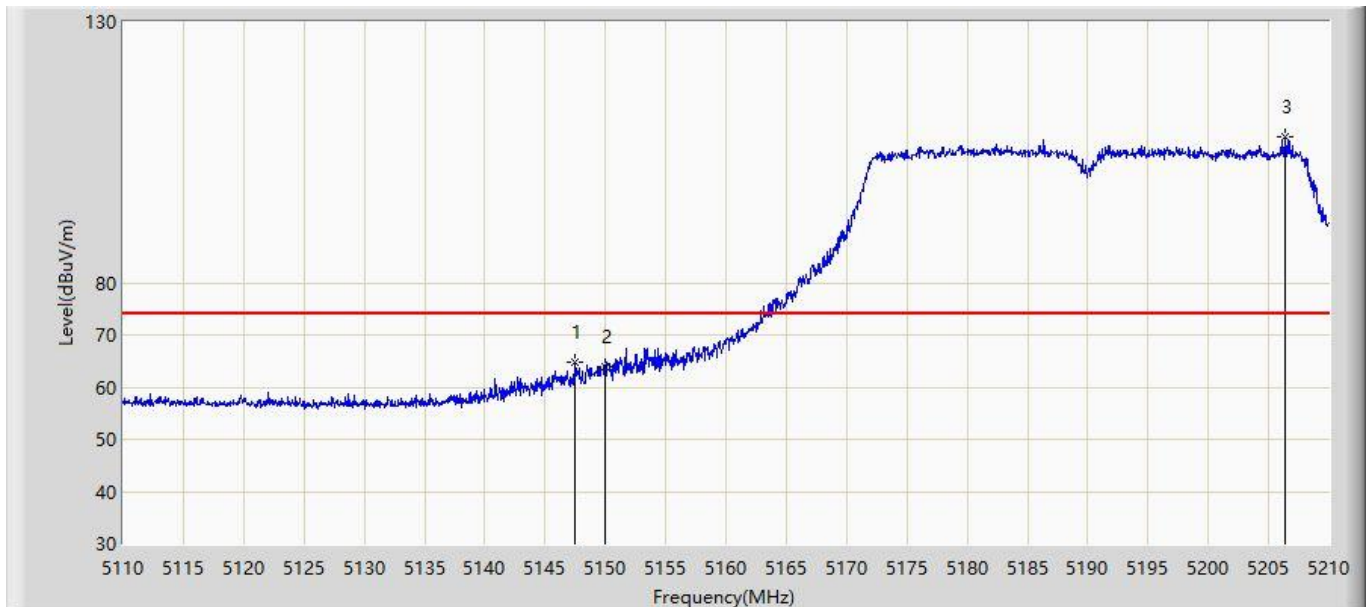


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.450	64.888	58.094	-9.112	74.000	6.794	PK
2			5150.000	63.907	57.108	-10.093	74.000	6.799	PK
3		*	5206.350	107.895	101.398	N/A	N/A	6.498	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 15:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

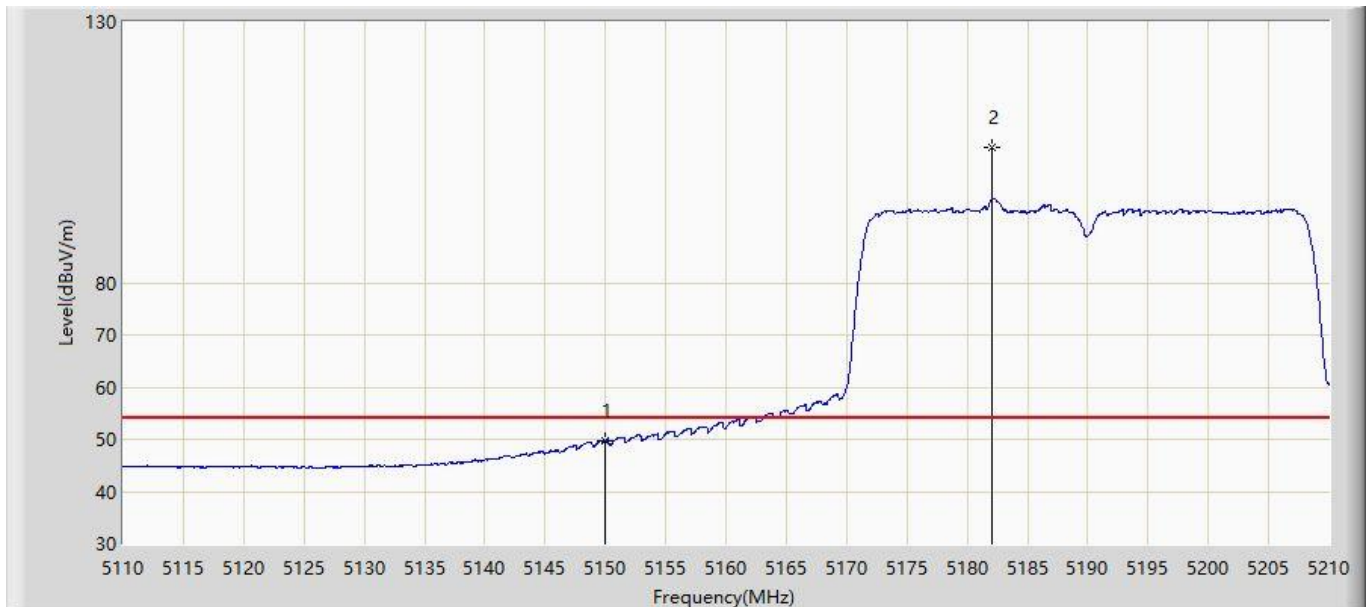


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.693	42.894	-4.307	54.000	6.799	AV
2		*	5182.050	105.936	99.147	N/A	N/A	6.789	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 15:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

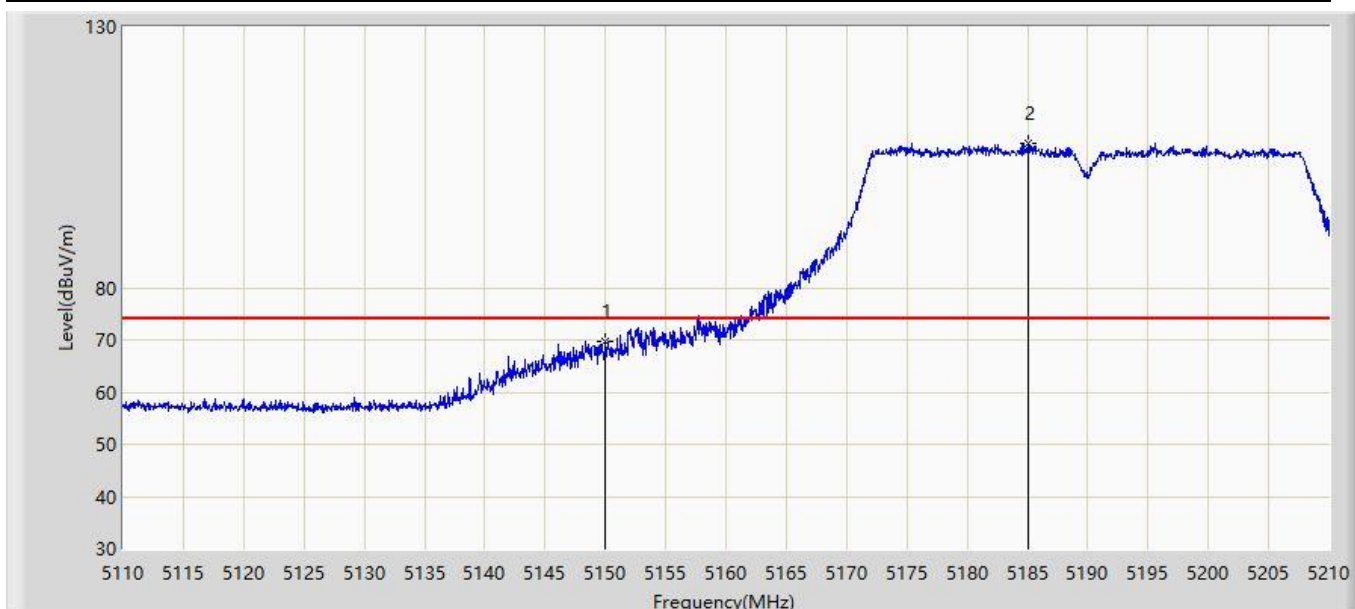


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	69.723	62.924	-4.277	74.000	6.799	PK
2		*	5185.000	107.802	101.059	N/A	N/A	6.742	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 15:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz, Ant 0 + 1 + 2 + 3	

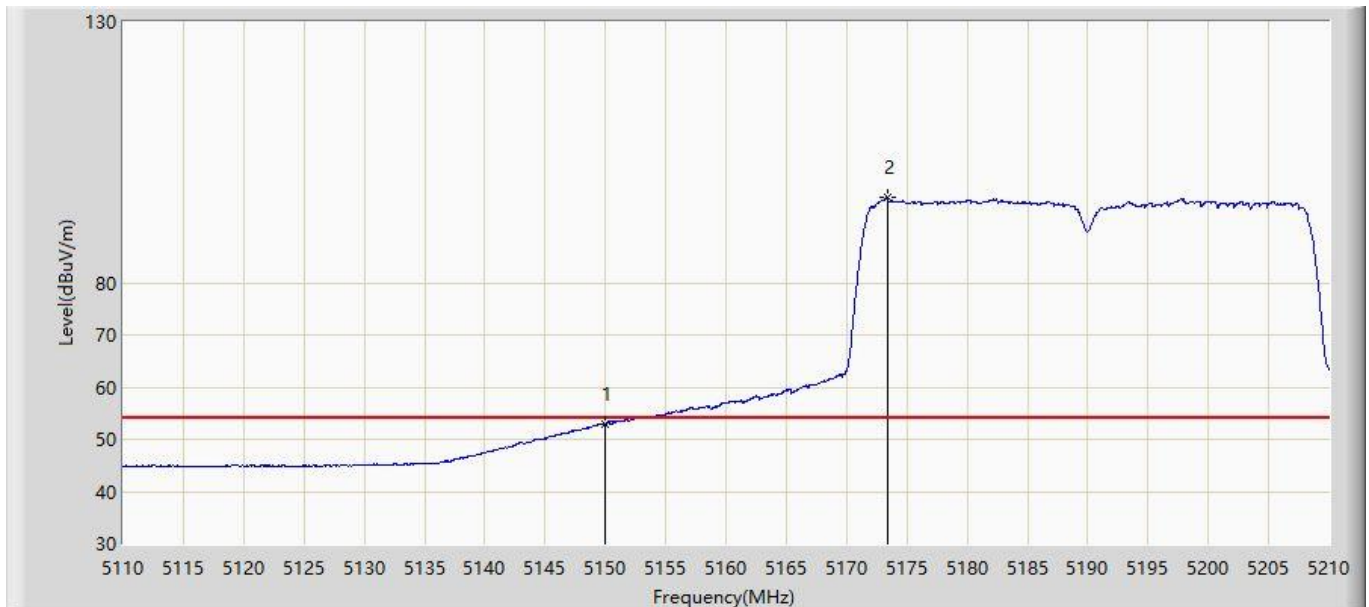


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.953	46.154	-1.047	54.000	6.799	AV
2		*	5173.400	96.308	89.486	N/A	N/A	6.823	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 15:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

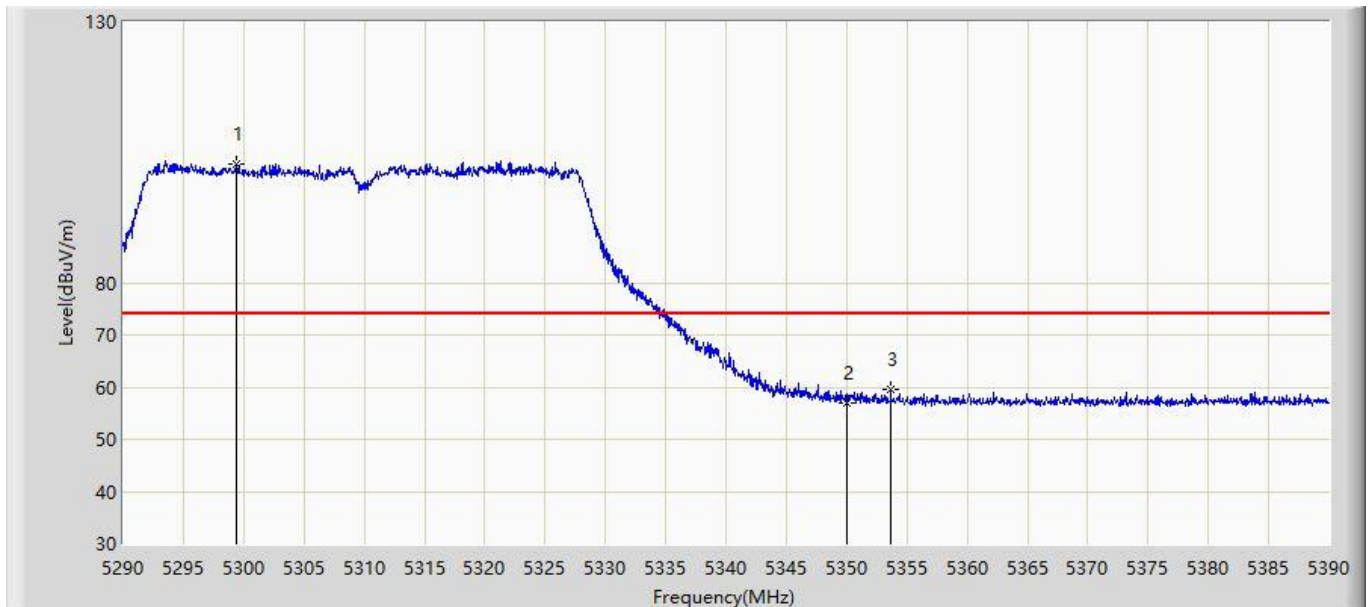


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.400	102.733	96.112	N/A	N/A	6.622	PK
2			5350.000	56.870	50.242	-17.130	74.000	6.629	PK
3			5353.650	59.535	52.922	-14.465	74.000	6.613	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 15:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

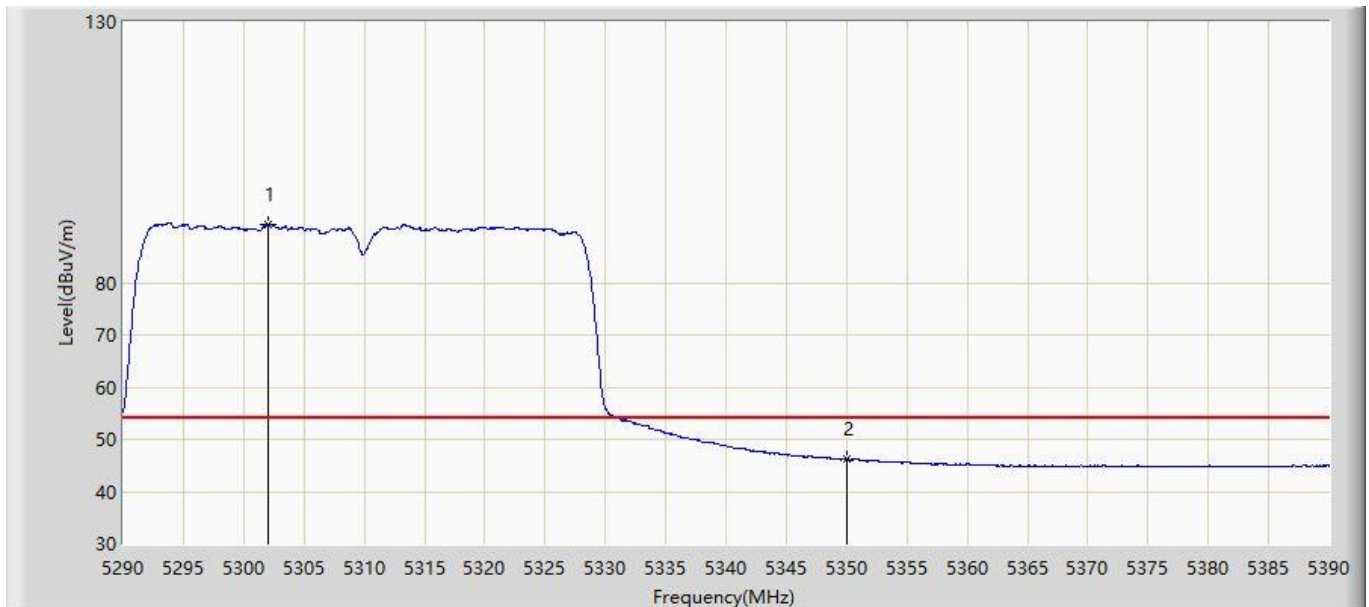


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.050	91.146	84.505	N/A	N/A	6.641	AV
2			5350.000	46.195	39.567	-7.805	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

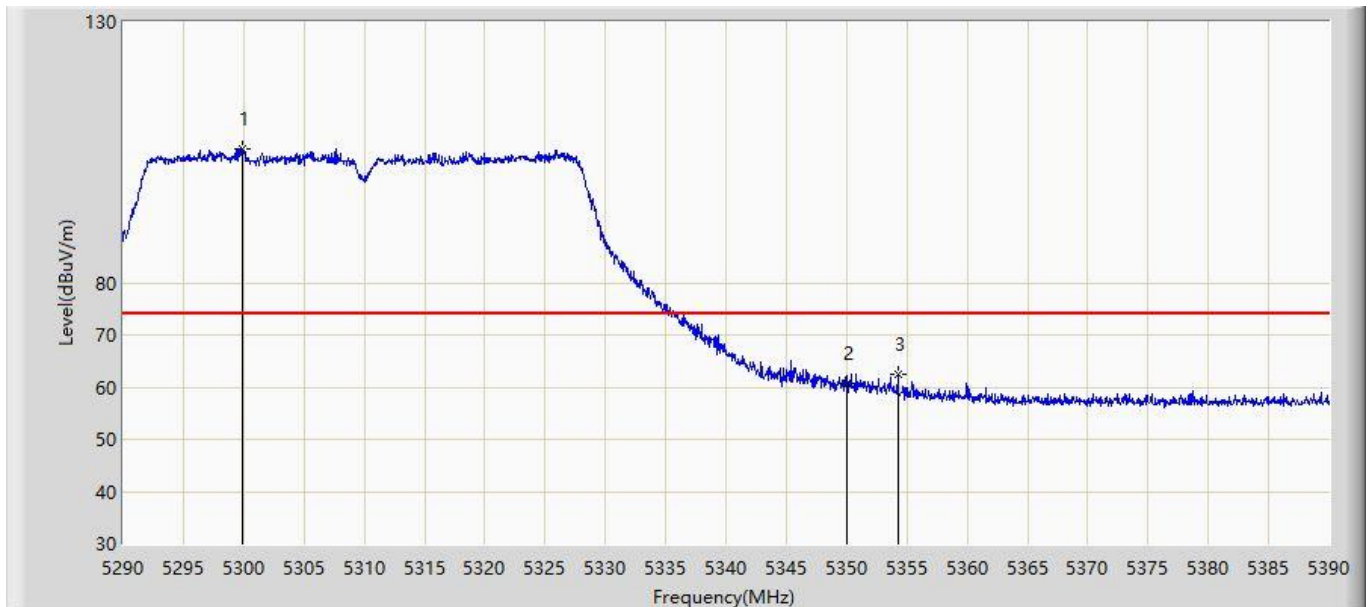


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.900	105.640	99.012	N/A	N/A	6.627	PK
2			5350.000	60.656	54.028	-13.344	74.000	6.629	PK
3			5354.250	62.435	55.823	-11.565	74.000	6.612	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz, Ant 0 + 1 + 2 + 3	

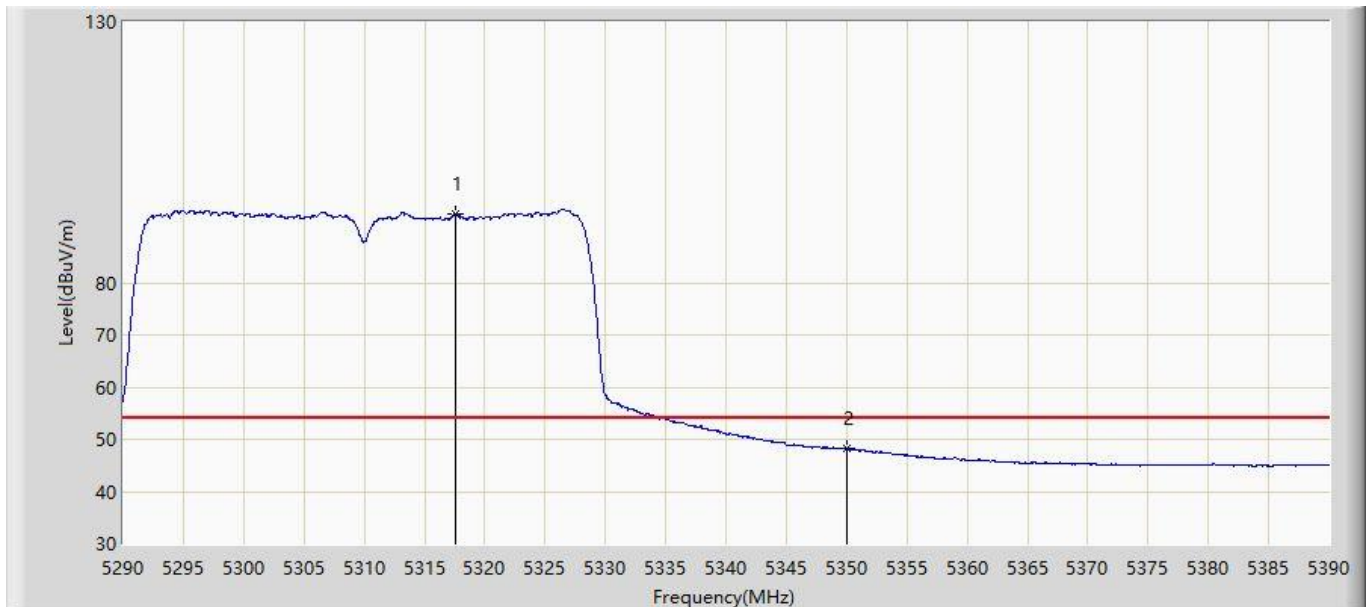


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.550	93.224	86.615	N/A	N/A	6.609	AV
2			5350.000	48.157	41.529	-5.843	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

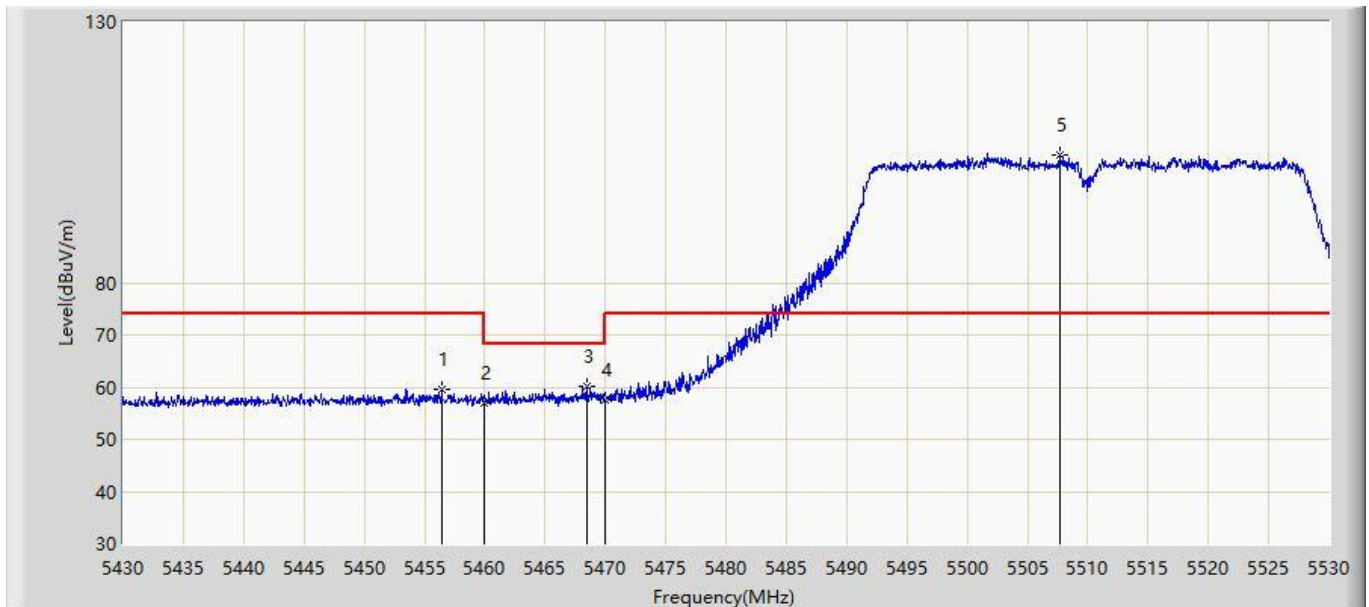


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.450	59.664	52.701	-14.336	74.000	6.963	PK
2			5460.000	57.058	50.081	-16.942	74.000	6.978	PK
3			5468.450	60.034	53.023	-8.166	68.200	7.011	PK
4			5470.000	57.511	50.494	-10.689	68.200	7.016	PK
5		*	5507.750	104.532	97.251	N/A	N/A	7.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

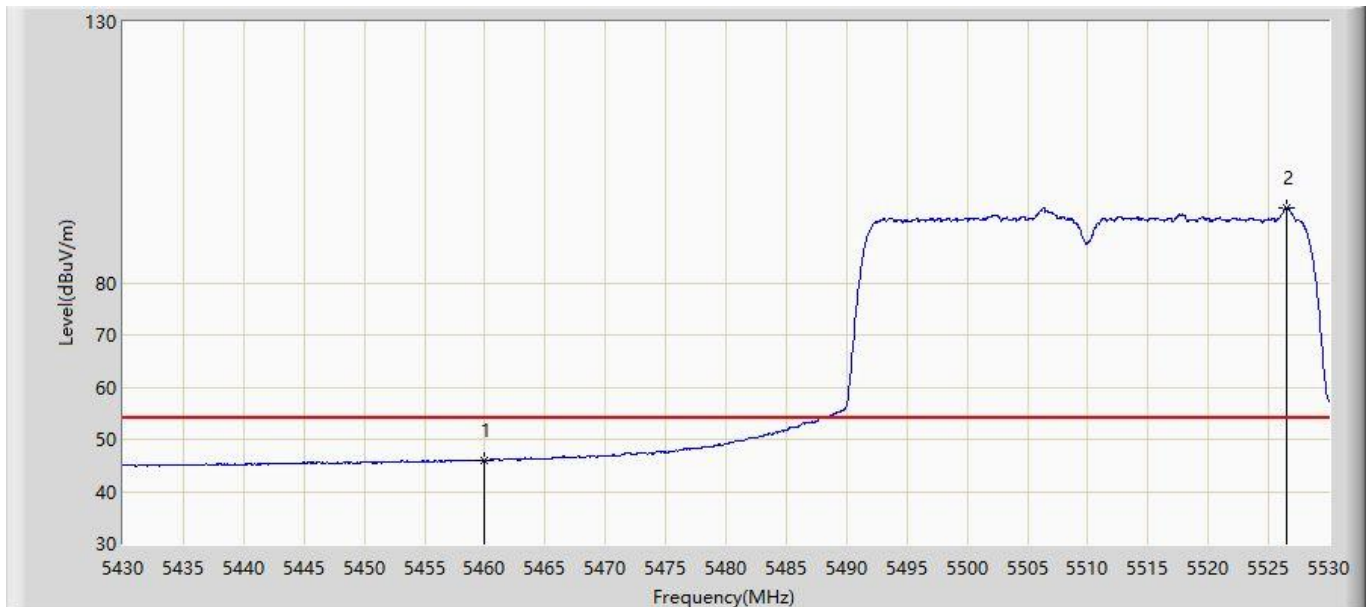


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.973	38.996	-8.027	54.000	6.978	AV
2		*	5526.450	94.480	87.422	N/A	N/A	7.058	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

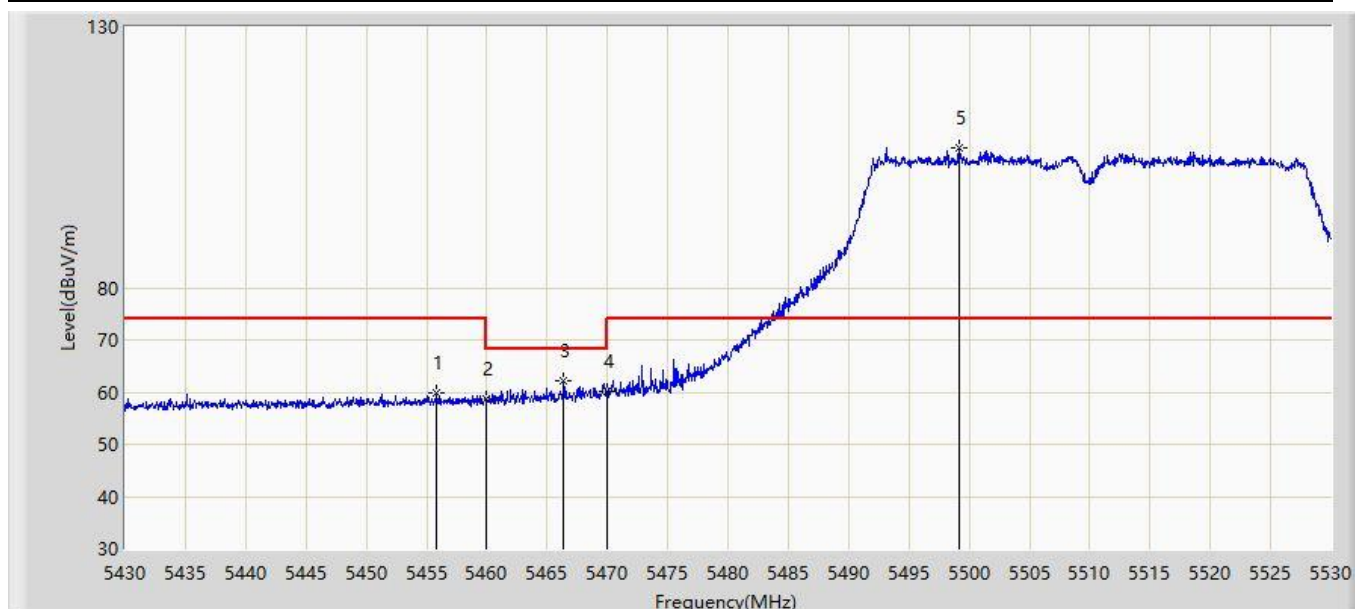


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.850	59.745	52.784	-14.255	74.000	6.961	PK
2			5460.000	58.790	51.813	-15.210	74.000	6.978	PK
3			5466.400	62.240	55.237	-5.960	68.200	7.003	PK
4			5470.000	60.124	53.107	-8.076	68.200	7.016	PK
5		*	5499.150	106.941	99.682	N/A	N/A	7.260	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz, Ant 0 + 1 + 2 + 3	

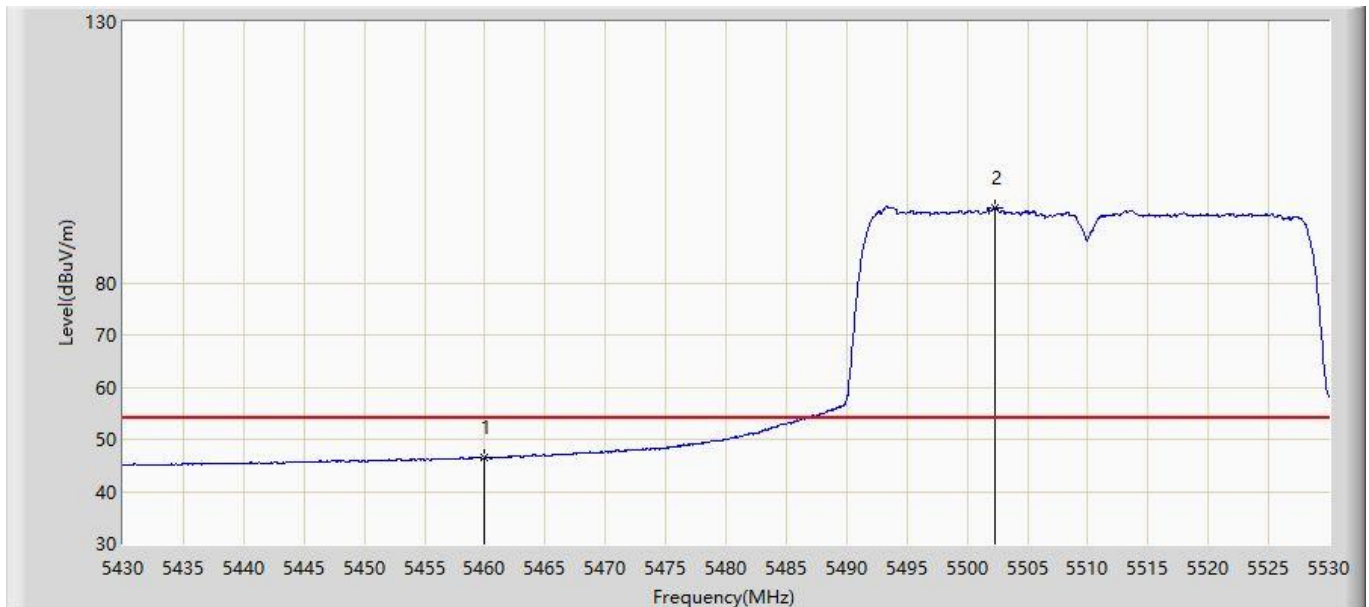


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.492	39.515	-7.508	54.000	6.978	AV
2		*	5502.250	94.321	87.029	N/A	N/A	7.292	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz, Ant 0 + 1 + 2 + 3	

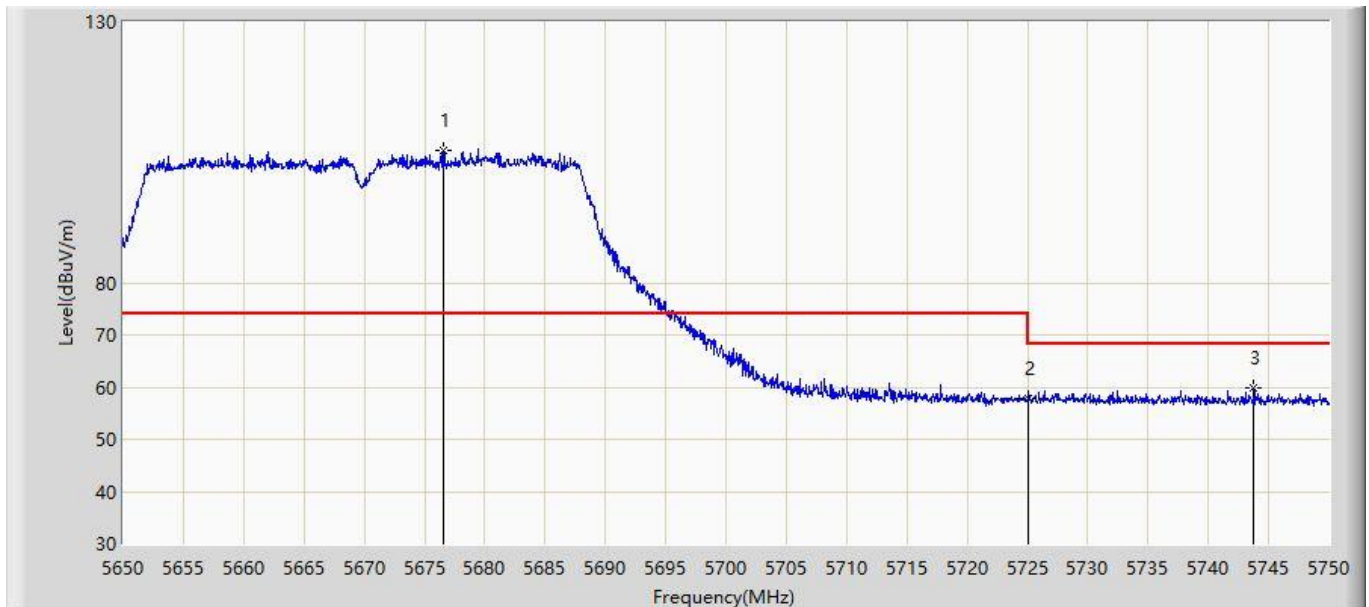


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.600	105.422	98.112	N/A	N/A	7.311	PK
2			5725.000	57.757	50.425	-10.443	68.200	7.332	PK
3			5743.750	59.856	52.411	-8.344	68.200	7.445	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz, Ant 0 + 1 + 2 + 3	

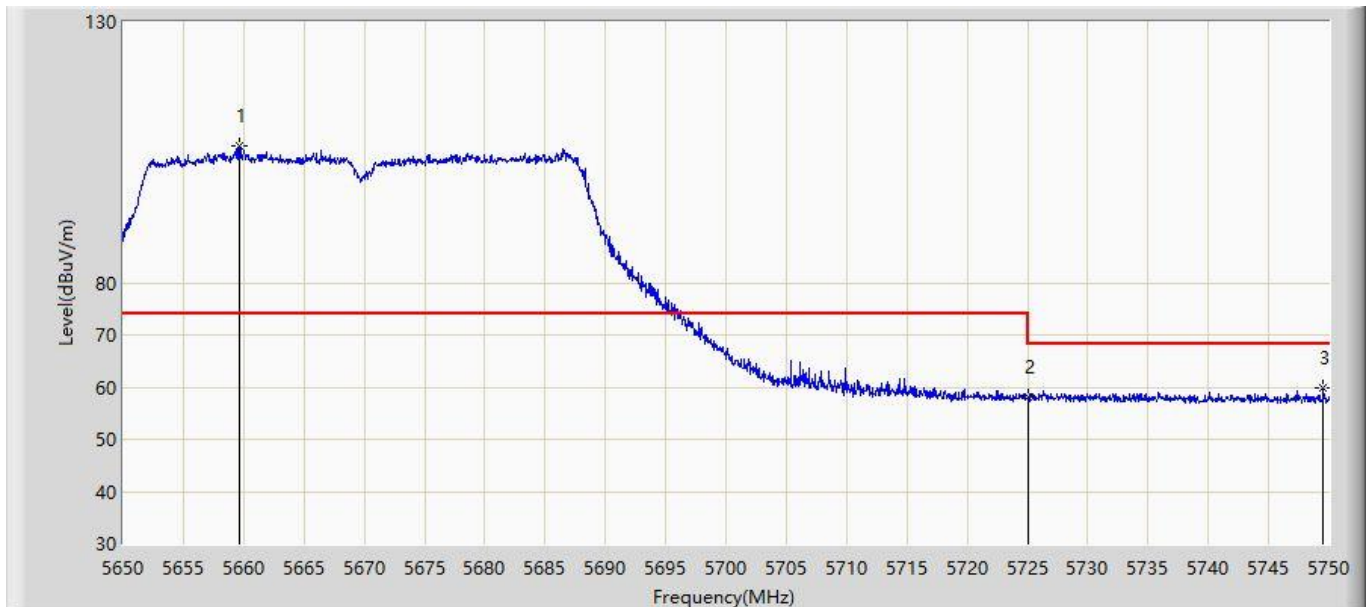


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5659.700	106.129	98.817	N/A	N/A	7.312	PK
2			5725.000	58.095	50.763	-10.105	68.200	7.332	PK
3			5749.550	59.928	52.489	-8.272	68.200	7.439	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:14
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz, Ant 0 + 1 + 2 + 3	

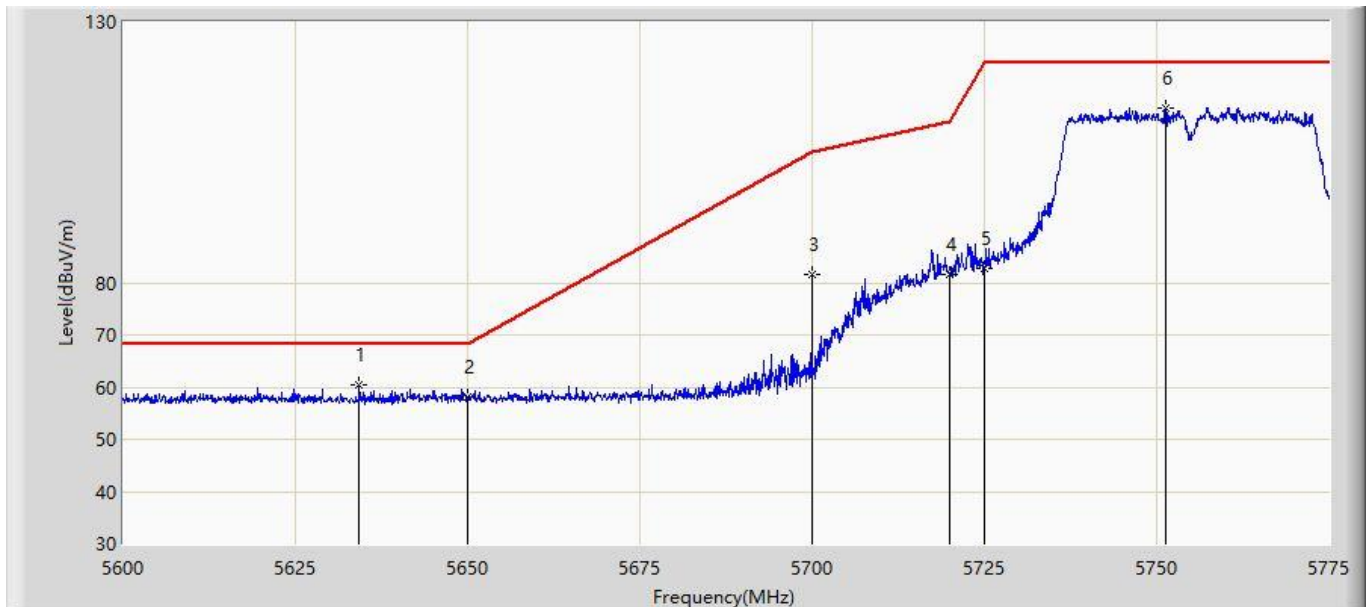


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5634.300	60.530	53.550	-7.670	68.200	6.980	PK
2			5650.000	58.057	50.917	-10.143	68.200	7.140	PK
3			5700.000	81.563	74.348	-23.637	105.200	7.215	PK
4			5720.000	81.563	74.290	-29.237	110.800	7.273	PK
5			5725.000	82.825	75.493	-39.375	122.200	7.332	PK
6			5751.375	113.404	105.967	N/A	N/A	7.437	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:17
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz, Ant 0 + 1 + 2 + 3	

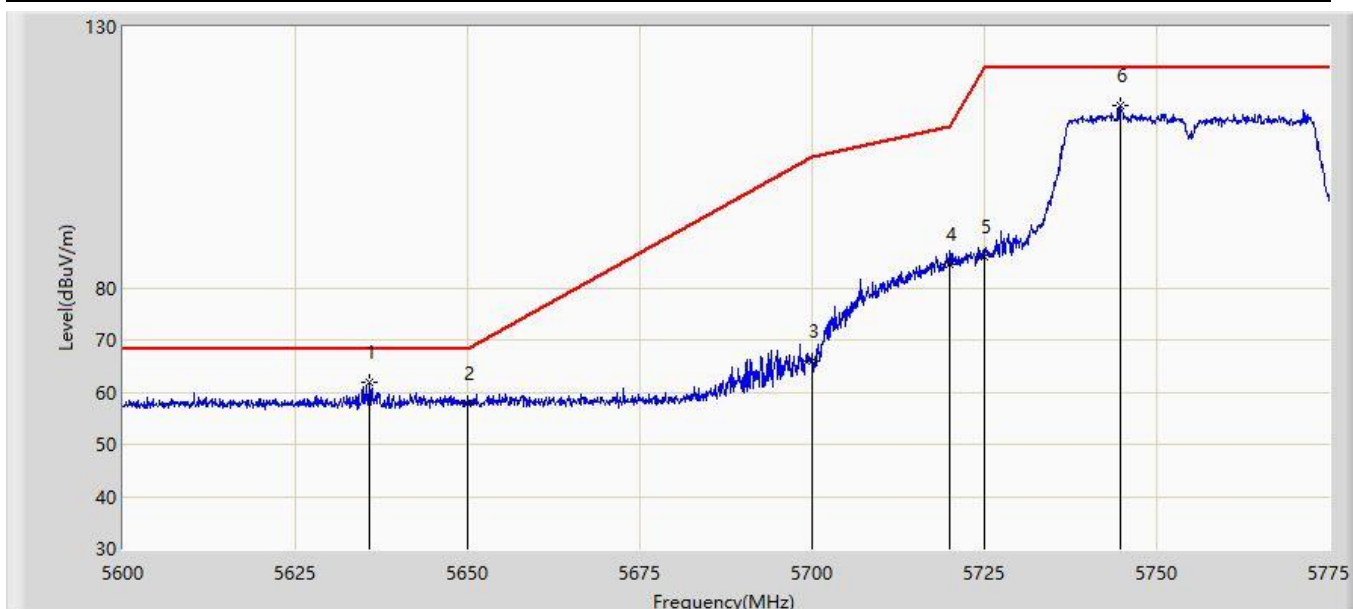


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.788	61.764	54.791	-6.436	68.200	6.972	PK
2			5650.000	57.948	50.808	-10.252	68.200	7.140	PK
3			5700.000	66.053	58.838	-39.147	105.200	7.215	PK
4			5720.000	84.464	77.191	-26.336	110.800	7.273	PK
5			5725.000	86.053	78.721	-36.147	122.200	7.332	PK
6			5744.638	114.941	107.497	N/A	N/A	7.444	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:19
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz, Ant 0 + 1 + 2 + 3	

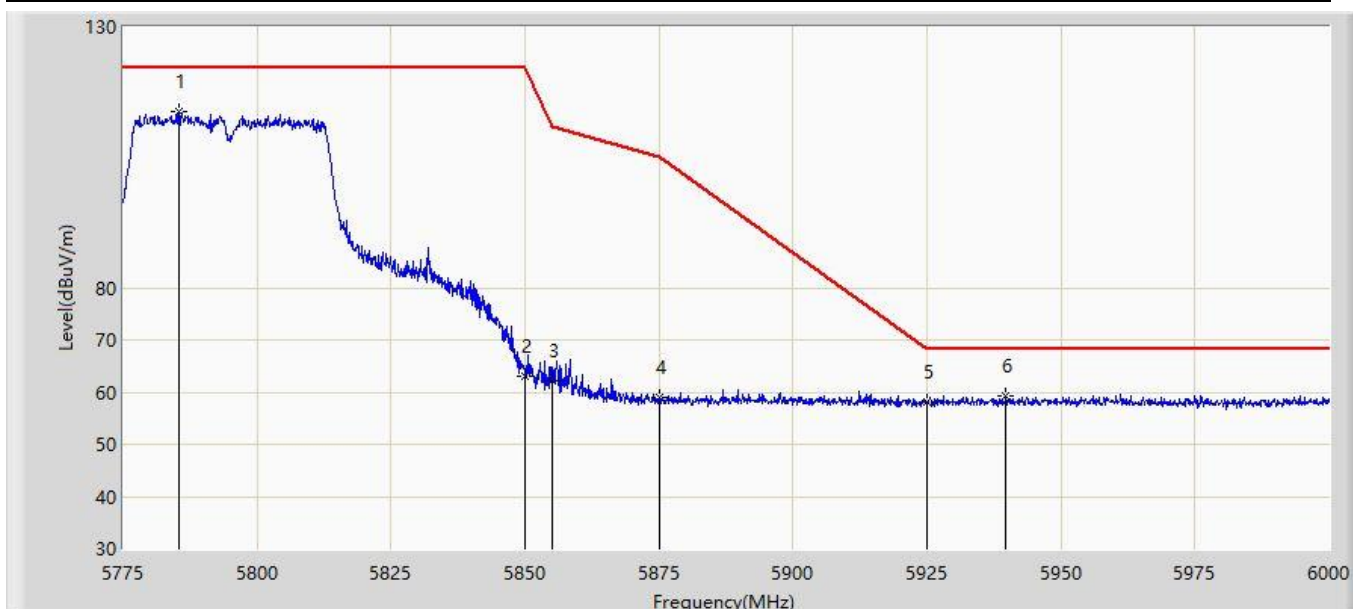


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.462	113.652	106.129	N/A	N/A	7.523	PK
2			5850.000	63.176	55.484	-59.024	122.200	7.692	PK
3			5855.000	62.289	54.645	-48.511	110.800	7.644	PK
4			5875.000	58.998	51.396	-46.202	105.200	7.602	PK
5			5925.000	58.116	50.290	-10.084	68.200	7.826	PK
6			5939.700	59.214	51.481	-8.986	68.200	7.734	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:23
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz, Ant 0 + 1 + 2 + 3	

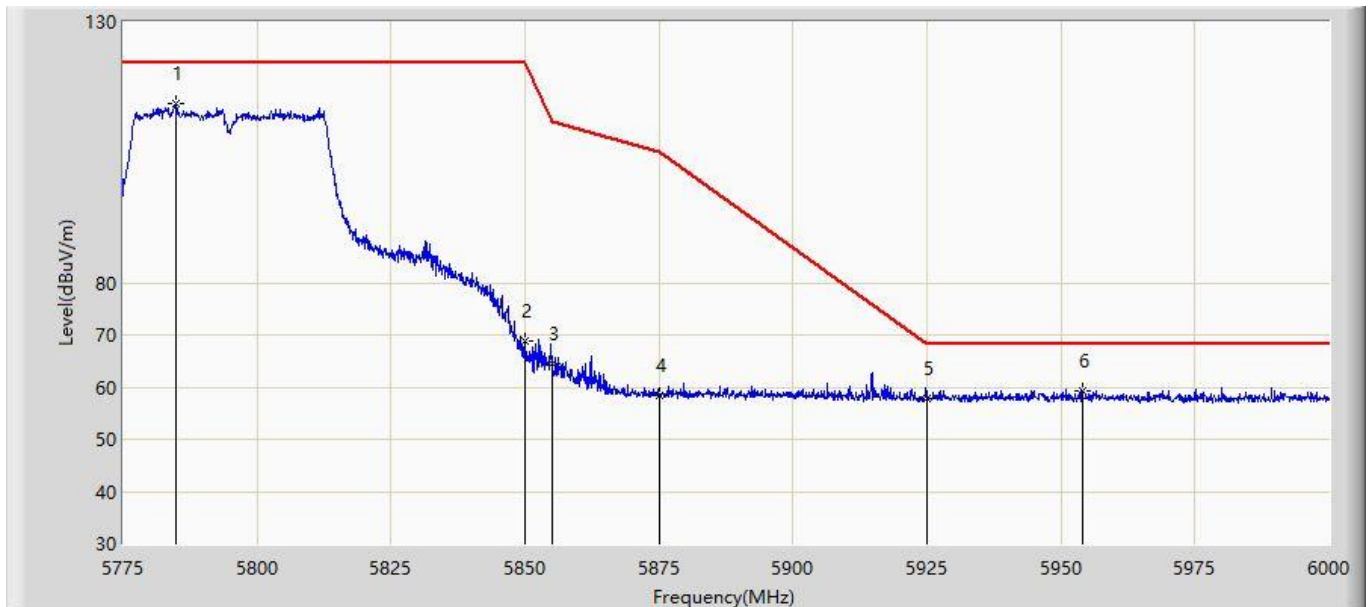


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.788	114.385	106.859	N/A	N/A	7.526	PK
2			5850.000	68.717	61.025	-53.483	122.200	7.692	PK
3			5855.000	64.433	56.789	-46.367	110.800	7.644	PK
4			5875.000	58.430	50.828	-46.770	105.200	7.602	PK
5			5925.000	57.919	50.093	-10.281	68.200	7.826	PK
6			5953.987	59.417	51.765	-8.783	68.200	7.652	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

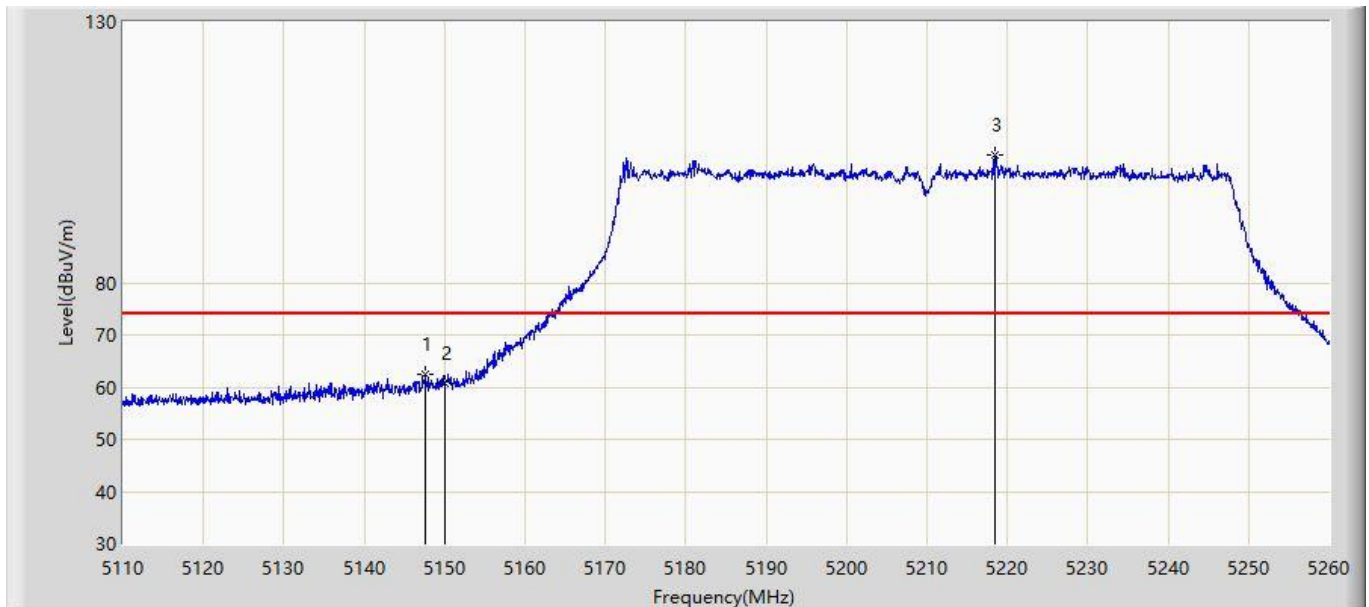


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.575	62.350	55.557	-11.650	74.000	6.793	PK
2			5150.000	60.771	53.972	-13.229	74.000	6.799	PK
3		*	5218.375	104.486	97.985	N/A	N/A	6.500	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

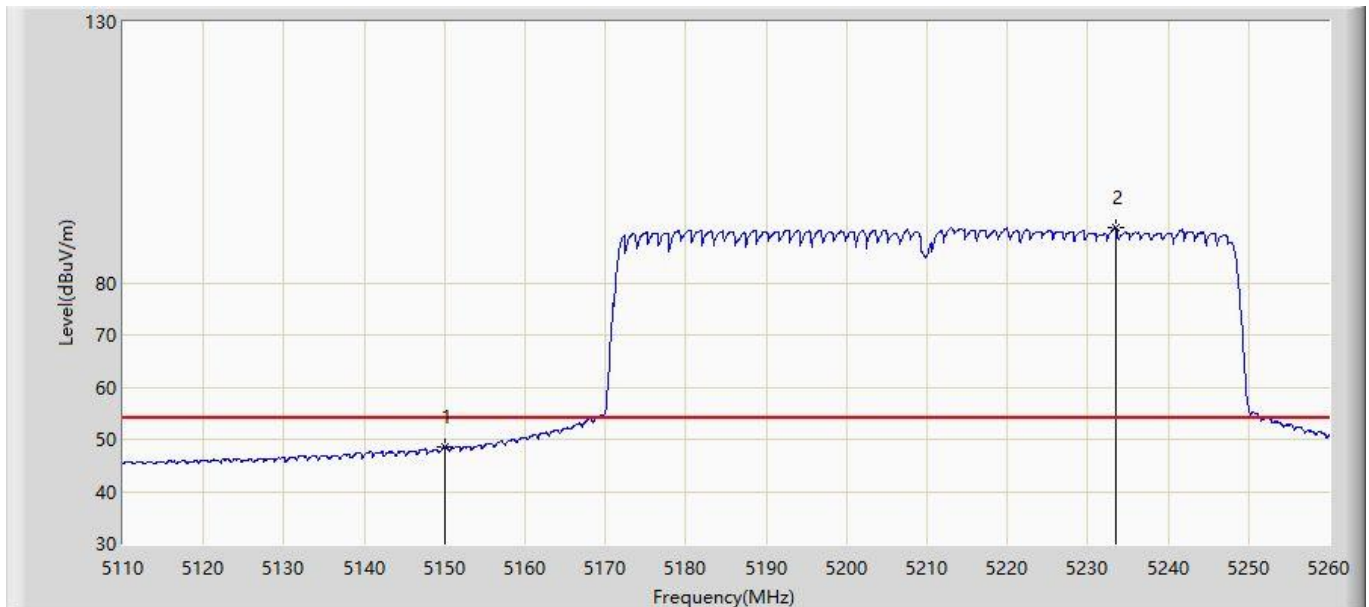


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.416	41.617	-5.584	54.000	6.799	AV
2		*	5233.525	90.505	83.751	N/A	N/A	6.755	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

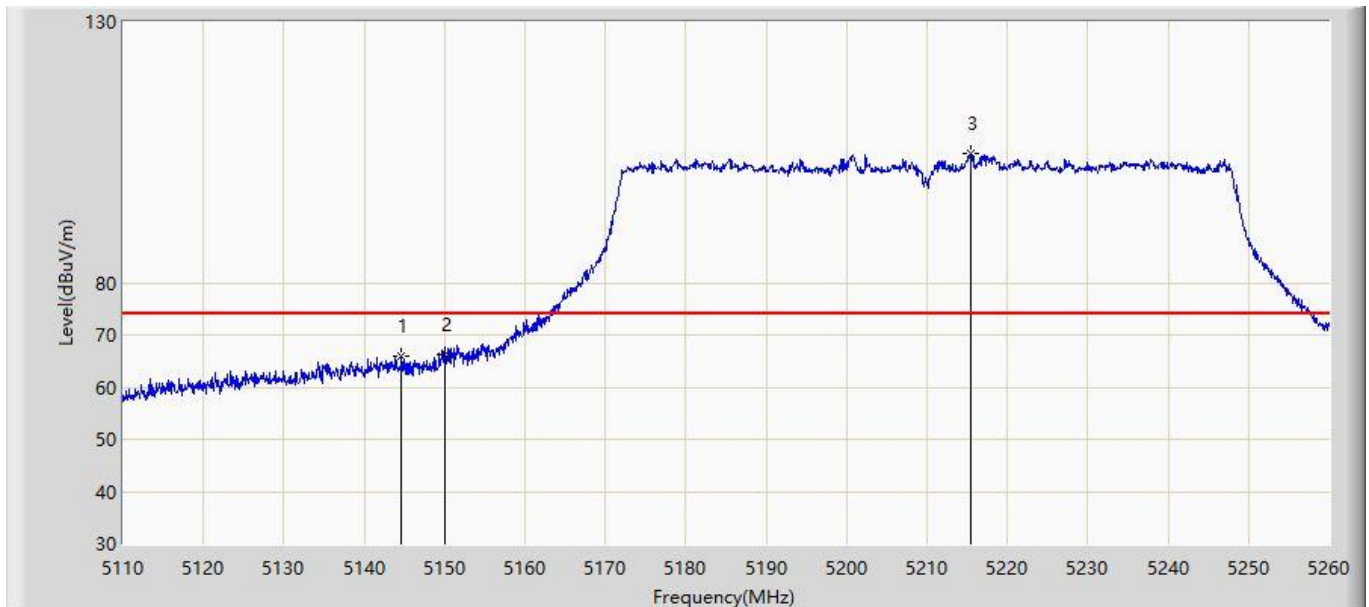


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.575	65.951	59.146	-8.049	74.000	6.805	PK
2			5150.000	66.359	59.560	-7.641	74.000	6.799	PK
3		*	5215.375	104.726	98.264	N/A	N/A	6.462	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz, Ant 0 + 1 + 2 + 3	

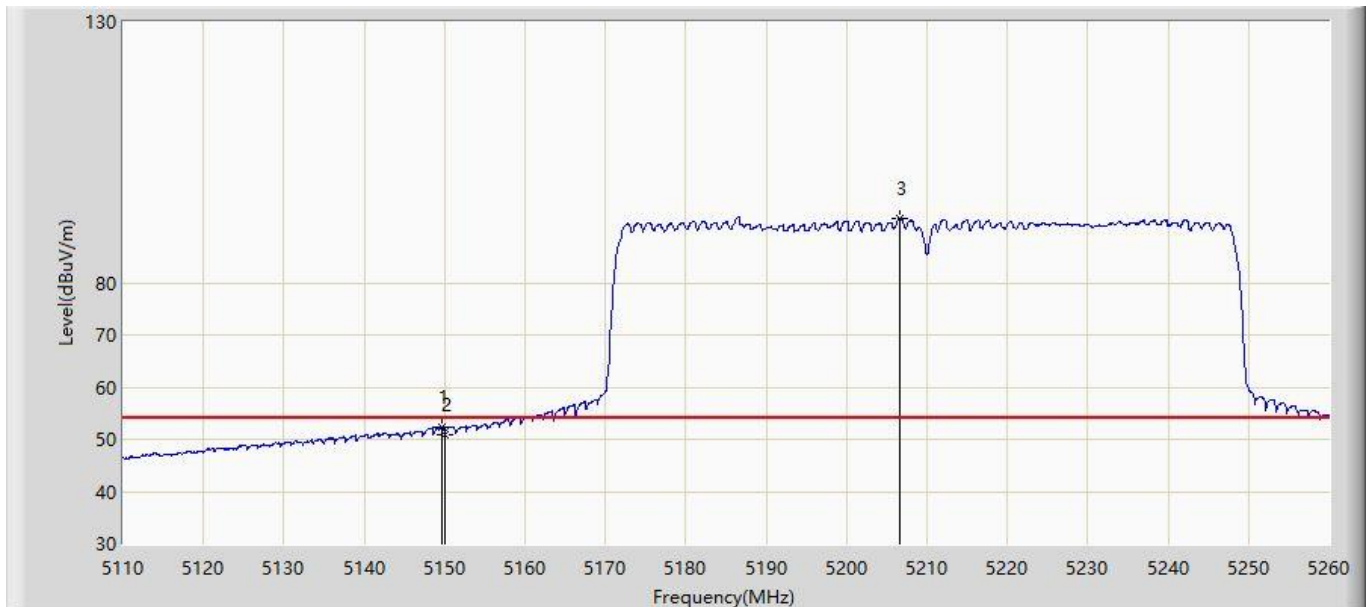


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.750	52.286	45.488	-1.714	54.000	6.798	AV
2			5150.000	50.988	44.189	-3.012	54.000	6.799	AV
3		*	5206.600	92.306	85.810	N/A	N/A	6.497	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

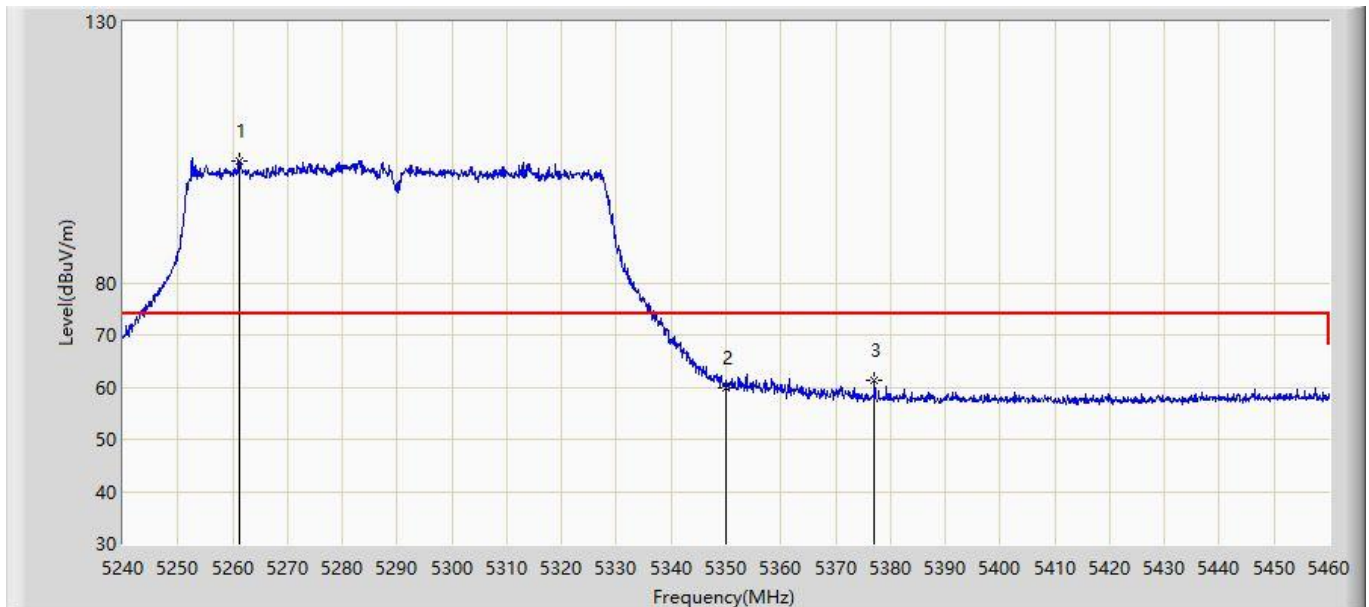


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5261.120	103.304	96.678	N/A	N/A	6.625	PK
2			5350.000	59.825	53.197	-14.175	74.000	6.629	PK
3			5377.060	61.405	54.742	-12.595	74.000	6.663	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

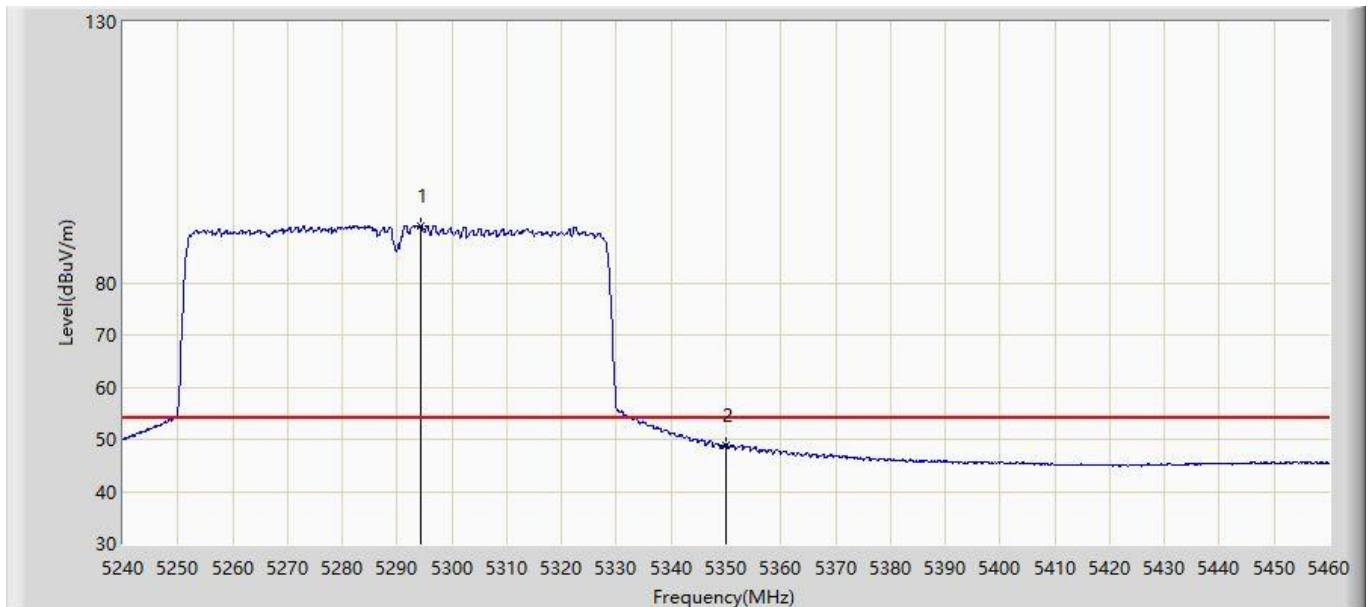


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.340	90.857	84.304	N/A	N/A	6.553	AV
2			5350.000	48.934	42.306	-5.066	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

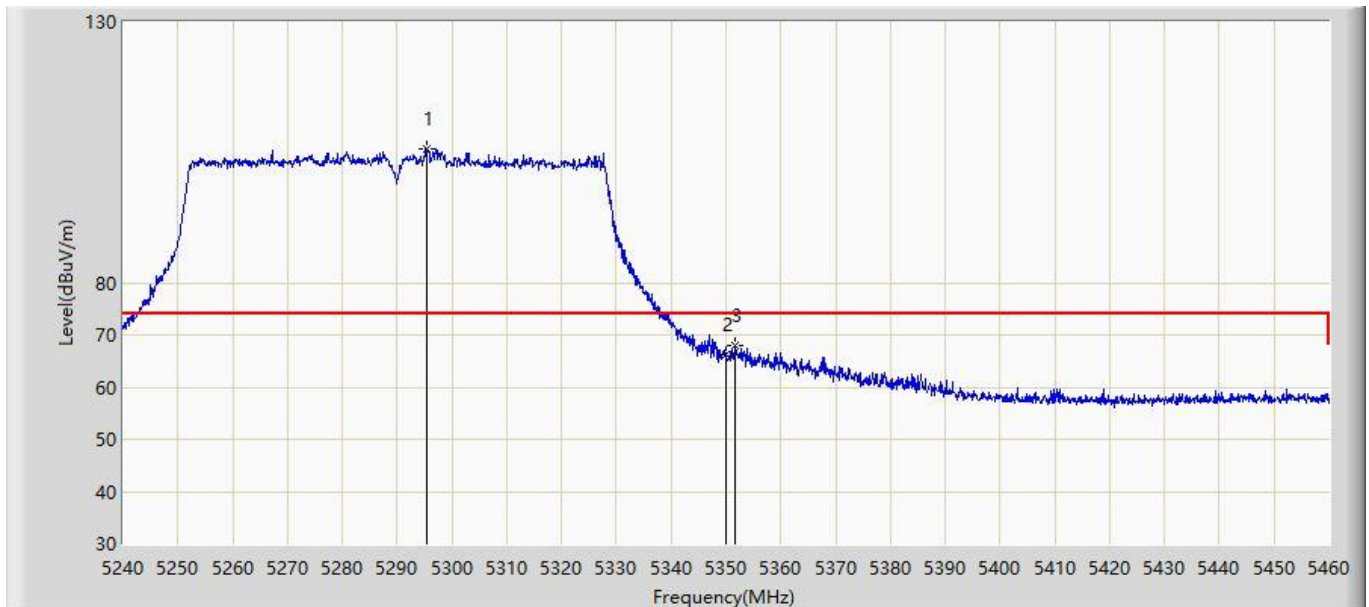


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.440	105.765	99.197	N/A	N/A	6.568	PK
2			5350.000	66.173	59.545	-7.827	74.000	6.629	PK
3			5351.540	68.104	61.486	-5.896	74.000	6.619	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 0 + 1 + 2 + 3	

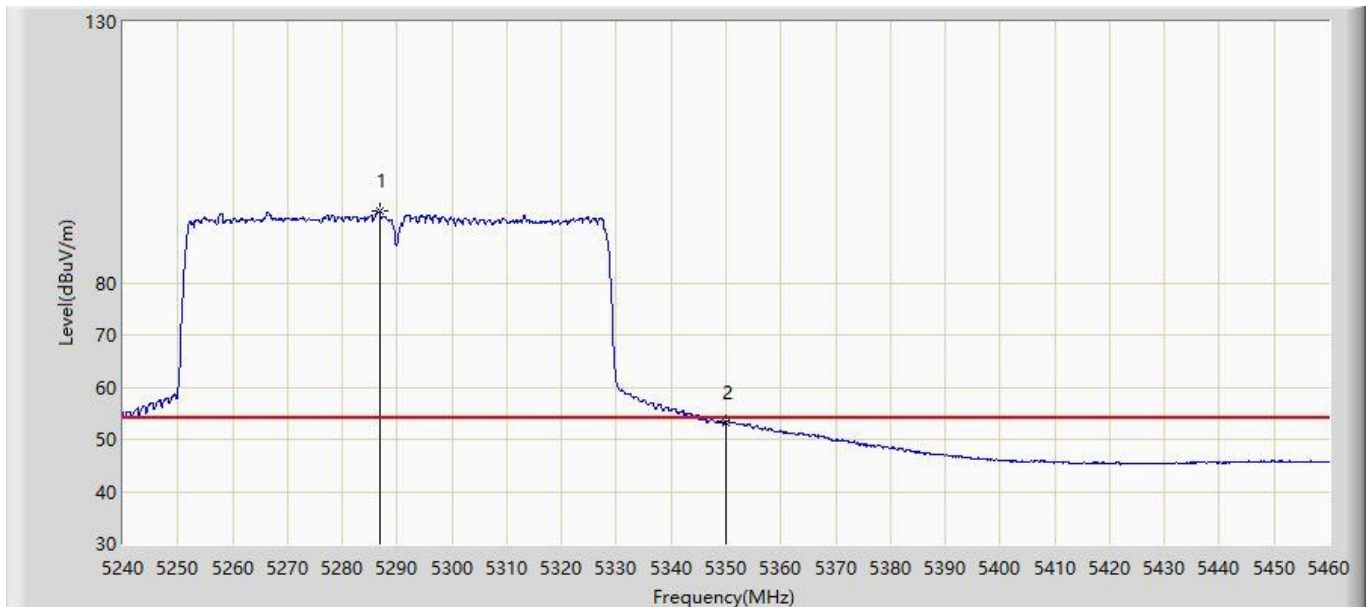


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5286.750	93.840	87.390	N/A	N/A	6.450	AV
2			5350.000	53.292	46.664	-0.708	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

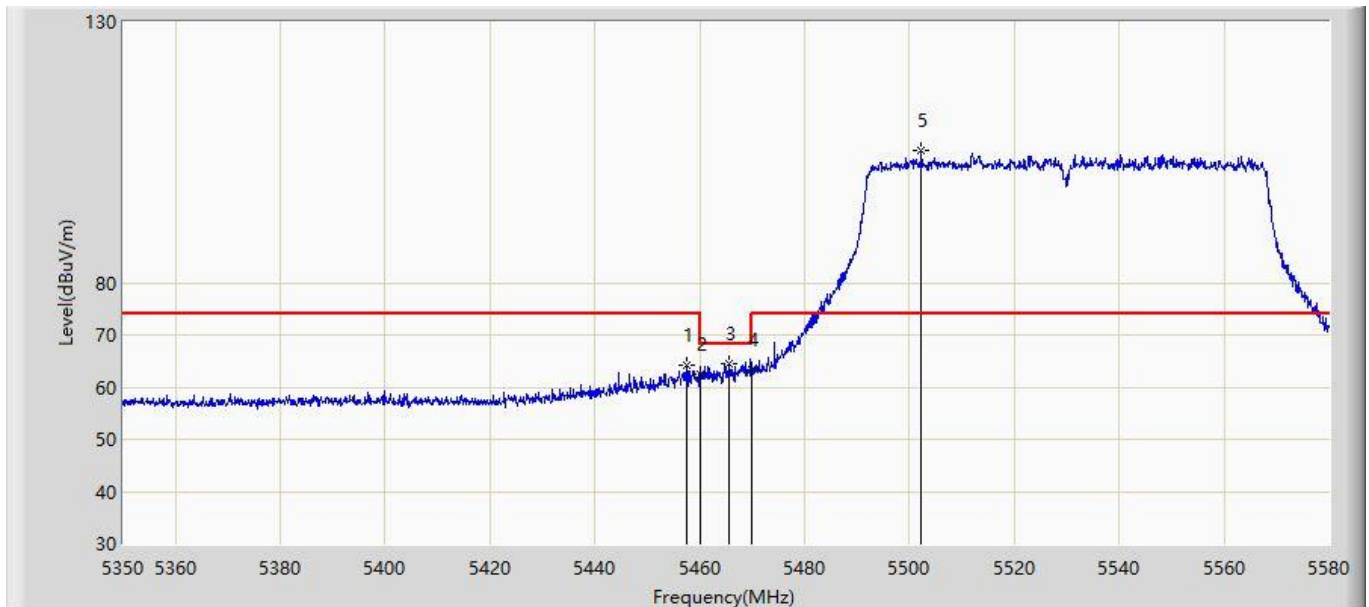


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.410	64.202	57.235	-9.798	74.000	6.967	PK
2			5460.000	62.414	55.437	-11.586	74.000	6.978	PK
3			5465.460	64.622	57.623	-3.578	68.200	6.999	PK
4			5470.000	63.237	56.220	-4.963	68.200	7.016	PK
5		*	5502.260	105.300	98.008	N/A	N/A	7.292	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

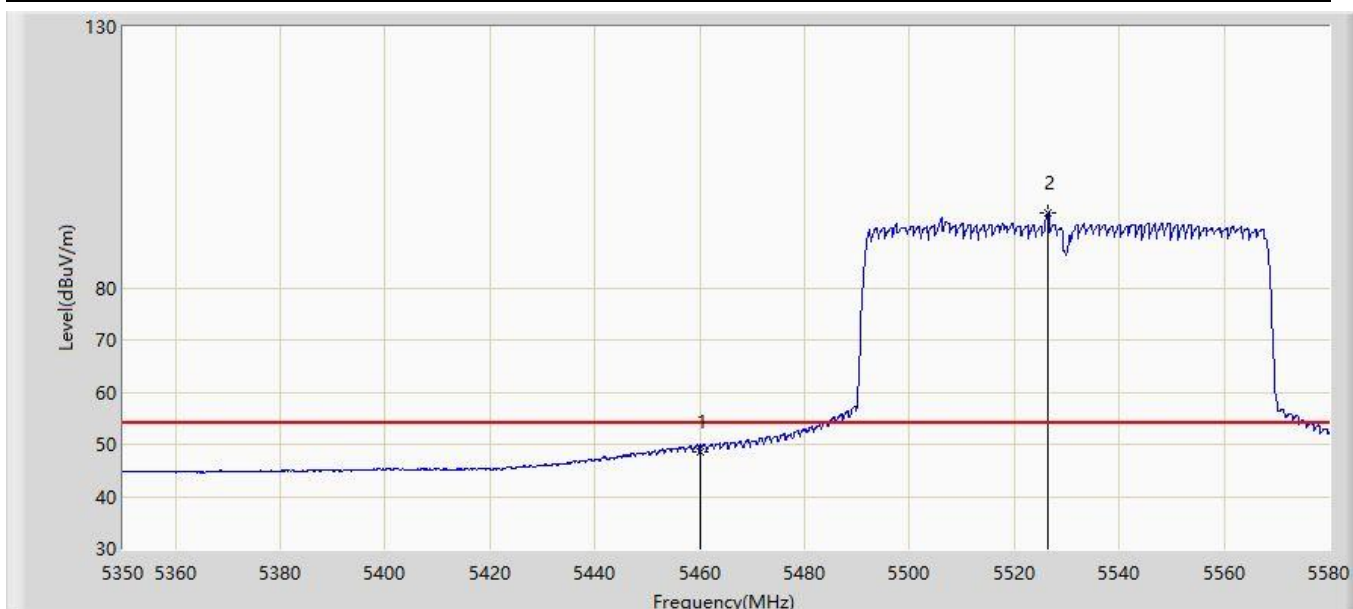


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.684	41.707	-5.316	54.000	6.978	AV
2		*	5526.525	94.312	87.254	N/A	N/A	7.058	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 16:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

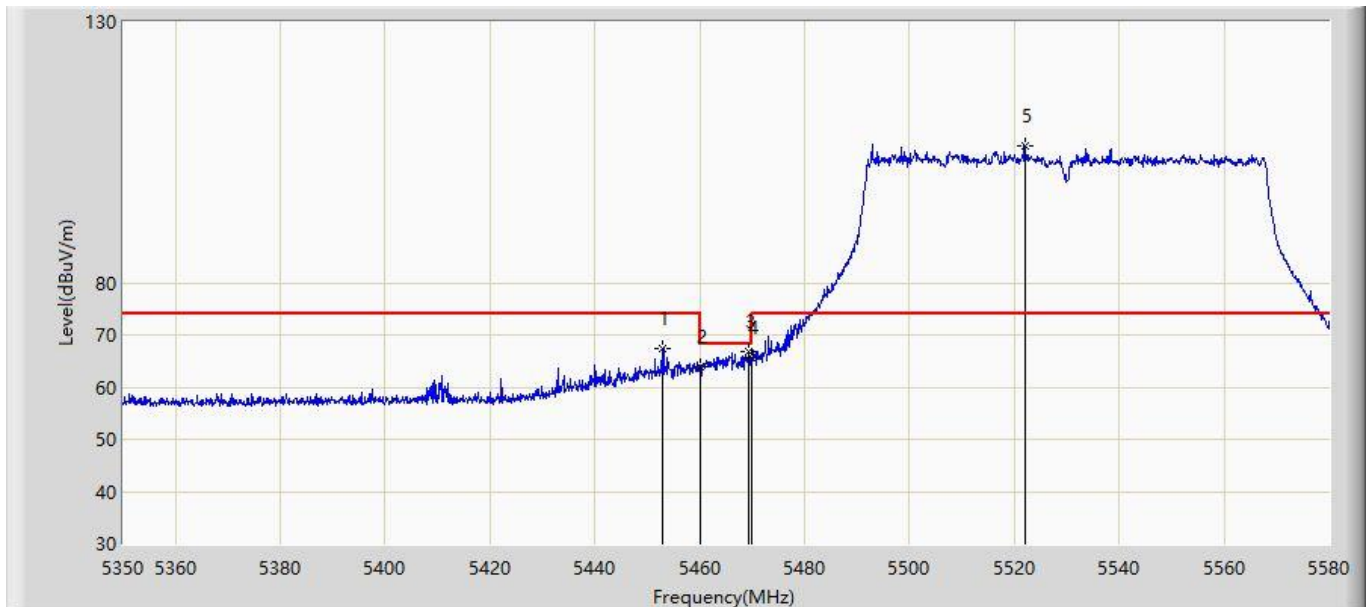


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.810	67.467	60.509	-6.533	74.000	6.958	PK
2			5460.000	64.023	57.046	-9.977	74.000	6.978	PK
3			5469.255	66.840	59.826	-1.360	68.200	7.014	PK
4			5470.000	65.726	58.709	-2.474	68.200	7.016	PK
5		*	5521.925	106.140	99.069	N/A	N/A	7.072	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 0 + 1 + 2 + 3	

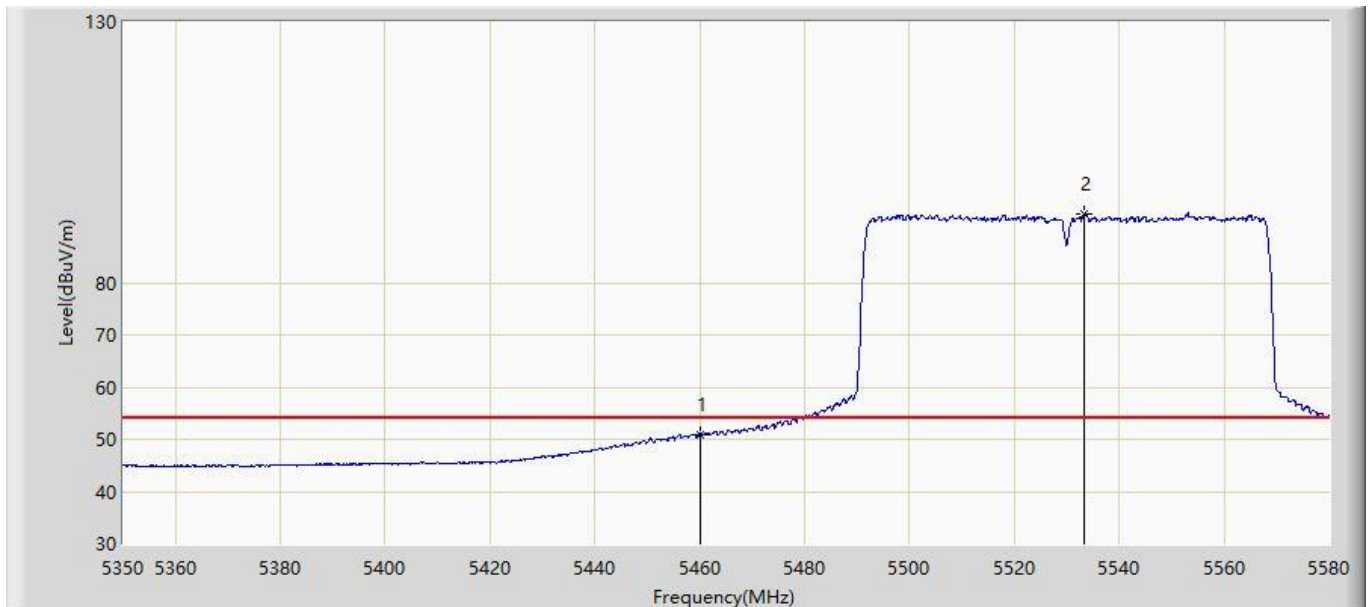


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.971	43.994	-3.029	54.000	6.978	AV
2		*	5533.310	93.206	86.166	N/A	N/A	7.040	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz, Ant 0 + 1 + 2 + 3	

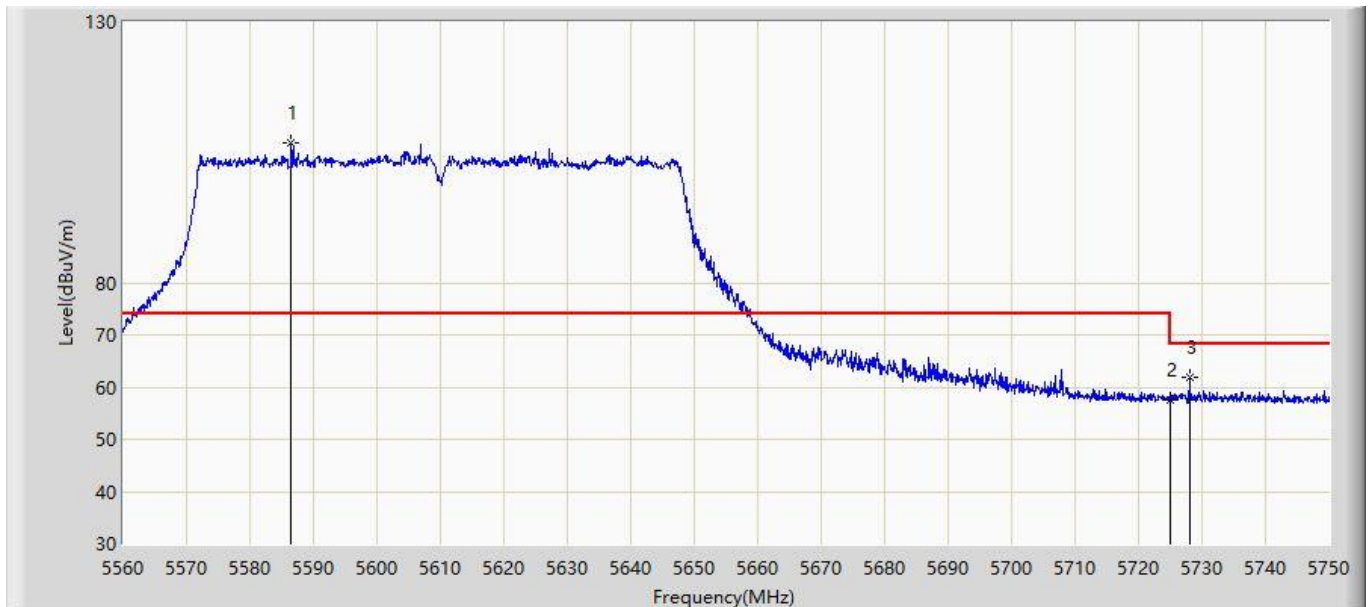


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5586.505	106.818	99.538	N/A	N/A	7.280	PK
2			5725.000	57.573	50.241	-10.627	68.200	7.332	PK
3			5728.055	61.762	54.406	-6.438	68.200	7.356	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz, Ant 0 + 1 + 2 + 3	

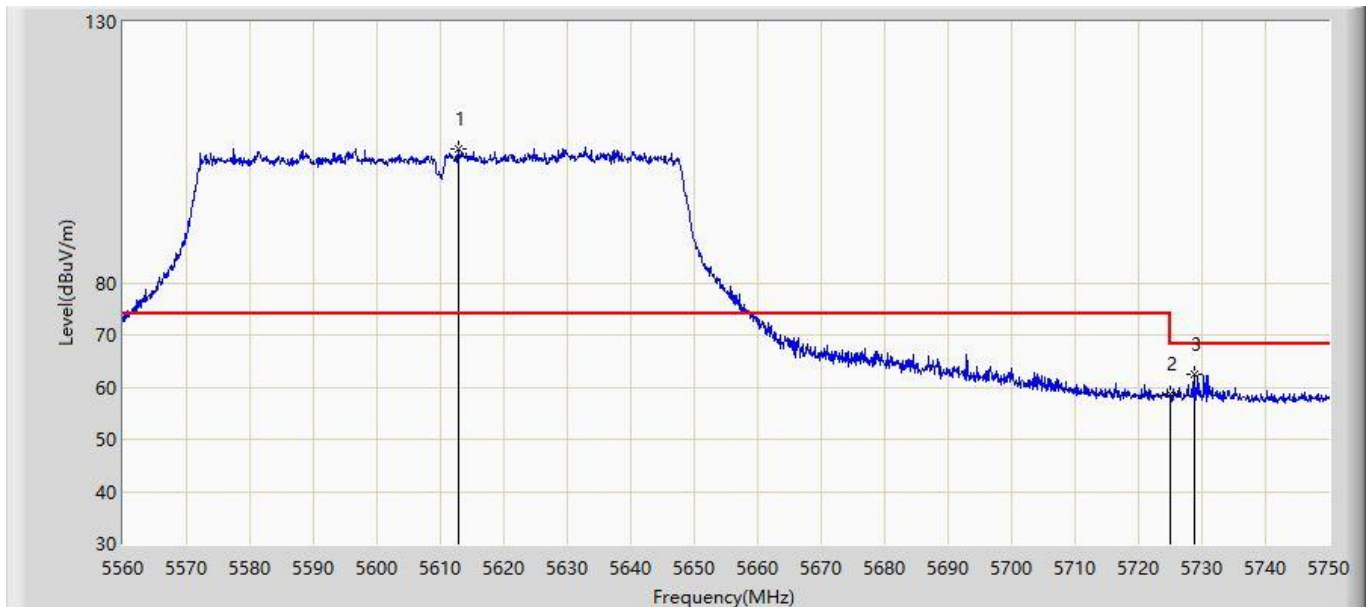


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5612.820	105.781	98.723	N/A	N/A	7.058	PK
2			5725.000	58.561	51.229	-9.639	68.200	7.332	PK
3			5728.910	62.448	55.087	-5.752	68.200	7.362	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:08
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz, Ant 0 + 1 + 2 + 3	

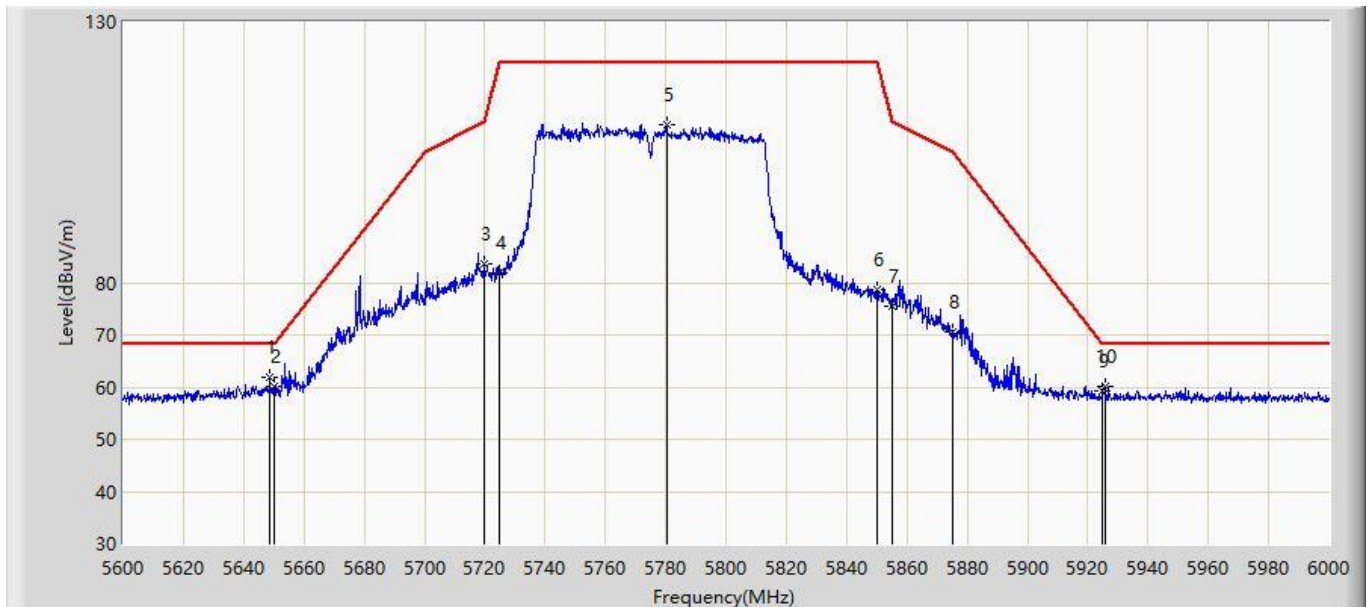


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5648.600	61.917	54.807	-6.283	68.200	7.110	PK
2			5650.000	60.252	53.112	-7.948	68.200	7.140	PK
3			5720.000	83.594	76.321	-27.206	110.800	7.273	PK
4			5725.000	81.813	74.481	-40.387	122.200	7.332	PK
5			5780.400	110.324	102.780	N/A	N/A	7.544	PK
6			5850.000	78.769	71.077	-43.431	122.200	7.692	PK
7			5855.000	75.516	67.872	-35.284	110.800	7.644	PK
8			5875.000	70.661	63.059	-34.539	105.200	7.602	PK
9			5925.000	59.236	51.410	-8.964	68.200	7.826	PK
10			5926.000	60.091	52.270	-8.109	68.200	7.821	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:10
Limit: FCC_Part15.407_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz, Ant 0 + 1 + 2 + 3	

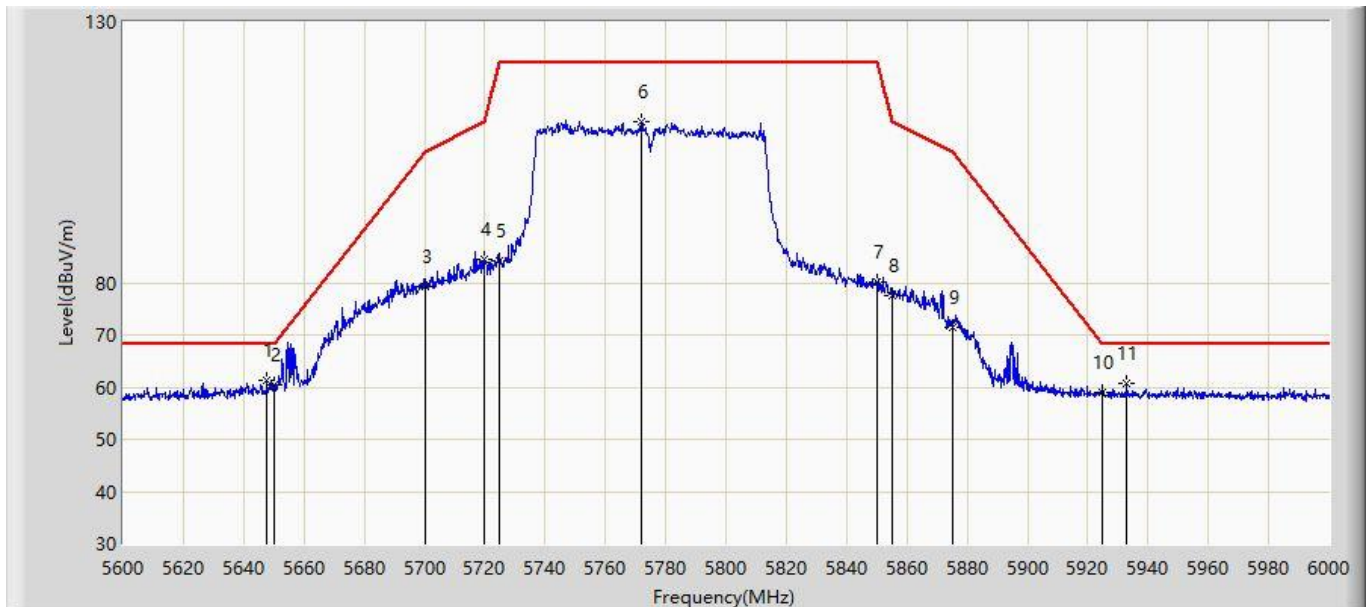


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.600	61.164	54.075	-7.036	68.200	7.089	PK
2			5650.000	60.369	53.229	-7.831	68.200	7.140	PK
3			5700.000	79.328	72.113	-25.872	105.200	7.215	PK
4			5720.000	84.363	77.090	-26.437	110.800	7.273	PK
5			5725.000	84.257	76.925	-37.943	122.200	7.332	PK
6			5772.000	110.887	103.367	N/A	N/A	7.521	PK
7			5850.000	80.145	72.453	-42.055	122.200	7.692	PK
8			5855.000	77.617	69.973	-33.183	110.800	7.644	PK
9			5875.000	71.568	63.966	-33.632	105.200	7.602	PK
10			5925.000	58.932	51.106	-9.268	68.200	7.826	PK
11			5933.000	60.775	52.995	-7.425	68.200	7.780	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

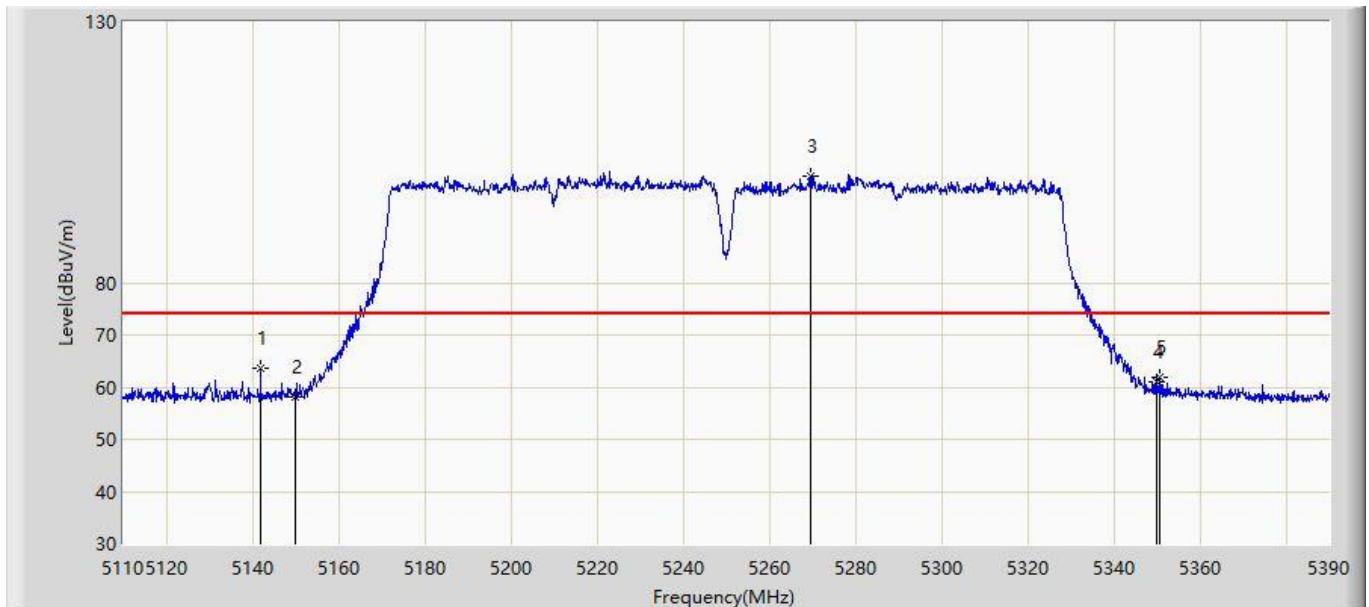


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.920	63.676	56.860	-10.324	74.000	6.815	PK
2			5150.000	58.256	51.457	-15.744	74.000	6.799	PK
3		*	5269.740	100.432	93.870	N/A	N/A	6.562	PK
4			5350.000	61.024	54.396	-12.976	74.000	6.629	PK
5			5350.800	61.758	55.135	-12.242	74.000	6.623	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

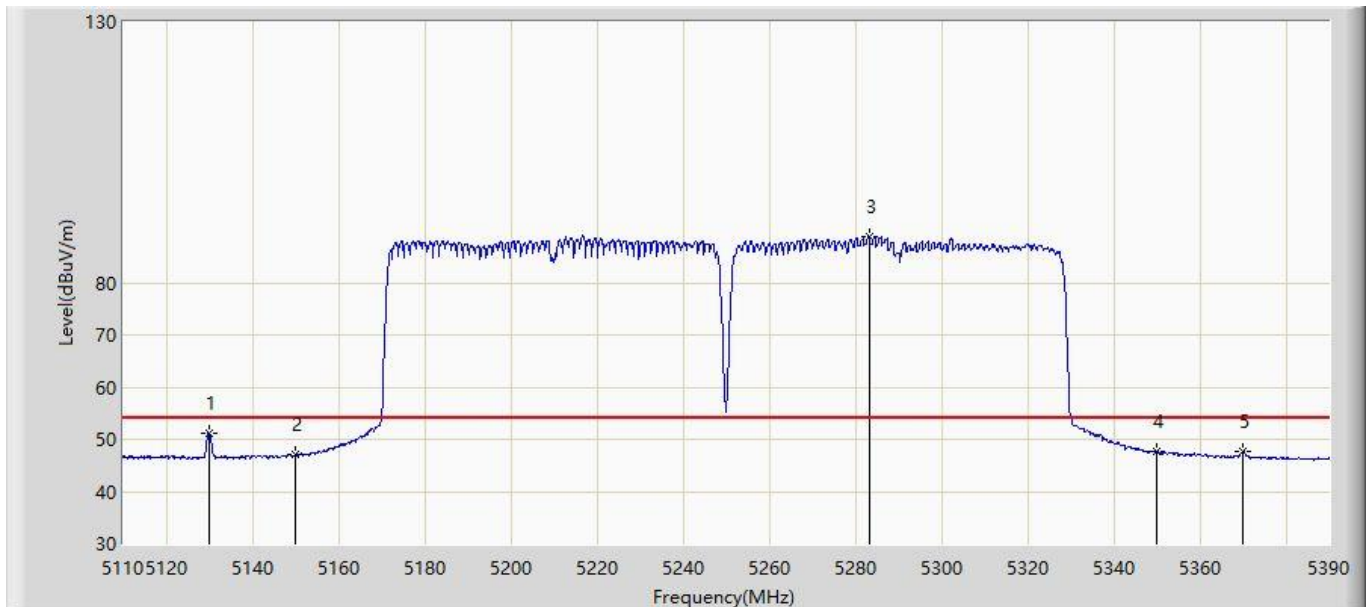


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.880	51.142	44.298	-2.858	54.000	6.844	AV
2			5150.000	47.131	40.332	-6.869	54.000	6.799	AV
3		*	5283.180	88.872	82.451	N/A	N/A	6.421	AV
4			5350.000	47.592	40.964	-6.408	54.000	6.629	AV
5			5369.840	47.608	41.008	-6.392	54.000	6.600	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

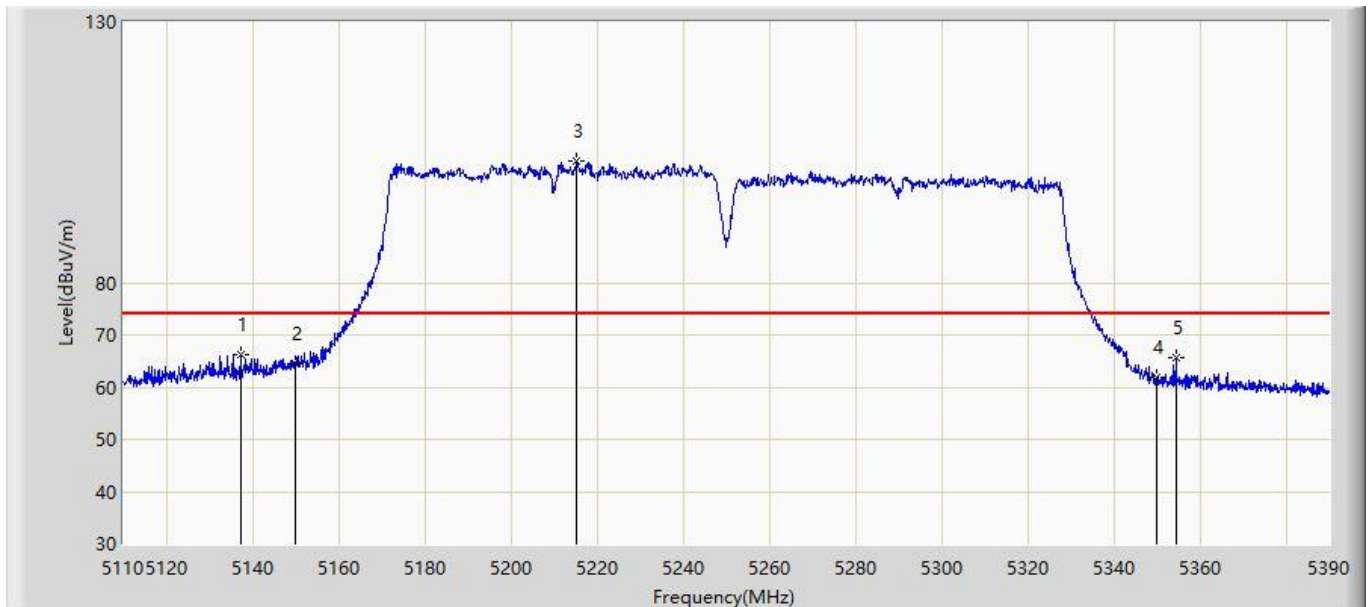


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.300	66.369	59.535	-7.631	74.000	6.833	PK
2			5150.000	64.356	57.557	-9.644	74.000	6.799	PK
3		*	5215.420	103.265	96.804	N/A	N/A	6.461	PK
4			5350.000	61.838	55.210	-12.162	74.000	6.629	PK
5			5354.440	65.696	59.084	-8.304	74.000	6.612	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5210MHz& 5290MHz, Ant 0 + 1 + 2 + 3	

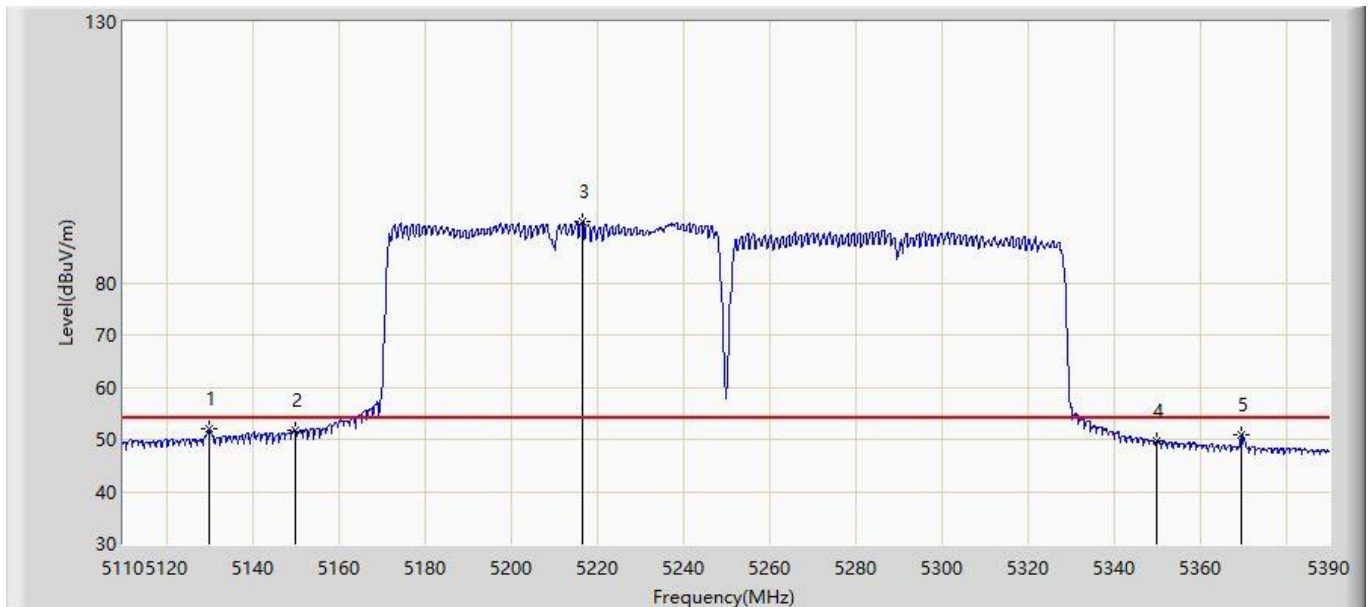


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.880	52.168	45.324	-1.832	54.000	6.844	AV
2			5150.000	51.690	44.891	-2.310	54.000	6.799	AV
3		*	5216.540	91.737	85.268	N/A	N/A	6.468	AV
4			5350.000	49.740	43.112	-4.260	54.000	6.629	AV
5			5369.700	50.789	44.190	-3.211	54.000	6.598	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

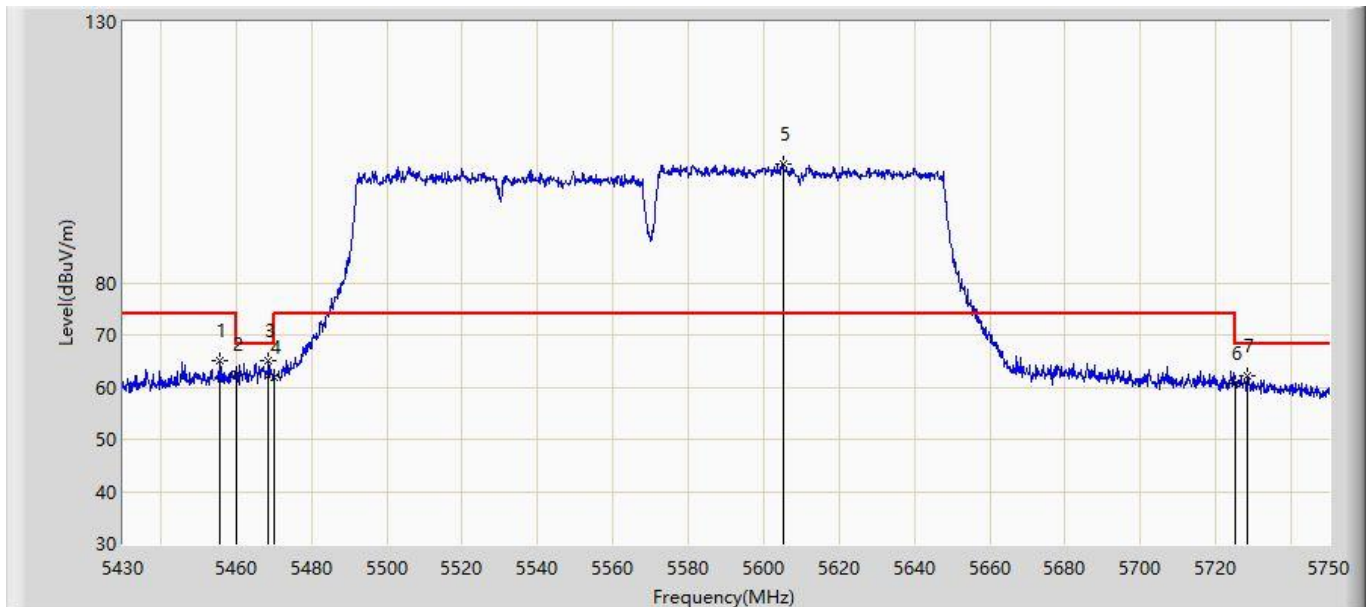


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.760	64.971	58.011	-9.029	74.000	6.961	PK
2			5460.000	62.511	55.534	-11.489	74.000	6.978	PK
3			5468.560	65.040	58.029	-3.160	68.200	7.012	PK
4			5470.000	61.977	54.960	-6.223	68.200	7.016	PK
5		*	5605.200	102.813	95.719	N/A	N/A	7.095	PK
6			5725.000	60.766	53.434	-7.434	68.200	7.332	PK
7			5728.400	62.304	54.946	-5.896	68.200	7.359	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

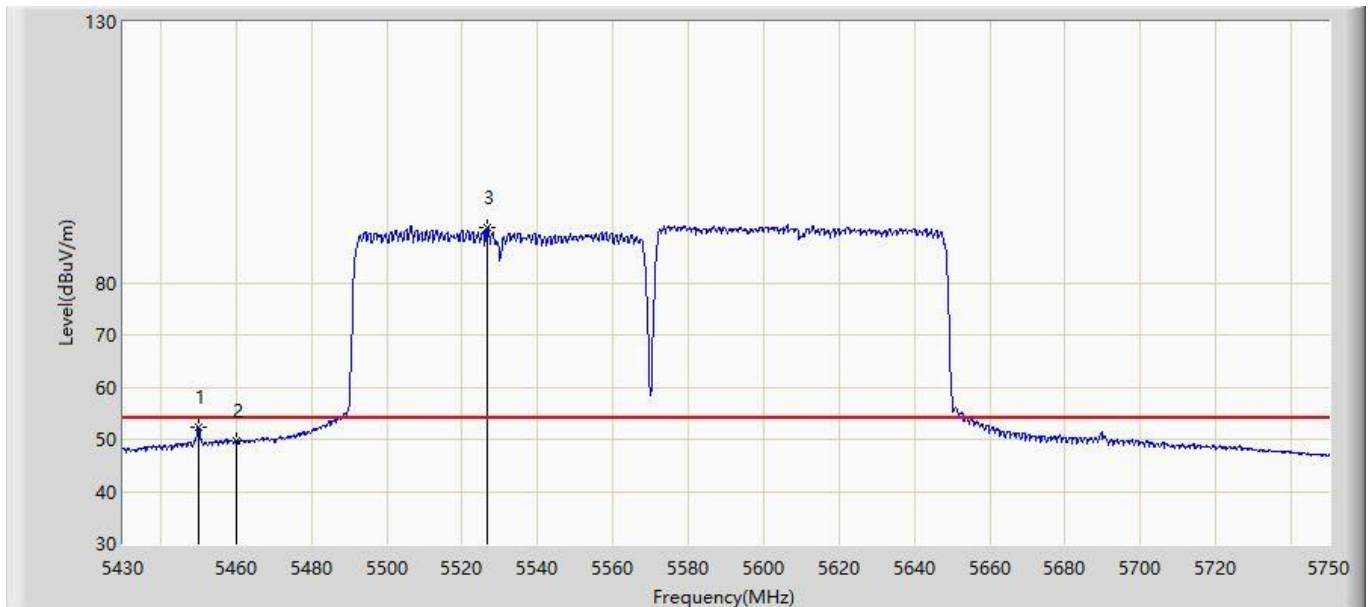


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.160	52.254	45.286	-1.746	54.000	6.967	AV
2			5460.000	49.820	42.843	-4.180	54.000	6.978	AV
3		*	5526.800	90.496	83.439	N/A	N/A	7.057	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

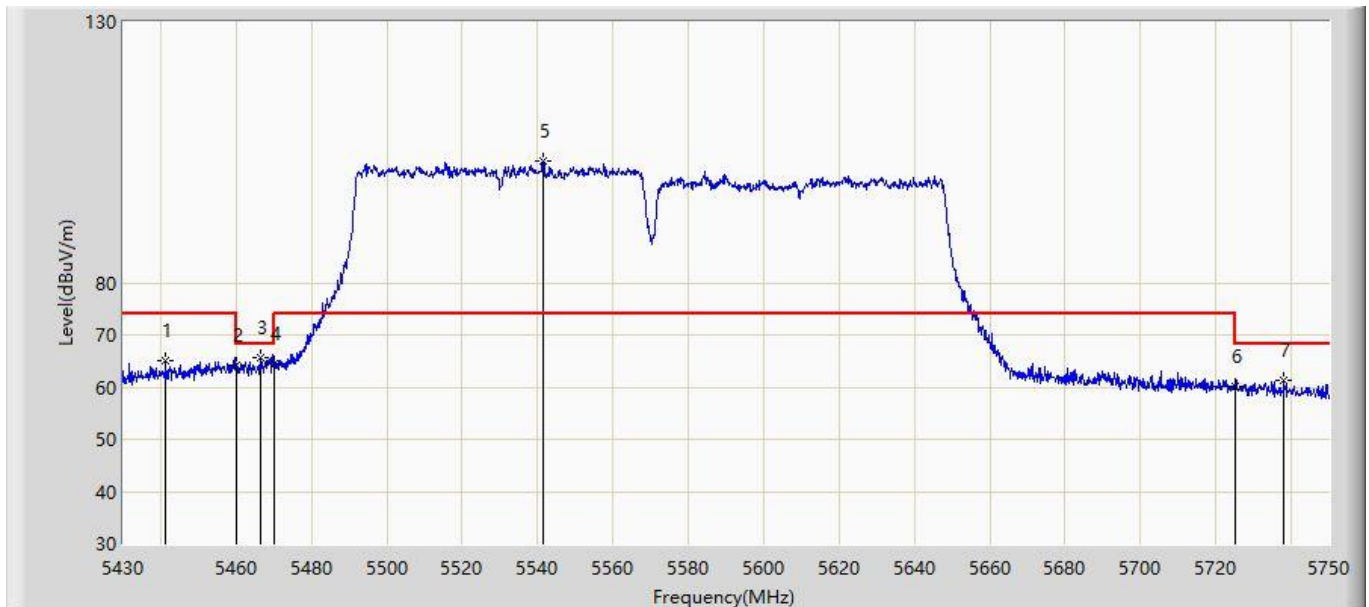


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.360	65.021	58.021	-8.979	74.000	7.000	PK
2			5460.000	64.331	57.354	-9.669	74.000	6.978	PK
3			5466.320	65.669	58.666	-2.531	68.200	7.003	PK
4			5470.000	64.534	57.517	-3.666	68.200	7.016	PK
5		*	5541.360	103.429	96.376	N/A	N/A	7.053	PK
6			5725.000	60.144	52.812	-8.056	68.200	7.332	PK
7			5738.000	61.407	53.992	-6.793	68.200	7.416	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at channel 5530MHz& 5610MHz, Ant 0 + 1 + 2 + 3	

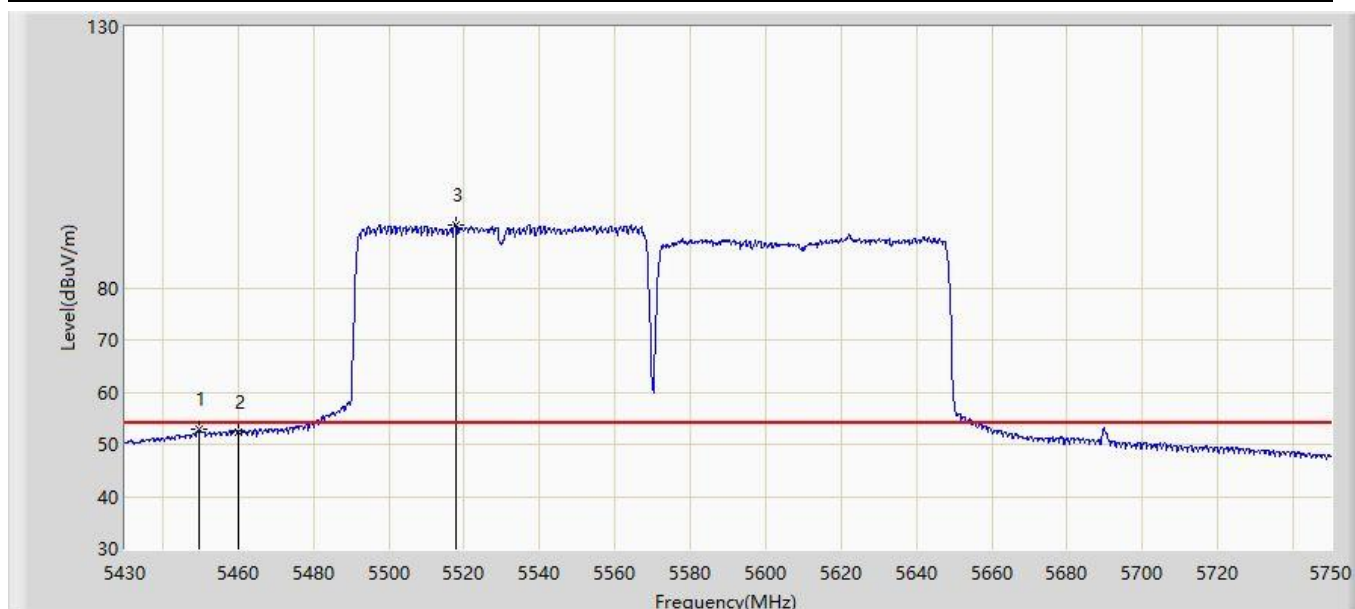


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.680	52.859	45.890	-1.141	54.000	6.970	AV
2			5460.000	52.458	45.481	-1.542	54.000	6.978	AV
3		*	5517.840	92.173	85.041	N/A	N/A	7.132	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

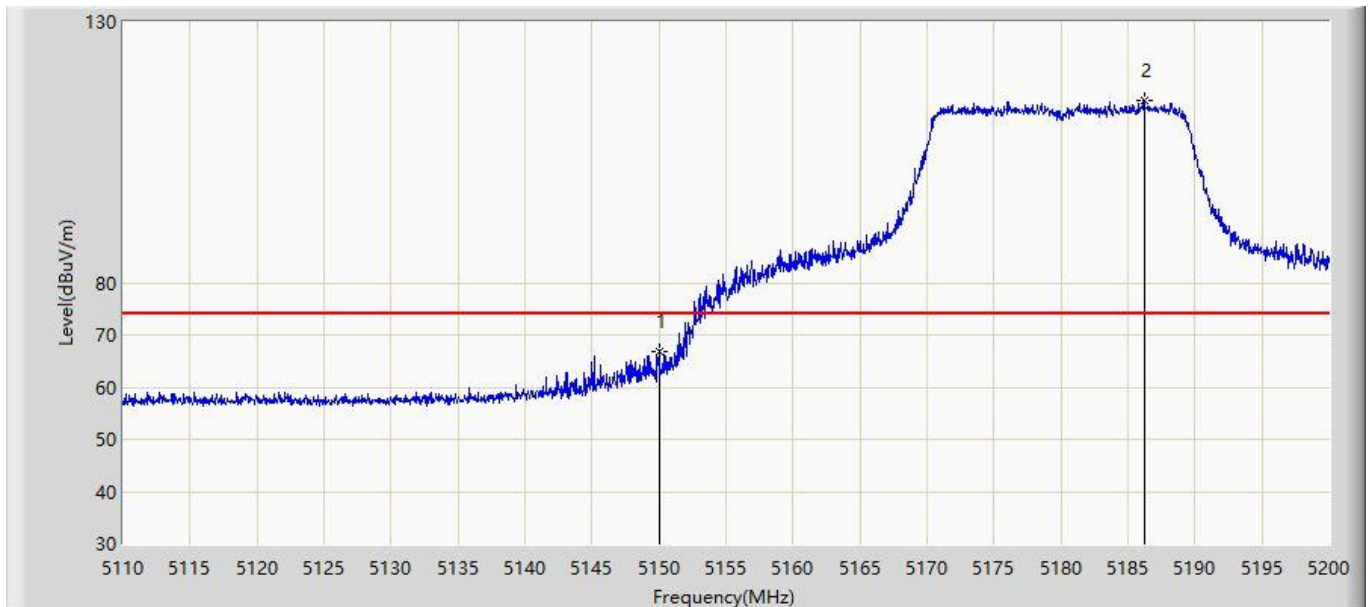


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	66.803	60.004	-7.197	74.000	6.799	PK
2		*	5186.185	114.940	108.215	N/A	N/A	6.724	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

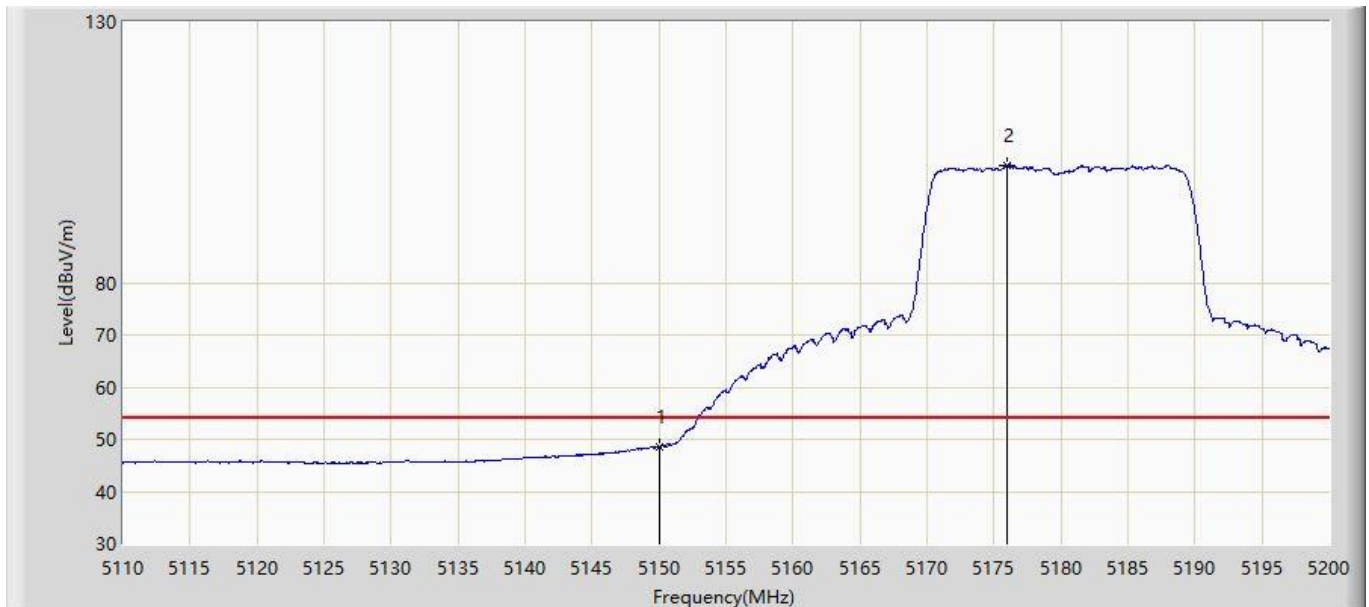


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.559	41.760	-5.441	54.000	6.799	AV
2		*	5176.015	102.532	95.720	N/A	N/A	6.812	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

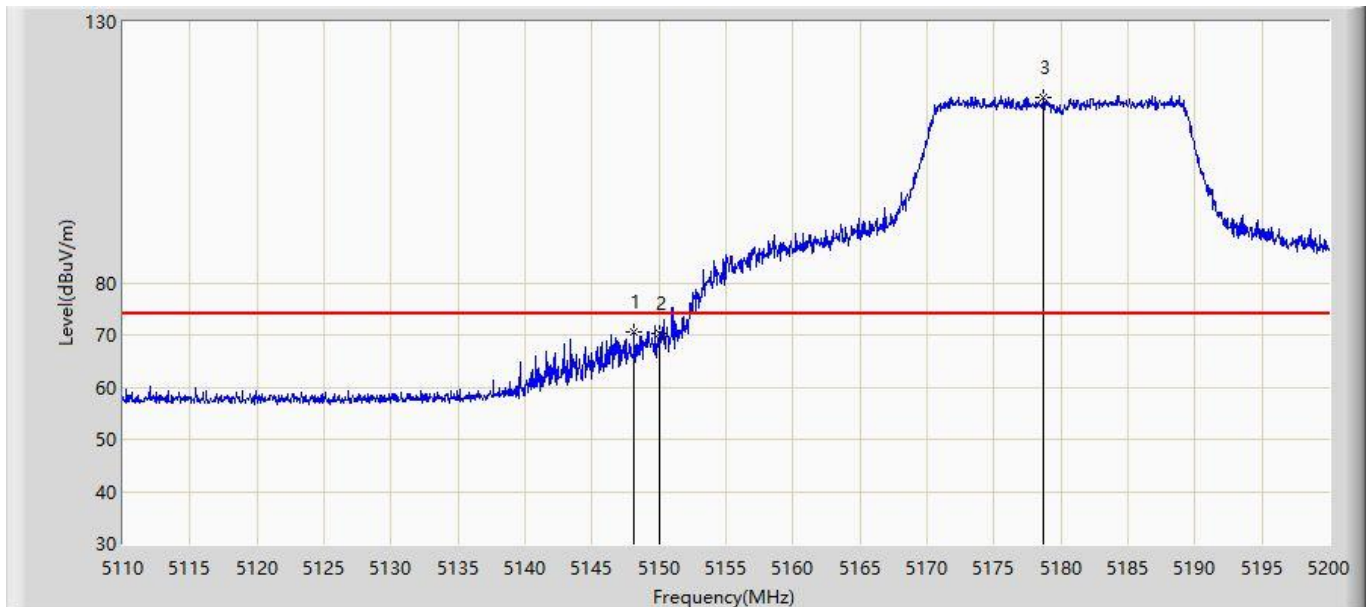


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.160	70.659	63.867	-3.341	74.000	6.792	PK
2			5150.000	70.300	63.501	-3.700	74.000	6.799	PK
3		*	5178.715	115.557	108.755	N/A	N/A	6.802	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 0 + 1 + 2 + 3	

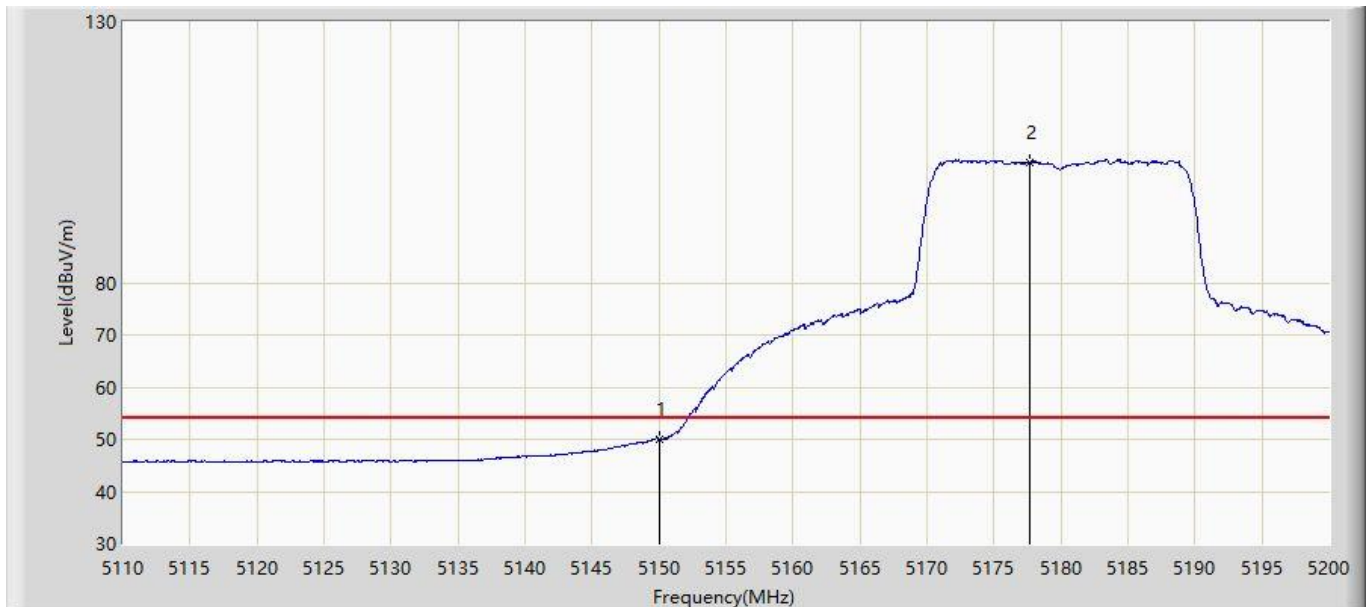


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.051	43.252	-3.949	54.000	6.799	AV
2		*	5177.680	103.157	96.351	N/A	N/A	6.806	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

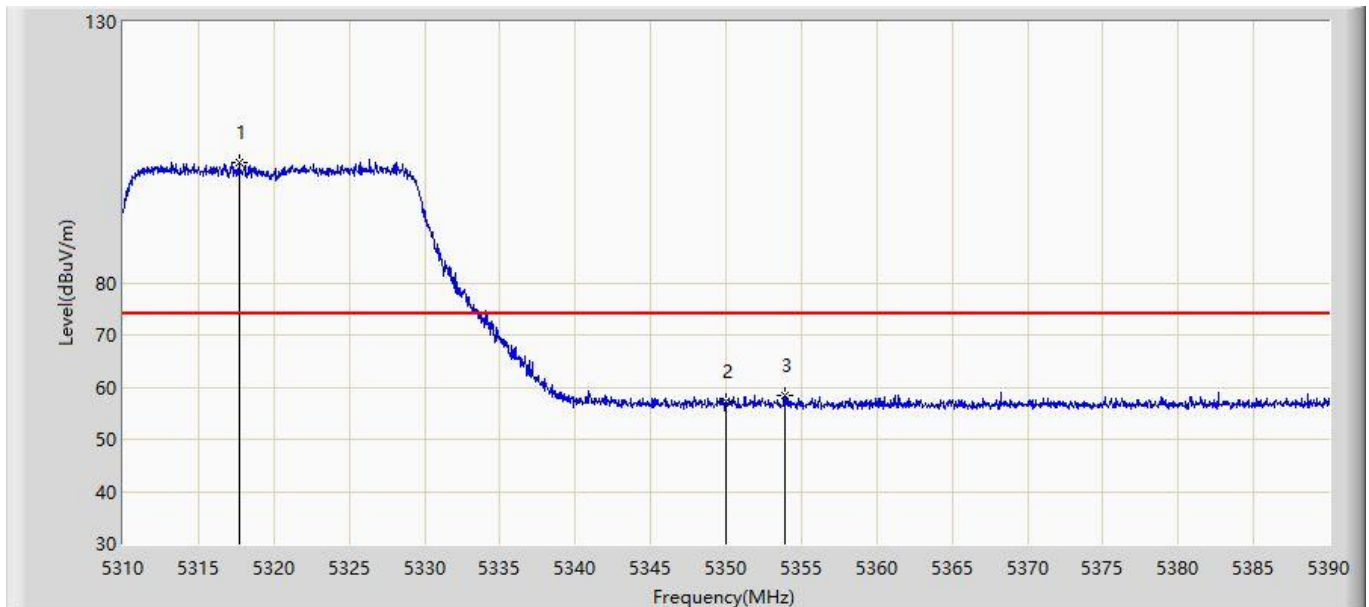


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.720	103.121	96.512	N/A	N/A	6.609	PK
2			5350.000	57.209	50.581	-16.791	74.000	6.629	PK
3			5353.880	58.430	51.817	-15.570	74.000	6.613	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

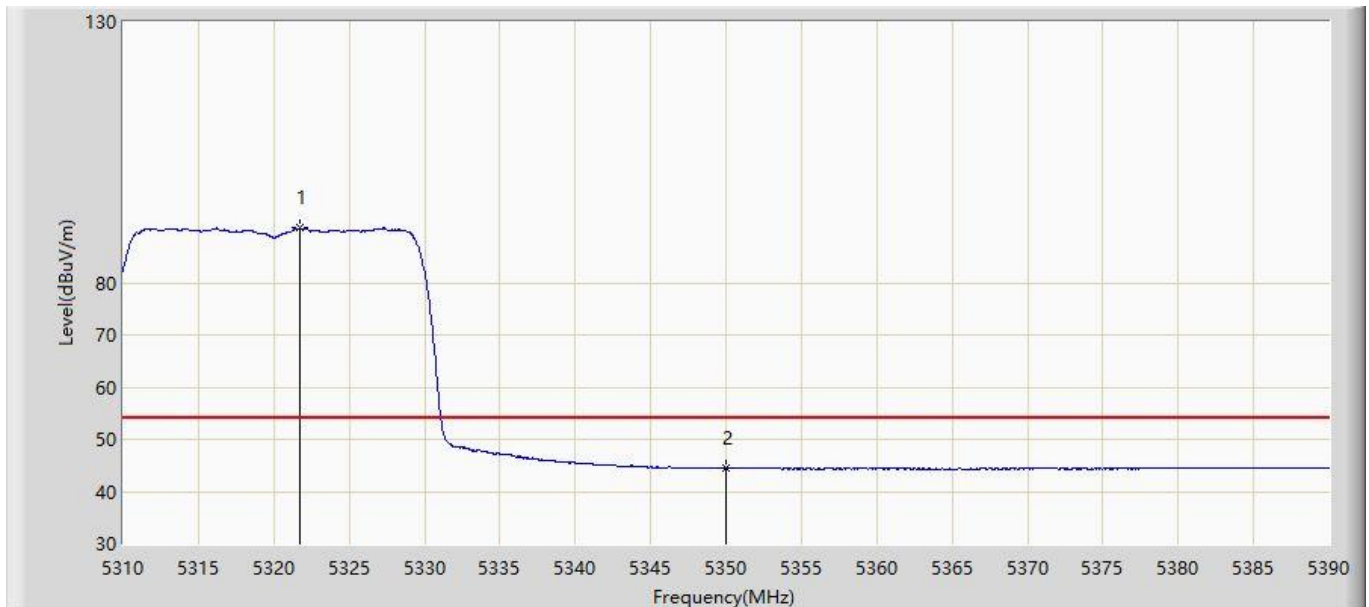


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.760	90.446	83.811	N/A	N/A	6.635	AV
2			5350.000	44.438	37.810	-9.562	54.000	6.629	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

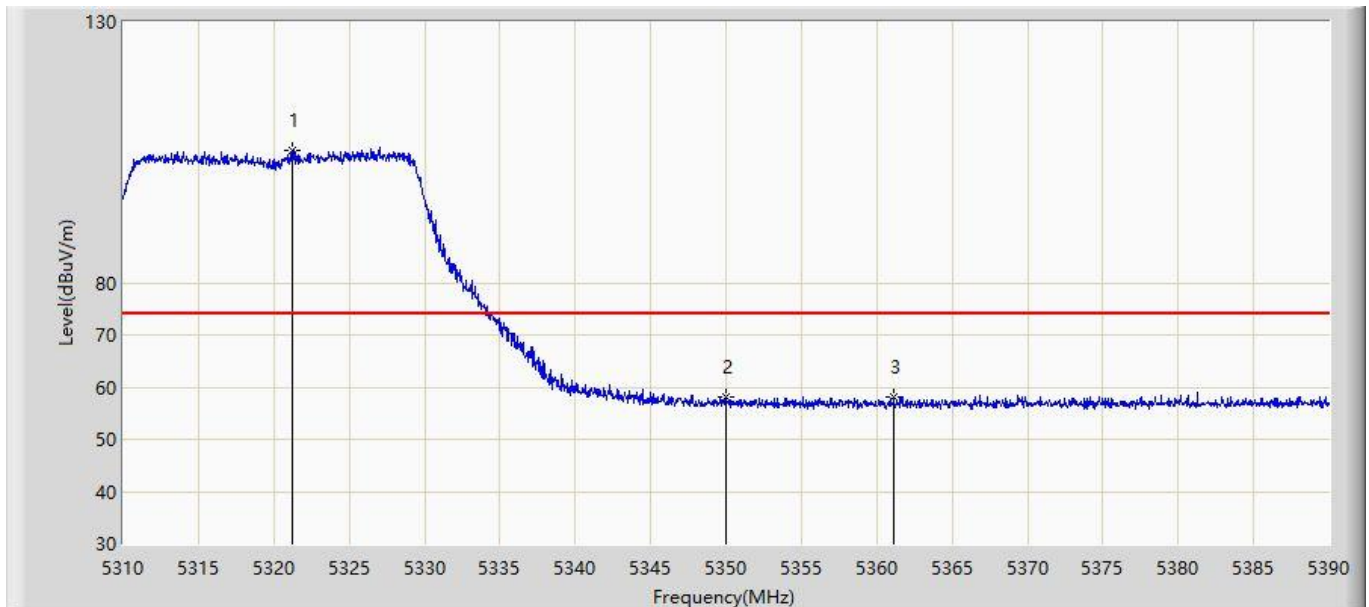


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.240	105.355	98.724	N/A	N/A	6.631	PK
2			5350.000	58.030	51.402	-15.970	74.000	6.629	PK
3			5361.120	58.085	51.482	-15.915	74.000	6.603	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 0 + 1 + 2 + 3	

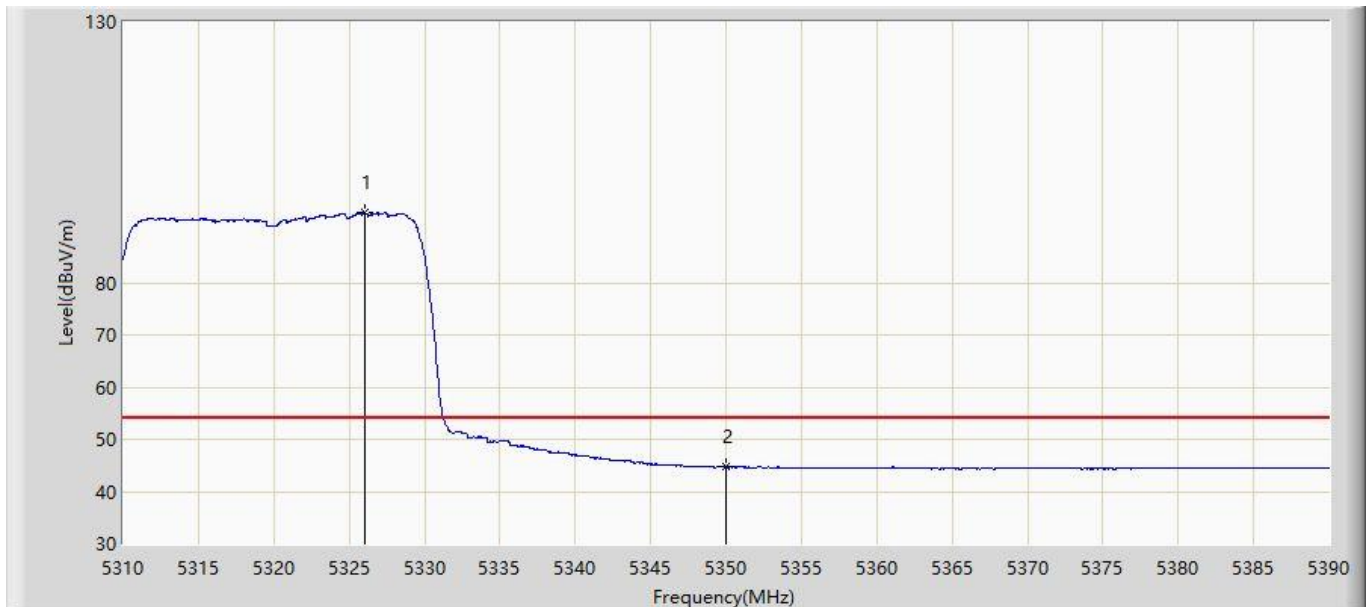


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.000	93.387	86.723	N/A	N/A	6.665	AV
2			5350.000	44.655	38.027	-9.345	54.000	6.629	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

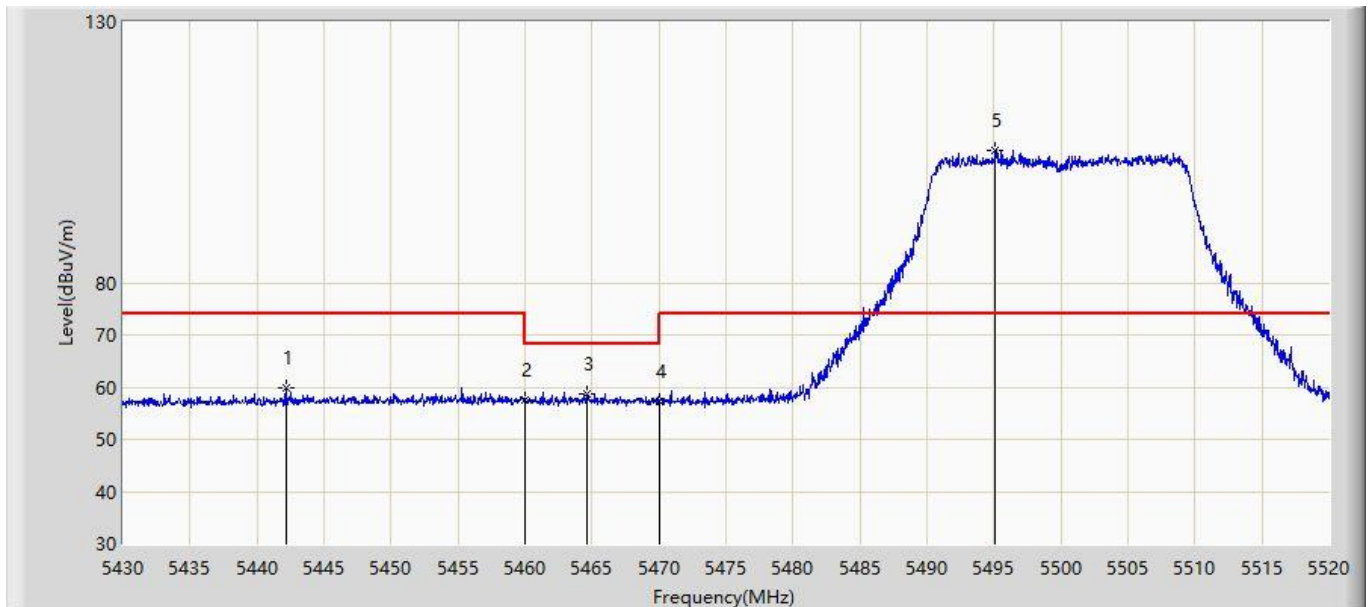


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5442.150	59.799	52.802	-14.201	74.000	6.998	PK
2			5460.000	57.516	50.539	-16.484	74.000	6.978	PK
3			5464.605	58.709	51.713	-9.491	68.200	6.996	PK
4			5470.000	57.291	50.274	-10.909	68.200	7.016	PK
5		*	5495.115	105.465	98.248	N/A	N/A	7.217	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/17 - 18:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 0 + 1 + 2 + 3	

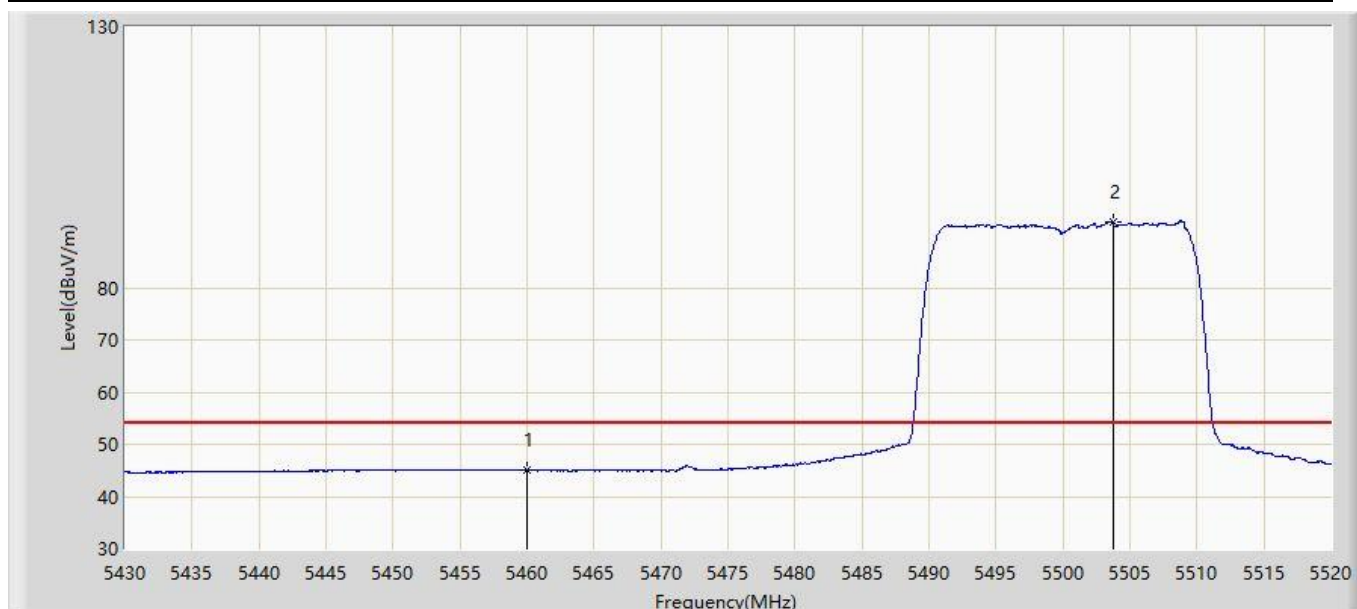

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.075	38.098	-8.925	54.000	6.978	AV
2		*	5503.710	92.596	85.288	N/A	N/A	7.308	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)