

Test Report for FCC

FCC ID :TKWBSA2-OEPW

Report Number		ESTEFC1603-004			
Applicant	Company name	SUPREMA INC			
	Address	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea			
	Telephone	82-31-710-4908			
	Contact Person	Kyung-Jin Hong			
	Factory address	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea			
Product	Product name	Biostation A2			
	Model No.	BSA2-OEPW	Manufacturer	SUPREMA INC	
	Serial No.	NONE	Country of origin	KOREA	
Test date	8/Mar/16 ~ 9/Mar/16		Date of issued	23-Mar-16	
Test location	347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do 467-811, R. O. Korea				
Standard	FCC PART 15 Subpart B, ANSI C 63.4(2009)				
Test item	☒ Conducted Emission	☐ Class A	☒ Class B	Test result	OK
	☒ Radiated Emission	☐ Class A	☒ Class B	Test result	OK
Measurement facility registration number		659627			
Tested by	Senior Engineer S.S. An (Signature)				
Reviewed by	Engineering Manager J.M. Yang (Signature)				
Abbreviation	OK, Pass = Complied, Fail = Failed, N/A = not applicable				
* Note - Basic Model Number : BSA2-OEPW - Additional Model(s) : BSA2-OHPW - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data(below 1 GHz)	9-1
5.4 Test data(above 1 GHz)	9-2
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup	12
8. Photographs of EUT	14

Appendix 1. Special diagram

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu, Seoul 153-759, R. O. Korea

EMC Test Lab : 347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do 467-811, R. O. Korea

1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety
and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC
requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA
between the RRA and the FCC.

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product	: Biostation A2
Model Number	: BSA2-OEPW
Serial Number	: NONE
Manufacturer	: SUPREMA INC
Country of origin	: Korea
Sample Receipt Date	: 11-Feb-16
Rating	: DC 12 V
Testing Voltage	: AC 120 V , 60 Hz
" X-tallist(s) or Frequencies generated	: The highest operating frequency is 2 462 MHz

2.2 General descriptions of EUT

Product specifications

Category	Feature	Specification
General	Biometric	Fingerprint
	LFD	Supported
	RF Option	2.4 GHz, 125 kHz Mifare/DesFire/DesFire EV1/Felica/NFC, 125 kHz iClass SE
Storage capacity	Max. User (1:1)	500,000
	Max. User (1:N)	100,000
	Max. Template (1:1)	1,000,000
	Max. Template (1:N)	200,000
	Max. Text Log	5,000,000
	Max. Image Log	50,000
Interface	Wi-Fi	Supported
	TCP/IP	Supported
	RS-485	1ch Host or Slave (Selectable)
	RS-232	Supported
	Wiegand	1ch Input, 1ch Output
	TTL input	1ch Input
	Relay	2 Relay
	USB	USB 2.0 (Host)

3. Test Standards

Test Standard : FCC PART 15 Subpart B

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2009)


This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

4. Measurement Condition

4.1 EUT Operation.

- The EUT was in the following operation mode during all testing.
1. Connect the EUT to External Network / LAN port of the Note PC.
 2. Install the provided test program by the manufacturer.
 3. Execute the test program and check the operating status of the EUT.
(Check fingerprint detection and RFID Card display on the note pc continuously.)
 4. Configuration 1(Adapter – Mode1) / Configuration 2(PoE – Mode2)

4.2 Configuration and Peripherals

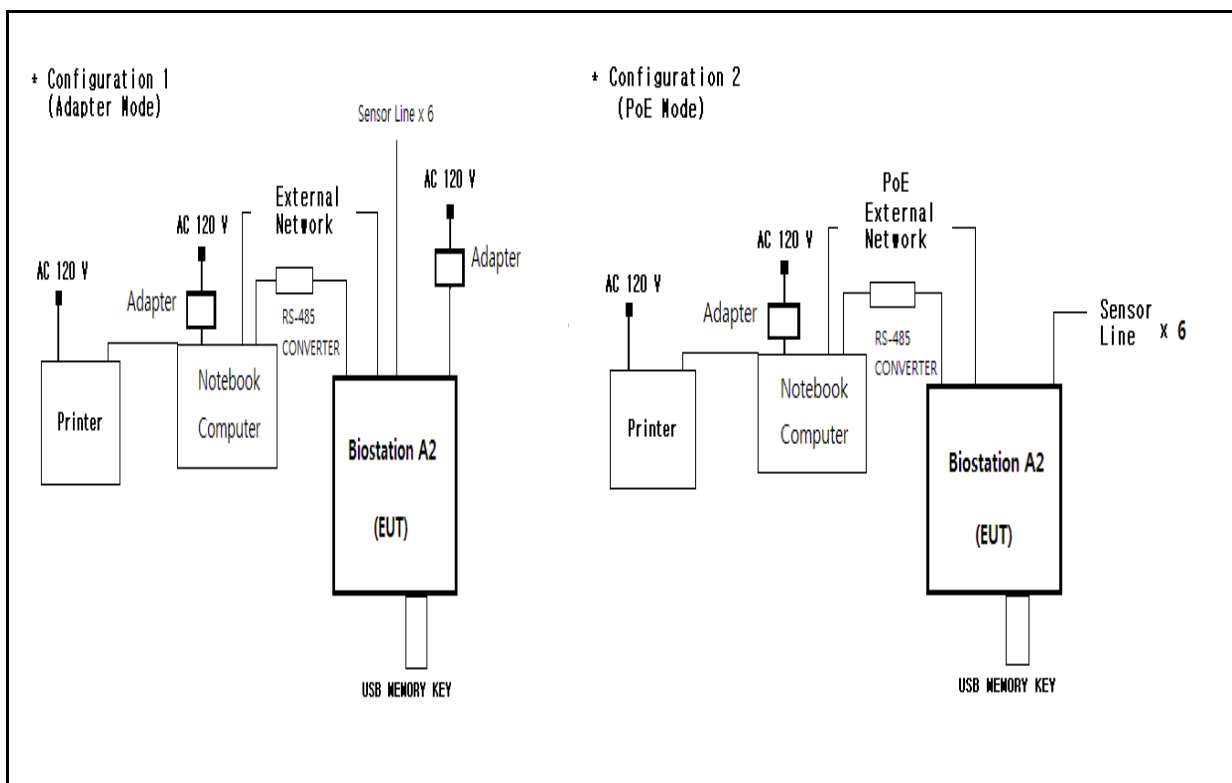

4.3 EUT and Support equipment

(Mode 1)

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Biostation A2	BSA2-OEPW	NONE	SUPREMA INC	EUT
USB Memory Key	NONE	NONE	NONE	
Adapter	JPW128KA1200N05	NONE	BridgePower Corp.	
RS-485 CONVERTER	NONE	NONE	NONE	
Notebook Computer	GW687AV	CNU0295RBD	HEWLETT-PACKARD	
Adapter	Series PPP009H	F1-09031504151D	Hipro	
Printer	K10229	NONE	CANON VIETNAM CO.,LTD.	

(Mode 2)

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Biostation A2	BSA2-OEPW	NONE	SUPREMA INC	EUT
USB Memory Key	NONE	NONE	NONE	
RS-485 CONVERTER	NONE	NONE	NONE	
Notebook Computer	GW687AV	CNU0295RBD	HEWLETT-PACKARD	
Adapter	Series PPP009H	F1-09031504151D	Hipro	
Printer	K10229	NONE	CANON VIETNAM CO.,LTD.	

4.4 Cable Connecting

(Mode 1)

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Biostation A2	USB	USB MEMORY KEY	USB	-	-	
Biostation A2	Power	Adapter	-	1.8	Unshielded	
Biostation A2	LAN	External Network Hub	LAN	20.0	Unshielded	
Biostation A2	Jack Line	Sensor Line x 6	-	3.0	Shielded	
Biostation A2	RS-485	RS-485 CONVERTER	USB	3.0	Unshielded	
Notebook Computer	Power	Adapter	-	2.0	Shielded	
Notebook Computer	LAN	External Network Hub	LAN	20.0	Unshielded	
Notebook Computer	USB	Printer	USB	2.0	Shielded	

(Mode 2)

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Biostation A2	USB	USB MEMORY KEY	USB	-	-	
Biostation A2	LAN	External Network Hub (With PoE Port)	LAN	20.0	Unshielded	
Biostation A2	Jack Line	Sensor Line x 6	-	3.0	Shielded	
Biostation A2	RS-485	RS-485 CONVERTER	USB	3.0	Unshielded	
Notebook Computer	Power	Adapter	-	2.0	Shielded	
Notebook Computer	LAN	External Network Hub	LAN	20.0	Unshielded	
Notebook Computer	USB	Printer	USB	2.0	Shielded	

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15 Subpart B. The test setup was made according to ANSI C 63.4 (2009) on an 10 m semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of Plastic table. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	7-Dec-16
Logbicon Antenna	VULB 9168	SCHWARZBECK	9168-193	30-Sep-16
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
PREAMPLIFIER	8449B	AGILENT	3008A00581	7-Dec-16
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	7-Dec-16
Horn Antenna	BBHA 9120D	SCHWARZBECK	469	3-Sep-16
Turn Table	DT1500-S	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Antenna Master & Turn table controller	C02000-P	Innco System GmbH	CO2000/642 /28051111/L	-

5.2 Environmental Condition

Below 1 GHz –Test Place : 10 m Semi-anechoic chamber

(Mode 1)

Temperature (°C) : 19.6 °C

Humidity (% R.H.) : 48.8 % R.H.

(Mode 2)

Temperature (°C) : 19.3 °C

Humidity (% R.H.) : 49.1 % R.H.

Above 1 GHz–Test Place : 3 m Semi-anechoic chamber

(Mode 1)

Temperature (°C) : 19.4 °C

Humidity (% R.H.) : 49.2 % R.H.

(Mode 2)

Temperature (°C) : 19.8 °C

Humidity (% R.H.) : 49.5 % R.H.

5.3 Test data (Below 1 GHz) (Mode 1)

Test Date : 8-Mar-16

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Quasi-peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
32.90	20.08	V	2.3	11.72	0.92	40.00	32.72	7.28
165.30	20.06	V	2.5	12.55	2.03	43.50	34.65	8.85
250.00	27.58	V	2.4	11.67	2.52	46.00	41.77	4.23
375.00	18.91	H	1.9	15.18	3.12	46.00	37.20	8.80
550.00	17.54	H	1.8	19.07	3.82	46.00	40.42	5.58
800.00	10.81	H	1.6	22.72	4.69	46.00	38.22	7.78
850.00	13.75	H	1.3	23.25	4.85	46.00	41.84	4.16
Remark	H : Horizontal, V : Vertical *Result Value = Reading + Ant Factor + Cable loss *Margin= Limit - Result *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection							

(Mode 2)

Test Date : 9-Mar-16

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Quasi-peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
72.50	22.49	V	1.6	10.46	1.34	40.00	34.29	5.71
250.00	26.92	H	2.3	11.67	2.52	46.00	41.11	4.89
405.30	16.27	V	1.6	15.86	3.25	46.00	35.38	10.62
540.00	14.55	V	1.3	18.87	3.78	46.00	37.20	8.80
550.00	17.35	H	1.6	19.07	3.82	46.00	40.23	5.77
800.00	12.54	H	1.3	22.72	4.69	46.00	39.95	6.05
850.00	13.28	H	1.5	23.25	4.85	46.00	41.37	4.63
Remark	H : Horizontal, V : Vertical *Result Value = Reading + Ant Factor + Cable loss *Margin= Limit - Result *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection							

5.4 Test data (Above 1 GHz) (Mode 1)

Test Date : 8-Mar-16

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
Peak(RBW:1 MHz VBW:1 MHz)								
1056.00	46.70	H	1.0	25.20	-31.89	74.00	40.02	33.98
1056.00	48.32	V	1.0	25.20	-31.89	74.00	41.64	32.36
1196.00	47.22	H	1.0	25.45	-31.67	74.00	41.00	33.00
1196.00	49.71	V	1.0	25.45	-31.67	74.00	43.49	30.51
2112.00	44.66	H	1.0	25.69	-29.83	74.00	40.52	33.48
2112.00	45.55	V	1.0	25.69	-29.83	74.00	41.41	32.59
Average(RBW:1 MHz VBW:10 Hz)								
1056.00	38.32	H	1.0	25.20	-31.89	54.00	31.64	22.36
1056.00	42.60	V	1.0	25.20	-31.89	54.00	35.92	18.08
1196.00	34.65	H	1.0	25.45	-31.67	54.00	28.43	25.57
1196.00	38.31	V	1.0	25.45	-31.67	54.00	32.09	21.91
2112.00	38.75	H	1.0	25.69	-29.83	54.00	34.61	19.39
2112.00	40.90	V	1.0	25.69	-29.83	54.00	36.76	17.24
Remark	H : Horizontal, V : Vertical * Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain * Margin= Limit - Result * The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 10 Hz for average detection at frequency above 1 GHz. *The highest operating frequency of the EUT is 1.0 GHz , so the radiated emission measurement was performed up to 6 GHz by requested applicant. *Application method of the highest frequency is in the following *Highest frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. *Highest frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. *Highest frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. *Highest frequency of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz,							

(Mode 2)

Test Date : 9-Mar-16

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
Peak(RBW:1 MHz VBW:1 MHz)								
1056.00	45.39	H	1.0	25.20	-31.89	74.00	38.71	35.29
1056.00	47.16	V	1.0	25.20	-31.89	74.00	40.48	33.52
1152.00	46.38	H	1.0	25.37	-31.67	74.00	40.08	33.92
1152.00	46.31	V	1.0	25.37	-31.67	74.00	40.01	33.99
1200.00	48.35	H	1.0	25.46	-31.67	74.00	42.14	31.86
1200.00	49.59	V	1.0	25.46	-31.67	74.00	43.38	30.62
Average(RBW:1 MHz VBW:10 Hz)								
1056.00	36.32	H	1.0	25.20	-31.89	54.00	29.64	24.36
1056.00	39.77	V	1.0	25.20	-31.89	54.00	33.09	20.91
1152.00	35.22	H	1.0	25.37	-31.67	54.00	28.92	25.08
1152.00	38.98	V	1.0	25.37	-31.67	54.00	32.68	21.32
1200.00	34.85	H	1.0	25.46	-31.67	54.00	28.64	25.36
1200.00	38.05	V	1.0	25.46	-31.67	54.00	31.84	22.16
Remark	H : Horizontal, V : Vertical * Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain * Margin= Limit - Result * The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 10 Hz for average detection at frequency above 1 GHz. *The highest operating frequency of the EUT is 1.0 GHz , so the radiated emission measurement was performed up to 6 GHz by requested applicant. *Application method of the highest frequency is in the following *Highest frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. *Highest frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. *Highest frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. *Highest frequency of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz,							

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15 Subpart B . The test setup was made according to ANSI C 63.4 (2009) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Test Receiver	ESPI	Rohde & Schwarz	100005	7-Dec-16
LISN	ENV 216	ROHDE & SCHWARZ	101231	7-Dec-16
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	7-Dec-16
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	NONE	7-Dec-16

6.2 Environmental Condition

Test Place : Shielded Room

(Mode 1)

Temperature (°C) : 19.5 °C

Humidity (% R.H.) : 48.6 % R.H.

6.3 Test data


Test Date : 8-Mar-16

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Cispr Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
0.20	0.13	0.14	N	63.61	43.13	43.40	53.61		
0.60	0.14	0.17	N	56.00	36.83	37.15	46.00		
0.66	0.14	0.18	N	56.00	37.69	38.01	46.00		
11.08	0.42	0.35	N	60.00	44.76	45.53	50.00		
12.02	0.46	0.36	N	60.00	45.42	46.25	50.00		
13.34	0.62	0.38	H	60.00	45.20	46.20	50.00		
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								

7. Photographs of test setup

7.1 Setup for Radiated Test : (30 ~ 1 000) MHz (Mode 1)

[Front]

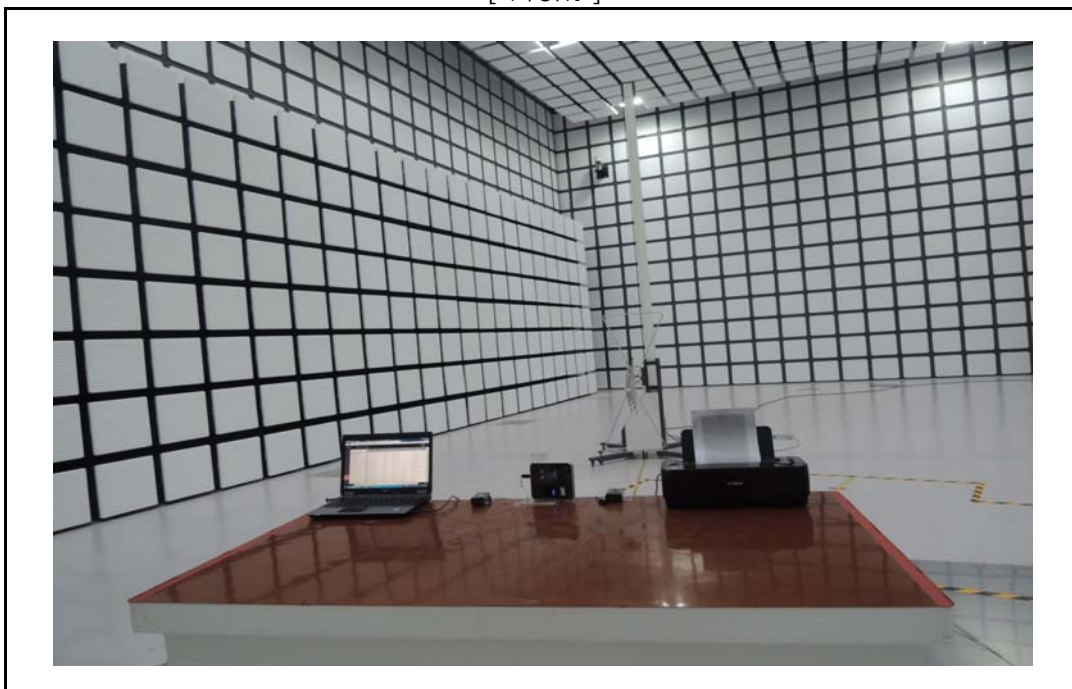

[Rear]



7. Photographs of test setup

(Mode 2)

[Front]



[Rear]



7.2 Setup for Radiated Test : above 1 GHz (Mode 1)

[Front]



[Rear]



(Mode 2)

[Front]



[Rear]



7.3 Setup for Conducted Test : (0.15 ~ 30) MHz

[Front]



[Rear]



8. Photographs of EUT

[Front]




[Rear]




Appendix 1. Special diagram

*HOT

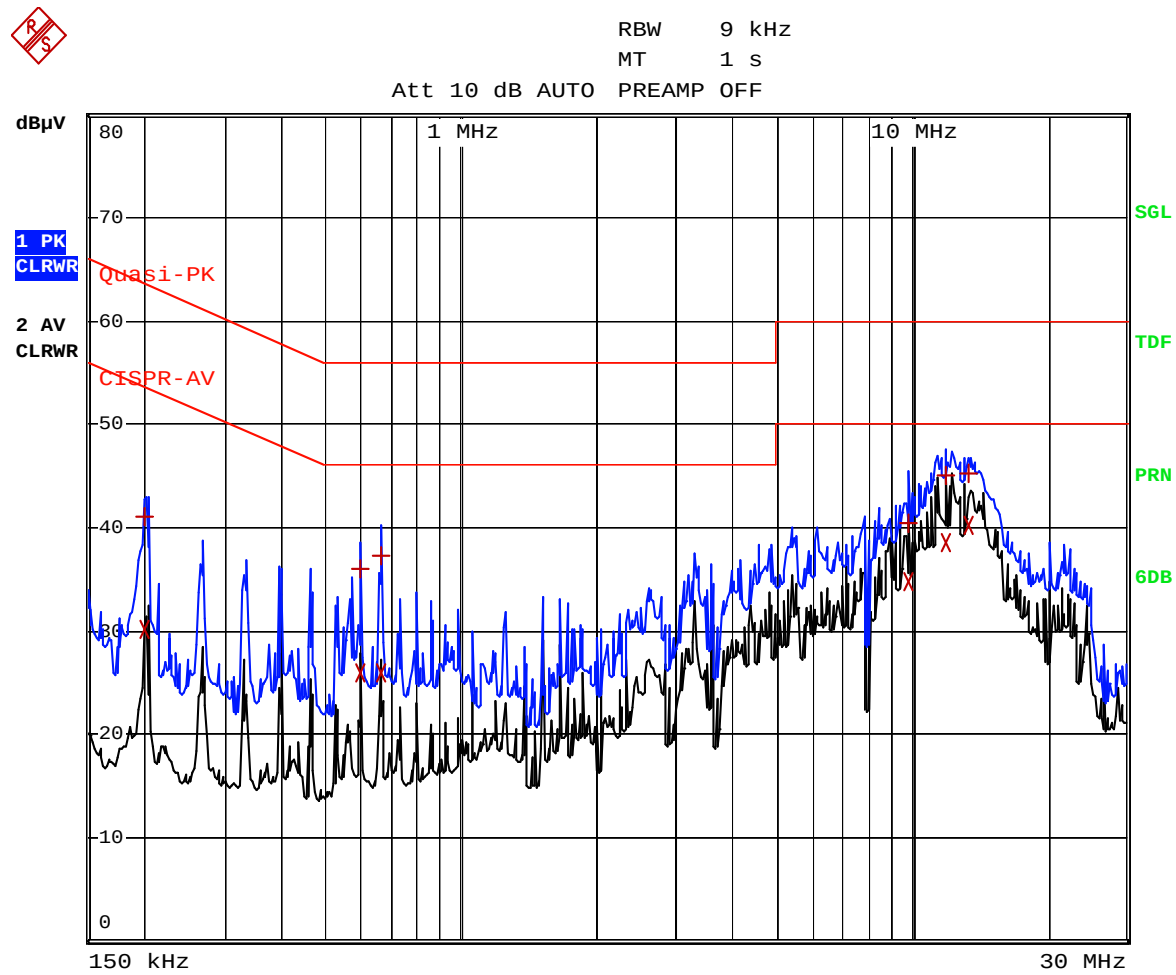

Comment: 16-02122_HOT
Date: 8.MAR.2016 10:10:09

*NEUTRAL

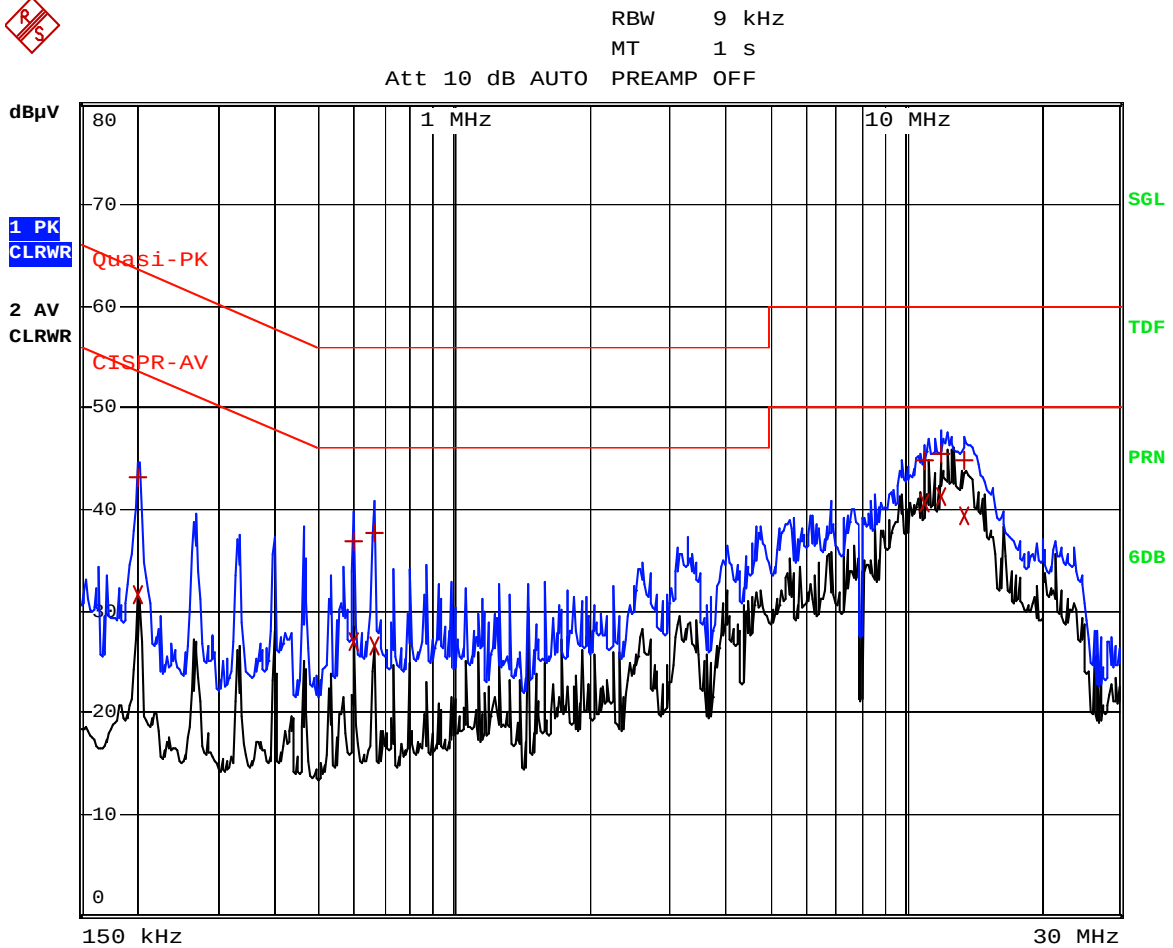

Comment: 16-02122_NEUTRAL

Date: 8.MAR.2016 10:12:56